



TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

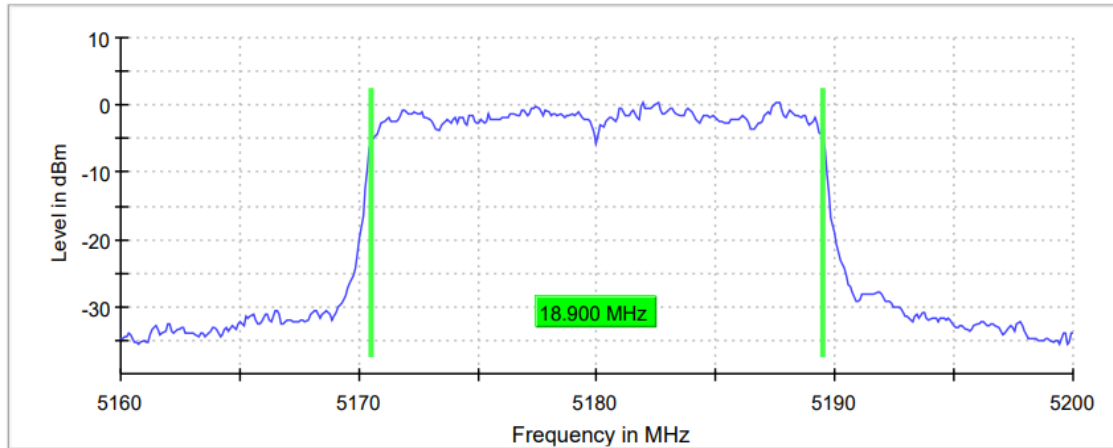

Middle Channel

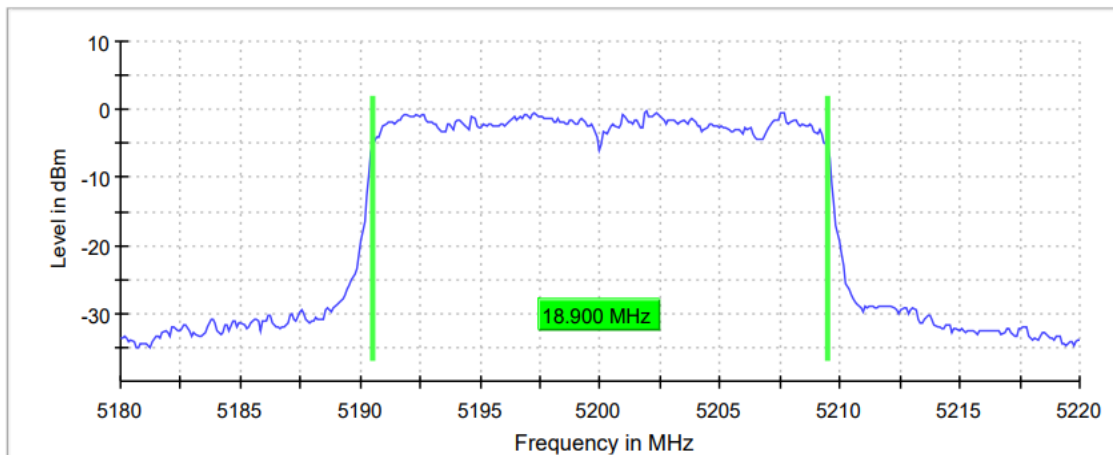

Highest Channel

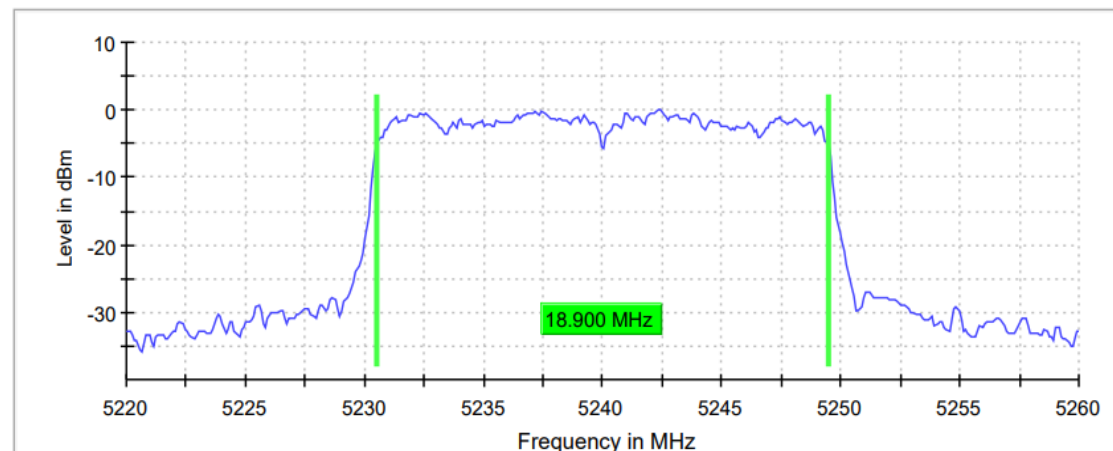

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	84 / max. 150	74 / max. 150	58 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.23 dB	0.05 dB	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode MIMO Radio A+B)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


	Lowest frequency	Middle frequency	Highest frequency
	5180 MHz	5200 MHz	5240 MHz
26dB Bandwidth (MHz)	21.000	20.900	20.800
Occupied bandwidth (MHz)	18.900	18.900	18.900

26 dB Bandwidth:

Lowest Channel

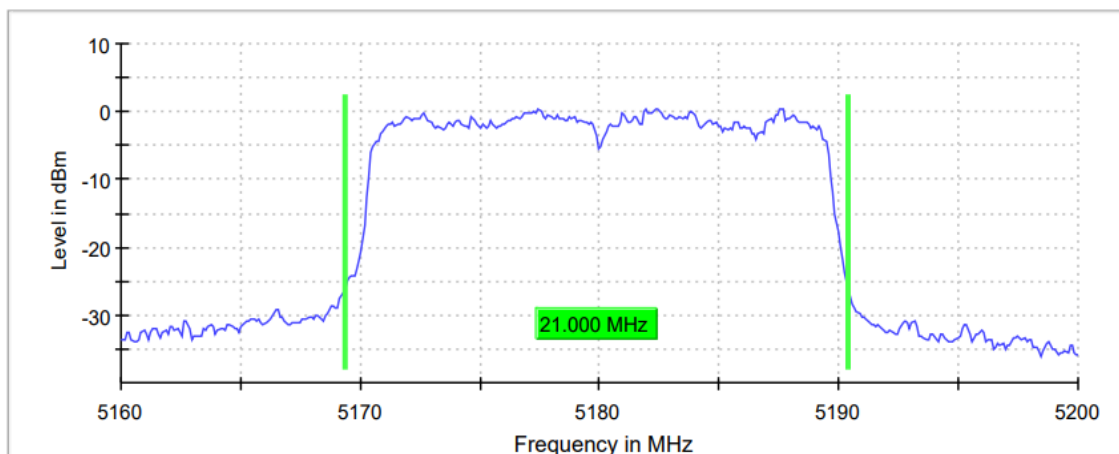


Middle Channel

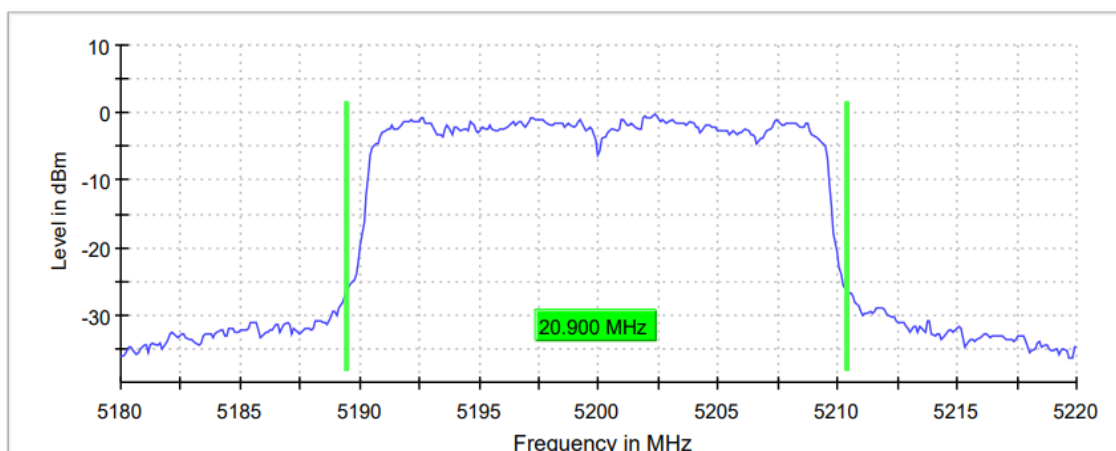

TEST RESULTS (Cont.)

Highest Channel

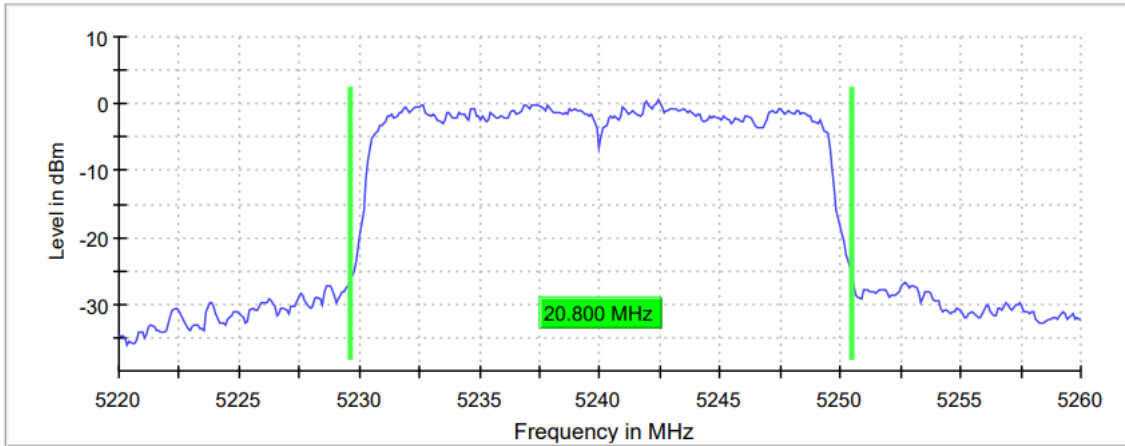


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	0.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	80 / max. 150	71 / max. 150	47 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.02 dB	0.07 dB	0.21 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

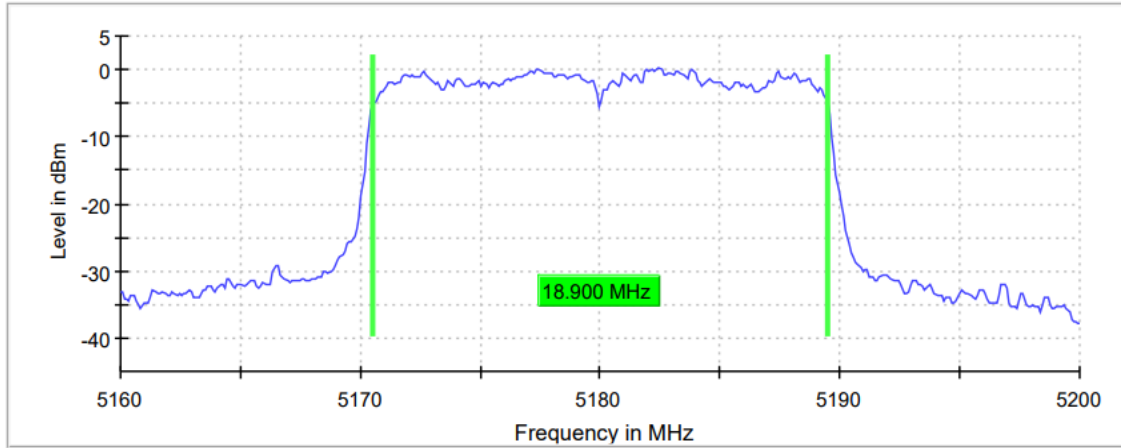

Middle Channel

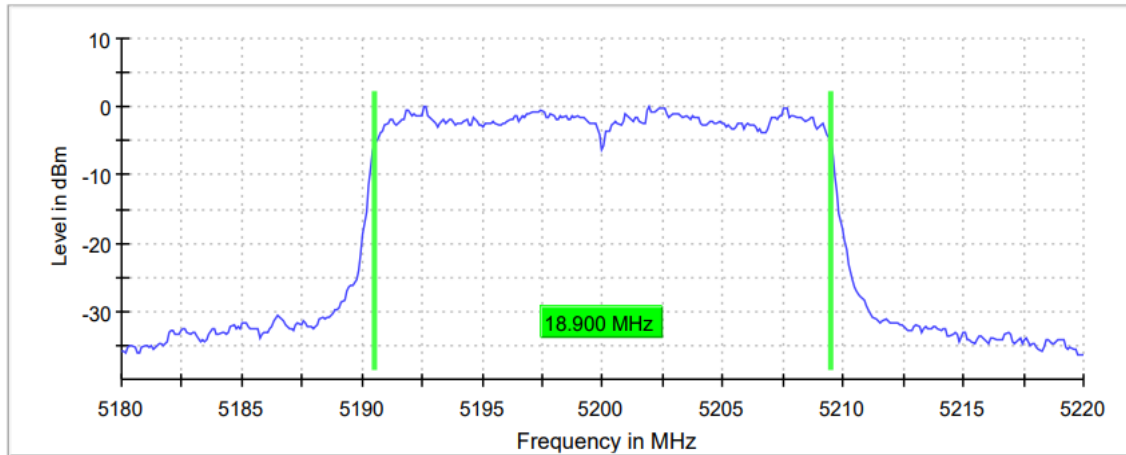

Highest Channel

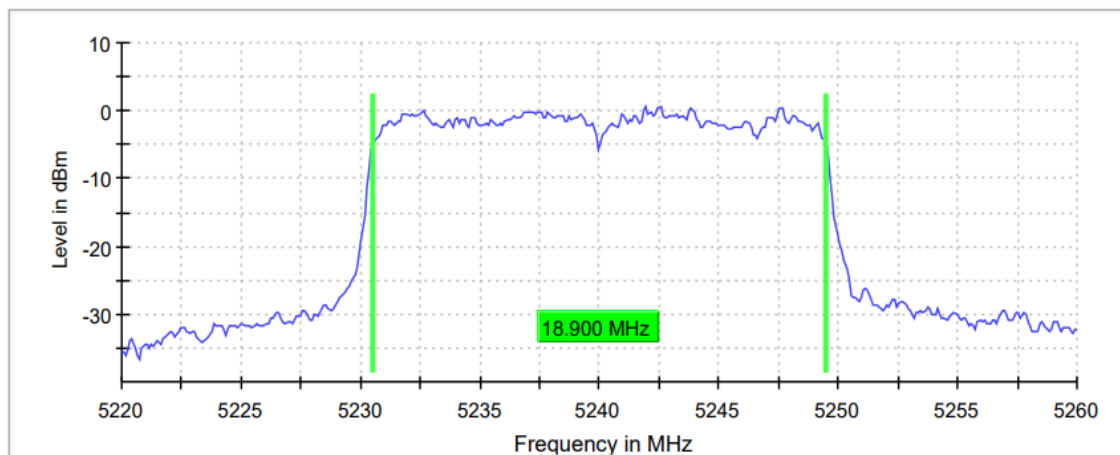

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 µs	28.477 µs	28.477 µs
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	76 / max. 150	90 / max. 150	81 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.15 dB	0.06 dB	0.20 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode SISO Radio A)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
26dB bandwidth (MHz)	41.126	40.525
Occupied bandwidth (MHz)	37.750	37.750

26 dB Bandwidth

Lowest Channel

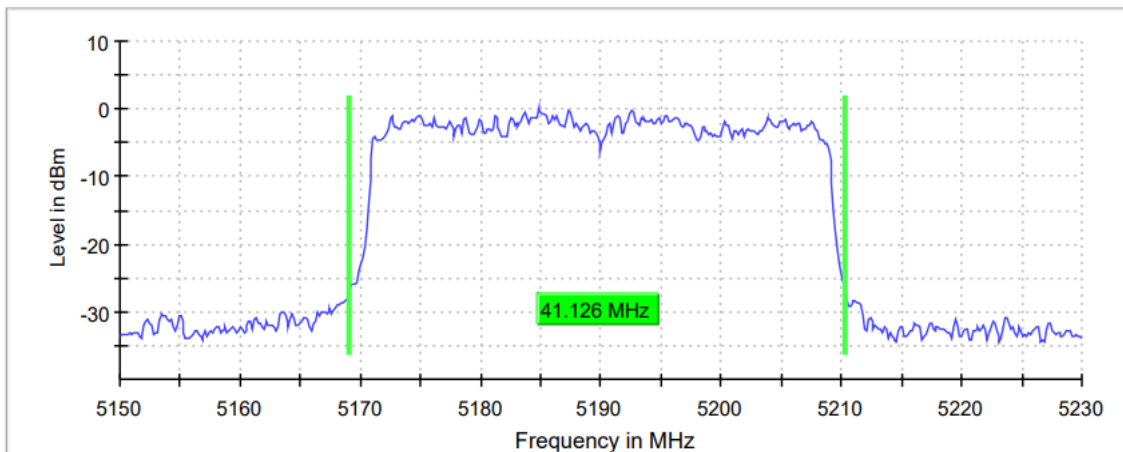

Highest Channel

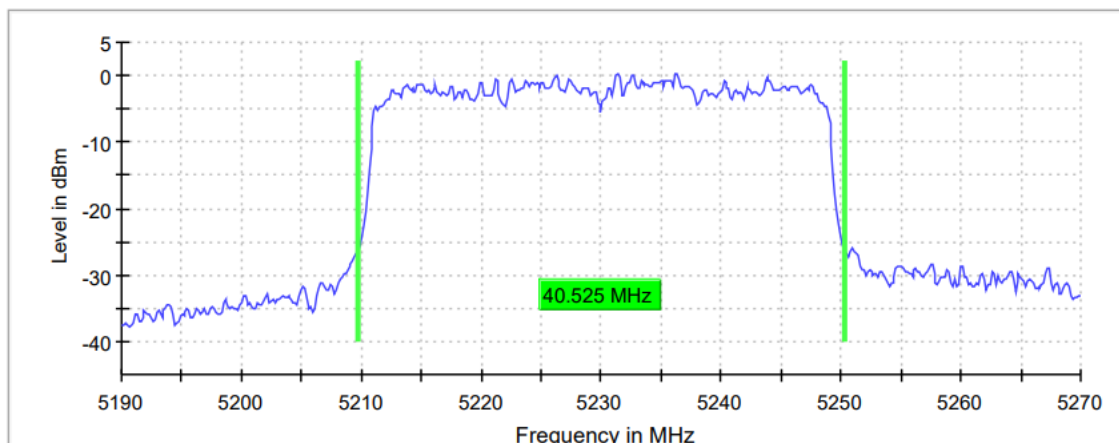

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	85 / max. 150	111 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.26 dB	0.00 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

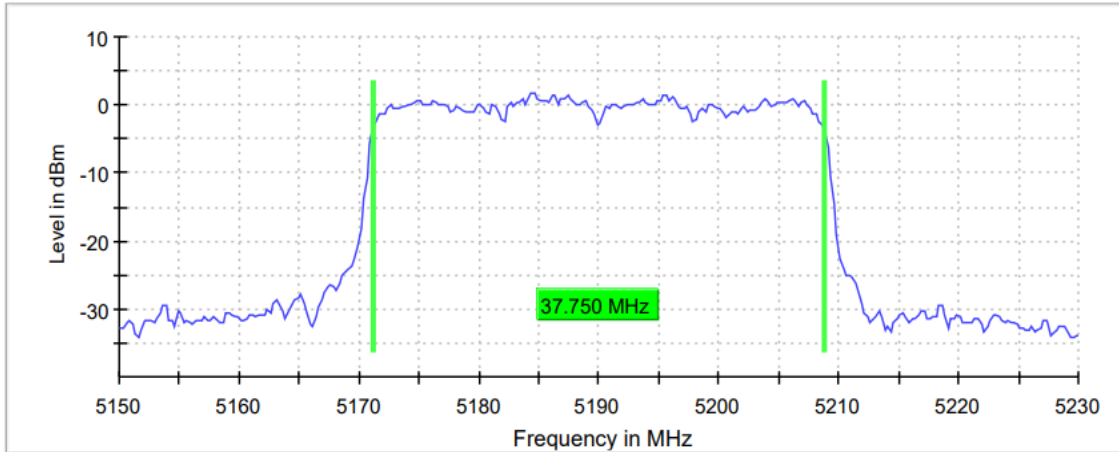

Highest Channel

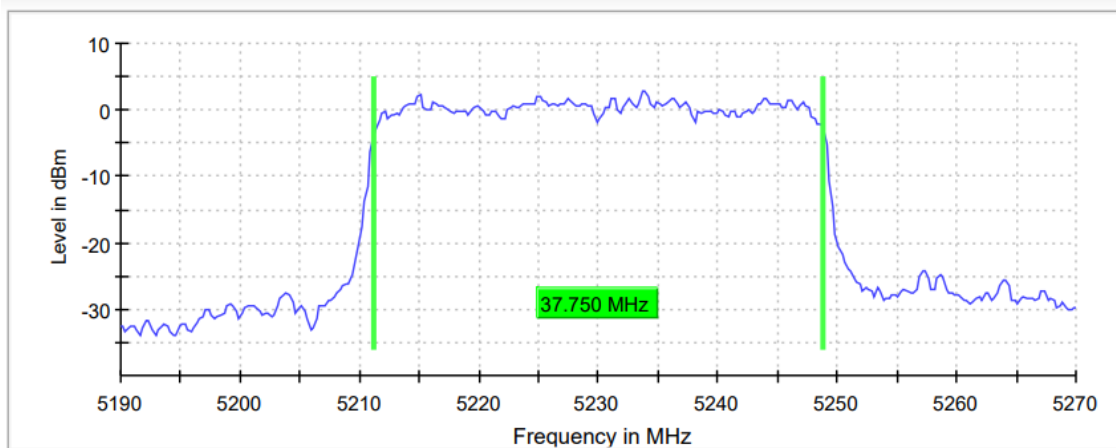

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	63 / max. 150	84 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.14 dB	0.13 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 40 MHz

	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
26dB bandwidth (MHz)	40.826	40.675
Occupied bandwidth (MHz)	37.750	37.750


26 dB Bandwidth

Lowest Channel

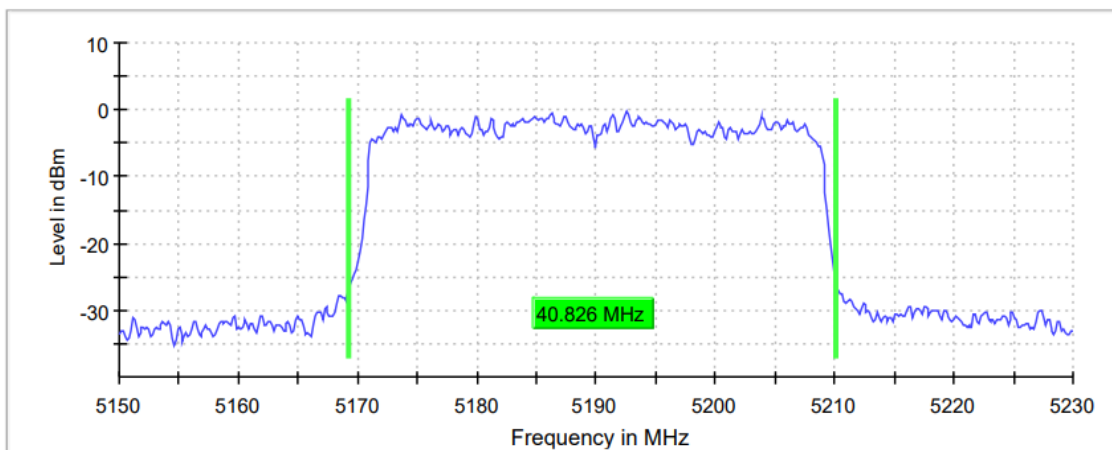

Highest Channel

26 dB Bandwidth

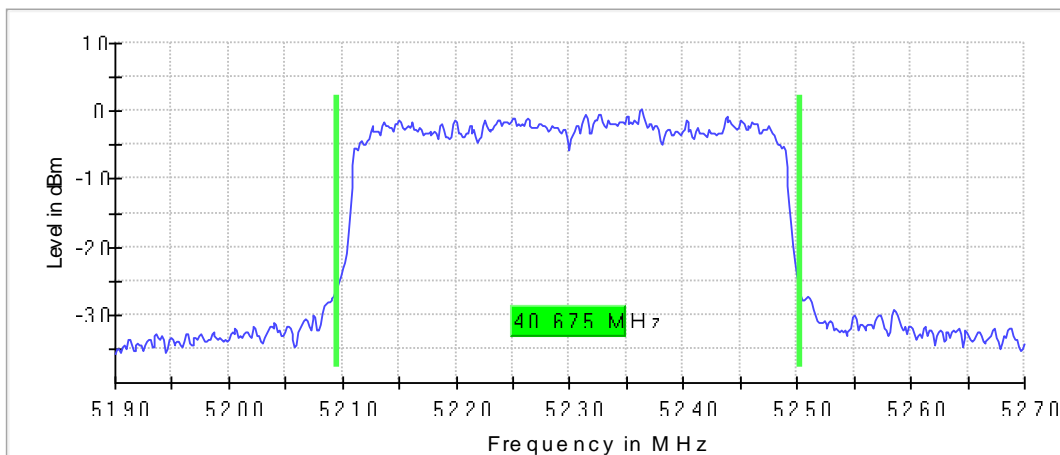

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	106 / max. 150	118 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.07 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

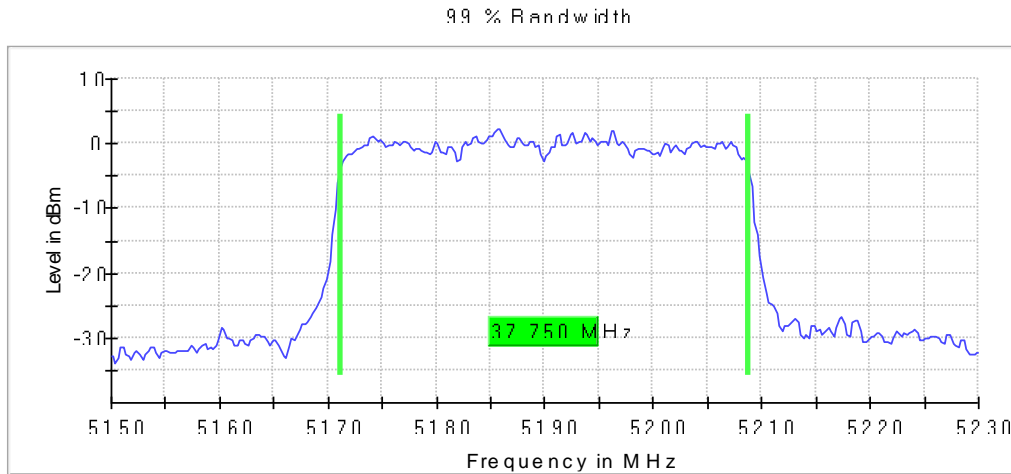

Highest Channel

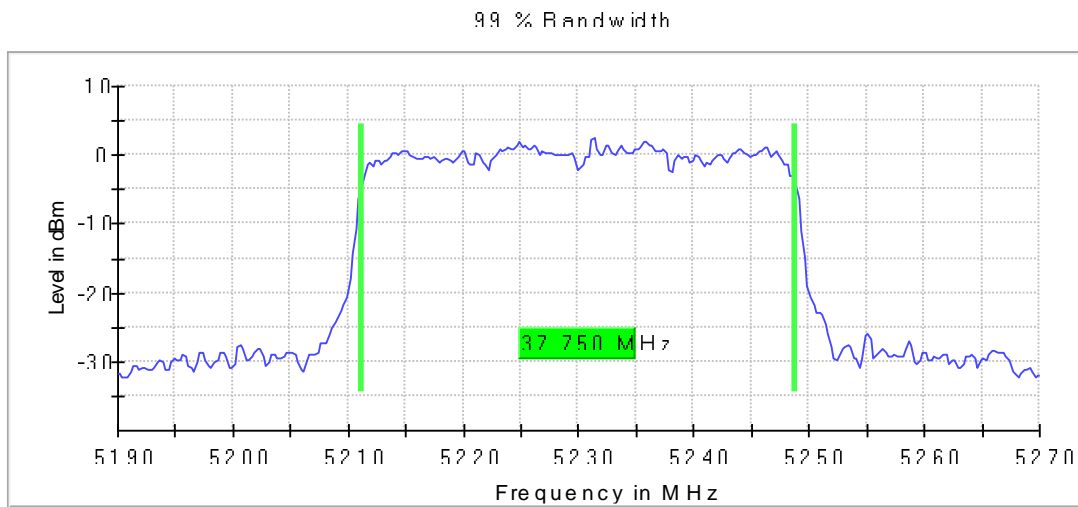

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 µs	18.906 µs
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	121 / max. 150	100 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode MIMO Radio A+B)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
26dB bandwidth (MHz)	40.375	40.675
Occupied bandwidth (MHz)	37.750	37.750

26 dB Bandwidth

Lowest Channel

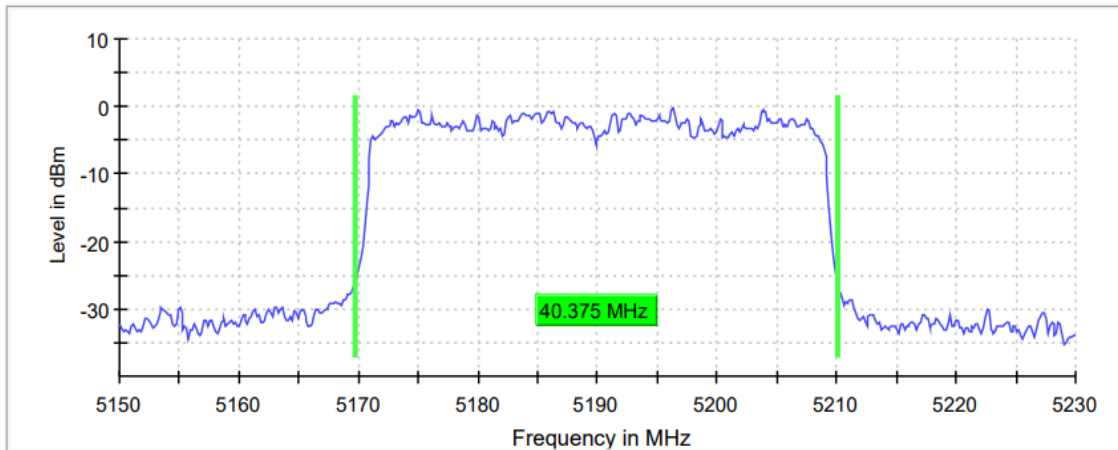

Highest Channel

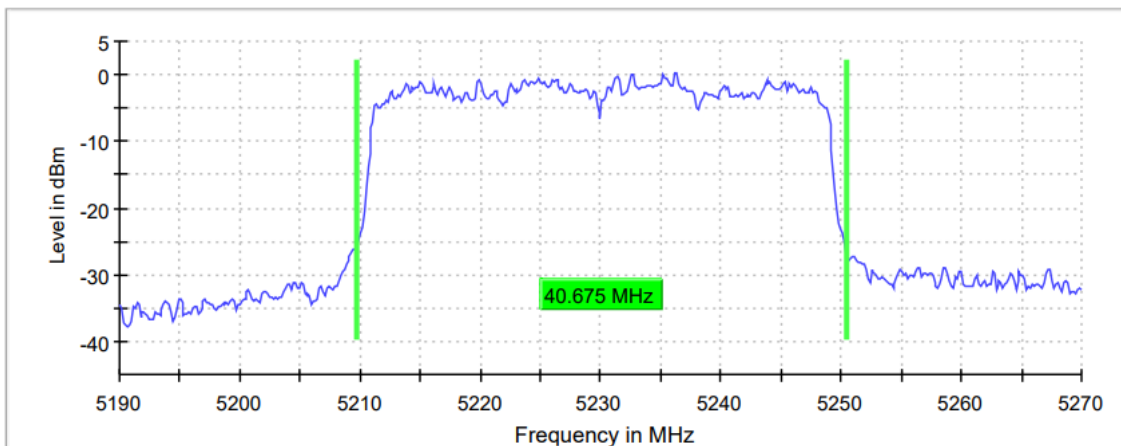

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	86 / max. 150	65 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.28 dB	0.27 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

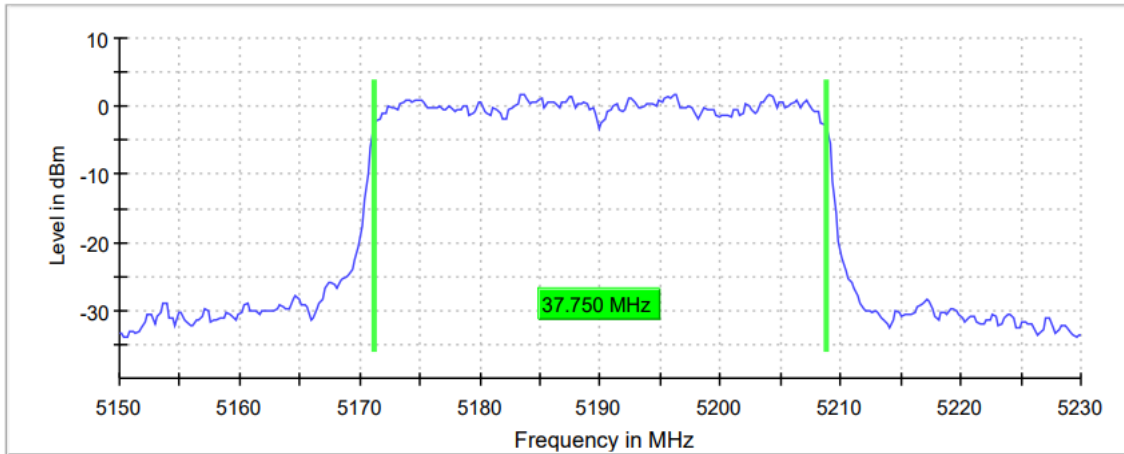

Highest Channel

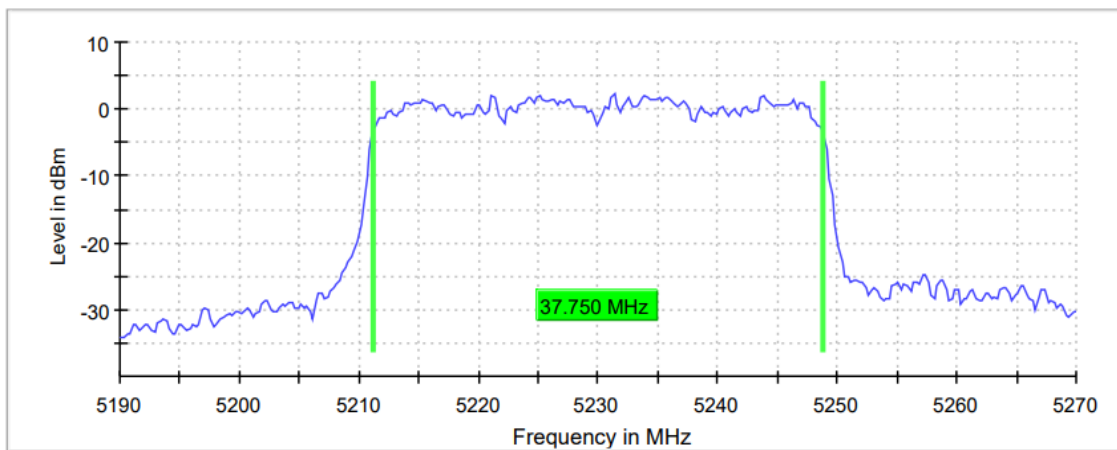

TEST RESULTS (Cont.)

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	88 / max. 150	66 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.15 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode SISO Radio A)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	81.500
Occupied bandwidth (MHz)	77.500

**26 dB Bandwidth
 Lowest Channel**

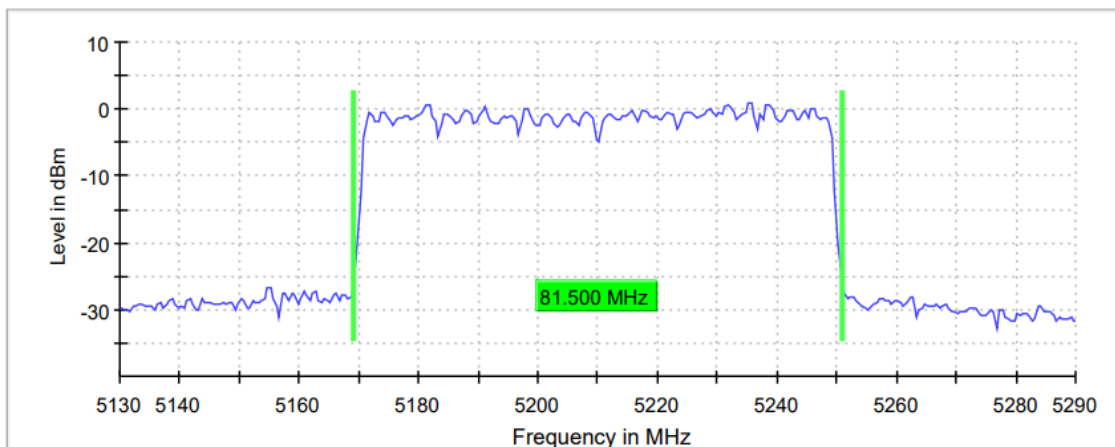

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	73 / max. 150
Stable	5 / 5
Max Stable Difference	0.14 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

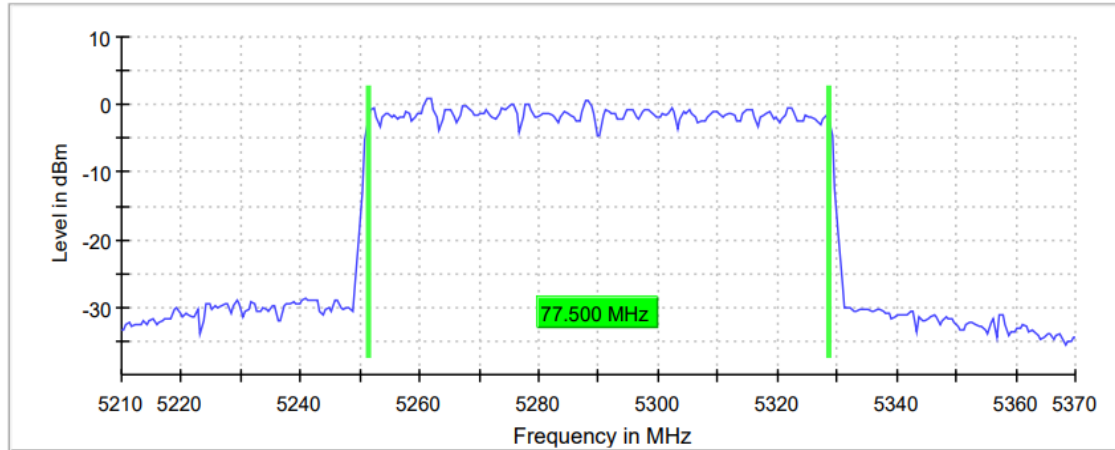

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	88 / max. 150
Stable	5 / 5
Max Stable Difference	0.27 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	81.500
Occupied bandwidth (MHz)	77.500

**26 dB Bandwidth
 Lowest Channel**

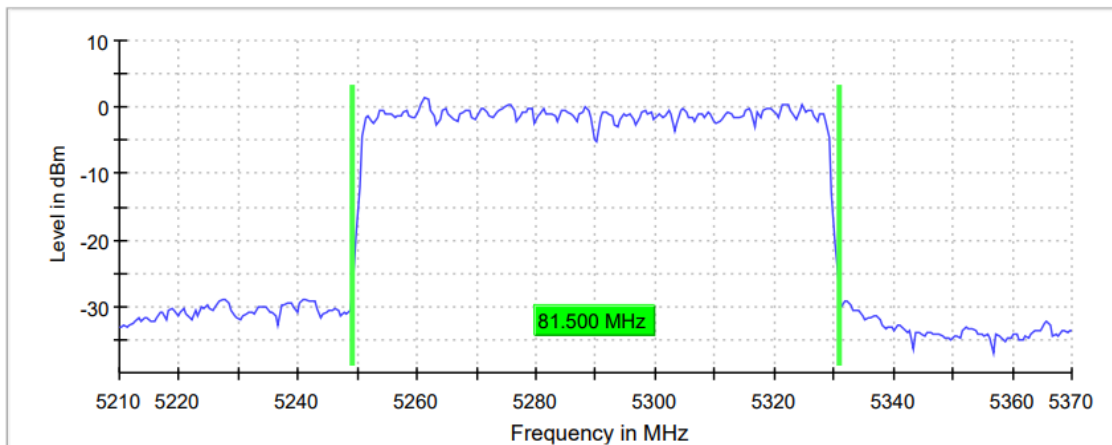

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	92 / max. 150
Stable	5 / 5
Max Stable Difference	0.07 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

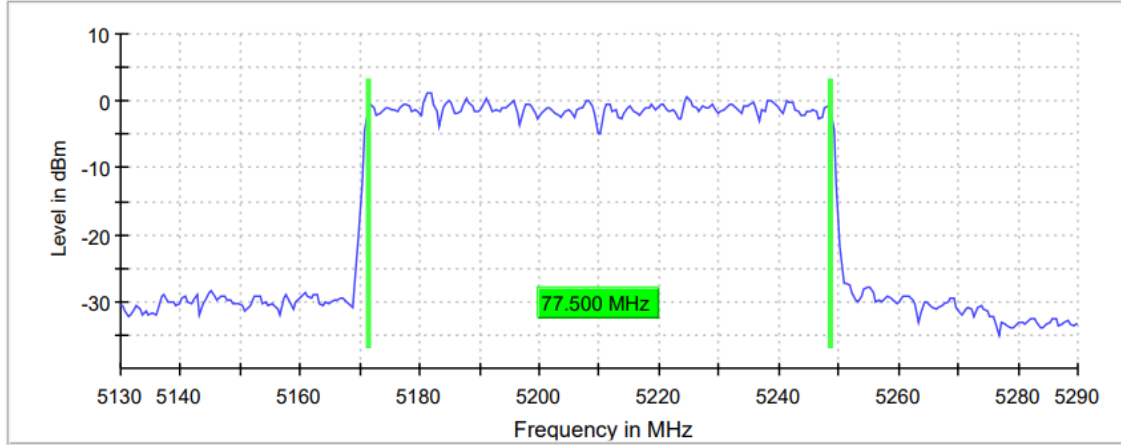

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	118 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode MIMO Radio A+B)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	81.500
Occupied bandwidth (MHz)	77.500

**26 dB Bandwidth
 Lowest Channel**

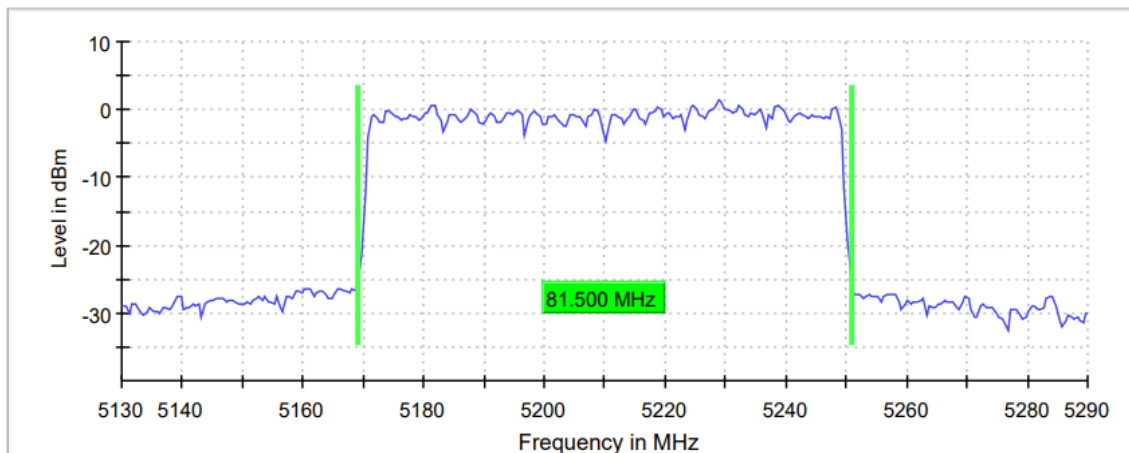

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	110/ max. 150
Stable	5 / 5
Max Stable Difference	0.09 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

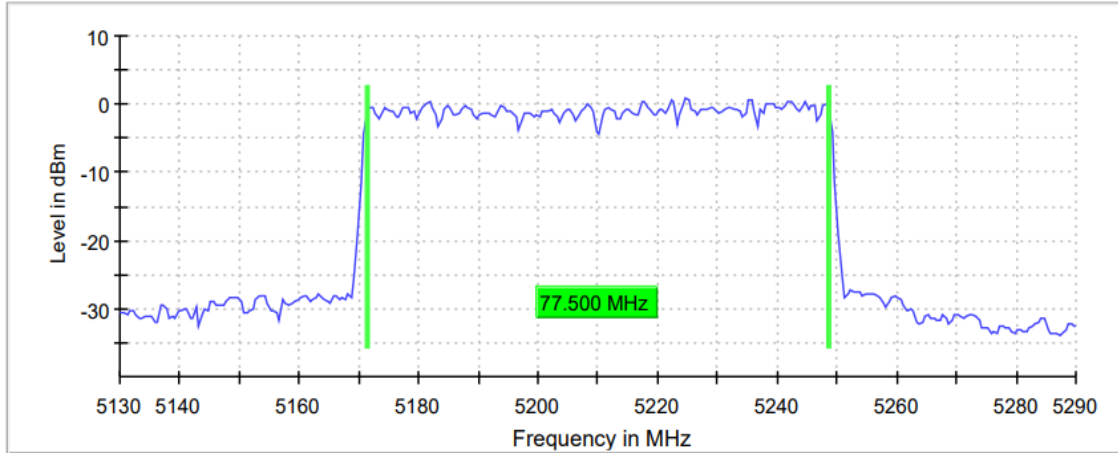

Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	88 / max. 150
Stable	5 / 5
Max Stable Difference	0.05 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac Mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
26dB bandwidth (MHz)	24.600	25.100	25.200
Occupied bandwidth (MHz)	18.900	18.900	18.200

26 dB Bandwidth:

Lowest Channel

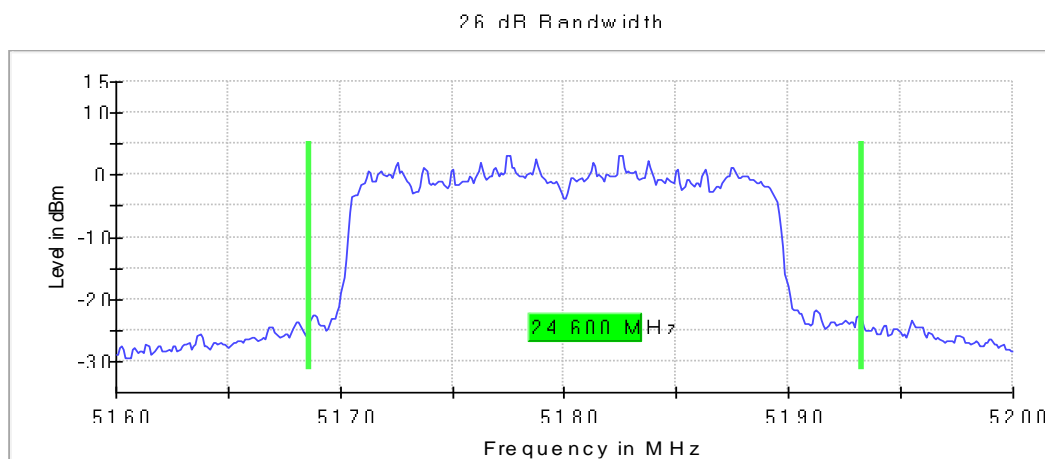


Middle Channel

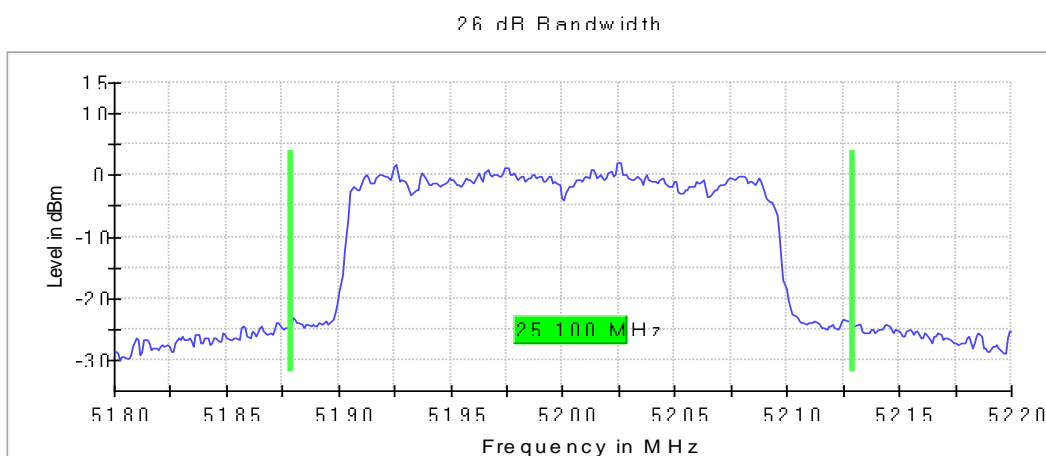

TEST RESULTS (Cont.)

Highest Channel

26 dB Bandwidth

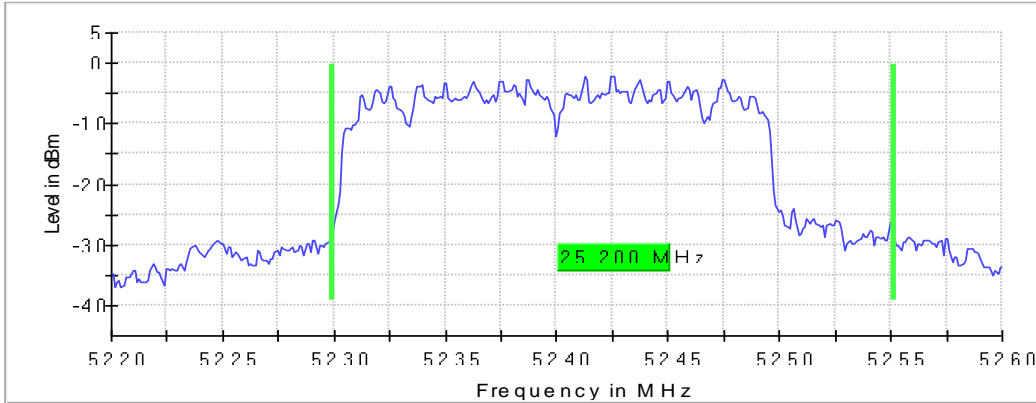


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 µs	28.477 µs	28.477 µs
Reference Level	10.000 dBm	0.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	124 / max. 150	122 / max. 150	78 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB	0.00 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

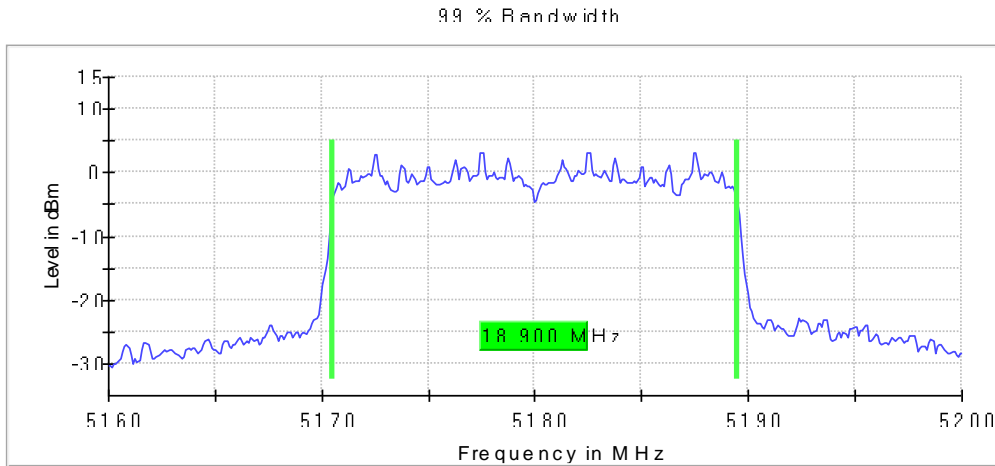

Middle Channel

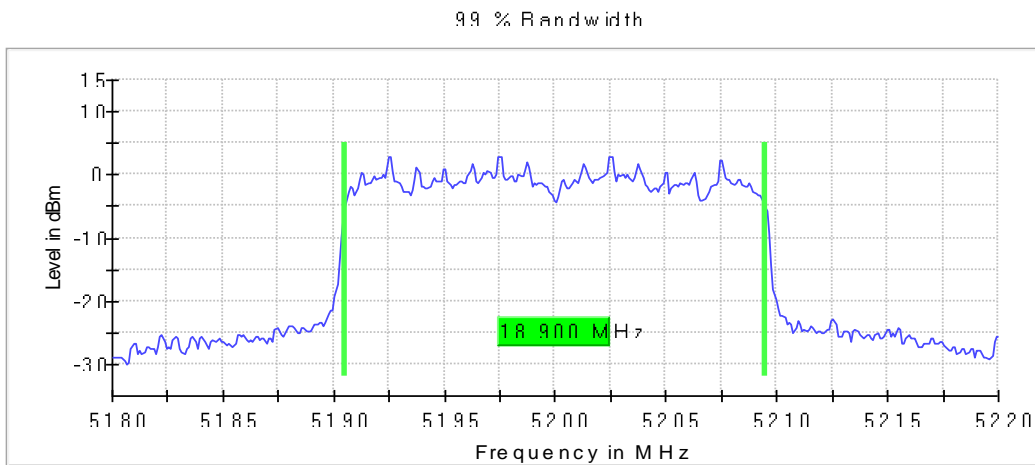

Highest Channel

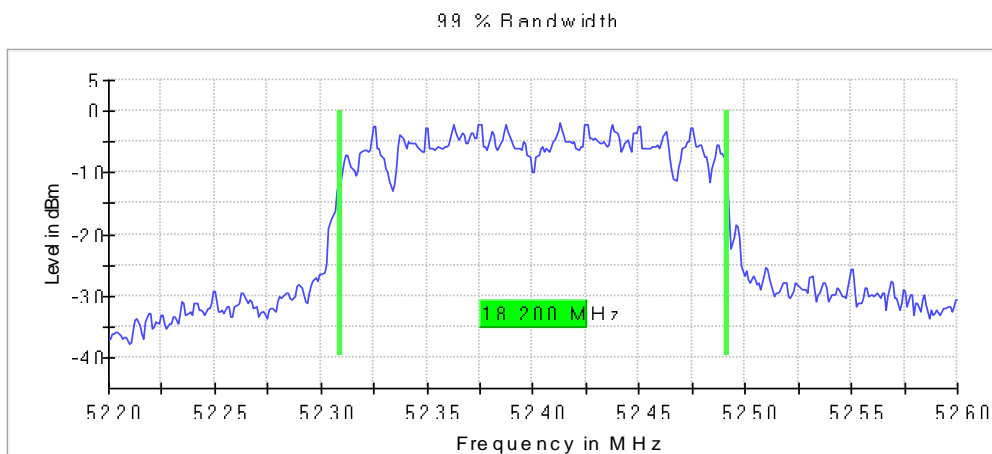

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	46 / max. 150	71 / max. 150	58 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB	0.11 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac Mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
26dB bandwidth (MHz)	41.425	40.976
Occupied bandwidth (MHz)	36.250	36.250

26 dB Bandwidth

Lowest Channel

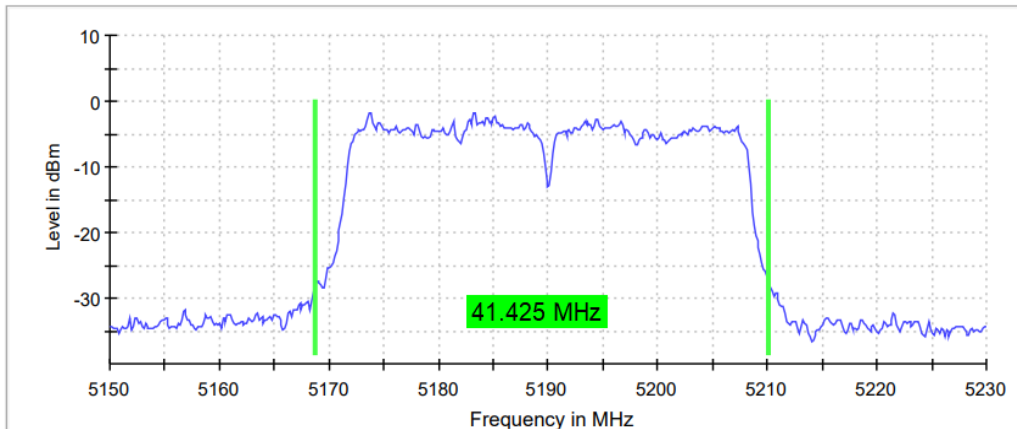

Highest Channel

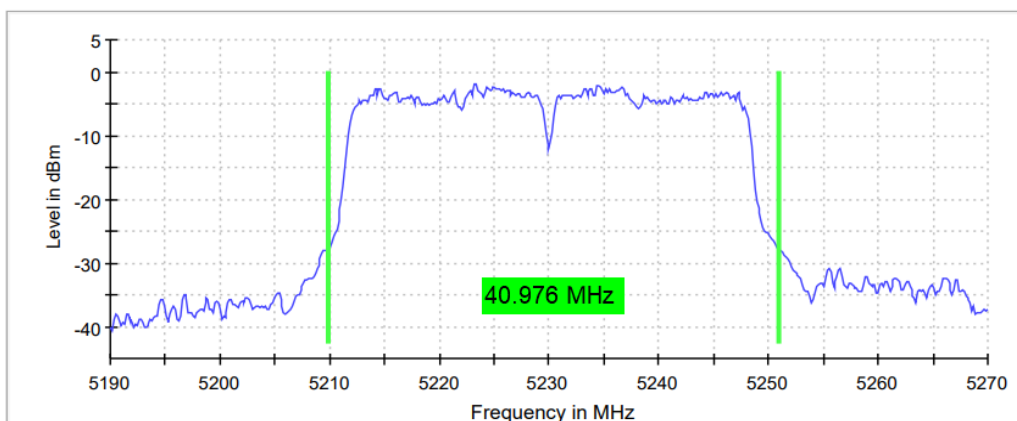

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	68 / max. 150	102 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.05 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

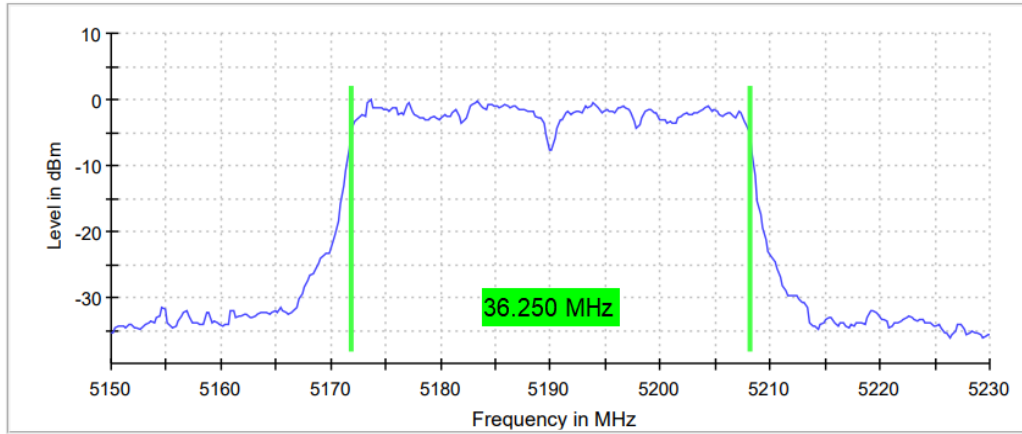

Highest Channel

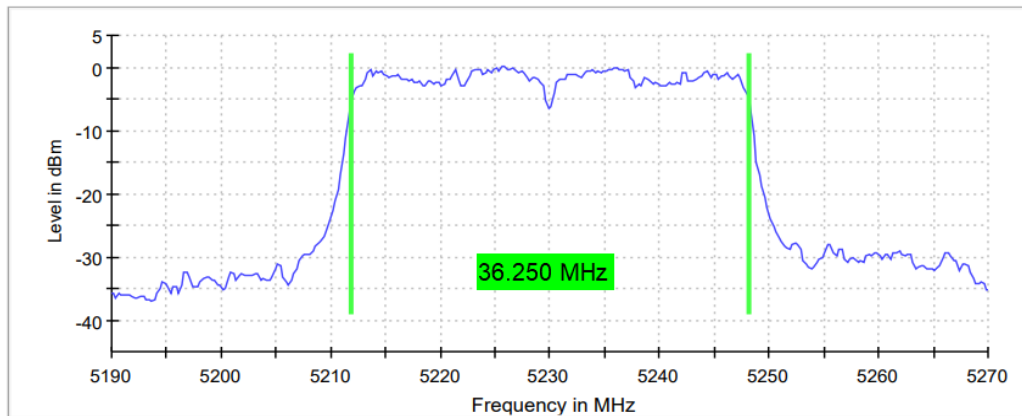

TEST RESULTS (Cont.)

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	77 / max. 150	75 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac Mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	90.000
Occupied bandwidth (MHz)	78.000

**26 dB Bandwidth
 Lowest Channel**

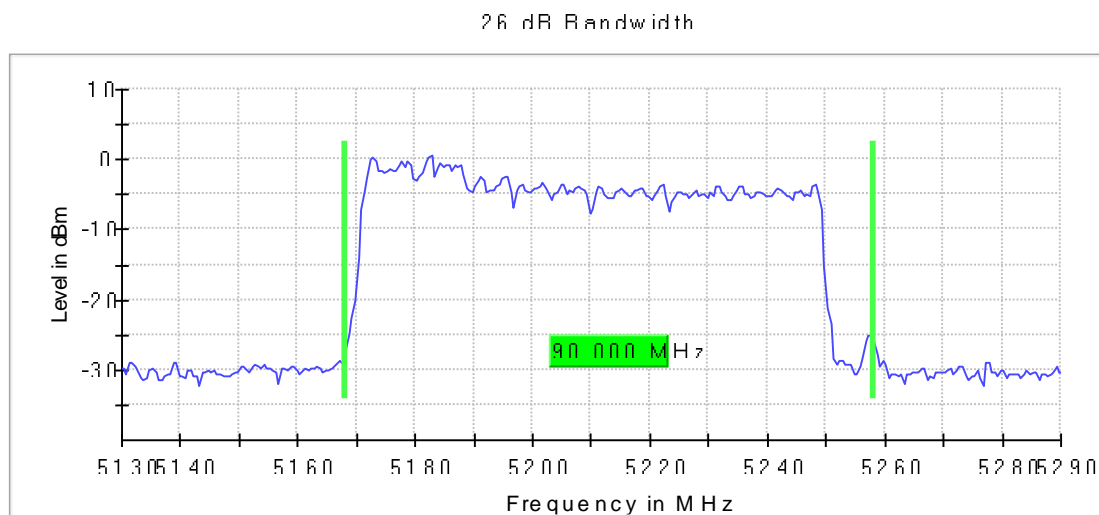

TEST RESULTS (Cont.)

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	MaxPeak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	82 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

99 % Bandwidth

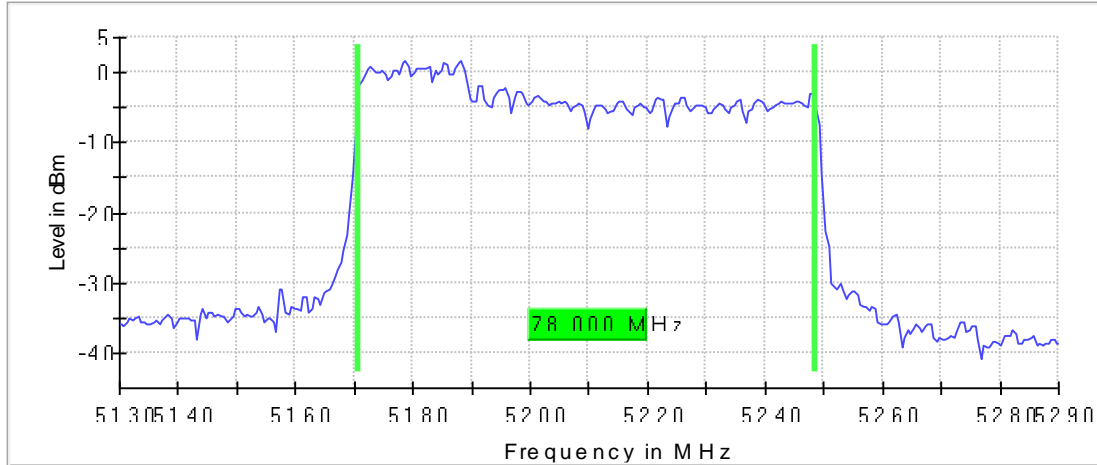

Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	122 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax Mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
26dB bandwidth (MHz)	21.000	20.900	20.800
Occupied bandwidth (MHz)	18.900	18.900	18.900

26 dB Bandwidth:

Lowest Channel

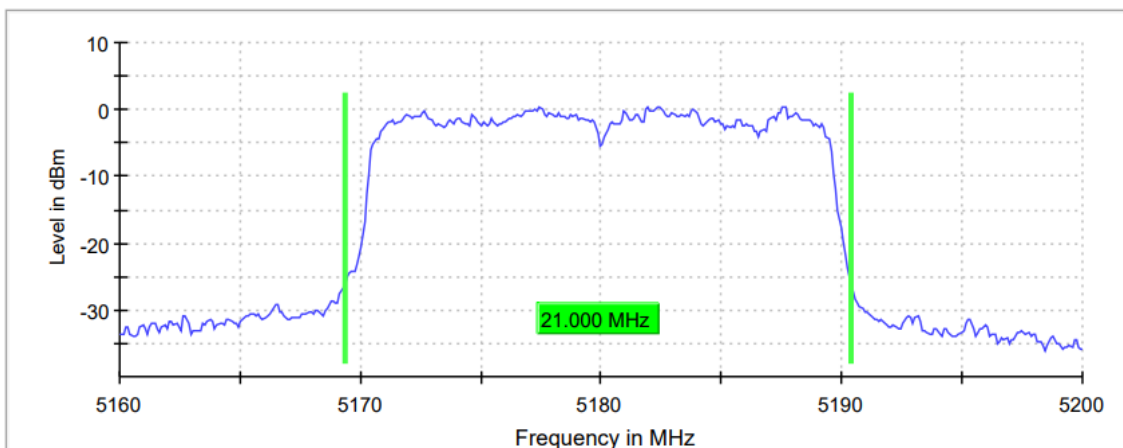


Middle Channel

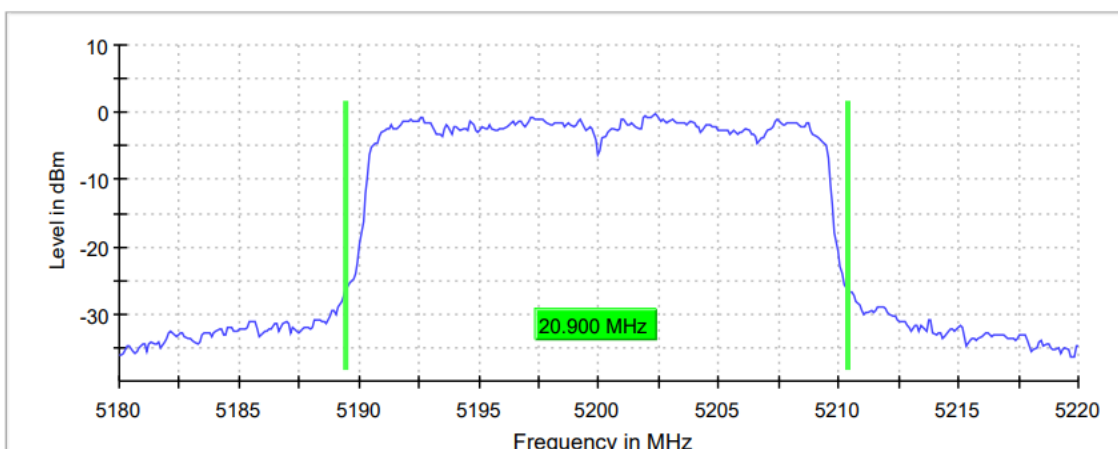

TEST RESULTS (Cont.)

Highest Channel

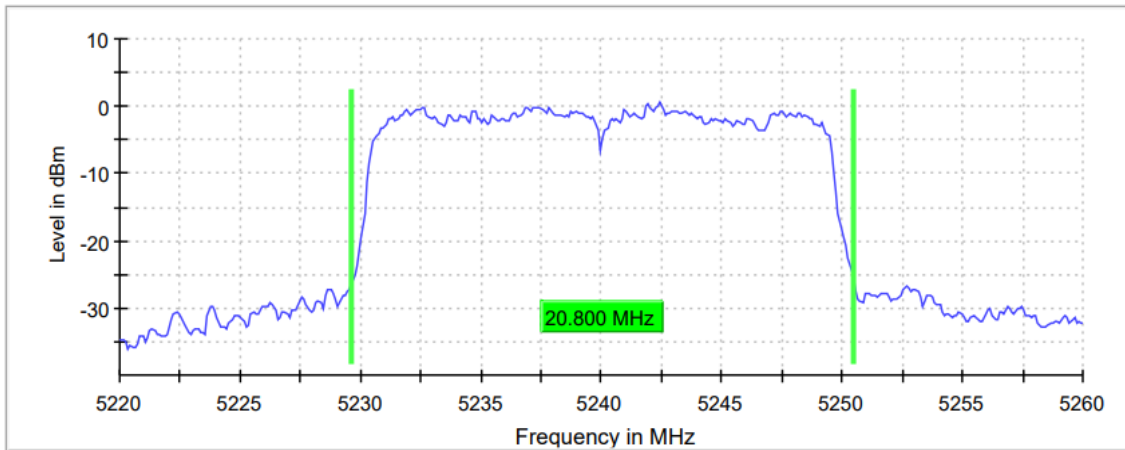


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	0.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	80 / max. 150	71 / max. 150	47 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.02 dB	0.07 dB	0.21 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

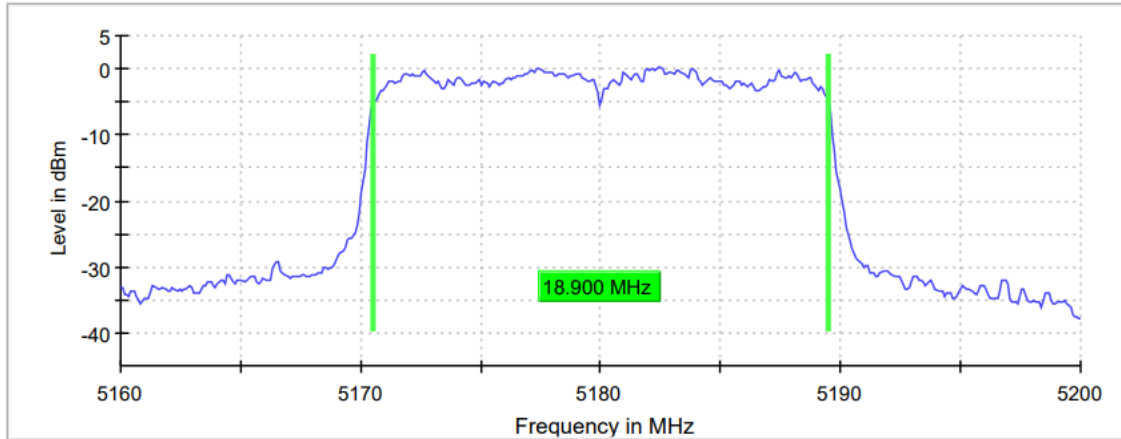

Middle Channel

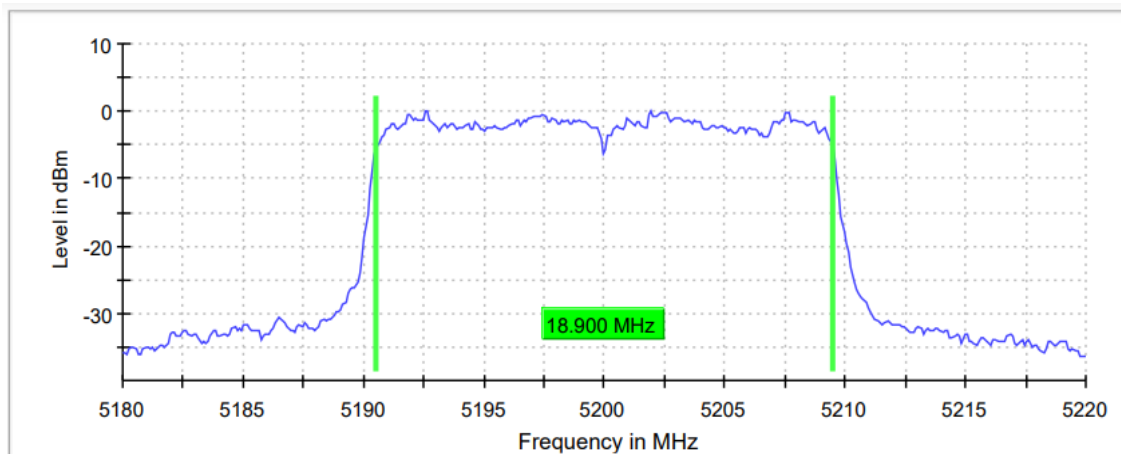

Highest Channel

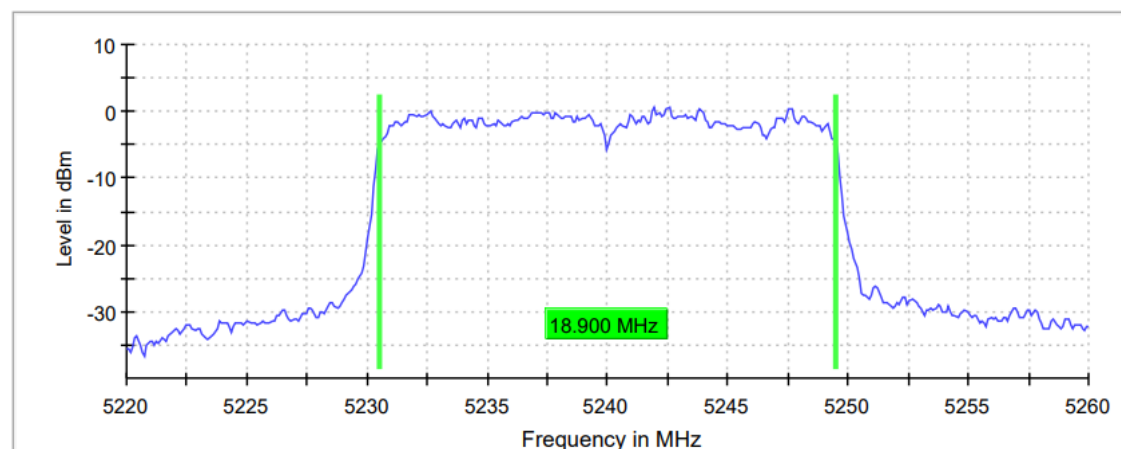

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	76 / max. 150	90 / max. 150	81 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.15 dB	0.06 dB	0.20 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax Mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
26dB bandwidth (MHz)	43.827	40.675
Occupied bandwidth (MHz)	37.750	38.000

26 dB Bandwidth

Lowest Channel

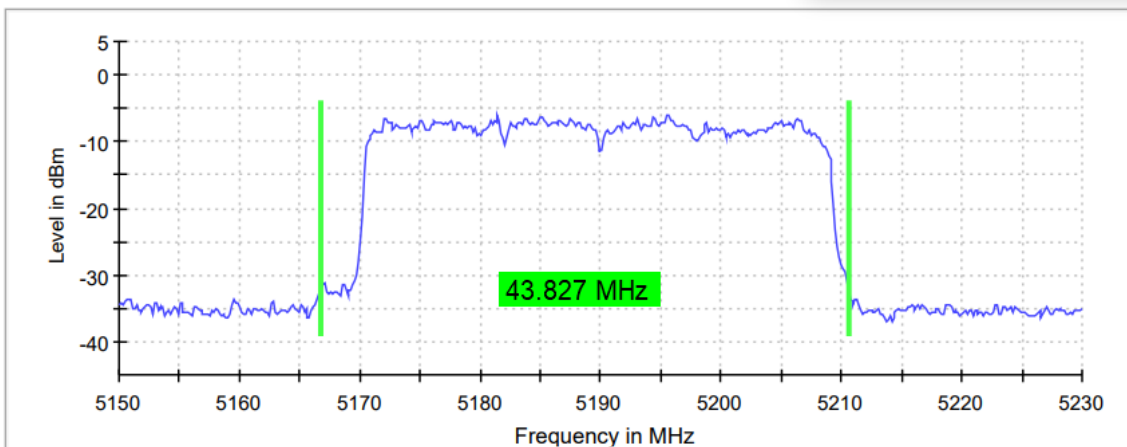

Highest Channel

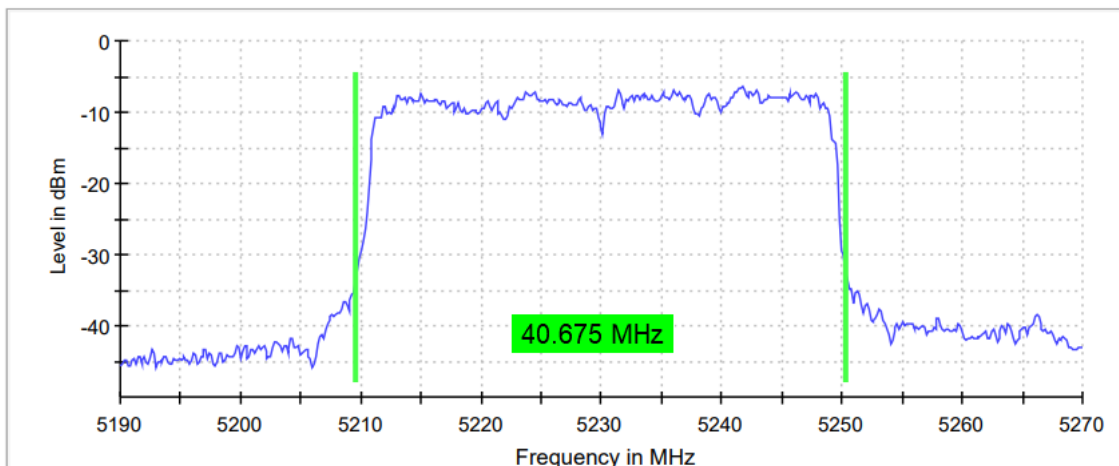

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	127 / max. 150	125 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

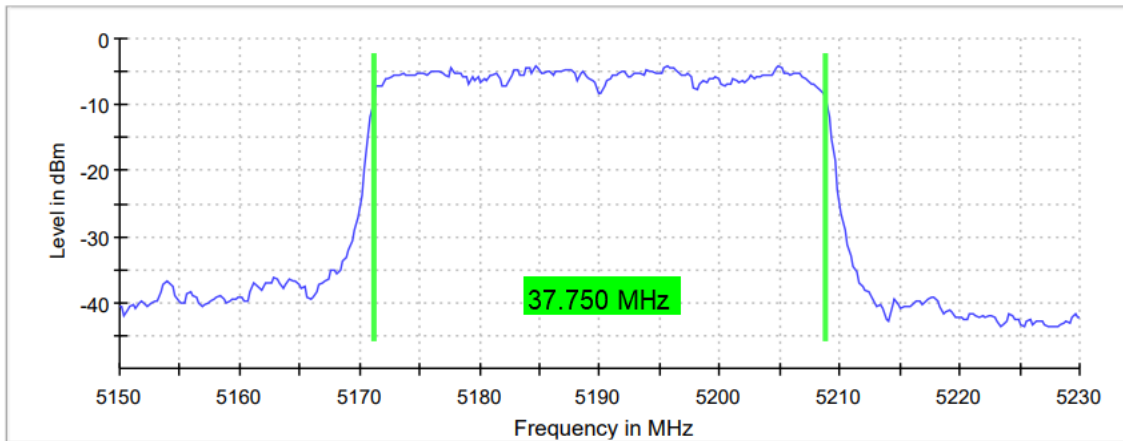

Highest Channel

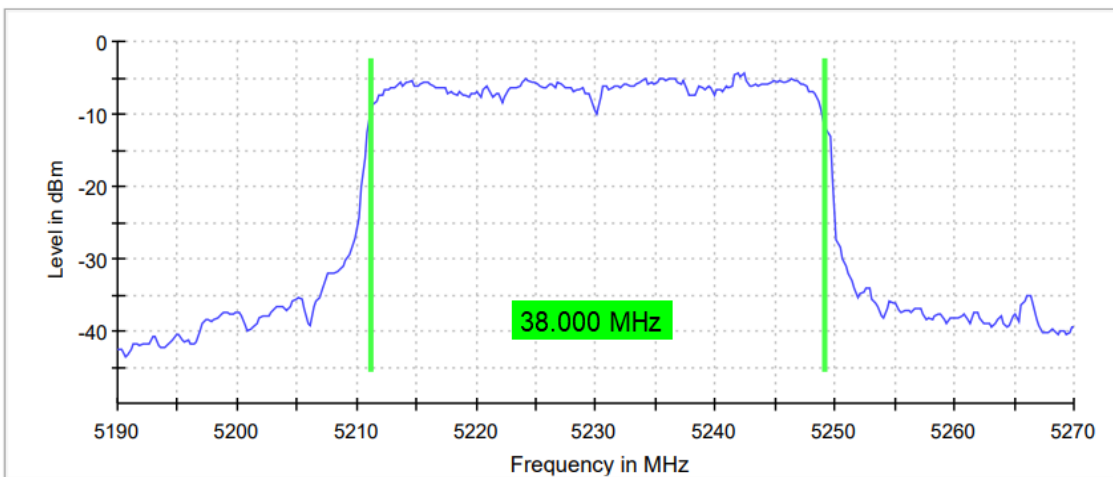

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	87 / max. 150	100 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax Mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	82.000
Occupied bandwidth (MHz)	77.500

**26 dB Bandwidth
 Lowest Channel**

26 dB Bandwidth

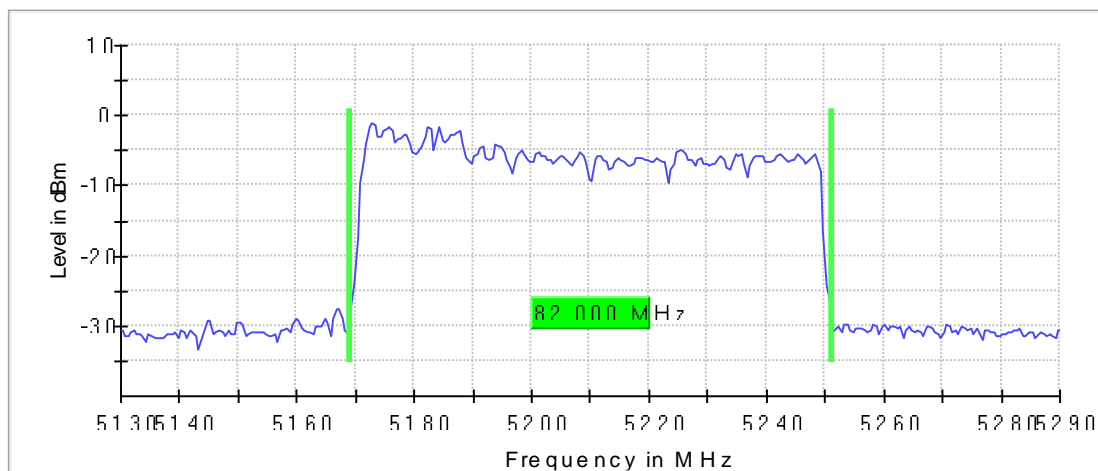

TEST RESULTS (Cont.)

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 µs
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	MaxPeak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	48 / max. 150
Stable	5 / 5
Max Stable Difference	0.08 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

99 % Bandwidth

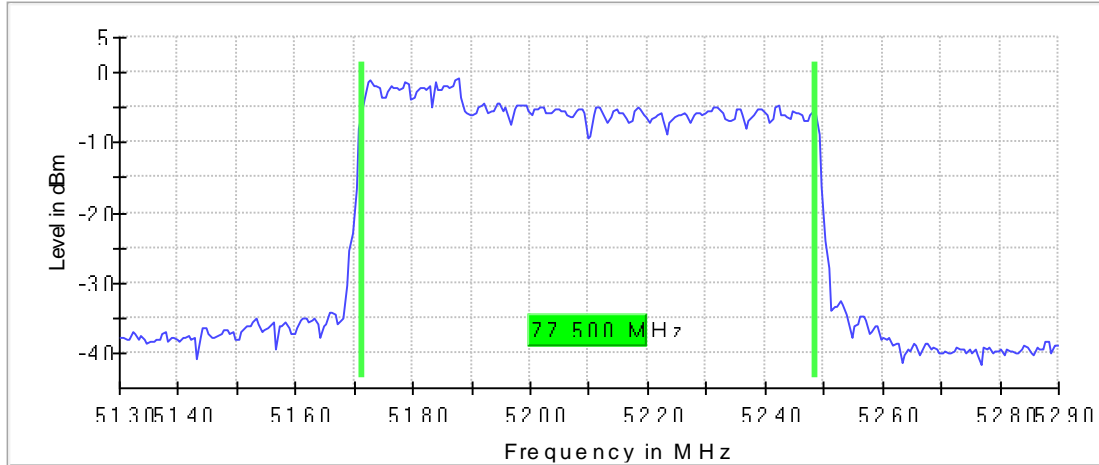

Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	97 / max. 150
Stable	5 / 5
Max Stable Difference	0.28 dB

TEST B.2: POWER LIMITS. MAXIMUM OUTPUT POWER

LIMITS:	Product standard:	Part 15 Subpart C §15.407 and RSS-247
	Test standard:	Part 15 Subpart C §15.407(a) (1) (iv) and RSS-247 6.2.1.1

LIMITS

In band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


TEST SETUP

Measured according to ANSI C63.10, Section 11.9.2.3.2 Method AVGPM-G

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

As Per KDB 662911 D01 Multiple Transmitter Output v02r01, for 802.11ac and ax Beamforming mode the directional gain for 2 TX antennas are calculated as follows:

$$\text{Directional Gain} = \text{Antenna gain} + 10\log(N_{\text{ANT}})$$

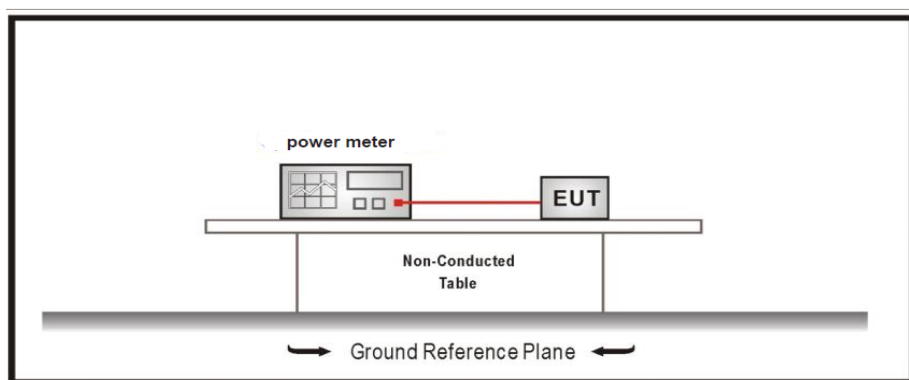

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode SISO Radio A)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Middle frequency	Highest frequency
	5180 MHz	5200 MHz	5240 MHz
Maximum conducted power (dBm)	11.287	10.741	11.394
Maximum EIRP power (dBm)	8.487	7.941	8.594

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

TEST RESULTS (Cont.):


CONDUCTED OUTPUT POWER

Lowest Channel

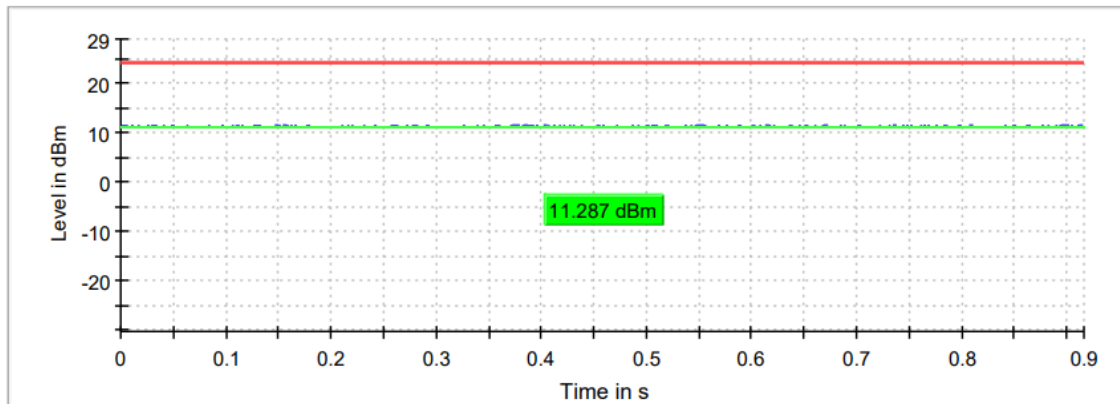


— Gated Trace — Overall — Limit

Middle Channel

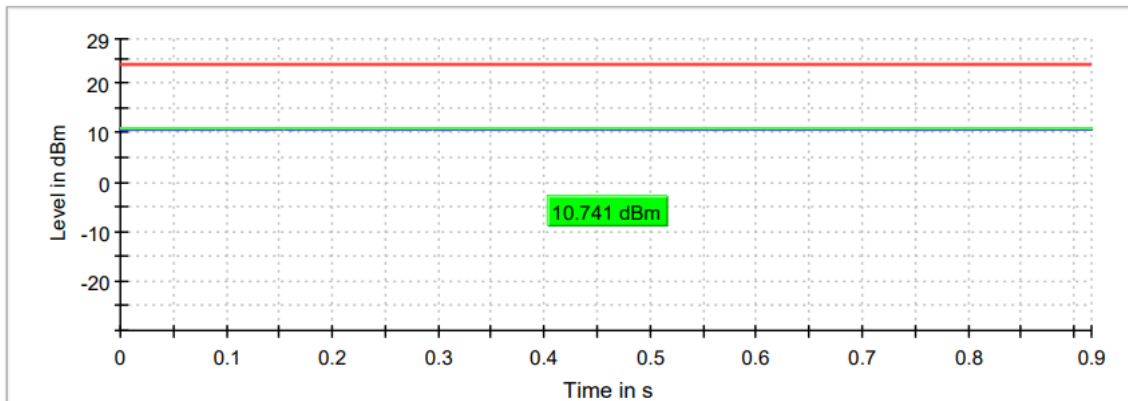

— Gated Trace — Overall — Limit

Highest Channel

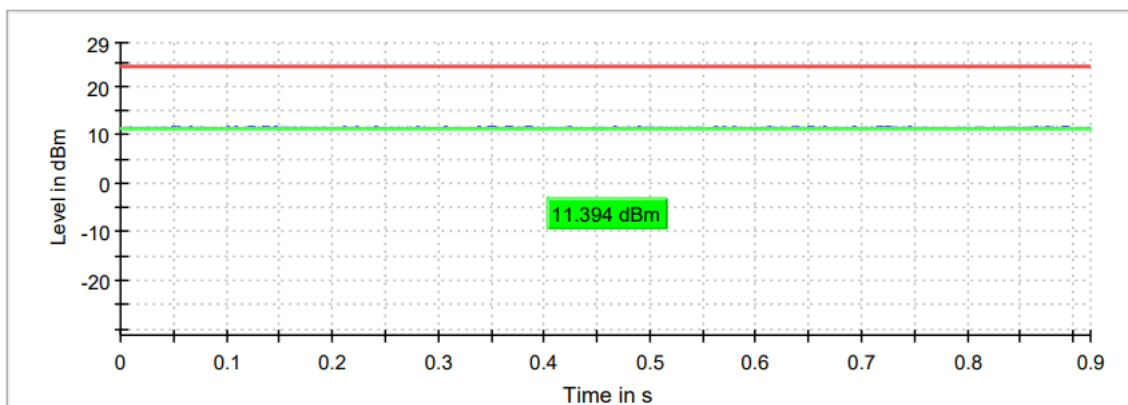

— Gated Trace — Overall — Limit


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode SISO Radio B)
TEST RESULTS:	PASS

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	11.580	11.103	11.488
Maximum EIRP power (dBm)	8.780	8.303	8.688


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

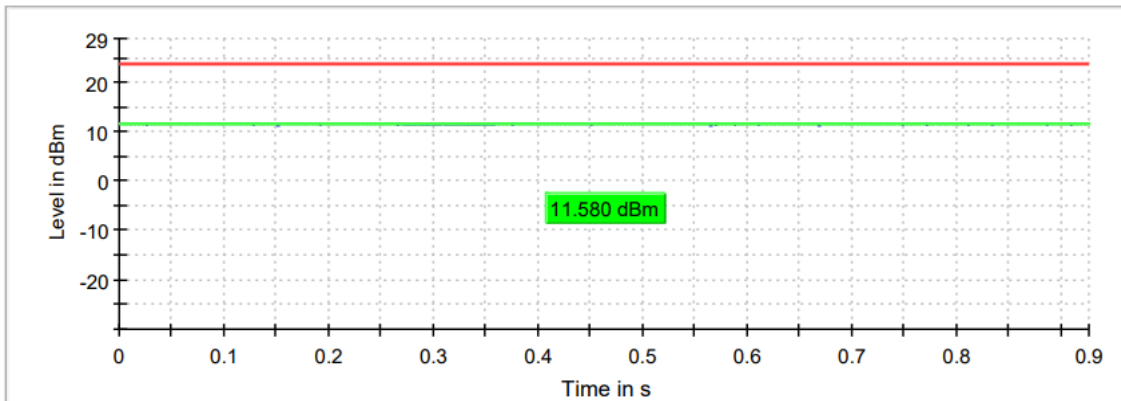

— Gated Trace — Overall — Limit


Middle Channel

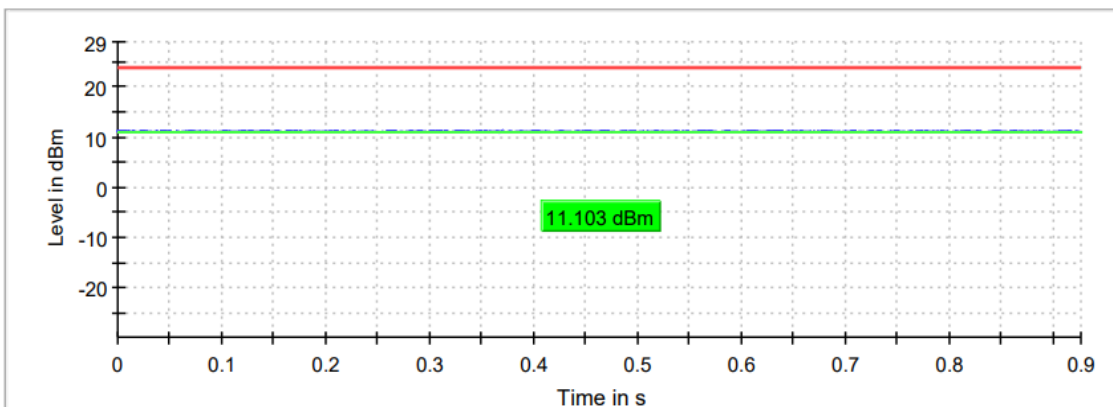

— Gated Trace — Overall — Limit

TEST RESULTS (Cont.):	CONDUCTED OUTPUT POWER
------------------------------	-------------------------------

Highest Channel

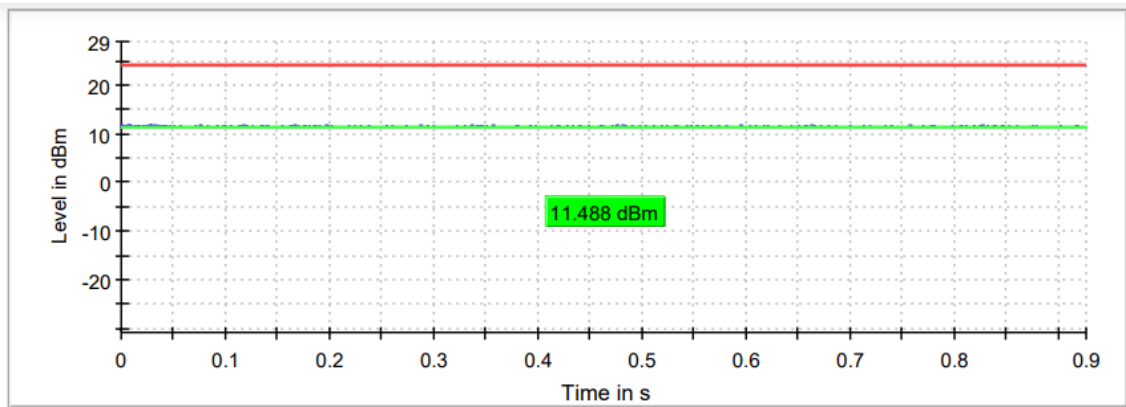

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode MIMO Radio A+B)
TEST RESULTS:	PASS

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	14.333	13.755	14.218
Maximum EIRP power (dBm)	11.533	10.955	11.418

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

TEST RESULTS (Cont.):


CONDUCTED OUTPUT POWER

Lowest Channel

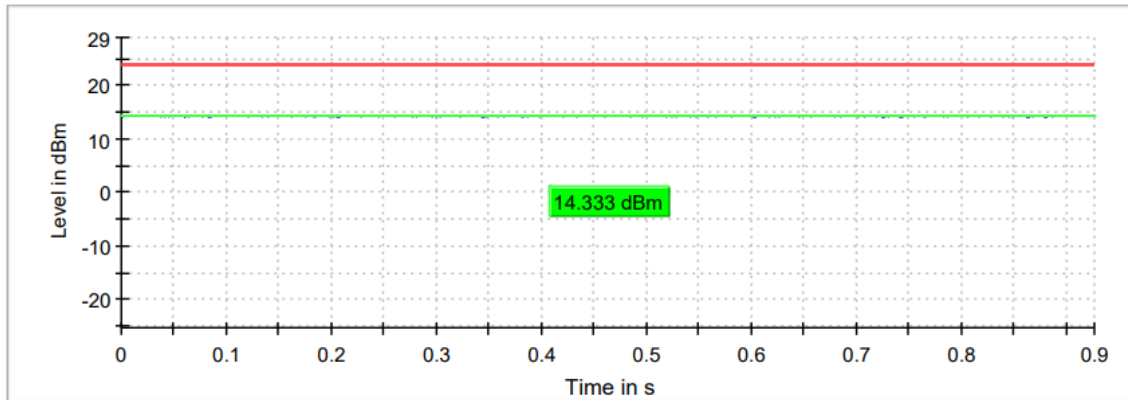


— Gated Trace — Overall — Limit

Middle Channel

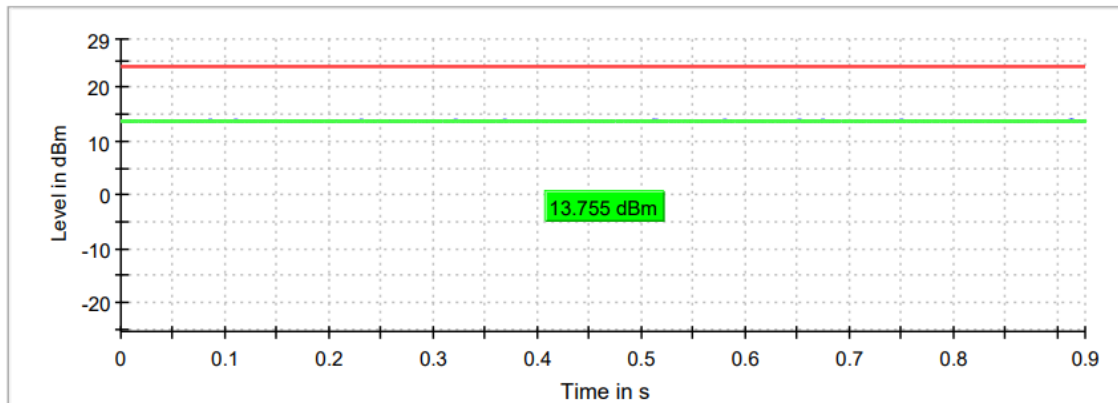

— Gated Trace — Overall — Limit

Highest Channel

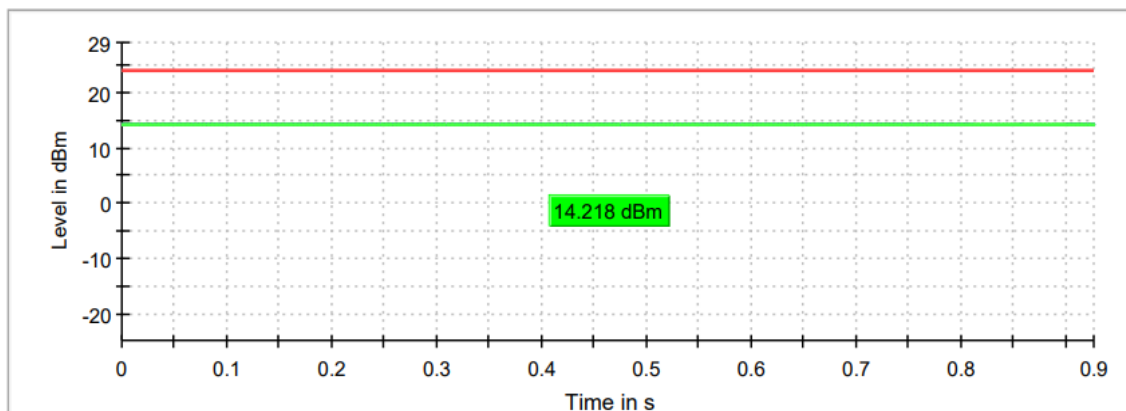

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.547	10.062	10.714
Maximum EIRP power (dBm)	7.747	7.262	7.914

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

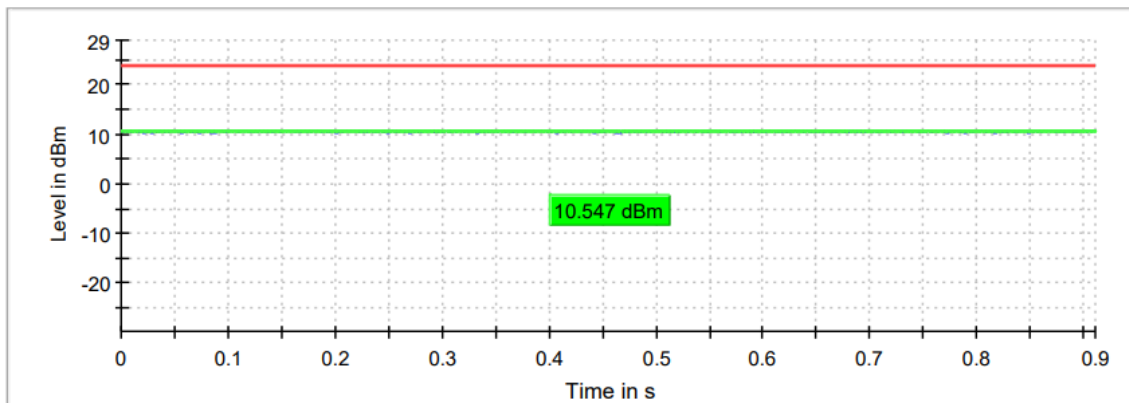


Middle Channel

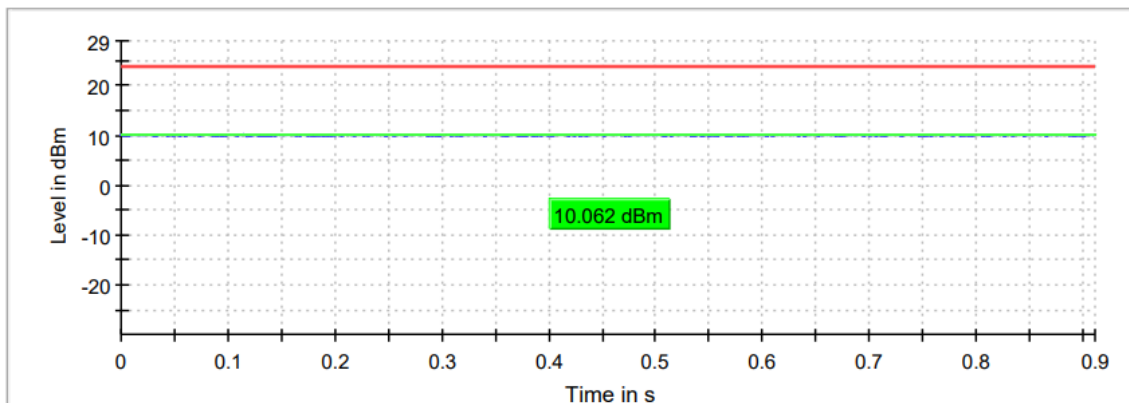

TEST RESULTS (Cont.):	CONDUCTED OUTPUT POWER
------------------------------	-------------------------------

Highest Channel

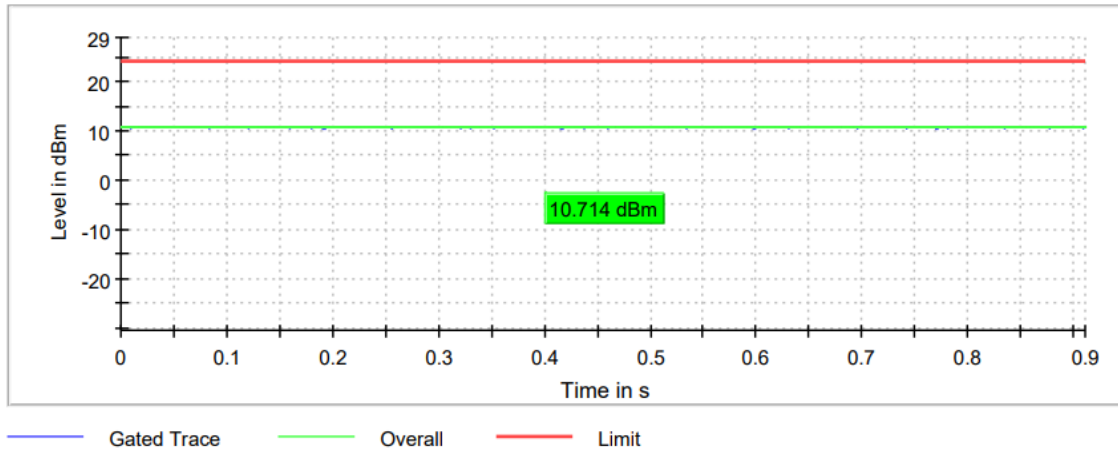

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.600	10.168	10.551
Maximum EIRP power (dBm)	7.800	7.368	7.751

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER


Lowest Channel

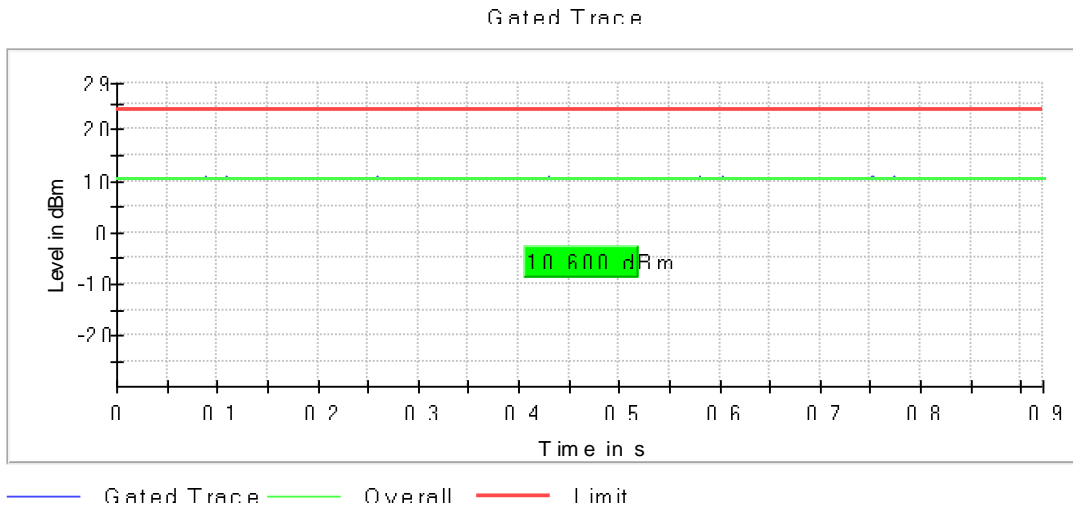

Middle Channel

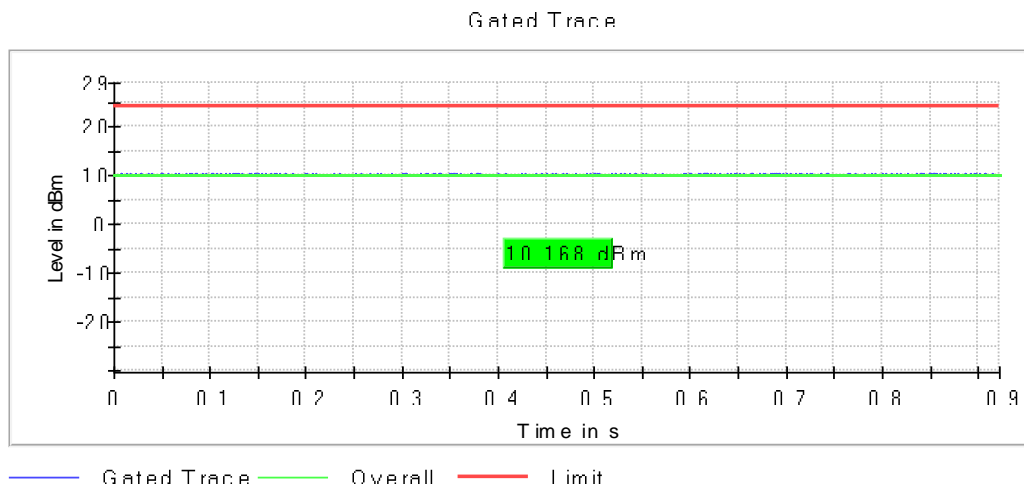

Highest Channel

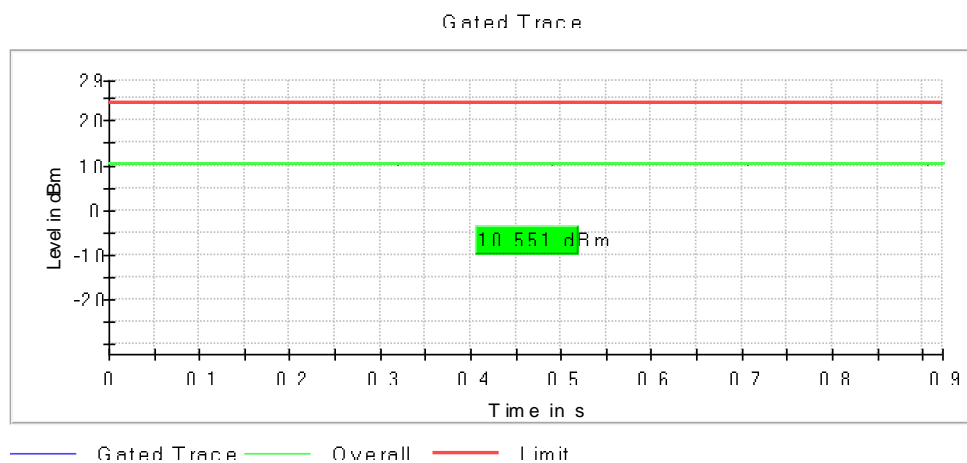

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	13.366	12.732	13.318
Maximum EIRP power (dBm)	10.566	9.932	10.518

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

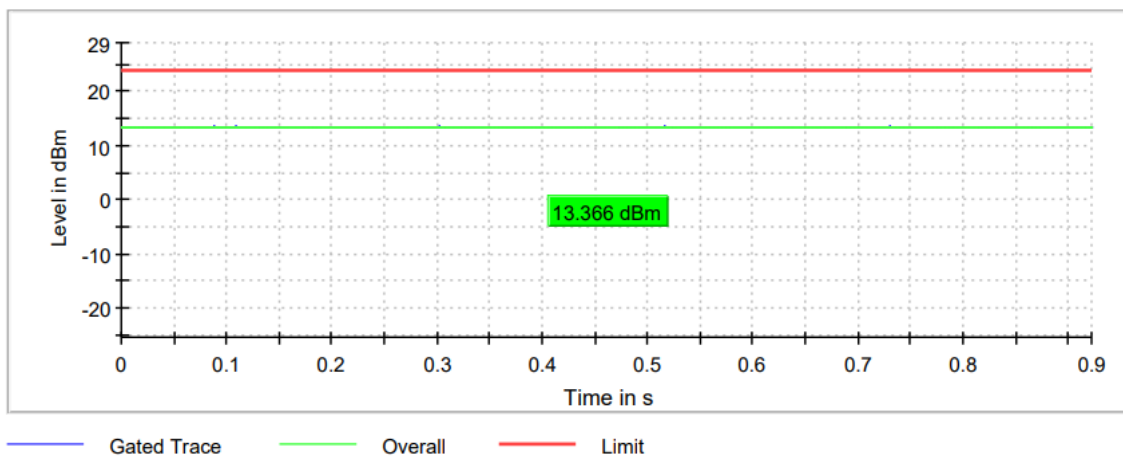


Middle Channel

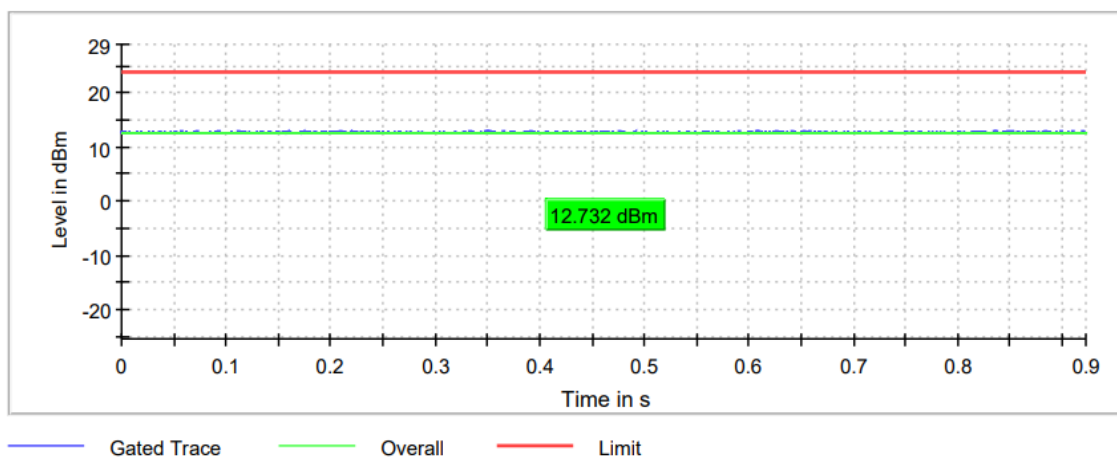

TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Highest Channel

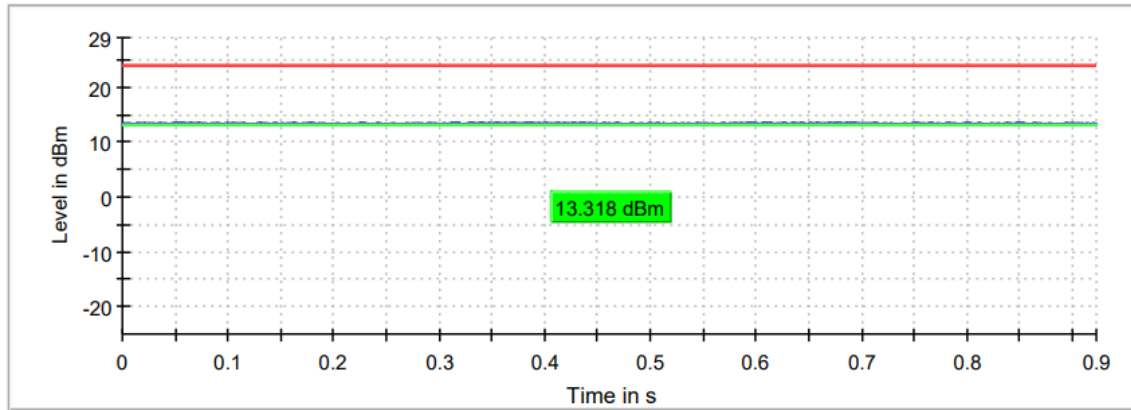

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	10.103	10.439
Maximum EIRP power (dBm)	7.303	7.639

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

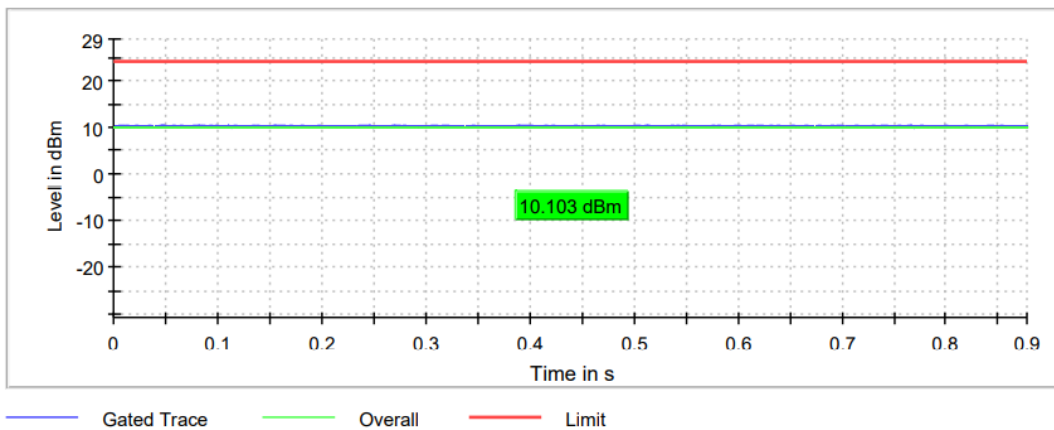

Highest Channel

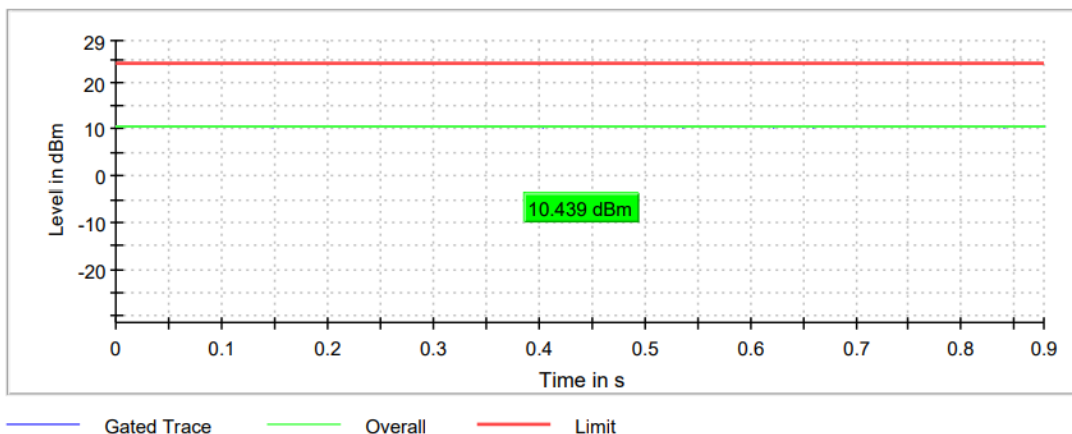

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	9.900	10.016
Maximum EIRP power (dBm)	7.100	7.216

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

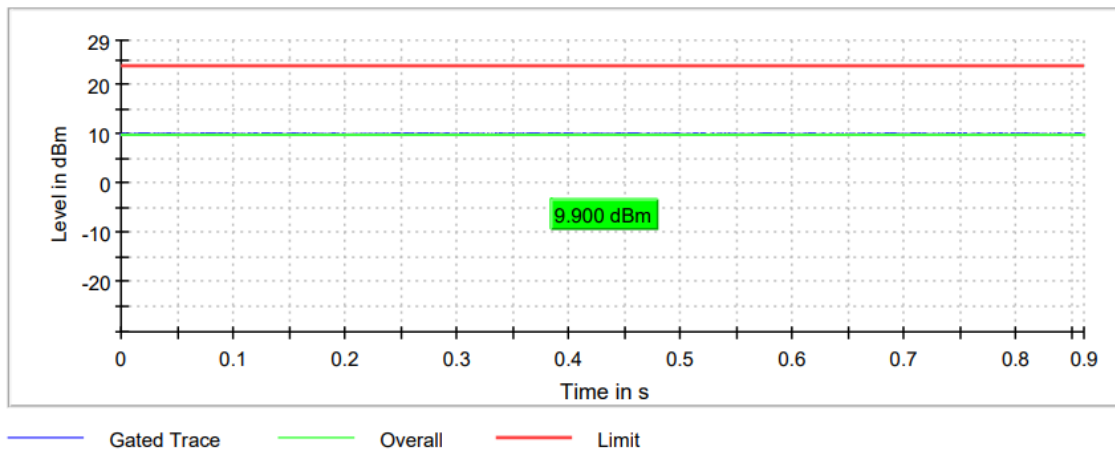

Highest Channel

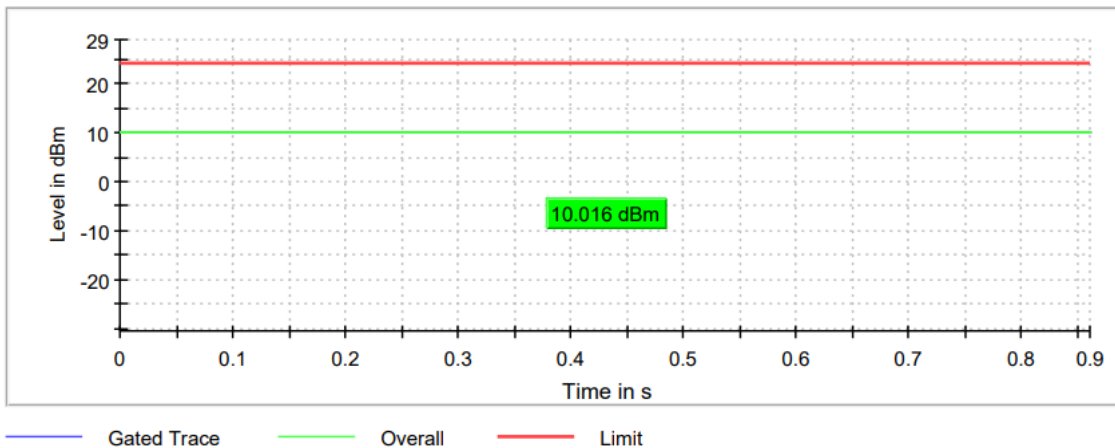

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	13.184	13.461
Maximum EIRP power (dBm)	10.384	10.661

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

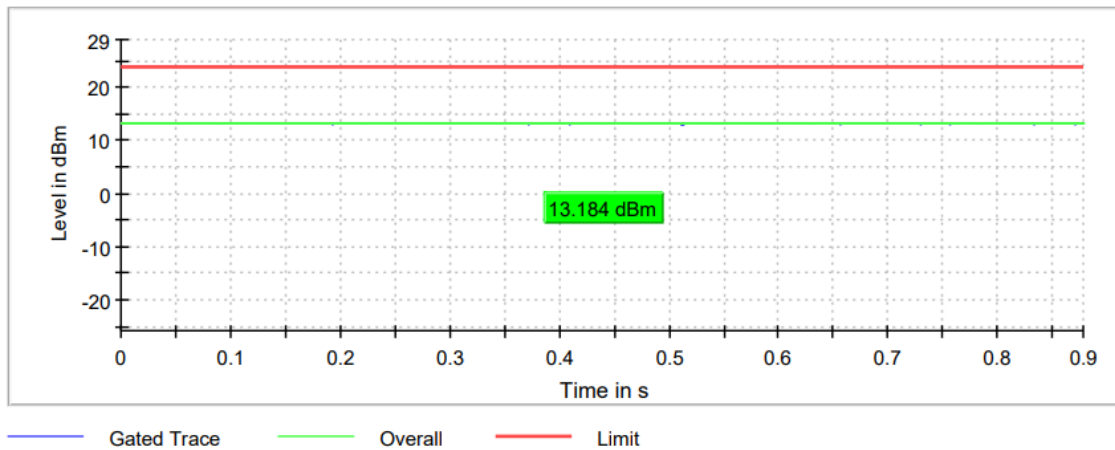

Highest Channel

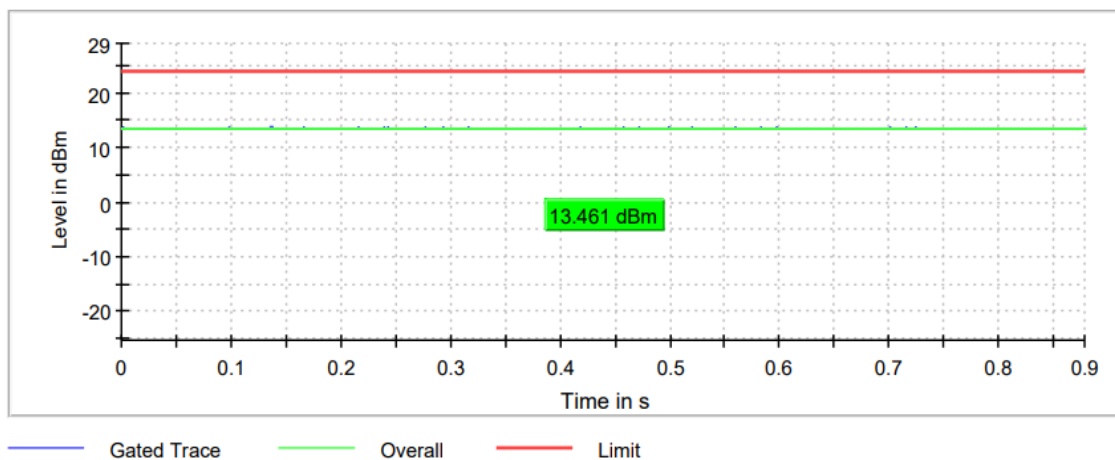

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	12.439	11.799	12.276
Maximum EIRP power (dBm)	9.639	8.999	9.476


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

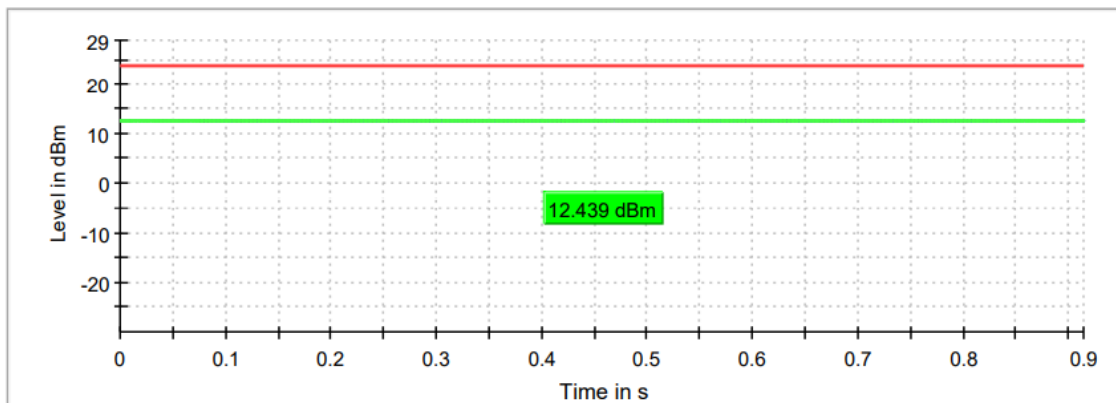

— Gated Trace — Overall — Limit

Middle Channel

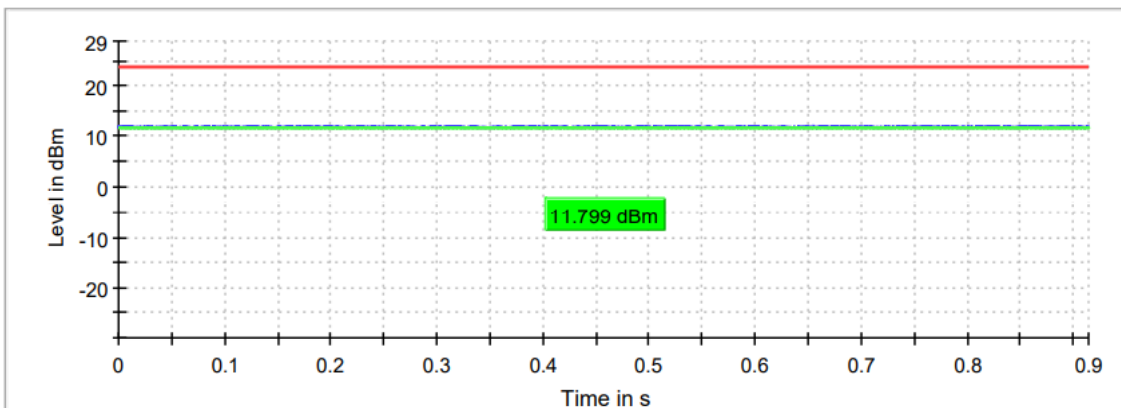


— Gated Trace — Overall — Limit

TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Highest Channel

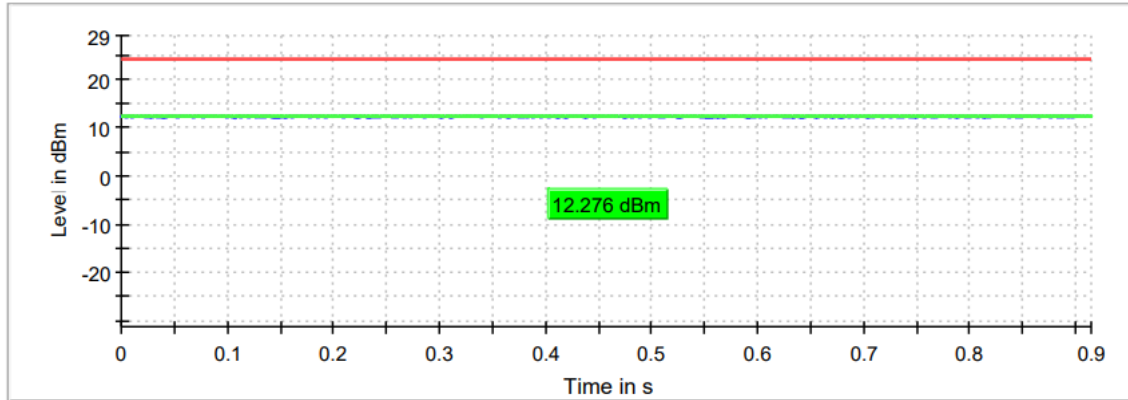

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	12.019	11.587	11.977
Maximum EIRP power (dBm)	9.219	8.787	9.177

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

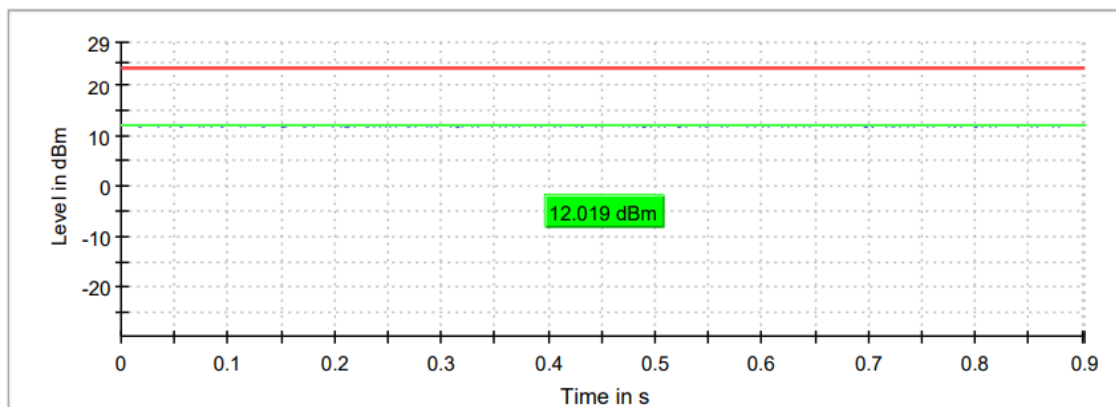


— Gated Trace — Overall — Limit

TEST RESULTS (Cont.):


CONDUCTED OUTPUT POWER

Middle Channel

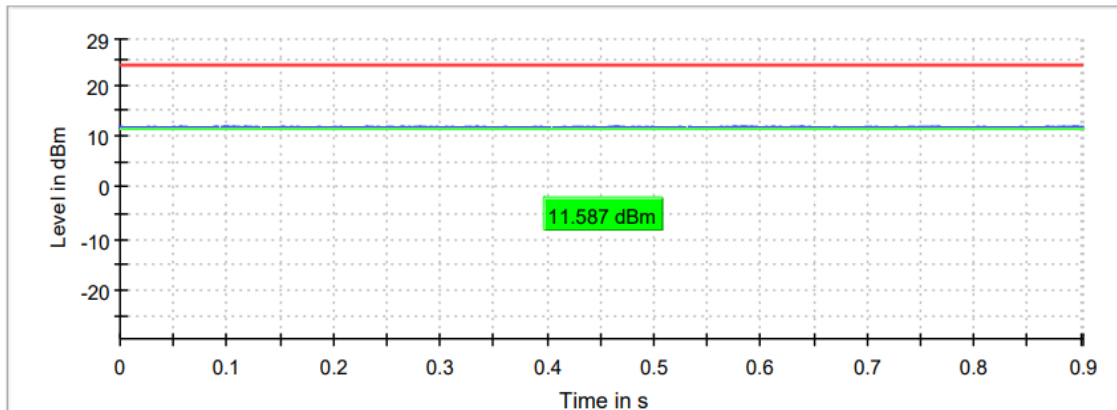

— Gated Trace — Overall — Limit

Highest Channel

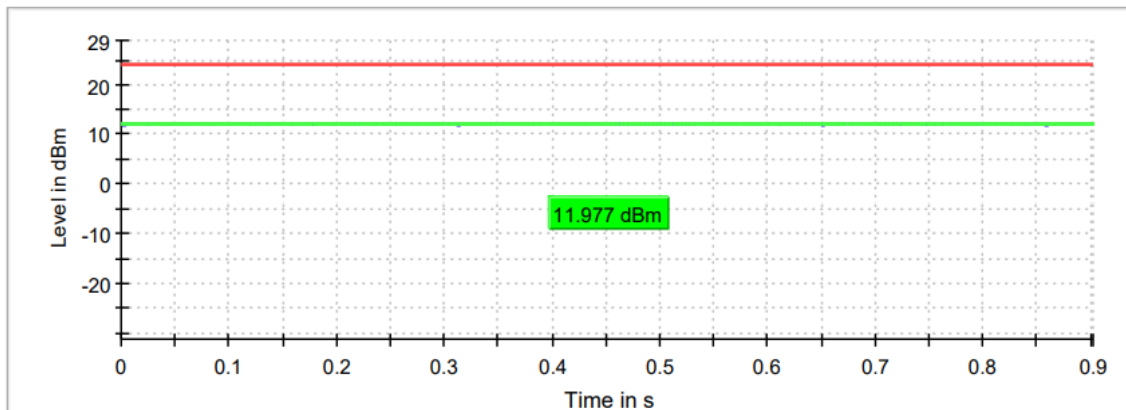

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	13.618	13.341	13.754
Maximum EIRP power (dBm)	10.818	10.541	10.954

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

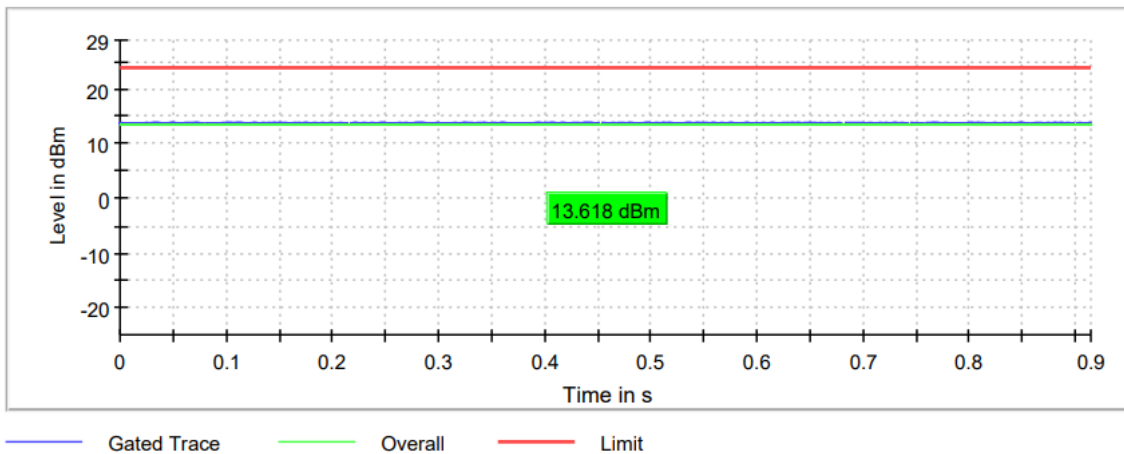


Middle Channel

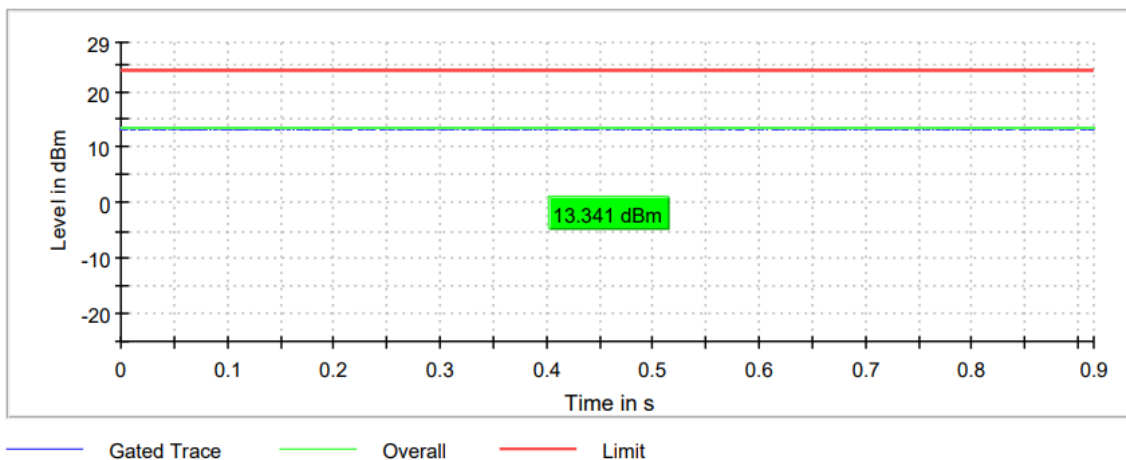

TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Highest Channel

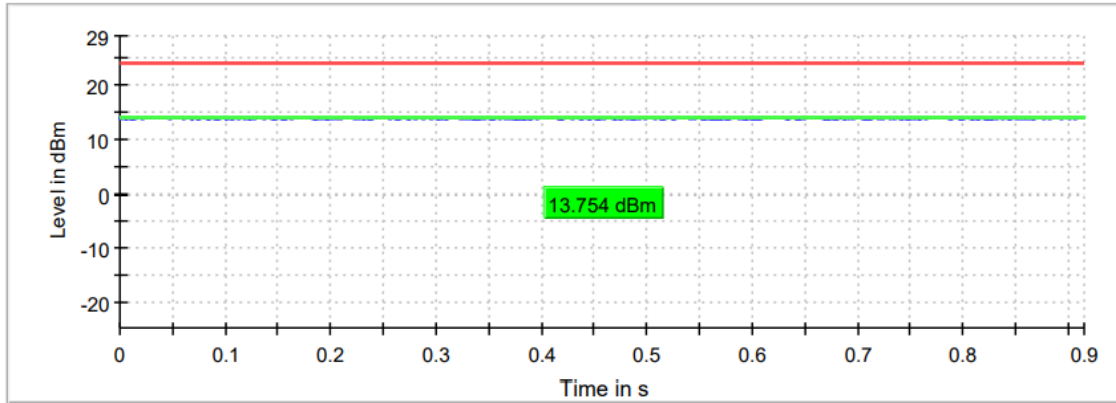

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	8.945	9.443
Maximum EIRP power (dBm)	6.154	6.643


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

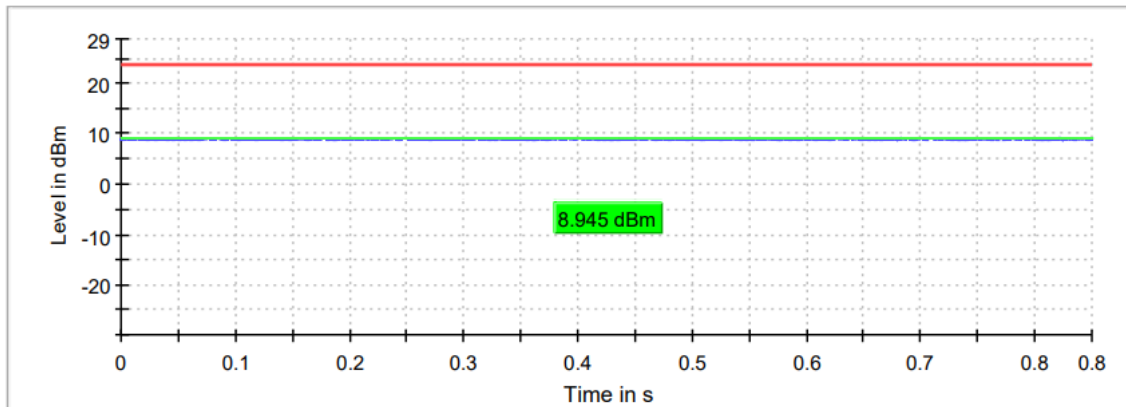

— Gated Trace — Overall — Limit

Highest Channel

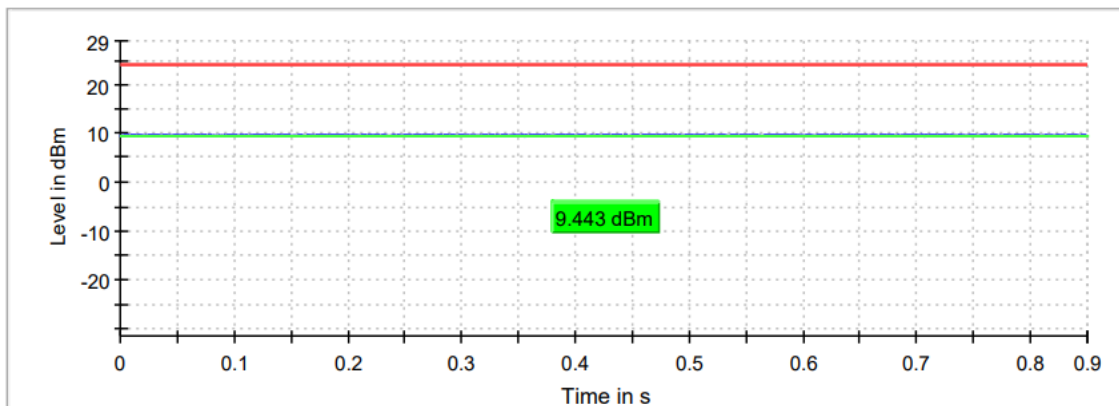

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac Mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	9.191	9.329
Maximum EIRP power (dBm)	6.391	6.529

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

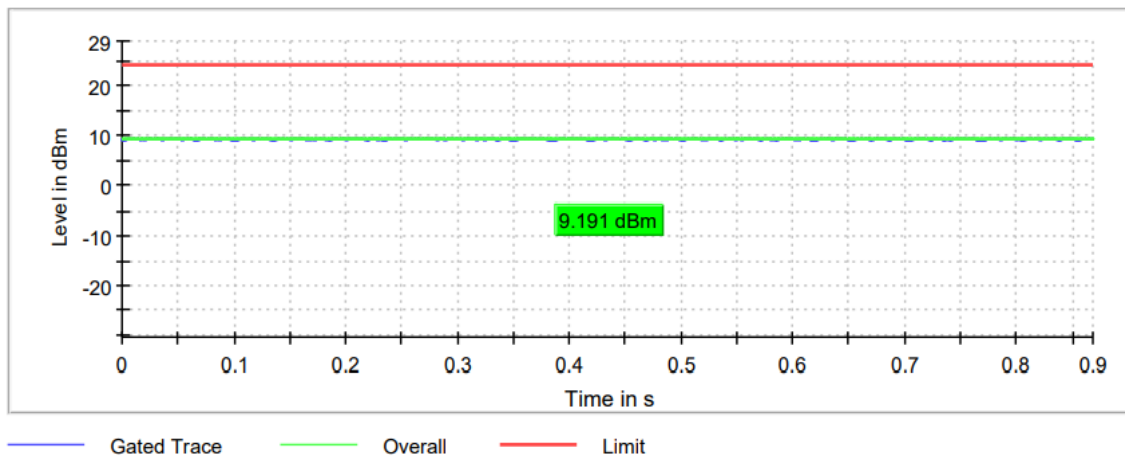

Highest Channel

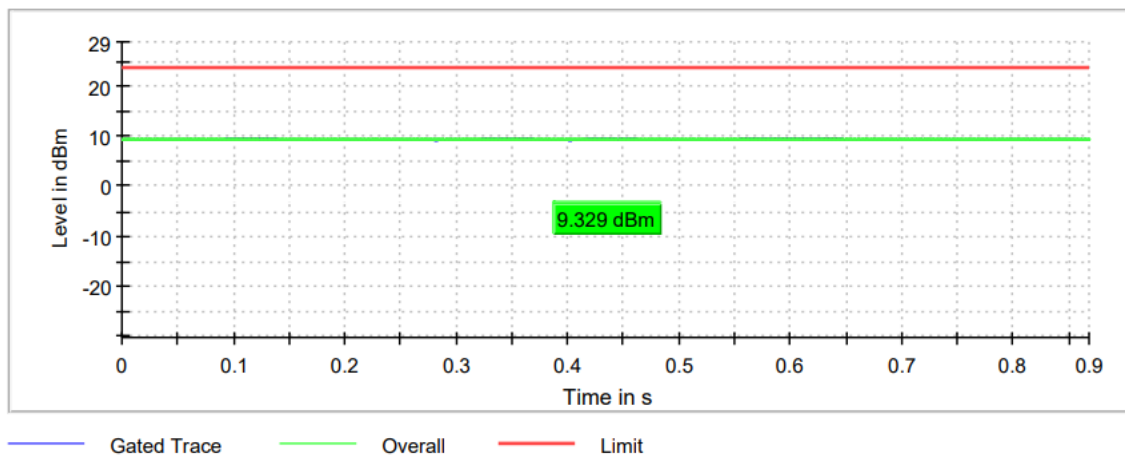

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	12.187	12.486
Maximum EIRP power (dBm)	9.387	9.686

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

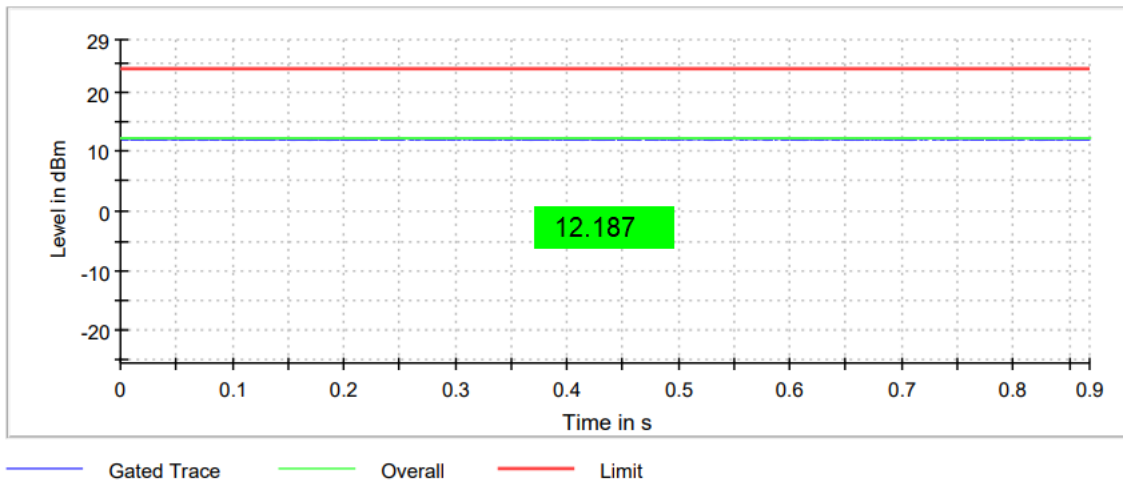

Highest Channel

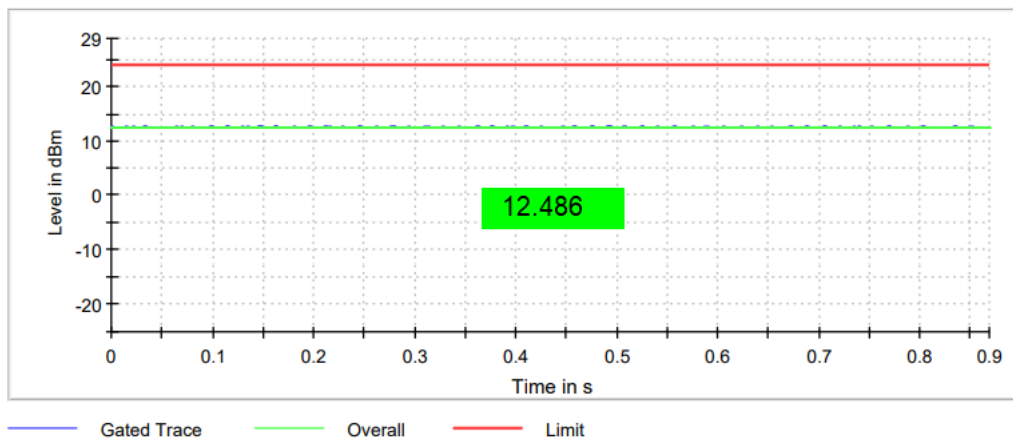

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	9.574
Maximum EIRP power (dBm)	6.774

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

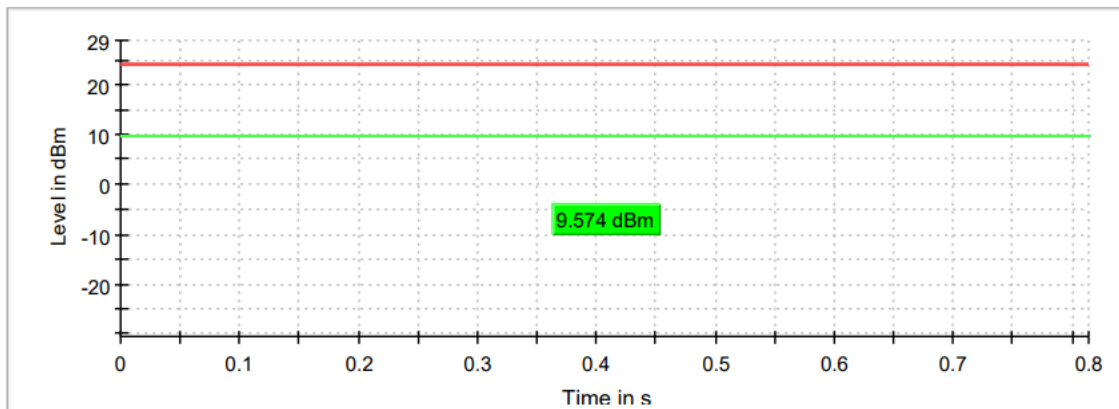

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	9.281
Maximum EIRP power (dBm)	6.481

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

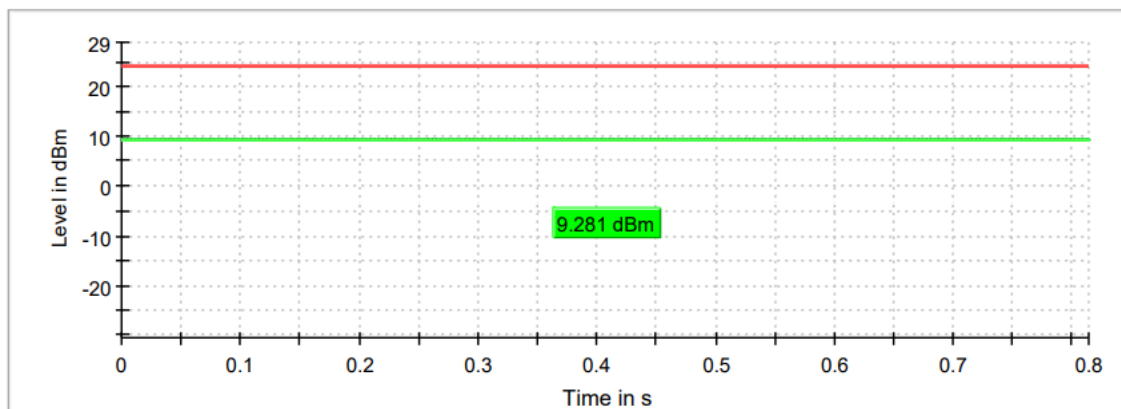

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	12.345
Maximum EIRP power (dBm)	9.545

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

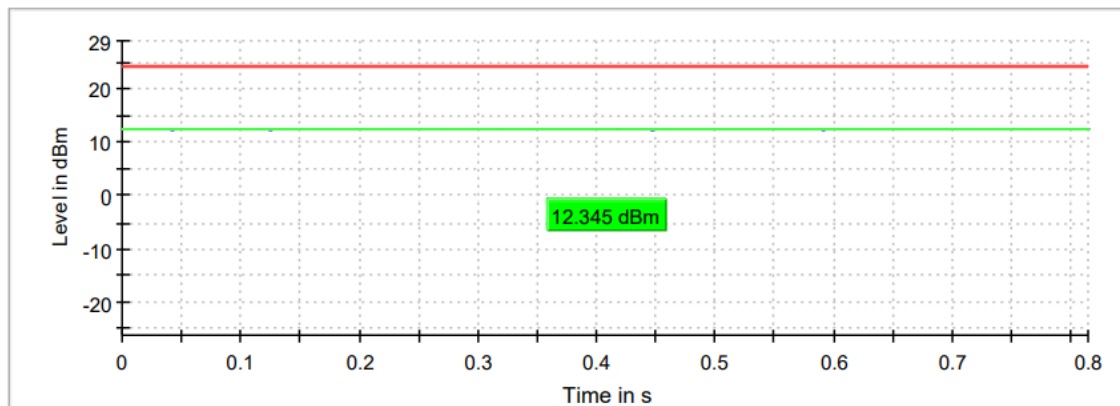

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.747	10.240	10.869
Maximum EIRP power (dBm)	7.947	7.440	8.069


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

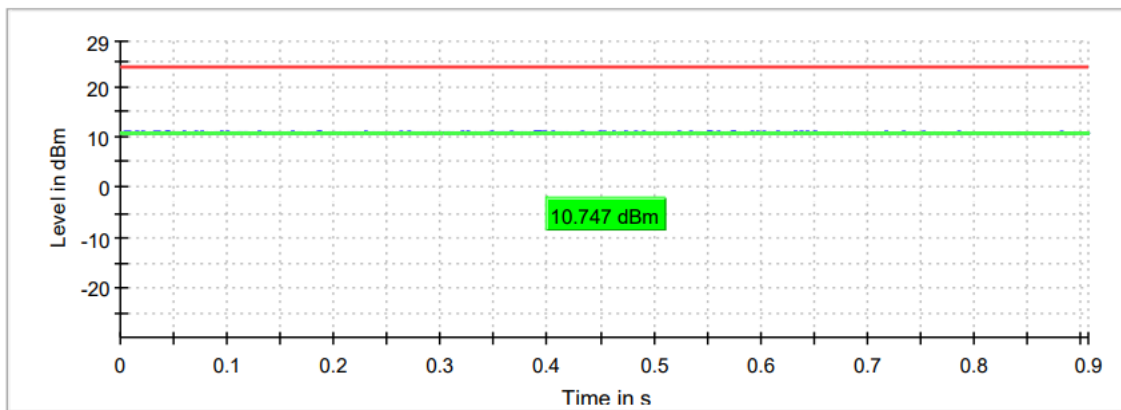

— Gated Trace — Overall — Limit

Middle Channel

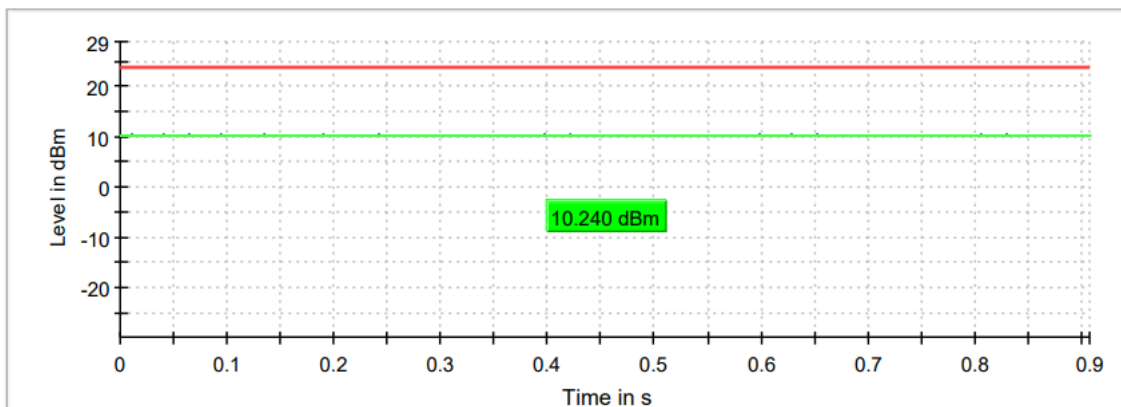


— Gated Trace — Overall — Limit

TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Highest Channel

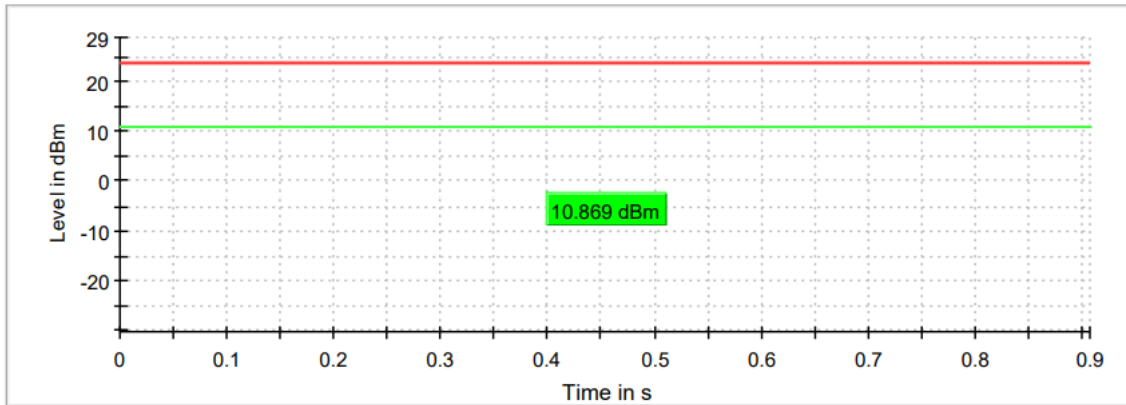

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.647	10.238	10.603
Maximum EIRP power (dBm)	7.847	7.438	7.803

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

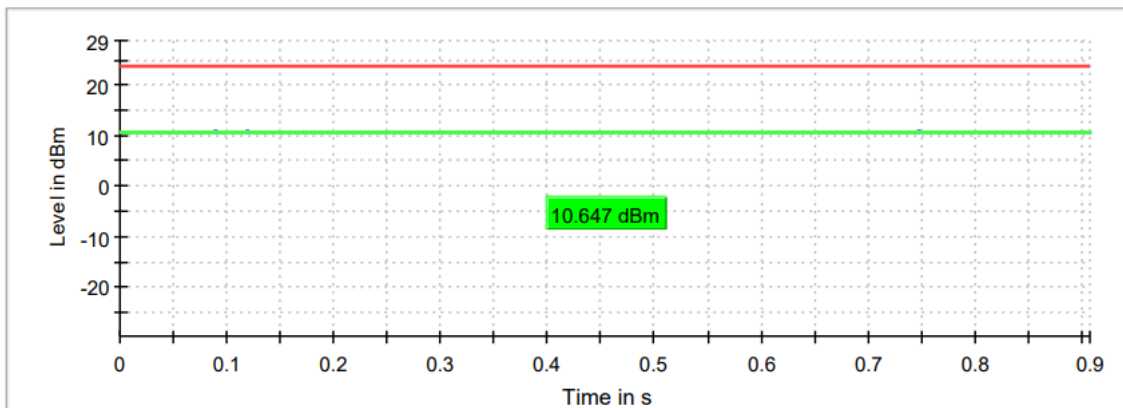


— Gated Trace — Overall — Limit

TEST RESULTS (Cont.):


CONDUCTED OUTPUT POWER

Middle Channel

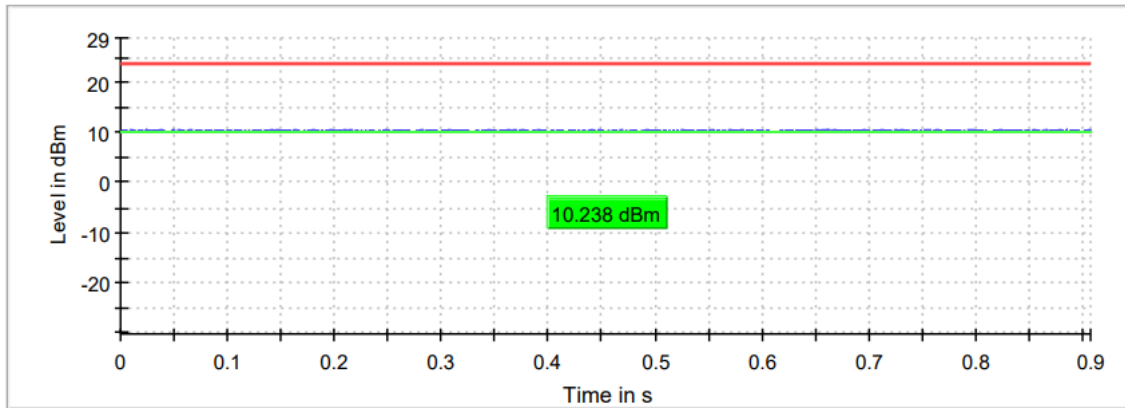

— Gated Trace — Overall — Limit

Highest Channel

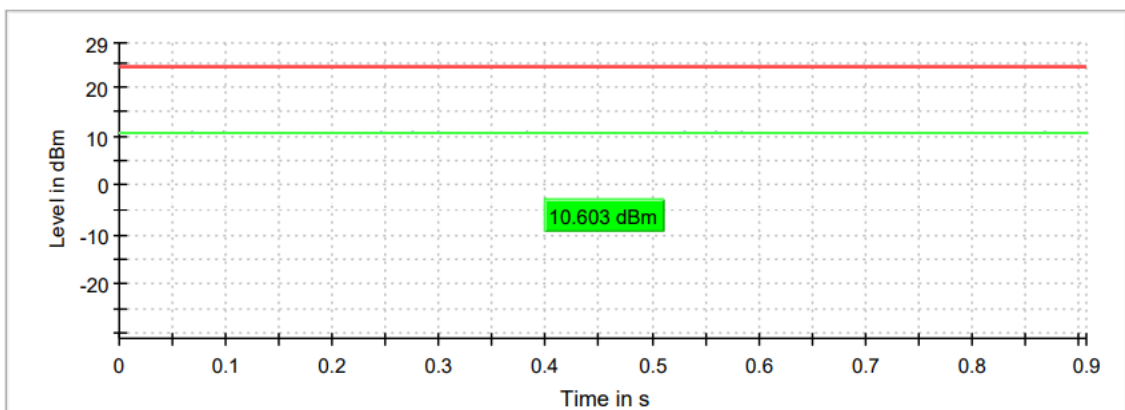

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	13.563	13.005	13.546
Maximum EIRP power (dBm)	10.763	10.205	10.746

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

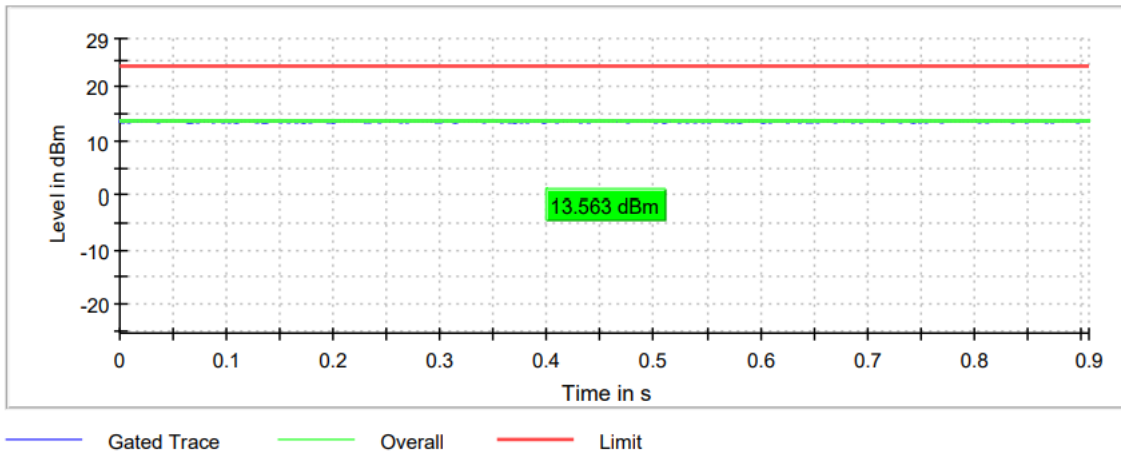


Middle Channel

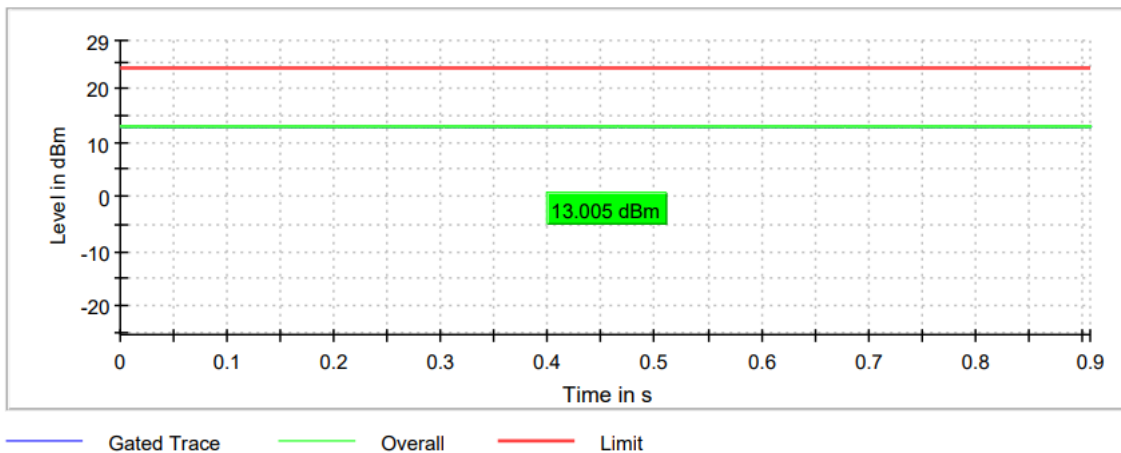

TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Highest Channel

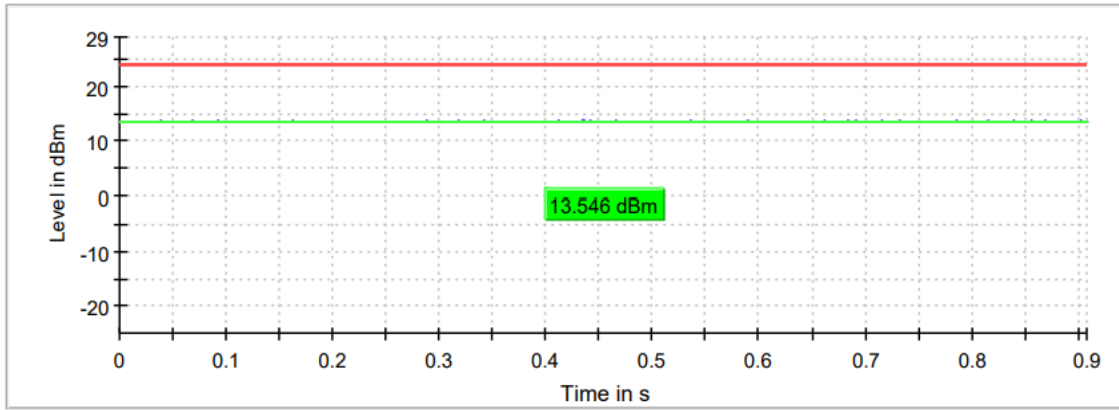

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	10.543	10.855
Maximum EIRP power (dBm)	7.743	8.055


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

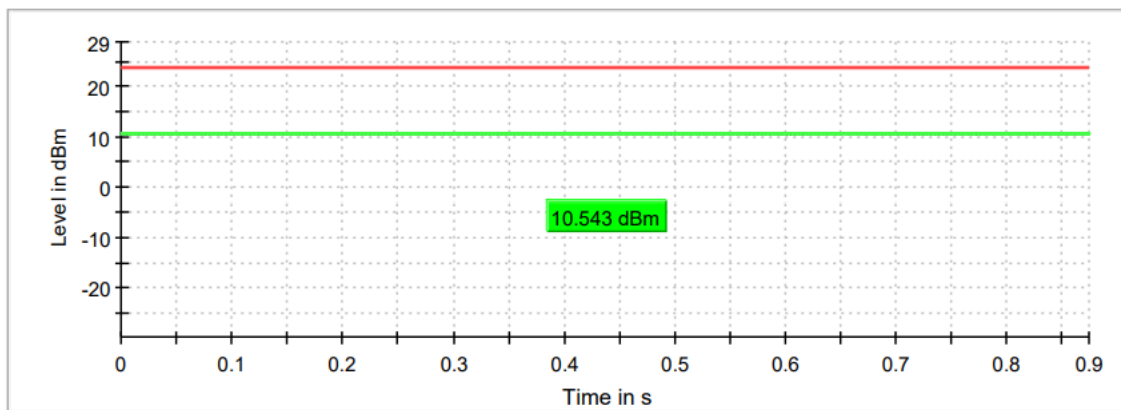

— Gated Trace — Overall — Limit

Highest Channel

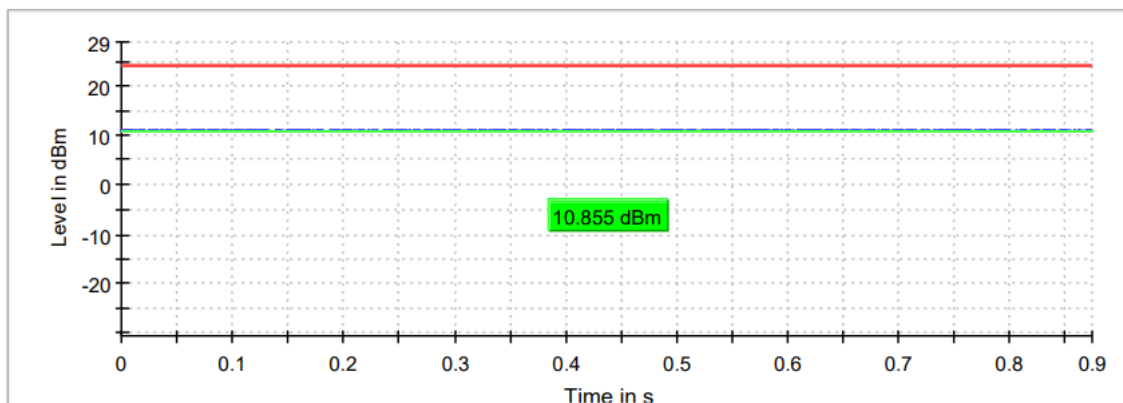

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	10.465	10.574
Maximum EIRP power (dBm)	7.665	7.774

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

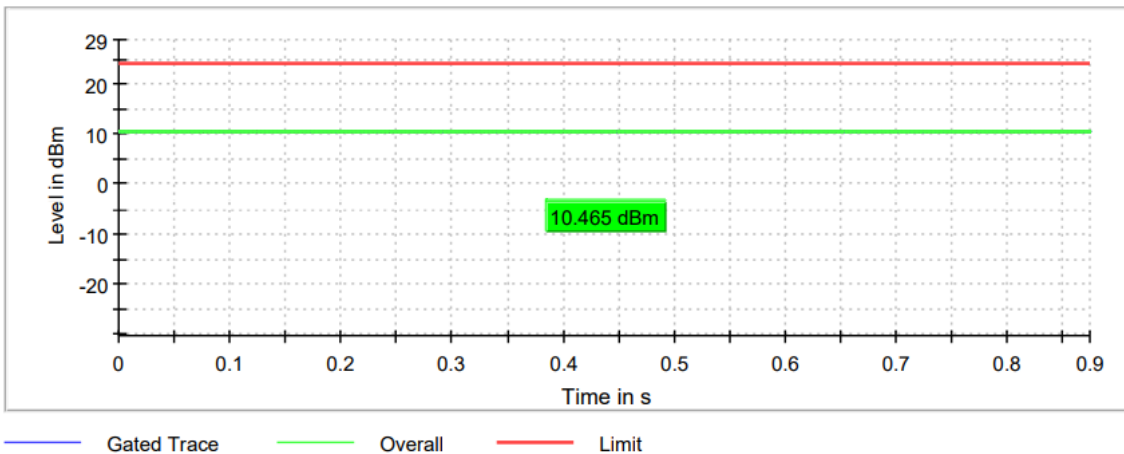

Highest Channel

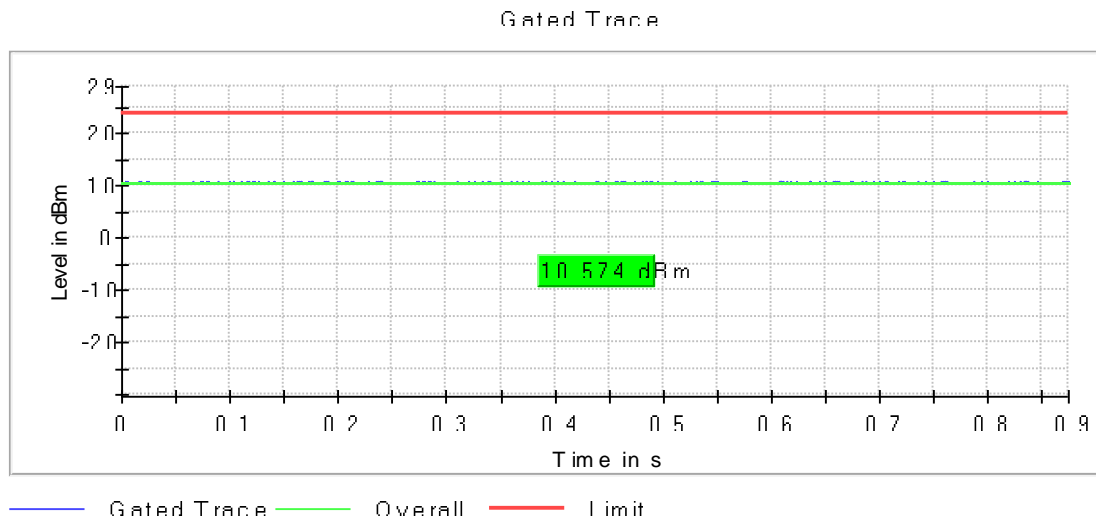

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Maximum conducted power (dBm)	13.335	13.559
Maximum EIRP power (dBm)	10.535	10.759

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

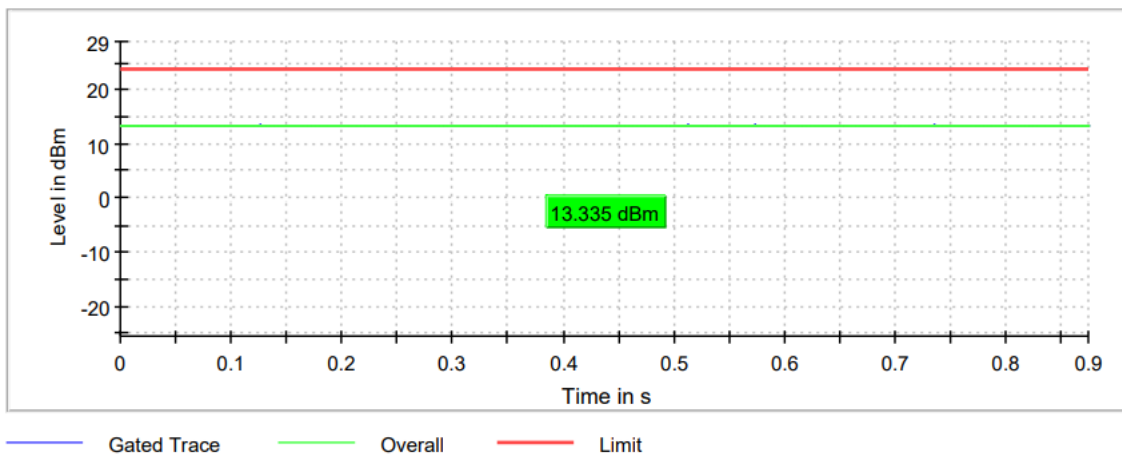

Highest Channel

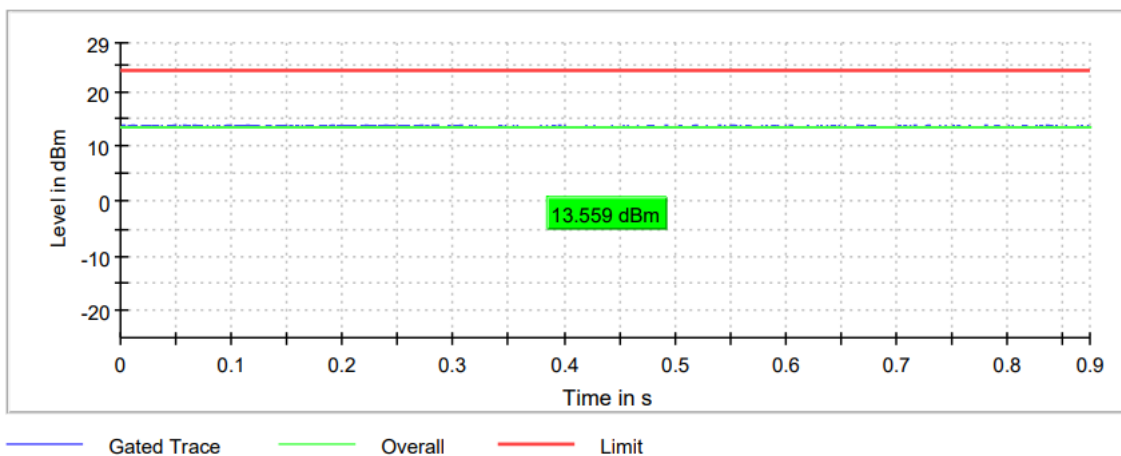

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	9.652
Maximum EIRP power (dBm)	6.852

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

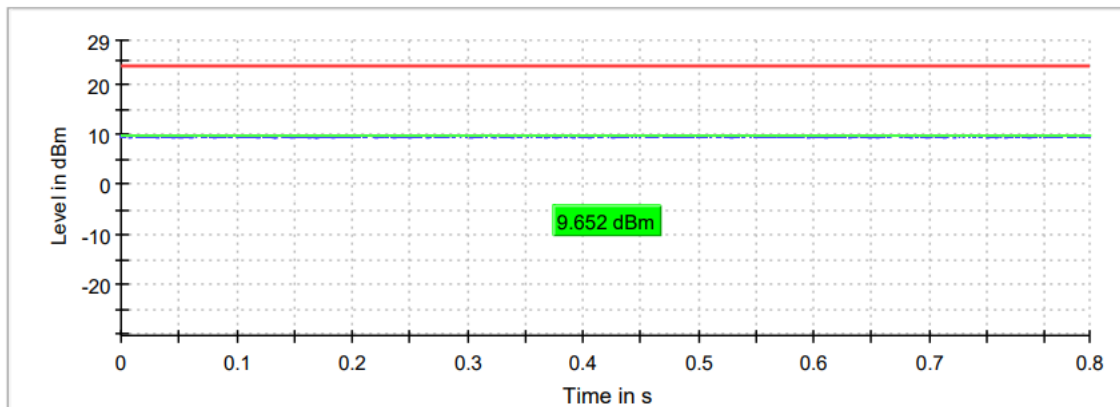

— Gated Trace
 — Overall
 — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	9.575
Maximum EIRP power (dBm)	6.775

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

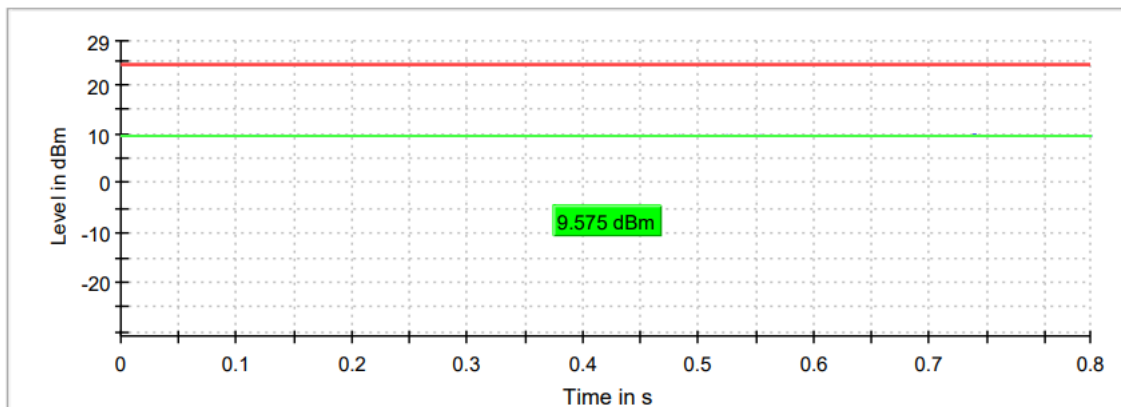

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	12.552
Maximum EIRP power (dBm)	9.752

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

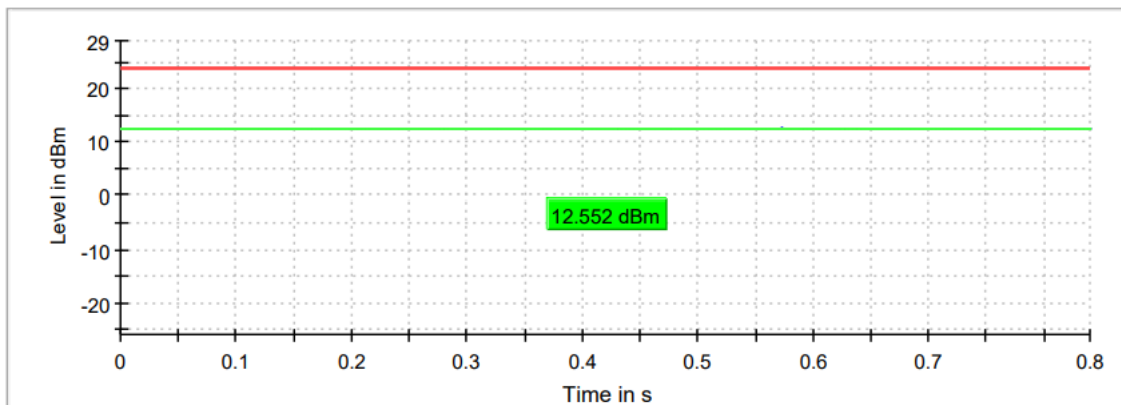

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +3.0 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	14.150	13.922	12.991
Maximum EIRP power (dBm)	14.350	14.122	13.191

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

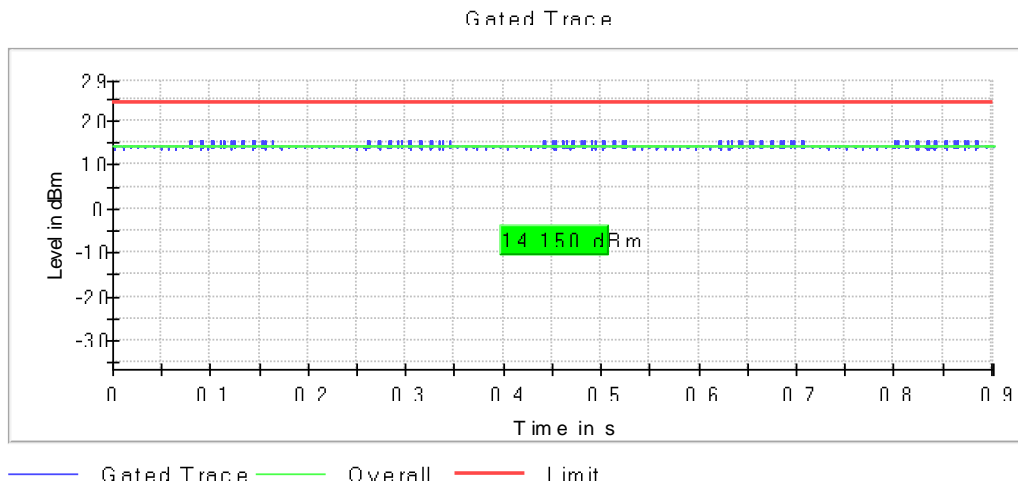


Middle Channel

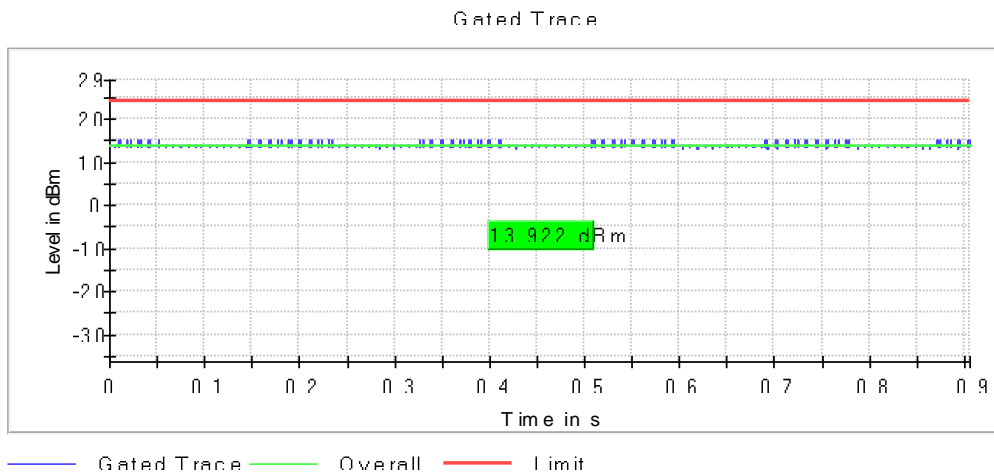

TEST RESULTS (Cont.):

High Channel

Gated Trace

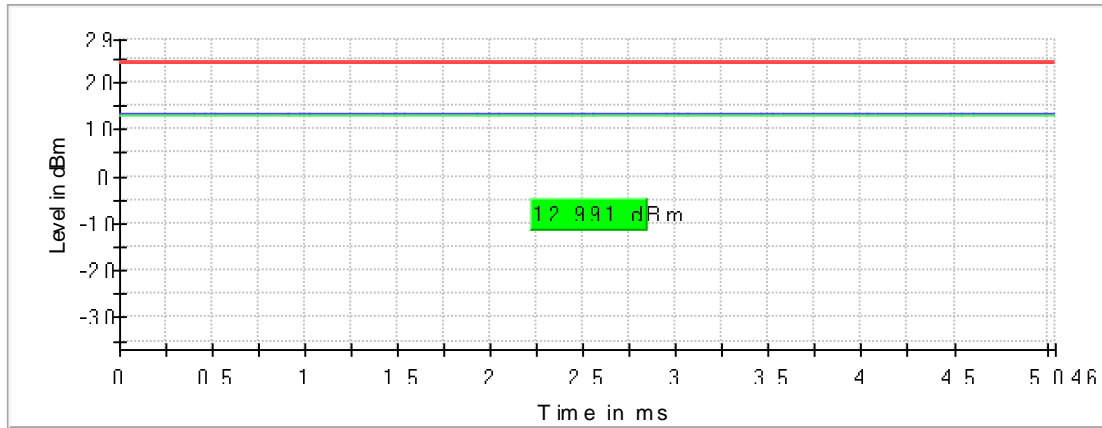

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +3.0 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	8.398	8.559
Maximum EIRP power (dBm)	8.598	8.759

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

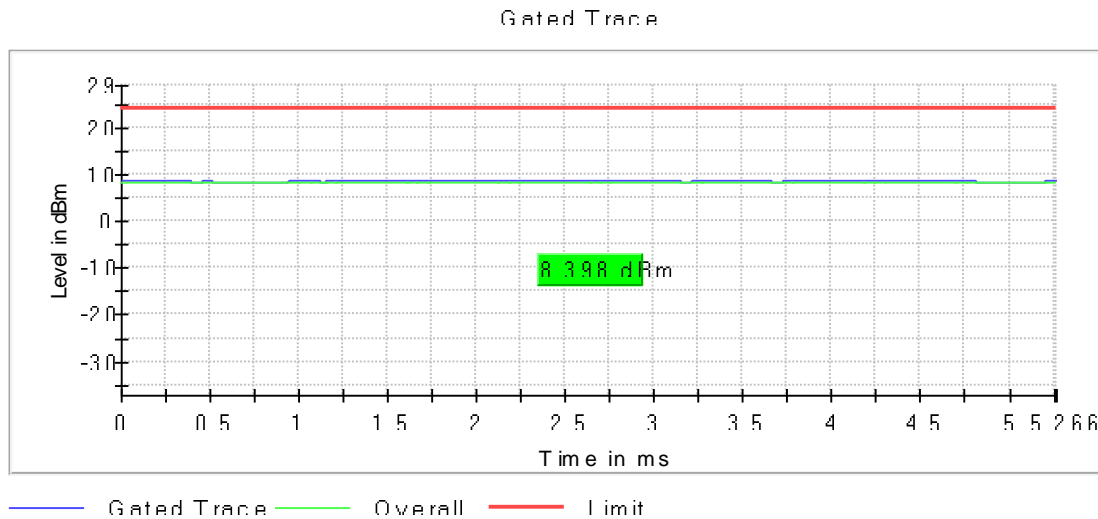

Highest Channel

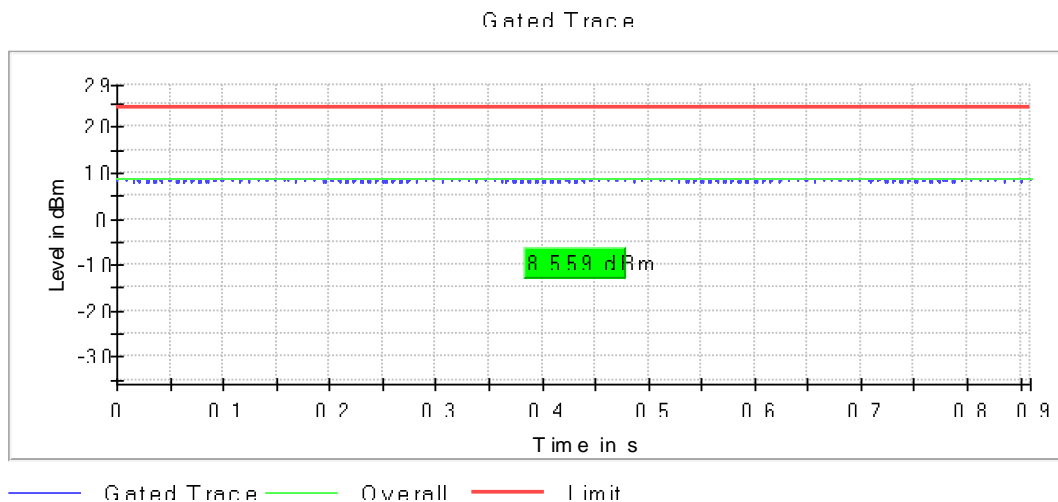

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 80 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +3.0 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	7.779
Maximum EIRP power (dBm)	7.979

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

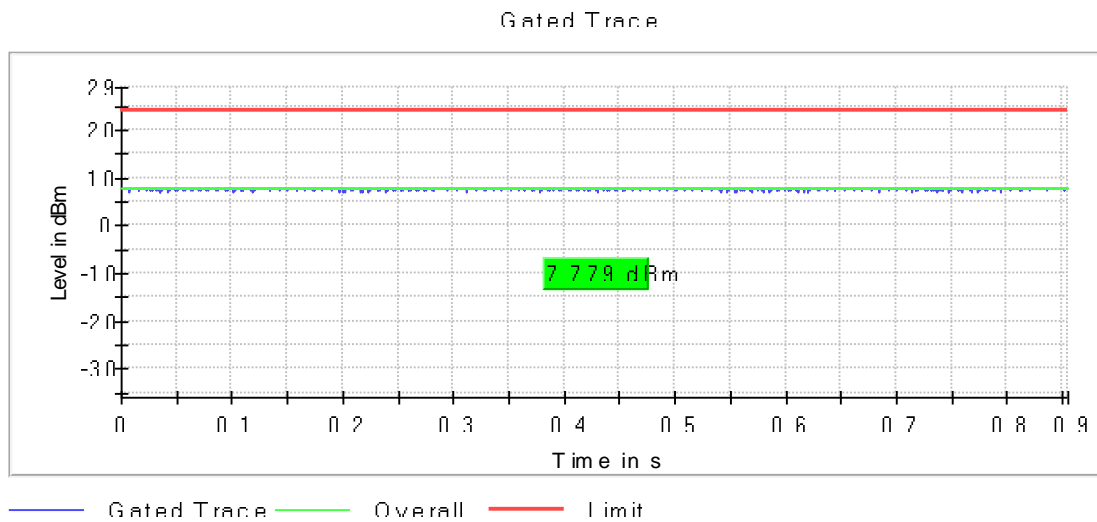

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +3.0 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.223	9.177	9.097
Maximum EIRP power (dBm)	10.423	9.377	9.297

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

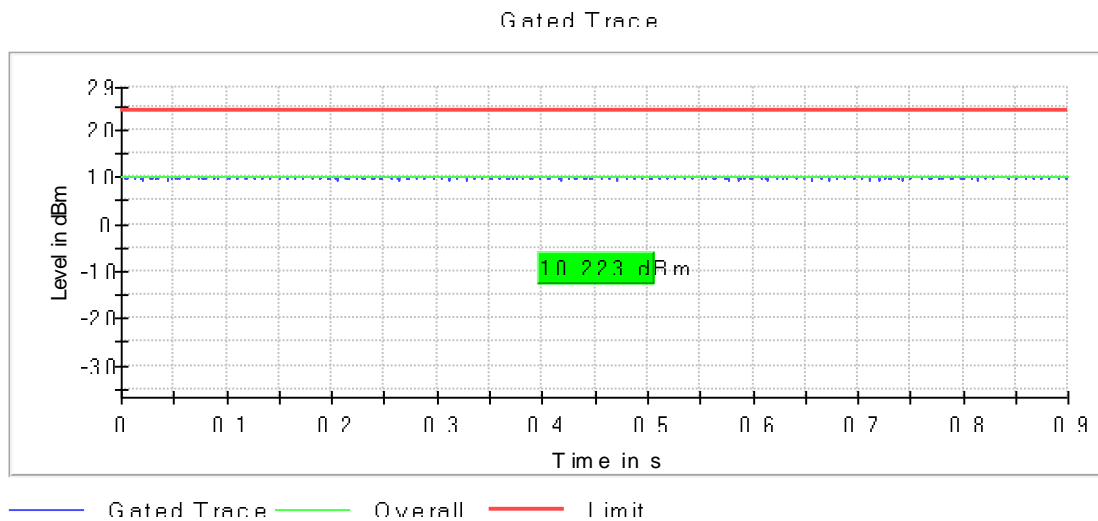


Middle Channel

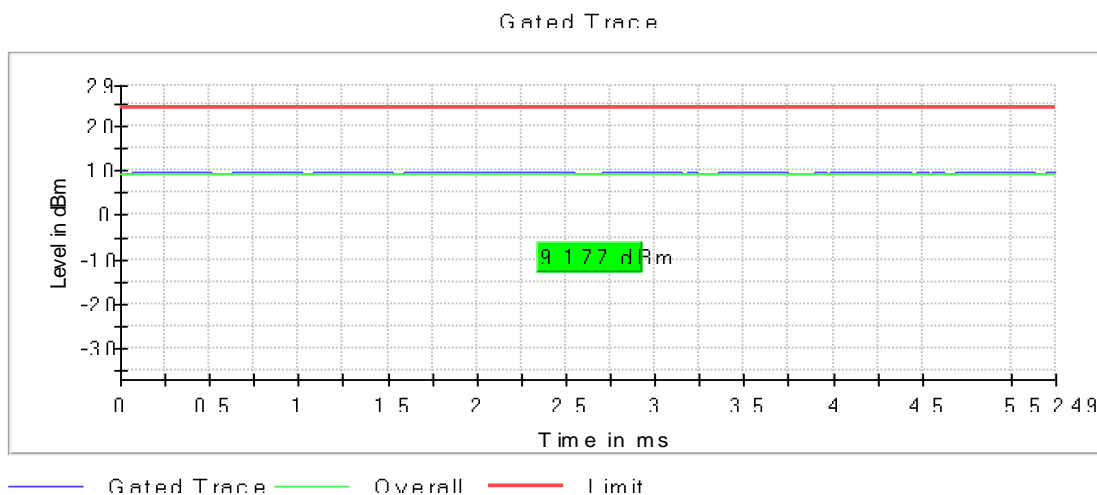

TEST RESULTS (Cont.):

High Channel

Gated Trace

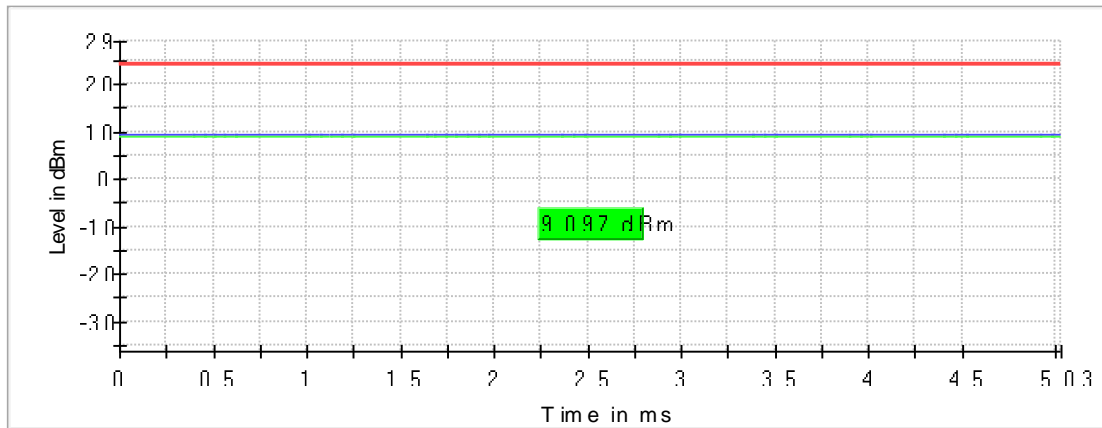

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax mode Beamforming)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +3.0 dBi

	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	8.010	7.562
Maximum EIRP power (dBm)	8.210	7.762


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

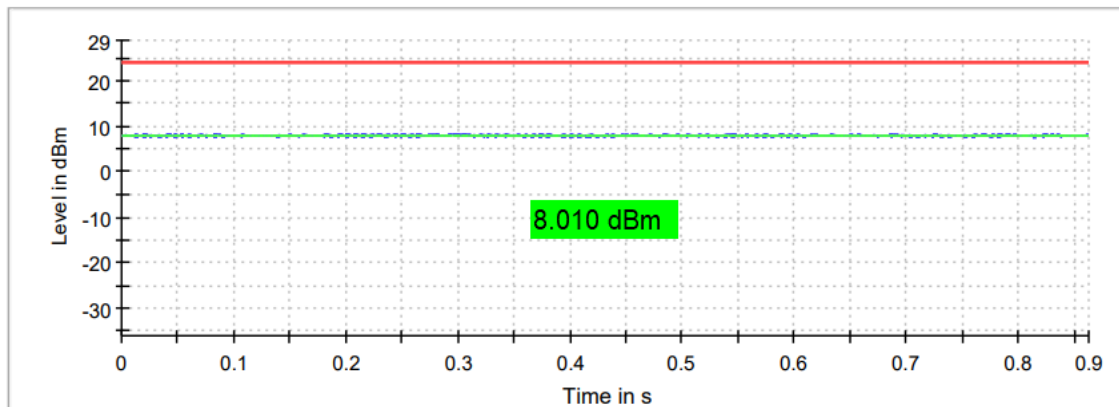

— Gated Trace — Overall — Limit

Highest Channel

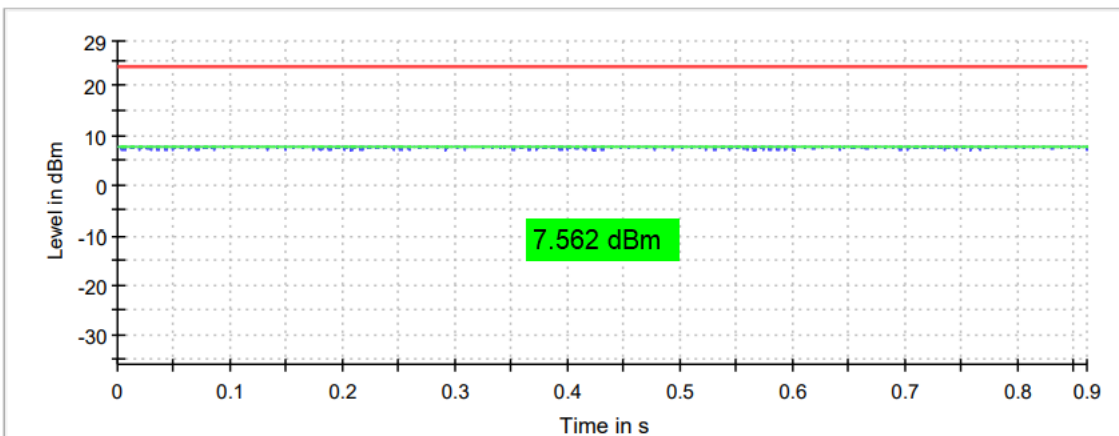

— Gated Trace — Overall — Limit