


Test report No:
 NIE: 62486RRF.013

Partial Test Report

Reference Standard:

USA FCC Part 27

CANADA RSS-130, RSS-139, RSS-199

(*) Identification of item tested	Telematic control unit with wireless technologies, used in automotive industry
(*) Trademark	BMW
(*) Model and /or type reference	WAVE-11-HIGH-R1
Other identification of the product	HW version: D3 SW version: 20512H.001_047_009 FCC ID: T8GWAVE11HIGHR1 IC: 6434A-WAVE11HIGHR1
(*) Features	GSM, UMTS, LTE, 5G, GNSS
Applicant	HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH BECKER-GOERING-STR. 16, 76307 KARLSBAD, GERMANY
Test method requested, standard	USA FCC Part 27 (10-1-19 Edition). CANADA RSS-130 Issue 2, Feb. 2019. CANADA RSS-139 Issue 3, Jul. 2015. CANADA RSS-199 Issue 3, Dec. 2016. - Radiated emissions. ANSI C63.26-2015. KDB 971168 D01 Power Meas License Digital Systems v03r01, April. 2018.
Approved by (name / position & signature)	José Carlos Luque RF Lab. Supervisor  Firmado digitalmente por 74841983Y JOSE CARLOS LUQUE (C:A29507456) Fecha: 2021.03.23 16:37:42 +01'00'
Date of issue	2021-03-23
Report template No	FDT08_23 (*) "Data provided by the client"

Index

Competences and guarantees	3
General conditions	3
Uncertainty.....	3
Data provided by the client	3
Usage of samples	4
Test sample description	4
Identification of the client	8
Testing period and place	8
Document history	8
Environmental conditions	9
Remarks and comments.....	10
Testing verdicts.....	10
Summary	11
Appendix A: Test results for FCC Part 27 / RSS-130, RSS-139, RSS-199	12

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document. **IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of model WAVE-11-HIGH-R1 is a telematics control unit with wireless technologies, used in automotive, equipped with 2 modems, OEM and customer. The project name WAVE has the meaning "Wireless Access in Vehicular Environment" and thus describes the key features of this device as Communication and Data Interface. This unit was designed for automotive usage and contains the following features: GSM, UMTS, LTE, 5G, and GNSS.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
62486E/719	Telematic Control Unit	WAVE-11-HIGH-R1	B395A.0M4907000	2021/02/04
62486E/012	Antenna (DA WAVE HIGH 5G US)	DA05DI20	--	2020/09/22
62486E/036	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/037	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/038	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/039	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/060	Harness	--	--	2020/09/22

Auxiliary elements used with the Sample S/01:

Control N°	Description	Model	Serial N°	Date of reception
62486E/109	Battery Li-ion	11FR1580-2	--	2020/09/28
62486E/042	Antenna ground plane for roof	--	--	2020/09/22
62486E/045	RF Cable for 4-Fakra	--	--	2020/09/22
62486E/056	OABR Cable	--	--	2020/09/22
62486E/064	OABR 1000 BaseT Converter	--	--	2020/09/22
62486E/067	I-Box OABR Adapter	--	--	2020/09/22
62486E/071	Ethernet Cable	--	--	2020/09/22
62486E/090	Speaker	FR7	--	2020/09/28
62486E/101	SOS Pulser (E-Call)	9385	11221	2020/09/28

Sample S/01 has undergone the following test(s): The Radiated tests of the n7A + LTE Band 7, the n71A + LTE Band 71, indicated in the Appendix A.

- Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
62486E/105	Telematic Control Unit	WAVE-11-HIGH-R1	B392120L4900533	2020/09/28
62486E/012	Antenna (DA WAVE HIGH 5G US)	DA05DI20	--	2020/09/22
62486E/036	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/037	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/038	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/039	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/060	Harness	--	--	2020/09/22

Auxiliary elements used with the Sample S/02:

Control N°	Description	Model	Serial N°	Date of reception
62486E/109	Battery Li-ion	11FR1580-2	--	2020/09/28
62486E/042	Antenna ground plane for roof	--	--	2020/09/22
62486E/045	RF Cable for 4-Fakra	--	--	2020/09/22
62486E/056	OABR Cable	--	--	2020/09/22
62486E/064	OABR 1000 BaseT Converter	--	--	2020/09/22
62486E/067	I-Box OABR Adapter	--	--	2020/09/22
62486E/071	Ethernet Cable	--	--	2020/09/22
62486E/090	Speaker	FR7	--	2020/09/28
62486E/101	SOS Pulser (E-Call)	9385	11221	2020/09/28

Sample S/02 has undergone the following test(s): The Radiated tests of the n41A + LTE Band 41 indicated in the Appendix A.

- Sample S/03 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
62486E/724	Telematic Control Unit	WAVE-11-HIGH-R1	B395A/0M4907003	2021/02/04
62486E/012	Antenna (DA WAVE HIGH 5G US)	DA05DI20	--	2020/09/22
62486E/036	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/037	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/038	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/039	Antenna Box	AB01-I20-01	--	2020/09/22
62486E/060	Harness	--	--	2020/09/22

Auxiliary elements used with the Sample S/03:

Control N°	Description	Model	Serial N°	Date of reception
62486E/109	Battery Li-ion	11FR1580-2	--	2020/09/28
62486E/042	Antenna ground plane for roof	--	--	2020/09/22
62486E/045	RF Cable for 4-Fakra	--	--	2020/09/22
62486E/056	OABR Cable	--	--	2020/09/22
62486E/064	OABR 1000 BaseT Converter	--	--	2020/09/22
62486E/067	I-Box OABR Adapter	--	--	2020/09/22
62486E/071	Ethernet Cable	--	--	2020/09/22
62486E/090	Speaker	FR7	--	2020/09/28
62486E/101	SOS Pulser (E-Call)	9385	11221	2020/09/28

Sample S/03 has undergone the following test(s): The Radiated tests of the n38A + LTE Band 38, the n66A + LTE Band 66 indicated in the Appendix A.

Test sample description

Ports..... :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾		
	RF connector – code D violet (trunk/roof)	Port not used for SOP2021 (it has V2X interfaces and gateway for SDARS signal towards another ECU)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
	RF connector – code C blue (trunk/roof)	>5m	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
	NanoMQS 20pol	>5m	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	NanoMQS 10pol	>8m	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	HDBT MATenet 2-Pol (Roof/Trunk)	>5m	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	Antenna Connector grey (Roof)	<0.5m	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
Supplementary information to the ports..... :							
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 12V car battery / attenuator (4,5 V ≤ UB ≤ 18 V; UB typical: 12 V)					
<input type="checkbox"/>	DC:						
Rated Power	12V DC						
Clock frequencies.....	25MHz;26MHz;32,768kHz;49,58MHz;						
Other parameters	See Technical description						
Software version	D3						
Hardware version	20512H.001_047_009						

Dimensions in cm (W x H x D)	160x18x112 mm		
Mounting position	<input type="checkbox"/>	Table top equipment	
	<input type="checkbox"/>	Wall/Ceiling mounted equipment	
	<input type="checkbox"/>	Floor standing equipment	
	<input type="checkbox"/>	Hand-held equipment	
	<input checked="" type="checkbox"/>	Other: automotive telematics control unit	
Modules/parts	Module/parts of test item	Type	Manufacturer
Accessories (not part of the test item)	Description	Type	Manufacturer
	Cable Harness	-	
	2G/3G4G/5G Antenna	-	Hirschmann/ Molex
	E-CALL button/LED	-	
	SOS Loudspeaker	-	
	Wake-up unit Box	-	
Documents as provided by the applicant	Description	File name	Issue date
	Technical Description		

⁽³⁾ Only for Medical Equipment

Identification of the client

HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH
 BECKER-GOERING-STR. 16, 76307 KARLSBAD, GERMANY

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-02-02
Date (finish)	2021-03-13

Document history

Report number	Date	Description
62486RRF.013	2021-03-23	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C
	Max. = 35 °C
Relative humidity	Min. = 20 %
	Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C
	Max. = 35 °C
Relative humidity	Min. = 20 %
	Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Nicolás Salguero, Miguel Manuel López, Cristina Calle and Javier Miguel Nadales.

Used instrumentation:

Radiated Measurements

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N.A.	N.A.
2. Shielded Room ETS LINDGREN S101	N.A.	N.A.
3. EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2019/10	2021/10
4. Biconical/Log Antenna 30MHz - 6GHz ETS LINDGREN 3142E	2020/10	2023/10
5. Attenuator 3 dB 2W, DC-6GHz, JFW 50HN-03	2020/10	2021/10
6. Signal and Spectrum Analyzer 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2019/10	2021/10
7. Horn Antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2020/08	2023/08
8. Wideband Radio Communication Tester ROHDE AND SCHWARZ CMW500	2021/02	2022/02
9. RF Preamplifier G>30dB, 1-18GHz BONN ELEKTRONIK BLMA 0118-3A	2020/10	2021/10
10. Low Noise Amplifier G>30dB, 18 - 40 GHz BONN ELEKTRONIK BLMA 1840-1M	2019/11	2021/11
11. Horn Antenna 18 - 40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2018/07	2021/07
12. RF Preamplifier 40 dB, 10 MHz - 6 GHz BONN ELEKTRONIK BLNA 0160-01N	2021/03	2022/03
13. UXM 5G RF Test Platform KEYSIGHT TECHNOLOGIES E7515B	2020/01	2022/01
14. DC Power Supply, 30V/5A KEYSIGHT TECHNOLOGIES U8002A	N.A.	N.A.
15. Digital Multimeter, FLUKE 175	2020/11	2021/11
16. DC Power Supply 30V/5A KEYSIGHT TECHNOLOGIES U8002A	N.A.	N.A.
17. Horn Antenna 18-40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2020/05	2023/05
18. Wideband Radio Communication Tester ROHDE AND SCHWARZ CMW500	2020/04	2021/04
19. Wideband Radio Communication Tester ROHDE AND SCHWARZ CMW500	2020/07	2021/07
20. Wideband Radio Communication Tester ROHDE AND SCHWARZ CMW500	2020/09	2021/09
21. Wideband Radio Communication Tester ROHDE AND SCHWARZ CMX500	2020/08	2021/08

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

FCC PART 27 / RSS-130, RSS-139, RSS-199 PARAGRAPH		
Requirement – Test case	Verdict	Remark
FCC 27.50 / RSS-130 4.6., RSS-139 6.5., RSS-199 4.4.: RF output power	N/M	(1)
FCC 2.1047 / RSS-130 4.2., RSS-139 6.2., RSS-199 4.1.: Modulation characteristics	N/M	(1)
FCC 27.54 / RSS-130 4.3., RSS-139 6.4., RSS-199 4.3.: Frequency stability	N/M	(1)
FCC 2.1049 / RSS-Gen 6.7., RSS-139 6.4., RSS-199 4.3.: Occupied Bandwidth	N/M	(1)
FCC 27.53 / RSS-130 4.7., RSS-139 6.6., RSS-199 4.5.: Spurious emissions at antenna terminals	N/M	(1)
FCC 27.53 / RSS-130 4.7., RSS-139 6.6., RSS-199 4.5.: Radiated emissions	P	(2)
<u>Supplementary information and remarks:</u>		
(1) Test not requested. Radiated emissions test only requested. (2) The 62486RRF.001 contains the results of the pre-testing to determine the worst case of the setting of the antennas. <ul style="list-style-type: none"> · Conf #1: MIMO1 Port -> Int BuA Antenna / MIMO2 Port -> MIMO2 Antenna / Antennenbox for NAD#2. · Conf #2: MIMO1 Port -> Int BuA Antenna / MIMO2 Port -> MIMO2 Antenna / FSA antenna for NAD#2. · Conf #3: MIMO1 Port -> MIMO1 Antenna / MIMO2 Port -> MIMO2 Antenna / Antennenbox for NAD#2. · Conf #4: MIMO1 Port -> MIMO2 Antenna / MIMO2 Port -> MIMO2 Antenna / FSA antenna for NAD#2. 		

Appendix A: Test results for FCC Part 27 / RSS-130, RSS-139, RSS-199

INDEX

TEST CONDITIONS	14
Radiated emissions	20

TEST CONDITIONS

POWER SUPPLY (V):

Vnominal: 12 Vdc
 Type of Power Supply: External DC (vehicle battery).

The module with the highest antenna gain has been tested using the worst case obtained for conducted output power for New Radio 5G. And the other module has been tested using an adjacent channel to the 5G with LTE band with a setting that would allow communication in the same band to both modules simultaneously.

TEST FREQUENCIES:

n7A + LTE Band 7. (antenna configuration 3):

Table 4.3.1.1.1.7-1: Test frequencies for NR operating band n7 and SCS 15 kHz

CBW [MHz]	carrier Bandwidth [PRBs]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequency Point A [ARFCN]	offsetTo Carrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute FrequencySSB [ARFCN]	k_{SSB}	Offset Carrier CORE SET#0 [RBs] Note 2	CORE SET#0 Index (Offset [RBs]) Note 1	offsetTo PointA (SIB1) [PRBs] Note 1			
5	25	Downlink	Low	2622.5	524500	2620.25	524050	0	15	6554	524410	0	0	0 (0)	0		
			Mid	2655	531000	2634.39	526878	102		6636	530910	0	0	0 (0)	102		
			High	2687.5	537500	2594.53	518906	504		6718	537410	0	0	0 (0)	504		
		Uplink	Low	2502.5	500500	2500.25	500050	0	-	-	-	-	-	-	-		
			Mid	2535	507000	2442.03	488406	504	-	-	-	-	-	-	-		
			High	2567.5	513500	2564.17	512834	6	-	-	-	-	-	-	-		
		10	52	Downlink	Low	2625	525000	2620.32	524064	0	15	6555	524430	2	0	0 (0)	0
					Mid	2655	531000	2631.96	526392	102		6630	530430	2	0	0 (0)	102
					High	2685	537000	2589.6	517920	504		6705	536430	2	0	0 (0)	504
Uplink	Low			2505	501000	2500.32	500064	0	-	-	-	-	-	-	-		
	Mid			2535	507000	2439.6	487920	504	-	-	-	-	-	-	-		
	High			2565	513000	2559.24	511848	6	-	-	-	-	-	-	-		
15	79			Downlink	Low	2627.5	525500	2620.39	524078	0	15	6556	524450	4	0	0 (0)	0
					Mid	2655	531000	2629.53	525906	102		6624	529950	4	0	0 (0)	102
					High	2682.5	536500	2584.67	516934	504		6692	535450	4	0	0 (0)	504
		Uplink	Low	2507.5	501500	2500.39	500078	0	-	-	-	-	-	-	-		
			Mid	2535	507000	2437.17	487434	504	-	-	-	-	-	-	-		
			High	2562.5	512500	2554.31	510862	6	-	-	-	-	-	-	-		
		20	106	Downlink	Low	2630	526000	2620.46	524092	0	15	6557	524650	6	1	2 (4)	5
					Mid	2655	531000	2627.1	525420	102		6618	529470	6	0	0 (0)	102
					High	2680	536000	2579.74	515948	504		6682	534530	2	0	1 (2)	506
Uplink	Low			2510	502000	2500.46	500092	0	-	-	-	-	-	-	-		
	Mid			2535	507000	2434.74	486948	504	-	-	-	-	-	-	-		
	High			2560	512000	2549.38	509876	6	-	-	-	-	-	-	-		

Note 1: The CORESET#0 Index and the associated CORESET#0 Offset refers to Table 13-1 in TS 38.213 [22]. The value of CORESET#0 Index is controlResourceSetZero (pdcc-ConfigSIB1) in the MIB. The offsetToPointA IE is expressed in units of resource blocks assuming 15 kHz subcarrier spacing for FR1 and 60 kHz subcarrier spacing for FR2.

Note 2: The parameter Offset Carrier CORESET#0 specifies the offset from the lowest subcarrier of the carrier and the lowest subcarrier of CORESET#0. It corresponds to the parameter $\Delta F_{\text{offsetCORESET-0-Carrier}}$ in Annex C expressed in number of common RBs.

Module NAD2					Module NAD1			
Test frequencies for n7A					LTE Band 7			
5G Carrier in Band n7								
Channel	n7A				Channel	BW (MHz)	Freq. (MHz)	EARFCN
	SCS (kHz)	BW (MHz)	Freq. (MHz)	NR-ARFCN				
Low	15	5	2502.5	500500	Adjacent channel to Low	10	2525	21000
Middle	15	5	2535	507000	Adjacent channel to Middle	10	2542.5	21175
High	15	5	2567.5	513500	Adjacent channel to High	10	2560	21350

Note: Tested channels due to the characteristics of the simultaneous transmission of both modules.

n38A + LTE Band 38. (antenna configuration 3):

Table 4.3.1.1.1.38-2: Test frequencies for NR operating band n38 and SCS 30 kHz

CBW [MHz]	carrier Bandwidth [PRBs]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute FrequencyPoint A [ARFCN]	offsetTo Carrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute FrequencySSB [ARFCN]	k_{SSB}	Offset Carrier CORE SET#0 [RBs] Note 2	CORE SET#0 Index (Offset [RBs]) Note 1	offsetTo PointA (SIB1) [PRBs] Note 1							
10	24	Downlink & Uplink	Low	2575	515000	2570.68	514136	30	6439	515090	6	0	3 (3)	6							
			Mid	2595	519000	2553.96	510792								102	6486	518910	18	0	0 (0)	204
			High	2615	523000	2429.24	485848								504	6536	522970	14	0	1 (1)	1010
15	38	Downlink & Uplink	Low	2577.5	515500	2570.66	514132	30	6437	515050	18	0	2 (2)	4							
			Mid	2595	519000	2551.44	510288								102	6480	518430	2	0	1 (1)	206
			High	2612.5	522500	2424.22	484844								504	6526	522050	18	0	2 (2)	1012
20	51	Downlink & Uplink	Low	2580	516000	2570.82	514164	30	6438	515070	14	0	2 (2)	4							
			Mid	2595	519000	2549.1	509820								102	6474	517950	22	0	0 (0)	204
			High	2610	522000	2419.38	483876								504	6513	521070	14	0	2 (2)	1012
40	106	Downlink & Uplink	Low	2590	518000	2570.92	514184	30	6439	515090	14	0	2 (2)	4							
			Mid	2595	519000	2539.2	507840								102	6450	516030	18	0	1 (1)	206
			High	2600	520000	2399.48	479896								504	6461	516970	22	0	0 (0)	1008

Note 1: The CORESET#0 Index and the associated CORESET#0 Offset refers to Table 13-4 in TS 38.213 [22]. The value of CORESET#0 Index is signalled in controlResourceSetZero (pdcch-ConfigSIB1) in the MIB. The offsetToPointA IE is expressed in units of resource blocks assuming 15 kHz subcarrier spacing for FR1 and 60 kHz subcarrier spacing for FR2.

Note 2: The parameter Offset Carrier CORESET#0 specifies the offset from the lowest subcarrier of the carrier and the lowest subcarrier of CORESET#0. It corresponds to the parameter $\Delta F_{\text{OffsetCORESET-0-carrier}}$ in Annex C expressed in number of common RBs.

Module NAD2					Module NAD1			
Test frequencies for n38A					LTE Band 38			
5G Carrier in Band n38								
Channel	n38A				Channel	BW (MHz)	Freq. (MHz)	EARFCN
	SCS (kHz)	BW (MHz)	Freq. (MHz)	NR-ARFCN				
Low	30	20	2580	516000	Adjacent channel to Low	5	2592.5	37975
Middle	30	20	2595	519000	Adjacent channel to Middle	5	2607.5	38125
High	30	20	2610	522000	Adjacent channel to High	5	2590	37950

Note: Tested channels due to the characteristics of the simultaneous transmission of both modules.

n41A + LTE Band 41. (antenna configuration 3):

Table 4.3.1.1.1.41-2: Test frequencies for NR operating band n41, SCS 30 kHz and ΔF_{Raster} 30 kHz

CBW [MHz]	carrier Bandwidth [PRBs]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequency Point A [ARFCN]	offsetTo Carrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute Frequency SSB [ARFCN]	k_{SSB}	Offset Carrier CORE SET#0 [RBs] Note 2	CORE SET#0 Index (Offset [RBs]) Note 1	offsetTo PointA (SIB1) [PRBs] Note 1	
10	24	Downlink & Uplink	Low	2501.01	500202	2496.69	499338	0	30	6252	500190	20	0	1 (1)	2
			Mid	2592.99	518598	2551.95	510390	102		6483	518670	0	0	3 (3)	210
			High	2685	537000	2499.24	499848	504		6711	536910	18	0	0 (0)	1008
15	38	Downlink & Uplink	Low	2503.5	500700	2496.66	499332	0	30	6252	500190	22	0	1 (1)	2
			Mid	2592.99	518598	2549.43	509886	102		6474	517950	0	0	0 (0)	204
			High	2682.48	536496	2494.2	498840	504		6699	535950	10	0	1 (1)	1010
20	51	Downlink & Uplink	Low	2506.02	501204	2496.84	499368	0	30	6252	500190	10	0	1 (1)	2
			Mid	2592.99	518598	2547.09	509418	102		6471	517710	4	0	3 (3)	210
			High	2679.99	535998	2489.37	497874	504		6687	534990	12	0	1 (1)	1010
30	78	Downlink & Uplink	Low	2511	502200	2496.96	499392	0	30	6252	500190	2	0	1 (1)	2
			Mid	2592.99	518598	2542.23	508446	102		6456	516510	0	0	0 (0)	204
			High	2674.98	534996	2479.5	495900	504		6663	533070	6	0	2 (2)	1012
40	106	Downlink & Uplink	Low	2516.01	503202	2496.93	499386	0	30	6252	500190	4	0	1 (1)	2
			Mid	2592.99	518598	2537.19	507438	102		6444	515550	16	0	0 (0)	204
			High	2670	534000	2469.48	493896	504		6636	530910	2	0	0 (0)	1008
50	133	Downlink & Uplink	Low	2521.02	504204	2497.08	499416	0	30	6252	500190	18	0	0 (0)	0
			Mid	2592.99	518598	2532.33	506466	102		6432	514590	20	0	0 (0)	204
			High	2664.99	532998	2459.61	491922	504		6612	528990	20	0	0 (0)	1008
60	162	Downlink & Uplink	Low	2526	505200	2496.84	499368	0	30	6252	500190	10	0	1 (1)	2
			Mid	2592.99	518598	2527.11	505422	102		6420	513630	0	0	2 (2)	208
			High	2659.98	531996	2449.38	489876	504		6588	527070	14	0	2 (2)	1012
80	217	Downlink & Uplink	Low	2536.02	507204	2496.96	499392	0	30	6252	500190	2	0	1 (1)	2
			Mid	2592.99	518598	2517.21	503442	102		6396	511710	20	0	2 (2)	208
			High	2649.99	529998	2429.49	485898	504		6537	522990	4	0	1 (1)	1010
90	245	Downlink & Uplink	Low	2541	508200	2496.9	499380	0	30	6252	500190	6	0	1 (1)	2
			Mid	2592.99	518598	2512.17	502434	102		6381	510510	4	0	0 (0)	204
			High	2644.98	528996	2419.44	483888	504		6513	521070	10	0	2 (2)	1012
100	273	Downlink & Uplink	Low	2546.01	509202	2496.87	499374	0	30	6252	500190	8	0	1 (1)	2
			Mid	2592.99	518598	2507.13	501426	102		6369	509550	20	0	0 (0)	204
			High	2640	528000	2409.42	481884	504		6486	518910	6	0	0 (0)	1008

Note 1: The CORESET#0 Index and the associated CORESET#0 Offset refers to Table 13-4 in TS 38.213 [22]. The value of CORESET#0 Index is signalled in controlResourceSetZero (pdcch-ConfigSIB1) in the MIB. The offsetToPointA IE is expressed in units of resource blocks assuming 15 kHz subcarrier spacing for FR1 and 60 kHz subcarrier spacing for FR2.

Note 2: The parameter Offset Carrier CORESET#0 specifies the offset from the lowest subcarrier of the carrier and the lowest subcarrier of CORESET#0. It corresponds to the parameter $\Delta F_{\text{OffsetCORESET-0-Carrier}}$ in Annex C expressed in number of common RBs.

Module NAD2					Module NAD1			
Test frequencies for n41A					LTE Band 41			
5G Carrier in Band n41								
Channel	n41A				Channel	BW (MHz)	Freq. (MHz)	EARFCN
	SCS (kHz)	BW (MHz)	Freq. (MHz)	NR-ARFCN				
Low	30	100	2546.01	509202	Adjacent channel to Low	20	2606	40750
Middle	30	100	2592.99	518598	Adjacent channel to Middle	20	2653	41220
High	30	100	2640	528000	Adjacent channel to High	20	2580	40490

Note: Tested channels due to the characteristics of the simultaneous transmission of both modules.

n66A + LTE Band 66. (antenna configuration 3):

Table 4.3.1.1.1.66-1: Test frequencies for NR operating band n66, uplink and downlink channel bandwidth combinations and SCS 15 kHz

UL/DL Bandwidth combination	CBW [MHz]	carrier Bandwidth [PRBs]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequency Point A [ARFCN]	offset To Carrier [Carrier PRBs]	SS block SCS [kHz]	GS CN	absolute Frequency SSB [ARFCN]	k_{SSB}	Offset Carrier CORES ET#0 [RBs] Note 2	CORES ET#0 Index (Offset [RBs]) Note 1	offset To Point A (SIB1) [PRBs] Note 1
5/5	5	25	Downlink	Low	211 2.5 00	2110 25	422050	0	15	527 9	422410	0	0	0 (0)	0
				Mid	214 5 00	2124 39	424878	102		536 1	428910	0	0	0 (0)	102
				High	217 7.5 00	2084 53	416906	504		544 3	435410	0	0	0 (0)	504
	5	25	Uplink	Low	171 2.5 00	1710 25	342050	0	-	-	-	-	-	-	-
				Mid	174 5 00	1652 03	330406	504	-	-	-	-	-	-	
				High	177 7.5 00	1774 17	354834	6	-	-	-	-	-	-	
5/20	20	106	Downlink	Low	212 0 00	2110 46	422092	0	15	528 2	422650	6	1	2 (4)	5
				Mid	215 2.5 00	2124 6	424920	102		536 4	429150	6	1	2 (4)	107
				High	218 5 00	2084 74	416948	504		544 6	435650	6	1	2 (4)	509
	5	25	Uplink	Low	171 2.5 00	1710 25	342050	0	-	-	-	-	-	-	-
				Mid	174 5 00	1652 03	330406	504	-	-	-	-	-	-	
				High	177 7.5 00	1774 17	354834	6	-	-	-	-	-	-	
5/40	40	216	Downlink	Low	213 0 00	2110 56	422112	0	15	528 3	422670	6	1	2 (4)	5
				Mid	215 2.5 00	2117 2	423440	102		534 4	427490	6	0	0 (0)	102
				High	218 5 00	2069 84	413968	504		540 5	432490	6	0	0 (0)	504
	5	25	Uplink	Low	171 2.5 00	1710 25	342050	0	-	-	-	-	-	-	-
				Mid	173 7.5 00	1644 53	328906	504	-	-	-	-	-	-	
				High	176 2.5 00	1759 17	351834	6	-	-	-	-	-	-	
10/10	10	52	Downlink	Low	211 5 00	2110 32	422064	0	15	528 0	422430	2	0	0 (0)	0
				Mid	214 5 00	2121 96	424392	102		535 5	428430	2	0	0 (0)	102
				High	217 5 00	2079 6	415920	504		543 0	434430	2	0	0 (0)	504
	10	52	Uplink	Low	171 5 00	1710 32	342064	0	-	-	-	-	-	-	-
				Mid	174 5 00	1649 6	329920	504	-	-	-	-	-	-	
				High	177 5 00	1769 24	353848	6	-	-	-	-	-	-	
10/20	20	106	Downlink	Low	212 0 00	2110 46	422092	0	15	528 2	422650	6	1	2 (4)	5
				Mid	215 0 00	2122 1	424420	102		535 7	428650	6	1	2 (4)	107
				High	218 0 00	2079 74	415948	504		543 2	434650	6	1	2 (4)	509
	10	52	Uplink	Low	171 5 00	1710 32	342064	0	-	-	-	-	-	-	-
				Mid	174 5 00	1649 6	329920	504	-	-	-	-	-	-	
				High	177 5 00	1769 24	353848	6	-	-	-	-	-	-	
10/40	40	216	Downlink	Low	213 0 00	2110 56	422112	0	15	528 3	422670	6	1	2 (4)	5
				Mid	215 2.5 00	2117 2	423440	102		534 4	427490	6	0	0 (0)	102
				High	218 0 00	2069 84	413968	504		540 5	432490	6	0	0 (0)	504
	10	52	Uplink	Low	171 5 00	1710 32	342064	0	-	-	-	-	-	-	-
				Mid	174 0 00	1644 6	328920	504	-	-	-	-	-	-	
				High	176 5 00	1759 24	351848	6	-	-	-	-	-	-	

15/15	15	79	Downlink	Low	211 7.5	4235 00	2110 .39	422078	0	15	528 1	422450	4	0	0 (0)	0
				Middle	214 5	4290 00	2119 53	423906	102		534 9	427950	4	0	0 (0)	102
				High	217 2.5	4345 00	2074 .67	414934	504		541 7	433450	4	0	0 (0)	504
	15	79	Uplink	Low	171 7.5	3435 00	1710 .39	342078	0	-	-	-	-	-	-	-
				Middle	174 5	3490 00	1647 .17	329434	504	-	-	-	-	-	-	
				High	177 2.5	3545 00	1764 .31	352862	6	-	-	-	-	-	-	
20/20	20	106	Downlink	Low	212 0	4240 00	2110 .46	422092	0	15	528 2	422650	6	1	2 (4)	5
				Middle	214 5	4290 00	2117 .1	423420	102		534 3	427470	6	0	0 (0)	102
				High	217 0	4340 00	2069 .74	413948	504		540 7	432530	2	0	1 (2)	506
	20	106	Uplink	Low	172 0	3440 00	1710 .46	342092	0	-	-	-	-	-	-	
				Middle	174 5	3490 00	1644 .74	328948	504	-	-	-	-	-	-	
				High	177 0	3540 00	1759 .38	351876	6	-	-	-	-	-	-	
20/40	40	216	Downlink	Low	213 0	4260 00	2110 .56	422112	0	15	528 3	422670	6	6	2 (4)	5
				Middle	215 5	4310 00	2117 .2	423440	102		534 4	427490	6	0	0 (0)	102
				High	218 0	4360 00	2069 .84	413968	504		540 5	432490	6	0	0 (0)	504
	20	106	Uplink	Low	172 0	3440 00	1710 .46	342092	0	-	-	-	-	-	-	
				Middle	174 5	3490 00	1644 .74	328948	504	-	-	-	-	-	-	
				High	177 0	3540 00	1759 .38	351876	6	-	-	-	-	-	-	
25/25	25	133	Downlink	Low	212 2.5	4245 00	2110 .53	422106	0	15	528 3	422670	8	1	2 (4)	5
				Middle	214 5	4290 00	2114 .67	422934	102		533 7	426990	8	0	0 (0)	102
				High	216 7.5	4335 00	2064 .81	412962	504		539 4	431550	4	0	1 (2)	506
	25	133	Uplink	Low	172 2.5	3445 00	1710 .53	342106	0	-	-	-	-	-	-	
				Middle	174 5	3490 00	1642 .31	328462	504	-	-	-	-	-	-	
				High	176 7.5	3535 00	1754 .45	350890	6	-	-	-	-	-	-	
30/30	30	160	Downlink	Low	212 5	4250 00	2110 .6	422120	0	15	528 4	422690	10	1	2 (4)	5
				Middle	214 5	4290 00	2112 .24	422448	102		533 1	426510	10	0	0 (0)	102
				High	216 5	4330 00	2059 .88	411976	504		538 1	430570	6	0	1 (2)	506
	30	160	Uplink	Low	172 5	3450 00	1710 .6	342120	0	-	-	-	-	-	-	
				Middle	174 5	3490 00	1639 .88	327976	504	-	-	-	-	-	-	
				High	176 5	3530 00	1749 .52	349904	6	-	-	-	-	-	-	
40/40	40	216	Downlink	Low	213 0	4260 00	2110 .56	422112	0	15	528 3	422670	6	1	2 (4)	5
				Middle	214 5	4290 00	2107 .2	421440	102		531 9	425550	2	0	1 (2)	104
				High	216 0	4320 00	2049 .84	409968	504		535 8	428670	6	1	2 (4)	509
	40	216	Uplink	Low	173 0	3460 00	1710 .56	342112	0	-	-	-	-	-	-	
				Middle	174 5	3490 00	1634 .84	326968	504	-	-	-	-	-	-	
				High	176 0	3520 00	1739 .48	347896	6	-	-	-	-	-	-	

Note 1: The CORESET#0 Index and the associated CORESET#0 Offset refers to Table 13-1 in TS 38.213 [22]. The value of CORESET#0 Index is signalled in controlResourceSetZero (pdcch-ConfigSIB1) in the MIB. The offsetToPointA IE is expressed in units of resource blocks assuming 15 kHz subcarrier spacing for FR1 and 60 kHz subcarrier spacing for FR2.

Note 2: The parameter Offset Carrier CORESET#0 specifies the offset from the lowest subcarrier of the carrier and the lowest subcarrier of CORESET#0. It corresponds to the parameter $\Delta F_{\text{OffsetCORESET0-Carrier}}$ in Annex C expressed in number of common RBs.

Module NAD2					Module NAD1			
Test frequencies for n66A.					LTE Band 66			
5G Carrier in Band n66.								
Channel	n66A				Channel	BW (MHz)	Freq. (MHz)	EARFCN
	SCS (kHz)	BW (MHz)	Freq. (MHz)	NR-ARFCN				
Low	15	40	1730	346000	Adjacent channel to Low	3	1751.5	132387
Middle	15	40	1745	349000	Adjacent channel to Middle	3	1766.5	132537
High	15	40	1760	352000	Adjacent channel to High	3	1738.5	132257

Note: Tested channels due to the characteristics of the simultaneous transmission of both modules.

n71A + LTE Band 71. (antenna configuration 3):

Table 4.3.1.1.1.71-1: Test frequencies for NR operating band n71 and SCS 15 kHz

CBW [MHz]	carrier Bandwidth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequency Point A [ARFCN]	offsetTo Carrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute Frequency SSB [ARFCN]	k_{SSB}	Offset Carrier CORE SET#0 [RBs] Note 2	CORE SET#0 Index (Offset [RBs]) Note 1	offsetTo PointA (SIB1) [PRBs] Note 1
5	25	Downlink	Low	619.5	123900	617.25	123450	0	15	1548	123870	8	1	0 (0)	1
			Mid	634.5	126900	613.89	122778	102		1587	126990	0	1	2 (4)	107
			High	649.5	129900	556.53	111306	504		1623	129870	8	1	0 (0)	505
		Uplink	Low	665.5	133100	663.25	132650	0	-	-	-	-	-	-	-
			Mid	680.5	136100	587.53	117506	504	-	-	-	-	-	-	-
			High	695.5	139100	692.17	138434	6	-	-	-	-	-	-	-
10	52	Downlink	Low	622	124400	617.32	123464	0	15	1549	123890	10	1	0 (0)	1
			Mid	634.5	126900	611.46	122292	102		1581	126510	2	1	2 (4)	107
			High	647	129400	551.6	110320	504		1610	128890	10	1	0 (0)	505
		Uplink	Low	668	133600	663.32	132664	0	-	-	-	-	-	-	-
			Mid	680.5	136100	585.1	117020	504	-	-	-	-	-	-	-
			High	693	138600	687.24	137448	6	-	-	-	-	-	-	-
15	79	Downlink	Low	624.5	124900	617.39	123478	0	15	1547	123850	4	0	0 (0)	0
			Mid	634.5	126900	609.03	121806	102		1575	126030	4	1	2 (4)	107
			High	644.5	128900	546.67	109334	504		1600	127970	8	1	1 (2)	507
		Uplink	Low	670.5	134100	663.39	132678	0	-	-	-	-	-	-	-
			Mid	680.5	136100	582.67	116534	504	-	-	-	-	-	-	-
			High	690.5	138100	682.31	136462	6	-	-	-	-	-	-	-
20	106	Downlink	Low	627	125400	617.46	123492	0	15	1548	123870	6	0	0 (0)	0
			Mid	634.5	126900	606.6	121320	102		1569	125550	6	1	2 (4)	107
			High	642	128400	541.74	108348	504		1587	126990	10	1	1 (2)	507
		Uplink	Low	673	134600	663.46	132692	0	-	-	-	-	-	-	-
			Mid	680.5	136100	580.24	116048	504	-	-	-	-	-	-	-
			High	688	137600	677.38	135476	6	-	-	-	-	-	-	-

Note 1: The CORESET#0 Index and the associated CORESET#0 Offset refers to Table 13-1 in TS 38.213 [22]. The value of CORESET#0 Index is signalled in controlResourceSetZero (pdcch-ConfigSIB1) in the MIB. The offsetToPointA IE is expressed in units of resource blocks assuming 15 kHz subcarrier spacing for FR1 and 60 kHz subcarrier spacing for FR2.

Note 2: The parameter Offset Carrier CORESET#0 specifies the offset from the lowest subcarrier of the carrier and the lowest subcarrier of CORESET#0. It corresponds to the parameter $\Delta F_{\text{OffsetCORESET-0-Carrier}}$ in Annex C expressed in number of common RBs.

Module NAD2					Module NAD1			
Test frequencies for n71A					LTE Band 71			
5G Carrier in Band n71								
Channel	n71A				Channel	BW (MHz)	Freq. (MHz)	EARFCN
	SCS (kHz)	BW (MHz)	Freq. (MHz)	NR-ARFCN				
Low	15	15	670.5	134100	Adjacent channel to Low	20	688	133372
Middle	15	15	680.5	136100	Adjacent channel to Middle	10	693	133422
High	15	15	690.5	138100	Adjacent channel to High	20	673	133222

Note: Tested channels due to the characteristics of the simultaneous transmission of both modules.

Radiated emissions

SPECIFICATION:

1. n66a + LTE Band 66. FCC §2.1053 & §27.53 (h) / RSS-139 Issue 3 Clause 6.6.

FCC §27.53 (h):

(h) Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

RSS-139 Issue 3 Clause 6.6:

i. In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

ii. After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} P$ (watts) dB.

2. n7a + LTE Band 7. n38a + LTE Band 38. n41a + LTE Band 41. FCC §2.1053 & §27.53 (m) (4) / RSS-199 Issue 3 Clause 4.5 (b).

FCC §27.53 (m) (4):

(m) For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts in accordance with the standards below. If a licensee has multiple contiguous channels, out-of-band emissions shall be measured from the upper and lower edges of the contiguous channels.

(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199 Issue 3 Clause 4.5 (b):

4.5. In the 1 MHz band immediately outside and adjacent to the channel edge, the unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth for base station and fixed subscriber equipment, and 2% for mobile subscriber equipment. Beyond the 1 MHz band, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% or 2% of the occupied bandwidth, as applicable.

Equipment shall comply with the following unwanted emission limits:

(b) for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:

- i. $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
- ii. $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
- iii. $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2490.5 MHz and 2496 MHz, and $55 + 10 \log_{10} p$ at or below 2490.5 MHz.

In (b), p is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.

MEASUREMENT LIMIT:

On all frequencies between the channel edge and 5 megahertz from the channel edge:

At P_o transmitting power, the specified minimum attenuation becomes $40 + 10 \log(P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [40 + 10 \log(P_o \text{ in mwatts}) - 30] = -10 \text{ dBm}$$

On all frequencies between 5 megahertz and X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section; and between 2490.5 MHz and 2496 MHz:

At P_o transmitting power, the specified minimum attenuation becomes $43 + 10 \log(P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log(P_o \text{ in mwatts}) - 30] = -13 \text{ dBm}$$

On all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section; and below 2490.5 MHz:

At P_o transmitting power, the specified minimum attenuation becomes $55 + 10 \log(P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [55 + 10 \log(P_o \text{ in mwatts}) - 30] = -25 \text{ dBm}$$

3. n71a + LTE Band 71. FCC §2.1053 & §27.53 (g) / RSS-130 Issue 2 Clause 4.7.

FCC §27.53 (g):

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

RSS-130 Issue 2 Clause 4.7:

4.7.1. The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

MEASUREMENT LIMIT:

At P_o transmitting power, the specified minimum attenuation becomes $43 + 10 \log(P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log(P_o \text{ in mwatts}) - 30] = -13 \text{ dBm}$$

METHOD:

The measurement was performed with the EUT inside an anechoic chamber.

The spectrum was scanned from 30 MHz to at least the 10th harmonic of the High frequency generated within the equipment.

The EUT was placed on a non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 18 GHz and at 1 m distance for measurements above 18 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded.


The maximum field strength (dB μ V/m) of each detected emission at less than 20 dB respect to the limit is converted to an equivalent EIRP level (dBm) according to ANSI C63.26 with the formula:

$$\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20 \log(D) - 104.8; \text{ where } D \text{ is the measurement distance (in the far field region) in m.}$$
$$D = 3 \text{ m}$$


A resolution bandwidth / video bandwidth of 100 kHz / 300 kHz or higher were used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.

TEST SETUP:


Radiated measurements setup from 30 MHz to 1 GHz:

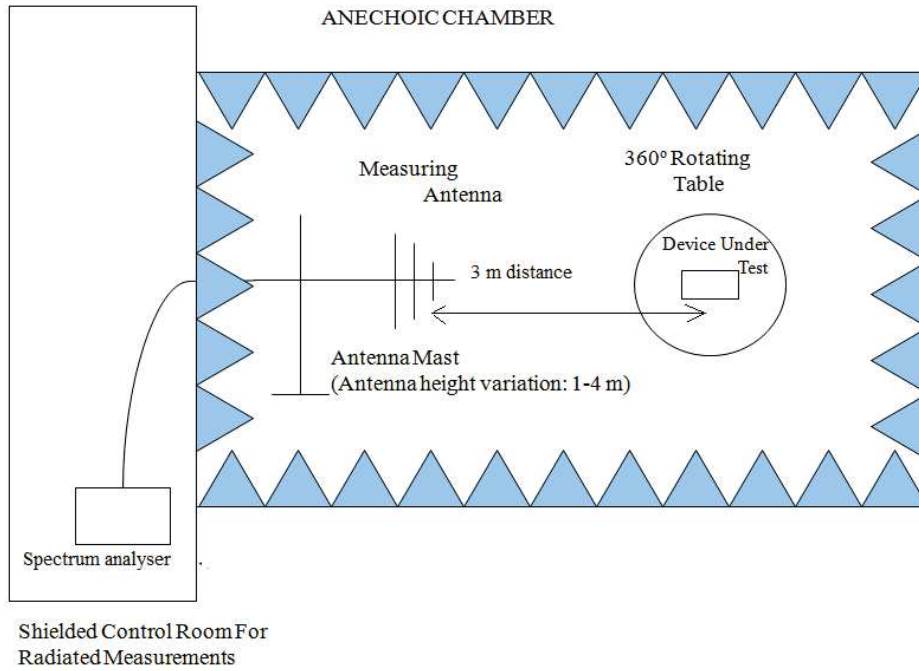

Radiated measurements setup from 1 GHz to 18 GHz:

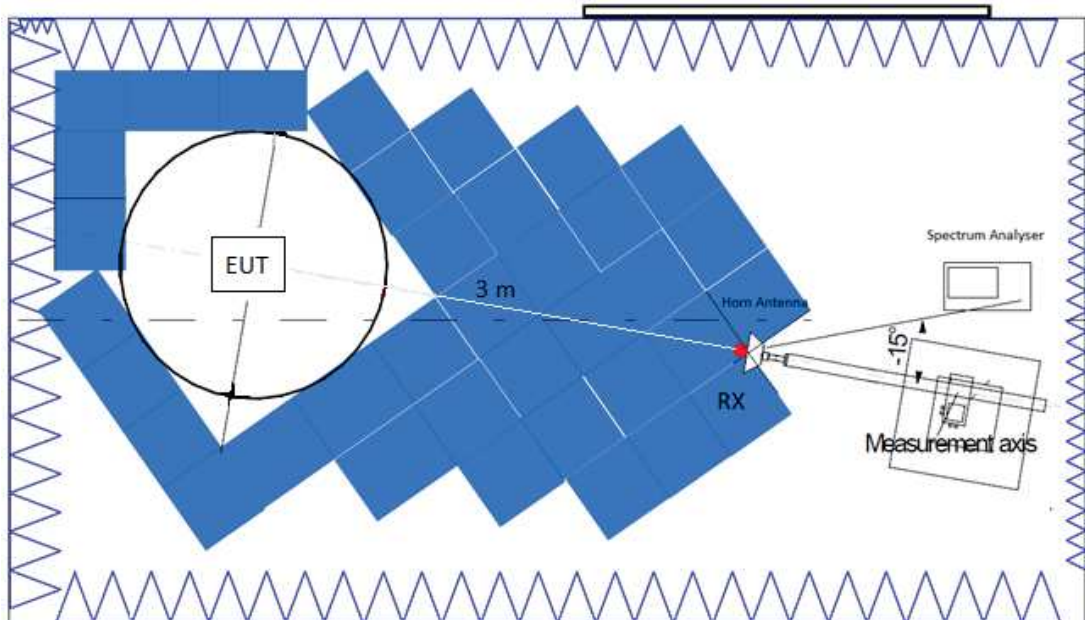

Radiated measurements setup $f > 18$ GHz:

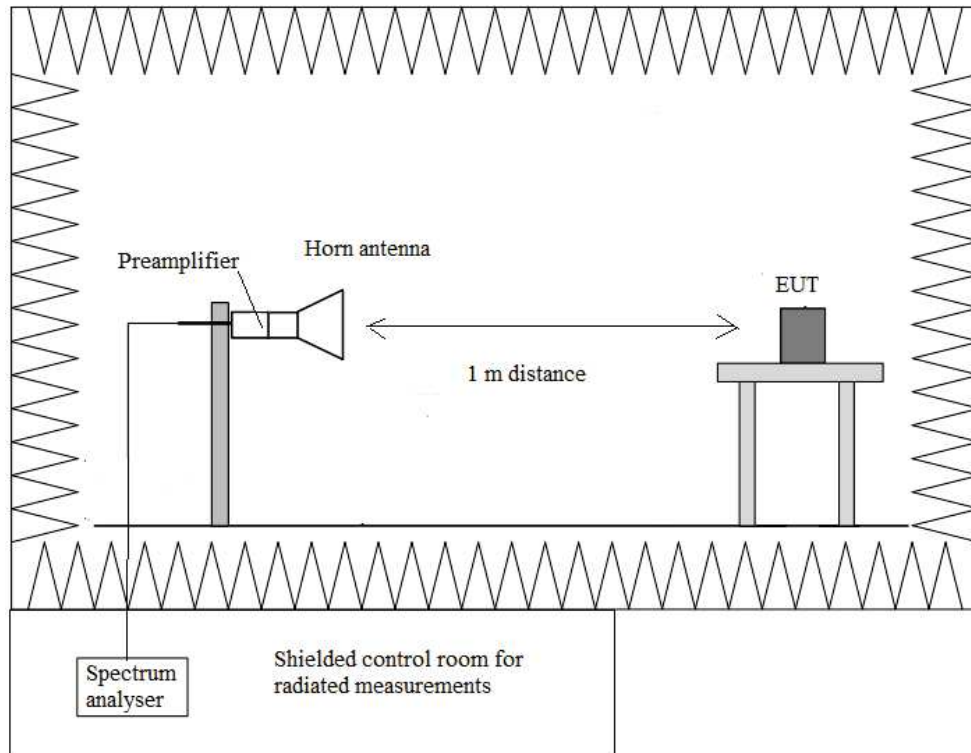

RESULTS:

• **n7A + LTE Band 7:**

A preliminary scan determined the worst case:

1) n7A (Module NAD2):

n7A: Pi/2 BPSK, BW=5 MHz, SCS=15 kHz, RB=1, Offset=0.

2) LTE Band 7 (Module NAD1):

7: QPSK, BW=10 MHz, RB=1, Offset=0.

The following results are the ones of the worst case.

- LOW CHANEL:

Frequency range 30 MHz - 1 GHz:

Spurious frequencies at less than 20 dB below the limit:

Spurious frequency (MHz)	E.I.R.P (dBm)	Polarization	Detector	Measurement Uncertainty (dB)
56.109	-42.4	V	Peak	<± 5.08
250.109	-44.68	V	Peak	<± 5.08

Frequency range 1 - 26 GHz:

Spurious frequencies at less than 20 dB below the limit:

Spurious frequency (GHz)	E.I.R.P (dBm)	Polarization	Detector	Measurement Uncertainty (dB)
17.50235	-31.09	V	Peak	<± 4.82
17.64395	-30.63	V	Peak	<± 4.82
20.00285	-29.8	V	Peak	<± 4.82
20.16485	-28.26	V	Peak	<± 4.82
22.50245	-39.51	V	Peak	<± 4.82
22.68575	-30.18	V	Peak	<± 4.82

Frequency range 2490.5 - 2496 MHz:

Spurious frequencies at less than 20 dB below the limit:

Spurious frequency (GHz)	E.I.R.P (dBm)	Polarization	Detector	Measurement Uncertainty (dB)
2.4959785	-27.06	V	Peak	<± 5.13

- MIDDLE CHANNEL:

Frequency range 30 MHz - 1 GHz:

Spurious frequencies at less than 20 dB below the limit:

Spurious frequency (MHz)	E.I.R.P (dBm)	Polarization	Detector	Measurement Uncertainty (dB)
55.592	-41.15	V	Peak	<± 5.08

Frequency range 1 - 26 GHz:

Spurious frequencies at less than 20 dB below the limit:

Spurious frequency (GHz)	E.I.R.P (dBm)	Polarization	Detector	Measurement Uncertainty (dB)
17.72975	-35.04	V	Peak	<± 4.82
17.77715	-39.39	V	Peak	<± 4.82
20.26235	-32.21	V	Peak	<± 4.82
20.31695	-30.61	V	Peak	<± 4.82
22.79555	-42.69	V	Peak	<± 4.82
22.85645	-35.03	V	Peak	<± 4.82

Frequency range 2490.5 - 2496 MHz:

No spurious frequencies at less than 20 dB below the limit.

- HIGH CHANNEL:

Frequency range 30 MHz - 1 GHz:

No spurious frequencies at less than 20 dB below the limit.

Frequency range 1 - 26 GHz:

Spurious frequencies at less than 20 dB below the limit:

Spurious frequency (GHz)	E.I.R.P (dBm)	Polarization	Detector	Measurement Uncertainty (dB)
17.88185	-30	V	Peak	<± 4.82
17.95685	-32.04	V	Peak	<± 4.82
20.43667	-27.84	V	Peak	<± 4.82
20.52305	-29.01	V	Peak	<± 4.82
22.99175	-34.38	V	Peak	<± 4.82
23.08775	-37.66	V	Peak	<± 4.82

Frequency range 2490.5 - 2496 MHz:


No spurious frequencies at less than 20 dB below the limit.

Measurement Uncertainty (dB)	<± 5.08 for f < 1 GHz <± 5.13 for f ≥ 1 GHz up to 17 GHz <± 4.82 for f ≥ 17 GHz up to 26 GHz
------------------------------	--


Verdict: PASS

FREQUENCY RANGE 30 MHz - 1 GHz (worst case):


- Low Channel:

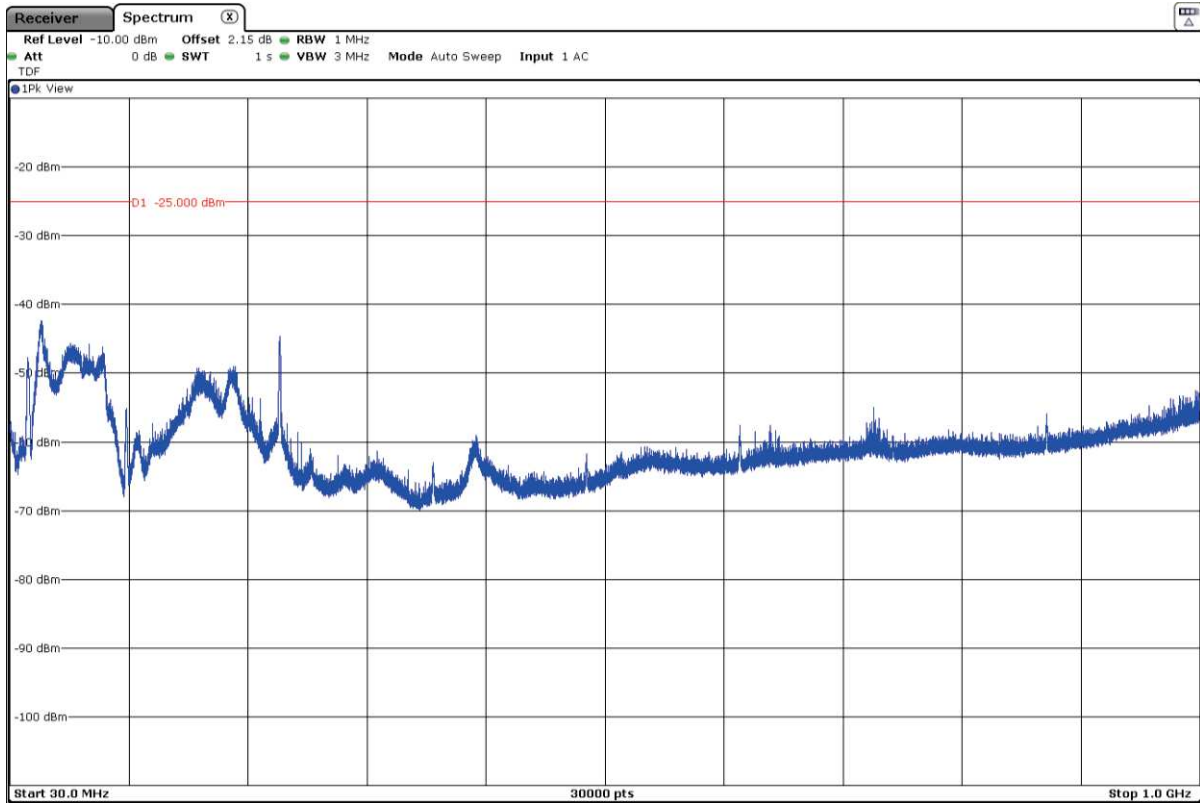

- Middle Channel:

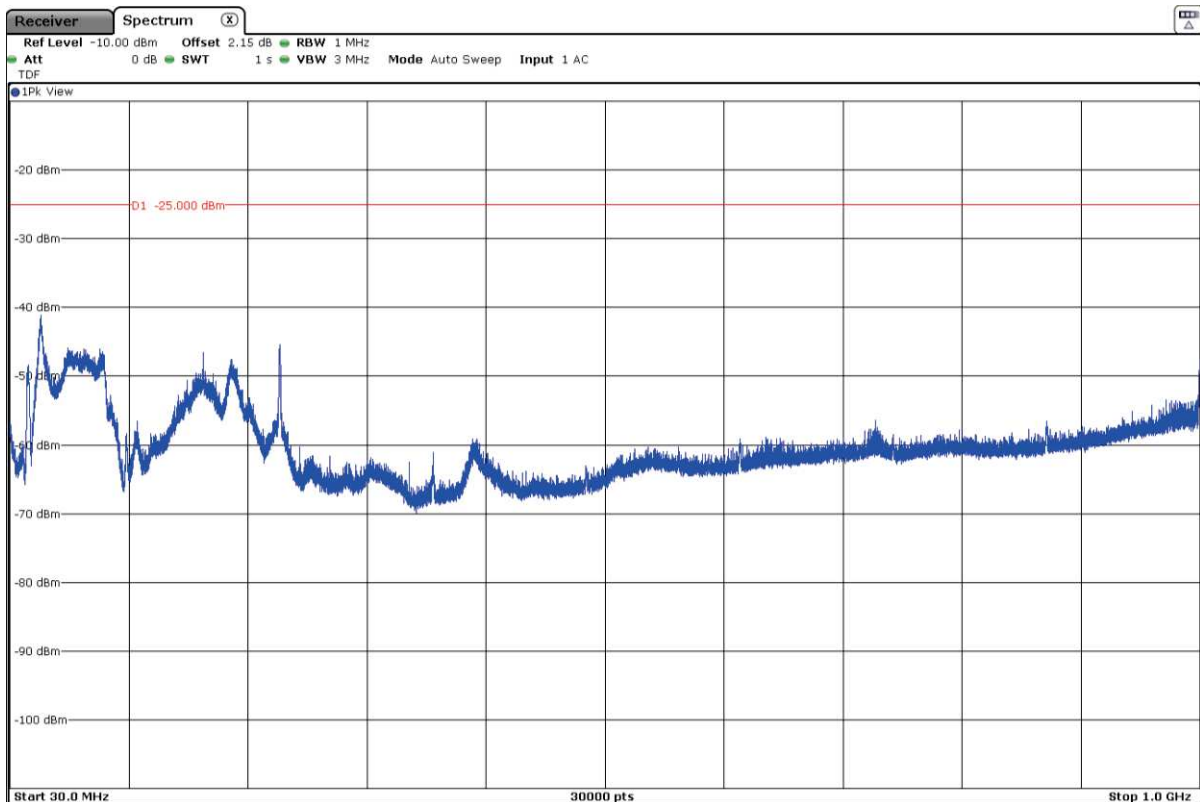


- High Channel:

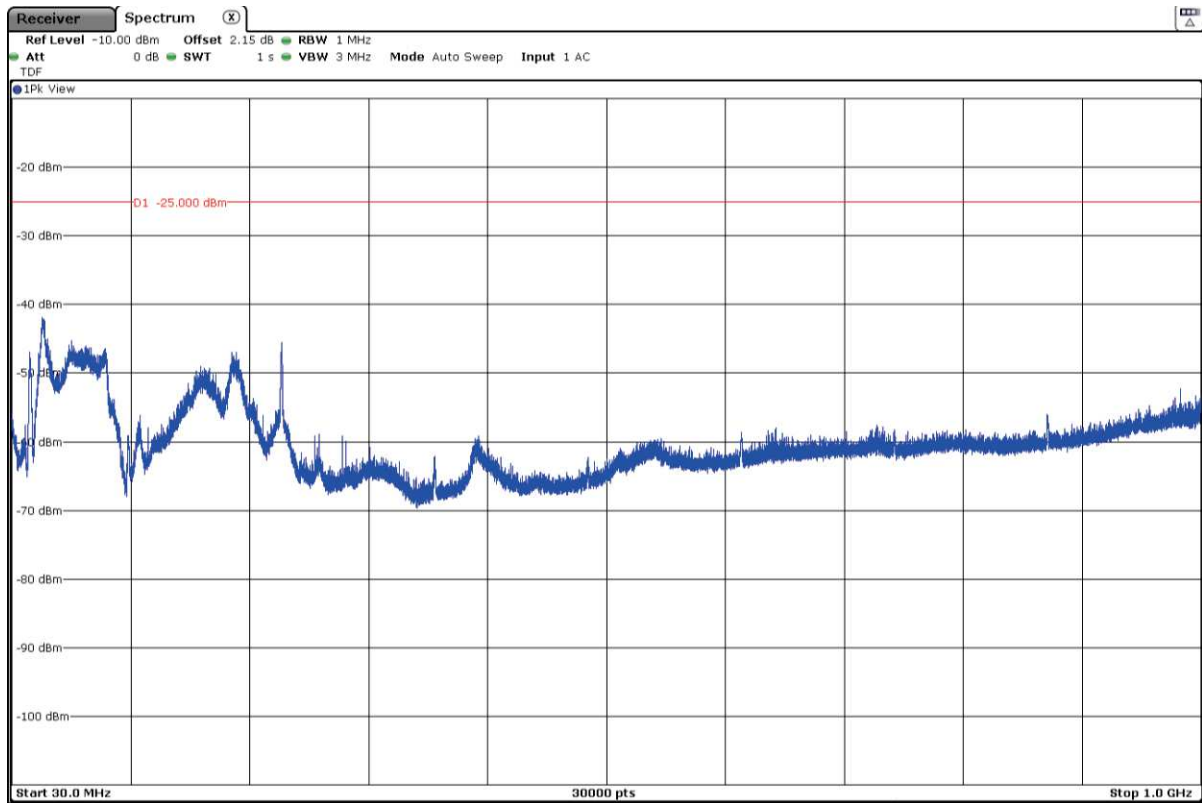


FREQUENCY RANGE 1 - 3 GHz (worst case):

- Low Channel:

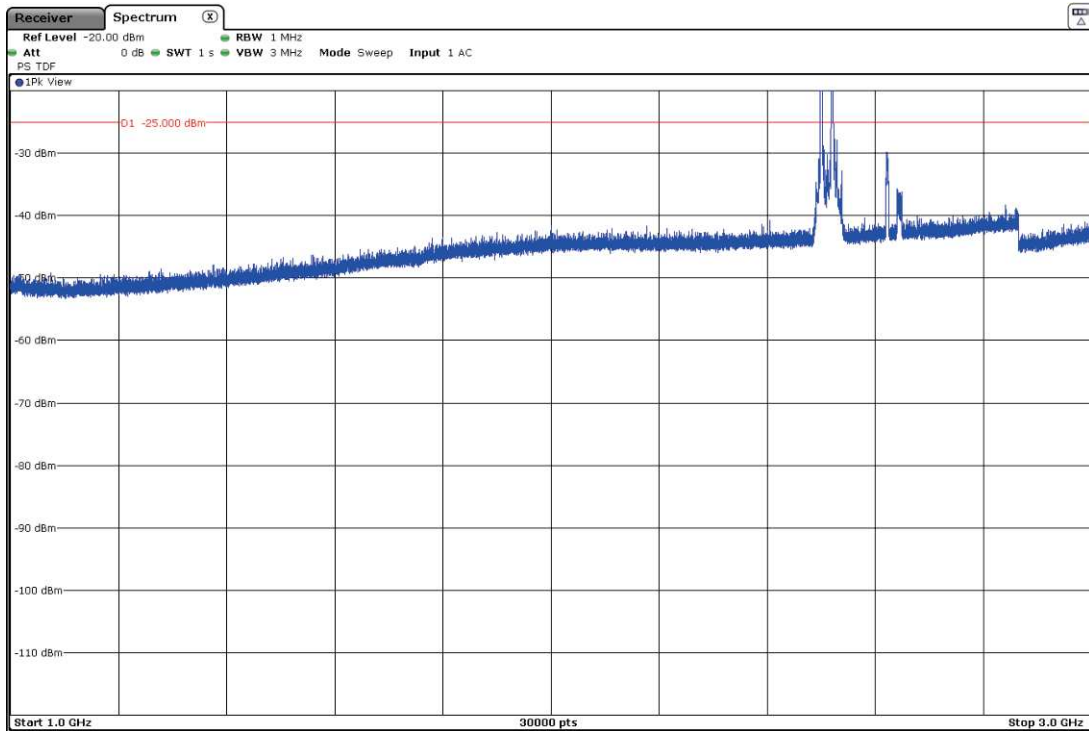


The peaks above the limit are the carrier frequencies. The peaks at 2622MHz and 2645MHz correspond to the downlink signals.

- Middle Channel:

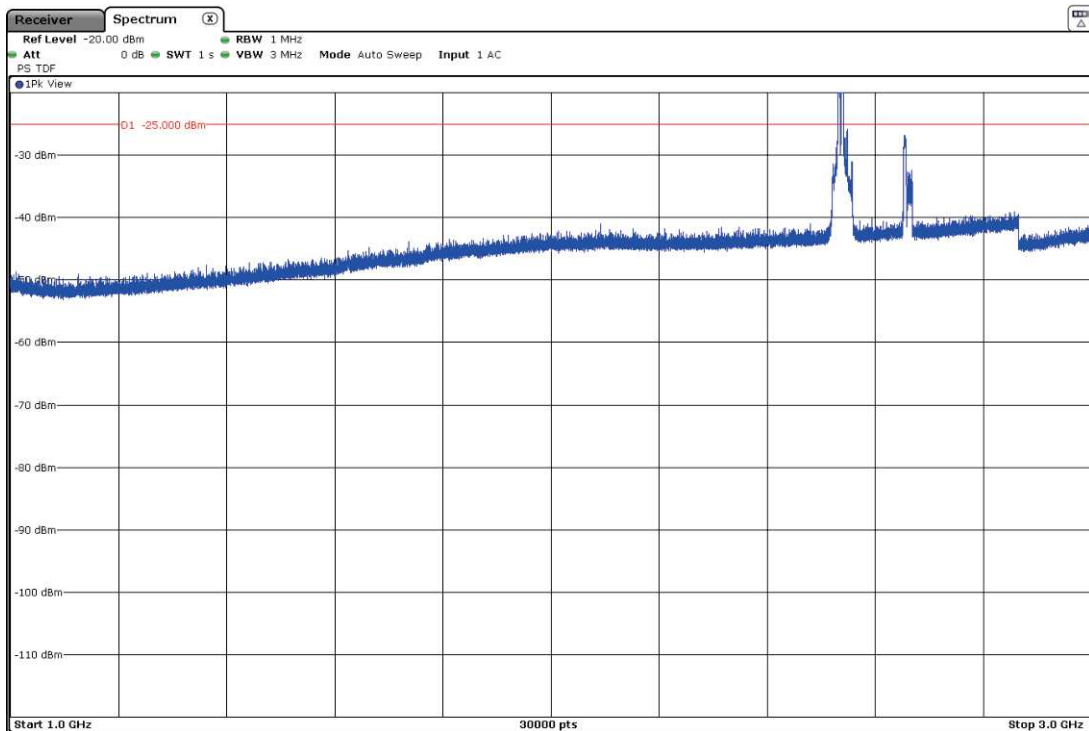

The peaks above the limit are the carrier frequencies. The peaks at 2655MHz and 2662.5MHz correspond to the downlink signals.


- High Channel:

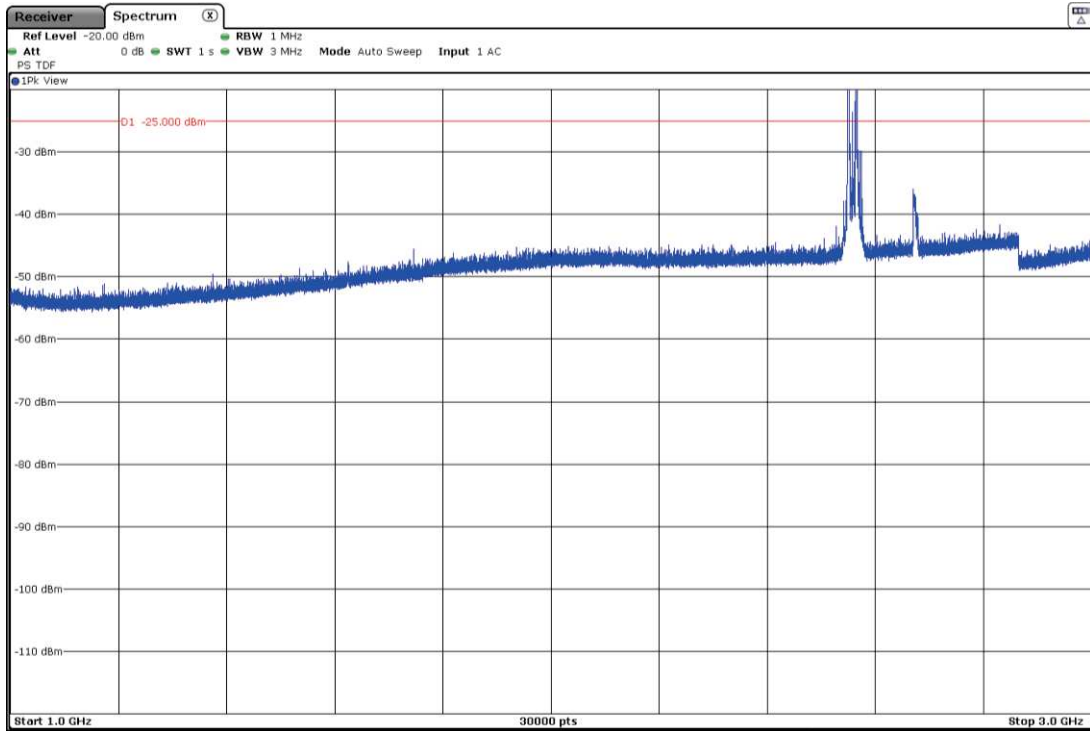


The peaks above the limit are the carrier frequencies. The peaks at 2567.5MHz and 2680MHz correspond to the downlink signals.

FREQUENCY RANGE 3 - 17 GHz (worst case):


- Low Channel:

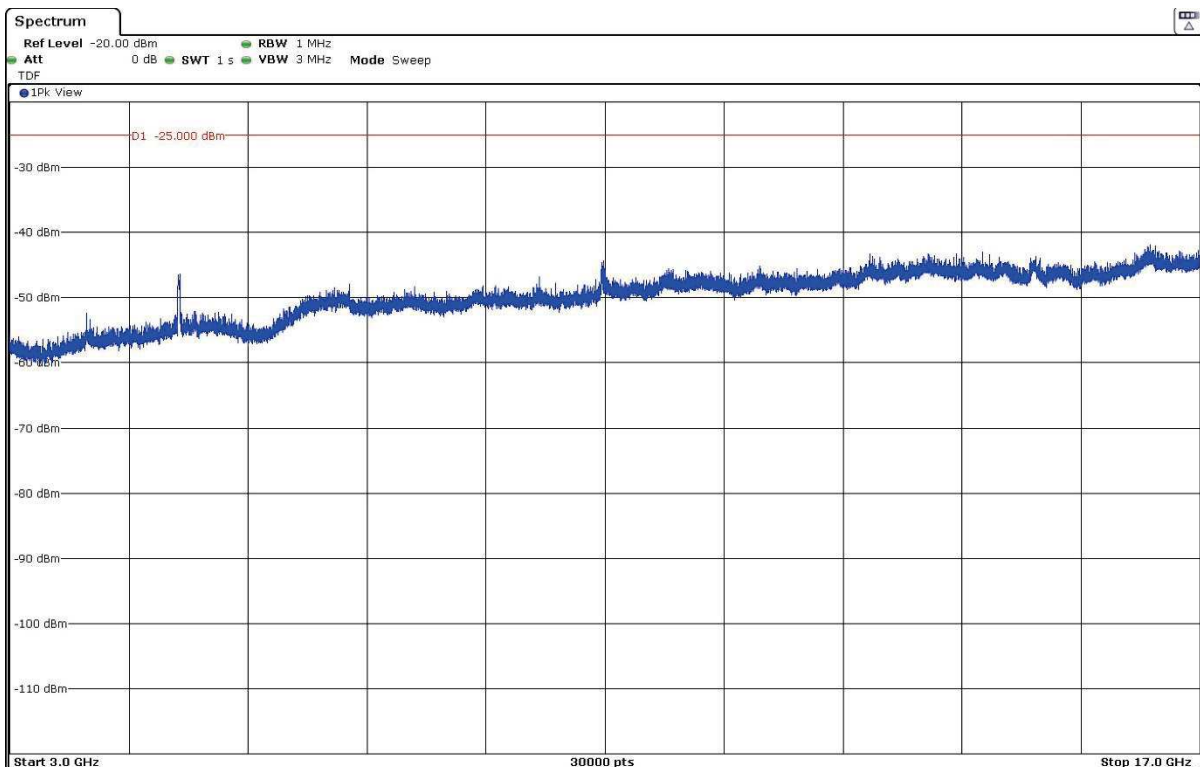

- Middle Channel:

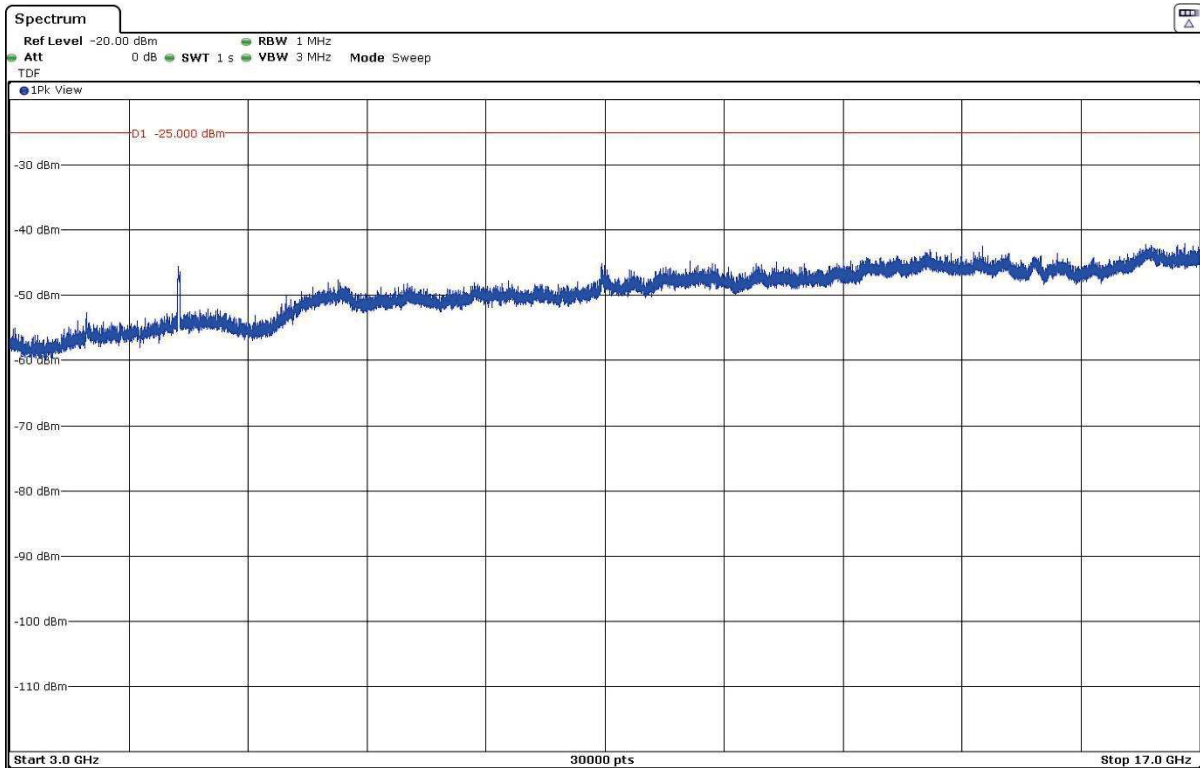


- High Channel:

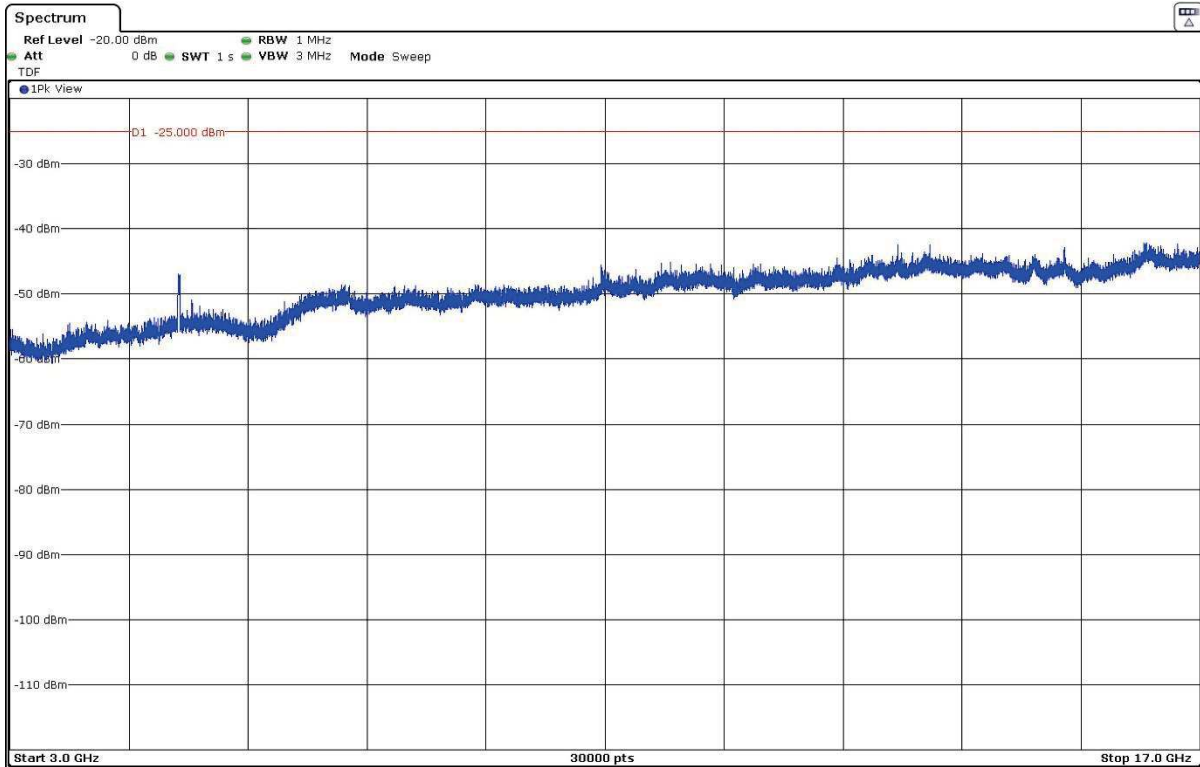


FREQUENCY RANGE 17 - 26 GHz (worst case):


- Low Channel:

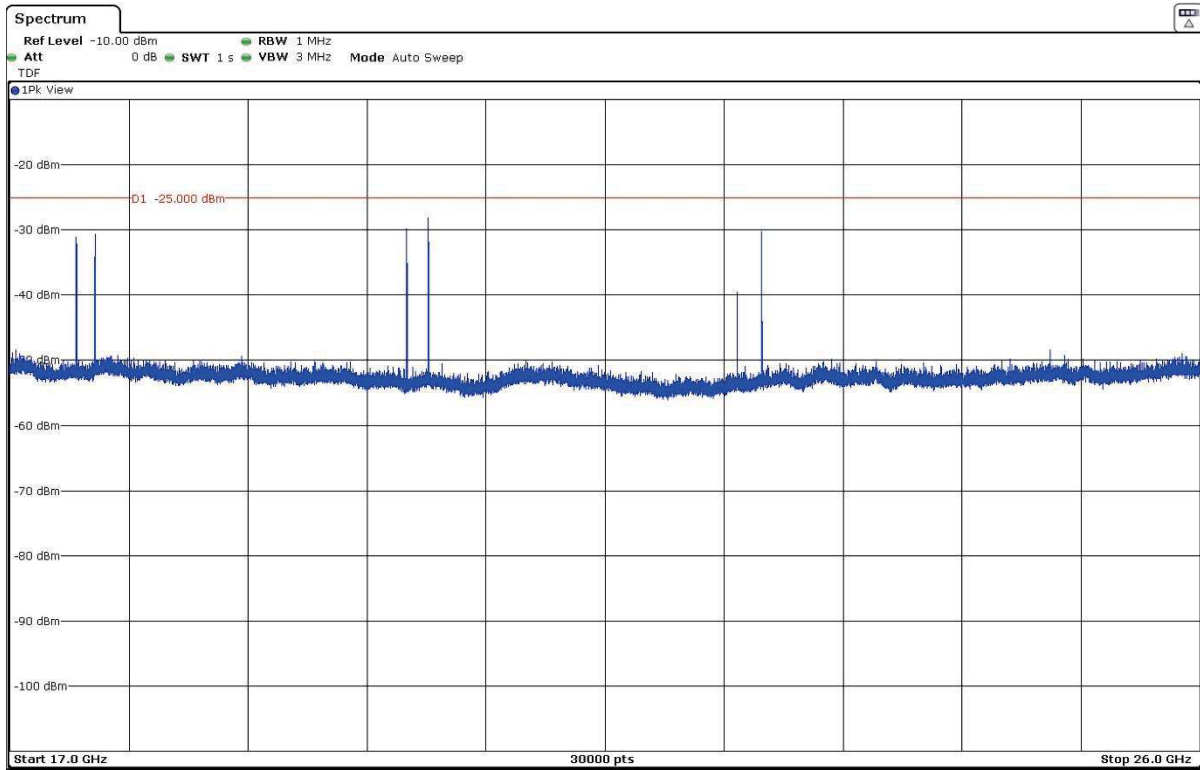

- Middle Channel:


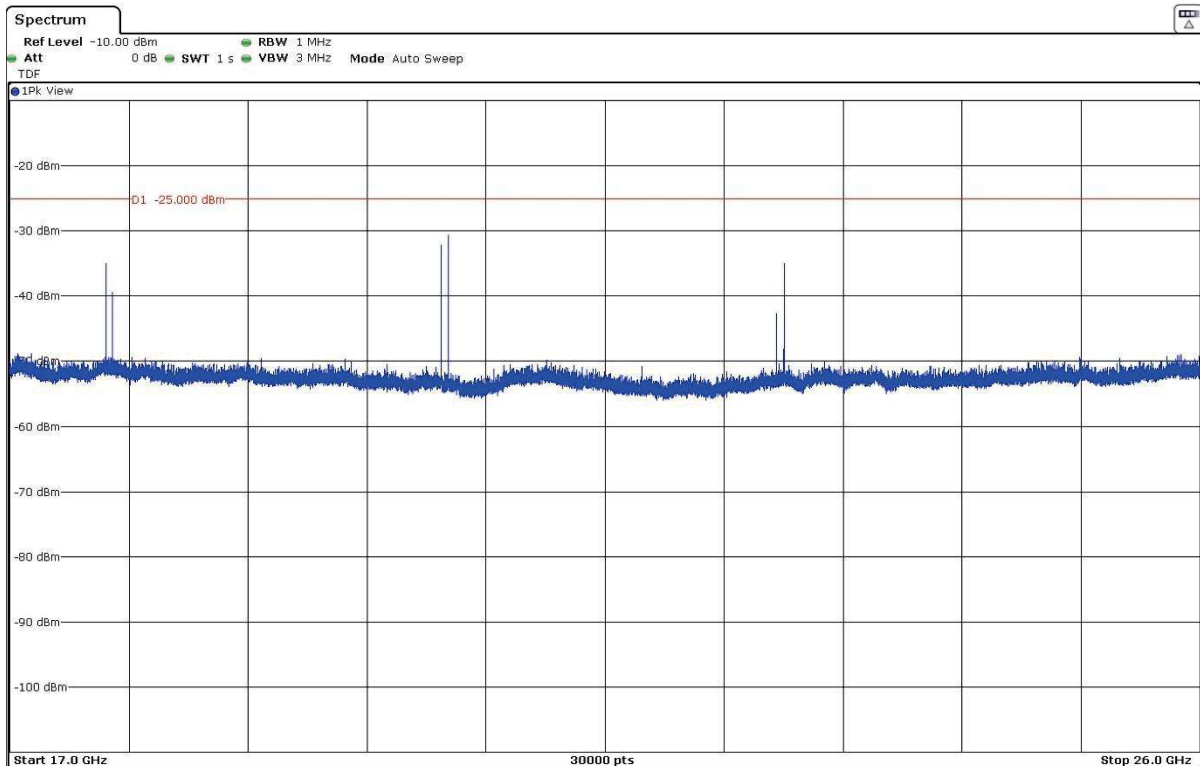


- High Channel:


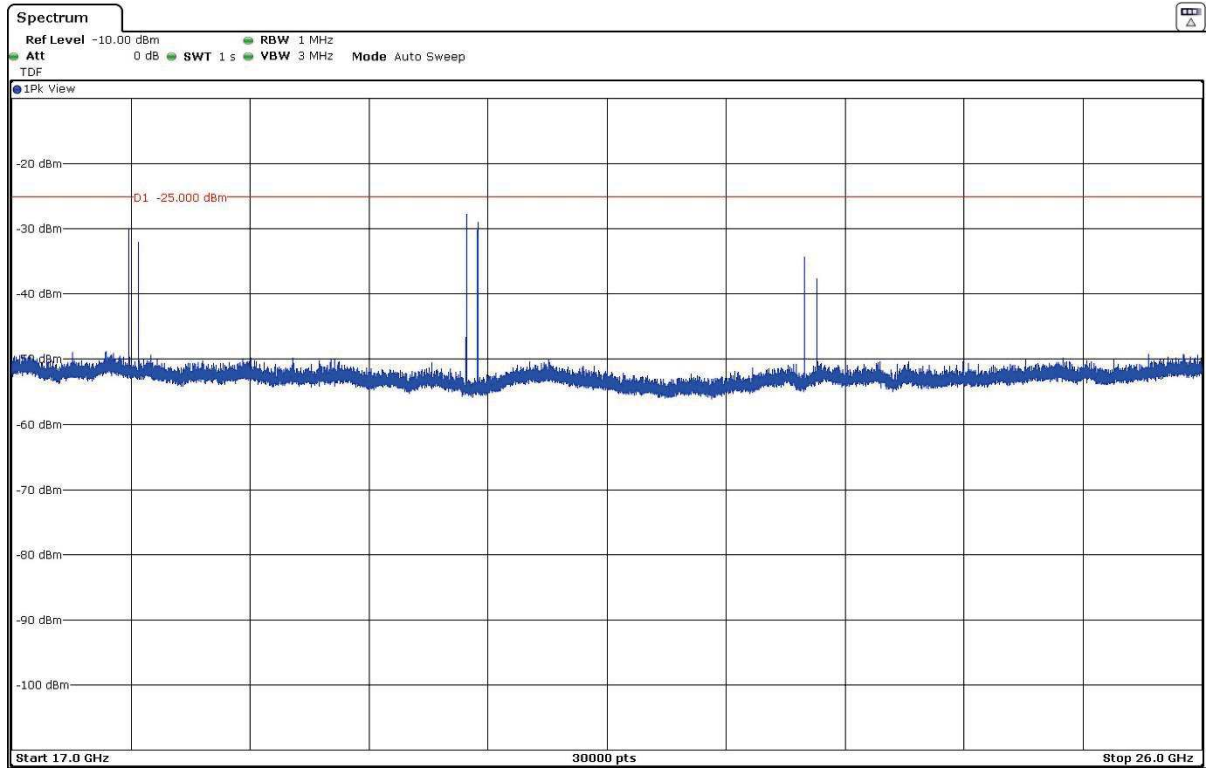


FREQUENCY RANGE 2490.5 - 2496 MHz (worst case):

- Low Channel:

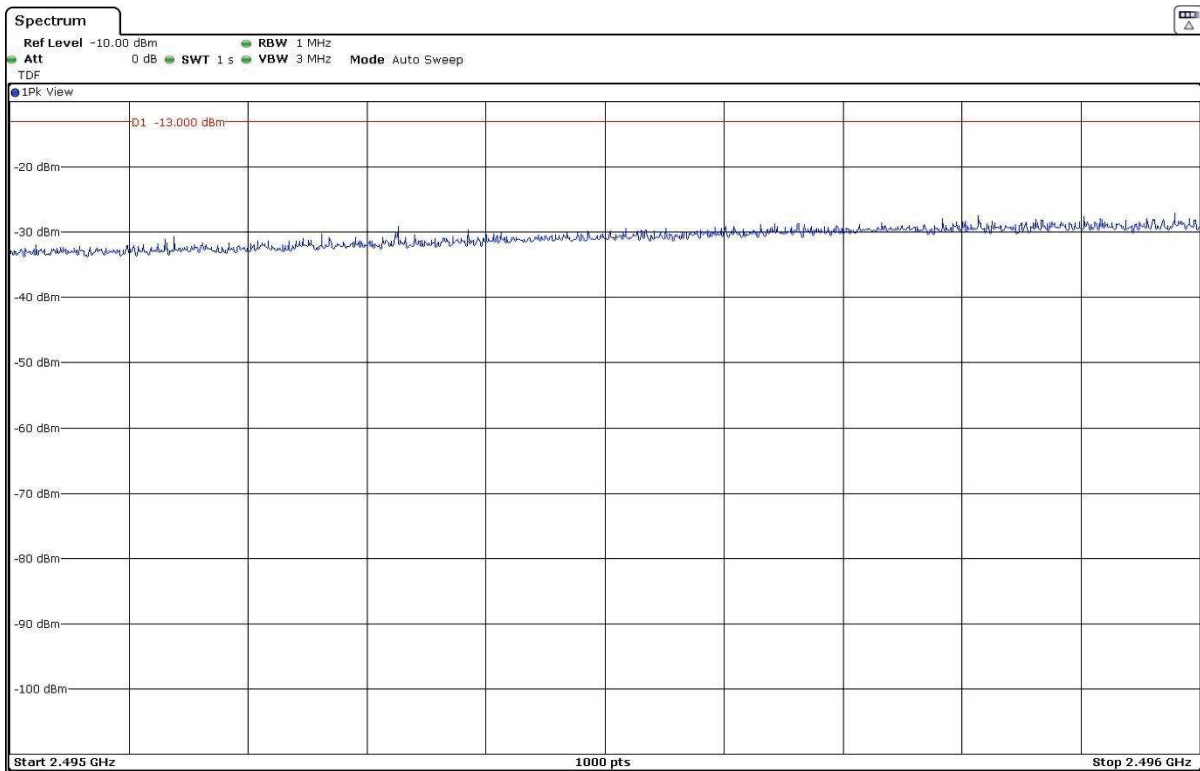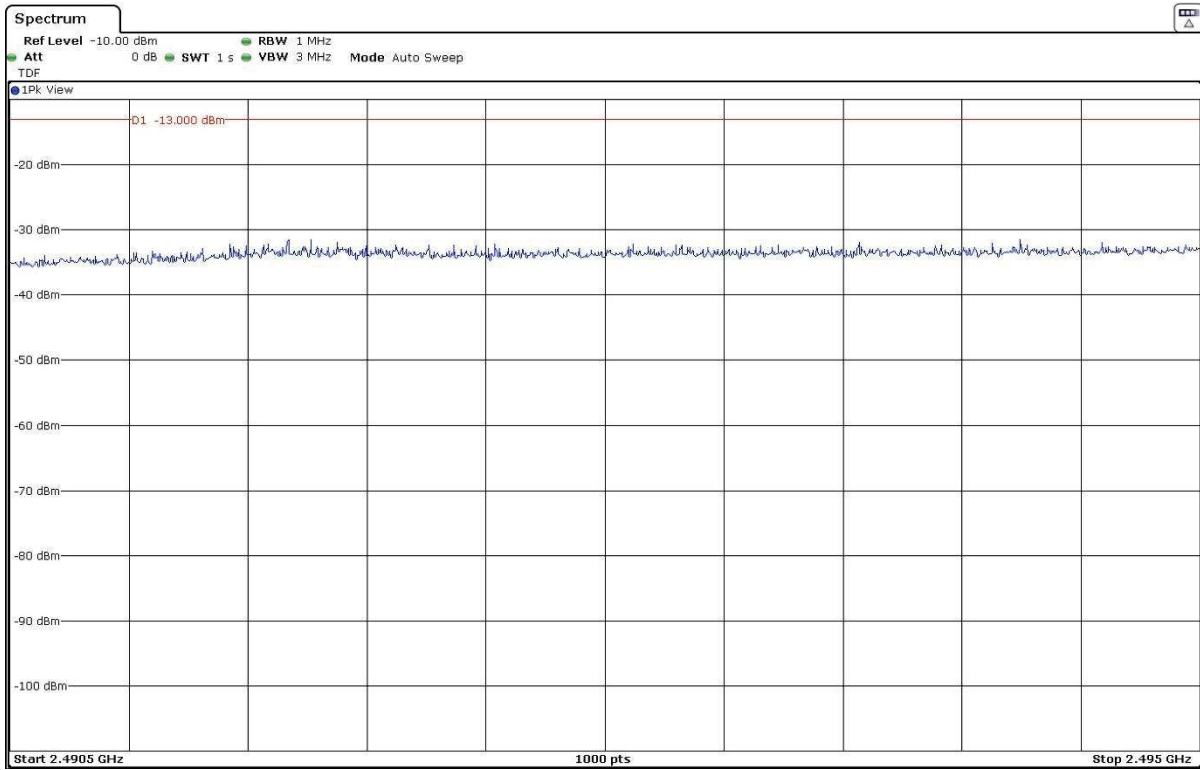

- Middle Channel:

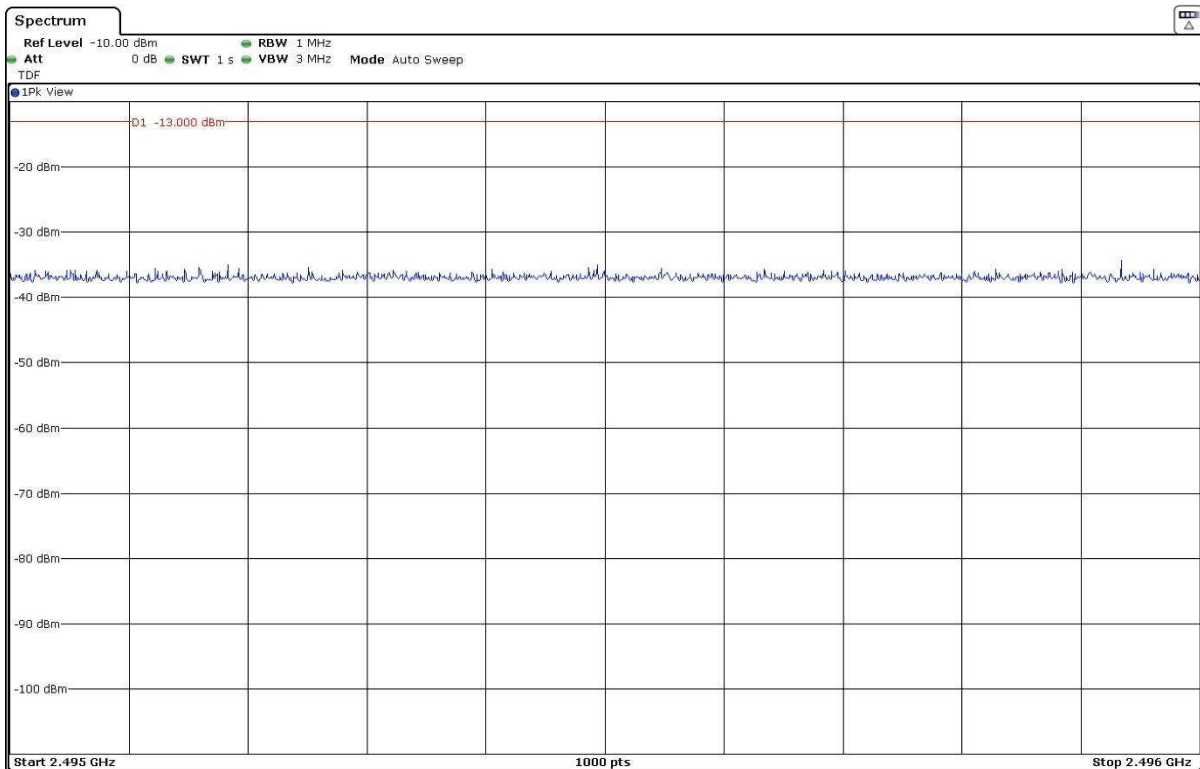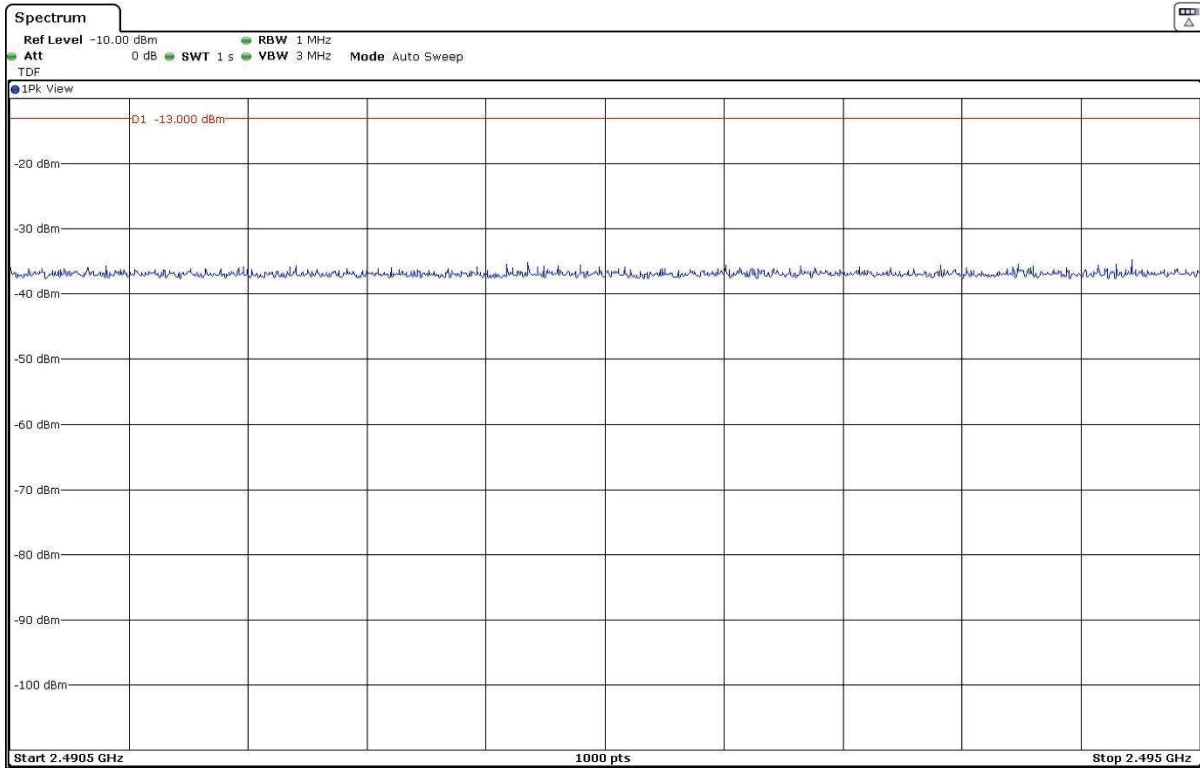

- High Channel:

