





# Rapport utfärdad av ackrediterat provningslaboratorium

Test report issued by an Accredited Testing Laboratory

## EMF Test Report: Ericsson RBS 6402 LTE B2 B4 B7 B25 FCC and Industry Canada

<b>Document number:</b>	Rev B	<b>Date of report:</b>	2015-04-21
<b>Testing laboratory:</b>	Ericsson EMF Research Laboratory  Ericsson AB SE-164 80 Stockholm Sweden	<b>Company/Client:</b>	Mika Savilakso  Oy LM Ericsson AB Elektroniikkatie 10 FI - 905903 Oulu Finland
<b>Tests performed by:</b>	Paramananda Joshi	<b>Dates of tests:</b>	2015-03-27 to 2015-04-02
<b>Manufacturer and market name(s) of device:</b>	Ericsson RBS 6402		
<b>Testing has been performed in accordance with:</b>	FCC CFR title 47, part 1.1310, FCC KDB447498 D01, Industry Canada RSS 102		
<b>Test results:</b>	The tested device complies with the requirements in respect of all parameters subject to the test.		
<b>Additional information:</b>			
<b>Signature:</b>	Test engineer  <hr/> Paramananda Joshi Experienced Researcher paramananda.joshi@ericsson.com Tel: +46 10 711 00 06	Quality Manager  <hr/> Björn Thors Senior Specialist RF Exposure Assessment bjorn.thors@ericsson.com Tel: +46 10 717 18 24	

## Table of Contents

1	Summary of EMF Test Report .....	3
1.1	Equipment under test (EUT) .....	3
1.2	Results .....	3
2	General information .....	5
3	Equipment under test .....	5
4	Test equipment .....	6
4.1	Near-field scanner .....	6
4.2	Additional equipment .....	7
5	EMF exposure assessments .....	7
5.1	Field strength system performance check .....	7
5.2	Field strength measurement description .....	7
5.3	Field strength measurement results .....	9
5.4	Field strength measurement uncertainty .....	18
6	Conclusion .....	19
7	References .....	19
8	Revision History .....	20
	APPENDIX A: Photographs of the EUT .....	21
	APPENDIX B: Electric and magnetic field strength probe calibration parameters .....	22
	APPENDIX C: Photographs of the EUT when positioned for field strength measurements .....	23

# 1 Summary of EMF Test Report<sup>1</sup>

## 1.1 Equipment under test (EUT)

Product name	RBS 6402		
Product number	KRD 901 060/1, KRD 901 060/2, KRD 901 060/7, KRD 901 060/8, KRD 901 060/9		
Frequency Band [MHz]	1900	2100	2600
Modes	LTE	LTE	LTE
Supported	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Covered by report	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Exposure environment	General public		

## 1.2 Results

RF exposure assessment results for general public (uncontrolled) exposure applicable in USA and Canada [1] - [3] are given in the tables below. The equipment under test (EUT) conforms to the requirements of the relevant standards when the combined exposure ratio is less than one.

RF exposure assessment results for general public (uncontrolled) exposure as obtained for the Pico RBS with the internal cellular antenna together with an assumed output power tolerance of 0.6 dB using procedures and exposure limits applicable for the US markets [3].

3GPP band	Standard	Nominal output power from the radio	Test position	Test separation distance <sup>2</sup>	Exposure ratio <sup>3</sup>	Result
B2, B25 <sup>4</sup> (1900), B4 (2100), B7 (2600)	L	4 x 0.25 W	Front	20 cm	0.15	<b>PASSED</b>
B2, B25 <sup>4</sup> (1900), B4 (2100), B7 (2600)	L	4 x 0.25 W	45 degree radial towards the right	20 cm	0.16	<b>PASSED</b>
B2, B25 <sup>4</sup> (1900), B4 (2100), B7 (2600)	L	4 x 0.25 W	Right	20 cm	0.18	<b>PASSED</b>

Expanded uncertainty (k=2) 95 % for field strength measurements using the DASY5 near field scanner.

< 30%

<sup>1</sup> This and the following page contain a summary of the test results. The full report provides a complete description of all test details and results.

<sup>2</sup> The separation distance is measured from the EUT casing.

<sup>3</sup> The exposure ratio is defined as the evaluated exposure parameter expressed as the power fraction of the related exposure limit. Here, the maximum ER value among all different possible configurations is shown.

<sup>4</sup> Test was conducted for B25, since B2 is a sub-set of B25.

EAB-15:023179 Uen, Rev B, 2015-04-21

RF exposure assessment results for general public (uncontrolled) exposure as obtained for the Pico RBS with the internal cellular antenna together with an assumed output power tolerance of 0.6 dB using procedures applicable for the Canadian markets [2].

3GPP band	Standard	Nominal output power from the radio	Test position	Test separation distance <sup>2</sup>	Exposure ratio <sup>3</sup>	Result
B2, B25 <sup>5</sup> (1900), B4 (2100), B7 (2600)	L	4 x 0.25 W	Front	20 cm	0.30	<b>PASSED</b>
B2, B25 <sup>4</sup> (1900), B4 (2100), B7 (2600)	L	4 x 0.25 W	45 degree radial towards the right	20 cm	0.33	<b>PASSED</b>
B2, B25 <sup>4</sup> (1900), B4 (2100), B7 (2600)	L	4 x 0.25 W	Right	20 cm	0.37	<b>PASSED</b>

Expanded uncertainty (k=2) 95 % for field strength measurements using the DASY5 near field scanner.

< 30%

<sup>5</sup> Separate tests were not conducted for B2 (1930 -1990 MHz), since it is a sub-set of B25 (1930 – 1995 MHz). Therefore, results for B25 are also valid for B2.

## 2 General information


The test results reported in this document have been obtained by field strength measurements according to FCC [3] and Industry Canada [2] procedures. The purpose of the tests was to verify that the equipment under test (EUT) is in compliance with the appropriate RF exposure standards, recommendations and limits [1] - [3].

## 3 Equipment under test

Table 1 summarizes the technical data for the EUT. Photographs of the device with the internal antennas are presented in Appendix A. The device can be installed in two different orientations, here denoted wall, for vertical installation on a wall, or ceiling, for horizontal mounting in a ceiling with the radome facing down (see Figure 1). Furthermore, the device can also be installed with or without a fan module<sup>6</sup>. Shown in Figure 1 is also the terminology used in this report to denote the different sides of the EUT. Note that this terminology is not dependent on the used mounting position.

**Table 1: Technical data for the EUT.**

<b>Product name</b>	RBS 6402		
<b>Product tested</b>	KRD 901 060/2	<b>Serial number</b>	C829278263
<b>Products covered by test</b>	KRD 901 060/1, KRD 901 060/2, KRD 901 060/7, KRD 901 060/8, KRD 901 060/9		
<b>Dimensions, H x W x D (mm)</b>	165 x 280 x 60 (with no fan module), 185 x 280 x 60 (with a fan module)		
<b>Configurations(s) covered by this report</b>	LTE 1900 (B2, B25) LTE 2100 (B4) LTE 2600 (B7)		
<b>Antenna(s)</b>	Internal antennas (Cellular bands )		
<b>Transmitter frequency range (MHz)</b>	LTE 1900 (B2): 1930 – 1990 LTE 1900 (B25): 1930 – 1995 LTE 2100 (B4): 2110 – 2155 LTE 2600 (B7): 2620 – 2690		

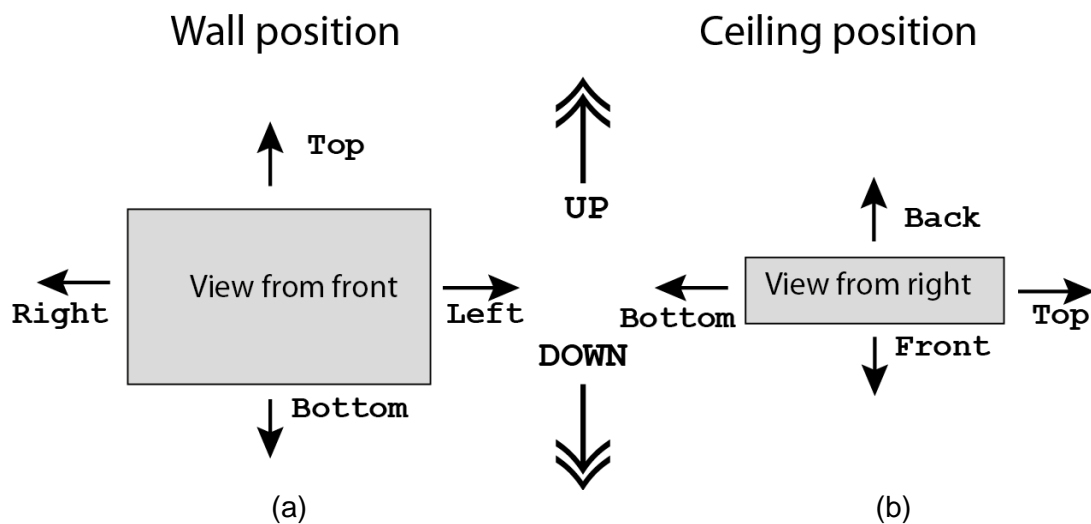

**Figure 1: EUT installation positions and terminology used to denote the different sides of the EUT. (a) Wall installation position. (b) Ceiling installation position.**

In Table 2 the output power levels provided by the client are given for the different LTE bands.<sup>7</sup>

<sup>6</sup> Fan module is always present if both the RF cards are installed in the EUT or if the EUT with single RF card is installed in the ceiling.

<sup>7</sup> The presented output power levels correspond to the maximum power configurations for which measurements were made.

**Table 2: Nominal and measured output power levels for LTE.**

Band / Mode	Nominal output power <sup>8</sup> (dBm)	Tolerance, upper limit (dB)	Maximum output power <sup>9</sup> (dBm)	Tested low, mid and high channels		Measured maximum output power (dBm) TX1/TX2
				Channel number	Frequency (MHz)	
LTE B25 (1900), 15 MHz Bandwidth	24.0	0.6	30.6	8115	1937.5	23.5/24.4 (RF0)
				8365	1962.5	23.4/24.3 (RF0)
				8615	1982.5	23.3/24.1(RF0)
LTE B25 (1900), 10 MHz Bandwidth	24.0	0.6	30.6	8090	1935.0	23.4/24.4 (RF1)
				8365	1962.5	23.4/24.3 (RF1)
				8640	1990.0	23.3/24.1(RF1)
LTE B4 (2100), 5 MHz Bandwidth	24.0	0.6	30.6	1975	2112.5	23.4/24.4 (RF0)
				2175	2132.5	23.0/23.6 (RF0)
				2375	2152.5	23.5/23.8(RF0)
LTE B4 (2100), 5 MHz Bandwidth	24.0	0.6	30.6	1975	2112.5	23.6/24.3 (RF1)
				2175	2132.5	22.8/23.5 (RF1)
				2375	2152.5	23.3/23.9(RF1)
LTE B7 (2600), 20 MHz Bandwidth	24.0	0.6	30.6	2850	2630.0	23.6/24.6 (RF0)
				3100	2655.0	23.7/24.8 <sup>10</sup> (RF0)
				3350	2680.0	23.5/24.6(RF0)
LTE B7 (2600), 15 MHz Bandwidth	24.0	0.6	30.6	2825	2627.5	23.5/24.5 (RF1)
				3100	2655.0	23.5/24.6 (RF1)
				3375	2682.5	23.1/24.4(RF1)

Both RF cards of the EUT (denoted RF 0 and RF 1) were used for this test; see Appendix A. Separate measurements were conducted for both ports of each RF card. The four ports are denoted RF 0 TX 1, RF 0 TX 2, RF 1 TX 1 and RF 1 TX 2, see Appendix A. The exposure measurements were conducted for the bandwidths corresponding to configurations with the highest measured maximum output power. For each band, the same configurations were used for both ports of each RF card. QPSK modulation was used for the assessments.

The EUT is equipped with four internal pifa antennas for mobile communications. Each antenna is positioned at the device extremities as shown in Appendix A.

## 4 Test equipment

### 4.1 Near-field scanner

The field strength measurements were conducted using the DASY5 professional near-field scanner by Schmid & Partner Engineering AG.

The equipment list related to the DASY5 near-field scanner is given in Table 3. In Appendix B calibration parameters for the used field strength test probe(s) are listed.

<sup>8</sup> Nominal output power per port.

<sup>9</sup>Conservative measure of the total maximum possible output power level delivered to the antenna, i.e. the nominal output power level per port plus the tolerance in production times the number of ports.

<sup>10</sup> The reasons for a reported power level above 24.6 dBm may be attributed to power measurement uncertainties.

**Table 3: Equipment list related to the DASY5 near-field scanner.**

Description	Serial number	Calibration due date	Calibration interval
Probe electronics, DAE3	S/N 422	2015-04-08	12 months
E-field probe, ER3DV4R	S/N 2210	2015-04-10	12 months
HAC dipole, CD2450V3	S/N 1052	NA	NA

## 4.2 Additional equipment

Additional equipment used during the measurements is listed in Table 4.

**Table 4: List of additional equipment with calibration information.**

Description	Serial number	Calibration due date	Calibration interval
Power meter, Rhode & Schwartz NRVS	S/N 848888/052	2016-10-26	24 months
Power sensor, Rhode & Schwartz NRV-Z5	S/N 100609	2014-10-26	24 months

## 5 EMF exposure assessments

FCC [3] and Industry Canada procedures [2] specify exposure assessment methods to verify compliance with EMF exposure limits [1] of mobile devices. A minimum test separation distance of at least 20 cm is required between the device and nearby persons to apply mobile device exposure limits. The test separation distance for which the equipment is shown to comply with the exposure limits must be clearly provided in the operating and installation instructions.

A system performance check was conducted to verify the system operations, see Section 5.1. A description of the field strength measurements is given in Section 5.2 and the results are given in Section 5.3. In Section 5.4, an uncertainty budget is provided.

### 5.1 Field strength system performance check

System performance checks of the DASY5 measurement system were conducted prior to the field strength measurements using the CD2450V3 hearing aid compatibility (HAC) dipole. The electric field strength was measured in the far-field region and compared against theoretical results calculated using the far-field formula

$$E = \frac{\sqrt{\eta P G}}{2\sqrt{\pi R}}, \quad (4)$$

where  $P$ ,  $G$ ,  $\eta$  and  $R$  denote the transmitted power, the antenna gain, the free space wave impedance and the distance between the probe and the reference antenna, respectively. The results, provided in Table 5, are within  $\pm 1$  dB of the reference values.

**Table 5: Field strength system performance check results**

Frequency (MHz)	Transmitted power (W)	Antenna gain (dBi)	Separation distance (m)	E (V/m)		Difference (dB)	Date
				Measured	Reference		
2450	0.25	2.15	0.25	14.7	13.8	0.55	2015-03-30

### 5.2 Field strength measurement description

The FCC KDB 447498 D01 [3] and RSS-102[2] specify that EMF exposure shall be assessed for mobile conditions, i.e. for a test separation distance of at least 20 cm, by conducting measurements of spatially averaged electric field strengths along vertical lines corresponding to the longest dimensions of the exposed person's body. For a typical standing adult, the height may be estimated as 180 cm [3].

Here, however, an averaging length of 90 cm was assumed to make the results more conservative and applicable to all members of the general public<sup>11</sup>. The spatial resolution between the assessment points was 5 cm [3]. The electric field strength measurements were conducted using the DASY5 near field scanner.

The measurements were conducted in front of the EUT to confirm that the exposure is below the exposure limits at a test separation distance of 20 cm. The distance in this context corresponds to the shortest distance between the EUT casing and the line along which the measurements were taken. Prior to the measurements along line, area scans were conducted for each configuration combination to check where the maxima occur when all four ports are transmitting simultaneously. To maximize the measured front exposure, the corresponding measurement lines were defined to pass through the hot-spot locations, see Figure 2. An Ericsson internal tool, Lowpower Compliance Analyzer (LCA) [6], was used as a postprocessor to the measurement data to find the position of the line that has the maximum averaged field values (averaged over 90 cm) among the lines in the measurement area. The distance between the measurement lines and geometrical centre of the EUT were found to vary from 5 cm to 14 cm depending upon the configurations used by the EUT. Measurements were made for each port separately for a wall installation exposure scenario with the line placed along the position suggested by the LCA tool to correspond to a child standing in front of the EUT<sup>12</sup>. This exposure scenario will result in a more conservative exposure assessment than any realistic exposure scenario for the ceiling-installed EUT. The LCA tool was then used to scale the measurements data to the maximum output power values of the corresponding ports including tolerances.

The signals from the two ports of each RF card are correlated. Therefore, the LCA tool was used to calculate ER per RF card with signal correlation of two ports of the card taken into consideration. The electric field magnitudes from the two ports of each RF card when transmitting separately were added point-by-point and root-mean-square averaged over the 90 cm long measurement line. The plane-wave equivalent power density was then determined via

$$S = \frac{E^2}{\eta}, \quad (8)$$

where  $\eta$  is the free space wave impedance (approximately 377  $\Omega$ ). The exposure ratio per RF card was then calculated as

$$ER^{RF0} = \max_{f=\text{low,mid,high}} \left[ \frac{S^{RF0}(f)}{S^{\text{lim}}(f)} \right], \quad (9)$$

$$ER^{RF1} = \max_{f=\text{low,mid,high}} \left[ \frac{S^{RF1}(f)}{S^{\text{lim}}(f)} \right], \quad (10)$$

where the maximum was taken with respect to the tested low, mid and high LTE channels. The total ER of the EUT was then calculated as

$$ER^{\text{total}} = ER^{RF0} + ER^{RF1} \quad (11)$$


The obtained results were compared against the MPE limit [1] and [2], corresponding to the limits for the products aimed for the US markets and Canadian markets, respectively, for general public/uncontrolled exposure. The exposure is below the exposure limits if the exposure ratio for the considered configuration is below 1.

<sup>11</sup> In [7], a 96 cm long child phantom for whole-body SAR measurements were proposed based on body height statistics for 4-year old children.

<sup>12</sup> In practice, the measurements were conducted in the laboratory with the EUT placed on a table using horizontal averaging planes. Therefore, effects of ground reflections are not included in these measurements. Since the EUT usually is mounted high above the ground this is a conservative estimate



Measurements were also conducted along two other radials to confirm that the exposure values were below the limits in these directions as well [3], see Figure 2. One of the radials was inclined towards the right side of the EUT and  $45^\circ$  apart from the radial along the front direction. In this case, the measurement line was located 20 cm from the EUT radome perpendicular to the  $45^\circ$  inclined-to-the-right radial, see Figure 2. Another radial was defined  $90^\circ$  from the radial along the front direction and to the right side of the EUT<sup>13</sup>. In this case, the measurement line was located 20 cm from the surface of the right side of the EUT. In the laboratory, the right side (the side with RF 0 TX 1 and RF 1 TX 2, see Annex A) of the EUT was facing upwards and the measurement line was located 20 cm above the EUT surface, see Appendix C. These measurements were conducted for the channel with the highest measured output power, since the exposure ratio values were found to be substantially below the limits and the variation among the measured channels in the front direction was found to be small, see Table 6.

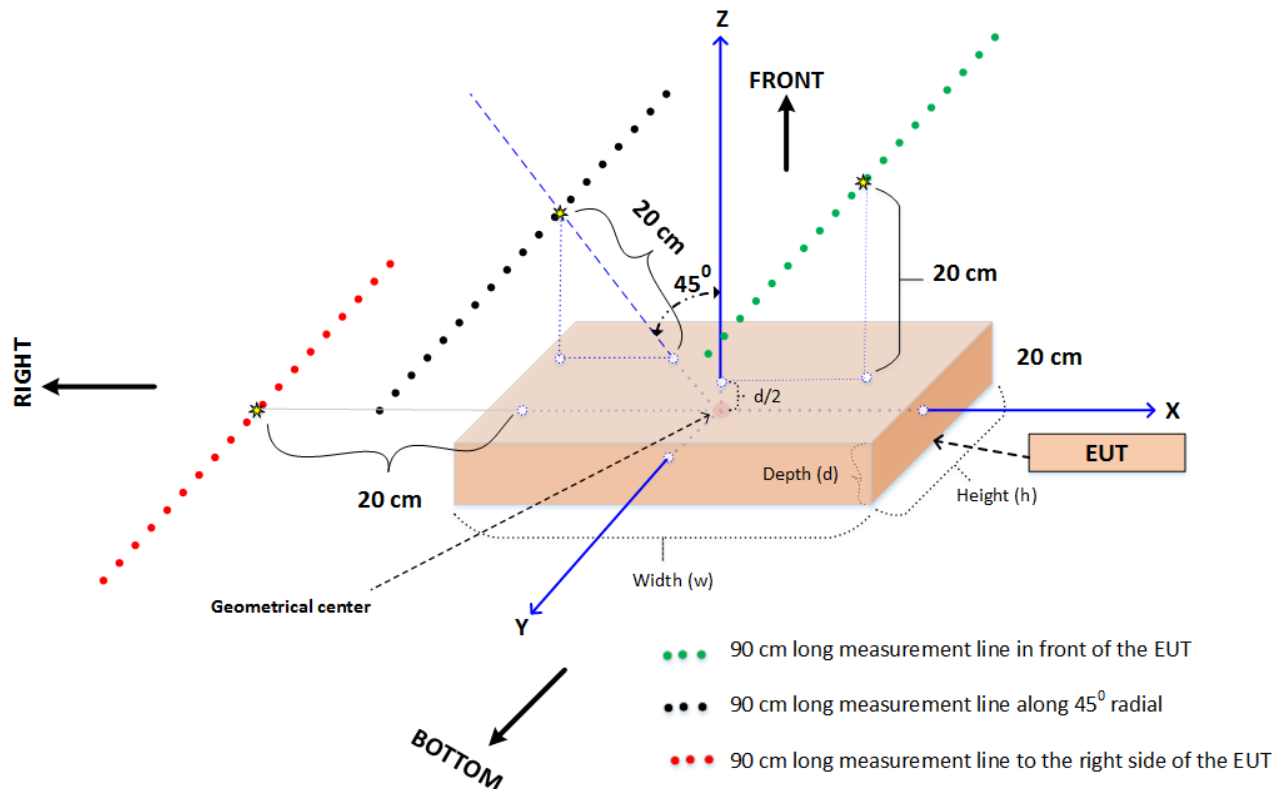

**Figure 2: Positions of measurement lines in the vicinity of the EUT. The x-coordinate for the front exposure assessment was chosen to make the measurement line pass through the hot-spot location obtained via a surface (area) scan in the plane  $z = 20$  cm with all ports transmitting simultaneously.**

### 5.3 Field strength measurement results

In Table 6 - Table 8, spatially averaged plane-wave equivalent power density values and the corresponding exposure ratios, calculated based on the FCC limits specified in [1] are given.

In Table 9 - Table 11, spatially averaged plane-wave equivalent power density values and the corresponding exposure ratios, calculated based on the Industry Canada limits specified in [2] are given.

Since the exposure values were found to be well below the limits with two installed RF cards, measurements with only one RF card installed were not conducted.

<sup>13</sup> A measurement for one configuration was also conducted to the left side of the EUT. Since the ER to this side was lower than the ER for the right side, the rest of the measurements were conducted to the right side and along a  $45^\circ$  radial inclined to the right side.

**Table 6: Spatially averaged plane-wave equivalent power density values and corresponding exposure ratios measured at the selected 20 cm test separation distance in front of the EUT for general public (uncontrolled) exposure (applicable for the products aimed for the US markets).**

RF card and band placement	RF card	Channel	Nominal output power from the radio (W)	Mounting/ Test position	Test separation distance (cm)	$S$ (W/m <sup>2</sup> )	$S_{lim}$ (W/m <sup>2</sup> )	ER	Total combined ER
RF0 → B4 RF1 → B25	RF 0	1975	2 x 0.25 W	Wall/Front	20	0.66	10	0.07	0.14
		2175	2 x 0.25 W	Wall/Front	20	0.64	10	0.06	
		2375	2 x 0.25 W	Wall/Front	20	0.65	10	0.06	
	RF 1	8090	2 x 0.25 W	Wall/Front	20	0.70	10	0.07	
		8365	2 x 0.25 W	Wall/Front	20	0.74	10	0.07	
		8640	2 x 0.25 W	Wall/Front	20	0.75	10	0.07	
RF0 → B25 RF1 → B4	RF 0	8115	2 x 0.25 W	Wall/Front	20	0.64	10	0.06	0.14
		8365	2 x 0.25 W	Wall/Front	20	0.72	10	0.07	
		8615	2 x 0.25 W	Wall/Front	20	0.63	10	0.06	
	RF 1	1975	2 x 0.25 W	Wall/Front	20	0.71	10	0.07	
		2175	2 x 0.25 W	Wall/Front	20	0.71	10	0.07	
		2375	2 x 0.25 W	Wall/Front	20	0.75	10	0.07	
RF0 → B7 RF1 → B25	RF 0	2850	2 x 0.25 W	Wall/Front	20	0.43	10	0.04	0.14
		3100	2 x 0.25 W	Wall/Front	20	0.57	10	0.06	
		3350	2 x 0.25 W	Wall/Front	20	0.56	10	0.06	
	RF 1	8090	2 x 0.25 W	Wall/Front	20	0.74	10	0.07	
		8365	2 x 0.25 W	Wall/Front	20	0.75	10	0.08	
		8640	2 x 0.25 W	Wall/Front	20	0.79	10	0.08	
RF0 → B25 RF1 → B7	RF 0	8115	2 x 0.25 W	Wall/Front	20	0.64	10	0.06	0.14
		8365	2 x 0.25 W	Wall/Front	20	0.72	10	0.07	
		8615	2 x 0.25 W	Wall/Front	20	0.66	10	0.07	
	RF 1	2825	2 x 0.25 W	Wall/Front	20	0.49	10	0.05	
		3100	2 x 0.25 W	Wall/Front	20	0.60	10	0.06	
		3375	2 x 0.25 W	Wall/Front	20	0.64	10	0.06	
RF0 → B7 RF1 → B4	RF 0	2850	2 x 0.25 W	Wall/Front	20	0.42	10	0.04	0.14
		3100	2 x 0.25 W	Wall/Front	20	0.56	10	0.06	
		3350	2 x 0.25 W	Wall/Front	20	0.56	10	0.06	
	RF 1	1975	2 x 0.25 W	Wall/Front	20	0.81	10	0.08	
		2175	2 x 0.25 W	Wall/Front	20	0.78	10	0.08	
		2375	2 x 0.25 W	Wall/Front	20	0.79	10	0.08	
RF0 → B4 RF1 → B7	RF 0	1975	2 x 0.25 W	Wall/Front	20	0.72	10	0.07	0.14
		2175	2 x 0.25 W	Wall/Front	20	0.70	10	0.07	
		2375	2 x 0.25 W	Wall/Front	20	0.72	10	0.07	
	RF 1	2825	2 x 0.25 W	Wall/Front	20	0.45	10	0.05	
		3100	2 x 0.25 W	Wall/Front	20	0.54	10	0.05	
		3375	2 x 0.25 W	Wall/Front	20	0.60	10	0.06	
RF0 → B4 RF1 → B4	RF 0	1975	2 x 0.25 W	Wall/Front	20	0.70	10	0.07	0.15
		2175	2 x 0.25 W	Wall/Front	20	0.70	10	0.07	
		2375	2 x 0.25 W	Wall/Front	20	0.71	10	0.07	

	RF 1	1975	2 x 0.25 W	Wall/Front	20	0.69	10	0.07	
		2175	2 x 0.25 W	Wall/Front	20	0.72	10	0.07	
		2375	2 x 0.25 W	Wall/Front	20	0.78	10	0.08	
RF0 → B7 RF1 → B7	RF 0	2850	2 x 0.25 W	Wall/Front	20	0.42	10	0.04	0.12
		3100	2 x 0.25 W	Wall/Front	20	0.50	10	0.05	
		3350	2 x 0.25 W	Wall/Front	20	0.53	10	0.05	
	RF 1	2825	2 x 0.25 W	Wall/Front	20	0.46	10	0.05	
		3100	2 x 0.25 W	Wall/Front	20	0.52	10	0.05	
		3375	2 x 0.25 W	Wall/Front	20	0.59	10	0.06	
RF0 → B25 RF1 → B25	RF 0	8115	2 x 0.25 W	Wall/Front	20	0.60	10	0.06	0.15
		8365	2 x 0.25 W	Wall/Front	20	0.69	10	0.07	
		8615	2 x 0.25 W	Wall/Front	20	0.64	10	0.06	
	RF 1	8090	2 x 0.25 W	Wall/Front	20	0.67	10	0.07	
		8365	2 x 0.25 W	Wall/Front	20	0.68	10	0.07	
		8640	2 x 0.25 W	Wall/Front	20	0.73	10	0.07	

**Table 7: Spatially averaged plane-wave equivalent power density values and corresponding exposure ratios measured at the selected 20 cm test separation distance along the 45° right-side inclined radial of the EUT for general public (uncontrolled) exposure (applicable for the products aimed for the US markets).**

RF card and band placement	RF card	Channel	Nominal output power from the radio (W)	Mounting/ Test position	Test separation distance (cm)	$S$ (W/m <sup>2</sup> )	$S^{\text{lim}}$ (W/m <sup>2</sup> )	ER	Total combined ER
RF0 → B4 RF1 → B25	RF 0	1975	2 x 0.25 W	Wall/45°	20	0.79	10	0.08	0.15
		2175	2 x 0.25 W	Wall/45°	20	-	10	-	
		2375	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	8090	2 x 0.25 W	Wall/45°	20	0.70	10	0.07	
		8365	2 x 0.25 W	Wall/45°	20	-	10	-	
		8640	2 x 0.25 W	Wall/45°	20	-	10	-	
RF0 → B25 RF1 → B4	RF 0	1975	2 x 0.25 W	Wall/45°	20	0.58	10	0.06	0.15
		2175	2 x 0.25 W	Wall/45°	20	-	10	-	
		2375	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	8090	2 x 0.25 W	Wall/45°	20	0.83	10	0.08	
		8365	2 x 0.25 W	Wall/45°	20	-	10	-	
		8640	2 x 0.25 W	Wall/45°	20	-	10	-	
RF0 → B7 RF1 → B25	RF 0	2850	2 x 0.25 W	Wall/45°	20	-	10	-	0.15
		3100	2 x 0.25 W	Wall/45°	20	0.72	10	0.07	
		3350	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	8090	2 x 0.25 W	Wall/45°	20	0.70	10	0.07	
		8365	2 x 0.25 W	Wall/45°	20	-	10	-	
		8640	2 x 0.25 W	Wall/45°	20	-	10	-	
RF0 → B25 RF1 → B7	RF 0	8115	2 x 0.25 W	Wall/45°	20	0.58	10	0.06	0.13
		8365	2 x 0.25 W	Wall/45°	20	-	10	-	
		8615	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	2825	2 x 0.25 W	Wall/45°	20	-	10	-	

		3100	2 x 0.25 W	Wall/45°	20	0.63	10	0.06	
		3375	2 x 0.25 W	Wall/45°	20	-	10	-	
RF0 → B7 RF1 → B4	RF 0	2850	2 x 0.25 W	Wall/45°	20	-	10	-	0.16
		3100	2 x 0.25 W	Wall/45°	20	0.72	10	0.07	
		3350	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	1975	2 x 0.25 W	Wall/45°	20	0.83	10	0.08	
		2175	2 x 0.25 W	Wall/45°	20	-	10	-	
		2375	2 x 0.25 W	Wall/45°	20	-	10	-	
RF0 → B4 RF1 → B7	RF 0	1975	2 x 0.25 W	Wall/45°	20	0.79	10	0.08	0.15
		2175	2 x 0.25 W	Wall/45°	20	-	10	-	
		2375	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	2825	2 x 0.25 W	Wall/45°	20	-	10	-	
		3100	2 x 0.25 W	Wall/45°	20	0.63	10	0.06	
		3375	2 x 0.25 W	Wall/45°	20	-	10	-	
RF0 → B4 RF1 → B4	RF 0	1975	2 x 0.25 W	Wall/45°	20	0.79	10	0.08	0.17
		2175	2 x 0.25 W	Wall/45°	20	-	10	-	
		2375	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	1975	2 x 0.25 W	Wall/45°	20	0.83	10	0.08	
		2175	2 x 0.25 W	Wall/45°	20	-	10	-	
		2375	2 x 0.25 W	Wall/45°	20	-	10	-	
RF0 → B7 RF1 → B7	RF 0	2850	2 x 0.25 W	Wall/45°	20	-	10	-	0.14
		3100	2 x 0.25 W	Wall/45°	20	0.72	10	0.07	
		3350	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	2825	2 x 0.25 W	Wall/45°	20	-	10	-	
		3100	2 x 0.25 W	Wall/45°	20	0.63	10	0.06	
		3375	2 x 0.25 W	Wall/45°	20	-	10	-	
RF0 → B25 RF1 → B25	RF 0	8115	2 x 0.25 W	Wall/45°	20	0.58	10	0.06	0.13
		8365	2 x 0.25 W	Wall/45°	20	-	10	-	
		8615	2 x 0.25 W	Wall/45°	20	-	10	-	
	RF 1	8090	2 x 0.25 W	Wall/45°	20	0.70	10	0.07	
		8365	2 x 0.25 W	Wall/45°	20	-	10	-	
		8640	2 x 0.25 W	Wall/45°	20	-	10	-	

**Table 8: Spatially averaged plane-wave equivalent power density values and corresponding exposure ratios measured at the selected 20 cm test separation distance to the right side of the EUT for general public (uncontrolled) exposure (applicable for the products aimed for the US markets).**

RF card and band placement	RF card	Channel	Nominal output power from the radio (W)	Mounting/ Test position	Test separation distance (cm)	$S$ (W/m <sup>2</sup> )	$S^{\text{lim}}$ (W/m <sup>2</sup> )	ER	Total combined ER
RF0 → B4 RF1 → B25	RF 0	1975	2 x 0.25 W	Wall/Right	20	0.92	10	0.09	0.16
		2175	2 x 0.25 W	Wall/Right	20	-	10	-	
		2375	2 x 0.25 W	Wall/Right	20	-	10	-	
	RF 1	8090	2 x 0.25 W	Wall/Right	20	0.66	10	0.07	
		8365	2 x 0.25 W	Wall/Right	20	-	10	-	
		8640	2 x 0.25 W	Wall/Right	20	-	10	-	
RF0 → B25 RF1 → B4	RF 0	8115	2 x 0.25 W	Wall/Right	20	0.58	10	0.06	0.15
		8365	2 x 0.25 W	Wall/Right	20	-	10	-	
		8615	2 x 0.25 W	Wall/Right	20	-	10	-	
	RF 1	1975	2 x 0.25 W	Wall/Right	20	0.90	10	0.09	
		2175	2 x 0.25 W	Wall/Right	20	-	10	-	
		2375	2 x 0.25 W	Wall/Right	20	-	10	-	
RF0 → B7 RF1 → B25	RF 0	2850	2 x 0.25 W	Wall/Right	20	-	10	-	0.11
		3100	2 x 0.25 W	Wall/Right	20	0.41	10	0.04	
		3350	2 x 0.25 W	Wall/Right	20	-	10	-	
	RF 1	8090	2 x 0.25 W	Wall/Right	20	0.66	10	0.07	
		8365	2 x 0.25 W	Wall/Right	20	-	10	-	
		8640	2 x 0.25 W	Wall/Right	20	-	10	-	
RF0 → B25 RF1 → B7	RF 0	8115	2 x 0.25 W	Wall/Right	20	0.58	10	0.06	0.10
		8365	2 x 0.25 W	Wall/Right	20	-	10	-	
		8615	2 x 0.25 W	Wall/Right	20	-	10	-	
	RF 1	2825	2 x 0.25 W	Wall/Right	20	-	10	-	
		3100	2 x 0.25 W	Wall/Right	20	0.41	10	0.04	
		3375	2 x 0.25 W	Wall/Right	20	-	10	-	
RF0 → B7 RF1 → B4	RF 0	2850	2 x 0.25 W	Wall/Right	20	-	10	-	0.14
		3100	2 x 0.25 W	Wall/Right	20	0.41	10	0.04	
		3350	2 x 0.25 W	Wall/Right	20	-	10	-	
	RF 1	1975	2 x 0.25 W	Wall/Right	20	0.90	10	0.09	
		2175	2 x 0.25 W	Wall/Right	20	-	10	-	
		2375	2 x 0.25 W	Wall/Right	20	-	10	-	
RF0 → B4 RF1 → B7	RF 0	1975	2 x 0.25 W	Wall/Right	20	0.92	10	0.09	0.14
		2175	2 x 0.25 W	Wall/Right	20	-	10	-	
		2375	2 x 0.25 W	Wall/Right	20	-	10	-	
	RF 1	2825	2 x 0.25 W	Wall/Right	20	-	10	-	
		3100	2 x 0.25 W	Wall/Right	20	0.41	10	0.04	
		3375	2 x 0.25 W	Wall/Right	20	-	10	-	
RF0 → B4 RF1 → B4	RF 0	1975	2 x 0.25 W	Wall/Right	20	0.92	10	0.09	0.19
		2175	2 x 0.25 W	Wall/Right	20	-	10	-	
		2375	2 x 0.25 W	Wall/Right	20	-	10	-	

	RF 1	1975	2 x 0.25 W	Wall/Right	20	0.90	10	0.09	
		2175	2 x 0.25 W	Wall/Right	20	-	10	-	
		2375	2 x 0.25 W	Wall/Right	20	-	10	-	
RF0 → B7 RF1 → B7	RF 0	2850	2 x 0.25 W	Wall/Right	20	-	10	-	0.09
		3100	2 x 0.25 W	Wall/Right	20	0.41	10	0.04	
		3350	2 x 0.25 W	Wall/Right	20	-	10	-	
	RF 1	2825	2 x 0.25 W	Wall/Right	20	-	10	-	
		3100	2 x 0.25 W	Wall/Right	20	0.41	10	0.04	
		3375	2 x 0.25 W	Wall/Right	20	-	10	-	
RF0 → B25 RF1 → B25	RF 0	8115	2 x 0.25 W	Wall/Right	20	0.58	10	0.06	0.13
		8365	2 x 0.25 W	Wall/Right	20	-	10	-	
		8615	2 x 0.25 W	Wall/Right	20	-	10	-	
	RF 1	8090	2 x 0.25 W	Wall/Right	20	0.66	10	0.07	
		8365	2 x 0.25 W	Wall/Right	20	-	10	-	
		8640	2 x 0.25 W	Wall/Right	20	-	10	-	

**Table 9: Spatially averaged plane-wave equivalent power density values and corresponding exposure ratios measured at the selected 20 cm test separation distance in front of the EUT for general public (uncontrolled) exposure (applicable for the products aimed for the Canadian markets).**

RF card and band placement	RF card	Channel	Nominal output power from the radio (W)	Mounting/ Test position	Test separation distance (cm)	$S$ (W/m <sup>2</sup> )	$S^{\text{lim}}$ (W/m <sup>2</sup> )	ER	Total combined ER
RF0 → B4 RF1 → B25	RF 0	1975	2 x 0.25 W	Wall/Front	20	0.66	4.9	0.13	0.30
		2175	2 x 0.25 W	Wall/Front	20	0.64	4.9	0.13	
		2375	2 x 0.25 W	Wall/Front	20	0.65	5.0	0.13	
	RF 1	8090	2 x 0.25 W	Wall/Front	20	0.70	4.6	0.15	
		8365	2 x 0.25 W	Wall/Front	20	0.74	4.7	0.16	
		8640	2 x 0.25 W	Wall/Front	20	0.75	4.7	0.16	
RF0 → B25 RF1 → B4	RF 0	8115	2 x 0.25 W	Wall/Front	20	0.64	4.6	0.14	0.31
		8365	2 x 0.25 W	Wall/Front	20	0.72	4.7	0.15	
		8615	2 x 0.25 W	Wall/Front	20	0.63	4.7	0.13	
	RF 1	1975	2 x 0.25 W	Wall/Front	20	0.71	4.9	0.15	
		2175	2 x 0.25 W	Wall/Front	20	0.71	4.9	0.14	
		2375	2 x 0.25 W	Wall/Front	20	0.75	5.0	0.15	
RF0 → B7 RF1 → B25	RF 0	2850	2 x 0.25 W	Wall/Front	20	0.43	5.7	0.08	0.27
		3100	2 x 0.25 W	Wall/Front	20	0.57	5.7	0.10	
		3350	2 x 0.25 W	Wall/Front	20	0.56	5.8	0.10	
	RF 1	8090	2 x 0.25 W	Wall/Front	20	0.74	4.6	0.16	
		8365	2 x 0.25 W	Wall/Front	20	0.75	4.7	0.16	
		8640	2 x 0.25 W	Wall/Front	20	0.79	4.7	0.17	
RF0 → B25 RF1 → B7	RF 0	8115	2 x 0.25 W	Wall/Front	20	0.64	4.6	0.14	0.27
		8365	2 x 0.25 W	Wall/Front	20	0.72	4.7	0.15	
		8615	2 x 0.25 W	Wall/Front	20	0.66	4.7	0.14	

	RF 1	2825	2 x 0.25 W	Wall/Front	20	0.49	5.7	0.09	
		3100	2 x 0.25 W	Wall/Front	20	0.60	5.7	0.11	
		3375	2 x 0.25 W	Wall/Front	20	0.64	5.8	0.11	
RF0 → B7 RF1 → B4	RF 0	2850	2 x 0.25 W	Wall/Front	20	0.42	5.7	0.07	0.27
		3100	2 x 0.25 W	Wall/Front	20	0.56	5.7	0.10	
		3350	2 x 0.25 W	Wall/Front	20	0.56	5.8	0.10	
	RF 1	1975	2 x 0.25 W	Wall/Front	20	0.81	4.9	0.16	
		2175	2 x 0.25 W	Wall/Front	20	0.78	4.9	0.16	
		2375	2 x 0.25 W	Wall/Front	20	0.79	5.0	0.16	
RF0 → B4 RF1 → B7	RF 0	1975	2 x 0.25 W	Wall/Front	20	0.72	4.9	0.15	0.26
		2175	2 x 0.25 W	Wall/Front	20	0.70	4.9	0.14	
		2375	2 x 0.25 W	Wall/Front	20	0.72	5.0	0.14	
	RF 1	2825	2 x 0.25 W	Wall/Front	20	0.45	5.7	0.08	
		3100	2 x 0.25 W	Wall/Front	20	0.54	5.7	0.09	
		3375	2 x 0.25 W	Wall/Front	20	0.60	5.8	0.10	
RF0 → B4 RF1 → B4	RF 0	1975	2 x 0.25 W	Wall/Front	20	0.70	4.9	0.14	0.31
		2175	2 x 0.25 W	Wall/Front	20	0.70	4.9	0.14	
		2375	2 x 0.25 W	Wall/Front	20	0.71	5.0	0.14	
	RF 1	1975	2 x 0.25 W	Wall/Front	20	0.69	4.9	0.14	
		2175	2 x 0.25 W	Wall/Front	20	0.72	4.9	0.15	
		2375	2 x 0.25 W	Wall/Front	20	0.78	5.0	0.16	
RF0 → B7 RF1 → B7	RF 0	2850	2 x 0.25 W	Wall/Front	20	0.42	5.7	0.07	0.20
		3100	2 x 0.25 W	Wall/Front	20	0.50	5.7	0.09	
		3350	2 x 0.25 W	Wall/Front	20	0.53	5.8	0.09	
	RF 1	2825	2 x 0.25 W	Wall/Front	20	0.46	5.7	0.08	
		3100	2 x 0.25 W	Wall/Front	20	0.52	5.7	0.09	
		3375	2 x 0.25 W	Wall/Front	20	0.59	5.8	0.10	
RF0 → B25 RF1 → B25	RF 0	8115	2 x 0.25 W	Wall/Front	20	0.60	4.6	0.13	0.31
		8365	2 x 0.25 W	Wall/Front	20	0.69	4.7	0.15	
		8615	2 x 0.25 W	Wall/Front	20	0.64	4.7	0.14	
	RF 1	8090	2 x 0.25 W	Wall/Front	20	0.67	4.6	0.14	
		8365	2 x 0.25 W	Wall/Front	20	0.68	4.7	0.15	
		8640	2 x 0.25 W	Wall/Front	20	0.73	4.7	0.15	

**Table 10: Spatially averaged plane-wave equivalent power density values and corresponding exposure ratios measured at the selected 20 cm test separation distance along the 45° right-side inclined radial of the EUT for general public (uncontrolled) exposure (applicable for the products aimed for the Canadian markets).**

RF card and band placement	RF card	Channel	Nominal output power from the radio (W)	Mounting/ Test position	Test separation distance (cm)	$S$ (W/m <sup>2</sup> )	$S^{\text{lim}}$ (W/m <sup>2</sup> )	$ER$	Total combined $ER$
----------------------------	---------	---------	---	-------------------------	-------------------------------	-------------------------	--------------------------------------	------	---------------------

RF0 → B4 RF1 → B25	RF 0	1975	2 x 0.25 W	Wall/45°	20	0.79	4.9	0.16	0.32
		2175	2 x 0.25 W	Wall/45°	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/45°	20	-	5.0	-	
	RF 1	8090	2 x 0.25 W	Wall/45°	20	0.70	4.6	0.15	
		8365	2 x 0.25 W	Wall/45°	20	-	4.7	-	
		8640	2 x 0.25 W	Wall/45°	20	-	4.7	-	
RF0 → B25 RF1 → B4	RF 0	8115	2 x 0.25 W	Wall/45°	20	0.58	4.6	0.13	0.30
		8365	2 x 0.25 W	Wall/45°	20	-	4.7	-	
		8615	2 x 0.25 W	Wall/45°	20	-	4.7	-	
	RF 1	1975	2 x 0.25 W	Wall/45°	20	0.83	4.9	0.17	
		2175	2 x 0.25 W	Wall/45°	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/45°	20	-	5.0	-	
RF0 → B7 RF1 → B25	RF 0	2850	2 x 0.25 W	Wall/45°	20	-	5.7	-	0.28
		3100	2 x 0.25 W	Wall/45°	20	0.72	5.7	0.13	
		3350	2 x 0.25 W	Wall/45°	20	-	5.8	-	
	RF 1	8090	2 x 0.25 W	Wall/45°	20	0.70	4.6	0.15	
		8365	2 x 0.25 W	Wall/45°	20	-	4.7	-	
		8640	2 x 0.25 W	Wall/45°	20	-	4.7	-	
RF0 → B25 RF1 → B7	RF 0	8115	2 x 0.25 W	Wall/45°	20	0.58	4.6	0.13	0.24
		8365	2 x 0.25 W	Wall/45°	20	-	4.7	-	
		8615	2 x 0.25 W	Wall/45°	20	-	4.7	-	
	RF 1	2825	2 x 0.25 W	Wall/45°	20	-	5.7	-	
		3100	2 x 0.25 W	Wall/45°	20	0.63	5.7	0.11	
		3375	2 x 0.25 W	Wall/45°	20	-	5.8	-	
RF0 → B7 RF1 → B4	RF 0	2850	2 x 0.25 W	Wall/45°	20	-	5.7	-	0.30
		3100	2 x 0.25 W	Wall/45°	20	0.72	5.7	0.13	
		3350	2 x 0.25 W	Wall/45°	20	-	5.8	-	
	RF 1	1975	2 x 0.25 W	Wall/45°	20	0.83	4.9	0.17	
		2175	2 x 0.25 W	Wall/45°	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/45°	20	-	5.0	-	
RF0 → B4 RF1 → B7	RF 0	1975	2 x 0.25 W	Wall/45°	20	0.79	4.9	0.16	0.28
		2175	2 x 0.25 W	Wall/45°	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/45°	20	-	5.0	-	
	RF 1	2825	2 x 0.25 W	Wall/45°	20	-	5.7	-	
		3100	2 x 0.25 W	Wall/45°	20	0.63	5.7	0.11	
		3375	2 x 0.25 W	Wall/45°	20	-	5.8	-	
RF0 → B4 RF1 → B4	RF 0	1975	2 x 0.25 W	Wall/45°	20	0.79	4.9	0.16	0.33
		2175	2 x 0.25 W	Wall/45°	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/45°	20	-	5.0	-	
	RF 1	1975	2 x 0.25 W	Wall/45°	20	0.83	4.9	0.17	
		2175	2 x 0.25 W	Wall/45°	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/45°	20	-	5.0	-	
RF0 → B7 RF1 → B7	RF 0	2850	2 x 0.25 W	Wall/45°	20	-	5.7	-	0.24
		3100	2 x 0.25 W	Wall/45°	20	0.72	5.7	0.13	
		3350	2 x 0.25 W	Wall/45°	20	-	5.8	-	



RF0 → B25 RF1 → B25	RF 1	2825	2 x 0.25 W	Wall/45°	20	-	5.7	-	
		3100	2 x 0.25 W	Wall/45°	20	0.63	5.7	0.11	
		3375	2 x 0.25 W	Wall/45°	20	-	5.8	-	
	RF 0	8115	2 x 0.25 W	Wall/45°	20	0.58	4.6	0.13	0.28
		8365	2 x 0.25 W	Wall/45°	20	-	4.7	-	
		8615	2 x 0.25 W	Wall/45°	20	-	4.7	-	
	RF 1	8090	2 x 0.25 W	Wall/45°	20	0.70	4.6	0.15	
		8365	2 x 0.25 W	Wall/45°	20	-	4.7	-	
		8640	2 x 0.25 W	Wall/45°	20	-	4.7	-	

**Table 11: Spatially averaged plane-wave equivalent power density values and corresponding exposure ratios measured at the selected 20 cm test separation distance to the right side of the EUT for general public (uncontrolled) exposure (applicable for the products aimed for the Canadian markets).**

RF card and band placement	RF card	Channel	Nominal output power from the radio (W)	Mounting/ Test position	Test separation distance (cm)	$S$ (W/m <sup>2</sup> )	$S^{\text{lim}}$ (W/m <sup>2</sup> )	ER	Total combined ER
RF0 → B4 RF1 → B25	RF 0	1975	2 x 0.25 W	Wall/Right	20	0.92	4.9	0.19	0.34
		2175	2 x 0.25 W	Wall/Right	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/Right	20	-	5.0	-	
	RF 1	8090	2 x 0.25 W	Wall/Right	20	0.66	4.6	0.14	
		8365	2 x 0.25 W	Wall/Right	20	-	4.7	-	
		8640	2 x 0.25 W	Wall/Right	20	-	4.7	-	
RF0 → B25 RF1 → B4	RF 0	8115	2 x 0.25 W	Wall/Right	20	0.58	4.6	0.12	0.31
		8365	2 x 0.25 W	Wall/Right	20	-	4.7	-	
		8615	2 x 0.25 W	Wall/Right	20	-	4.7	-	
	RF 1	1975	2 x 0.25 W	Wall/Right	20	0.90	4.9	0.18	
		2175	2 x 0.25 W	Wall/Right	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/Right	20	-	5.0	-	
RF0 → B7 RF1 → B25	RF 0	2850	2 x 0.25 W	Wall/Right	20	-	5.7	-	0.22
		3100	2 x 0.25 W	Wall/Right	20	0.41	5.7	0.07	
		3350	2 x 0.25 W	Wall/Right	20	-	5.8	-	
	RF 1	8090	2 x 0.25 W	Wall/Right	20	0.66	4.6	0.14	
		8365	2 x 0.25 W	Wall/Right	20	-	4.7	-	
		8640	2 x 0.25 W	Wall/Right	20	-	4.7	-	
RF0 → B25 RF1 → B7	RF 0	8115	2 x 0.25 W	Wall/Right	20	0.58	4.6	0.12	0.20
		8365	2 x 0.25 W	Wall/Right	20	-	4.7	-	
		8615	2 x 0.25 W	Wall/Right	20	-	4.7	-	
	RF 1	2825	2 x 0.25 W	Wall/Right	20	-	5.7	-	
		3100	2 x 0.25 W	Wall/Right	20	0.41	5.7	0.07	
		3375	2 x 0.25 W	Wall/Right	20	-	5.8	-	
RF0 → B7 RF1 → B4	RF 0	2850	2 x 0.25 W	Wall/Right	20	-	5.7	-	0.26
		3100	2 x 0.25 W	Wall/Right	20	0.41	5.7	0.07	
		3350	2 x 0.25 W	Wall/Right	20	-	5.8	-	

	RF 1	1975	2 x 0.25 W	Wall/Right	20	0.90	4.9	0.18	
		2175	2 x 0.25 W	Wall/Right	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/Right	20	-	5.0	-	
RF0 → B4 RF1 → B7	RF 0	1975	2 x 0.25 W	Wall/Right	20	0.92	4.9	0.19	0.26
		2175	2 x 0.25 W	Wall/Right	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/Right	20	-	5.0	-	
	RF 1	2825	2 x 0.25 W	Wall/Right	20	-	5.7	-	
		3100	2 x 0.25 W	Wall/Right	20	0.41	5.7	0.07	
		3375	2 x 0.25 W	Wall/Right	20	-	5.8	-	
RF0 → B4 RF1 → B4	RF 0	1975	2 x 0.25 W	Wall/Right	20	0.92	4.9	0.19	0.38
		2175	2 x 0.25 W	Wall/Right	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/Right	20	-	5.0	-	
	RF 1	1975	2 x 0.25 W	Wall/Right	20	0.90	4.9	0.18	
		2175	2 x 0.25 W	Wall/Right	20	-	4.9	-	
		2375	2 x 0.25 W	Wall/Right	20	-	5.0	-	
RF0 → B7 RF1 → B7	RF 0	2850	2 x 0.25 W	Wall/Right	20	-	5.7	-	0.15
		3100	2 x 0.25 W	Wall/Right	20	0.41	5.7	0.07	
		3350	2 x 0.25 W	Wall/Right	20	-	5.8	-	
	RF 1	2825	2 x 0.25 W	Wall/Right	20	-	5.7	-	
		3100	2 x 0.25 W	Wall/Right	20	0.41	5.7	0.07	
		3375	2 x 0.25 W	Wall/Right	20	-	5.8	-	
RF0 → B25 RF1 → B25	RF 0	8115	2 x 0.25 W	Wall/Right	20	0.58	4.6	0.12	0.27
		8365	2 x 0.25 W	Wall/Right	20	-	4.7	-	
		8615	2 x 0.25 W	Wall/Right	20	-	4.7	-	
	RF 1	8090	2 x 0.25 W	Wall/Right	20	0.66	4.6	0.14	
		8365	2 x 0.25 W	Wall/Right	20	-	4.7	-	
		8640	2 x 0.25 W	Wall/Right	20	-	4.7	-	

## 5.4 Field strength measurement uncertainty

An uncertainty budget [4] for the field strength measurements using the DASY5 near-field scanner is given in Table 12.

**Table 12: Uncertainty budget with the combined standard uncertainty and the extended (K=1.96) uncertainty for field strength measurements of base stations using the DASY5 near-field scanner.**

Influence quantities	Uncertainty (%)	Probability distribution	Divisor	Weighting factor, $c_i \in$	Weighting factor, $c_i (H)$	Standard uncertainty (%) (E)	Standard uncertainty (%) (H)
<b>Measurement equipment</b>							
Calibration	$\pm 5.1$	Normal	1	1	1	$\pm 5.1$	$\pm 5.1$
Isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7$	$\pm 2.7$
Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7$	$\pm 2.7$
Fields out of measurement range	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6$	$\pm 0.6$
Noise	$\pm 0.0$	Normal	1	1	1	$\pm 0.0$	$\pm 0.0$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5$	$\pm 1.5$
Power scaling	$\pm 4.5$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.6$	$\pm 2.6$
<b>Mechanical constraints</b>							
Positioning system	$\pm 0.0$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0$	$\pm 0.0$
Matching between probe and EUT	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7$	$\pm 2.7$
<b>Physical Parameters</b>							
Drifts in output power of the EUT, Probe, temperature and humidity	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9$	$\pm 2.9$
Perturbation by the environment	$\pm 12.0$	Rectangular	$\sqrt{3}$	1	1	$\pm 6.9$	$\pm 6.9$
<b>Combined standard Uncertainty</b>						<b><math>\pm 10.6</math></b>	<b><math>\pm 10.6</math></b>
<b>Expanded uncertainty (k=1.96)</b>						<b><math>\pm 21.2</math></b>	<b><math>\pm 21.2</math></b>

## 6 Conclusion

The results in Section 5 show that the plane-wave equivalent power density values, measured and estimated according to the requirements of FCC [3] and Industry Canada [2], are below the relevant MPE limits [1] and [2] for all specified configurations at a separation distance of 20 cm between the equipment and any nearby person.

The compliance distance of 20 cm is also valid for one RF card installed configuration, because RF exposure would be even lower on that case compared to the both the RF cards installed configurations.

Consequently, the EUT is in compliance with the appropriate RF exposure standards and recommendations.

## 7 References

- [1] FCC, Code of Federal Regulations CFR title 47, part 1.1310 "Radiofrequency radiation exposure limits", Federal Communications Commission (FCC), August 1997.
- [2] Industry Canada, Radio Standard Specification (RSS) 102, (Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), 2015.
- [3] FCC KDB447498 D01, "Mobile and Portable Devices RF exposure procedures and Equipment Authorization Policies", February 2014.
- [4] Ericsson, EAB-13:071570, "Uncertainty budget for field strength measurements of radio base stations using the DASY5 system," Ericsson AB, Tech. Rep., 2013.
- [5] Thors et al., "Product Compliance Assessments of Low Power Radio Base Stations with Respect to Whole-Body Radiofrequency Exposure Limits", in EuCAP, 2013.
- [6] "Ericsson repository lowpower compliance (LCA) tool", available at <https://eforge.ericsson.se/sf/wiki/do/viewPage/projects.postfeko/wiki/LowpowerTool>, Ericsson, 2015.

## 8 Revision History

Rev.	Date	Description
B	2015-04-21	Removed Appendix D
A	2015-04-09	First revision

APPENDIX A: Photographs of the EUT



Figure A.1 (a) Front view of the EUT (without fan module). (b) Front view of the EUT (with fan module)



Figure A.2 EUT with the fan module opened

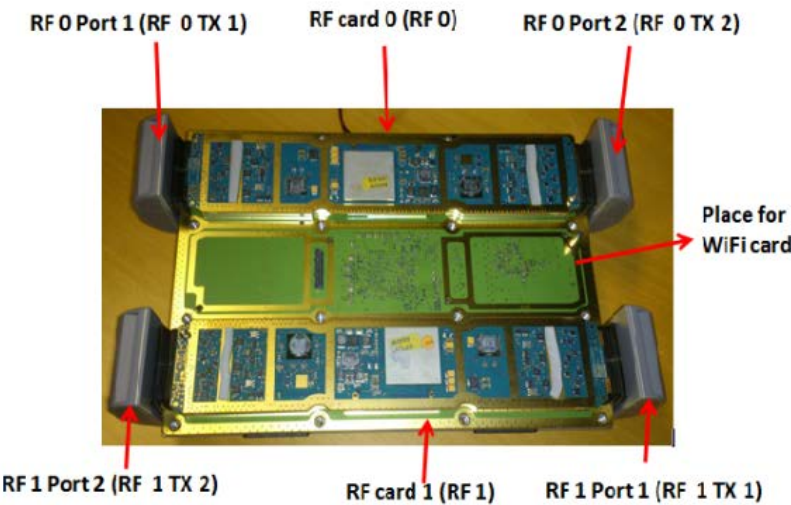


Figure A.3 Front view of the EUT with radome removed showing both RF cards, antenna locations and places for WiFi card.

**APPENDIX B: Electric and magnetic field strength probe calibration parameters****ER3DV4R S/N 2210****Diode compression:**

Parameter	Value in mV
DCP X	100.0
DCP Y	97.5
DCP Z	98.5

**Sensitivity in free space:**

Parameter	Value in $\mu\text{V}/(\text{V/m})^2$
Norm X	2.80
Norm Y	3.12
Norm Z	5.26

**Probe tip to sensor center (S/N 2210): 2.5 mm**

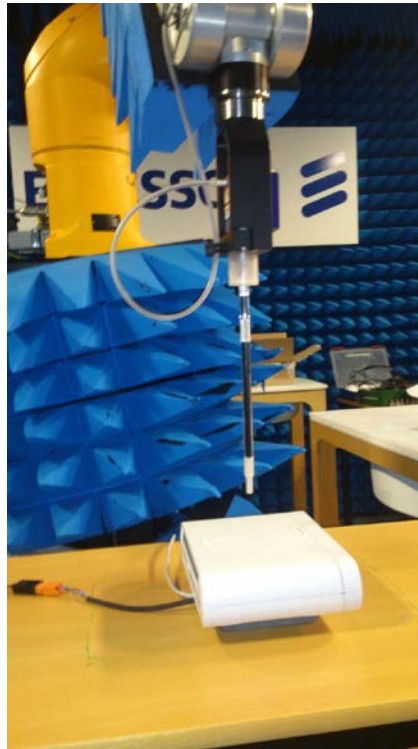
**APPENDIX C: Photographs of the EUT when positioned for field strength measurements**

Figure C.1 EUT positioned for field strength measurements in the front position using the DASY5 near-field scanner.



Figure C.2 EUT positioned for field strength measurements in the right side using the DASY5 near-field scanner.