



TEST REPORT

Product Name: LED Outdoor Wall Light
FCC ID: 2A7VP-C6609A
Trademark: N/A
Model Number: C6609-A, C6609-B, C6609-C, C6609-D, C6609-E, C6609-F, C6609-G, C6611-A, C6611-B, C6611-C, C6611-D, C6611-E, C6611-F, C6611-G, C6621-A, C6621-B, C6621-C, C6621-D, C6621-E, C6621-F, C6621-G
Prepared For: Shenzhen Jindian Zhiguang Lighting Co.,Ltd
Address: D402, Shengyang Industrial Zone, No.3, Shunv Road, Longhua District, Shenzhen, China
Manufacturer: Shenzhen Jindian Zhiguang Lighting Co.,Ltd
Address: D402, Shengyang Industrial Zone, No.3, Shunv Road, Longhua District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 06, 2024
Sample tested Date: Mar. 06, 2024 to Mar. 11, 2024
Issue Date: Mar. 11, 2024
Report No.: CTB240308010RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit.....	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	38
8.1 Block Diagram Of Test Setup.....	38
8.2 Limit.....	38
8.3 Test procedure	38
8.4 Test Result	39
9. CONDUCTED OUTPUT POWER	46
9.1 Block Diagram Of Test Setup.....	46
9.2 Limit.....	46
9.3 Test procedure	46
9.4 Test Result	47
10. 6DB OCCUPIED BANDWIDTH.....	48
10.1 Block Diagram Of Test Setup.....	48
10.2 Limit.....	48
10.3 Test procedure	48
10.4 Test Result	49
11. POWER SPECTRAL DENSITY.....	54
11.1 Block Diagram Of Test Setup.....	54
11.2 Limit.....	54
11.3 Test procedure	54
11.4 Test Result	55
12. ANTENNA REQUIREMENT	60
13. EUT TEST SETUP PHOTOGRAPHS.....	61

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240308010RFX	Mar. 11, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): C6609-A, C6609-B, C6609-C, C6609-D, C6609-E, C6609-F, C6609-G, C6611-A, C6611-B, C6611-C, C6611-D, C6611-E, C6611-F, C6611-G, C6621-A, C6621-B, C6621-C, C6621-D, C6621-E, C6621-F, C6621-G

Model Description: All the model are the same circuit and RF module, only different for model name
.Test sample model: C6609-A

Wi-Fi Specification: IEEE 802.11b/g/n

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel
IEEE 802.11n 40: 2422-2452MHz/ 7 channel

Max. RF output power: WiFi (2.4G): 23.489dBm

Type of Modulation: WiFi: DSSS, OFDM

Antenna installation: WiFi: PCB antenna

Antenna Gain: WiFi (2.4G): 2.45dBi

Ratings: 100-120V AC

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

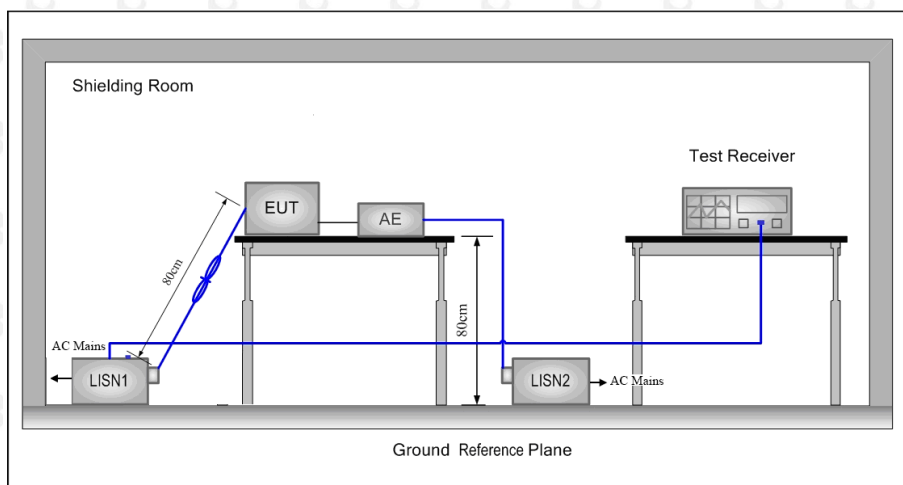

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

6.4 Test Result

Test Specification: Line
 AC 120V 60Hz
 the worst: 802.11b (low channel)

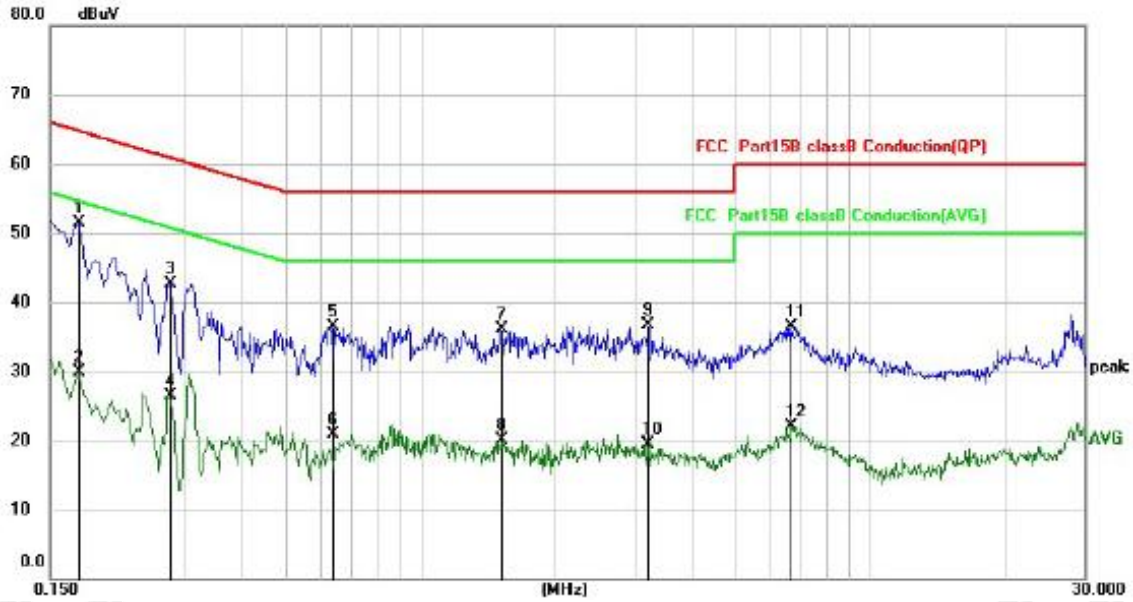


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1	*	0.1740	41.56	9.95	51.51	64.77	-13.26	QP
2		0.1740	19.88	9.95	29.83	54.77	-24.94	AVG
3		0.2779	32.80	9.96	42.76	60.88	-18.12	QP
4		0.2779	16.63	9.96	26.59	50.88	-24.29	AVG
5		0.6380	26.43	10.01	36.44	56.00	-19.56	QP
6		0.6380	10.92	10.01	20.93	46.00	-25.07	AVG
7		1.5100	25.99	10.05	36.04	56.00	-19.96	QP
8		1.5100	9.96	10.05	20.01	46.00	-25.99	AVG
9		3.1900	26.44	10.20	36.64	56.00	-19.36	QP
10		3.1900	9.25	10.20	19.45	46.00	-26.55	AVG
11		6.6859	26.06	10.50	36.56	60.00	-23.44	QP
12		6.6859	11.66	10.50	22.16	50.00	-27.84	AVG

Remark:

$$\text{Factor} = \text{Cable loss} + \text{LISN factor}, \text{Margin} = \text{Measurement} - \text{Limit}$$

Test Specification: Neutral
 AC 120V 60Hz
 the worst: 802.11b (low channel)

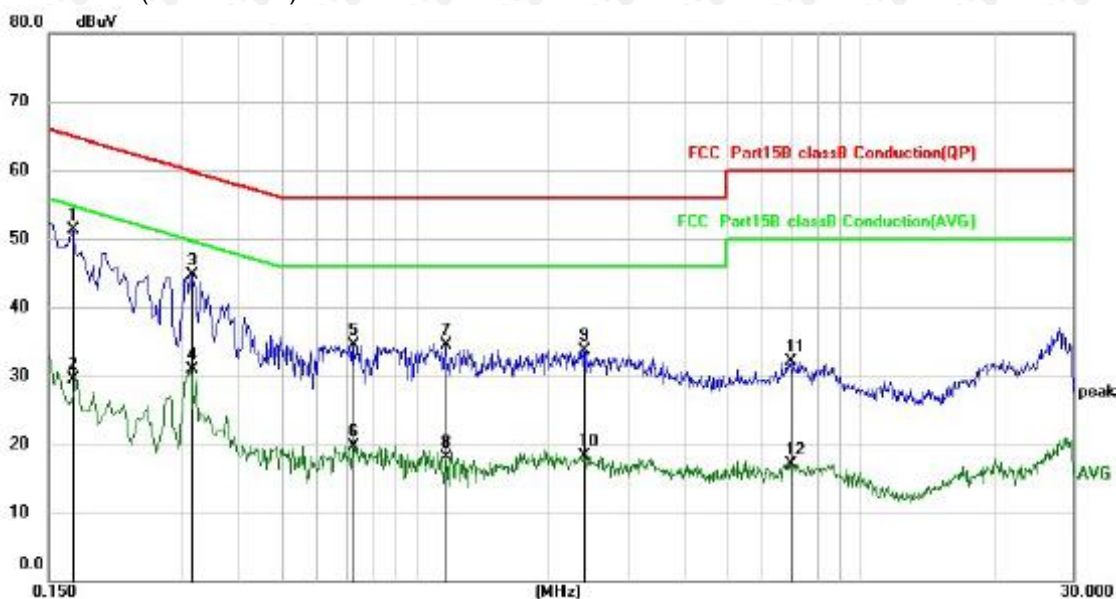

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1700	41.41	9.95	51.36	64.96	-13.60	QP
2		0.1700	19.47	9.95	29.42	54.96	-25.54	AVG
3		0.3149	34.66	9.97	44.63	59.84	-15.21	QP
4		0.3149	20.93	9.97	30.90	49.84	-18.94	AVG
5		0.7259	24.50	10.02	34.52	56.00	-21.48	QP
6		0.7259	9.67	10.02	19.69	46.00	-26.31	AVG
7		1.1659	24.47	10.02	34.49	56.00	-21.51	QP
8		1.1659	8.13	10.02	18.15	46.00	-27.85	AVG
9		2.3860	23.59	10.13	33.72	56.00	-22.28	QP
10		2.3860	8.27	10.13	18.40	46.00	-27.60	AVG
11		6.9778	21.53	10.52	32.05	60.00	-27.95	QP
12		6.9778	6.63	10.52	17.15	50.00	-32.85	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

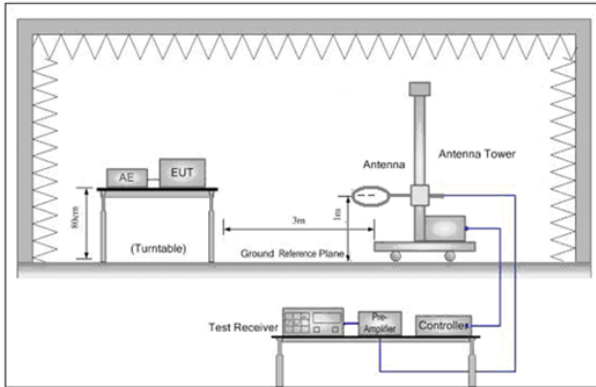


Figure 1. Below 30MHz

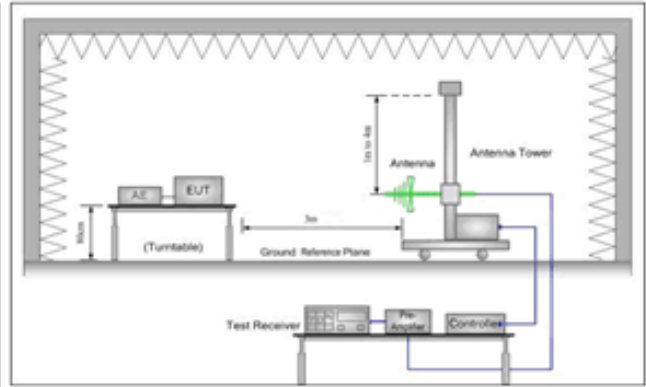


Figure 2. 30MHz to 1GHz

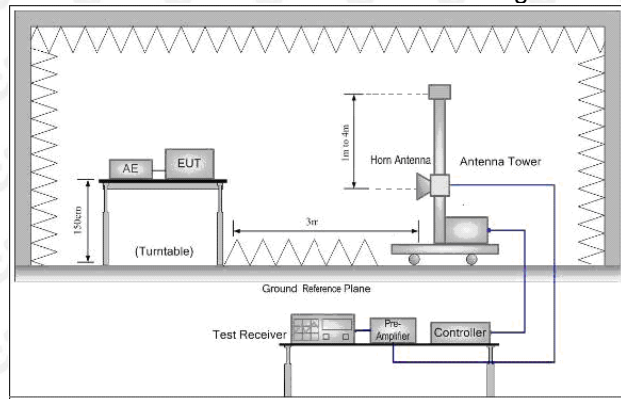


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

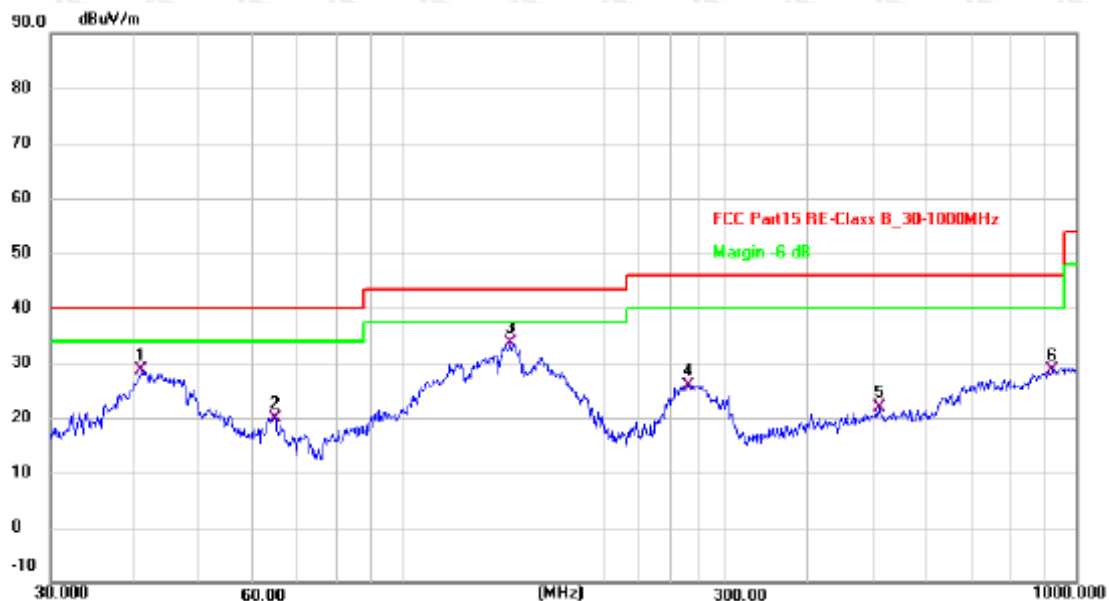

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	40.9880	46.66	-17.98	28.68	40.00	-11.32	QP
2	64.6594	40.91	-20.94	19.97	40.00	-20.03	QP
3 *	144.3347	51.19	-17.53	33.66	43.50	-9.84	QP
4	265.6757	45.06	-19.06	26.00	46.00	-20.00	QP
5	510.0435	34.05	-12.10	21.95	46.00	-24.05	QP
6	922.5157	31.52	-3.00	28.52	46.00	-17.48	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

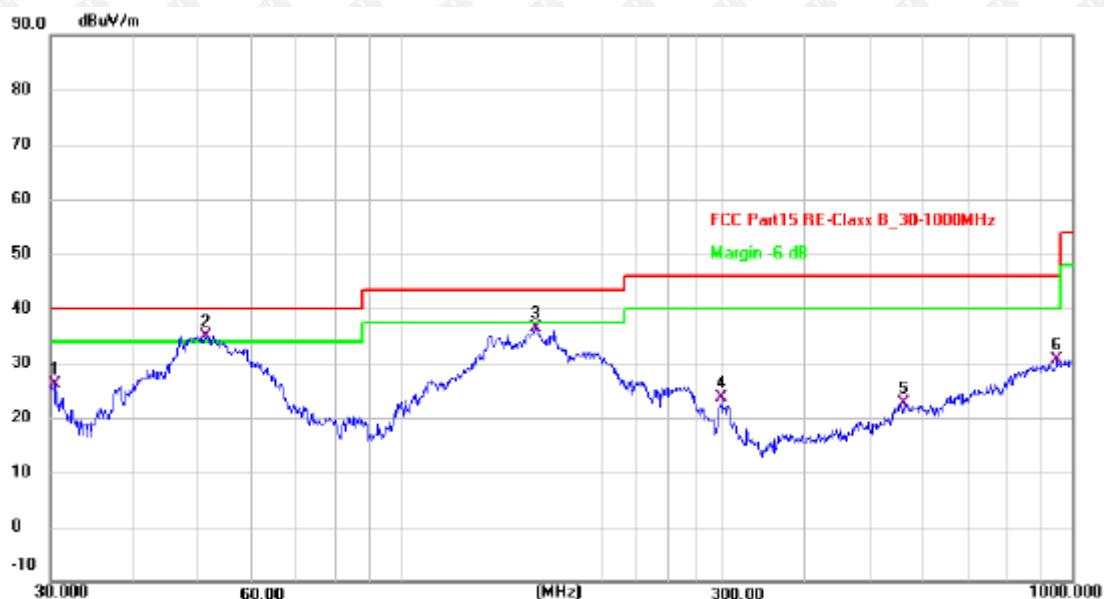

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.4237	43.12	-17.11	26.01	40.00	-13.99	QP
2 *	51.1210	50.76	-15.99	34.77	40.00	-5.23	QP
3	158.6673	52.60	-16.12	36.48	43.50	-7.02	QP
4	300.3672	38.70	-15.06	23.64	46.00	-22.36	QP
5	560.6928	27.59	-4.93	22.66	46.00	-23.34	QP
6	948.7610	27.86	2.65	30.51	46.00	-15.49	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.90	-3.64	61.26	74	-12.74	peak
4824	49.80	-3.64	46.16	54	-7.84	AVG
7236	58.03	-0.95	57.08	74	-16.92	peak
7236	45.09	-0.95	44.14	54	-9.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.23	-3.64	61.59	74	-12.41	peak
4824	47.70	-3.64	44.06	54	-9.94	AVG
7236	57.15	-0.95	56.20	74	-17.80	peak
7236	45.02	-0.95	44.07	54	-9.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.83	-3.51	62.32	74	-11.68	peak
4874	50.75	-3.51	47.24	54	-6.76	AVG
7311	57.84	-0.82	57.02	74	-16.98	peak
7311	44.14	-0.82	43.32	54	-10.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.65	-3.51	60.14	74	-13.86	peak
4874	47.12	-3.51	43.61	54	-10.39	AVG
7311	59.09	-0.82	58.27	74	-15.73	peak
7311	43.52	-0.82	42.70	54	-11.30	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.76	-3.43	61.33	74	-12.67	peak
4924	46.08	-3.43	42.65	54	-11.35	AVG
7386	57.39	-0.75	56.64	74	-17.36	peak
7386	42.57	-0.75	41.82	54	-12.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.97	-3.43	60.54	74	-13.46	peak
4924	48.66	-3.43	45.23	54	-8.77	AVG
7386	57.76	-0.75	57.01	74	-16.99	peak
7386	41.27	-0.75	40.52	54	-13.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	66.19	-3.64	62.55	74	-11.45	peak
4824	48.17	-3.64	44.53	54	-9.47	AVG
7236	58.08	-0.95	57.13	74	-16.87	peak
7236	46.51	-0.95	45.56	54	-8.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	63.09	-3.64	59.45	74	-14.55	peak
4824	47.19	-3.64	43.55	54	-10.45	AVG
7236	57.72	-0.95	56.77	74	-17.23	peak
7236	45.38	-0.95	44.43	54	-9.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.84	-3.51	61.33	74	-12.67	peak
4874	47.45	-3.51	43.94	54	-10.06	AVG
7311	59.26	-0.82	58.44	74	-15.56	peak
7311	43.68	-0.82	42.86	54	-11.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.61	-3.51	60.10	74	-13.90	peak
4874	48.02	-3.51	44.51	54	-9.49	AVG
7311	57.77	-0.82	56.95	74	-17.05	peak
7311	43.11	-0.82	42.29	54	-11.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.01	-3.43	60.58	74	-13.42	peak
4924	47.61	-3.43	44.18	54	-9.82	AVG
7386	58.14	-0.75	57.39	74	-16.61	peak
7386	43.95	-0.75	43.20	54	-10.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.07	-3.43	58.64	74	-15.36	peak
4924	47.87	-3.43	44.44	54	-9.56	AVG
7386	56.80	-0.75	56.05	74	-17.95	peak
7386	42.56	-0.75	41.81	54	-12.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.70	-3.64	61.06	74	-12.94	peak
4824	47.30	-3.64	43.66	54	-10.34	AVG
7236	58.24	-0.95	57.29	74	-16.71	peak
7236	42.92	-0.95	41.97	54	-12.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.67	-3.64	60.03	74	-13.97	peak
4824	47.44	-3.64	43.80	54	-10.20	AVG
7236	56.86	-0.95	55.91	74	-18.09	peak
7236	42.52	-0.95	41.57	54	-12.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	62.36	-3.51	58.85	74.00	-15.15	peak
4874.00	48.39	-3.51	44.88	54.00	-9.12	AVG
7311.00	59.32	-0.82	58.50	74.00	-15.50	peak
7311.00	43.34	-0.82	42.52	54.00	-11.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	62.88	-3.51	59.37	74.00	-14.63	peak
4874.00	45.93	-3.51	42.42	54.00	-11.58	AVG
7311.00	57.00	-0.82	56.18	74.00	-17.82	peak
7311.00	42.35	-0.82	41.53	54.00	-12.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.43	-3.43	60.00	74	-14.00	peak
4924	45.57	-3.43	42.14	54	-11.86	AVG
7386	58.29	-0.75	57.54	74	-16.46	peak
7386	43.89	-0.75	43.14	54	-10.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.33	-3.43	59.90	74	-14.10	peak
4924	45.86	-3.43	42.43	54	-11.57	AVG
7386	57.44	-0.75	56.69	74	-17.31	peak
7386	43.59	-0.75	42.84	54	-11.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	63.22	-3.63	59.59	74	-14.41	peak
4844	48.88	-3.63	45.25	54	-8.75	AVG
7266	58.72	-0.94	57.78	74	-16.22	peak
7266	46.66	-0.94	45.72	54	-8.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.65	-3.63	62.02	74	-11.98	peak
4844	48.92	-3.63	45.29	54	-8.71	AVG
7266	58.44	-0.94	57.50	74	-16.50	peak
7266	45.13	-0.94	44.19	54	-9.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.88	-3.51	59.37	74	-14.63	peak
4874	47.84	-3.51	44.33	54	-9.67	AVG
7311	60.77	-0.82	59.95	74	-14.05	peak
7311	45.39	-0.82	44.57	54	-9.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.65	-0.82	55.83	74	-18.17	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	62.66	-3.43	59.23	74	-14.77	peak
4904	47.07	-3.43	43.64	54	-10.36	AVG
7356	56.59	-0.75	55.84	74	-18.16	peak
7356	42.86	-0.75	42.11	54	-11.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	64.46	-3.43	61.03	74	-12.97	peak
4904	46.28	-3.43	42.85	54	-11.15	AVG
7356	58.10	-0.75	57.35	74	-16.65	peak
7356	42.39	-0.75	41.64	54	-12.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.73	-5.81	51.92	74	-22.08	peak
2390	/	-5.81	/	54	/	AVG
2399	64.40	-5.84	58.56	74	-15.44	peak
2399	48.85	-5.84	43.01	54	-10.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.18	-5.81	50.37	74	-23.63	peak
2390	/	-5.81	/	54	/	AVG
2399	63.15	-5.84	57.31	74	-16.69	peak
2399	47.23	-5.84	41.39	54	-12.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.71	-5.65	51.06	74	-22.94	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.07	-5.65	50.42	74	-23.58	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	58.23	-5.81	52.42	74	-21.58	peak
2390	/	-5.81	/	54	/	AVG
2399	61.65	-5.84	55.81	74	-18.19	peak
2399	46.53	-5.84	40.69	54	-13.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.96	-5.81	51.15	74	-22.85	peak
2390	/	-5.81	/	54	/	AVG
2399	62.31	-5.84	56.47	74	-17.53	peak
2399	45.41	-5.84	39.57	54	-14.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.36	-5.65	51.71	74	-22.29	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.56	-5.65	51.91	74	-22.09	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.32	-5.81	50.51	74	-23.49	peak
2390	/	-5.81	/	54	/	AVG
2399	62.42	-5.84	56.58	74	-17.42	peak
2399	48.74	-5.84	42.90	54	-11.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.98	-5.81	51.17	74	-22.83	peak
2390	/	-5.81	/	54	/	AVG
2399	61.27	-5.84	55.43	74	-18.57	peak
2399	48.28	-5.84	42.44	54	-11.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.51	-5.65	51.86	74	-22.14	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.19	-5.65	50.54	74	-23.46	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.19	-5.81	52.38	74	-21.62	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.00	-5.81	52.19	74	-21.81	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.71	-5.65	52.06	74	-21.94	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.99	-5.65	52.34	74	-21.66	peak
2483.5	/	-5.65	/	54	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

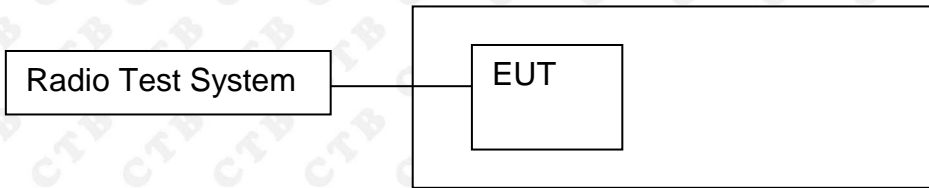


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

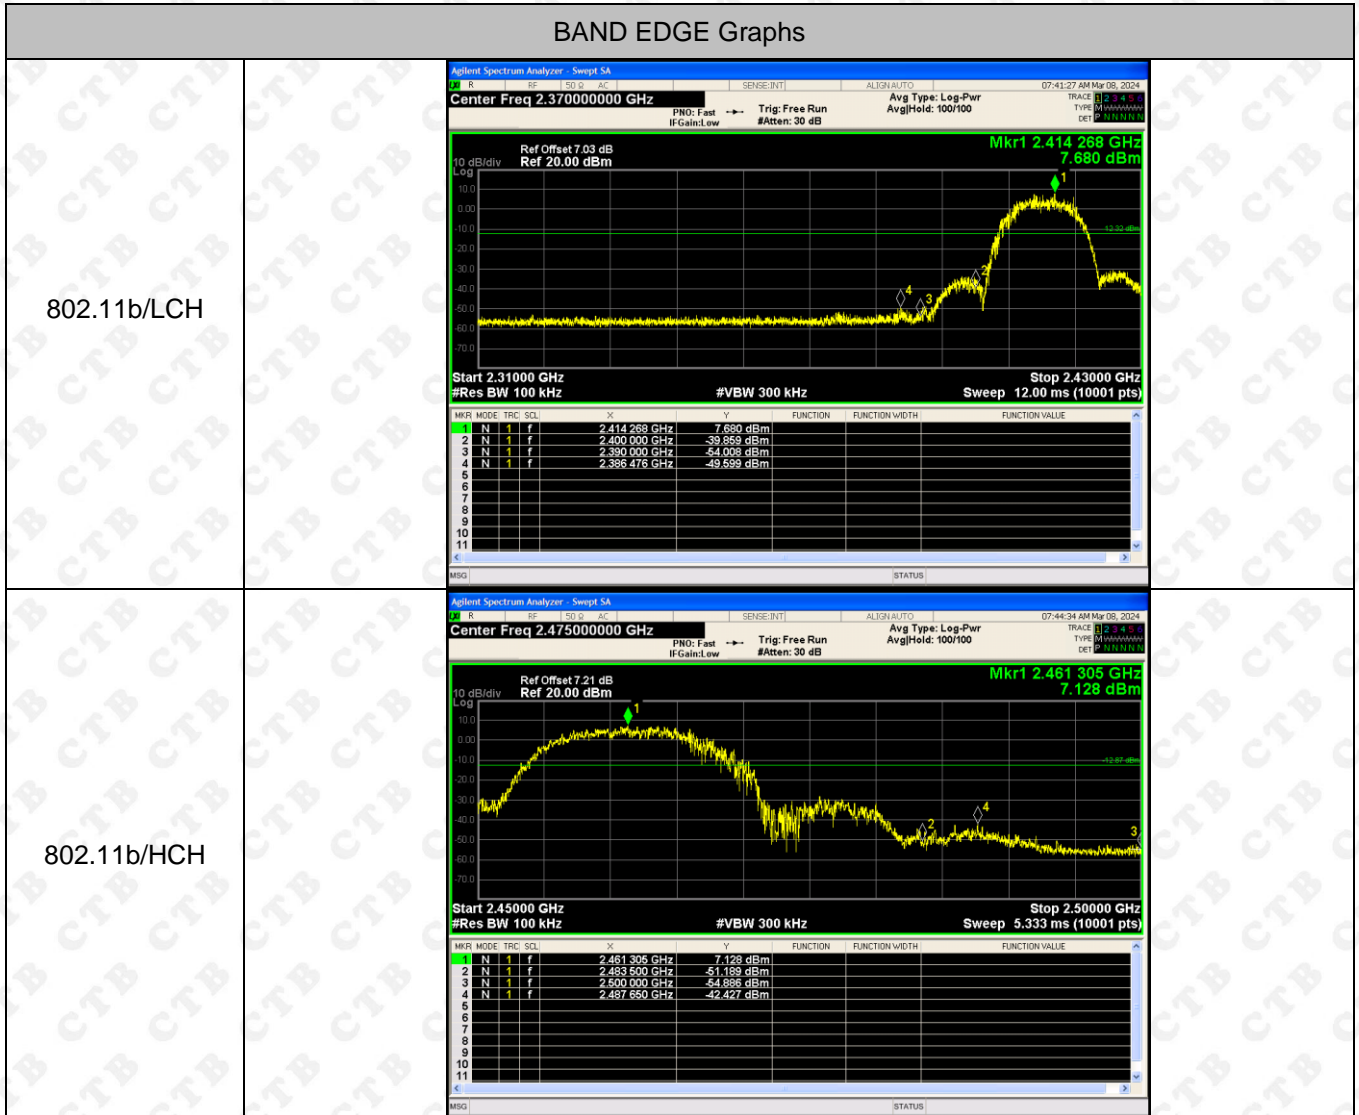


BAND EDGE Graphs


802.11g/LCH

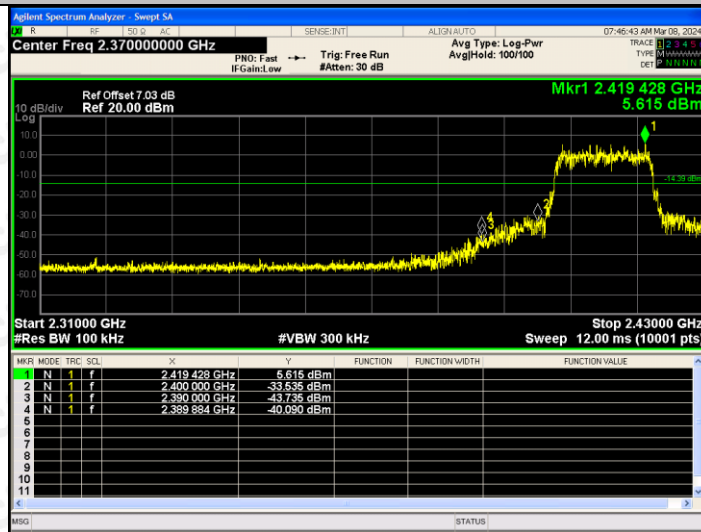


802.11g/HCH

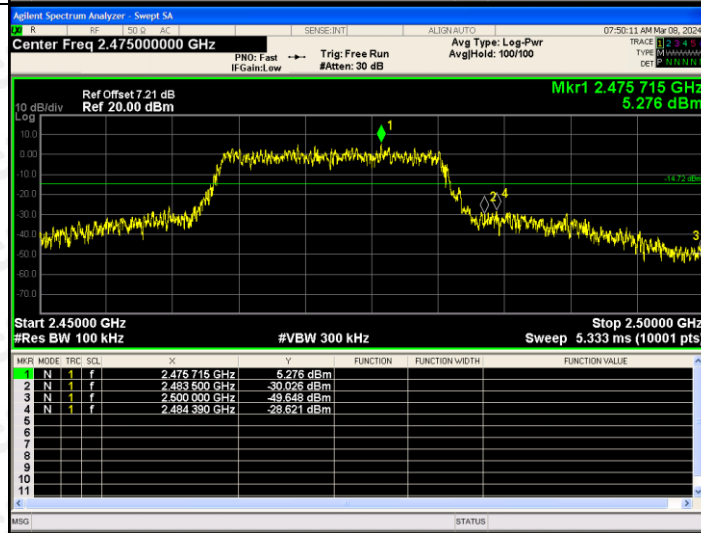


802.11n(HT20)/LCH

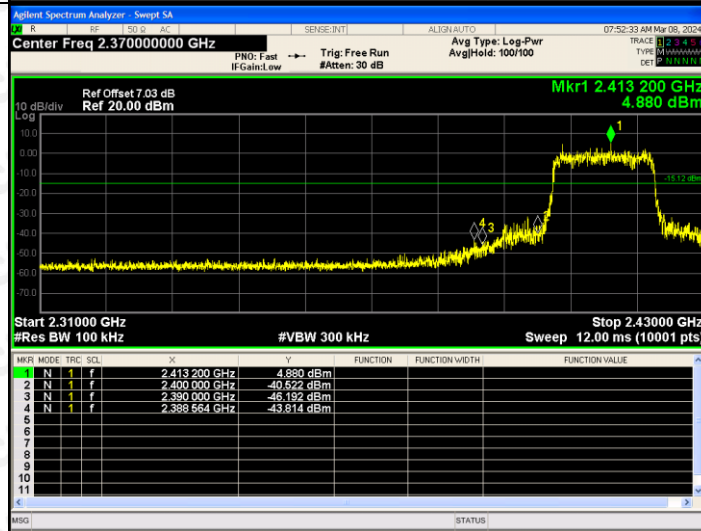


802.11n(HT20)/H
CH

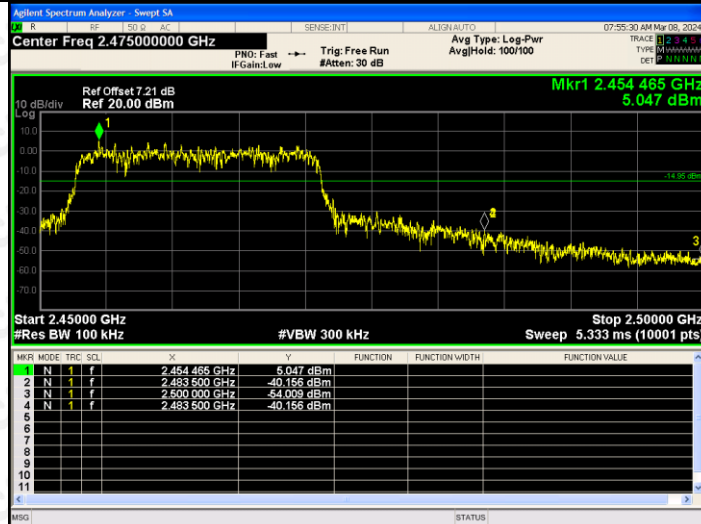

802.11n(HT40)/L
CH

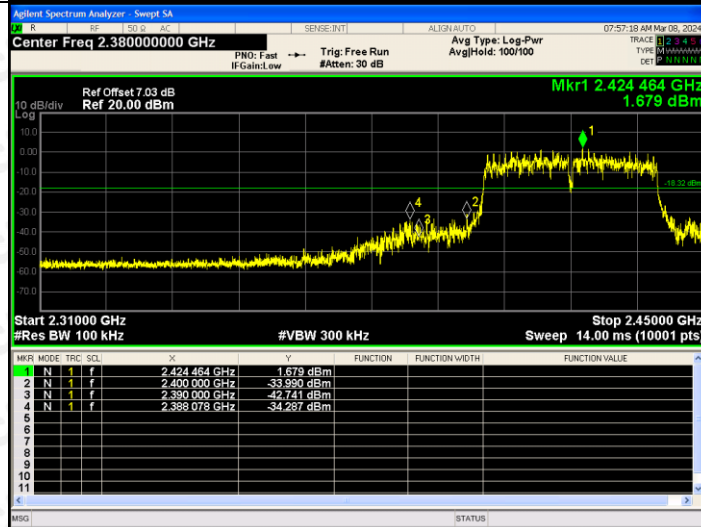

802.11n(HT40)/H
CH

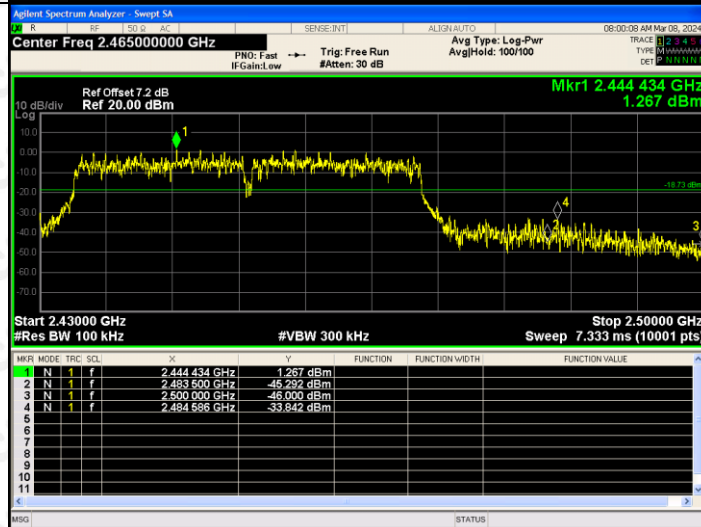

RF Conducted Spurious Emissions Graphs


<p>802.11b/LCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4079 GHz</td> <td></td> <td></td> <td>3.168 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6839 GHz</td> <td></td> <td></td> <td>-41.860 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9817 GHz</td> <td></td> <td></td> <td>-56.430 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0913 GHz</td> <td></td> <td></td> <td>-54.417 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5116 GHz</td> <td></td> <td></td> <td>-55.046 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4079 GHz			3.168 dBm	2	N	1	f	24.6839 GHz			-41.860 dBm	3	N	1	f	4.9817 GHz			-56.430 dBm	4	N	1	f	7.0913 GHz			-54.417 dBm	5	N	1	f	9.5116 GHz			-55.046 dBm
MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4079 GHz			3.168 dBm																																										
2	N	1	f	24.6839 GHz			-41.860 dBm																																										
3	N	1	f	4.9817 GHz			-56.430 dBm																																										
4	N	1	f	7.0913 GHz			-54.417 dBm																																										
5	N	1	f	9.5116 GHz			-55.046 dBm																																										
<p>802.11b/MCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4388 GHz</td> <td></td> <td></td> <td>6.342 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6893 GHz</td> <td></td> <td></td> <td>-41.471 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8740 GHz</td> <td></td> <td></td> <td>-54.334 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3719 GHz</td> <td></td> <td></td> <td>-54.752 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5821 GHz</td> <td></td> <td></td> <td>-54.221 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4388 GHz			6.342 dBm	2	N	1	f	24.6893 GHz			-41.471 dBm	3	N	1	f	4.8740 GHz			-54.334 dBm	4	N	1	f	7.3719 GHz			-54.752 dBm	5	N	1	f	9.5821 GHz			-54.221 dBm
MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4388 GHz			6.342 dBm																																										
2	N	1	f	24.6893 GHz			-41.471 dBm																																										
3	N	1	f	4.8740 GHz			-54.334 dBm																																										
4	N	1	f	7.3719 GHz			-54.752 dBm																																										
5	N	1	f	9.5821 GHz			-54.221 dBm																																										
<p>802.11b/HCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4608 GHz</td> <td></td> <td></td> <td>6.394 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6959 GHz</td> <td></td> <td></td> <td>-41.809 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9243 GHz</td> <td></td> <td></td> <td>-50.612 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.5484 GHz</td> <td></td> <td></td> <td>-54.324 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8442 GHz</td> <td></td> <td></td> <td>-55.696 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4608 GHz			6.394 dBm	2	N	1	f	24.6959 GHz			-41.809 dBm	3	N	1	f	4.9243 GHz			-50.612 dBm	4	N	1	f	7.5484 GHz			-54.324 dBm	5	N	1	f	9.8442 GHz			-55.696 dBm
MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4608 GHz			6.394 dBm																																										
2	N	1	f	24.6959 GHz			-41.809 dBm																																										
3	N	1	f	4.9243 GHz			-50.612 dBm																																										
4	N	1	f	7.5484 GHz			-54.324 dBm																																										
5	N	1	f	9.8442 GHz			-55.696 dBm																																										

RF Conducted Spurious Emissions Graphs


<p>802.11g/LCH</p>	<table border="1"> <thead> <tr> <th>MIR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4079 GHz</td> <td></td> <td></td> <td>3.876 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6718 GHz</td> <td></td> <td></td> <td>-40.912 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8114 GHz</td> <td></td> <td></td> <td>-56.412 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2316 GHz</td> <td></td> <td></td> <td>-54.462 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5116 GHz</td> <td></td> <td></td> <td>-54.106 dBm</td> </tr> </tbody> </table>	MIR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4079 GHz			3.876 dBm	2	N	1	f	24.6718 GHz			-40.912 dBm	3	N	1	f	4.8114 GHz			-56.412 dBm	4	N	1	f	7.2316 GHz			-54.462 dBm	5	N	1	f	9.5116 GHz			-54.106 dBm
MIR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4079 GHz			3.876 dBm																																										
2	N	1	f	24.6718 GHz			-40.912 dBm																																										
3	N	1	f	4.8114 GHz			-56.412 dBm																																										
4	N	1	f	7.2316 GHz			-54.462 dBm																																										
5	N	1	f	9.5116 GHz			-54.106 dBm																																										
<p>802.11g/MCH</p>	<table border="1"> <thead> <tr> <th>MIR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4441 GHz</td> <td></td> <td></td> <td>3.672 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6497 GHz</td> <td></td> <td></td> <td>-41.398 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8896 GHz</td> <td></td> <td></td> <td>-55.176 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3825 GHz</td> <td></td> <td></td> <td>-55.039 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5530 GHz</td> <td></td> <td></td> <td>-54.410 dBm</td> </tr> </tbody> </table>	MIR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4441 GHz			3.672 dBm	2	N	1	f	24.6497 GHz			-41.398 dBm	3	N	1	f	4.8896 GHz			-55.176 dBm	4	N	1	f	7.3825 GHz			-55.039 dBm	5	N	1	f	9.5530 GHz			-54.410 dBm
MIR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4441 GHz			3.672 dBm																																										
2	N	1	f	24.6497 GHz			-41.398 dBm																																										
3	N	1	f	4.8896 GHz			-55.176 dBm																																										
4	N	1	f	7.3825 GHz			-55.039 dBm																																										
5	N	1	f	9.5530 GHz			-54.410 dBm																																										
<p>802.11g/HCH</p>	<table border="1"> <thead> <tr> <th>MIR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4767 GHz</td> <td></td> <td></td> <td>2.423 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6753 GHz</td> <td></td> <td></td> <td>-41.591 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9922 GHz</td> <td></td> <td></td> <td>-55.212 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1963 GHz</td> <td></td> <td></td> <td>-54.438 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9842 GHz</td> <td></td> <td></td> <td>-54.619 dBm</td> </tr> </tbody> </table>	MIR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4767 GHz			2.423 dBm	2	N	1	f	24.6753 GHz			-41.591 dBm	3	N	1	f	4.9922 GHz			-55.212 dBm	4	N	1	f	7.1963 GHz			-54.438 dBm	5	N	1	f	9.9842 GHz			-54.619 dBm
MIR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4767 GHz			2.423 dBm																																										
2	N	1	f	24.6753 GHz			-41.591 dBm																																										
3	N	1	f	4.9922 GHz			-55.212 dBm																																										
4	N	1	f	7.1963 GHz			-54.438 dBm																																										
5	N	1	f	9.9842 GHz			-54.619 dBm																																										

RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

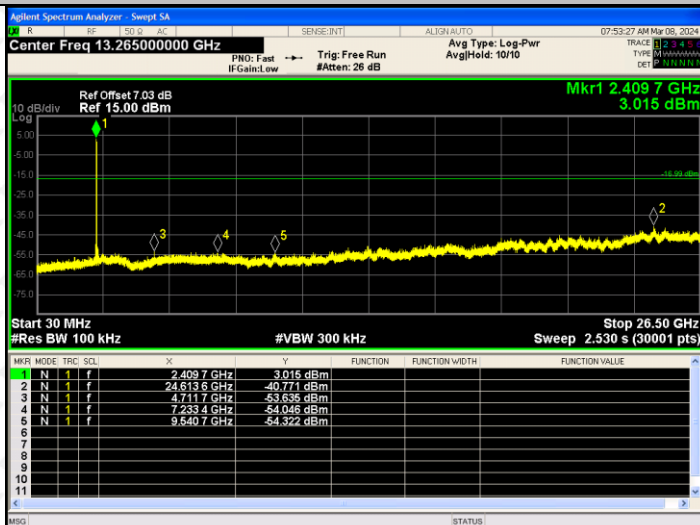

802.11 n(HT20)/MCH

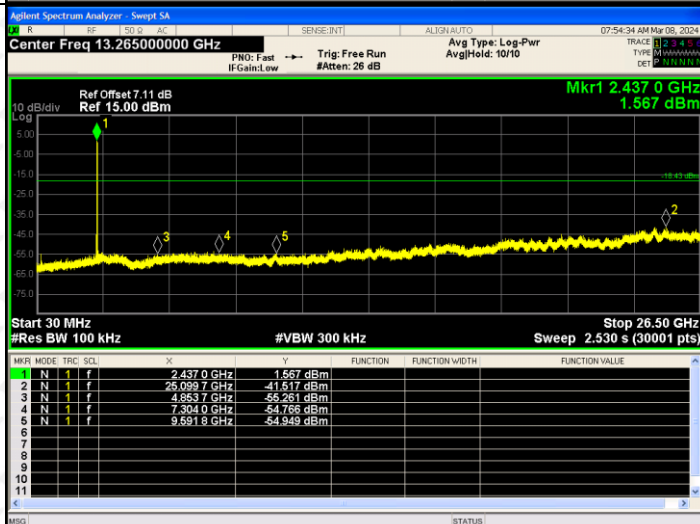

802.11 n(HT20)/HCH

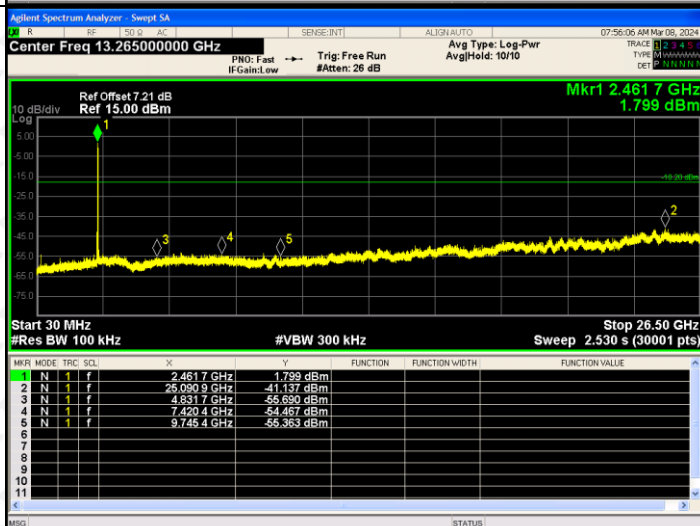

<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.424 7 GHz 1.497 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.424 7 GHz</td><td>1.497 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.428 2 GHz</td><td>-41.865 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.911 1 GHz</td><td>-55.290 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.120 4 GHz</td><td>-54.119 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.816 6 GHz</td><td>-54.081 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.424 7 GHz	1.497 dBm				2	N	1	f	2.428 2 GHz	-41.865 dBm				3	N	1	f	4.911 1 GHz	-55.290 dBm				4	N	1	f	7.120 4 GHz	-54.119 dBm				5	N	1	f	9.816 6 GHz	-54.081 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.424 7 GHz	1.497 dBm																																																		
2	N	1	f	2.428 2 GHz	-41.865 dBm																																																		
3	N	1	f	4.911 1 GHz	-55.290 dBm																																																		
4	N	1	f	7.120 4 GHz	-54.119 dBm																																																		
5	N	1	f	9.816 6 GHz	-54.081 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.428 2 GHz 1.238 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.428 2 GHz</td><td>1.238 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.911 1 GHz</td><td>-40.776 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>7.120 4 GHz</td><td>-54.207 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>9.816 6 GHz</td><td>-53.982 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.428 2 GHz	1.238 dBm				2	N	1	f	4.911 1 GHz	-40.776 dBm				3	N	1	f	7.120 4 GHz	-54.207 dBm				4	N	1	f	9.816 6 GHz	-53.982 dBm												
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.428 2 GHz	1.238 dBm																																																		
2	N	1	f	4.911 1 GHz	-40.776 dBm																																																		
3	N	1	f	7.120 4 GHz	-54.207 dBm																																																		
4	N	1	f	9.816 6 GHz	-53.982 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.448 5 GHz 0.396 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.448 5 GHz</td><td>0.396 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.469 3 GHz</td><td>-40.400 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.058 4 GHz</td><td>-54.631 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.538 9 GHz</td><td>-54.519 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.823 0 GHz</td><td>-54.893 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.448 5 GHz	0.396 dBm				2	N	1	f	2.469 3 GHz	-40.400 dBm				3	N	1	f	5.058 4 GHz	-54.631 dBm				4	N	1	f	7.538 9 GHz	-54.519 dBm				5	N	1	f	9.823 0 GHz	-54.893 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.448 5 GHz	0.396 dBm																																																		
2	N	1	f	2.469 3 GHz	-40.400 dBm																																																		
3	N	1	f	5.058 4 GHz	-54.631 dBm																																																		
4	N	1	f	7.538 9 GHz	-54.519 dBm																																																		
5	N	1	f	9.823 0 GHz	-54.893 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	22.396	30	PASS
	MCH	22.779	30	PASS
	HCH	23.489	30	PASS
802.11g	LCH	21.596	30	PASS
	MCH	23.017	30	PASS
	HCH	19.137	30	PASS
802.11n(HT20)	LCH	21.413	30	PASS
	MCH	21.883	30	PASS
	HCH	21.717	30	PASS
802.11n(HT40)	LCH	20.683	30	PASS
	MCH	20.367	30	PASS
	HCH	20.543	30	PASS

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

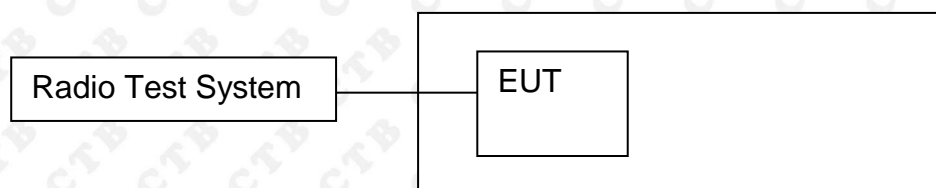

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	11.464	500	PASS
	MCH	10.985	500	PASS
	HCH	11.93	500	PASS
802.11g	LCH	16.344	500	PASS
	MCH	16.32	500	PASS
	HCH	16.349	500	PASS
802.11n(HT20)	LCH	16.316	500	PASS
	MCH	16.744	500	PASS
	HCH	16.738	500	PASS
802.11n(HT40)	LCH	35.149	500	PASS
	MCH	32.765	500	PASS
	HCH	35.116	500	PASS

Test Graph:

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.03 dB</p> <p>Ref 27.03 dBm</p> <p>Mkr3 2.417655 GHz</p> <p>-0.53665 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.769 MHz</p> <p>Total Power 23.4 dBm</p> <p>Transmit Freq Error -76.718 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 11.46 MHz</p> <p>x dB -6.00 dB</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.11 dB</p> <p>Ref 27.11 dBm</p> <p>Mkr3 2.44243 GHz</p> <p>-1.4900 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 15.040 MHz</p> <p>Total Power 23.5 dBm</p> <p>Transmit Freq Error -62.435 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.98 MHz</p> <p>x dB -6.00 dB</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.21 dB</p> <p>Ref 27.21 dBm</p> <p>Mkr3 2.467801 GHz</p> <p>-1.8624 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.639 MHz</p> <p>Total Power 24.4 dBm</p> <p>Transmit Freq Error -164.18 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 11.93 MHz</p> <p>x dB -6.00 dB</p>


<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 7.03 dB Ref 27.03 dBm</p> <p>Mkr3 2.420137 GHz 0.051710 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.150 MHz</p> <p>Total Power 22.1 dBm</p> <p>Transmit Freq Error -34.687 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.34 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 7.11 dB Ref 27.11 dBm</p> <p>Mkr3 2.445098 GHz 1.7338 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.135 MHz</p> <p>Total Power 22.3 dBm</p> <p>Transmit Freq Error -62.470 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.32 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 7.21 dB Ref 27.21 dBm</p> <p>Mkr3 2.470161 GHz -10.416 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.465 MHz</p> <p>Total Power 13.3 dBm</p> <p>Transmit Freq Error -13.720 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.35 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm</p> <p>Mkr3 2.420068 GHz -1.9759 dBm</p> <p>Center: 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>21.0 dBm</td> </tr> <tr> <td colspan="3">17.870 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	21.0 dBm	17.870 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	21.0 dBm											
17.870 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset: 7.11 dB Ref: 27.11 dBm</p> <p>Mkr3 2.445248 GHz -6.0206 dBm</p> <p>Center: 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>21.0 dBm</td> </tr> <tr> <td colspan="3">17.897 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	21.0 dBm	17.897 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	21.0 dBm											
17.897 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset: 7.21 dB Ref: 27.21 dBm</p> <p>Mkr3 2.470238 GHz -0.81819 dBm</p> <p>Center: 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>21.6 dBm</td> </tr> <tr> <td colspan="3">17.872 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	21.6 dBm	17.872 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	21.6 dBm											
17.872 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.439532 GHz</p> <p>-6.2089 dBm</p> <p>Center: 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>20.9 dBm</td> </tr> <tr> <td>35.636 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-42.243 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.15 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	20.9 dBm	35.636 MHz			Transmit Freq Error	OBW Power	99.00 %	-42.243 kHz	x dB	-6.00 dB	x dB Bandwidth			35.15 MHz		
Occupied Bandwidth	Total Power	20.9 dBm																	
35.636 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-42.243 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.15 MHz																			
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.453371 GHz</p> <p>-7.3458 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>20.8 dBm</td> </tr> <tr> <td>35.767 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-11.711 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>32.76 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	20.8 dBm	35.767 MHz			Transmit Freq Error	OBW Power	99.00 %	-11.711 kHz	x dB	-6.00 dB	x dB Bandwidth			32.76 MHz		
Occupied Bandwidth	Total Power	20.8 dBm																	
35.767 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-11.711 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
32.76 MHz																			
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.2 dB</p> <p>Ref: 27.20 dBm</p> <p>Mkr3 2.46951 GHz</p> <p>-6.2748 dBm</p> <p>Center: 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>20.8 dBm</td> </tr> <tr> <td>35.790 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-47.775 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.12 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	20.8 dBm	35.790 MHz			Transmit Freq Error	OBW Power	99.00 %	-47.775 kHz	x dB	-6.00 dB	x dB Bandwidth			35.12 MHz		
Occupied Bandwidth	Total Power	20.8 dBm																	
35.790 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-47.775 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.12 MHz																			

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

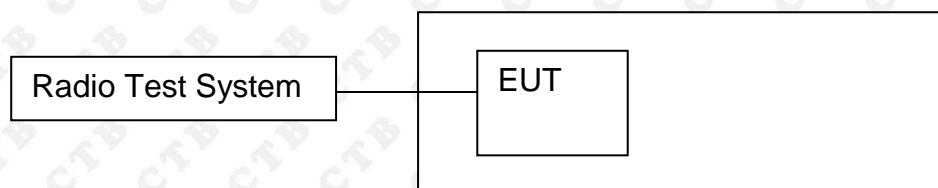

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-7.23	8	PASS
	MCH	-7.644	8	PASS
	HCH	-6.322	8	PASS
802.11g	LCH	-10.602	8	PASS
	MCH	-10.172	8	PASS
	HCH	-10.162	8	PASS
802.11n(H T20)	LCH	-10.539	8	PASS
	MCH	-10.268	8	PASS
	HCH	-10.532	8	PASS
802.11n(H T40)	LCH	-15.888	8	PASS
	MCH	-16.305	8	PASS
	HCH	-16.408	8	PASS

Test Graph

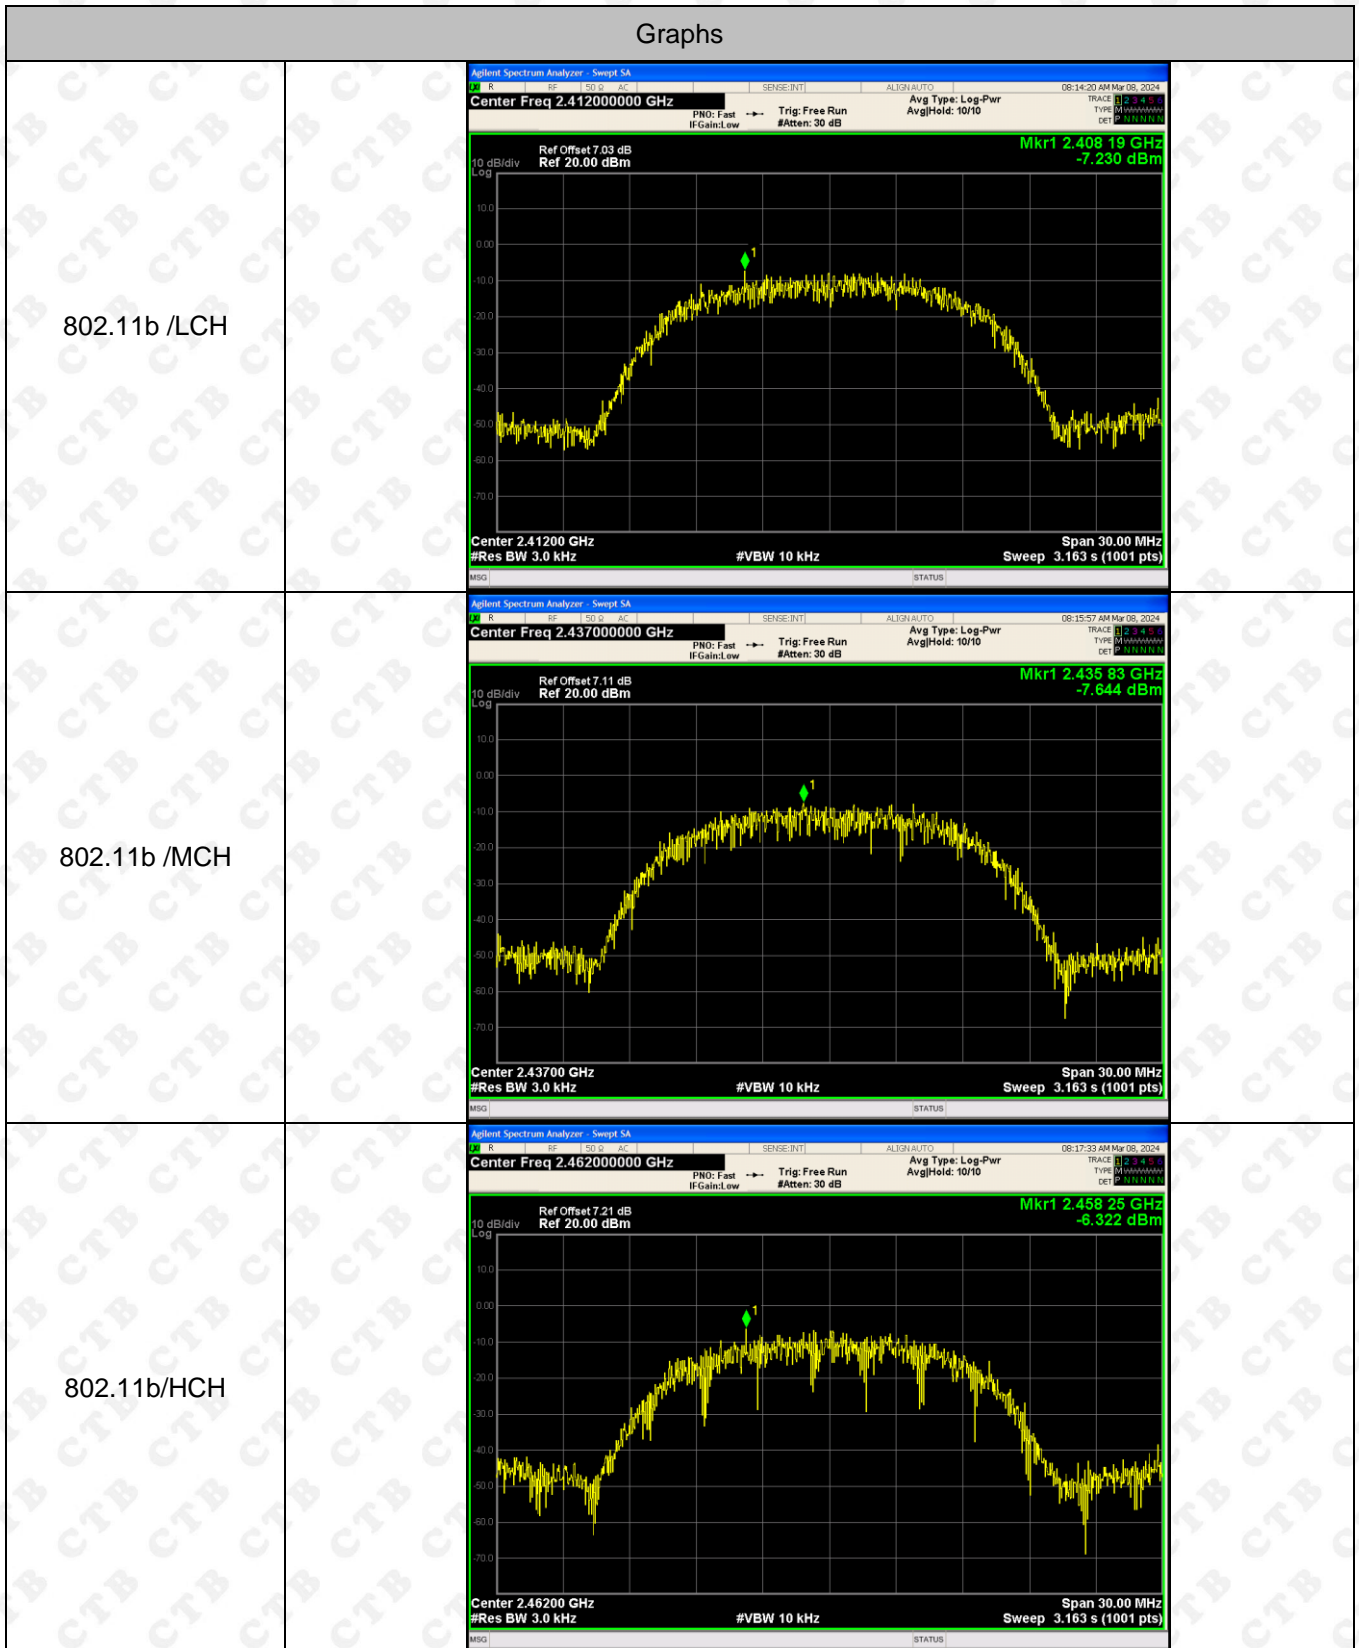
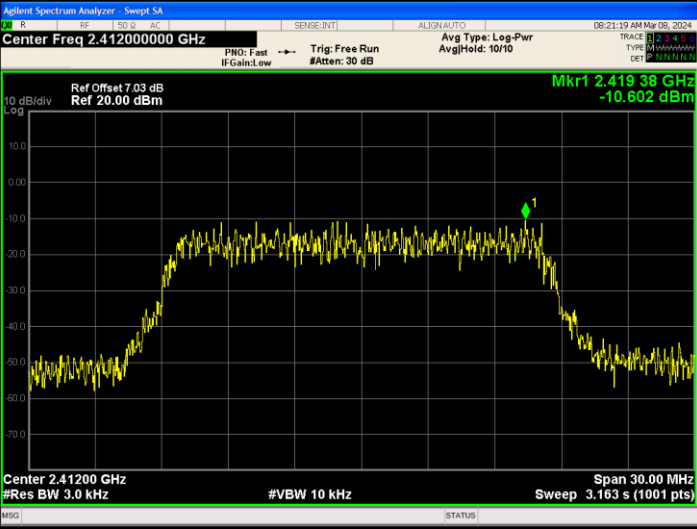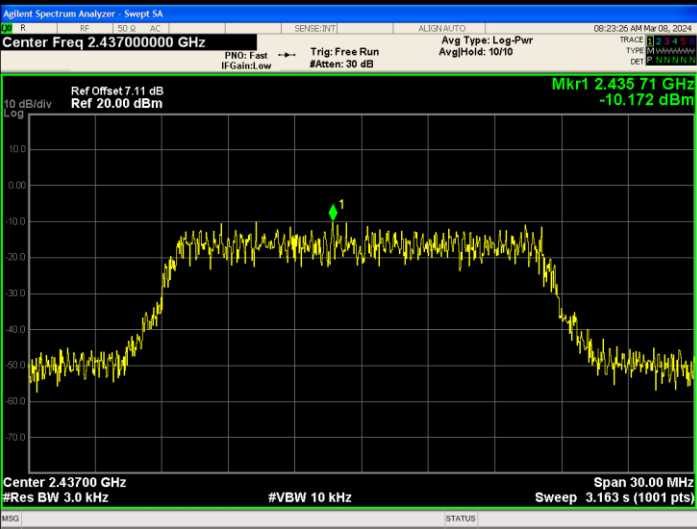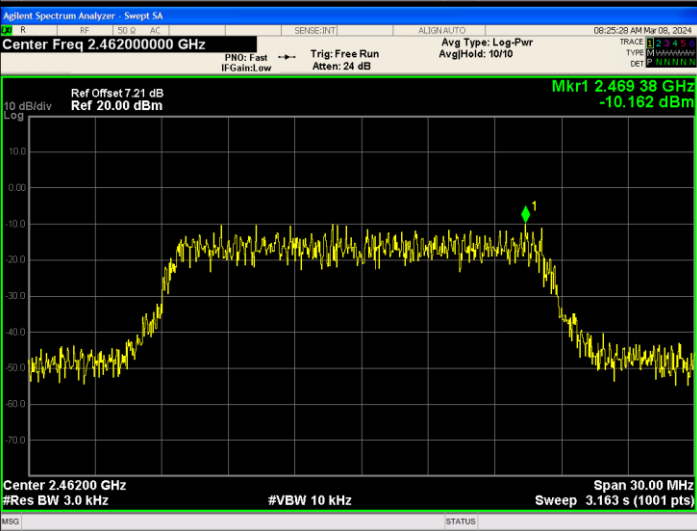
<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset: 7.03 dB Ref 20.00 dBm Mkr1 2.41938 GHz -10.602 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset: 7.11 dB Ref 20.00 dBm Mkr1 2.43571 GHz -10.172 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset: 7.21 dB Ref 20.00 dBm Mkr1 2.46938 GHz -10.162 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT20)/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset: 7.03 dB Ref 20.00 dBm Mkr1 2.41320 GHz -10.539 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset: 7.11 dB Ref 20.00 dBm Mkr1 2.43820 GHz -10.268 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset: 7.21 dB Ref 20.00 dBm Mkr1 2.46320 GHz -10.532 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Ref Offset: 7.03 dB Ref 20.00 dBm Mkr1 2.426 92 GHz -15.888 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset: 7.11 dB Ref 20.00 dBm Mkr1 2.430 34 GHz -16.305 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.45200000 GHz Ref Offset: 7.2 dB Ref 20.00 dBm Mkr1 2.445 34 GHz -16.408 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is 2.45dBi.


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G

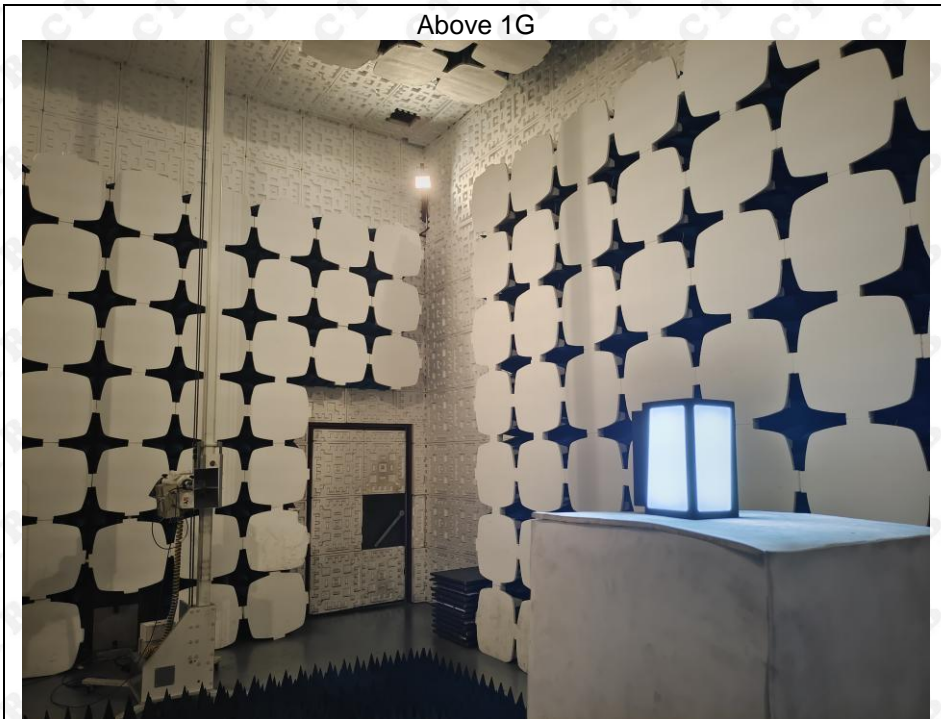

Conducted Emission

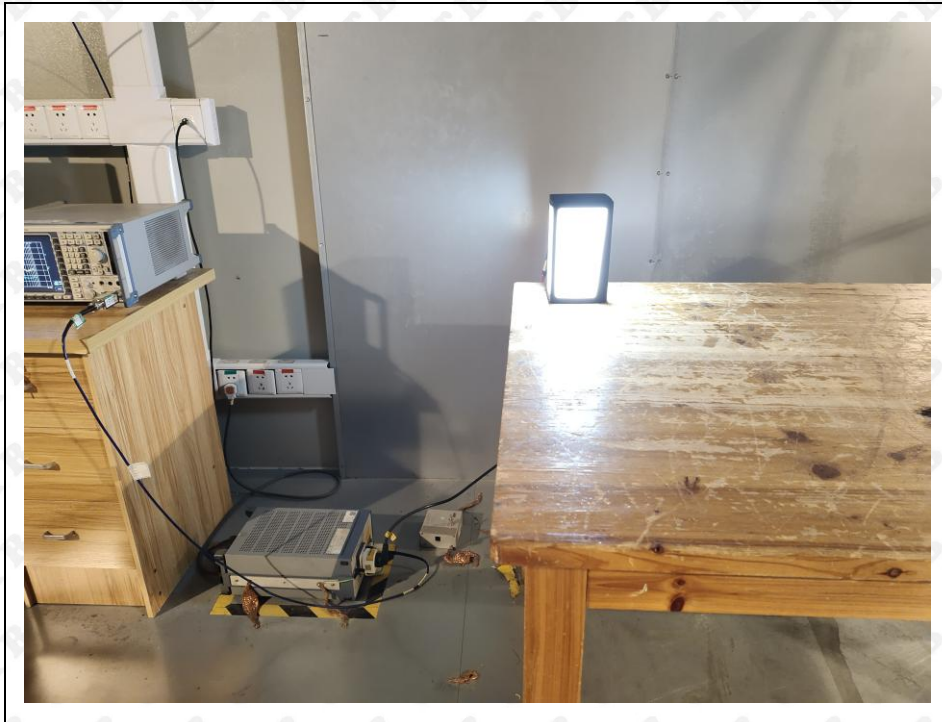

※※※※ END OF REPORT ※※※※