

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10418.1550	32.45	19.86	52.31	68.30	-15.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

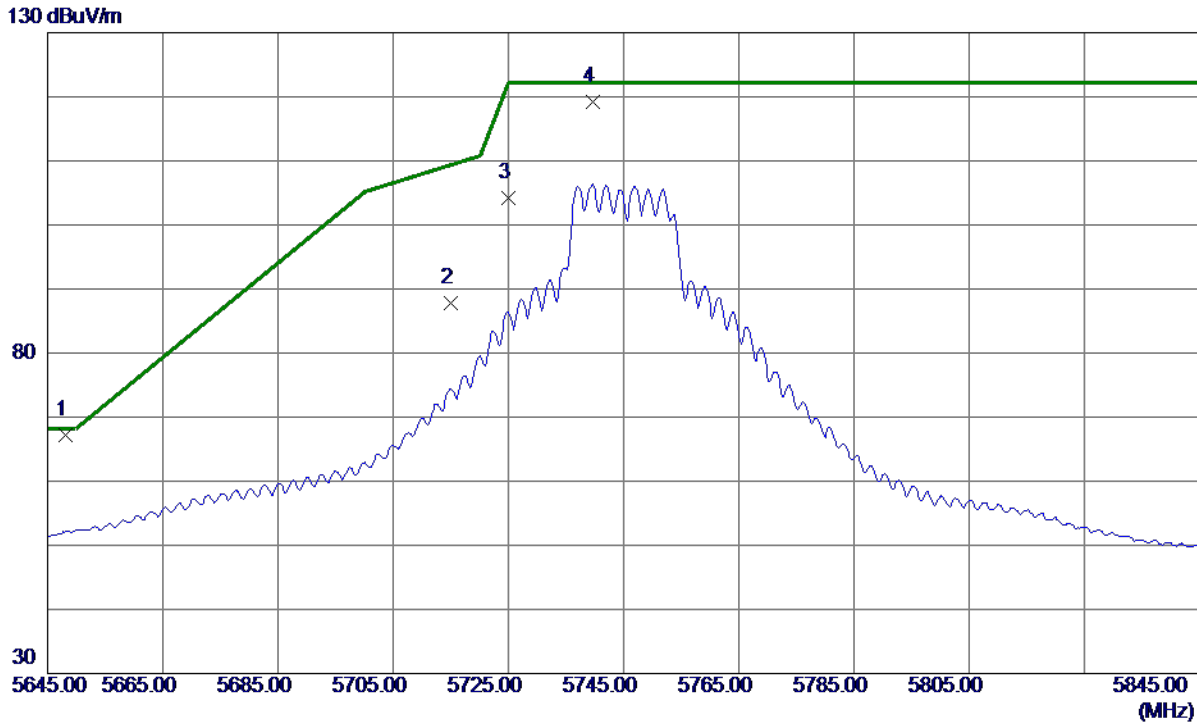

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.1000	51.74	15.53	67.27	68.20	-0.93	Peak	
2	5715.0000	72.08	15.65	87.73	109.40	-21.67	Peak	
3	5725.0000	88.60	15.67	104.27	122.20	-17.93	Peak	
4	5739.7000	103.59	15.70	119.29	122.20	-2.91	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

80 dBuV/m

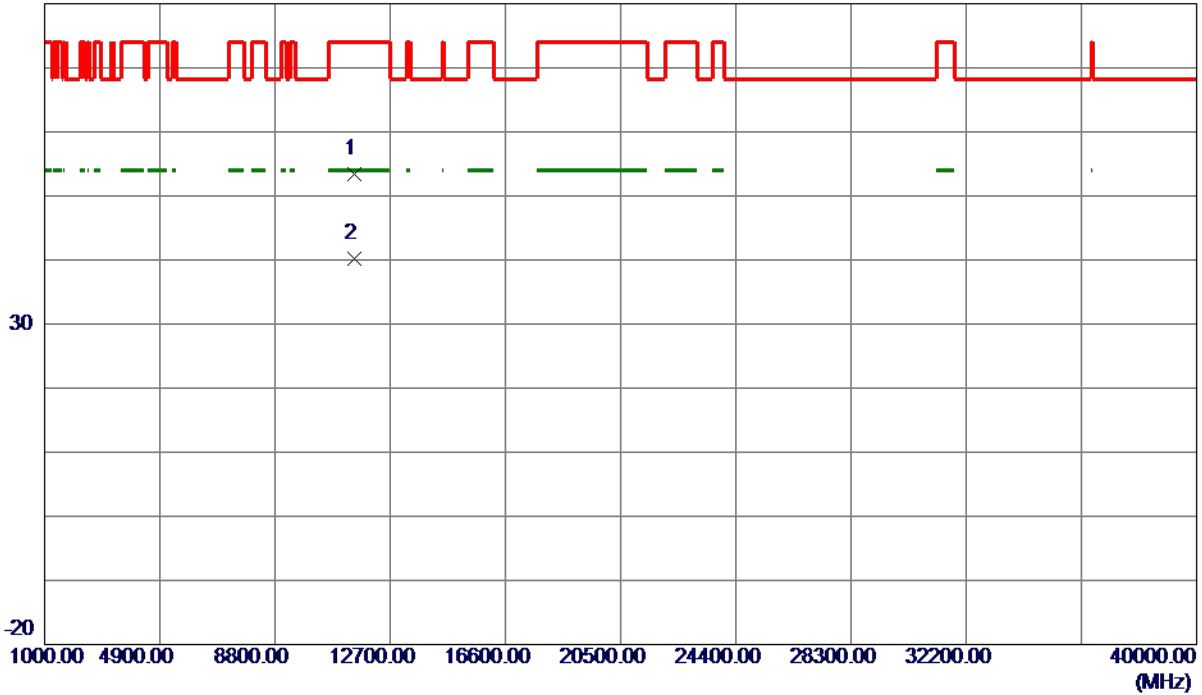

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.7650	32.67	20.68	53.35	74.00	-20.65	Peak	
2 *	11488.0150	19.52	20.68	40.20	54.00	-13.80	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

130 dBuV/m

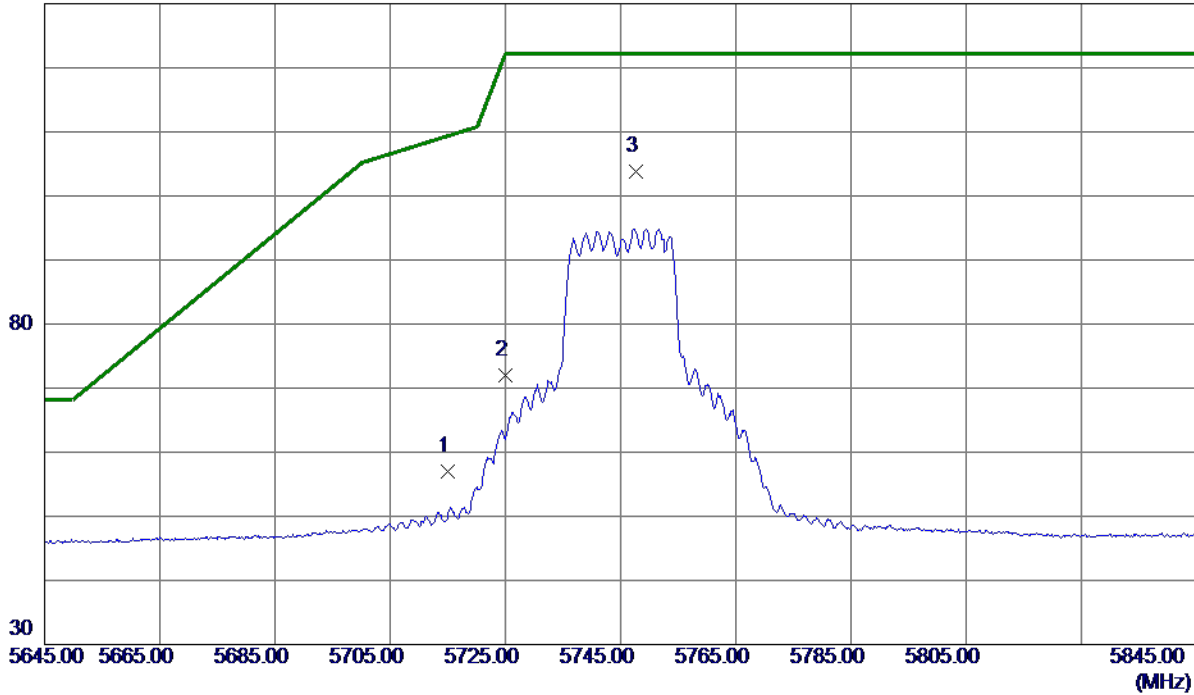


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.44	15.65	57.09	109.40	-52.31	Peak	
2	5725.0000	56.40	15.67	72.07	122.20	-50.13	Peak	
3 *	5747.6000	88.13	15.71	103.84	122.20	-18.36	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

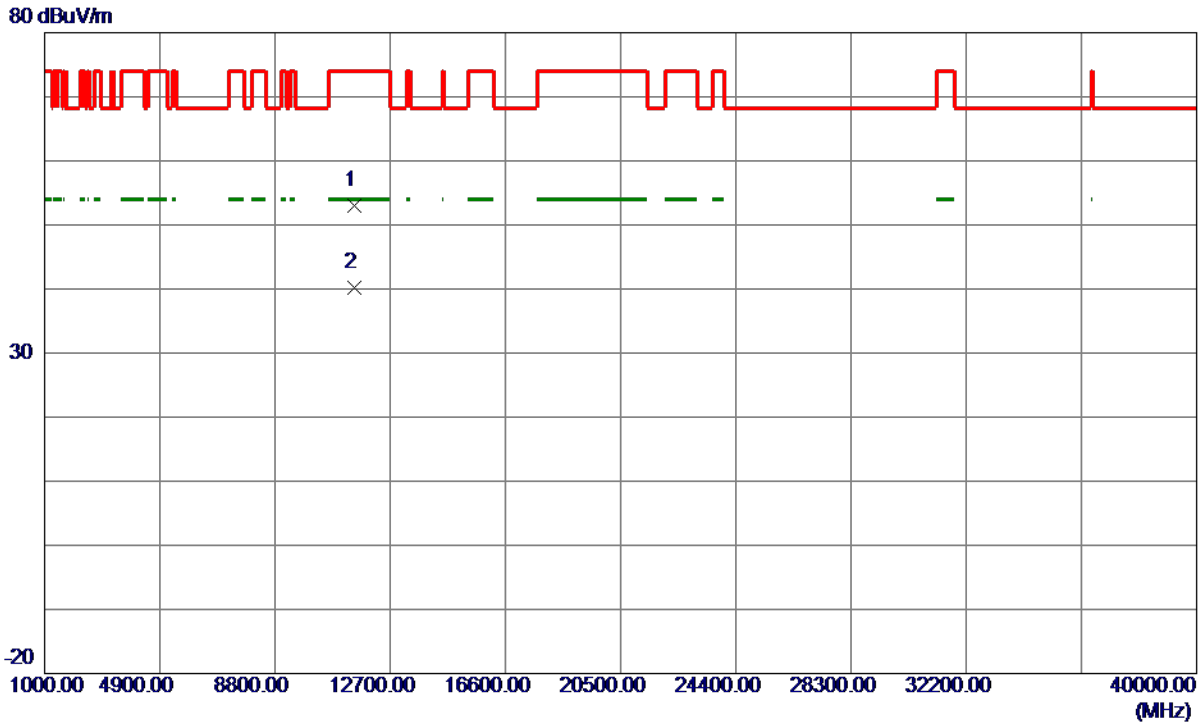


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11488.4000	32.35	20.68	53.03	74.00	-20.97	Peak	
2 *	11491.9150	19.53	20.68	40.21	54.00	-13.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

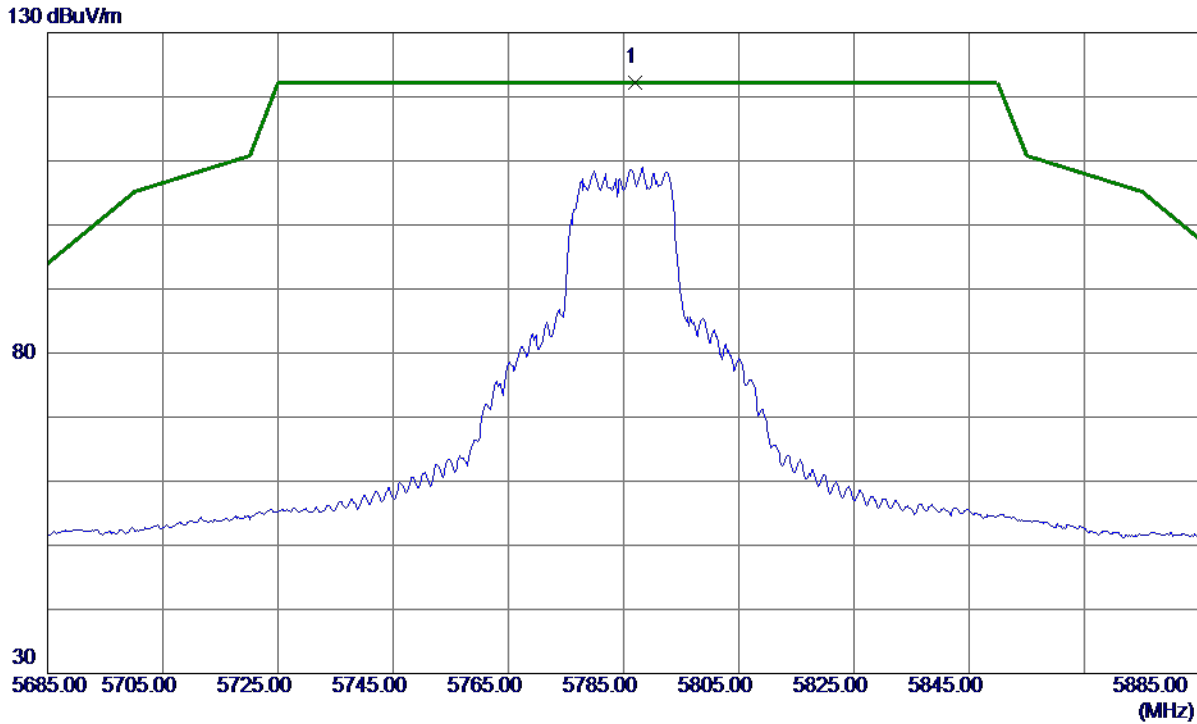

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.1000	106.37	15.78	122.15	122.20	-0.05	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

80 dBuV/m

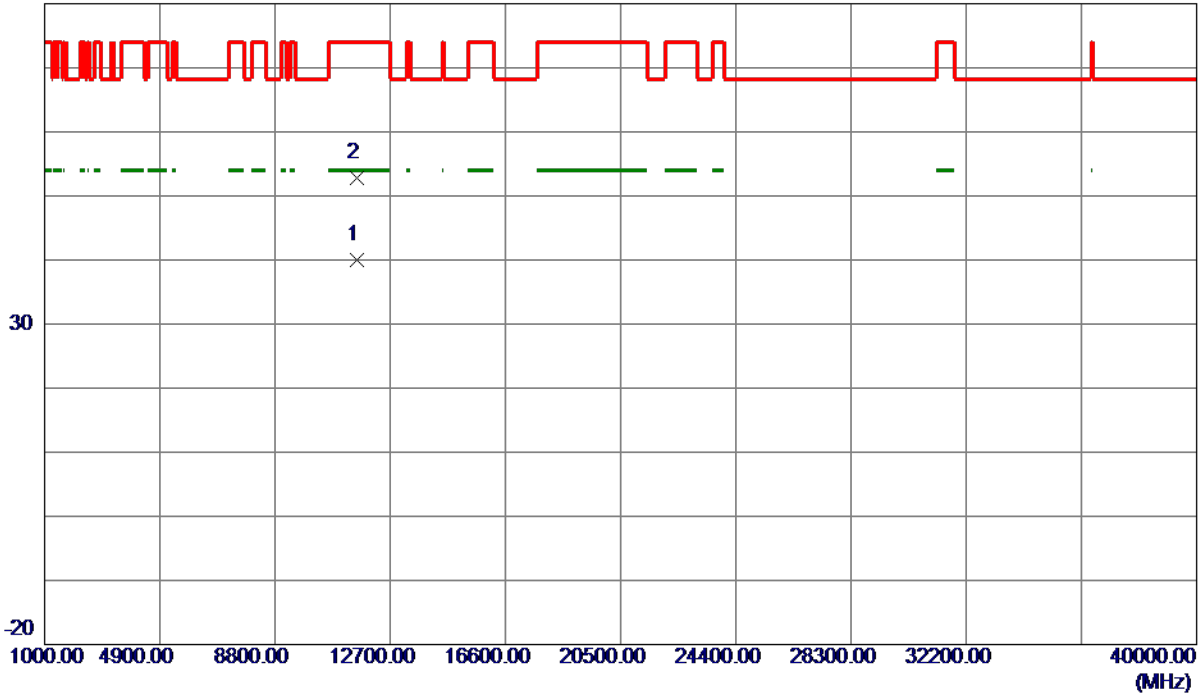


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.4550	19.24	20.72	39.96	54.00	-14.04	AVG	
2	11572.1100	31.99	20.72	52.71	74.00	-21.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

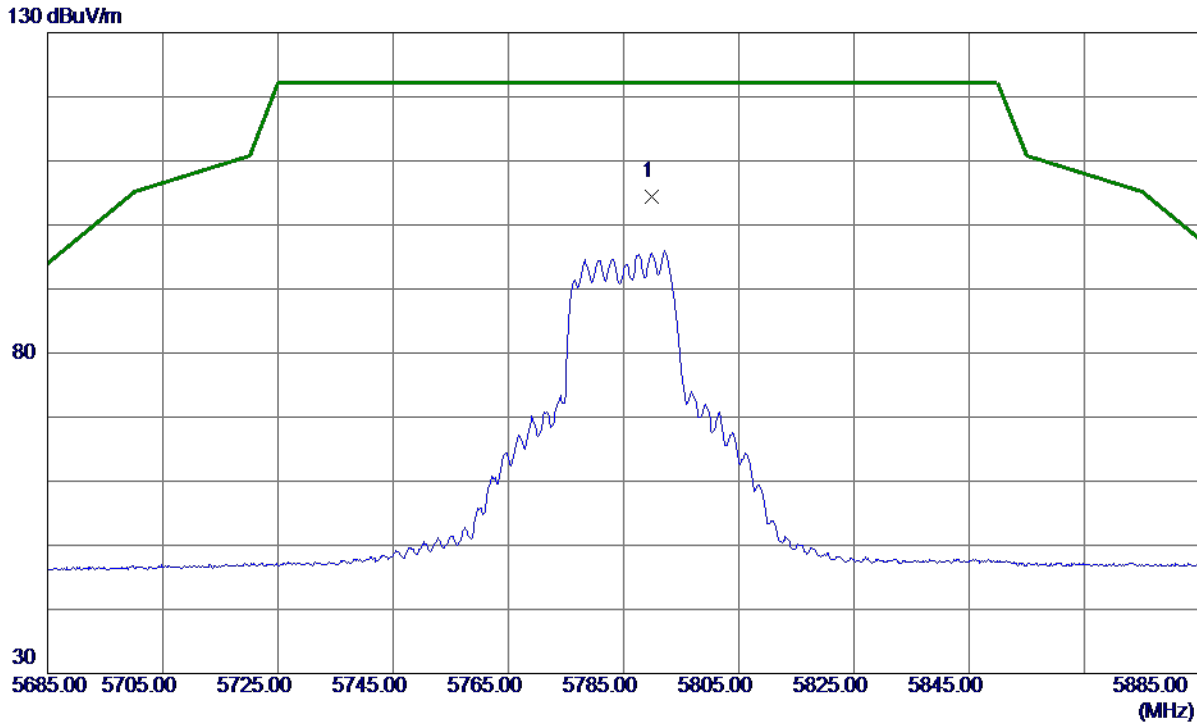


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5789.9000	88.69	15.79	104.48	122.20	-17.72	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

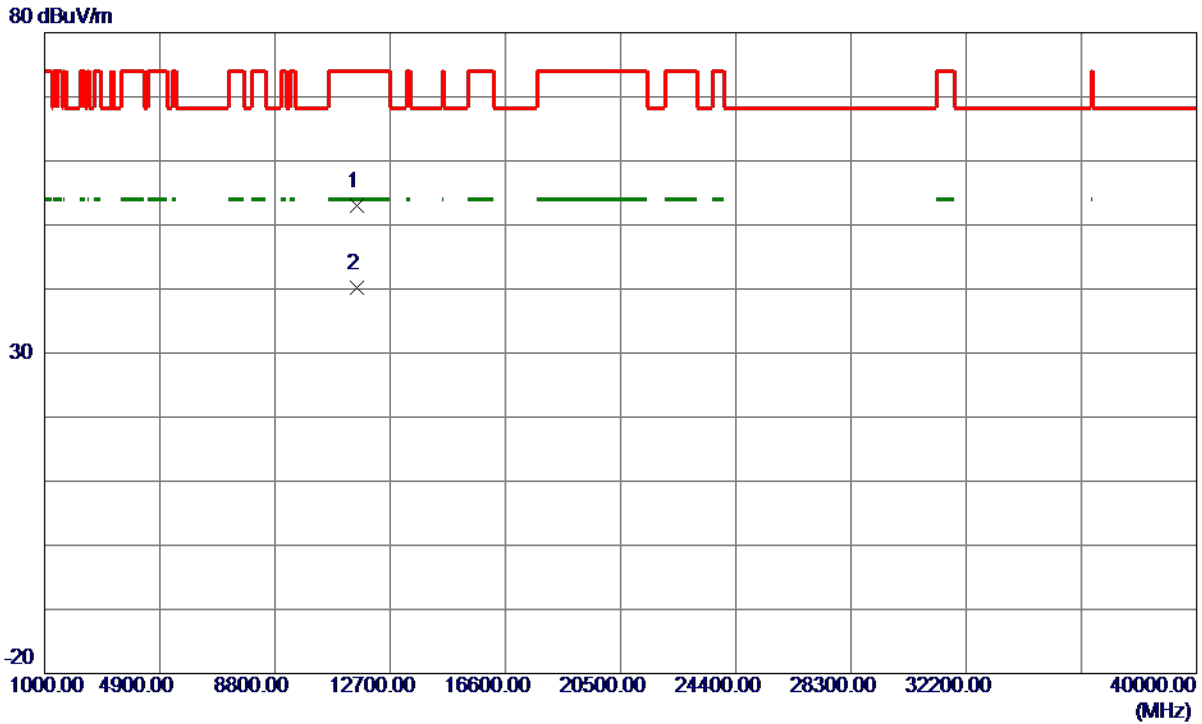


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11571.1400	32.18	20.72	52.90	74.00	-21.10	Peak	
2 *	11571.2550	19.38	20.72	40.10	54.00	-13.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

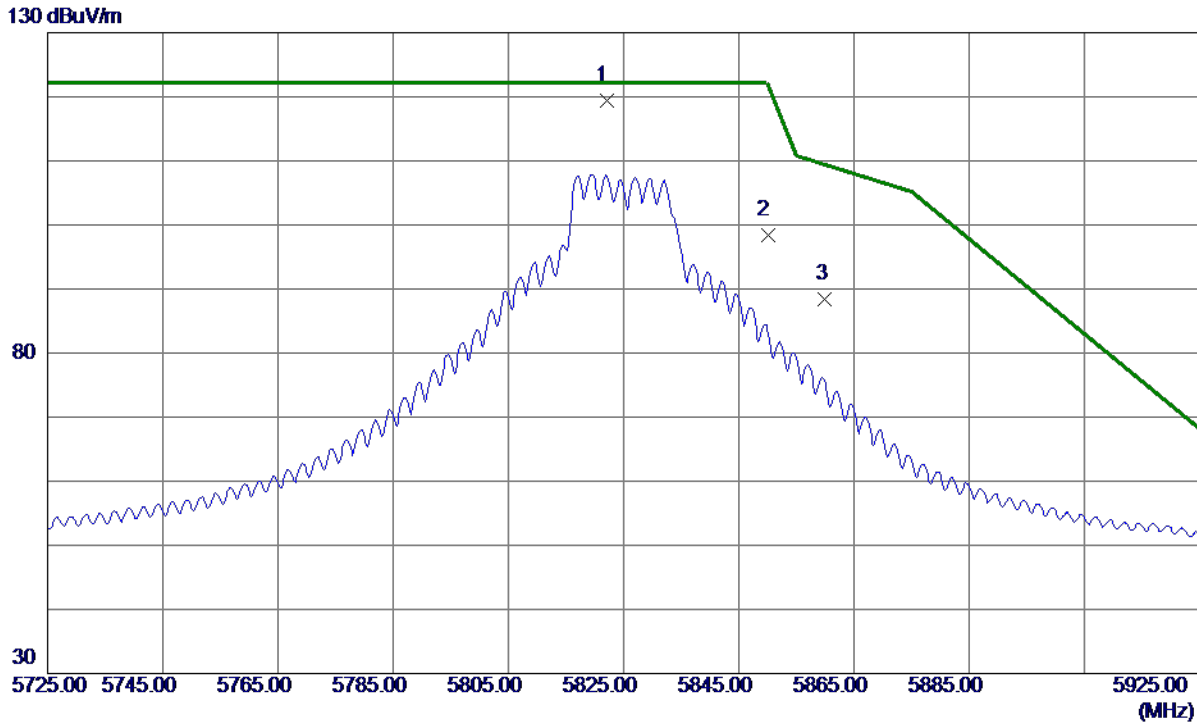


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.0000	103.59	15.85	119.44	122.20	-2.76	Peak	No Limit
2	5850.0000	82.47	15.90	98.37	122.20	-23.83	Peak	
3	5860.0000	72.52	15.92	88.44	109.40	-20.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

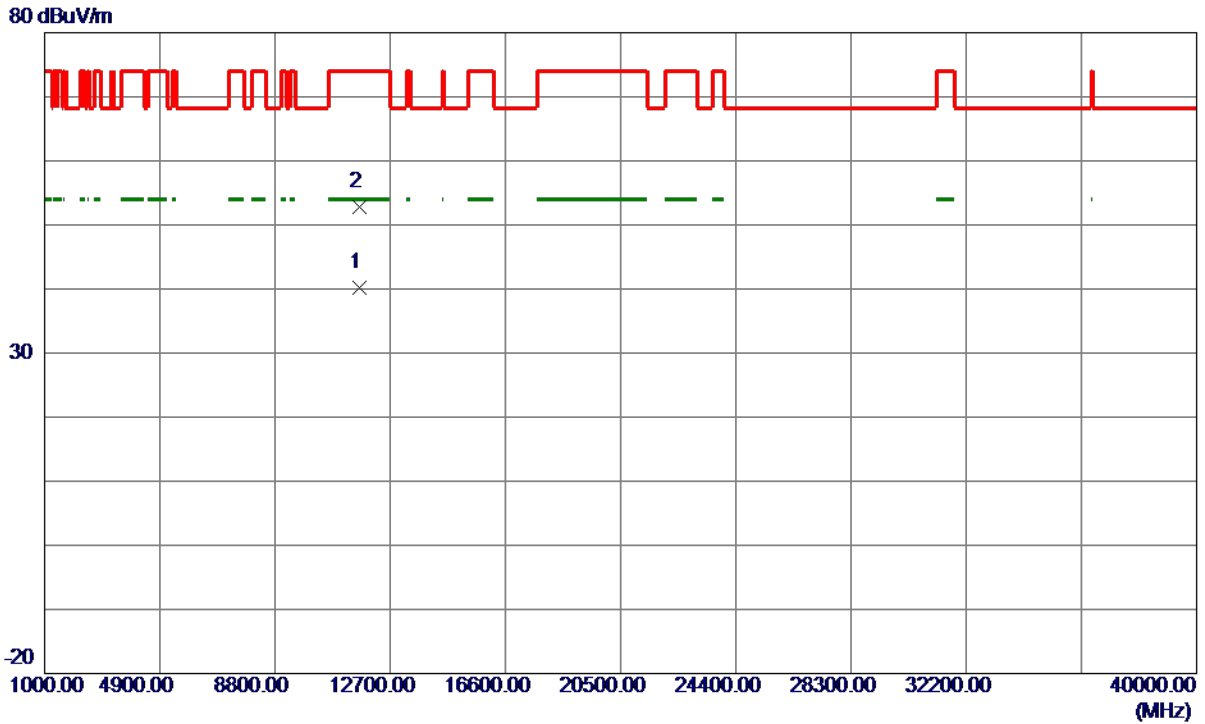


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11647.7100	19.36	20.77	40.13	54.00	-13.87	AVG	
2	11651.1100	31.96	20.77	52.73	74.00	-21.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

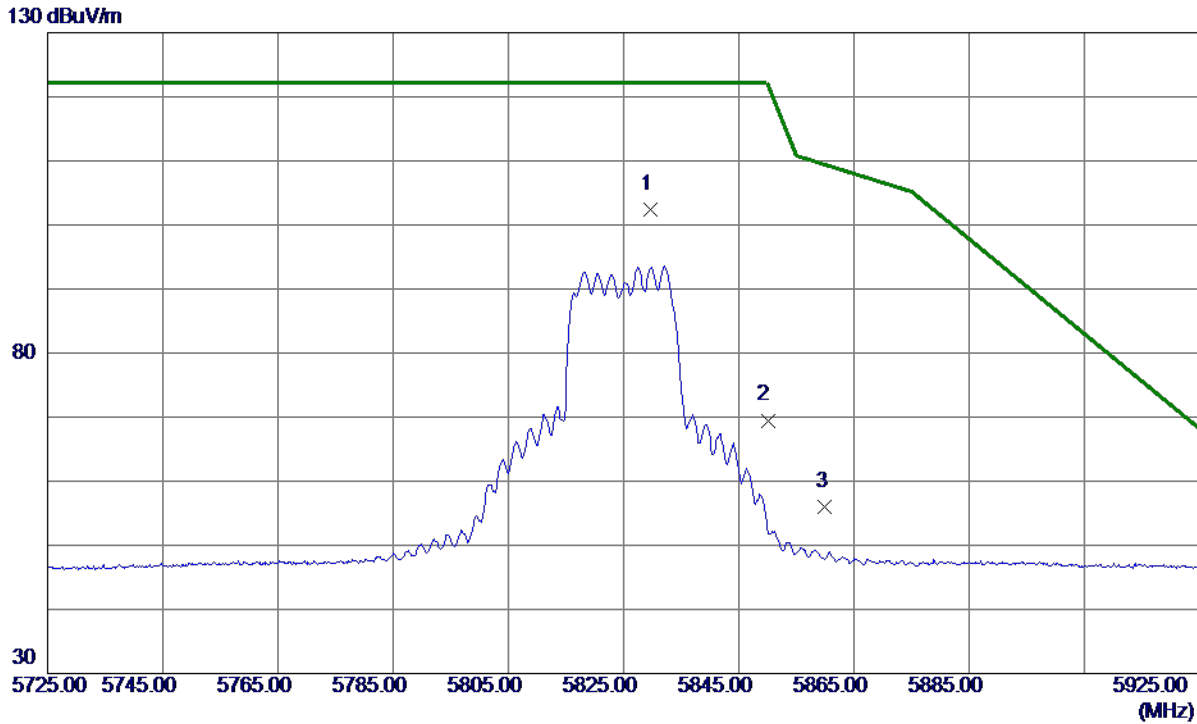


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5829.7000	86.50	15.86	102.36	122.20	-19.84	Peak	No Limit
2	5850.0000	53.60	15.90	69.50	122.20	-52.70	Peak	
3	5860.0000	40.13	15.92	56.05	109.40	-53.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

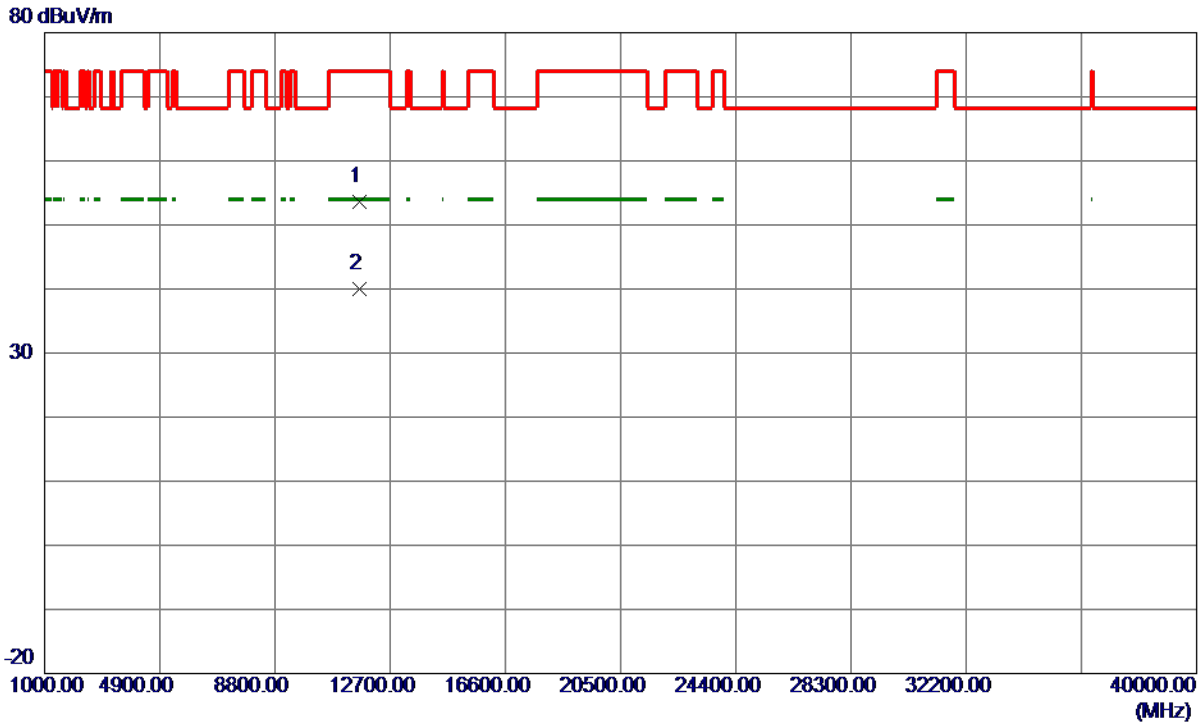


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.8050	32.86	20.77	53.63	74.00	-20.37	Peak	
2 *	11650.1500	19.22	20.77	39.99	54.00	-14.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

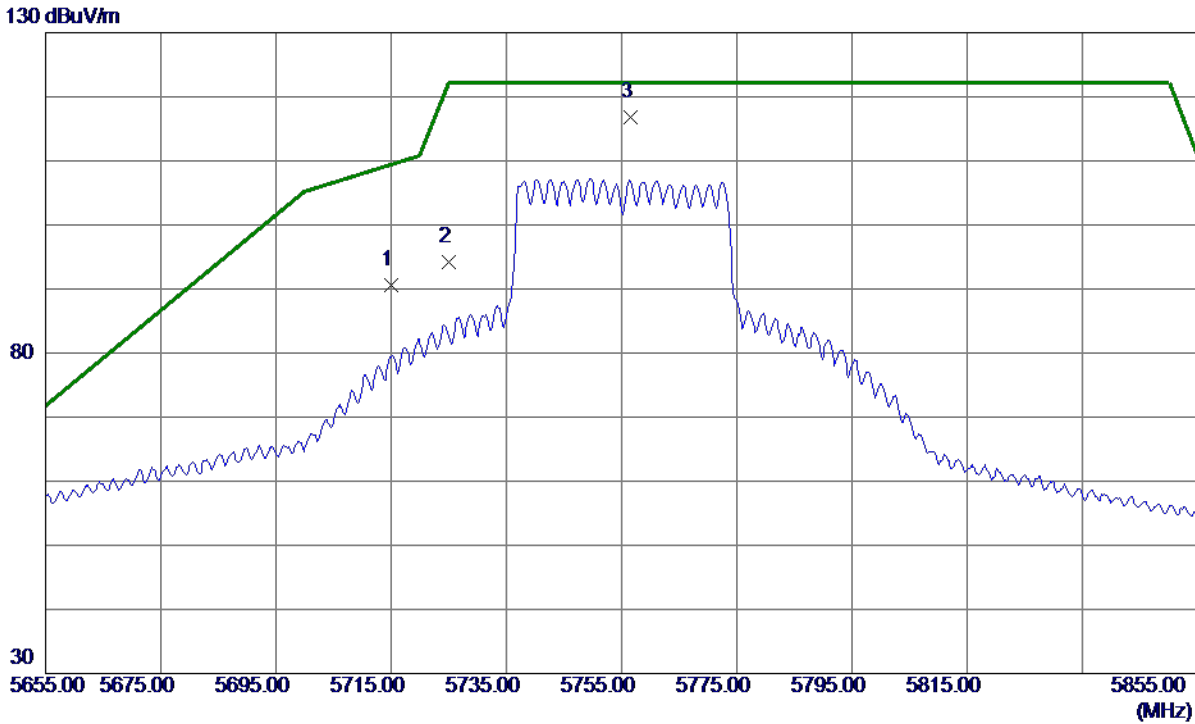


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	74.97	15.65	90.62	109.40	-18.78	Peak	
2	5725.0000	78.55	15.67	94.22	122.20	-27.98	Peak	
3 *	5756.6000	100.97	15.73	116.70	122.20	-5.50	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

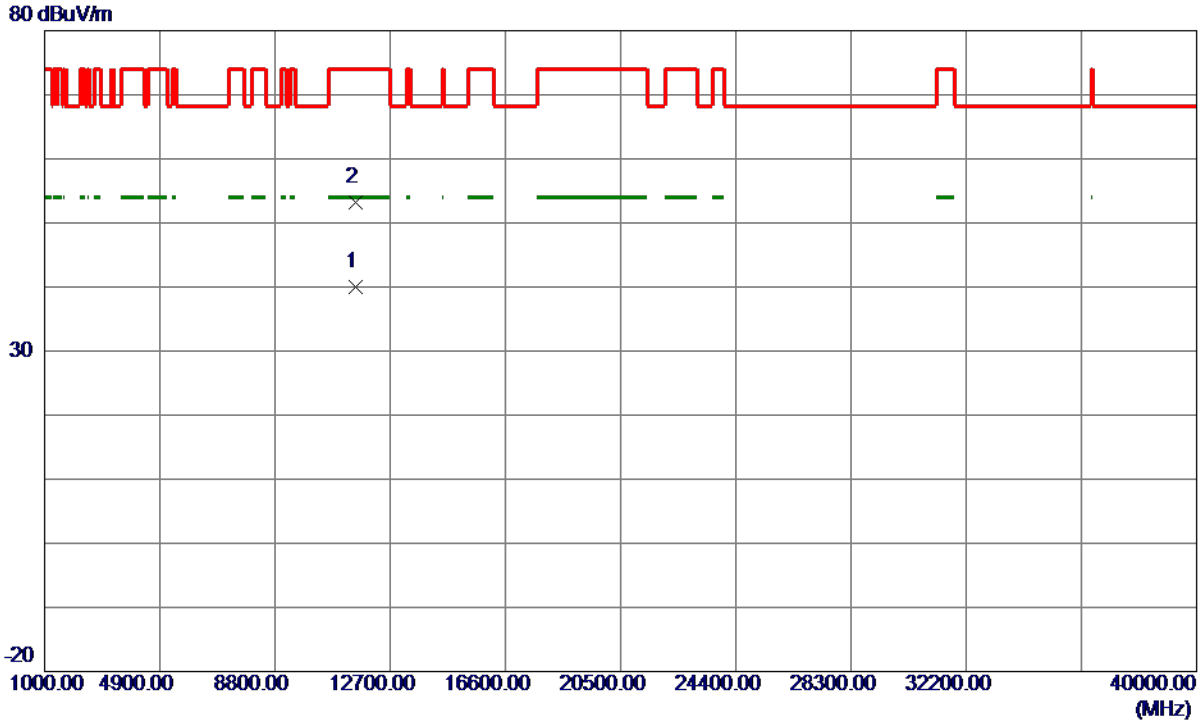

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.0250	19.39	20.69	40.08	54.00	-13.92	AVG	
2	11509.5500	32.53	20.69	53.22	74.00	-20.78	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

130 dBuV/m

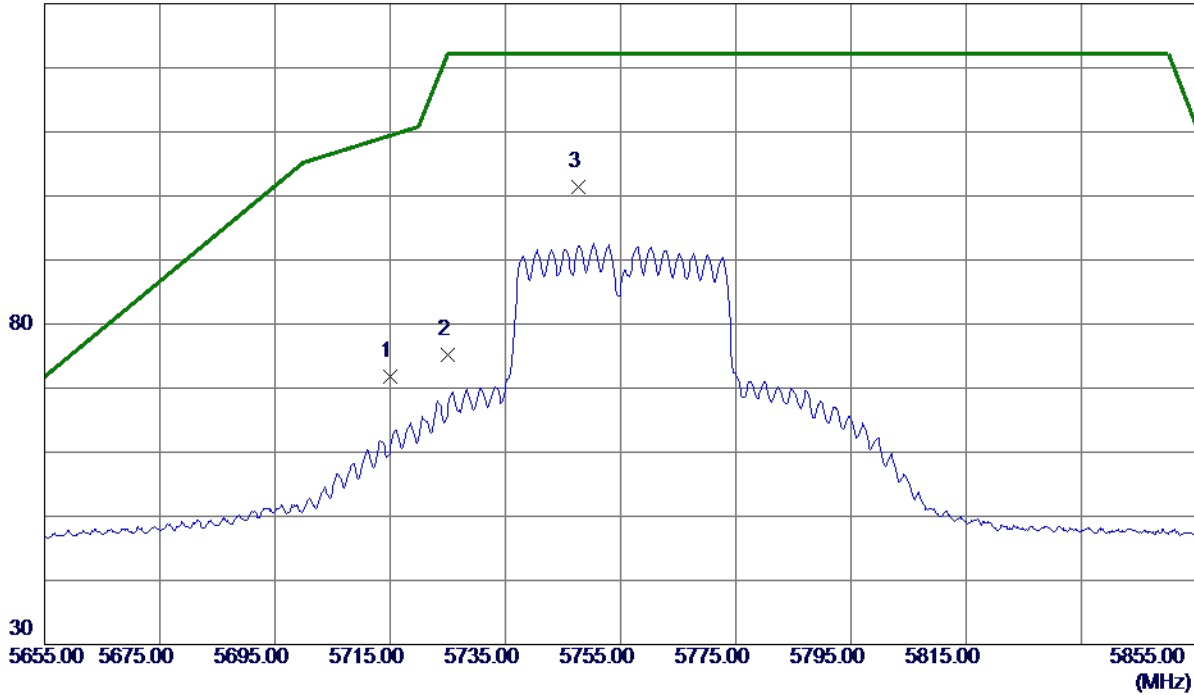

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	56.21	15.65	71.86	109.40	-37.54	Peak	
2	5725.0000	59.50	15.67	75.17	122.20	-47.03	Peak	
3 *	5747.6000	85.76	15.71	101.47	122.20	-20.73	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.0750	19.31	20.69	40.00	54.00	-14.00	AVG	
2	11511.9400	32.58	20.69	53.27	74.00	-20.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

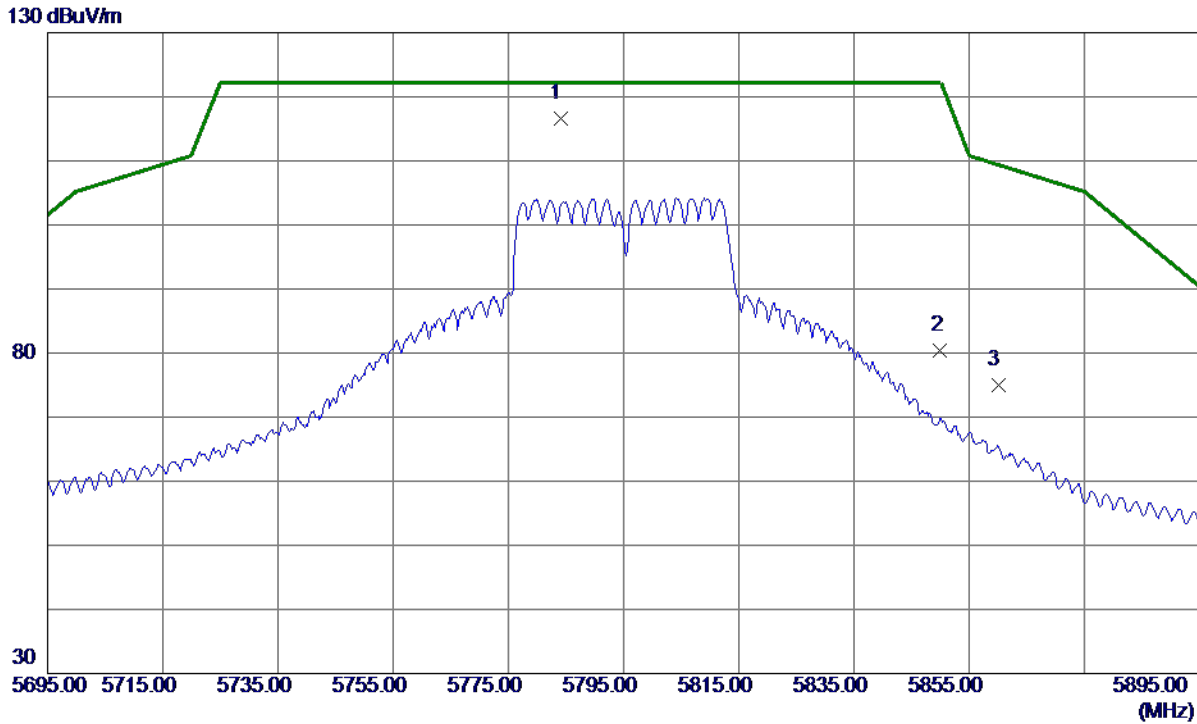


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5784.0000	100.79	15.78	116.57	122.20	-5.63	Peak	No Limit
2	5850.0000	64.54	15.90	80.44	122.20	-41.76	Peak	
3	5860.0000	59.03	15.92	74.95	109.40	-34.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

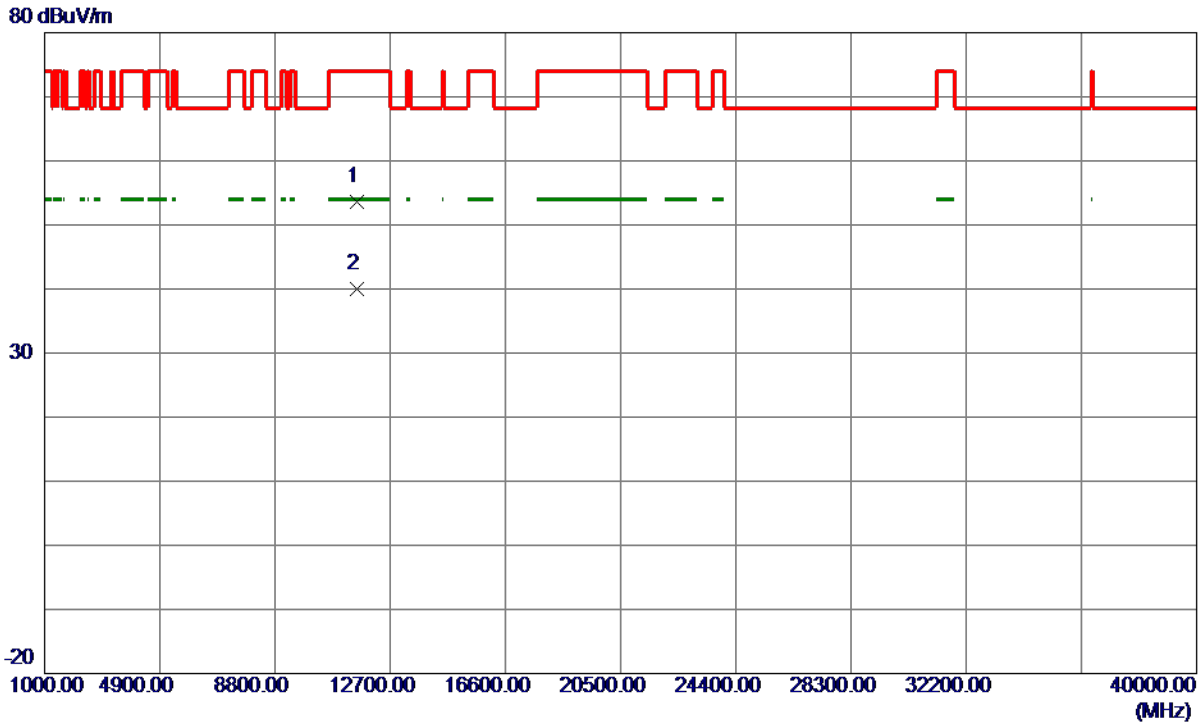


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11589.0950	32.95	20.73	53.68	74.00	-20.32	Peak	
2 *	11590.6200	19.23	20.73	39.96	54.00	-14.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

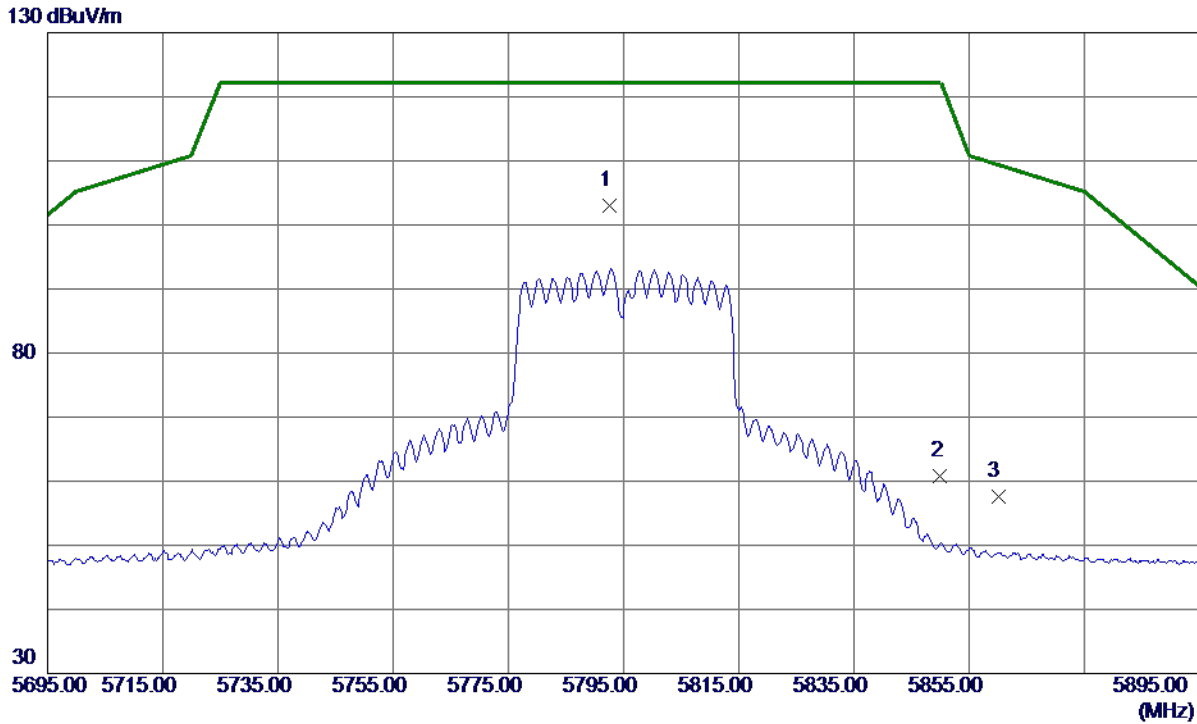

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.6000	87.19	15.79	102.98	122.20	-19.22	Peak	No Limit
2	5850.0000	44.87	15.90	60.77	122.20	-61.43	Peak	
3	5860.0000	41.67	15.92	57.59	109.40	-51.81	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

80 dBuV/m

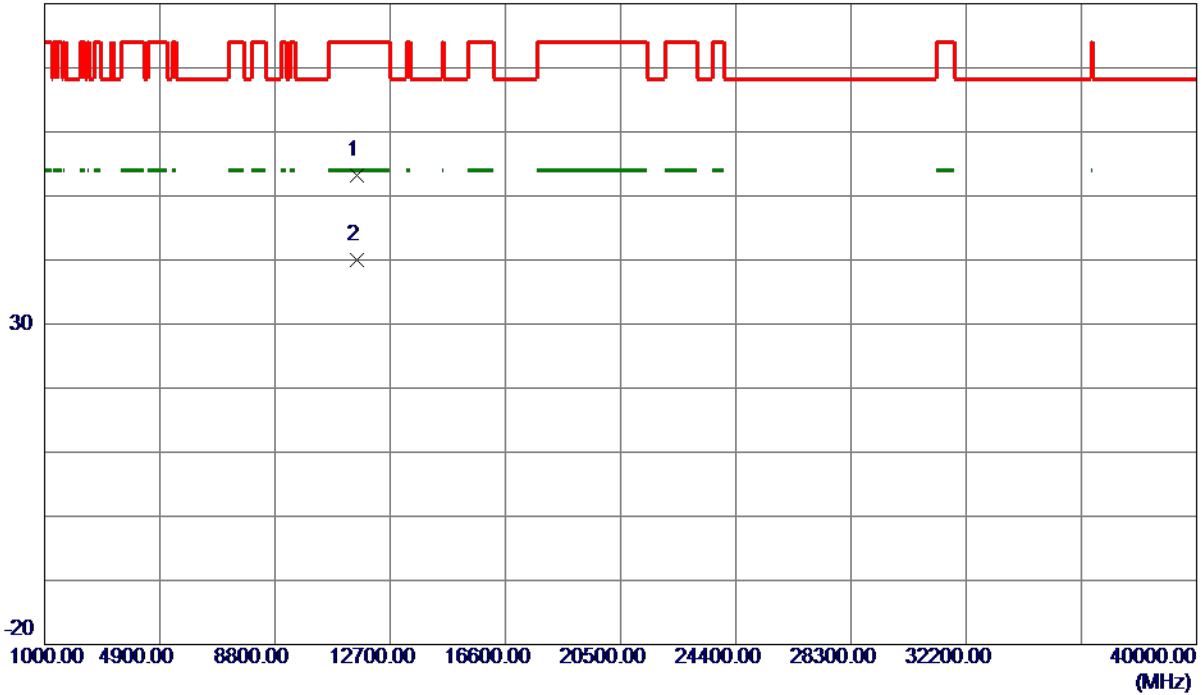


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.5650	32.53	20.73	53.26	74.00	-20.74	Peak	
2 *	11590.6100	19.32	20.73	40.05	54.00	-13.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

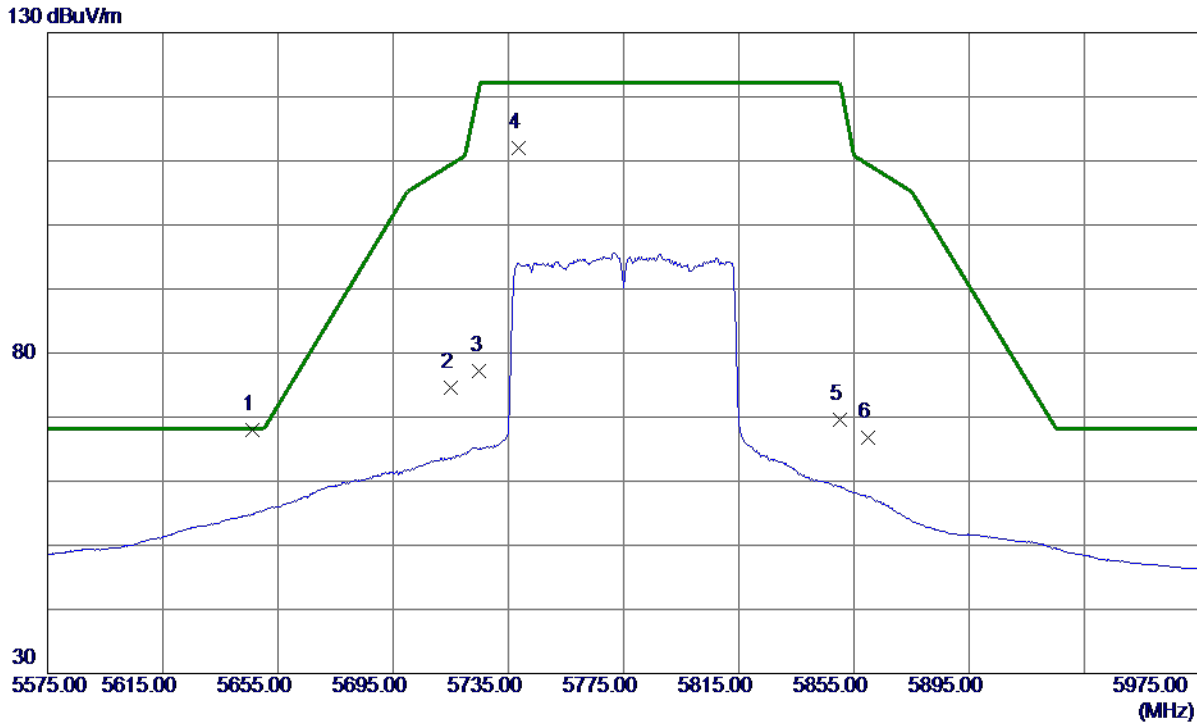


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.2000	52.44	15.53	67.97	68.20	-0.23	Peak	
2	5715.0000	58.93	15.65	74.58	109.40	-34.82	Peak	
3	5725.0000	61.47	15.67	77.14	122.20	-45.06	Peak	
4	5738.6000	96.22	15.69	111.91	122.20	-10.29	Peak	No Limit
5	5850.0000	53.70	15.90	69.60	122.20	-52.60	Peak	
6	5860.0000	50.95	15.92	66.87	109.40	-42.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

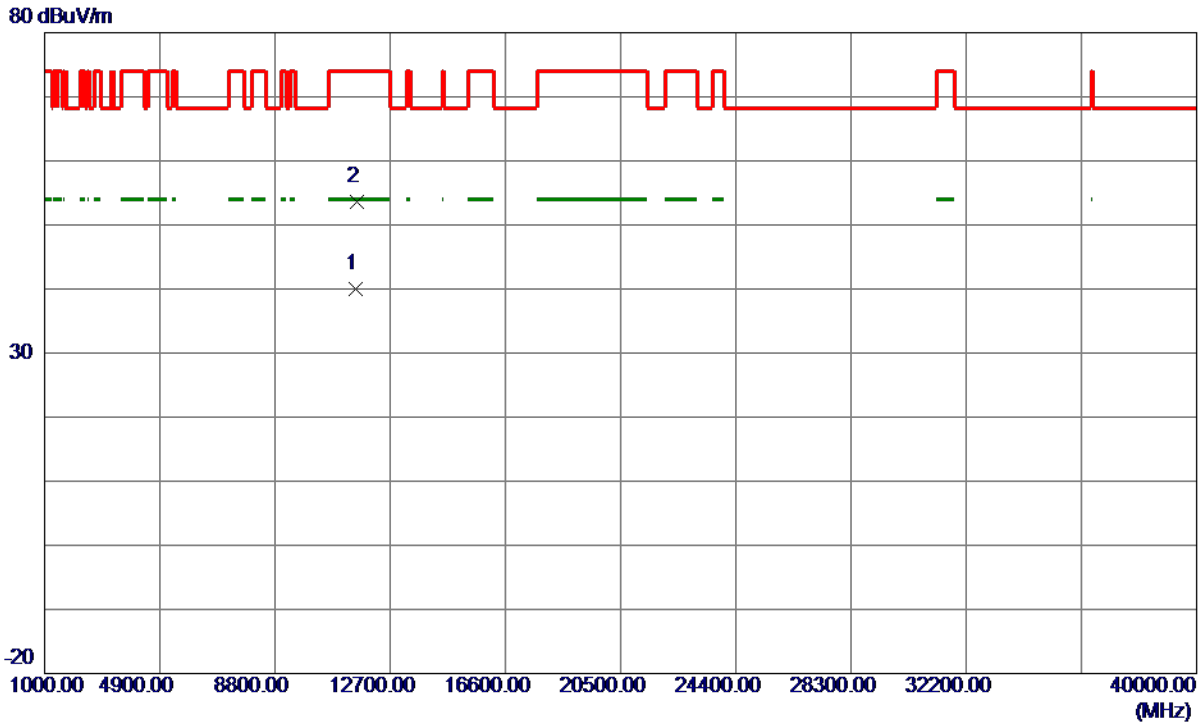

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11551.5500	19.24	20.71	39.95	54.00	-14.05	AVG	
2	11551.7500	32.98	20.71	53.69	74.00	-20.31	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

130 dBuV/m

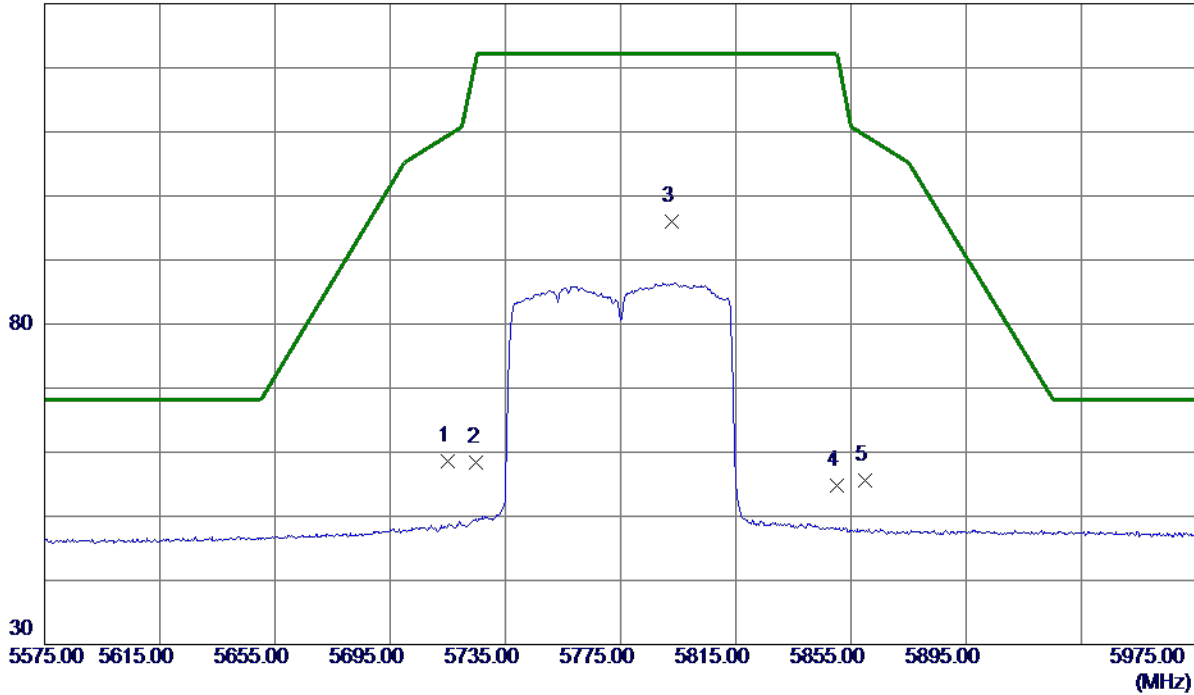

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	42.97	15.65	58.62	109.40	-50.78	Peak	
2	5725.0000	42.67	15.67	58.34	122.20	-63.86	Peak	
3 *	5792.6000	80.17	15.79	95.96	122.20	-26.24	Peak	No Limit
4	5850.0000	38.87	15.90	54.77	122.20	-67.43	Peak	
5	5860.0000	39.61	15.92	55.53	109.40	-53.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11548.0300	19.40	20.71	40.11	54.00	-13.89	AVG	
2	11551.3400	32.14	20.71	52.85	74.00	-21.15	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5180 MHz

Vertical

130 dBuV/m

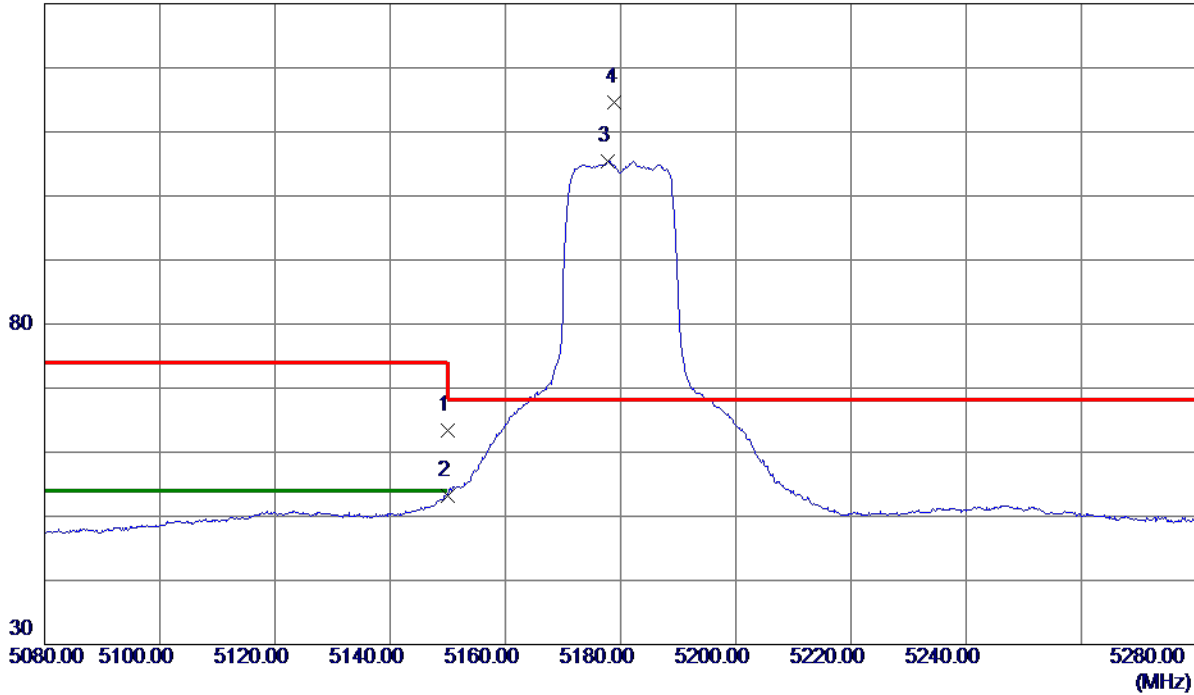


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.31	15.02	63.33	74.00	-10.67	Peak	
2	5150.0000	38.21	15.02	53.23	54.00	-0.77	AVG	
3	5177.8000	90.39	15.03	105.42	999.00	-893.58	AVG	No Limit
4 *	5179.0000	99.62	15.04	114.66	68.30	46.36	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5180 MHz

Vertical

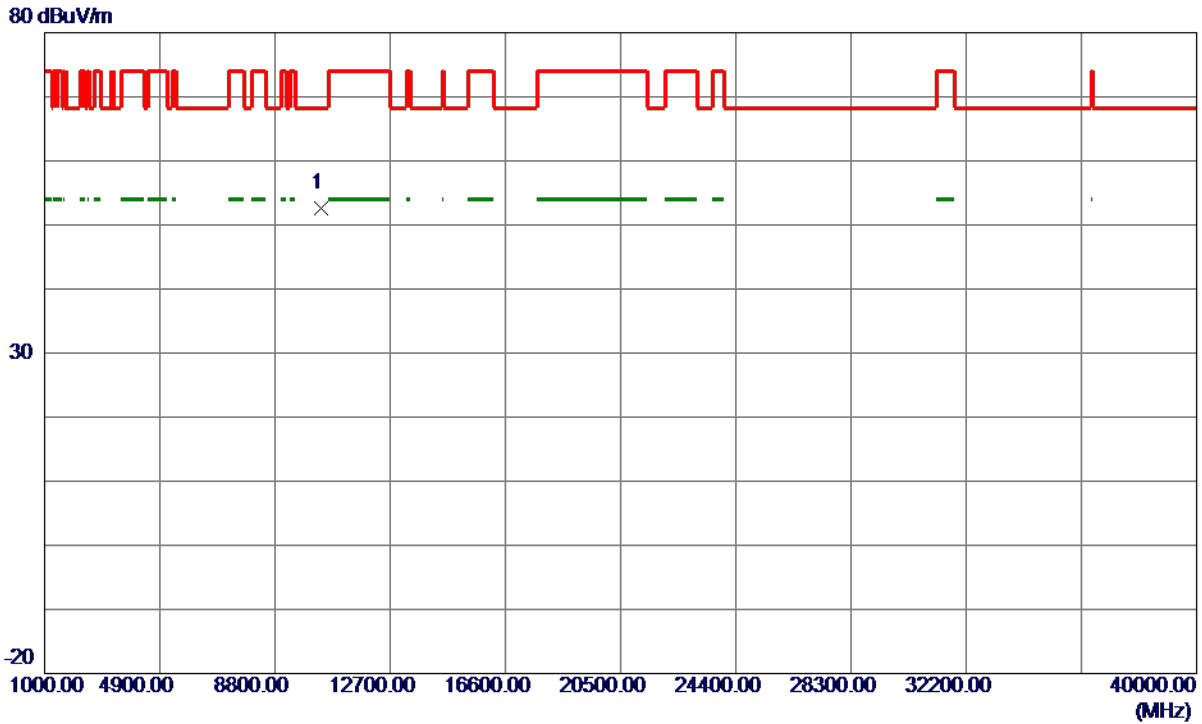

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10362.4750	32.76	19.78	52.54	68.30	-15.76	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5180 MHz

Horizontal

130 dBuV/m

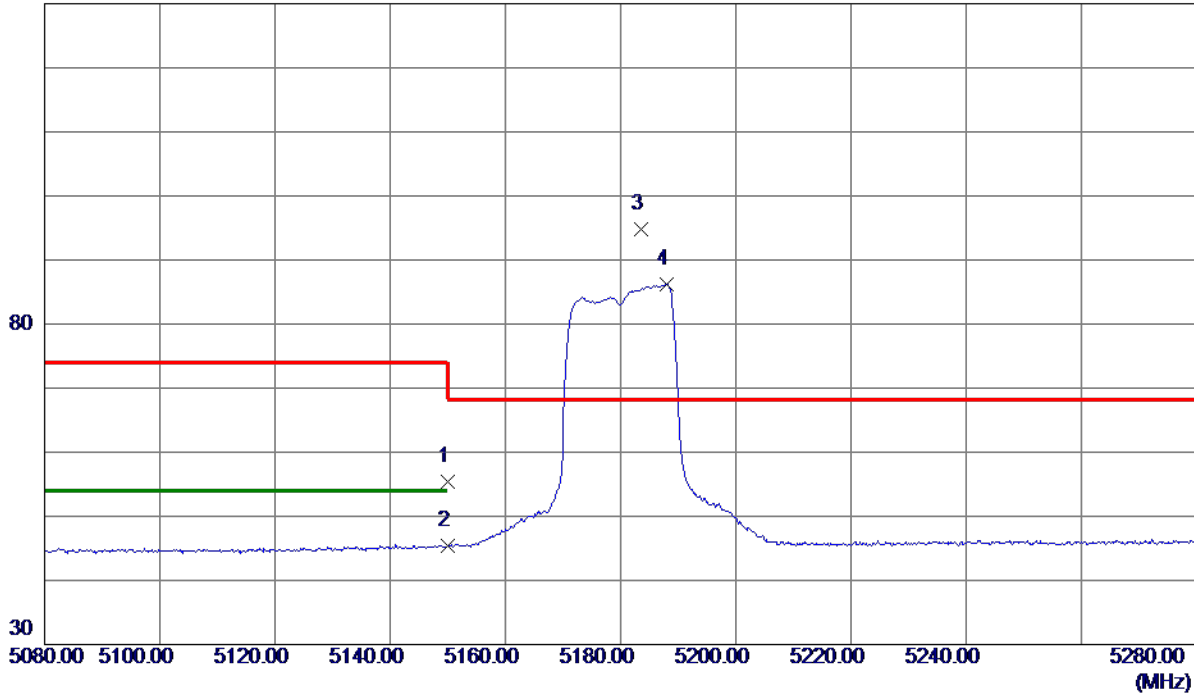


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.36	15.02	55.38	74.00	-18.62	Peak	
2	5150.0000	30.31	15.02	45.33	54.00	-8.67	AVG	
3 *	5183.6000	79.73	15.04	94.77	68.30	26.47	Peak	No Limit
4	5188.0000	71.09	15.04	86.13	999.00	-912.87	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5180 MHz

Horizontal

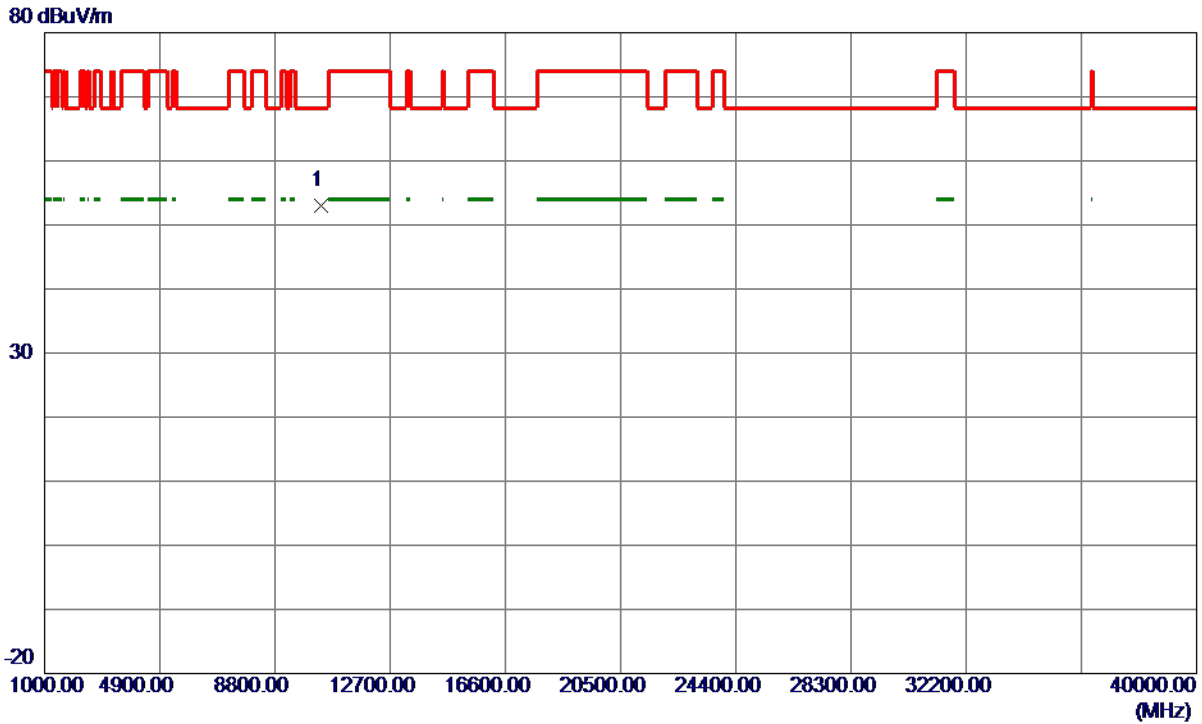

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10359.4450	33.22	19.78	53.00	68.30	-15.30	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5200 MHz

Vertical

130 dBuV/m

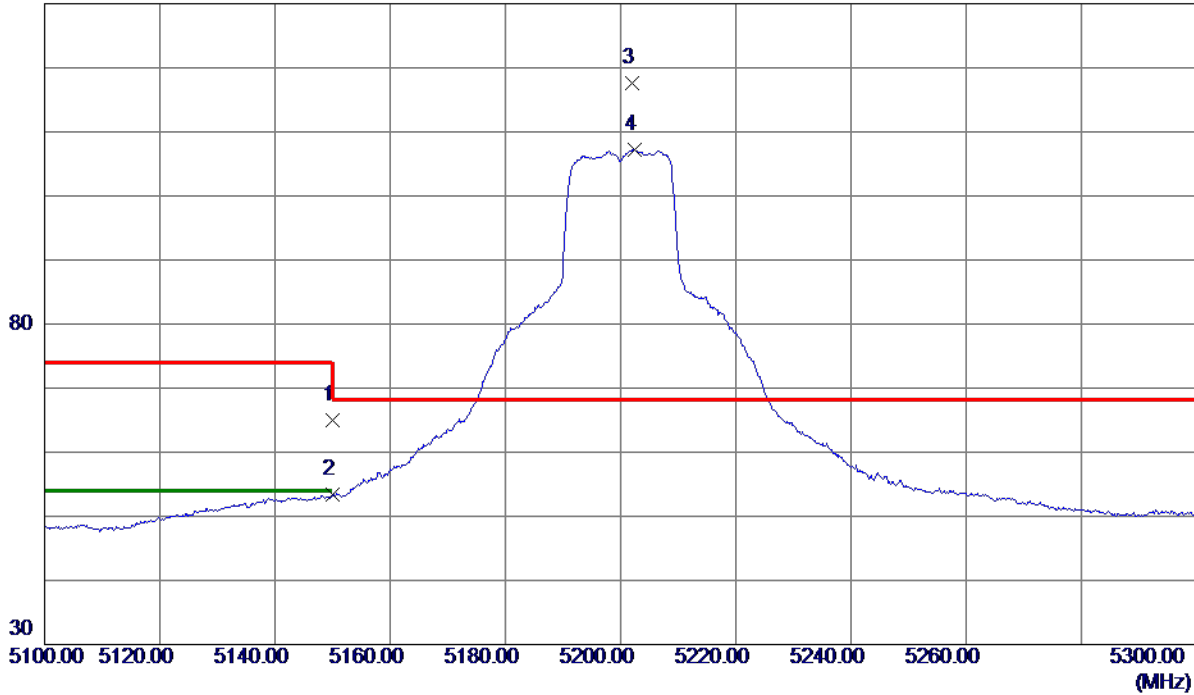


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.91	15.02	64.93	74.00	-9.07	Peak	
2	5150.0000	38.29	15.02	53.31	54.00	-0.69	AVG	
3 *	5201.9000	102.51	15.05	117.56	68.30	49.26	Peak	No Limit
4	5202.4000	92.19	15.05	107.24	999.00	-891.76	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5200 MHz

Vertical

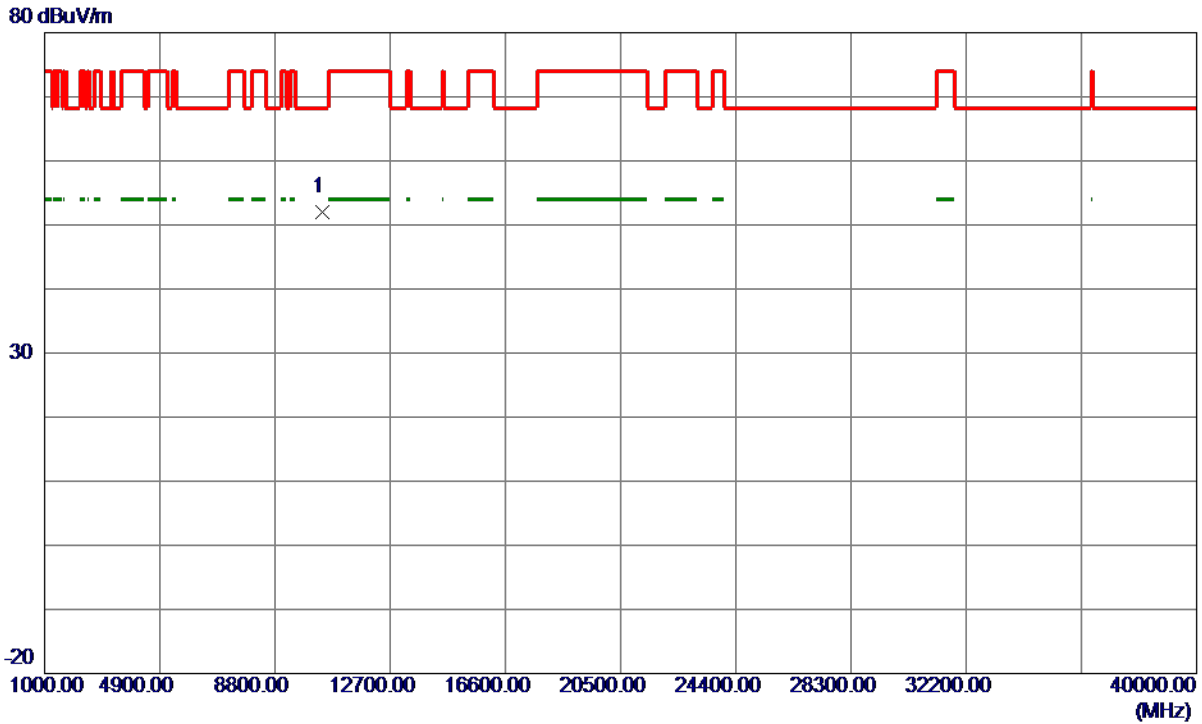

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10399.3550	32.10	19.83	51.93	68.30	-16.37	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5200 MHz

Horizontal

130 dBuV/m

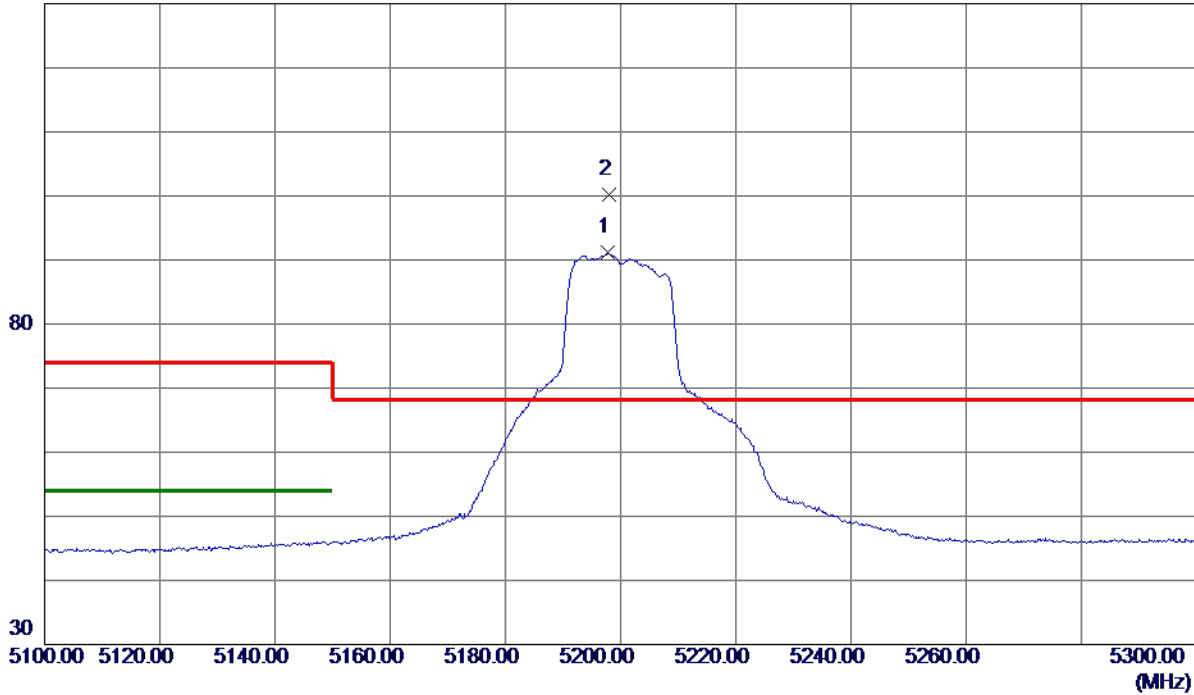

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5197.7000	76.08	15.05	91.13	999.00	-907.87	AVG	No Limit
2 *	5198.0000	85.13	15.05	100.18	68.30	31.88	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5200 MHz

Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10401.8350	32.58	19.83	52.41	68.30	-15.89	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5240 MHz

Vertical

130 dBuV/m

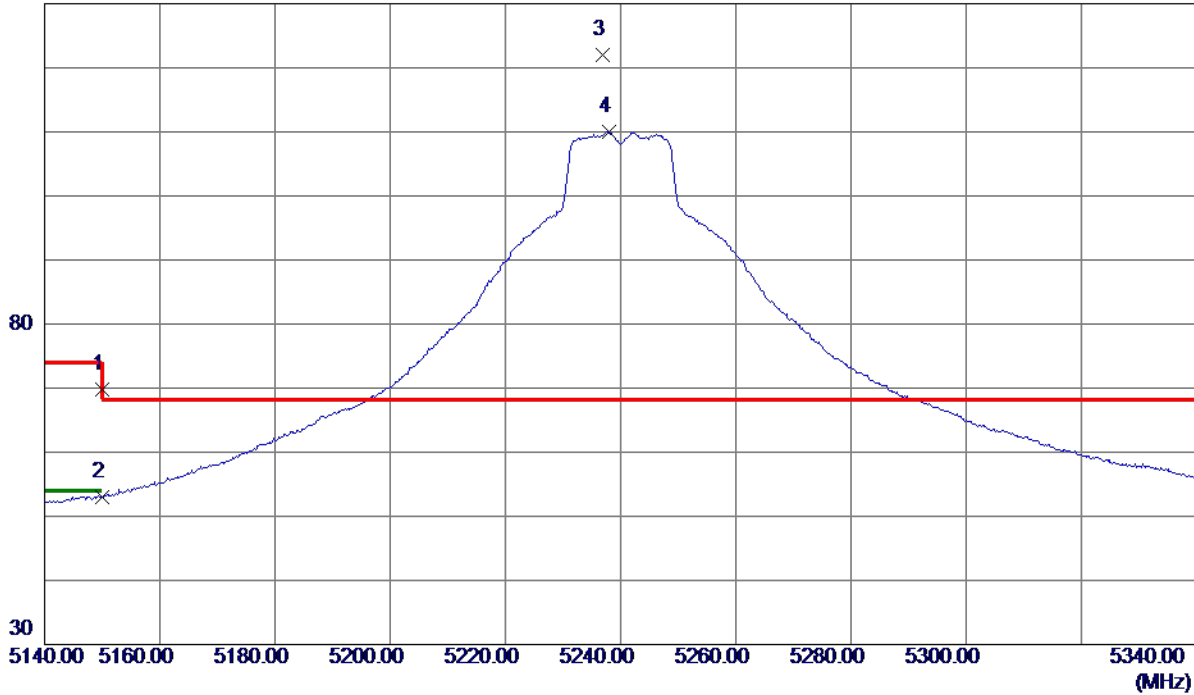

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	54.75	15.02	69.77	74.00	-4.23	Peak	
2	5150.0000	38.07	15.02	53.09	54.00	-0.91	AVG	
3 *	5236.9000	107.01	15.08	122.09	68.30	53.79	Peak	No Limit
4	5237.9000	94.89	15.08	109.97	999.00	-889.03	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5240 MHz

Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.2050	33.58	19.94	53.52	68.30	-14.78	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5240 MHz

Horizontal

130 dBuV/m

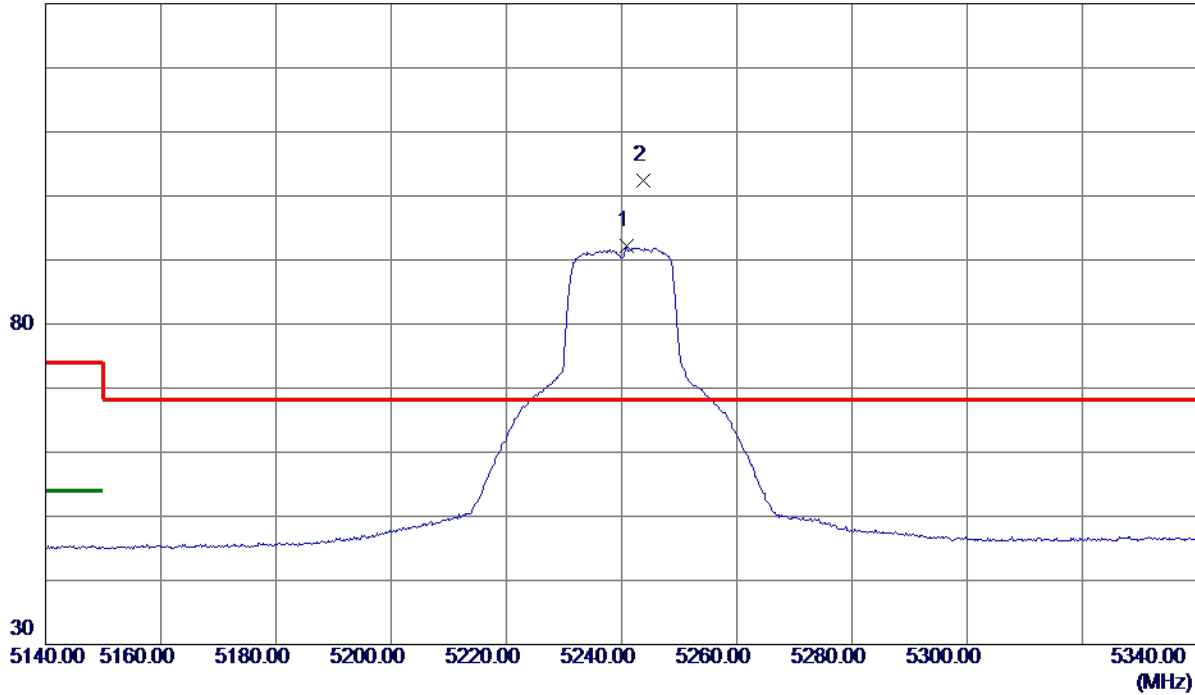


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5240.8000	77.07	15.08	92.15	999.00	-906.85	AVG	No Limit
2 *	5243.7000	87.39	15.08	102.47	68.30	34.17	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5240 MHz

Horizontal

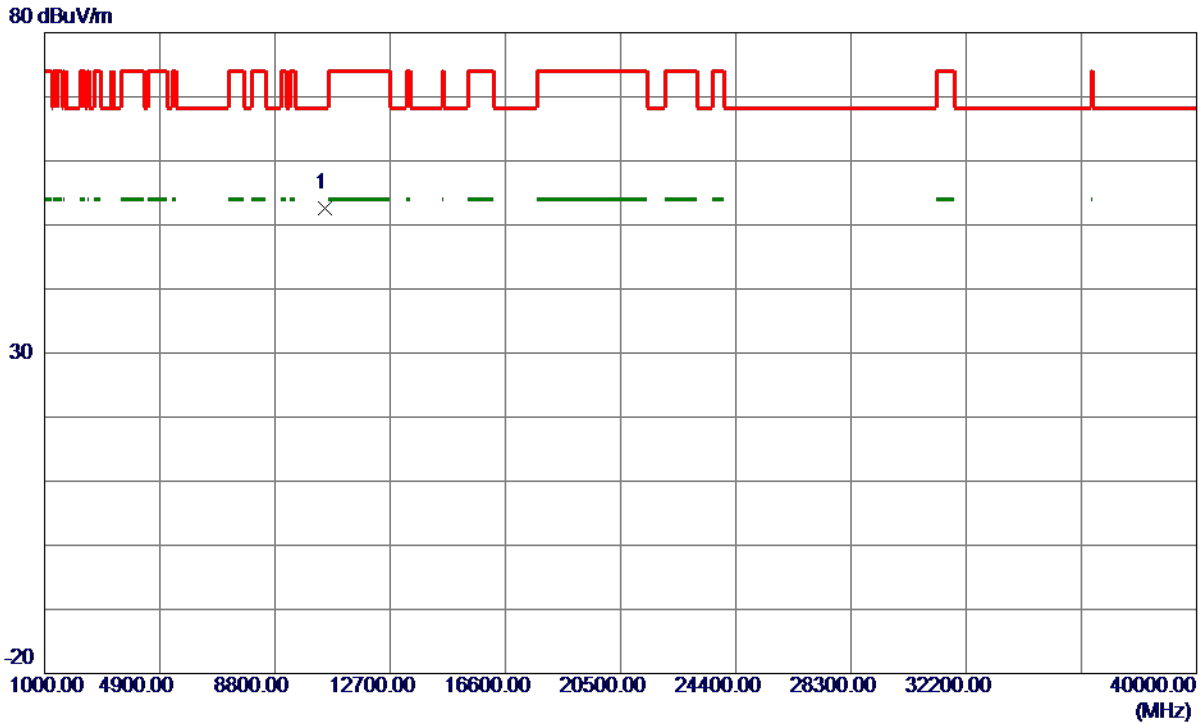

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10478.3300	32.67	19.94	52.61	68.30	-15.69	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5190 MHz

Vertical

130 dBuV/m

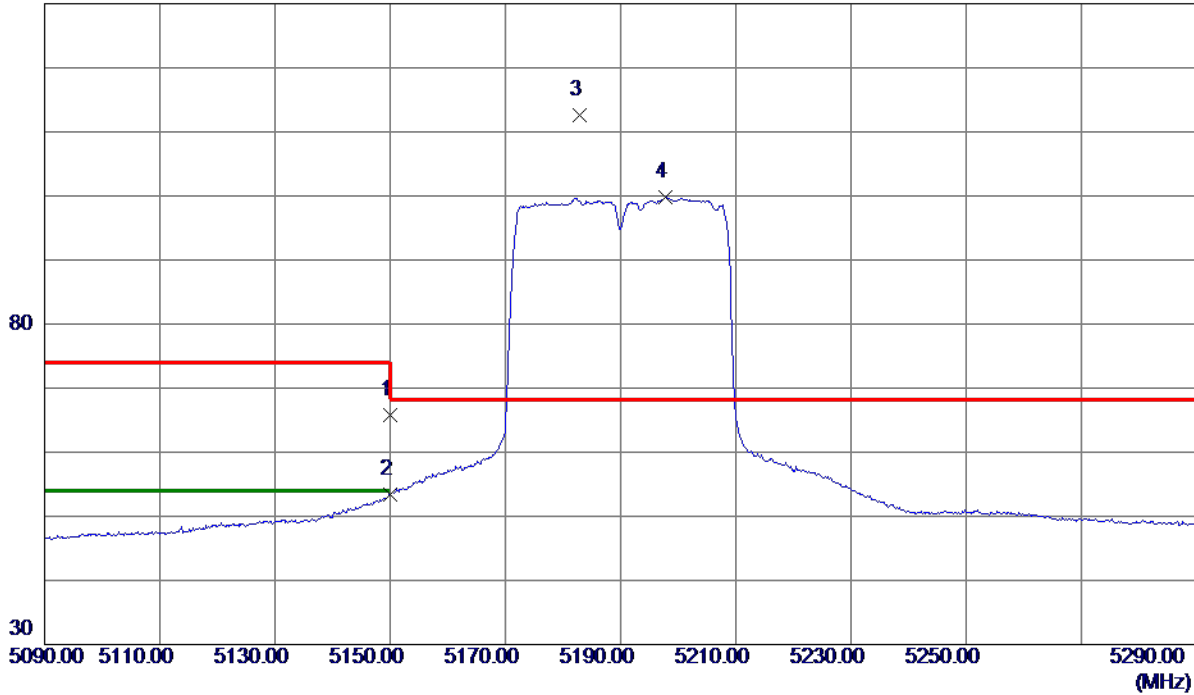


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	50.83	15.02	65.85	74.00	-8.15	Peak	
2	5150.0000	38.32	15.02	53.34	54.00	-0.66	AVG	
3 *	5182.8000	97.58	15.04	112.62	68.30	44.32	Peak	No Limit
4	5197.8000	84.80	15.05	99.85	999.00	-899.15	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5190 MHz

Vertical

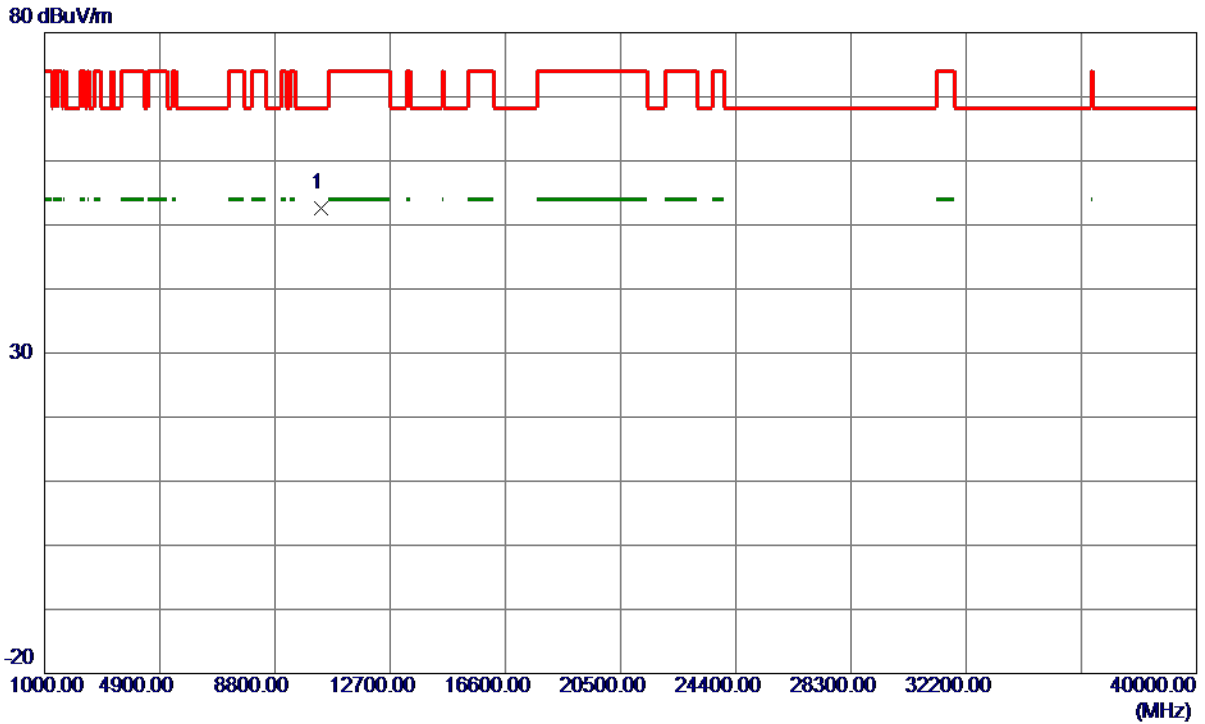

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10378.1750	32.83	19.80	52.63	68.30	-15.67	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5190 MHz

Horizontal

130 dBuV/m

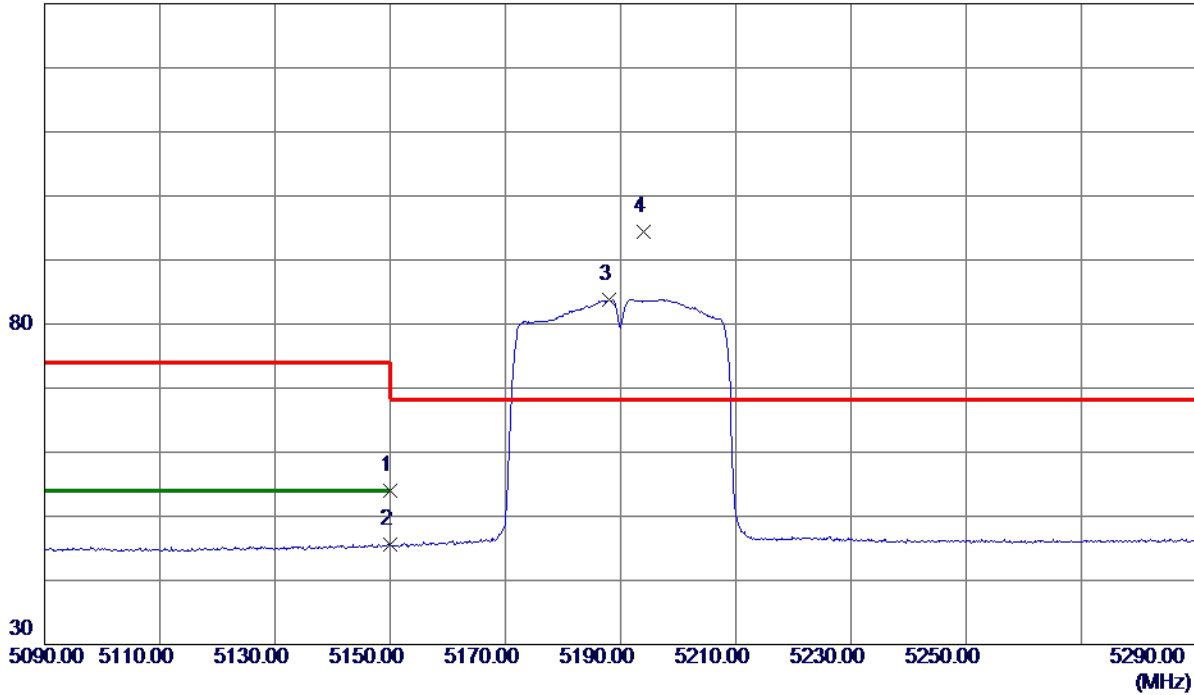

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.01	15.02	54.03	74.00	-19.97	Peak	
2	5150.0000	30.67	15.02	45.69	54.00	-8.31	AVG	
3	5188.1000	68.78	15.04	83.82	999.00	-915.18	AVG	No Limit
4 *	5194.0000	79.33	15.05	94.38	68.30	26.08	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5190 MHz

Horizontal

80 dBuV/m

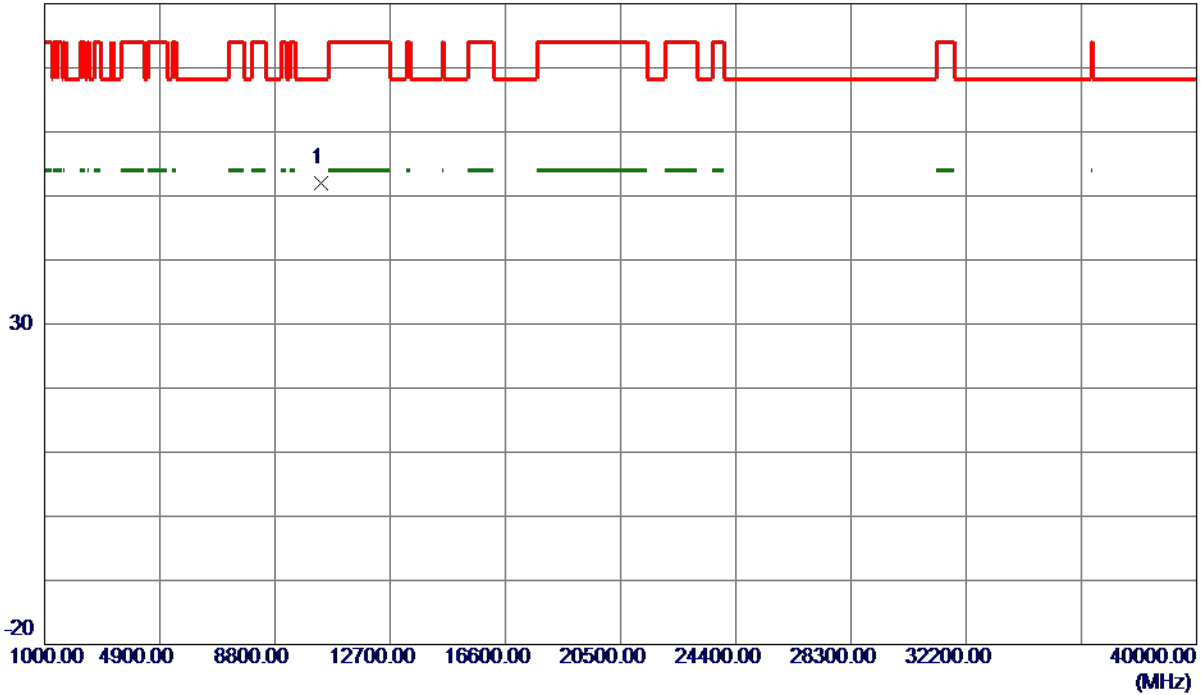

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10379.4750	32.25	19.80	52.05	68.30	-16.25	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5230 MHz

Vertical

130 dBuV/m

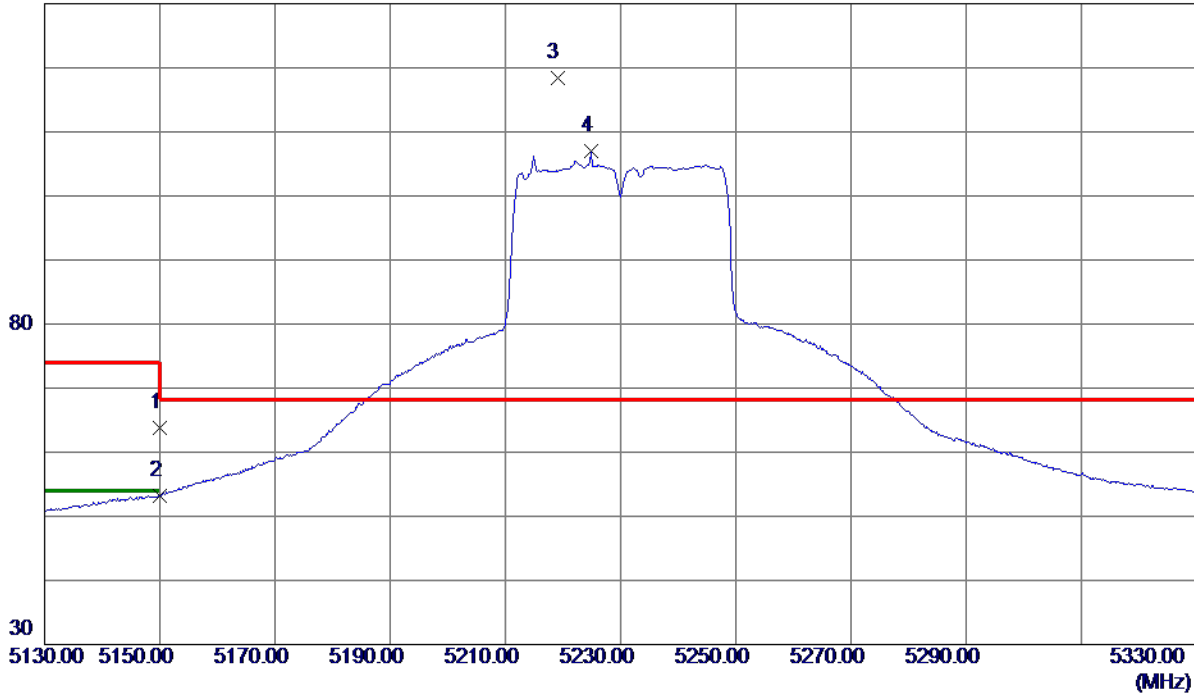


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.86	15.02	63.88	74.00	-10.12	Peak	
2	5150.0000	38.18	15.02	53.20	54.00	-0.80	AVG	
3 *	5219.0000	103.39	15.06	118.45	68.30	50.15	Peak	No Limit
4	5224.9000	91.98	15.07	107.05	999.00	-891.95	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5230 MHz

Vertical

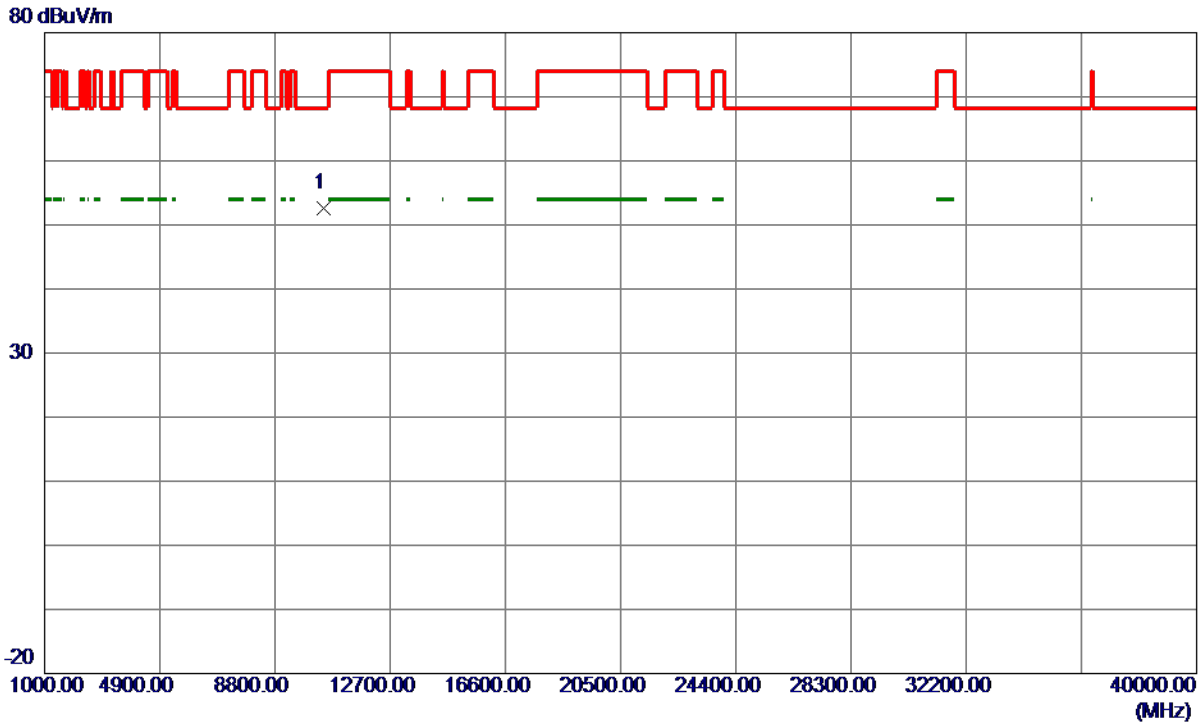

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10458.0000	32.64	19.91	52.55	68.30	-15.75	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5230 MHz

Horizontal

130 dBuV/m

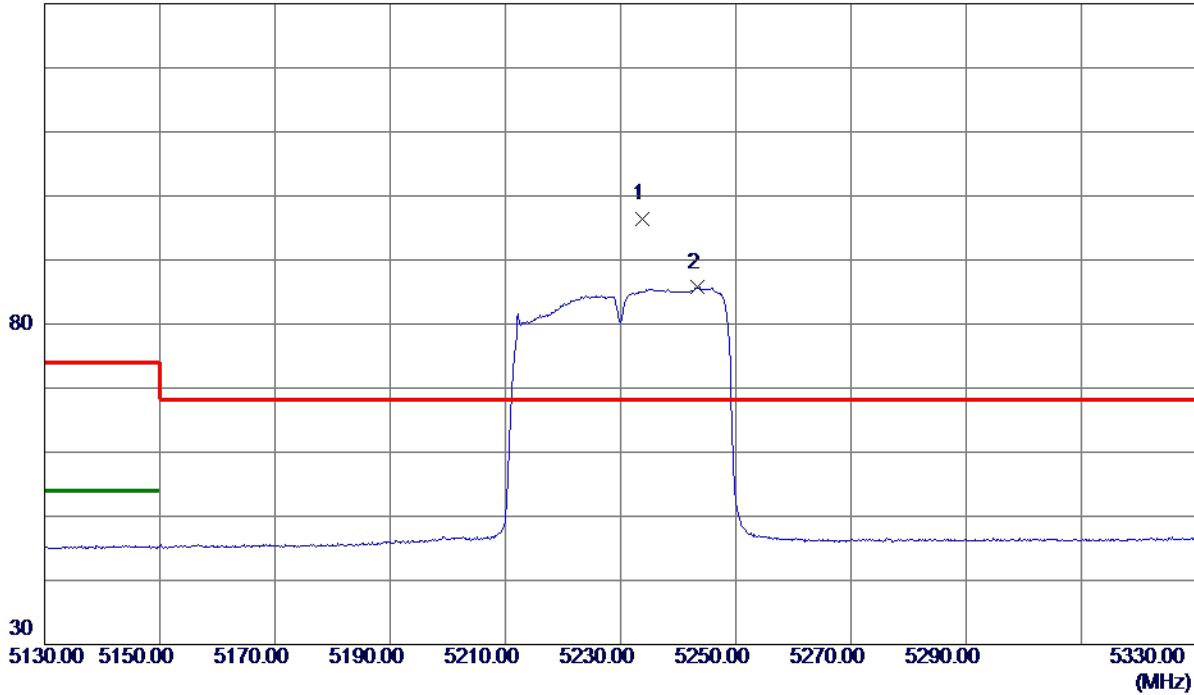


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5233.8000	81.36	15.07	96.43	68.30	28.13	Peak	No Limit
2	5243.4000	70.62	15.08	85.70	999.00	-913.30	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5230 MHz

Horizontal

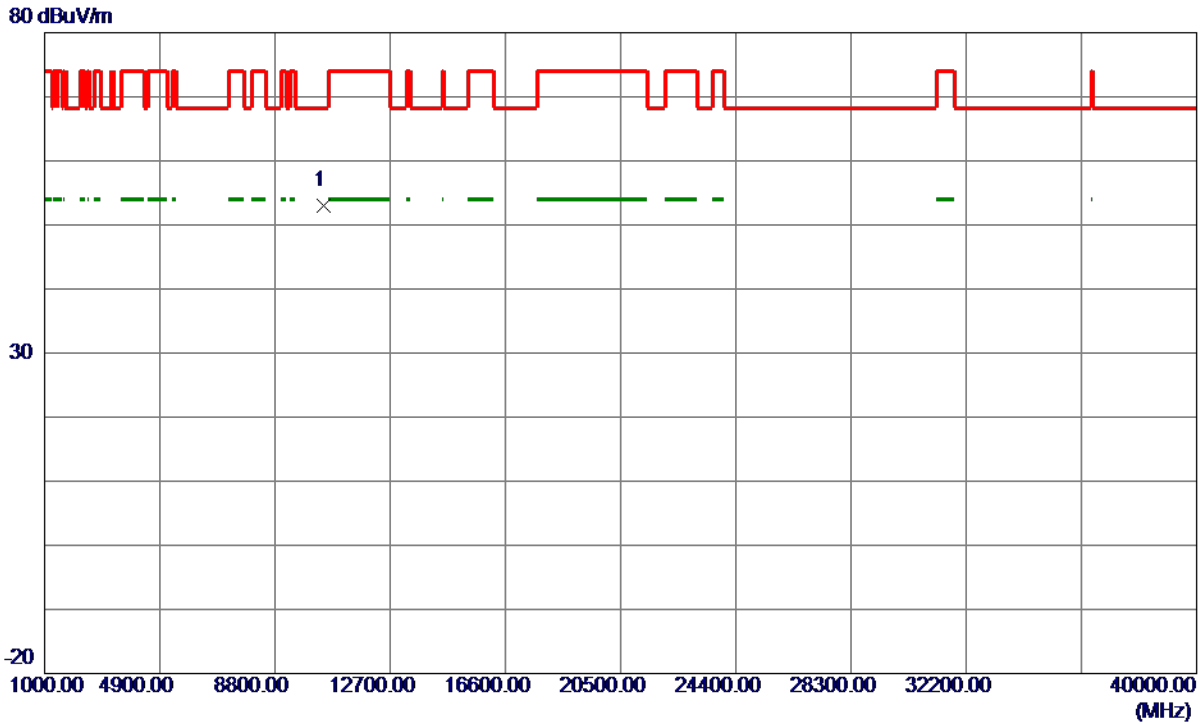


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10459.2350	33.08	19.91	52.99	68.30	-15.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz

Vertical

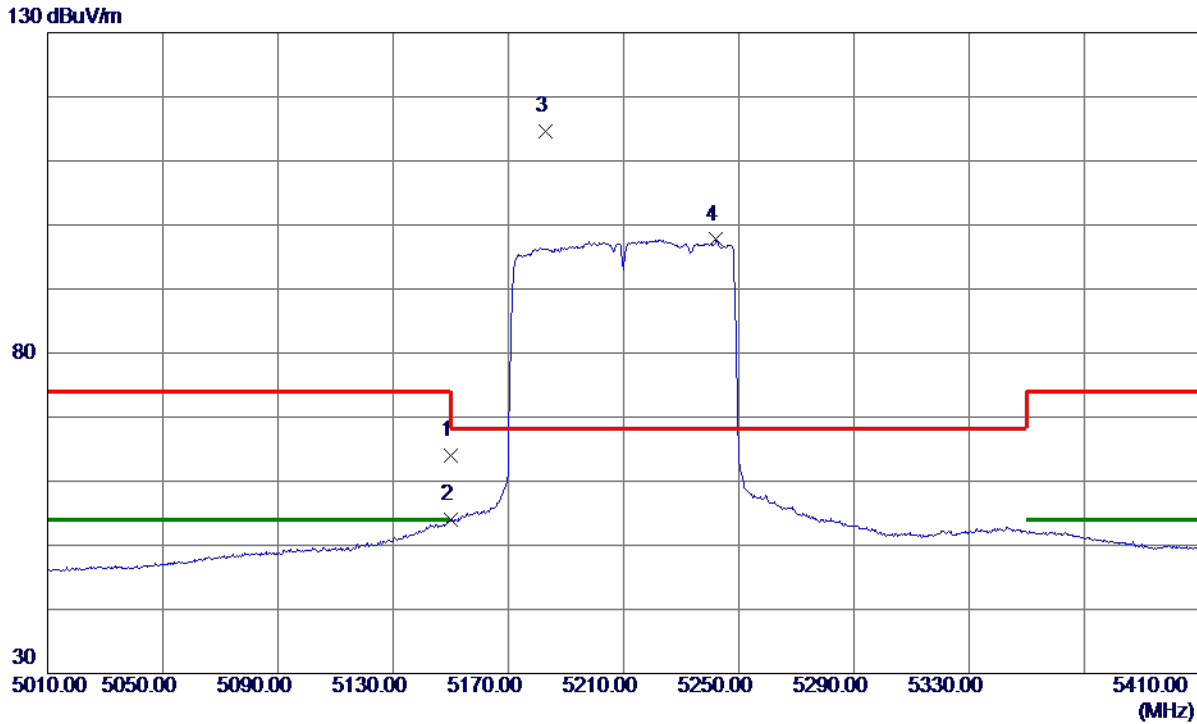

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.03	15.02	64.05	74.00	-9.95	Peak	
2	5150.0000	38.95	15.02	53.97	54.00	-0.03	AVG	
3 *	5182.8000	99.63	15.04	114.67	68.30	46.37	Peak	No Limit
4	5242.2000	82.62	15.08	97.70	999.00	-901.30	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz

Vertical

80 dBuV/m

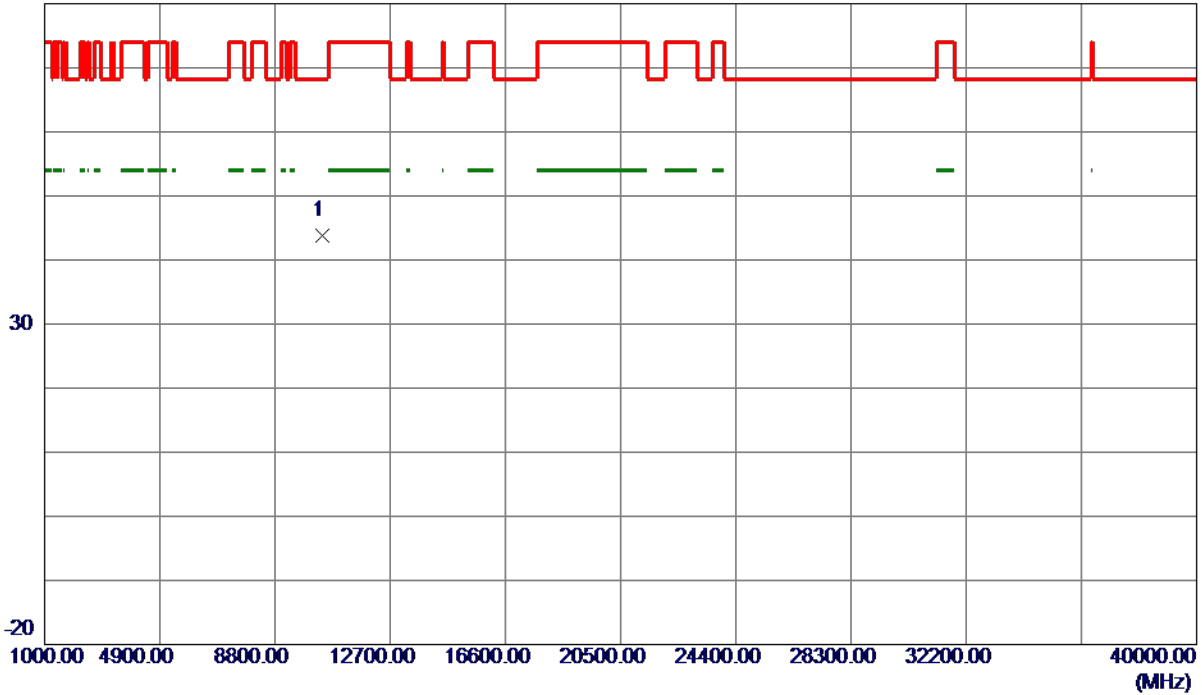

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10419.5630	34.91	8.89	43.80	68.30	-24.50	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz

Horizontal

130 dBuV/m

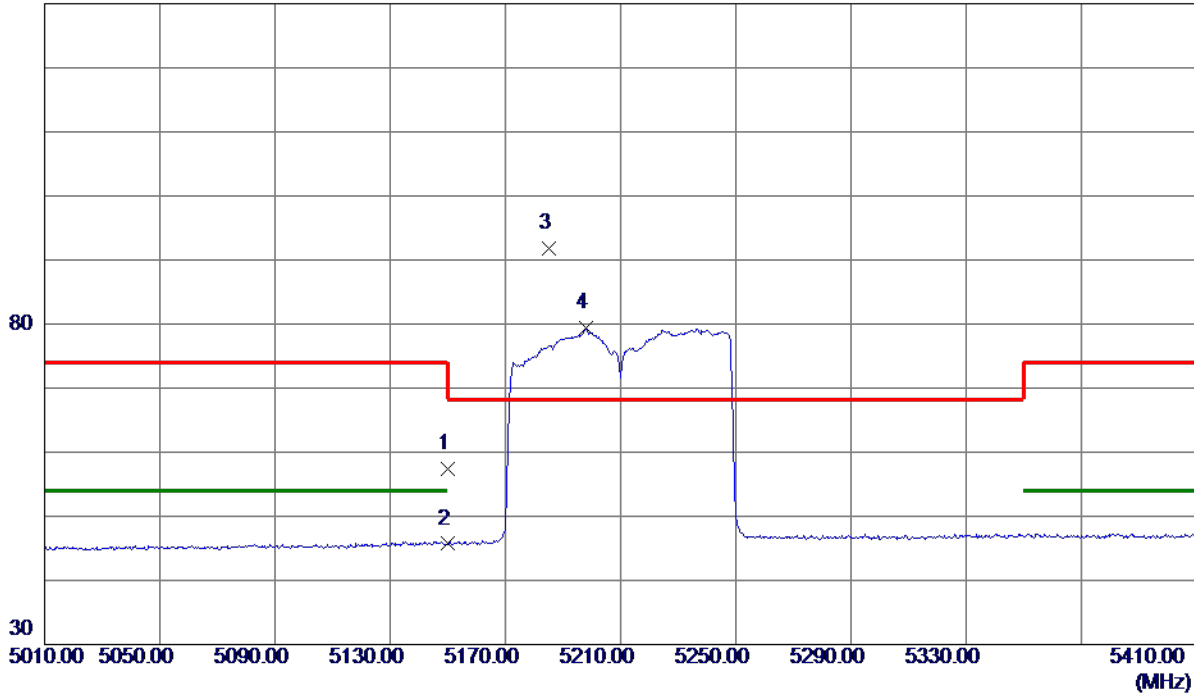


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.29	15.02	57.31	74.00	-16.69	Peak	
2	5150.0000	30.68	15.02	45.70	54.00	-8.30	AVG	
3 *	5185.2000	76.73	15.04	91.77	68.30	23.47	Peak	No Limit
4	5198.0000	64.34	15.05	79.39	999.00	-919.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

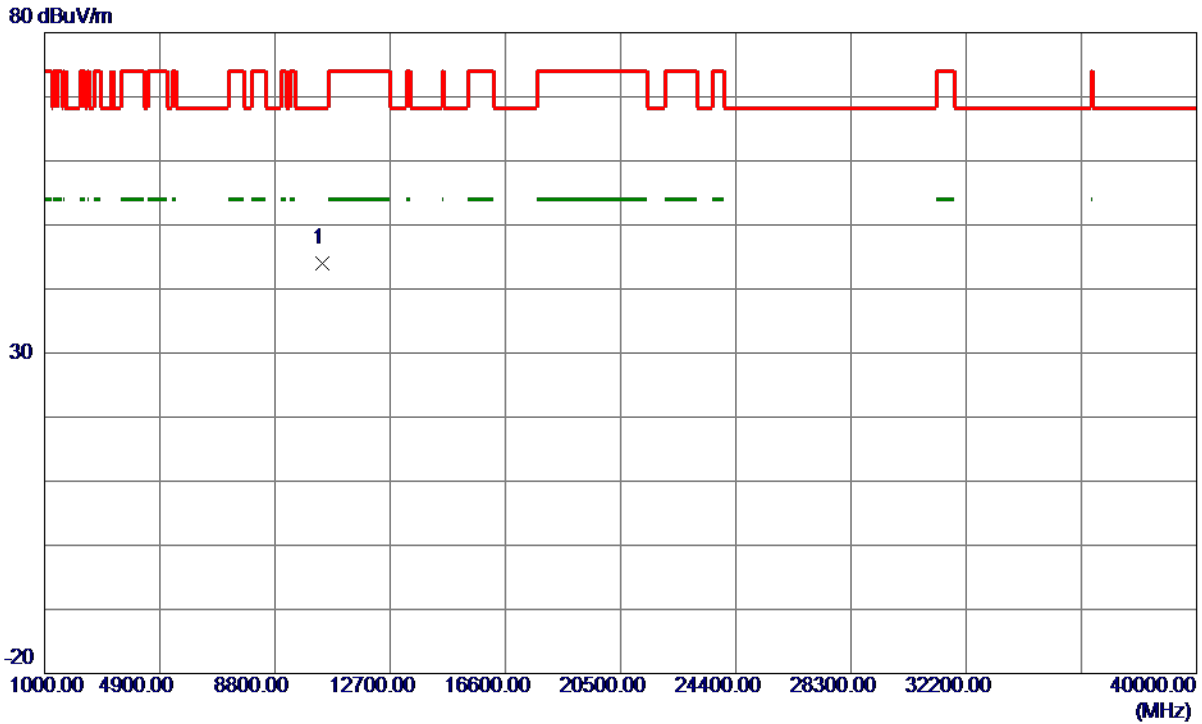

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10418.4750	35.06	8.89	43.95	68.30	-24.35	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5745 MHz

Vertical

130 dBuV/m

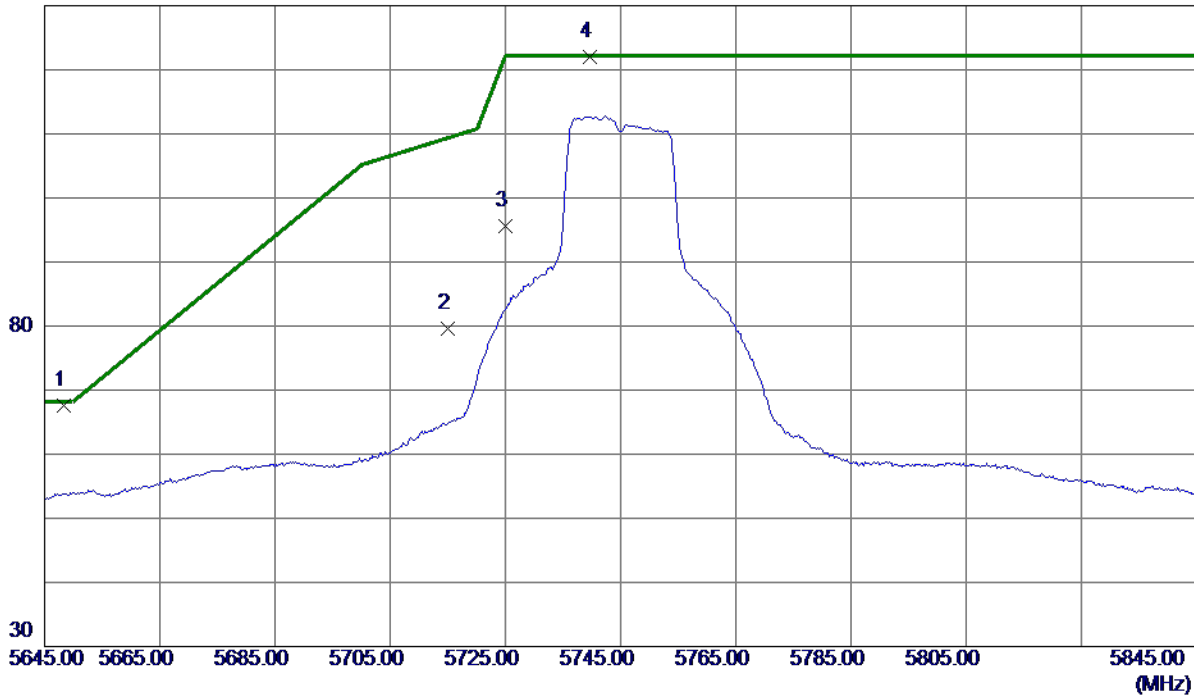


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.4000	52.03	15.53	67.56	68.20	-0.64	Peak	
2	5715.0000	63.97	15.65	79.62	109.40	-29.78	Peak	
3	5725.0000	79.86	15.67	95.53	122.20	-26.67	Peak	
4 *	5739.6000	106.27	15.70	121.97	122.20	-0.23	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5745 MHz

Vertical

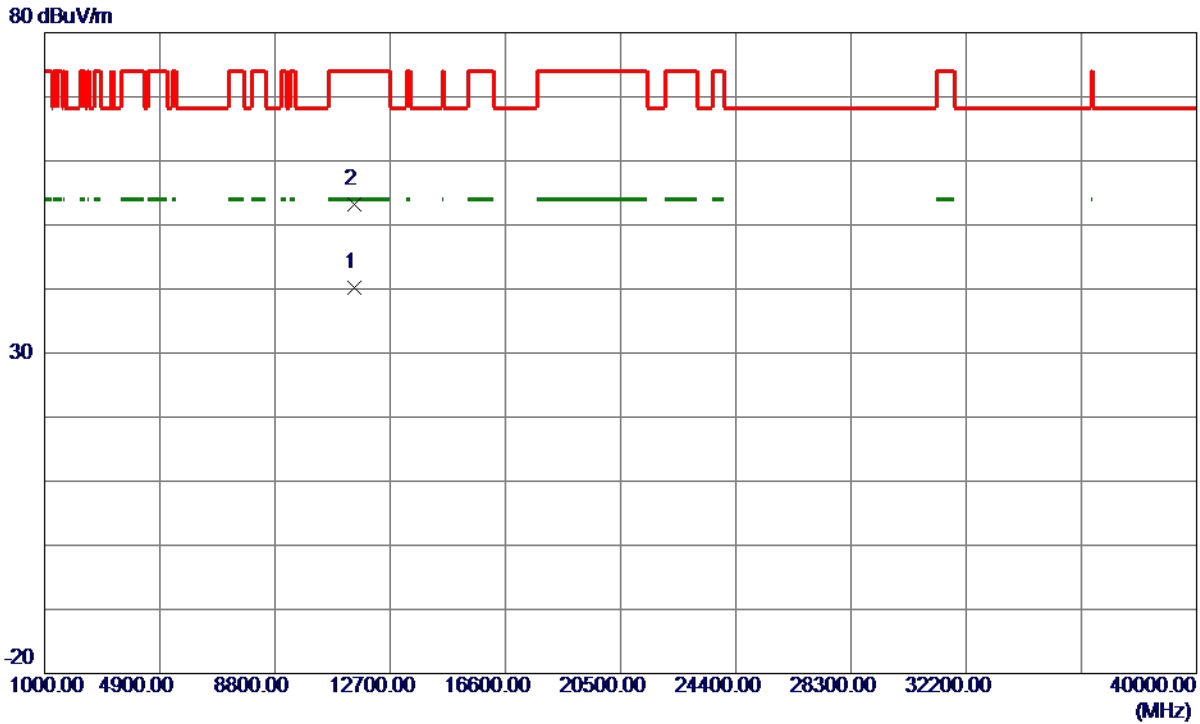

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.8050	19.58	20.68	40.26	54.00	-13.74	AVG	
2	11490.9150	32.55	20.68	53.23	74.00	-20.77	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5745 MHz

Horizontal

130 dBuV/m

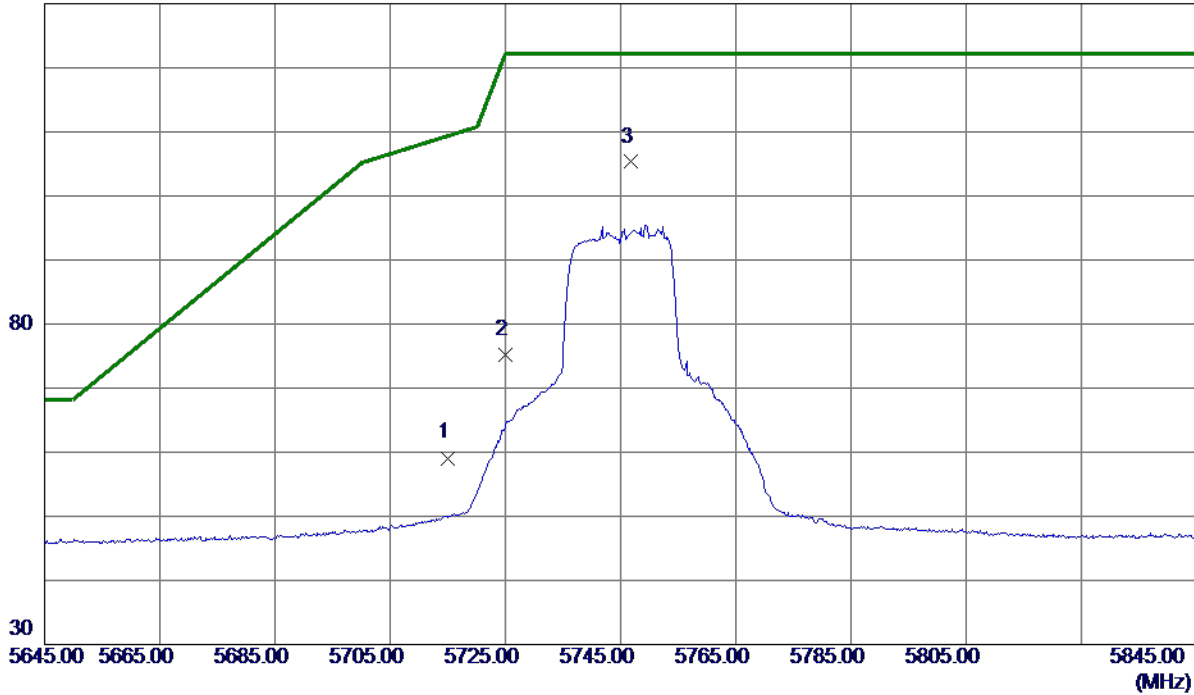


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	43.45	15.65	59.10	109.40	-50.30	Peak	
2	5725.0000	59.61	15.67	75.28	122.20	-46.92	Peak	
3 *	5746.8000	89.59	15.71	105.30	122.20	-16.90	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5745 MHz

Horizontal

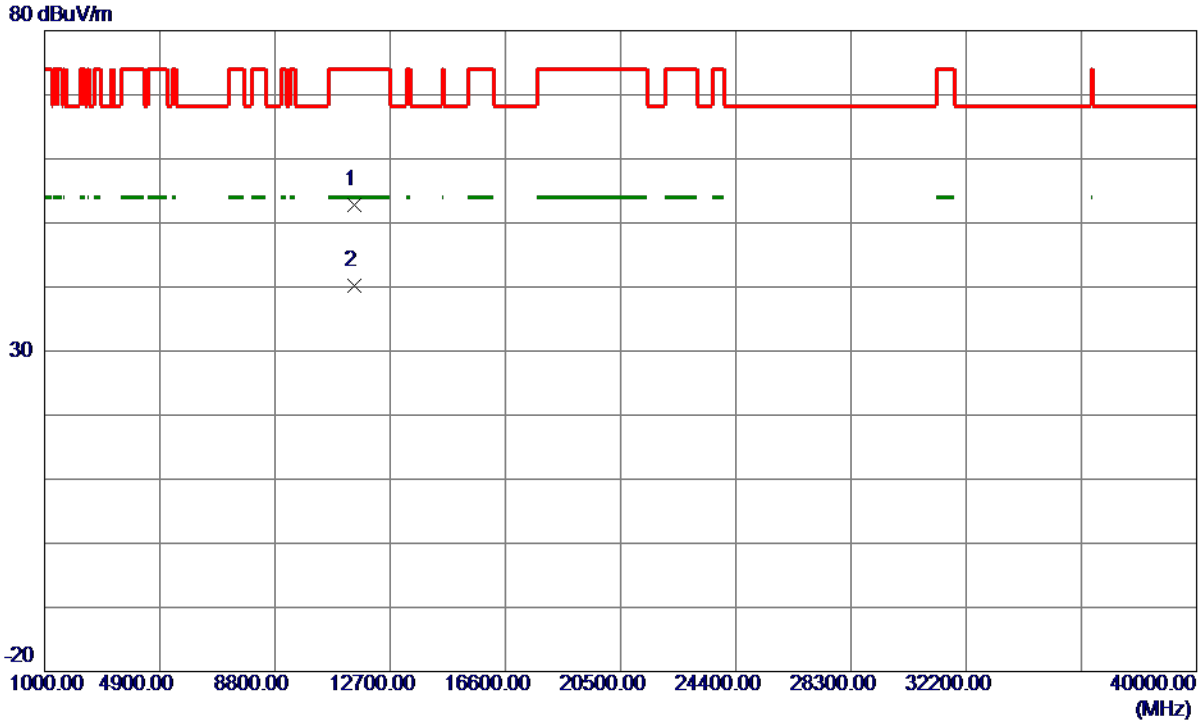


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.1449	32.17	20.68	52.85	74.00	-21.15	Peak	
2 *	11489.6600	19.43	20.68	40.11	54.00	-13.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5785 MHz

Vertical

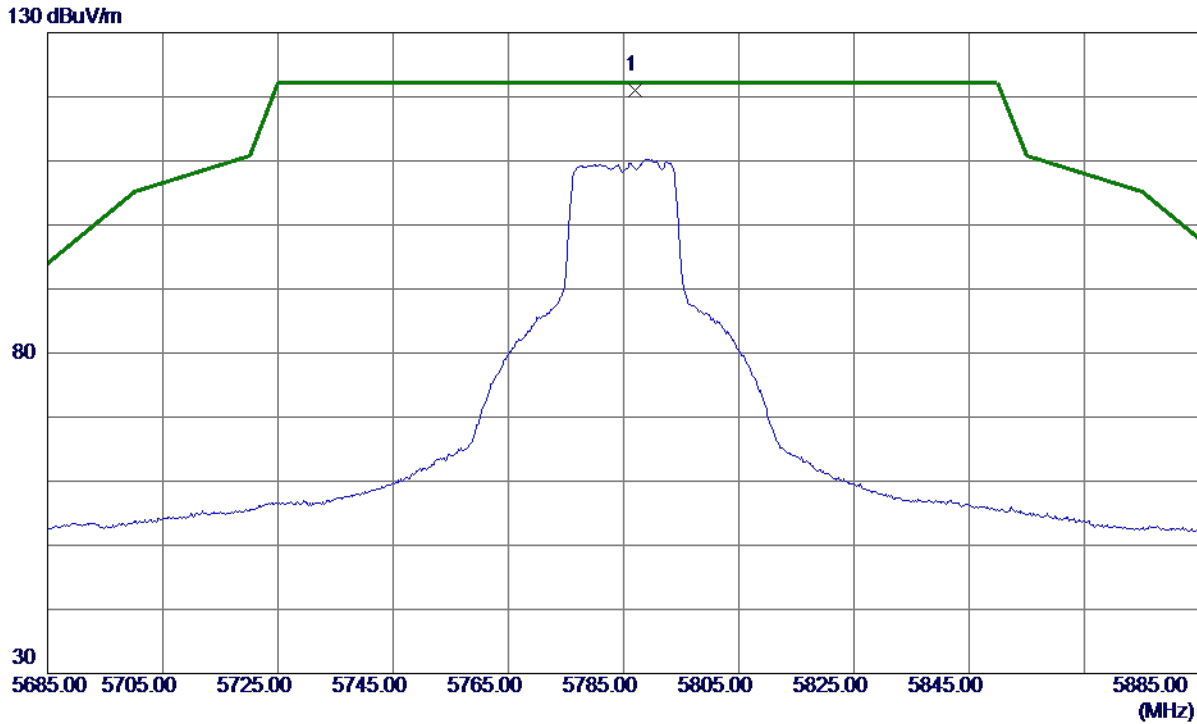


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5786.9000	105.23	15.78	121.01	122.20	-1.19	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5785 MHz

Vertical

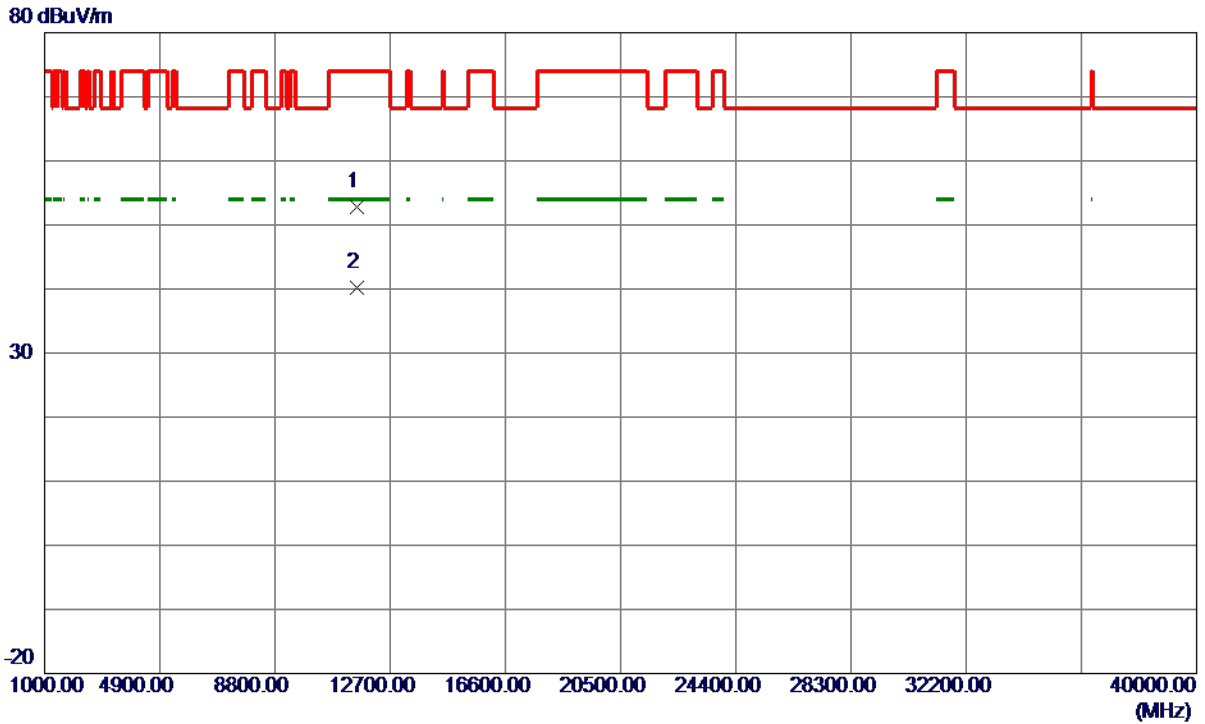


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.9800	32.00	20.72	52.72	74.00	-21.28	Peak	
2 *	11571.5400	19.45	20.72	40.17	54.00	-13.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5785 MHz

Horizontal

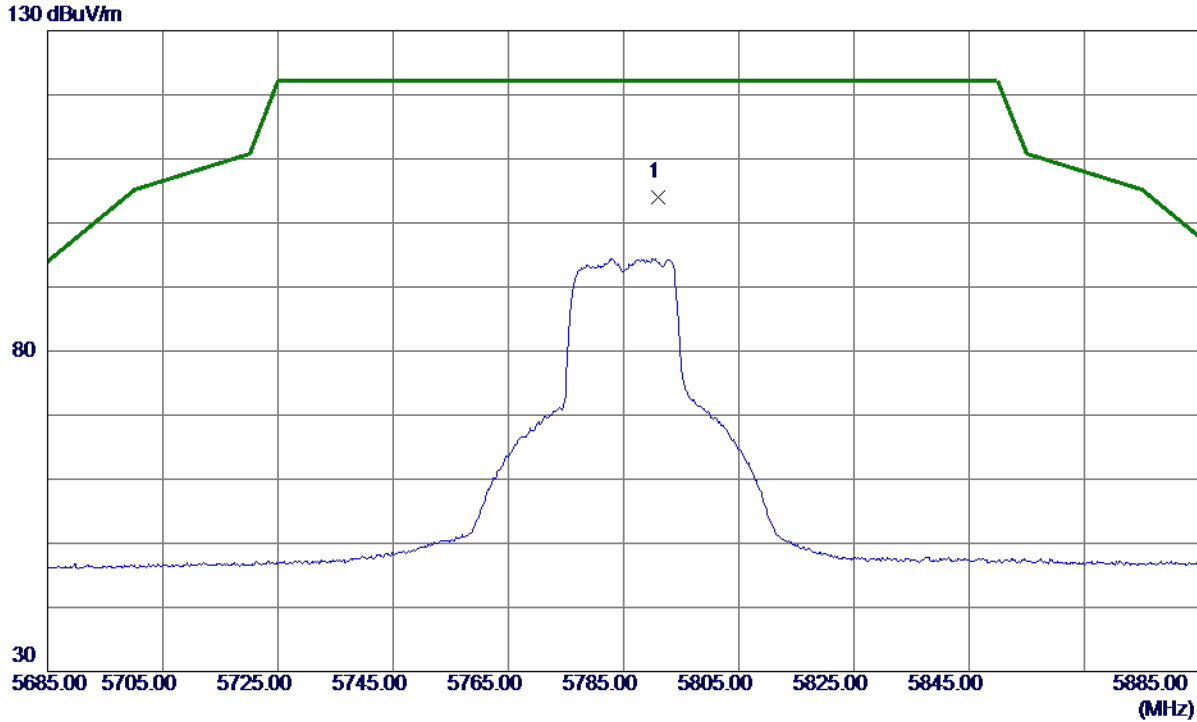


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.1000	88.28	15.79	104.07	122.20	-18.13	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5785 MHz

Horizontal

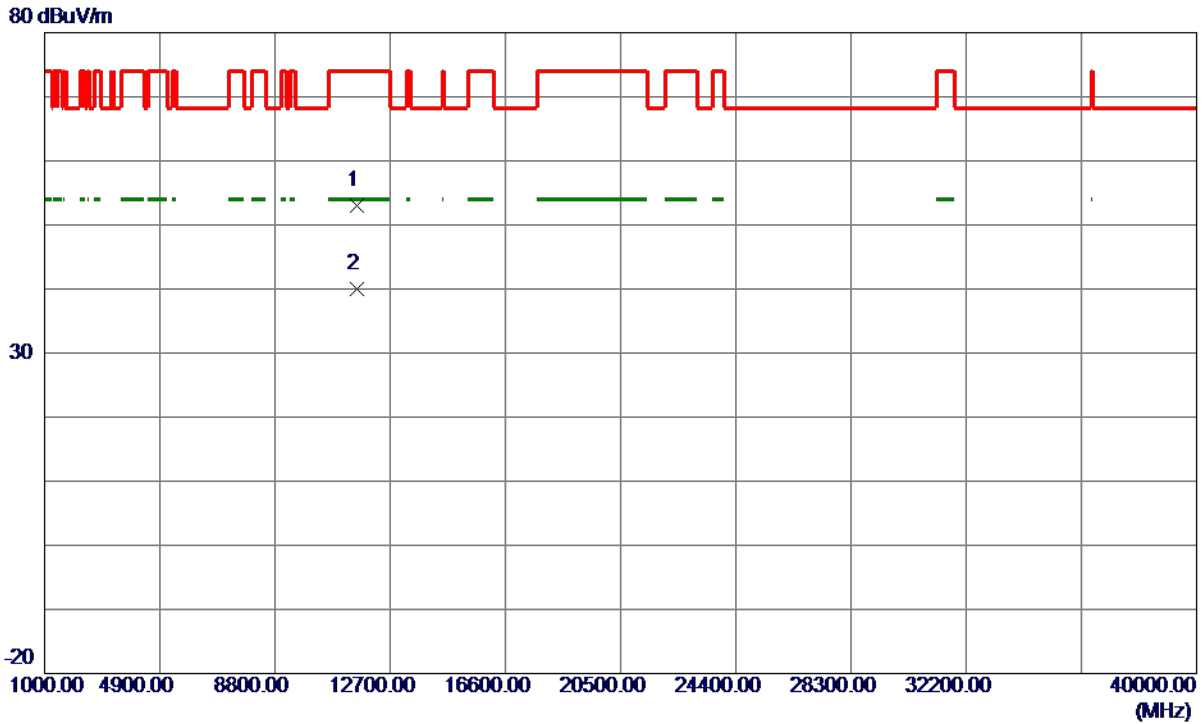


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11569.2550	32.25	20.72	52.97	74.00	-21.03	Peak	
2 *	11570.5850	19.31	20.72	40.03	54.00	-13.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5825 MHz

Vertical

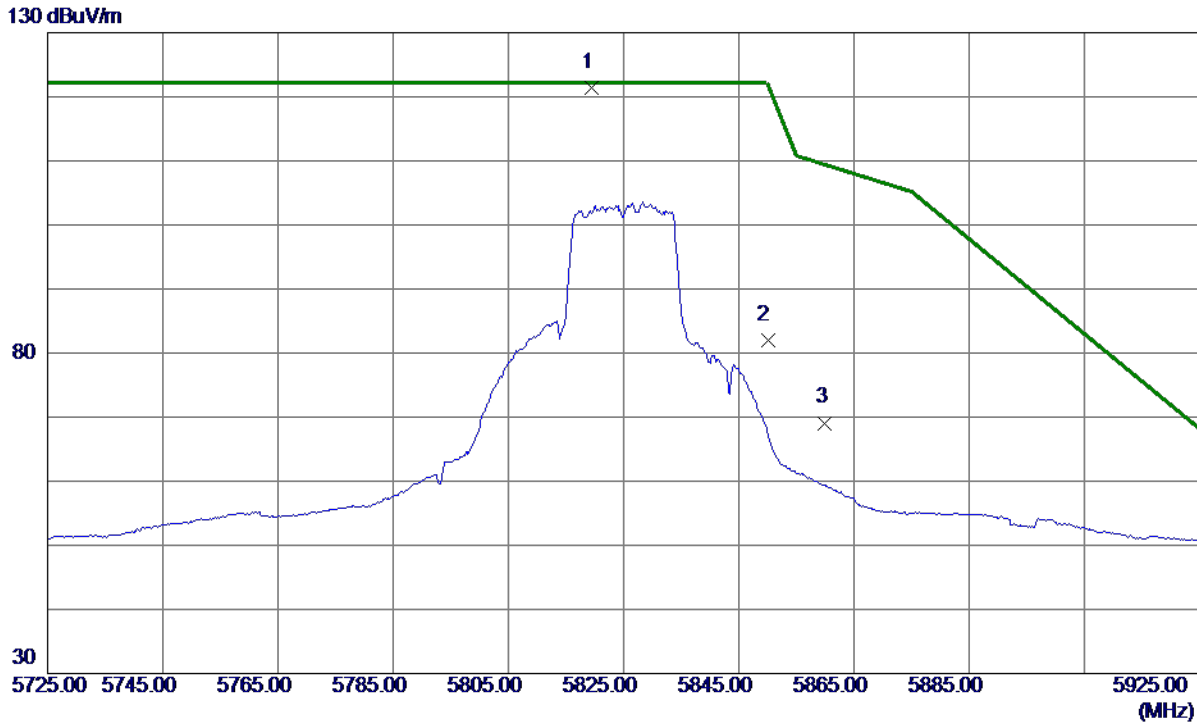

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.5000	105.48	15.84	121.32	122.20	-0.88	Peak	No Limit
2	5850.0000	66.03	15.90	81.93	122.20	-40.27	Peak	
3	5860.0000	53.18	15.92	69.10	109.40	-40.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5825 MHz

Vertical




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11648.0300	19.38	20.77	40.15	54.00	-13.85	AVG	
2	11652.3200	32.85	20.77	53.62	74.00	-20.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5825 MHz

Horizontal

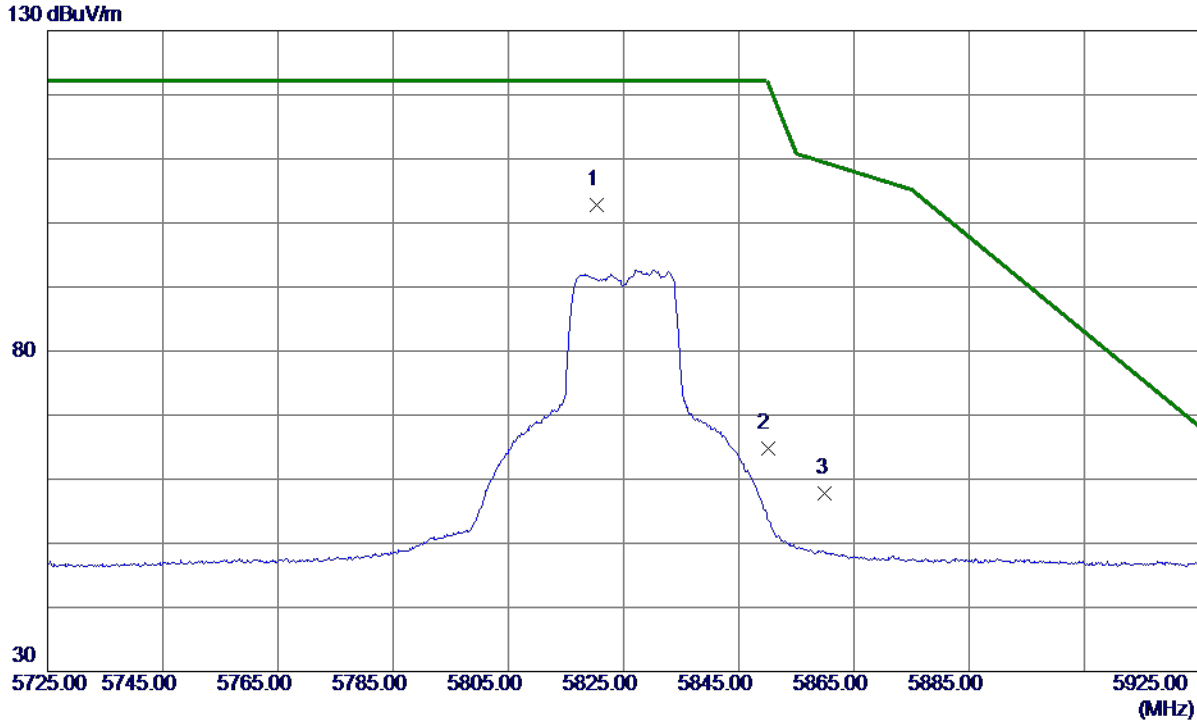


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5820.4000	87.04	15.84	102.88	122.20	-19.32	Peak	No Limit
2	5850.0000	48.87	15.90	64.77	122.20	-57.43	Peak	
3	5860.0000	41.91	15.92	57.83	109.40	-51.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5825 MHz

Horizontal

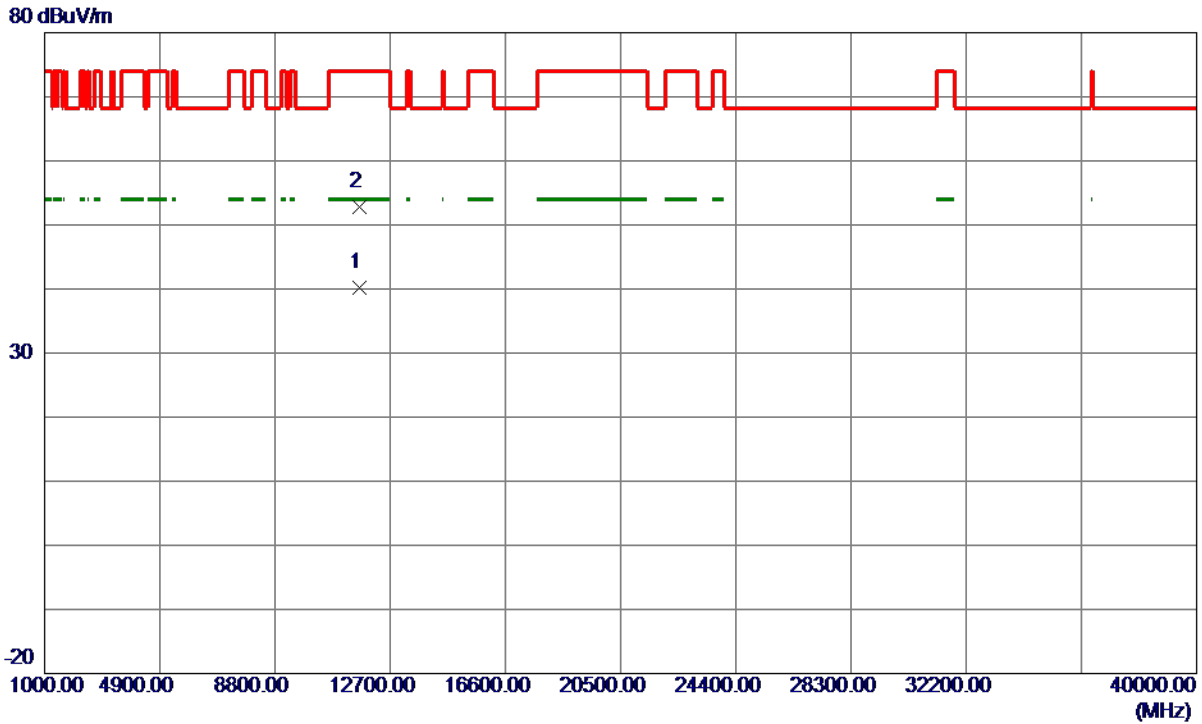


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.2550	19.34	20.77	40.11	54.00	-13.89	AVG	
2	11649.7900	31.97	20.77	52.74	74.00	-21.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz

Vertical

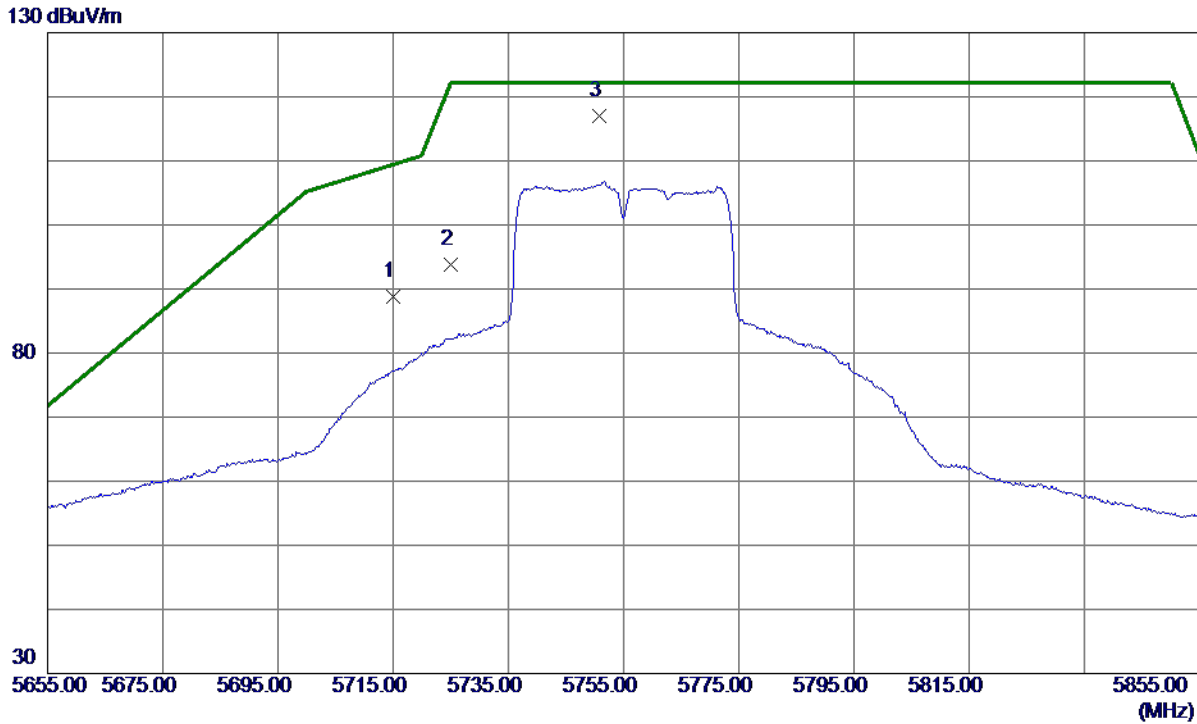


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	73.07	15.65	88.72	109.40	-20.68	Peak	
2	5725.0000	78.19	15.67	93.86	122.20	-28.34	Peak	
3 *	5750.7000	101.22	15.72	116.94	122.20	-5.26	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz

Vertical

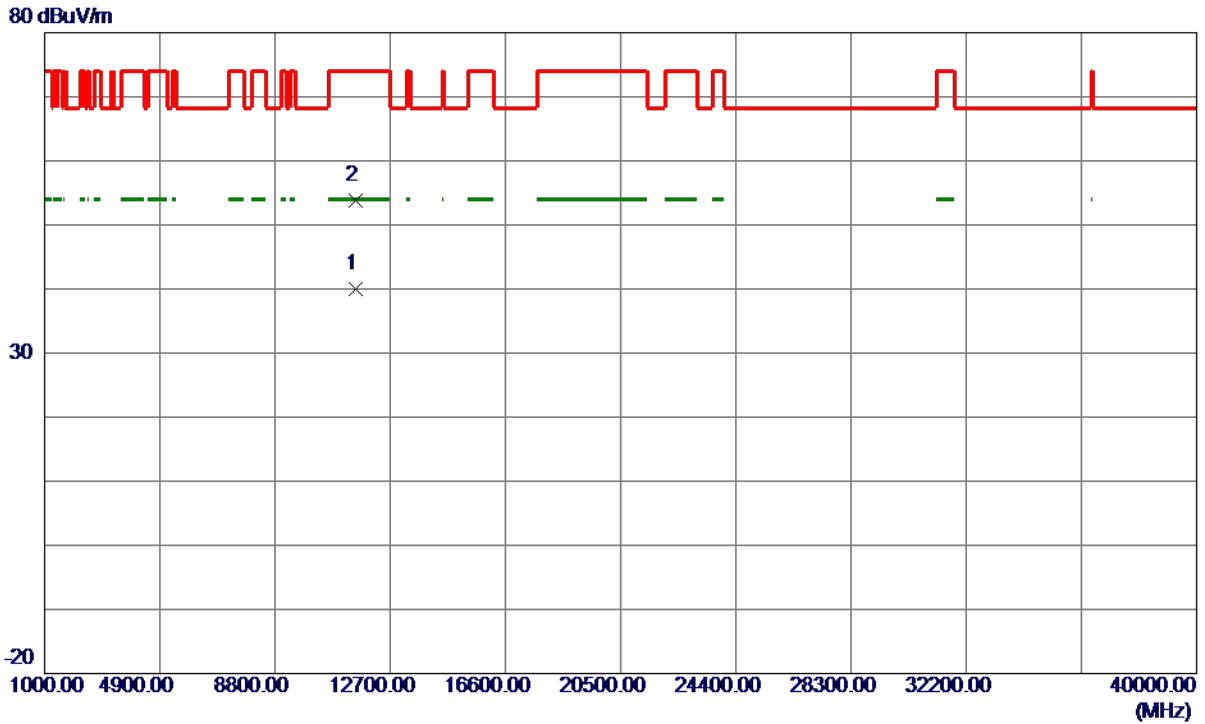


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.5700	19.24	20.69	39.93	54.00	-14.07	AVG	
2	11511.9100	33.08	20.69	53.77	74.00	-20.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz

Horizontal

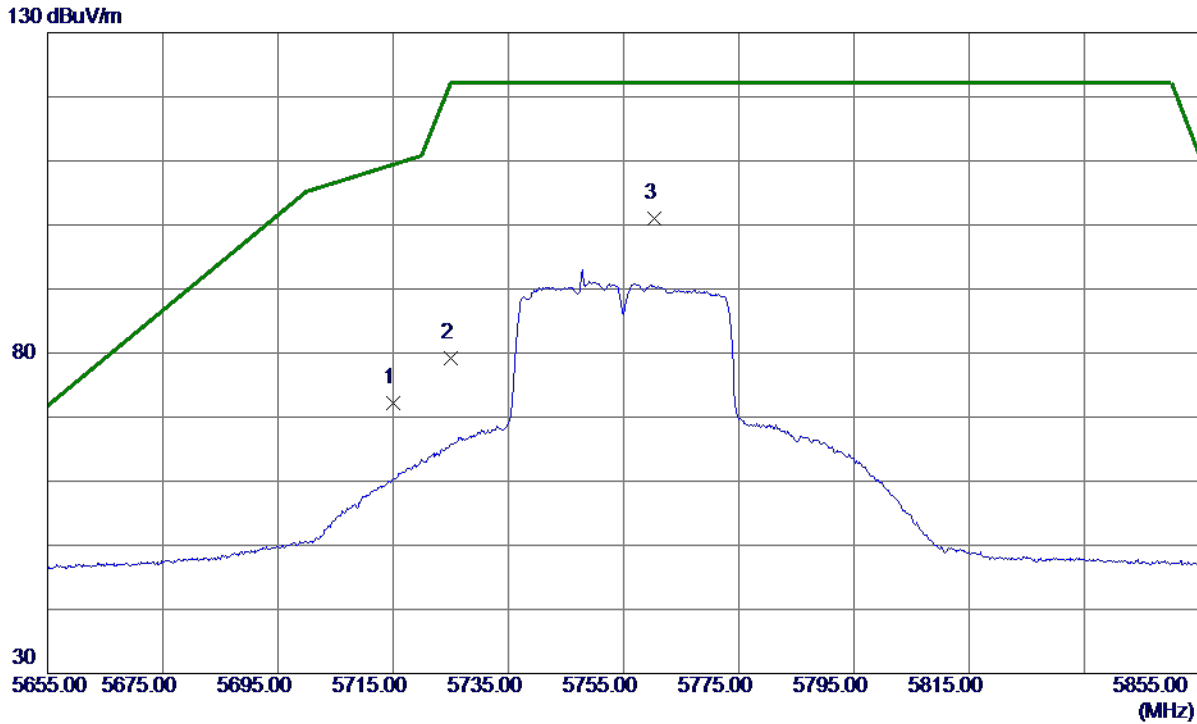


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	56.56	15.65	72.21	109.40	-37.19	Peak	
2	5725.0000	63.54	15.67	79.21	122.20	-42.99	Peak	
3 *	5760.4000	85.29	15.73	101.02	122.20	-21.18	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz

Horizontal

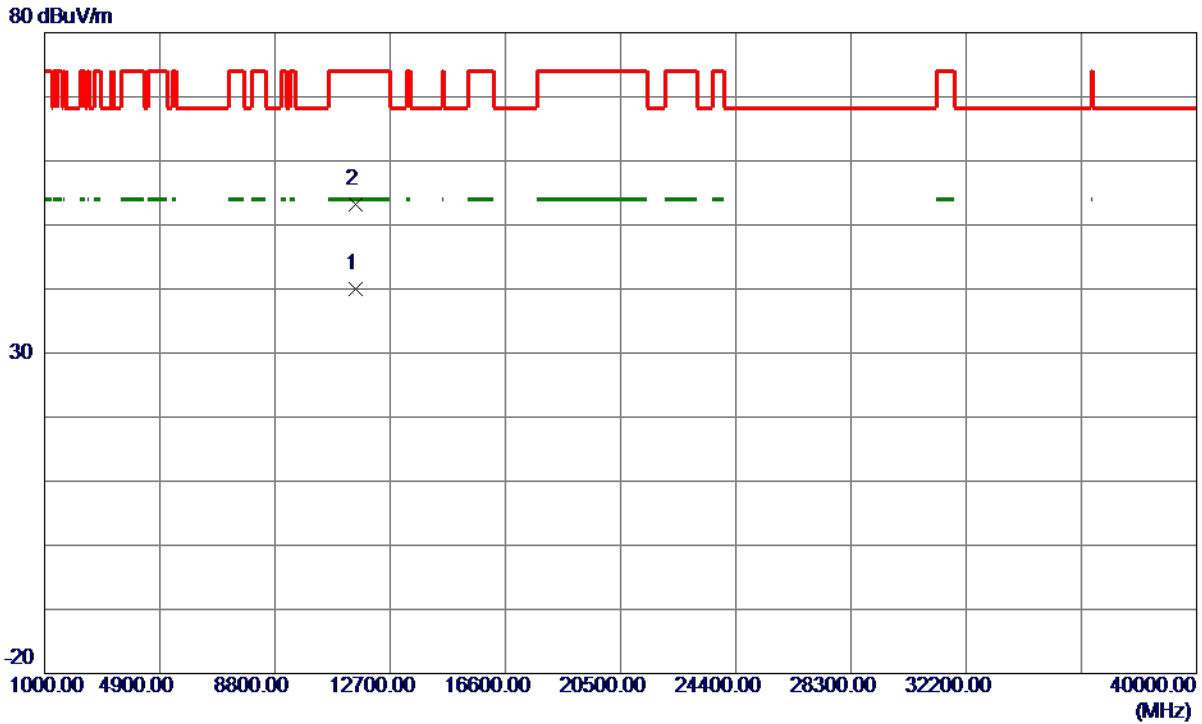


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.5199	19.30	20.69	39.99	54.00	-14.01	AVG	
2	11511.1300	32.57	20.69	53.26	74.00	-20.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz

Vertical

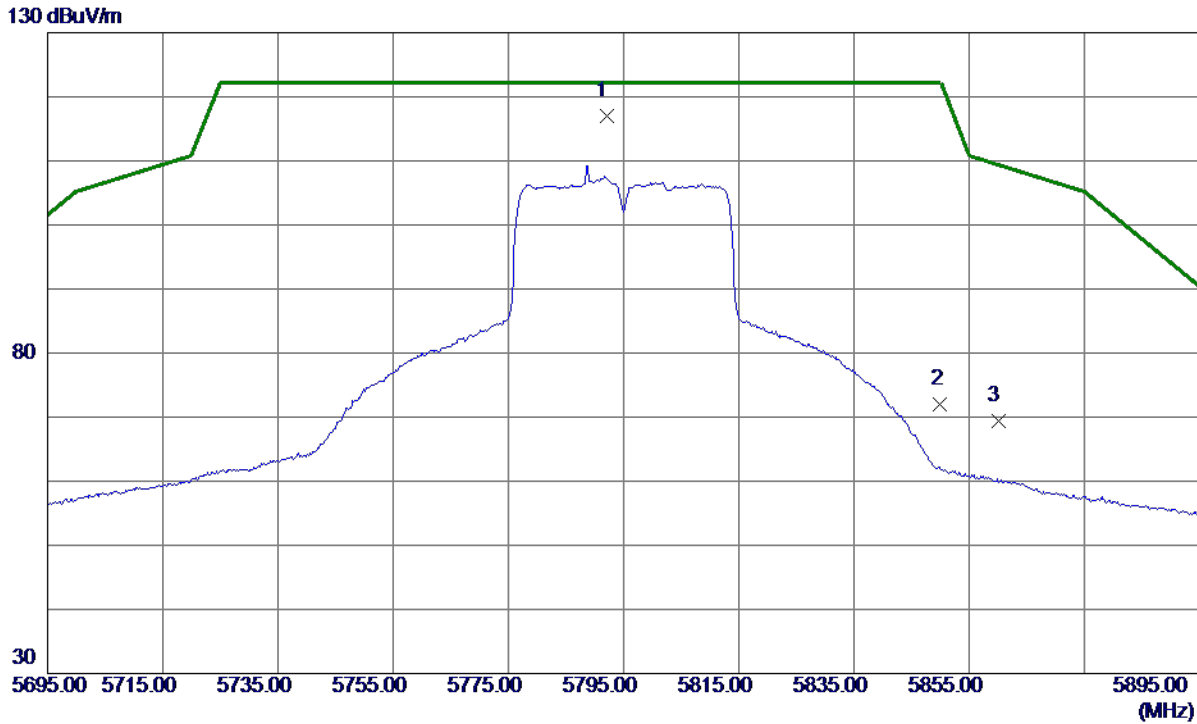

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.0000	101.18	15.79	116.97	122.20	-5.23	Peak	No Limit
2	5850.0000	56.15	15.90	72.05	122.20	-50.15	Peak	
3	5860.0000	53.49	15.92	69.41	109.40	-39.99	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz

Vertical

80 dBuV/m

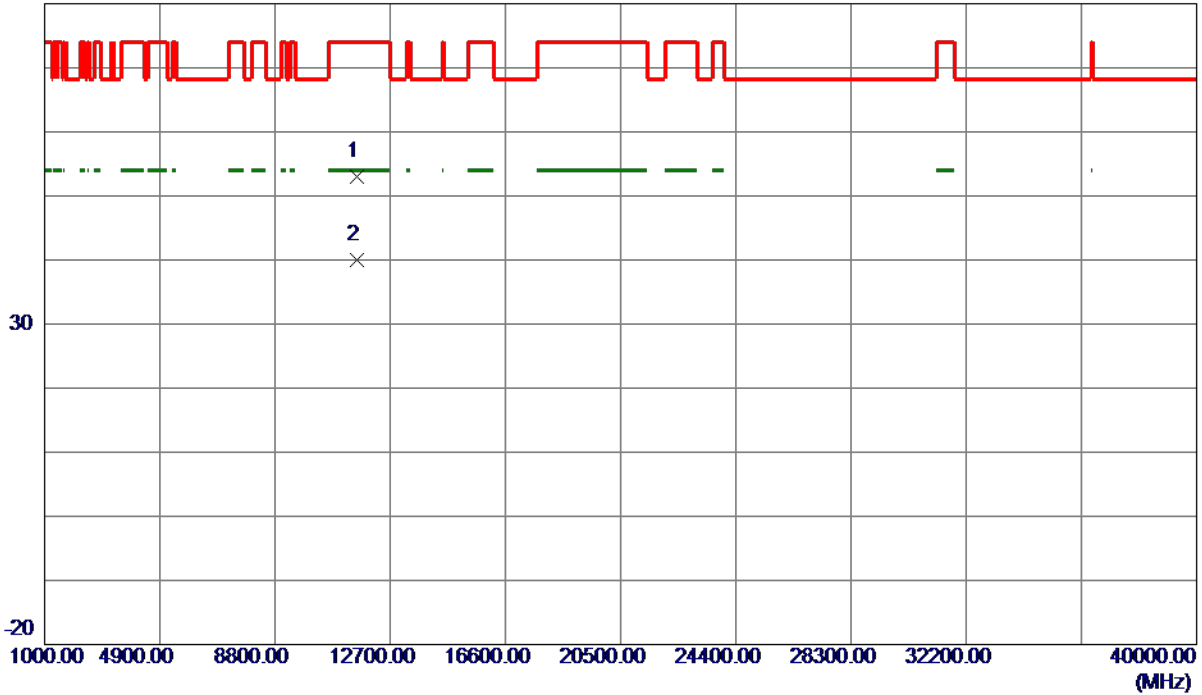


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.3650	32.26	20.73	52.99	74.00	-21.01	Peak	
2 *	11591.3050	19.25	20.74	39.99	54.00	-14.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz

Horizontal

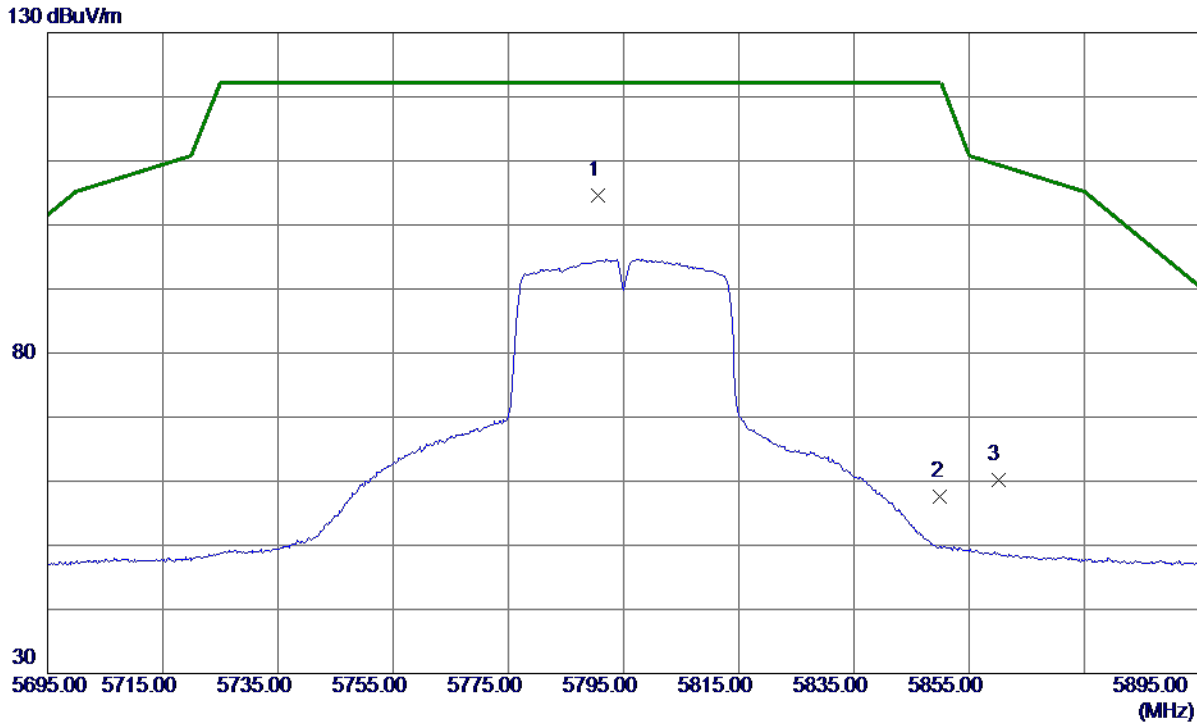


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5790.6000	88.75	15.79	104.54	122.20	-17.66	Peak	No Limit
2	5850.0000	41.73	15.90	57.63	122.20	-64.57	Peak	
3	5860.0000	44.24	15.92	60.16	109.40	-49.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz

Horizontal

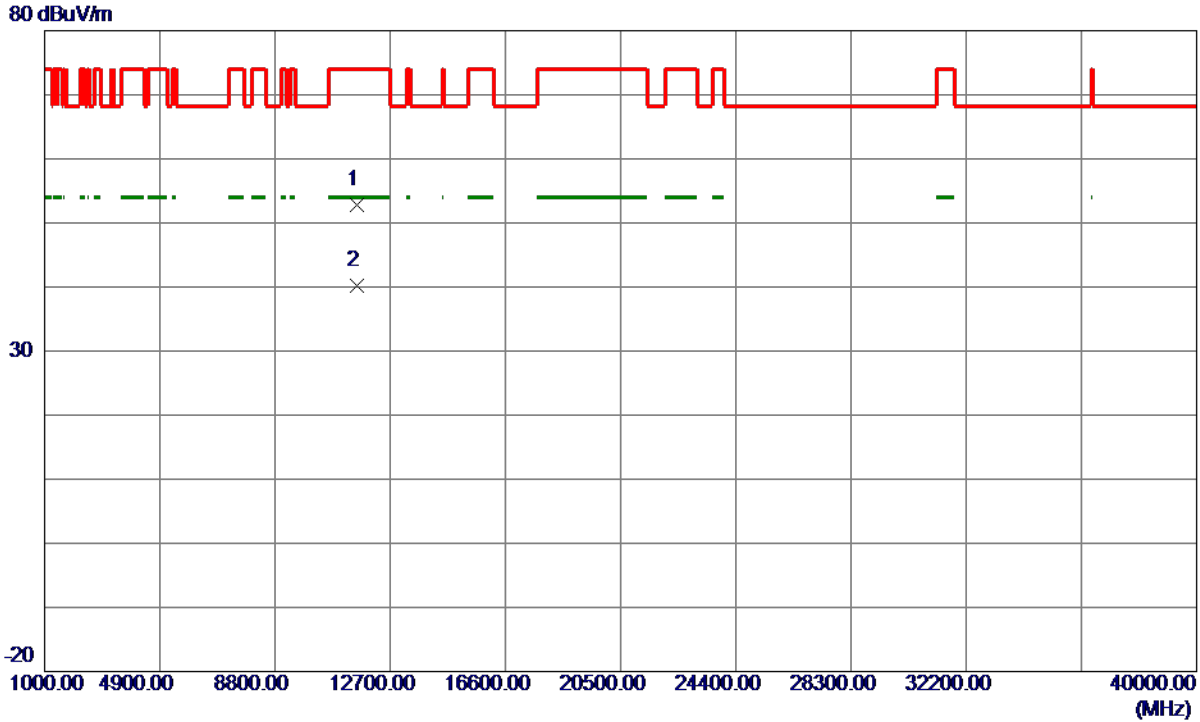


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.3150	32.06	20.73	52.79	74.00	-21.21	Peak	
2 *	11591.3350	19.42	20.74	40.16	54.00	-13.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz

Vertical

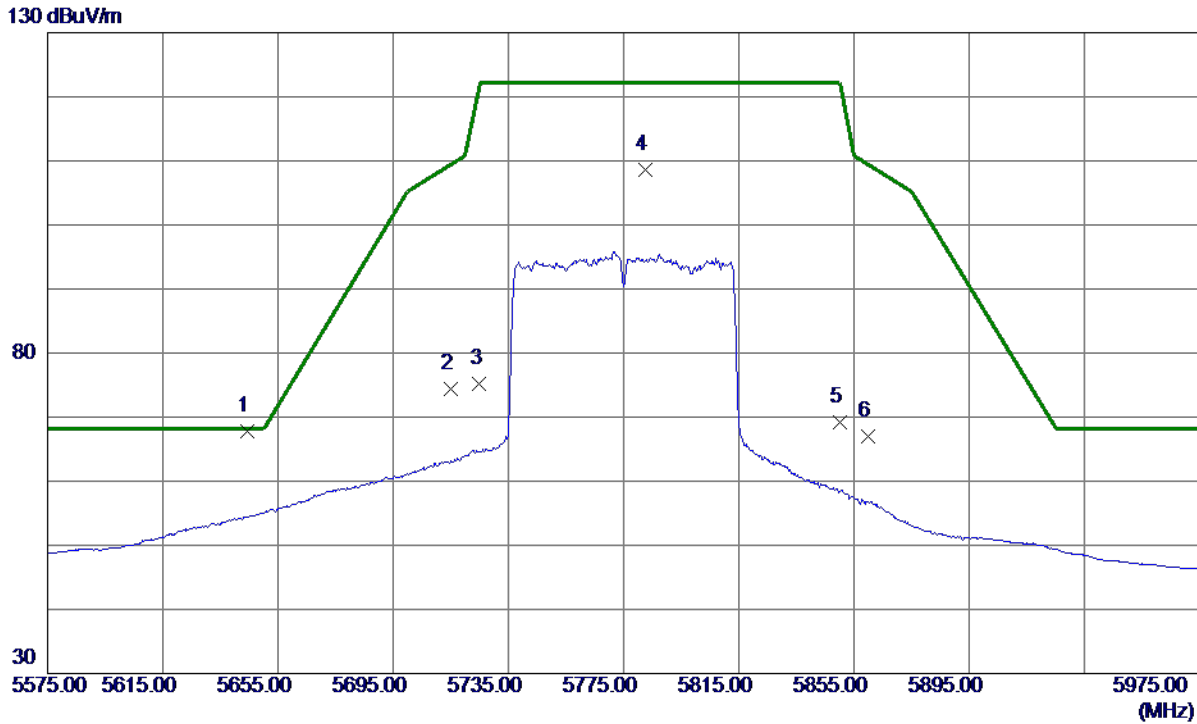

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5644.2000	52.27	15.52	67.79	68.20	-0.41	Peak	
2	5715.0000	58.76	15.65	74.41	109.40	-34.99	Peak	
3	5725.0000	59.47	15.67	75.14	122.20	-47.06	Peak	
4	5782.6000	92.81	15.77	108.58	122.20	-13.62	Peak	No Limit
5	5850.0000	53.37	15.90	69.27	122.20	-52.93	Peak	
6	5860.0000	51.15	15.92	67.07	109.40	-42.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz

Vertical

80 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11551.6830	20.37	11.20	31.57	54.00	-22.43	AVG	
2	11552.1050	33.36	11.20	44.56	74.00	-29.44	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz

Horizontal

130 dBuV/m

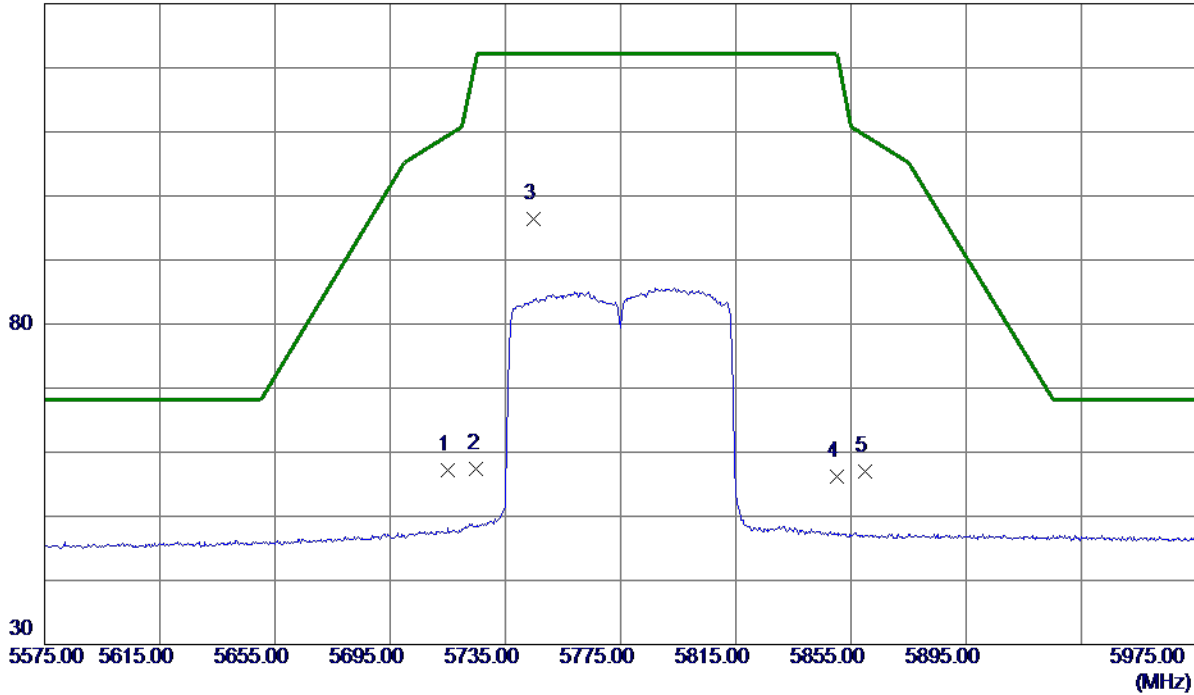

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.47	15.65	57.12	109.40	-52.28	Peak	
2	5725.0000	41.81	15.67	57.48	122.20	-64.72	Peak	
3 *	5744.6000	80.75	15.71	96.46	122.20	-25.74	Peak	No Limit
4	5850.0000	40.25	15.90	56.15	122.20	-66.05	Peak	
5	5860.0000	41.15	15.92	57.07	109.40	-52.33	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz

Horizontal

80 dBuV/m

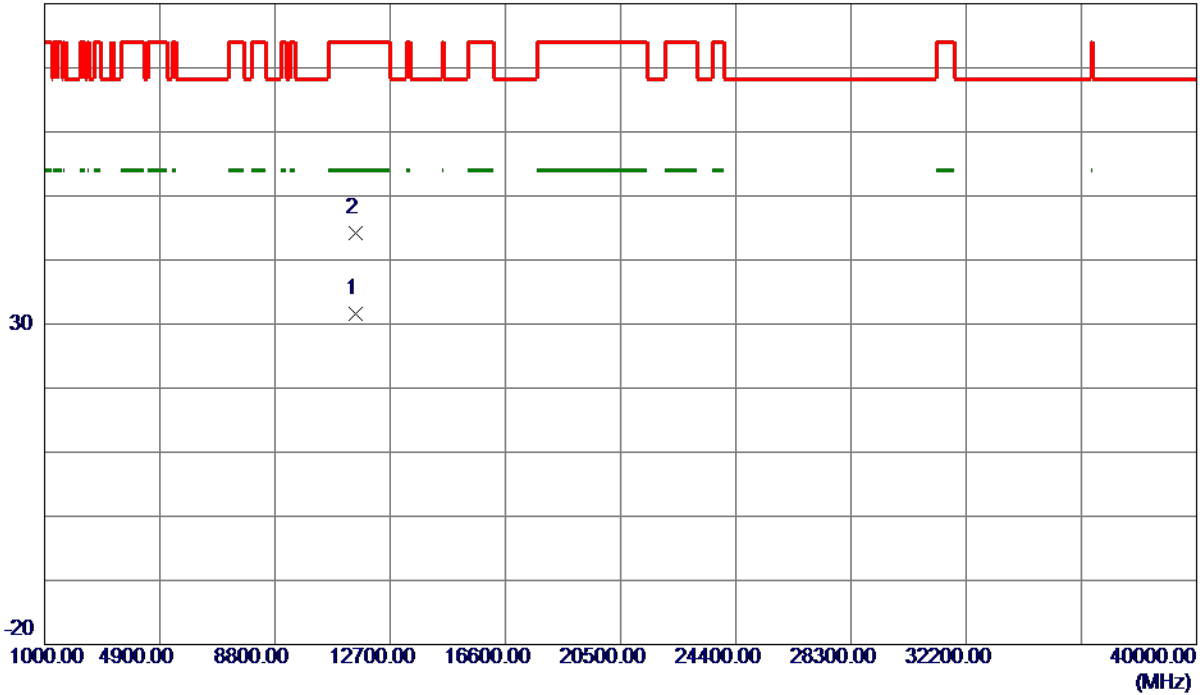

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.1769	20.35	11.20	31.55	54.00	-22.45	AVG	
2	11550.3450	33.08	11.20	44.28	74.00	-29.72	Peak	

REMARKS:




- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Non-Beamforming

Test Mode	UNII-1_TX A Mode
------------------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.70	17.30
40	5200	38.65	19.90
48	5240	38.29	19.10

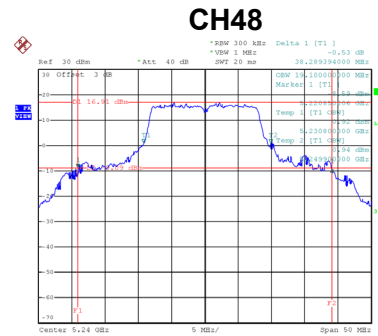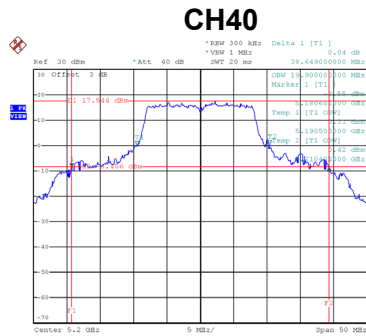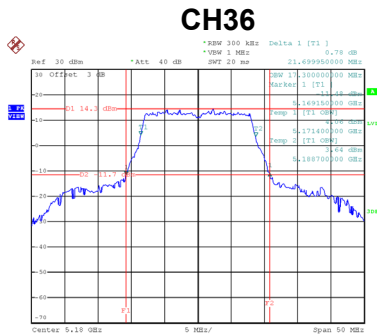




Date: 12.JUL.2019 22:20:49

Date: 12.JUL.2019 22:22:59

Date: 12.JUL.2019 22:23:53

Test Mode	UNII-3_TX A Mode
------------------	-------------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	16.35	16.80	500	Complies
157	5785	16.45	16.80	500	Complies
165	5825	16.35	16.60	500	Complies

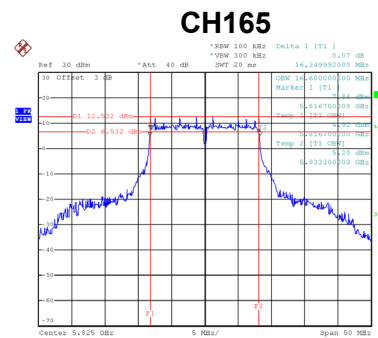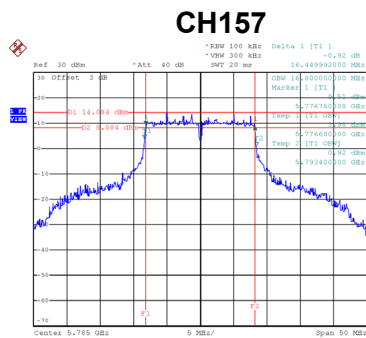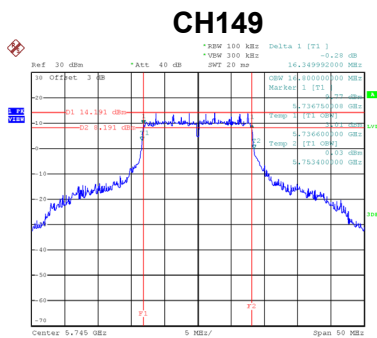


Date: 12.JUL.2019 22:26:03

Date: 12.JUL.2019 22:27:14


Date: 12.JUL.2019 22:29:20

Test Mode	UNII-1_TX AC (VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	22.00	18.20
40	5200	34.19	18.70
48	5240	34.20	18.80

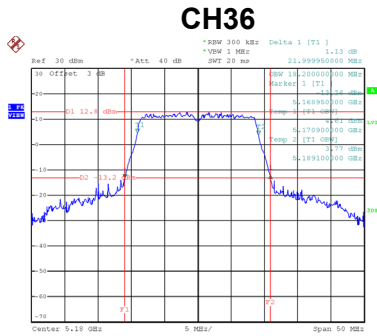

Date: 22_JUN,2019 17:13:30

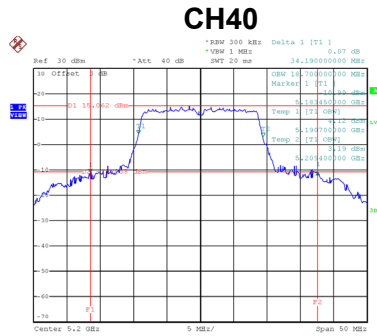


Date: 22_JUN,2019 17:14:19

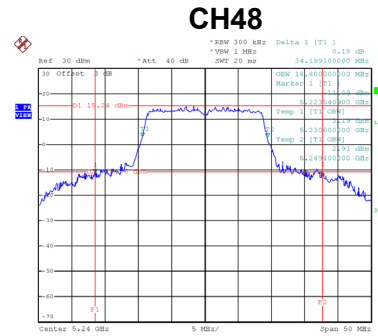


Date: 22_JUN,2019 17:15:11

Test Mode	UNII-1_TX AC (VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	78.90	40.20
46	5230	78.00	40.00

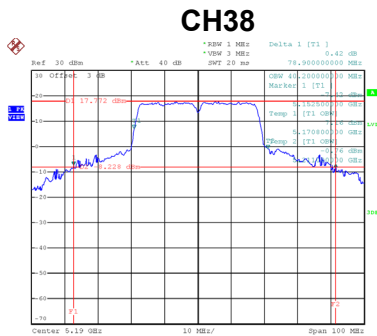

Date: 22_JUN,2019 17:28:29

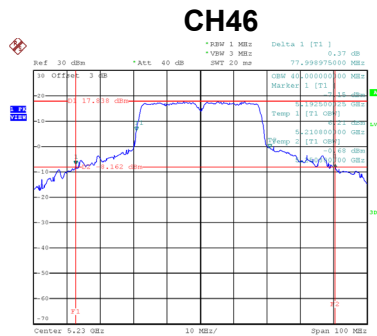


Date: 22_JUN,2019 17:30:27

Test Mode	UNII-1_TX AC (VHT80)
-----------	----------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	82.41	76.00


CH42

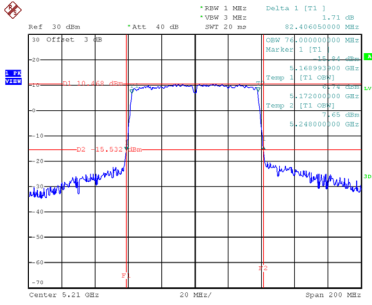


Date: 22 JUN 2019 18:14:33

Test Mode	UNII-1_TX AX (HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	26.69	19.40
40	5200	40.49	20.10
48	5240	38.99	19.90

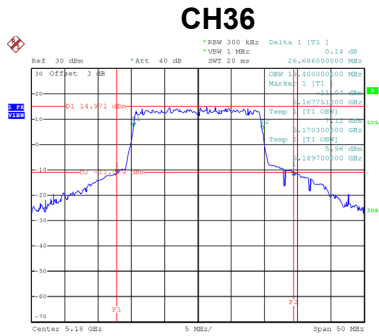

Date: 22 JUN 2019 17:56:49

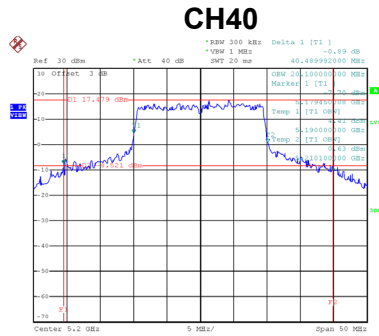


Date: 22 JUN 2019 16:25:06

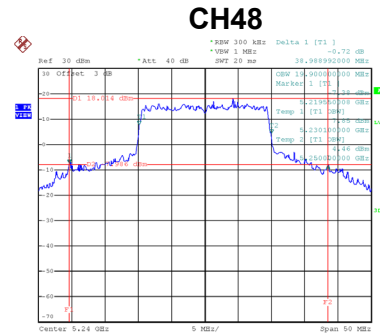


Date: 22 JUN 2019 16:25:53

Test Mode	UNII-1_TX AX (HE40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	41.70	38.00
46	5230	57.99	38.40

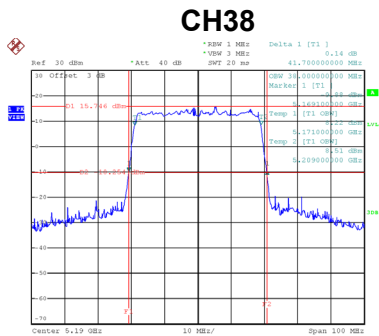

Date: 22 JUN 2019 17:58:43

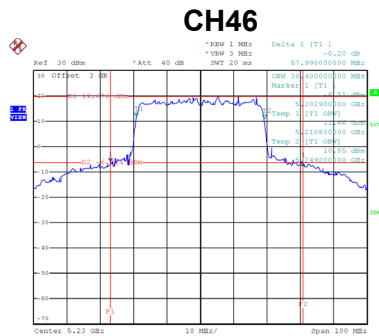


Date: 22 JUN 2019 18:00:30

Test Mode	UNII-1_TX AX (HE80)
-----------	---------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	82.20	77.20


CH42

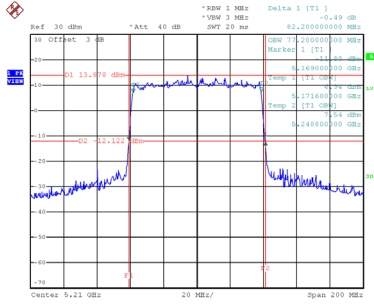


Date: 22 JUN 2019 18:02:19

Test Mode UNII-3_TX AC (VHT20) Mode


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	17.65	17.80	500	Complies
157	5785	17.65	17.80	500	Complies
165	5825	17.65	17.80	500	Complies

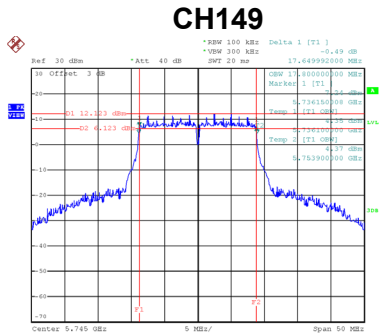

Date: 22 JUN, 2019 17:16:26

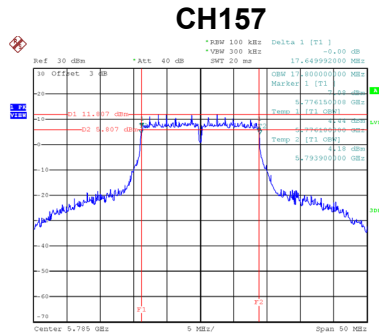


Date: 22 JUN, 2019 17:17:33

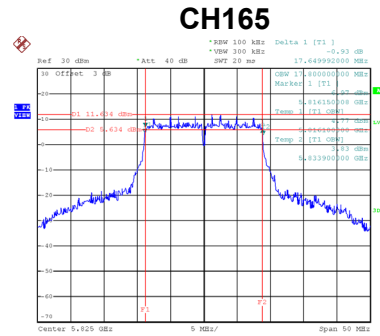


Date: 22 JUN, 2019 17:18:42

Test Mode UNII-3_TX AC (VHT40) Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.60	36.40	500	Complies
159	5795	36.50	36.40	500	Complies

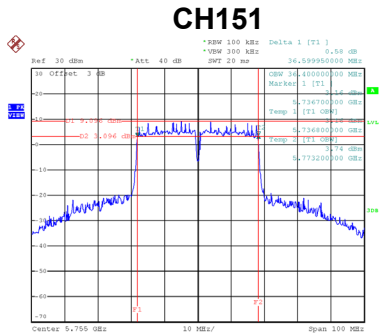

Date: 22 JUN, 2019 17:32:31

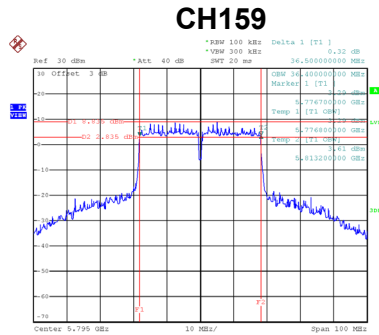


Date: 22 JUN, 2019 17:34:44

Test Mode	UNII-3_TX AC (VHT80)
-----------	----------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	77.00	76.00	500	Complies

CH155

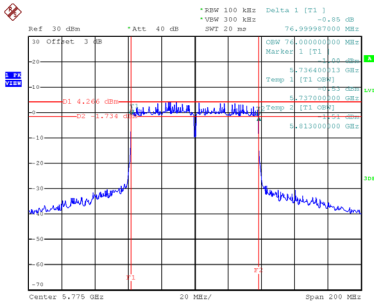


Date: 22 JUN 2019 18:16:35

Test Mode	UNII-3_TX AX (HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	19.05	19.20	500	Complies
157	5785	19.10	19.10	500	Complies
165	5825	19.05	19.10	500	Complies

CH149

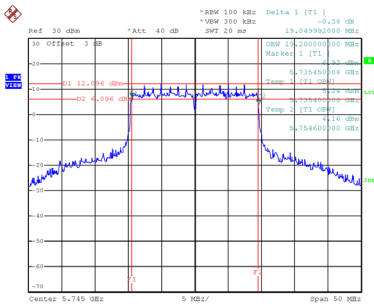


Date: 22 JUN 2019 16:26:41

CH157

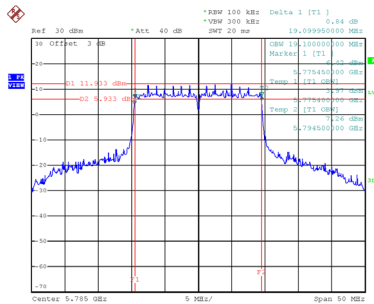

Date: 22 JUN 2019 16:27:45

CH165

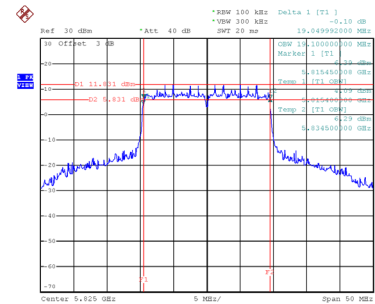


Date: 22 JUN 2019 16:28:35

Test Mode	UNII-3_TX AX (HE40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	37.59	37.80	500	Complies
159	5795	37.50	37.60	500	Complies

CH151

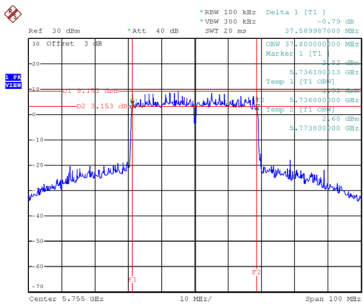

Date: 22 JUN 2019 16:31:16

CH159

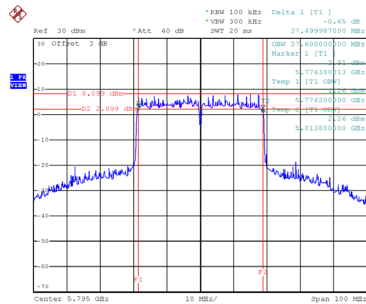


Date: 22 JUN 2019 16:32:11

Test Mode	UNII-3_TX AX (HE80)
-----------	---------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	76.79	76.80	500	Complies

CH155



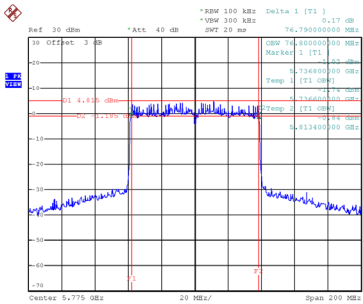


Date: 22 JUN 2019 18:05:00

Beamforming

Test Mode	UNII-1_TX AC (VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.85	18.20
40	5200	21.91	18.20
48	5240	22.10	18.40

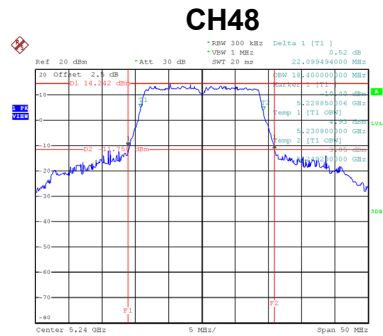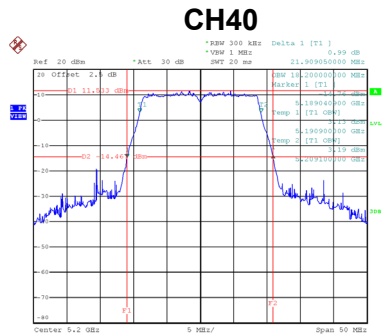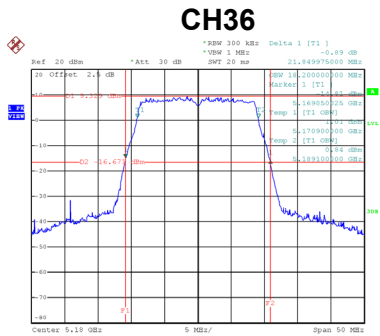



Date: 29 JUN 2019 15:30:59

Date: 29 JUN 2019 15:34:00

Date: 29 JUN 2019 15:34:59

Test Mode	UNII-1_TX AC (VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	41.80	36.80
46	5230	41.90	36.80

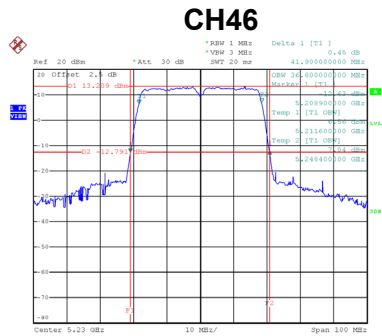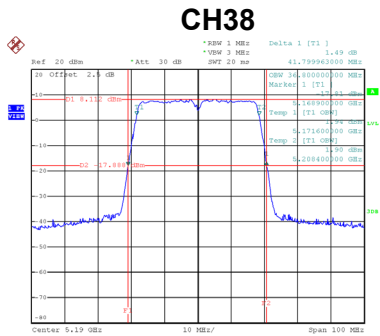


Date: 29 JUN 2019 15:55:37

Date: 29 JUN 2019 15:56:24

Test Mode	UNII-1_TX AC (VHT80)
-----------	----------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	83.00	76.00

CH42

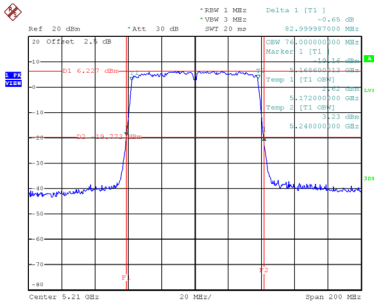


Date: 29 JUN 2019 15:59:05

Test Mode	UNII-1_TX AX (HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.85	19.10
40	5200	22.00	19.20
48	5240	27.00	19.40

CH36

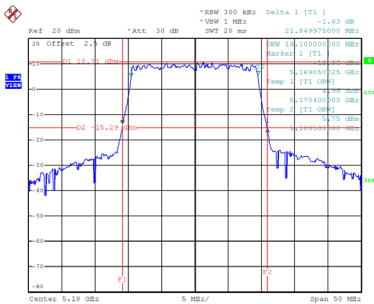


Date: 29 JUN 2019 16:32:22

CH40

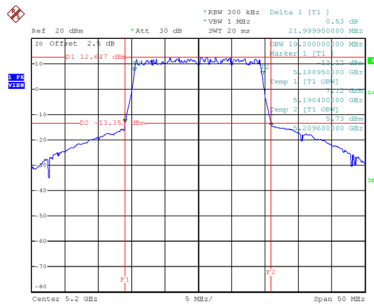

Date: 29 JUN 2019 16:33:08



CH48

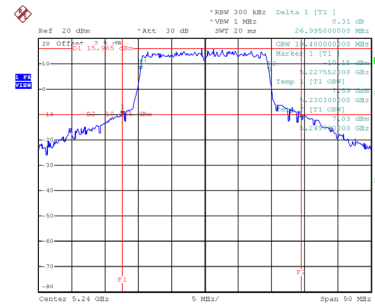

Date: 29 JUN 2019 16:33:45

Test Mode	UNII-1_TX AX (HE40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	41.61	38.00
46	5230	41.70	38.00

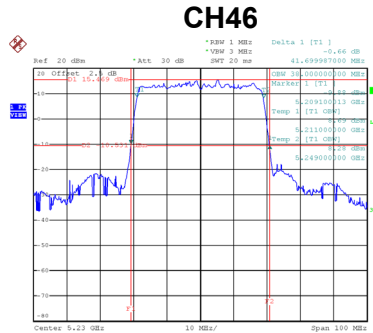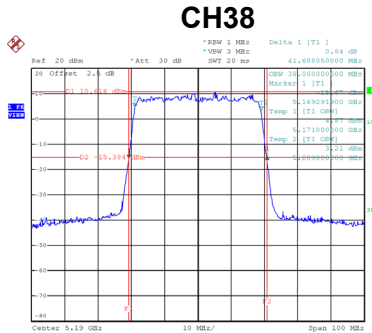


Date: 29 JUN 2019 16:37:21

Date: 29 JUN 2019 16:38:22

Test Mode	UNII-1_TX AX (HE80)
-----------	---------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	82.20	77.20

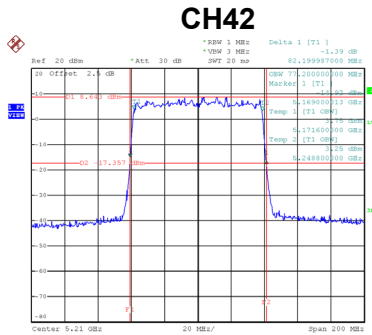


Date: 29 JUN 2019 16:41:31

Test Mode	UNII-3_TX AC (VHT20) Mode
------------------	----------------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	17.65	17.80	500	Complies
157	5785	17.65	17.90	500	Complies
165	5825	17.75	17.80	500	Complies

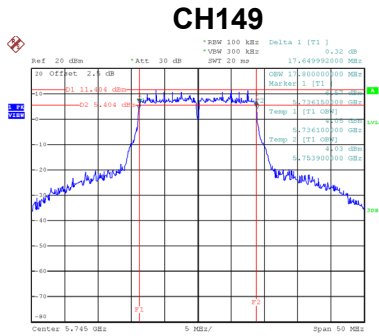

Date: 29_JUN,2019 15:35:38

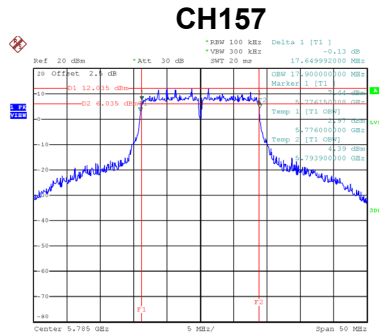


Date: 29_JUN,2019 15:37:02

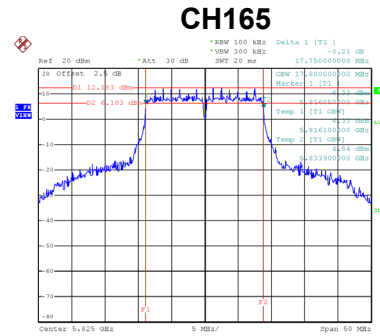


Date: 29_JUN,2019 15:37:39

Test Mode	UNII-3_TX AC (VHT40) Mode
------------------	----------------------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.60	36.40	500	Complies
159	5795	36.50	36.40	500	Complies

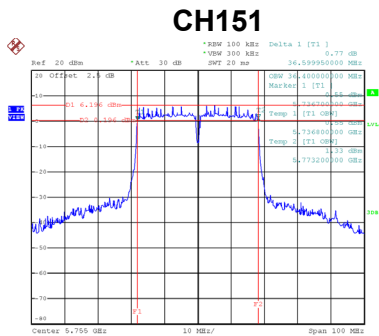

Date: 29_JUN,2019 15:57:22

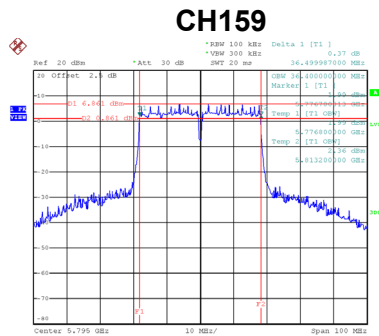


Date: 29_JUN,2019 15:58:10

Test Mode	UNII-3_TX AC (VHT80)
-----------	----------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	76.00	76.00	500	Complies

CH155

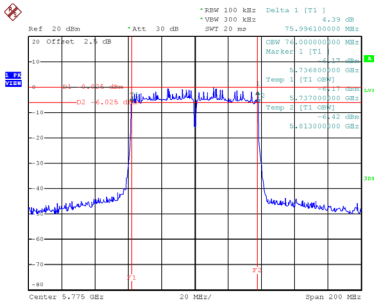


Date: 29 JUN 2019 15:59:55

Test Mode	UNII-3_TX AX (HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	19.10	19.10	500	Complies
157	5785	18.99	19.10	500	Complies
165	5825	19.05	19.10	500	Complies

CH149

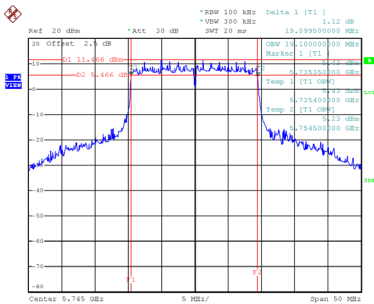


Date: 29 JUN 2019 16:34:55

CH157

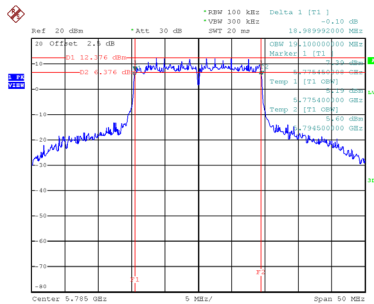

Date: 29 JUN 2019 16:35:36

CH165

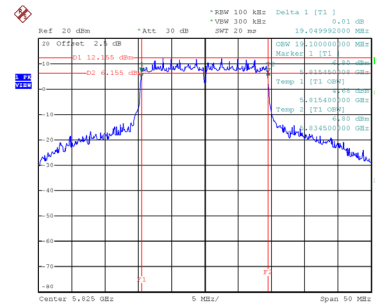


Date: 29 JUN 2019 16:36:11

Test Mode UNII-3_TX AX (HE40) Mode


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	37.40	37.60	500	Complies
159	5795	37.79	37.60	500	Complies

CH151

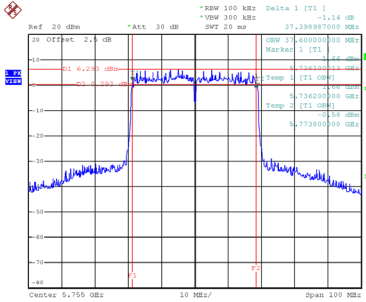

Date: 29 JUN 2019 16:39:21

CH159

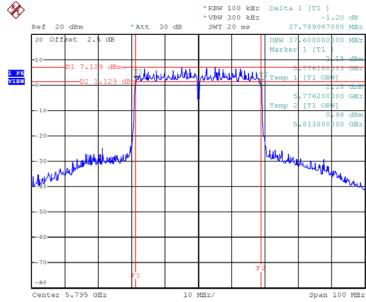


Date: 29 JUN 2019 16:40:23

Test Mode UNII-3_TX AX (HE80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	77.60	76.80	500	Complies

CH155

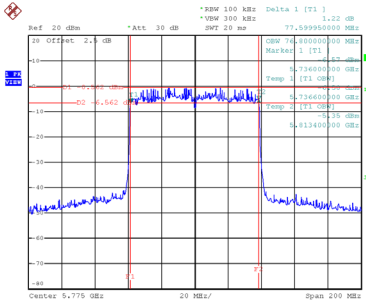

Date: 29 JUN 2019 16:42:21

APPENDIX F - MAXIMUM CONDUCTED OUTPUT POWER

Non-Beamforming

Test Mode	UNII-1_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.86	0.23	20.09	30.00	1.00	Complies
40	5200	22.37	0.23	22.60	30.00	1.00	Complies
48	5240	22.94	0.23	23.17	30.00	1.00	Complies

Test Mode	UNII-1_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.37	0.23	19.60	30.00	1.00	Complies
40	5200	22.52	0.23	22.75	30.00	1.00	Complies
48	5240	22.62	0.23	22.85	30.00	1.00	Complies

Test Mode	UNII-1_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	22.86	30.00	1.00	Complies
40	5200	25.69	30.00	1.00	Complies
48	5240	26.02	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.84	0.23	20.07	30.00	1.00	Complies
40	5200	21.42	0.23	21.65	30.00	1.00	Complies
48	5240	21.82	0.23	22.05	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.56	0.23	19.79	30.00	1.00	Complies
40	5200	20.95	0.23	21.18	30.00	1.00	Complies
48	5240	21.65	0.23	21.88	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	22.94	30.00	1.00	Complies
40	5200	24.43	30.00	1.00	Complies
48	5240	24.98	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.08	0.57	17.65	30.00	1.00	Complies
46	5230	21.41	0.57	21.98	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.39	0.57	17.96	30.00	1.00	Complies
46	5230	21.57	0.57	22.14	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	20.82	30.00	1.00	Complies
46	5230	25.08	30.00	1.00	Complies

Test Mode	UNII-3_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.61	0.23	22.84	30.00	1.00	Complies
157	5785	22.77	0.23	23.00	30.00	1.00	Complies
165	5825	22.91	0.23	23.14	30.00	1.00	Complies

Test Mode	UNII-3_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.76	0.23	22.99	30.00	1.00	Complies
157	5785	22.84	0.23	23.07	30.00	1.00	Complies
165	5825	22.55	0.23	22.78	30.00	1.00	Complies

Test Mode	UNII-3_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	25.93	30.00	1.00	Complies
157	5785	26.04	30.00	1.00	Complies
165	5825	25.97	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.57	0.23	22.80	30.00	1.00	Complies
157	5785	22.79	0.23	23.02	30.00	1.00	Complies
165	5825	22.65	0.23	22.88	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.37	0.23	22.60	30.00	1.00	Complies
157	5785	22.58	0.23	22.81	30.00	1.00	Complies
165	5825	22.48	0.23	22.71	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	25.71	30.00	1.00	Complies
157	5785	25.93	30.00	1.00	Complies
165	5825	25.81	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.65	0.57	23.22	30.00	1.00	Complies
159	5795	22.58	0.57	23.15	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.54	0.57	23.11	30.00	1.00	Complies
159	5795	22.61	0.57	23.18	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	26.18	30.00	1.00	Complies
159	5795	26.18	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	20.15	0.00	20.15	30.00	1.00	Complies
40	5200	21.48	0.00	21.48	30.00	1.00	Complies
48	5240	22.08	0.00	22.08	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.93	0.00	19.93	30.00	1.00	Complies
40	5200	21.12	0.00	21.12	30.00	1.00	Complies
48	5240	21.72	0.00	21.72	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	23.05	30.00	1.00	Complies
40	5200	24.31	30.00	1.00	Complies
48	5240	24.91	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.49	0.29	17.78	30.00	1.00	Complies
46	5230	21.46	0.29	21.75	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.78	0.29	18.07	30.00	1.00	Complies
46	5230	21.86	0.29	22.15	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	20.94	30.00	1.00	Complies
46	5230	24.97	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	17.43	0.57	18.00	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	17.53	0.57	18.10	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	21.06	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.81	0.00	22.81	30.00	1.00	Complies
157	5785	22.85	0.00	22.85	30.00	1.00	Complies
165	5825	22.88	0.00	22.88	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.75	0.00	22.75	30.00	1.00	Complies
157	5785	22.76	0.00	22.76	30.00	1.00	Complies
165	5825	22.69	0.00	22.69	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	25.79	30.00	1.00	Complies
157	5785	25.82	30.00	1.00	Complies
165	5825	25.80	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.72	0.29	23.01	30.00	1.00	Complies
159	5795	22.83	0.29	23.12	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.65	0.29	22.94	30.00	1.00	Complies
159	5795	22.66	0.29	22.95	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	25.99	30.00	1.00	Complies
159	5795	26.05	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	19.78	0.57	20.35	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	19.92	0.57	20.49	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	23.43	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	20.25	0.12	20.37	30.00	1.00	Complies
40	5200	22.72	0.12	22.84	30.00	1.00	Complies
48	5240	22.84	0.12	22.96	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.89	0.12	20.01	30.00	1.00	Complies
40	5200	22.42	0.12	22.54	30.00	1.00	Complies
48	5240	22.75	0.12	22.87	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	23.20	30.00	1.00	Complies
40	5200	25.70	30.00	1.00	Complies
48	5240	25.92	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.59	0.39	17.98	30.00	1.00	Complies
46	5230	21.92	0.39	22.31	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.03	0.39	18.42	30.00	1.00	Complies
46	5230	22.23	0.39	22.62	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	21.22	30.00	1.00	Complies
46	5230	25.48	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	17.71	0.53	18.24	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	17.73	0.53	18.26	30.00	1.00	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	21.26	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.65	0.12	22.77	30.00	1.00	Complies
157	5785	22.84	0.12	22.96	30.00	1.00	Complies
165	5825	22.87	0.12	22.99	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.88	0.12	23.00	30.00	1.00	Complies
157	5785	22.88	0.12	23.00	30.00	1.00	Complies
165	5825	22.75	0.12	22.87	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	25.89	30.00	1.00	Complies
157	5785	25.99	30.00	1.00	Complies
165	5825	25.94	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.93	0.39	23.32	30.00	1.00	Complies
159	5795	22.78	0.39	23.17	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.83	0.39	23.22	30.00	1.00	Complies
159	5795	22.79	0.39	23.18	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	26.28	30.00	1.00	Complies
159	5795	26.19	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	19.97	0.53	20.50	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	20.21	0.53	20.74	30.00	1.00	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	23.63	30.00	1.00	Complies

Beamforming

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.53	0.23	18.76	28.63	0.73	Complies
40	5200	20.51	0.23	20.74	28.63	0.73	Complies
48	5240	22.95	0.23	23.18	28.63	0.73	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.12	0.23	18.35	28.63	0.73	Complies
40	5200	20.08	0.23	20.31	28.63	0.73	Complies
48	5240	22.69	0.23	22.92	28.63	0.73	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	21.57	28.63	0.73	Complies
40	5200	23.54	28.63	0.73	Complies
48	5240	26.06	28.63	0.73	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	14.77	0.57	15.34	28.63	0.73	Complies
46	5230	19.57	0.57	20.14	28.63	0.73	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.07	0.57	15.64	28.63	0.73	Complies
46	5230	20.33	0.57	20.90	28.63	0.73	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.51	28.63	0.73	Complies
46	5230	23.55	28.63	0.73	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.65	0.23	22.88	27.20	0.52	Complies
157	5785	22.68	0.23	22.91	27.20	0.52	Complies
165	5825	22.86	0.23	23.09	27.20	0.52	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.74	0.23	22.97	27.20	0.52	Complies
157	5785	22.76	0.23	22.99	27.20	0.52	Complies
165	5825	22.56	0.23	22.79	27.20	0.52	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	25.93	27.20	0.52	Complies
157	5785	25.96	27.20	0.52	Complies
165	5825	25.95	27.20	0.52	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	20.83	0.57	21.40	27.20	0.52	Complies
159	5795	21.86	0.57	22.43	27.20	0.52	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	20.89	0.57	21.46	27.20	0.52	Complies
159	5795	21.75	0.57	22.32	27.20	0.52	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	24.44	27.20	0.52	Complies
159	5795	25.39	27.20	0.52	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.32	0.00	18.32	28.63	0.73	Complies
40	5200	20.75	0.00	20.75	28.63	0.73	Complies
48	5240	22.95	0.00	22.95	28.63	0.73	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.43	0.00	18.43	28.63	0.73	Complies
40	5200	20.47	0.00	20.47	28.63	0.73	Complies
48	5240	22.83	0.00	22.83	28.63	0.73	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	21.39	28.63	0.73	Complies
40	5200	23.62	28.63	0.73	Complies
48	5240	25.90	28.63	0.73	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.23	0.29	15.52	28.63	0.73	Complies
46	5230	20.11	0.29	20.40	28.63	0.73	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.49	0.29	15.78	28.63	0.73	Complies
46	5230	20.63	0.29	20.92	28.63	0.73	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.67	28.63	0.73	Complies
46	5230	23.68	28.63	0.73	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	16.36	0.57	16.93	28.63	0.73	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	16.53	0.57	17.10	28.63	0.73	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	20.02	28.63	0.73	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.75	0.00	22.75	27.20	0.52	Complies
157	5785	22.71	0.00	22.71	27.20	0.52	Complies
165	5825	22.90	0.00	22.90	27.20	0.52	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.93	0.00	22.93	27.20	0.52	Complies
157	5785	22.63	0.00	22.63	27.20	0.52	Complies
165	5825	22.81	0.00	22.81	27.20	0.52	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	25.85	27.20	0.52	Complies
157	5785	25.68	27.20	0.52	Complies
165	5825	25.87	27.20	0.52	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	21.31	0.29	21.60	27.20	0.52	Complies
159	5795	22.33	0.29	22.62	27.20	0.52	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	21.29	0.29	21.58	27.20	0.52	Complies
159	5795	22.33	0.29	22.62	27.20	0.52	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	24.61	27.20	0.52	Complies
159	5795	25.64	27.20	0.52	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	17.49	0.57	18.06	27.20	0.52	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	18.04	0.57	18.61	27.20	0.52	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	21.35	27.20	0.52	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.77	0.12	18.89	28.63	0.73	Complies
40	5200	20.88	0.12	21.00	28.63	0.73	Complies
48	5240	22.92	0.12	23.04	28.63	0.73	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.93	0.12	19.05	28.63	0.73	Complies
40	5200	20.69	0.12	20.81	28.63	0.73	Complies
48	5240	22.71	0.12	22.83	28.63	0.73	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	21.98	28.63	0.73	Complies
40	5200	23.91	28.63	0.73	Complies
48	5240	25.94	28.63	0.73	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.27	0.39	15.66	28.63	0.73	Complies
46	5230	20.13	0.39	20.52	28.63	0.73	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.74	0.39	16.13	28.63	0.73	Complies
46	5230	20.89	0.39	21.28	28.63	0.73	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.91	28.63	0.73	Complies
46	5230	23.93	28.63	0.73	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	16.47	0.53	17.00	28.63	0.73	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	16.68	0.53	17.21	28.63	0.73	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	20.12	28.63	0.73	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.81	0.12	22.93	27.20	0.52	Complies
157	5785	22.69	0.12	22.81	27.20	0.52	Complies
165	5825	22.98	0.12	23.10	27.20	0.52	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.69	0.12	22.81	27.20	0.52	Complies
157	5785	22.73	0.12	22.85	27.20	0.52	Complies
165	5825	22.48	0.12	22.60	27.20	0.52	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	25.88	27.20	0.52	Complies
157	5785	25.84	27.20	0.52	Complies
165	5825	25.86	27.20	0.52	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	21.39	0.39	21.78	27.20	0.52	Complies
159	5795	22.58	0.39	22.97	27.20	0.52	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	21.68	0.39	22.07	27.20	0.52	Complies
159	5795	22.21	0.39	22.60	27.20	0.52	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	24.94	27.20	0.52	Complies
159	5795	25.80	27.20	0.52	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	17.86	0.53	18.39	27.20	0.52	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	18.16	0.53	18.69	27.20	0.52	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Total
-----------	--------------------------------




Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	21.55	27.20	0.52	Complies

APPENDIX G - POWER SPECTRAL DENSITY

Non-Beamforming




Test Mode	UNII-1_TX A Mode_Ant. 1
------------------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	10.39	0.23	10.62	15.62	Complies
40	5200	12.40	0.23	12.63	15.62	Complies
48	5240	12.10	0.23	12.33	15.62	Complies

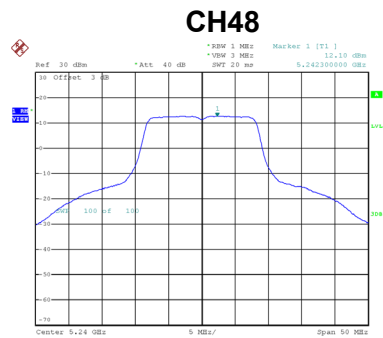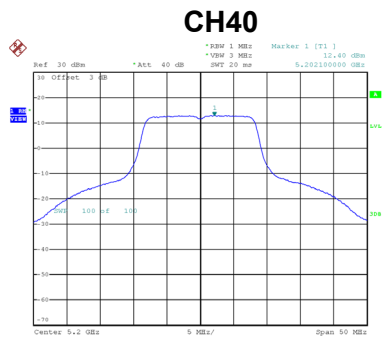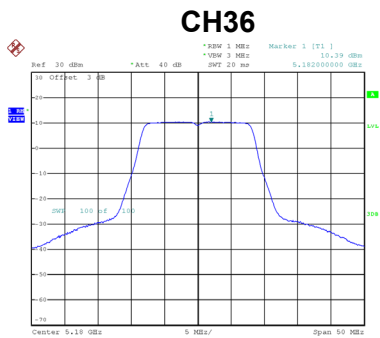

Test Mode	UNII-1_TX A Mode_Ant. 2
------------------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	9.69	0.23	9.92	15.62	Complies
40	5200	11.76	0.23	11.99	15.62	Complies
48	5240	11.84	0.23	12.07	15.62	Complies

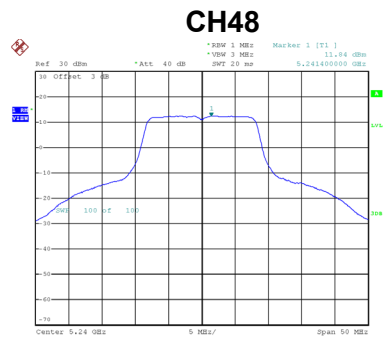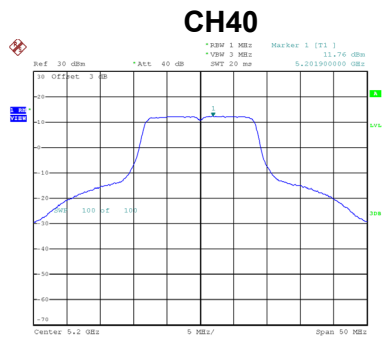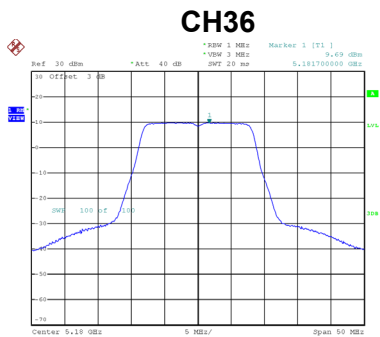

Test Mode	UNII-1_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	13.29	15.62	Complies
40	5200	15.33	15.62	Complies
48	5240	15.21	15.62	Complies