

MEASUREMENT REPORT

FCC PART 15.407 WLAN 802.11a/n/ac/ax

FCC ID: TE7AX3200

APPLICANT: TP-Link Technologies Co., Ltd.

Application Type: Certification

Product: AX3200 Tri-Band Wi-Fi 6 Router

Model No.: Archer AX3200

Brand Name: tp-link

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part15 Subpart E (Section 15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01,
KDB 662911 D01v02r01, KDB 484596 D01v01

Test Date: March 30 ~ July 04, 2020

Reviewed By:



(Paddy Chen)

Approved By:



(Chenz Ker)



Testing Laboratory
3261

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2007TW0001-U2	Rev. 01	Initial report	07-10-2020	Valid

Note: This report reused the test data from other authorized device (FCC ID: TE7AX90, Original Grant Date: June 16, 2020). And add some spot check verified data according to KDB 484596 D01v01 and the difference between the FCC IDs.

CONTENTS

Description	Page
General Information	6
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report	9
2.4. Description of Available Antennas.....	10
2.5. Description of Antenna RF Port	11
2.6. Test Mode	12
2.7. Description of Test Software	12
2.8. Duty Cycle	13
2.9. Test Configuration	15
2.10. EMI Suppression Device(s)/Modifications	15
2.11. Labeling Requirements.....	15
3. DESCRIPTION OF TEST	16
3.1. Evaluation Procedure	16
3.2. AC Line Conducted Emissions	16
3.3. Radiated Emissions.....	17
4. ANTENNA REQUIREMENTS	18
5. TEST EQUIPMENT CALIBRATION DATE	19
6. MEASUREMENT UNCERTAINTY	20
7. TEST RESULT	21
7.1. Summary	21
7.2. 26dB Bandwidth Measurement.....	22
7.2.1. Test Limit	22
7.2.2. Test Procedure used.....	22
7.2.3. Test Setting.....	22
7.2.4. Test Setup	22
7.2.5. Test Result.....	23
7.3. 6dB Bandwidth Measurement.....	30
7.3.1. Test Limit	30

7.3.2. Test Procedure used.....	30
7.3.3. Test Setting.....	30
7.3.4. Test Setup	30
7.3.5. Test Result.....	31
7.4. Output Power Measurement.....	35
7.4.1. Test Limit	35
7.4.2. Test Procedure Used	35
7.4.3. Test Setting.....	35
7.4.4. Test Setup	35
7.4.5. Test Result.....	36
7.5. Power Spectral Density Measurement.....	44
7.5.1. Test Limit	44
7.5.2. Test Procedure Used	44
7.5.3. Test Setting.....	44
7.5.4. Test Setup	45
7.5.5. Test Result.....	46
7.6. Frequency Stability Measurement.....	94
7.6.1. Test Limit	94
7.6.2. Test Procedure Used	94
7.6.3. Test Setup	95
7.6.4. Test Result.....	96
7.7. Radiated Spurious Emission Measurement	97
7.7.1. Test Limit	97
7.7.2. Test Procedure Used	97
7.7.3. Test Setting.....	97
7.7.4. Test Setup	99
7.7.5. Test Result.....	100
7.8. Radiated Restricted Band Edge Measurement	226
7.8.1. Test Limit	226
7.8.2. Test Procedure Used	227
7.8.3. Test Setting.....	228
7.8.4. Test Setup	229
7.8.5. Test Result.....	230
7.9. AC Conducted Emissions Measurement.....	385
7.9.1. Test Limit	385
7.9.2. Test Procedure	385
7.9.3. Test Setup	386
7.9.4. Test Result.....	387

8. CONCLUSION.....	389
Appendix A - Test Setup Photograph	390
Appendix B - EUT Photograph.....	391

General Information

Applicant:	TP-Link Technologies Co., Ltd.
Applicant Address:	Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China
Manufacturer:	TP-Link Technologies Co., Ltd.
Manufacturer Address:	Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Designation No. TW3261) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

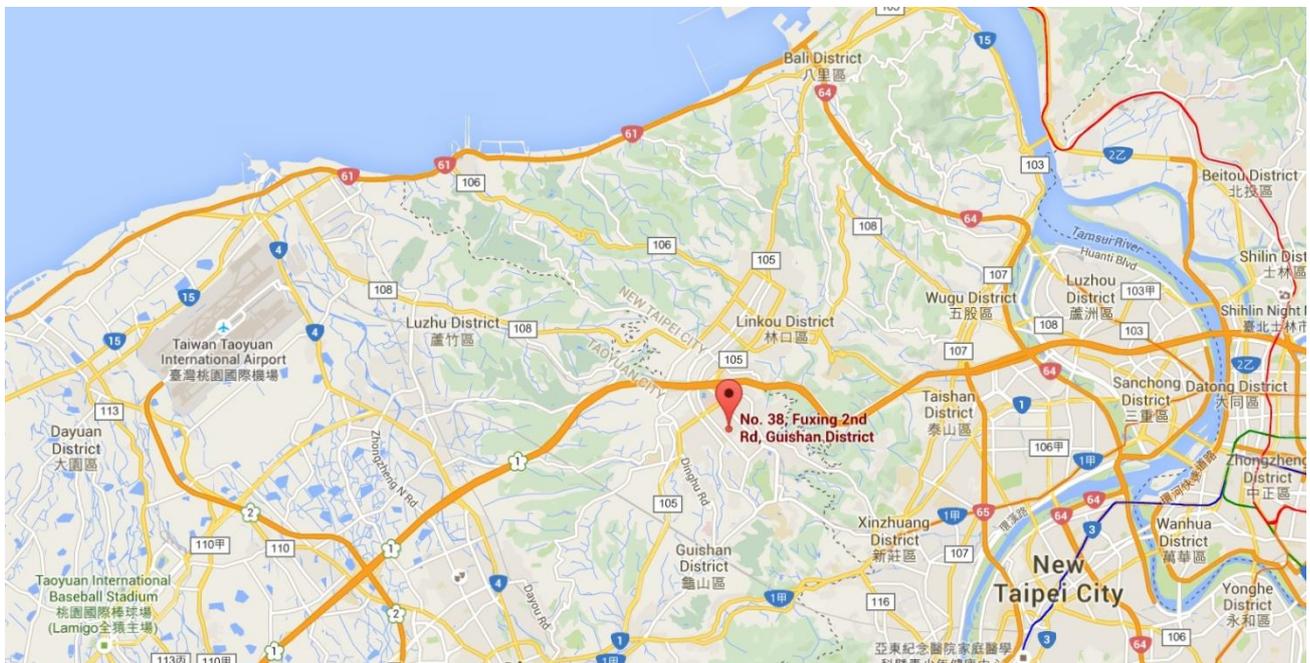

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	AX3200 Tri-Band Wi-Fi 6 Router
Model No.:	Archer AX3200
Brand Name:	tp-link
Wi-Fi Specification:	802.11a/b/g/n/ac/ax

Note: Archer AX3200 (FCC ID: TE7AX3200) is same with Archer AX90 (FCC ID: TE7AX90) except:

1. Archer AX3200 has shut down the DFS band
2. Archer AX3200 combines two external antennas into one external antenna and changes one external antenna to one internal antenna, the internal antenna has the same antenna pattern with external antenna.

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2402Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	151	5755 MHz
159	5795 MHz	--	--	--	--

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	155	5775 MHz	--	--


2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	T _x Paths	Number of spatial streams	Max Antenna Gain (dBi)	Beam-Forming Directional Gain (dBi)	CDD Directional Gain (dBi)	
						For Power	For PSD
Monopole Antenna	2412 ~ 2462	2	1	3.52	6.53	3.52	6.53
	5150 ~ 5250	2	1	3.54	6.55	3.54	6.55
	5725 ~ 5850	4	1	3.20	9.22	3.20	9.22

Note:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.
 - For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB;
 - For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ac/ax, not include 802.11a/b/g/n. BF Directional gain = $G_{ANT} + 10 \log (N_{ANT})$.

2.5. Description of Antenna RF Port

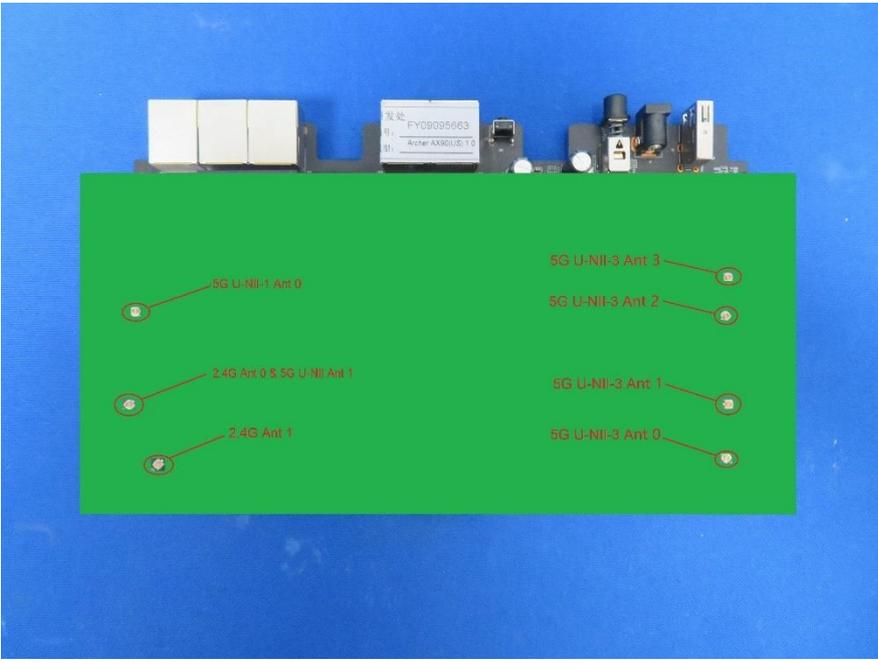Antenna RF Port								
Software Control Port	2.4GHz RF Port		5GHz RF Port					
			U-NII - 1		U-NII -3			
	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 2	Ant 3
 <p>The photograph shows the physical hardware of the antenna RF port. A green rectangular overlay is placed over the board, with red lines pointing to specific antenna ports. The labels are as follows:</p> <ul style="list-style-type: none"> 5G U-NII-1 Ant 0 2.4G Ant 0 & 5G U-NII Ant 1 2.4G Ant 1 5G U-NII-3 Ant 3 5G U-NII-3 Ant 2 5G U-NII-3 Ant 1 5G U-NII-3 Ant 0 								

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps) (CDD mode)
	Mode 2: Transmit by 802.11ac-VHT20 (MCS0) (CDD mode)
	Mode 3: Transmit by 802.11ac-VHT40 (MCS0) (CDD mode)
	Mode 4: Transmit by 802.11ac-VHT80 (MCS0) (CDD mode)
	Mode 5: Transmit by 802.11ax-HE20 (MCS0) (CDD mode)
	Mode 6: Transmit by 802.11ax-HE40 (MCS0) (CDD mode)
	Mode 7: Transmit by 802.11ax-HE80 (MCS0) (CDD mode)
	Mode 8: Transmit by 802.11ac-VHT20 (MCS0) (Beam-Forming mode)
	Mode 9: Transmit by 802.11ac-VHT40 (MCS0) (Beam-Forming mode)
	Mode 10: Transmit by 802.11ac-VHT80 (MCS0) (Beam-Forming mode)
	Mode 11: Transmit by 802.11ax-HE20 (MCS0) (Beam-Forming mode)
	Mode 12: Transmit by 802.11ax-HE40 (MCS0) (Beam-Forming mode)
	Mode 13: Transmit by 802.11ax-HE80 (MCS0) (Beam-Forming mode)

Note: Due to the same modulation between 802.11n and 802.11ac, so 802.11n-HT20 and HT40 are covered by 802.11ac-VHT20 and VHT40 in this report, meanwhile, power setting for 802.11n-HT20 and HT40 will not be greater than 802.11ac-VHT20 and VHT40.

2.7. Description of Test Software


The test utility software used during testing was “accessMTool”.

2.8. Duty Cycle

5GHz (NII) operation is possible in 20MHz, 40MHz, 80MHz and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Model No.	Test Mode -CDD	Duty Cycle
Archer AX3200	802.11a	94.94%
	802.11ac-VHT20	98.52%
	802.11ac-VHT40	96.96%
	802.11ac-VHT80	93.88%
	802.11ax-HE20	97.89%
	802.11ax-HE40	96.02%
	802.11ax-HE80	92.58%



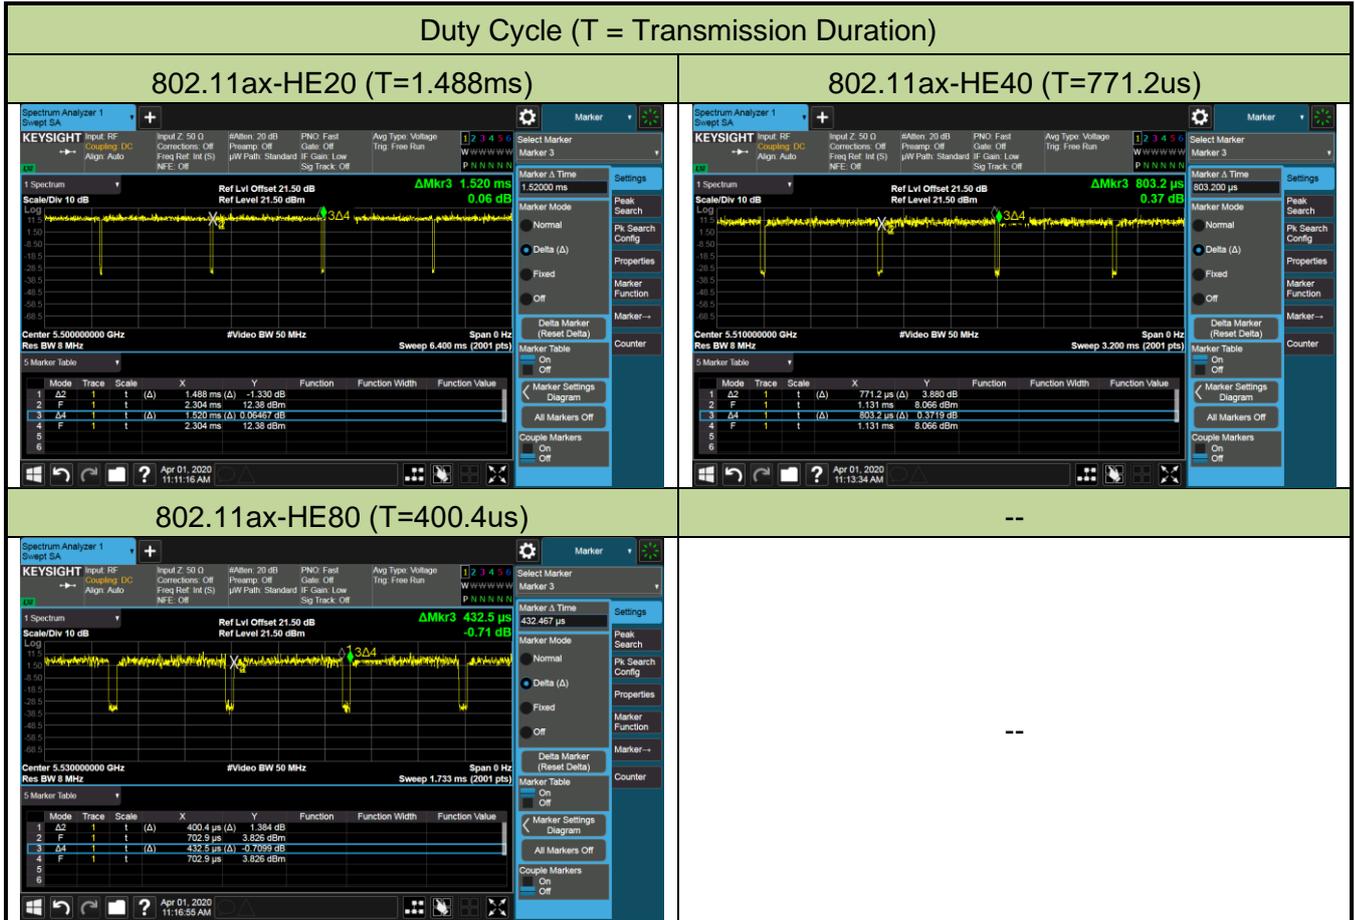

2.9. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.10. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.11. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50 μ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2021/03/26
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2021/04/24
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2021/05/28
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2021/04/29

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2021/06/03
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2021/04/27
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2021/04/24
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2021/04/24
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2021/04/24
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2021/04/24
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2021/03/24
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2021/03/25
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/02
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/07/11
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2021/06/16
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2021/04/29

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2021/04/24
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/02
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/07/11
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2021/06/09
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2021/04/29

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 2.53dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.25dB 1GHz ~ 25GHz: 4.45dB

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(ii), (3)	Maximum Conducted Output Power	Refer to section 7.4		Pass	Section 7.4
15.407(a)(1)(ii), (2), (3), (5)	Peak Power Spectral Density	Refer to section 7.6		Pass	Section 7.5
15.407(g)	Frequency Stability	± 20 ppm		Pass	Section 7.6
15.407(b)(1), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.7 & 7.8
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.9

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- 3) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- 4) Test Items "26dB Bandwidth" & "6dB Bandwidth" have been assessed MIMO transmission, and showed the worst test data in this report.
- 5) EUT supports one configuration only in 802.11ax full RU mode, i.e. 242 tone in 11ax-HE20, 484 tone in 11ax-HE40, 996 tone in 11ax-HE80.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

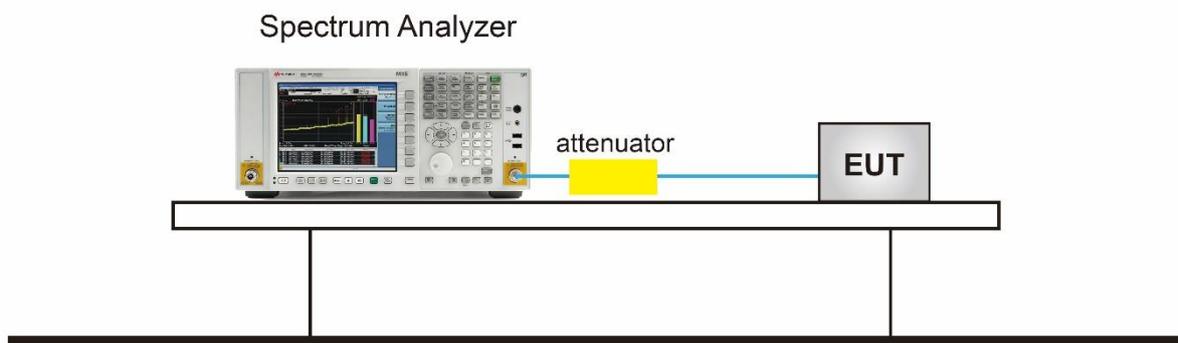

7.2.5. Test Result

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	24 ~ 25°C
Test Engineer	Kevin Ker	Relative Humidity	48 ~ 56%
Test Site	SR1	Test Date	2020/04/07
Test Mode	U-NII-1		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11a	6Mbps	36	5180	21.45	16.67
802.11a	6Mbps	44	5220	35.23	17.87
802.11a	6Mbps	48	5240	37.71	18.36
802.11ac-VHT20	MCS0	36	5180	21.30	17.81
802.11ac-VHT20	MCS0	44	5220	36.58	19.08
802.11ac-VHT20	MCS0	48	5240	38.03	19.30
802.11ac-VHT40	MCS0	38	5190	39.47	36.28
802.11ac-VHT40	MCS0	46	5230	41.15	36.32
802.11ac-VHT80	MCS0	42	5210	80.29	75.63
802.11ax-HE20	MCS0	36	5180	21.40	19.05
802.11ax-HE20	MCS0	44	5220	26.39	19.21
802.11ax-HE20	MCS0	48	5240	39.91	19.71
802.11ax-HE40	MCS0	38	5190	39.60	37.50
802.11ax-HE40	MCS0	46	5230	39.46	37.59
802.11ax-HE80	MCS0	42	5210	80.56	77.17

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	24 ~ 25°C
Test Engineer	Kevin Ker	Relative Humidity	48 ~ 56%
Test Site	SR1	Test Date	2020/04/07
Test Mode	U-NII-3		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1 + 2 + 3					
802.11a	6Mbps	149	5745	37.19	18.05
802.11a	6Mbps	157	5785	37.89	18.62
802.11a	6Mbps	165	5825	39.76	21.38
802.11ac-VHT20	MCS0	149	5745	34.71	18.63
802.11ac-VHT20	MCS0	157	5785	36.72	18.91
802.11ac-VHT20	MCS0	165	5825	39.17	20.67
802.11ac-VHT40	MCS0	151	5755	72.72	37.12
802.11ac-VHT40	MCS0	159	5795	74.96	37.76
802.11ac-VHT80	MCS0	155	5775	81.01	75.69
802.11ax-HE20	MCS0	149	5745	26.12	19.18
802.11ax-HE20	MCS0	157	5785	27.85	19.16
802.11ax-HE20	MCS0	165	5825	39.16	19.43
802.11ax-HE40	MCS0	151	5755	42.20	37.64
802.11ax-HE40	MCS0	159	5795	49.65	37.76
802.11ax-HE80	MCS0	155	5775	81.36	77.10

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

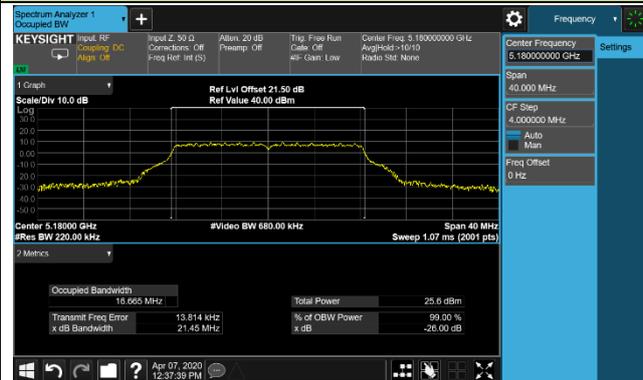

Channel 44 (5220MHz)




Channel 48 (5240MHz)

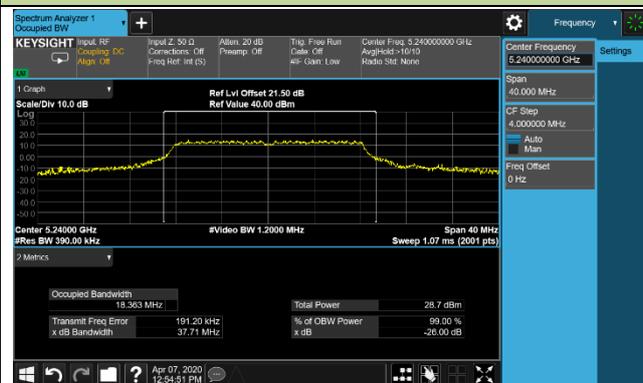


Channel 149 (5745MHz)



Channel 157 (5785MHz)

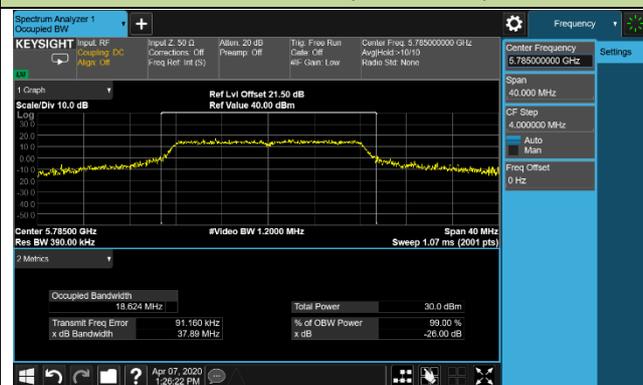


Channel 165 (5825MHz)

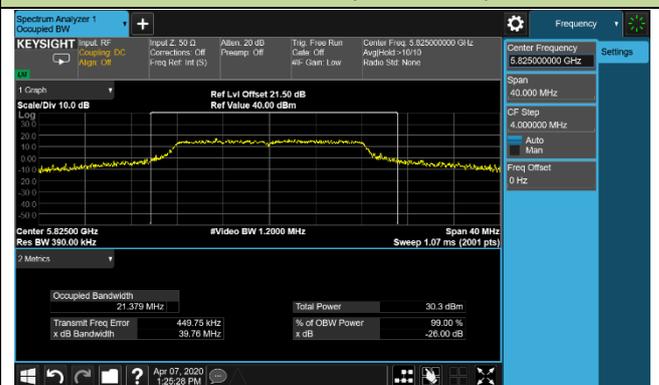


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

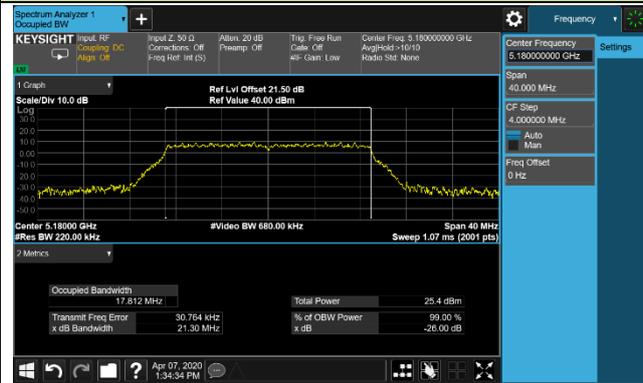

Channel 44 (5220MHz)

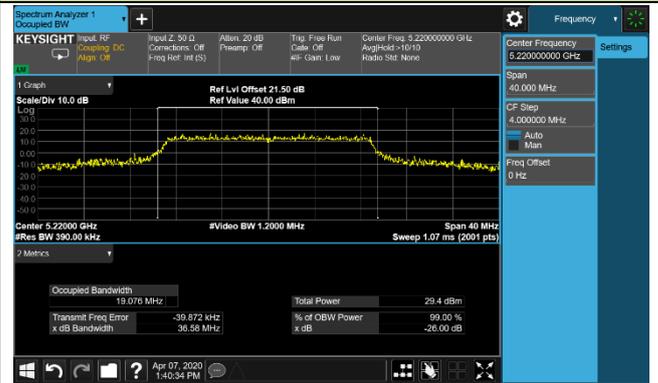

Channel 48 (5240MHz)

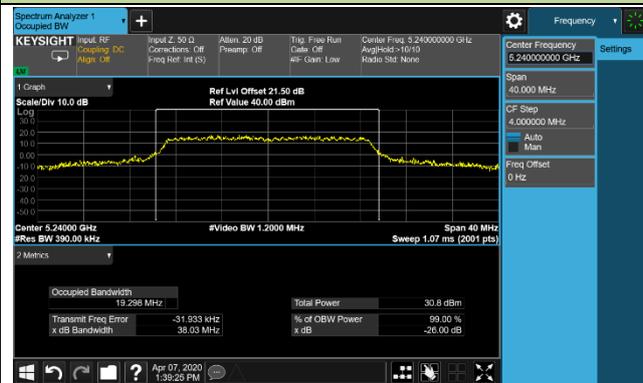


Channel 149 (5745MHz)



Channel 157 (5785MHz)




Channel 165 (5825MHz)

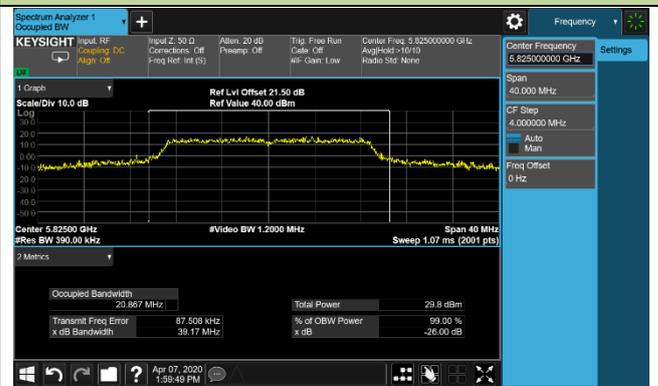


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

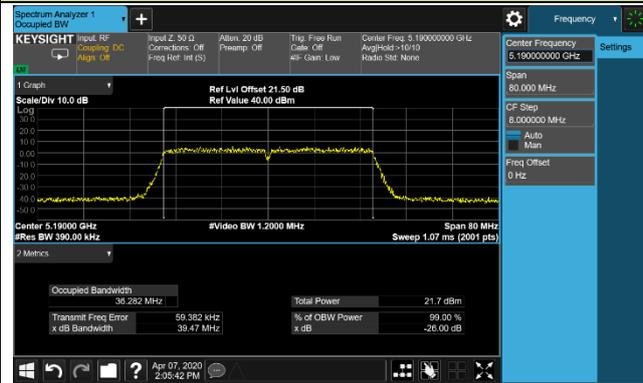

Channel 46 (5230MHz)

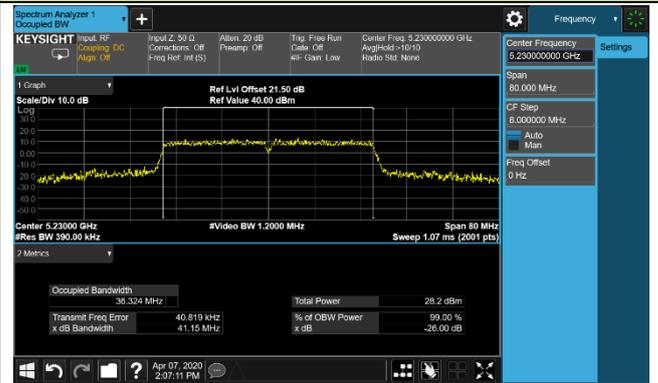

Channel 151 (5755MHz)

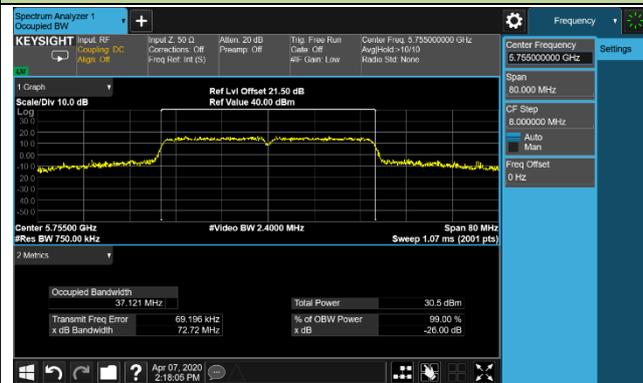


Channel 159 (5795MHz)




802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth

Channel 42 (5210MHz)

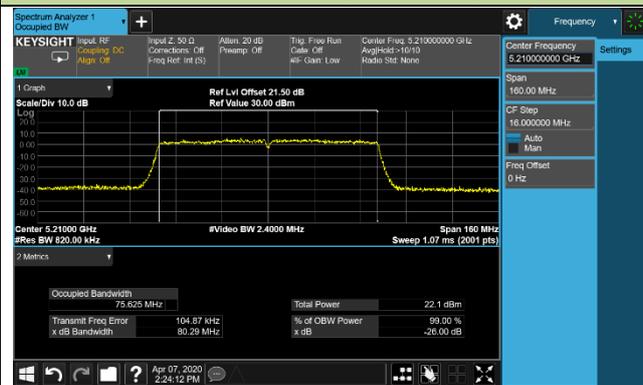


Channel 155 (5775MHz)

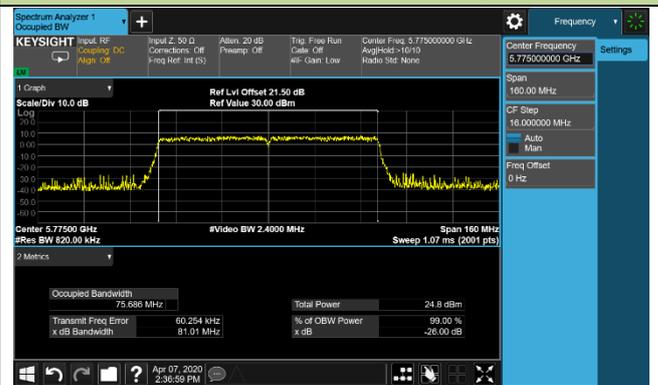

802.11ax-HE20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

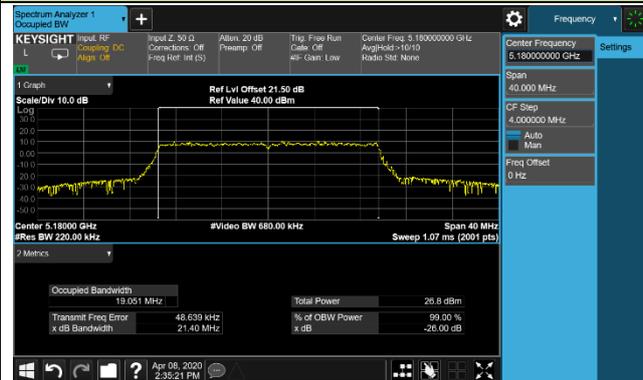


Channel 44 (5220MHz)




Channel 48 (5240MHz)

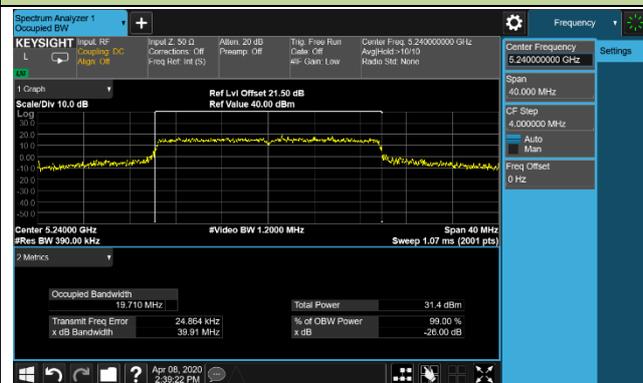

Channel 149 (5745MHz)

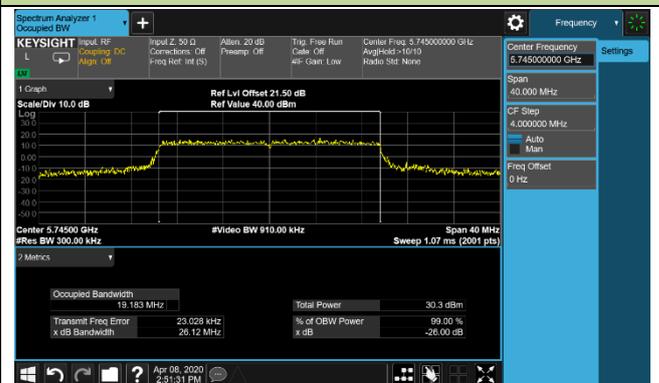

Channel 157 (5785MHz)

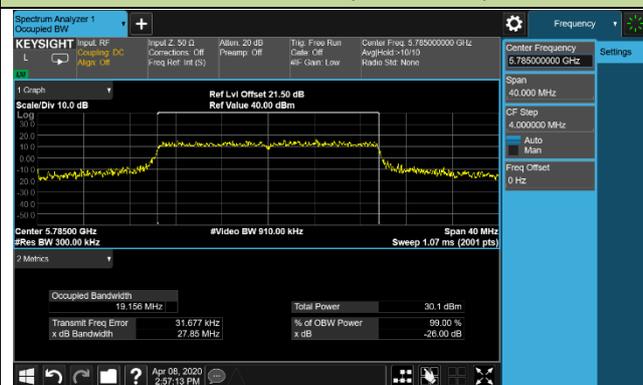


Channel 165 (5825MHz)




802.11ax-HE40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

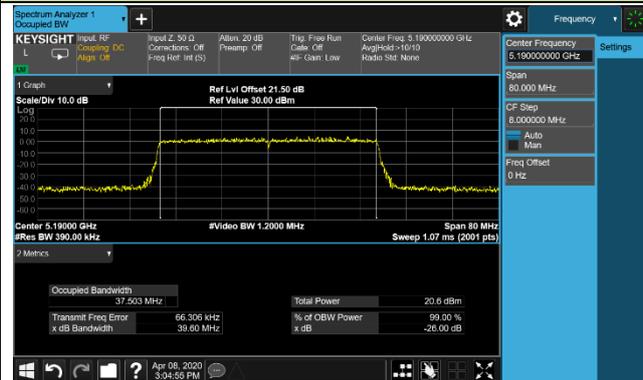


Channel 46 (5230MHz)

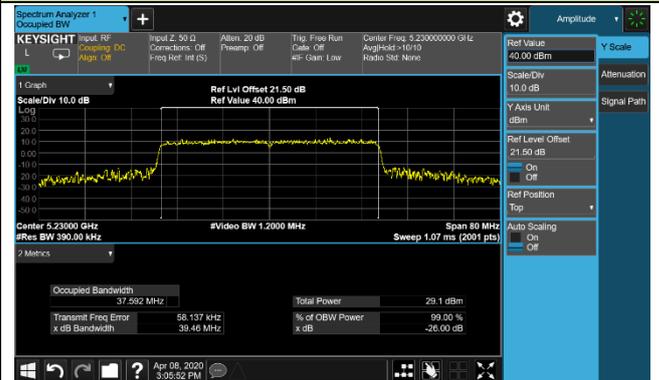

Channel 151 (5755MHz)

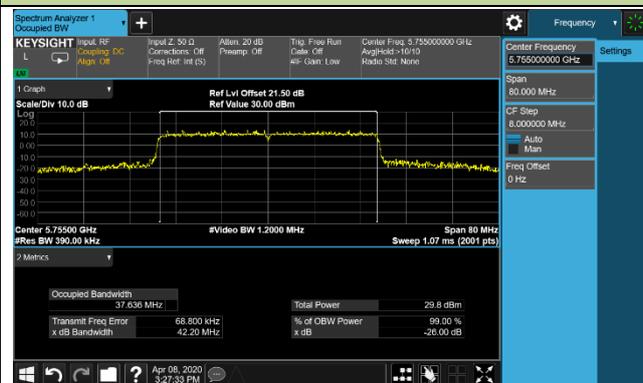


Channel 159 (5795MHz)

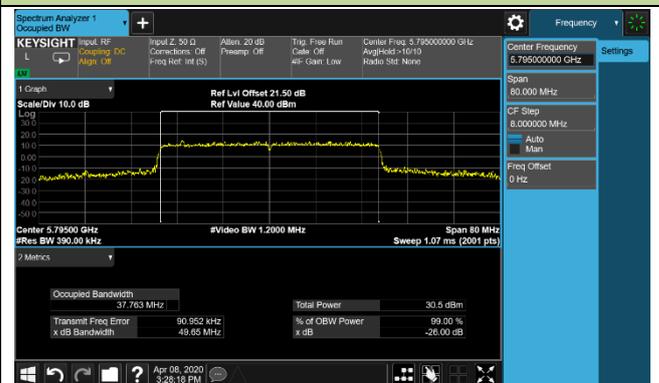


802.11ax-HE80 26dB Bandwidth & 99% Bandwidth

Channel 42 (5210MHz)

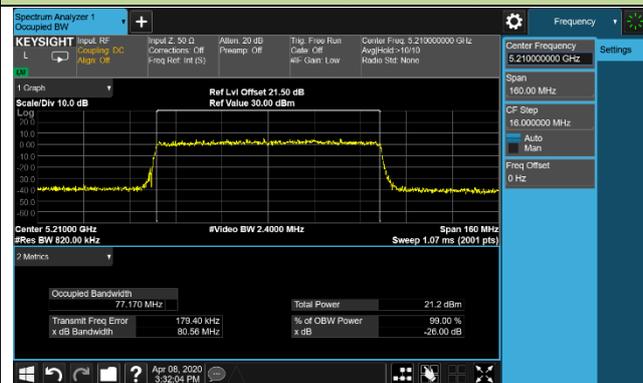

Channel 155 (5775MHz)

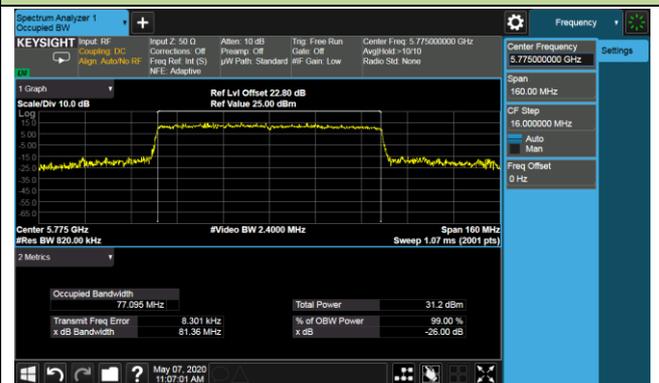

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

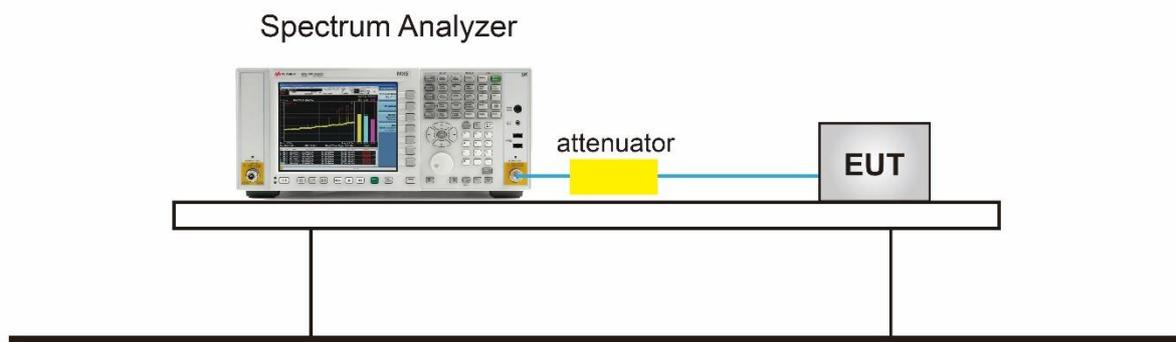


7.3.5. Test Result

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	SR1	Test Date	2020/04/07
Test Mode	U-NII-3		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 1 / Ant 0 + 1 + 2 + 3						
802.11a	6Mbps	149	5745	15.98	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.32	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.33	≥ 0.5	Pass
802.11ac-VHT20	NSS2MCS0	149	5745	17.56	≥ 0.5	Pass
802.11ac-VHT20	NSS2MCS0	157	5785	17.63	≥ 0.5	Pass
802.11ac-VHT20	NSS2MCS0	165	5825	17.33	≥ 0.5	Pass
802.11ac-VHT40	NSS2MCS0	151	5755	36.36	≥ 0.5	Pass
802.11ac-VHT40	NSS2MCS0	159	5795	36.37	≥ 0.5	Pass
802.11ac-VHT80	NSS2MCS0	155	5775	75.31	≥ 0.5	Pass
802.11ax-HE20	NSS2MCS0	149	5745	18.63	≥ 0.5	Pass
802.11ax-HE20	NSS2MCS0	157	5785	18.90	≥ 0.5	Pass
802.11ax-HE20	NSS2MCS0	165	5825	18.91	≥ 0.5	Pass
802.11ax-HE40	NSS2MCS0	151	5755	36.02	≥ 0.5	Pass
802.11ax-HE40	NSS2MCS0	159	5795	36.30	≥ 0.5	Pass
802.11ax-HE80	NSS2MCS0	155	5775	75.79	≥ 0.5	Pass

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

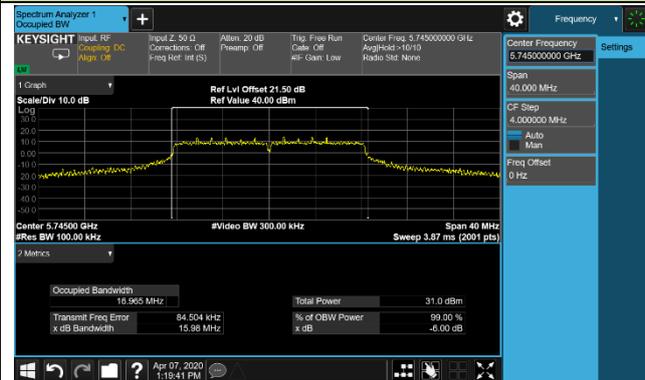

Channel 157 (5785MHz)

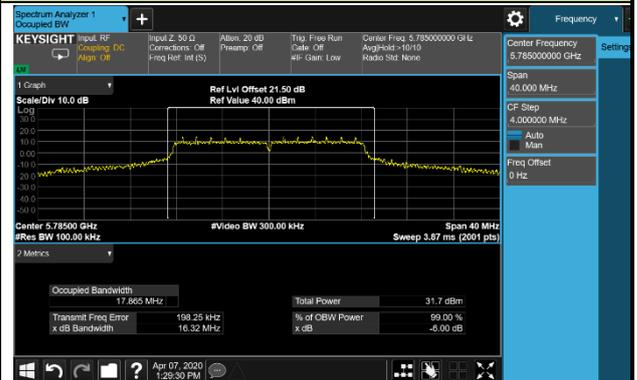


Channel 165 (5825MHz)

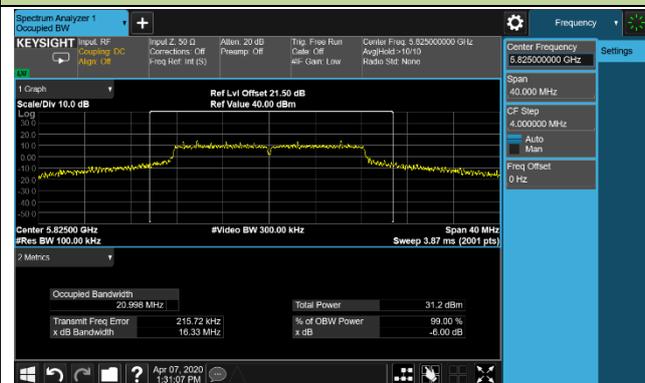


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

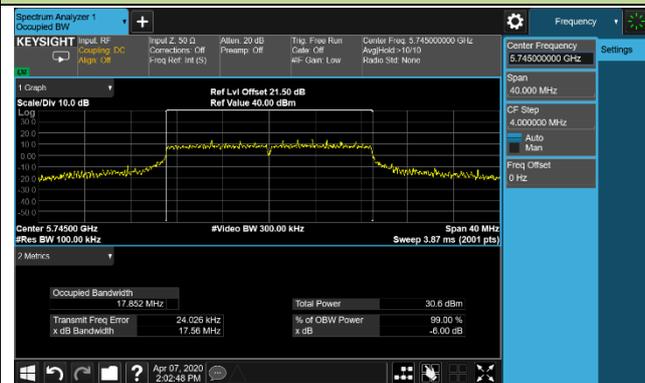

Channel 157 (5785MHz)

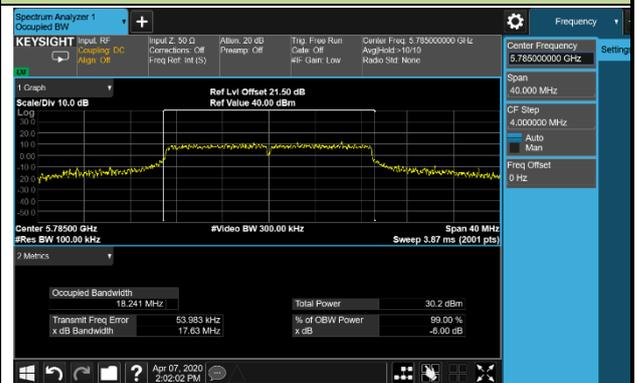


Channel 165 (5825MHz)

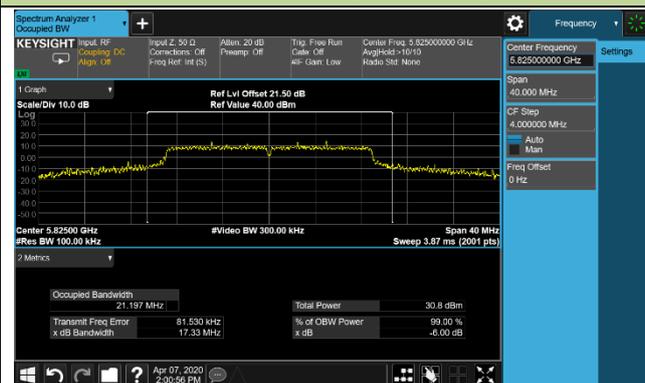


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

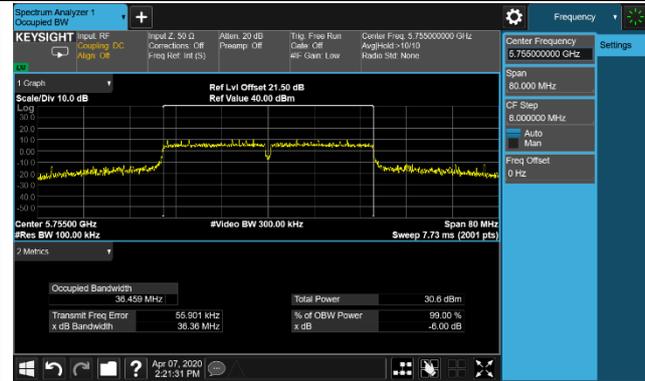


Channel 159 (5795MHz)

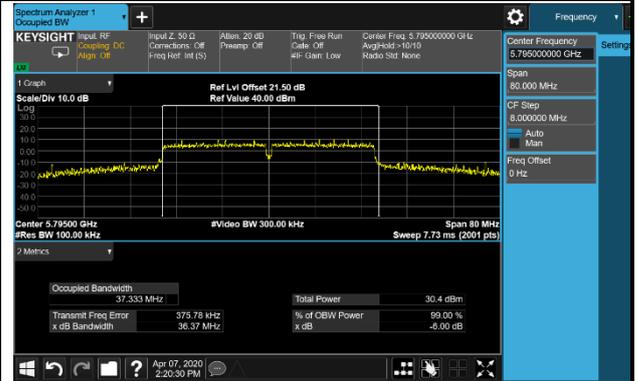


802.11ac-VHT80 6dB Bandwidth


Channel 155 (5775MHz)

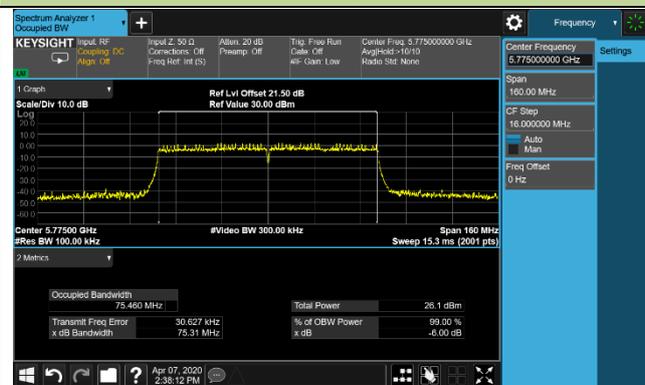

Channel 149 (5745MHz)

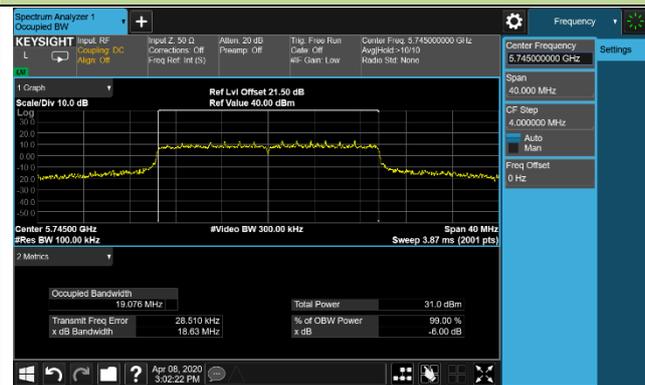

Channel 157 (5785MHz)

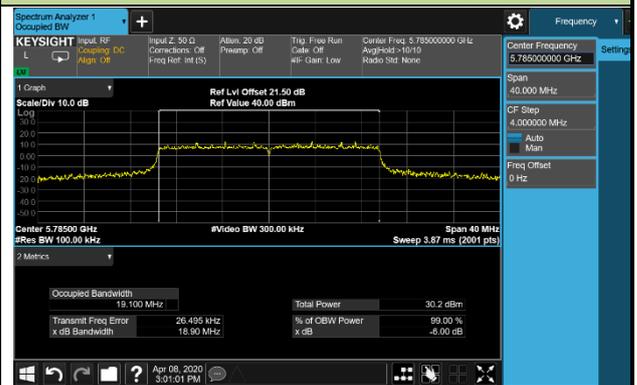


Channel 165 (5825MHz)




802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

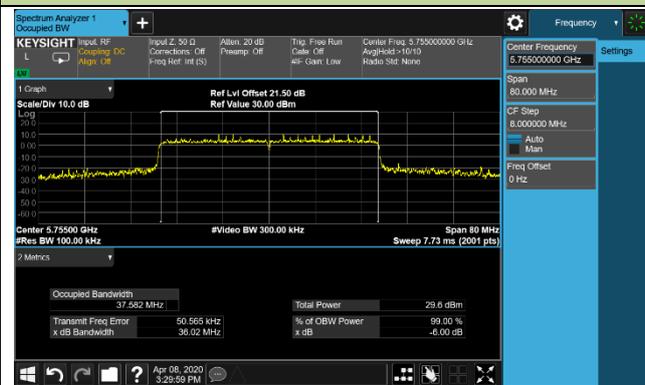


Channel 159 (5795MHz)

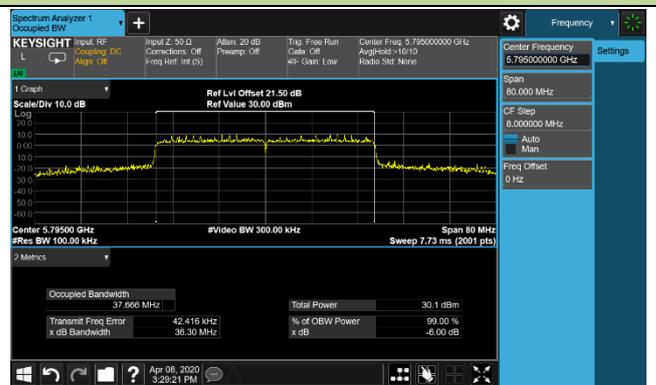

802.11ax-HE80 6dB Bandwidth

Channel 155 (5775MHz)

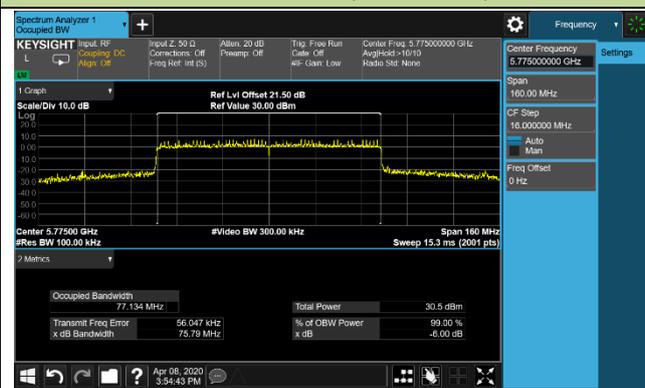

7.4. Output Power Measurement

7.4.1. Test Limit

For the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725 - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033 D02v02r01 - Section E) 3) b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.4.4. Test Setup

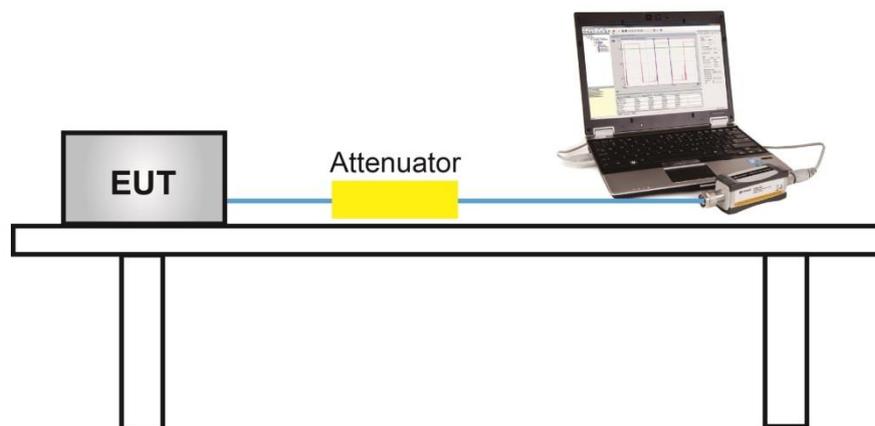

7.4.5. Test Result

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	23 ~ 25°C
Test Engineer	Kevin Ker	Relative Humidity	46 ~ 56%
Test Site	SR1	Test Date	2020/04/18
Test Mode	CDD Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	22.12	21.90	--	--	25.02	≤ 30.00	Pass
11a	6Mbps	44	5220	23.61	23.48	--	--	26.56	≤ 30.00	Pass
11a	6Mbps	48	5240	23.81	23.47	--	--	26.65	≤ 30.00	Pass
11a	6Mbps	149	5745	23.77	24.01	23.52	23.73	29.78	≤ 30.00	Pass
11a	6Mbps	157	5785	23.80	24.02	23.62	23.75	29.82	≤ 30.00	Pass
11a	6Mbps	165	5825	23.81	24.22	23.71	23.96	29.95	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	22.23	22.12	--	--	25.19	≤ 30.00	Pass
11ac-VHT20	MCS0	40	5220	23.72	23.33	--	--	26.54	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	23.90	23.81	--	--	26.87	≤ 30.00	Pass
11ac-VHT20	MCS0	149	5745	23.90	24.12	23.78	23.82	29.93	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	23.87	24.23	23.76	23.82	29.94	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	23.71	24.21	23.81	23.67	29.88	≤ 30.00	Pass
11ac-VHT40	MCS0	38	5190	17.83	17.66	--	--	20.76	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	24.55	24.43	--	--	27.50	≤ 30.00	Pass
11ac-VHT40	MCS0	151	5755	23.77	23.71	23.81	23.85	29.81	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	23.86	23.87	23.92	23.97	29.93	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	17.09	16.93	--	--	20.02	≤ 30.00	Pass
11ac-VHT80	MCS0	155	5775	20.94	20.86	21.05	20.86	26.95	≤ 30.00	Pass
11ax-HE20	MCS0	36	5180	21.11	21.08	--	--	24.11	≤ 30.00	Pass
11ax-HE20	MCS0	40	5220	25.28	25.18	--	--	28.24	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	24.25	24.02	--	--	27.15	≤ 30.00	Pass
11ax-HE20	MCS0	149	5745	23.59	23.91	23.62	23.55	29.69	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	23.50	23.91	23.71	23.74	29.74	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	23.68	24.12	23.60	23.84	29.84	≤ 30.00	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ax-HE40	MCS0	38	5190	16.15	15.80	--	--	18.99	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	23.63	23.39	--	--	26.52	≤ 30.00	Pass
11ax-HE40	MCS0	151	5755	23.53	23.44	23.81	23.33	29.55	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	23.64	23.58	23.88	23.49	29.67	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	15.65	15.40	--	--	18.54	≤ 30.00	Pass
11ax-HE80	MCS0	155	5775	23.44	23.60	23.58	23.54	29.56	≤ 30.00	Pass

Note 1:

For 5150 – 5250MHz Band: The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

For 5725 ~5850MHz Bands: The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2: For 5150 - 5250MHz and 5725 - 5850MHz Bands: Average Power Limit (dBm) = 30 dBm.

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	23 ~ 25°C
Test Engineer	Kevin Ker	Relative Humidity	46 ~ 56%
Test Site	SR1	Test Date	2020/04/18
Test Mode	Beamforming Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT20	MCS0	36	5180	16.01	15.84	--	--	18.94	≤ 29.45	Pass
11ac-VHT20	MCS0	40	5220	23.72	23.33	--	--	26.54	≤ 29.45	Pass
11ac-VHT20	MCS0	48	5240	23.90	23.81	--	--	26.87	≤ 29.45	Pass
11ac-VHT20	MCS0	149	5745	15.82	15.93	16.13	16.16	22.03	≤ 26.78	Pass
11ac-VHT20	MCS0	157	5785	20.34	20.73	20.78	20.68	26.66	≤ 26.78	Pass
11ac-VHT20	MCS0	165	5825	15.86	16.18	16.05	16.08	22.06	≤ 26.78	Pass
11ac-VHT40	MCS0	38	5190	13.11	12.89	--	--	16.01	≤ 29.45	Pass
11ac-VHT40	MCS0	46	5230	24.55	24.43	--	--	27.50	≤ 29.45	Pass
11ac-VHT40	MCS0	151	5755	17.00	16.83	17.11	16.95	22.99	≤ 26.78	Pass
11ac-VHT40	MCS0	159	5795	18.81	18.97	19.19	19.00	25.02	≤ 26.78	Pass
11ac-VHT80	MCS0	42	5210	17.09	16.93	--	--	20.02	≤ 29.45	Pass
11ac-VHT80	MCS0	155	5775	14.08	13.98	14.39	14.03	20.14	≤ 26.78	Pass
11ax-HE20	MCS0	36	5180	15.91	16.00	--	--	18.97	≤ 29.45	Pass
11ax-HE20	MCS0	40	5220	25.28	25.18	--	--	28.24	≤ 29.45	Pass
11ax-HE20	MCS0	48	5240	24.25	24.02	--	--	27.15	≤ 29.45	Pass
11ax-HE20	MCS0	149	5745	20.39	20.74	20.63	20.35	26.55	≤ 26.78	Pass
11ax-HE20	MCS0	157	5785	20.31	20.44	20.55	20.33	26.43	≤ 26.78	Pass
11ax-HE20	MCS0	165	5825	20.41	20.82	20.62	20.30	26.56	≤ 26.78	Pass
11ax-HE40	MCS0	38	5190	16.15	15.80	--	--	18.99	≤ 29.45	Pass
11ax-HE40	MCS0	46	5230	23.63	23.39	--	--	26.52	≤ 29.45	Pass
11ax-HE40	MCS0	151	5755	17.92	17.94	18.15	18.02	24.03	≤ 26.78	Pass
11ax-HE40	MCS0	159	5795	18.89	18.86	19.19	19.02	25.01	≤ 26.78	Pass
11ax-HE80	MCS0	42	5210	14.00	13.92	--	--	16.97	≤ 29.45	Pass
11ax-HE80	MCS0	155	5775	14.05	13.89	14.12	13.91	20.01	≤ 26.78	Pass

Note 1:

For 5150 – 5250MHz Bands: The Total Average Power (dBm) = $10 \cdot \log \{10(\text{Ant 0 Average Power} / 10) + 10(\text{Ant 1 Average Power} / 10)\}$.

For 5725 – 5850MHz Bands: The Total Average Power (dBm) = $10 \cdot \log \{10(\text{Ant 0 Average Power} / 10) +$

$10(\text{Ant 1 Average Power} / 10) + 10(\text{Ant 2 Average Power} / 10) + 10(\text{Ant 3 Average Power} / 10)$.

Note 2:

For 5125 - 5250MHz Band: Average Power Limit (dBm) = $30 - (6.55 - 6) = 29.45\text{dBm}$

For 5725 - 5850MHz Band: Average Power Limit (dBm) = $30 - (9.22 - 6) = 26.78\text{dBm}$.

Spot Check Verified Data

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	47%
Test Site	SR1	Test Date	2020/06/20
Test Mode	CDD Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	22.03	21.89	--	--	24.97	≤ 30.00	Pass
11a	6Mbps	44	5220	23.51	23.47	--	--	26.50	≤ 30.00	Pass
11a	6Mbps	48	5240	23.75	23.45	--	--	26.61	≤ 30.00	Pass
11a	6Mbps	149	5745	23.56	23.61	23.05	23.38	29.43	≤ 30.00	Pass
11a	6Mbps	157	5785	23.54	23.71	23.73	23.69	29.69	≤ 30.00	Pass
11a	6Mbps	165	5825	23.63	23.64	23.67	23.62	29.66	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	21.67	21.62	--	--	24.66	≤ 30.00	Pass
11ac-VHT20	MCS0	40	5220	23.71	23.32	--	--	26.53	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	23.74	23.54	--	--	26.65	≤ 30.00	Pass
11ac-VHT20	MCS0	149	5745	23.43	23.69	23.76	23.71	29.67	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	23.49	23.77	23.71	23.68	29.68	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	23.51	23.74	23.72	23.62	29.67	≤ 30.00	Pass
11ac-VHT40	MCS0	38	5190	17.44	17.36	--	--	20.41	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	24.25	24.03	--	--	27.15	≤ 30.00	Pass
11ac-VHT40	MCS0	151	5755	23.57	23.63	23.54	23.51	29.58	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	23.68	23.76	23.49	23.59	29.65	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	17.01	16.92	--	--	19.98	≤ 30.00	Pass
11ac-VHT80	MCS0	155	5775	20.90	20.84	20.98	20.82	26.91	≤ 30.00	Pass
11ax-HE20	MCS0	36	5180	20.82	20.56	--	--	23.70	≤ 30.00	Pass
11ax-HE20	MCS0	40	5220	25.17	25.03	--	--	28.11	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	23.82	23.66	--	--	26.75	≤ 30.00	Pass
11ax-HE20	MCS0	149	5745	23.25	23.61	23.49	23.41	29.46	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	23.34	23.75	23.46	23.38	29.51	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	23.54	23.91	23.57	23.59	29.68	≤ 30.00	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ax-HE40	MCS0	38	5190	15.93	15.98	--	--	18.97	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	23.22	22.94	--	--	26.09	≤ 30.00	Pass
11ax-HE40	MCS0	151	5755	23.26	23.38	23.50	23.36	29.40	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	23.62	23.51	23.44	23.30	29.49	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	15.62	15.34	--	--	18.49	≤ 30.00	Pass
11ax-HE80	MCS0	155	5775	23.40	23.54	23.26	23.41	29.42	≤ 30.00	Pass

Note 1:

For 5150 – 5250MHz Band: The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

For 5725 ~5850MHz Bands: The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2: For 5150 - 5250MHz and 5725 - 5850MHz Bands: Average Power Limit (dBm) = 30 dBm.

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	47%
Test Site	SR1	Test Date	2020/06/20
Test Mode	Beamforming Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT20	MCS0	36	5180	15.98	15.81	--	--	18.94	≤ 29.45	Pass
11ac-VHT20	MCS0	40	5220	23.47	23.30	--	--	26.54	≤ 29.45	Pass
11ac-VHT20	MCS0	48	5240	23.71	23.59	--	--	26.87	≤ 29.45	Pass
11ac-VHT20	MCS0	149	5745	15.78	15.91	16.08	16.11	22.03	≤ 26.78	Pass
11ac-VHT20	MCS0	157	5785	20.26	20.67	20.69	20.58	26.66	≤ 26.78	Pass
11ac-VHT20	MCS0	165	5825	15.84	16.16	16.01	16.06	22.06	≤ 26.78	Pass
11ac-VHT40	MCS0	38	5190	13.06	12.86	--	--	18.91	≤ 29.45	Pass
11ac-VHT40	MCS0	46	5230	24.20	24.33	--	--	26.40	≤ 29.45	Pass
11ac-VHT40	MCS0	151	5755	16.97	16.80	17.08	16.87	26.66	≤ 26.78	Pass
11ac-VHT40	MCS0	159	5795	18.73	18.89	19.06	18.93	21.99	≤ 26.78	Pass
11ac-VHT80	MCS0	42	5210	16.94	16.73	--	--	26.57	≤ 29.45	Pass
11ac-VHT80	MCS0	155	5775	13.96	13.88	14.27	13.99	22.04	≤ 26.78	Pass
11ax-HE20	MCS0	36	5180	15.76	15.85	--	--	15.97	≤ 29.45	Pass
11ax-HE20	MCS0	40	5220	25.17	25.04	--	--	27.28	≤ 29.45	Pass
11ax-HE20	MCS0	48	5240	23.89	23.85	--	--	22.95	≤ 29.45	Pass
11ax-HE20	MCS0	149	5745	20.18	20.54	20.41	20.14	24.92	≤ 26.78	Pass
11ax-HE20	MCS0	157	5785	20.15	20.31	20.45	20.11	19.85	≤ 26.78	Pass
11ax-HE20	MCS0	165	5825	20.40	20.76	20.56	20.15	20.05	≤ 26.78	Pass
11ax-HE40	MCS0	38	5190	16.13	15.78	--	--	18.82	≤ 29.45	Pass
11ax-HE40	MCS0	46	5230	23.56	23.23	--	--	28.12	≤ 29.45	Pass
11ax-HE40	MCS0	151	5755	17.90	17.88	18.04	17.91	26.88	≤ 26.78	Pass
11ax-HE40	MCS0	159	5795	18.81	18.77	19.05	18.93	26.34	≤ 26.78	Pass
11ax-HE80	MCS0	42	5210	13.91	13.85	--	--	26.28	≤ 29.45	Pass
11ax-HE80	MCS0	155	5775	13.93	13.74	14.07	13.84	26.49	≤ 26.78	Pass

Note 1:

For 5150 – 5250MHz Bands: The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

For 5725 – 5850MHz Bands: The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

$/10) + 10(\text{Ant 2 Average Power} /10) + 10(\text{Ant 3 Average Power} /10)\}$.

Note 2:

For 5125 - 5250MHz Band: Average Power Limit (dBm) = $30 - (6.55 - 6) = 29.45\text{dBm}$

For 5725 - 5850MHz Band: Average Power Limit (dBm) = $30 - (9.22 - 6) = 26.78\text{dBm}$.

7.5. Power Spectral Density Measurement

7.5.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.5.2. Test Procedure Used

KDB 789033 D02v02r01 - Section F

7.5.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 100 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
11. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 6.99$ dB to the measured result.

7.5.4. Test Setup

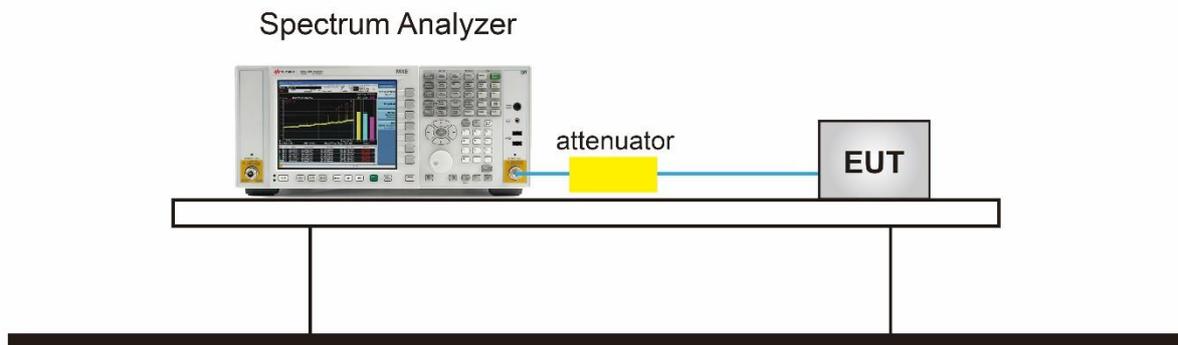

7.5.5. Test Result

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	23 ~ 25°C
Test Engineer	Kevin Ker	Relative Humidity	40 ~ 56%
Test Site	SR1	Test Date	2020/04/15 ~ 2020/04/17
Mode	Power Spectral Density (U-NII- 1) CDD Mode		

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6Mbps	36	5180	11.26	11.24	94.94	14.49	≤ 16.45	Pass
11a	6Mbps	44	5220	12.84	13.08	94.94	16.20	≤ 16.45	Pass
11a	6Mbps	48	5240	12.88	13.27	94.94	16.31	≤ 16.45	Pass
11ac-VHT20	MCS0	36	5180	11.00	11.17	98.52	14.10	≤ 16.45	Pass
11ac-VHT20	MCS0	44	5220	12.62	13.32	98.52	15.99	≤ 16.45	Pass
11ac-VHT20	MCS0	48	5240	12.84	13.18	98.52	16.02	≤ 16.45	Pass
11ac-VHT40	MCS0	38	5190	4.21	4.11	96.96	7.30	≤ 16.45	Pass
11ac-VHT40	MCS0	46	5230	10.60	11.00	96.96	13.95	≤ 16.45	Pass
11ac-VHT80	MCS0	42	5210	0.64	0.51	93.88	3.86	≤ 16.45	Pass
11ax-HE20	MCS0	36	5180	9.83	9.82	97.89	12.93	≤ 16.45	Pass
11ax-HE20	MCS0	44	5220	13.03	13.39	97.89	16.32	≤ 16.45	Pass
11ax-HE20	MCS0	48	5240	13.05	13.35	97.89	16.31	≤ 16.45	Pass
11ax-HE40	MCS0	38	5190	2.33	2.09	96.02	5.40	≤ 16.45	Pass
11ax-HE40	MCS0	46	5230	9.32	9.73	96.02	12.71	≤ 16.45	Pass
11ax-HE80	MCS0	42	5210	-1.48	-1.27	92.58	1.97	≤ 16.45	Pass

Note 1: When EUT duty cycle ≥ 98%,

For 5150 - 5250MHz Band, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/MHz).

When EUT duty cycle < 98%,

For 5150 - 5250MHz Band, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/MHz) + $10 \cdot \log (1/\text{Duty Cycle})$.

Note 2:

For 5150 - 5250MHz Band: PSD Limit (dBm/MHz) = 17 - (6.55 - 6) = 16.45dBm/MHz.

Product	AX3200 Tri-Band Wi-Fi 6 Router	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	SR2	Test Date	2020/04/17
Test Item	Power Spectral Density (U-NII-3) CDD Mode		

Test Mode	Data Rate/MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Ant 3 PSD (dBm/MHz)	Duty Cycle (%)	Constant Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
11a	6Mbps	149	5745	3.39	3.70	2.99	3.27	94.94	6.99	16.58	≤ 26.78	Pass
11a	6Mbps	157	5785	3.45	3.72	3.46	3.39	94.94	6.99	16.74	≤ 26.78	Pass
11a	6Mbps	165	5825	3.32	3.86	3.49	3.59	94.94	6.99	16.80	≤ 26.78	Pass
11ac-VHT20	MCS0	149	5745	3.49	3.75	3.38	3.52	98.52	6.99	16.55	≤ 26.78	Pass
11ac-VHT20	MCS0	157	5785	3.48	3.84	3.39	3.41	98.52	6.99	16.55	≤ 26.78	Pass
11ac-VHT20	MCS0	165	5825	3.16	3.67	3.51	3.17	98.52	6.99	16.39	≤ 26.78	Pass
11ac-VHT40	MCS0	151	5755	0.69	0.56	0.83	0.73	96.96	6.99	13.85	≤ 26.78	Pass
11ac-VHT40	MCS0	159	5795	0.53	0.44	0.68	0.36	96.96	6.99	13.65	≤ 26.78	Pass
11ac-VHT80	MCS0	155	5775	-5.07	-5.20	-4.82	-5.35	93.88	6.99	8.18	≤ 26.78	Pass
11ax-HE20	MCS0	149	5745	2.00	2.00	1.79	1.77	97.89	6.99	14.99	≤ 26.78	Pass
11ax-HE20	MCS0	157	5785	1.72	1.84	1.91	2.02	97.89	6.99	14.98	≤ 26.78	Pass
11ax-HE20	MCS0	165	5825	1.89	2.32	1.67	1.94	97.89	6.99	15.06	≤ 26.78	Pass
11ax-HE40	MCS0	151	5755	-0.74	-0.86	-0.44	-0.22	96.02	6.99	12.63	≤ 26.78	Pass
11ax-HE40	MCS0	159	5795	-0.71	-0.72	-0.65	-0.67	96.02	6.99	12.50	≤ 26.78	Pass
11ax-HE80	MCS0	155	5775	-3.73	-3.14	-3.30	-3.27	92.58	6.99	9.99	≤ 26.78	Pass

Note 1: When EUT duty cycle ≥ 98%,

the total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$
(dBm/100kHz) + Constant Factor (dB).

When EUT duty cycle < 98%, the total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$ (dBm/100kHz) + Constant Factor (dB) + $10 \cdot \log (1/\text{Duty Cycle})$.

Note 2: PSD Limit (dBm/500kHz) = 30 - (9.22 - 6) = 26.78dBm/500kHz.

802.11a Power Spectral Density - Ant 0 / Ant 0 + 1


Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)

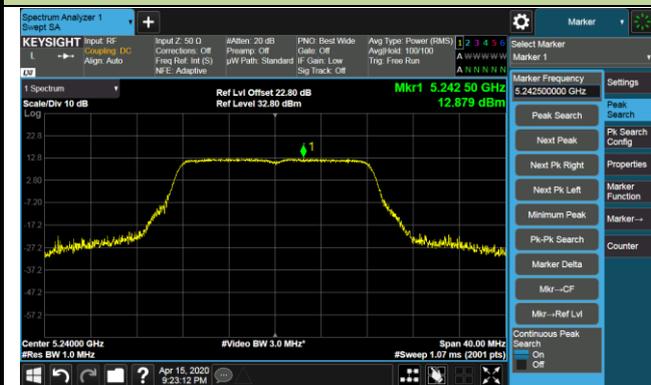

802.11ac-VHT20 Power Spectral Density - Ant 0 / Ant 0 + 1

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



802.11ac-VHT40 Power Spectral Density - Ant 0 / Ant 0 + 1

Channel 38 (5190MHz)



Channel 46 (5230MHz)



802.11ac-VHT80 Power Spectral Density - Ant 0 / Ant 0 + 1

Channel 42 (5210MHz)




802.11ax-HE20 Power Spectral Density - Ant 0 / Ant 0 + 1

Channel 36 (5180MHz)



Channel 44 (5220MHz)

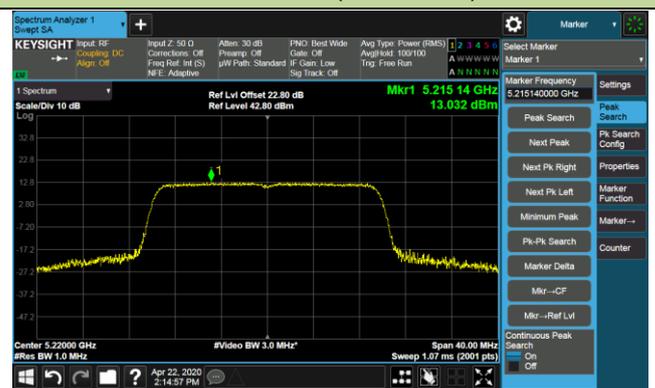


Channel 48 (5240MHz)



802.11ax-HE40 Power Spectral Density - Ant 0 / Ant 0 + 1

Channel 38 (5190MHz)

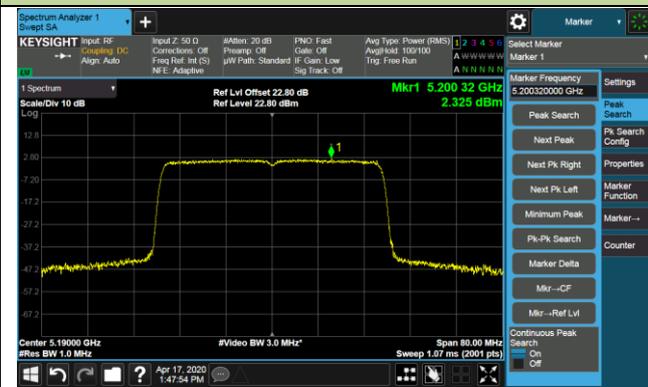

Channel 46 (5230MHz)



802.11ax-HE80 Power Spectral Density - Ant 0 / Ant 0 + 1

Channel 42 (5210MHz)

