

FCC Radio Test Report

FCC ID: TE7C50V5

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1808C179
Equipment : AC1200 Wireless Dual Band Router, AC1200 Dual Band Wi-Fi Router
Test Model : Archer C50, Archer A5
Series Model : N/A
Applicant : TP-Link Technologies Co., Ltd.
Address : Building 24 (floors 1,3,4,5) and 28 (floors1-4)
Central Science and Technology Park,Shennan Rd,
Nanshan, Shenzhen,China

Date of Receipt : Aug. 20, 2018
Date of Test : Sep. 03, 2018 ~ Nov. 27, 2018
Issued Date : Dec. 04, 2018
Tested by : BTL Inc.

Testing Engineer : Welly Zhou
(Welly Zhou)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 DESCRIPTION OF SUPPORT UNITS	14
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	18
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	20
4.2.6 EUT TEST CONDITIONS	20
4.2.7 TEST RESULTS (9 KHZ TO 30 MHZ)	20
4.2.8 TEST RESULTS (30 MHZ TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
5 . BANDWIDTH TEST	21
5.1 APPLIED PROCEDURES	21
5.1.1 TEST PROCEDURE	21
5.1.2 DEVIATION FROM STANDARD	21
5.1.3 TEST SETUP	21
5.1.4 EUT OPERATION CONDITIONS	21
5.1.5 EUT TEST CONDITIONS	21
5.1.6 TEST RESULTS	21
6 . MAXIMUM AVERAGE POWER TEST	22

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP	22
6.1.4 EUT OPERATION CONDITIONS	22
6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD	23
7.1.3 TEST SETUP	23
7.1.4 EUT OPERATION CONDITIONS	23
7.1.5 EUT TEST CONDITIONS	23
7.1.6 TEST RESULTS	23
8 . POWER SPECTRAL DENSITY TEST	24
8.1 APPLIED PROCEDURES / LIMIT	24
8.1.1 TEST PROCEDURE	24
8.1.2 DEVIATION FROM STANDARD	24
8.1.3 TEST SETUP	24
8.1.4 EUT OPERATION CONDITIONS	24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
9 . MEASUREMENT INSTRUMENTS LIST	25
10 . EUT TEST PHOTO	27
APPENDIX A - CONDUCTED EMISSION	31
APPENDIX B - RADIATED EMISSION (9 KHZ TO 30 MHZ)	34
APPENDIX C - RADIATED EMISSION (30 MHZ TO 1000 MHZ)	39
APPENDIX D - RADIATED EMISSION (ABOVE 1000 MHZ)	46
APPENDIX E - BANDWIDTH	131
APPENDIX F - MAXIMUM OUTPUT POWER	148
APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION	153
APPENDIX H - POWER SPECTRAL DENSITY	202

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Dec. 04, 2018

1. CERTIFICATION

Equipment : AC1200 Wireless Dual Band Router, AC1200 Dual Band Wi-Fi Router
Brand Name : tp-link
Test Model : Archer C50, Archer A5
Series Model : N/A
Applicant : TP-Link Technologies Co., Ltd.
Manufacturer : TP-Link Technologies Co., Ltd.
Address : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and
Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Date of Test : Sep. 03, 2018 ~ Nov. 27, 2018
Test Sample : Engineering Sample No.: D181110288
Standard(s) : FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1808C179) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the WLAN 2.4GHz part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	Bandwidth	PASS	
15.247(b)(3)	AVG Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

Note:

- (1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2xUc(y)$.

The BTL measurement uncertainty as below table:

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30 MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	3.82
		30 MH~200 MHz	H	3.78
		200 MHz~1,000 MHz	V	4.10
		200 MHz~1,000 MHz	H	4.06
		1 GHz~18 GHz	V	3.12
		1 GHz~18 GHz	H	3.68
		18 GHz~40 GHz	V	4.15
18 GHz~40 GHz	H	4.14		

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AC1200 Wireless Dual Band Router, AC1200 Dual Band Wi-Fi Router	
Brand Name	tp-link	
Test Model	Archer C50, Archer A5	
Series Model	N/A	
Model Difference(s)	Only differ in model name.	
Product Description	Operation Frequency	2412 MHz ~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps
	AVG Output Power (Max.)	802.11b: 22.77 dBm 802.11g: 23.05 dBm 802.11n(20 MHz): 23.13 dBm 802.11n(40 MHz): 20.40 dBm
Power Source	DC voltage supplied from AC/DC adapter. Brand/Model: tp-link/ T120100-2B1	
Power Rating	I/P: 100-240V~ 50/60Hz, 0.3A O/P: 12V=1A	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 - CH11 for 802.11b, 802.11g, 802.11n(20 MHz) CH03 - CH09 for 802.11n(40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Dipole	N/A	1.87
2	N/A	N/A	Dipole	N/A	1.93

Note:

This EUT supports MIMO 2X2, any transmit signals are correlated with each other,

so Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi,

Directional gain = $10\log[(10^{1.87/20} + 10^{1.93/20})^2 / 2]$ dBi = 4.91.

4. The worst case for 2TX as follow:

Operating Mode	TX Mode	2TX
802.11b		V (ANT 1+ANT 2)
802.11g		V (ANT 1+ANT 2)
802.11n(20 MHz)		V (ANT 1+ANT 2)
802.11n(40 MHz)		V (ANT 1+ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanned based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX Mode
Mode 6	TX B Mode Channel 01/02/06/10/11
Mode 7	TX G Mode Channel 01/02/06/10/11
Mode 8	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 9	TX N-40 MHz Mode Channel 03/04/06/08/09

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode:	Description
Mode 5	TX Mode

For Radiated Test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

For Band Edge Test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/02/06/10/11
Mode 2	TX G Mode Channel 01/02/06/10/11
Mode 3	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 4	TX N-40 MHz Mode Channel 03/04/06/08/09

Bandwidth	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Maximum Average Output Power	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Power Spectral Density	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1 Mbps)
 802.11g mode: OFDM (6 Mbps)
 802.11n HT20 mode : BPSK (13 Mbps)
 802.11n HT40 mode : BPSK (27 Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated 30 MHz to 1000 MHz test, the 802.11b is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	N/A		
Frequency (MHz)	2412	2437	2462
802.11b	34	35	36
802.11g	31	37	30
802.11n (20 MHz)	25	37	26
Frequency (MHz)	2422	2437	2452
802.11n (40 MHz)	19	31	21

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

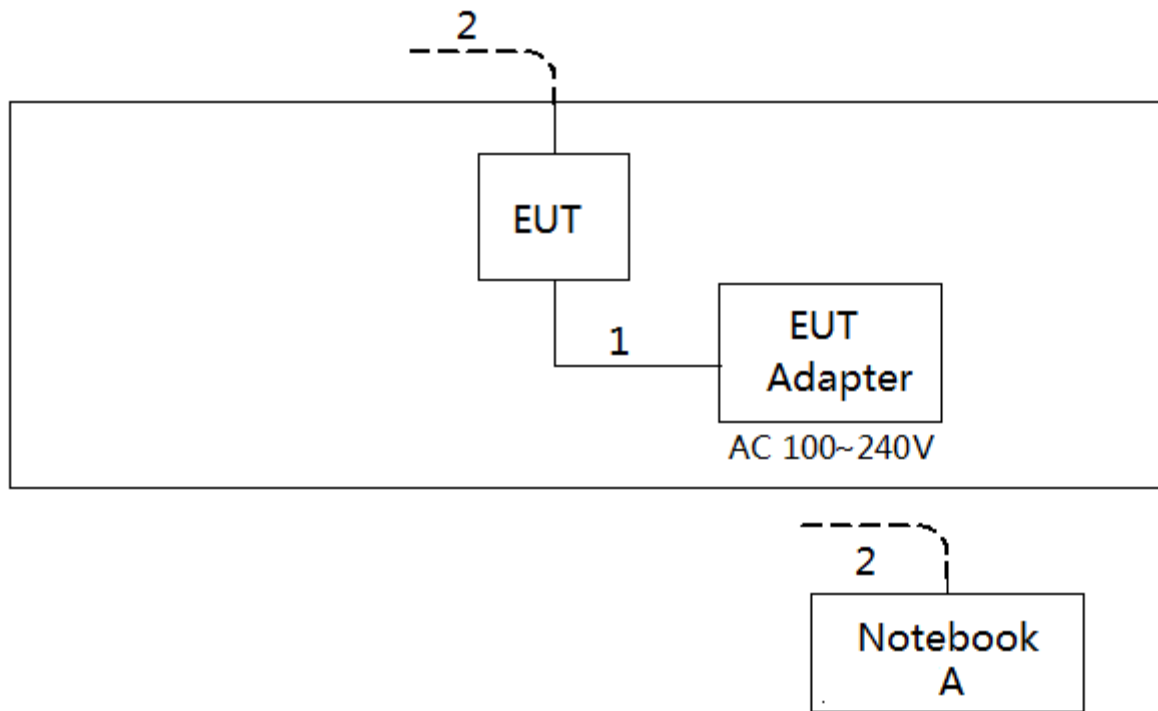

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook	Lenovo	G410	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	DC Cable
2	NO	NO	10m	RJ45 Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150 kHz-30 MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

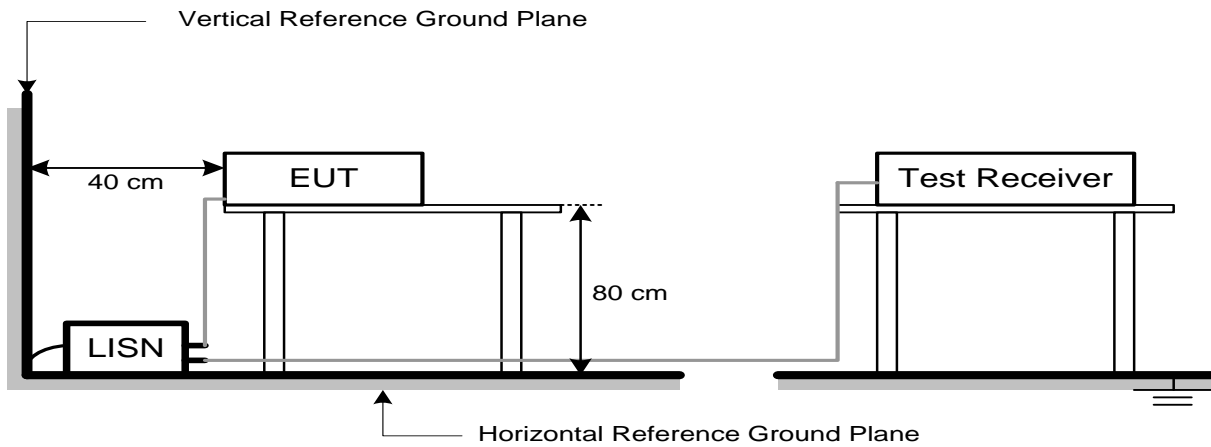

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

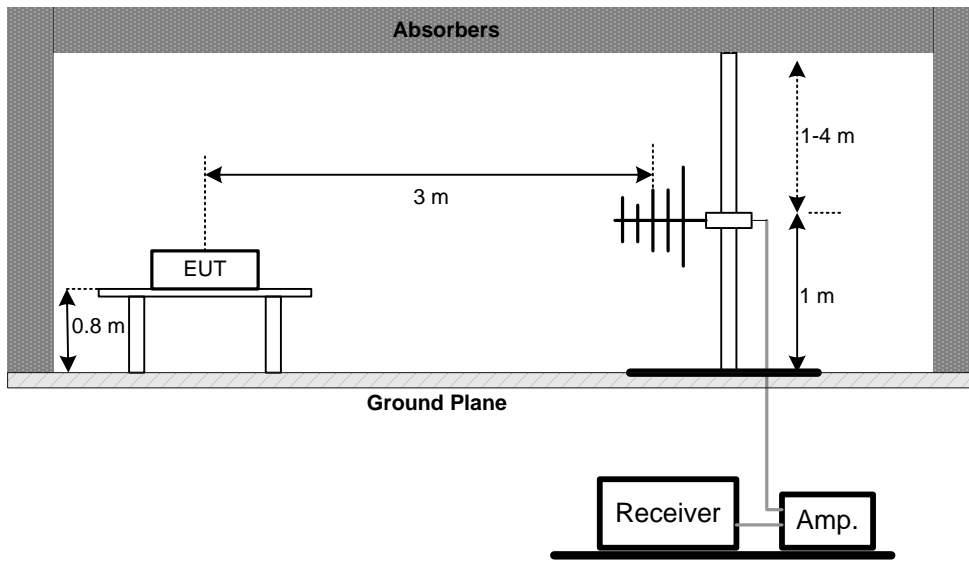

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

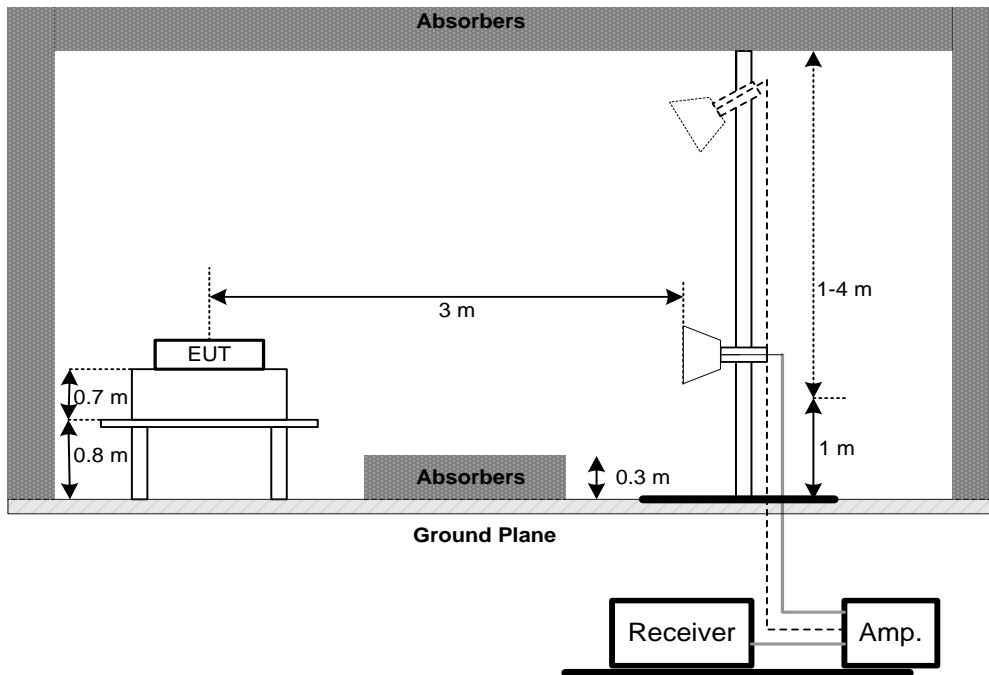

(C) For Radiated Emissions 9 kHz-30 MHz

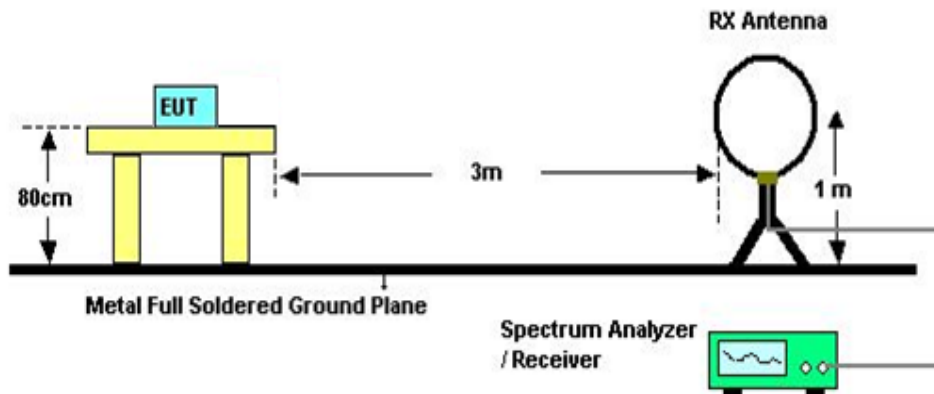

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9 kHz TO 30 MHz)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30 MHz TO 1000 MHz)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 26°C Relative Humidity: 58% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM AVERAGE POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Average Output Power	1 Watt or 30 dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum Average output power was performed in accordance with method 8.3.2.3 of FCC KDB 558074 D01 v05 DTS Meas Guidance and 11.9.2.3 of ANSI C63.10-2013.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

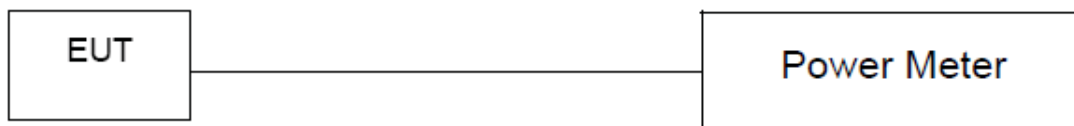

6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 26°C Relative Humidity: 58% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 26°C Relative Humidity: 58% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)	2400-2483.5	PASS


8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The Power Spectral Density was performed in accordance with method 8.4 of FCC KDB 558074 D01 v05 DTS Meas Guidance and 11.10.2 of ANSI C63.10-2013.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 26°C Relative Humidity: 58% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
2	LISN	EMCO	3816/2	52765	Mar. 11, 2019
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 11, 2019
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 11, 2019
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 23, 2019

Radiated Emission Measurement-9 kHz TO 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement-30 MHz TO 1000 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement - Above 1GHz

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Average output power

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 11, 2019


Antenna Conducted Spurious Emission

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Power Spectral Density



Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

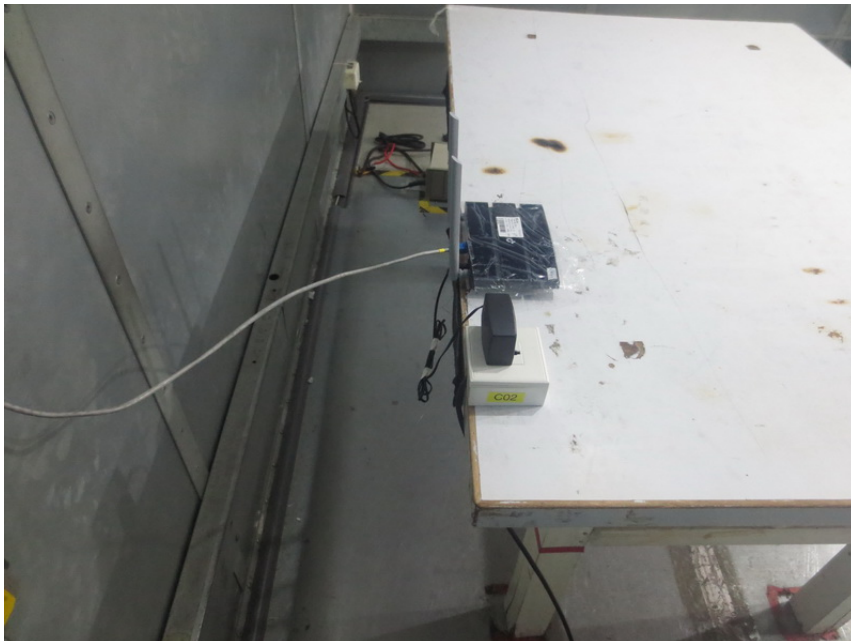10. EUT TEST PHOTO**Conducted Measurement Photos**



Radiated Measurement Photos

9 kHz to 30 MHz

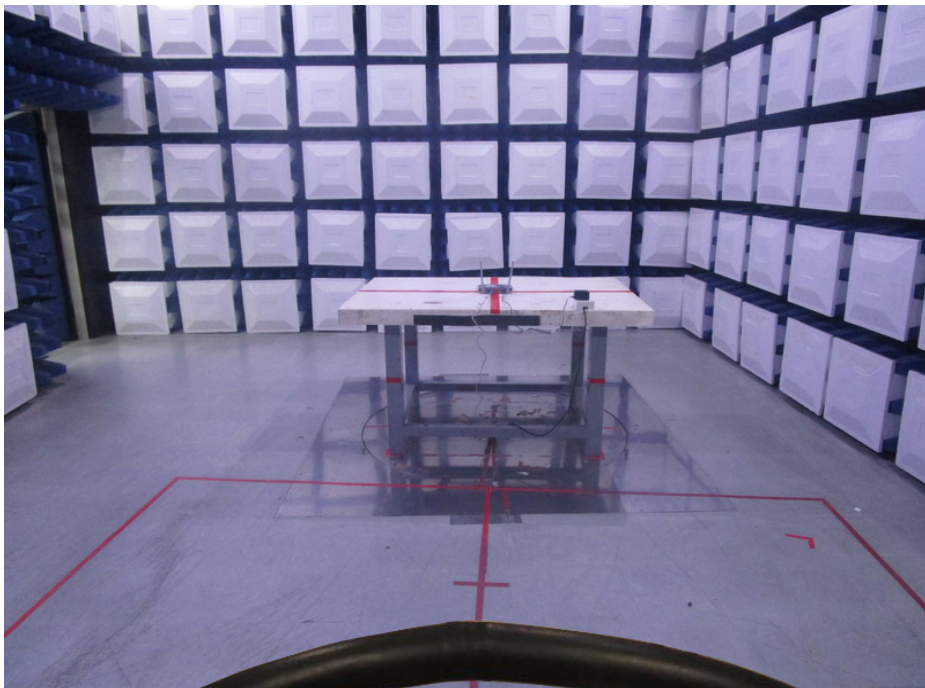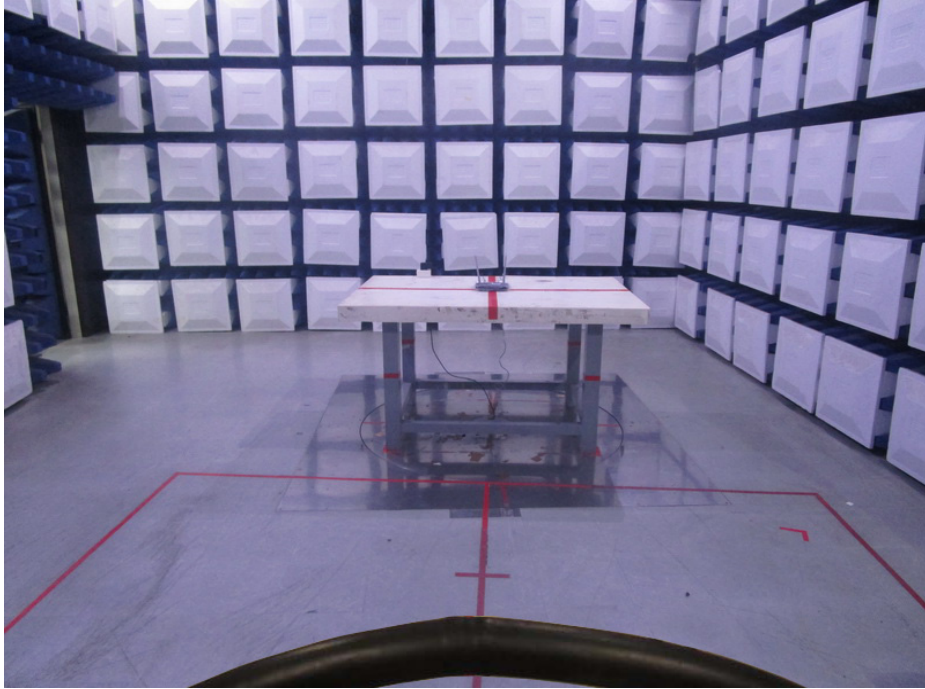


Radiated Measurement Photos

30 MHz to 1000 MHz

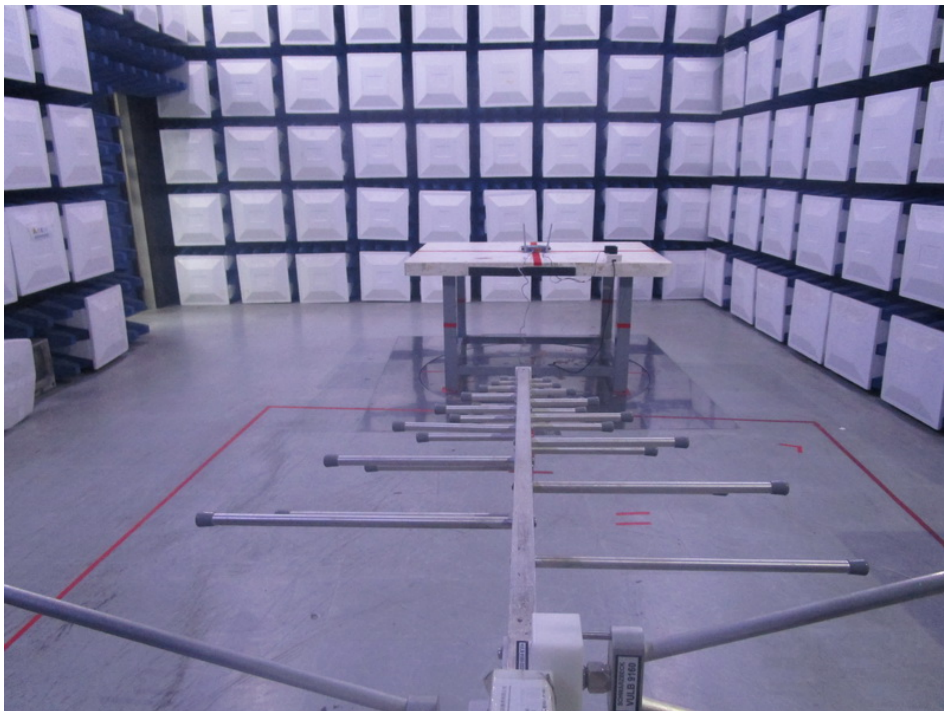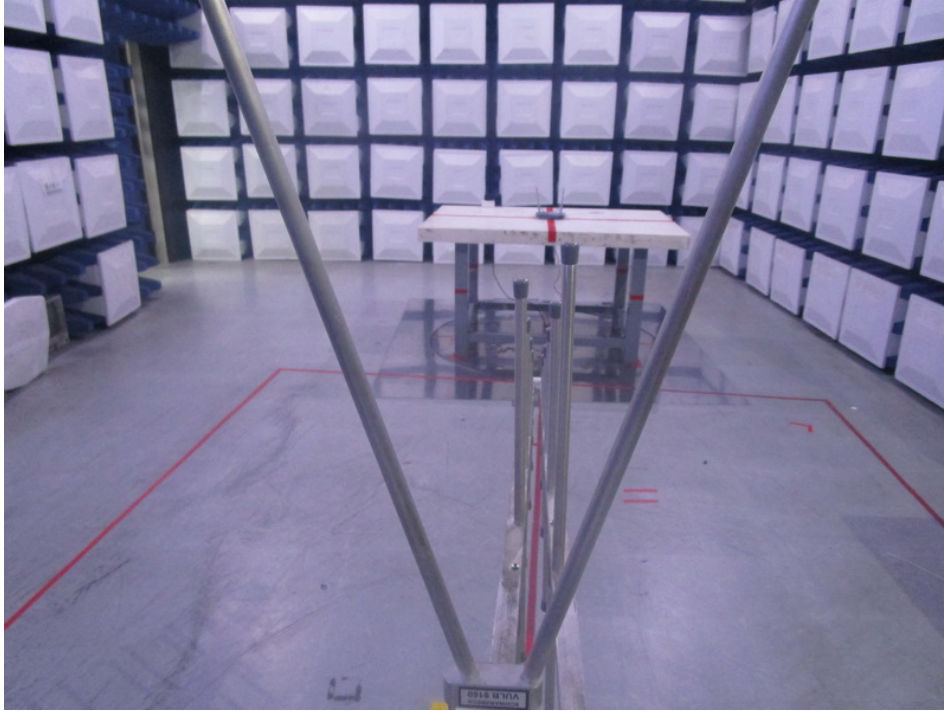

Radiated Measurement Photos


Above 1000 MHz

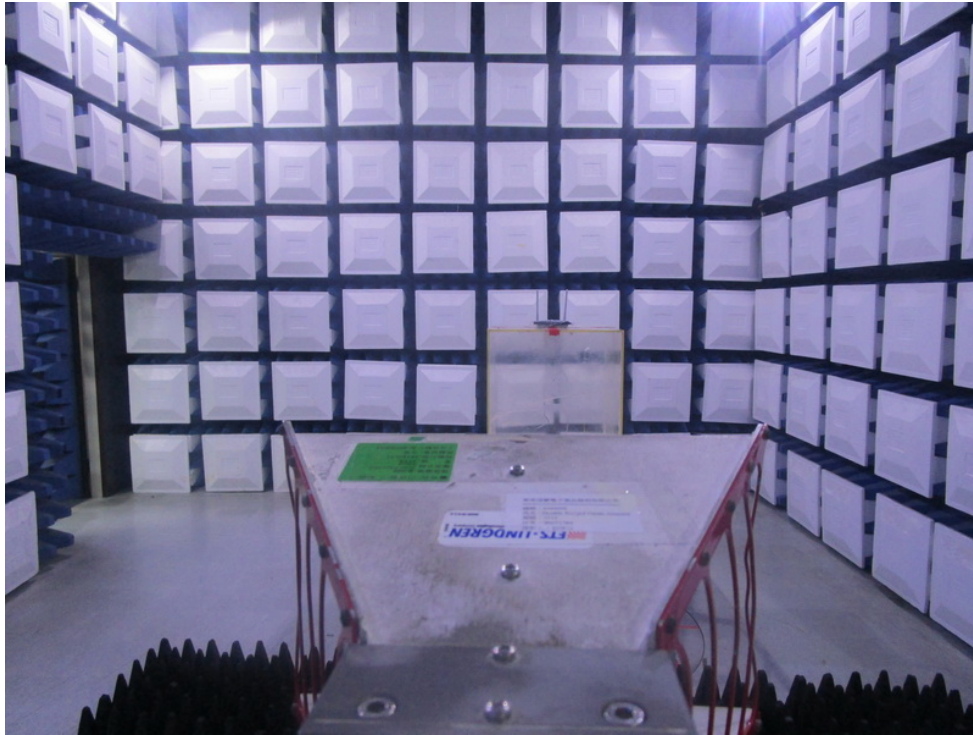

APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode


Line

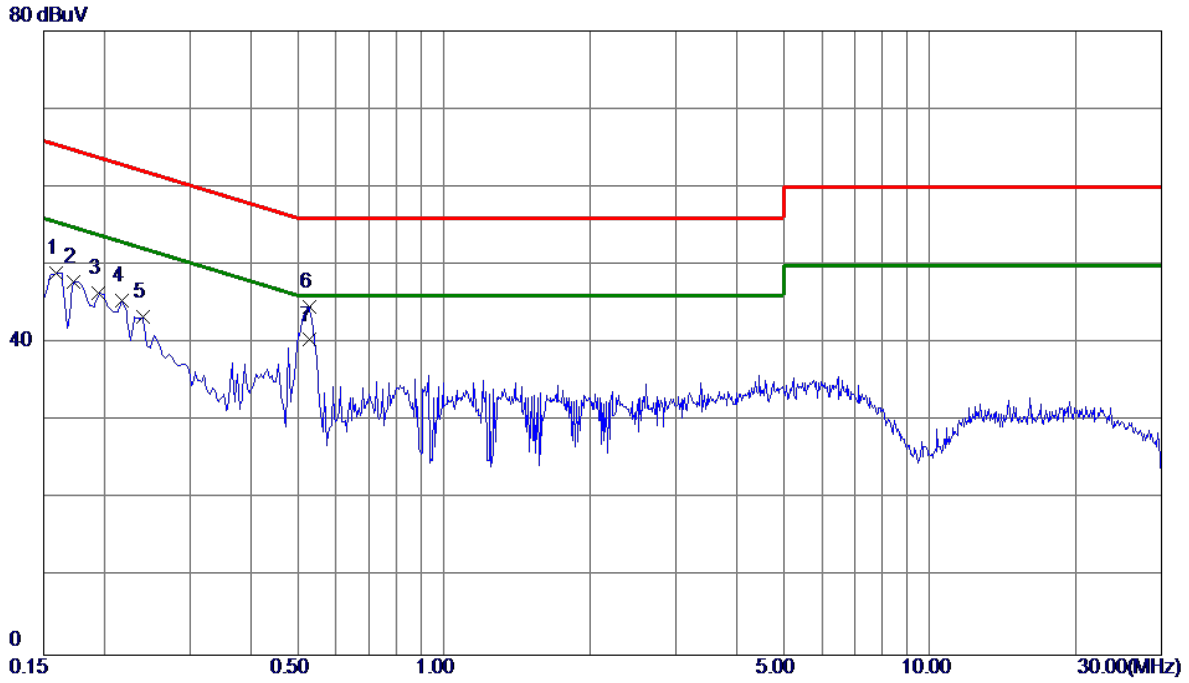

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1590	39.18	9.82	49.00	65.52	-16.52	Peak	
2	0.1725	38.00	9.82	47.82	64.84	-17.02	Peak	
3	0.1949	36.57	9.82	46.39	63.83	-17.44	Peak	
4	0.2175	35.64	9.82	45.46	62.91	-17.45	Peak	
5	0.2400	33.58	9.82	43.40	62.10	-18.70	Peak	
6	0.5280	34.89	9.80	44.69	56.00	-11.31	Peak	
7 *	0.5280	30.60	9.80	40.40	46.00	-5.60	AVG	

Test Mode: TX Mode

Neutral

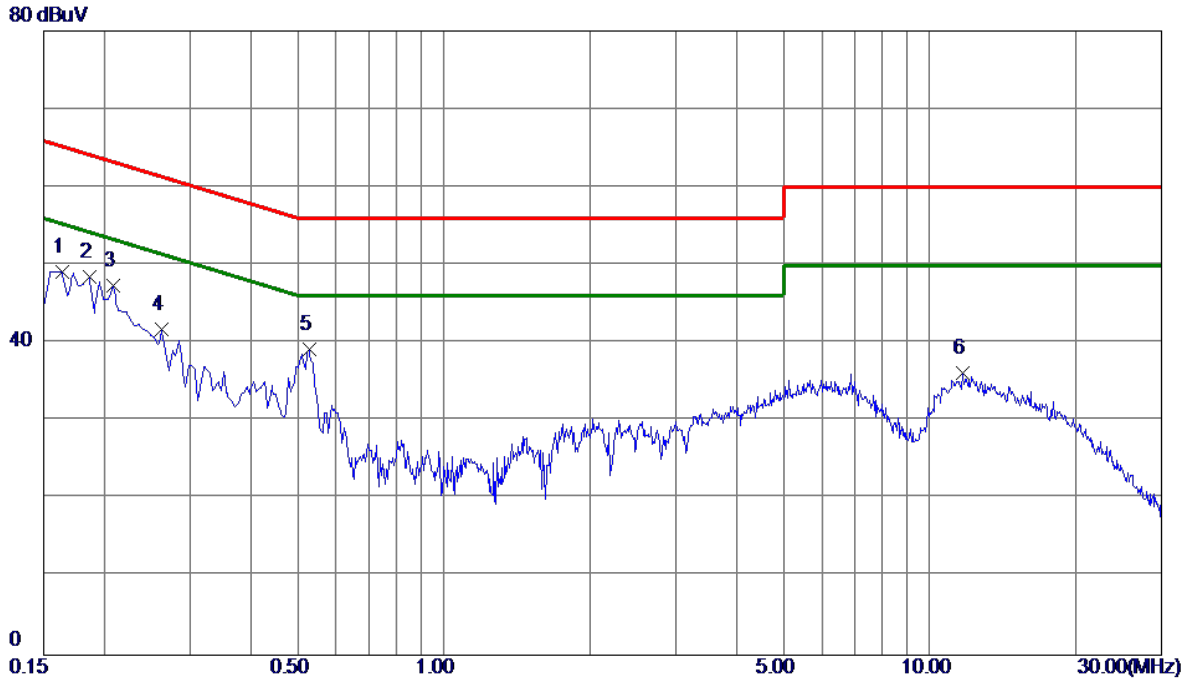


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1635	39.24	9.91	49.15	65.28	-16.13	Peak	
2 *	0.1860	38.54	9.91	48.45	64.21	-15.76	Peak	
3	0.2085	37.43	9.91	47.34	63.26	-15.92	Peak	
4	0.2625	31.81	9.92	41.73	61.35	-19.62	Peak	
5	0.5280	29.27	9.95	39.22	56.00	-16.78	Peak	
6	11.6745	25.36	10.86	36.22	60.00	-23.78	Peak	

APPENDIX B - RADIATED EMISSION (9 KHZ TO 30 MHZ)

Test Mode: TX Mode


Ant 0°

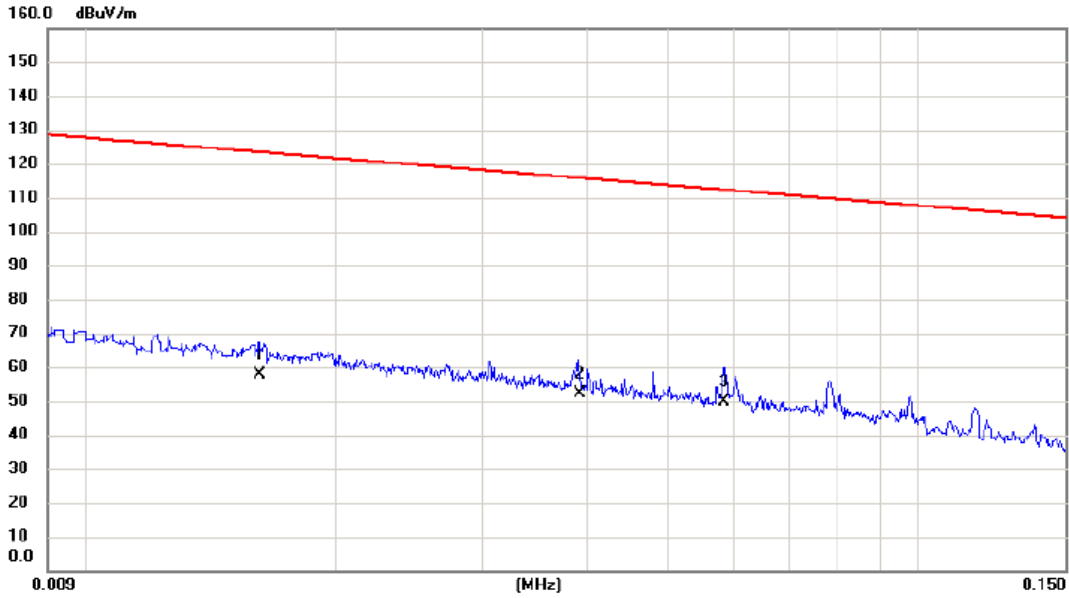

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0162	37.10	20.55	57.65	123.41	-65.76	AVG	
2		0.0392	32.60	19.70	52.30	115.74	-63.44	AVG	
3	*	0.0584	30.60	19.36	49.96	112.28	-62.32	AVG	

Test Mode: TX Mode


Ant 0°

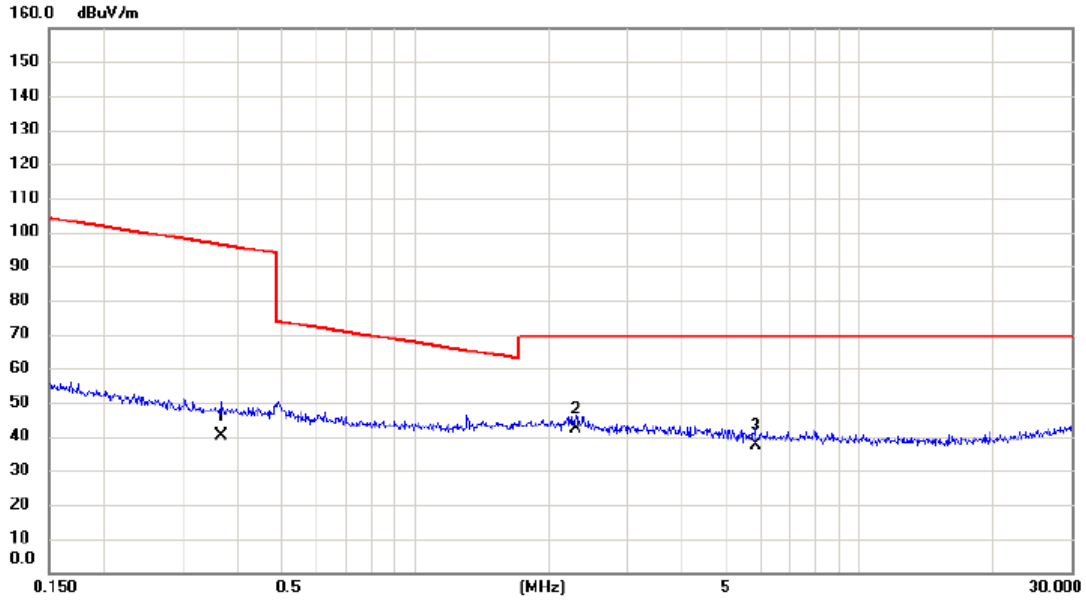

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3673	23.10	17.01	40.11	96.30	-56.19	AVG	
2	*	2.2968	25.20	16.94	42.14	69.54	-27.40	QP	
3		5.8358	22.50	15.03	37.53	69.54	-32.01	QP	

Test Mode: TX Mode

Ant 90°

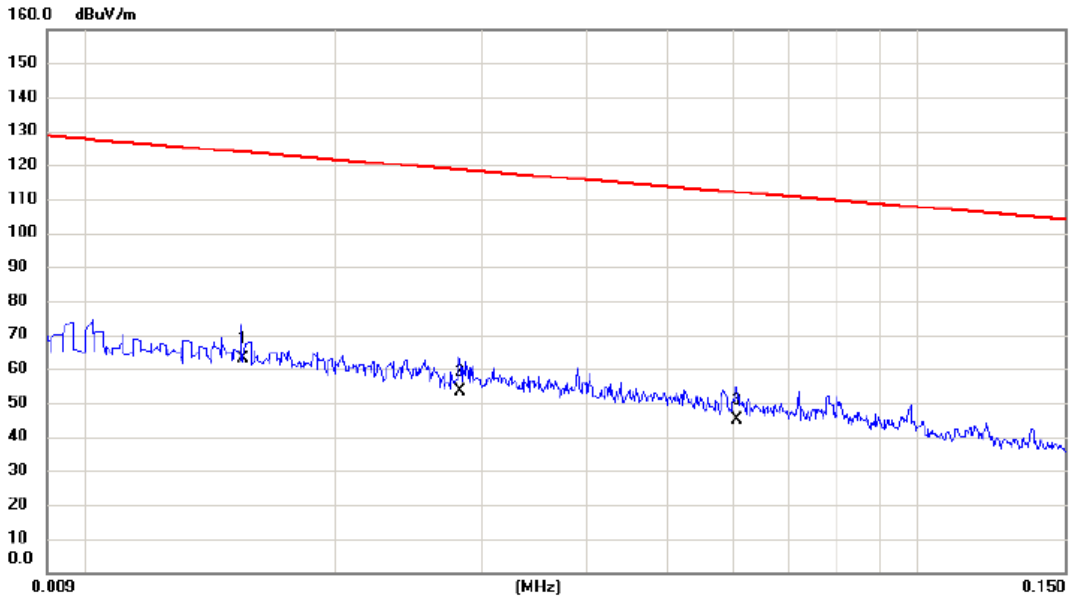

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0155	42.30	20.65	62.95	123.80	-60.85	AVG	
2		0.0282	33.50	19.88	53.38	118.60	-65.22	AVG	
3		0.0606	25.60	19.32	44.92	111.96	-67.04	AVG	

Test Mode: TX Mode

Ant 90°




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2863	33.20	17.05	50.25	98.47	-48.22	AVG	
2	*	0.5611	31.80	16.95	48.75	72.62	-23.87	QP	
3		2.2132	24.60	16.98	41.58	69.54	-27.96	QP	

APPENDIX C - RADIATED EMISSION (30 MHZ TO 1000 MHZ)

Test Mode: TX B Mode Channel 01

Vertical

80 dBuV/m

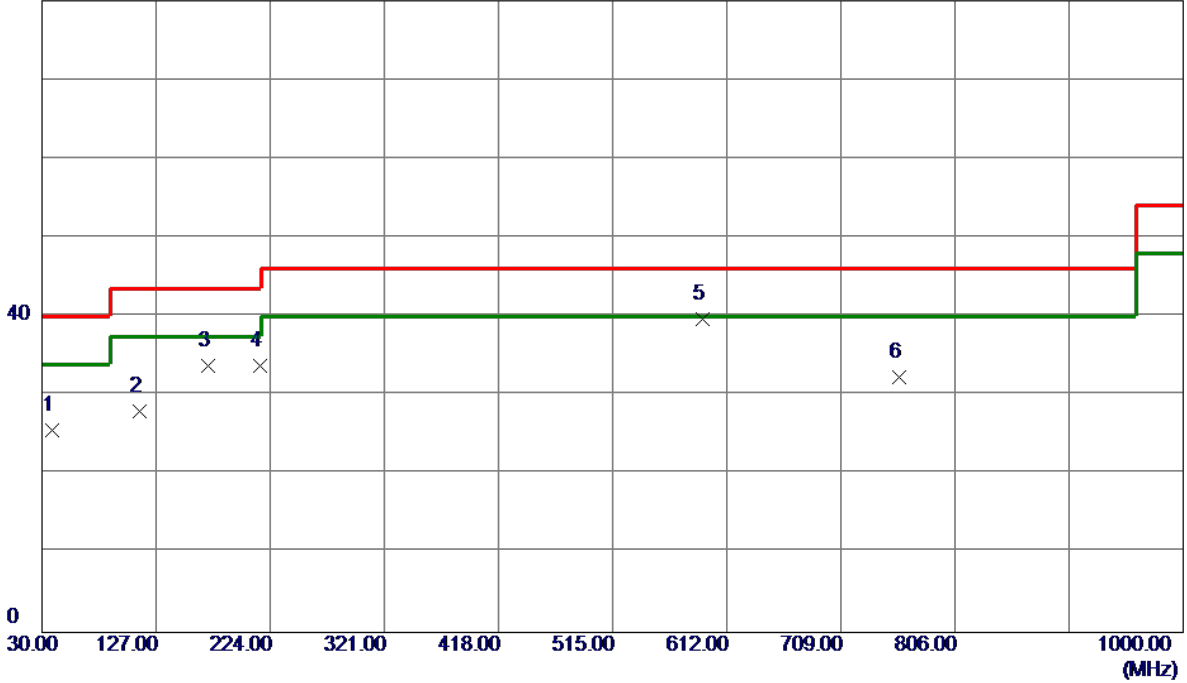


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38.2450	40.31	-14.66	25.65	40.00	-14.35	Peak	
2	113.4200	43.69	-15.74	27.95	43.50	-15.55	Peak	
3	171.1350	45.20	-11.38	33.82	43.50	-9.68	Peak	
4	215.2700	48.84	-15.02	33.82	43.50	-9.68	Peak	
5 *	591.1450	45.79	-6.15	39.64	46.00	-6.36	Peak	
6	758.4699	35.86	-3.53	32.33	46.00	-13.67	Peak	

Test Mode: TX B Mode Channel 01

Horizontal

80 dBuV/m

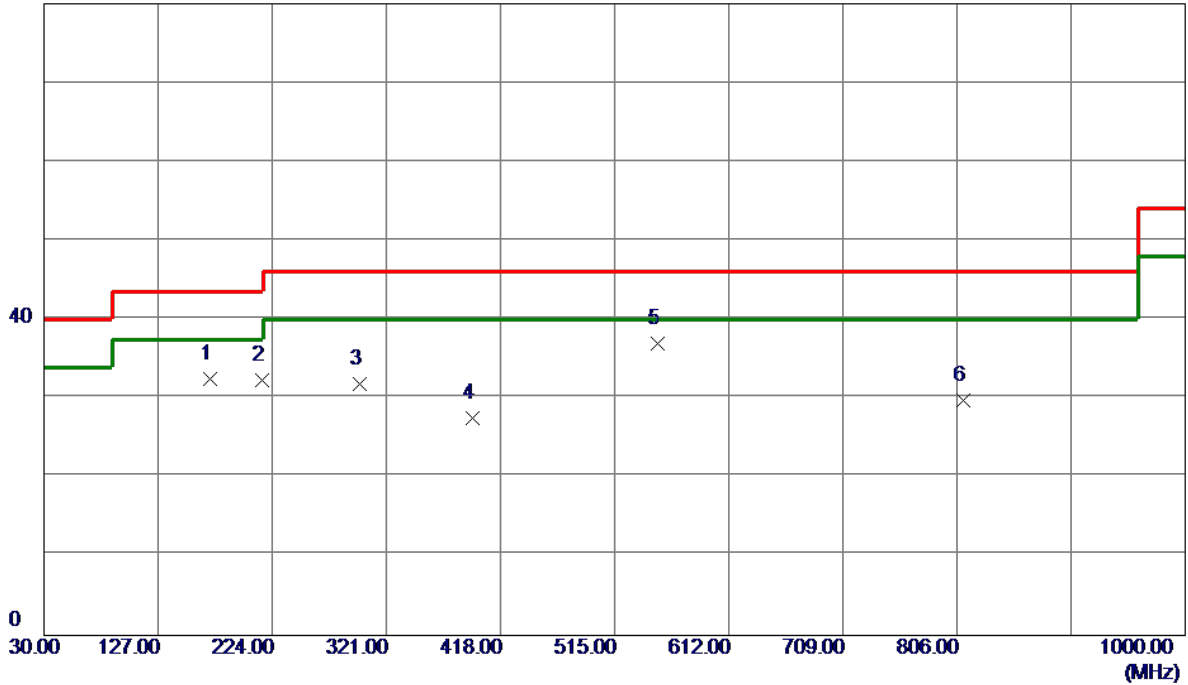


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	171.6200	43.91	-11.46	32.45	43.50	-11.05	Peak	
2	215.7550	47.33	-15.01	32.32	43.50	-11.18	Peak	
3	298.6900	42.26	-10.45	31.81	46.00	-14.19	Peak	
4	394.2349	37.12	-9.58	27.54	46.00	-18.46	Peak	
5 *	551.3750	42.38	-5.49	36.89	46.00	-9.11	Peak	
6	811.8200	30.99	-1.22	29.77	46.00	-16.23	Peak	

Test Mode: TX B Mode Channel 06

Vertical

80 dBuV/m

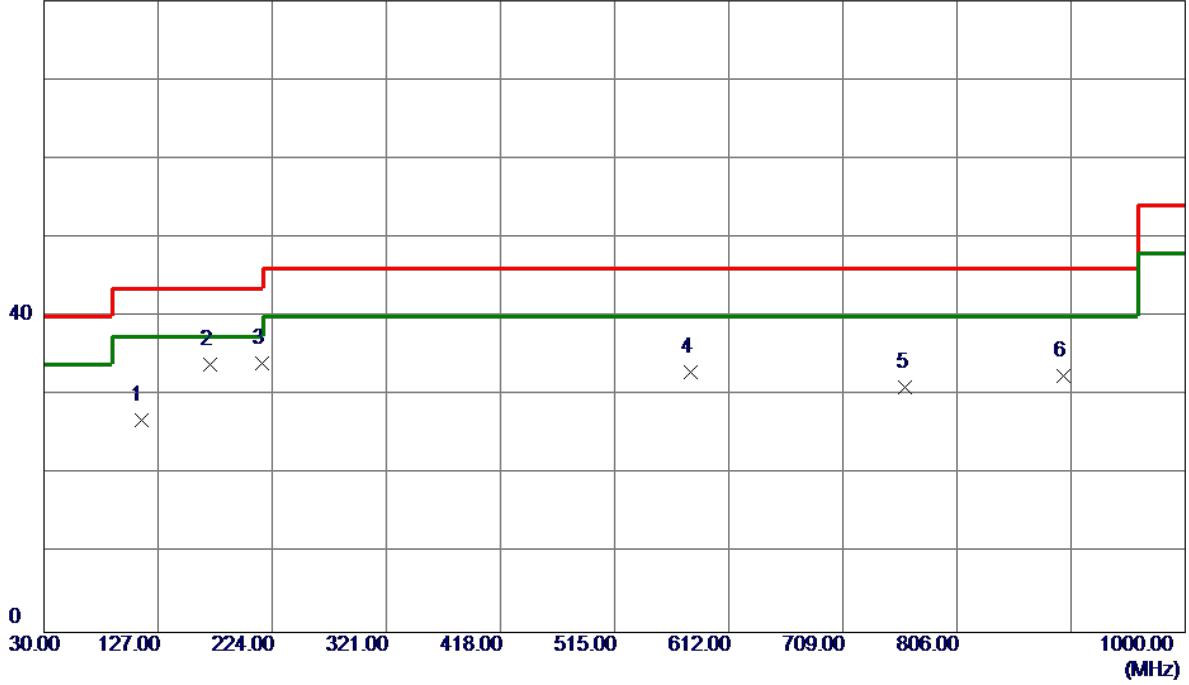


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	112.4500	42.79	-15.89	26.90	43.50	-16.60	Peak	
2	171.6200	45.41	-11.46	33.95	43.50	-9.55	Peak	
3 *	215.7550	49.13	-15.01	34.12	43.50	-9.38	Peak	
4	579.9900	38.98	-5.97	33.01	46.00	-12.99	Peak	
5	762.3500	34.29	-3.30	30.99	46.00	-15.01	Peak	
6	896.6950	33.16	-0.68	32.48	46.00	-13.52	Peak	

Test Mode: TX B Mode Channel 06

Horizontal


80 dBuV/m

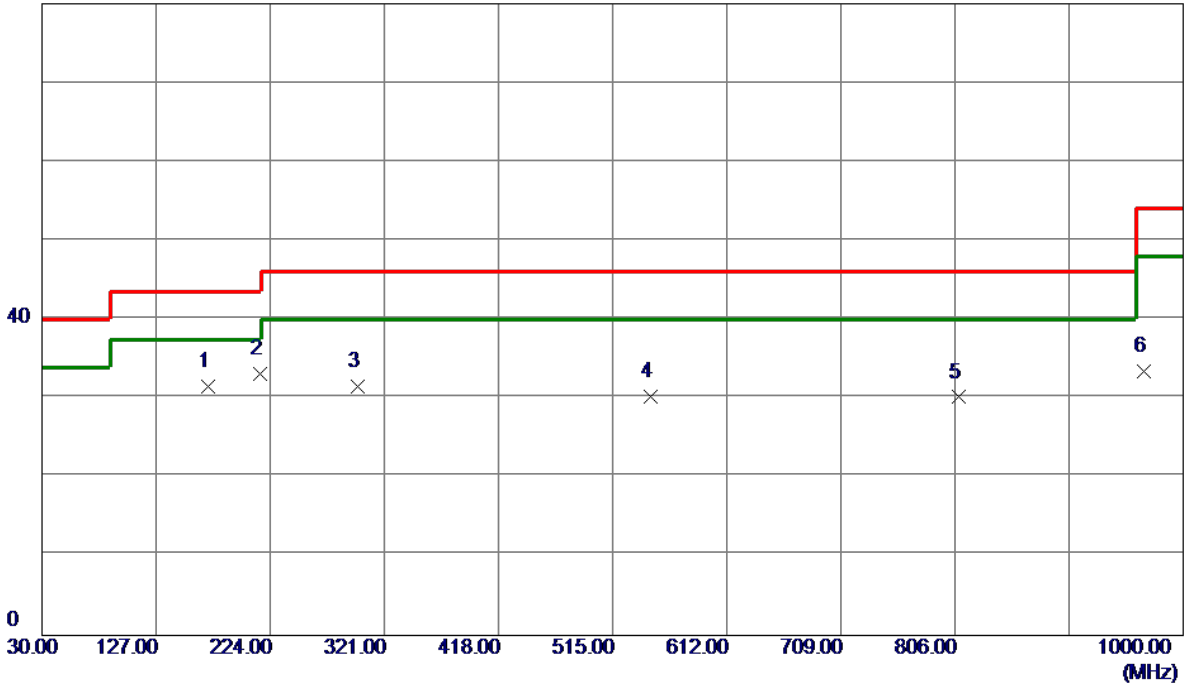

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	171.6200	42.93	-11.46	31.47	43.50	-12.03	Peak	
2 *	215.2700	48.17	-15.02	33.15	43.50	-10.35	Peak	
3	298.2049	42.01	-10.47	31.54	46.00	-14.46	Peak	
4	547.4950	35.90	-5.62	30.28	46.00	-15.72	Peak	
5	809.3950	31.35	-1.19	30.16	46.00	-15.84	Peak	
6	966.5350	32.43	1.02	33.45	54.00	-20.55	Peak	

Test Mode: TX B Mode Channel 11

Vertical

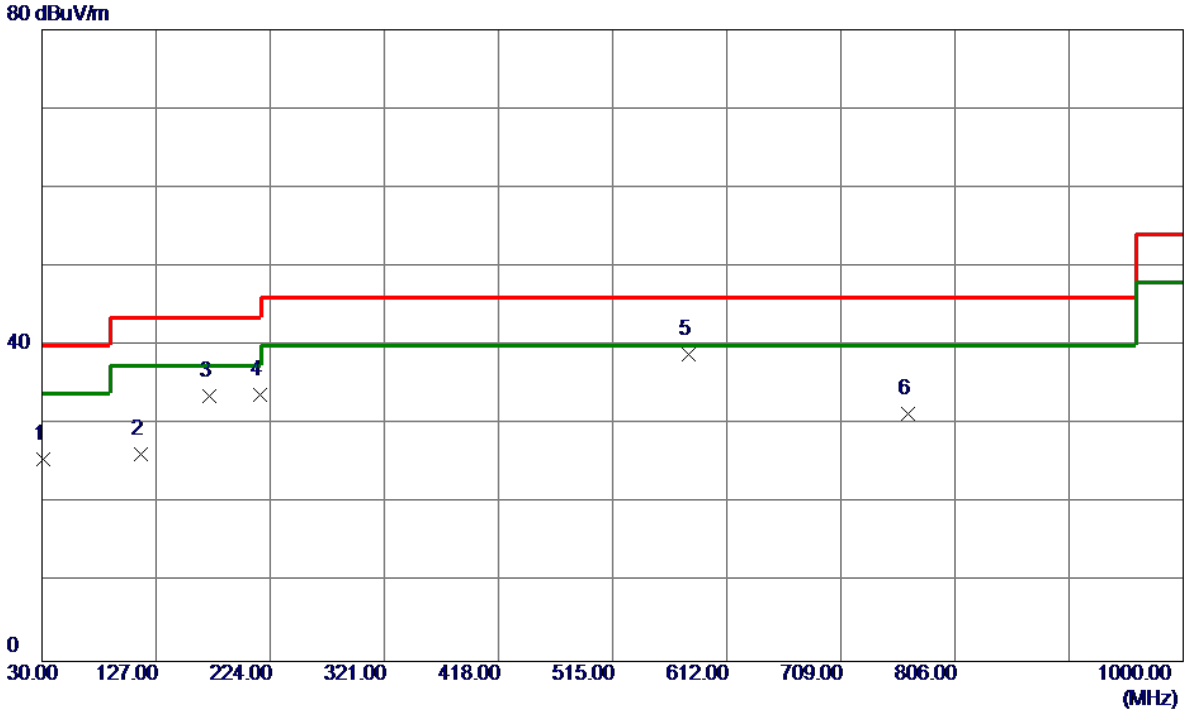


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	31.4550	40.61	-15.02	25.59	40.00	-14.41	Peak	
2	113.9050	41.91	-15.66	26.25	43.50	-17.25	Peak	
3	172.1050	45.17	-11.54	33.63	43.50	-9.87	Peak	
4	215.7550	48.74	-15.01	33.73	43.50	-9.77	Peak	
5 *	579.9900	44.87	-5.97	38.90	46.00	-7.10	Peak	
6	766.2300	34.50	-3.07	31.43	46.00	-14.57	Peak	

Test Mode: TX B Mode Channel 11

Horizontal

80 dBuV/m

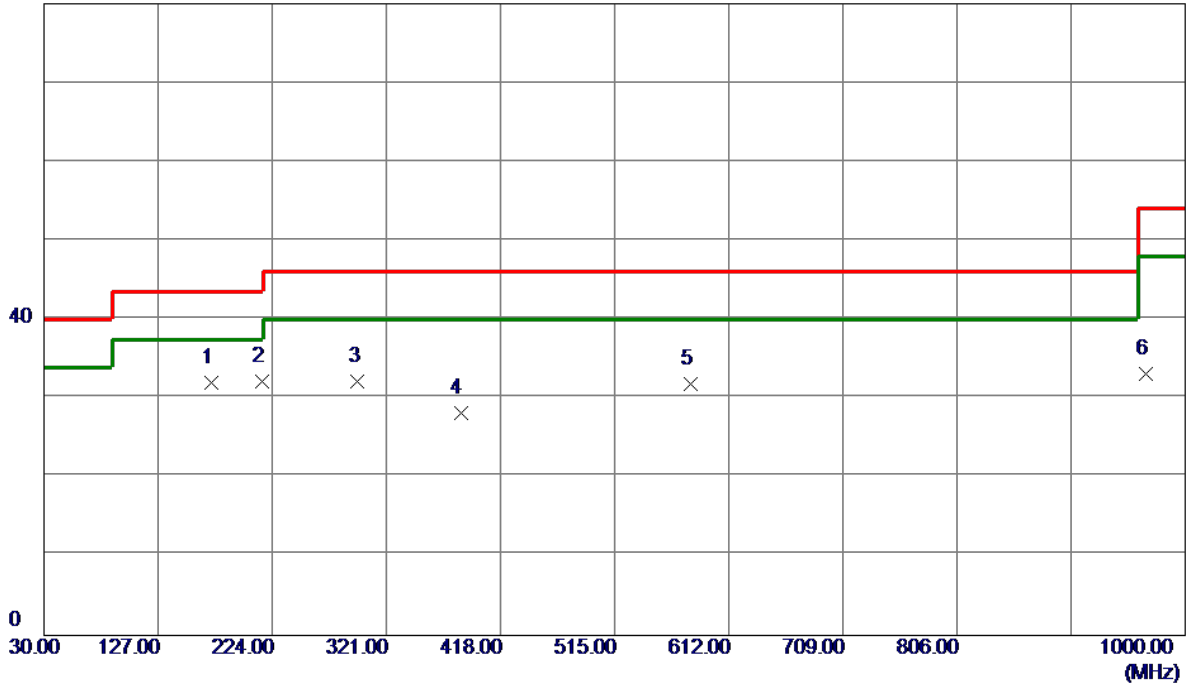


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	172.1050	43.51	-11.54	31.97	43.50	-11.53	Peak	
2 *	215.2700	47.11	-15.02	32.09	43.50	-11.41	Peak	
3	296.7500	42.76	-10.56	32.20	46.00	-13.80	Peak	
4	384.0500	38.10	-9.92	28.18	46.00	-17.82	Peak	
5	579.9900	37.84	-5.97	31.87	46.00	-14.13	Peak	
6	966.5350	32.07	1.02	33.09	54.00	-20.91	Peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000 MHZ)

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

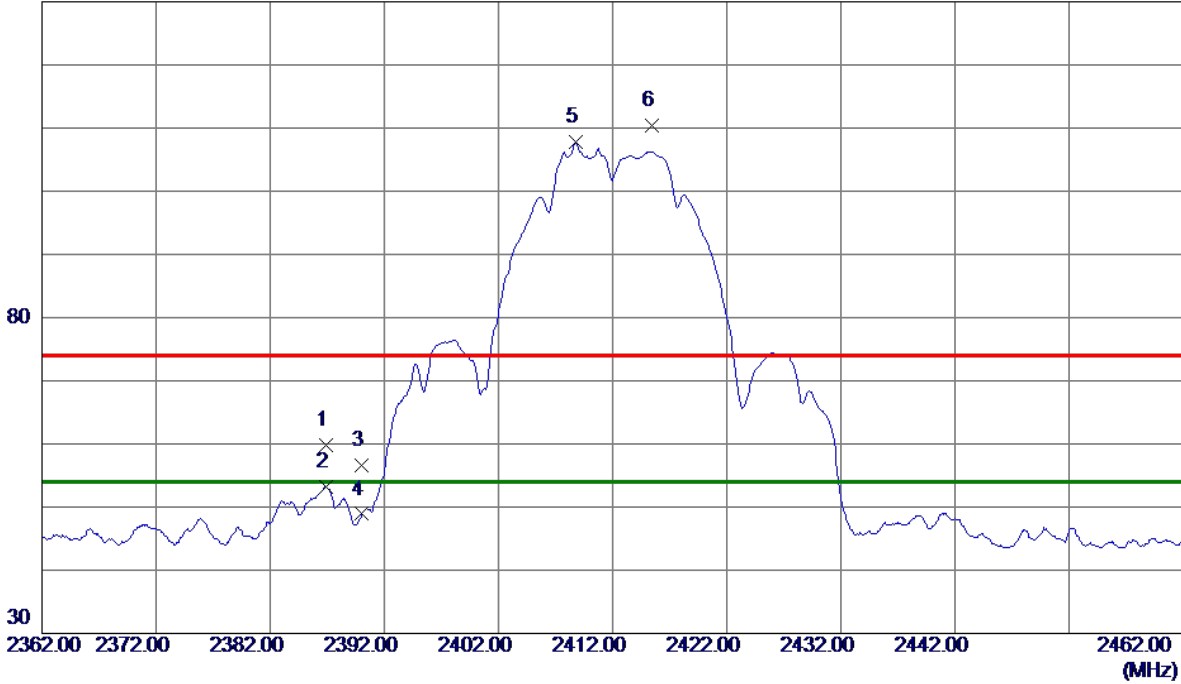


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.9000	52.33	7.39	59.72	74.00	-14.28	Peak	
2	2386.9000	45.90	7.39	53.29	54.00	-0.71	AVG	
3	2390.0000	49.13	7.39	56.52	74.00	-17.48	Peak	
4	2390.0000	41.51	7.39	48.90	54.00	-5.10	AVG	
5 *	2408.7500	100.44	7.37	107.81	54.00	53.81	AVG	No Limit
6	2415.4500	103.05	7.37	110.42	74.00	36.42	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

80 dBuV/m

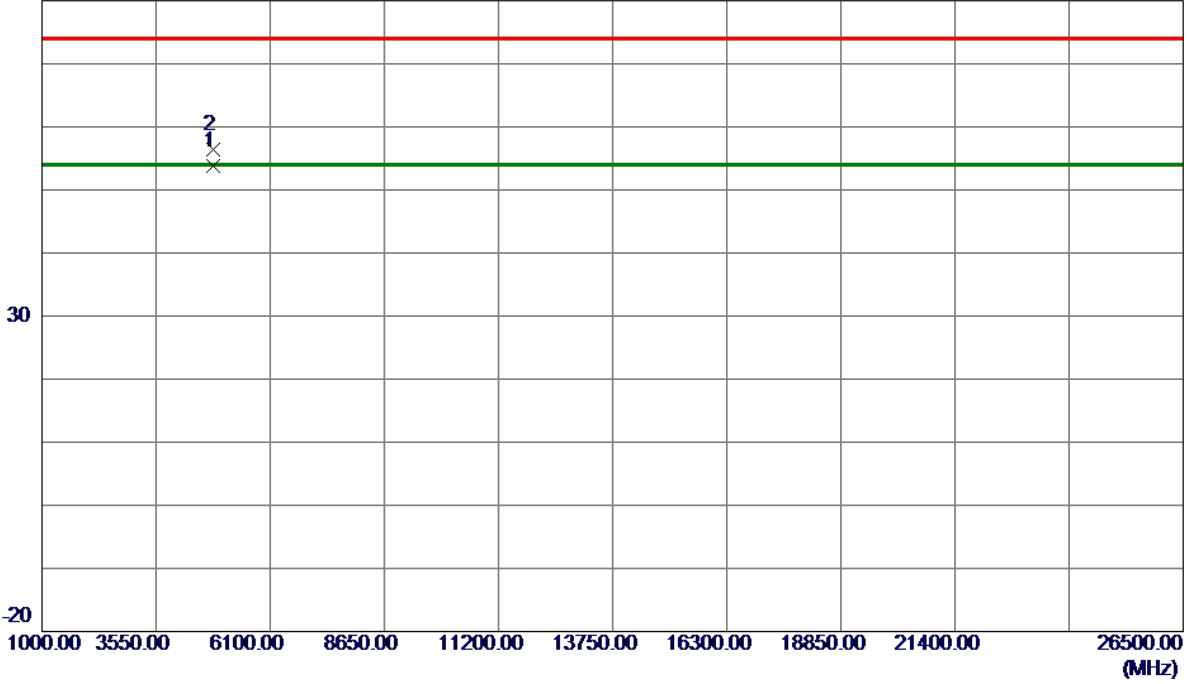


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9900	50.26	3.57	53.83	54.00	-0.17	AVG	
2	4824.0099	52.84	3.57	56.41	74.00	-17.59	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

130 dBuV/m

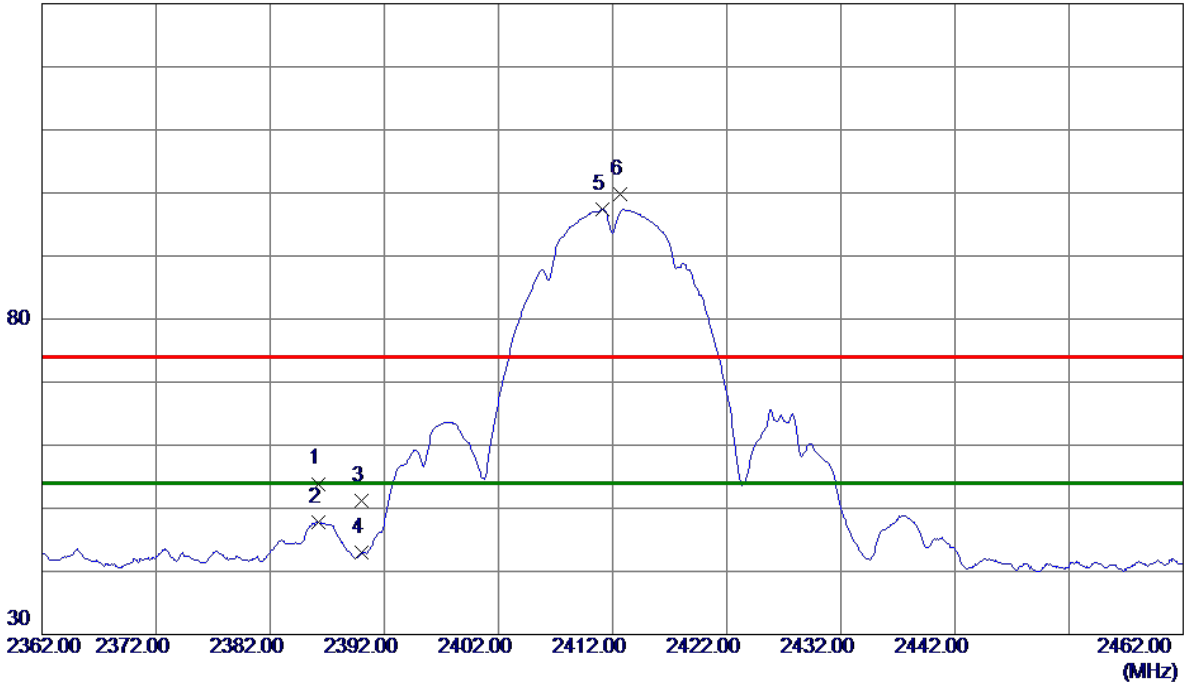


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.2500	46.51	7.39	53.90	74.00	-20.10	Peak	
2	2386.2500	40.46	7.39	47.85	54.00	-6.15	AVG	
3	2390.0000	43.84	7.39	51.23	74.00	-22.77	Peak	
4	2390.0000	35.62	7.39	43.01	54.00	-10.99	AVG	
5 *	2411.1000	89.96	7.37	97.33	54.00	43.33	AVG	No Limit
6	2412.6500	92.42	7.37	99.79	74.00	25.79	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal


80 dBuV/m

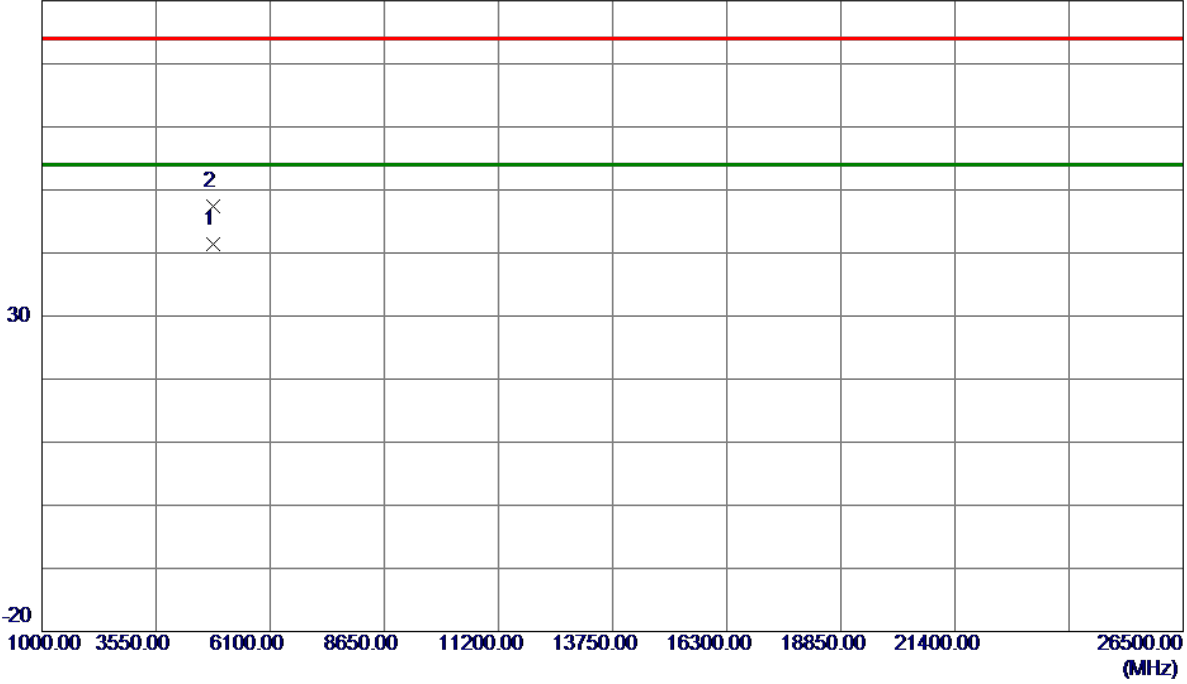

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9320	37.91	3.57	41.48	54.00	-12.52	AVG	
2	4823.9400	43.83	3.57	47.40	74.00	-26.60	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2417MHz


Vertical

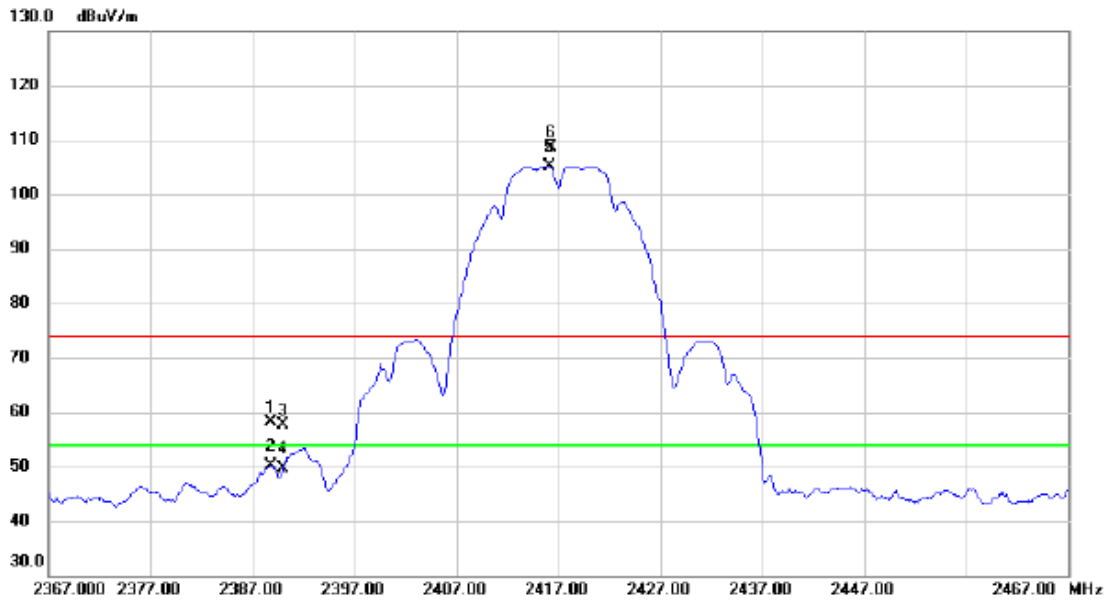

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.850	50.76	7.39	58.15	74.00	-15.85	peak	
2		2388.850	42.82	7.39	50.21	54.00	-3.79	AVG	
3		2390.000	50.27	7.38	57.65	74.00	-16.35	peak	
4		2390.000	42.25	7.38	49.63	54.00	-4.37	AVG	
5	*	2416.150	97.87	7.37	105.24	54.00	51.24	AVG	No Limit
6	X	2416.300	101.26	7.37	108.63	74.00	34.63	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2417MHz


Vertical

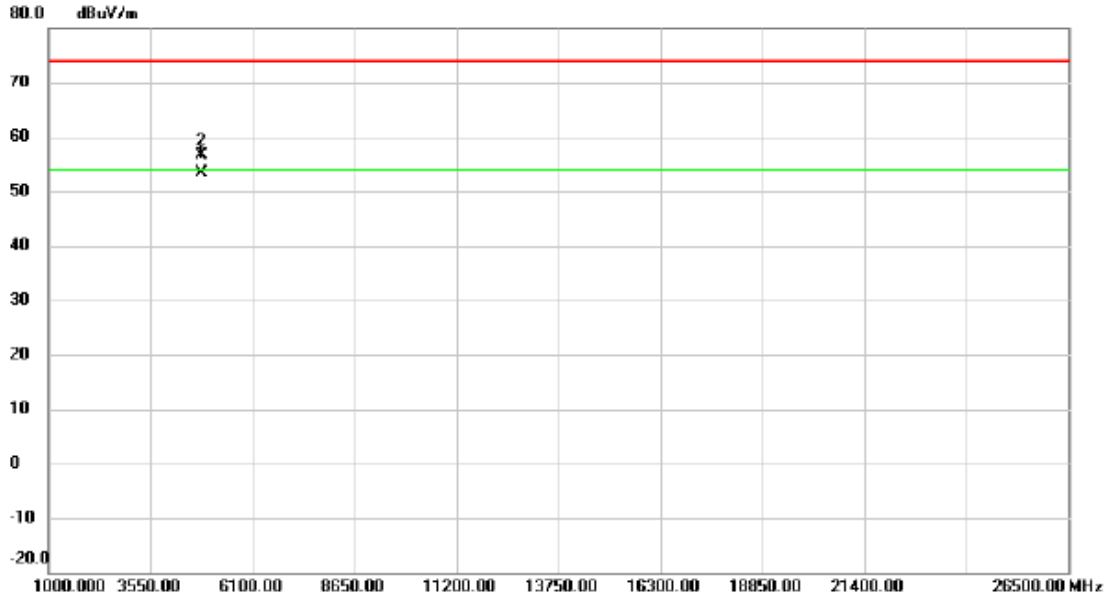

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4834.010	49.71	3.59	53.30	54.00	-0.70	AVG	
2		4834.045	52.93	3.59	56.52	74.00	-17.48	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2417MHz


Horizontal

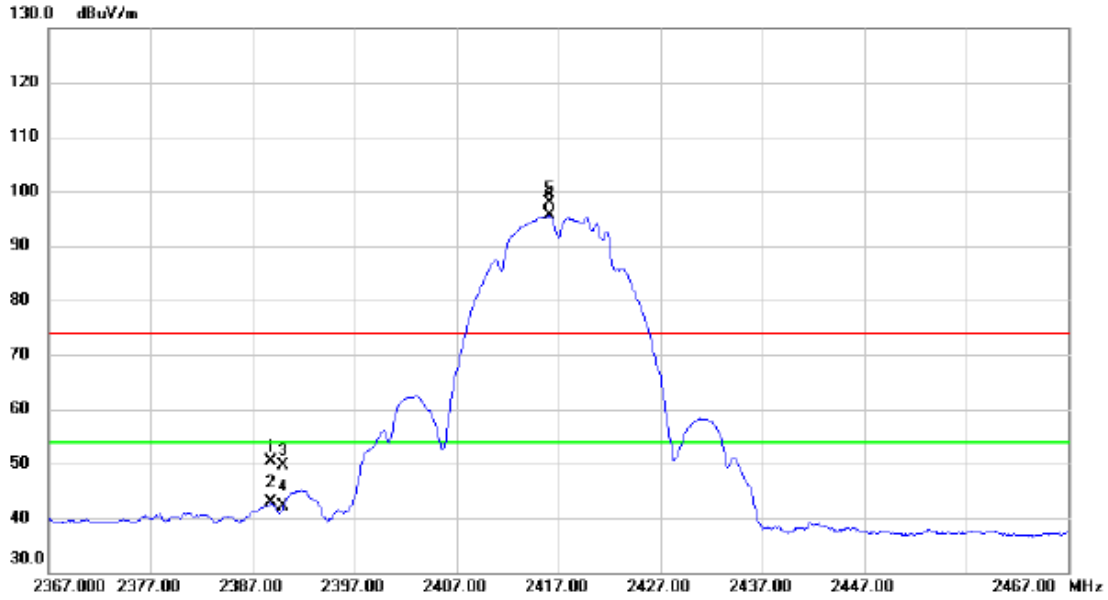

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.750	43.78	6.62	50.40	74.00	-23.60	peak	
2		2388.750	36.34	6.62	42.96	54.00	-11.04	AVG	
3		2390.000	42.99	6.62	49.61	74.00	-24.39	peak	
4		2390.000	35.62	6.62	42.24	54.00	-11.76	AVG	
5	X	2416.100	91.24	6.62	97.86	74.00	23.86	peak	No Limit
6	*	2416.100	88.90	6.62	95.52	54.00	41.52	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2417MHz

Horizontal

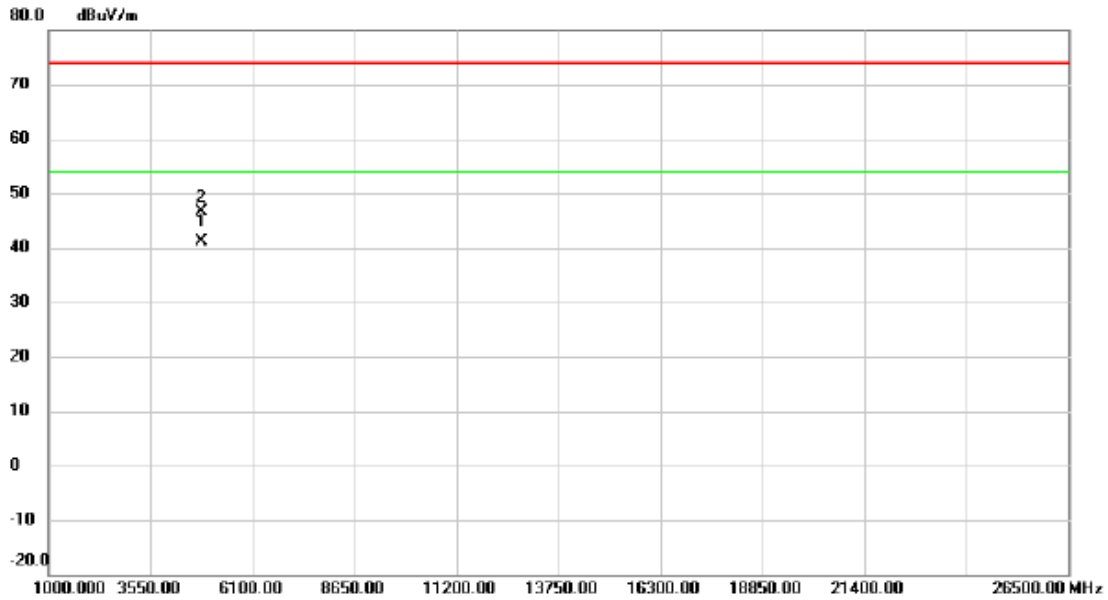


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4833.905	37.51	3.59	41.10	54.00	-12.90	AVG	
2		4834.073	42.98	3.59	46.57	74.00	-27.43	peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

130 dBuV/m

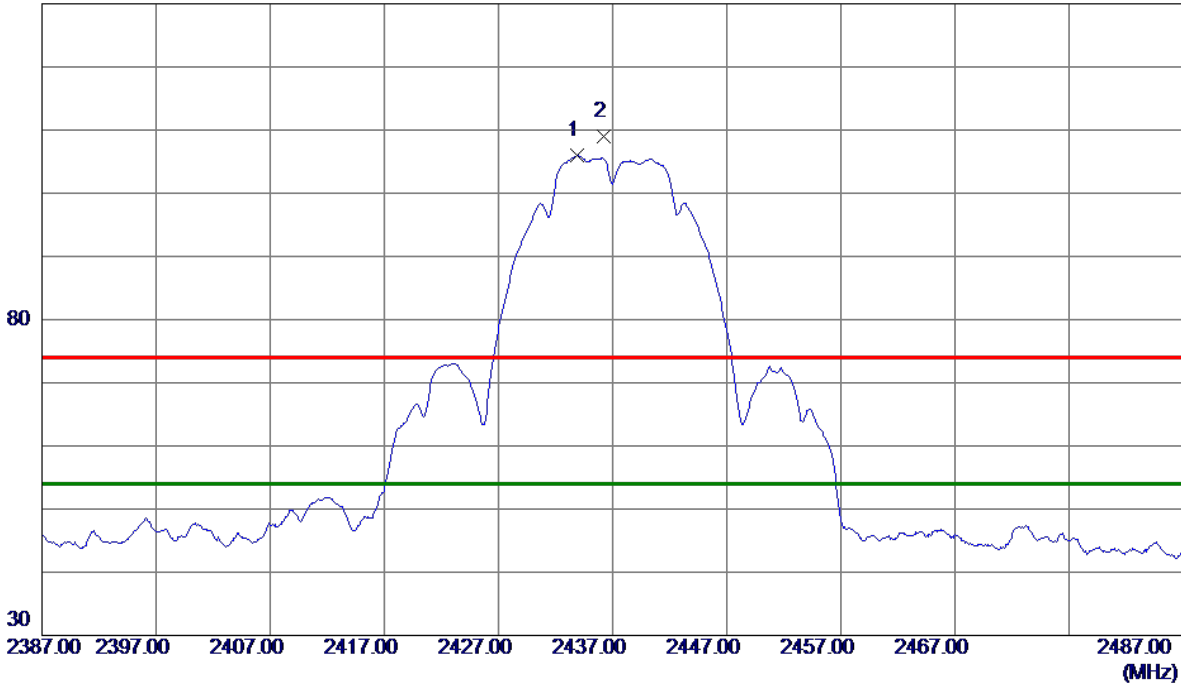


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2433.8500	98.63	7.35	105.98	54.00	51.98	AVG	No Limit
2	2436.2500	101.69	7.35	109.04	74.00	35.04	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical


80 dBuV/m

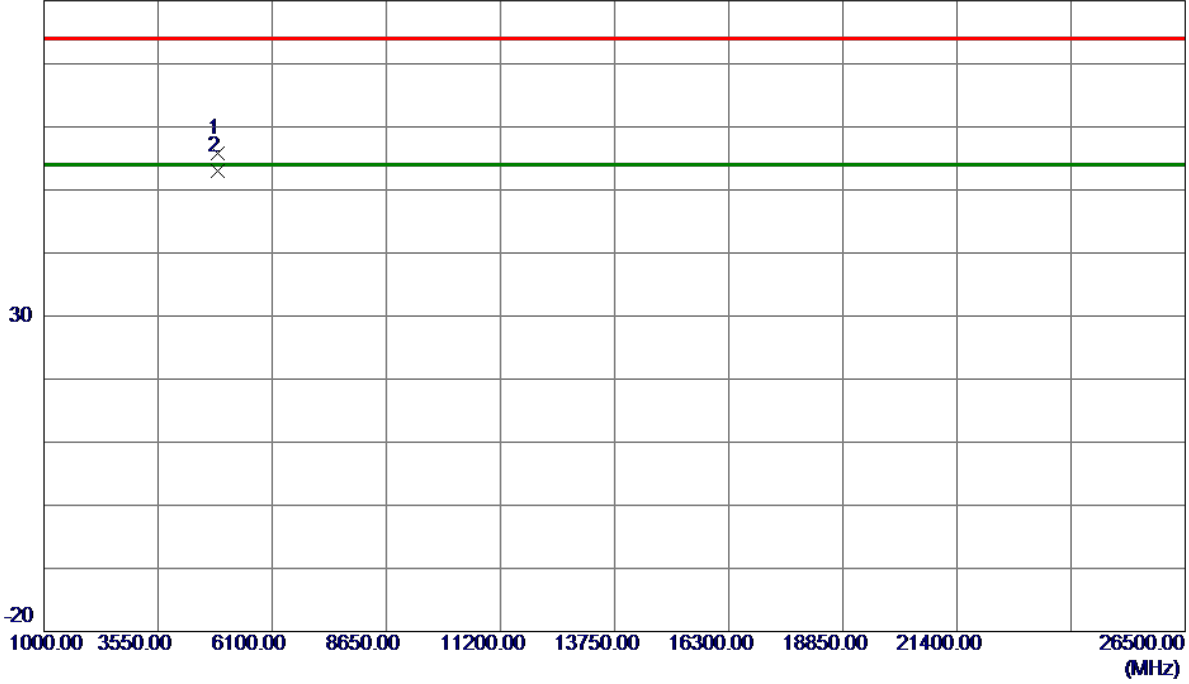

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9750	52.08	3.68	55.76	74.00	-18.24	Peak	
2 *	4873.9950	49.33	3.68	53.01	54.00	-0.99	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

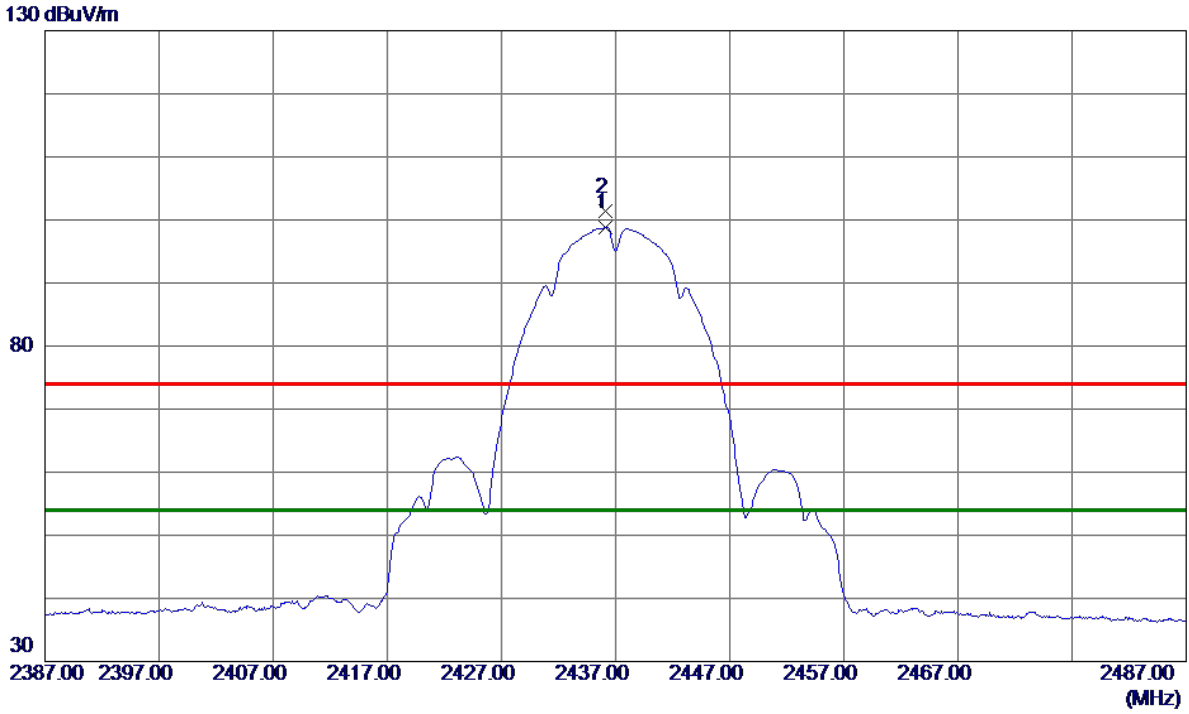


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2436.1000	92.25	6.61	98.86	54.00	44.86	AVG	No Limit
2	2436.1500	94.69	6.61	101.30	74.00	27.30	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal


80 dBuV/m

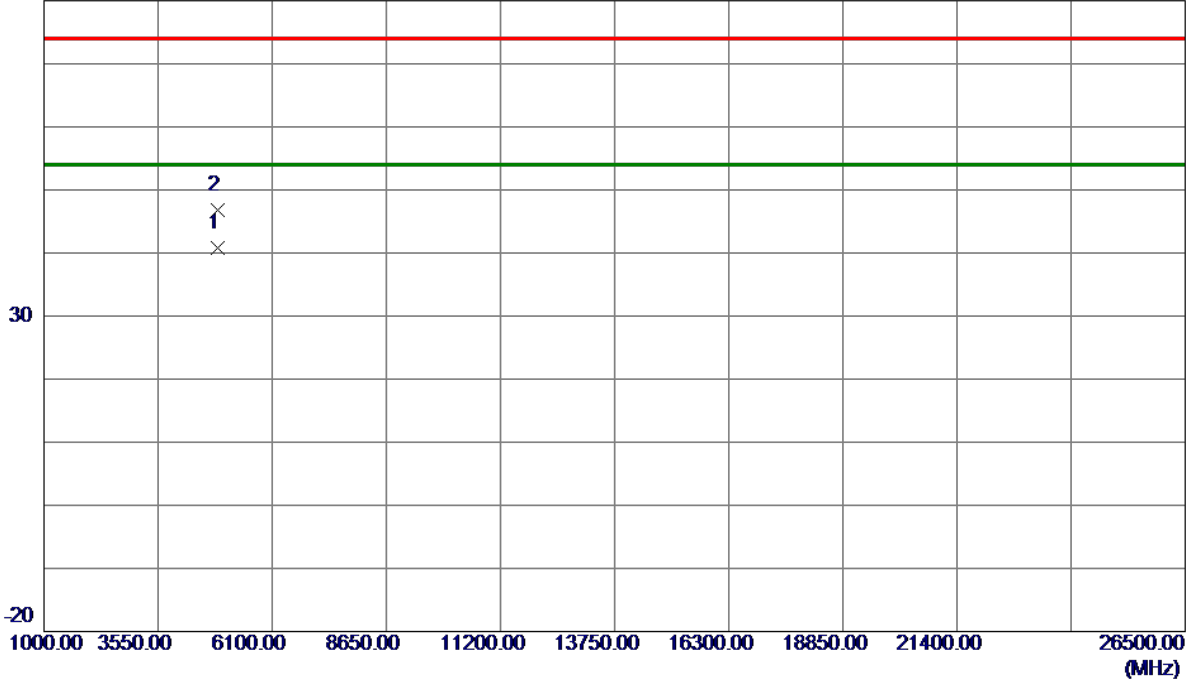

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9380	37.18	3.68	40.86	54.00	-13.14	AVG	
2	4874.1230	43.11	3.68	46.79	74.00	-27.21	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2457MHz


Vertical

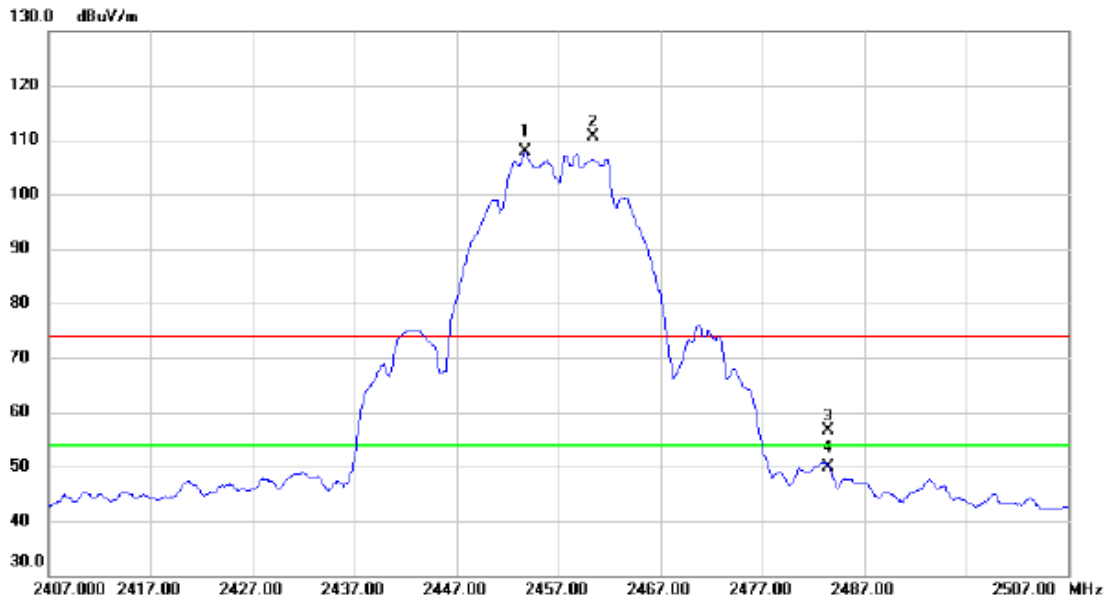

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.750	100.48	7.33	107.81	54.00	53.81	AVG	No Limit
2	X	2460.350	103.31	7.34	110.65	74.00	36.65	peak	No Limit
3		2483.500	49.37	7.32	56.69	74.00	-17.31	peak	
4		2483.500	42.59	7.32	49.91	54.00	-4.09	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2457MHz


Vertical

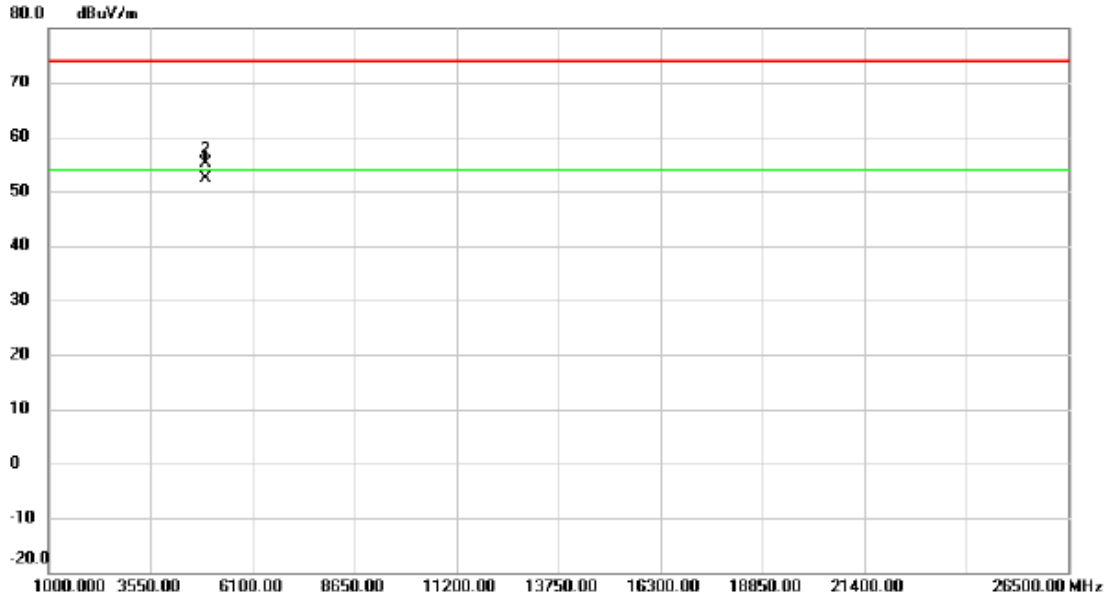

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4913.852	48.63	3.76	52.39	54.00	-1.61	AVG	
2		4914.105	51.32	3.77	55.09	74.00	-18.91	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2457MHz


Horizontal

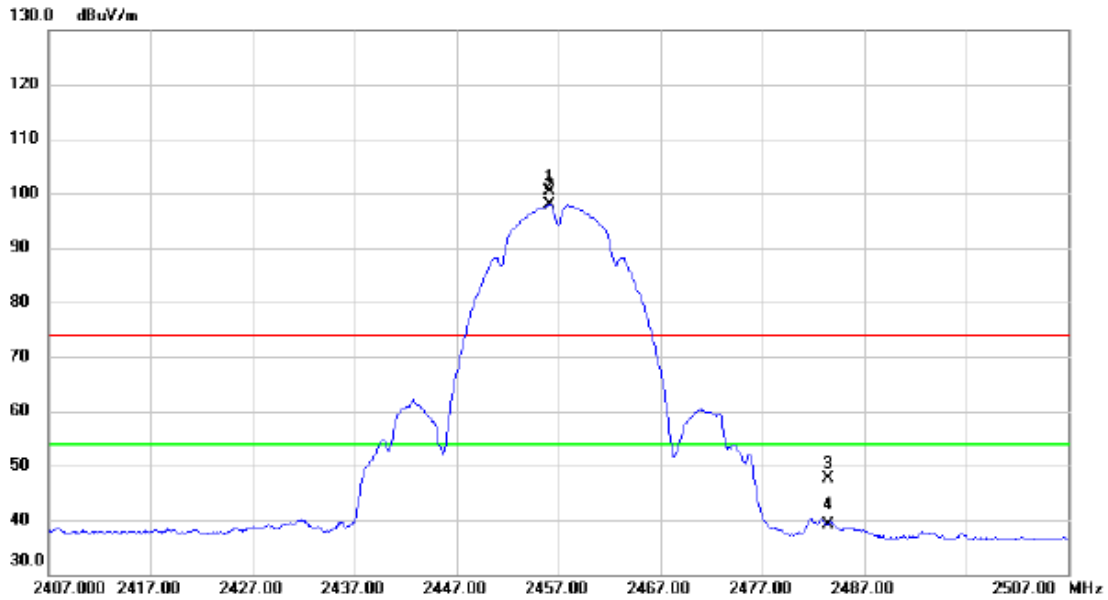

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.100	93.69	6.61	100.30	74.00	26.30	peak	No Limit
2	*	2456.150	91.25	6.61	97.86	54.00	43.86	AVG	No Limit
3		2483.500	40.99	6.61	47.60	74.00	-26.40	peak	
4		2483.500	32.59	6.61	39.20	54.00	-14.80	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2457MHz

Horizontal

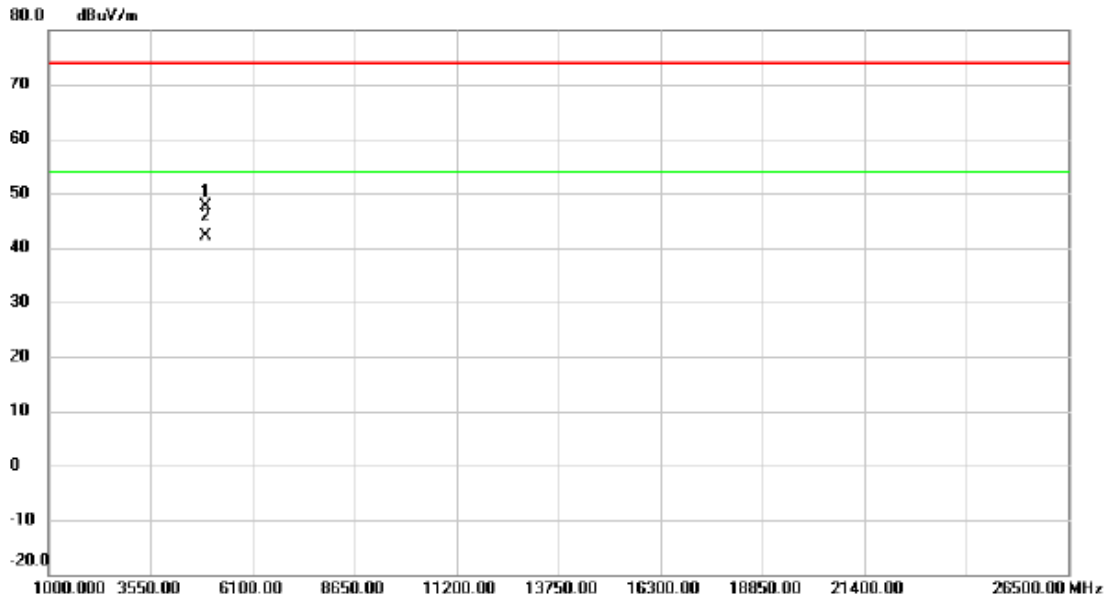


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4913.943	43.78	3.77	47.55	74.00	-26.45	peak	
2	*	4914.012	38.37	3.77	42.14	54.00	-11.86	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

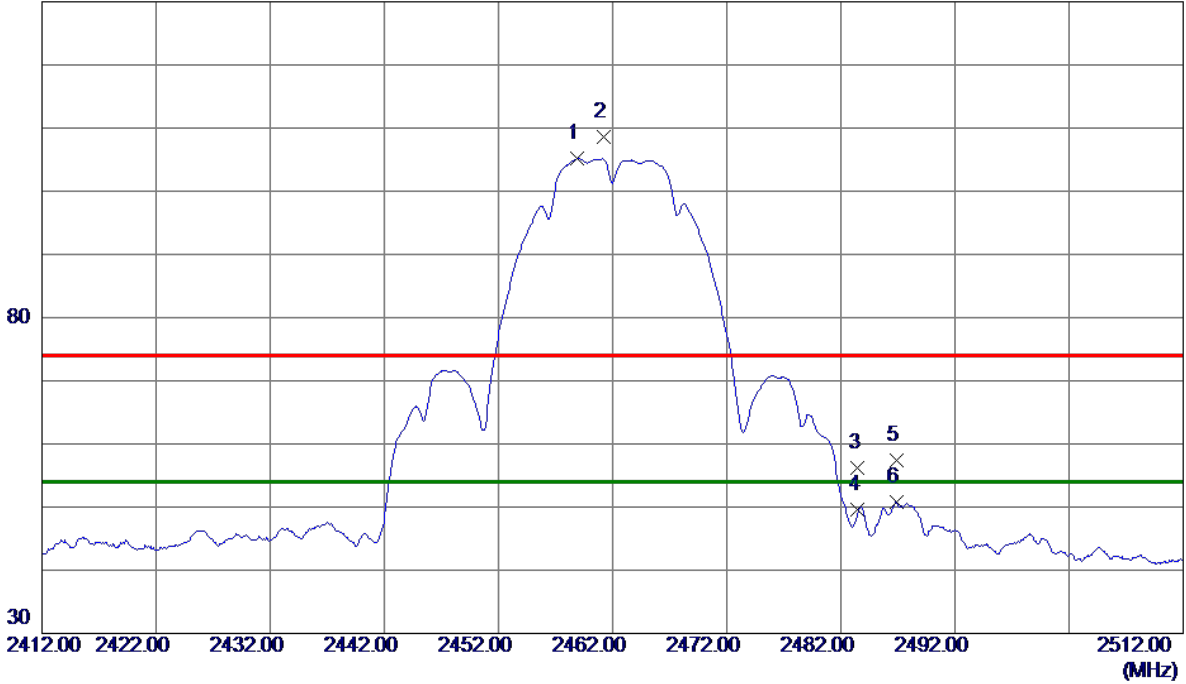


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2458.9000	97.83	7.34	105.17	54.00	51.17	AVG	No Limit
2	2461.2500	101.26	7.33	108.59	74.00	34.59	Peak	No Limit
3	2483.5000	48.94	7.32	56.26	74.00	-17.74	Peak	
4	2483.5000	42.30	7.32	49.62	54.00	-4.38	AVG	
5	2486.8500	50.02	7.31	57.33	74.00	-16.67	Peak	
6	2486.8500	43.56	7.31	50.87	54.00	-3.13	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical


80 dBuV/m

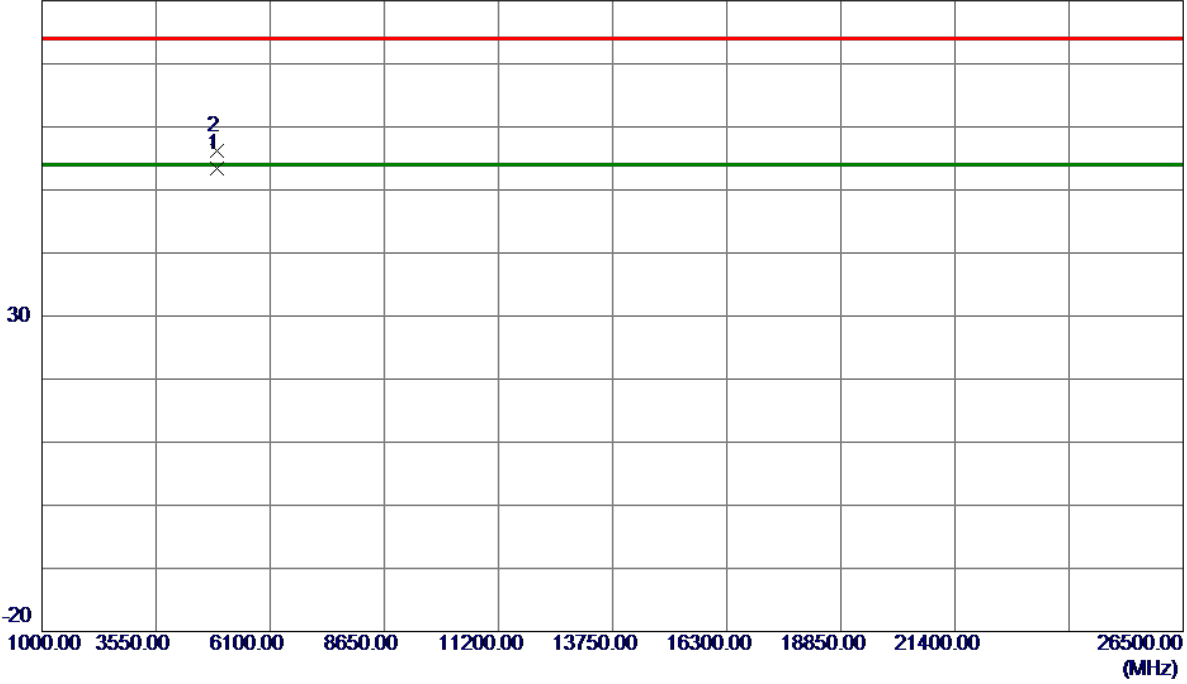

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9550	49.58	3.79	53.37	54.00	-0.63	AVG	
2	4924.0170	52.42	3.79	56.21	74.00	-17.79	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

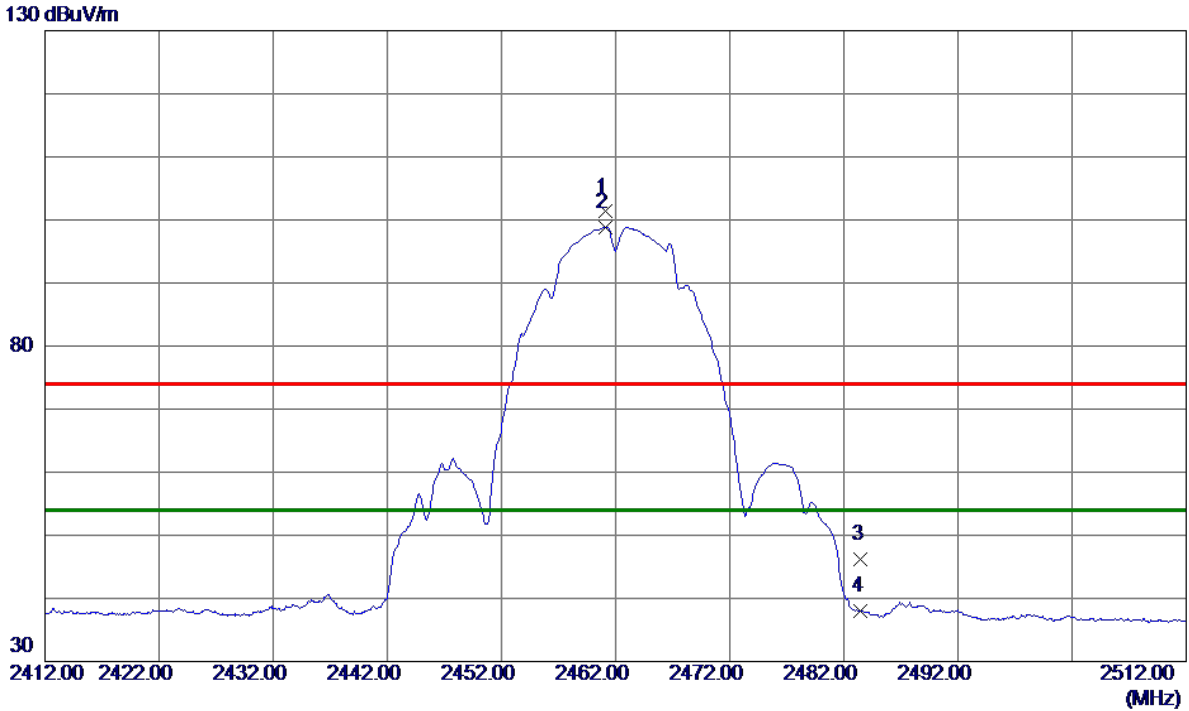


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.1000	94.69	6.61	101.30	74.00	27.30	Peak	No Limit
2 *	2461.1000	92.28	6.61	98.89	54.00	44.89	AVG	No Limit
3	2483.5000	39.61	6.61	46.22	74.00	-27.78	Peak	
4	2483.5000	31.39	6.61	38.00	54.00	-16.00	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

80 dBuV/m

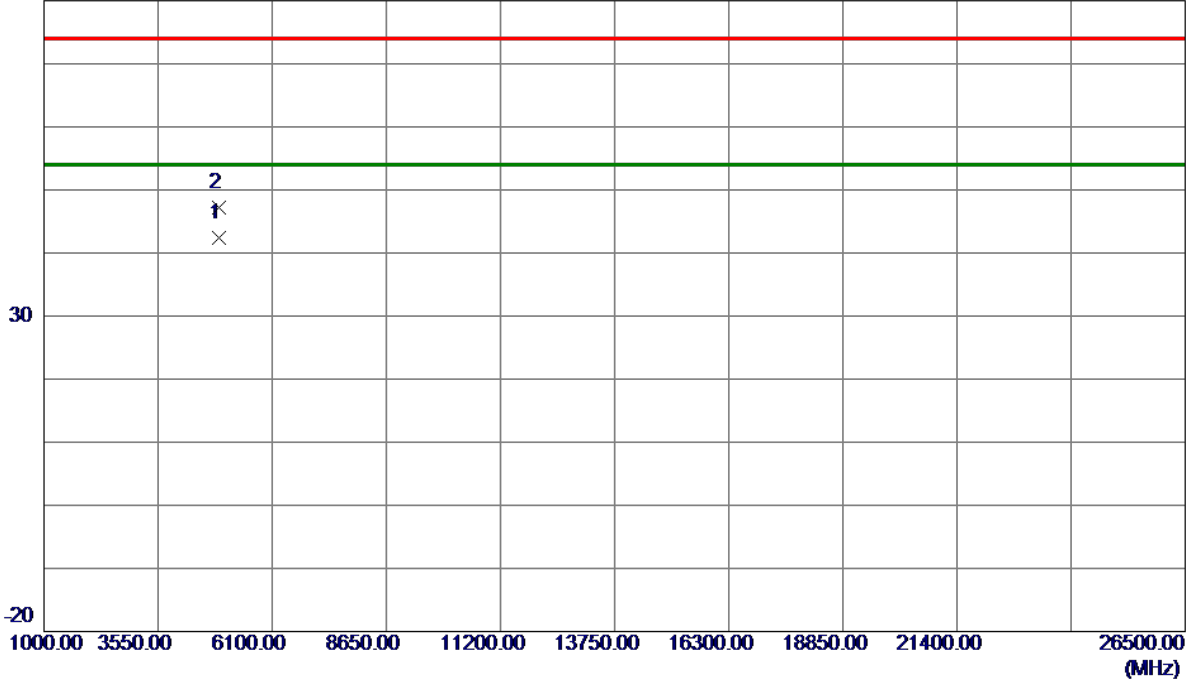


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0400	38.55	3.79	42.34	54.00	-11.66	AVG	
2	4924.0680	43.41	3.79	47.20	74.00	-26.80	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

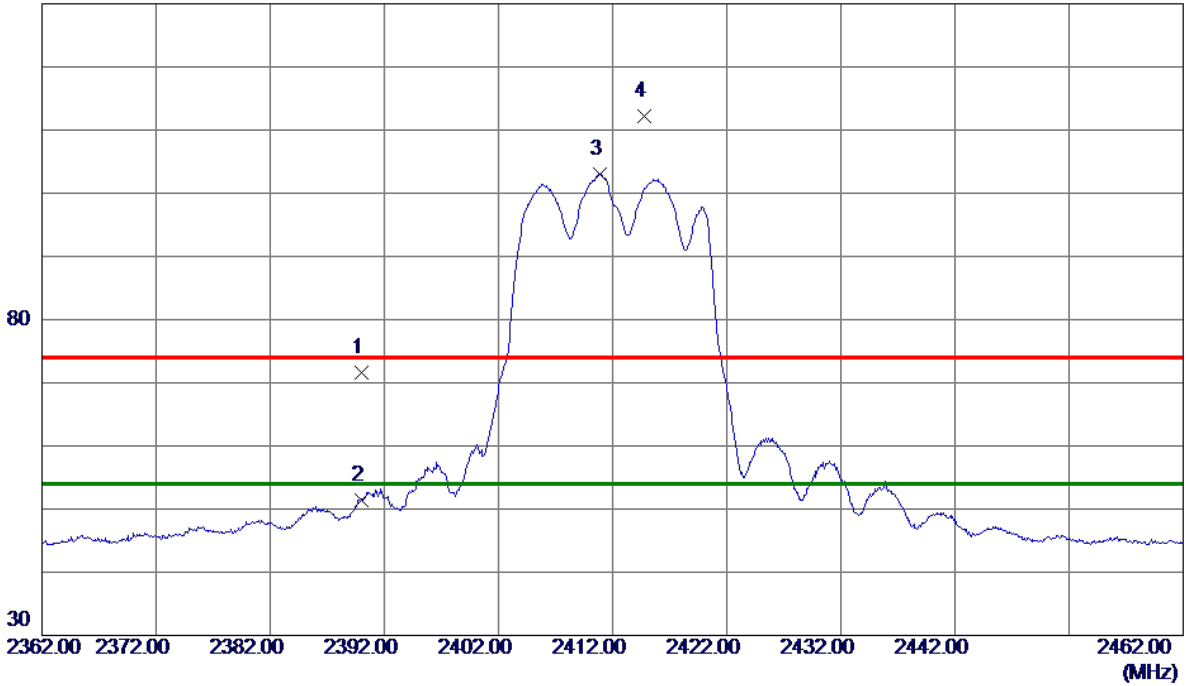


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	64.13	7.39	71.52	74.00	-2.48	Peak	
2	2390.0000	44.02	7.39	51.41	54.00	-2.59	AVG	
3 *	2410.9000	95.70	7.37	103.07	54.00	49.07	AVG	No Limit
4	2414.7500	104.78	7.37	112.15	74.00	38.15	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

80 dBuV/m

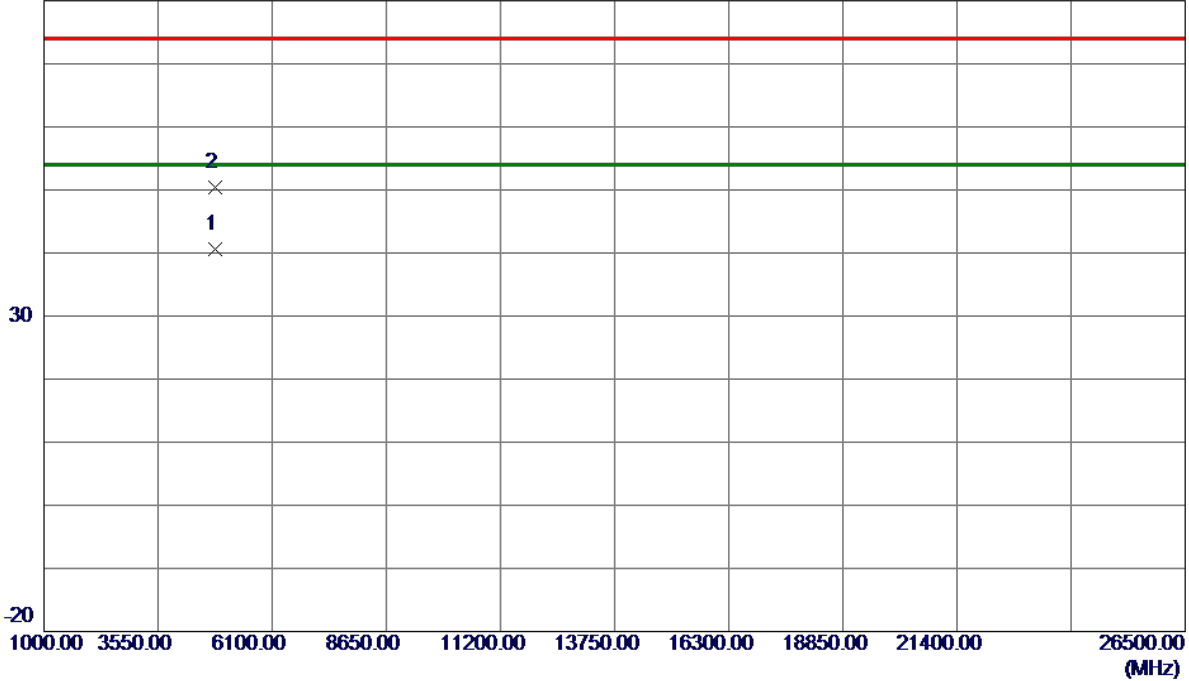


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.9750	36.95	3.57	40.52	54.00	-13.48	AVG	
2	4825.5000	46.87	3.57	50.44	74.00	-23.56	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

130 dBuV/m

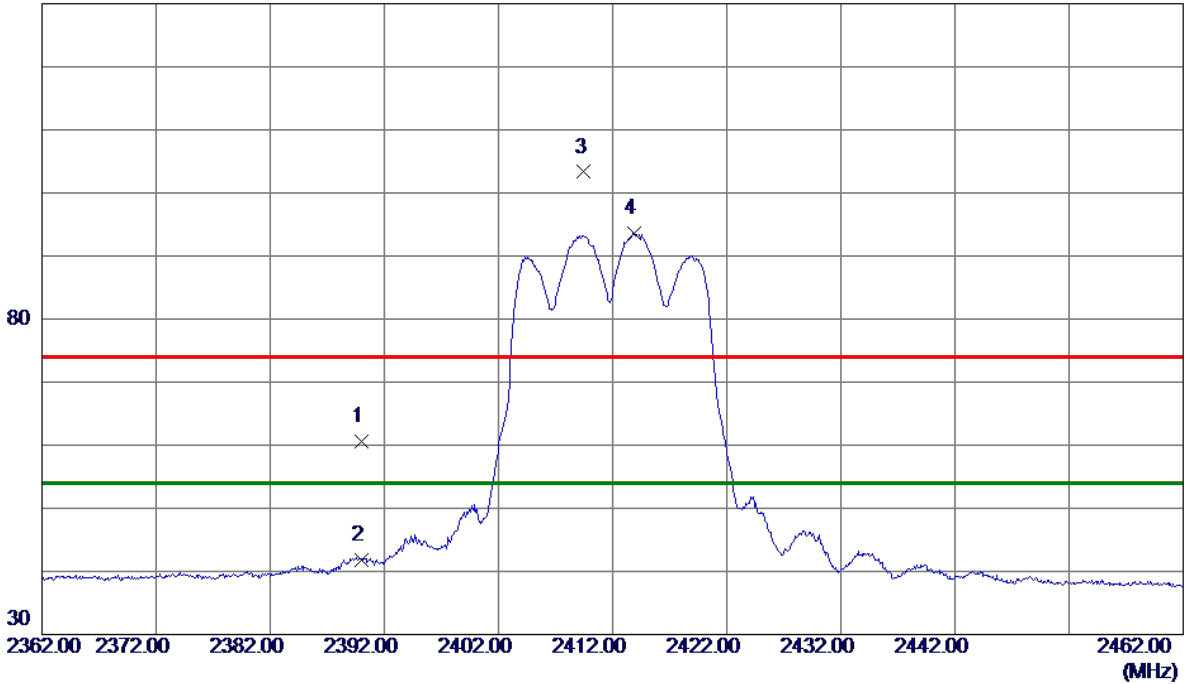


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	54.03	6.62	60.65	74.00	-13.35	Peak	
2	2390.0000	35.19	6.62	41.81	54.00	-12.19	AVG	
3	2409.5000	96.68	6.62	103.30	74.00	29.30	Peak	No Limit
4 *	2413.9000	87.00	6.62	93.62	54.00	39.62	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal


80 dBuV/m

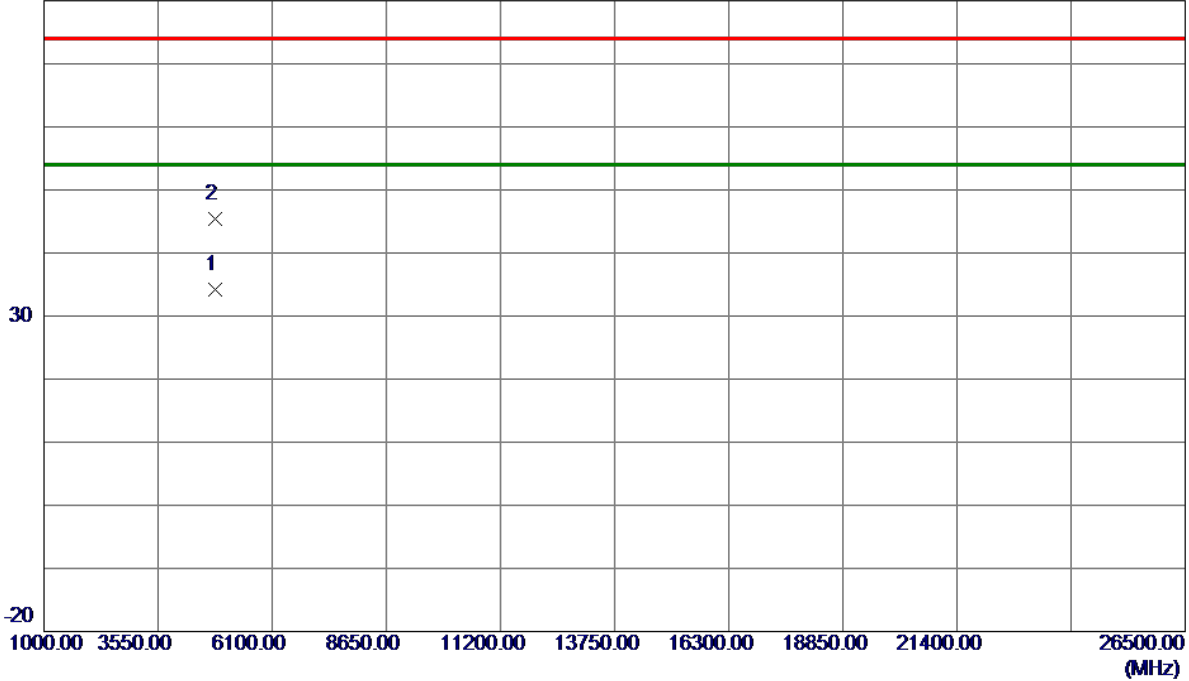

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.7500	30.56	3.57	34.13	54.00	-19.87	AVG	
2	4825.1700	41.81	3.57	45.38	74.00	-28.62	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2417MHz


Vertical

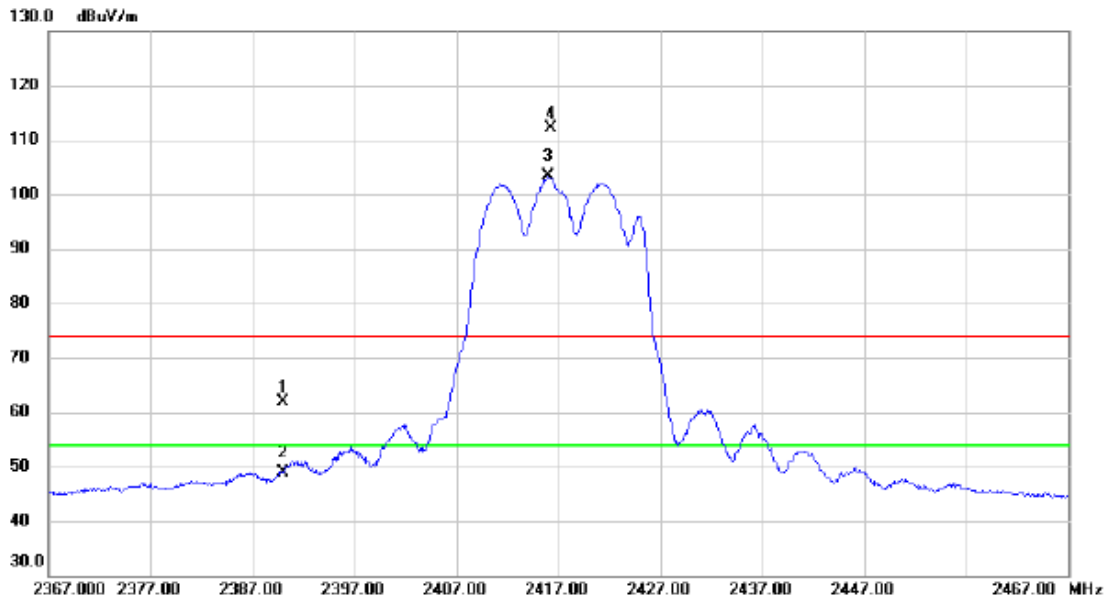

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	54.42	7.38	61.80	74.00	-12.20	peak	
2		2390.000	41.58	7.38	48.96	54.00	-5.04	AVG	
3	*	2416.000	95.92	7.37	103.29	54.00	49.29	AVG	No Limit
4	X	2416.300	104.81	7.37	112.18	74.00	38.18	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2417MHz


Vertical

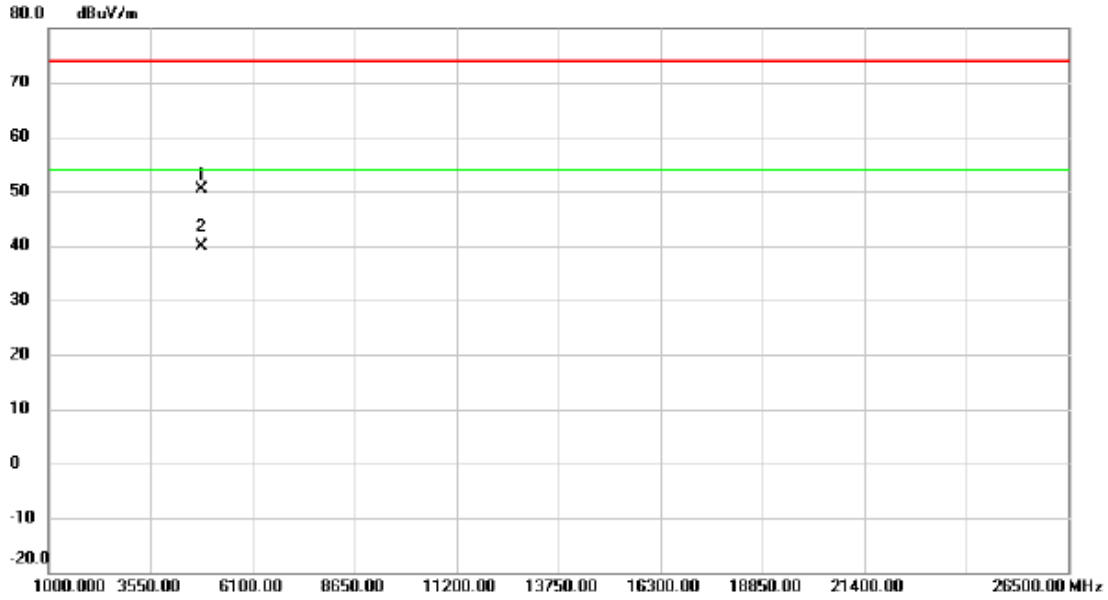

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4835.385	46.88	3.59	50.47	74.00	-23.53	peak	
2	*	4835.455	36.34	3.59	39.93	54.00	-14.07	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2417MHz


Horizontal

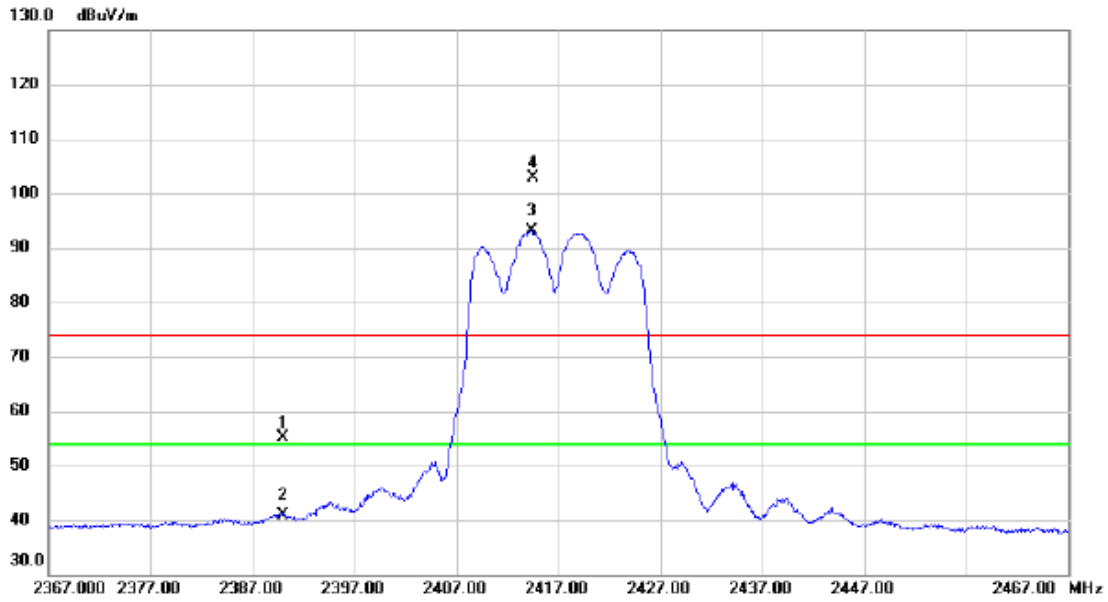

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	48.59	6.62	55.21	74.00	-18.79	peak	
2		2390.000	34.29	6.62	40.91	54.00	-13.09	AVG	
3	*	2414.350	86.42	6.62	93.04	54.00	39.04	AVG	No Limit
4	X	2414.550	96.33	6.62	102.95	74.00	28.95	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2417MHz


Horizontal

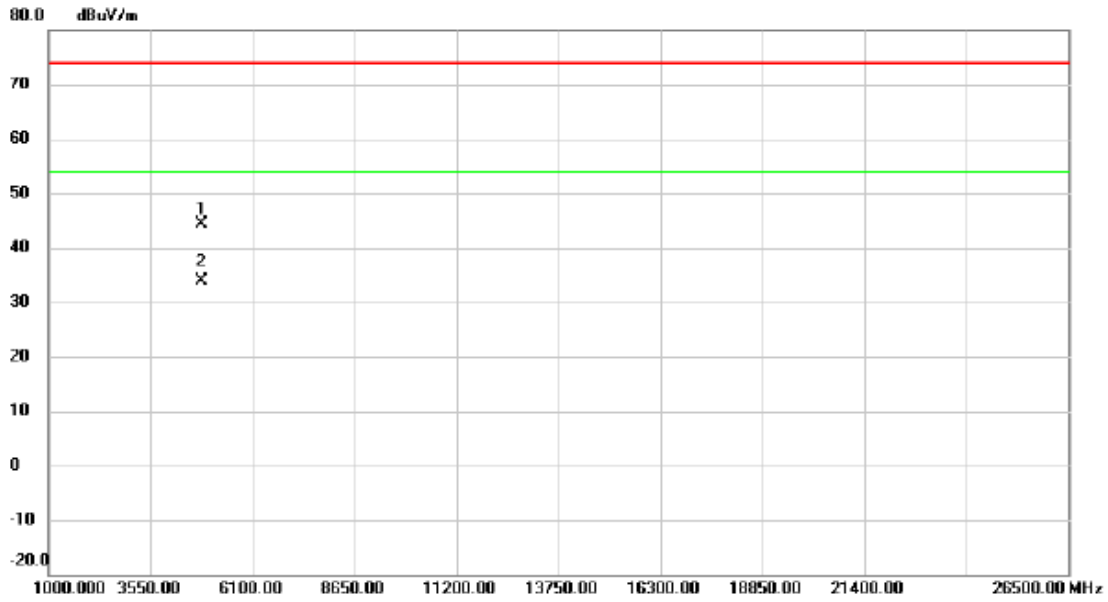

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4834.525	40.91	3.59	44.50	74.00	-29.50	peak	
2	*	4835.125	30.24	3.59	33.83	54.00	-20.17	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

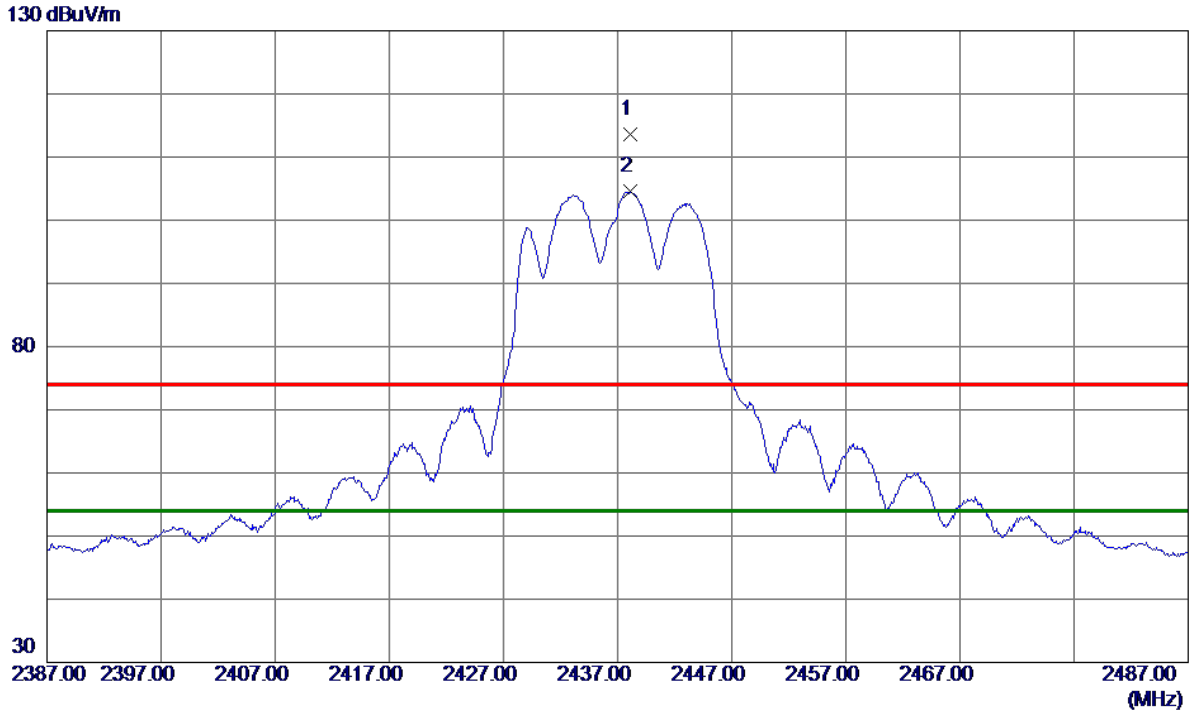


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2438.1000	106.23	7.35	113.58	74.00	39.58	Peak	No Limit
2 *	2438.1500	97.34	7.35	104.69	54.00	50.69	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical


80 dBuV/m

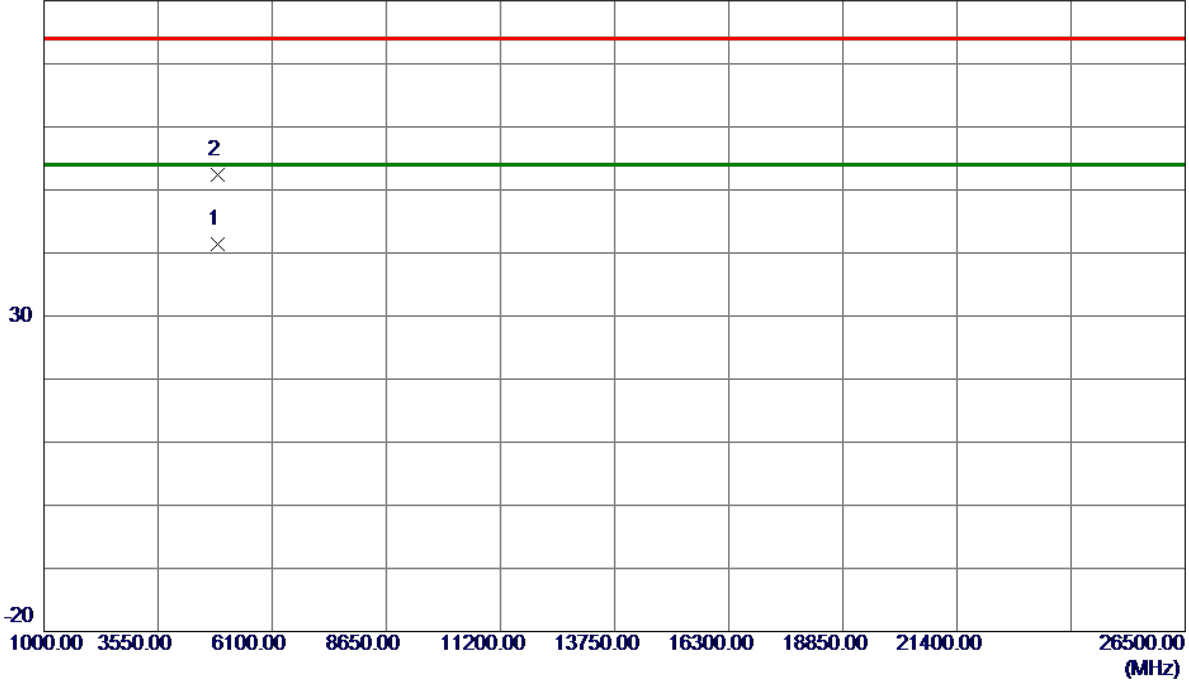

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.9000	37.67	3.68	41.35	54.00	-12.65	AVG	
2	4875.7350	48.64	3.69	52.33	74.00	-21.67	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

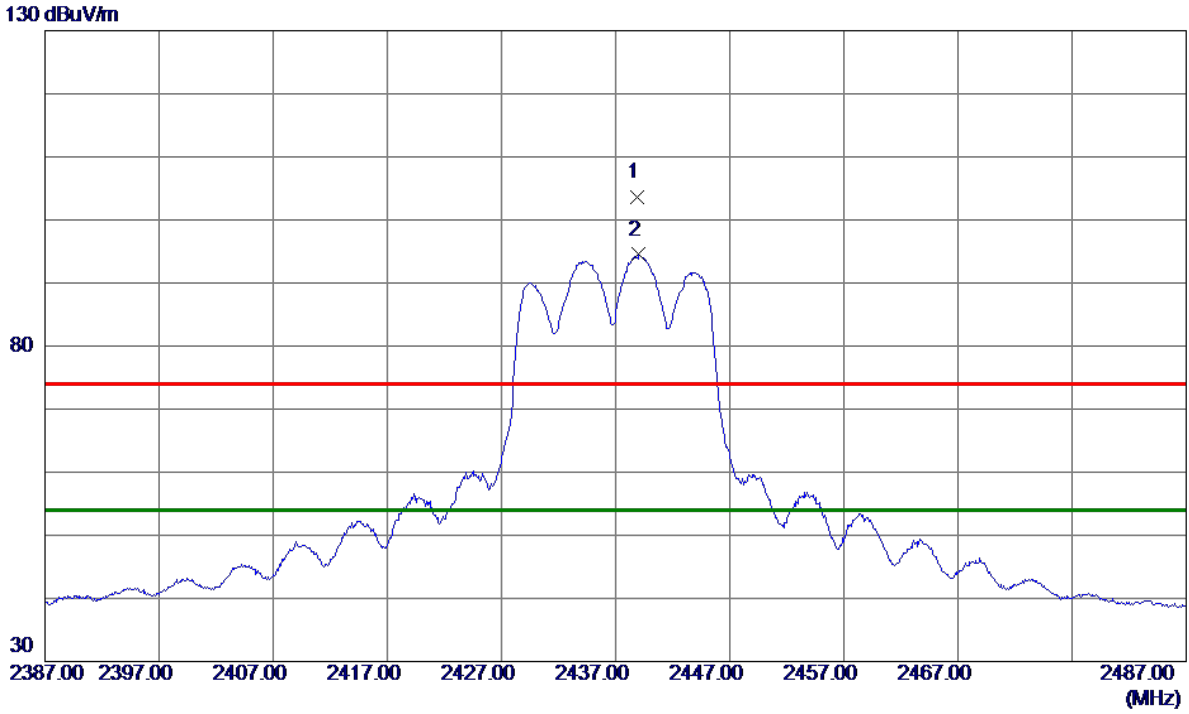


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2438.9000	97.00	6.61	103.61	74.00	29.61	Peak	No Limit
2 *	2439.0500	87.89	6.61	94.50	54.00	40.50	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal


80 dBuV/m

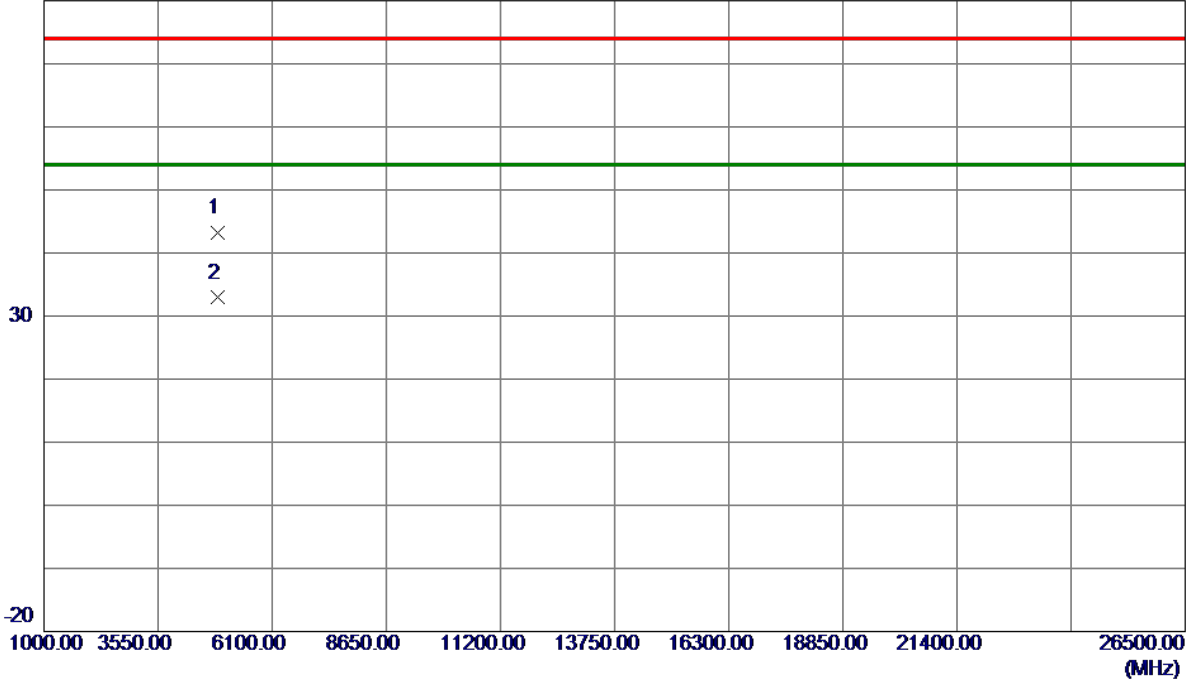

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.7599	39.59	3.68	43.27	74.00	-30.73	Peak	
2 *	4875.0700	29.22	3.68	32.90	54.00	-21.10	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2457MHz


Vertical

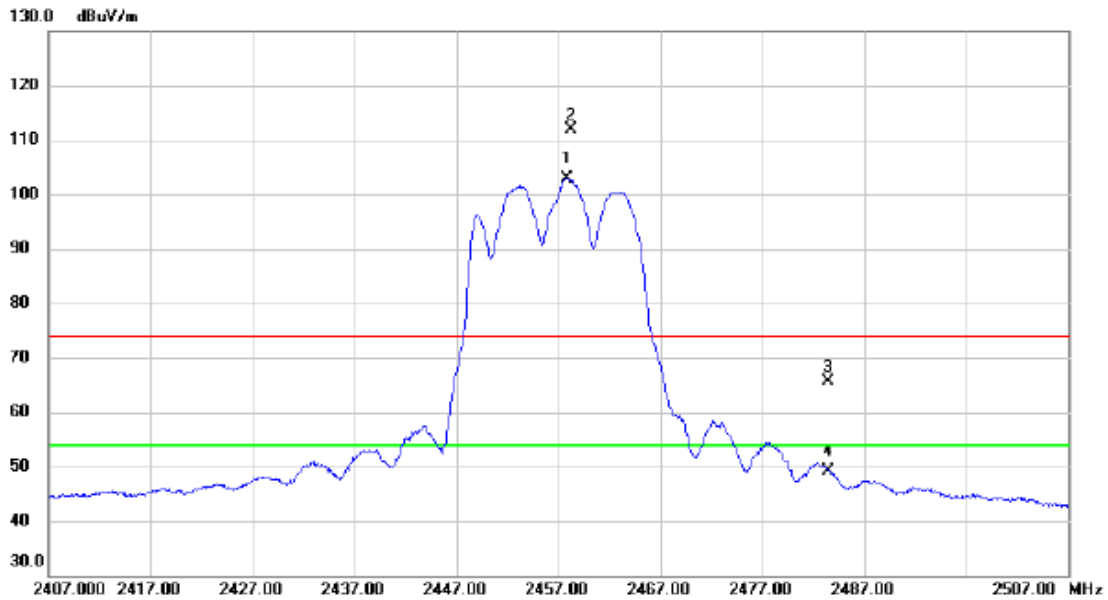

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2457.850	95.60	7.34	102.94	54.00	48.94	AVG	No Limit
2	X	2458.300	104.45	7.34	111.79	74.00	37.79	peak	No Limit
3		2483.500	58.28	7.32	65.60	74.00	-8.40	peak	
4		2483.500	41.89	7.32	49.21	54.00	-4.79	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2457MHz


Vertical

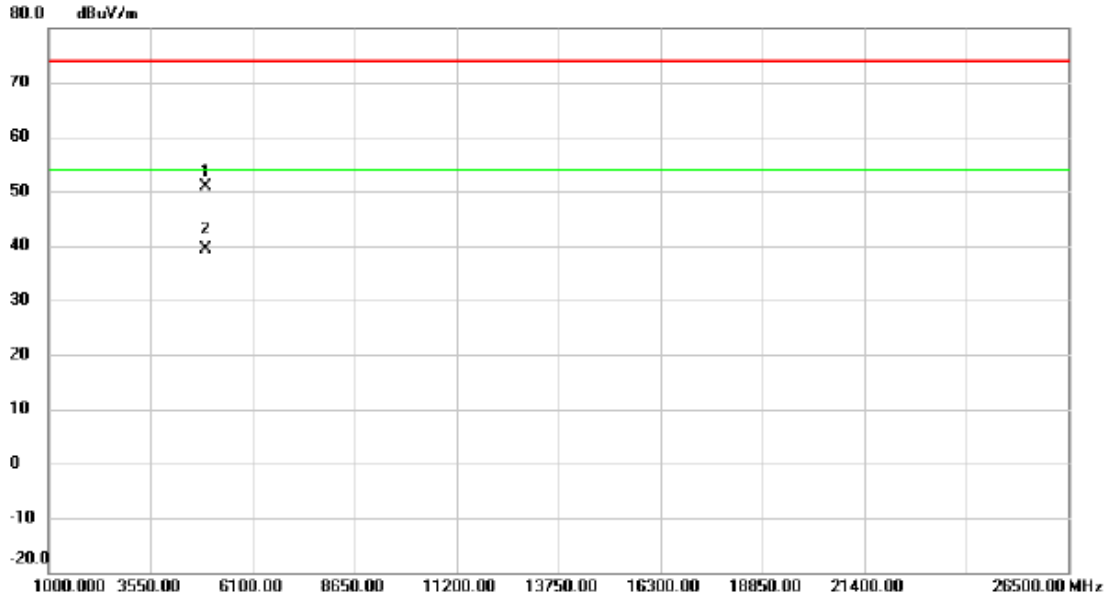

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4910.450	47.17	3.76	50.93	74.00	-23.07	peak	
2	*	4915.110	35.70	3.77	39.47	54.00	-14.53	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2457MHz


Horizontal

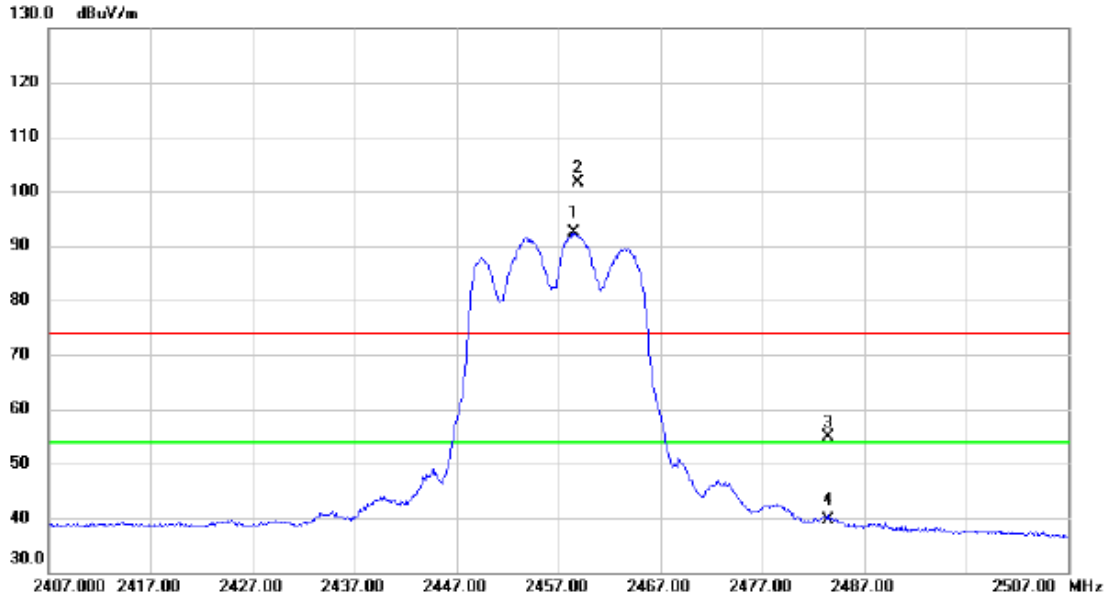

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2458.500	85.69	6.62	92.31	54.00	38.31	AVG	No Limit
2	X	2458.900	95.04	6.62	101.66	74.00	27.66	peak	No Limit
3		2483.500	48.19	6.61	54.80	74.00	-19.20	peak	
4		2483.530	33.02	6.61	39.63	54.00	-14.37	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2457MHz

Horizontal

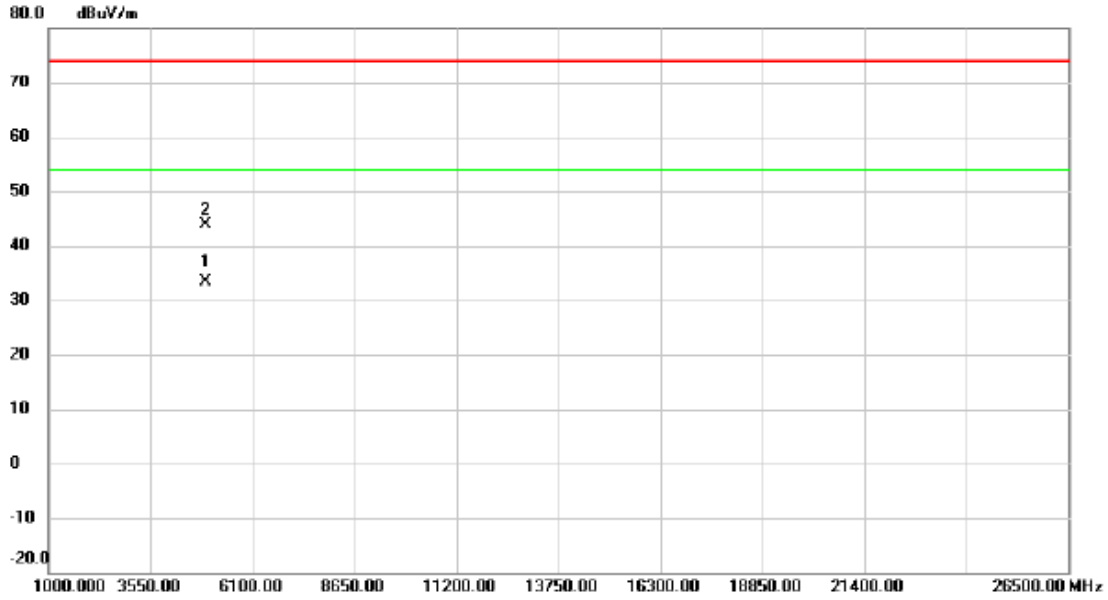


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4915.375	29.55	3.77	33.32	54.00	-20.68	AVG	
2		4916.200	40.21	3.77	43.98	74.00	-30.02	peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

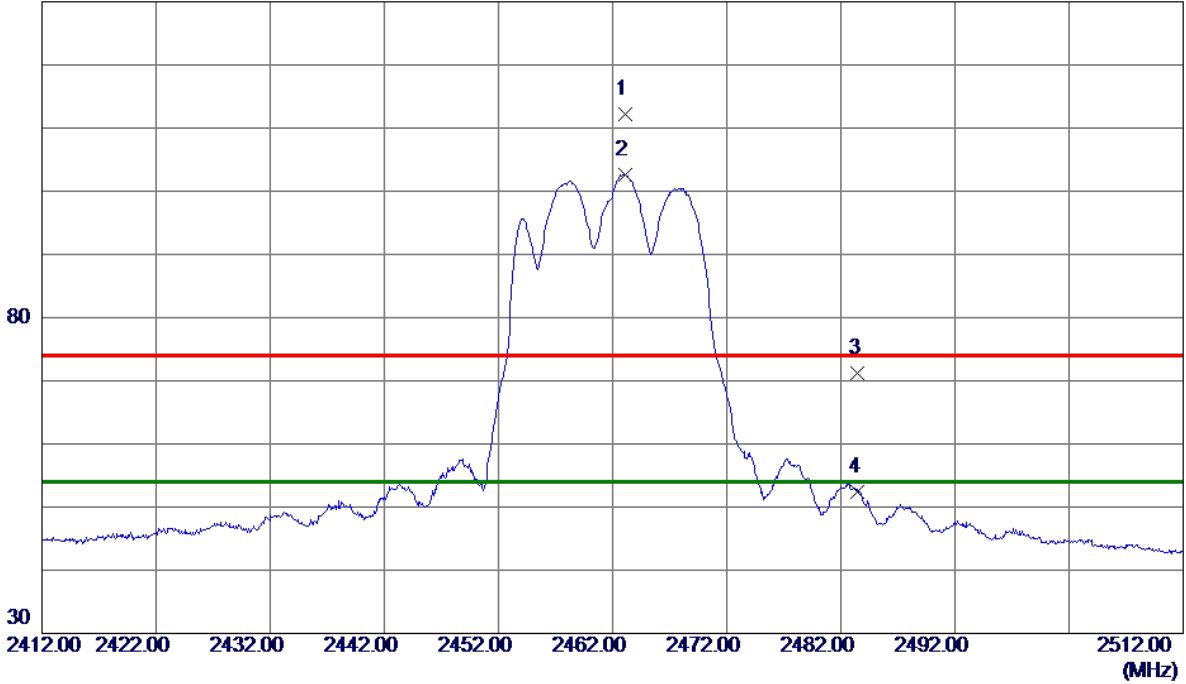


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2463.1000	104.85	7.33	112.18	74.00	38.18	Peak	No Limit
2 *	2463.1500	95.33	7.33	102.66	54.00	48.66	AVG	No Limit
3	2483.5000	63.90	7.32	71.22	74.00	-2.78	Peak	
4	2483.5000	45.12	7.32	52.44	54.00	-1.56	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

80 dBuV/m

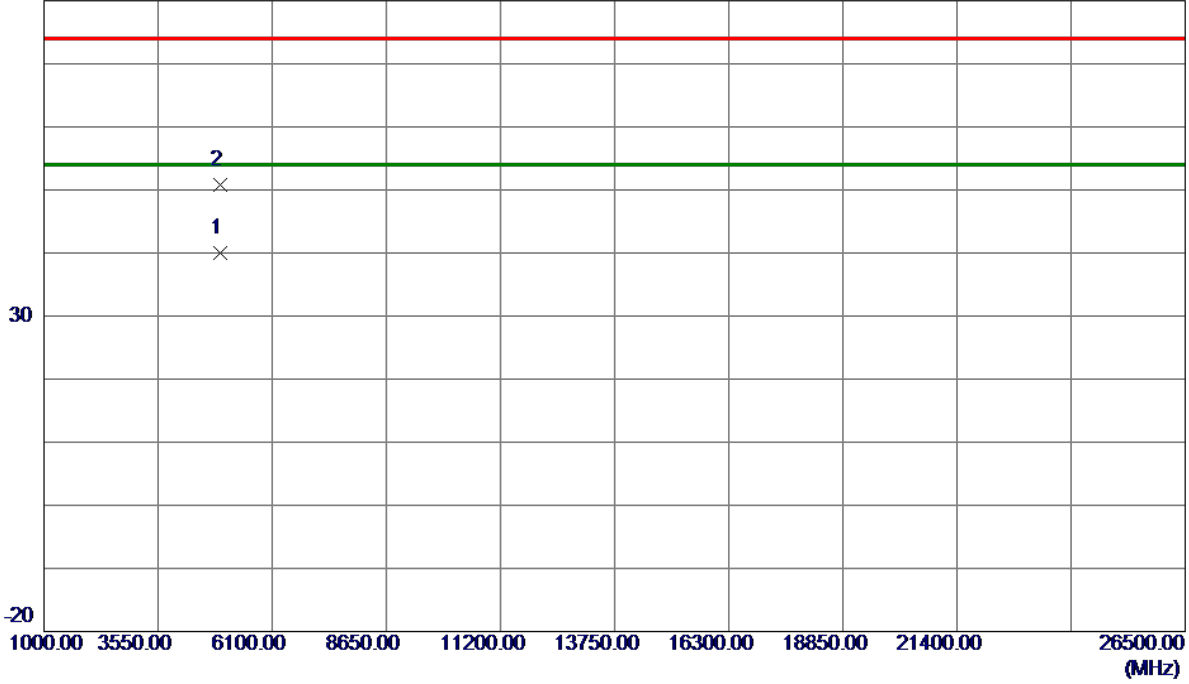


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4925.2500	36.28	3.79	40.07	54.00	-13.93	AVG	
2	4925.9850	47.06	3.80	50.86	74.00	-23.14	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

130 dBuV/m

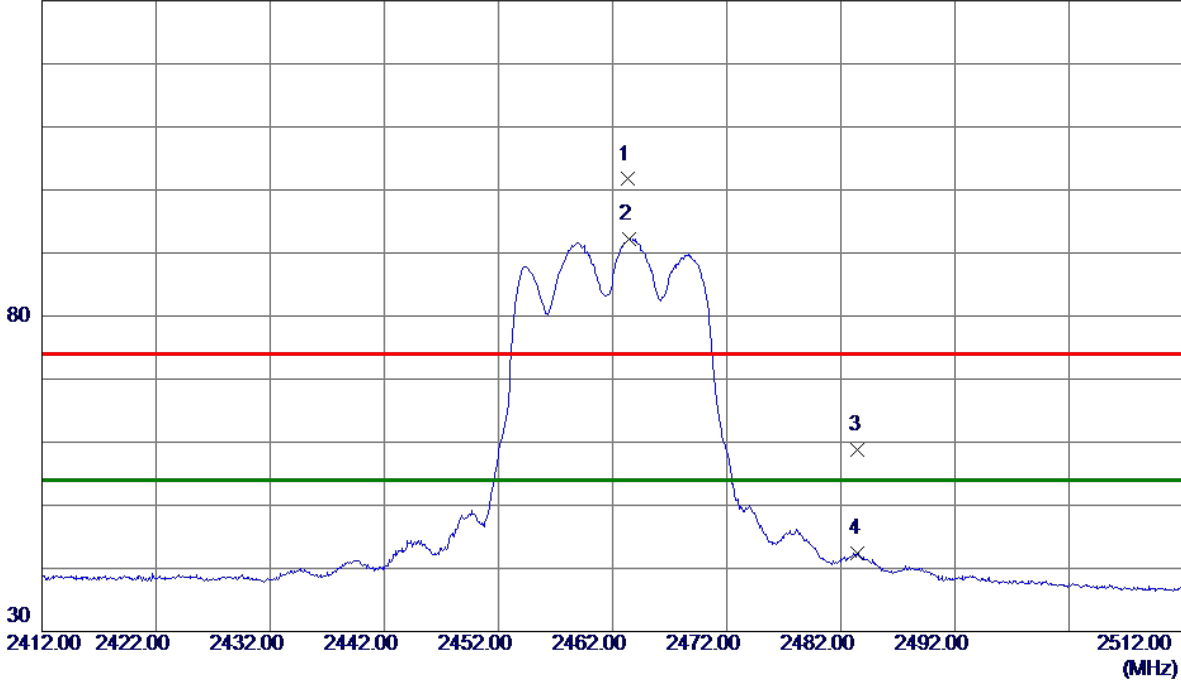


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2463.3000	95.09	6.61	101.70	74.00	27.70	Peak	No Limit
2 *	2463.4000	85.62	6.61	92.23	54.00	38.23	AVG	No Limit
3	2483.5000	52.13	6.61	58.74	74.00	-15.26	Peak	
4	2483.5000	35.70	6.61	42.31	54.00	-11.69	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

80 dBuV/m

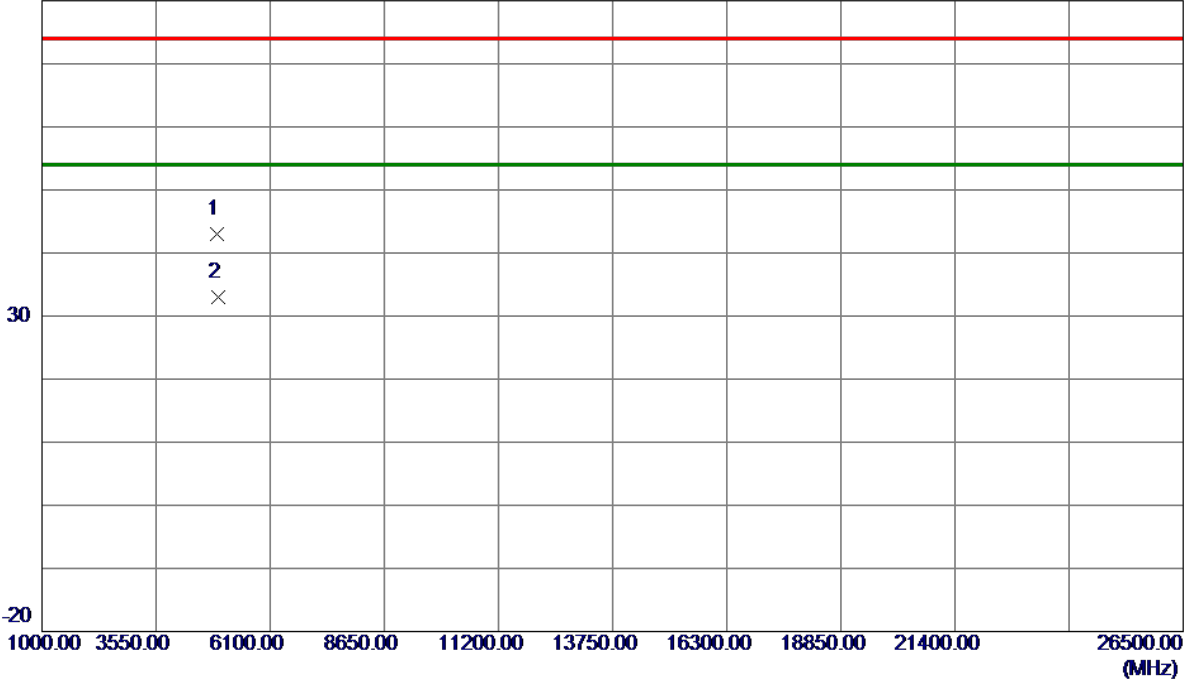


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4921.4450	39.23	3.79	43.02	74.00	-30.98	Peak	
2 *	4925.2550	29.16	3.79	32.95	54.00	-21.05	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

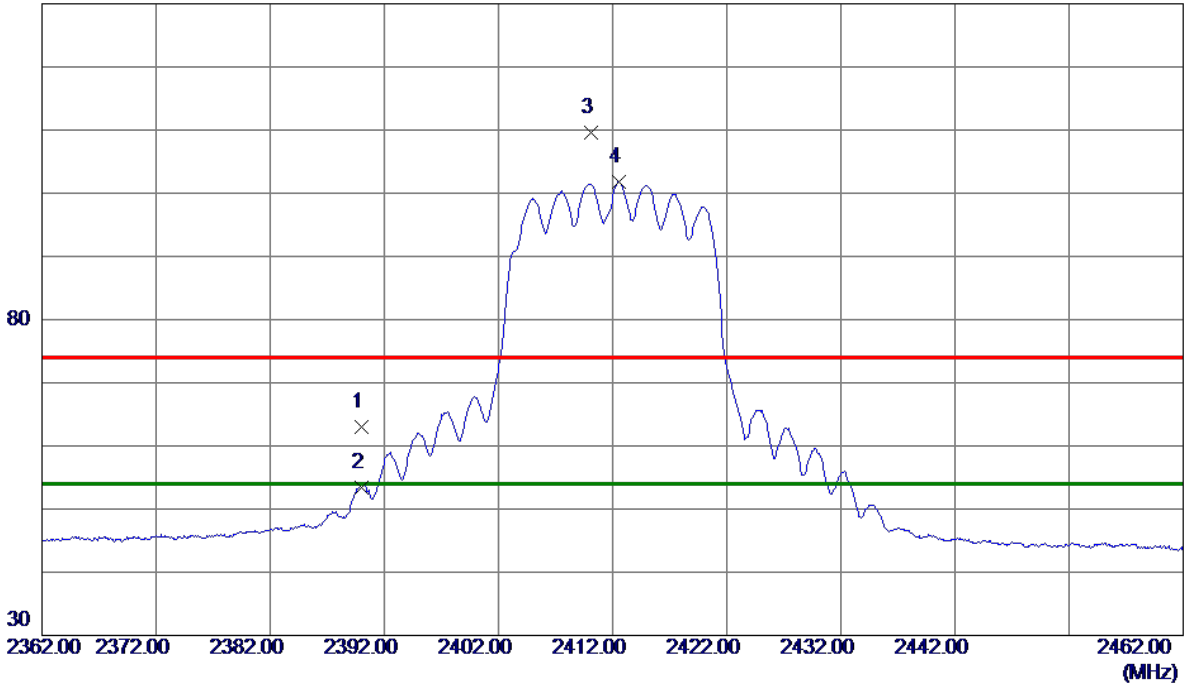


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.66	7.39	63.05	74.00	-10.95	Peak	
2	2390.0000	46.03	7.39	53.42	54.00	-0.58	AVG	
3	2410.1000	102.18	7.37	109.55	74.00	35.55	Peak	No Limit
4 *	2412.6000	94.44	7.37	101.81	54.00	47.81	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

80 dBuV/m

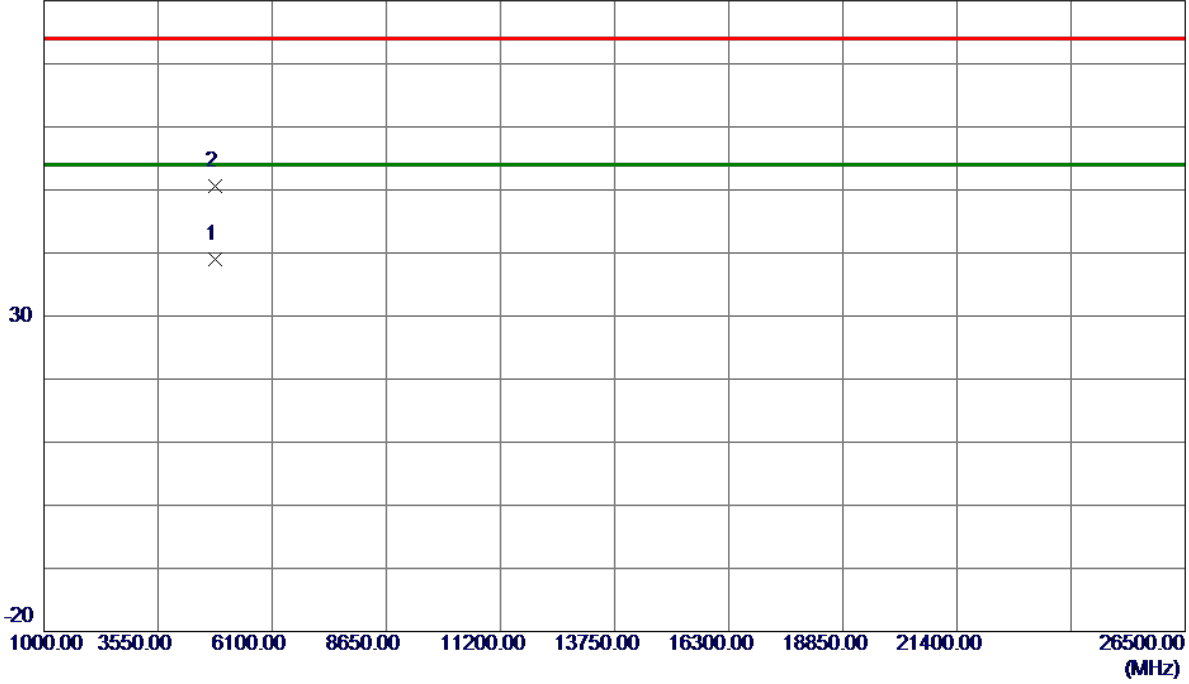


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4822.2900	35.48	3.57	39.05	54.00	-14.95	AVG	
2	4825.0400	47.09	3.57	50.66	74.00	-23.34	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

130 dBuV/m

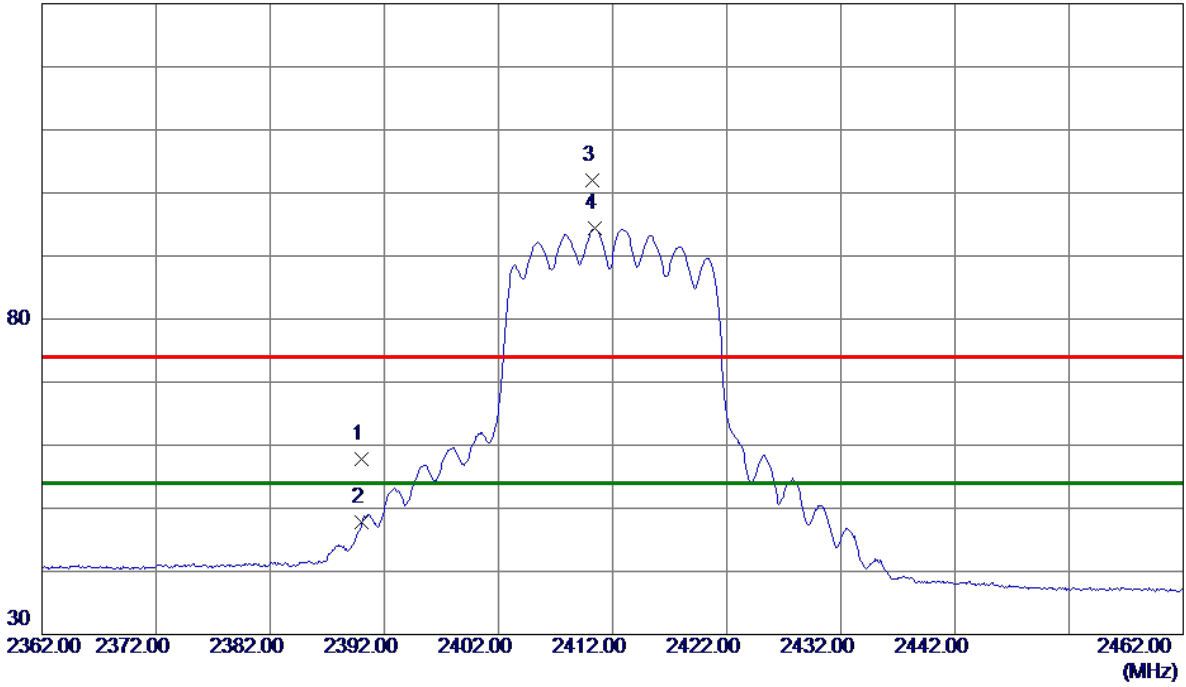


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	51.23	6.62	57.85	74.00	-16.15	Peak	
2	2390.0000	41.15	6.62	47.77	54.00	-6.23	AVG	
3	2410.2500	95.42	6.62	102.04	74.00	28.04	Peak	No Limit
4 *	2410.4500	87.78	6.62	94.40	54.00	40.40	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal


80 dBuV/m

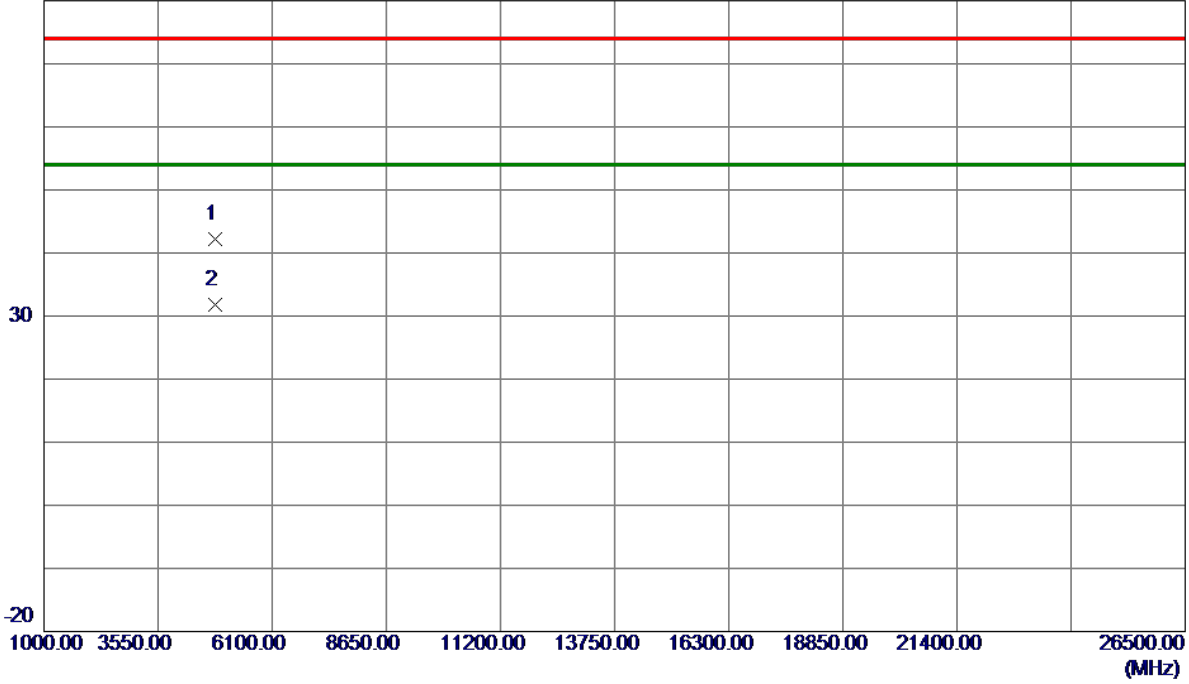

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4821.3350	38.70	3.57	42.27	74.00	-31.73	Peak	
2 *	4826.7599	28.27	3.58	31.85	54.00	-22.15	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2417MHz


Vertical

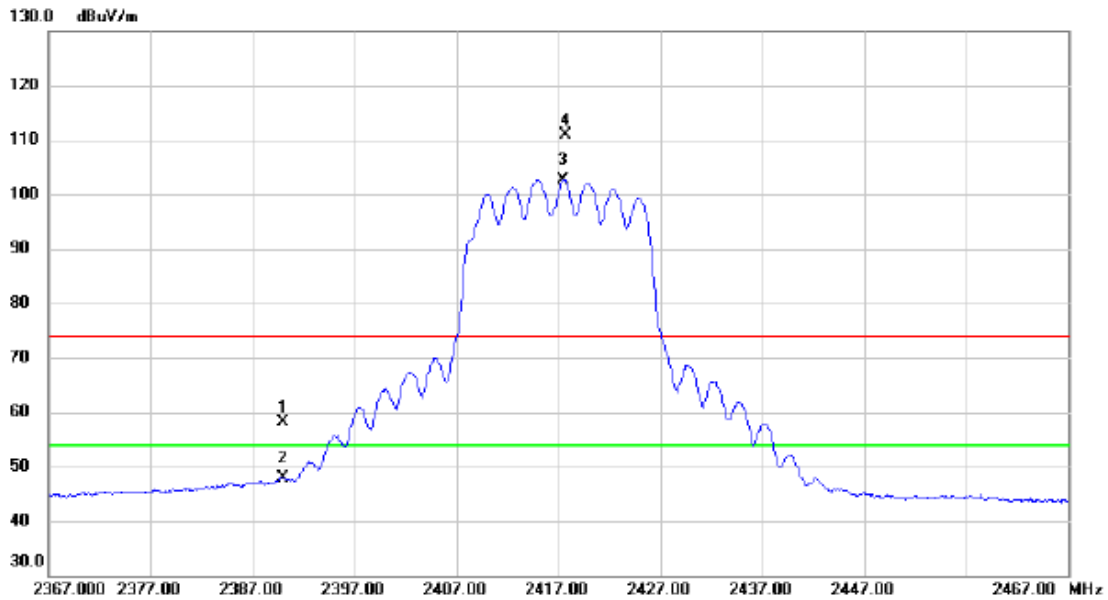

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	50.72	7.38	58.10	74.00	-15.90	peak	
2		2390.000	40.62	7.38	48.00	54.00	-6.00	AVG	
3	*	2417.500	95.35	7.37	102.72	54.00	48.72	AVG	No Limit
4	X	2417.700	103.39	7.37	110.76	74.00	36.76	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2417MHz


Vertical

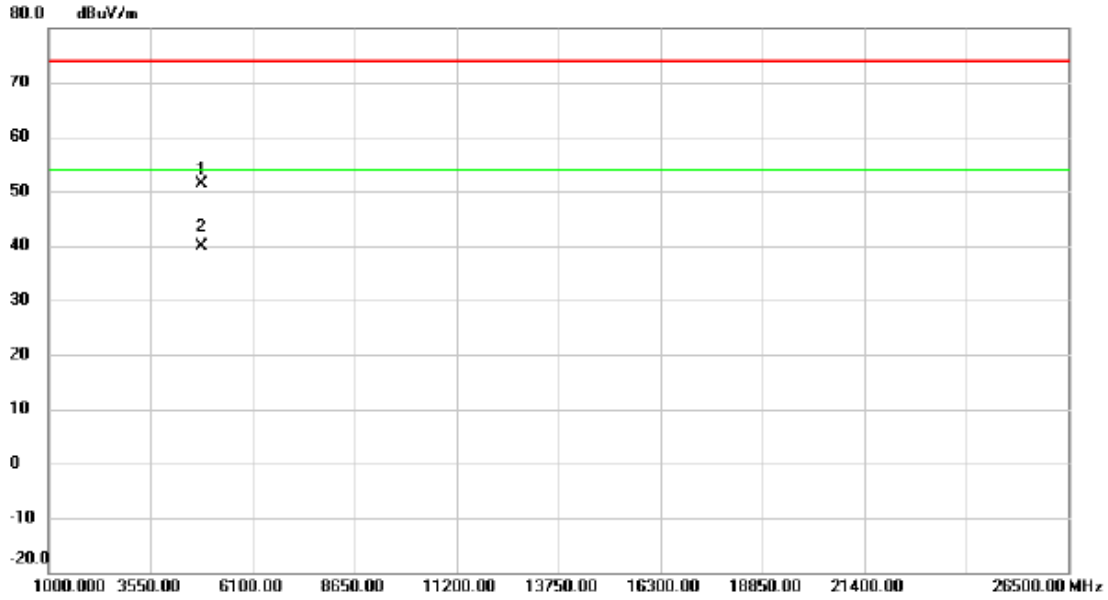

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4832.130	47.72	3.59	51.31	74.00	-22.69	peak	
2	*	4837.280	36.33	3.61	39.94	54.00	-14.06	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2417MHz


Horizontal

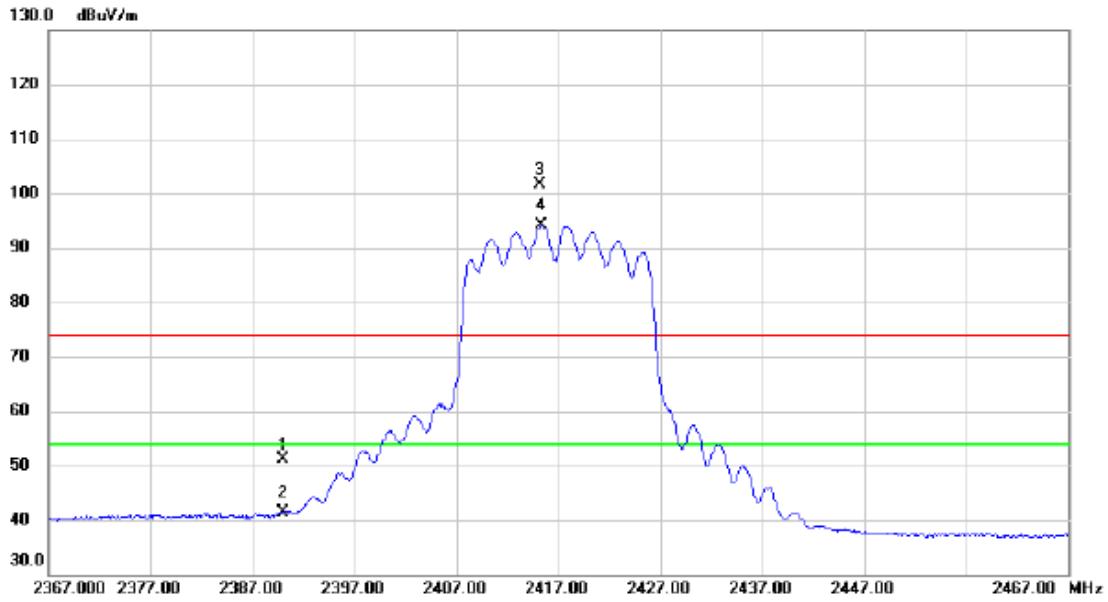

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	44.43	6.62	51.05	74.00	-22.95	peak	
2		2390.000	34.65	6.62	41.27	54.00	-12.73	AVG	
3	X	2415.250	95.00	6.62	101.62	74.00	27.62	peak	No Limit
4	*	2415.300	87.42	6.62	94.04	54.00	40.04	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2417MHz


Horizontal

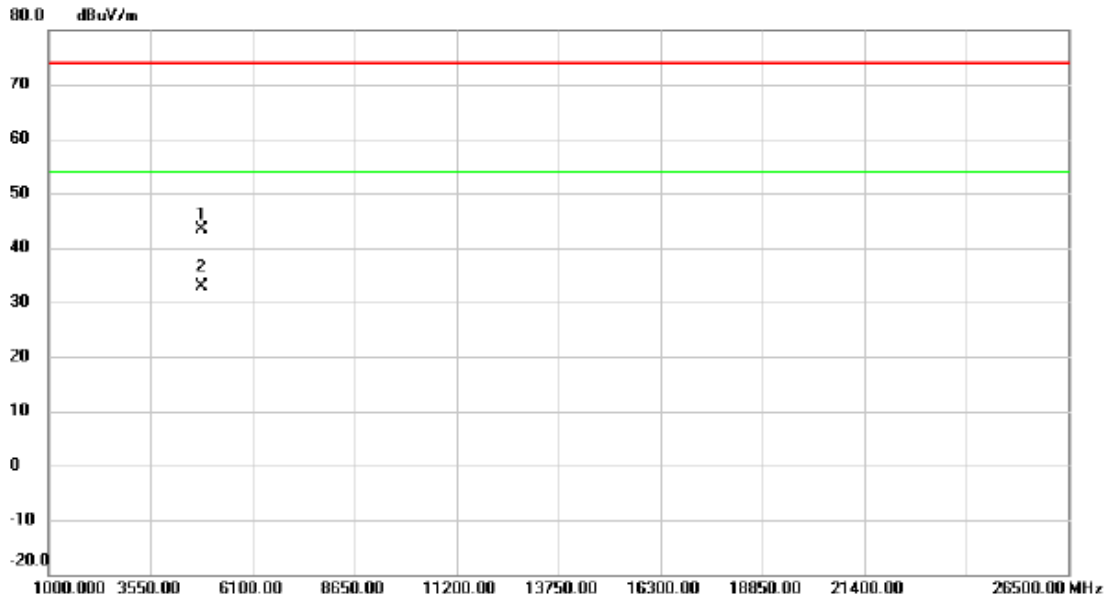

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4829.975	39.86	3.58	43.44	74.00	-30.56	peak	
2	*	4834.315	29.23	3.59	32.82	54.00	-21.18	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

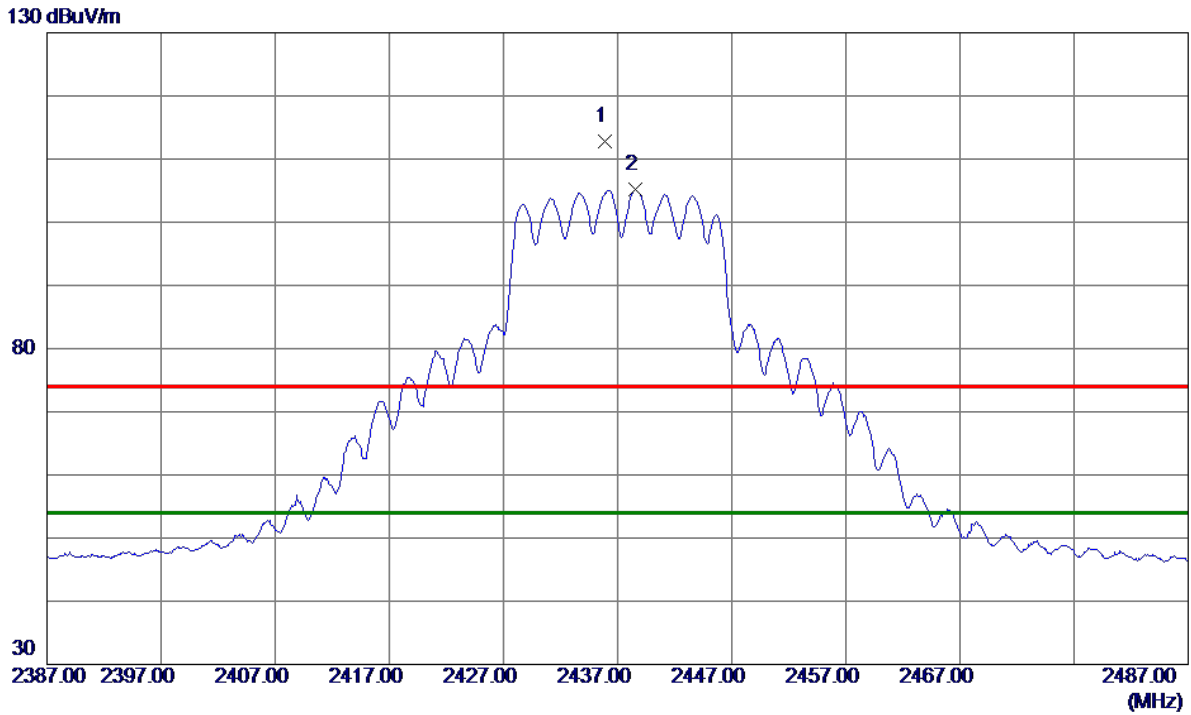


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2435.9000	105.50	7.35	112.85	74.00	38.85	Peak	No Limit
2 *	2438.5500	97.77	7.35	105.12	54.00	51.12	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical


80 dBuV/m

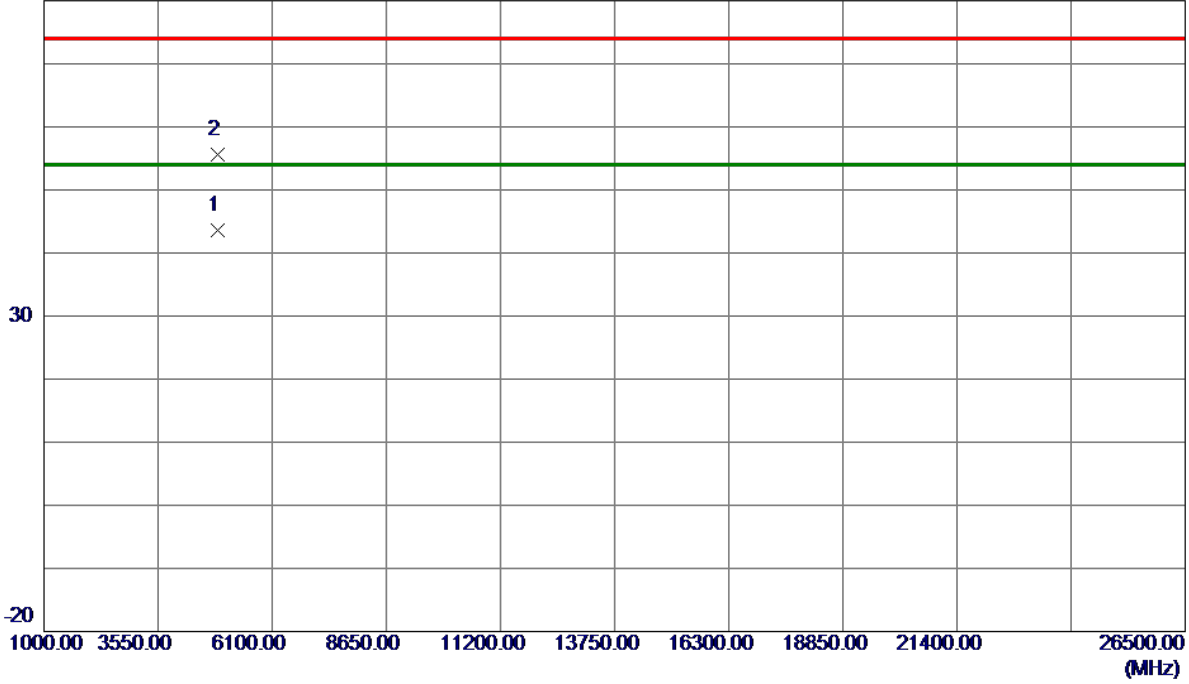

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4872.3500	39.97	3.68	43.65	54.00	-10.35	AVG	
2	4874.5350	51.85	3.68	55.53	74.00	-18.47	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

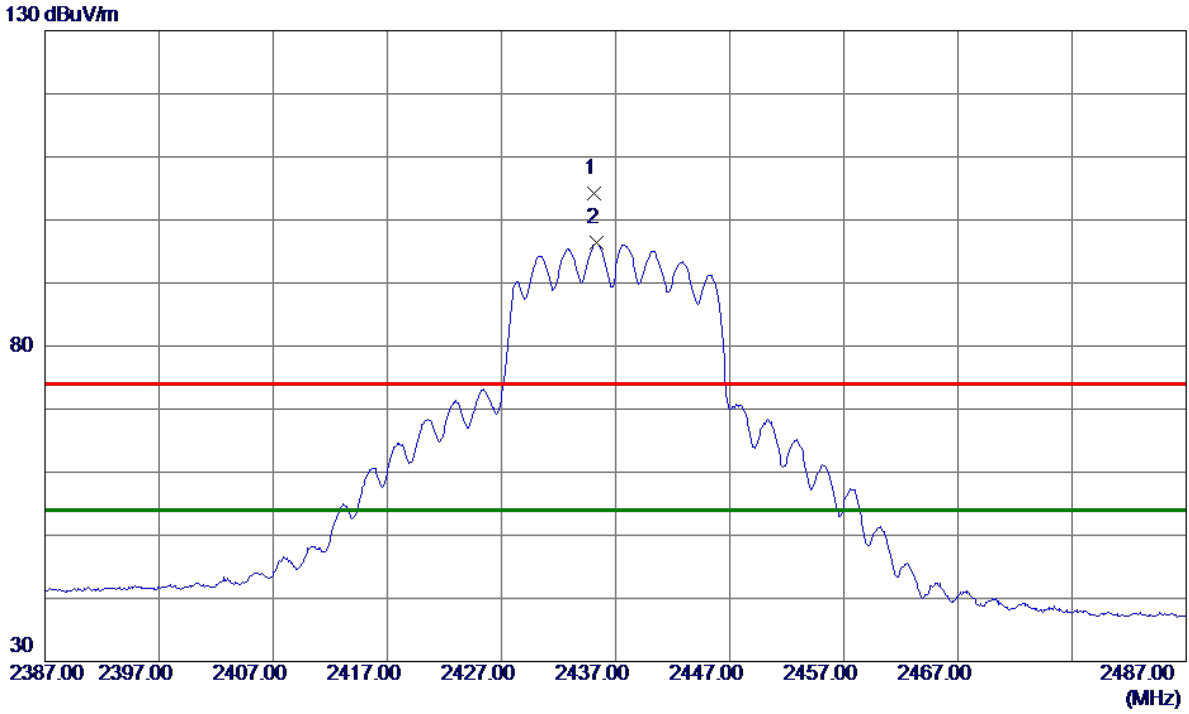


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2435.1500	97.54	6.61	104.15	74.00	30.15	Peak	No Limit
2 *	2435.3000	89.71	6.61	96.32	54.00	42.32	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal


80 dBuV/m

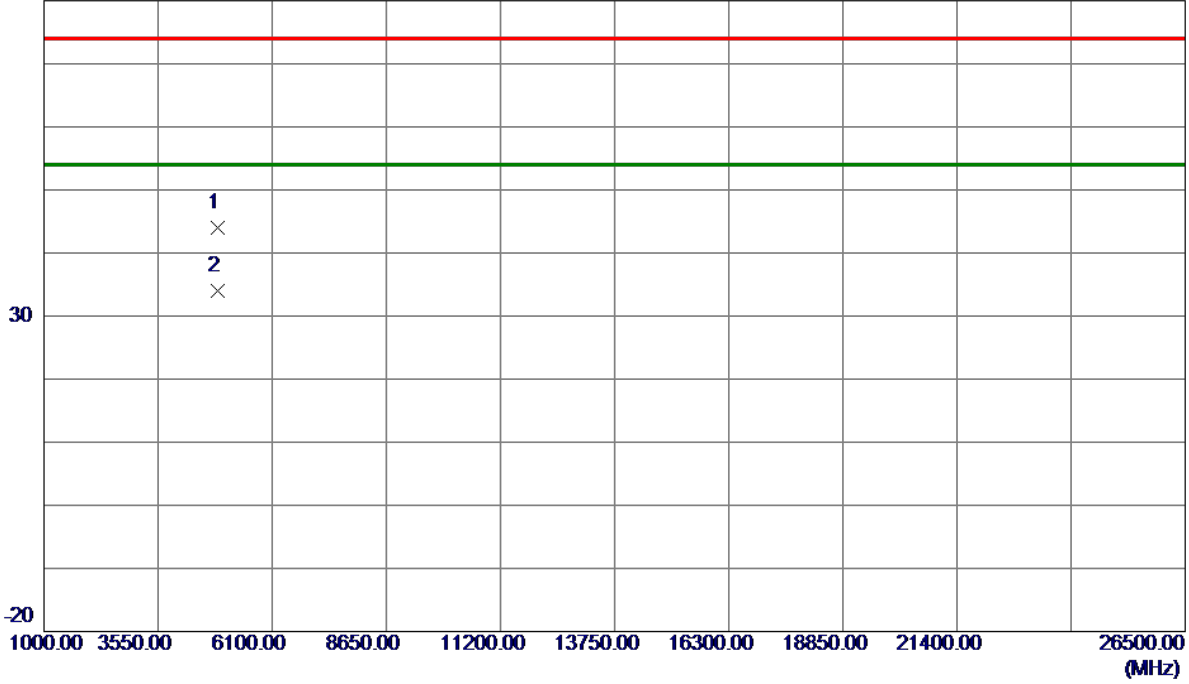

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4875.1000	40.27	3.68	43.95	74.00	-30.05	Peak	
2 *	4877.0299	30.22	3.69	33.91	54.00	-20.09	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2457MHz


Vertical

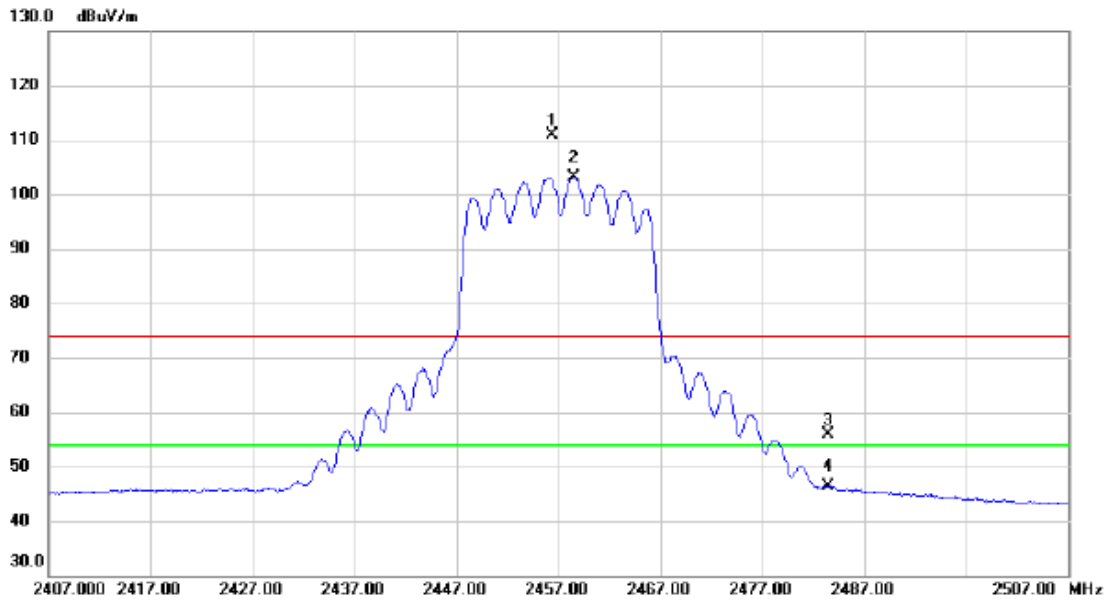

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.400	103.56	7.34	110.90	74.00	36.90	peak	No Limit
2	*	2458.550	95.90	7.34	103.24	54.00	49.24	AVG	No Limit
3		2483.500	48.62	7.32	55.94	74.00	-18.06	peak	
4		2483.500	39.01	7.32	46.33	54.00	-7.67	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2457MHz


Vertical

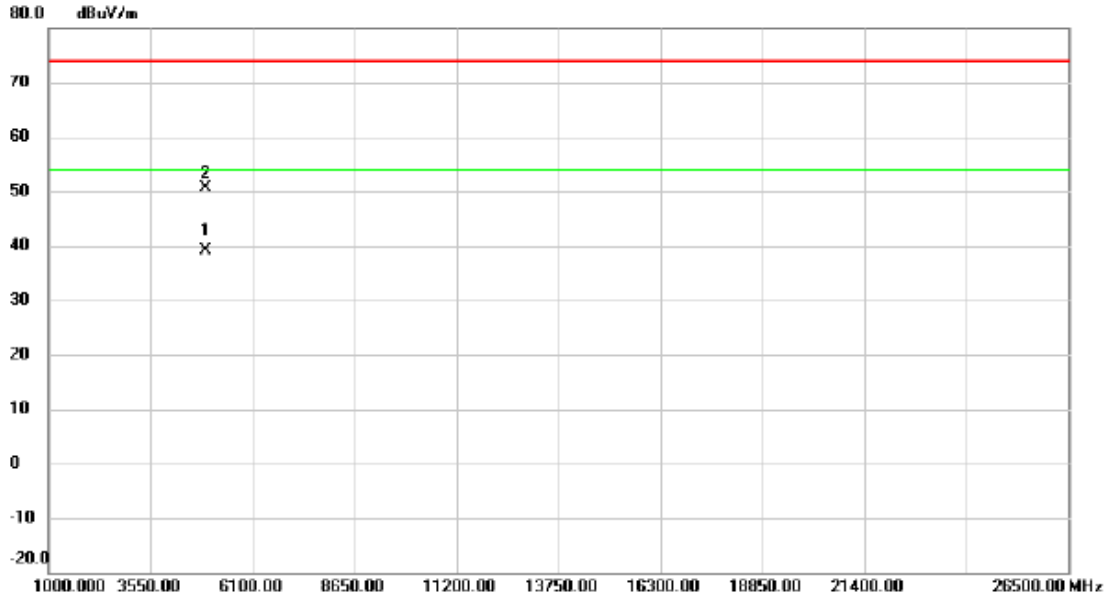

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4912.310	35.37	3.76	39.13	54.00	-14.87	AVG	
2		4914.970	46.74	3.77	50.51	74.00	-23.49	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2457MHz


Horizontal

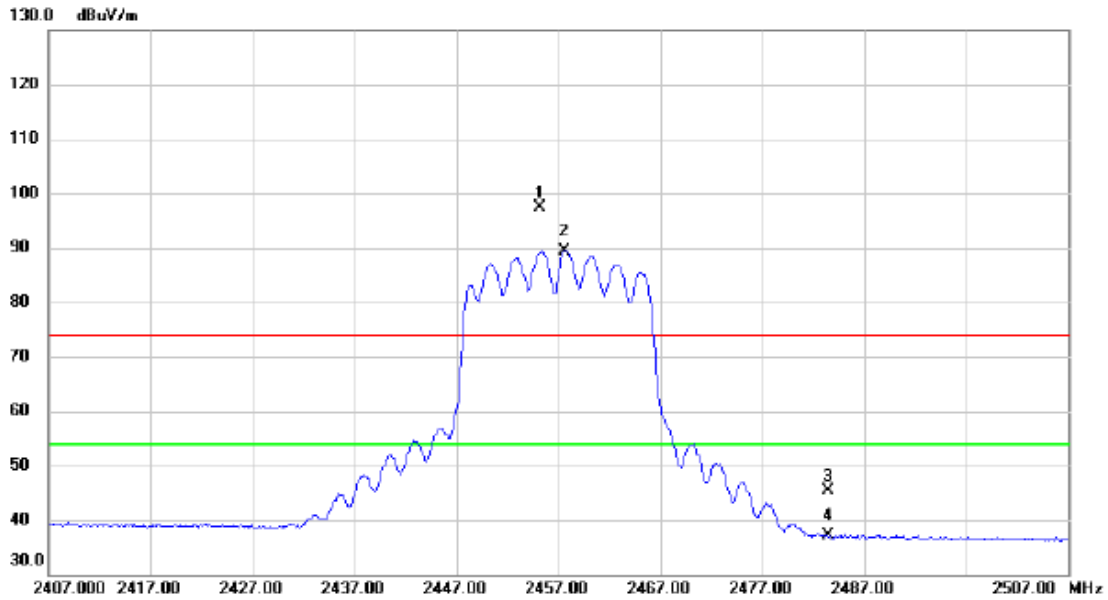

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2455.200	90.79	6.60	97.39	74.00	23.39	peak	No Limit
2	*	2457.650	82.87	6.62	89.49	54.00	35.49	AVG	No Limit
3		2483.500	38.82	6.61	45.43	74.00	-28.57	peak	
4		2483.500	30.57	6.61	37.18	54.00	-16.82	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2457MHz

Horizontal

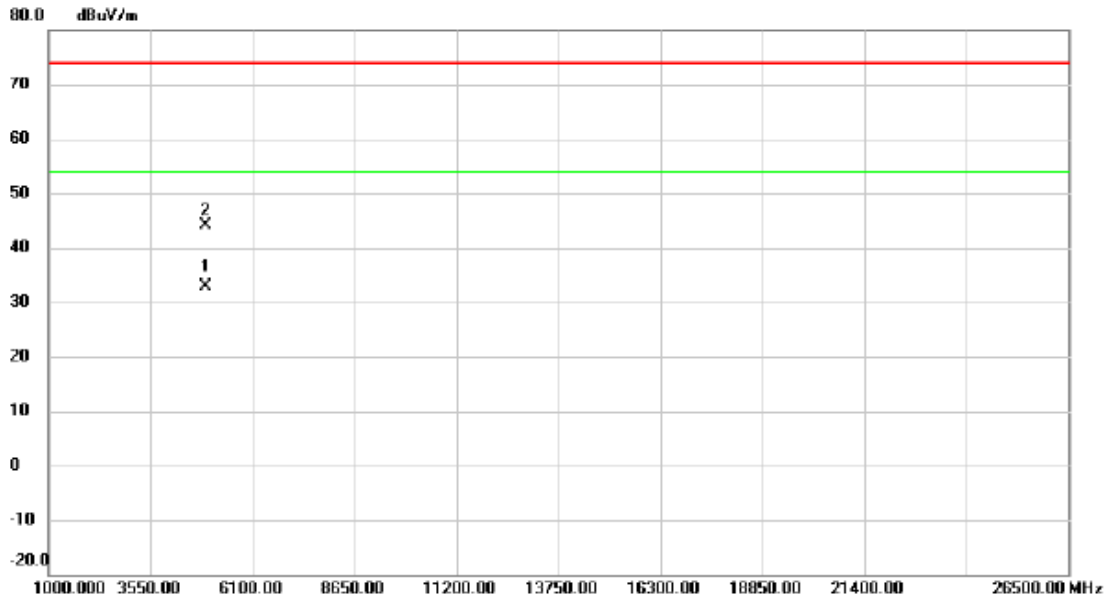


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4912.020	29.23	3.76	32.99	54.00	-21.01	AVG	
2		4914.675	40.44	3.77	44.21	74.00	-29.79	peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

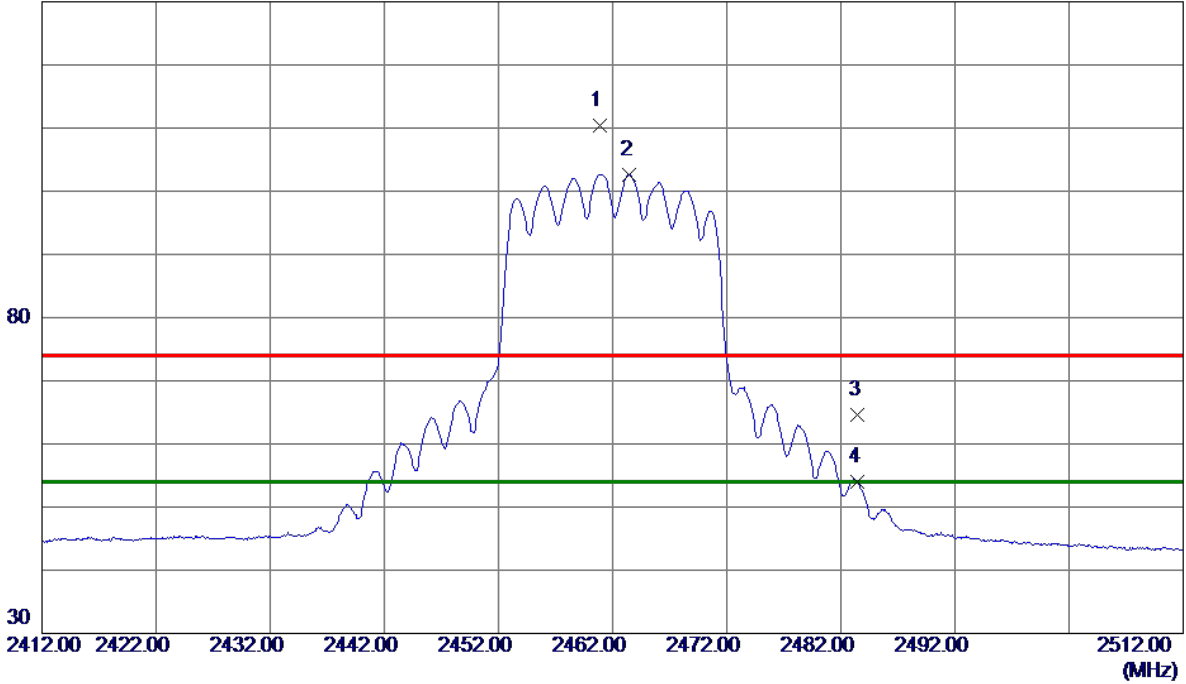


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2460.9000	102.99	7.33	110.32	74.00	36.32	Peak	No Limit
2 *	2463.5000	95.36	7.33	102.69	54.00	48.69	AVG	No Limit
3	2483.5000	57.27	7.32	64.59	74.00	-9.41	Peak	
4	2483.5000	46.59	7.32	53.91	54.00	-0.09	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical


80 dBuV/m

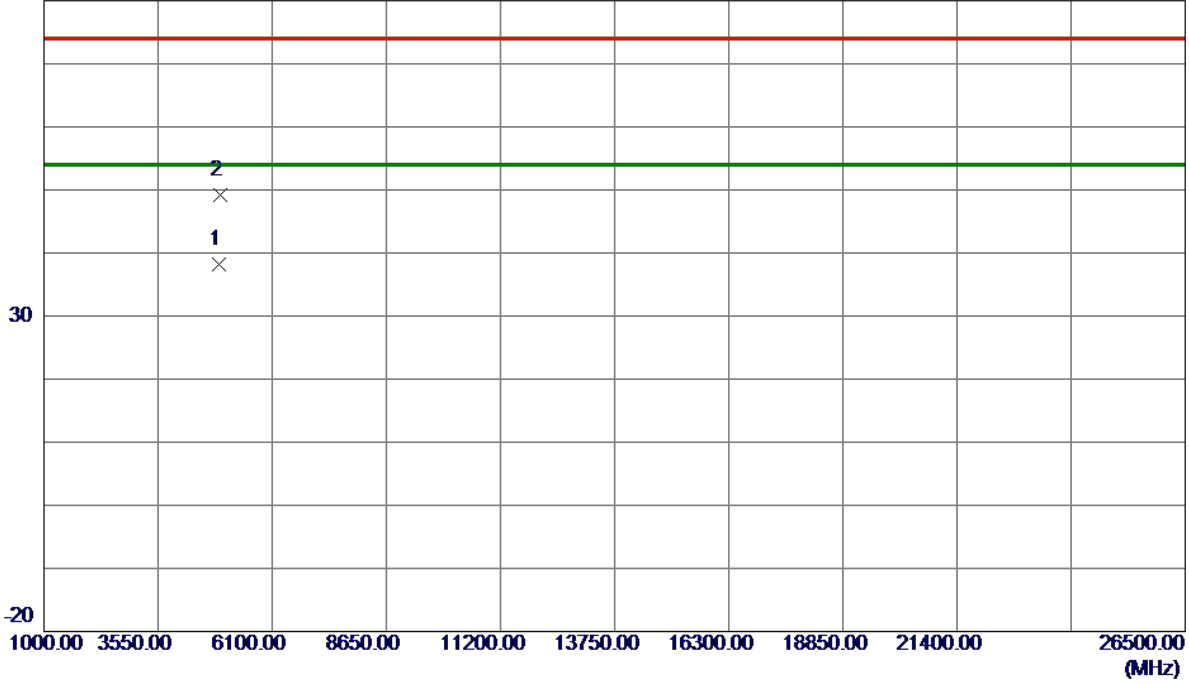

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4922.3500	34.45	3.79	38.24	54.00	-15.76	AVG	
2	4925.0550	45.33	3.79	49.12	74.00	-24.88	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

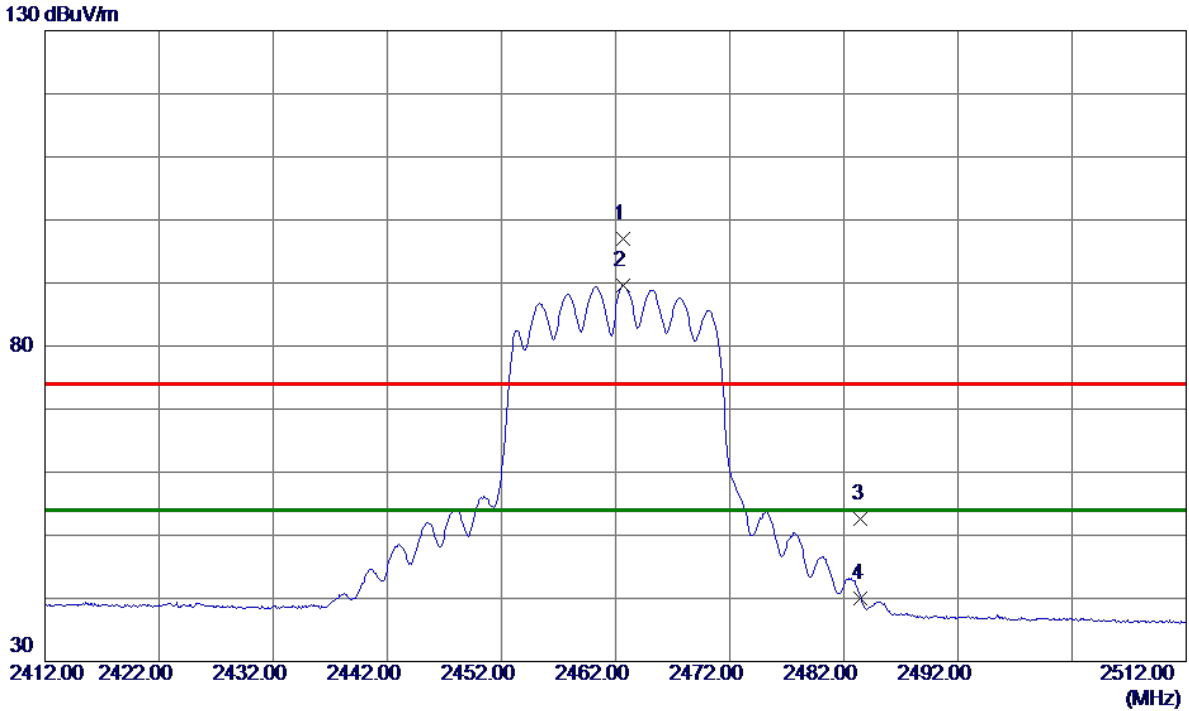


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2462.6500	90.43	6.61	97.04	74.00	23.04	Peak	No Limit
2 *	2462.6500	83.00	6.61	89.61	54.00	35.61	AVG	No Limit
3	2483.5000	46.05	6.61	52.66	74.00	-21.34	Peak	
4	2483.5000	33.30	6.61	39.91	54.00	-14.09	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

80 dBuV/m

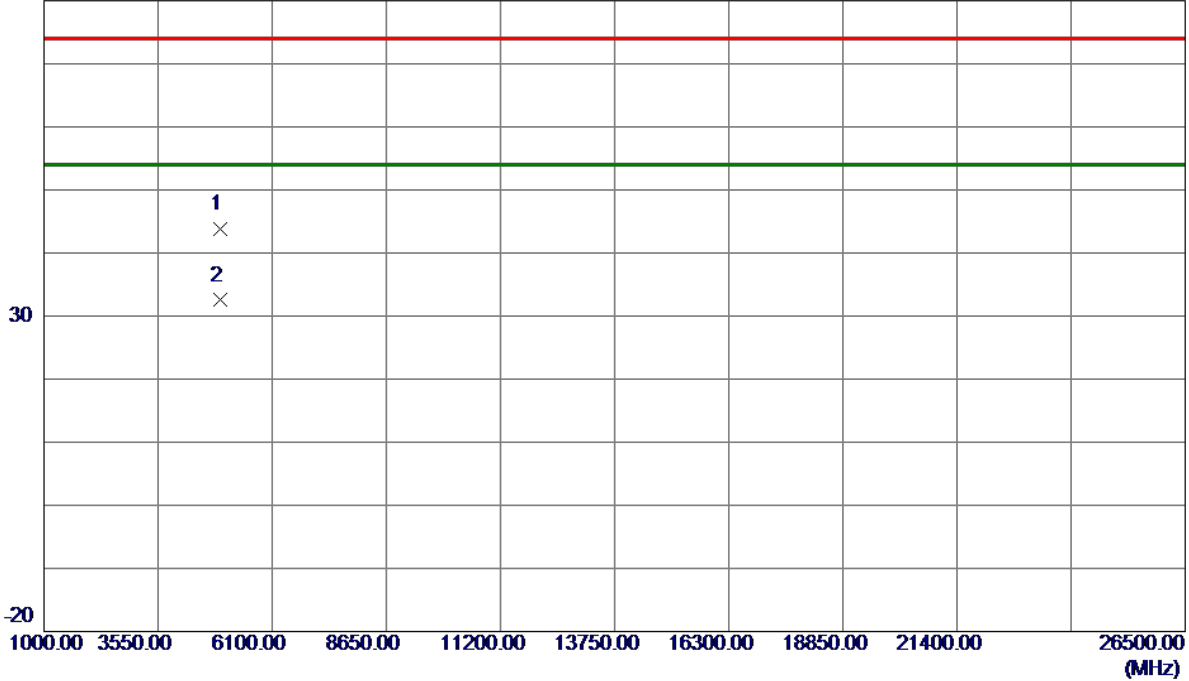


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.8600	39.99	3.79	43.78	74.00	-30.22	Peak	
2 *	4927.0900	28.70	3.80	32.50	54.00	-21.50	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

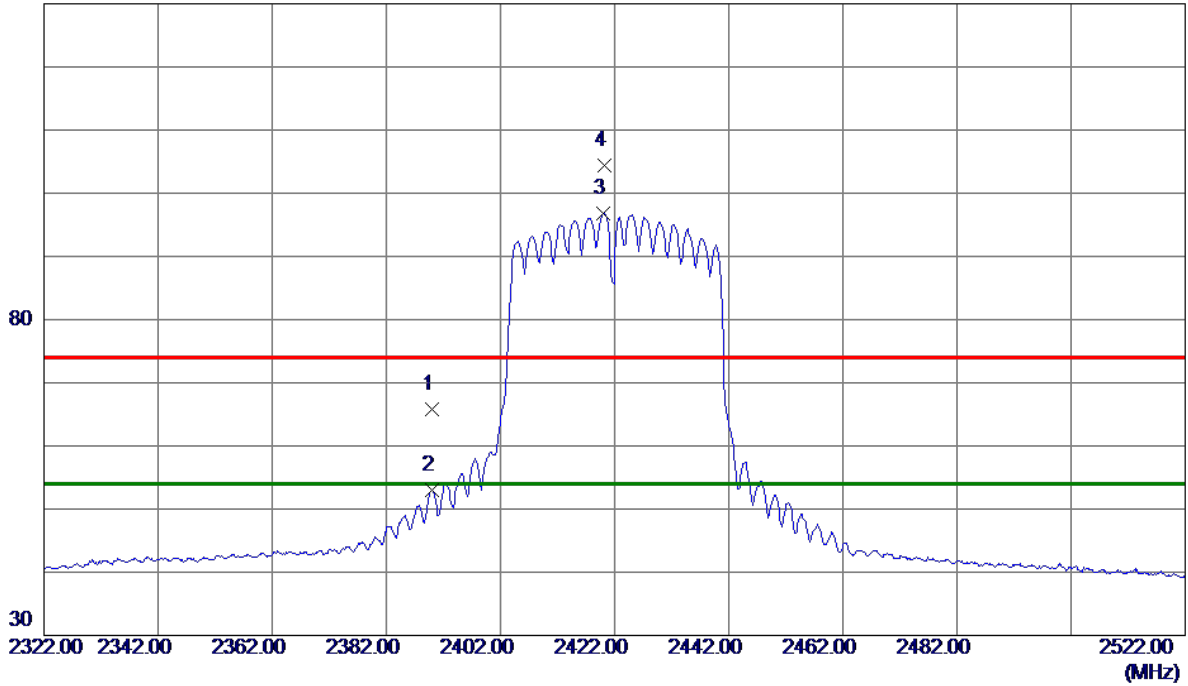


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	58.48	7.39	65.87	74.00	-8.13	Peak	
2	2390.0000	45.59	7.39	52.98	54.00	-1.02	AVG	
3 *	2420.1000	89.36	7.36	96.72	54.00	42.72	AVG	No Limit
4	2420.2000	97.04	7.36	104.40	74.00	30.40	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

80 dBuV/m

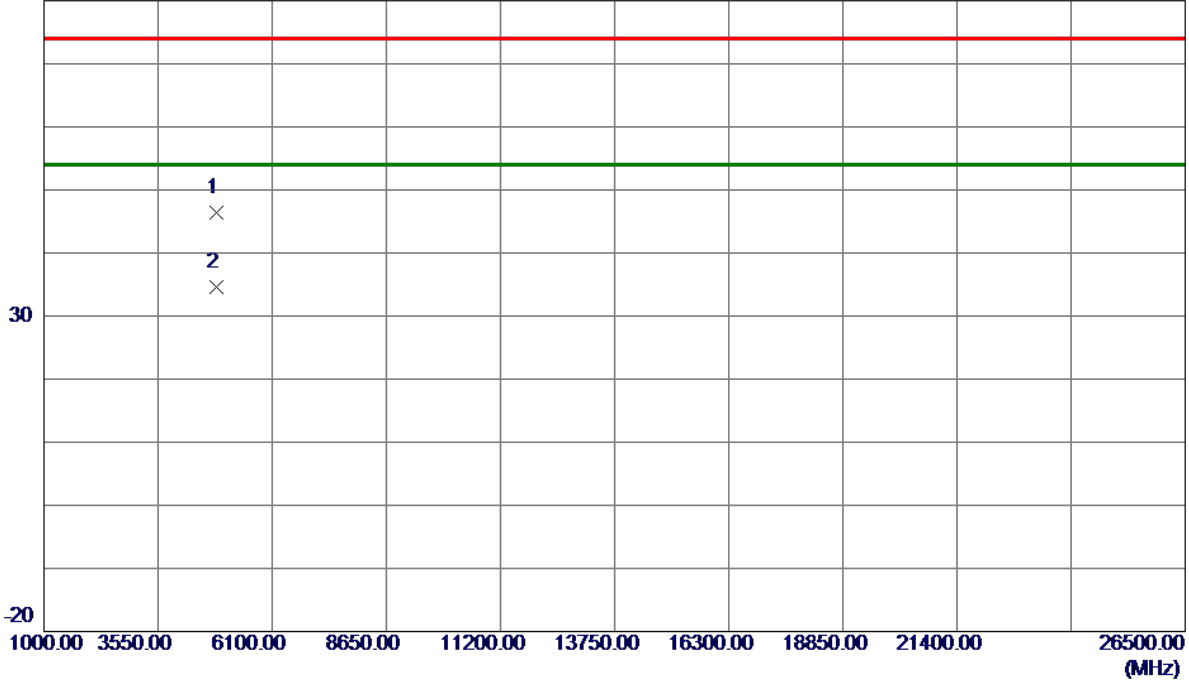


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4844.8450	42.80	3.62	46.42	74.00	-27.58	Peak	
2 *	4844.8550	30.90	3.62	34.52	54.00	-19.48	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

130 dBuV/m

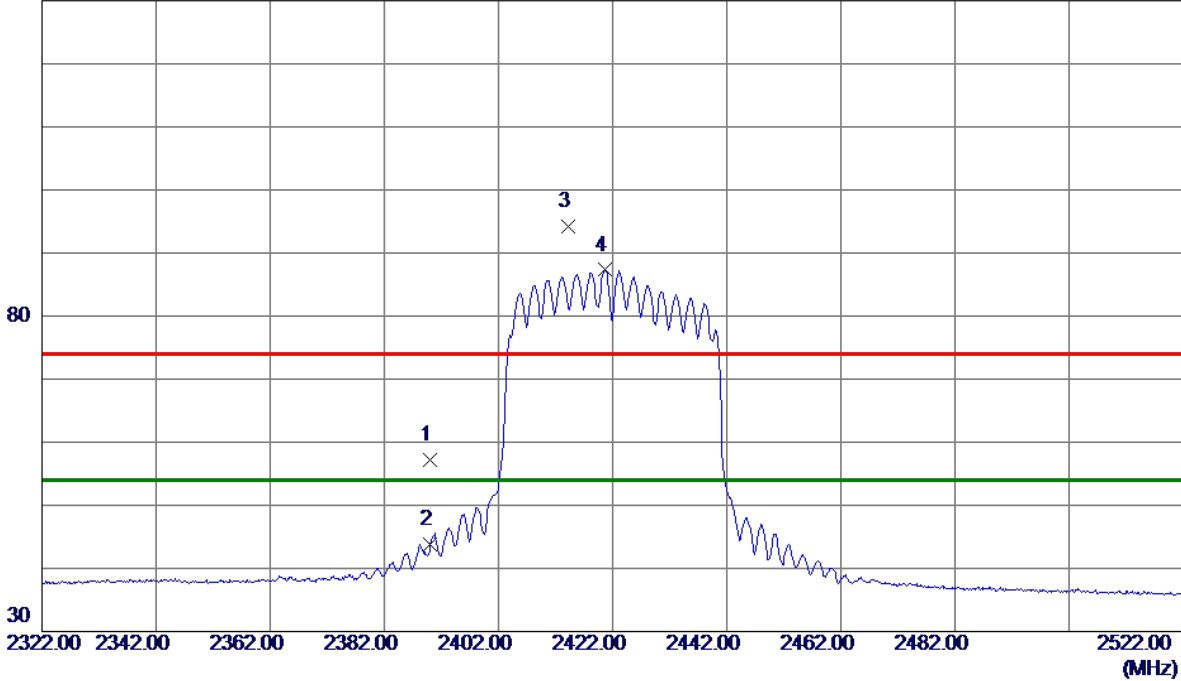


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	50.51	6.62	57.13	74.00	-16.87	Peak	
2	2390.0000	37.09	6.62	43.71	54.00	-10.29	AVG	
3	2414.3000	87.58	6.62	94.20	74.00	20.20	Peak	No Limit
4 *	2420.7000	80.68	6.62	87.30	54.00	33.30	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal


80 dBuV/m

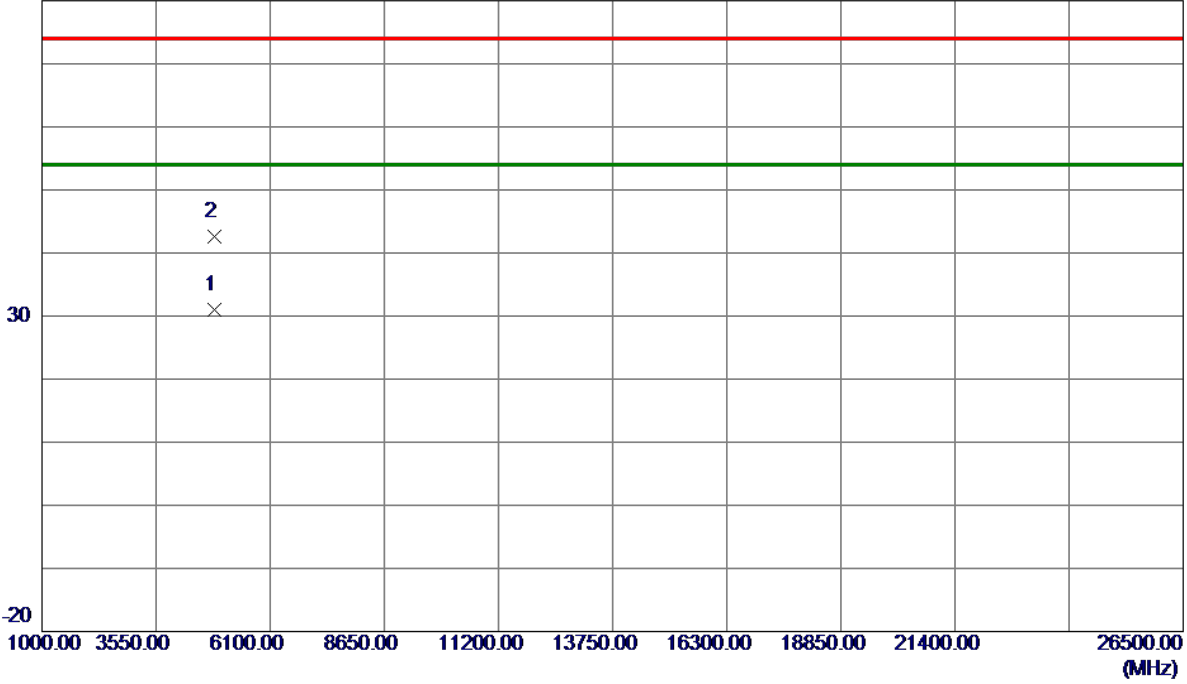

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4842.7620	27.38	3.61	30.99	54.00	-23.01	AVG	
2	4845.0000	39.04	3.62	42.66	74.00	-31.34	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2427MHz


Vertical

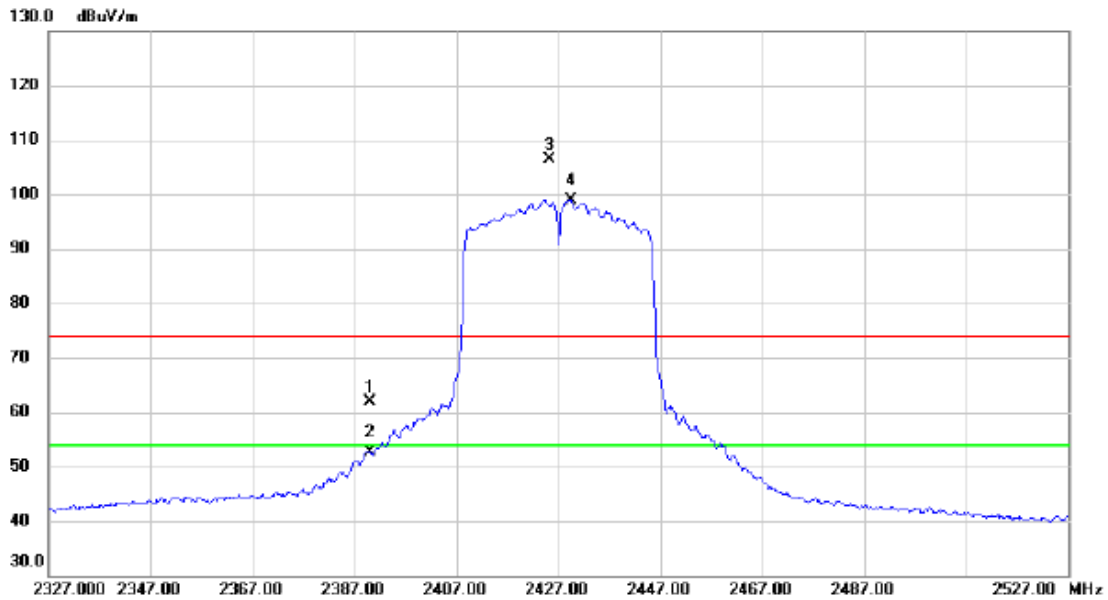

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	54.50	7.38	61.88	74.00	-12.12	peak	
2		2390.000	45.35	7.38	52.73	54.00	-1.27	AVG	
3	X	2425.200	98.93	7.36	106.29	74.00	32.29	peak	No Limit
4	*	2429.400	91.60	7.36	98.96	54.00	44.96	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2427MHz


Vertical

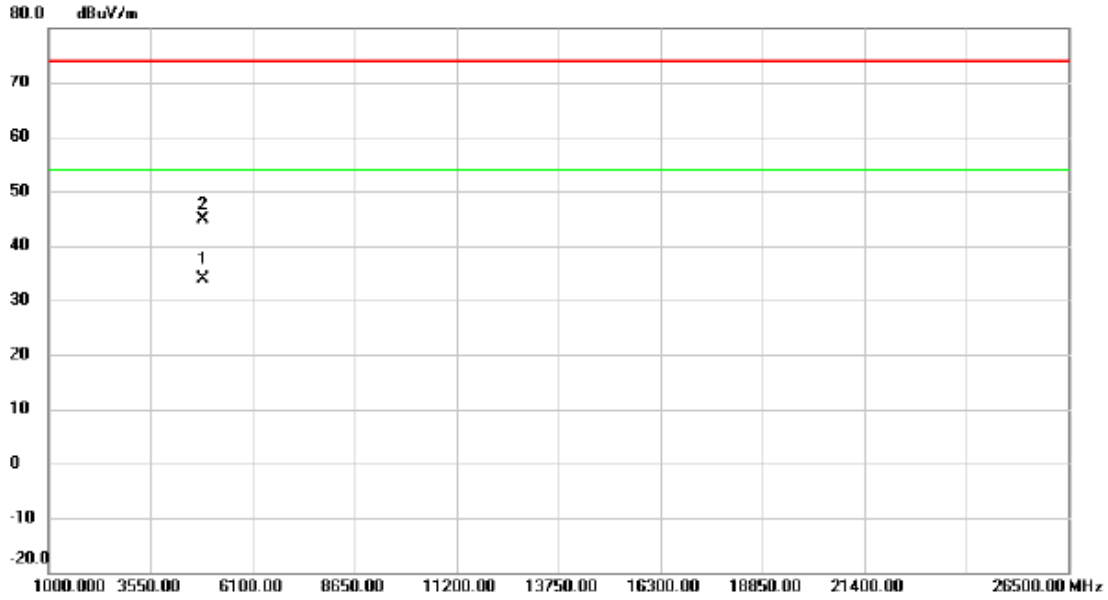

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4854.810	30.34	3.64	33.98	54.00	-20.02	AVG	
2		4856.700	41.36	3.64	45.00	74.00	-29.00	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2427MHz


Horizontal

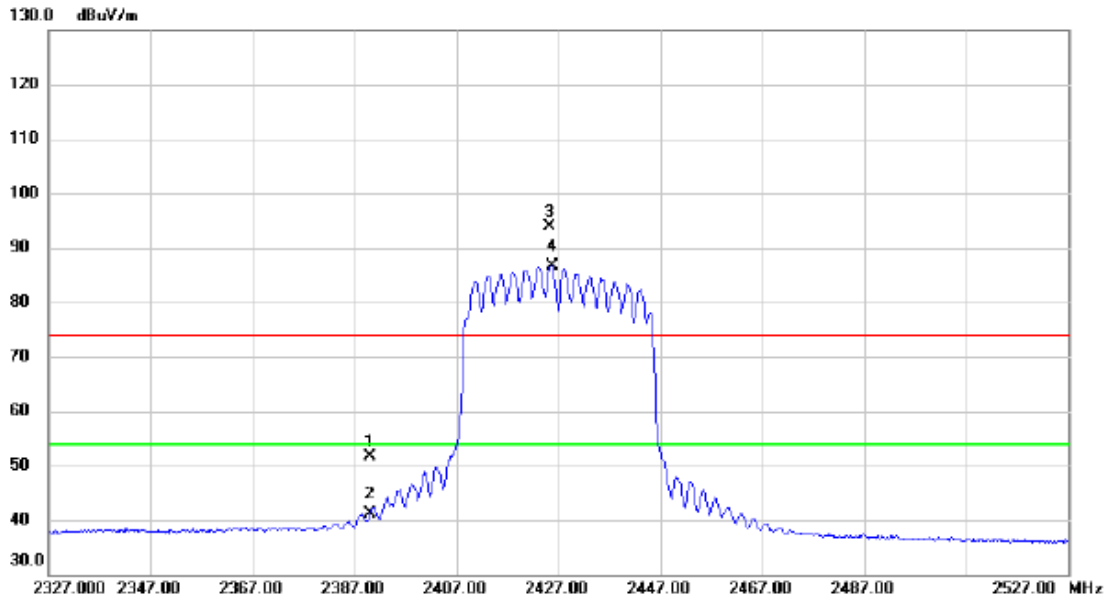

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	45.05	6.62	51.67	74.00	-22.33	peak	
2		2390.000	34.54	6.62	41.16	54.00	-12.84	AVG	
3	X	2425.300	87.17	6.61	93.78	74.00	19.78	peak	No Limit
4	*	2425.700	80.10	6.61	86.71	54.00	32.71	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2427MHz

Horizontal

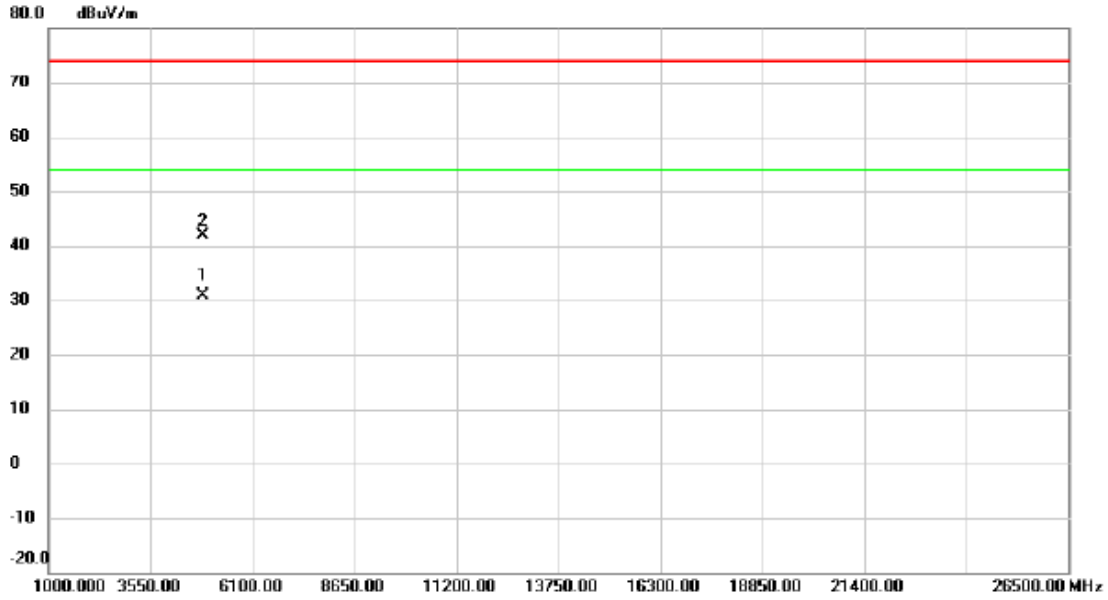


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4847.300	27.32	3.63	30.95	54.00	-23.05	AVG	
2		4854.950	38.14	3.64	41.78	74.00	-32.22	peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

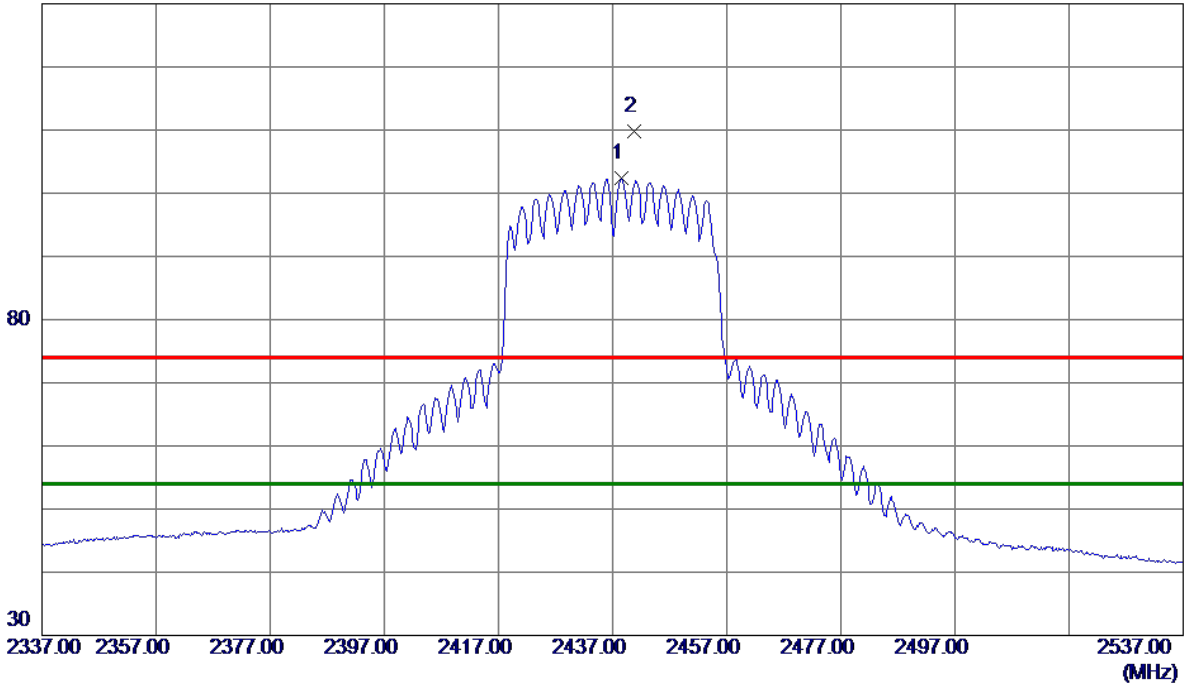


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.5000	95.01	7.35	102.36	54.00	48.36	AVG	No Limit
2	2440.7000	102.48	7.35	109.83	74.00	35.83	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical


80 dBuV/m

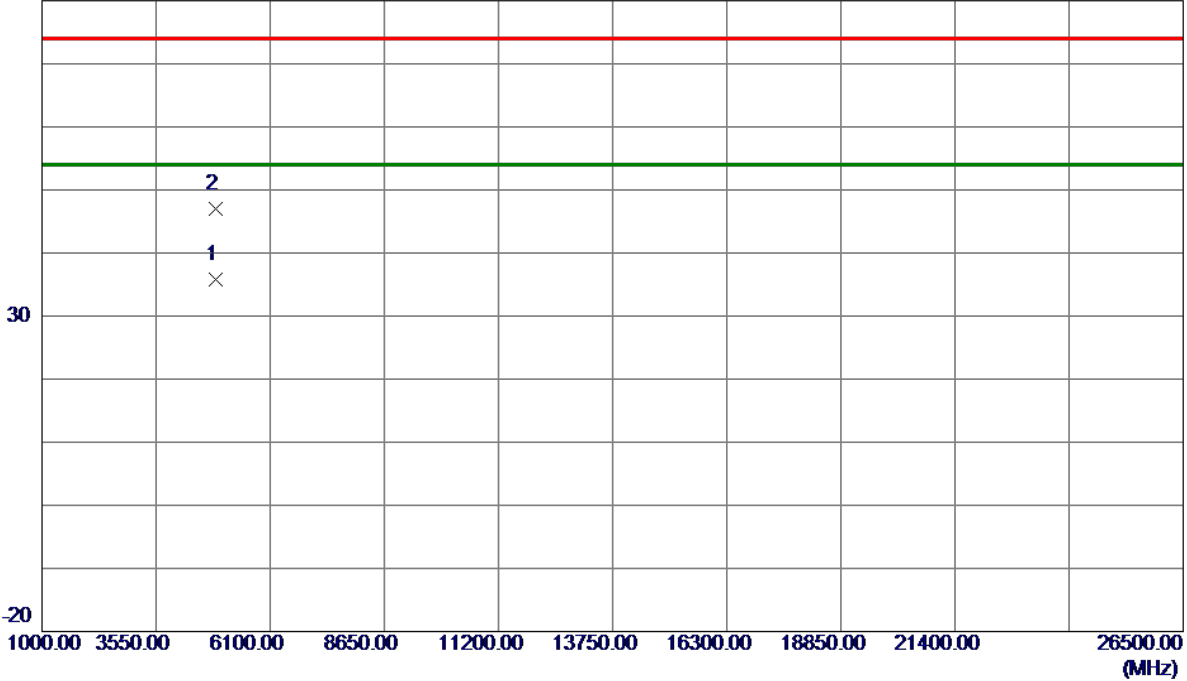

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.7250	32.17	3.68	35.85	54.00	-18.15	AVG	
2	4874.8450	43.38	3.68	47.06	74.00	-26.94	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

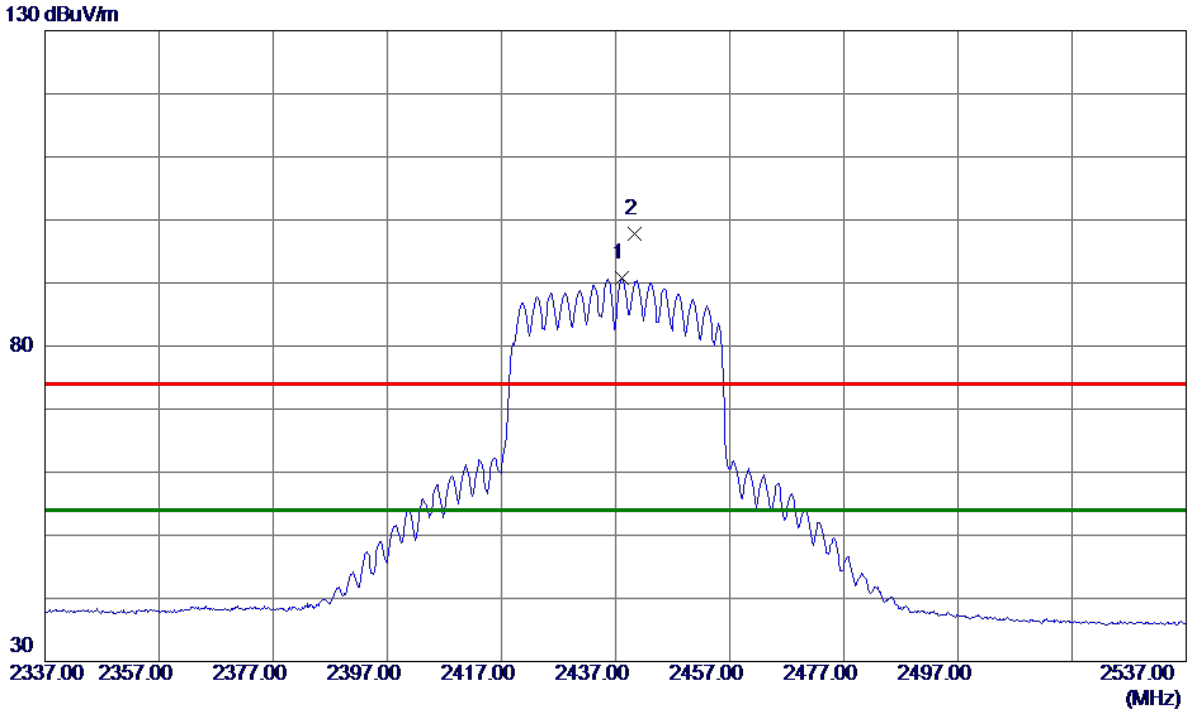


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.2000	84.21	6.61	90.82	54.00	36.82	AVG	No Limit
2	2440.4000	91.19	6.61	97.80	74.00	23.80	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal


80 dBuV/m

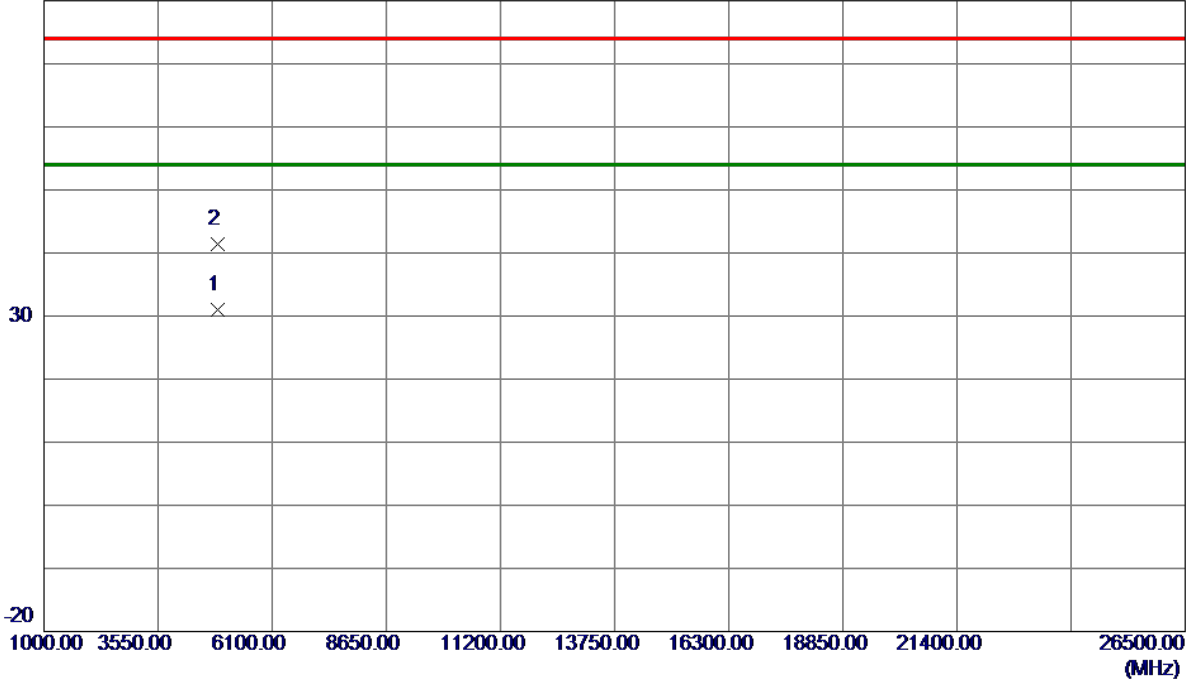

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.8600	27.28	3.68	30.96	54.00	-23.04	AVG	
2	4880.7500	37.64	3.70	41.34	74.00	-32.66	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2447MHz


Vertical

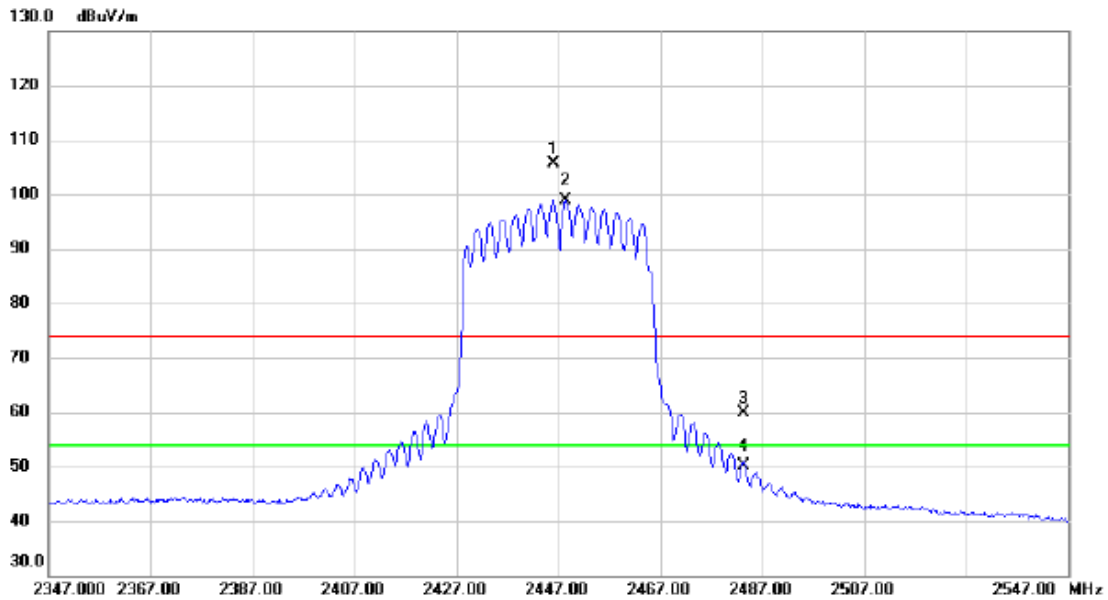

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2446.000	98.40	7.35	105.75	74.00	31.75	peak	No Limit
2	*	2448.500	91.49	7.34	98.83	54.00	44.83	AVG	No Limit
3		2483.500	52.45	7.32	59.77	74.00	-14.23	peak	
4		2483.500	42.78	7.32	50.10	54.00	-3.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2447MHz


Vertical

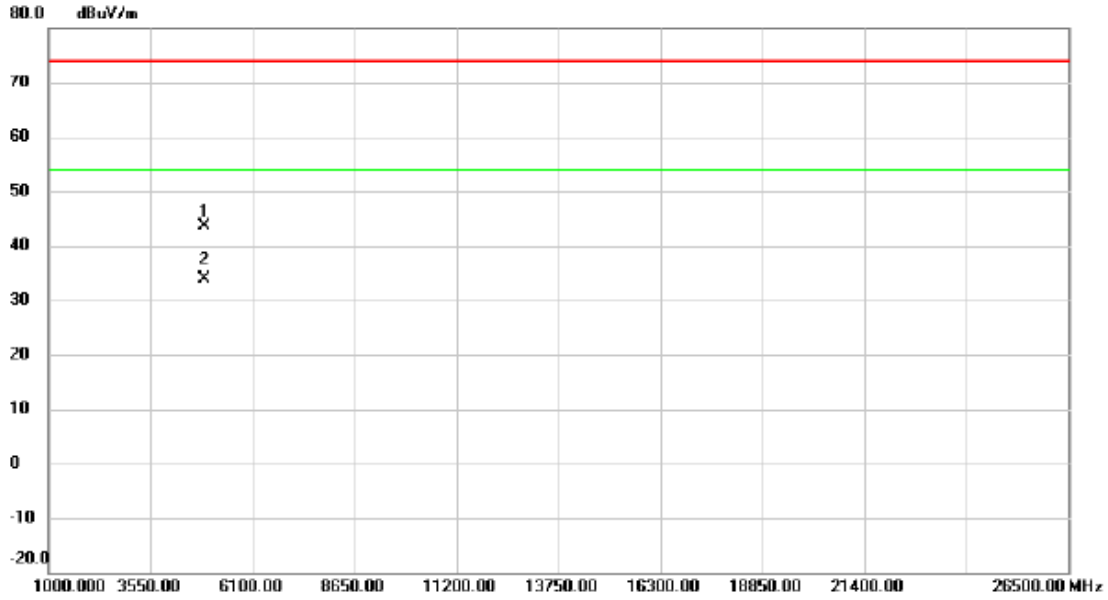

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4892.080	39.80	3.73	43.53	74.00	-30.47	peak	
2	*	4894.735	30.15	3.73	33.88	54.00	-20.12	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2447MHz


Horizontal

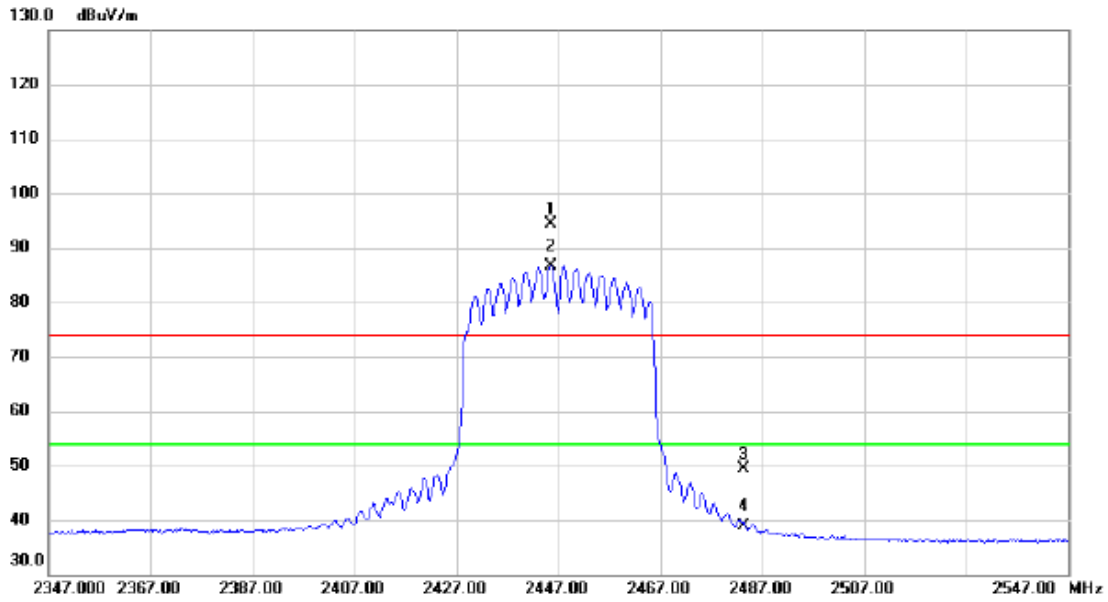

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2445.400	87.68	6.62	94.30	74.00	20.30	peak	No Limit
2	*	2445.600	80.10	6.62	86.72	54.00	32.72	AVG	No Limit
3		2483.500	42.74	6.61	49.35	74.00	-24.65	peak	
4		2483.500	32.19	6.61	38.80	54.00	-15.20	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2447MHz

Horizontal

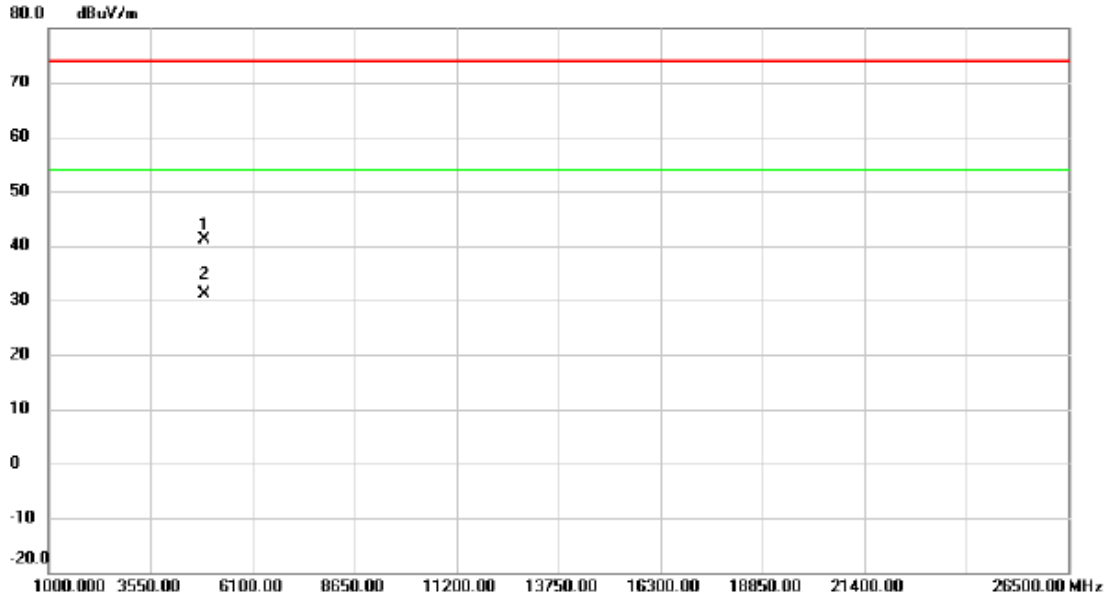


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4884.550	37.38	3.71	41.09	74.00	-32.91	peak	
2	*	4902.120	27.44	3.73	31.17	54.00	-22.83	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

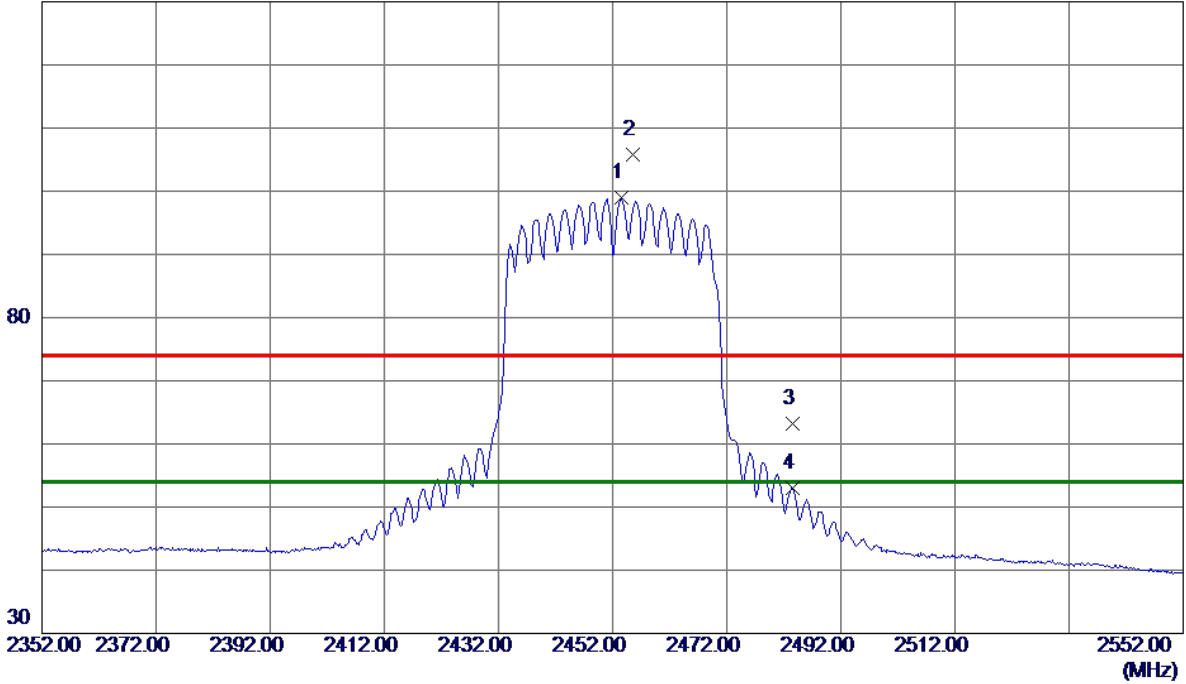


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2453.5000	91.63	7.34	98.97	54.00	44.97	AVG	No Limit
2	2455.6000	98.52	7.34	105.86	74.00	31.86	Peak	No Limit
3	2483.5000	55.92	7.32	63.24	74.00	-10.76	Peak	
4	2483.5000	45.63	7.32	52.95	54.00	-1.05	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical


80 dBuV/m

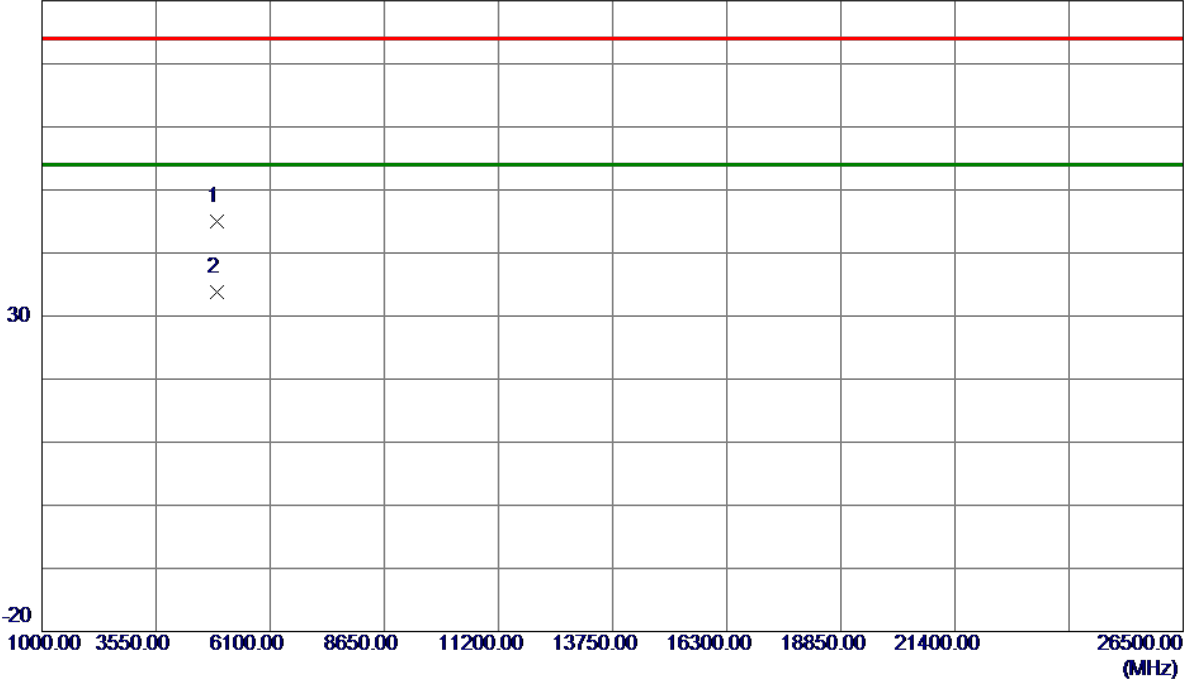

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4904.8600	41.33	3.75	45.08	74.00	-28.92	Peak	
2 *	4904.8700	30.02	3.75	33.77	54.00	-20.23	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

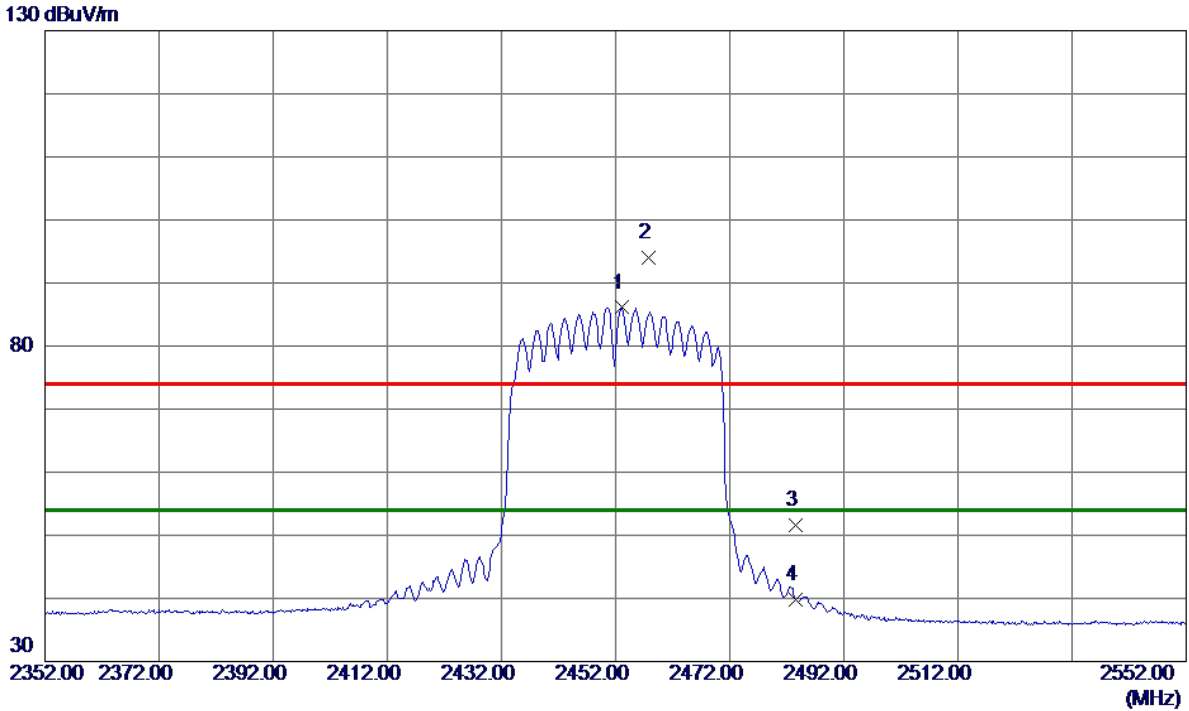


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2453.1000	79.49	6.61	86.10	54.00	32.10	AVG	No Limit
2	2457.7000	87.39	6.61	94.00	74.00	20.00	Peak	No Limit
3	2483.5000	45.06	6.61	51.67	74.00	-22.33	Peak	
4	2483.5000	33.26	6.61	39.87	54.00	-14.13	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

80 dBuV/m

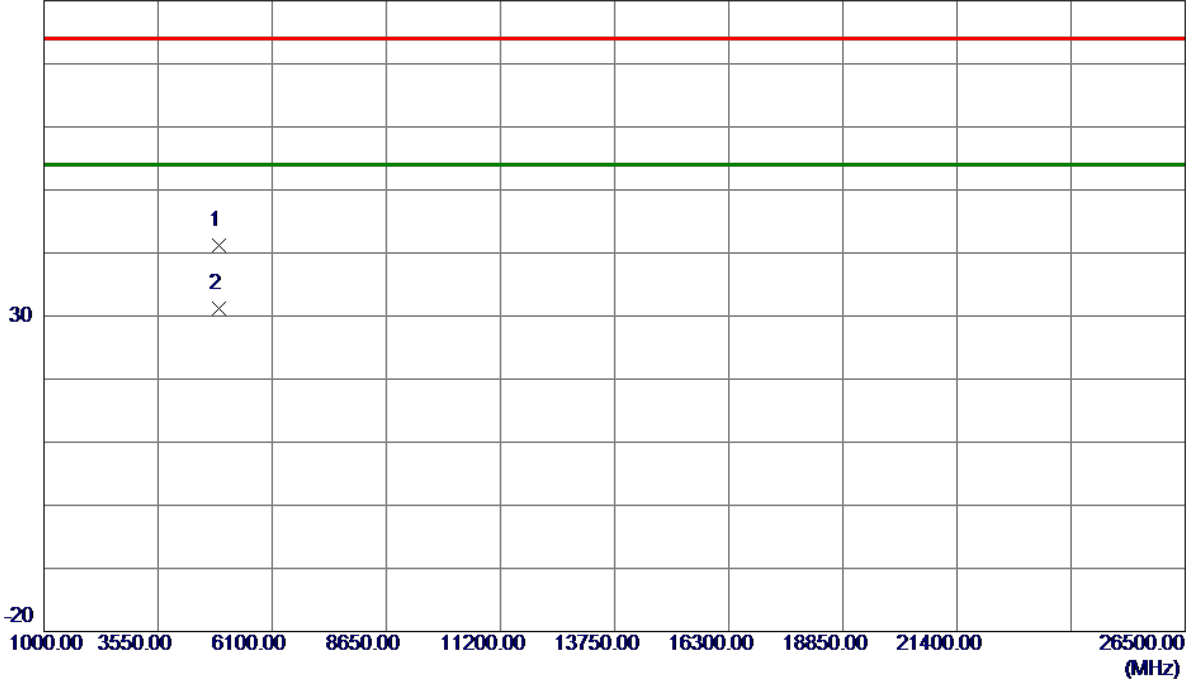

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4899.4600	37.44	3.74	41.18	74.00	-32.82	Peak	
2 *	4909.7300	27.37	3.76	31.13	54.00	-22.87	AVG	

TX B Mode_DUTY CYCLE

Duty cycle: TX 2412 MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 8.410 msec

T_{Total} : 8.555 msec

Duty cycle: 98.31%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

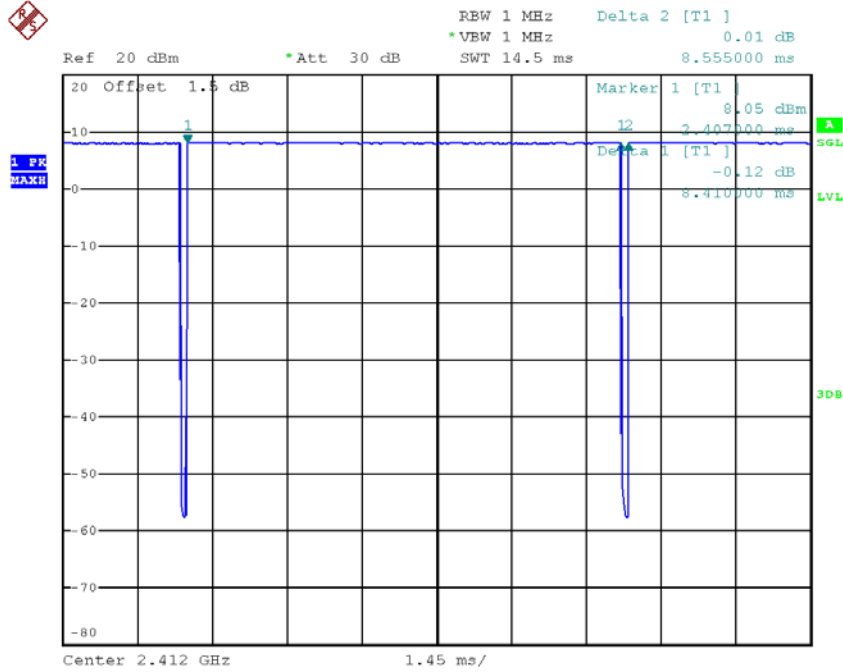

Date: 31.AUG.2018 16:42:06

Note: The duty cycle is $\geq 98\%$ no need to calculated as Duty Factor.

TX G Mode_DUTY CYCLE

Duty cycle: TX 2412 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 1.395 msec

T_{Total} : 1.550 msec

Duty cycle: 93.00 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.32$$

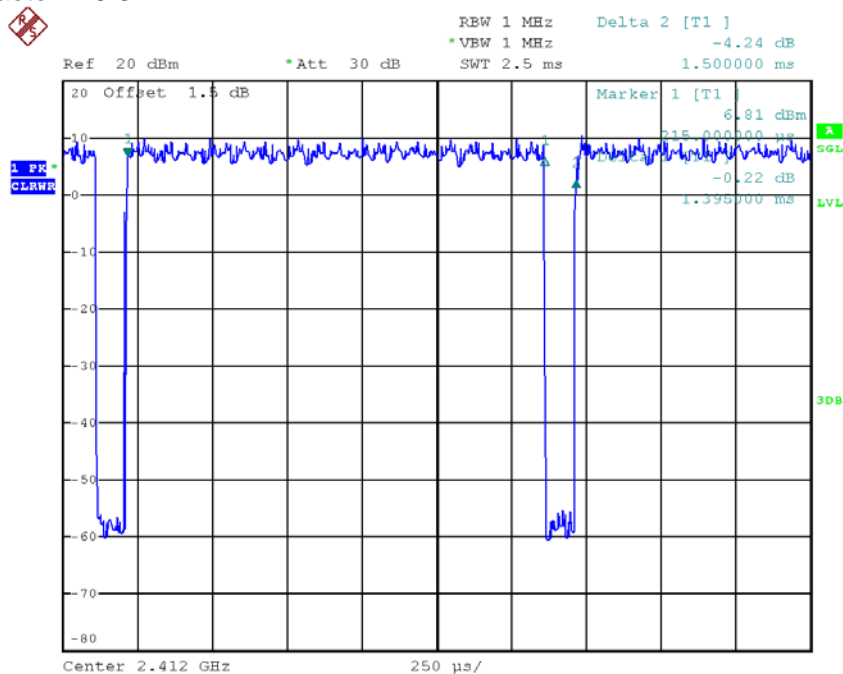

Date: 31.AUG.2018 16:43:31

Note: The EUT was programmed to be in continually transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX N20 Mode_DUTY CYCLE

Duty cycle: TX 2412 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 1.312 msec

T_{Total} : 1.456 msec

Duty cycle: 90.11%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.45$$

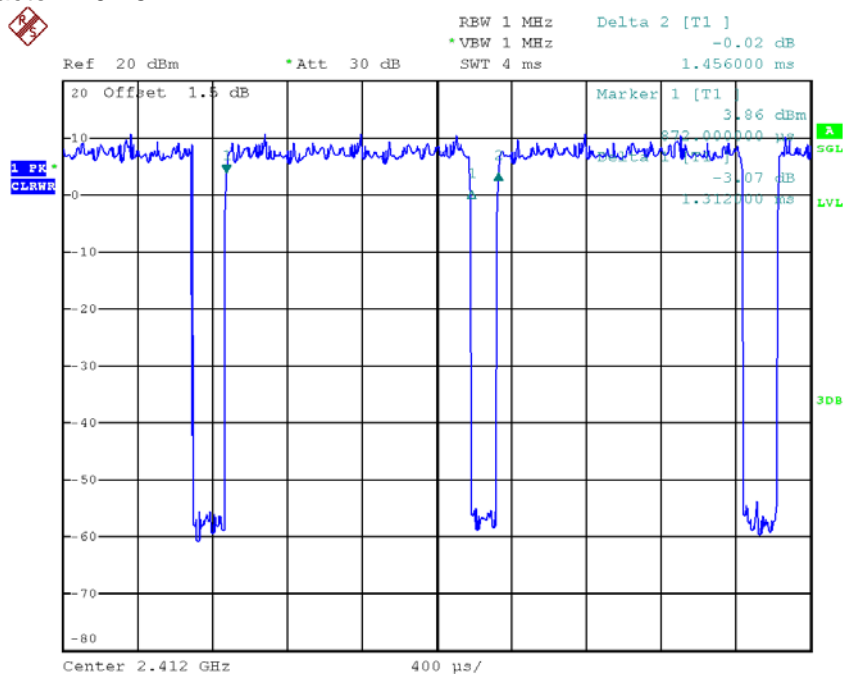

Date: 31.AUG.2018 16:45:08

Note: The EUT was programmed to be in continually transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX N40 Mode_DUTY CYCLE

Duty cycle: TX 2422MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.635 msec

T_{Total} : 0.765msec

Duty cycle: 83.01%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.81

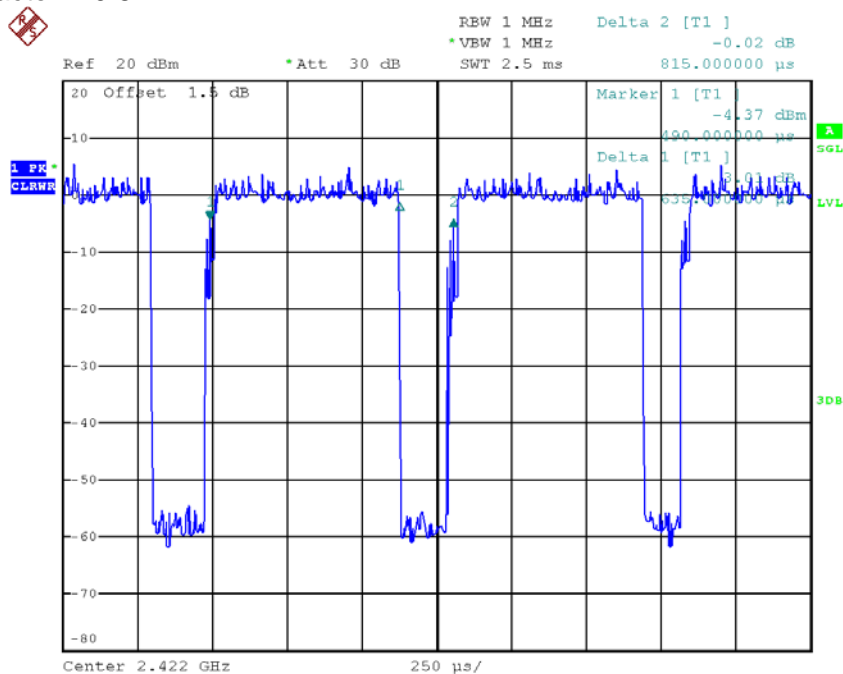

Date: 31.AUG.2018 16:46:04

Note: The EUT was programmed to be in continually transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as


$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

APPENDIX E - BANDWIDTH


Test Mode : TX B Mode_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
2412	10.11	500	Complies
2437	10.07	500	Complies
2462	10.10	500	Complies

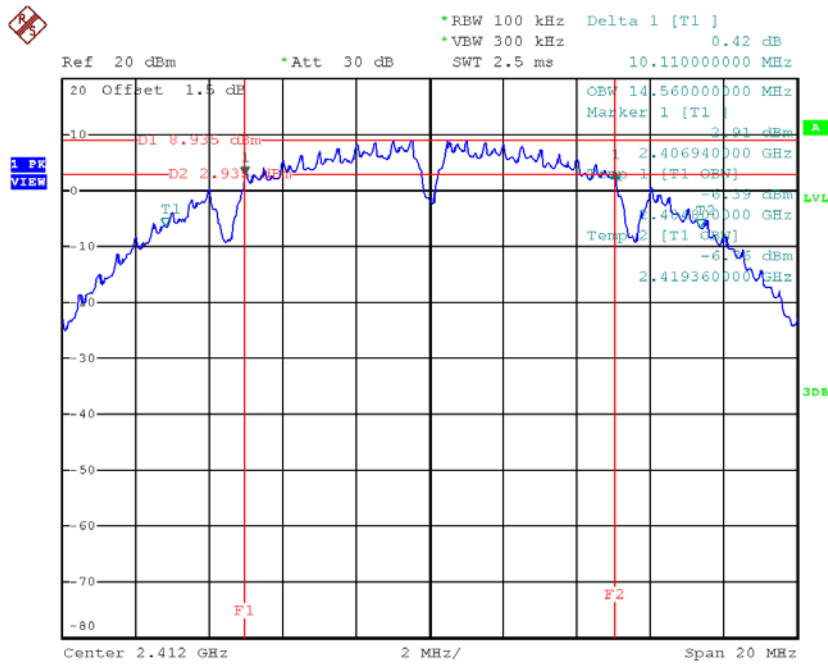TX CH01


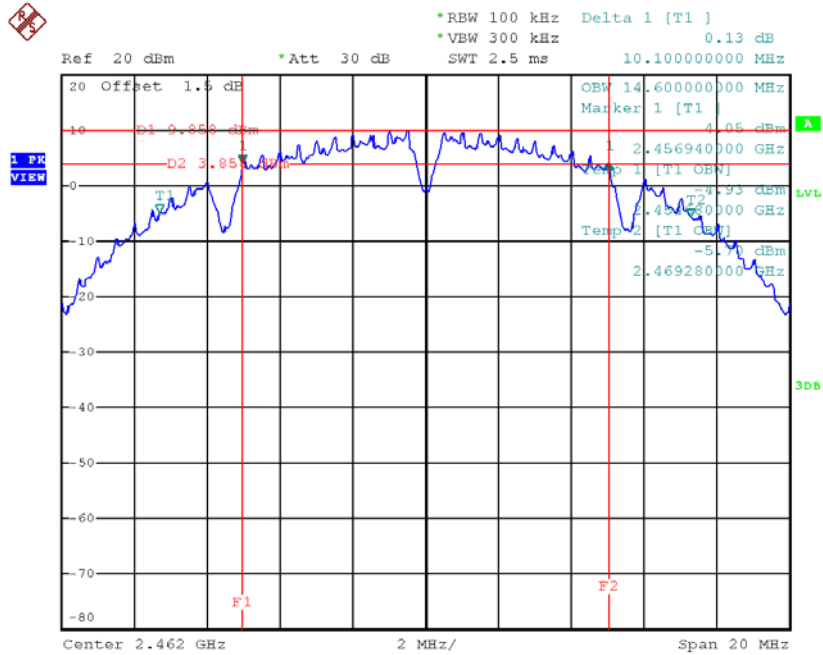
Date: 22.NOV.2018 21:28:09

TX CH06

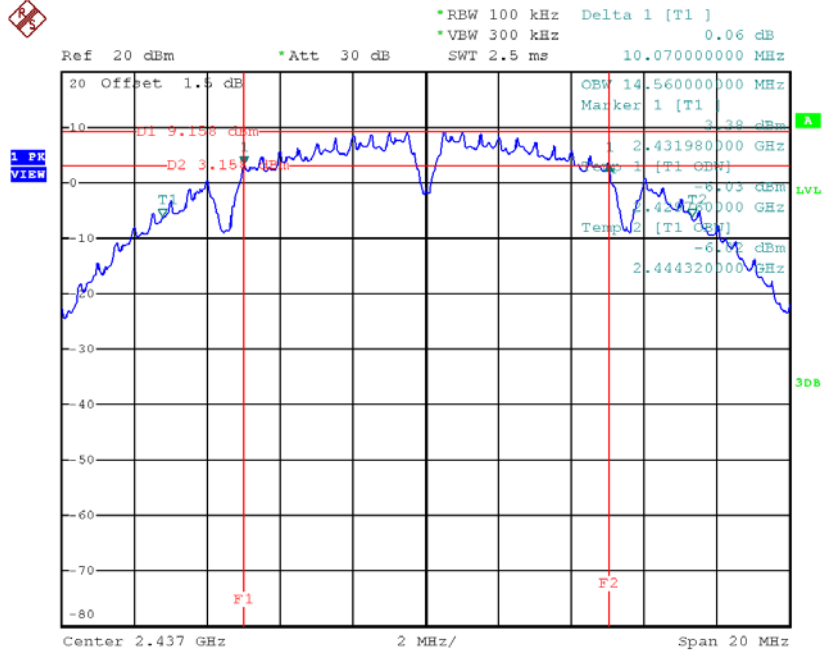

Date: 22.NOV.2018 21:29:30

TX CH11




Date: 22.NOV.2018 21:30:39

Test Mode: TX B Mode_CH01/06/11


Frequency (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	14.72	500	Complies
2437	14.72	500	Complies
2462	14.88	500	Complies

TX CH01

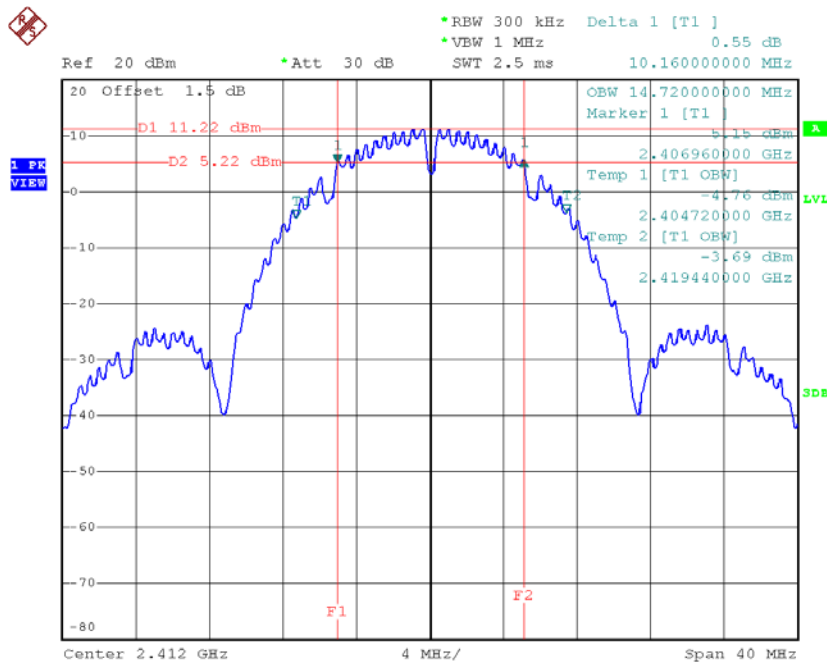


Date: 14.SEP.2018 15:57:04

TX CH06

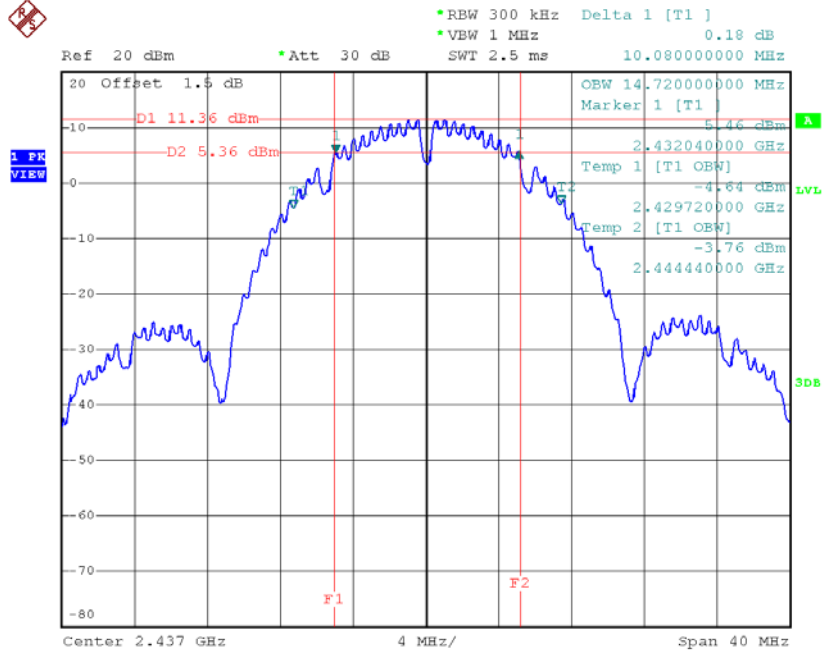

Date: 14.SEP.2018 16:04:41

TX CH11

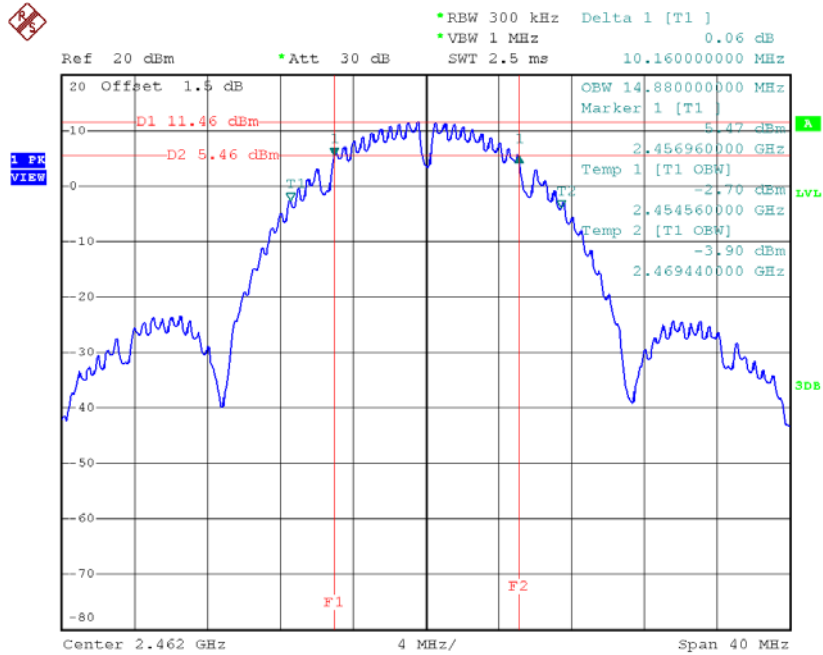


Date: 14.SEP.2018 15:55:46

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
2412	15.01	500	Complies
2437	14.47	500	Complies
2462	15.06	500	Complies

TX CH01

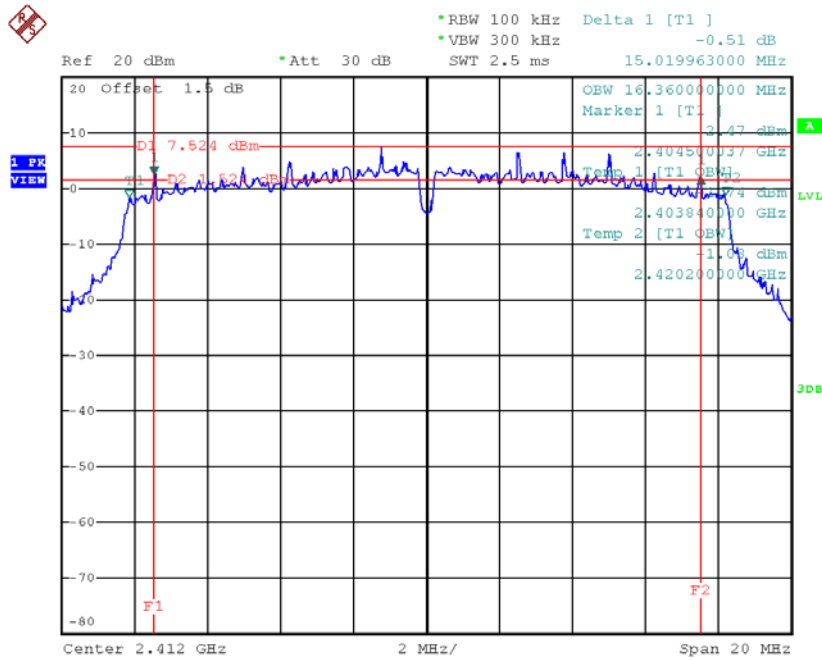


Date: 22.NOV.2018 21:31:48

TX CH06

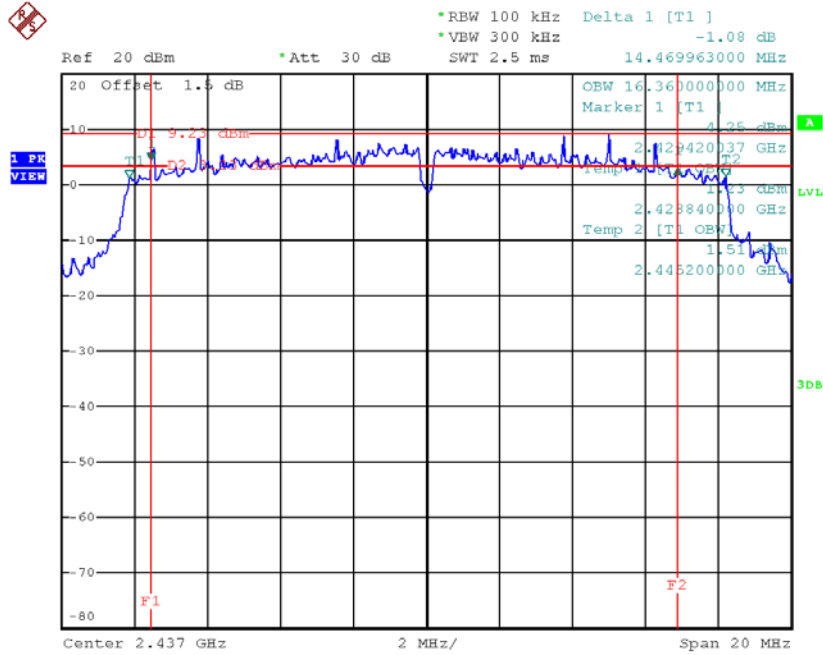

Date: 22.NOV.2018 21:32:39

TX CH11

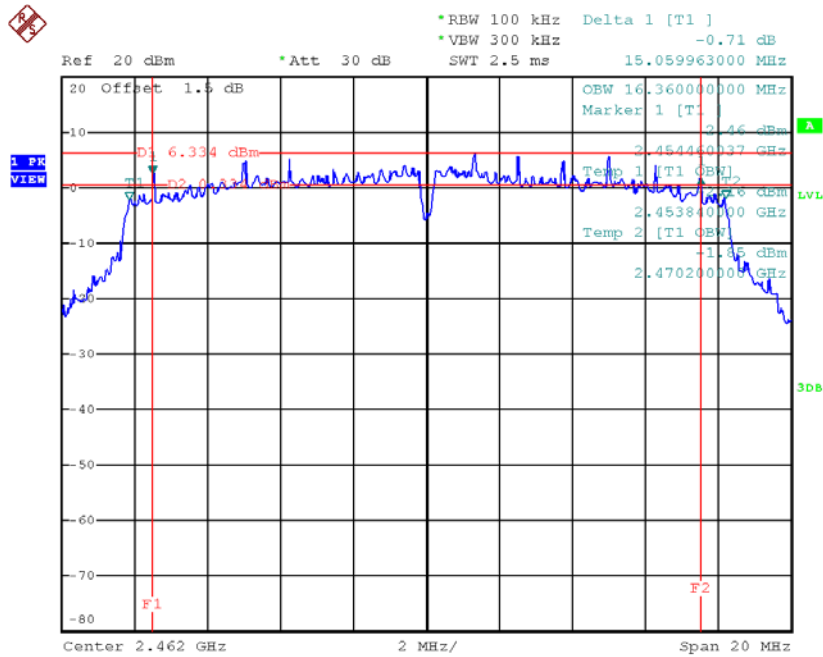


Date: 22.NOV.2018 21:33:36

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.88	500	Complies
2437	17.52	500	Complies
2462	16.88	500	Complies

TX CH01

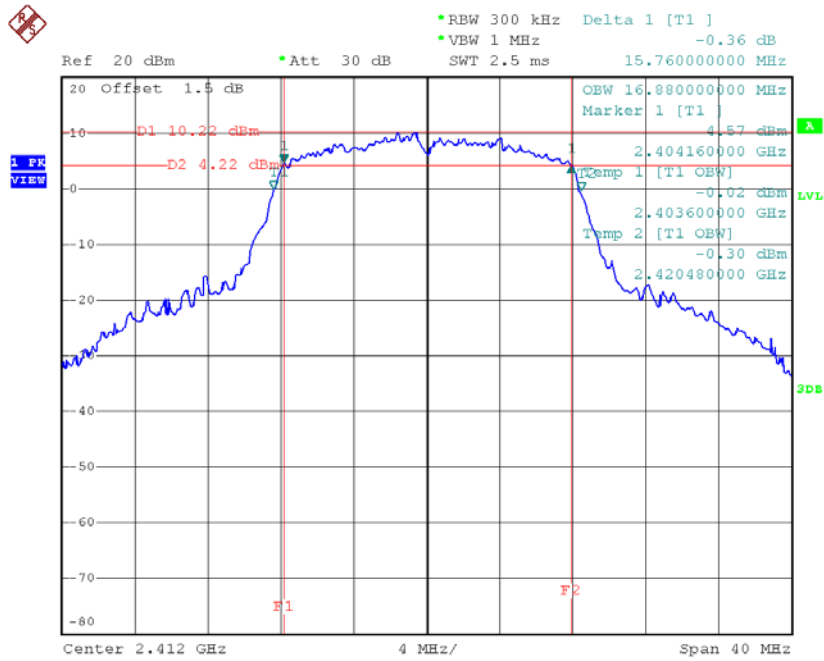


Date: 14.SEP.2018 15:44:05

TX CH06

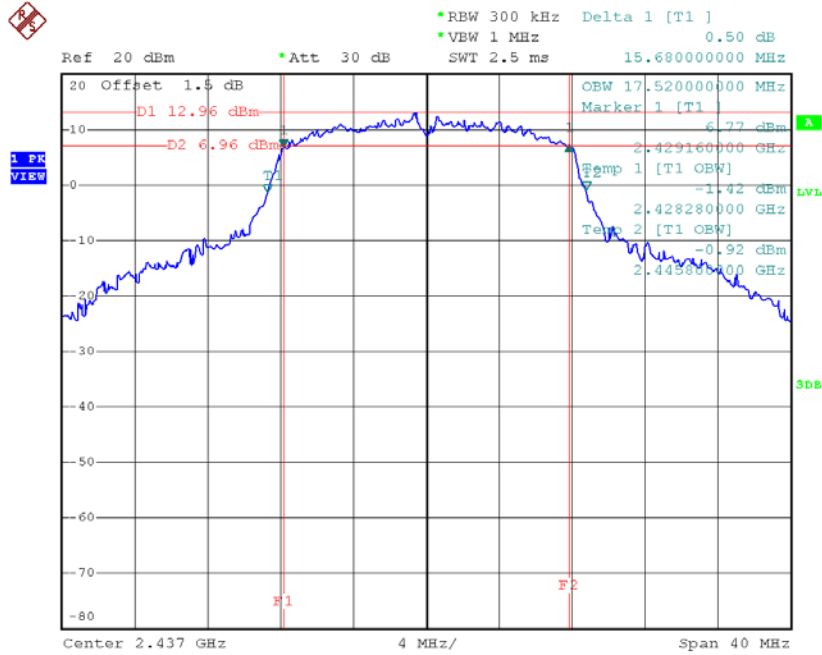

Date: 14.SEP.2018 15:35:45

TX CH11

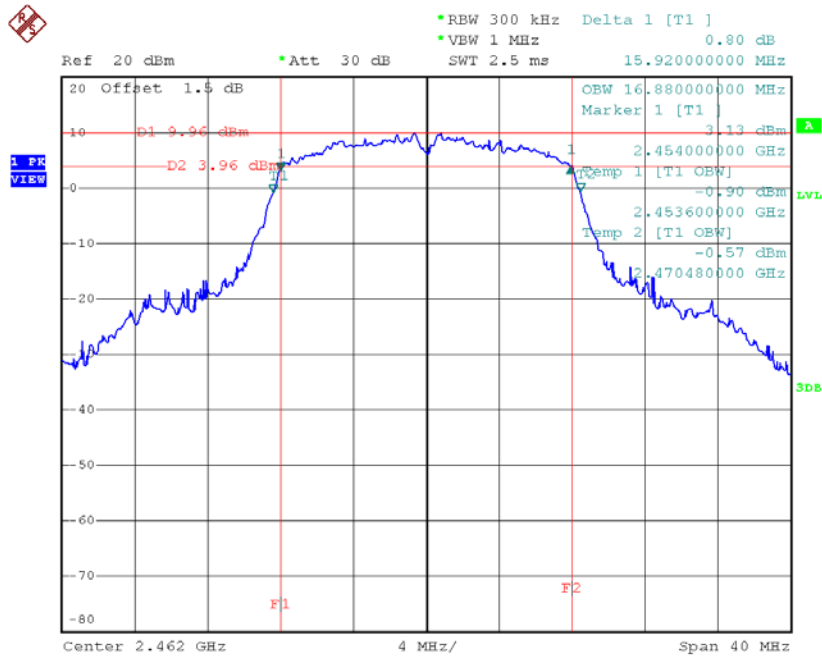


Date: 14.SEP.2018 15:48:59

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
2412	15.08	500	Complies
2437	15.10	500	Complies
2462	15.12	500	Complies

TX CH01

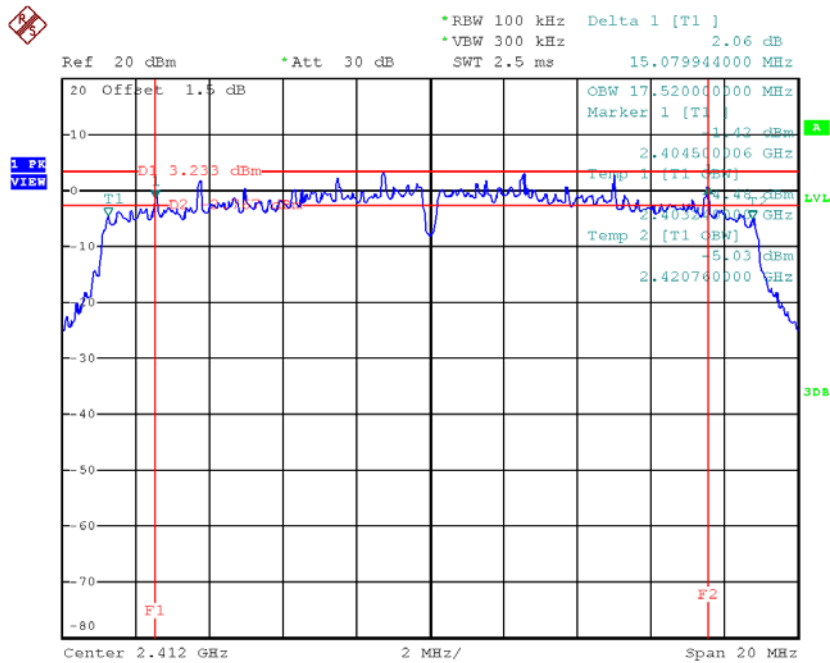


Date: 22.NOV.2018 21:34:38

TX CH06

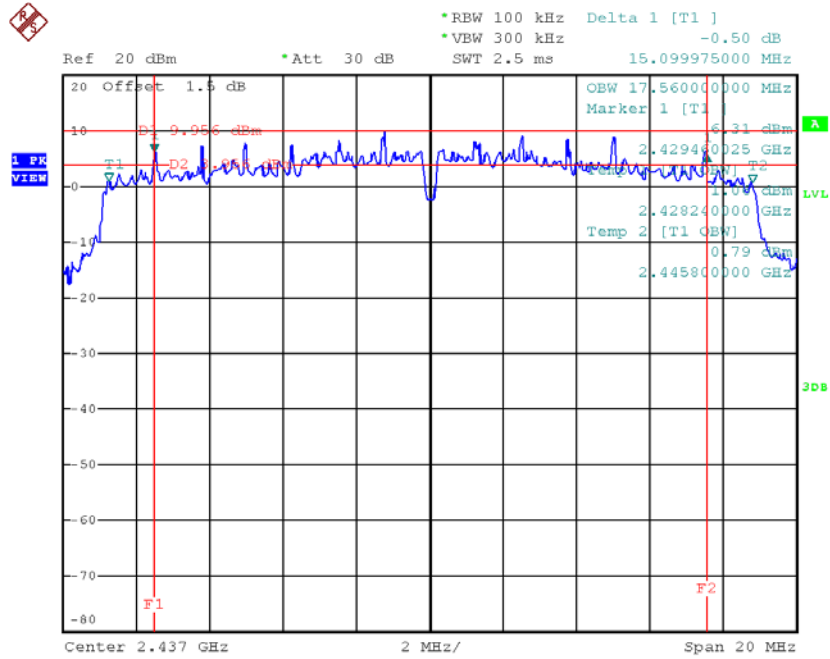

Date: 22.NOV.2018 21:35:35


TX CH11

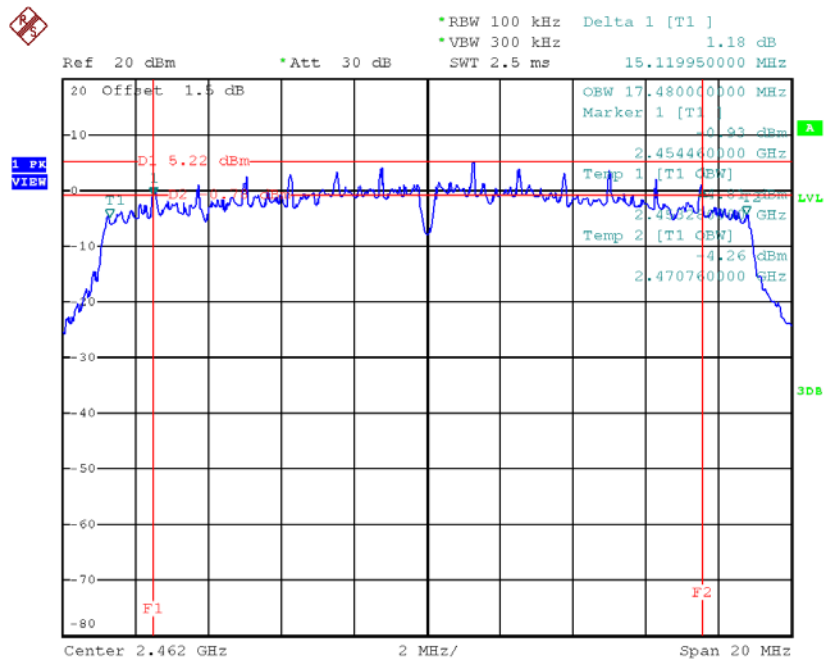

Date: 22.NOV.2018 21:36:37

Test Mode: TX N-20MHz Mode_CH01/06/11

Frequency (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.68	500	Complies
2437	18.40	500	Complies
2462	17.68	500	Complies

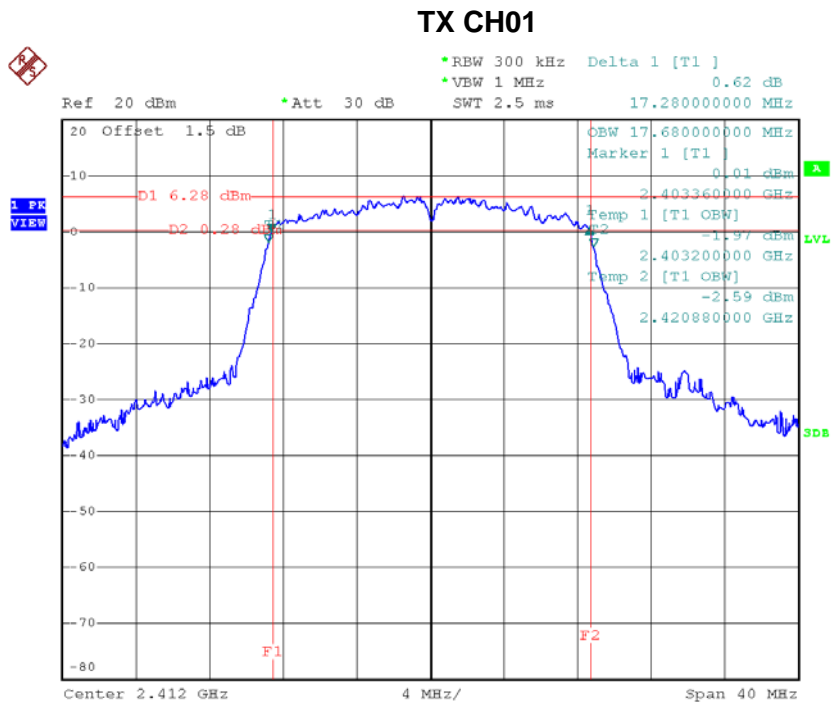

Date: 14.SEP.2018 15:03:32