


Test Mode: TX N-40M Mode 2437 MHz

Horizontal

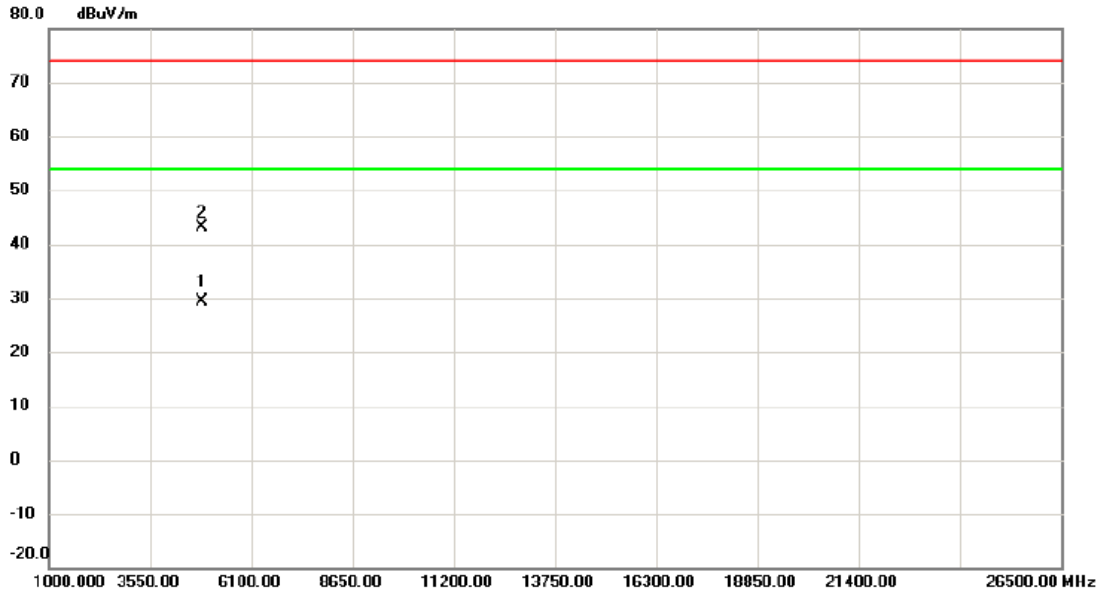


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4873.110	24.51	4.98	29.49	54.00	-24.51	AVG	
2		4875.205	38.13	5.00	43.13	74.00	-30.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Vertical

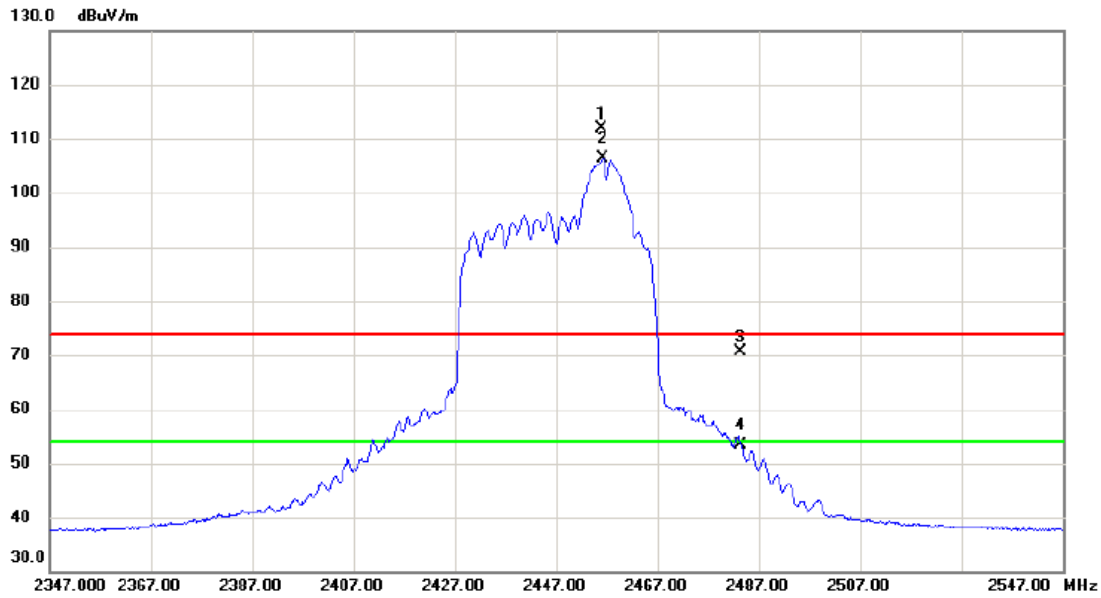

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.000	103.55	8.30	111.85	74.00	37.85	peak	No Limit
2	*	2456.200	98.15	8.30	106.45	54.00	52.45	AVG	No Limit
3		2483.500	62.13	8.38	70.51	74.00	-3.49	peak	
4		2483.500	45.00	8.38	53.38	54.00	-0.62	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Vertical

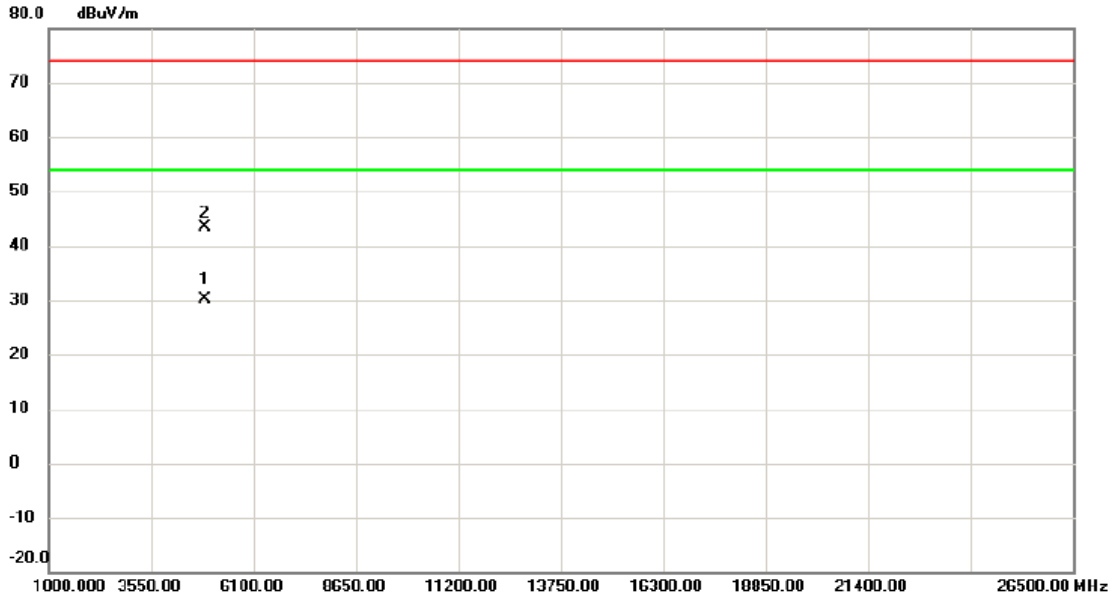


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4891.895	25.00	5.08	30.08	54.00	-23.92	AVG	
2		4896.250	38.31	5.10	43.41	74.00	-30.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Horizontal

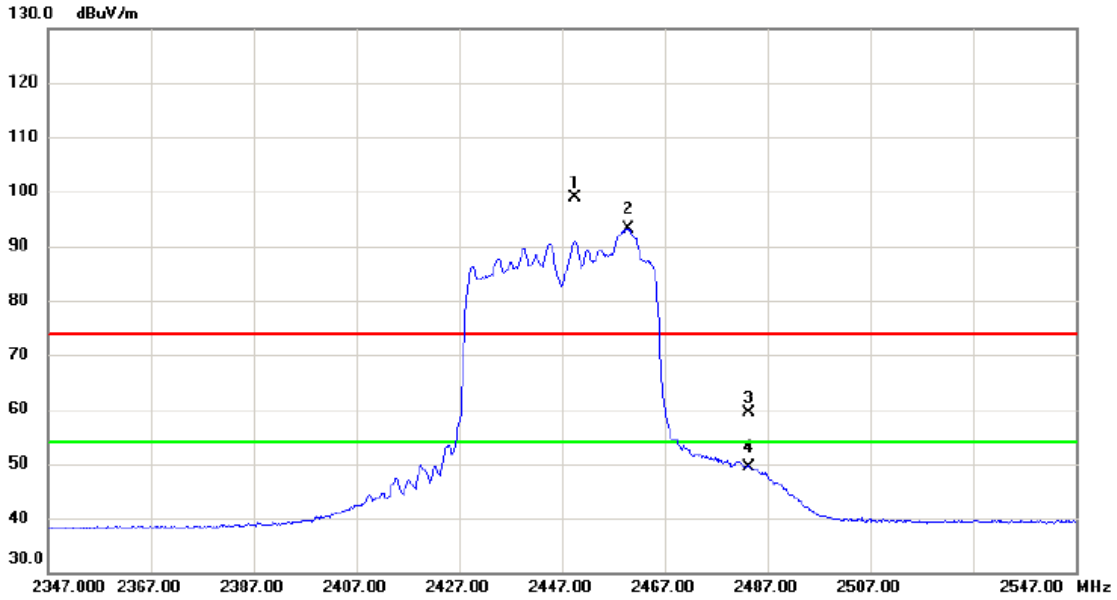


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2449.400	90.49	8.28	98.77	74.00	24.77	peak	No Limit
2	*	2459.800	84.92	8.31	93.23	54.00	39.23	AVG	No Limit
3		2483.500	50.94	8.38	59.32	74.00	-14.68	peak	
4		2483.500	41.10	8.38	49.48	54.00	-4.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Horizontal

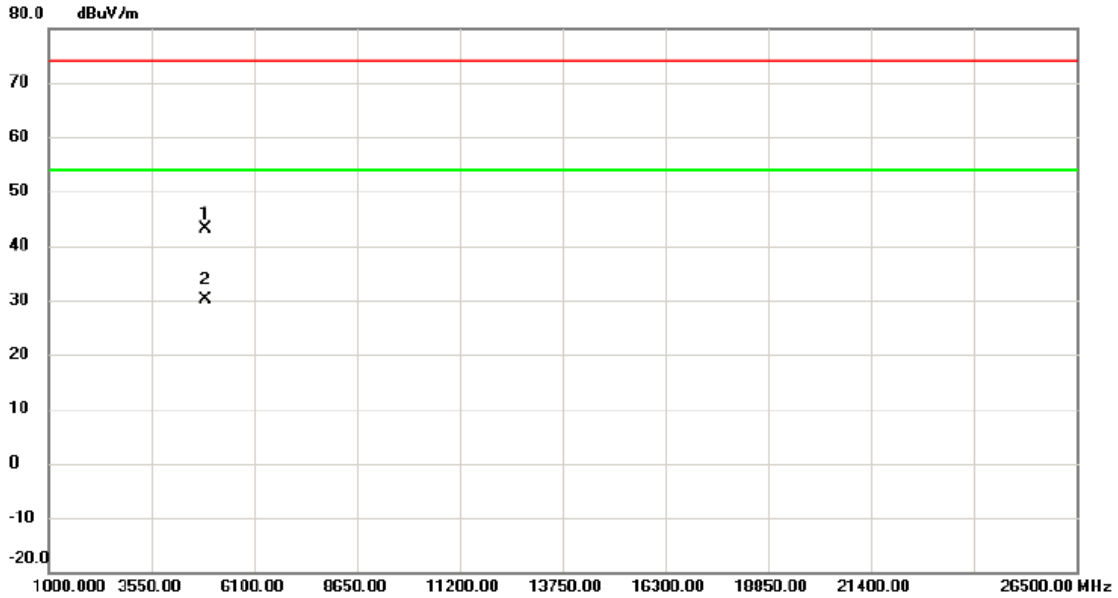


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4894.578	38.00	5.09	43.09	74.00	-30.91	peak	
2	*	4894.653	24.94	5.10	30.04	54.00	-23.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

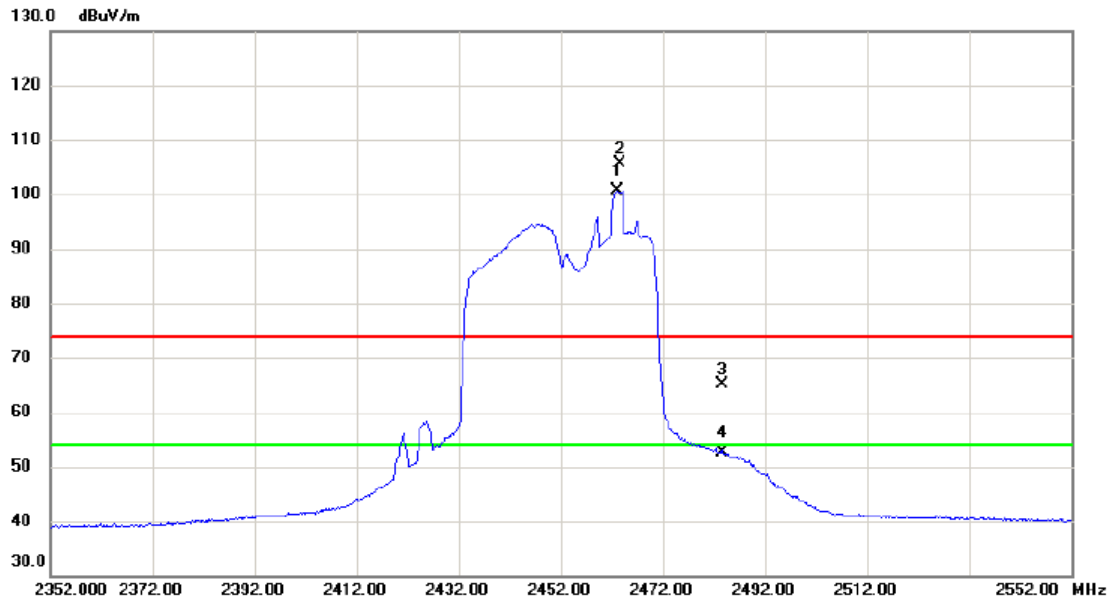


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2463.200	92.22	8.32	100.54	54.00	46.54	AVG	No Limit
2	X	2463.500	97.33	8.32	105.65	74.00	31.65	peak	No Limit
3		2483.500	56.77	8.38	65.15	74.00	-8.85	peak	
4		2483.530	44.29	8.38	52.67	54.00	-1.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

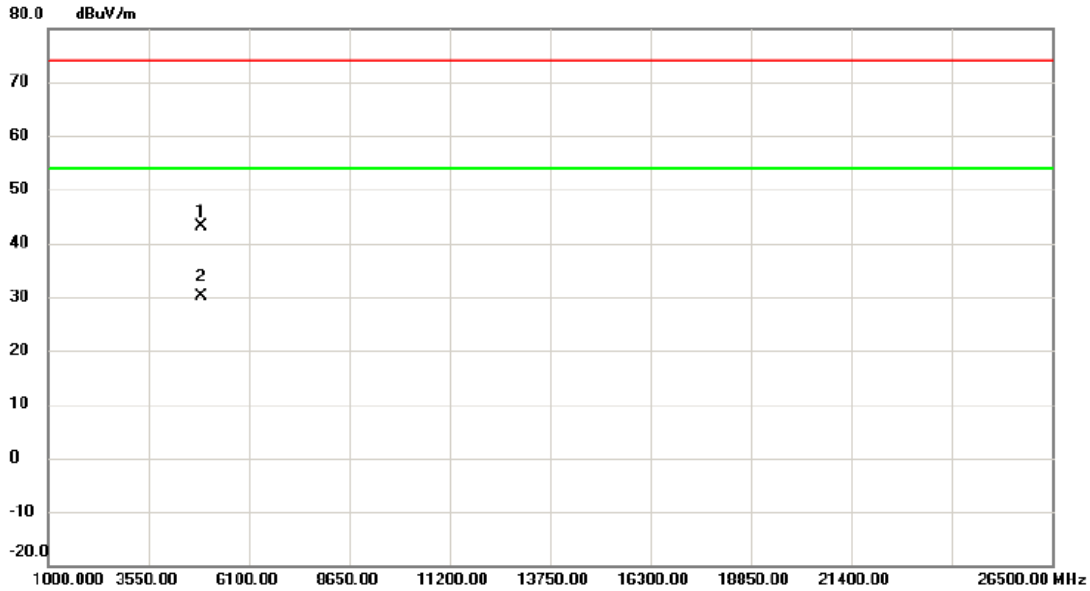


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4902.675	38.10	5.13	43.23	74.00	-30.77	peak	
2	*	4905.195	25.04	5.14	30.18	54.00	-23.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

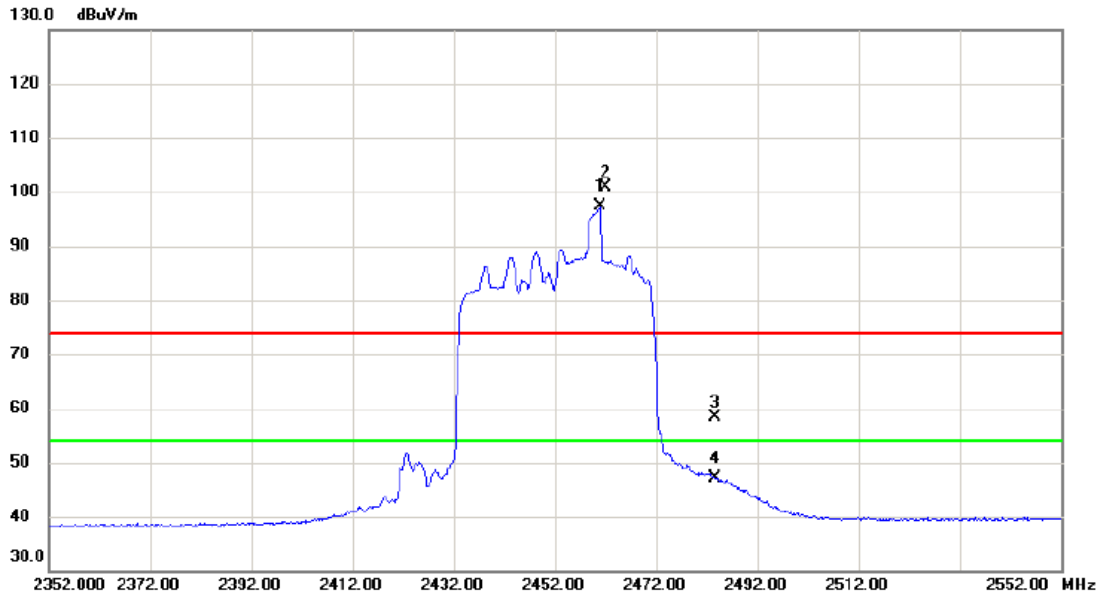


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2461.000	88.95	8.31	97.26	54.00	43.26	AVG	No Limit
2	X	2462.100	92.56	8.31	100.87	74.00	26.87	peak	No Limit
3		2483.500	50.08	8.38	58.46	74.00	-15.54	peak	
4		2483.500	38.76	8.38	47.14	54.00	-6.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

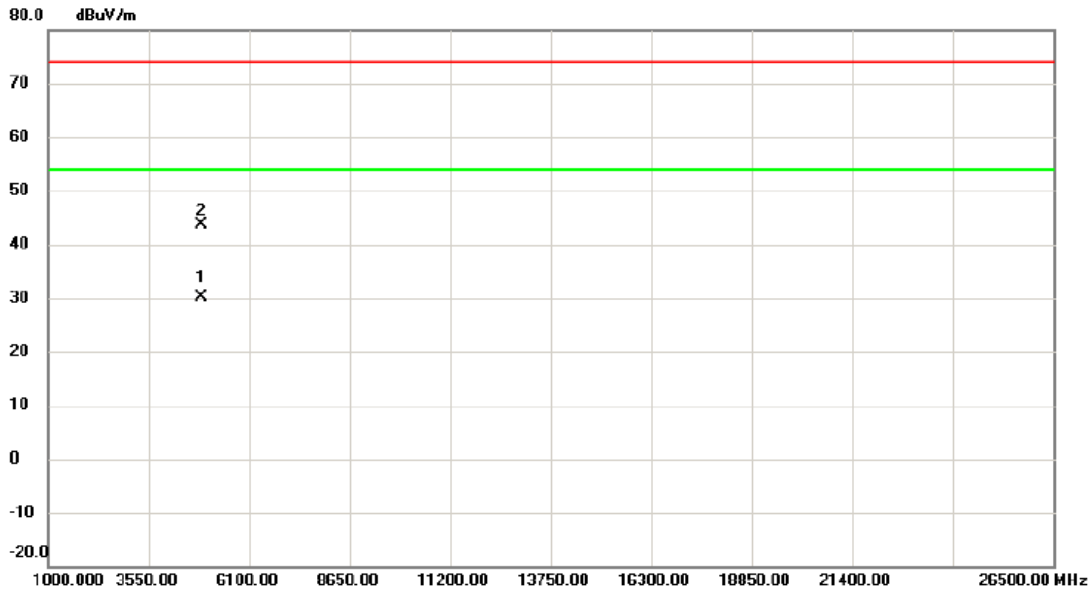


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4903.977	25.05	5.14	30.19	54.00	-23.81	AVG	
2		4906.217	38.59	5.15	43.74	74.00	-30.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2412 MHz

Vertical

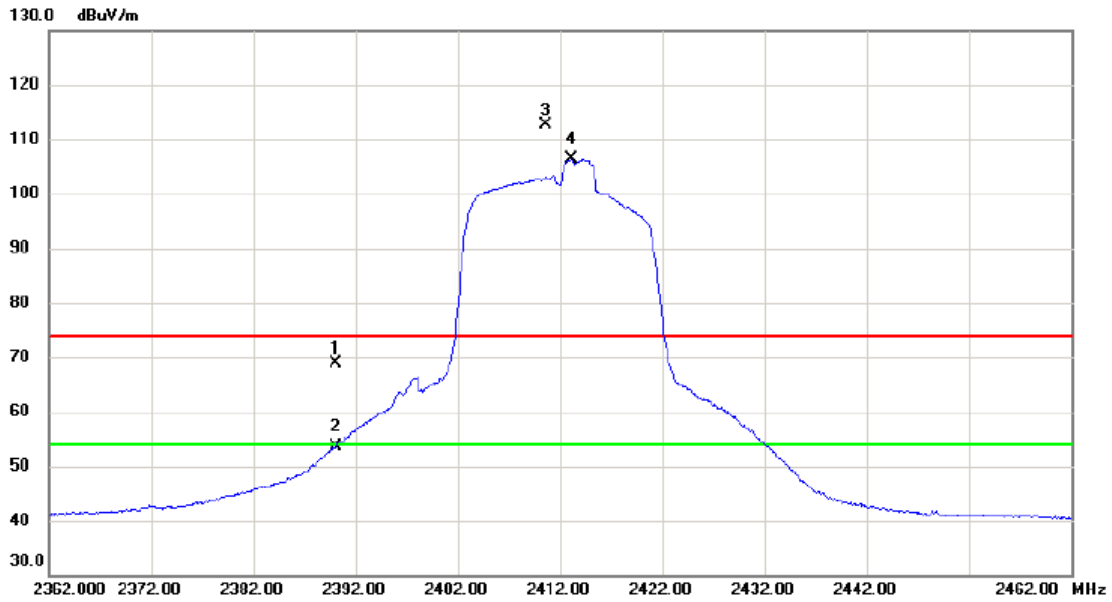


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	60.71	8.11	68.82	74.00	-5.18	peak	
2		2390.000	45.54	8.11	53.65	54.00	-0.35	AVG	
3	X	2410.600	104.53	8.17	112.70	74.00	38.70	peak	No Limit
4	*	2413.200	98.09	8.18	106.27	54.00	52.27	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2412 MHz

Vertical

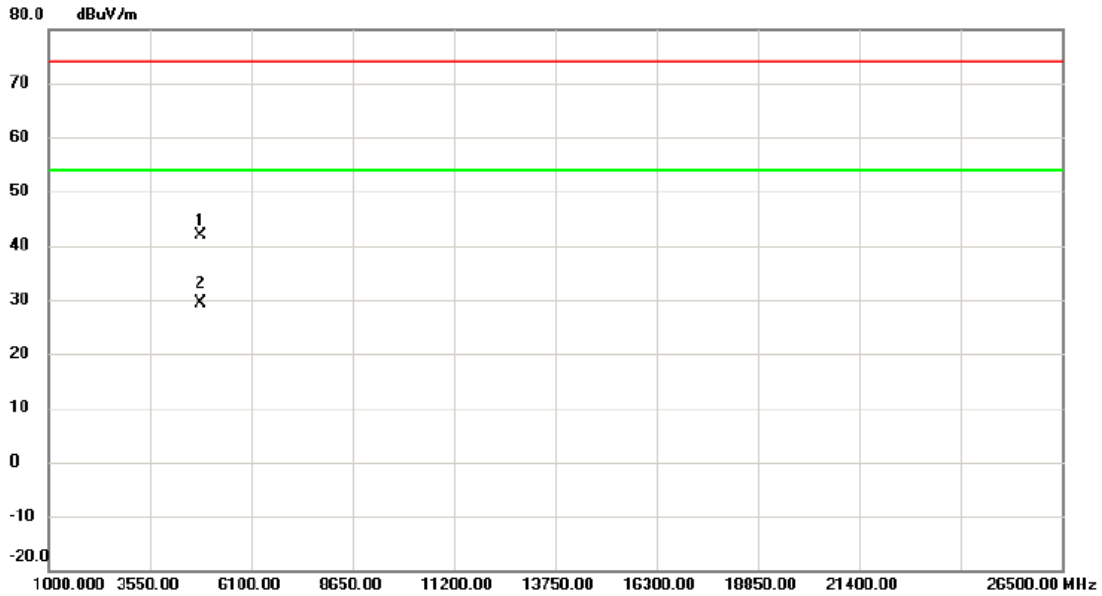


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4822.542	37.22	4.74	41.96	74.00	-32.04	peak	
2	*	4822.585	24.65	4.74	29.39	54.00	-24.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2412 MHz

Horizontal

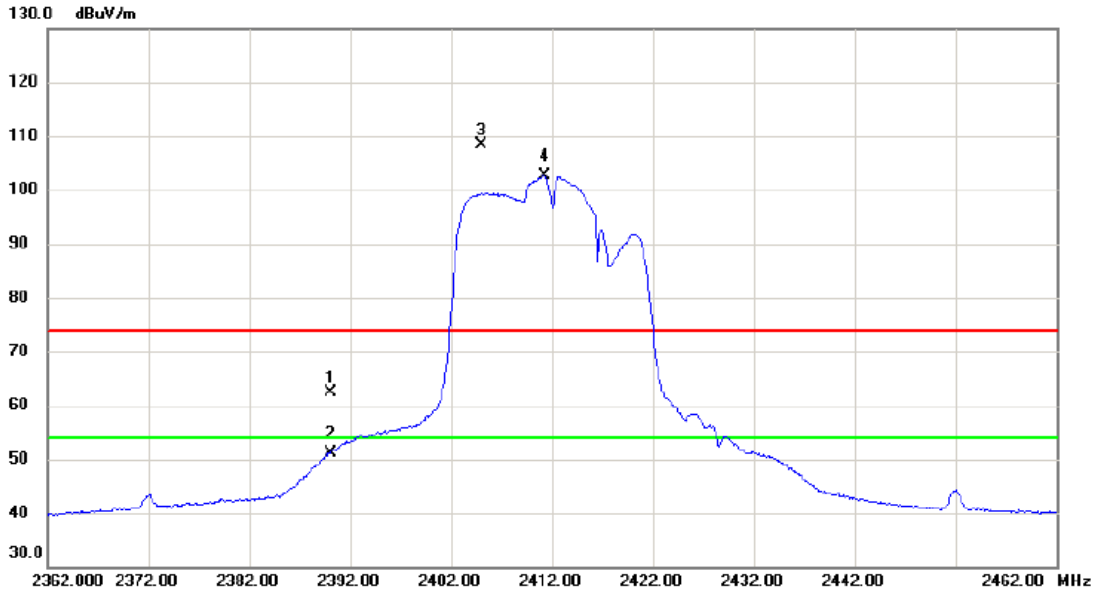

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	54.30	8.11	62.41	74.00	-11.59	peak	
2		2390.000	43.12	8.11	51.23	54.00	-2.77	AVG	
3	X	2404.950	100.17	8.15	108.32	74.00	34.32	peak	No Limit
4	*	2411.250	94.53	8.17	102.70	54.00	48.70	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2412 MHz

Horizontal

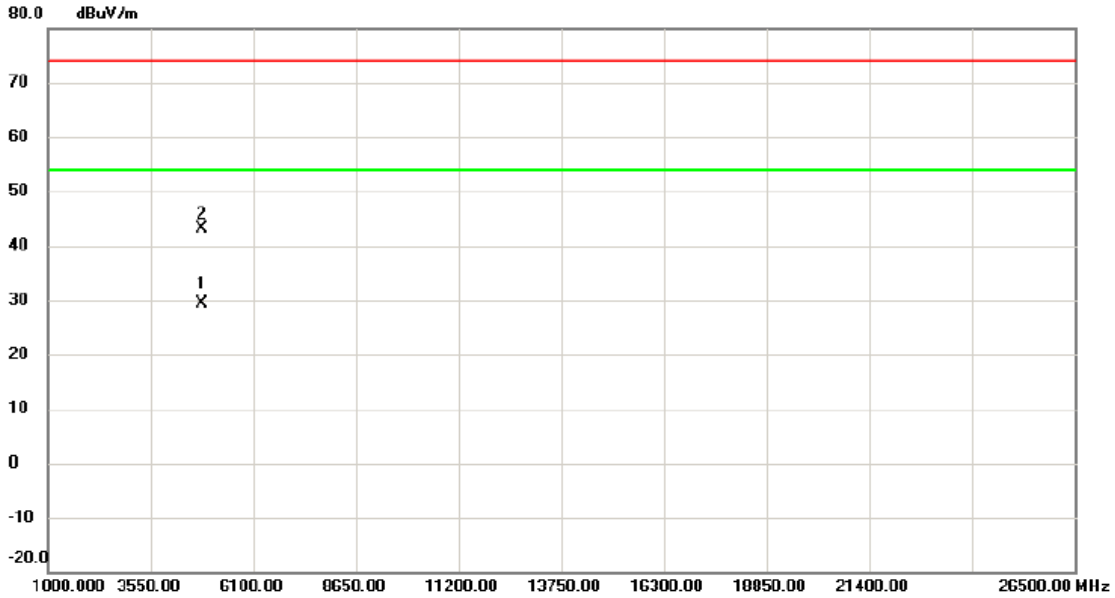


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4822.127	24.66	4.74	29.40	54.00	-24.60	AVG	
2		4824.953	38.35	4.75	43.10	74.00	-30.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2417 MHz

Vertical

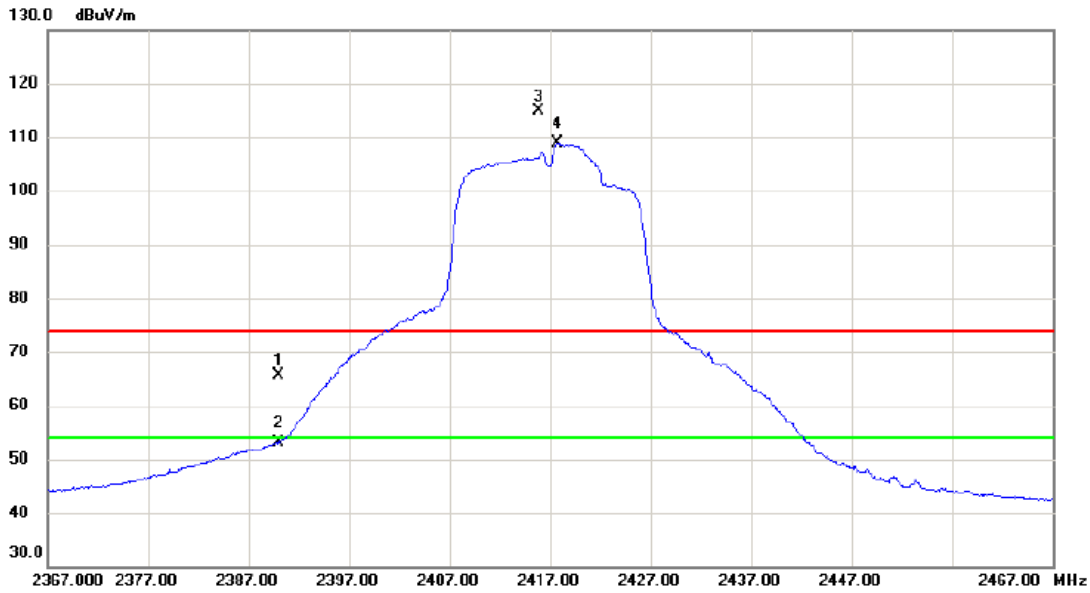

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	57.43	8.11	65.54	74.00	-8.46	peak	
2		2390.000	45.05	8.11	53.16	54.00	-0.84	AVG	
3	X	2415.850	106.57	8.19	114.76	74.00	40.76	peak	No Limit
4	*	2417.700	100.64	8.19	108.83	54.00	54.83	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2417 MHz

Vertical

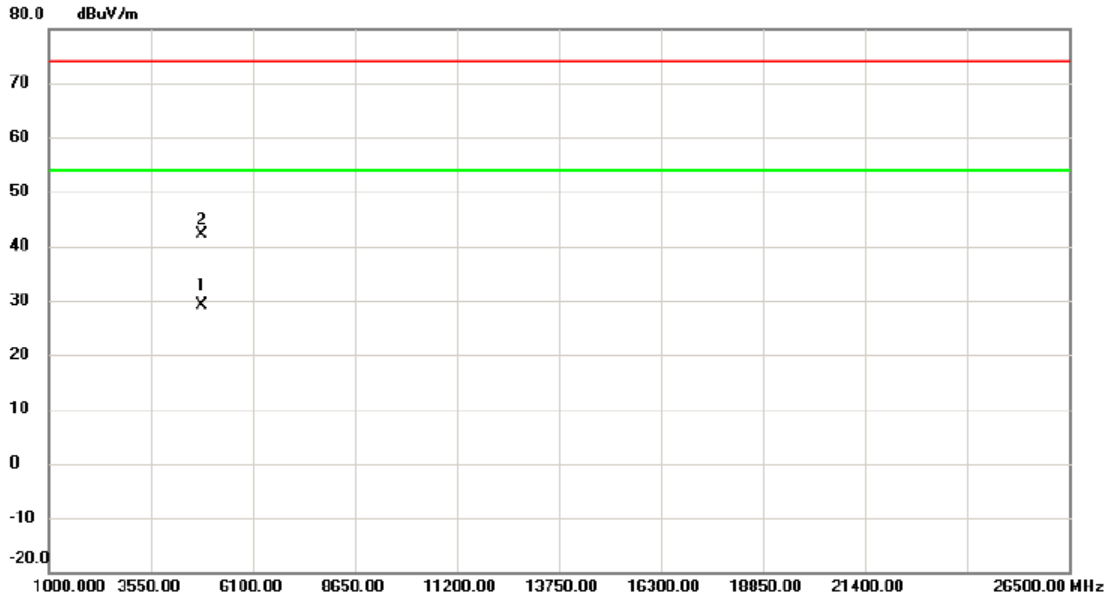


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4831.663	24.45	4.78	29.23	54.00	-24.77	AVG	
2		4832.470	37.37	4.79	42.16	74.00	-31.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2417 MHz

Horizontal

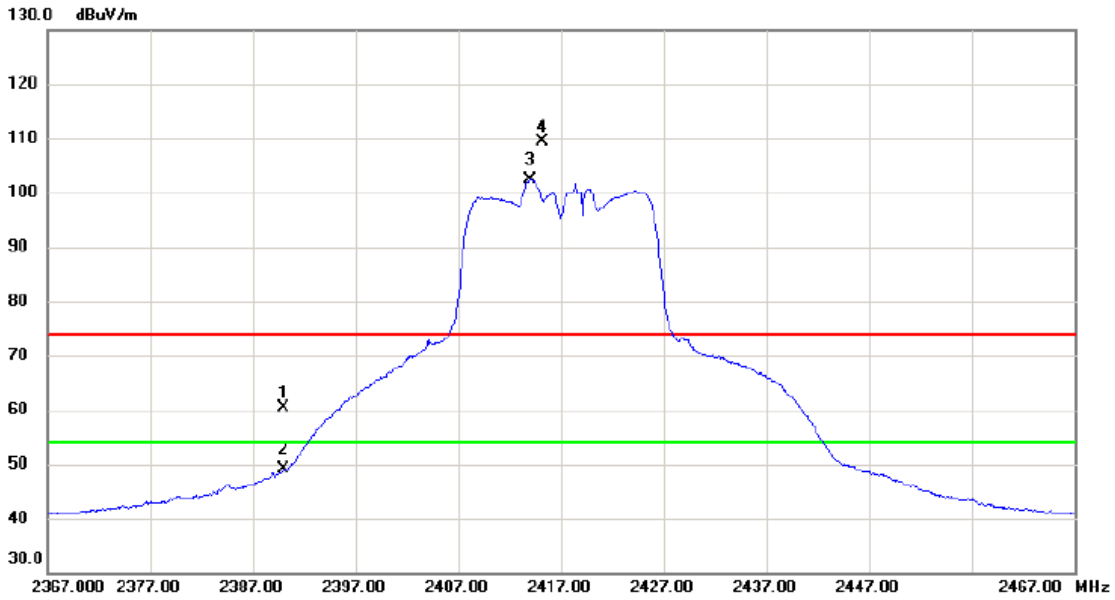


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	52.29	8.11	60.40	74.00	-13.60	peak	
2		2390.000	40.96	8.11	49.07	54.00	-4.93	AVG	
3	*	2414.050	94.26	8.19	102.45	54.00	48.45	AVG	No Limit
4	X	2415.200	101.26	8.19	109.45	74.00	35.45	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2417 MHz

Horizontal

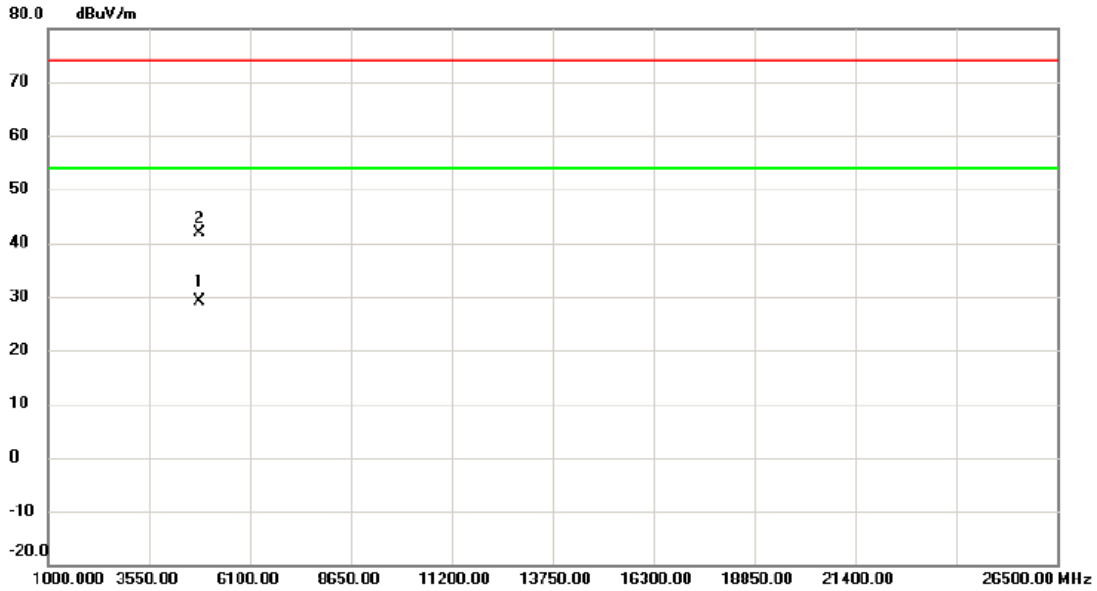


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4831.500	24.37	4.78	29.15	54.00	-24.85	AVG	
2		4833.055	37.18	4.79	41.97	74.00	-32.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2437 MHz

Vertical

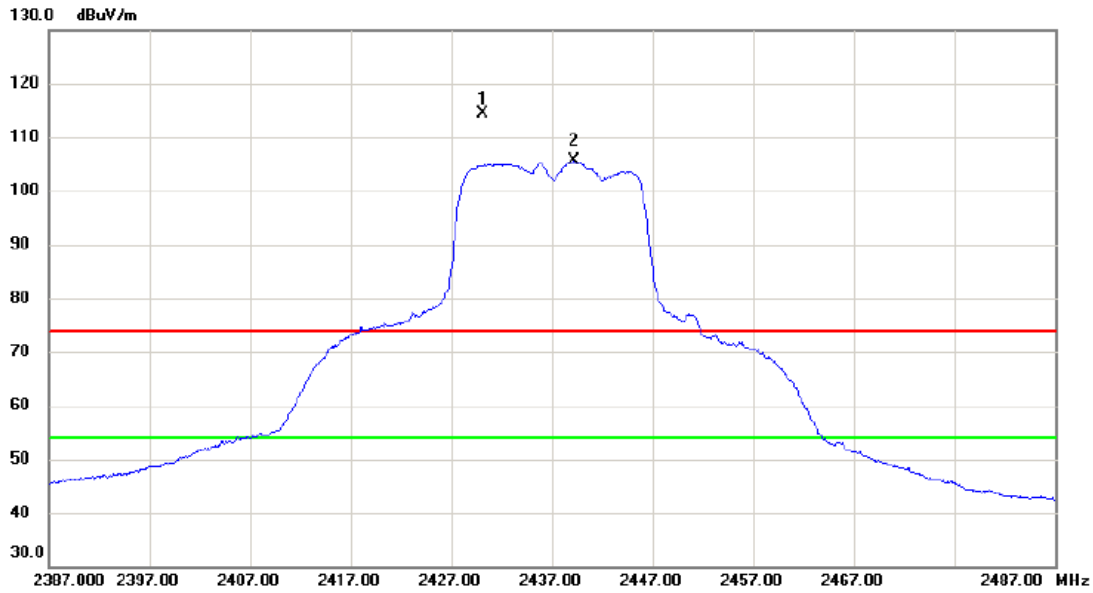

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2430.150	106.12	8.22	114.34	74.00	40.34	peak	No Limit
2	*	2439.250	97.26	8.26	105.52	54.00	51.52	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2437 MHz

Vertical

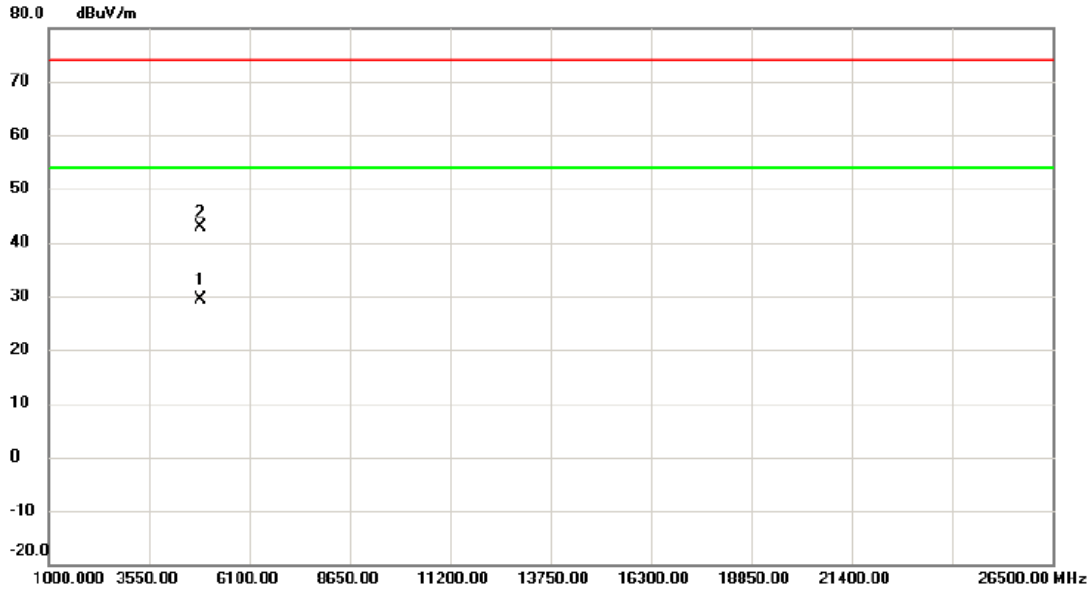


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4871.557	24.45	4.98	29.43	54.00	-24.57	AVG	
2	4874.840	37.89	5.00	42.89	74.00	-31.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2437 MHz

Horizontal

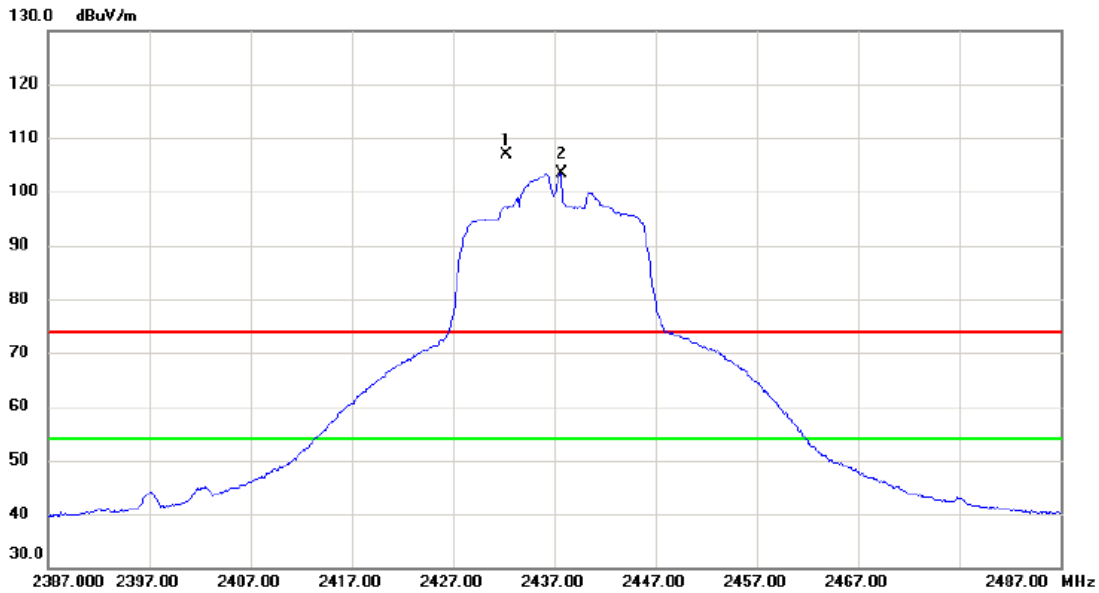


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2432.250	98.76	8.23	106.99	74.00	32.99	peak	No Limit
2	*	2437.750	95.19	8.26	103.45	54.00	49.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2437 MHz

Horizontal

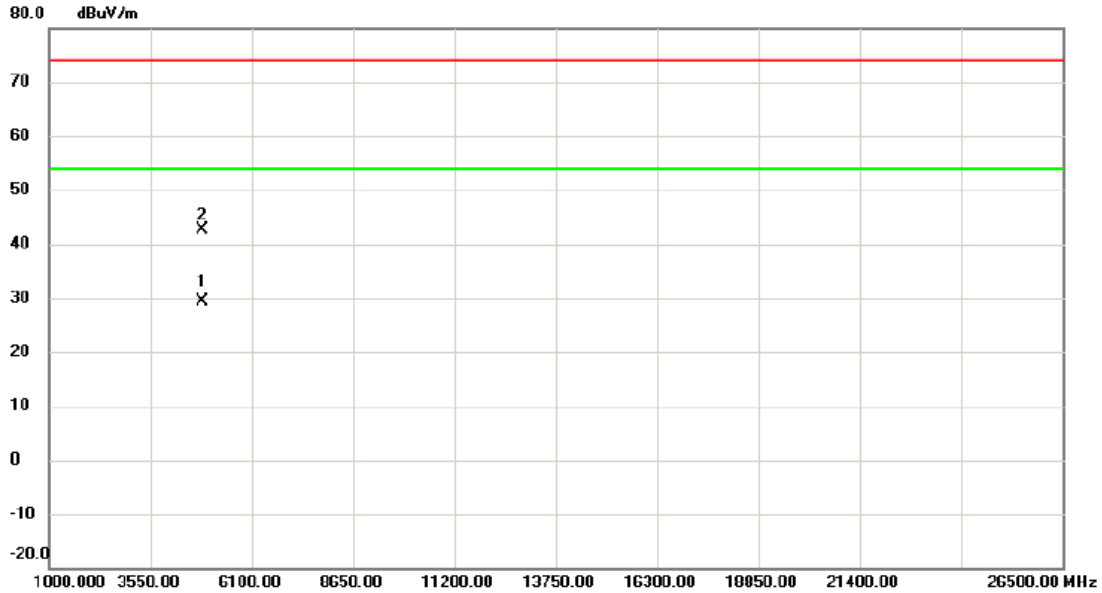


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4872.137	24.50	4.98	29.48	54.00	-24.52	AVG	
2		4873.568	37.63	5.00	42.63	74.00	-31.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2457 MHz

Vertical

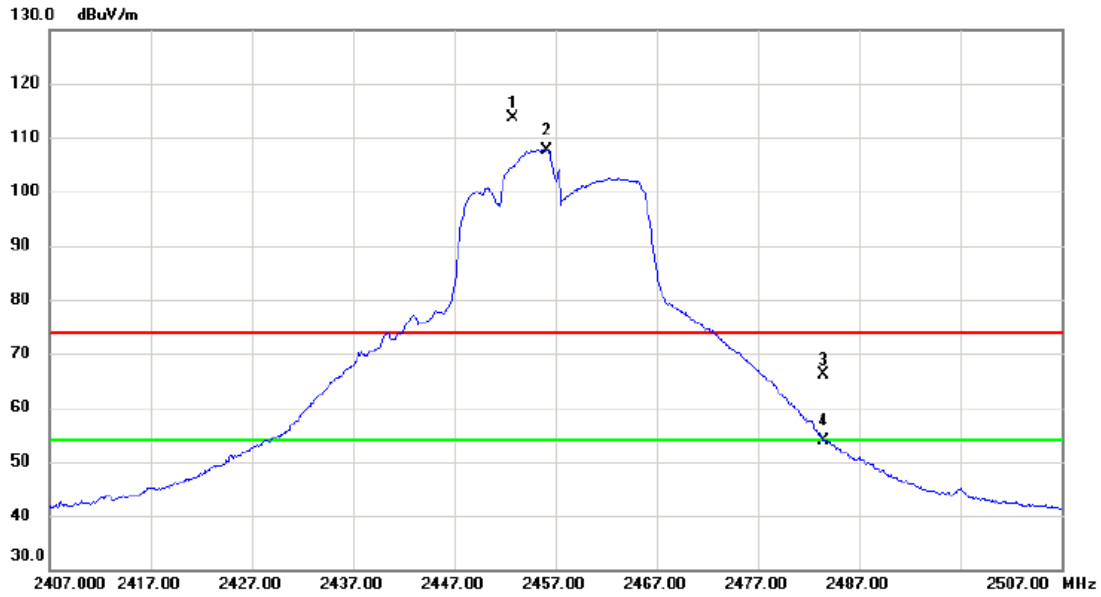


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2452.800	105.33	8.30	113.63	74.00	39.63	peak	No Limit
2	*	2456.200	99.38	8.30	107.68	54.00	53.68	AVG	No Limit
3		2483.500	57.70	8.38	66.08	74.00	-7.92	peak	
4		2483.500	45.42	8.38	53.80	54.00	-0.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2457 MHz

Vertical

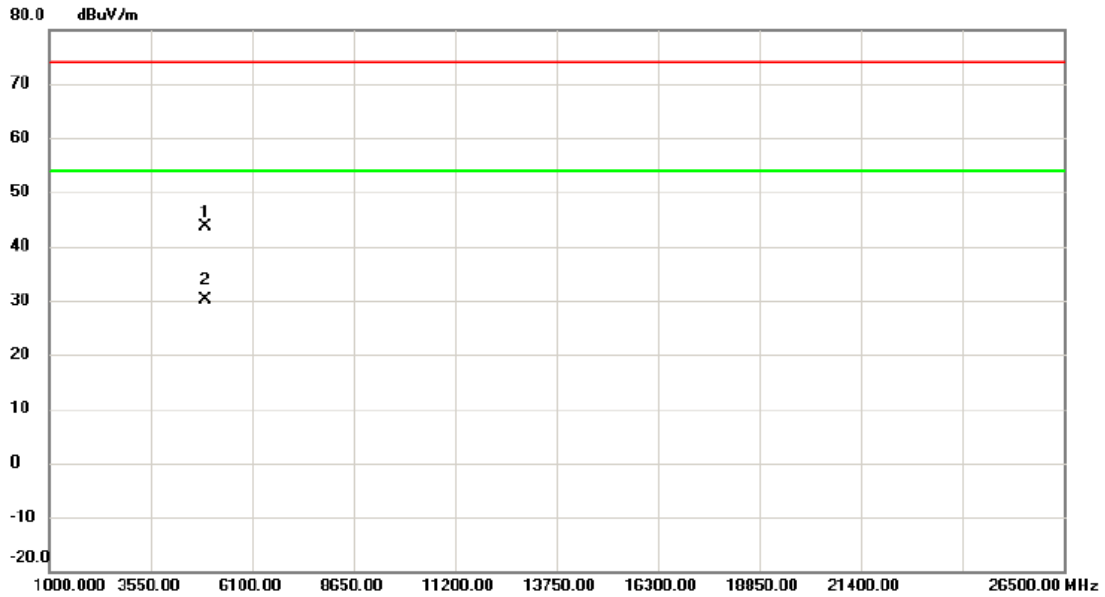


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4915.252	38.40	5.19	43.59	74.00	-30.41	peak	
2	*	4915.690	25.05	5.19	30.24	54.00	-23.76	AVG	

REMARKS:

- (1) Measurement Value = Reading + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2457 MHz

Horizontal

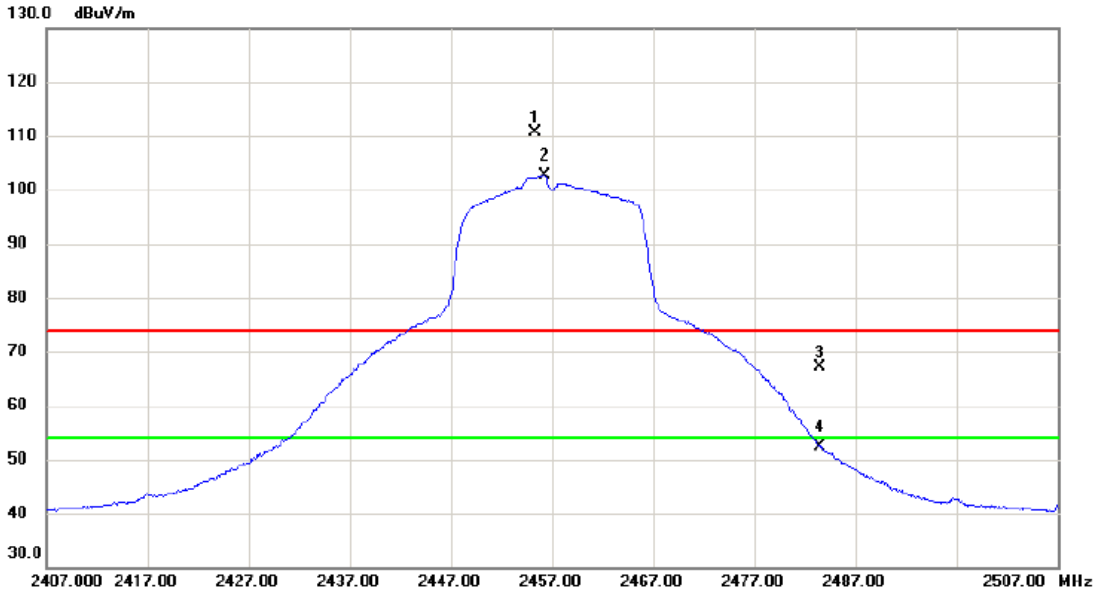


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2455.350	102.44	8.30	110.74	74.00	36.74	peak	No Limit
2	*	2456.300	94.42	8.30	102.72	54.00	48.72	AVG	No Limit
3		2483.500	58.78	8.38	67.16	74.00	-6.84	peak	
4		2483.500	43.95	8.38	52.33	54.00	-1.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2457 MHz

Horizontal

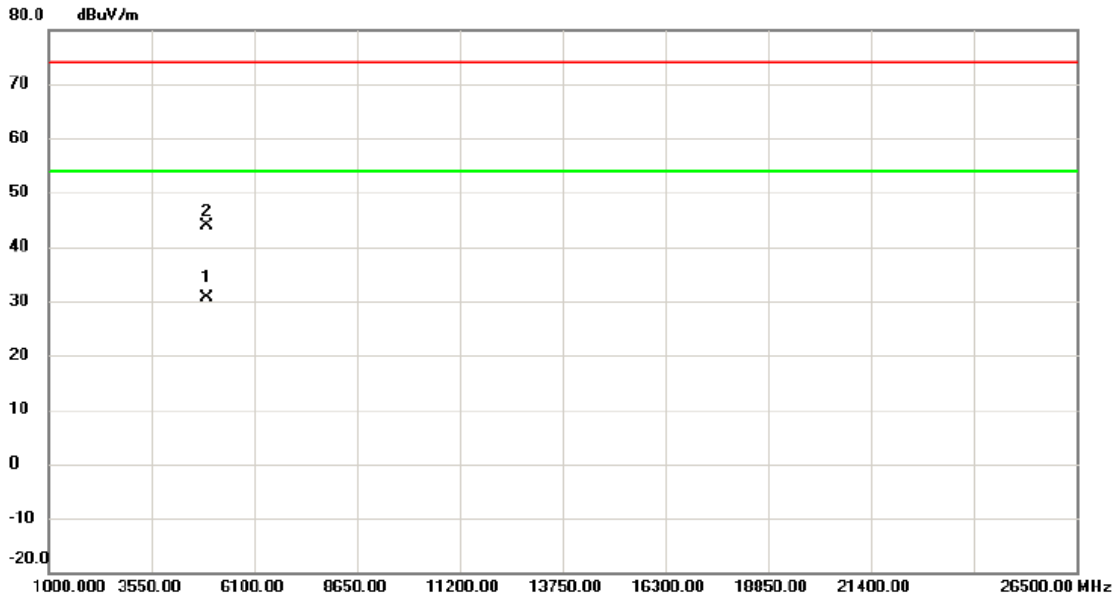


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4912.252	25.55	5.17	30.72	54.00	-23.28	AVG	
2		4915.145	38.64	5.19	43.83	74.00	-30.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2462 MHz

Vertical

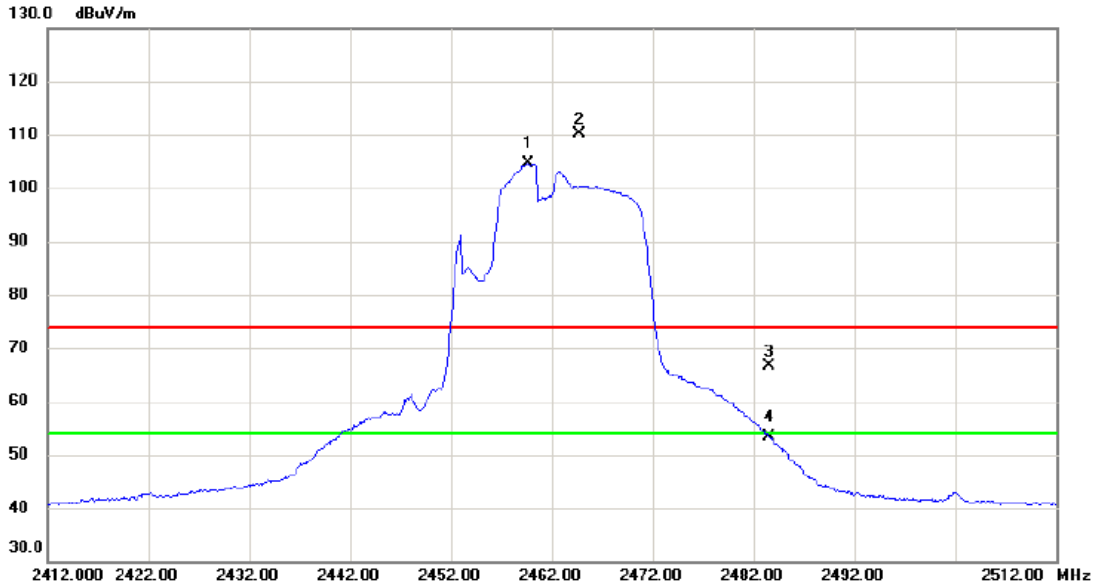

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.700	96.28	8.31	104.59	54.00	50.59	AVG	No Limit
2	X	2464.750	101.69	8.33	110.02	74.00	36.02	peak	No Limit
3		2483.500	58.20	8.38	66.58	74.00	-7.42	peak	
4		2483.500	45.03	8.38	53.41	54.00	-0.59	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2462 MHz

Vertical

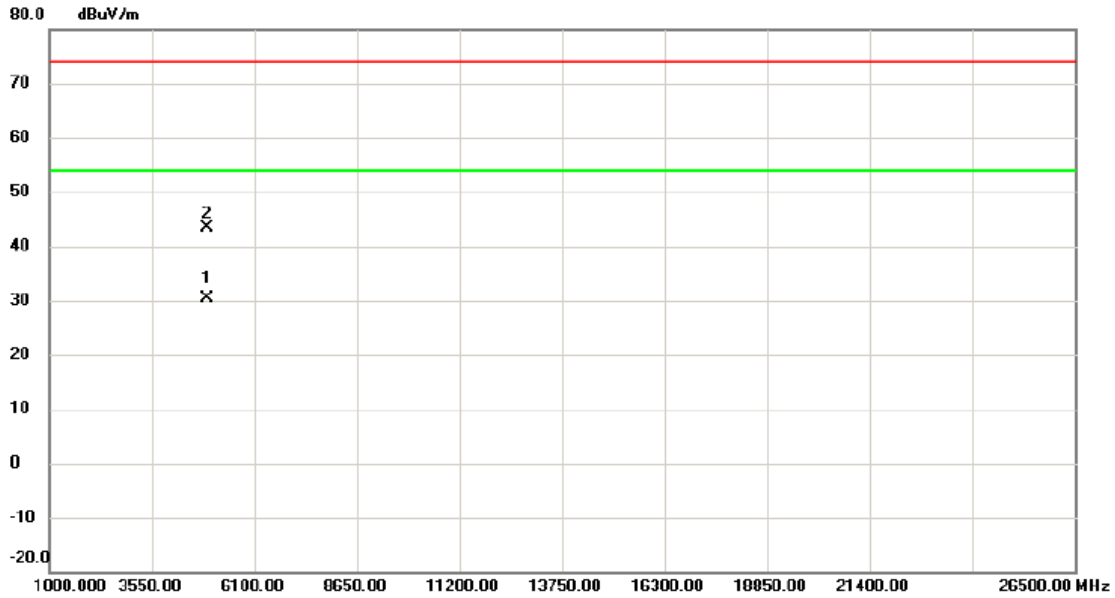


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4922.762	25.10	5.23	30.33	54.00	-23.67	AVG	
2		4923.587	38.23	5.24	43.47	74.00	-30.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2462 MHz

Horizontal

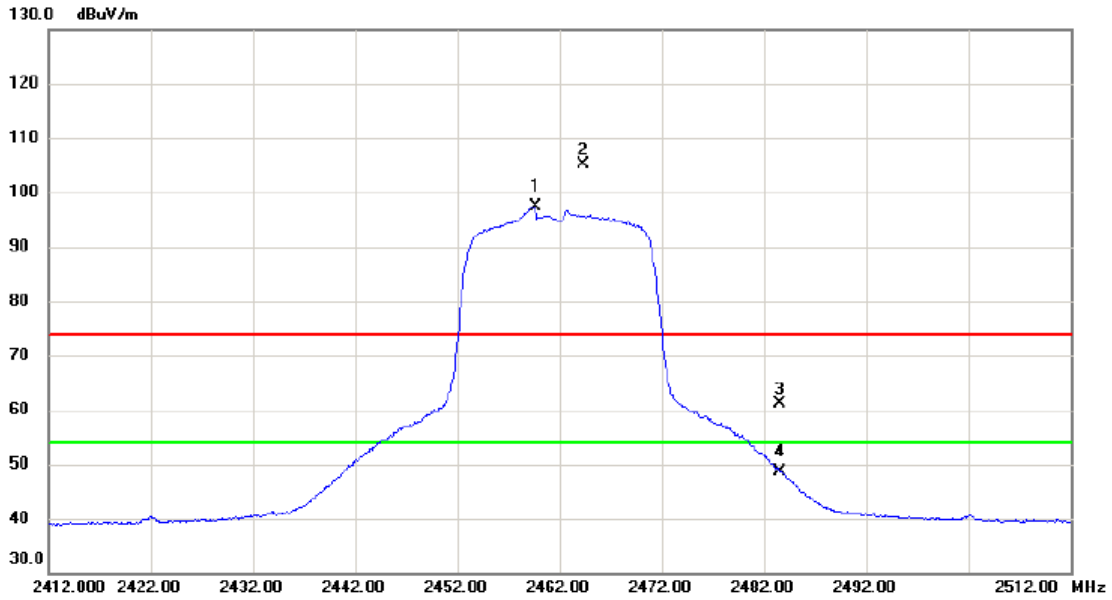


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.650	89.02	8.31	97.33	54.00	43.33	AVG	No Limit
2	X	2464.350	96.77	8.33	105.10	74.00	31.10	peak	No Limit
3		2483.500	52.68	8.38	61.06	74.00	-12.94	peak	
4		2483.500	40.28	8.38	48.66	54.00	-5.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M Mode 2462 MHz

Horizontal

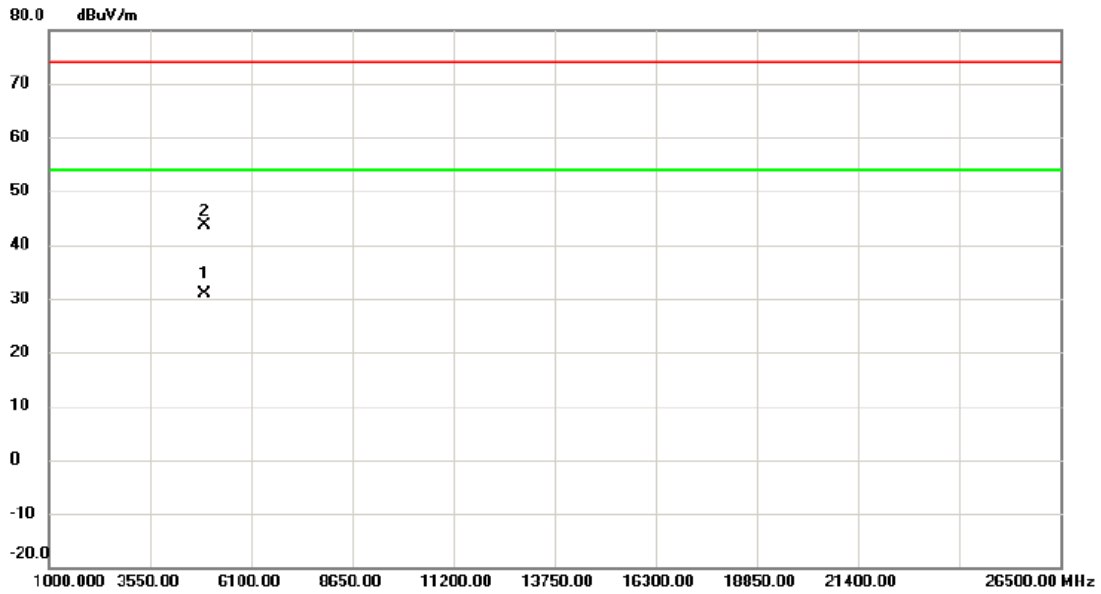


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4921.703	25.76	5.23	30.99	54.00	-23.01	AVG	
2		4925.135	38.35	5.24	43.59	74.00	-30.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2422 MHz

Vertical

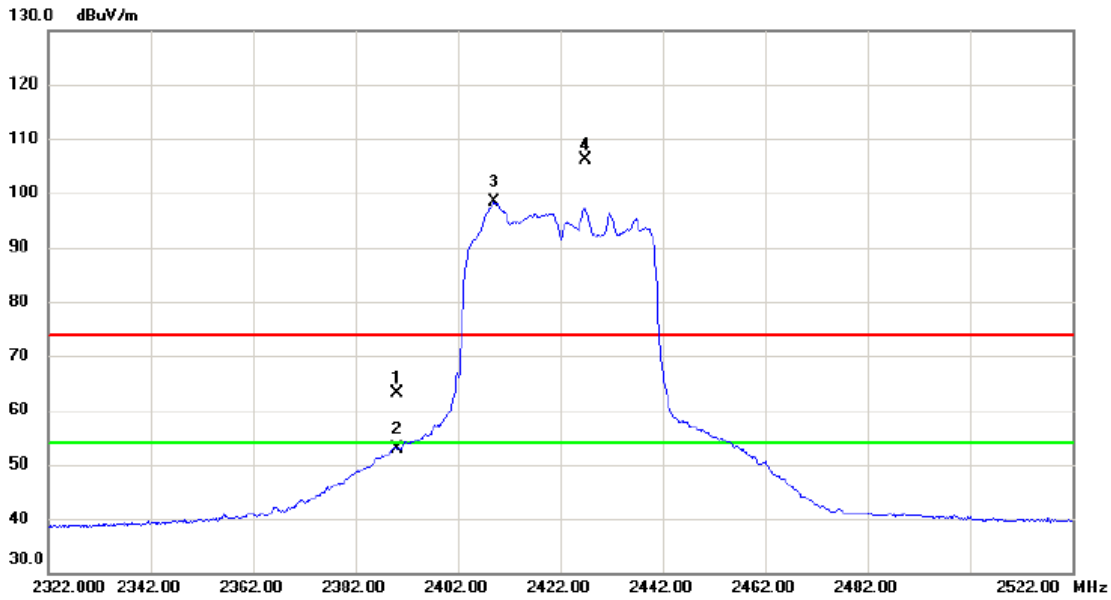


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	54.91	8.11	63.02	74.00	-10.98	peak	
2		2390.000	44.86	8.11	52.97	54.00	-1.03	AVG	
3	*	2409.200	90.14	8.16	98.30	54.00	44.30	AVG	No Limit
4	X	2427.000	98.02	8.22	106.24	74.00	32.24	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2422 MHz

Vertical

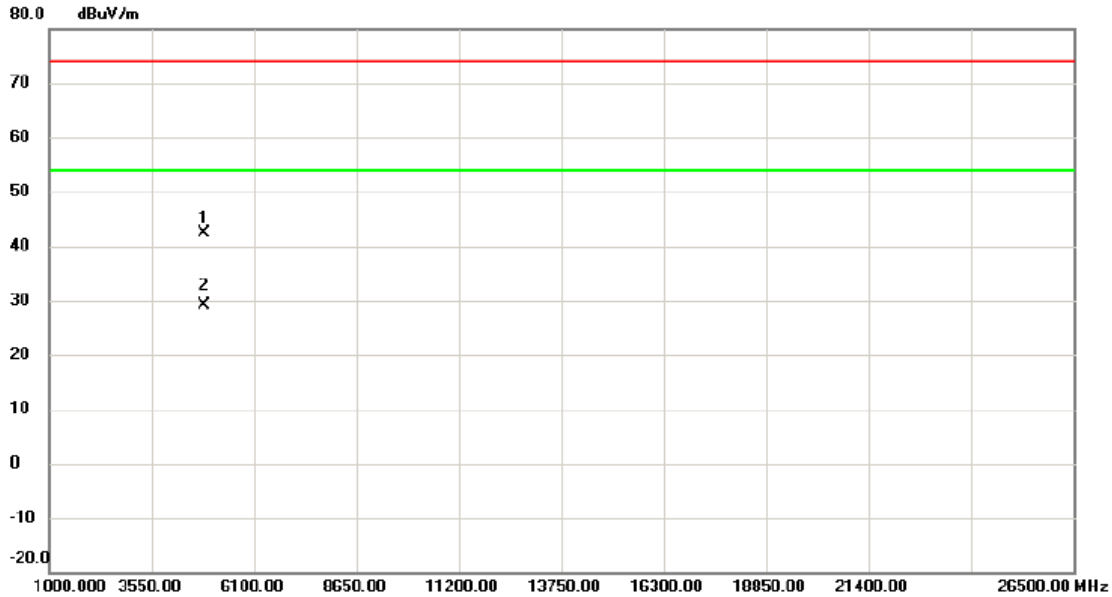


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4843.260	37.58	4.83	42.41	74.00	-31.59	peak	
2	*	4843.852	24.30	4.83	29.13	54.00	-24.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2422 MHz

Horizontal

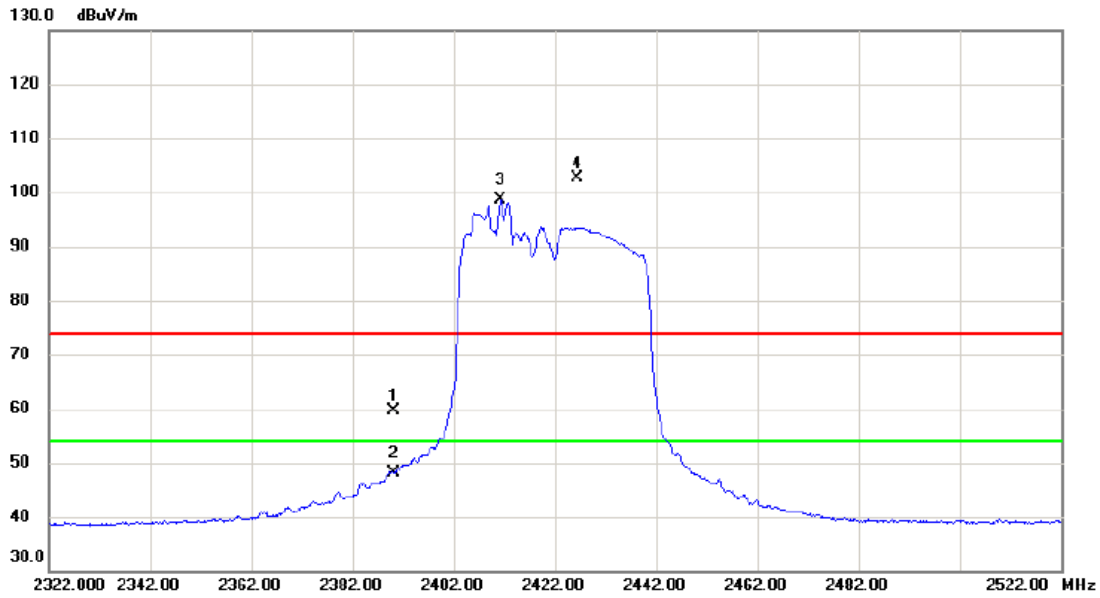


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.000	51.42	8.11	59.53	74.00	-14.47	peak	
2	2390.000	39.95	8.11	48.06	54.00	-5.94	AVG	
3 *	2411.300	90.56	8.17	98.73	54.00	44.73	AVG	No Limit
4 X	2426.500	94.34	8.22	102.56	74.00	28.56	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2422 MHz

Horizontal

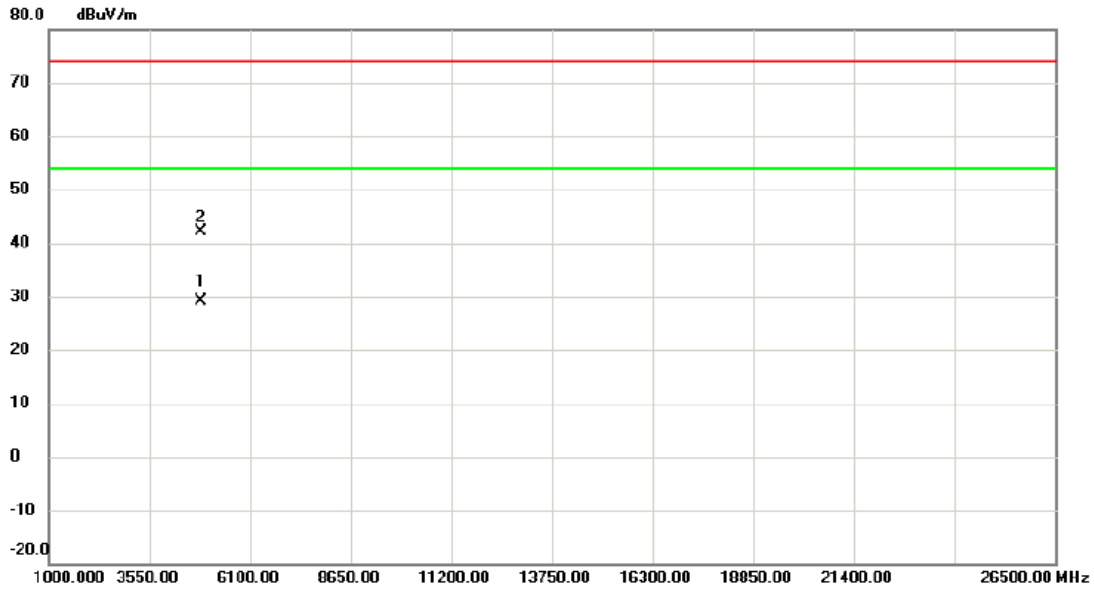

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4842.850	24.29	4.83	29.12	54.00	-24.88	AVG	
2		4845.507	37.31	4.86	42.17	74.00	-31.83	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2427 MHz

Vertical

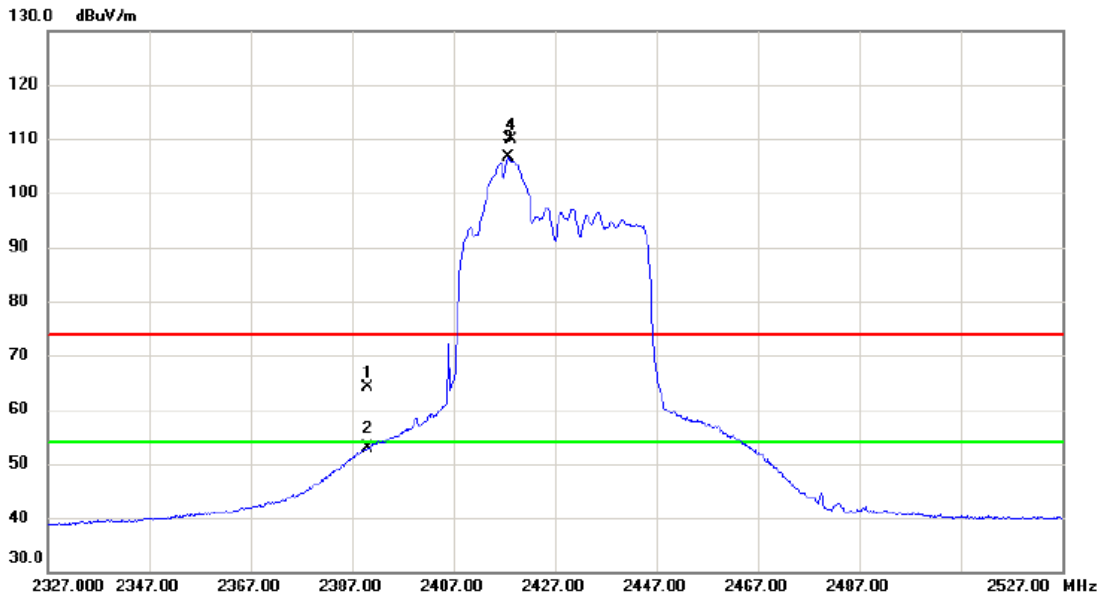


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.94	8.11	64.05	74.00	-9.95	peak	
2		2390.000	44.66	8.11	52.77	54.00	-1.23	AVG	
3	*	2417.800	98.32	8.19	106.51	54.00	52.51	AVG	No Limit
4	X	2418.300	101.64	8.19	109.83	74.00	35.83	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2427 MHz

Vertical

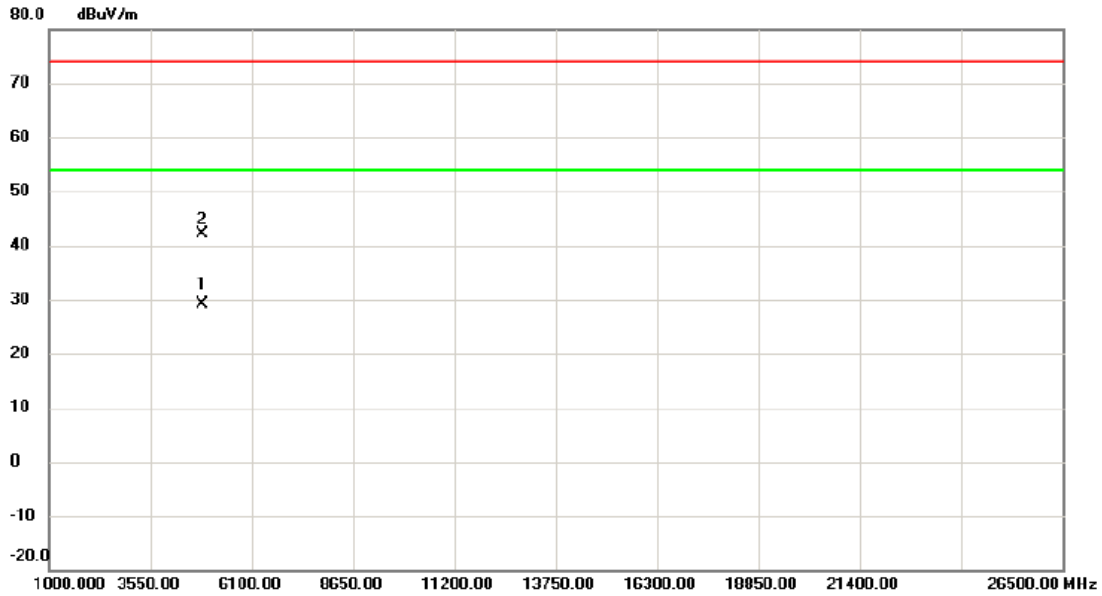


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4852.887	24.26	4.89	29.15	54.00	-24.85	AVG	
2		4852.948	37.25	4.89	42.14	74.00	-31.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2427 MHz

Horizontal

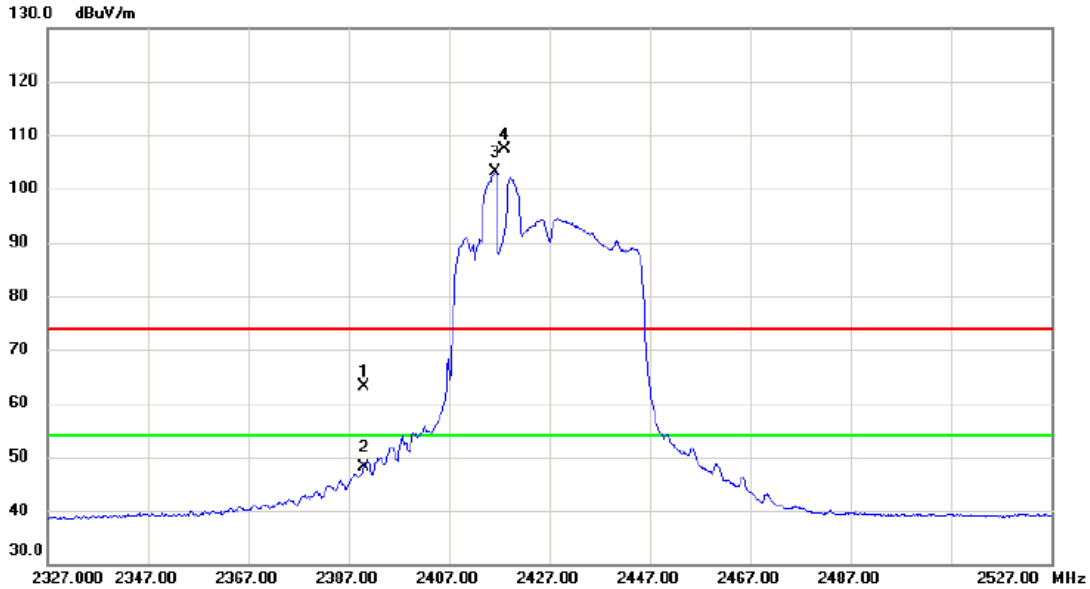


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	54.96	8.11	63.07	74.00	-10.93	peak	
2		2390.000	40.11	8.11	48.22	54.00	-5.78	AVG	
3	*	2416.300	95.06	8.19	103.25	54.00	49.25	AVG	No Limit
4	X	2418.200	99.08	8.19	107.27	74.00	33.27	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2427 MHz

Horizontal

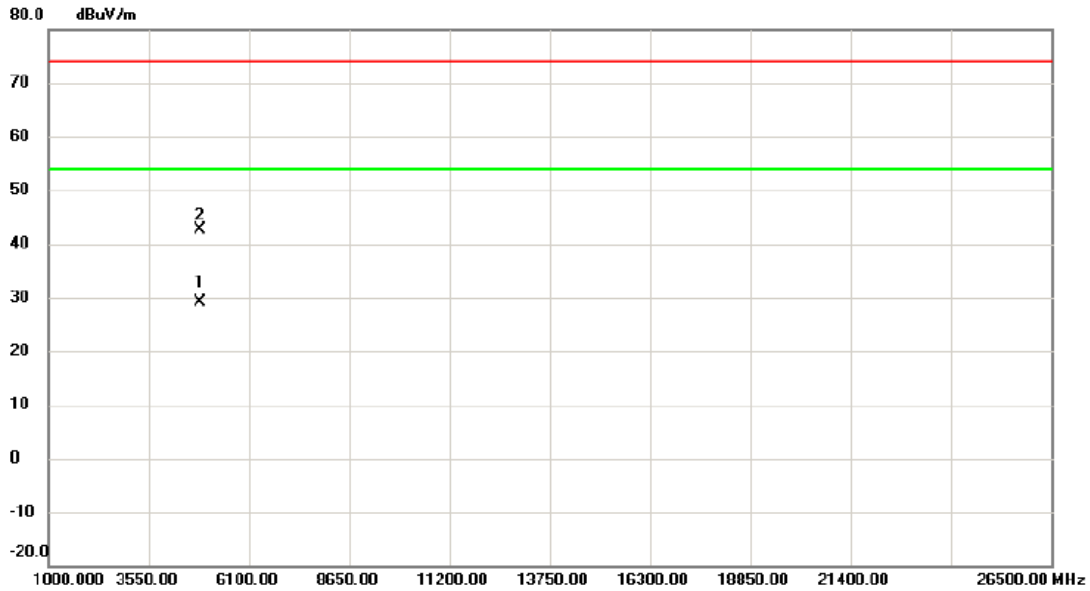


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4851.648	24.15	4.88	29.03	54.00	-24.97	AVG	
2	4852.625	37.76	4.89	42.65	74.00	-31.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2437 MHz

Vertical

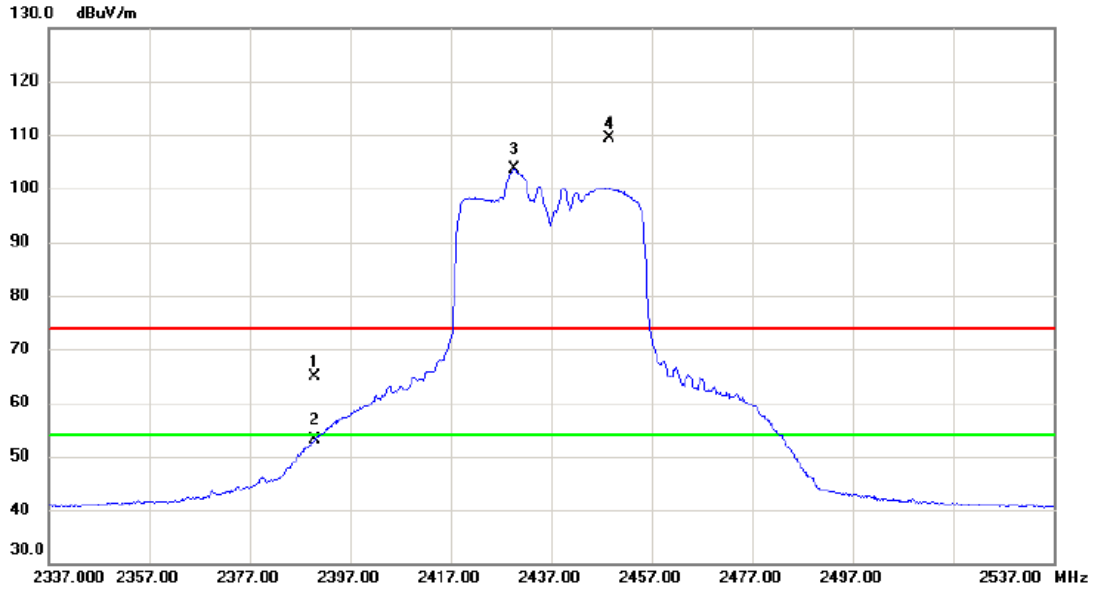


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.75	8.11	64.86	74.00	-9.14	peak	
2		2390.000	45.04	8.11	53.15	54.00	-0.85	AVG	
3	*	2429.700	95.37	8.22	103.59	54.00	49.59	AVG	No Limit
4	X	2448.600	100.98	8.28	109.26	74.00	35.26	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2437 MHz

Vertical

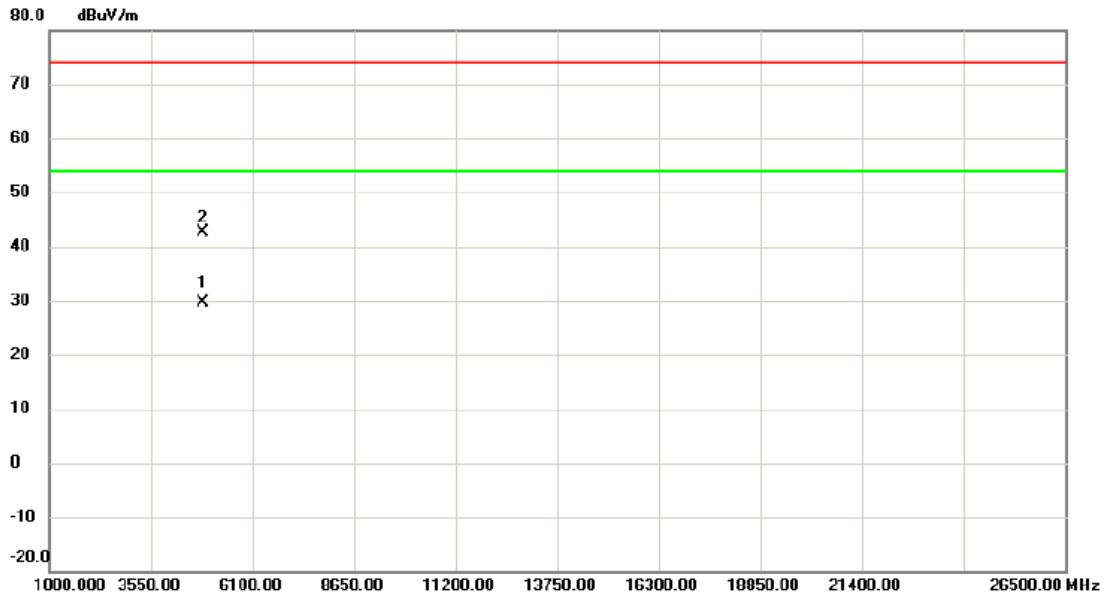


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4871.835	24.58	4.98	29.56	54.00	-24.44	AVG	
2	4872.727	37.74	4.98	42.72	74.00	-31.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2437 MHz

Horizontal

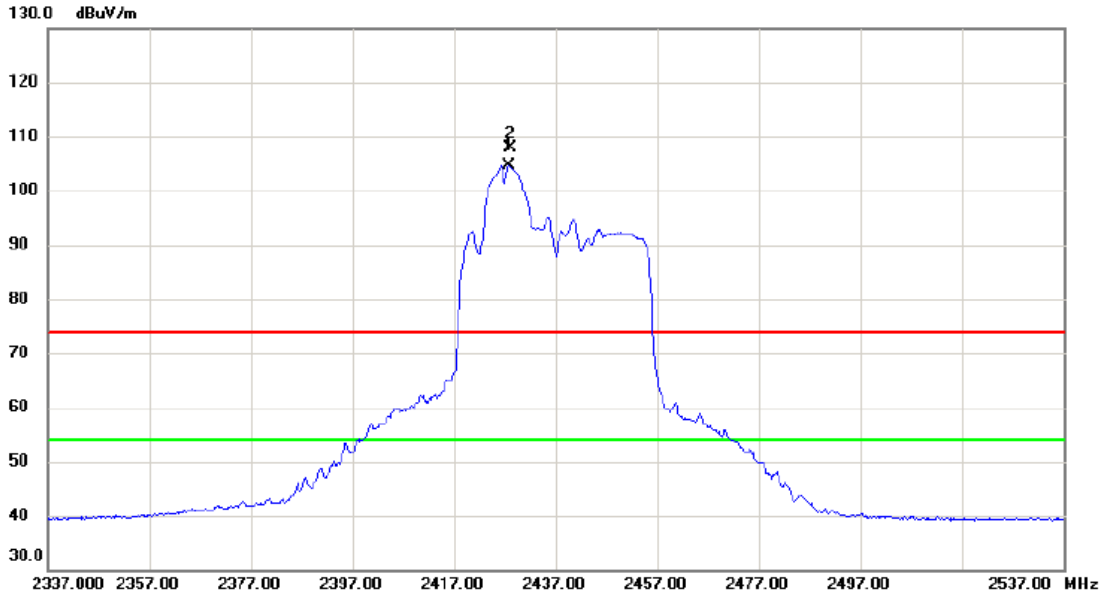


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2427.800	96.50	8.22	104.72	54.00	50.72	AVG	No Limit
2	X	2428.200	99.71	8.22	107.93	74.00	33.93	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2437 MHz

Horizontal

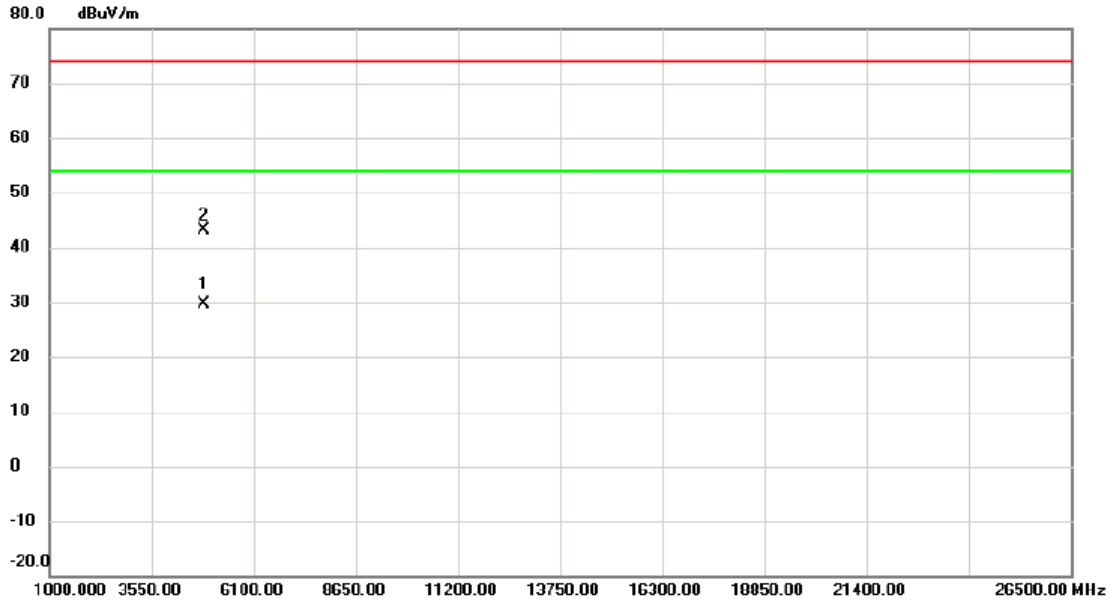


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4871.597	24.55	4.98	29.53	54.00	-24.47	AVG	
2		4872.767	38.04	4.98	43.02	74.00	-30.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2447 MHz

Vertical

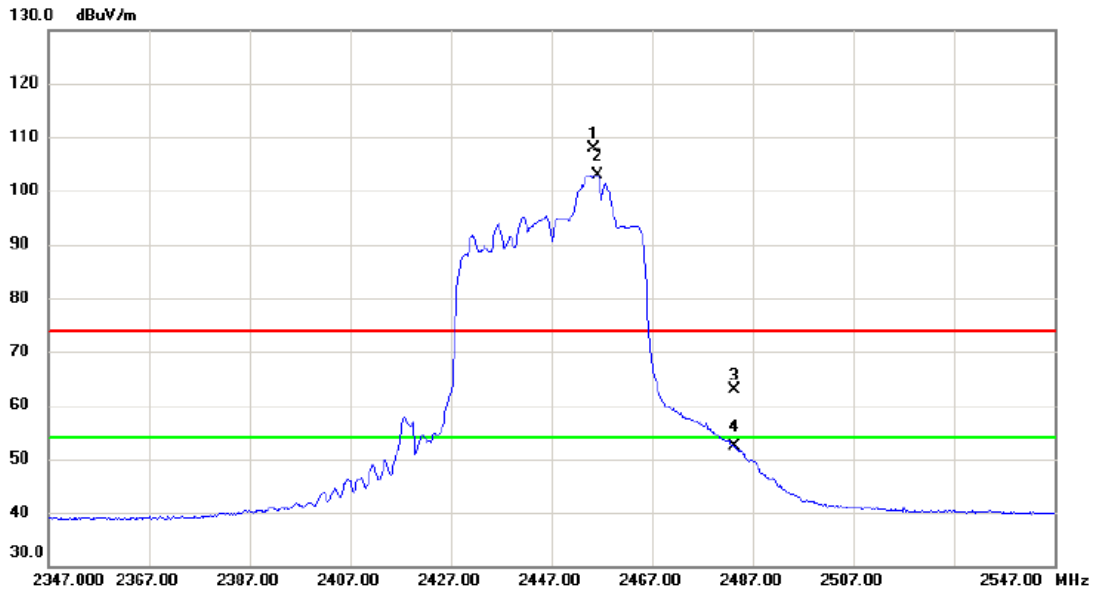


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2455.400	99.52	8.30	107.82	74.00	33.82	peak	No Limit
2	*	2456.200	94.63	8.30	102.93	54.00	48.93	AVG	No Limit
3		2483.500	54.48	8.38	62.86	74.00	-11.14	peak	
4		2483.500	44.09	8.38	52.47	54.00	-1.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2447 MHz

Vertical

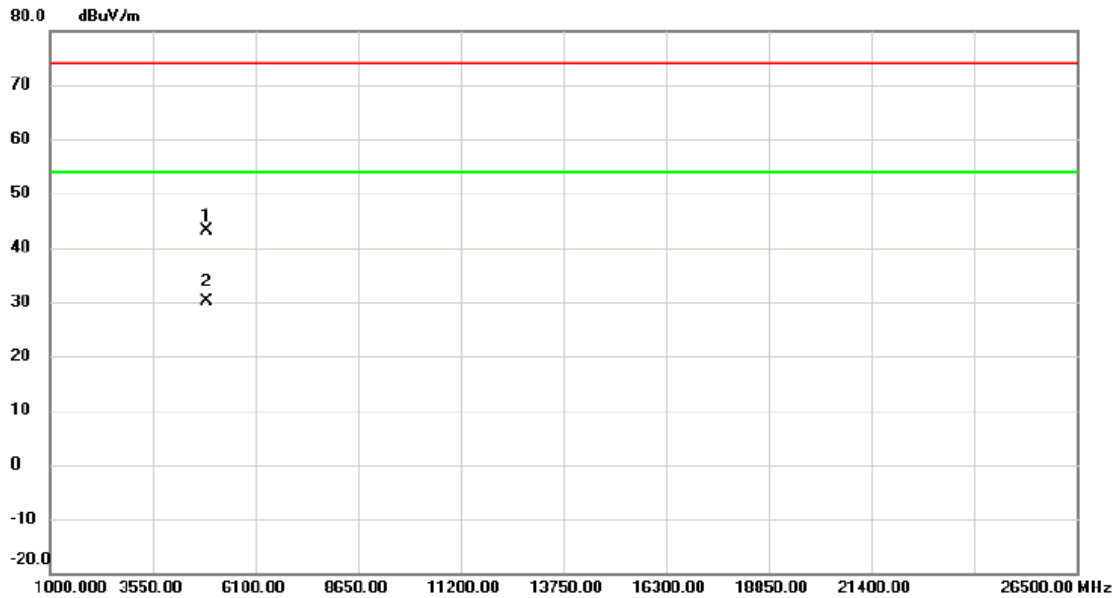


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4891.608	37.94	5.08	43.02	74.00	-30.98	peak	
2	*	4894.783	24.92	5.10	30.02	54.00	-23.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2447 MHz

Horizontal

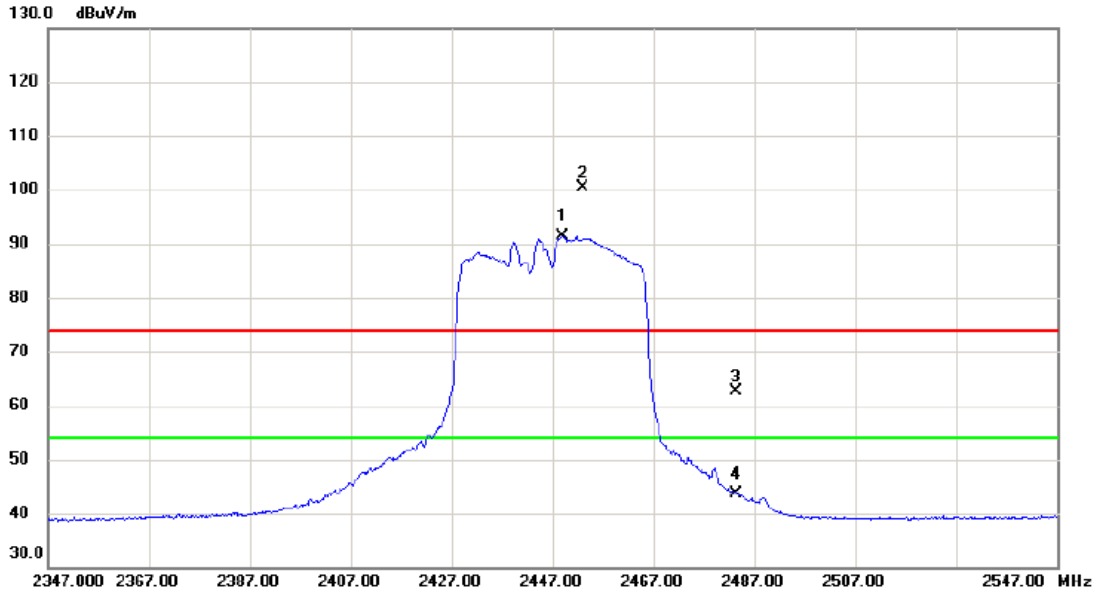


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2449.100	83.08	8.28	91.36	54.00	37.36	AVG	No Limit
2	X	2453.000	92.04	8.30	100.34	74.00	26.34	peak	No Limit
3		2483.500	54.28	8.38	62.66	74.00	-11.34	peak	
4		2483.500	35.33	8.38	43.71	54.00	-10.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2447 MHz

Horizontal

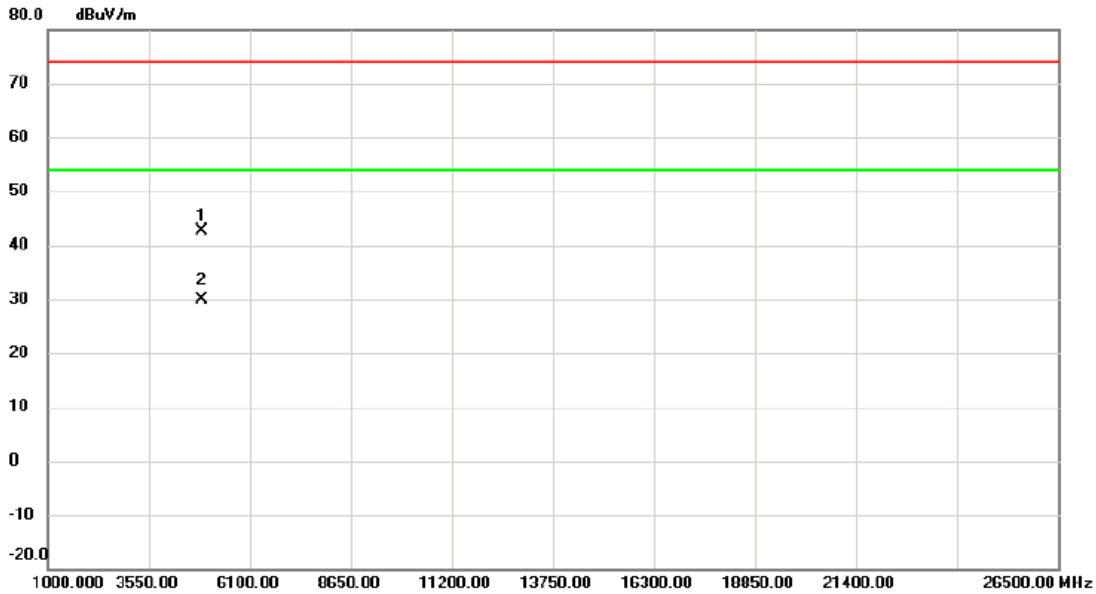


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4891.885	37.63	5.08	42.71	74.00	-31.29	peak	
2 *	4892.130	24.86	5.08	29.94	54.00	-24.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2452 MHz

Vertical

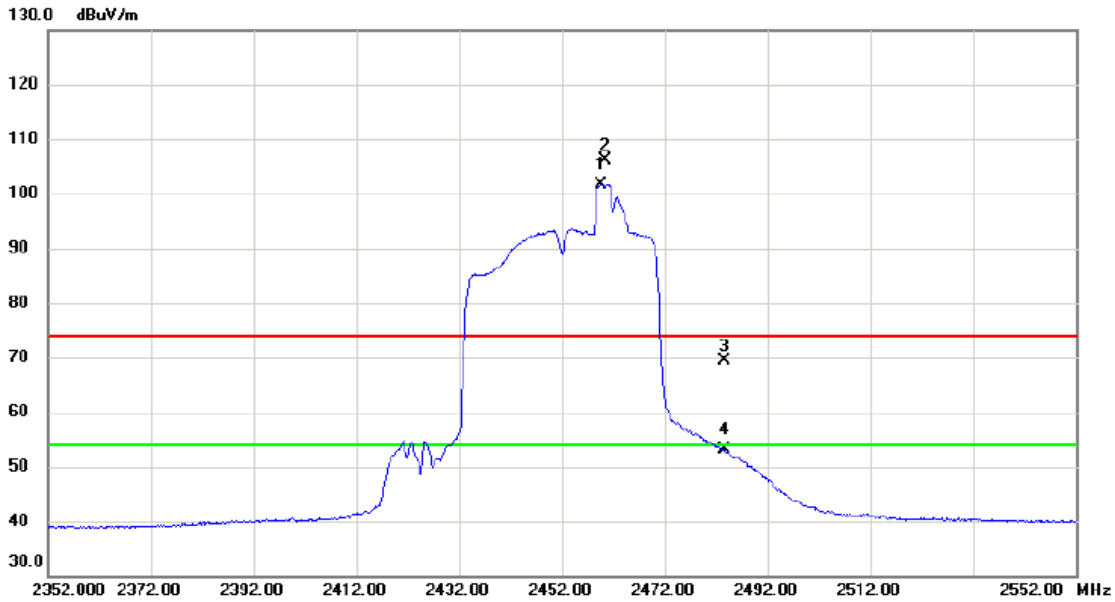


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.700	93.40	8.31	101.71	54.00	47.71	AVG	No Limit
2	X	2460.500	97.78	8.31	106.09	74.00	32.09	peak	No Limit
3		2483.500	60.96	8.38	69.34	74.00	-4.66	peak	
4		2483.500	44.80	8.38	53.18	54.00	-0.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2452 MHz

Vertical

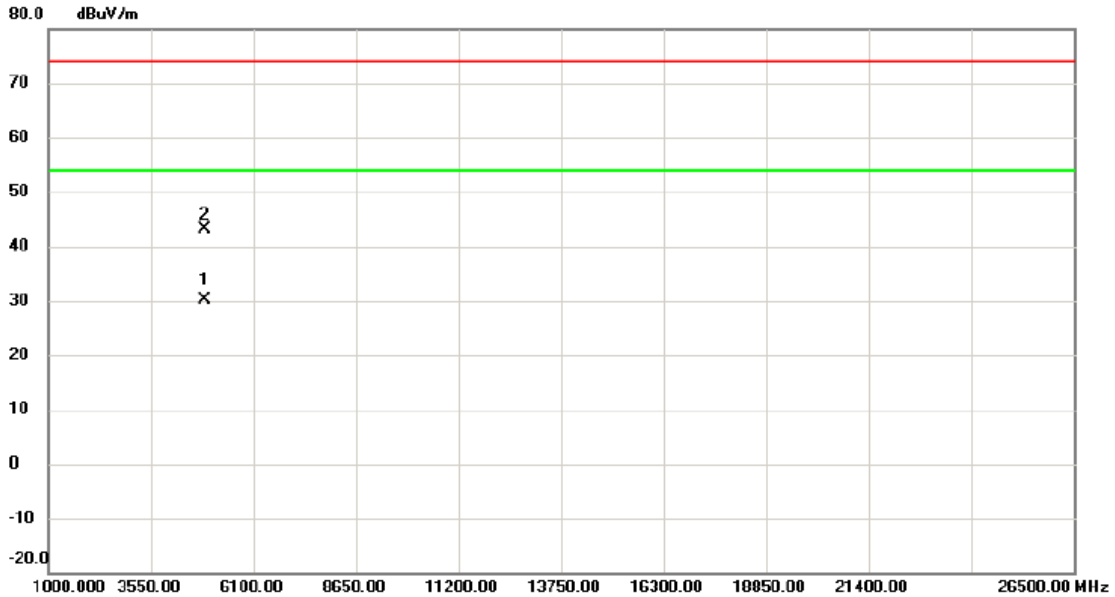


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4901.962	24.96	5.13	30.09	54.00	-23.91	AVG	
2		4904.375	37.92	5.14	43.06	74.00	-30.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2452 MHz

Horizontal

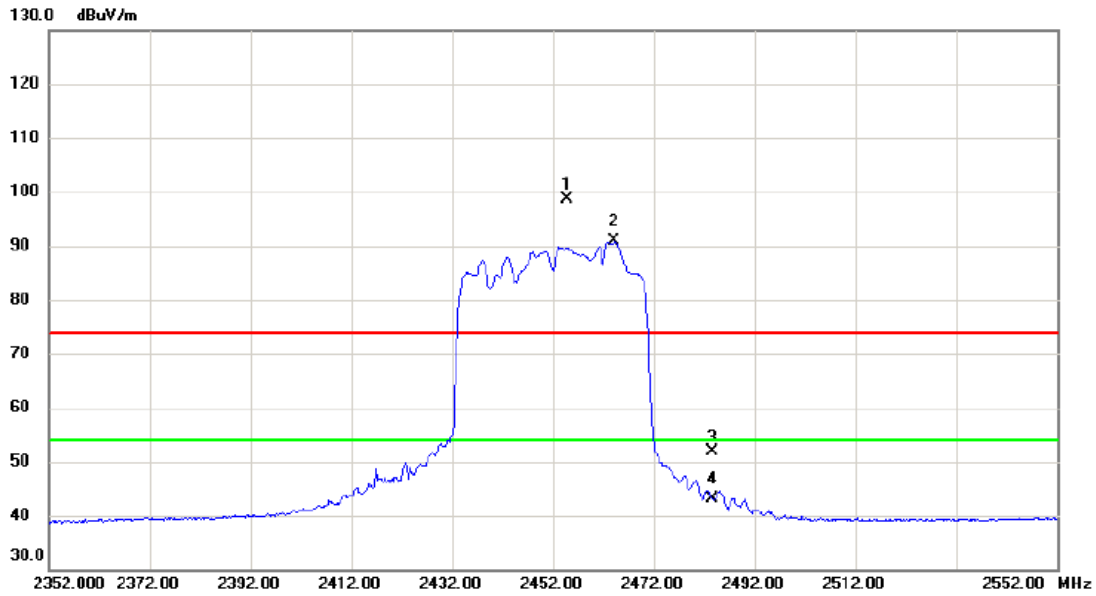


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.900	90.34	8.30	98.64	74.00	24.64	peak	No Limit
2	*	2464.200	82.44	8.33	90.77	54.00	36.77	AVG	No Limit
3		2483.500	43.46	8.38	51.84	74.00	-22.16	peak	
4		2483.500	34.85	8.38	43.23	54.00	-10.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-40M Mode 2452 MHz

Horizontal

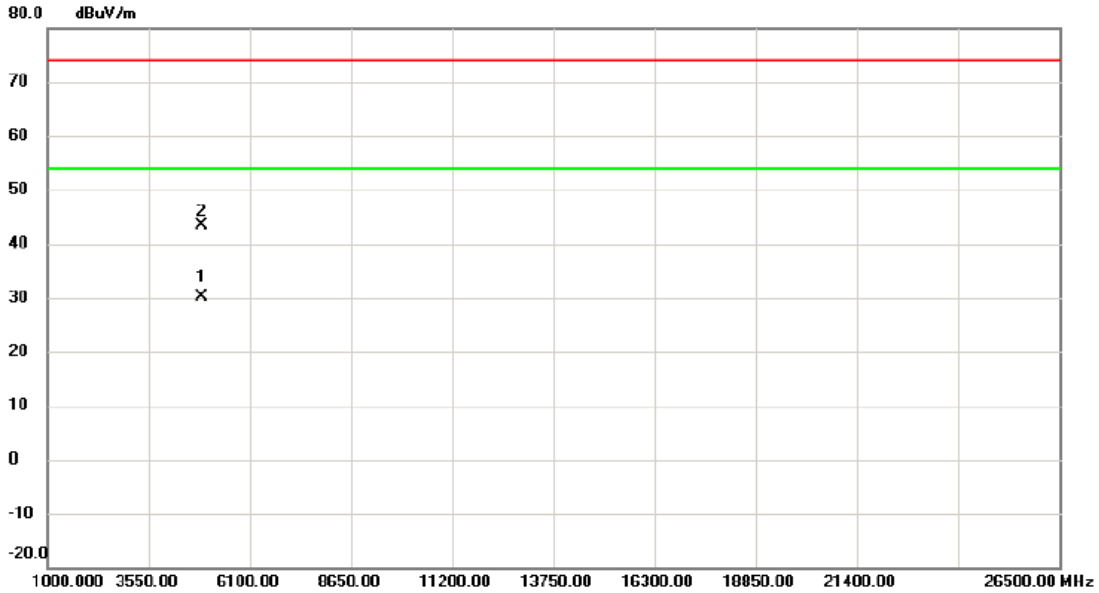

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4902.948	24.90	5.14	30.04	54.00	-23.96	AVG	
2		4903.932	38.18	5.14	43.32	74.00	-30.68	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	9.08	500	Complies
06	2437	9.09	500	Complies
11	2462	10.01	500	Complies

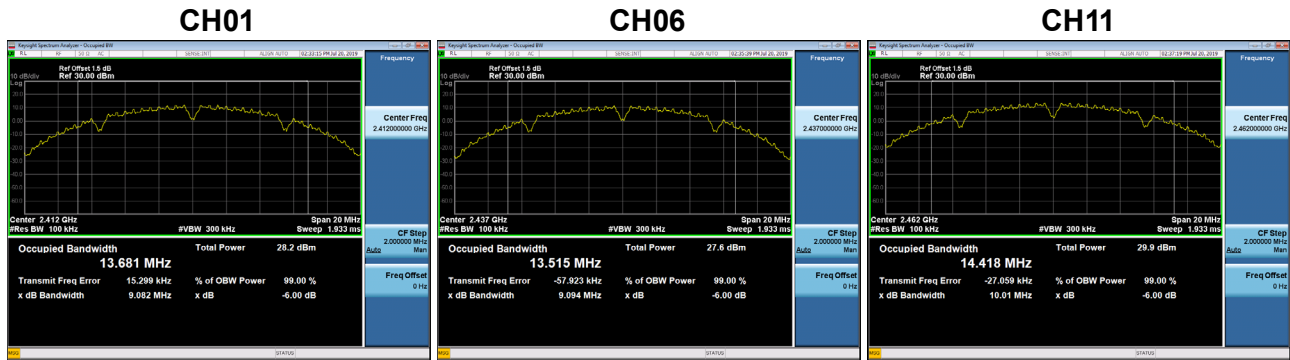


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	13.250	Complies
06	2437	13.073	Complies
11	2462	13.987	Complies

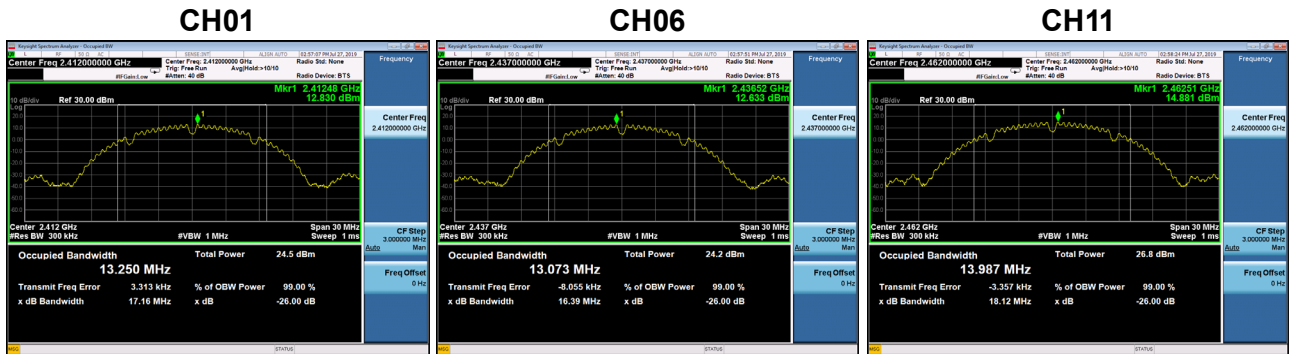


Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	15.14	500	Complies
06	2437	15.14	500	Complies
11	2462	15.11	500	Complies

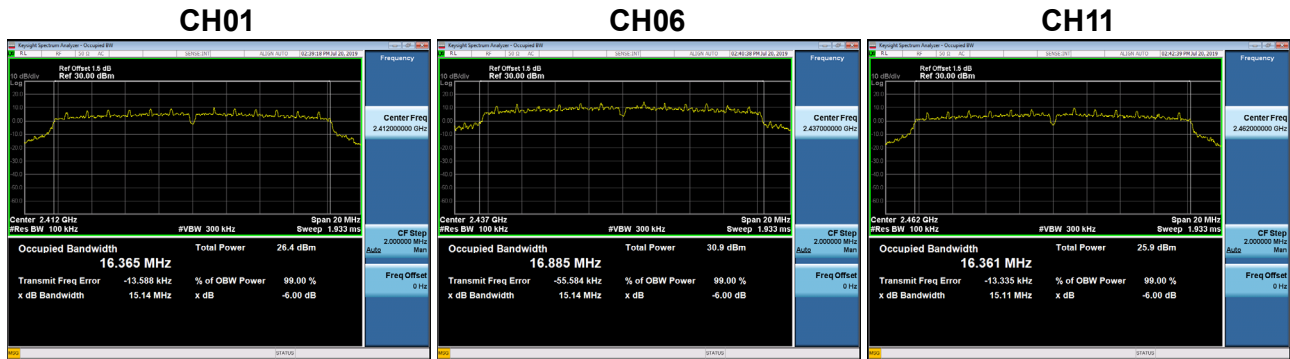


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	16.551	Complies
06	2437	20.336	Complies
11	2462	16.552	Complies

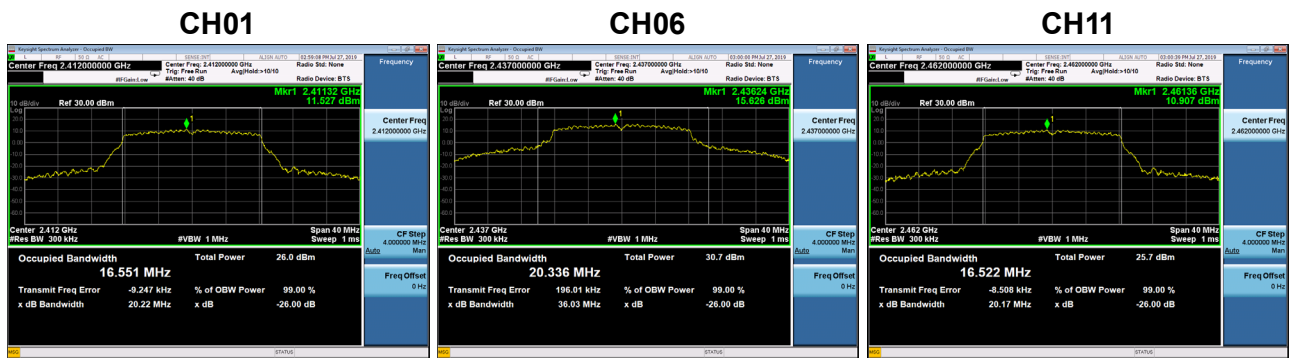


Test Mode	TX N-20M Mode
-----------	---------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	15.14	500	Complies
06	2437	15.14	500	Complies
11	2462	15.14	500	Complies


CH01

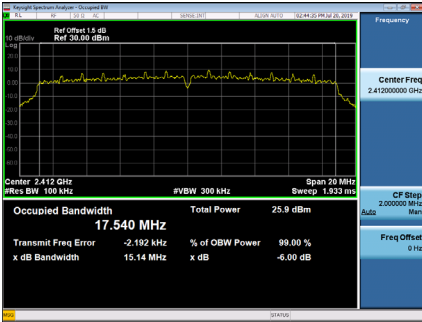

CH06

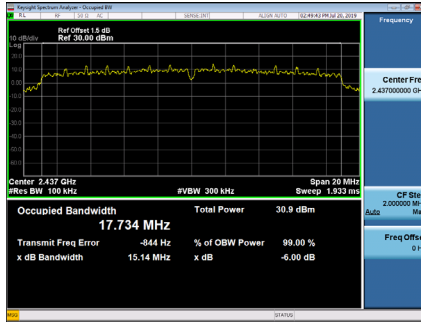


CH11

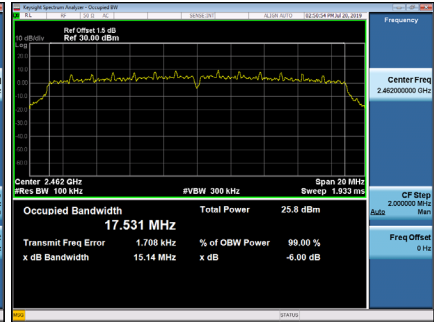


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	17.619	Complies
06	2437	21.819	Complies
11	2462	17.635	Complies


CH01

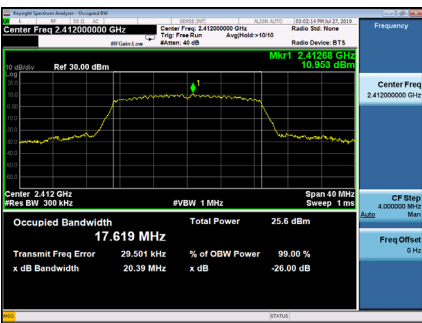

CH06

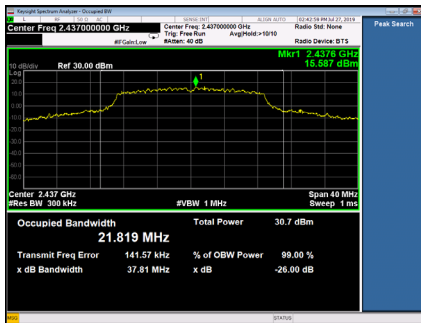


CH11

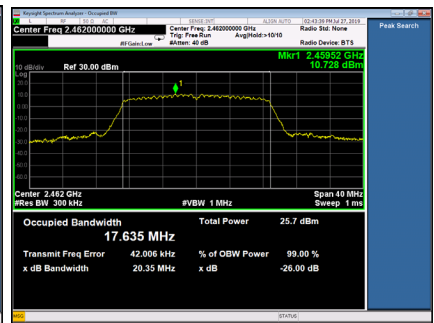


Test Mode	TX N-40M Mode
-----------	---------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	35.15	500	Complies
06	2437	35.12	500	Complies
09	2452	35.15	500	Complies

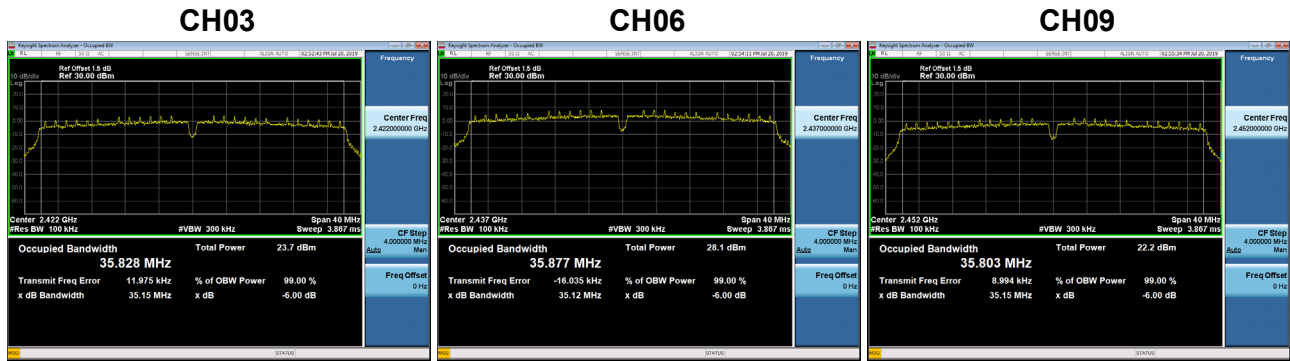


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.269	Complies
06	2437	36.376	Complies
09	2452	36.219	Complies

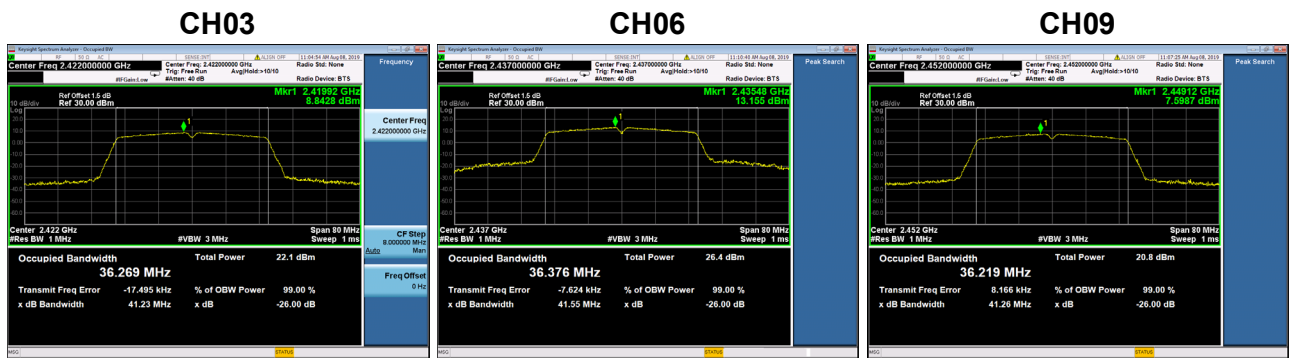


Test Mode	TX vht-20M Mode
-----------	-----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	15.14	500	Complies
06	2437	15.14	500	Complies
11	2462	15.14	500	Complies


CH01

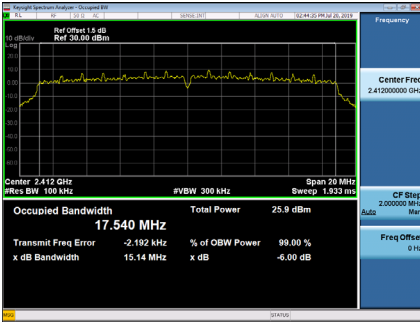

CH06

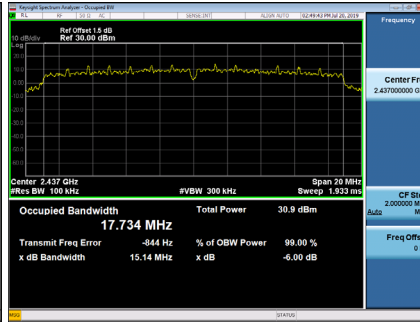


CH11

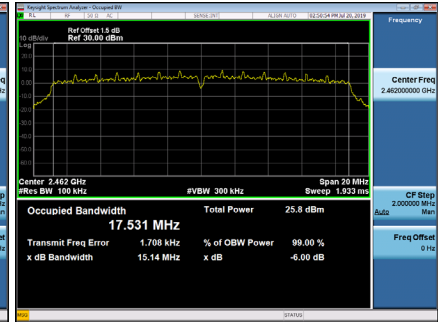


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	17.624	Complies
06	2437	21.903	Complies
11	2462	17.635	Complies

CH01

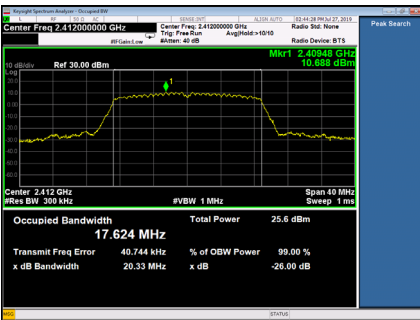

CH06

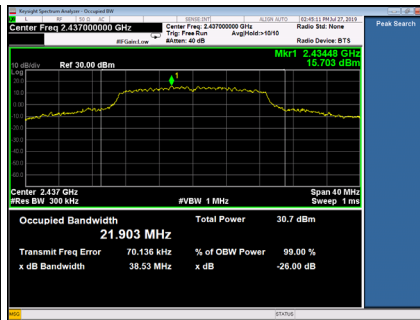


CH11




Test Mode	TX vht-40M Mode
-----------	-----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	35.15	500	Complies
06	2437	35.12	500	Complies
09	2452	35.15	500	Complies

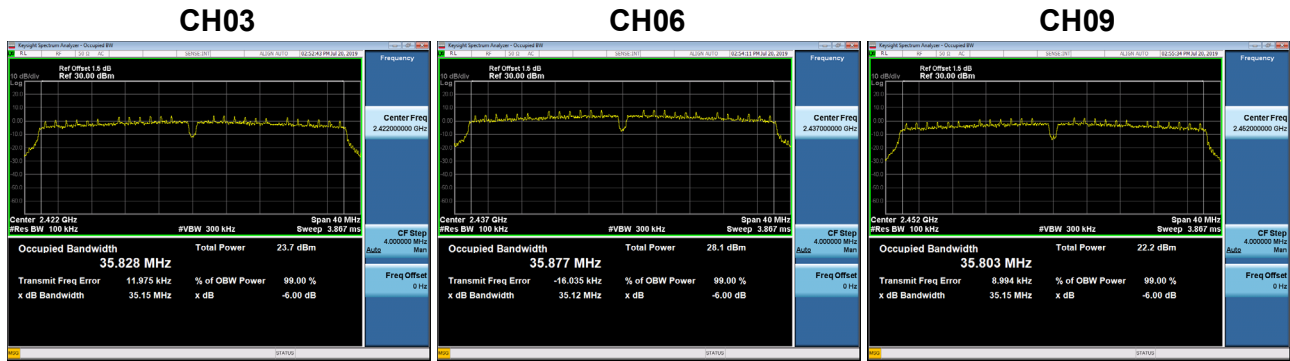

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.230	Complies
06	2437	36.456	Complies
09	2452	36.231	Complies

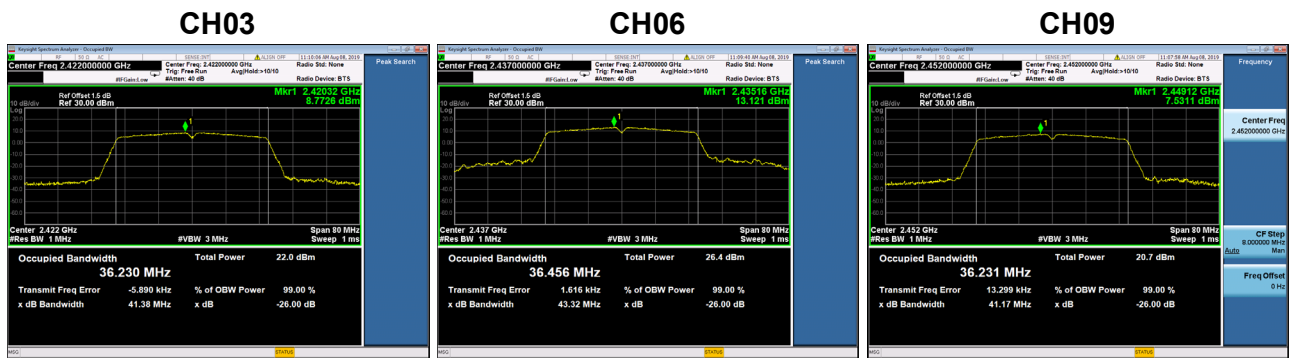

APPENDIX F - MAXIMUM AVERAGE OUTPUT POWER

Non Beamforming

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.65	0.14	20.79	30.00	1.0000	Complies
06	2437	19.74	0.14	19.88	30.00	1.0000	Complies
11	2462	21.61	0.14	21.75	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.68	0.14	20.82	30.00	1.0000	Complies
06	2437	20.12	0.14	20.26	30.00	1.0000	Complies
11	2462	21.58	0.14	21.72	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 3
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.73	0.14	20.87	30.00	1.0000	Complies
06	2437	20.17	0.14	20.31	30.00	1.0000	Complies
11	2462	21.84	0.14	21.98	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	25.60	0.3631	30.00	1.0000	Complies
06	2437	24.93	0.3110	30.00	1.0000	Complies
11	2462	26.59	0.4562	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.77	0.88	18.65	30.00	1.0000	Complies
06	2437	21.91	0.88	22.79	30.00	1.0000	Complies
11	2462	17.32	0.88	18.20	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.47	0.88	18.35	30.00	1.0000	Complies
06	2437	21.89	0.88	22.77	30.00	1.0000	Complies
11	2462	17.19	0.88	18.07	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 3
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.98	0.88	18.86	30.00	1.0000	Complies
06	2437	21.92	0.88	22.80	30.00	1.0000	Complies
11	2462	17.36	0.88	18.24	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.39	0.2185	30.00	1.0000	Complies
06	2437	27.56	0.5697	30.00	1.0000	Complies
11	2462	22.94	0.1968	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.14	0.96	18.10	30.00	1.0000	Complies
06	2437	21.81	0.96	22.77	30.00	1.0000	Complies
11	2462	17.11	0.96	18.07	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.94	0.96	17.90	30.00	1.0000	Complies
06	2437	21.87	0.96	22.83	30.00	1.0000	Complies
11	2462	17.12	0.96	18.08	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 3
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.17	0.96	18.13	30.00	1.0000	Complies
06	2437	21.85	0.96	22.81	30.00	1.0000	Complies
11	2462	17.21	0.96	18.17	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.81	0.1912	30.00	1.0000	Complies
06	2437	27.57	0.5719	30.00	1.0000	Complies
11	2462	22.88	0.1939	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.97	1.70	15.67	30.00	1.0000	Complies
06	2437	18.31	1.70	20.01	30.00	1.0000	Complies
09	2452	12.68	1.70	14.38	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.53	1.70	15.23	30.00	1.0000	Complies
06	2437	18.29	1.70	19.99	30.00	1.0000	Complies
09	2452	12.62	1.70	14.32	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 3
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.74	1.70	15.44	30.00	1.0000	Complies
06	2437	18.19	1.70	19.89	30.00	1.0000	Complies
09	2452	12.41	1.70	14.11	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.23	0.1053	30.00	1.0000	Complies
06	2437	24.74	0.2977	30.00	1.0000	Complies
09	2452	19.05	0.0803	30.00	1.0000	Complies

Test Mode	TX vht-20M Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.34	0.89	18.23	30.00	1.0000	Complies
06	2437	22.24	0.89	23.13	30.00	1.0000	Complies
11	2462	17.43	0.89	18.32	30.00	1.0000	Complies

Test Mode	TX vht-20M Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.31	0.89	18.20	30.00	1.0000	Complies
06	2437	22.31	0.89	23.20	30.00	1.0000	Complies
11	2462	17.47	0.89	18.36	30.00	1.0000	Complies

Test Mode	TX vht-20M Mode_Ant. 3
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.56	0.89	18.45	30.00	1.0000	Complies
06	2437	22.44	0.89	23.33	30.00	1.0000	Complies
11	2462	17.95	0.89	18.84	30.00	1.0000	Complies

Test Mode	TX vht-20M Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.07	0.1650	30.00	1.0000	Complies
06	2437	27.99	0.5131	30.00	1.0000	Complies
11	2462	23.29	0.1736	30.00	1.0000	Complies

Test Mode	TX vht-40M Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	14.36	1.78	16.14	30.00	1.0000	Complies
06	2437	18.78	1.78	20.56	30.00	1.0000	Complies
09	2452	13.06	1.78	14.84	30.00	1.0000	Complies

Test Mode	TX vht-40M Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.78	1.78	15.56	30.00	1.0000	Complies
06	2437	18.68	1.78	20.46	30.00	1.0000	Complies
09	2452	13.16	1.78	14.94	30.00	1.0000	Complies

Test Mode	TX vht-40M Mode_Ant. 3
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	14.35	1.78	16.13	30.00	1.0000	Complies
06	2437	18.78	1.78	20.56	30.00	1.0000	Complies
09	2452	12.99	1.78	14.77	30.00	1.0000	Complies

Test Mode	TX vht-40M Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.73	0.0784	30.00	1.0000	Complies
06	2437	25.30	0.2248	30.00	1.0000	Complies
09	2452	19.63	0.0608	30.00	1.0000	Complies

With Beamforming

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.90	0.96	17.86	28.23	0.6653	Complies
06	2437	21.32	0.96	22.28	28.23	0.6653	Complies
11	2462	16.62	0.96	17.58	28.23	0.6653	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.75	0.96	17.71	28.23	0.6653	Complies
06	2437	21.14	0.96	22.10	28.23	0.6653	Complies
11	2462	16.47	0.96	17.43	28.23	0.6653	Complies

Test Mode	TX N-20M Mode_Ant. 3
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.69	0.96	17.65	28.23	0.6653	Complies
06	2437	21.26	0.96	22.22	28.23	0.6653	Complies
11	2462	16.51	0.96	17.47	28.23	0.6653	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.51	0.1430	28.23	0.6653	Complies
06	2437	26.97	0.3992	28.23	0.6653	Complies
11	2462	22.26	0.1351	28.23	0.6653	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.41	1.70	15.11	28.23	0.6653	Complies
06	2437	17.13	1.70	18.83	28.23	0.6653	Complies
09	2452	11.89	1.70	13.59	28.23	0.6653	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.25	1.70	14.95	28.23	0.6653	Complies
06	2437	16.98	1.70	18.68	28.23	0.6653	Complies
09	2452	11.74	1.70	13.44	28.23	0.6653	Complies

Test Mode	TX N-40M Mode_Ant. 3
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.32	1.70	15.02	28.23	0.6653	Complies
06	2437	17.02	1.70	18.72	28.23	0.6653	Complies
09	2452	11.81	1.70	13.51	28.23	0.6653	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	19.80	0.0955	28.23	0.6653	Complies
06	2437	23.52	0.2248	28.23	0.6653	Complies
09	2452	18.29	0.0674	28.23	0.6653	Complies

Test Mode	TX vht-20M Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.32	0.89	17.21	28.23	0.6653	Complies
06	2437	22.04	0.89	22.93	28.23	0.6653	Complies
11	2462	15.61	0.89	16.50	28.23	0.6653	Complies

Test Mode	TX vht-20M Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.09	0.89	16.98	28.23	0.6653	Complies
06	2437	21.79	0.89	22.68	28.23	0.6653	Complies
11	2462	15.41	0.89	16.30	28.23	0.6653	Complies

Test Mode	TX vht-20M Mode_Ant. 3
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.18	0.89	17.07	28.23	0.6653	Complies
06	2437	22.09	0.89	22.98	28.23	0.6653	Complies
11	2462	15.49	0.89	16.38	28.23	0.6653	Complies

Test Mode	TX vht-20M Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.86	0.1250	28.23	0.6653	Complies
06	2437	27.64	0.4728	28.23	0.6653	Complies
11	2462	21.17	0.1065	28.23	0.6653	Complies

Test Mode	TX vht-40M Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.72	1.78	15.50	28.23	0.6653	Complies
06	2437	16.87	1.78	18.65	28.23	0.6653	Complies
09	2452	12.06	1.78	13.84	28.23	0.6653	Complies

Test Mode	TX vht-40M Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.51	1.78	15.29	28.23	0.6653	Complies
06	2437	16.82	1.78	18.60	28.23	0.6653	Complies
09	2452	11.95	1.78	13.73	28.23	0.6653	Complies

Test Mode	TX vht-40M Mode_Ant. 3
-----------	------------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	13.62	1.78	15.40	28.23	0.6653	Complies
06	2437	16.53	1.78	18.31	28.23	0.6653	Complies
09	2452	11.87	1.78	13.65	28.23	0.6653	Complies


Test Mode	TX vht-40M Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.17	0.0690	28.23	0.6653	Complies
06	2437	23.30	0.1417	28.23	0.6653	Complies
09	2452	18.52	0.0471	28.23	0.6653	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS

Test Mode TX B Mode_Ant. 1




Bandedge-CH01

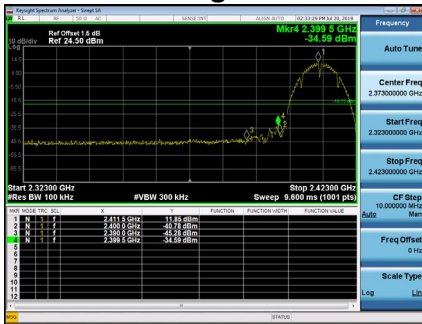



Bandedge-CH11



CH01 – 10th Harmonic of the fundamental frequency

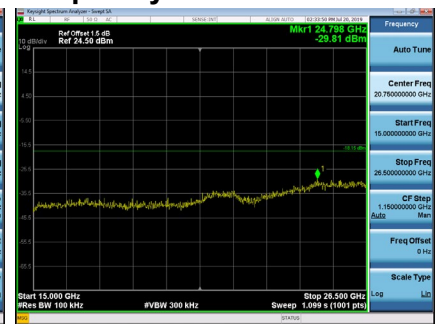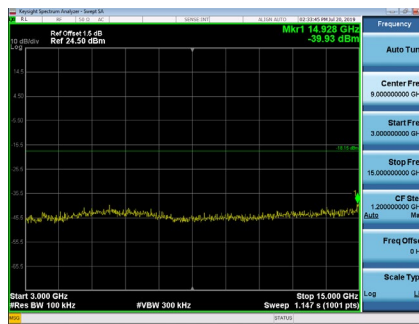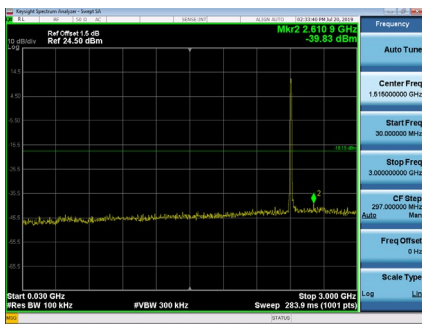

CH06 – 10th Harmonic of the fundamental frequency

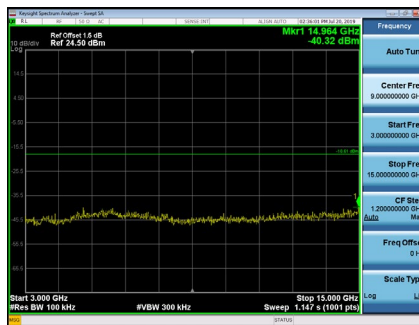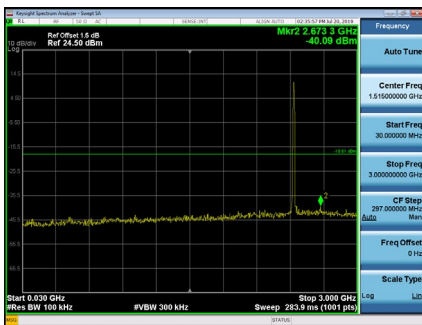

CH11 – 10th Harmonic of the fundamental frequency

