


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2427MHz


Horizontal

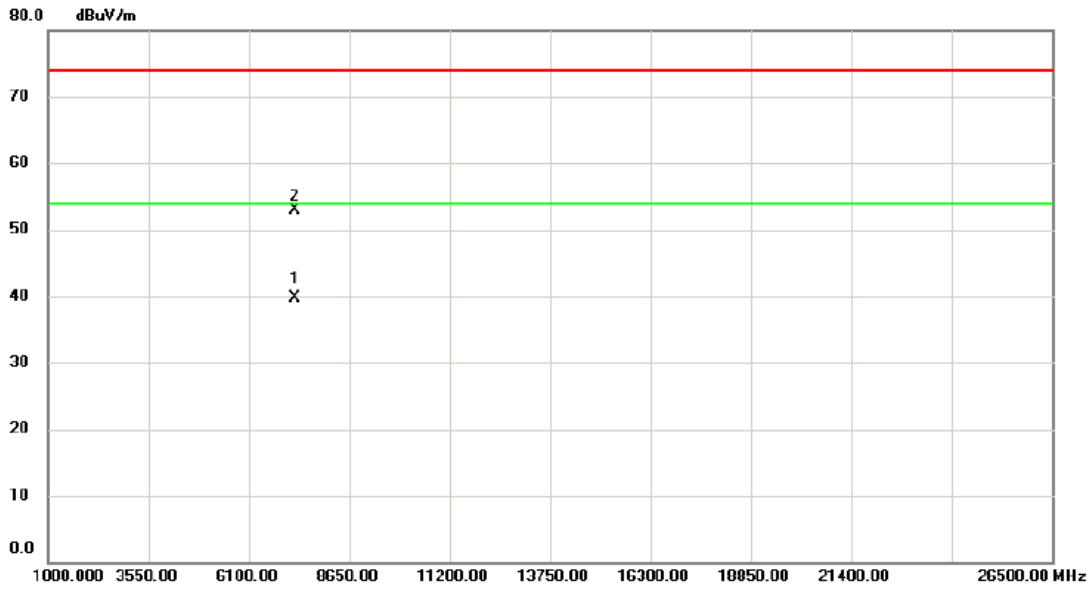

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7272.800	29.30	10.41	39.71	54.00	-14.29	AVG	
2		7274.000	42.56	10.42	52.98	74.00	-21.02	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical

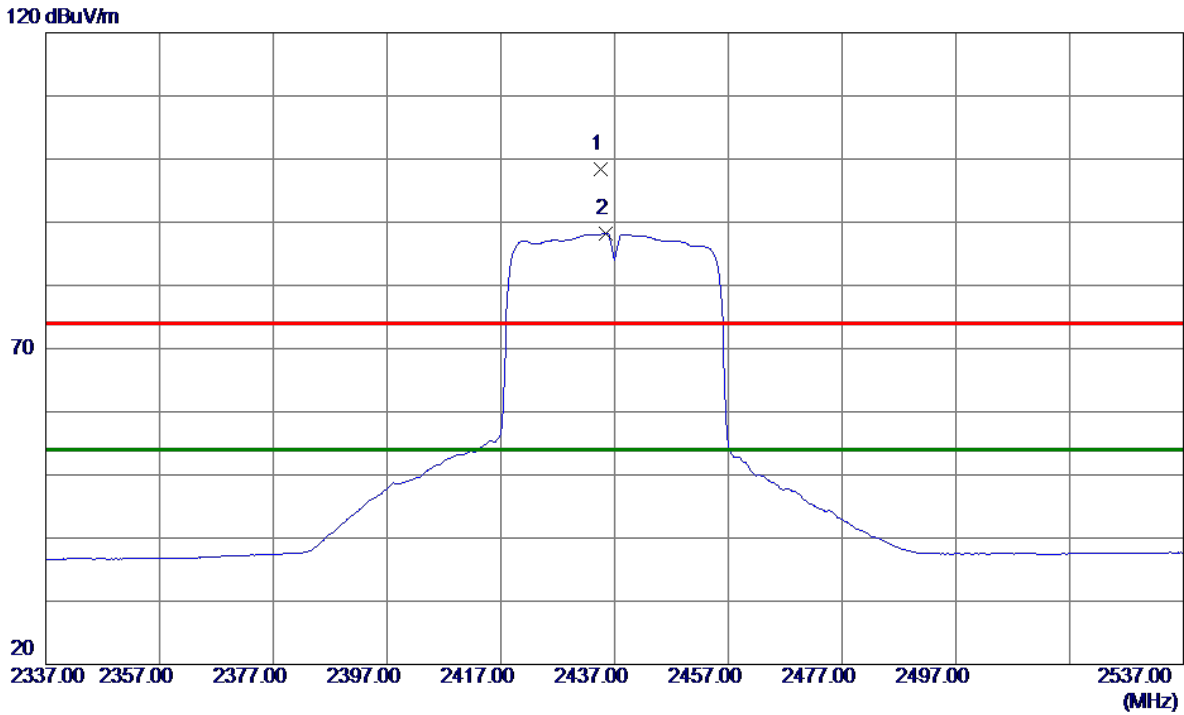


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2434.6000	88.99	9.38	98.37	74.00	24.37	Peak	No Limit
2 *	2435.4000	78.84	9.38	88.22	54.00	34.22	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical


80 dBuV/m

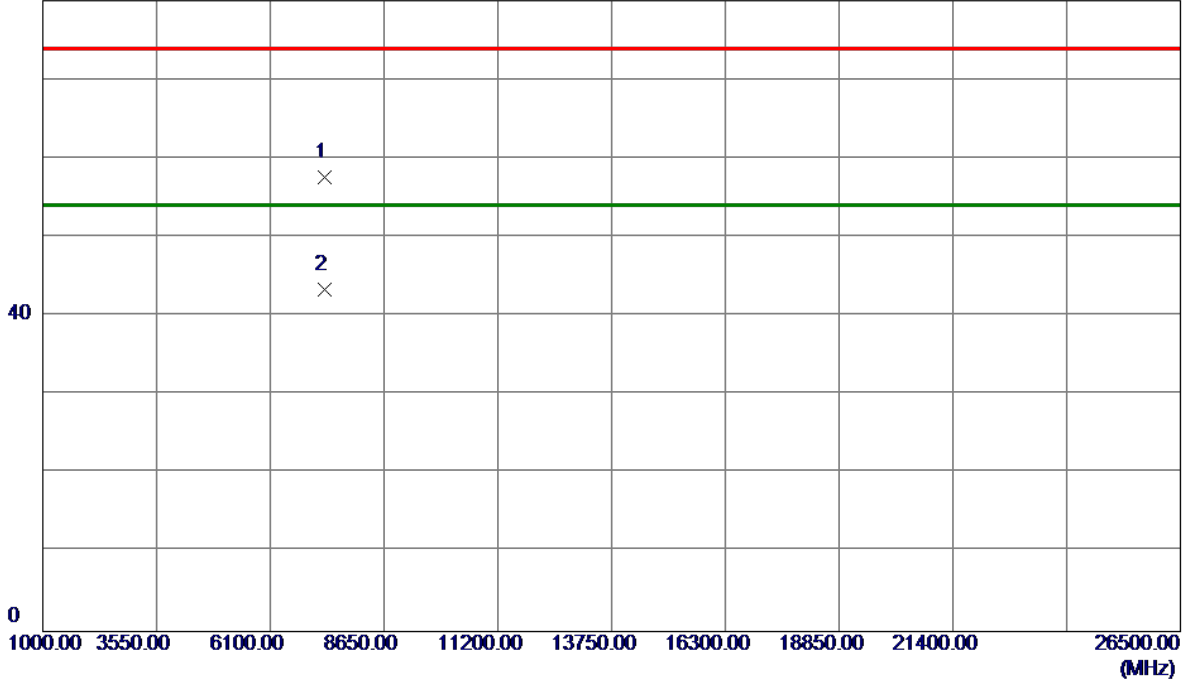

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7308.8000	47.19	10.48	57.67	74.00	-16.33	Peak	
2 *	7314.6000	32.94	10.49	43.43	54.00	-10.57	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal

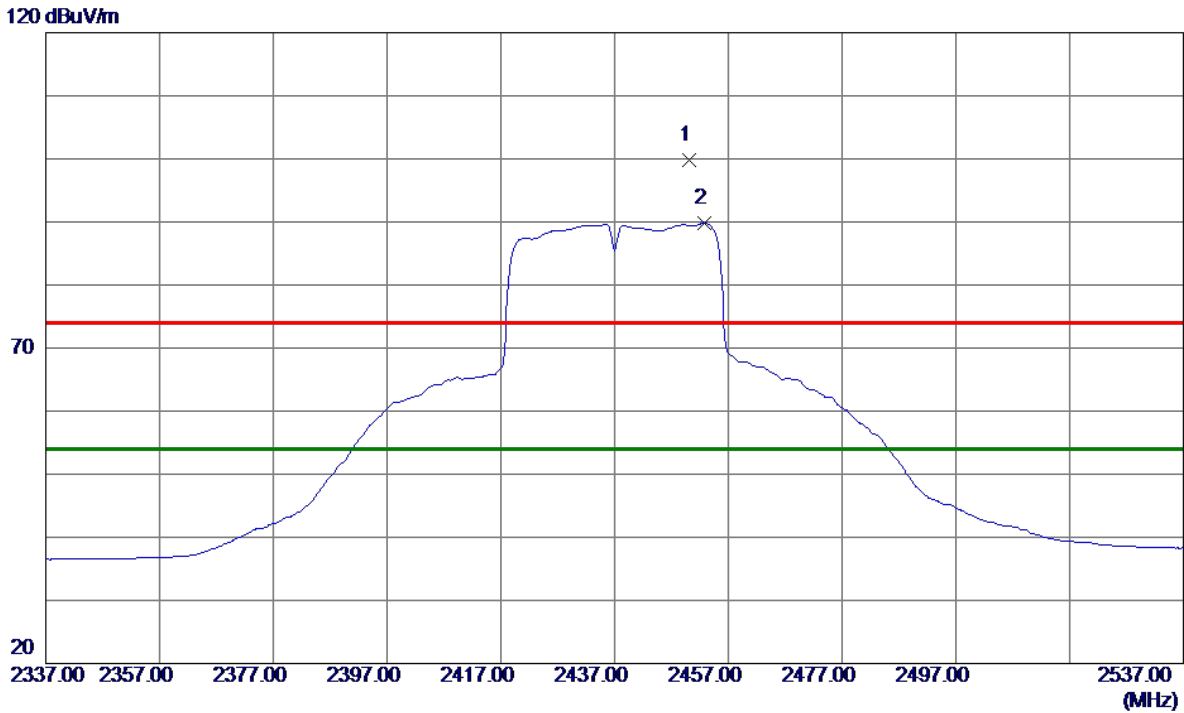


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2450.2000	90.42	9.46	99.88	74.00	25.88	Peak	No Limit
2 *	2452.8000	80.31	9.47	89.78	54.00	35.78	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal


80 dBuV/m

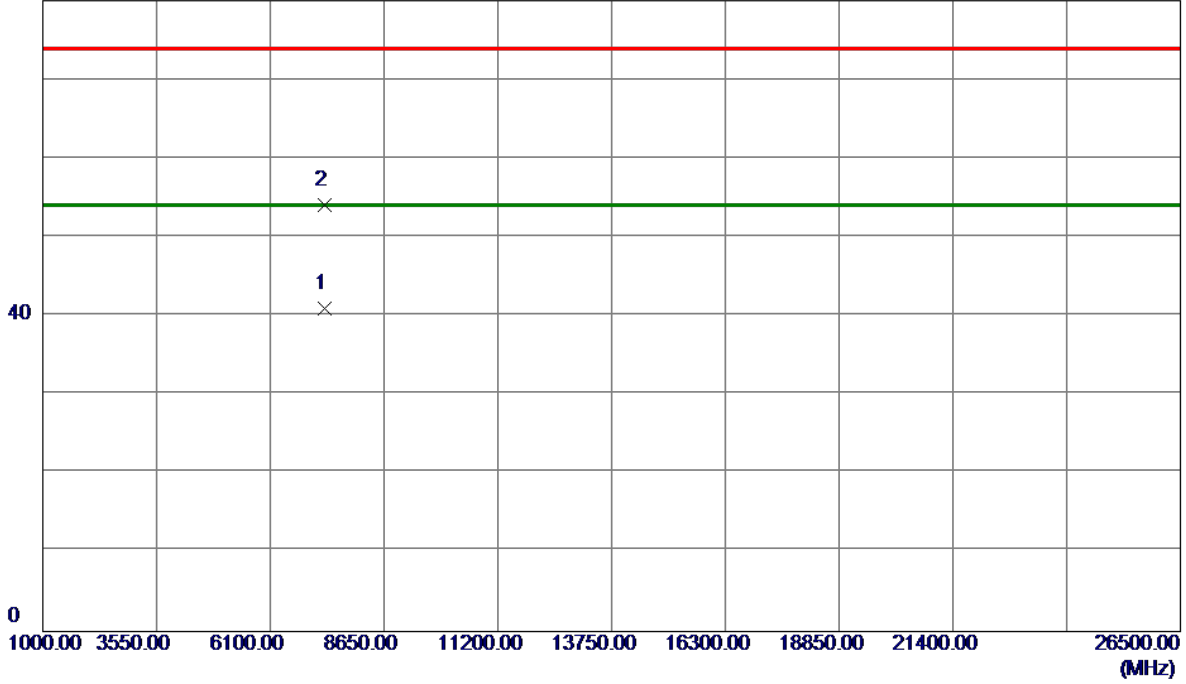

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7314.6000	30.40	10.49	40.89	54.00	-13.11	AVG	
2	7326.8000	43.53	10.51	54.04	74.00	-19.96	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2447MHz


Vertical

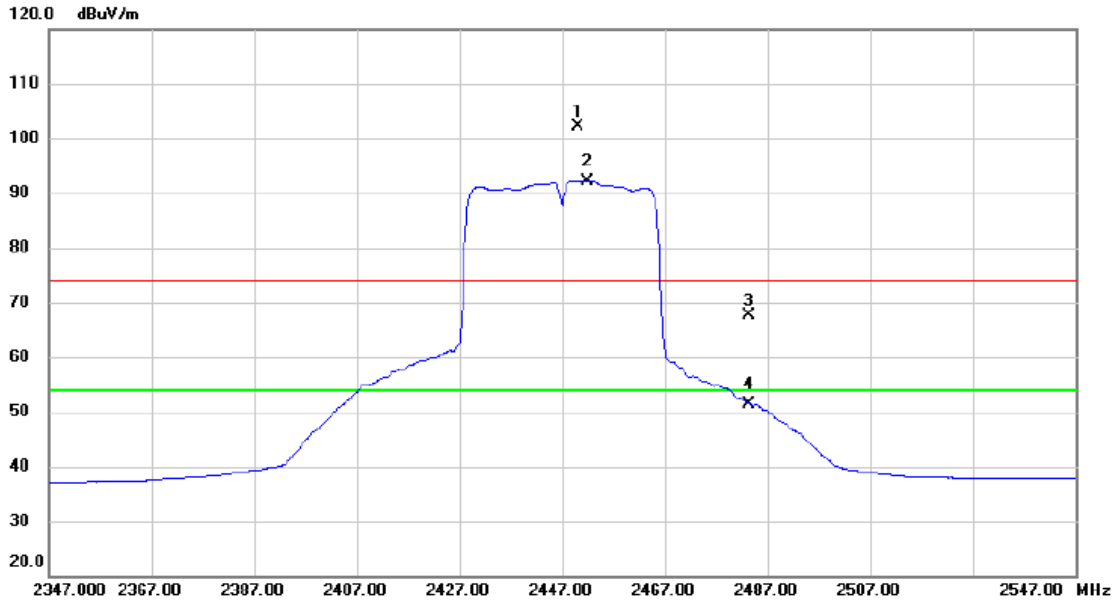

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2450.200	92.86	9.29	102.15	74.00	28.15	peak	No Limit
2	*	2451.800	82.95	9.30	92.25	54.00	38.25	AVG	No Limit
3		2483.500	58.28	9.45	67.73	74.00	-6.27	peak	
4		2483.500	42.00	9.45	51.45	54.00	-2.55	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2447MHz


Vertical

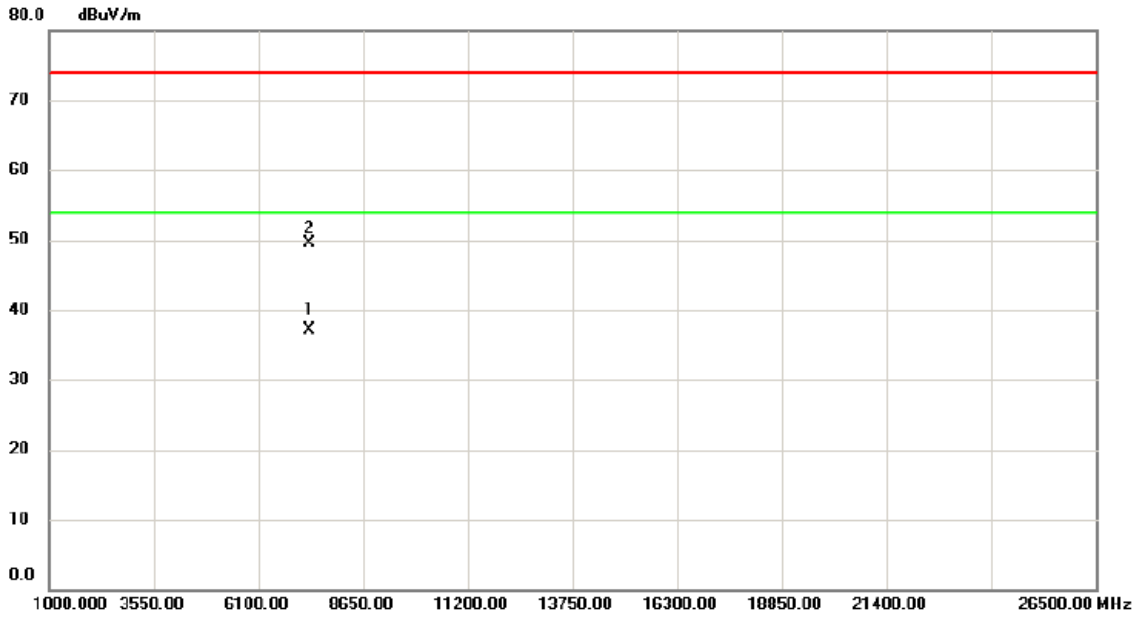

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7344.400	26.64	10.55	37.19	54.00	-16.81	AVG	
2		7345.000	38.96	10.55	49.51	74.00	-24.49	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2447MHz


Horizontal

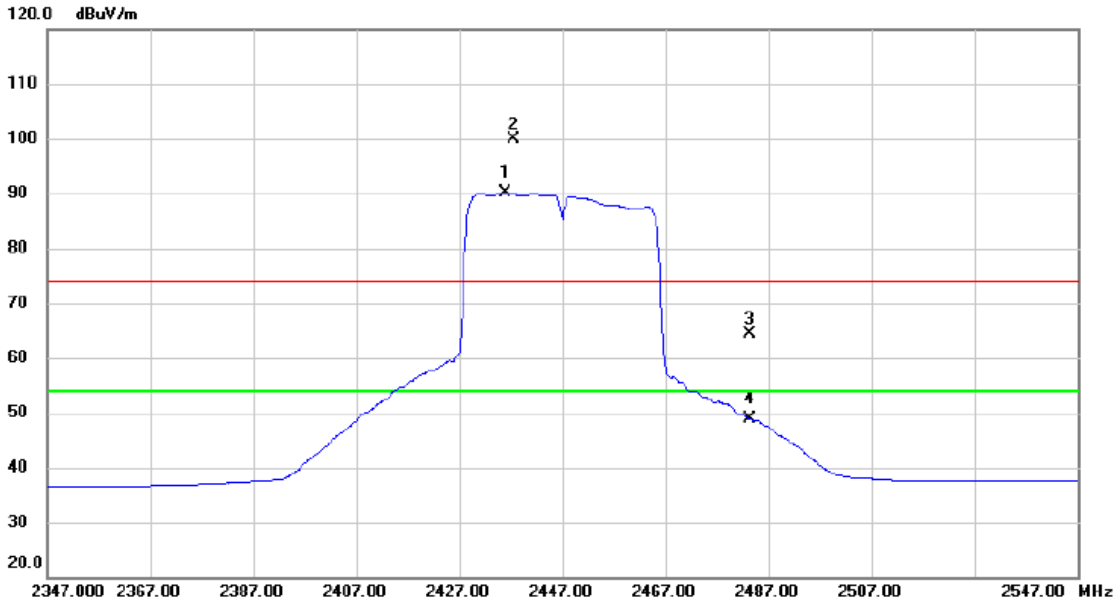

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2435.800	80.84	9.21	90.05	54.00	36.05	AVG	No Limit
2	X	2437.400	90.77	9.23	100.00	74.00	26.00	peak	No Limit
3		2483.500	54.96	9.45	64.41	74.00	-9.59	peak	
4		2483.500	39.35	9.45	48.80	54.00	-5.20	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2447MHz

Horizontal

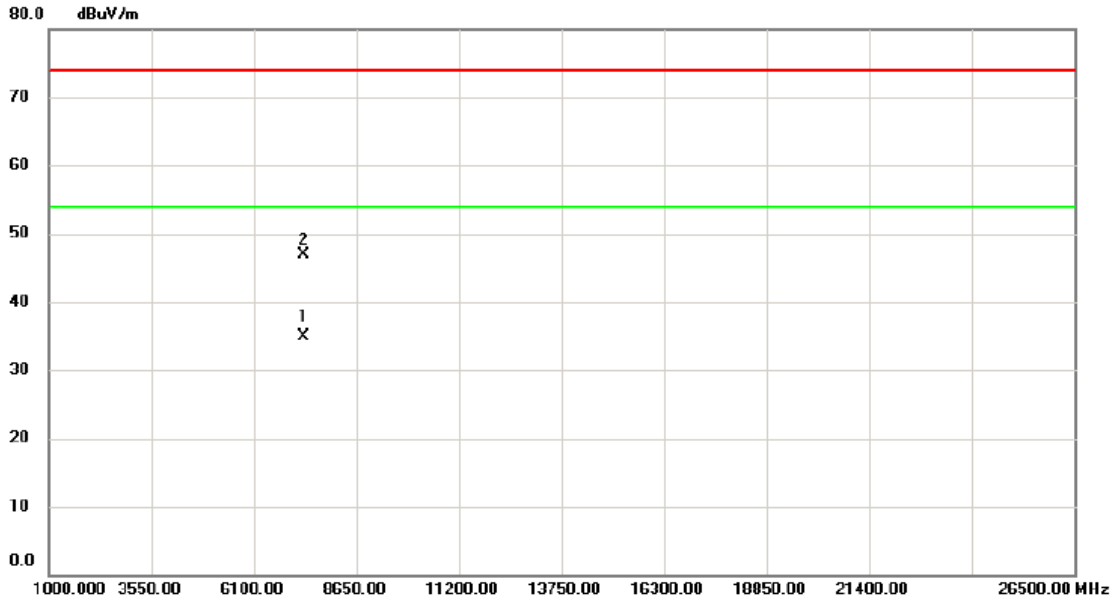


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	7332.200	24.40	10.53	34.93	54.00	-19.07	AVG	
2		7332.400	36.40	10.53	46.93	74.00	-27.07	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical

120 dBuV/m

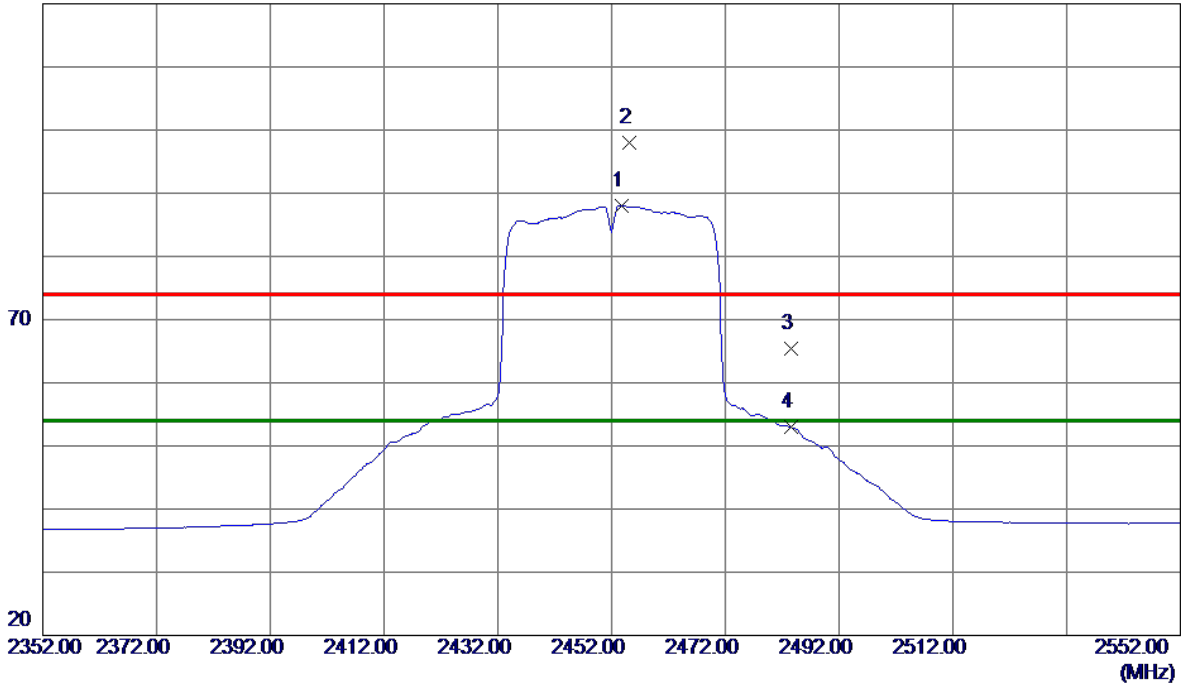


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2453.8000	78.56	9.47	88.03	74.00	14.03	Peak	No Limit
2 *	2455.2000	88.44	9.48	97.92	74.00	23.92	Peak	No Limit
3	2483.5000	55.77	9.63	65.40	74.00	-8.60	Peak	
4	2483.5000	43.30	9.63	52.93	54.00	-1.07	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical


80 dBuV/m

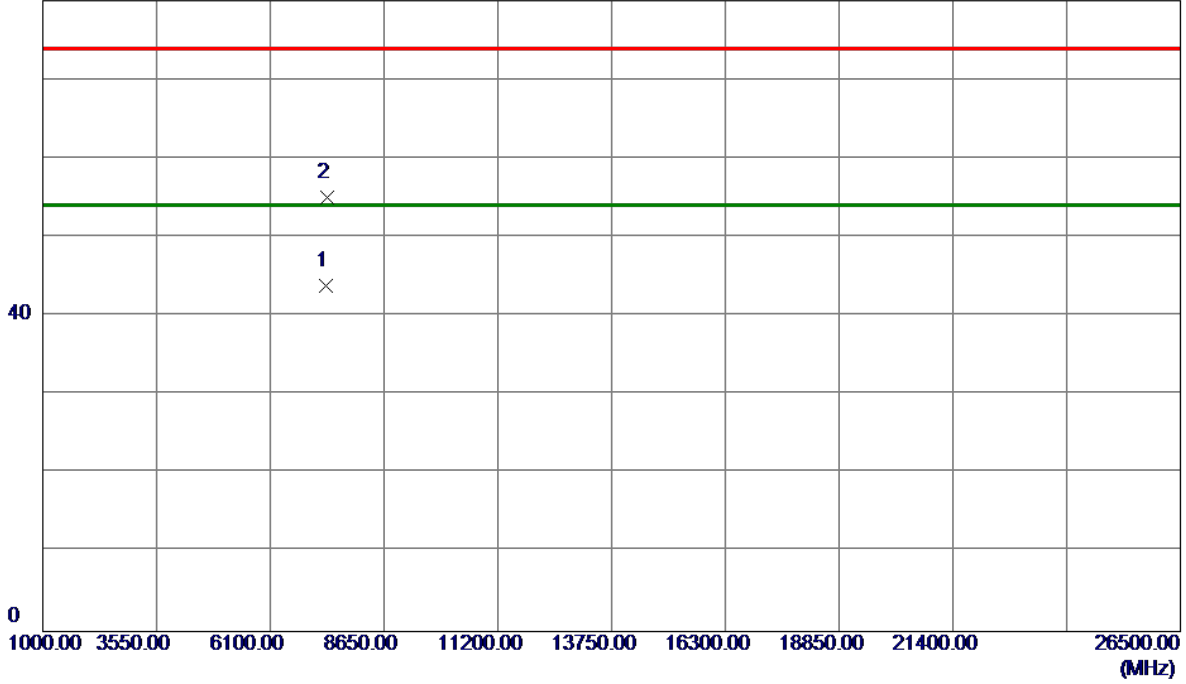

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7358.2000	33.24	10.57	43.81	54.00	-10.19	AVG	
2	7365.6000	44.51	10.59	55.10	74.00	-18.90	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

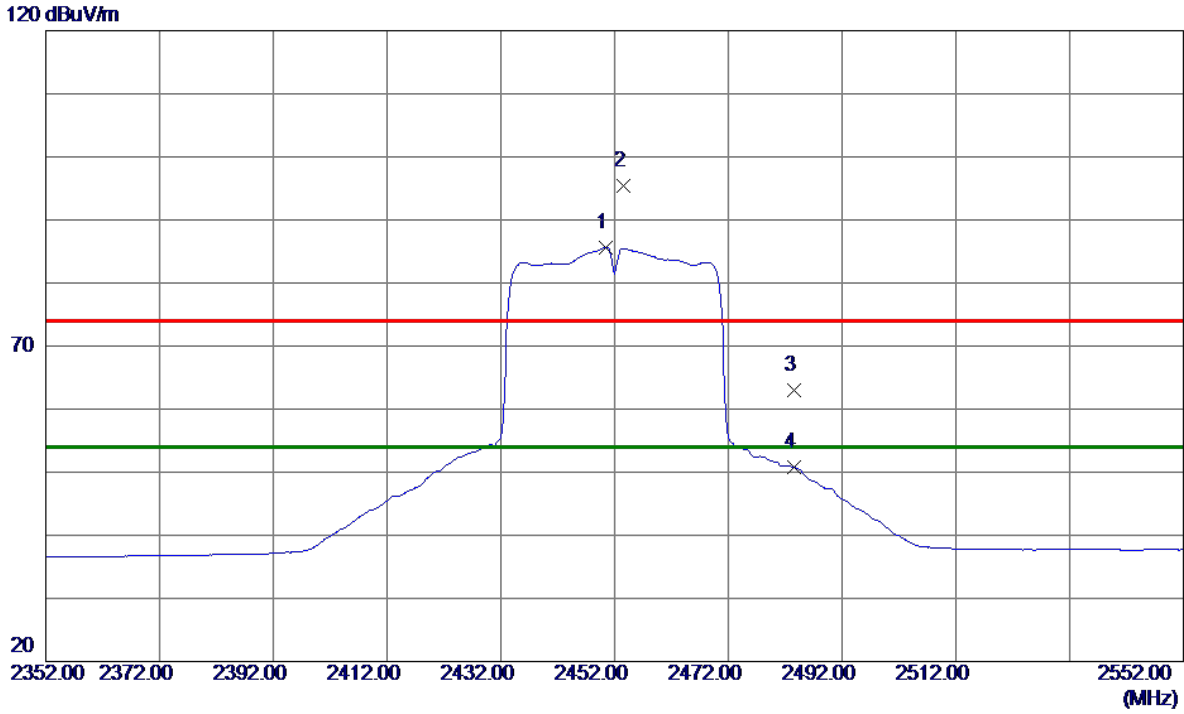


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2450.4000	76.18	9.46	85.64	54.00	31.64	AVG	No Limit
2	2453.6000	85.90	9.47	95.37	74.00	21.37	Peak	No Limit
3	2483.5000	53.33	9.63	62.96	74.00	-11.04	Peak	
4	2483.5000	41.08	9.63	50.71	54.00	-3.29	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

80 dBuV/m

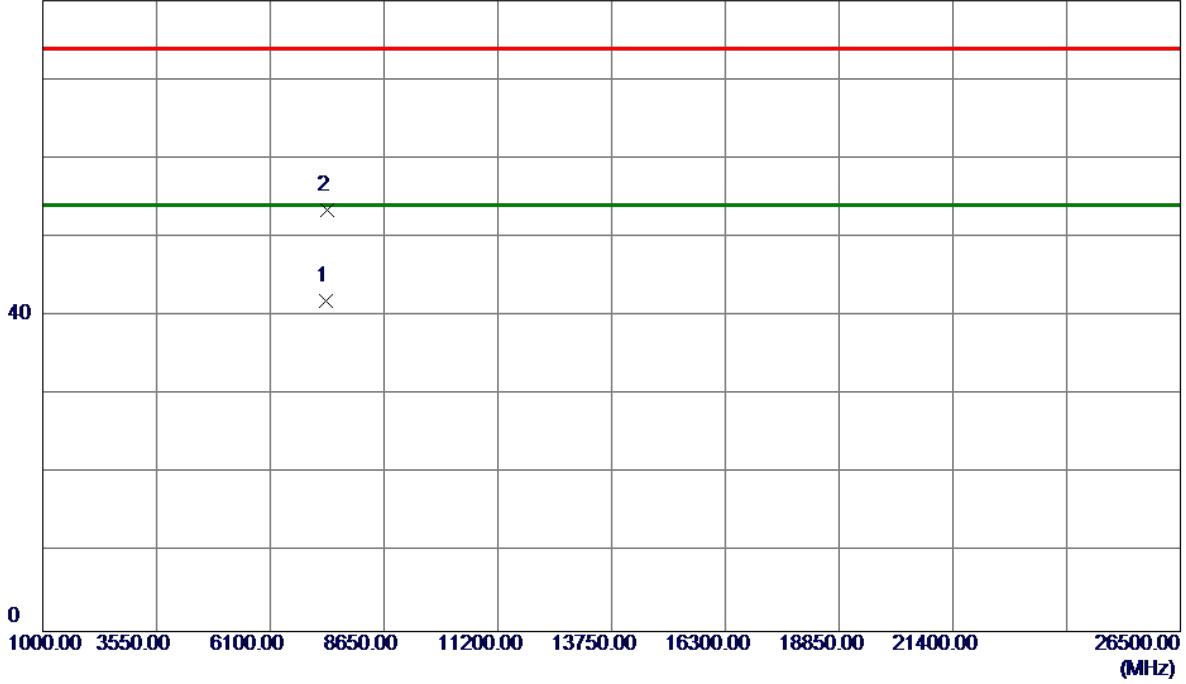

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7351.2000	31.36	10.56	41.92	54.00	-12.08	AVG	
2	7371.4000	42.88	10.60	53.48	74.00	-20.52	Peak	


APPENDIX E - BANDWIDTH

ANT 1

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.06	12.4	500	Complies
2437	10.10	12.28	500	Complies
2462	10.06	12.2	500	Complies

TX CH01

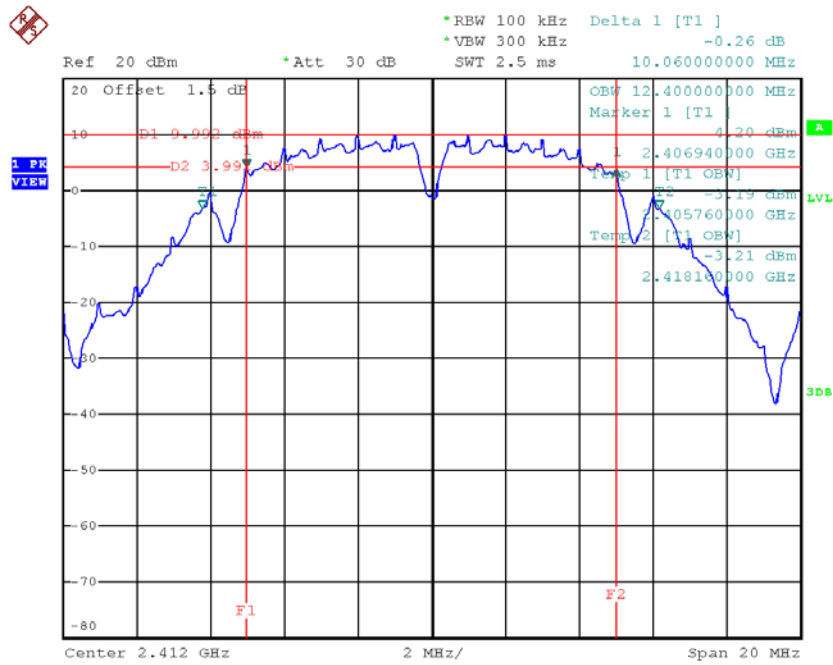


Date: 4.FEB.2018 15:30:03

TX CH06

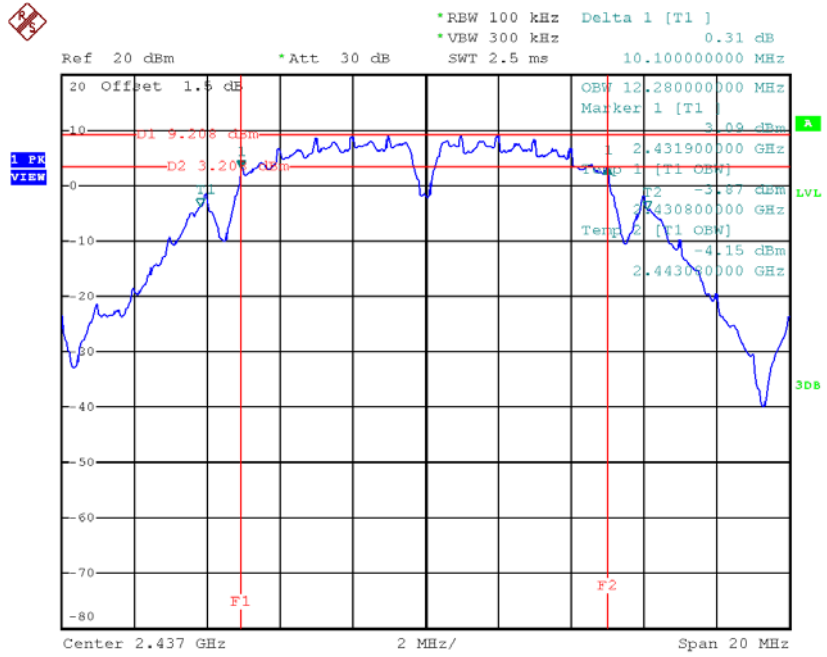

Date: 4.FEB.2018 15:39:58

TX CH11

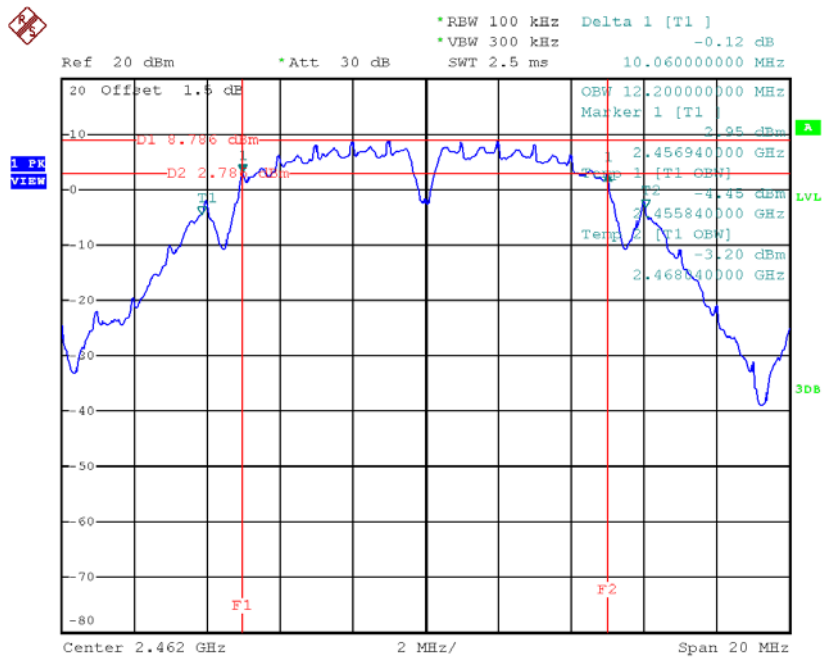


Date: 4.FEB.2018 15:46:54

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.58	16.44	500	Complies
2437	16.54	16.44	500	Complies
2462	16.53	16.44	500	Complies

TX CH01

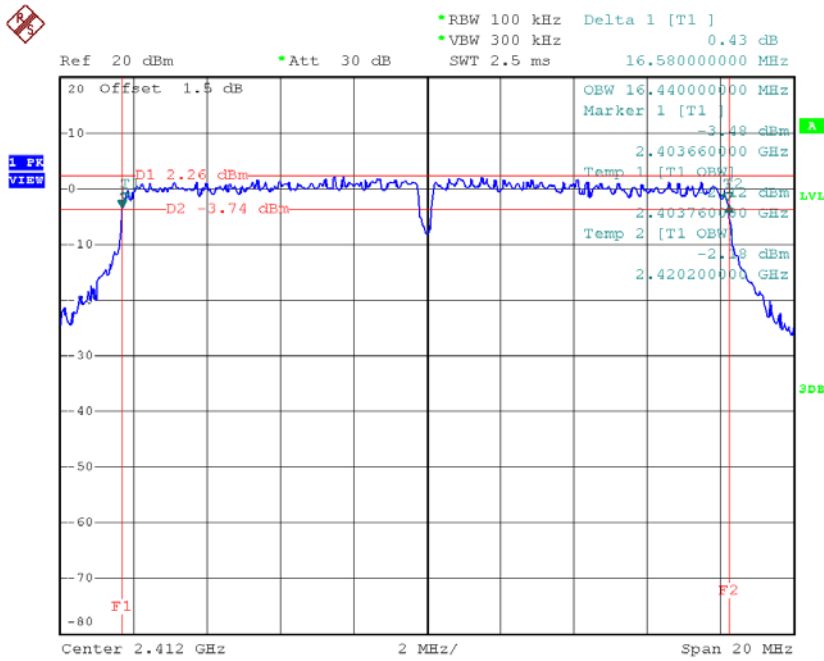


Date: 8.FEB.2018 13:10:38

TX CH06

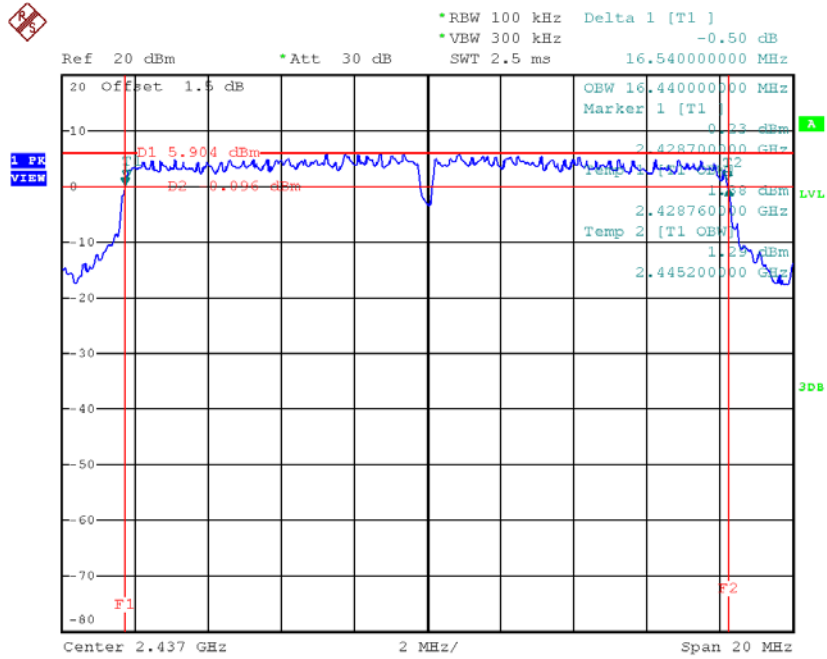

Date: 4.FEB.2018 15:57:38

TX CH11

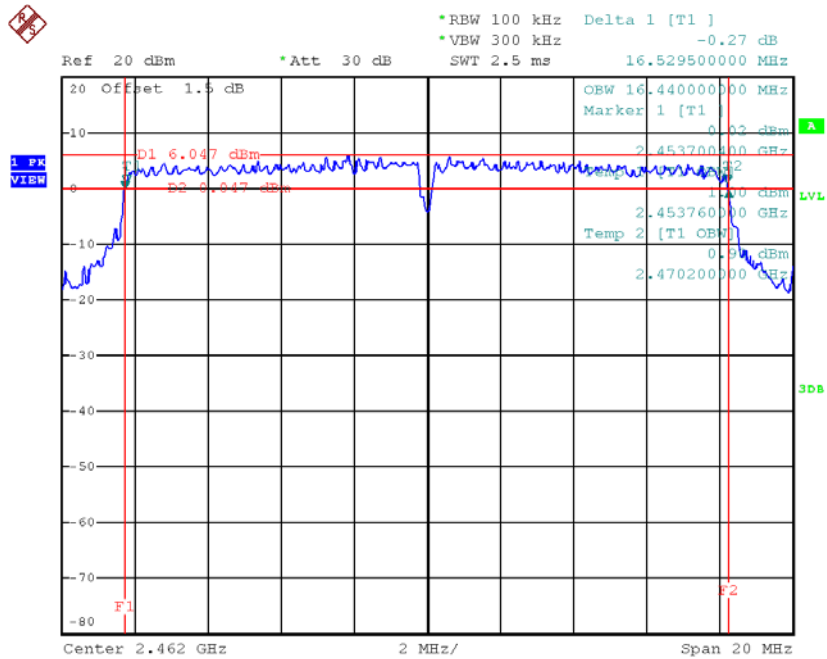


Date: 4.FEB.2018 16:01:04

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.66	17.56	500	Complies
2437	17.66	17.60	500	Complies
2462	17.72	17.60	500	Complies

TX CH01

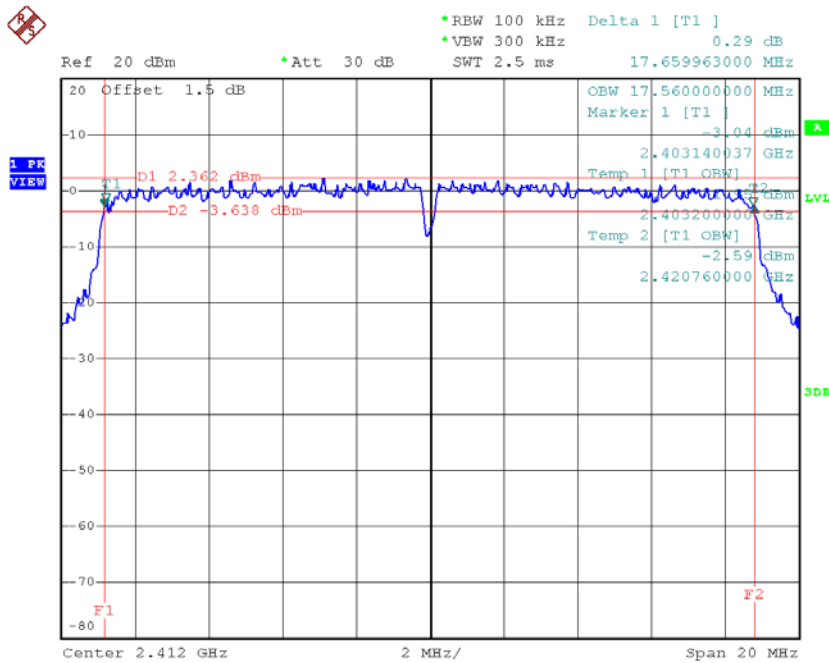


Date: 8.FEB.2018 13:11:50

TX CH06

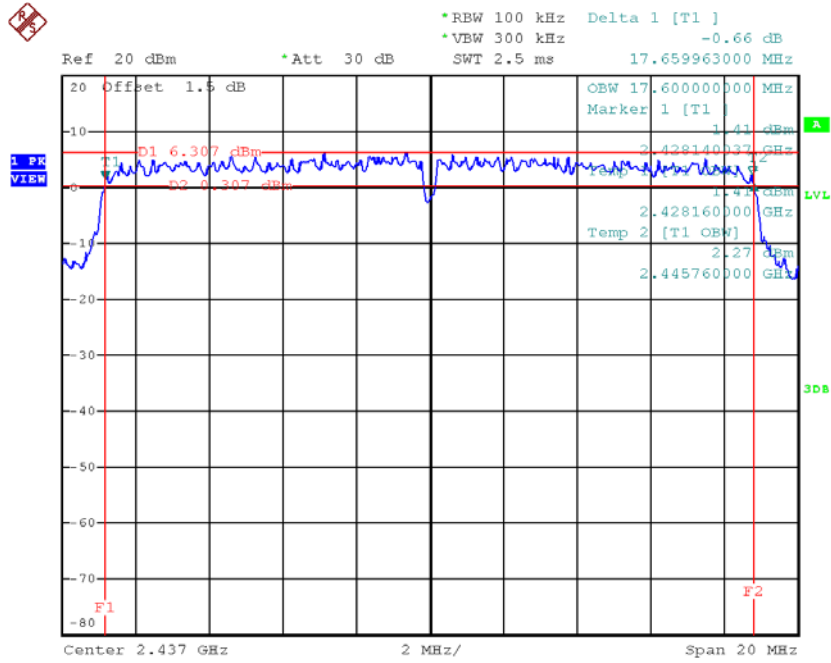

Date: 4.FEB.2018 16:09:16

TX CH11

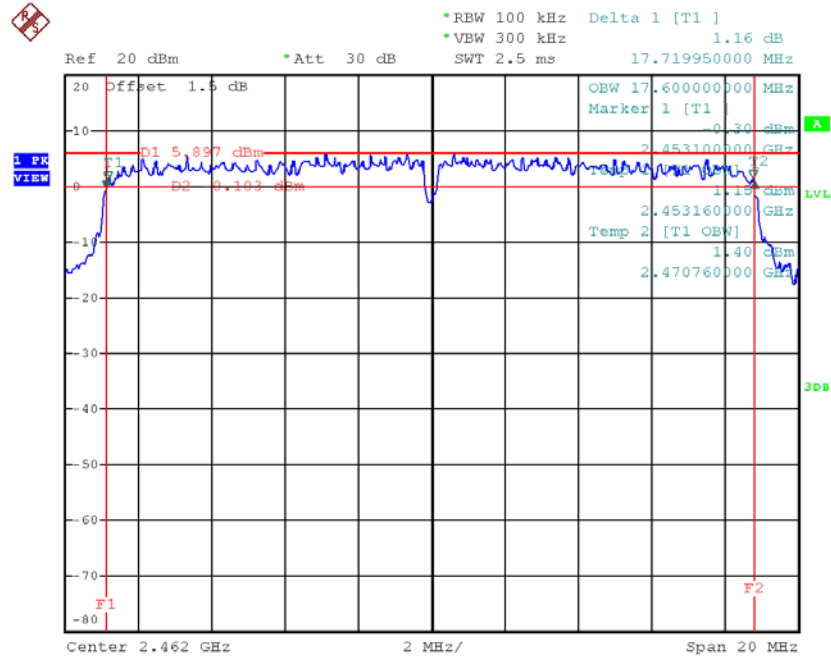


Date: 4.FEB.2018 16:12:11

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.48	36.08	500	Complies
2437	35.27	36.00	500	Complies
2452	36.52	36.08	500	Complies

TX CH03

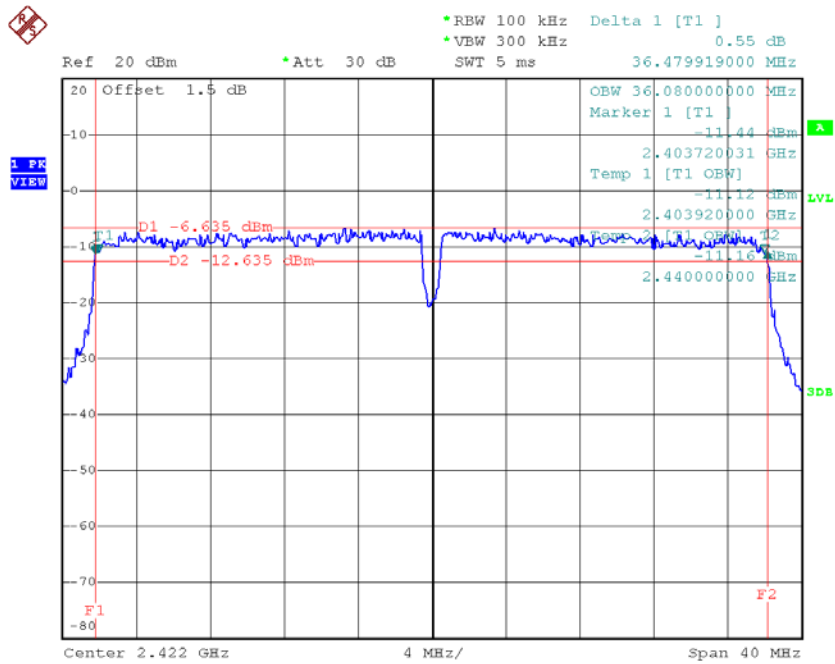


Date: 8.FEB.2018 13:15:35

TX CH06

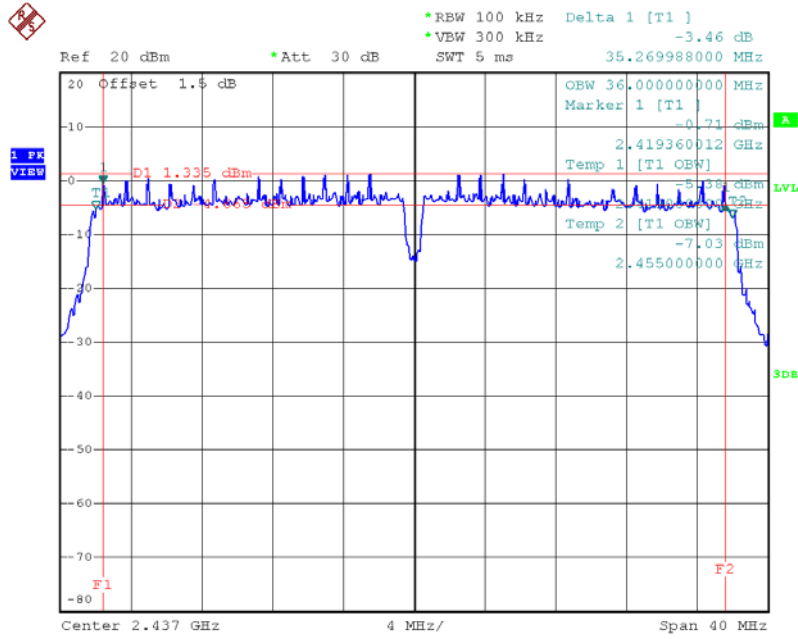

Date: 8.FEB.2018 13:21:54

TX CH09

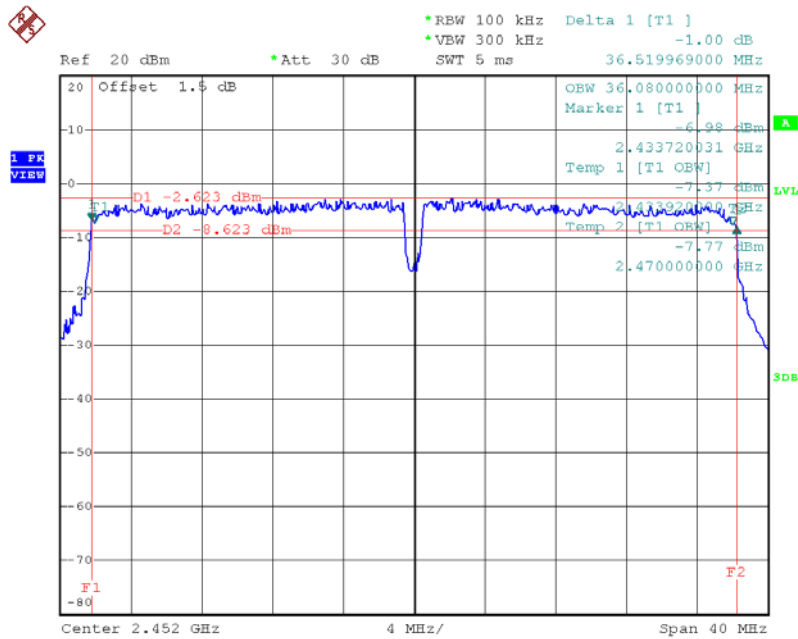


Date: 8.FEB.2018 13:18:31

ANT 2

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.06	12.20	500	Complies
2437	10.10	12.16	500	Complies
2462	10.06	12.12	500	Complies

TX CH01

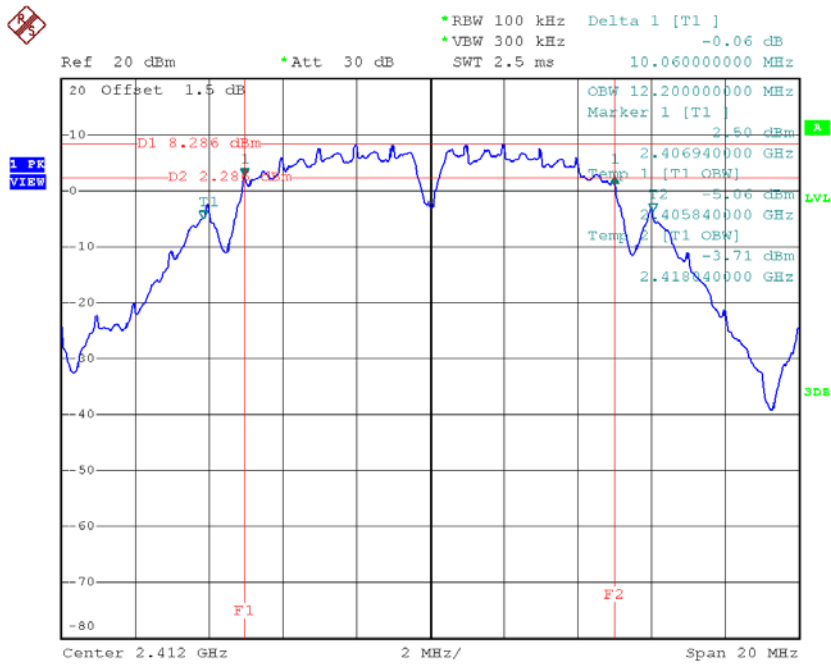


Date: 8.FEB.2018 13:39:43

TX CH06

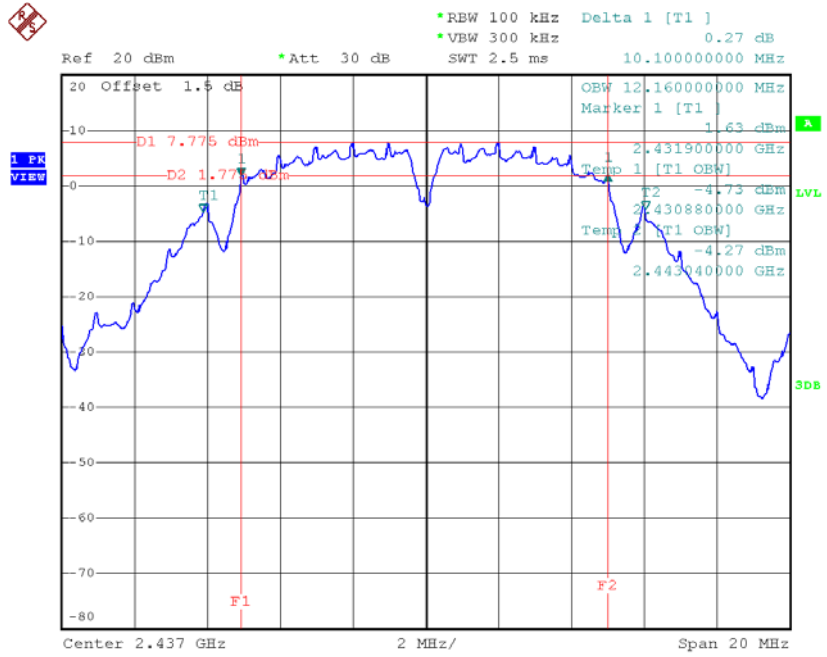

Date: 8.FEB.2018 13:42:44

TX CH11

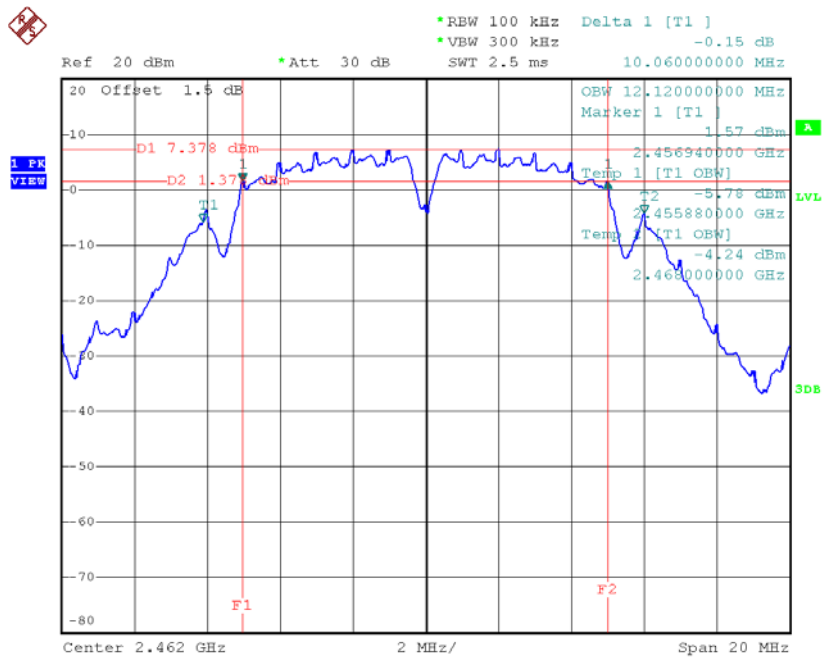


Date: 8.FEB.2018 13:44:38

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.58	16.4	500	Complies
2437	16.58	16.52	500	Complies
2462	16.59	16.44	500	Complies

TX CH01

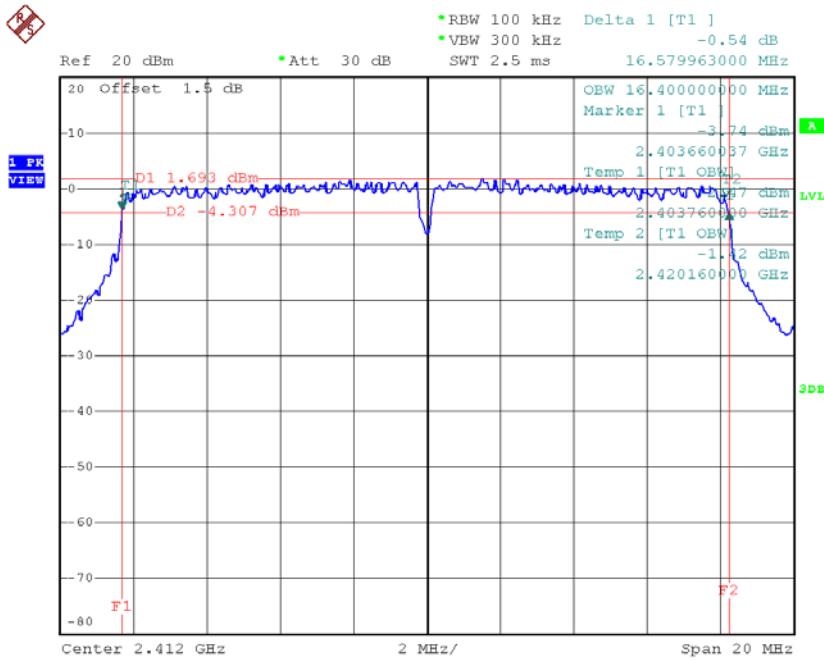


Date: 8.FEB.2018 13:48:14

TX CH06

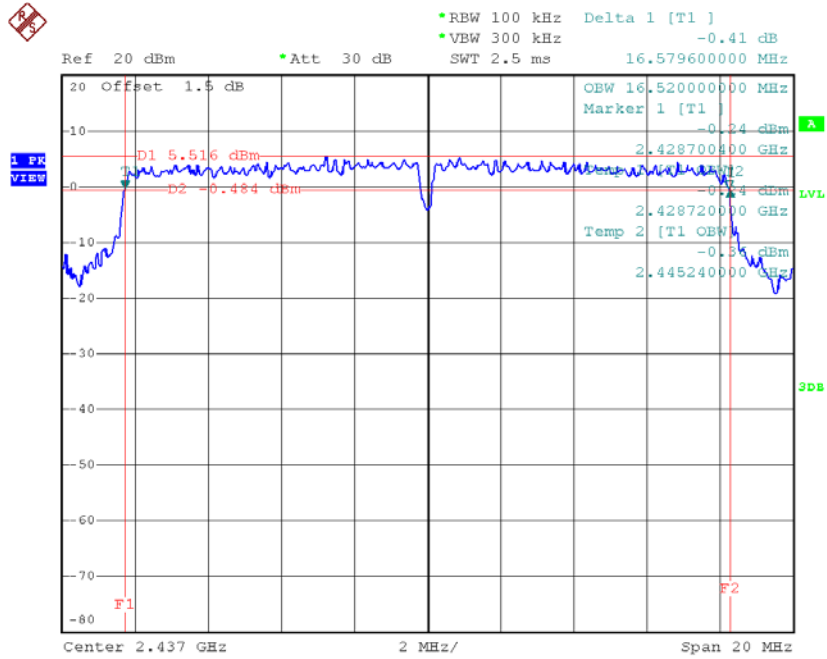

Date: 8.FEB.2018 13:50:18


TX CH11

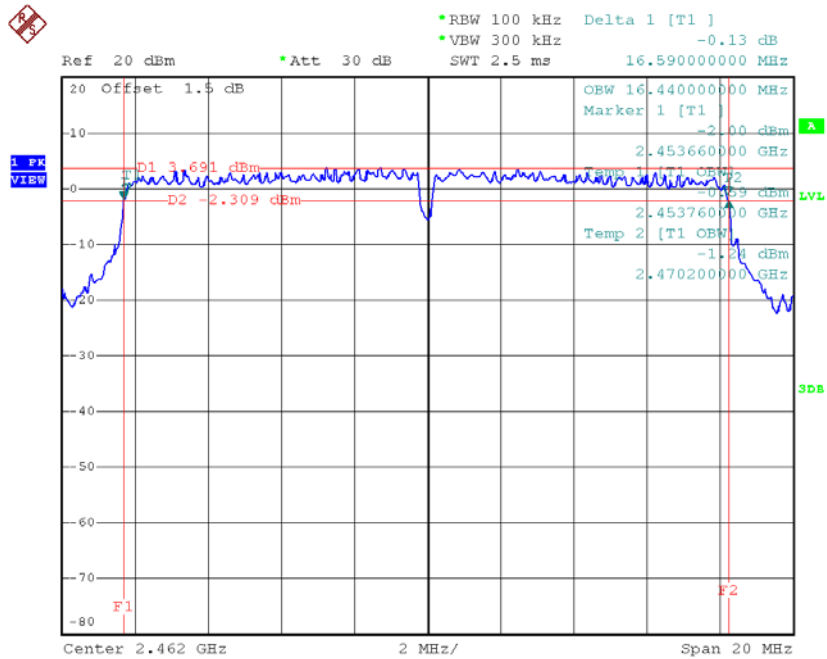

Date: 8.FEB.2018 13:52:04


Test Mode : TX N-20MHz Mode_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.66	17.56	500	Complies
2437	17.68	17.6	500	Complies
2462	17.66	17.56	500	Complies

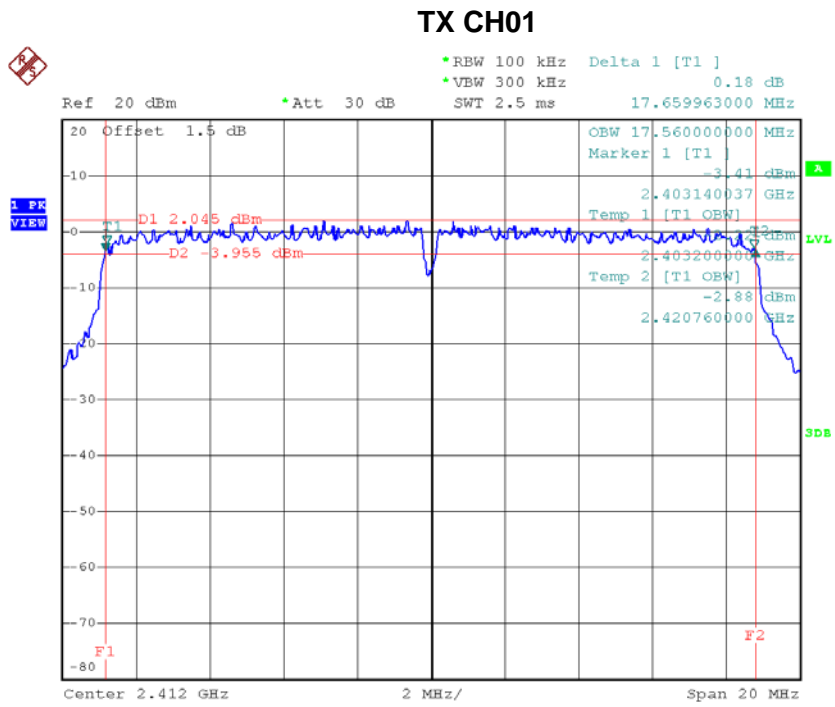


Date: 8.FEB.2018 13:53:47

TX CH06

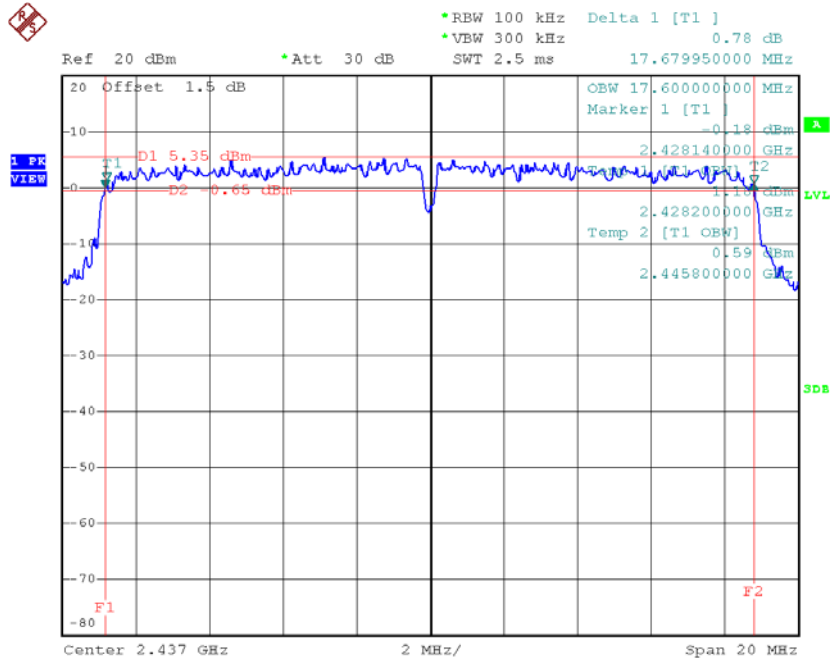

Date: 8.FEB.2018 13:57:15

TX CH11

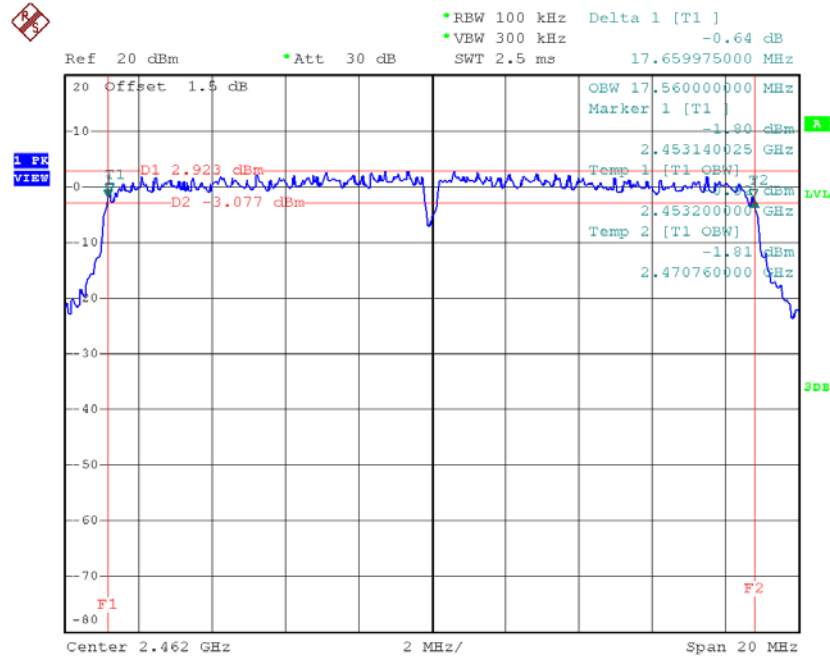


Date: 8.FEB.2018 13:59:17

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.48	36.08	500	Complies
2437	36.47	36.08	500	Complies
2452	36.52	36.08	500	Complies

TX CH03

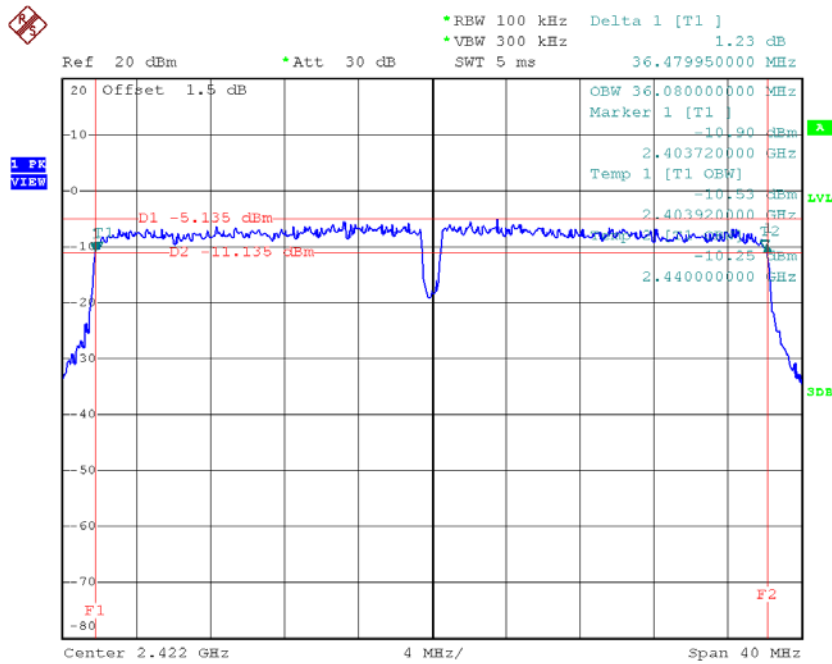


Date: 8.FEB.2018 14:01:33

TX CH06

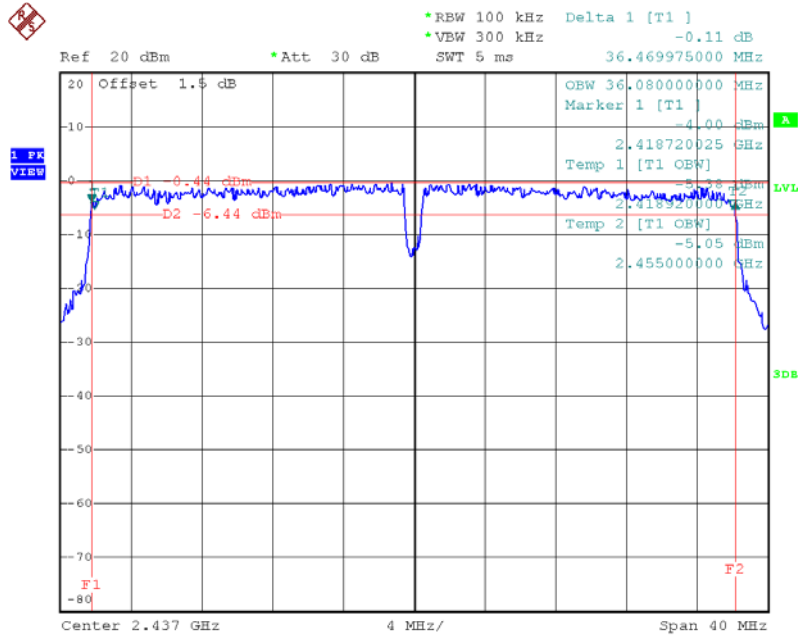

Date: 8.FEB.2018 14:03:07

TX CH09

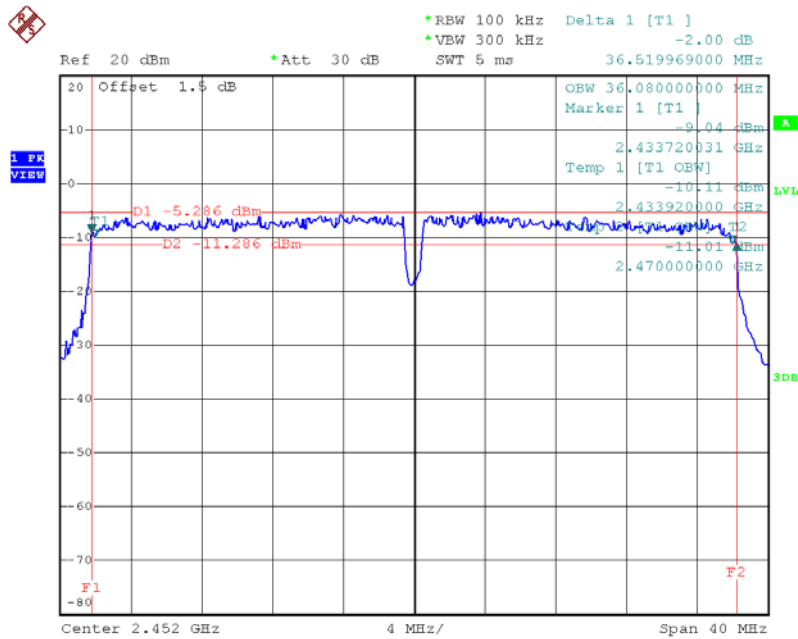

Date: 8.FEB.2018 14:25:47

APPENDIX F - MAXIMUM AVG CONDUCTED OUTPUT POWER

ANT 1

Test Mode :TX B Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.43	0.09	30.00	1.00	Complies
2437	19.41	0.09	30.00	1.00	Complies
2462	19.54	0.09	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.92	0.08	30.00	1.00	Complies
2437	19.86	0.10	30.00	1.00	Complies
2462	19.52	0.09	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.31	0.07	30.00	1.00	Complies
2437	19.73	0.09	30.00	1.00	Complies
2462	18.94	0.08	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	13.54	0.02	30.00	1.00	Complies
2437	19.43	0.09	30.00	1.00	Complies
2452	16.11	0.04	30.00	1.00	Complies

ANT 2

Test Mode :TX B Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.64	0.09	30.00	1.00	Complies
2437	19.53	0.09	30.00	1.00	Complies
2462	19.66	0.09	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.22	0.07	30.00	1.00	Complies
2437	19.68	0.09	30.00	1.00	Complies
2462	18.75	0.07	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	16.85	0.05	30.00	1.00	Complies
2437	19.85	0.10	30.00	1.00	Complies
2462	17.64	0.06	30.00	1.00	Complies


Test Mode :TX N40 Mode_CH03/06/09					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	13.45	0.02	30.00	1.00	Complies
2437	19.55	0.09	30.00	1.00	Complies
2452	14.58	0.03	30.00	1.00	Complies

APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION

ANT 1


Test Mode : TX B Mode

TX B mode CH01

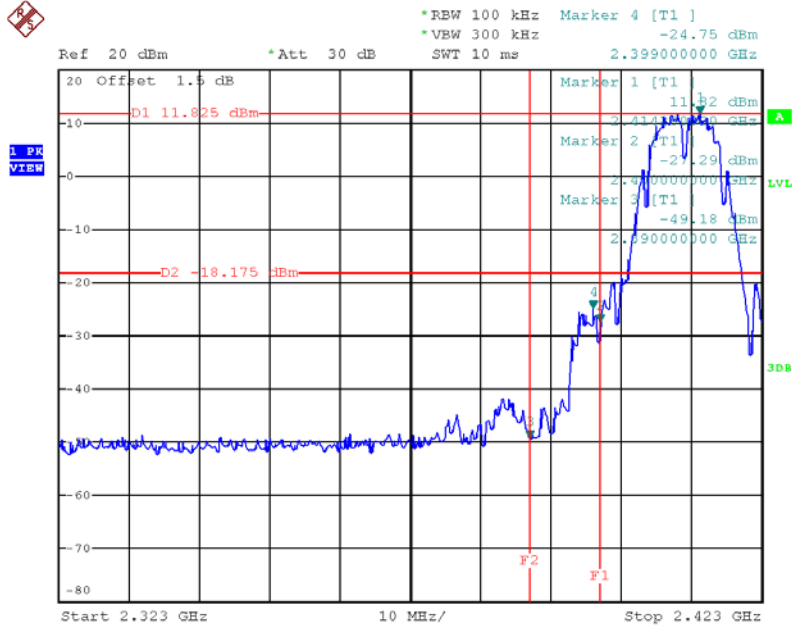


Date: 4.FEB.2018 15:30:10

TX B mode CH11

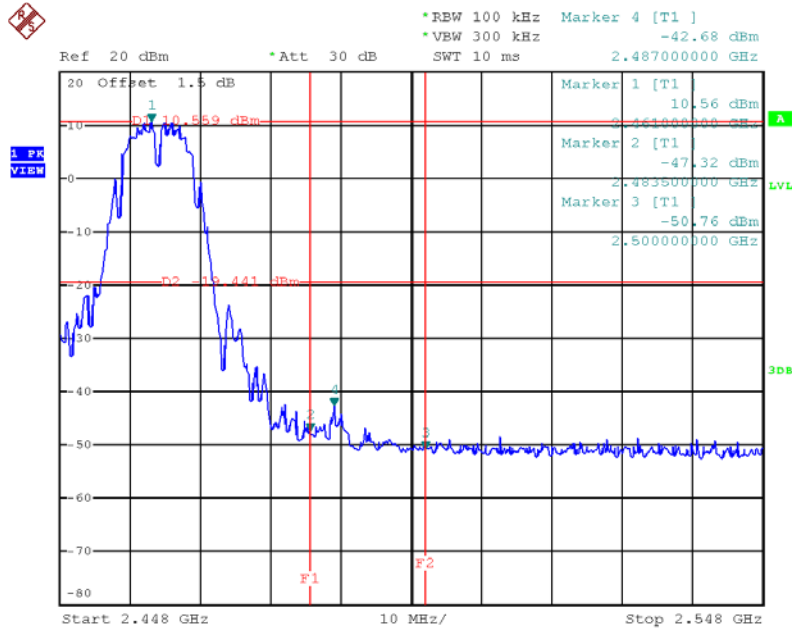


Date: 4.FEB.2018 15:47:03


TX B mode CH01 (10 Harmonic of the frequency)

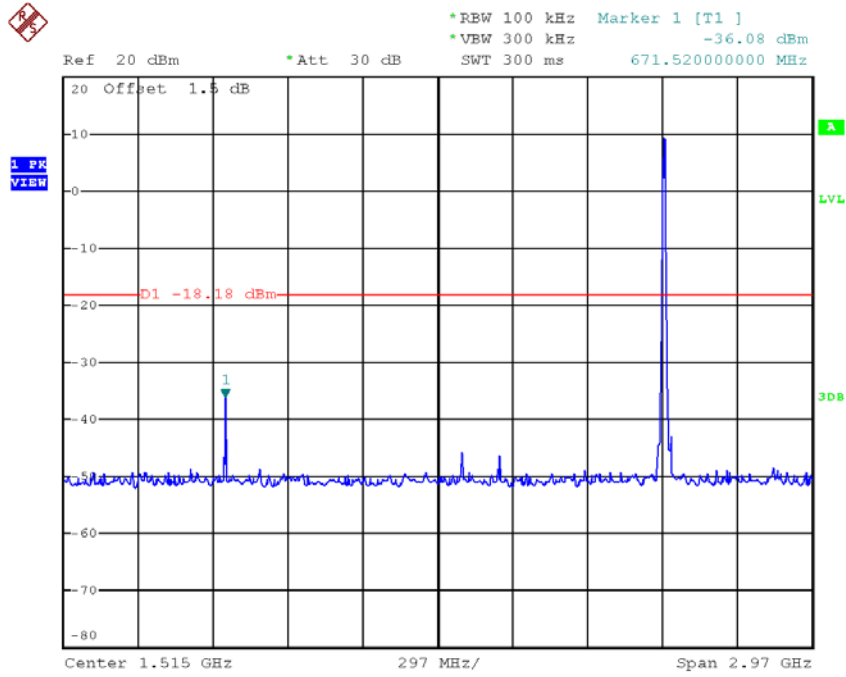

Date: 4.FEB.2018 15:37:42

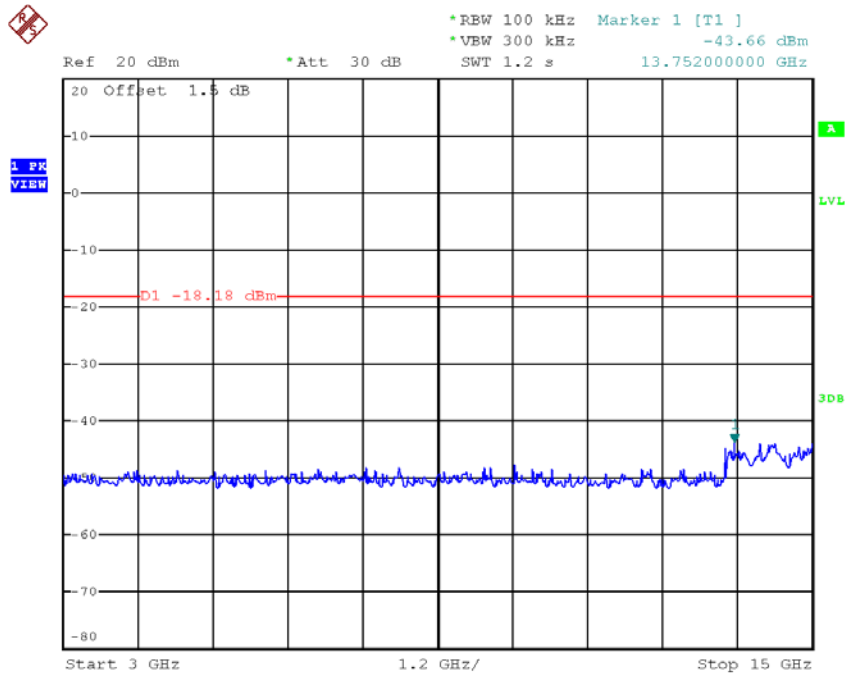


Date: 4.FEB.2018 15:30:30

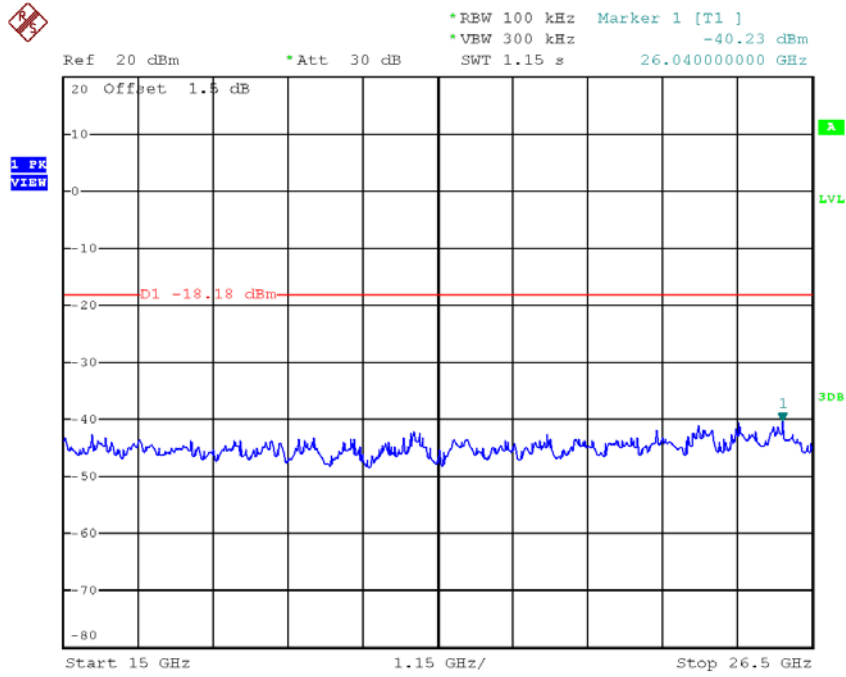


Date: 4.FEB.2018 15:30:37


TX B mode CH06 (10 Harmonic of the frequency)

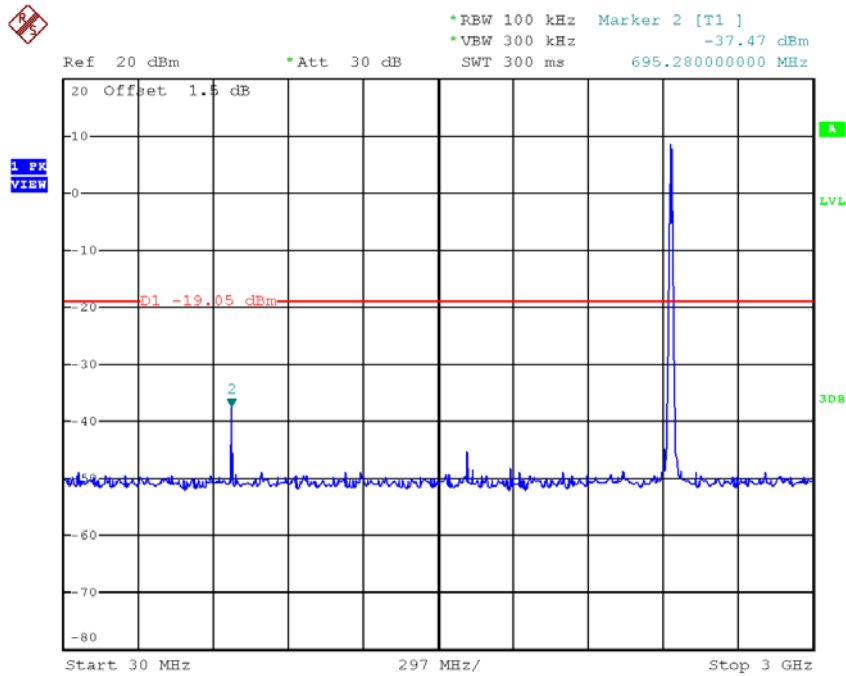

Date: 4.FEB.2018 15:45:34

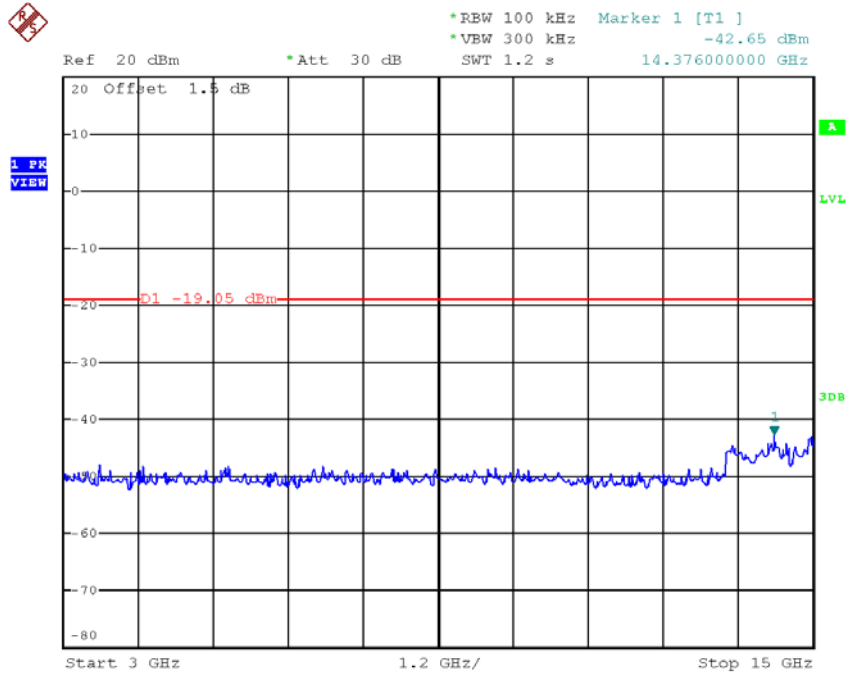


Date: 4.FEB.2018 15:40:29

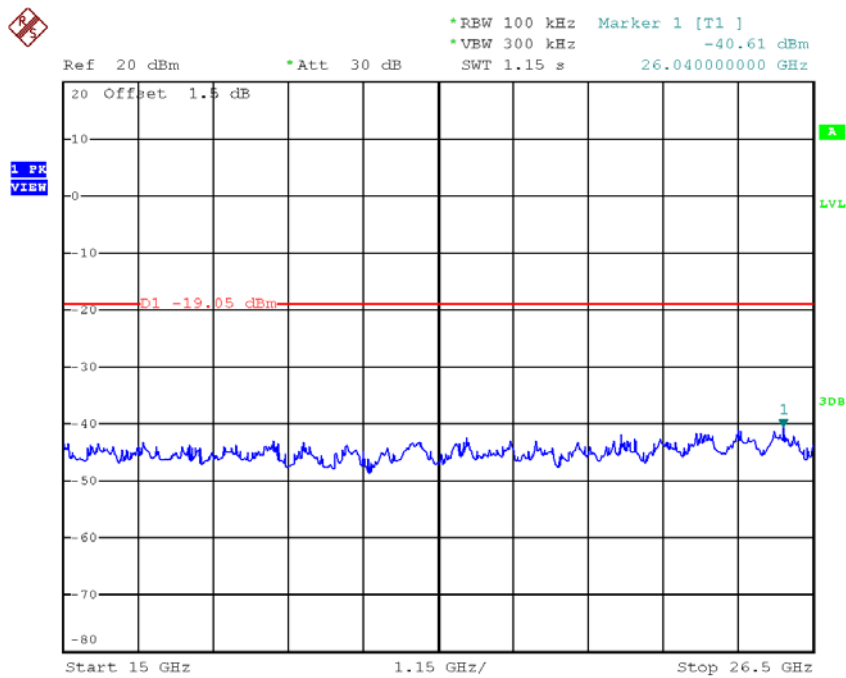


Date: 4.FEB.2018 15:40:37


TX B mode CH11 (10 Harmonic of the frequency)

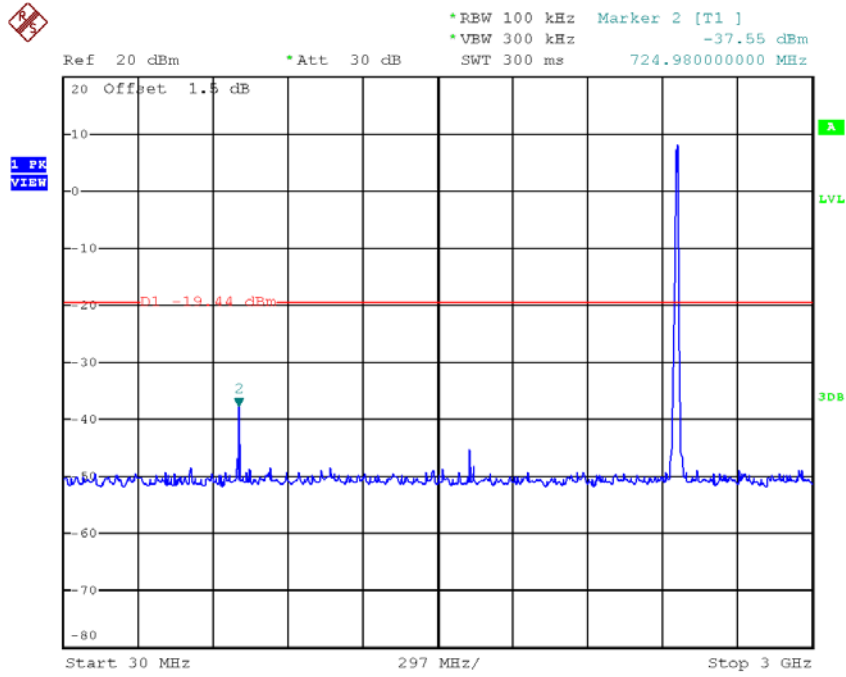

Date: 4.FEB.2018 15:49:57

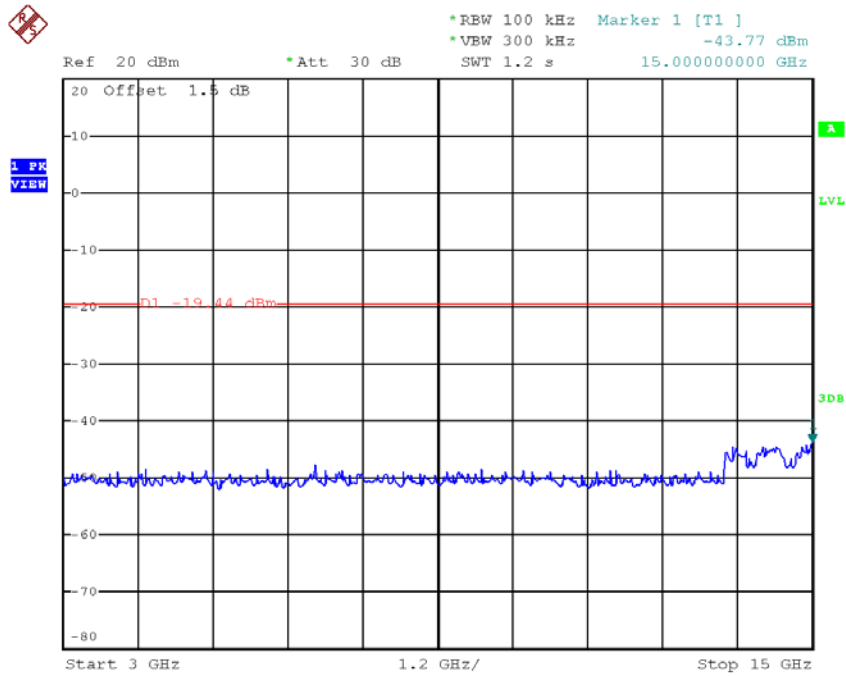


Date: 4.FEB.2018 15:47:24

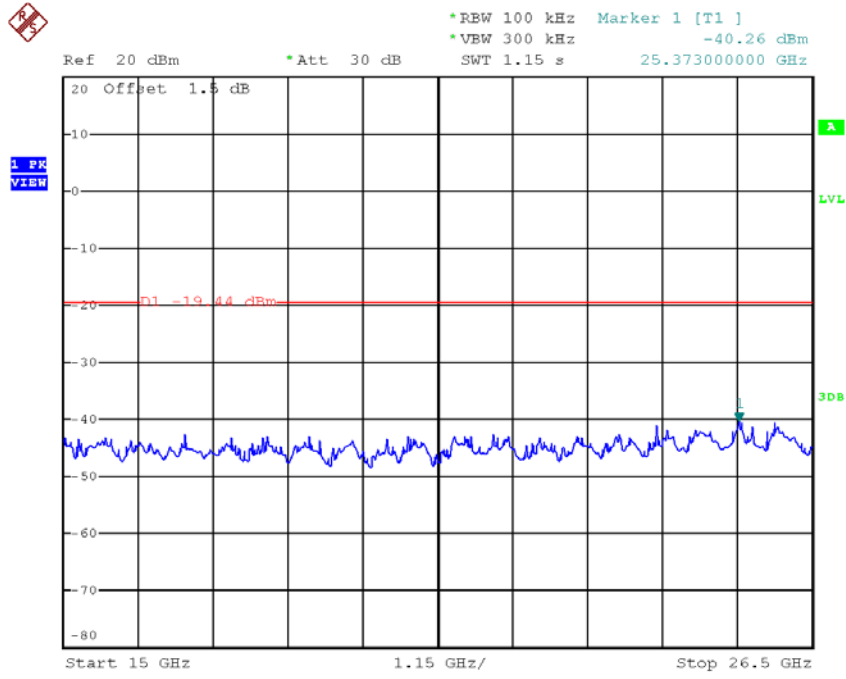

Date: 4.FEB.2018 15:47:32


Test Mode : TX G Mode

TX G mode CH01

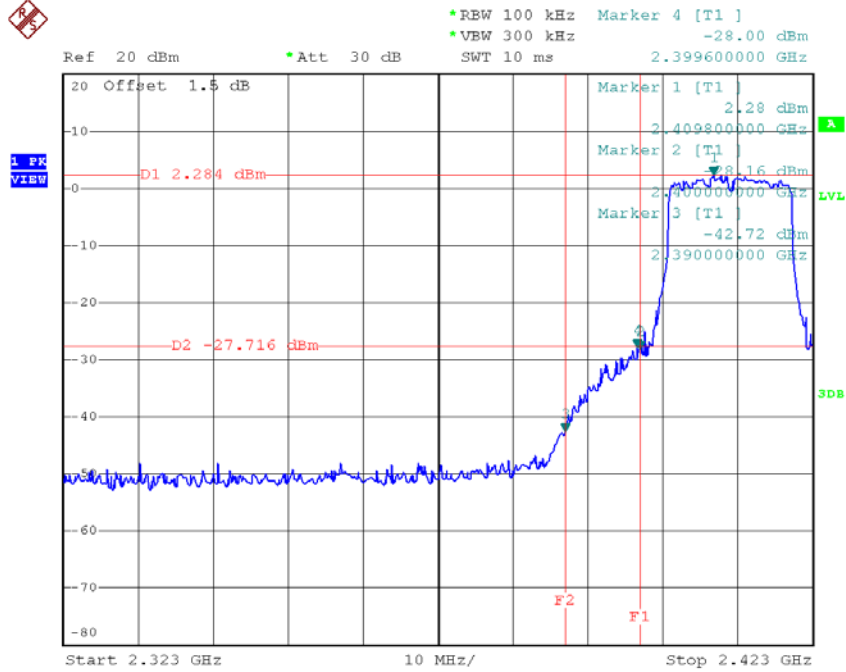


Date: 8.FEB.2018 13:10:20

TX G mode CH11

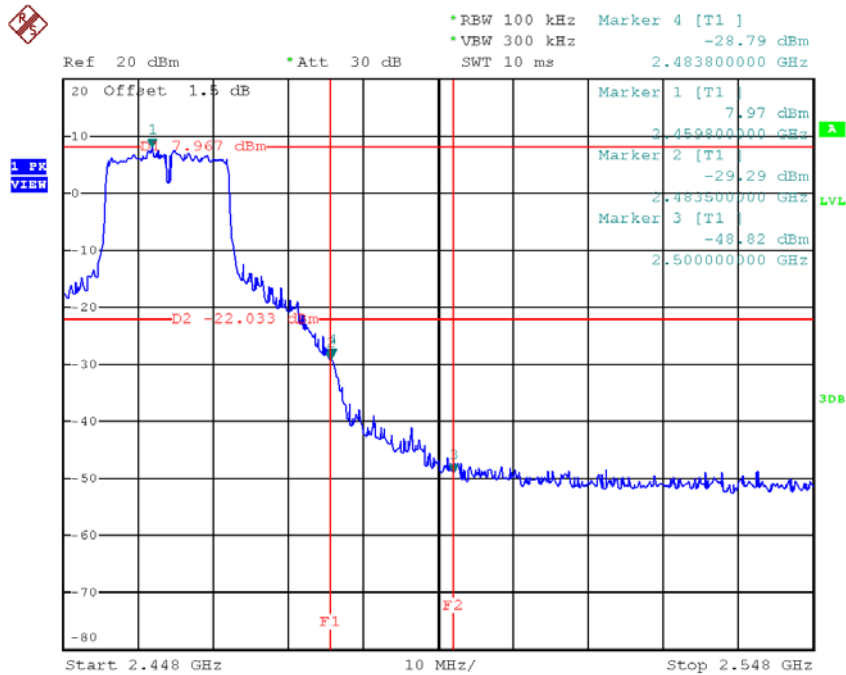


Date: 4.FEB.2018 16:01:12


TX G mode CH01 (10 Harmonic of the frequency)

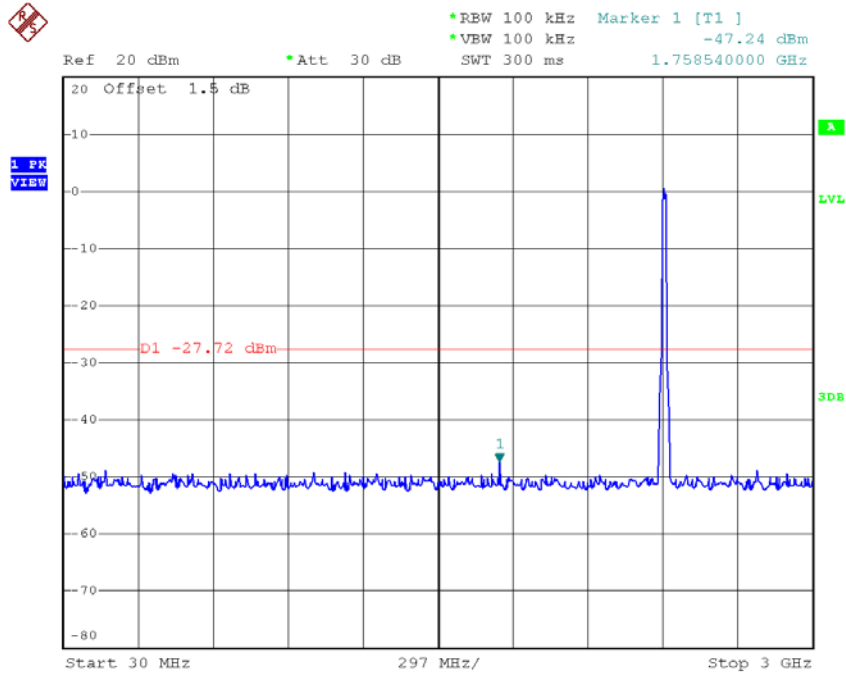

Date: 8.FEB.2018 13:27:27

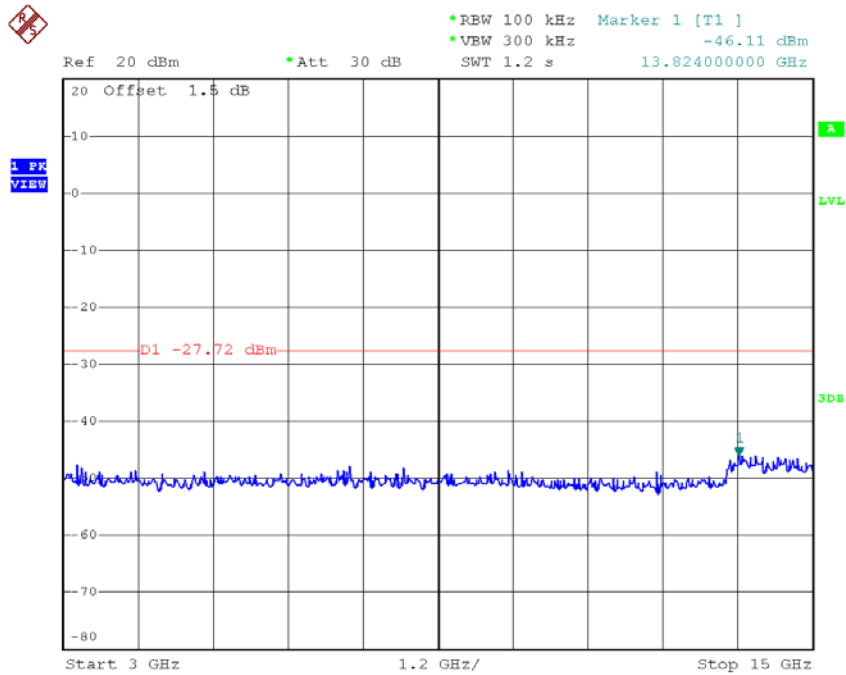


Date: 8.FEB.2018 13:11:01

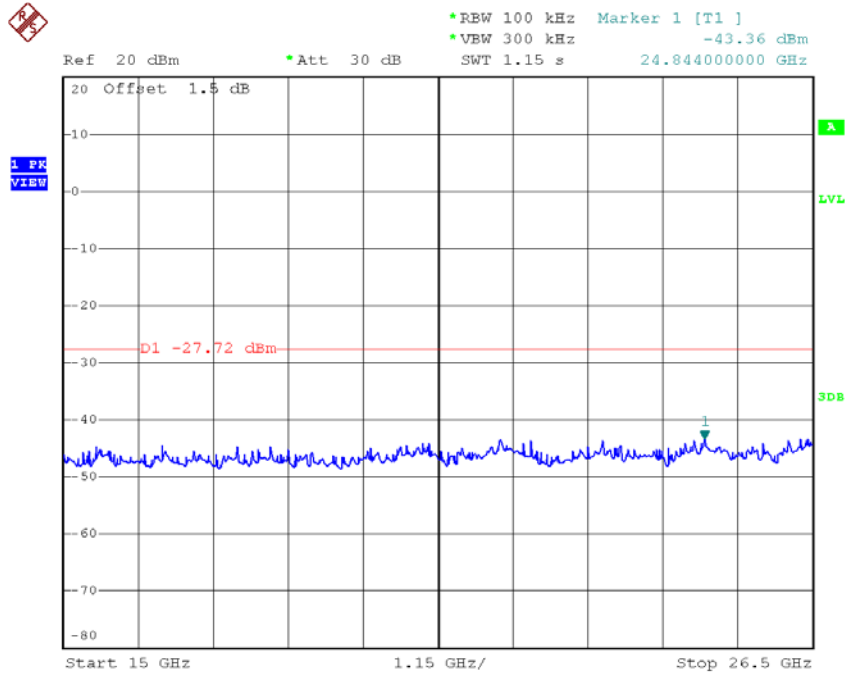


Date: 8.FEB.2018 13:11:11


TX G mode CH06 (10 Harmonic of the frequency)

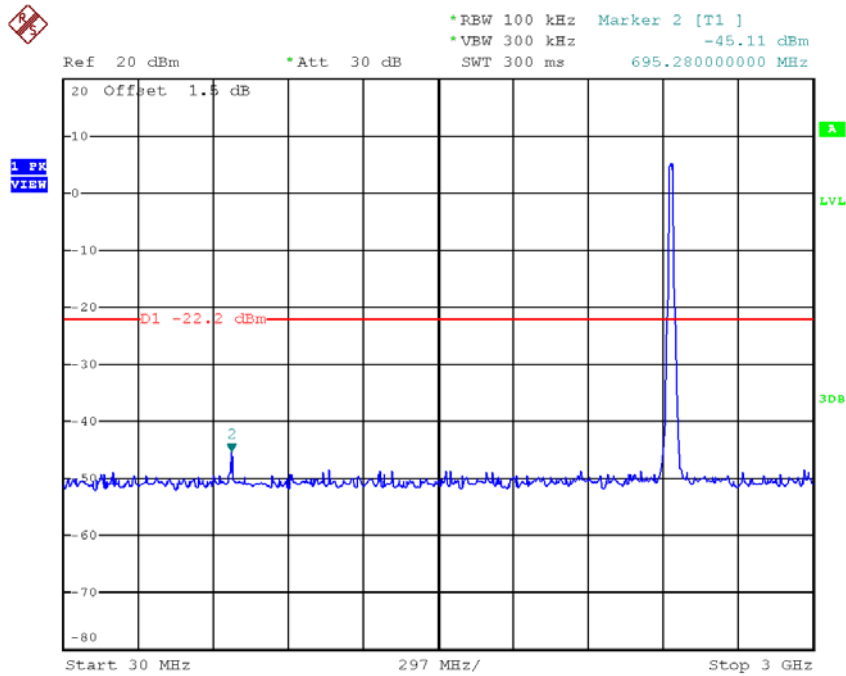

Date: 4.FEB.2018 15:59:39

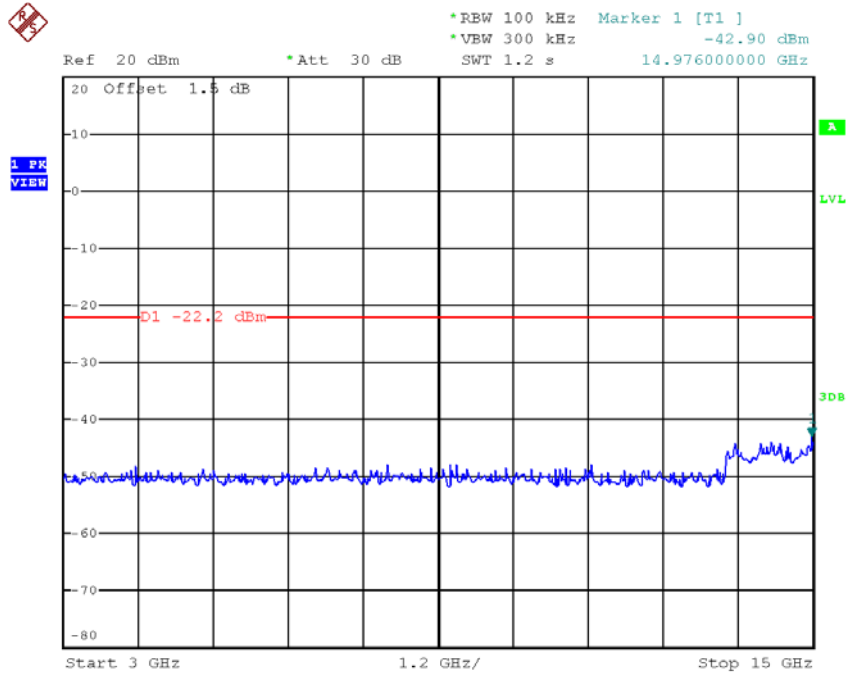


Date: 4.FEB.2018 15:58:07

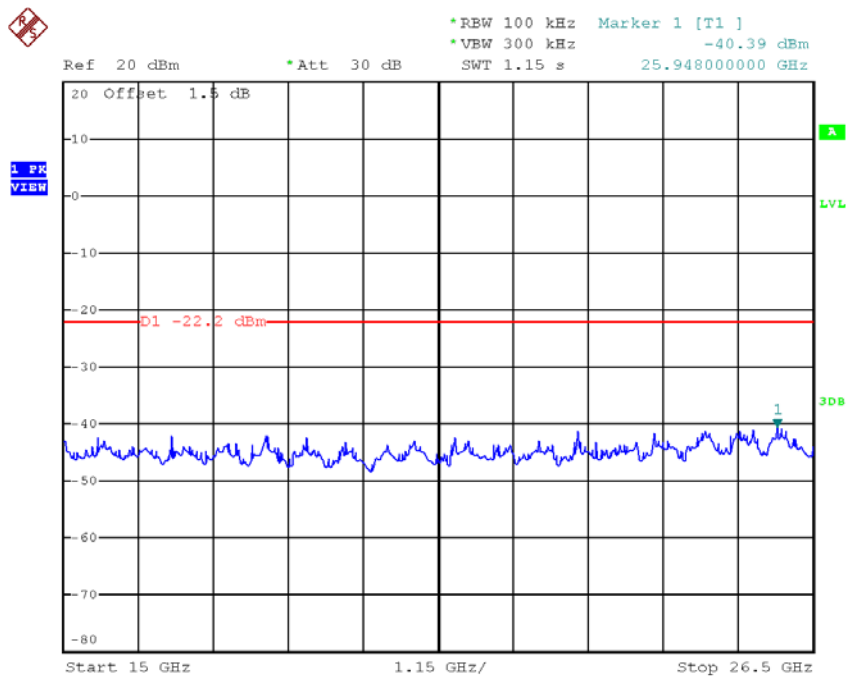


Date: 4.FEB.2018 15:58:15


TX G mode CH11 (10 Harmonic of the frequency)

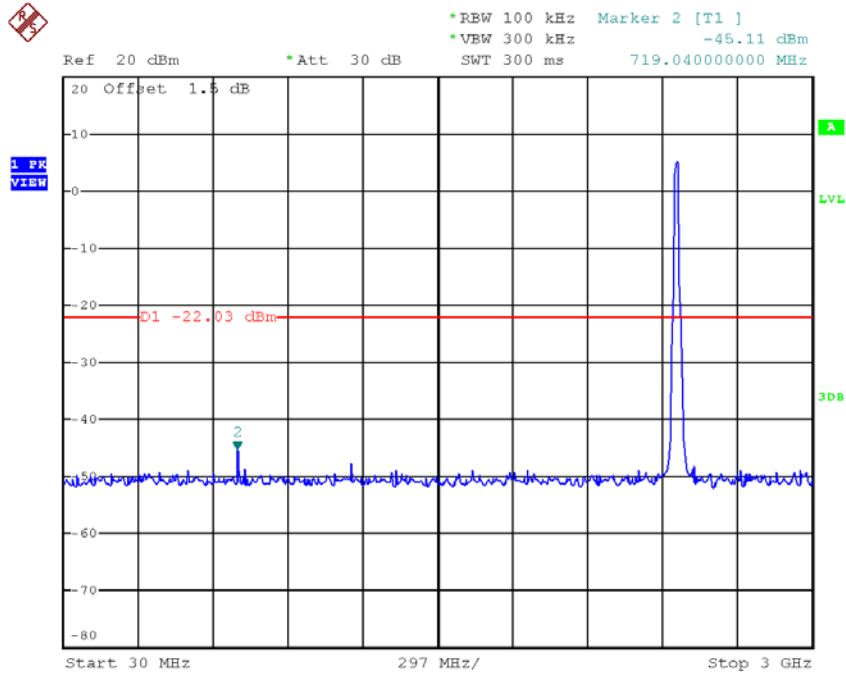

Date: 4.FEB.2018 16:02:42

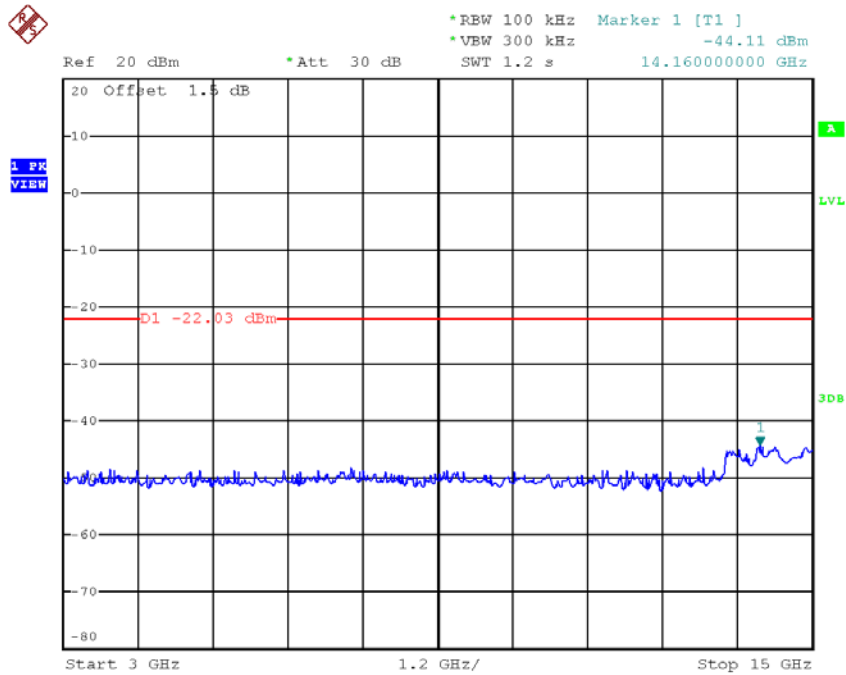


Date: 4.FEB.2018 16:01:33

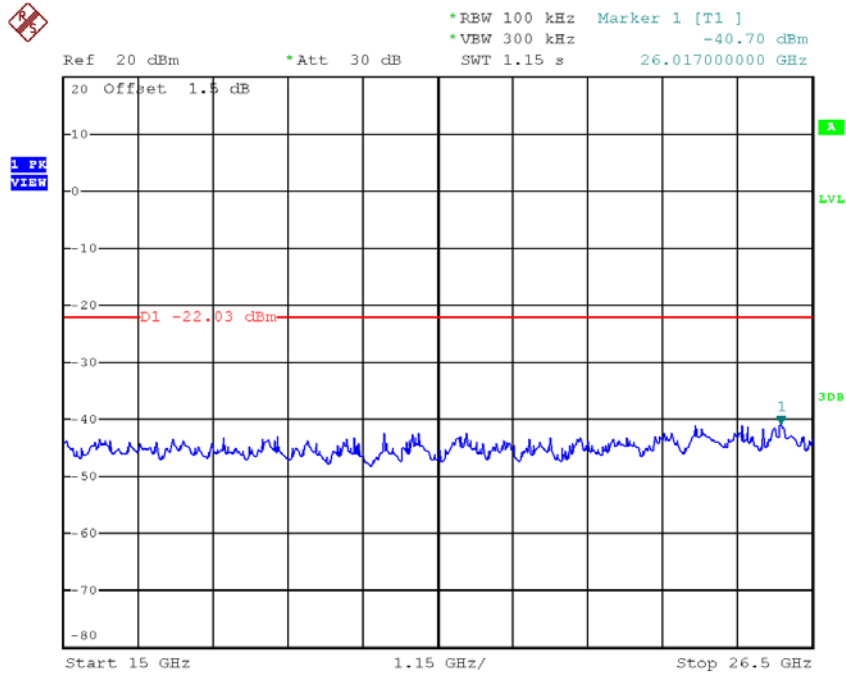

Date: 4.FEB.2018 16:01:41


Test Mode : TX N-20M Mode

TX HT20 mode CH01

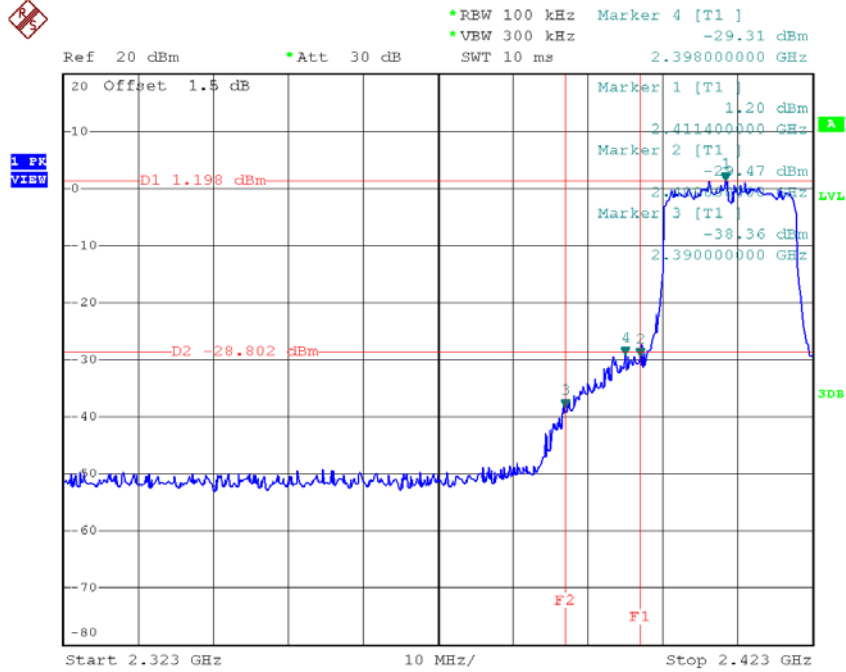


Date: 8.FEB.2018 13:13:08

TX HT20 mode CH11

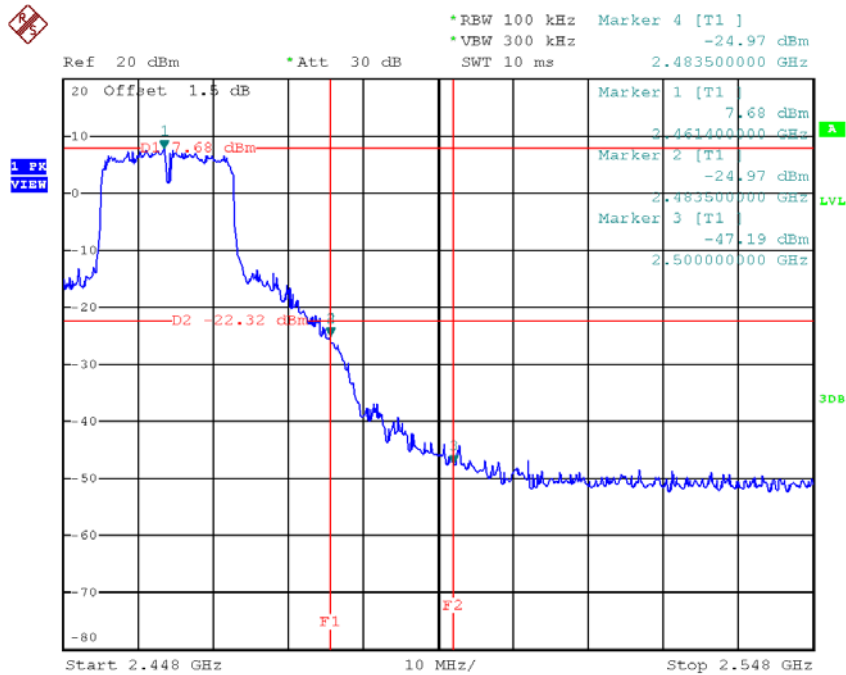


Date: 4.FEB.2018 16:12:19


TX HT20 mode CH01 (10 Harmonic of the frequency)

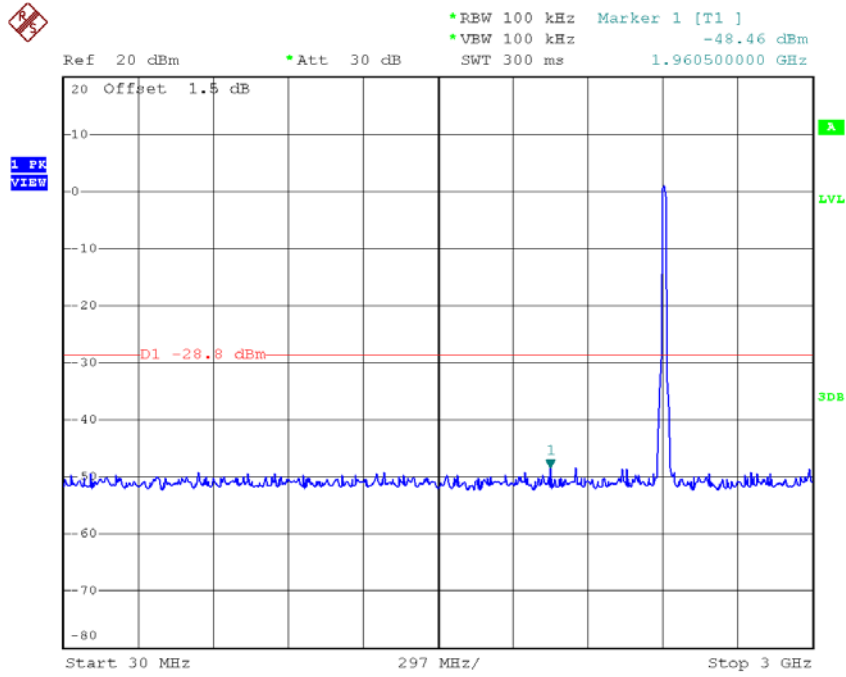

Date: 8.FEB.2018 13:28:20

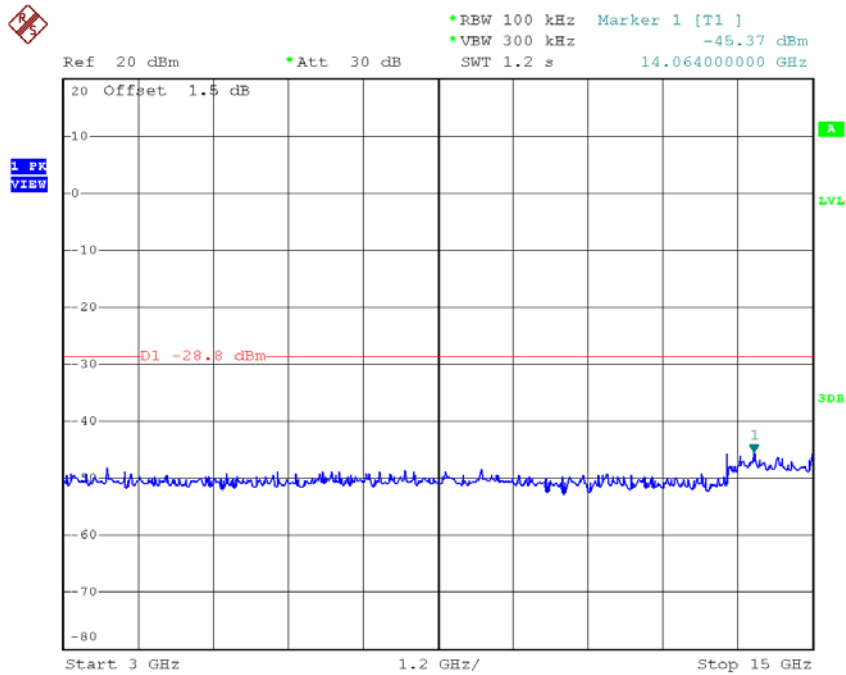


Date: 8.FEB.2018 13:13:31

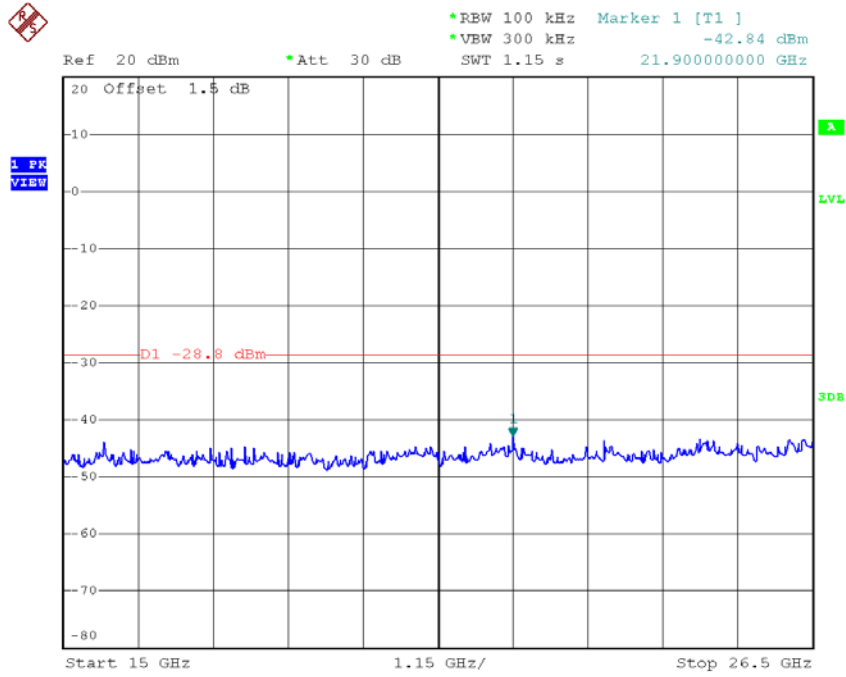


Date: 8.FEB.2018 13:13:40


TX HT20 mode CH06 (10 Harmonic of the frequency)

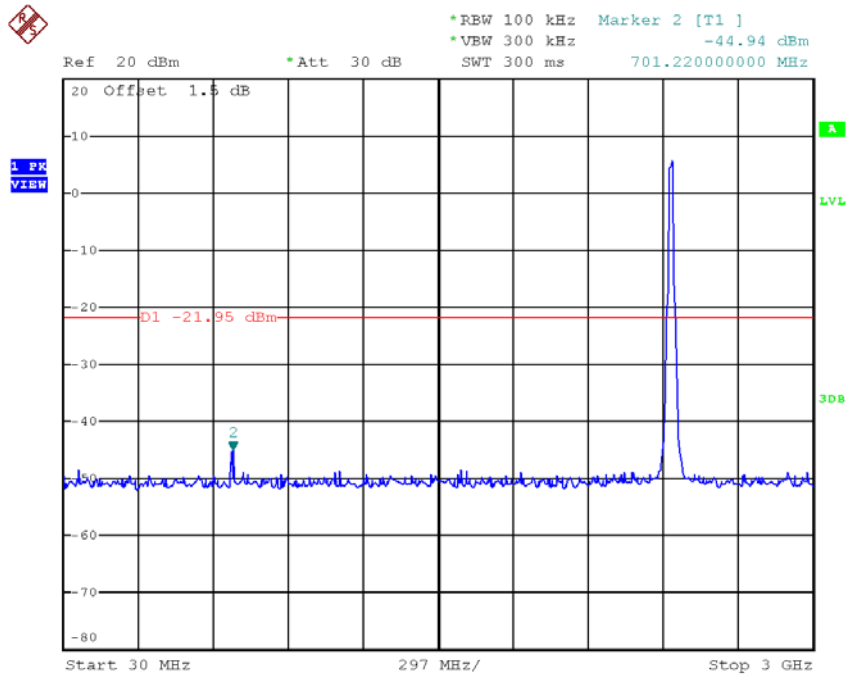

Date: 4.FEB.2018 16:10:51

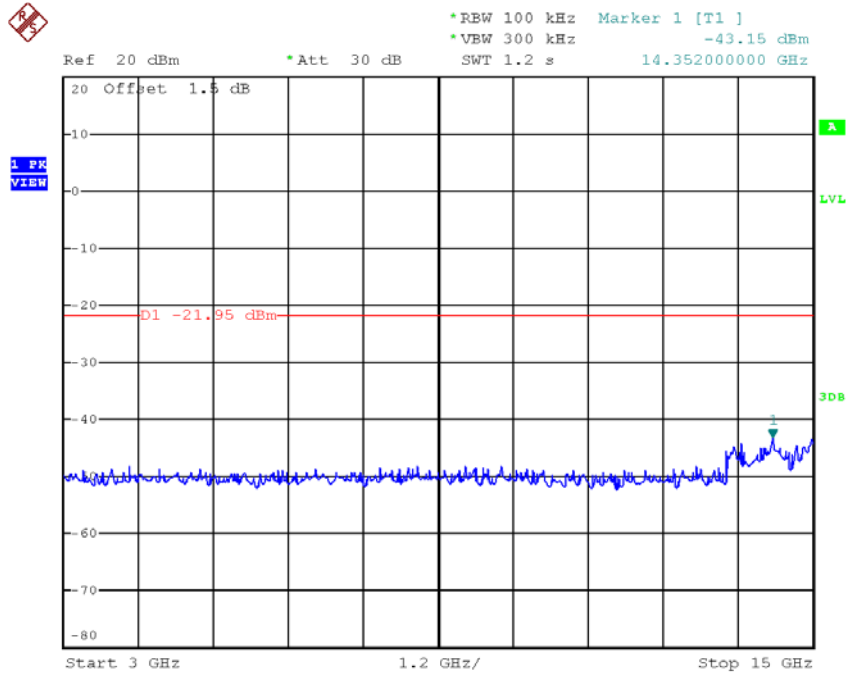


Date: 4.FEB.2018 16:09:45

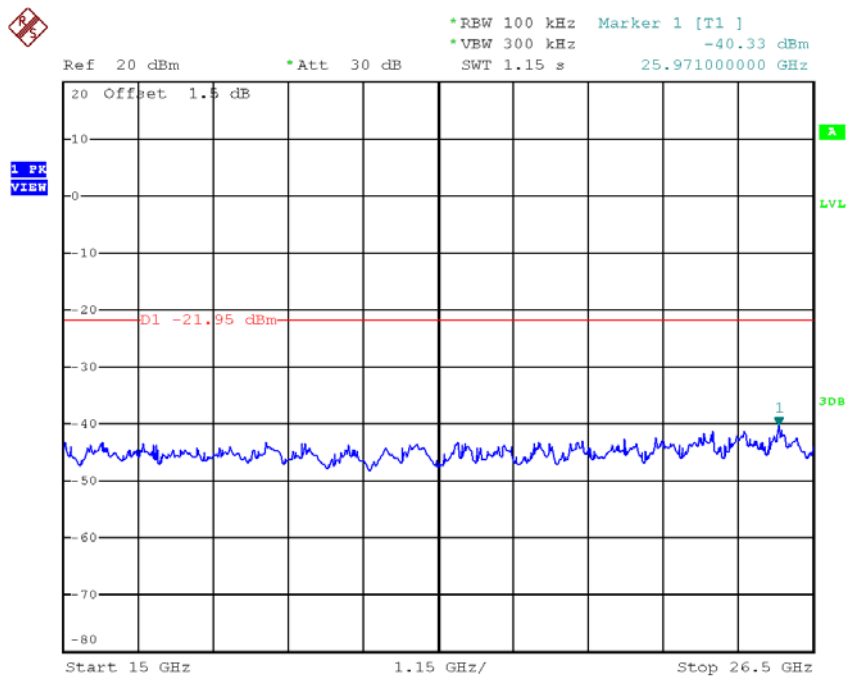


Date: 4.FEB.2018 16:09:53


TX HT20 mode CH11 (10 Harmonic of the frequency)

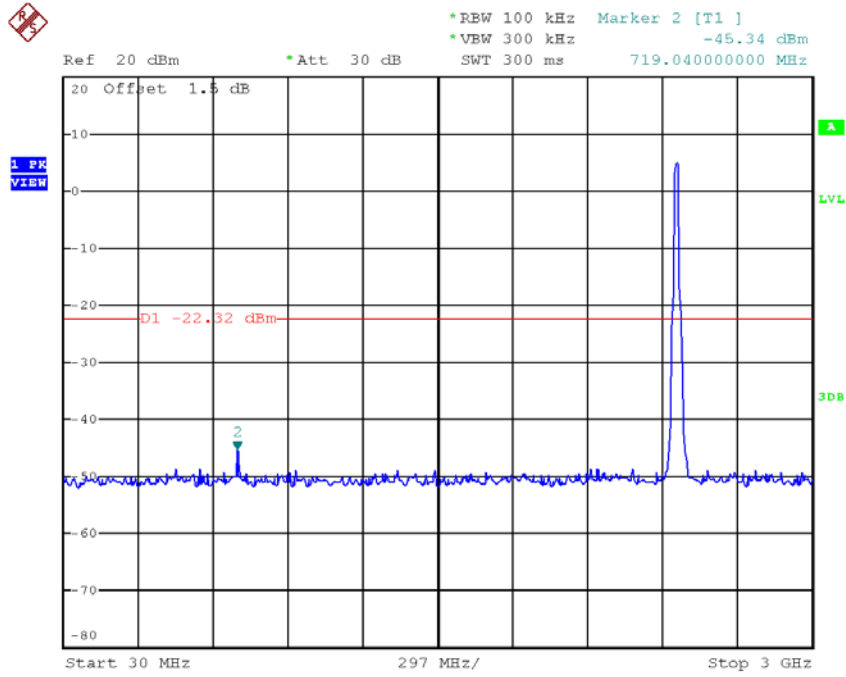

Date: 4.FEB.2018 16:14:36

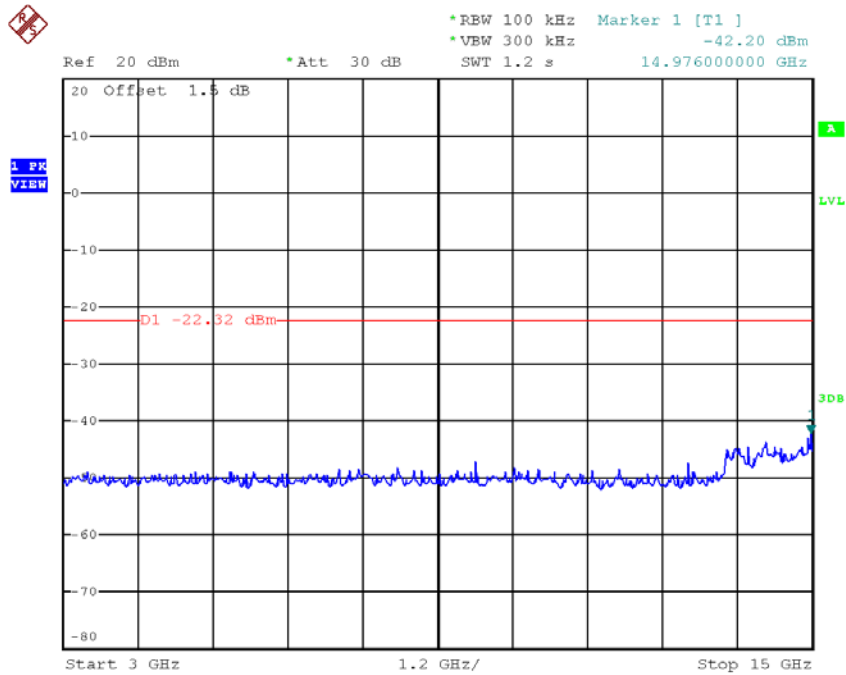


Date: 4.FEB.2018 16:12:40

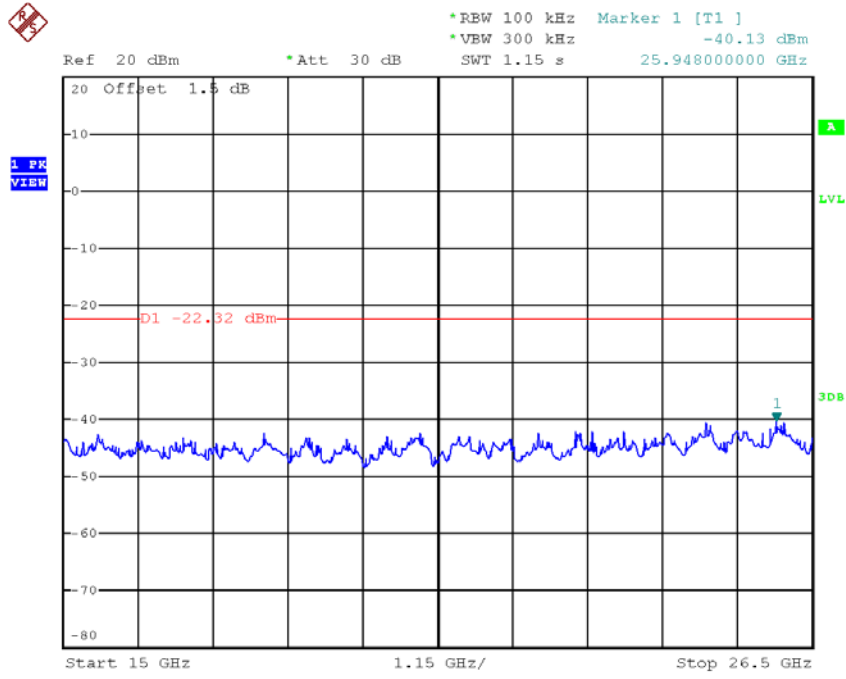

Date: 4.FEB.2018 16:12:48


Test Mode : TX N-40M Mode

TX HT40 mode CH03

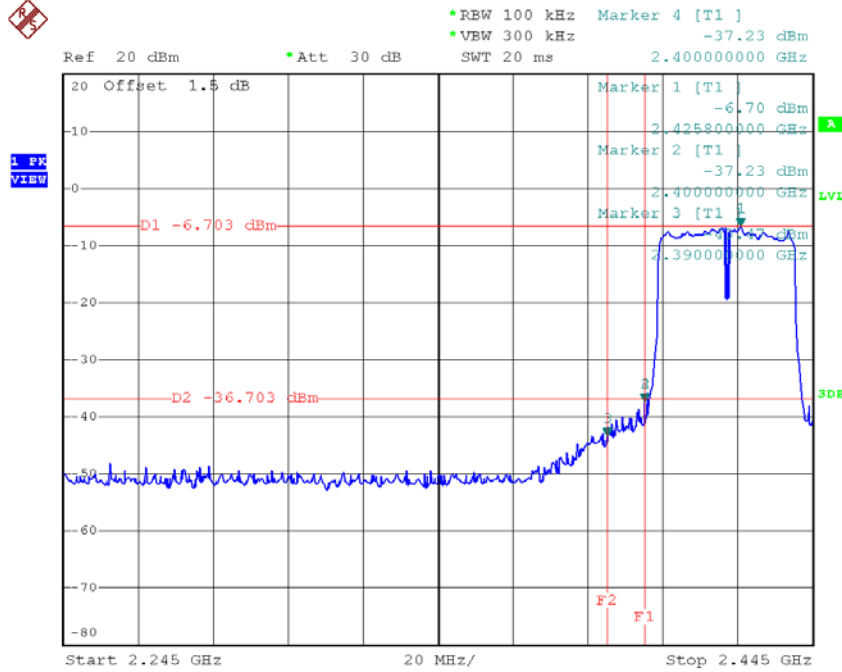


Date: 8.FEB.2018 13:15:21

TX HT40 mode CH09

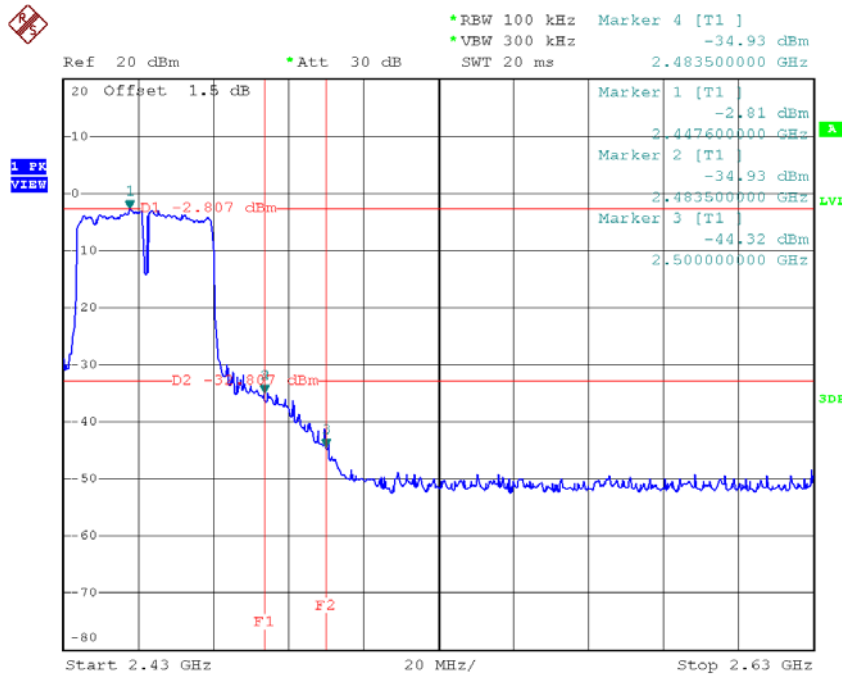


Date: 8.FEB.2018 13:18:17


TX HT40 mode CH03 (10 Harmonic of the frequency)

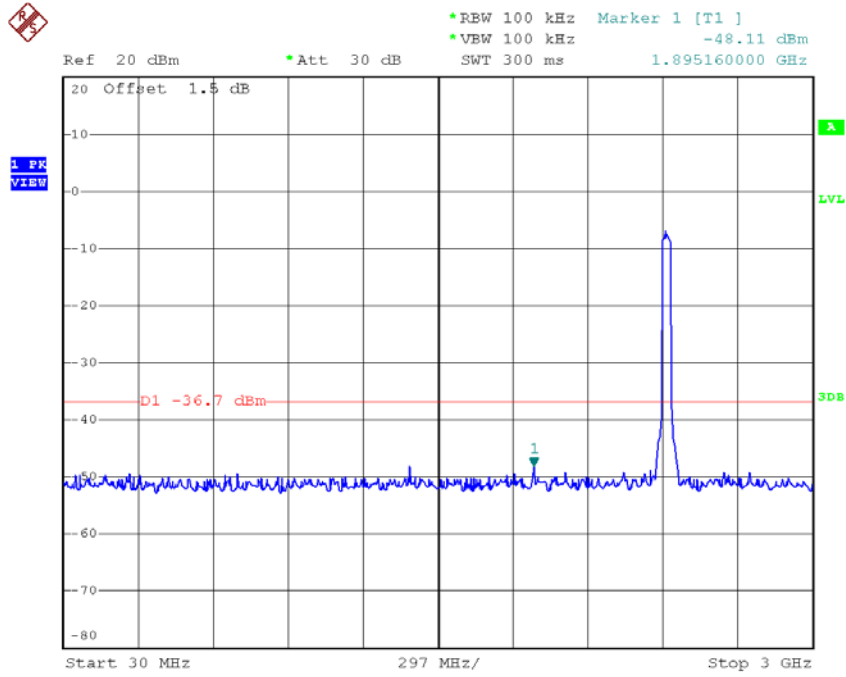

Date: 8.FEB.2018 13:29:15

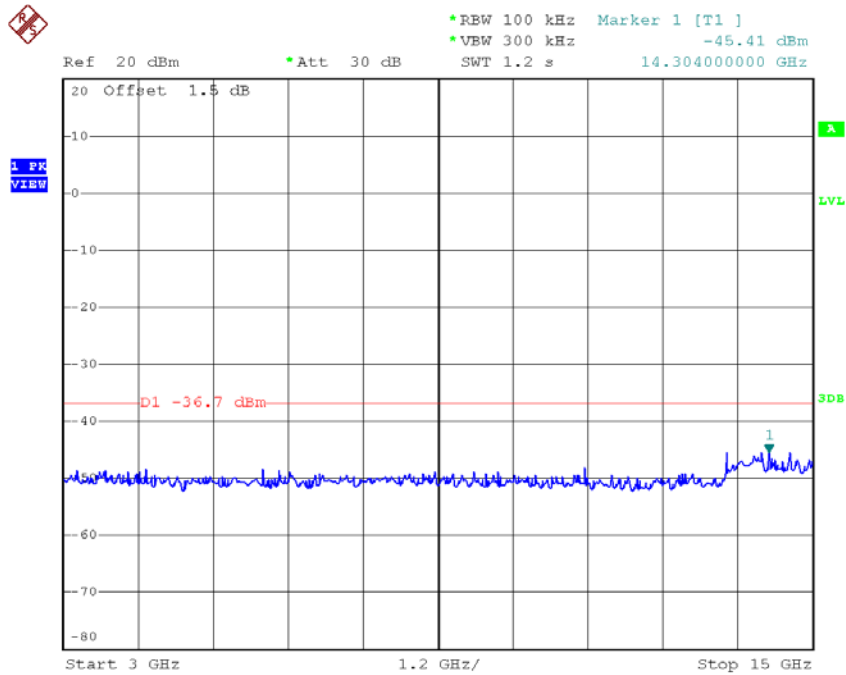


Date: 8.FEB.2018 13:15:58

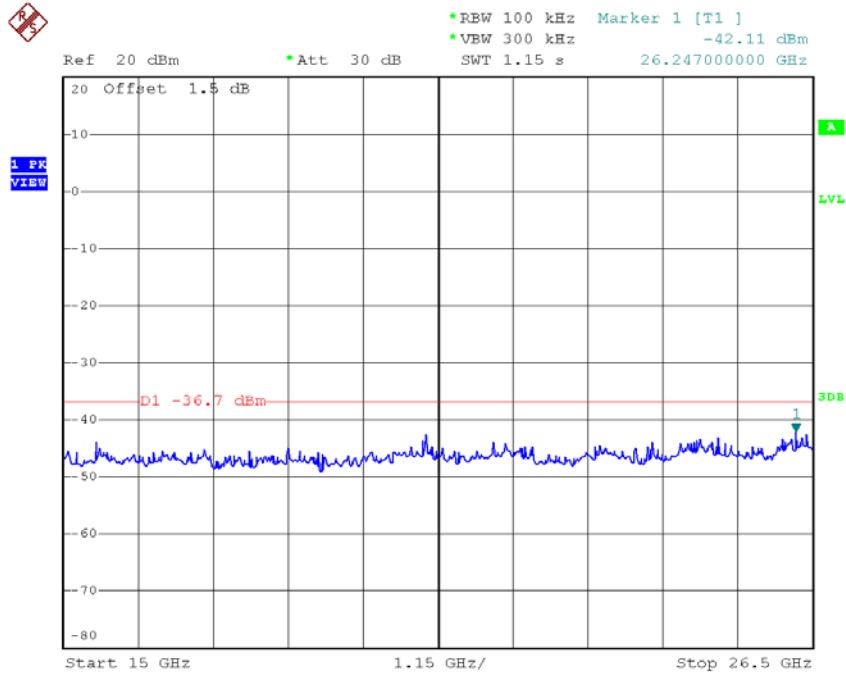


Date: 8.FEB.2018 13:16:07


TX HT40 mode CH06 (10 Harmonic of the frequency)

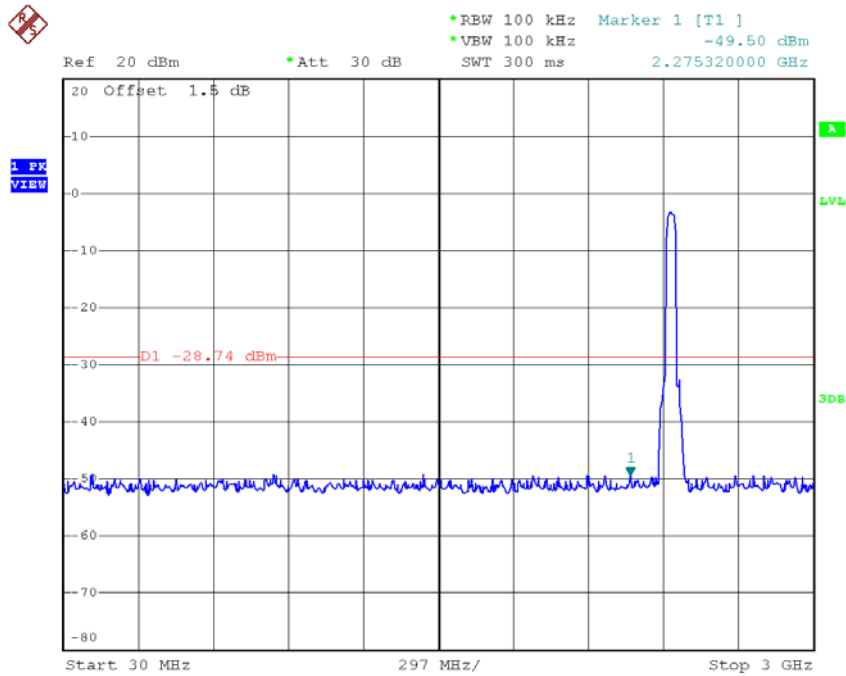

Date: 8.FEB.2018 13:30:06

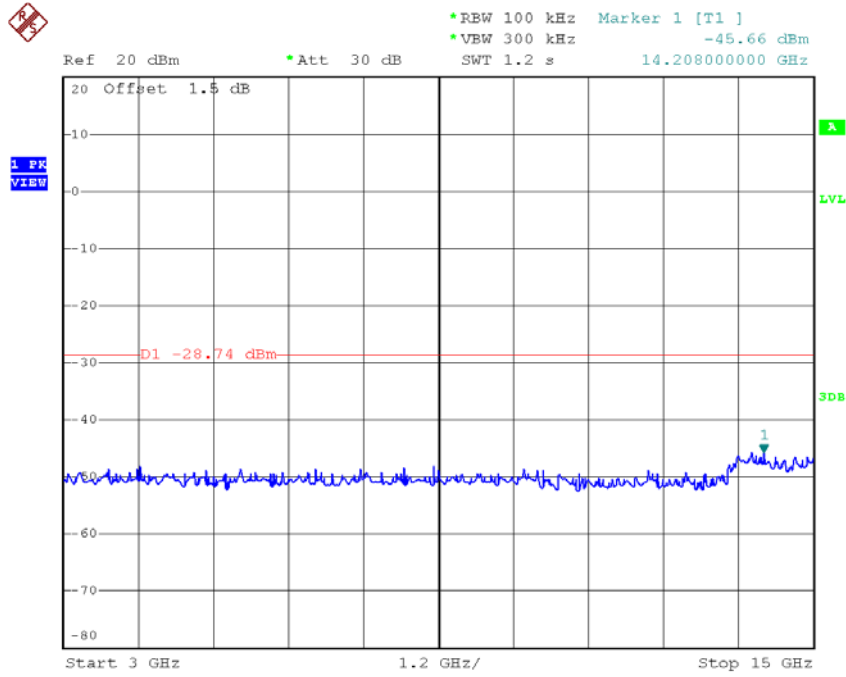


Date: 8.FEB.2018 13:22:17

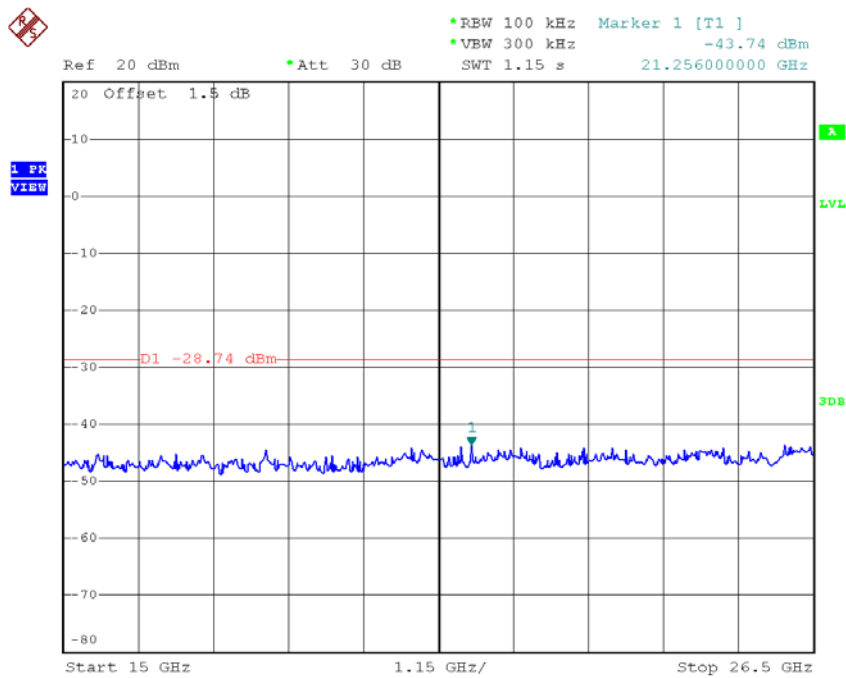


Date: 8.FEB.2018 13:22:27


TX HT40 mode CH09 (10 Harmonic of the frequency)

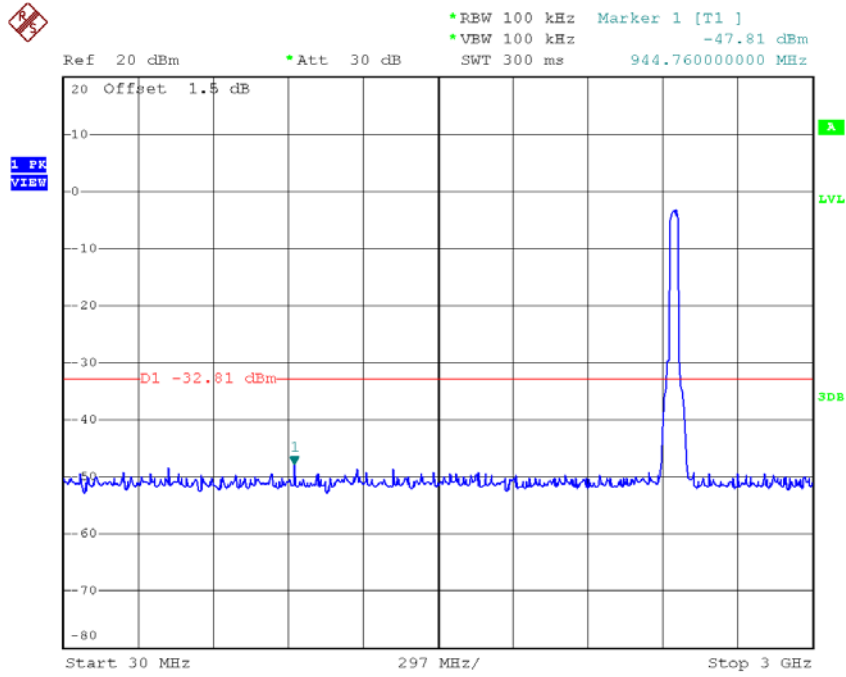

Date: 8.FEB.2018 13:30:53

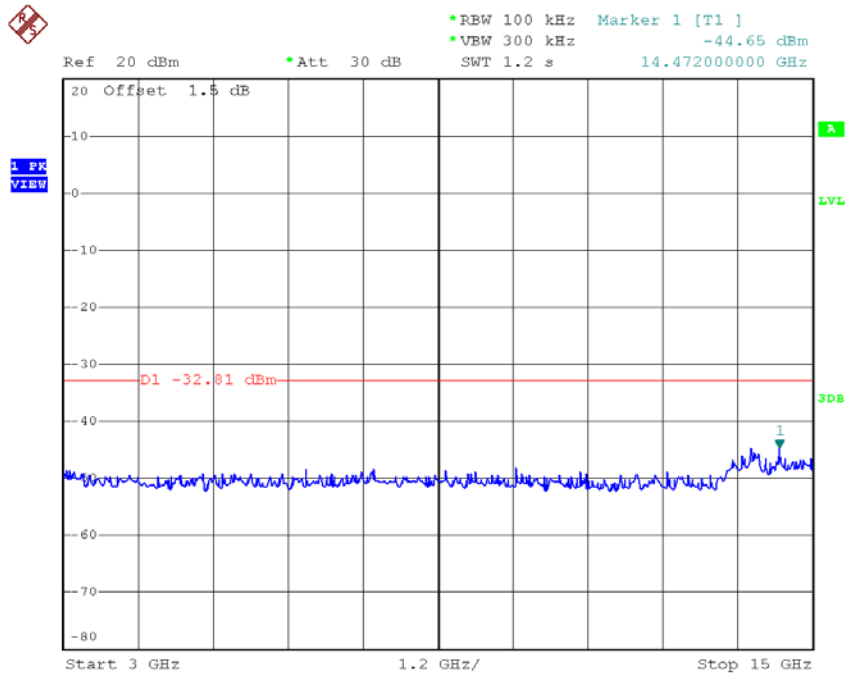

Date: 8.FEB.2018 13:18:55

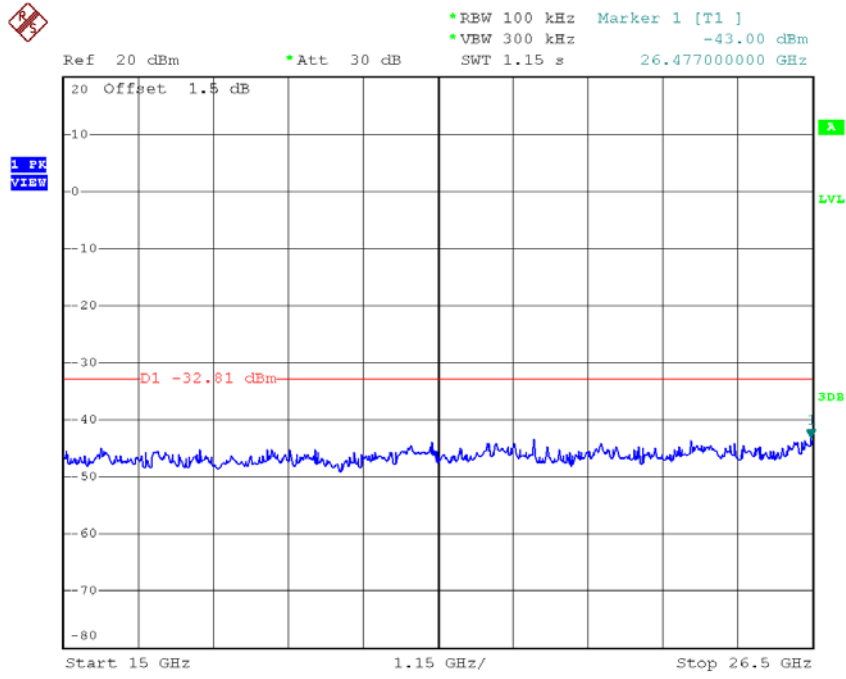


Date: 8.FEB.2018 13:19:04

ANT 2


Test Mode : TX B Mode

TX B mode CH01

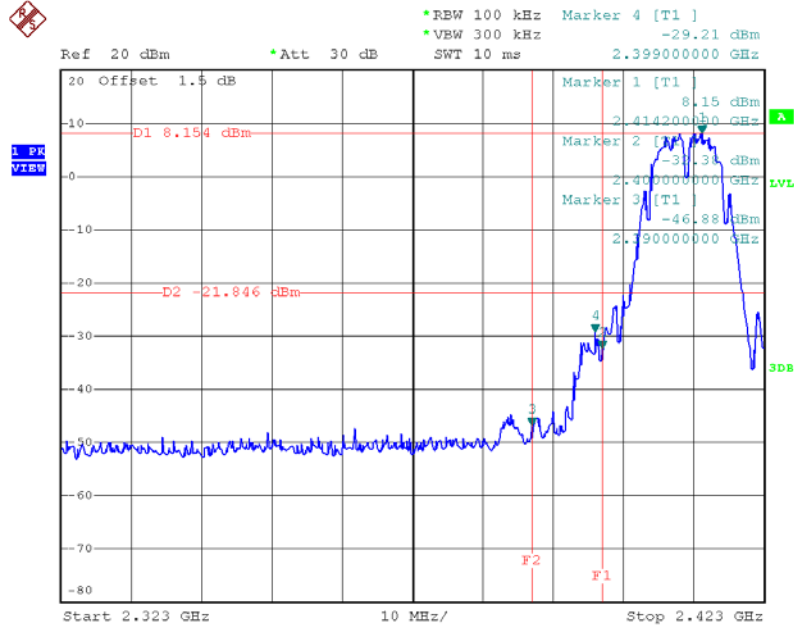


Date: 8.FEB.2018 13:39:53

TX B mode CH11

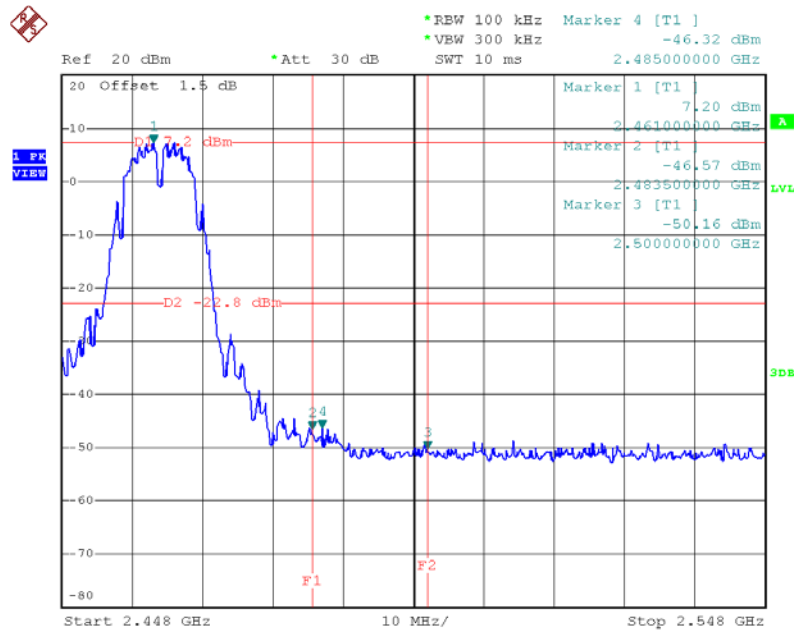


Date: 8.FEB.2018 13:44:46


TX B mode CH01 (10 Harmonic of the frequency)

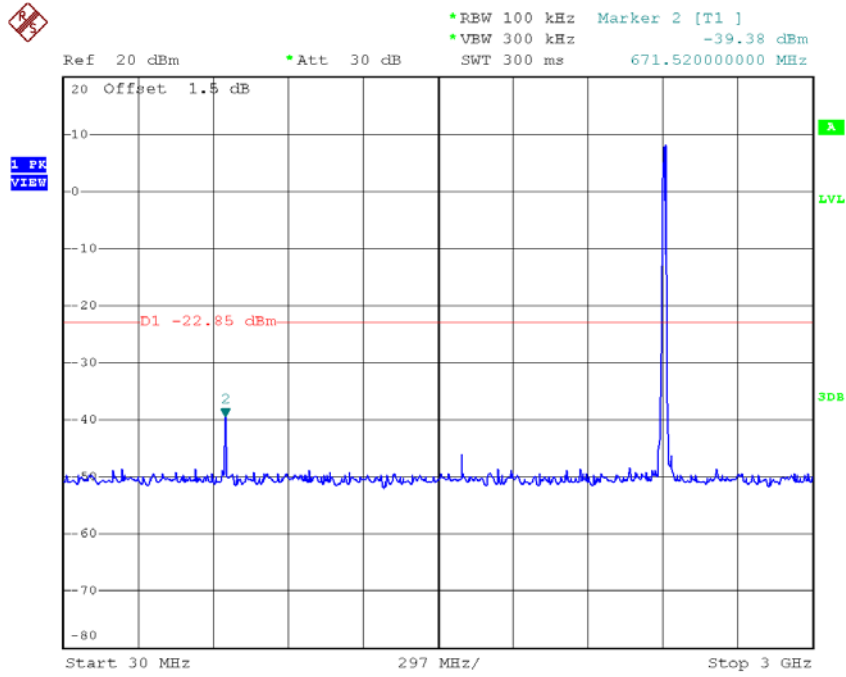

Date: 8.FEB.2018 13:40:46

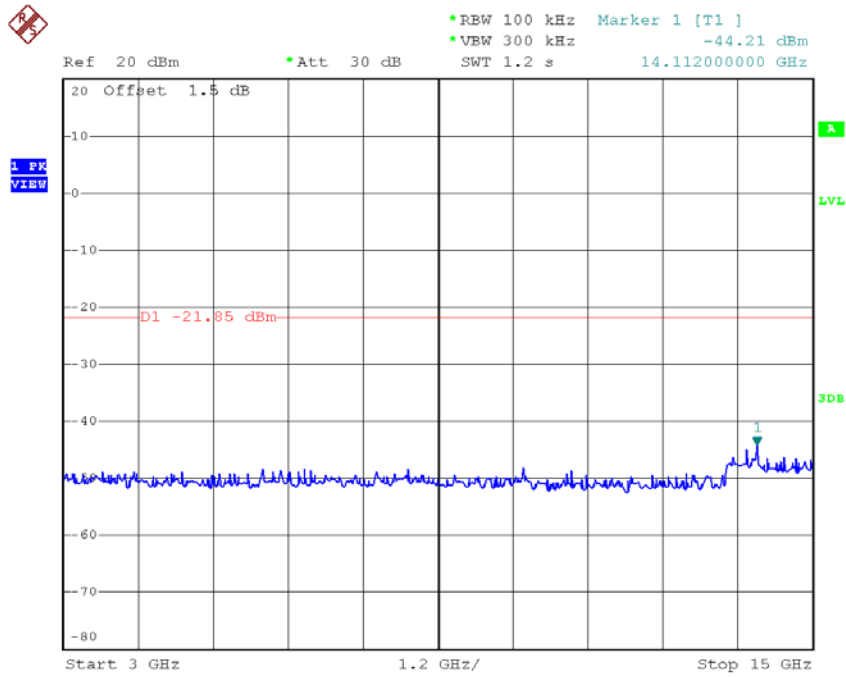


Date: 8.FEB.2018 13:41:32

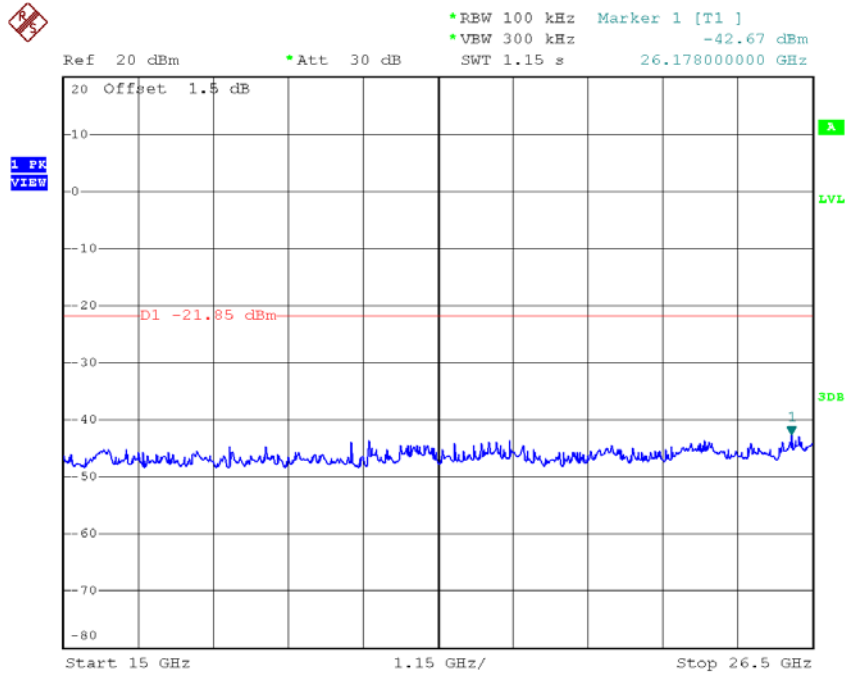


Date: 8.FEB.2018 13:41:41


TX B mode CH06 (10 Harmonic of the frequency)

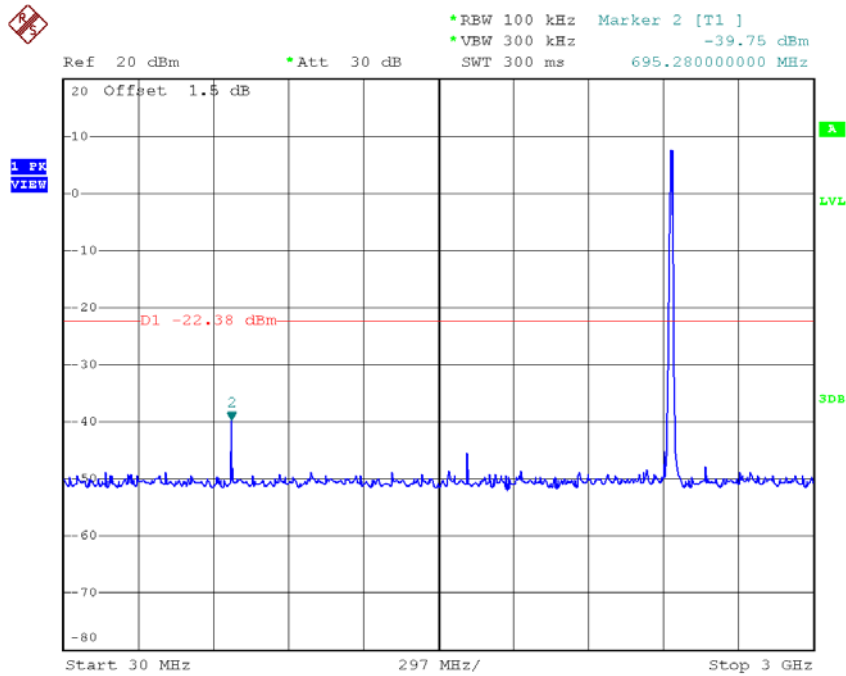

Date: 8.FEB.2018 13:43:18

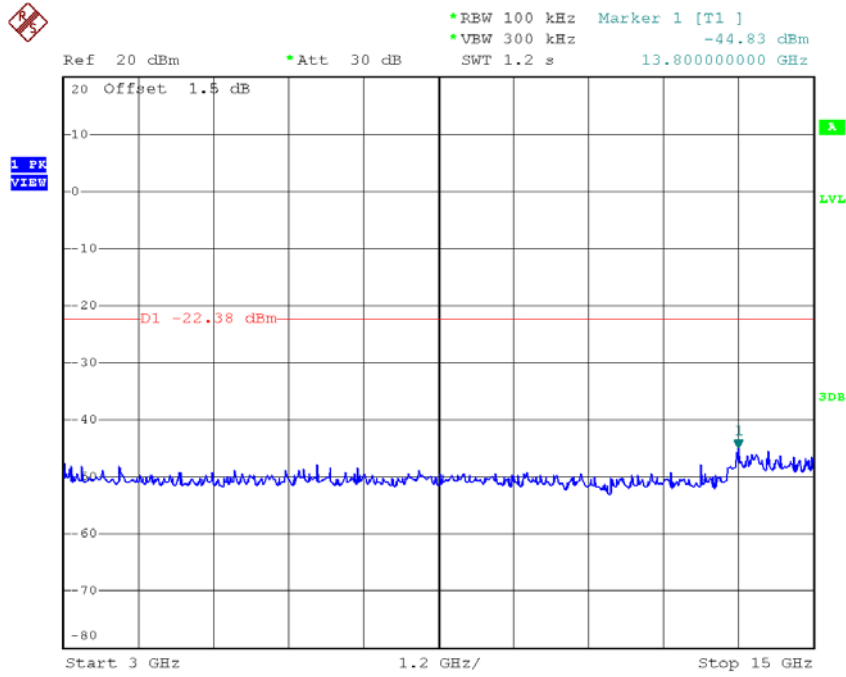


Date: 8.FEB.2018 13:43:29

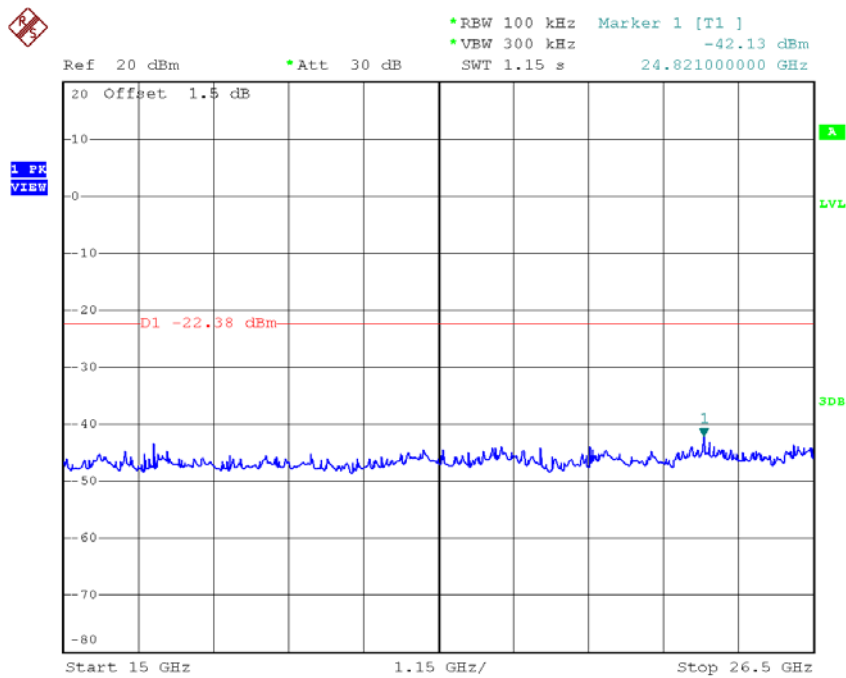


Date: 8.FEB.2018 13:43:38


TX B mode CH11 (10 Harmonic of the frequency)

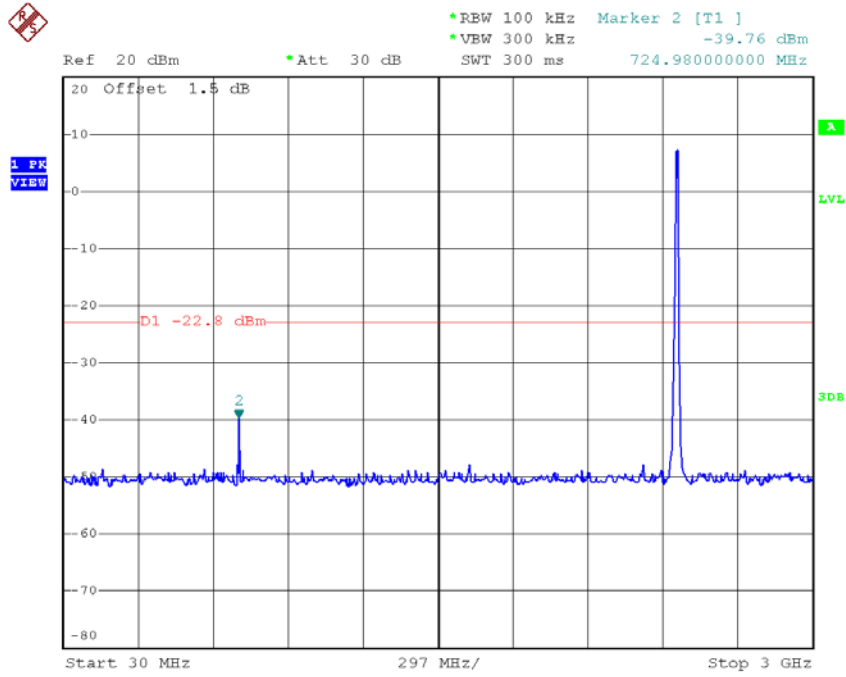

Date: 8.FEB.2018 13:45:10

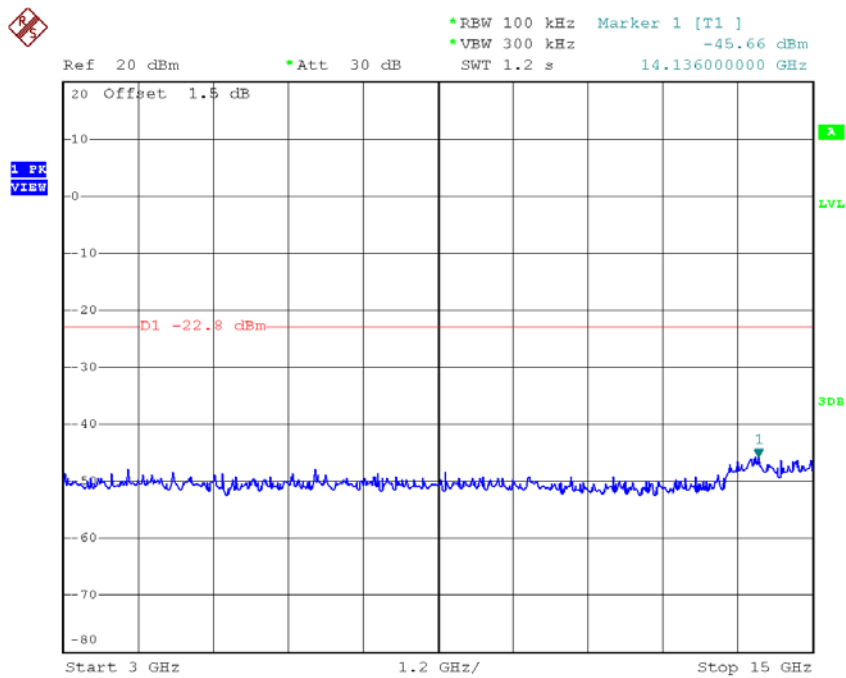


Date: 8.FEB.2018 13:45:28

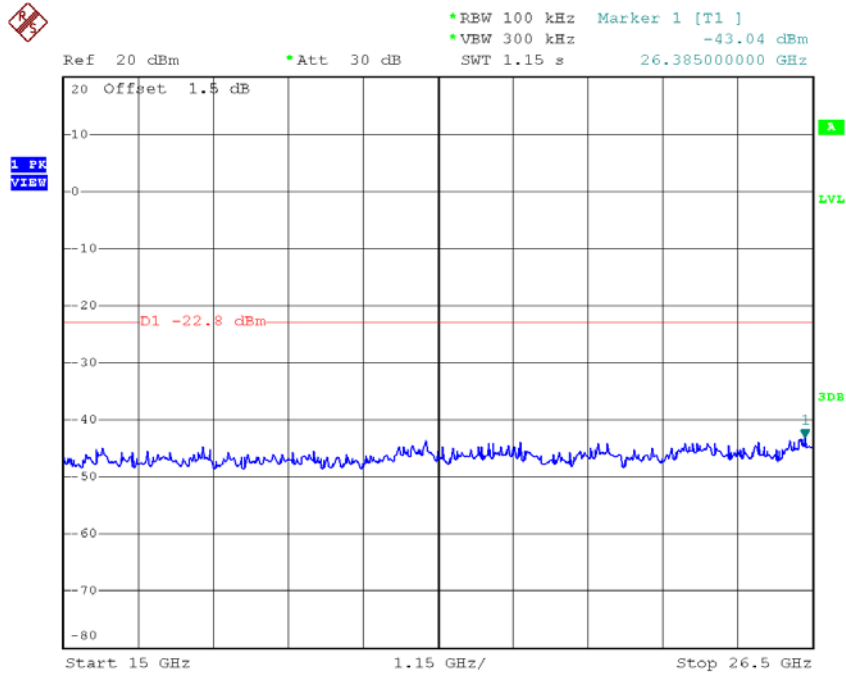

Date: 8.FEB.2018 13:45:37


Test Mode : TX G Mode

TX G mode CH01

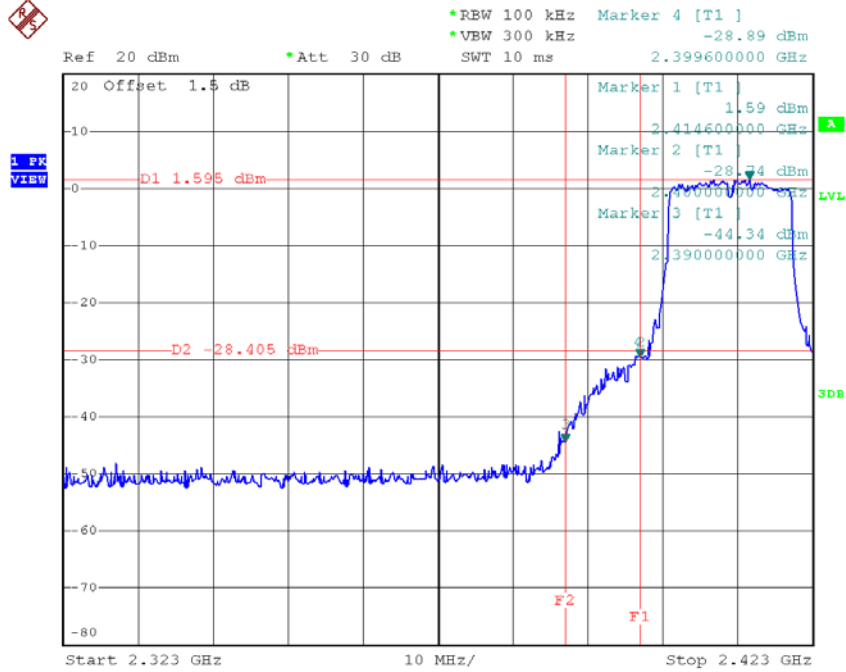


Date: 8.FEB.2018 13:47:55

TX G mode CH11

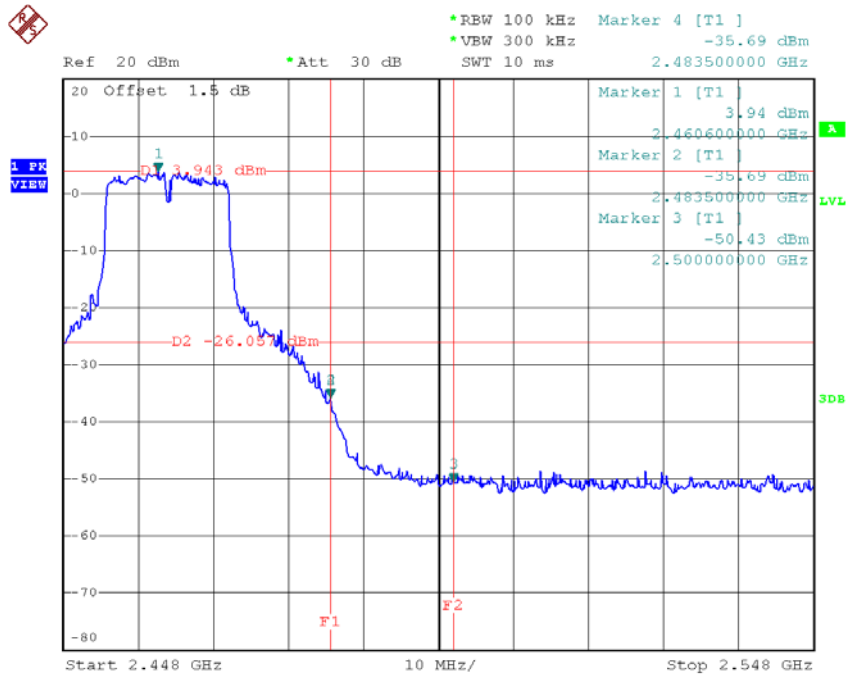


Date: 8.FEB.2018 13:52:12


TX G mode CH01 (10 Harmonic of the frequency)

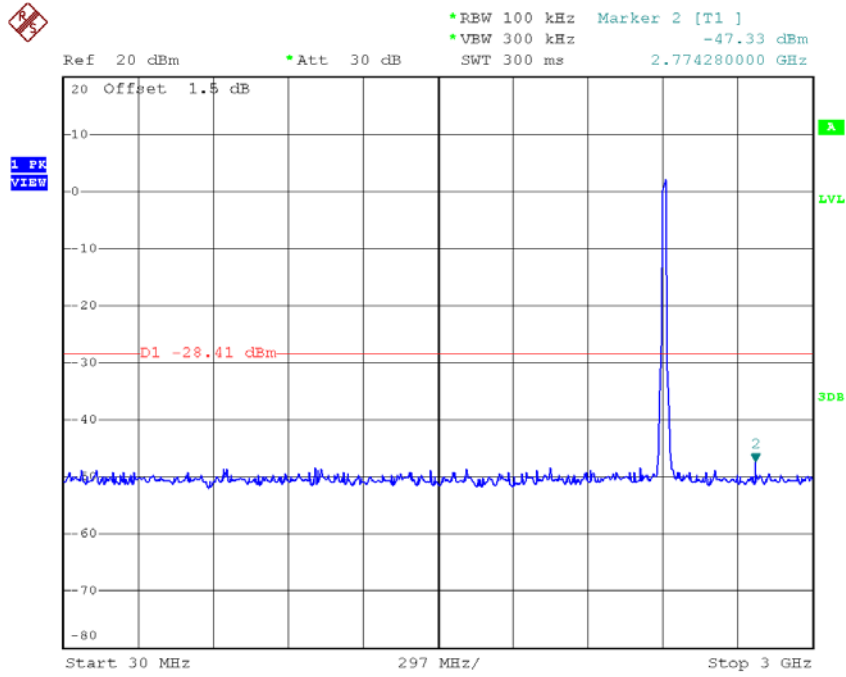

Date: 8.FEB.2018 13:48:38

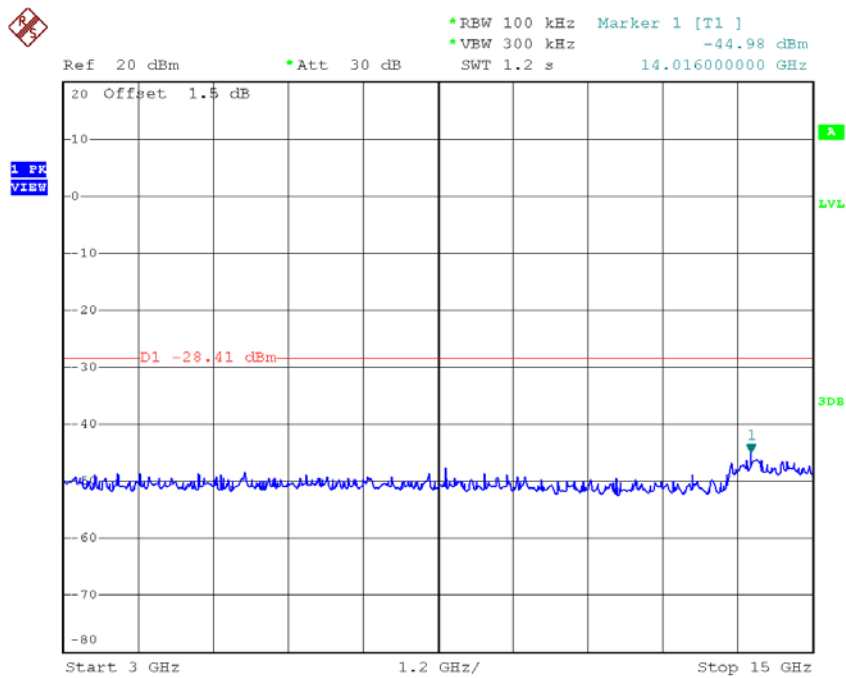


Date: 8.FEB.2018 13:49:29

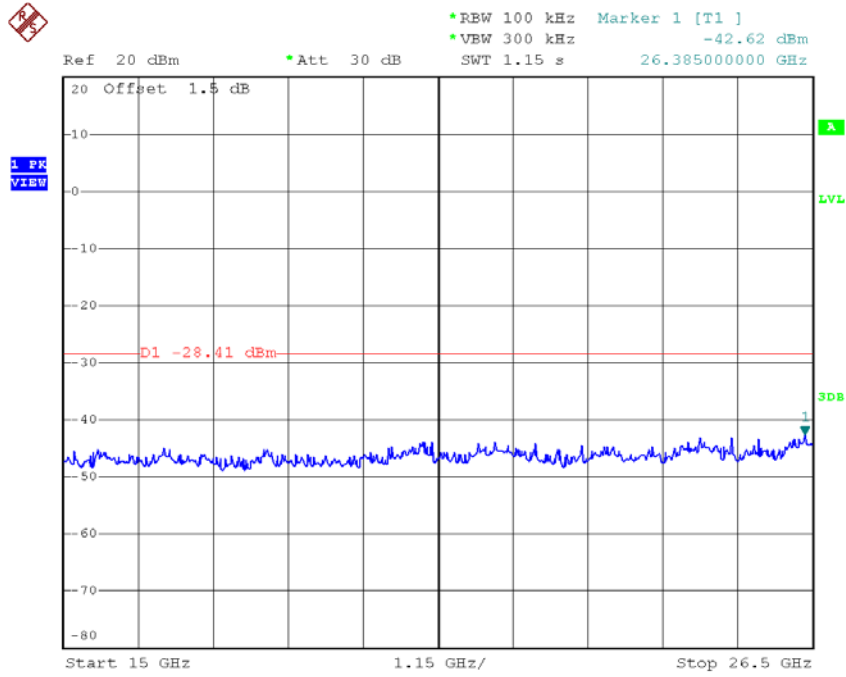


Date: 8.FEB.2018 13:49:38


TX G mode CH06 (10 Harmonic of the frequency)

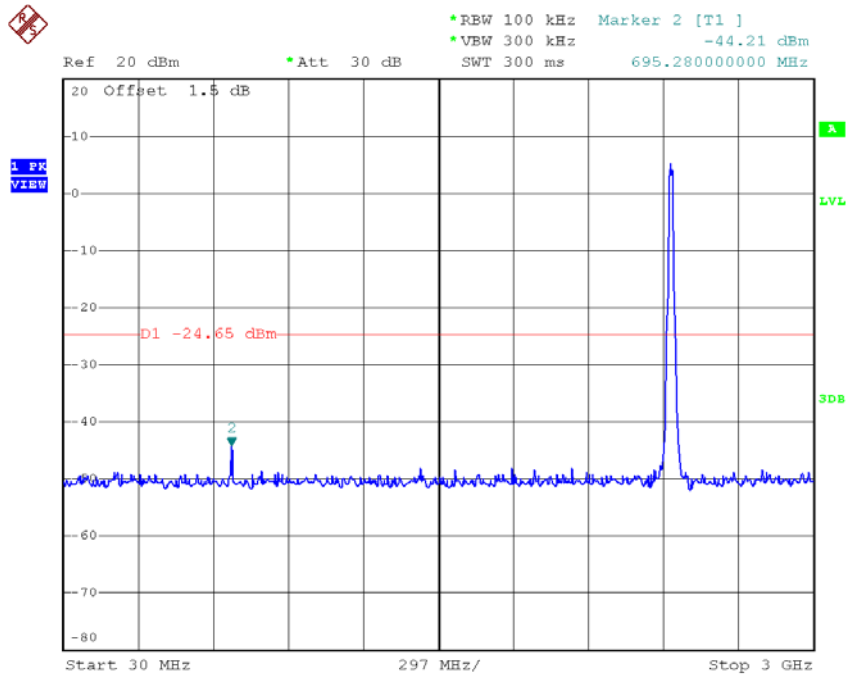

Date: 8.FEB.2018 13:50:52

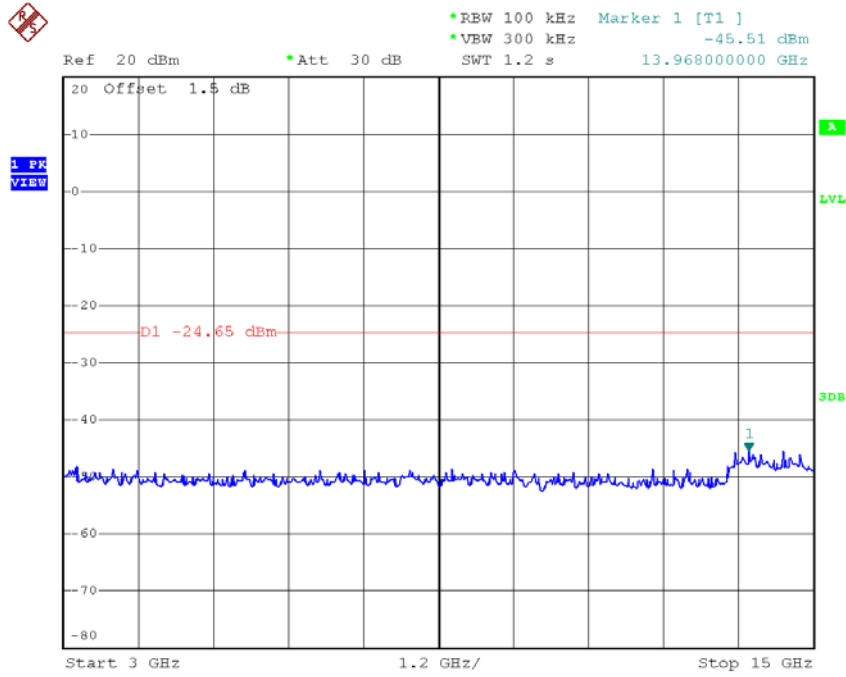


Date: 8.FEB.2018 13:51:05

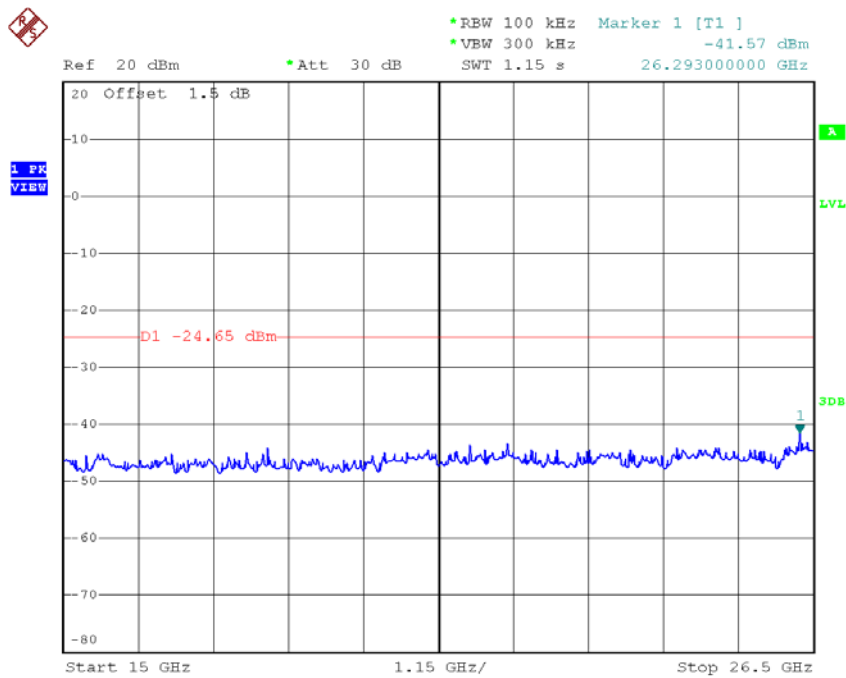


Date: 8.FEB.2018 13:51:14


TX G mode CH11 (10 Harmonic of the frequency)

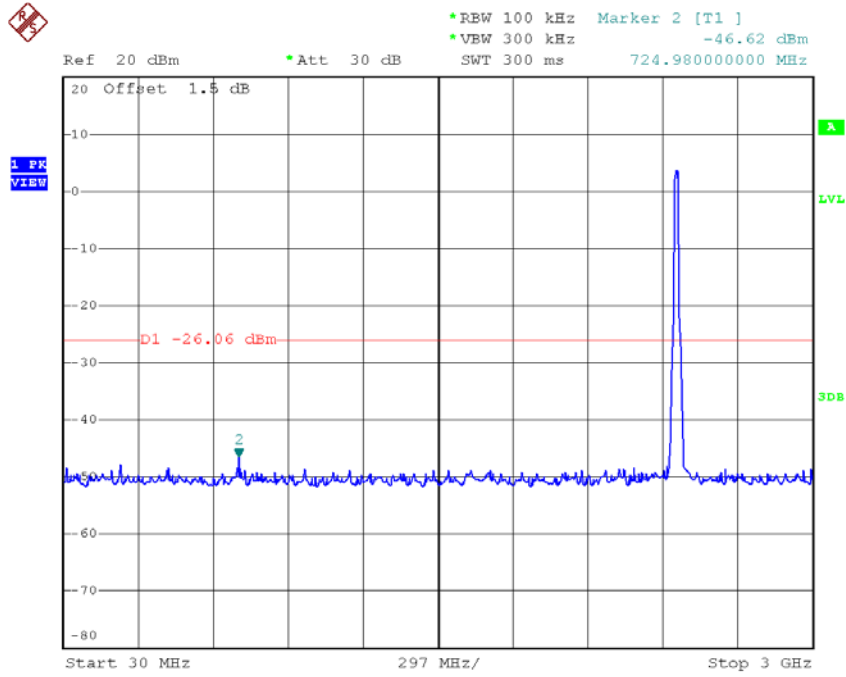

Date: 8.FEB.2018 13:52:36

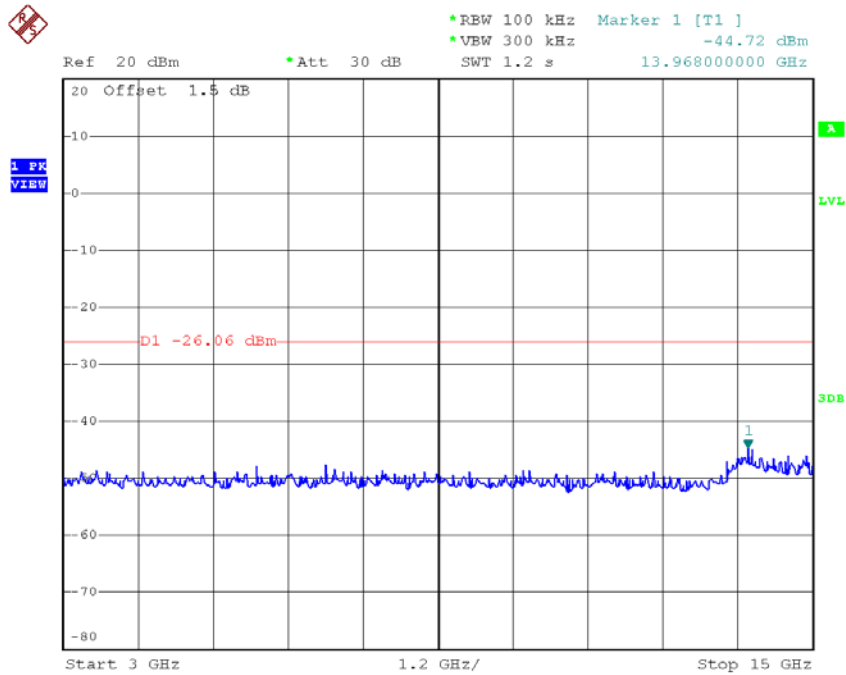


Date: 8.FEB.2018 13:52:46

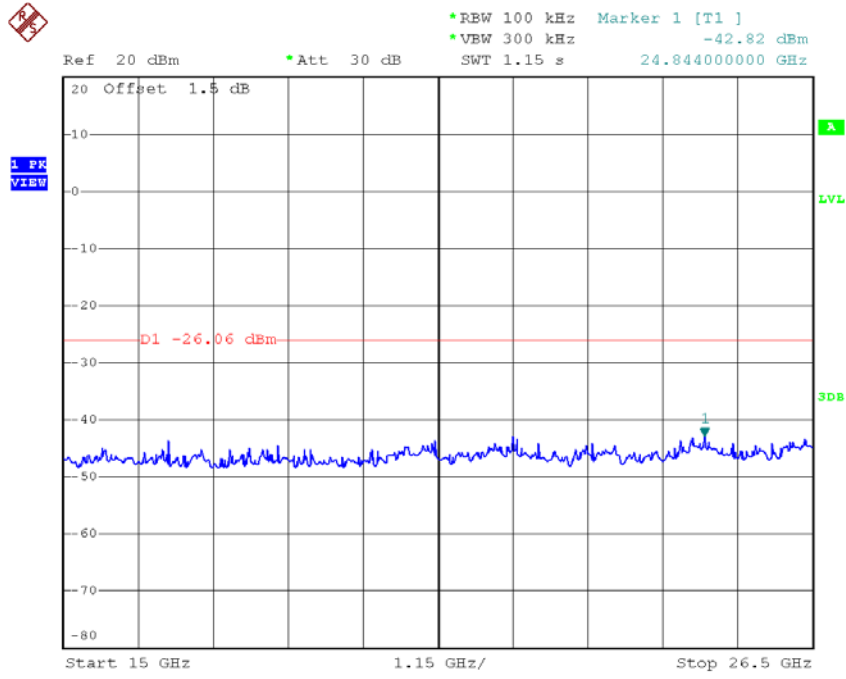

Date: 8.FEB.2018 13:52:55


Test Mode : TX N-20M Mode

TX HT20 mode CH01

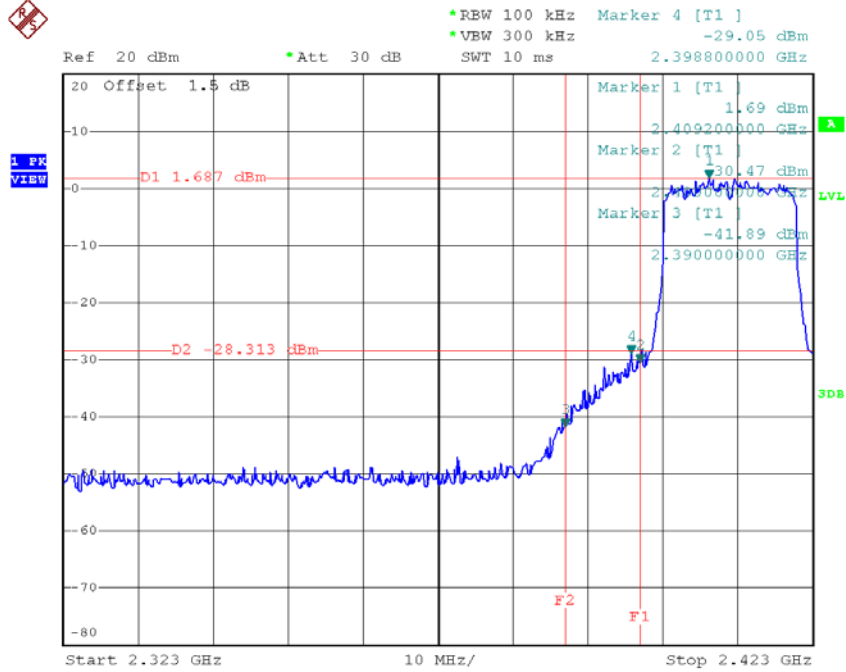


Date: 8.FEB.2018 13:55:02

TX HT20 mode CH11

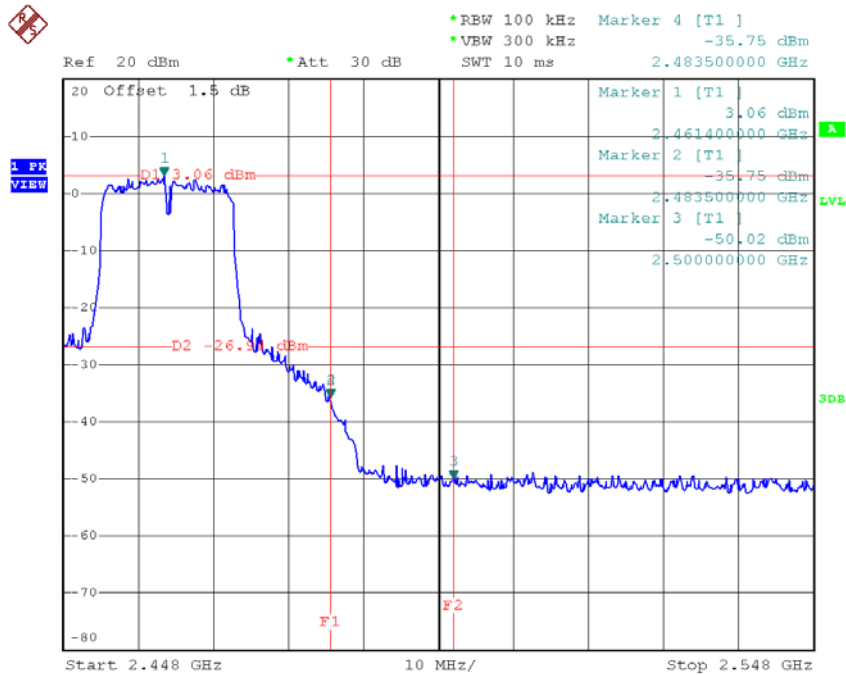


Date: 8.FEB.2018 13:59:25


TX HT20 mode CH01 (10 Harmonic of the frequency)

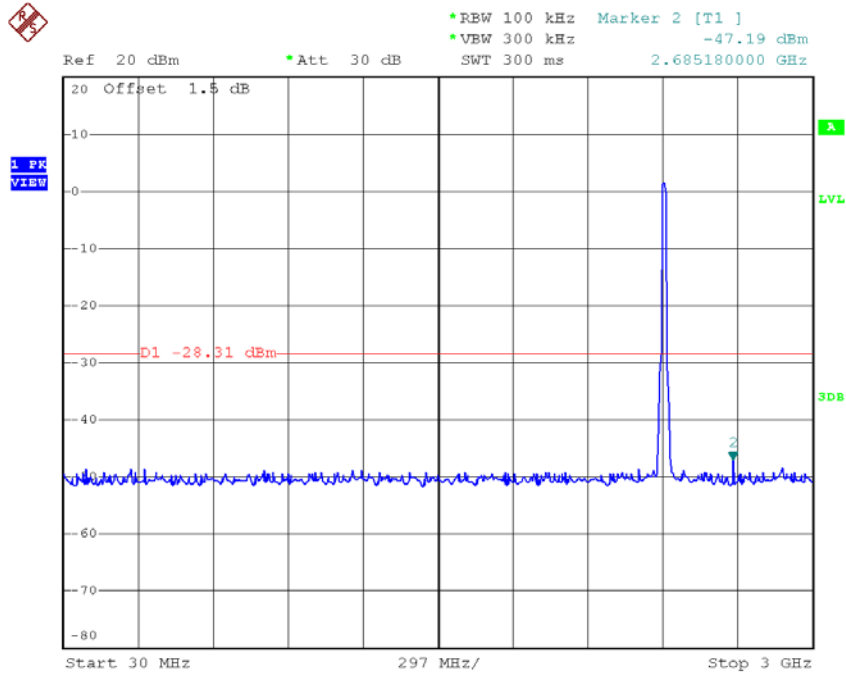

Date: 8.FEB.2018 13:55:27

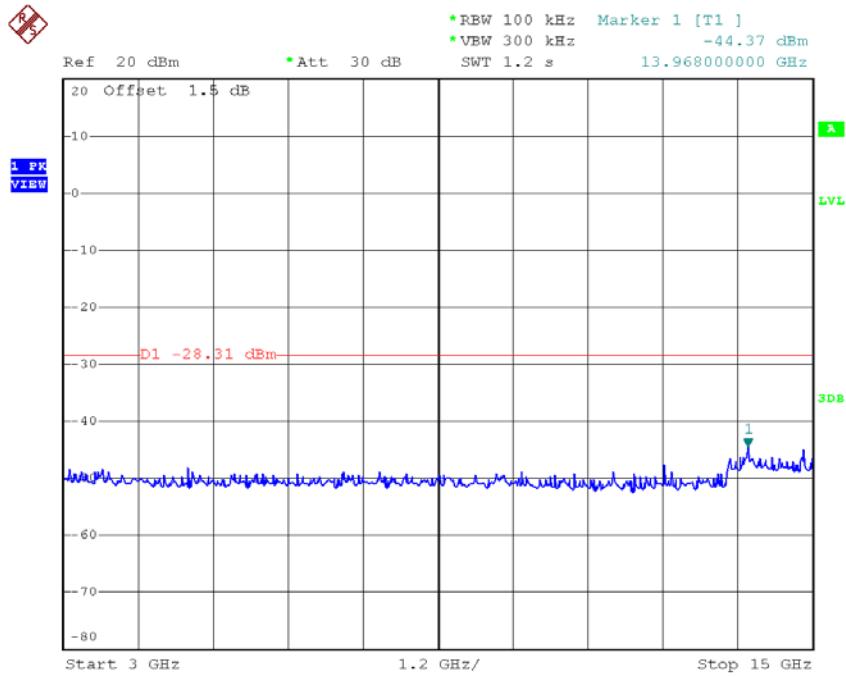


Date: 8.FEB.2018 13:55:36

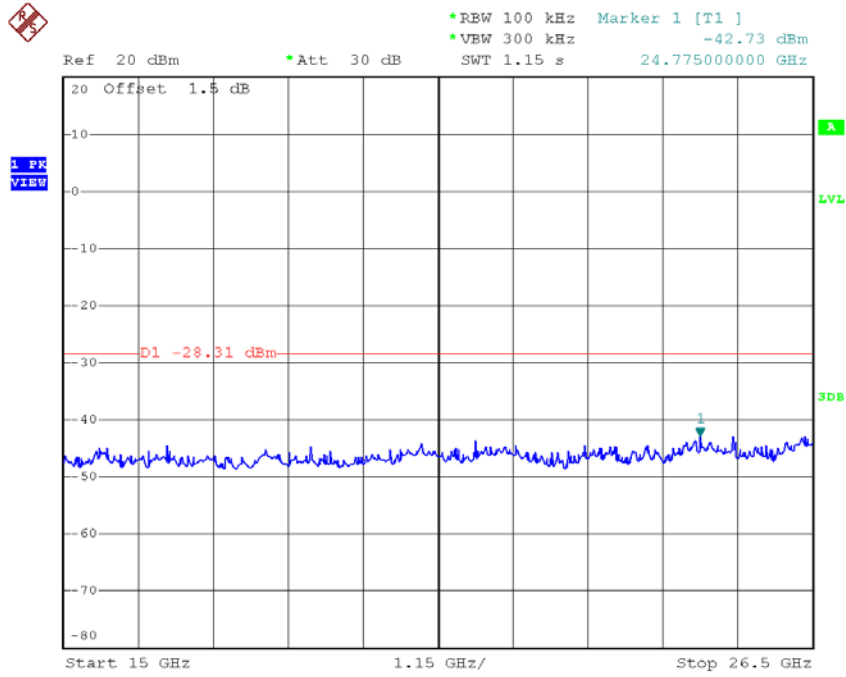


Date: 8.FEB.2018 13:55:45


TX HT20 mode CH06 (10 Harmonic of the frequency)

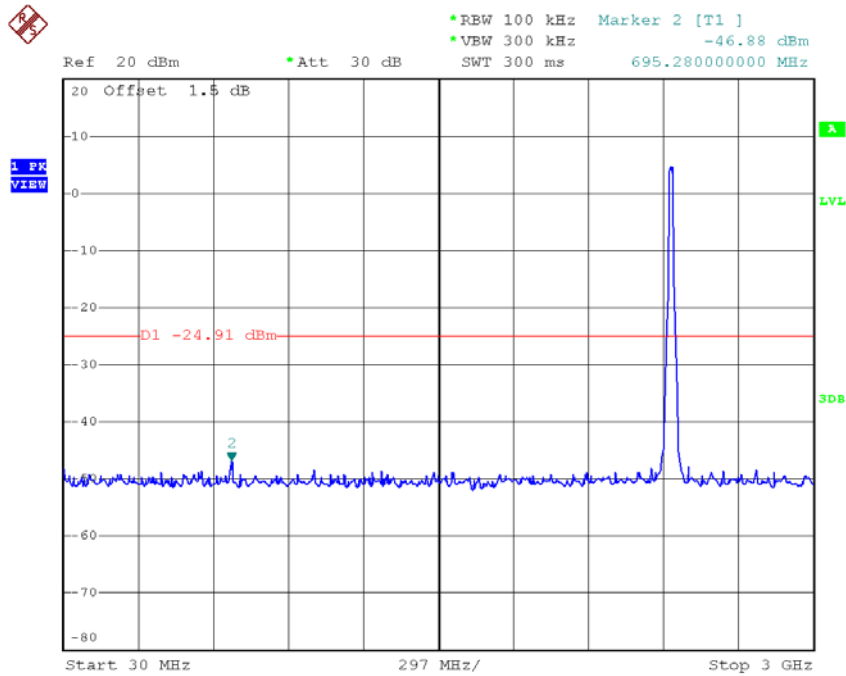

Date: 8.FEB.2018 13:57:47

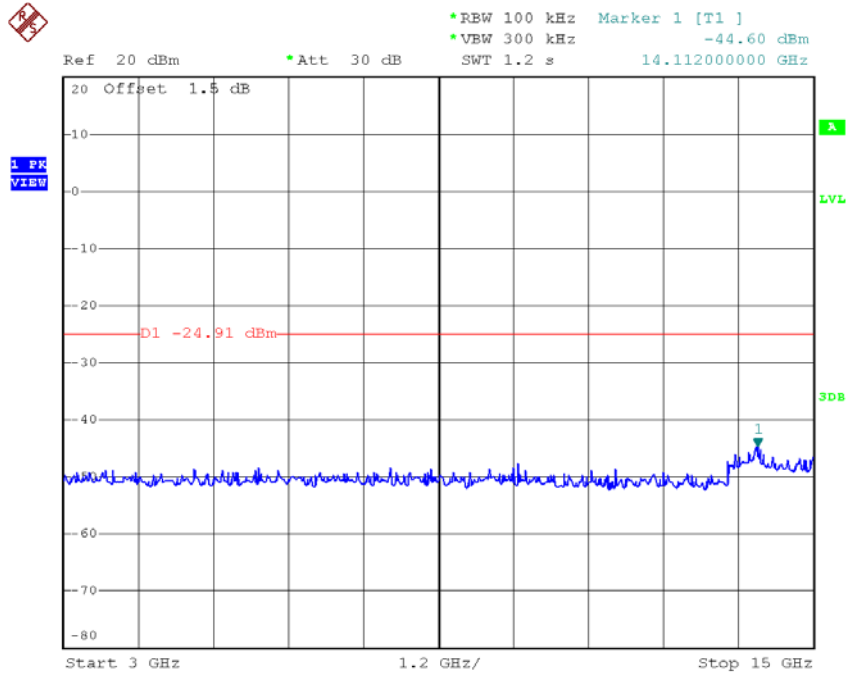


Date: 8.FEB.2018 13:57:56

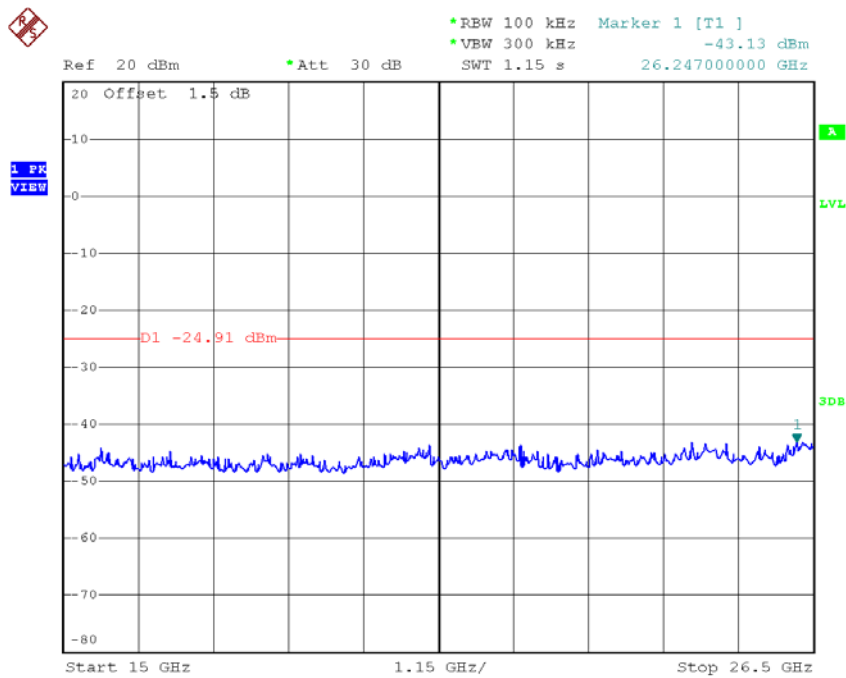


Date: 8.FEB.2018 13:58:05


TX HT20 mode CH11 (10 Harmonic of the frequency)

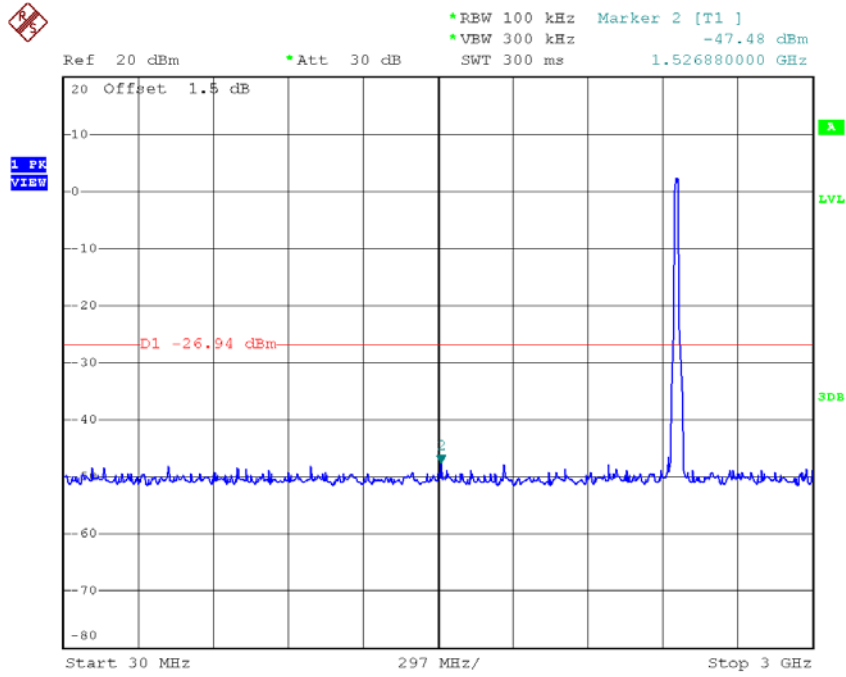

Date: 8.FEB.2018 13:59:48

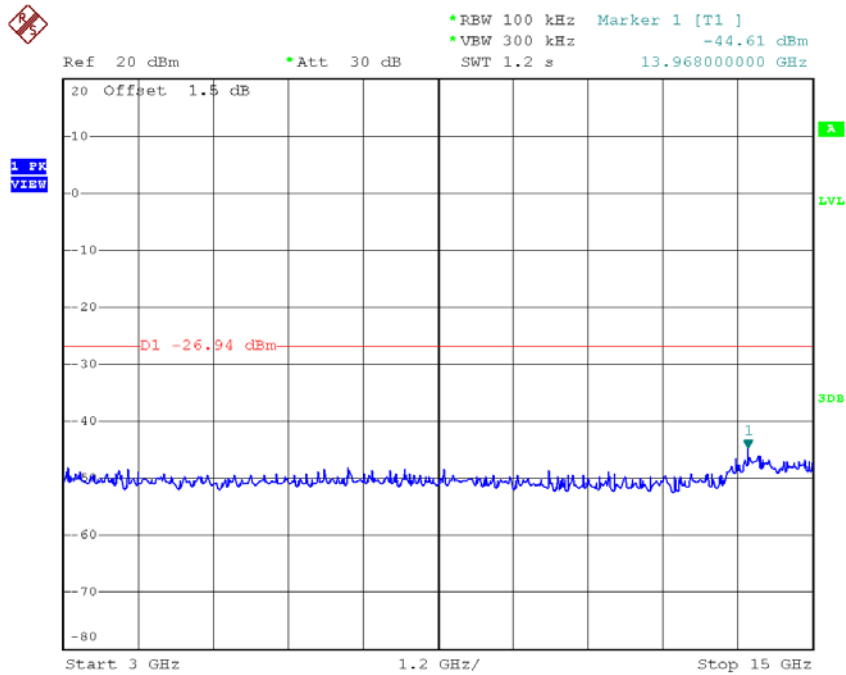


Date: 8.FEB.2018 13:59:57

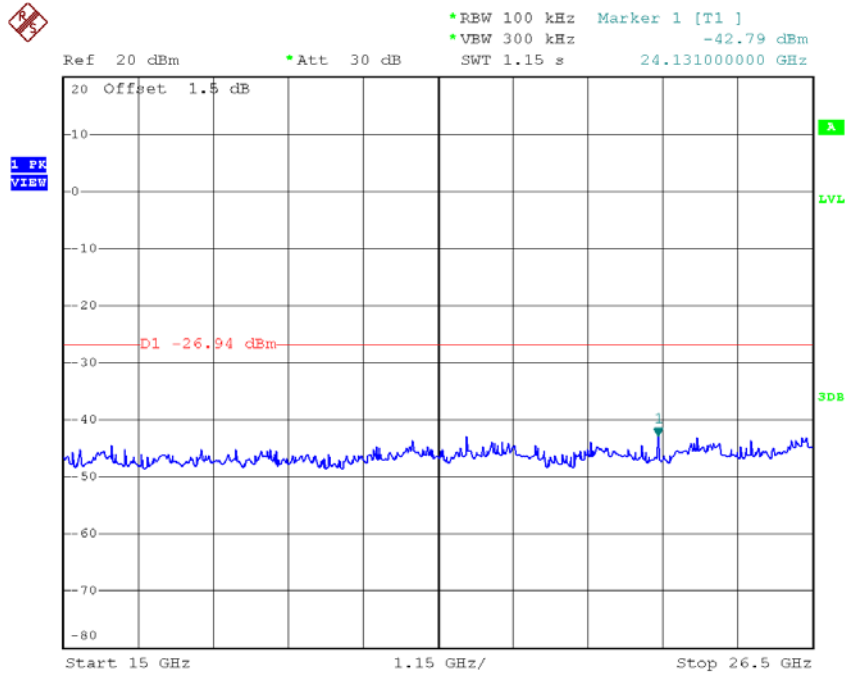

Date: 8.FEB.2018 14:00:06


Test Mode : TX N-40M Mode

TX HT40 mode CH03

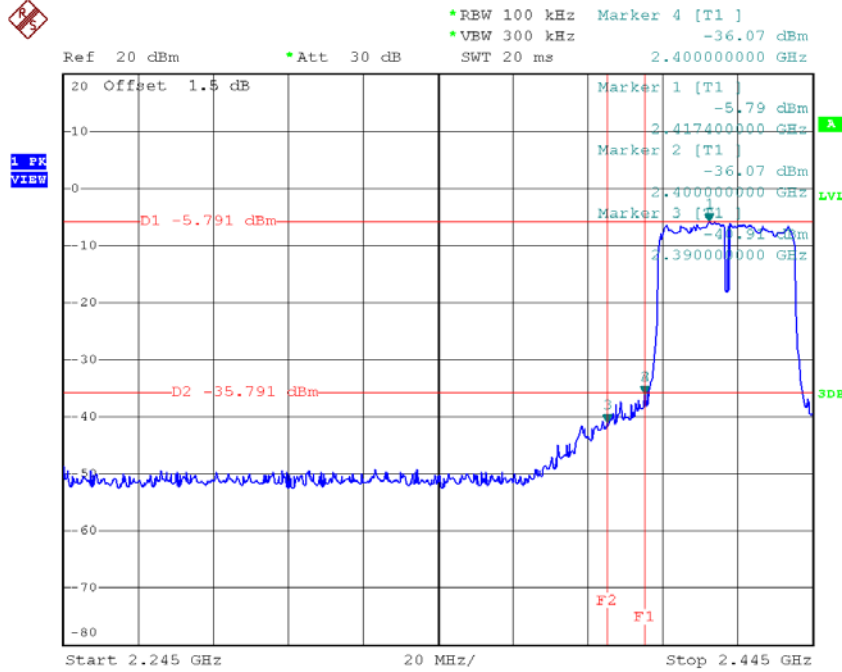

Date: 8.FEB.2018 14:01:21

TX HT40 mode CH09

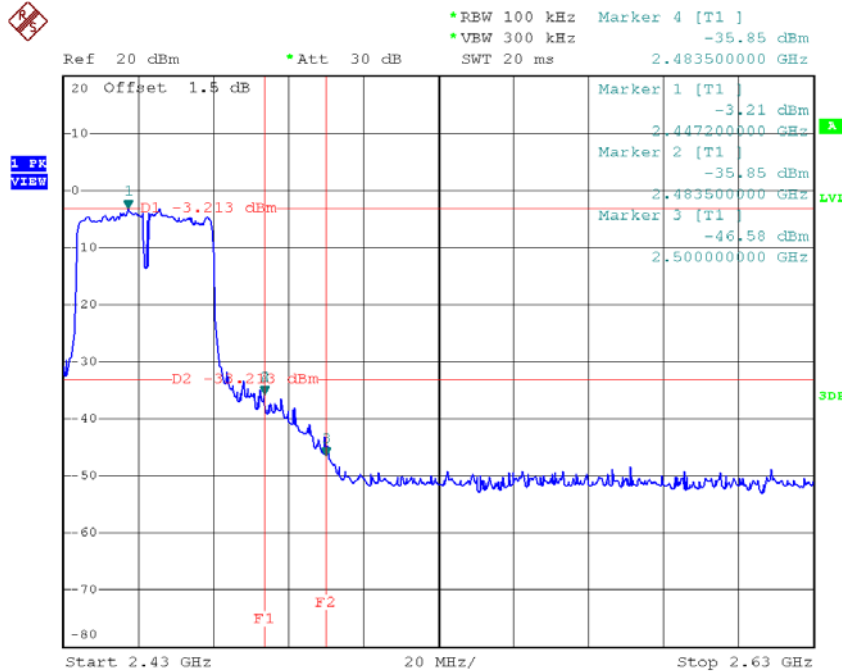

Date: 8.FEB.2018 14:26:50