

HK600-美-日-欧-英规-麦拉参数-221208

美规

Hako 600 Portable Power Station

Model: HK600
Battery Capacity: 600Wh (57.2Vh (22.2V / 26Ah))

Input:
DC7900 Port: 12-30V=8.5A (150W Max, Support MPPT)
USB-C2 Port: 5-20V=3A (100W Max)
DC7900 Port + USB-C2 Port: 250W Max

Output:
AC Port x2: 120V/60Hz, 600W Max continuous (Total, 1200W Surge Peak)
USB-C1 Port: 5V=3A / 9V=3A / 12V=3A / 15V=3A / 20V=3A (PD100W)
USB-C2 Port: 5V=3A / 9V=2A / 12V=1.5A / 15V=1.5A / 20V=1.5A (PD100W)
USB-A Port x 2: 5V=3A / 9V=2A / 12V=1.5A (Total 5V=4.8A, 24W Max)
DC5521 Port x 2: 13.8V=10A (120W Max)
Car Power Outlet: 13.8V=10A (120W Max)
DC5521 Port and Car Power Outlet: 120W (Total)
Max Power Output: 700W
LED Lighting: 2W
Recharging Temperature: 0~40°C
Operating Temperature: -10~40°C
www.voltme.com Designed by VOLTME
Shenzhen Voltrex Innovations Technology Co., Ltd

FCC ID: 2A7WR-HAK0600
IC: 28782-HAK0600
CAN ICES-0038 / NMB-0038

CAUTION

1. Please read the user manual carefully before using the product.
2. Don't use in rain, snow or other places exposed to liquids.
3. Avoid extreme temperatures.
4. Don't disassemble.
5. Don't cover with clothes, towels, etc. during operation.
6. Fully charge the power station prior to long-term storage. Check and charge the power station at least once every three months.
7. Store the power station in a dry and dust-free environment.

UK FC CE RoHS

SN

日规

ポータブル電源 Hako 600

型番: HK600
容量: リチウムイオン 57.2Wh (22.2V/26Ah)

入力:
DC7900端子: 12-30V=8.5A (最大150W, MPPT対応)
USB-C2端子: 5-20V=3A (最大100W)
DC7900端子+USB-C2端子: 最大250W

出力:
AC端子 x2: 100V~50/60Hz, 合計連続出力600W, 瞬間最大出力1200W
USB-C1端子: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A (PD100W)
USB-C2端子: 5V=3A, 9V=2A, 12V=1.5A, 15V=1.5A, 20V=1.5A (PD100W)
USB-A端子 x 2: 5V=3A, 9V=2A, 12V=1.5A (Total 5V=4.8A, 24W Max)
DC5521端子 x 2: 13.8V=10A (最大120W)
自動車用シガーライター端子: 13.8V=10A (最大120W)
DC5521端子+シガーライター端子: 最大120W
最大出力: 700W
LED照明: 2W
充電温度: 0~40°C
動作温度: -10~40°C
www.voltme.com Designed by VOLTME
Shenzhen Voltrex Innovations Technology Co., Ltd

FCC ID: 2A7WR-HAK0600
IC: 28782-HAK0600
CAN ICES-0038 / NMB-0038

RoHS

SN

注意

1. 使用前必ず取扱説明書をよく読んでください。
2. 雨や雪に降る場所、液体が飛ぶ場所等で、本製品を使用しないでください。
3. 極端な温度での使用は避けましょう。
4. 分解しないでください。
5. 動作中に、衣服やタオルなどで本製品を覆わないでください。
6. 長期に亘って使用しない場合は、必ず本製品を十分に充電してください。また、3ヶ月毎に必ずフル充電を繰り返し、充電を完了するまで待たず。
7. 本製品を乾燥し、埃のない場所で保管してください。

UK FC CE RoHS

SN

欧/英规

Hako 600 Portable Power Station

Model: HK600
Battery Capacity: 600Wh (57.2Vh (22.2V / 26Ah))

Input:
DC7900 Port: 12-30V=8.5A (150W Max, Support MPPT)
USB-C2 Port: 5-20V=3A (100W Max)
DC7900 Port + USB-C2 Port: 250W Max

Output:
AC Port x2: 230V/50Hz, 600W Max continuous (Total, 1200W Surge Peak)
USB-C1 Port: 5V=3A / 9V=3A / 12V=3A / 15V=3A / 20V=3A (PD100W)
USB-C2 Port: 5V=3A / 9V=2A / 12V=1.5A / 15V=1.5A / 20V=1.5A (PD100W)
USB-A Port x 2: 5V=3A / 9V=2A / 12V=1.5A (Total 5V=4.8A, 24W Max)
DC5521 Port x 2: 13.8V=10A (120W Max)
Car Power Outlet: 13.8V=10A (120W Max)
DC5521 Port and Car Power Outlet: 120W (Total)
Max Power Output: 700W
LED Lighting: 2W
Recharging Temperature: 0~40°C
Operating Temperature: -10~40°C
www.voltme.com Designed by VOLTME
Shenzhen Voltrex Innovations Technology Co., Ltd

FCC ID: 2A7WR-HAK0600
IC: 28782-HAK0600
CAN ICES-0038 / NMB-0038

CAUTION

1. Please read the user manual carefully before using the product.
2. Don't use in rain, snow or other places exposed to liquids.
3. Avoid extreme temperatures.
4. Don't disassemble.
5. Don't cover with clothes, towels, etc. during operation.
6. Fully charge the power station prior to long-term storage. Check and charge the power station at least once every three months.
7. Store the power station in a dry and dust-free environment.


UK FC CE RoHS

SN

尺寸: 105mmX55mm

PANTONE 2010C

工艺: 表面哑面

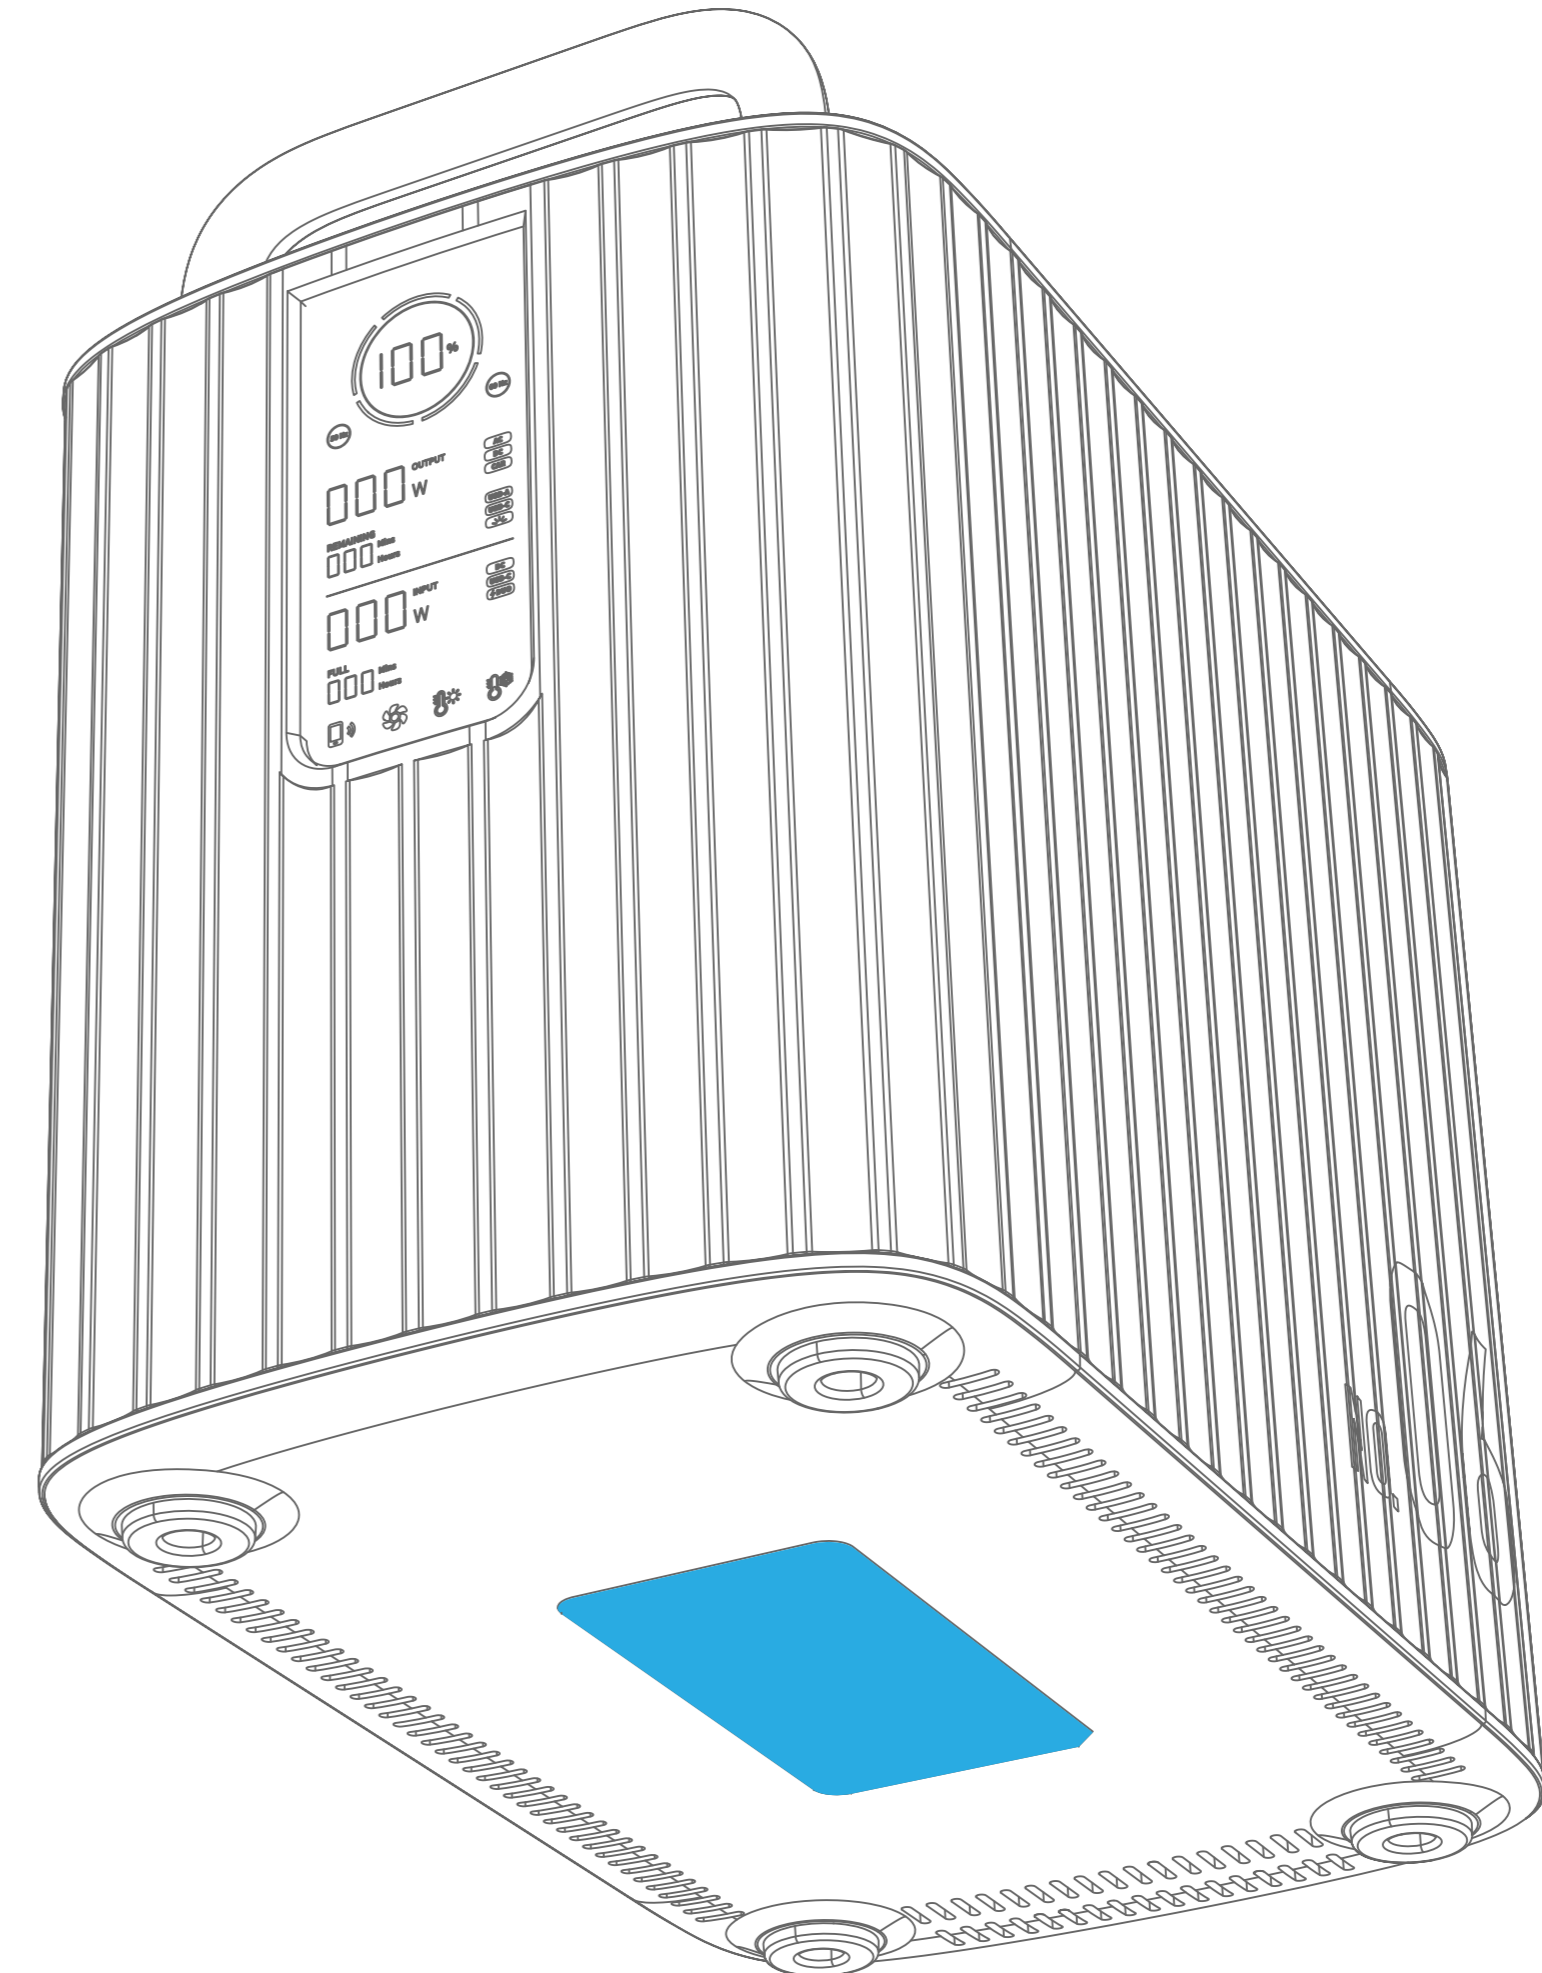

深圳市沃创力科技有限公司 Voltrex Innovations Technology Co., Ltd			VOLTME Innovations
VOLTME		品牌	
Hako 600		产品名称 (型号)	
H1003 (灰色)		SKU	
李上熊		制图人	
2022/11/05		日期	
2022/12/08	版本更新日期	Hako 600	版本号
			电子工程师审核
			产品经理审核