


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

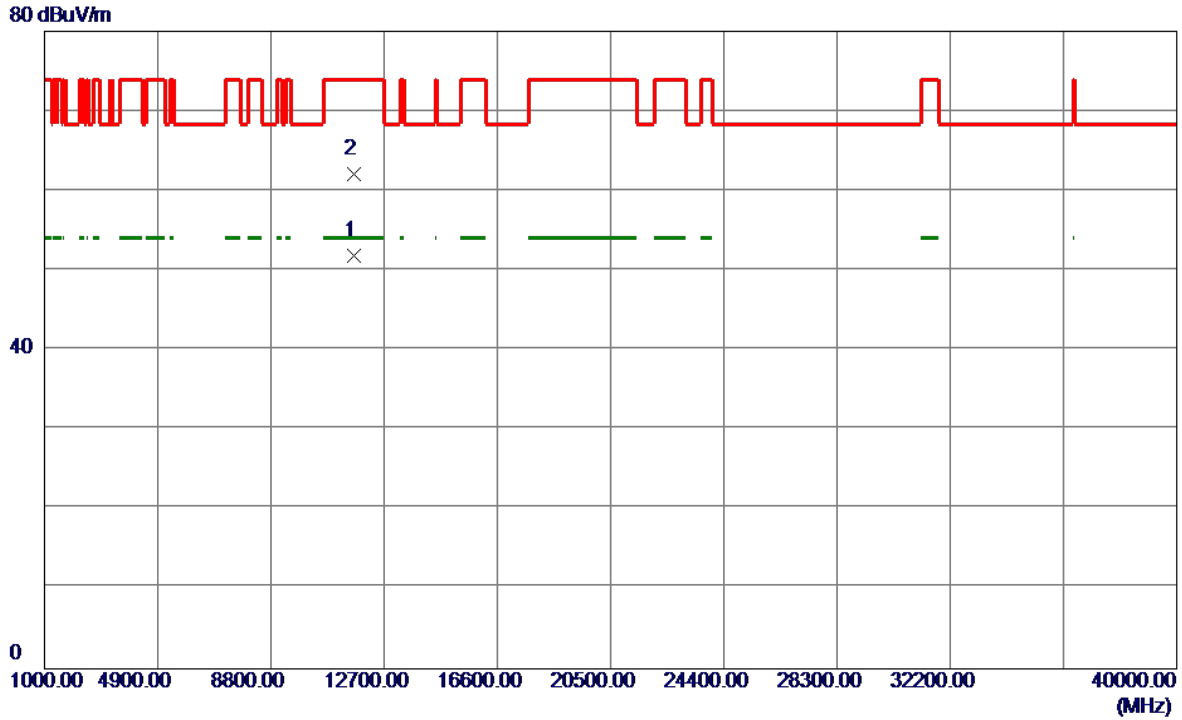

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0000	34.34	17.47	51.81	54.00	-2.19	AVG	
2	11650.4000	44.64	17.47	62.11	74.00	-11.89	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

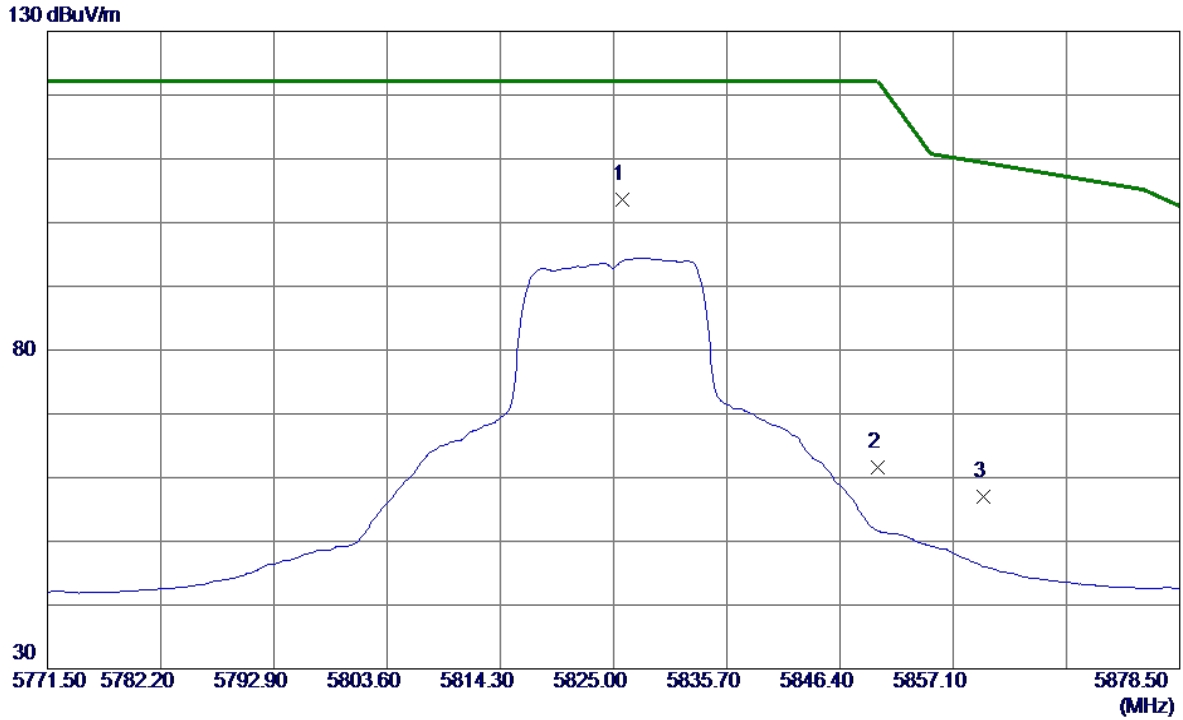

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5825.8560	84.08	19.44	103.52	122.20	-18.68	Peak	
2	5850.0000	42.05	19.55	61.60	122.20	-60.60	Peak	
3	5860.0000	37.49	19.59	57.08	109.40	-52.32	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

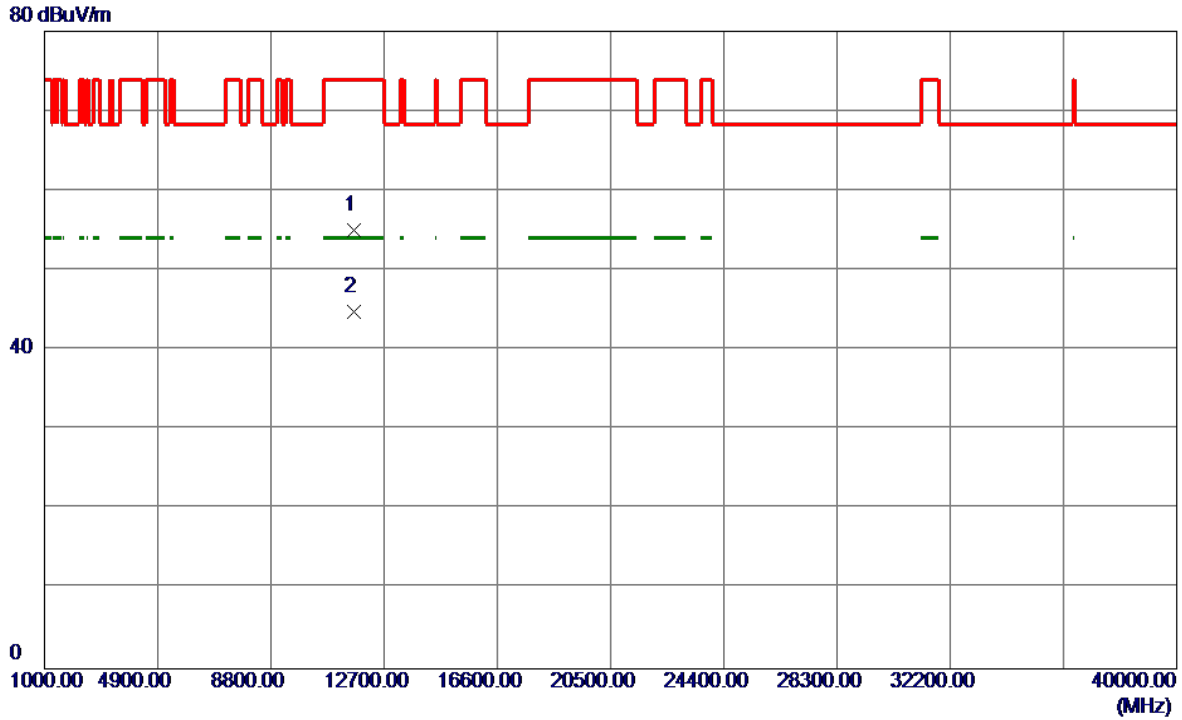


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11646.4000	37.61	17.46	55.07	74.00	-18.93	Peak	
2 *	11652.1000	27.33	17.47	44.80	54.00	-9.20	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical


130 dBuV/m

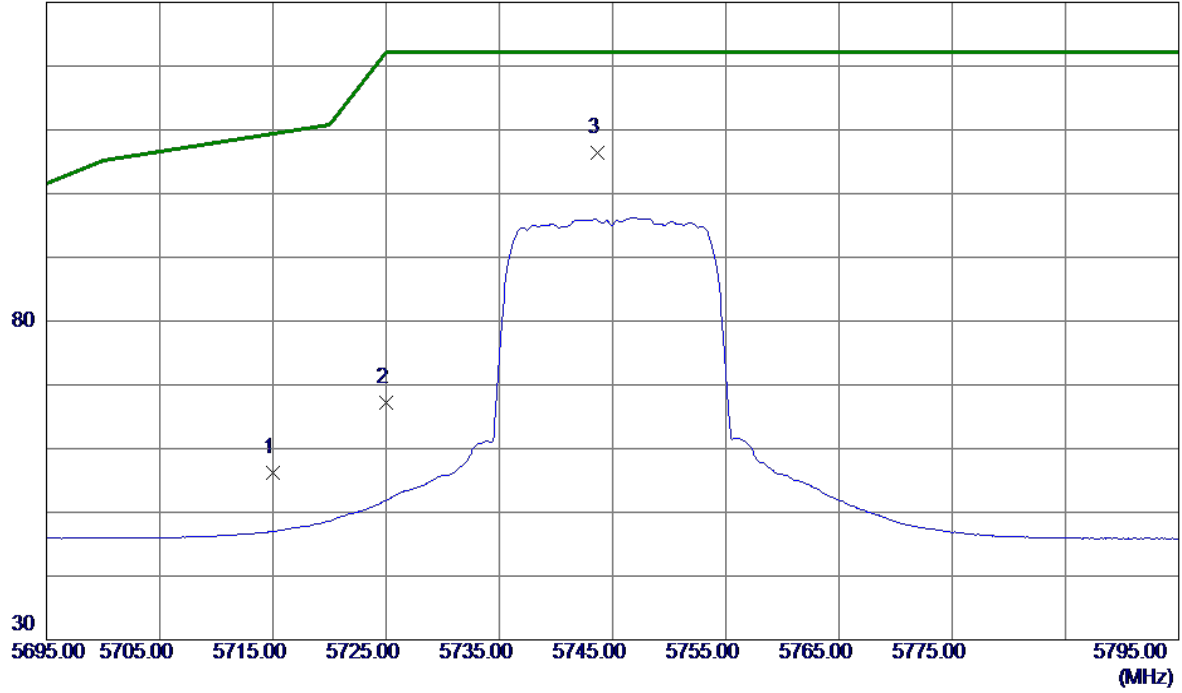

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.34	18.95	56.29	109.40	-53.11	Peak	
2	5725.0000	48.26	18.99	67.25	122.20	-54.95	Peak	
3 *	5743.7000	87.27	19.07	106.34	122.20	-15.86	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

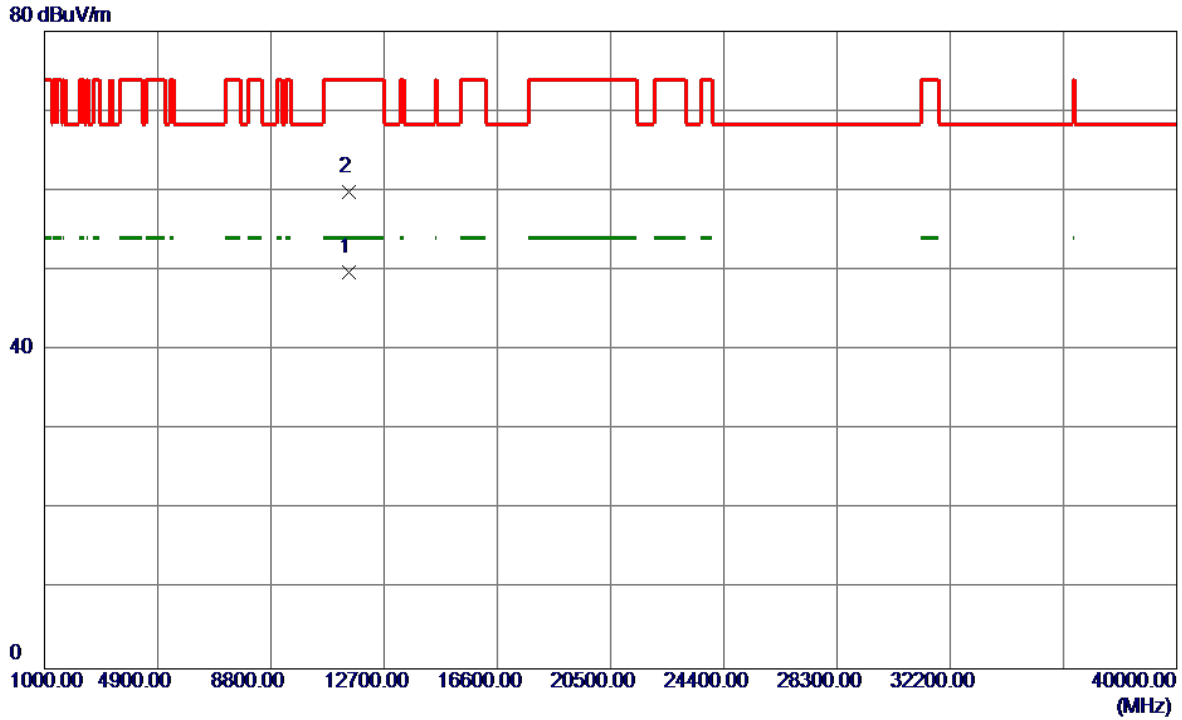

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.8000	32.59	17.20	49.79	54.00	-4.21	AVG	
2	11490.9000	42.70	17.21	59.91	74.00	-14.09	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

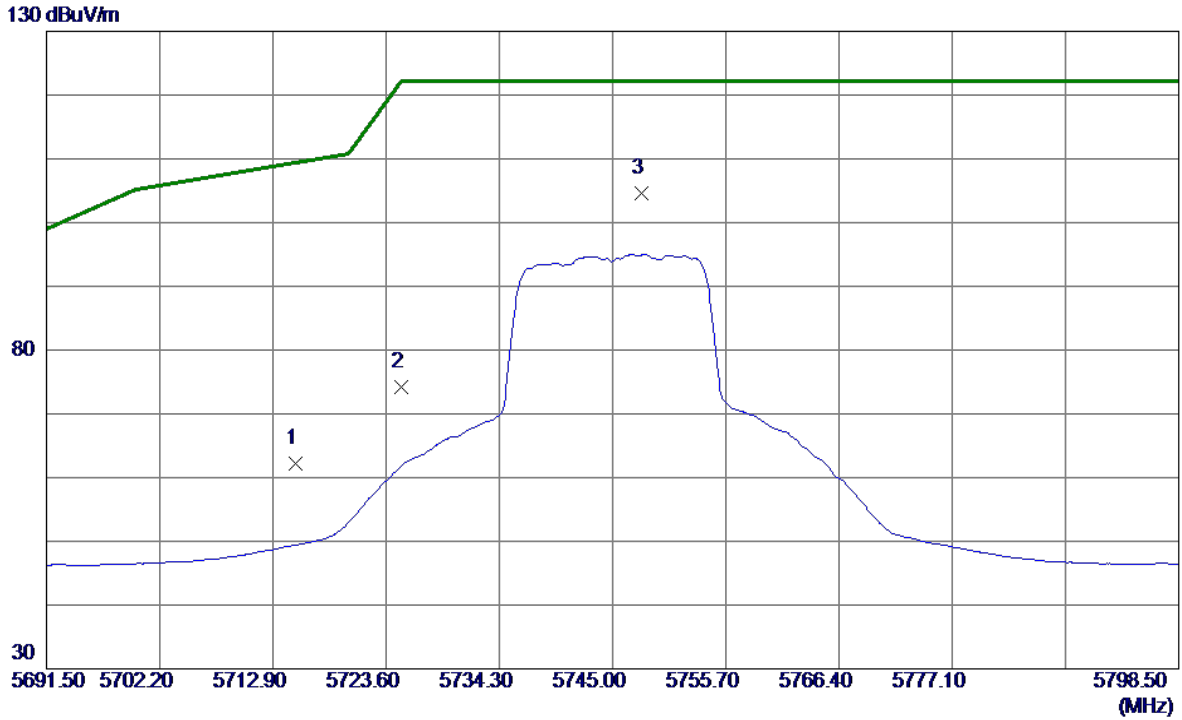

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	43.26	18.95	62.21	109.40	-47.19	Peak	
2	5725.0000	55.26	18.99	74.25	122.20	-47.95	Peak	
3 *	5747.7820	85.55	19.09	104.64	122.20	-17.56	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

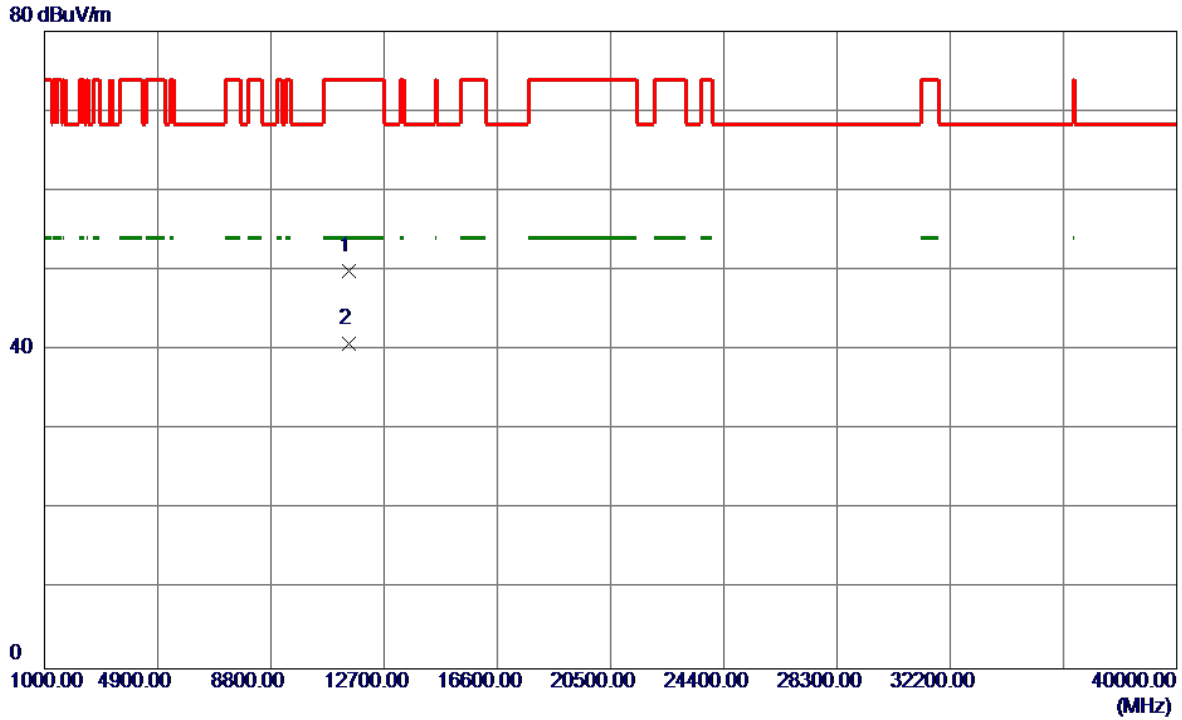

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11485.8000	32.79	17.19	49.98	74.00	-24.02	Peak	
2 *	11487.9000	23.63	17.20	40.83	54.00	-13.17	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

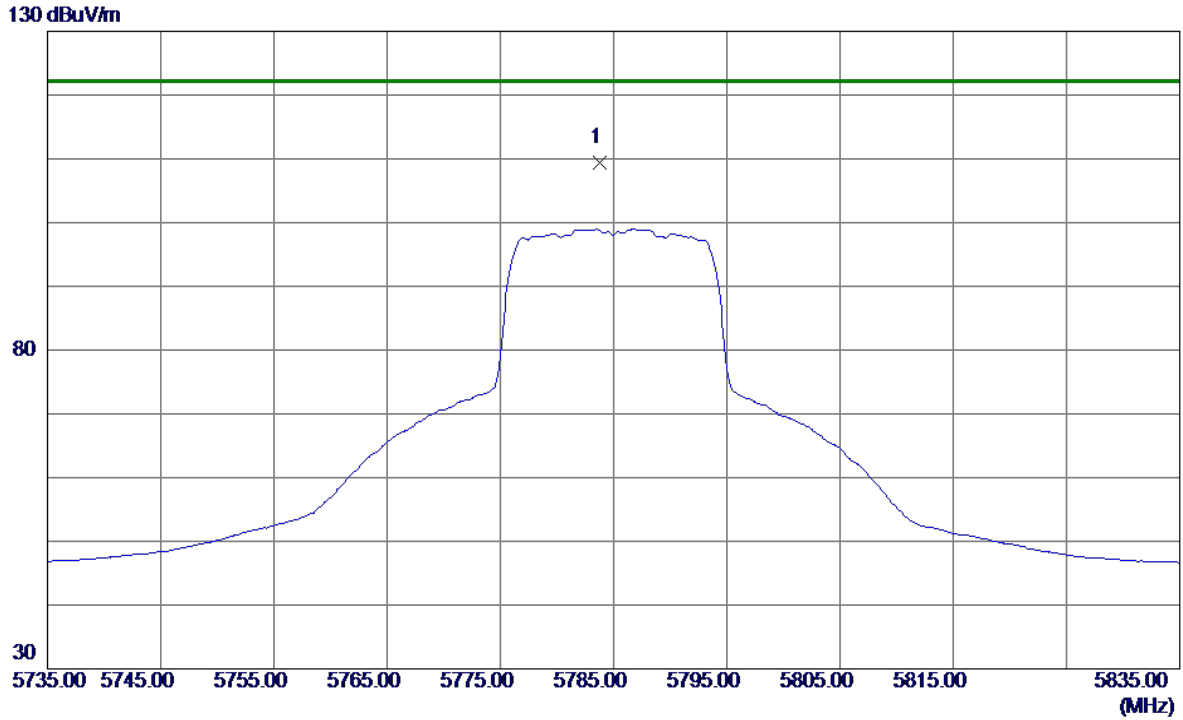

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5783.8000	90.11	19.25	109.36	122.20	-12.84	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

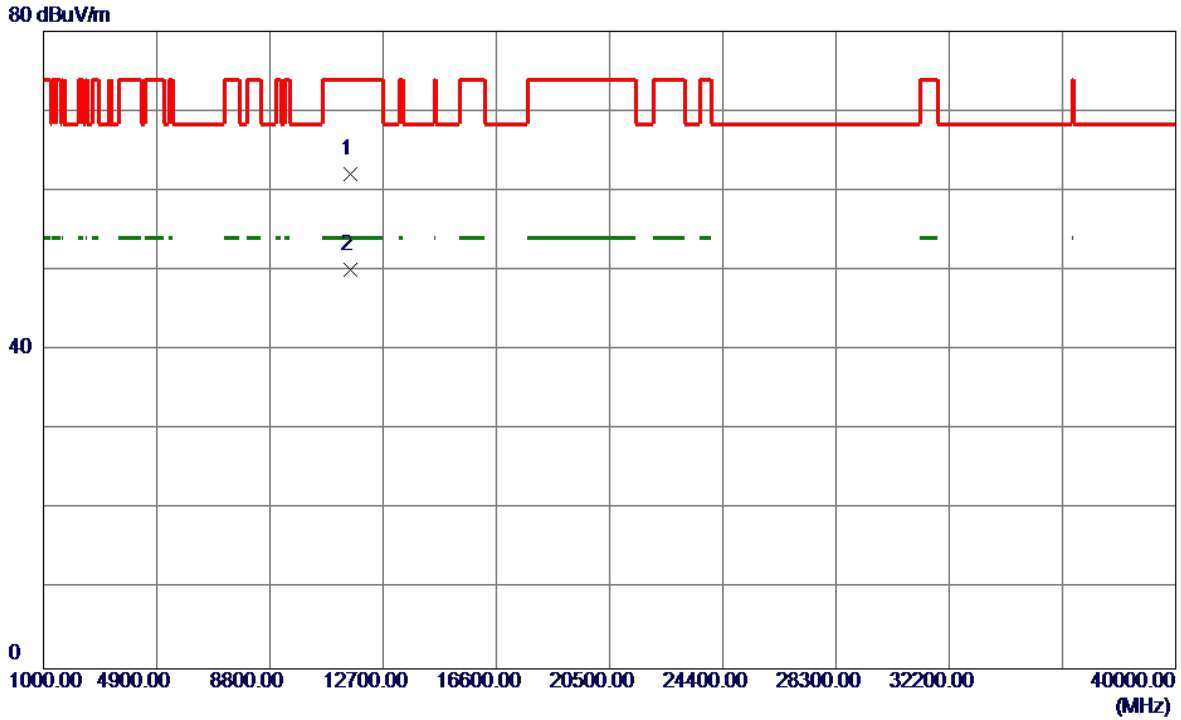

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11562.4000	44.71	17.33	62.04	74.00	-11.96	Peak	
2 *	11569.9000	32.77	17.34	50.11	54.00	-3.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

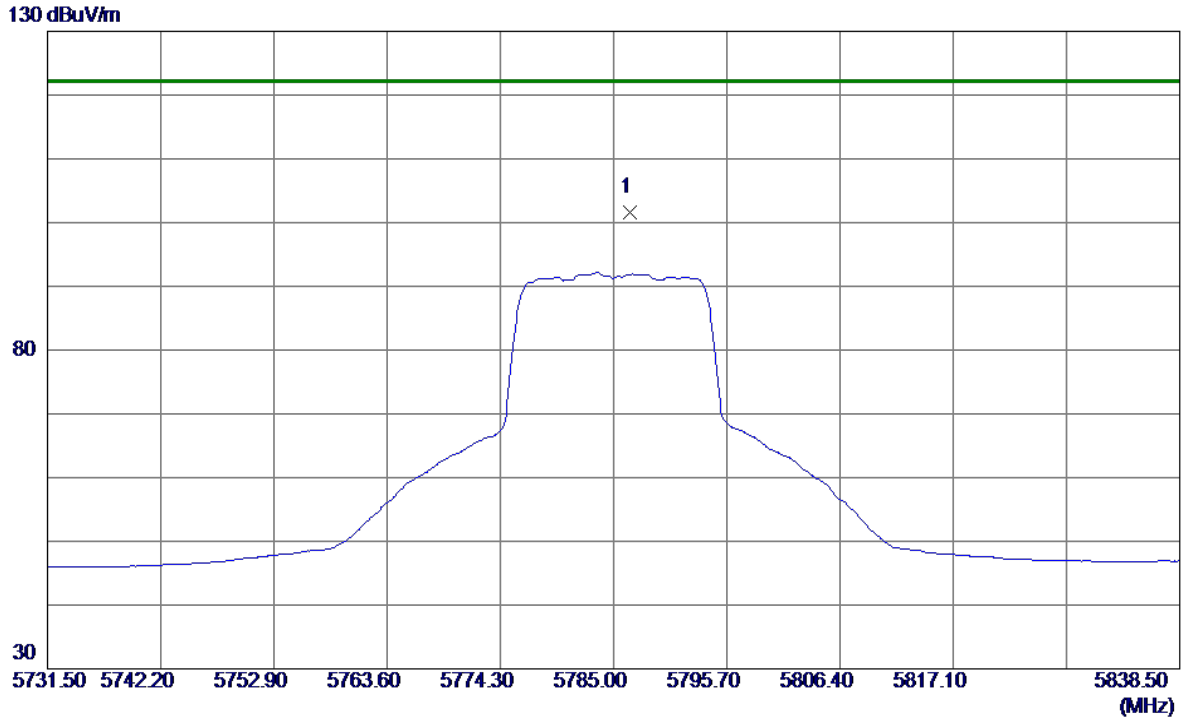

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5786.6050	82.28	19.26	101.54	122.20	-20.66	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

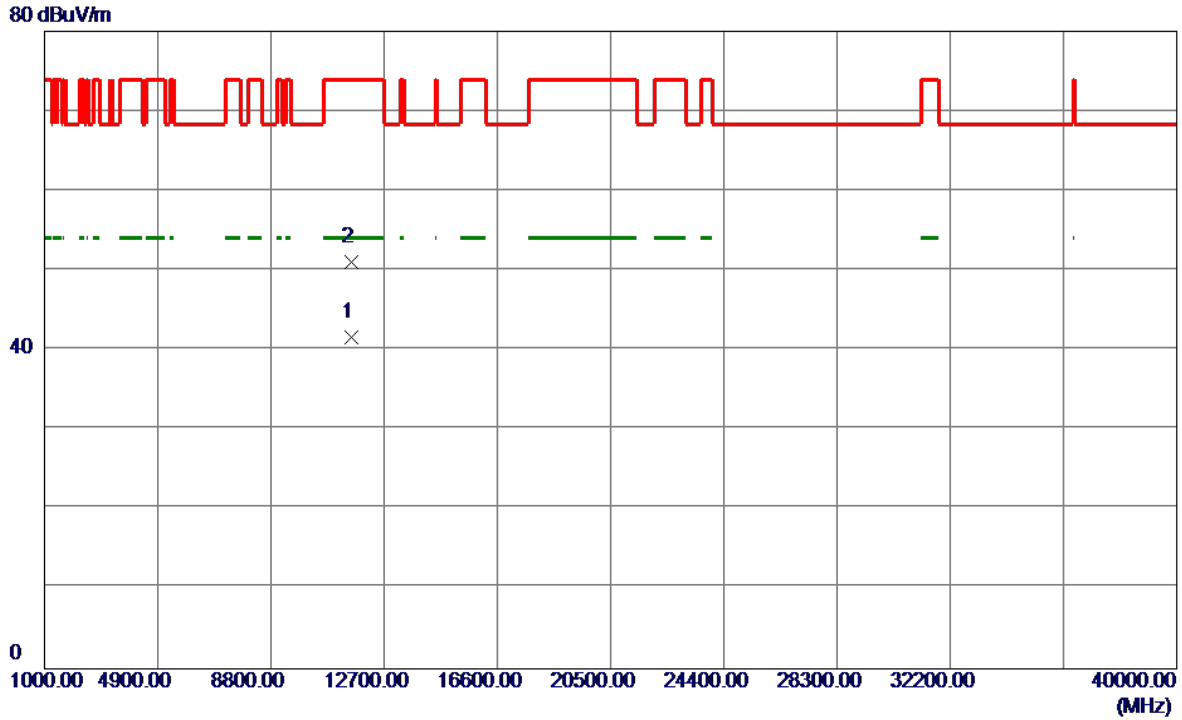

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.9000	24.21	17.34	41.55	54.00	-12.45	AVG	
2	11574.8000	33.65	17.35	51.00	74.00	-23.00	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

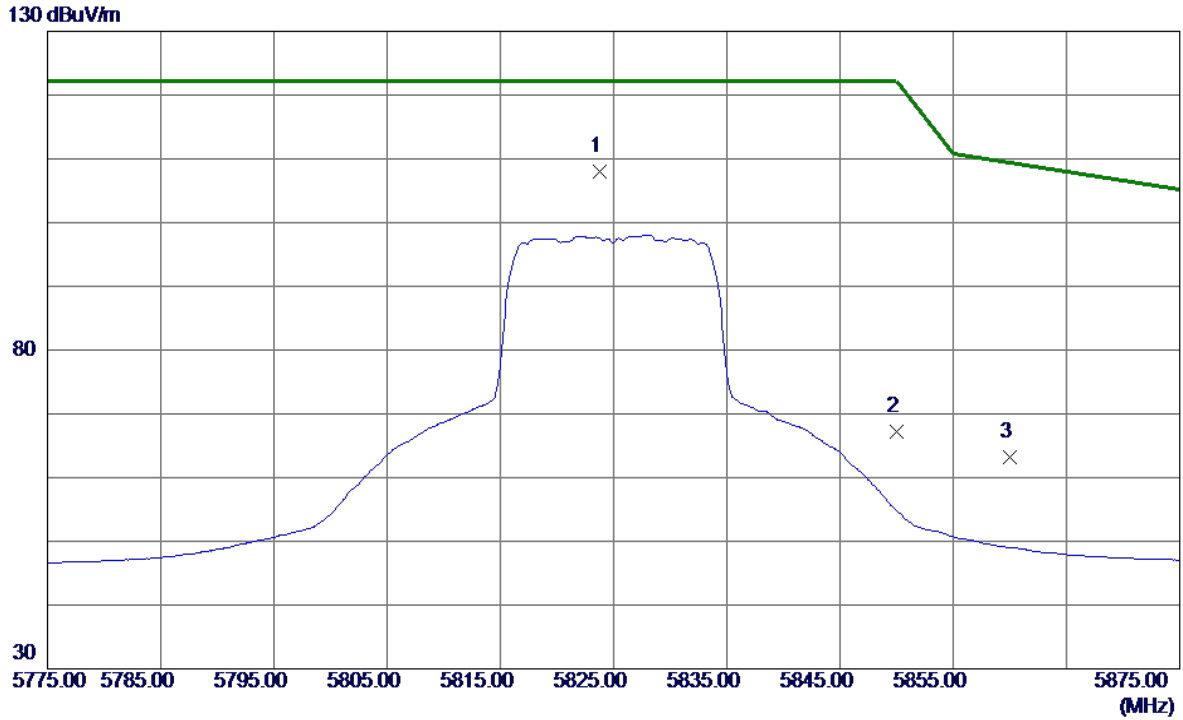

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.8000	88.66	19.43	108.09	122.20	-14.11	Peak	
2	5850.0000	47.72	19.55	67.27	122.20	-54.93	Peak	
3	5860.0000	43.70	19.59	63.29	109.40	-46.11	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

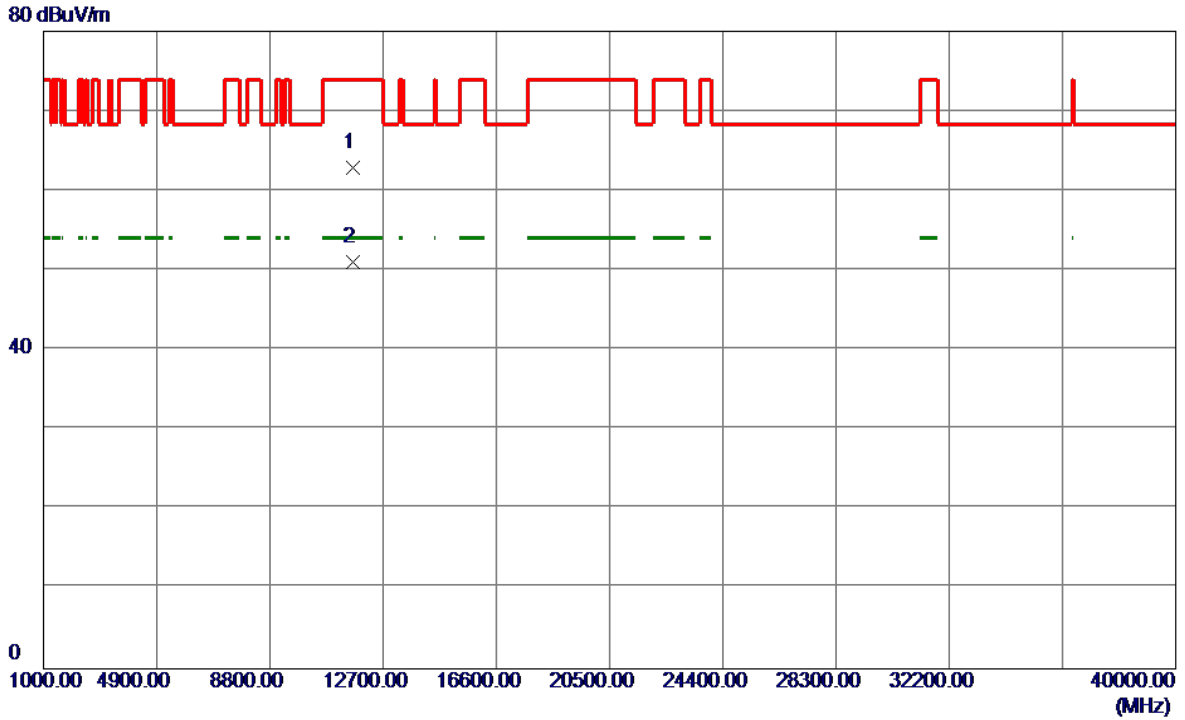

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.3000	45.44	17.47	62.91	74.00	-11.09	Peak	
2 *	11650.0000	33.50	17.47	50.97	54.00	-3.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

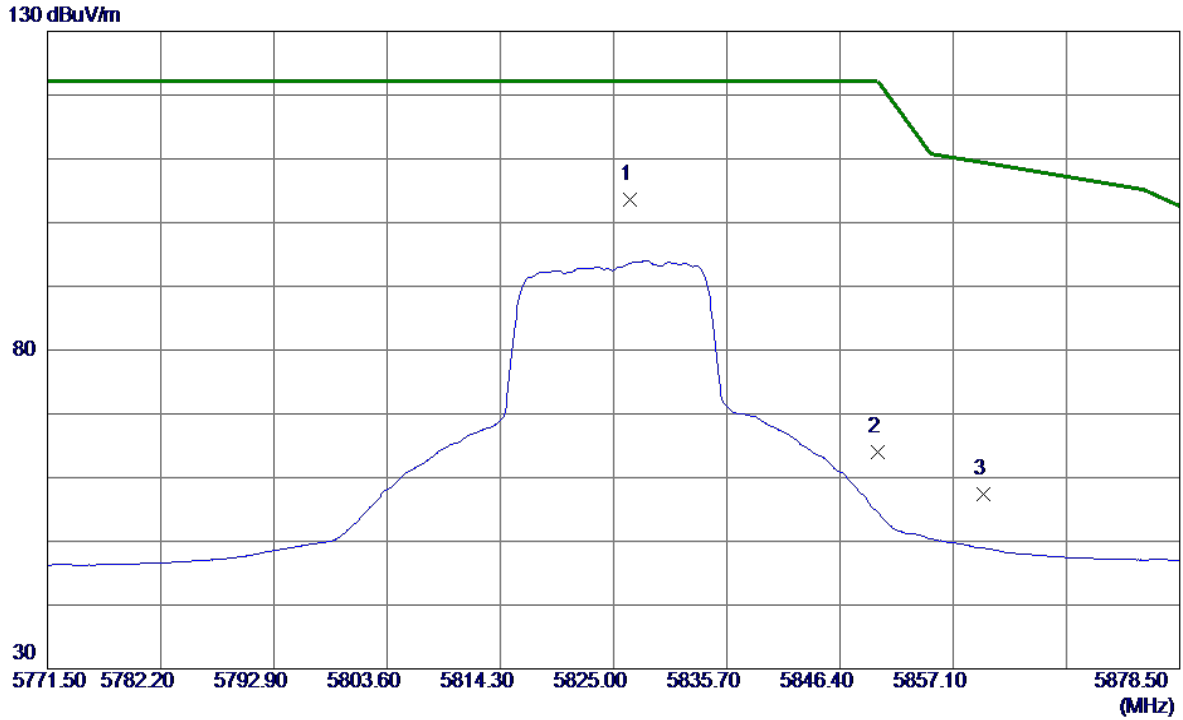

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.6050	84.15	19.44	103.59	122.20	-18.61	Peak	
2	5850.0000	44.54	19.55	64.09	122.20	-58.11	Peak	
3	5860.0000	37.76	19.59	57.35	109.40	-52.05	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

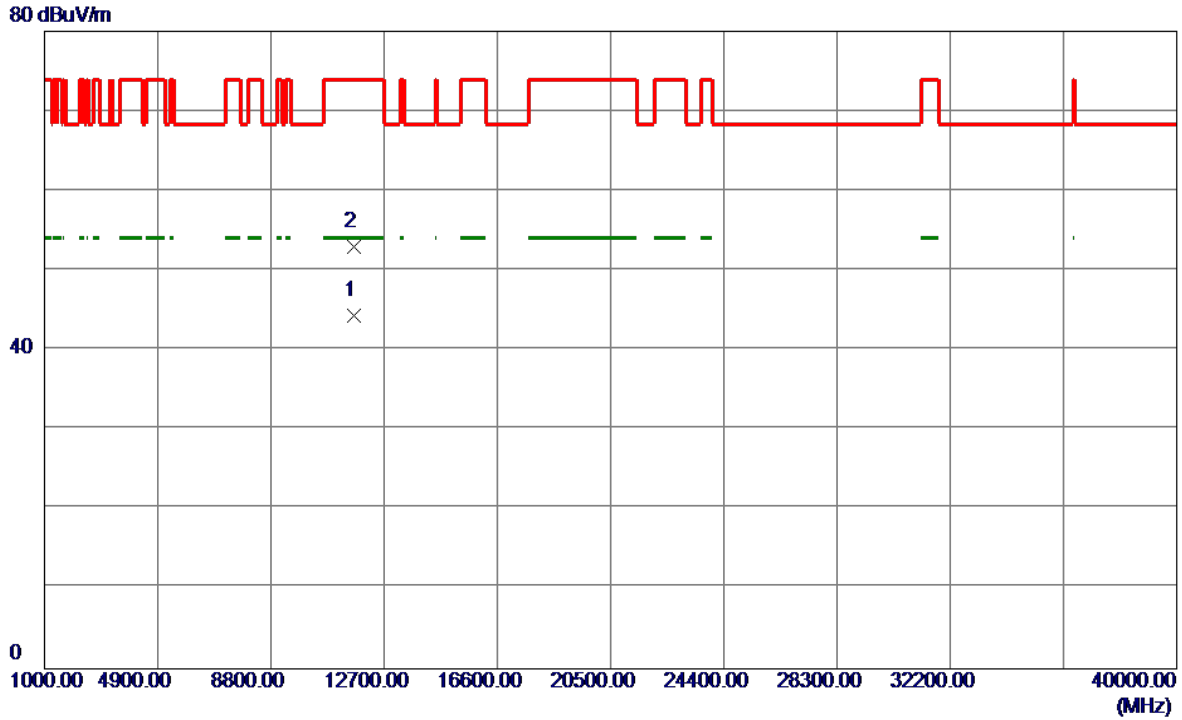

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.9000	26.87	17.47	44.34	54.00	-9.66	AVG	
2	11658.0000	35.49	17.48	52.97	74.00	-21.03	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

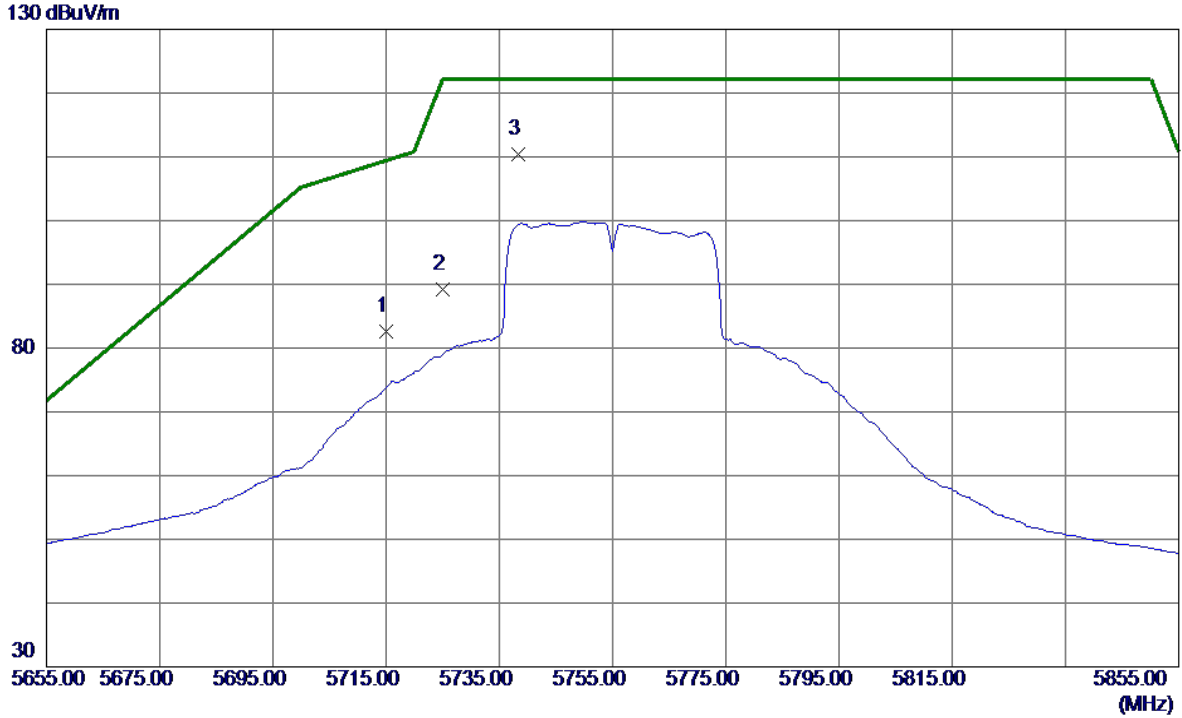

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	63.59	18.95	82.54	109.40	-26.86	Peak	
2	5725.0000	70.14	18.99	89.13	122.20	-33.07	Peak	
3 *	5738.4000	91.44	19.05	110.49	122.20	-11.71	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

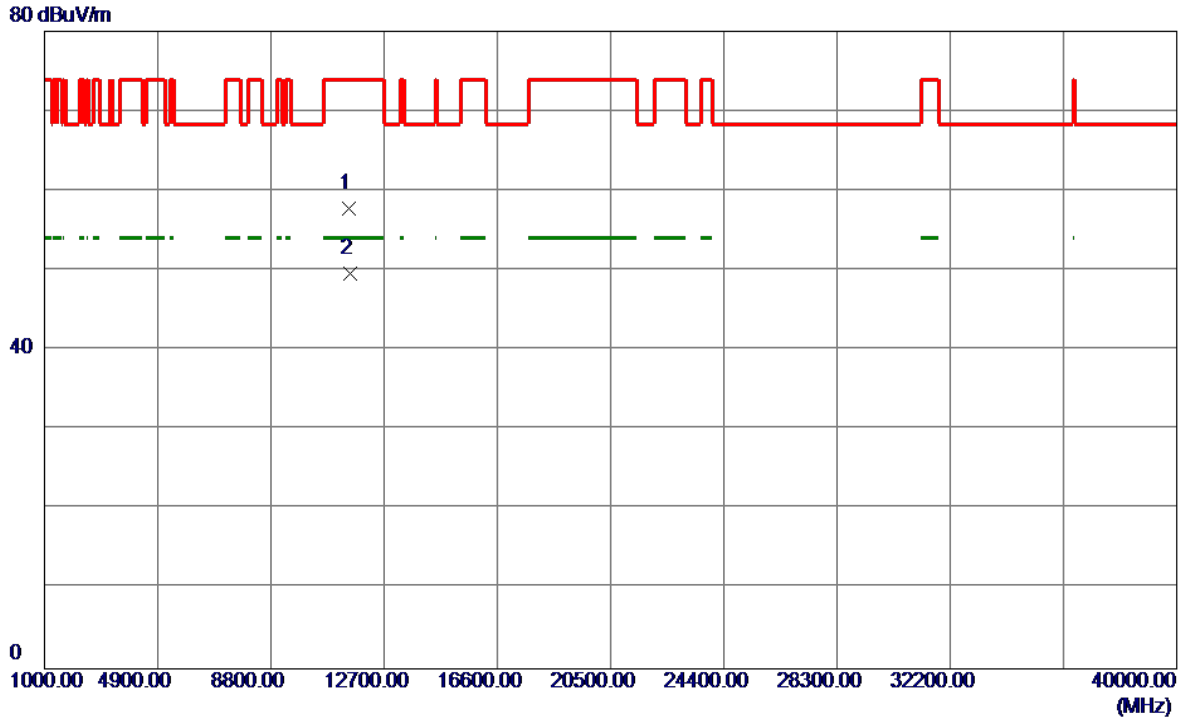

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11507.0000	40.52	17.24	57.76	74.00	-16.24	Peak	
2 *	11510.0000	32.36	17.25	49.61	54.00	-4.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

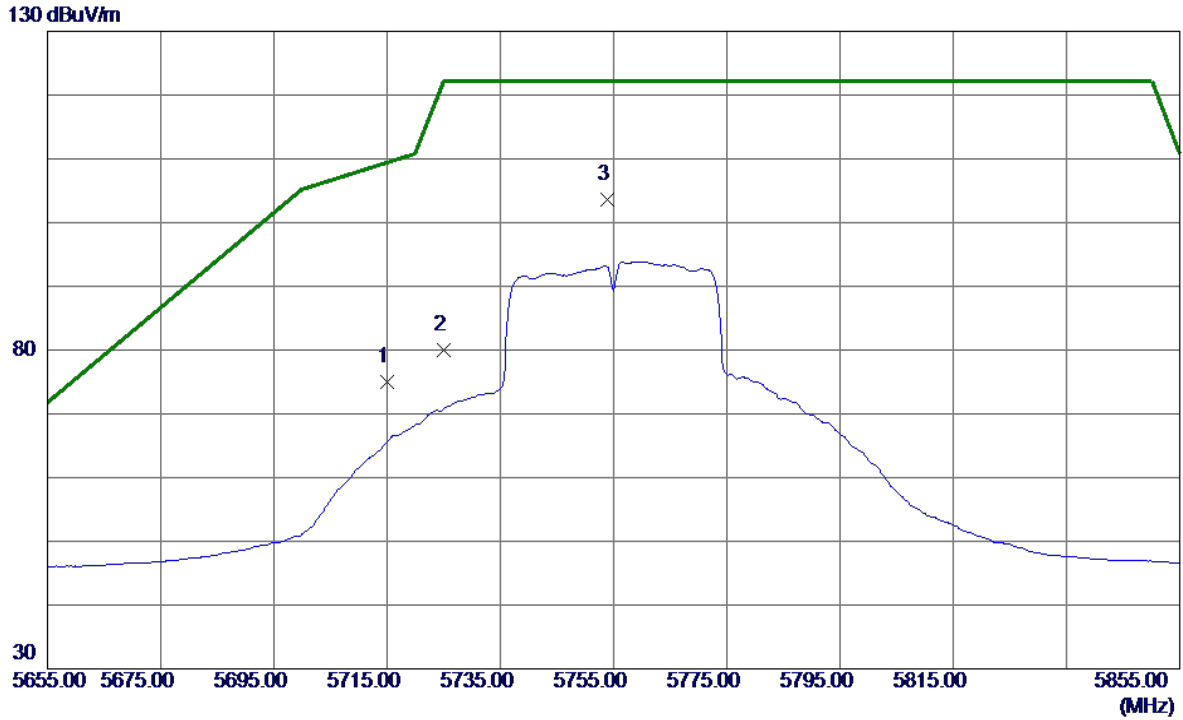

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	56.10	18.95	75.05	109.40	-34.35	Peak	
2	5725.0000	61.01	18.99	80.00	122.20	-42.20	Peak	
3 *	5753.8000	84.55	19.12	103.67	122.20	-18.53	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

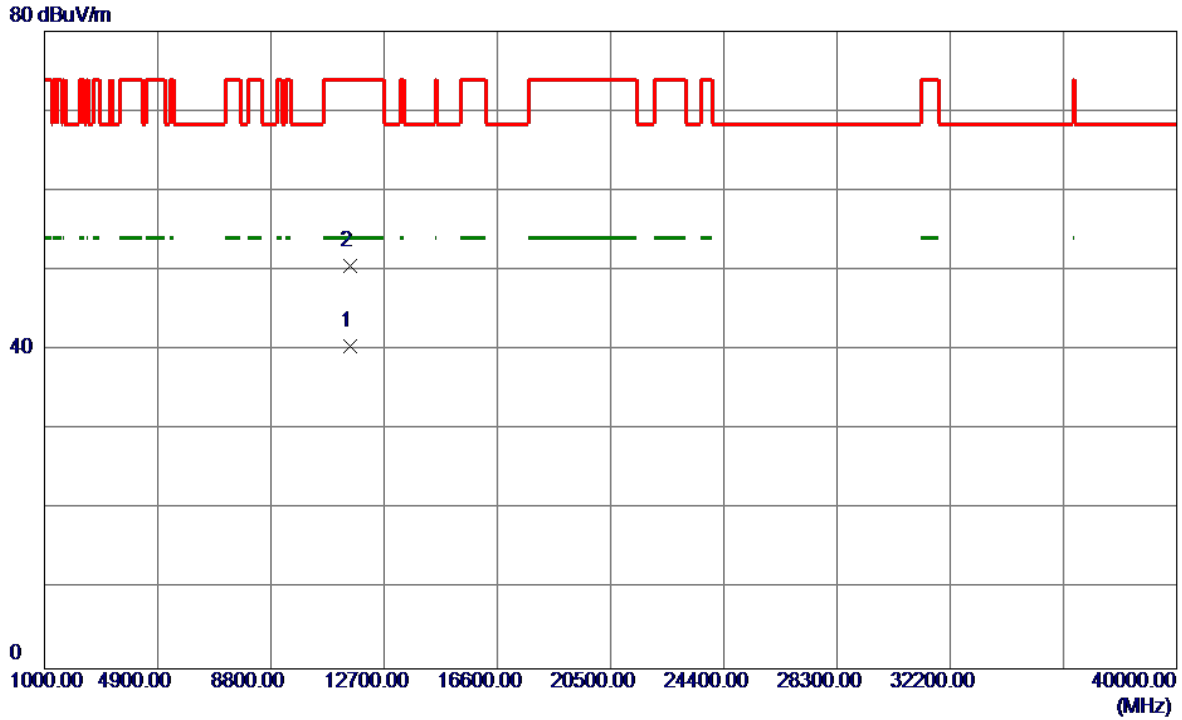

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.9000	23.28	17.25	40.53	54.00	-13.47	AVG	
2	11510.2000	33.27	17.25	50.52	74.00	-23.48	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

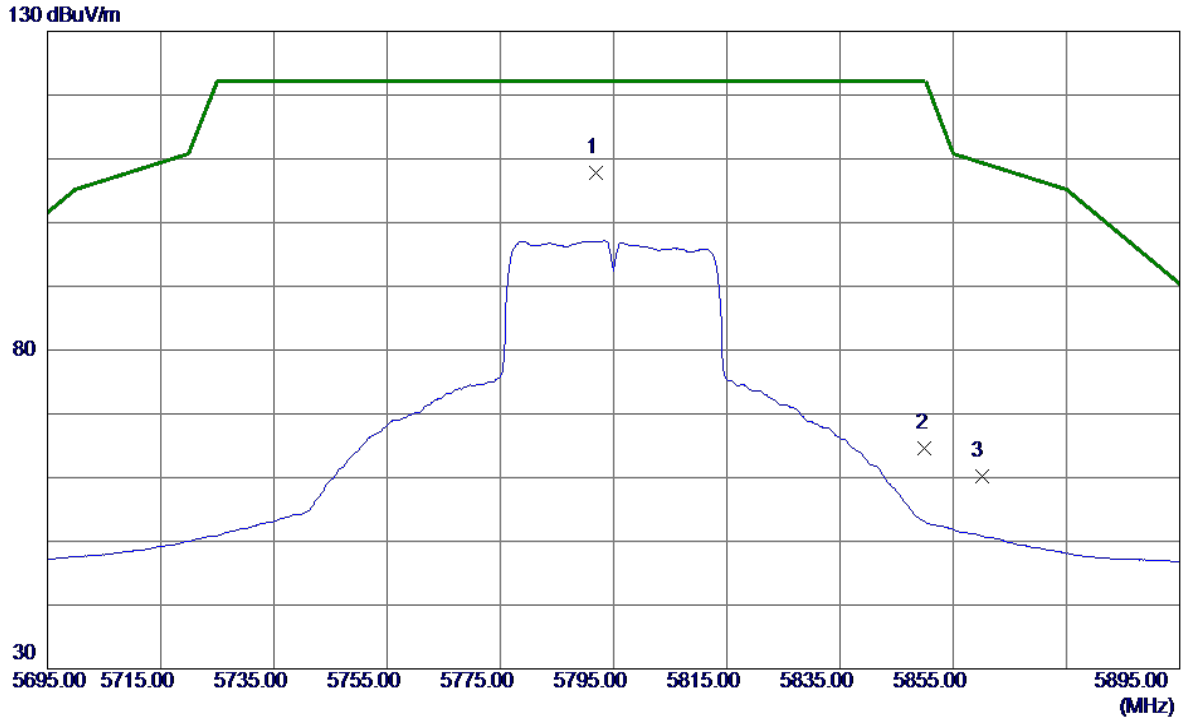

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.8000	88.44	19.29	107.73	122.20	-14.47	Peak	
2	5850.0000	45.11	19.55	64.66	122.20	-57.54	Peak	
3	5860.0000	40.64	19.59	60.23	109.40	-49.17	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

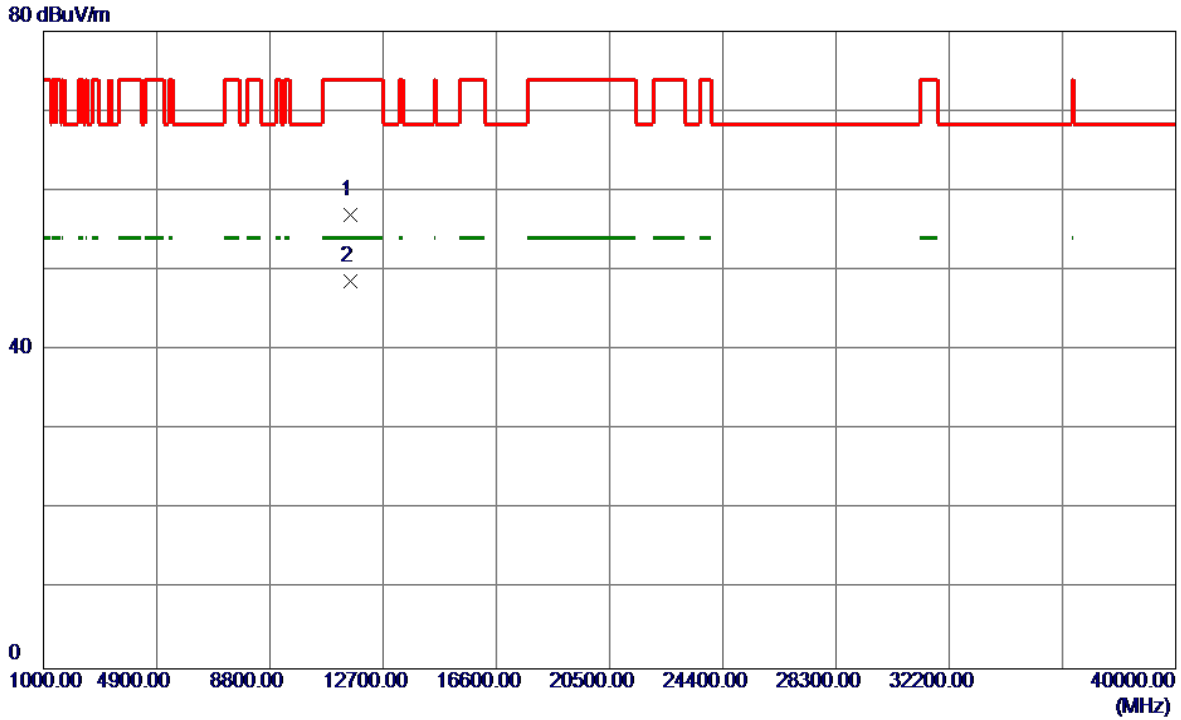

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11589.8000	39.60	17.37	56.97	74.00	-17.03	Peak	
2 *	11590.0000	31.30	17.37	48.67	54.00	-5.33	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

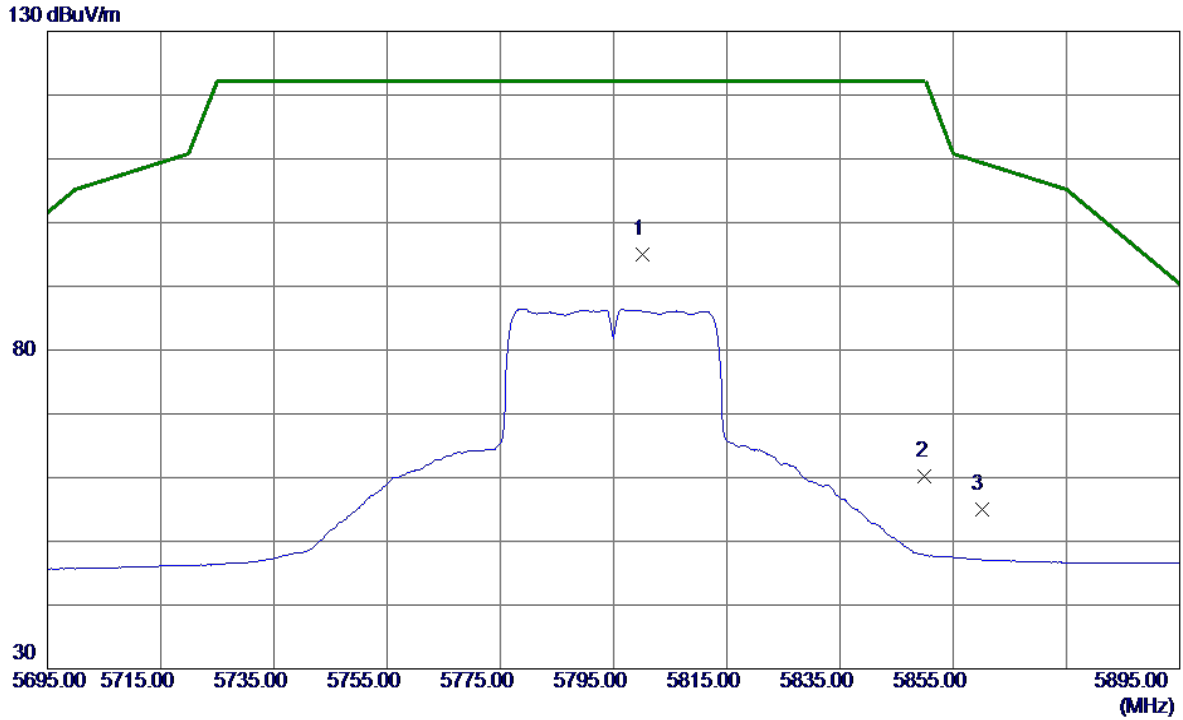

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5800.2000	75.63	19.32	94.95	122.20	-27.25	Peak	
2	5850.0000	40.64	19.55	60.19	122.20	-62.01	Peak	
3	5860.0000	35.37	19.59	54.96	109.40	-54.44	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

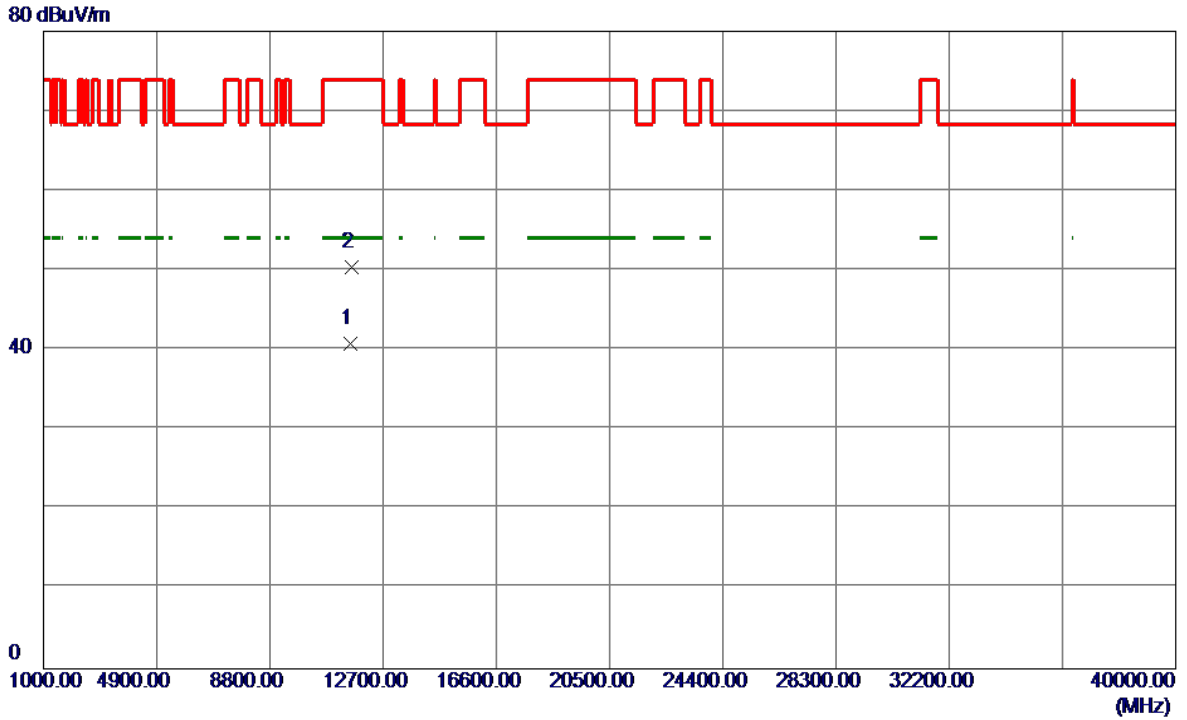

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.8000	23.38	17.37	40.75	54.00	-13.25	AVG	
2	11610.5000	32.93	17.40	50.33	74.00	-23.67	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

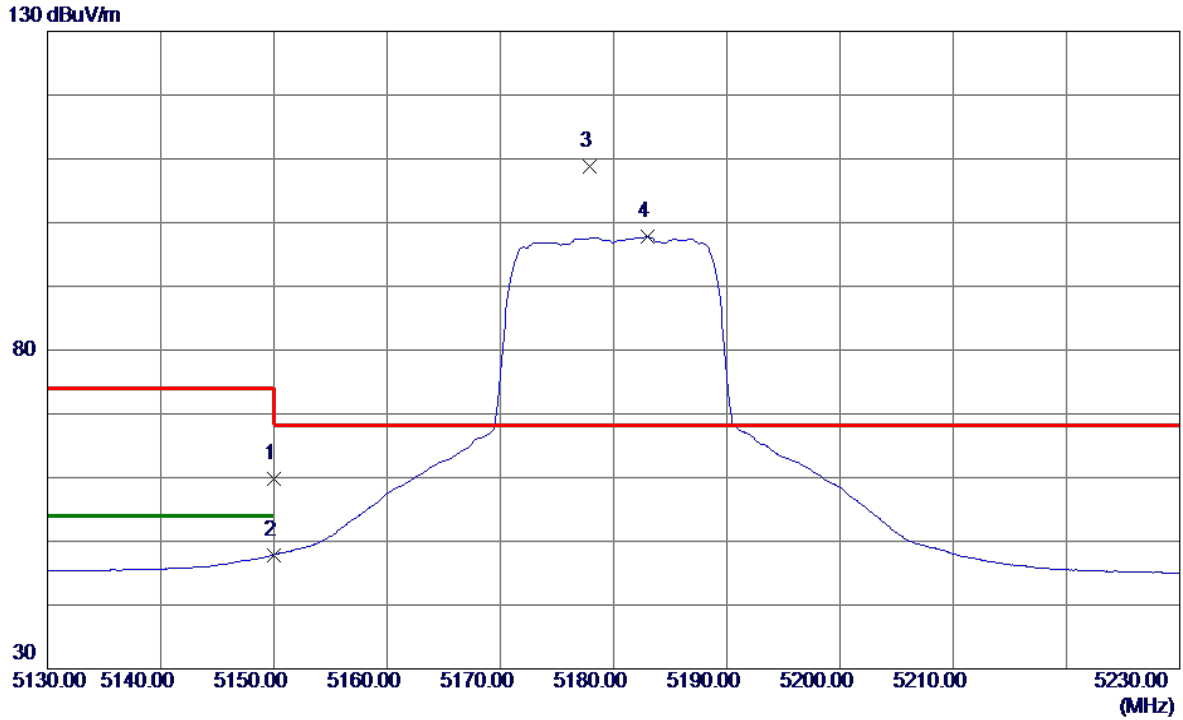

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.97	16.76	59.73	74.00	-14.27	Peak	
2	5150.0000	31.13	16.76	47.89	54.00	-6.11	AVG	
3 *	5177.9000	92.03	16.86	108.89	68.30	40.59	Peak	No Limit
4	5183.0000	80.84	16.88	97.72	999.00	-901.28	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

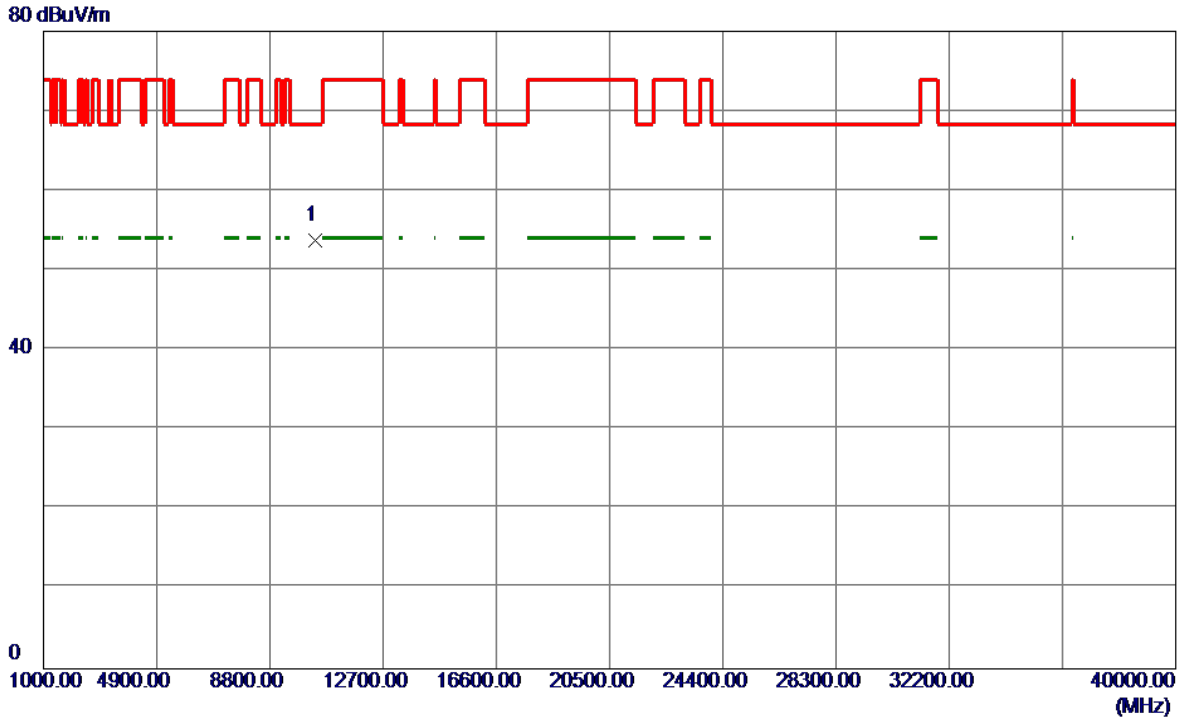

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10359.8000	38.93	14.79	53.72	68.30	-14.58	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

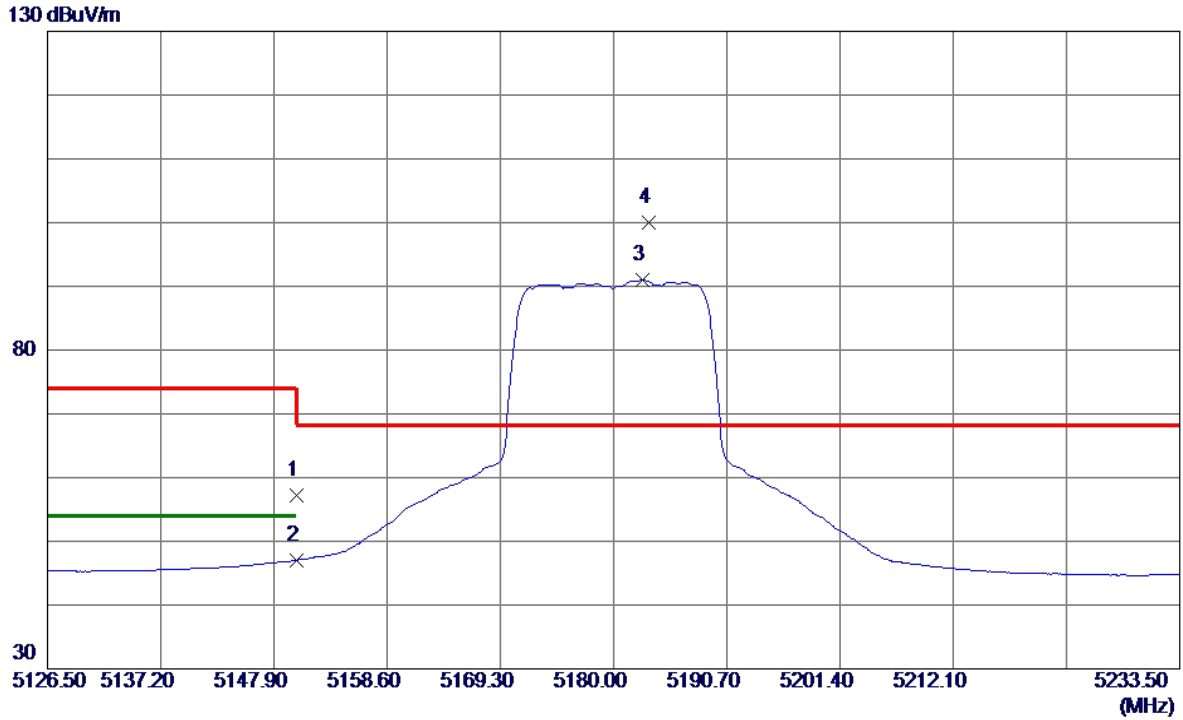

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.49	16.76	57.25	74.00	-16.75	Peak	
2	5150.0000	30.31	16.76	47.07	54.00	-6.93	AVG	
3	5182.6750	74.05	16.87	90.92	999.00	-908.08	AVG	No Limit
4 *	5183.3170	83.17	16.88	100.05	68.30	31.75	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

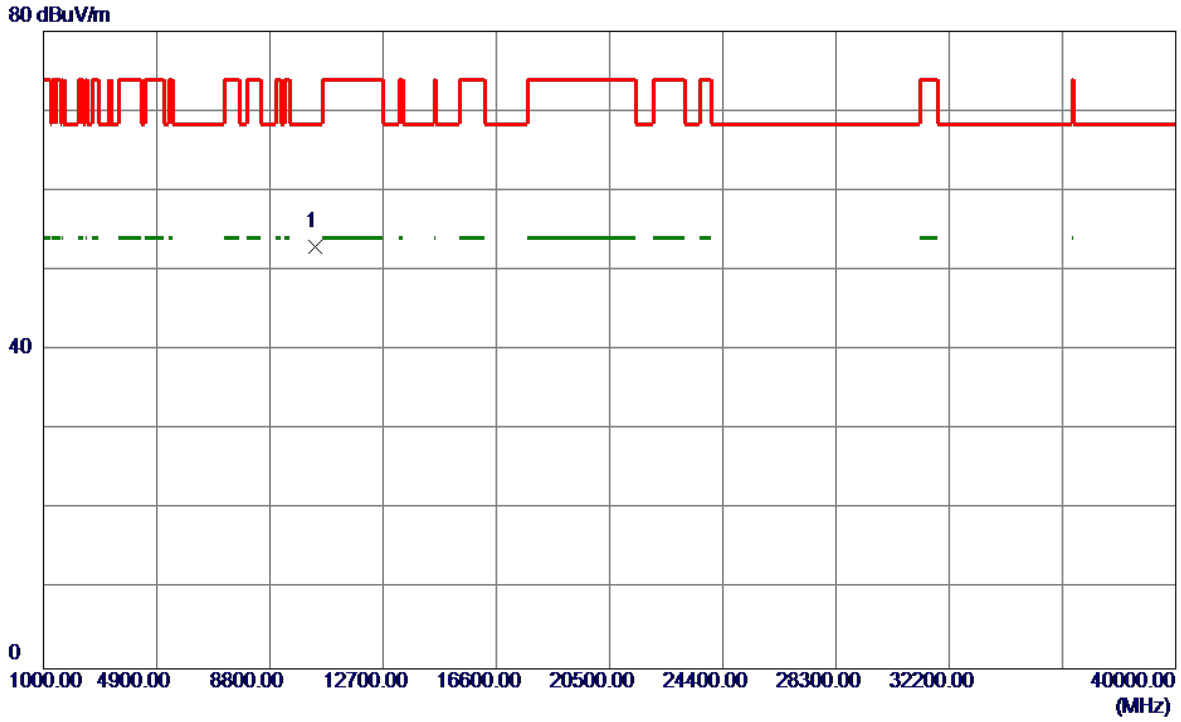

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10355.6000	38.19	14.79	52.98	68.30	-15.32	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

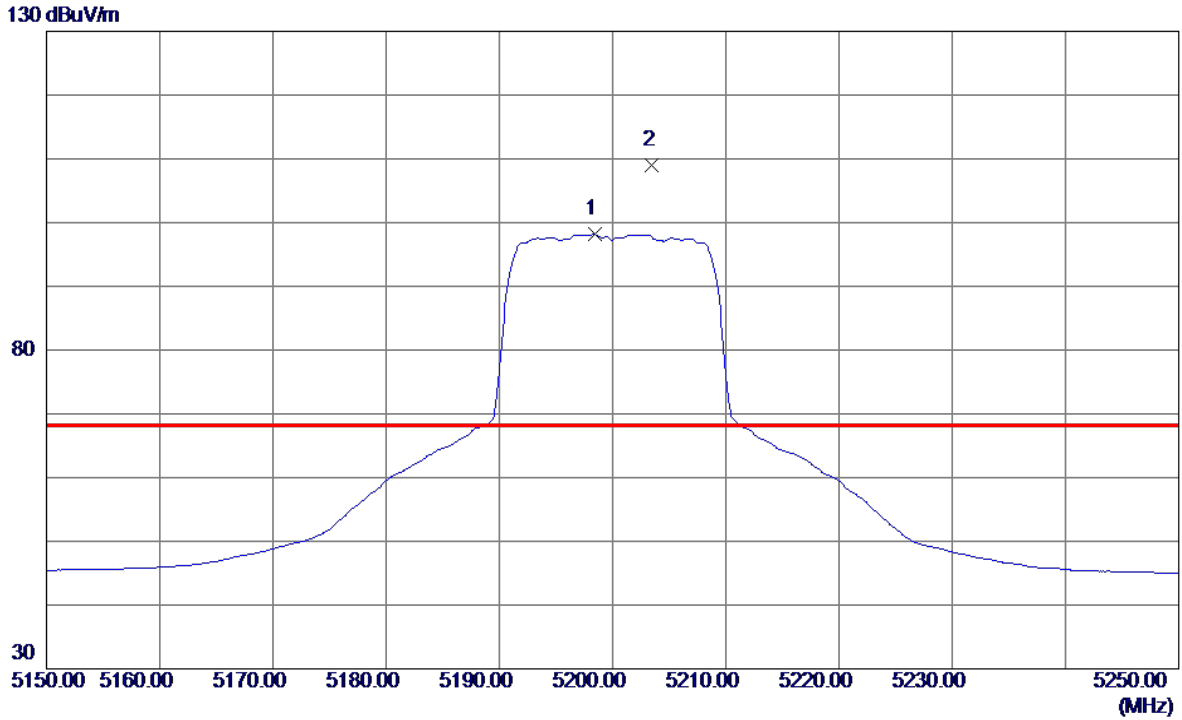

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5198.4000	81.22	16.93	98.15	999.00	-900.85	AVG	No Limit
2 *	5203.5000	91.98	16.95	108.93	68.30	40.63	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

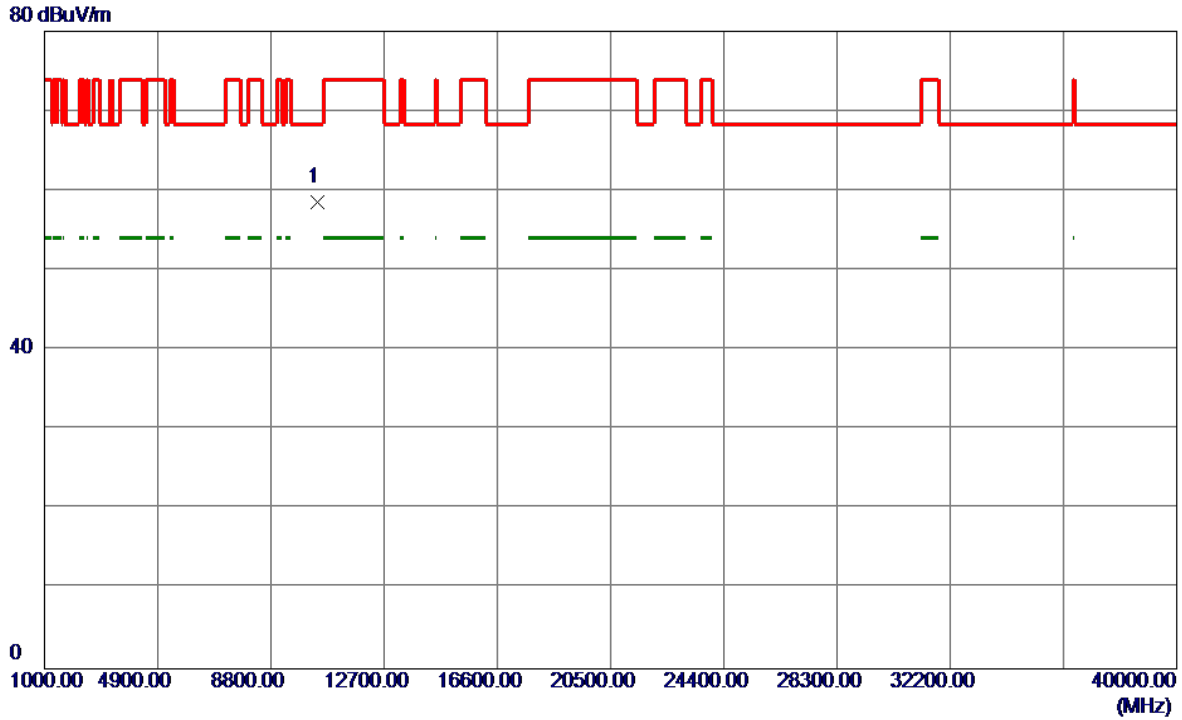

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10402.6000	43.70	14.86	58.56	68.30	-9.74	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

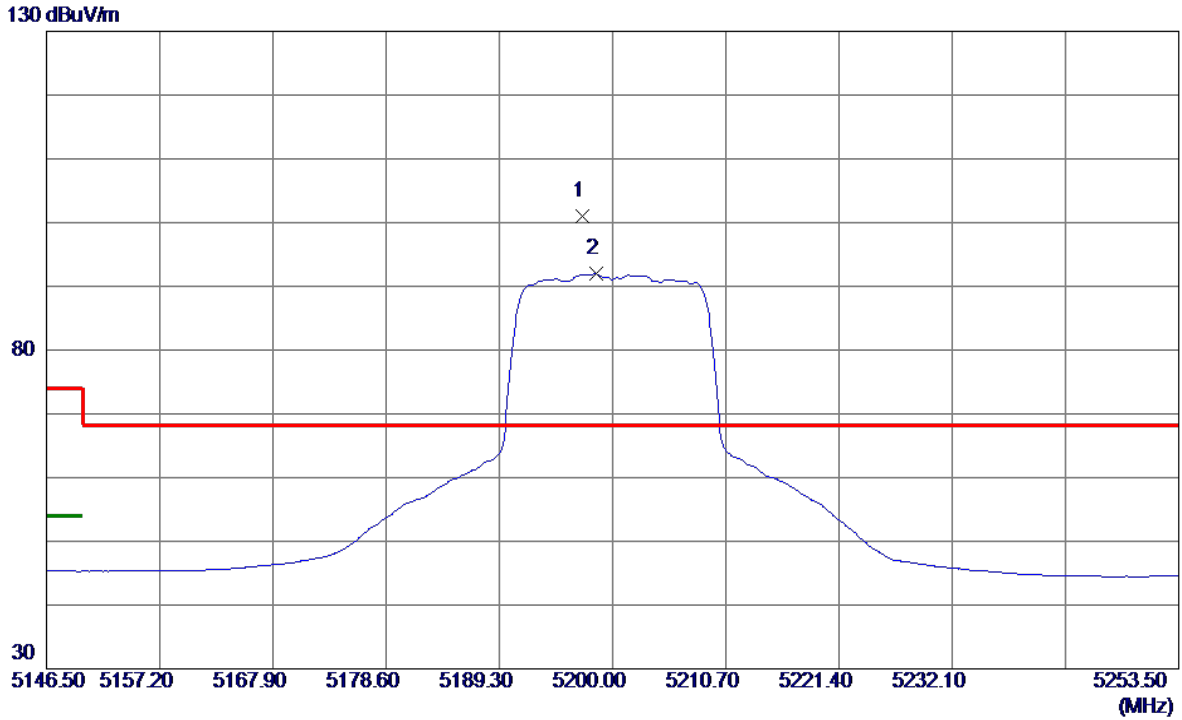

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5197.1110	83.97	16.93	100.90	68.30	32.60	Peak	No Limit
2	5198.3950	75.01	16.93	91.94	999.00	-907.06	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

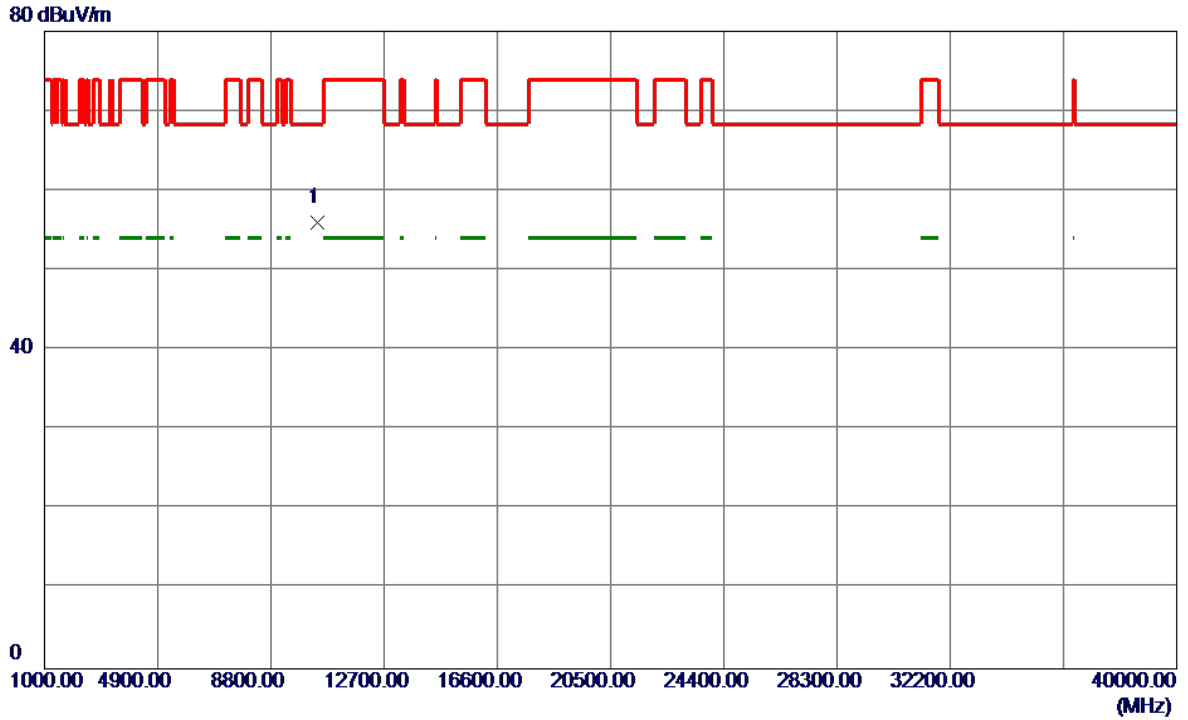

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10394.9500	41.20	14.85	56.05	68.30	-12.25	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

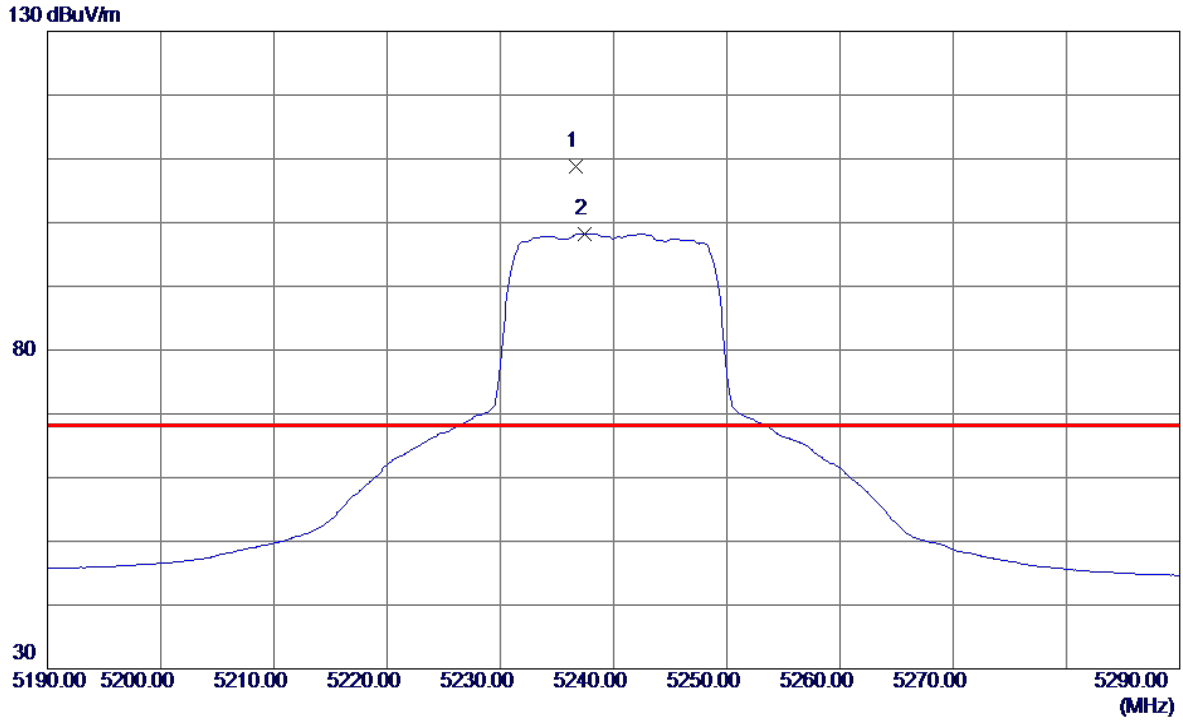

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5236.7000	91.75	17.07	108.82	68.30	40.52	Peak	No Limit
2	5237.4000	81.20	17.07	98.27	999.00	-900.73	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

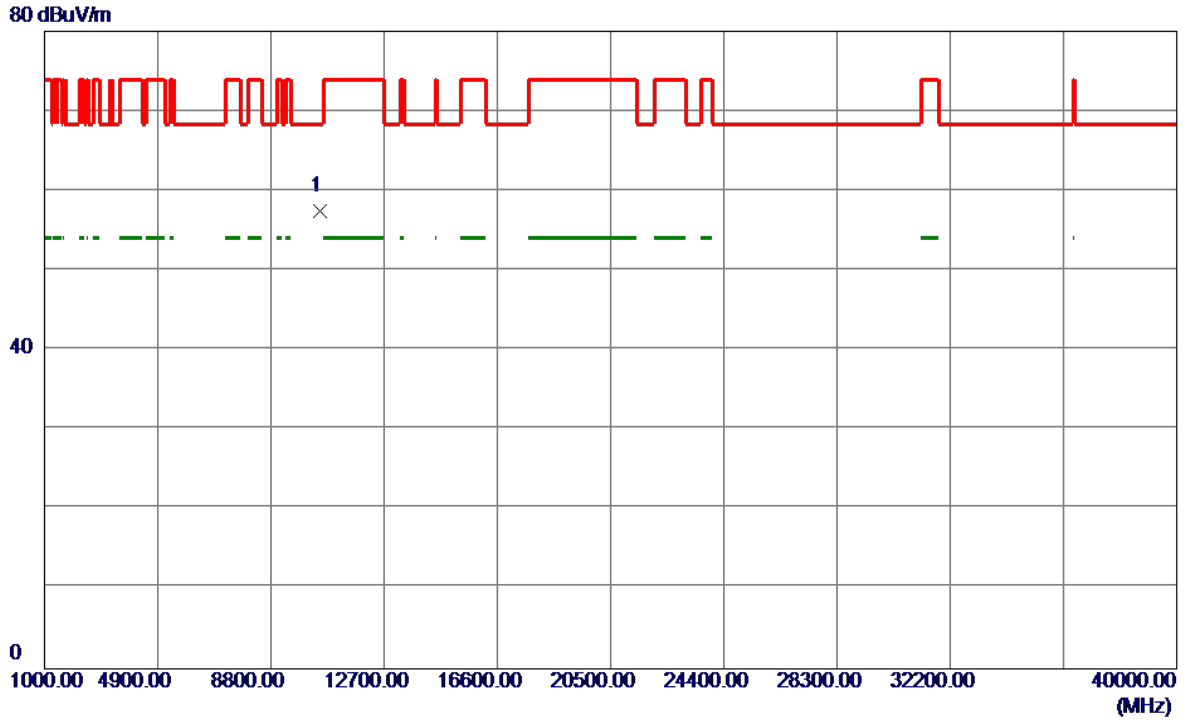

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10482.6000	42.45	14.99	57.44	68.30	-10.86	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

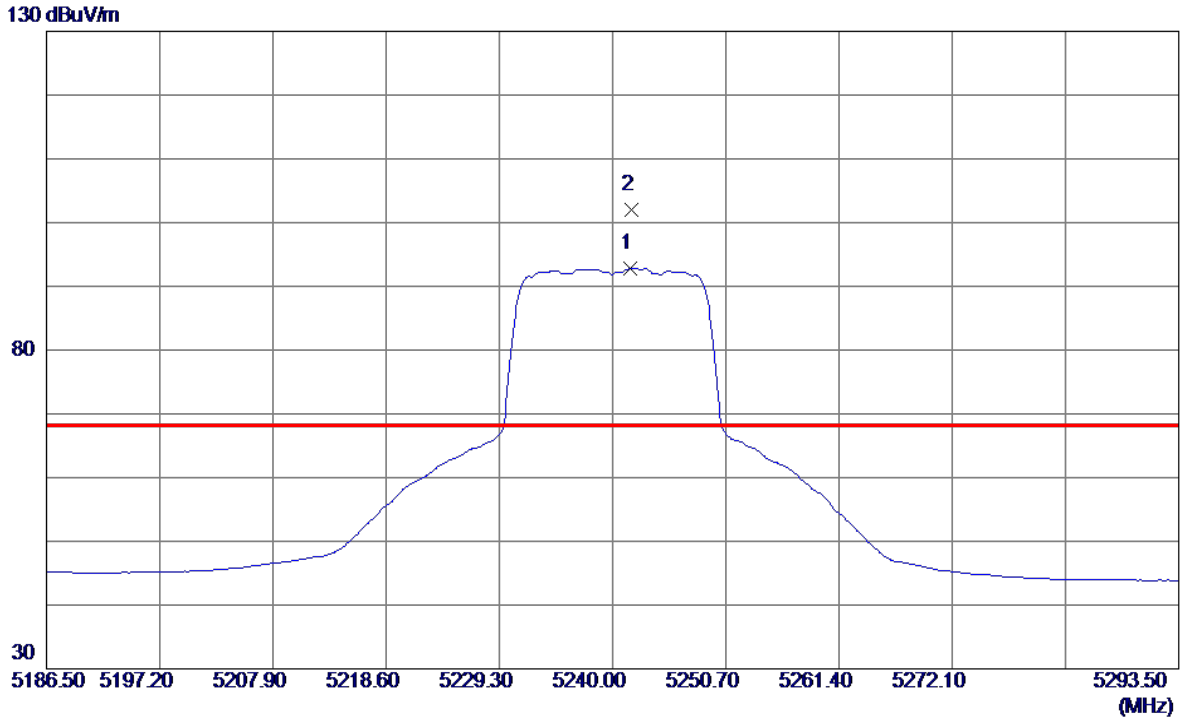

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5241.7120	75.65	17.08	92.73	999.00	-906.27	AVG	No Limit
2 *	5241.8190	84.94	17.08	102.02	68.30	33.72	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

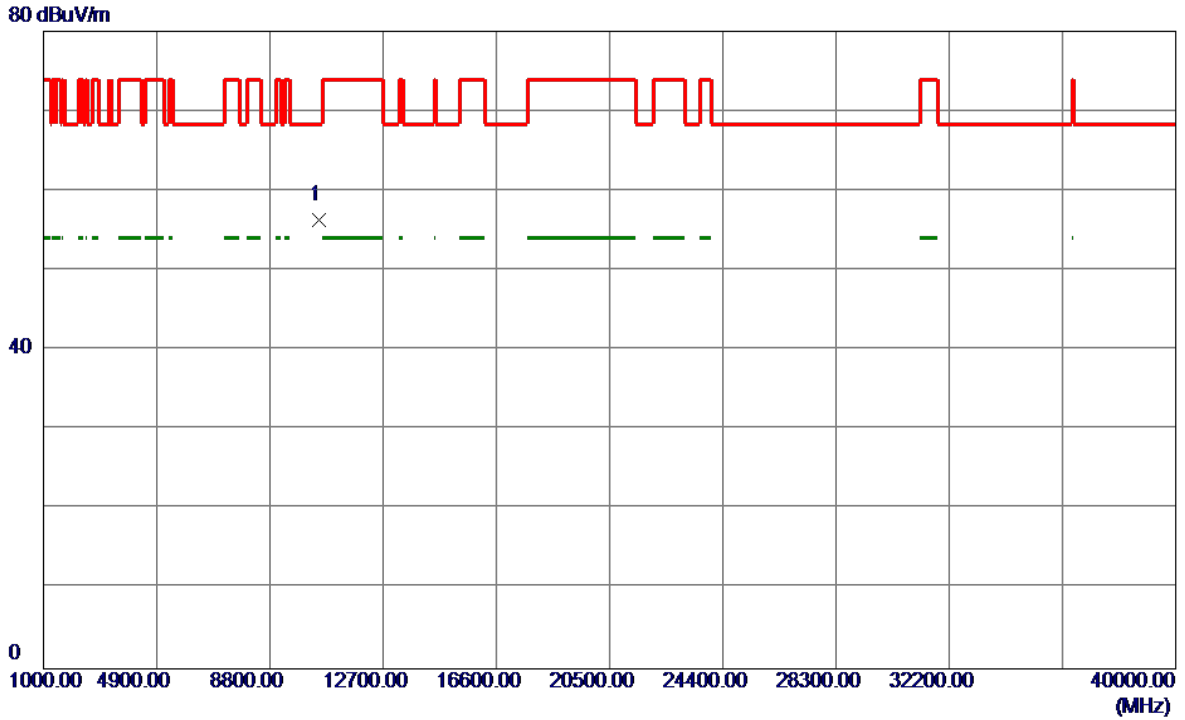

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10469.9500	41.41	14.97	56.38	68.30	-11.92	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

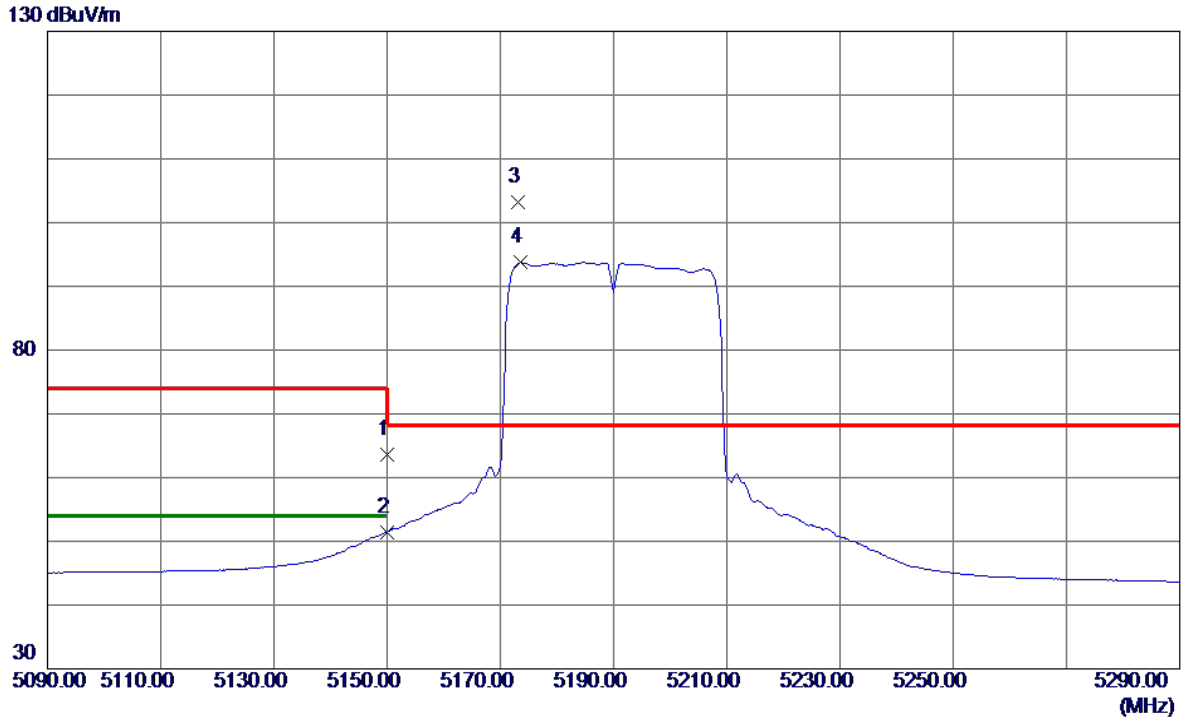

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.91	16.76	63.67	74.00	-10.33	Peak	
2	5150.0000	34.65	16.76	51.41	54.00	-2.59	AVG	
3 *	5173.2000	86.39	16.84	103.23	68.30	34.93	Peak	No Limit
4	5173.6000	76.90	16.84	93.74	999.00	-905.26	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

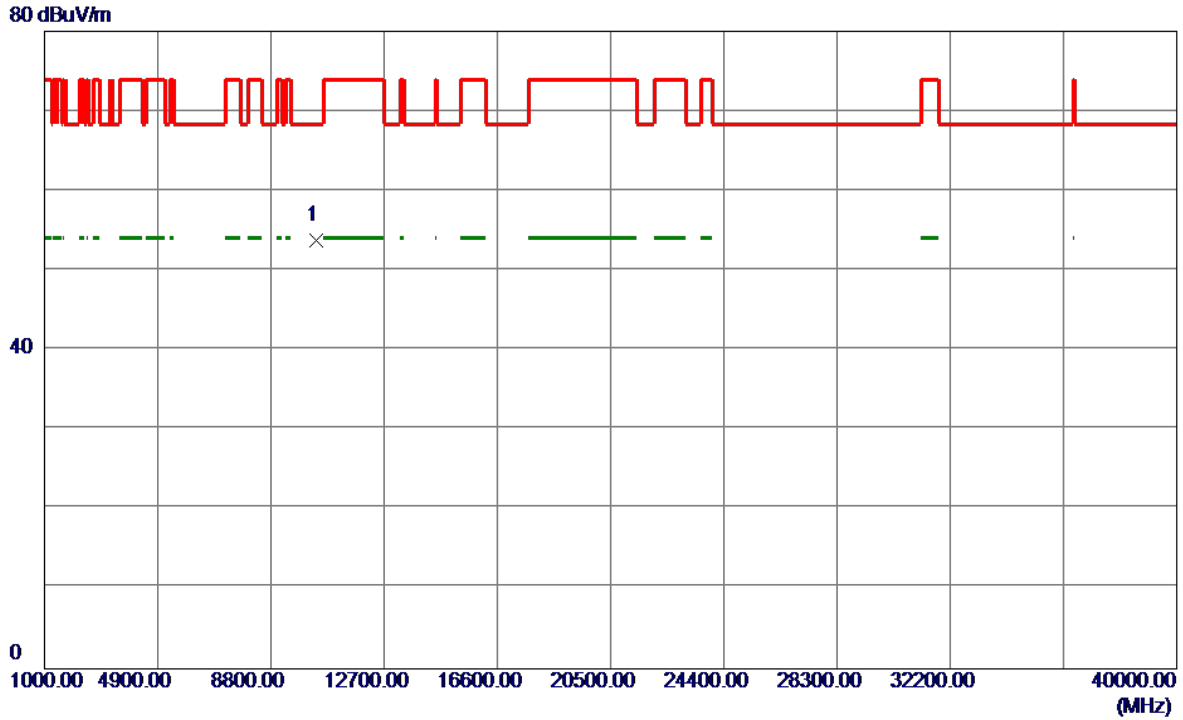


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.4000	38.93	14.83	53.76	68.30	-14.54	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


130 dBuV/m

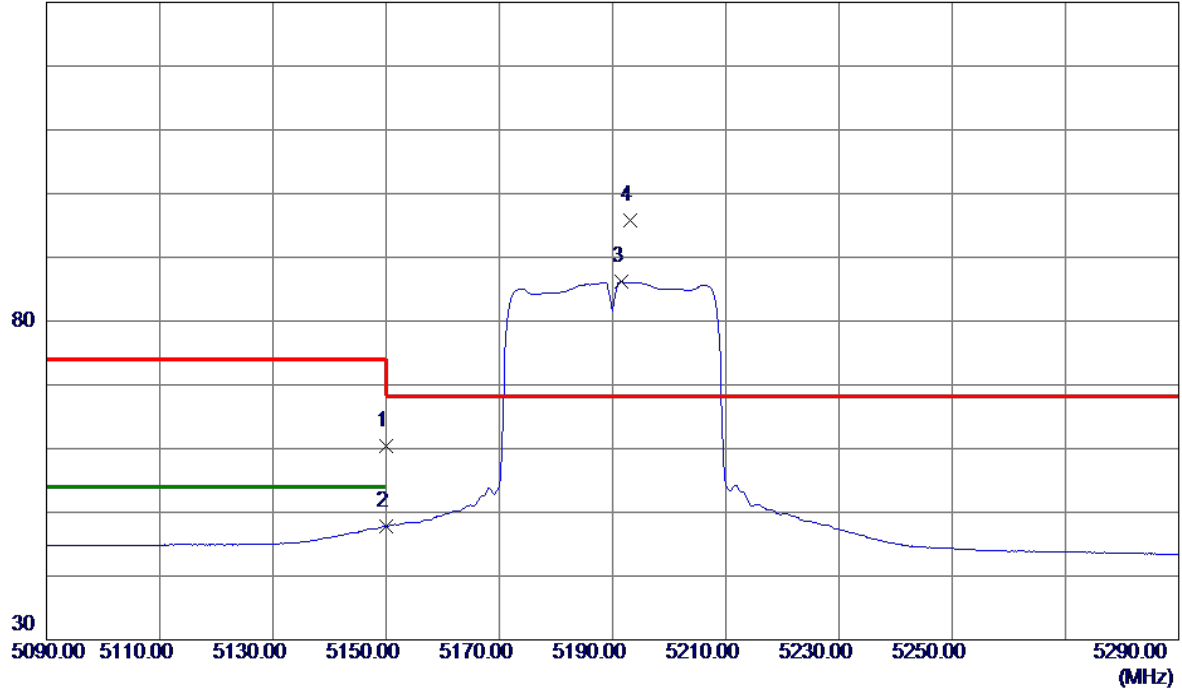

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.62	16.76	60.38	74.00	-13.62	Peak	
2	5150.0000	31.05	16.76	47.81	54.00	-6.19	AVG	
3	5191.6000	69.23	16.91	86.14	999.00	-912.86	AVG	No Limit
4 *	5193.2000	78.83	16.91	95.74	68.30	27.44	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

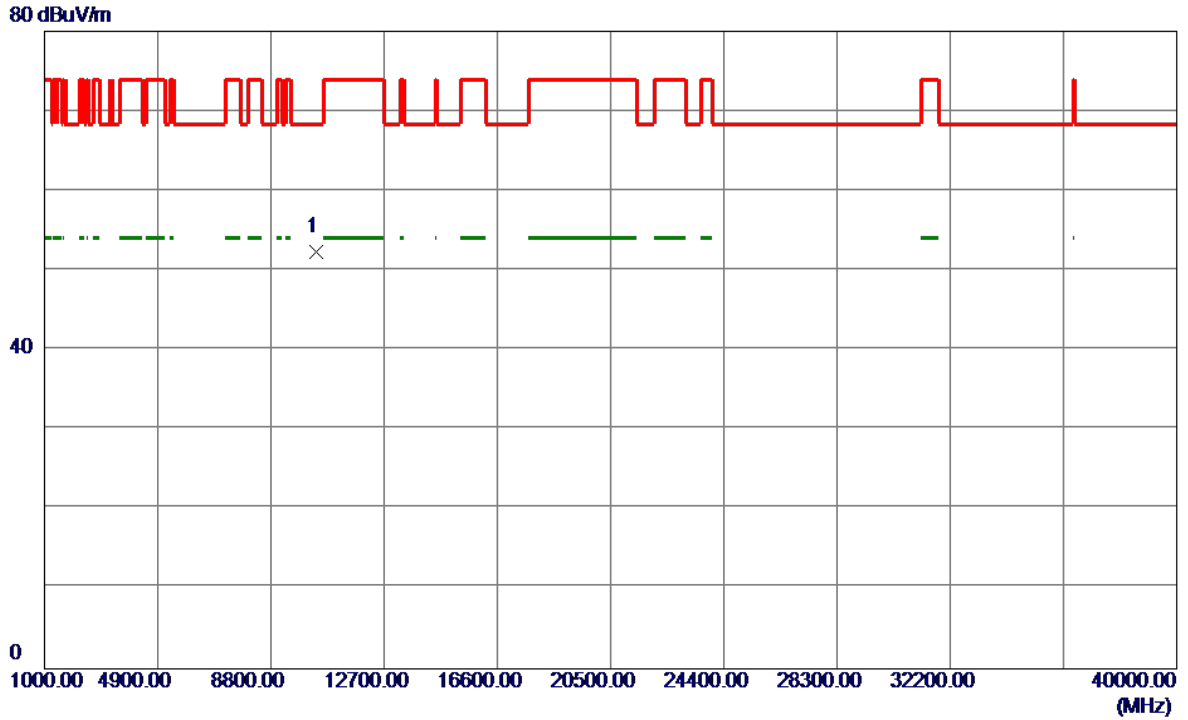


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10376.1500	37.49	14.82	52.31	68.30	-15.99	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical


130 dBuV/m

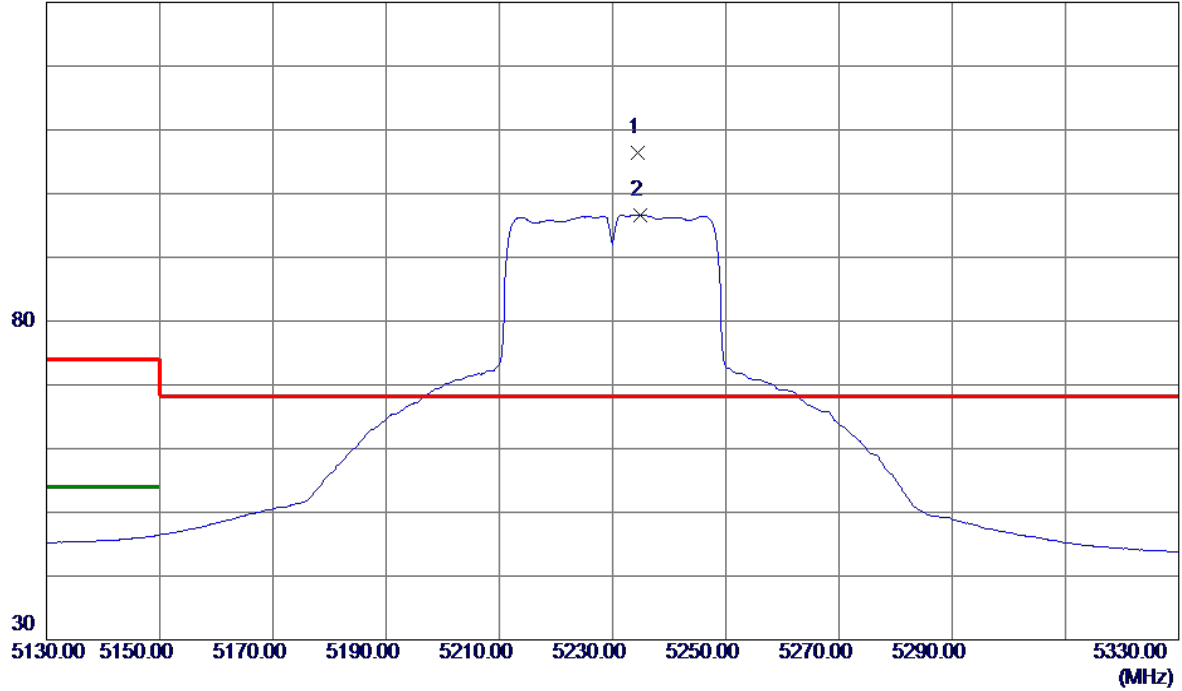

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5234.4000	89.26	17.06	106.32	68.30	38.02	Peak	No Limit
2	5234.8000	79.59	17.06	96.65	999.00	-902.35	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

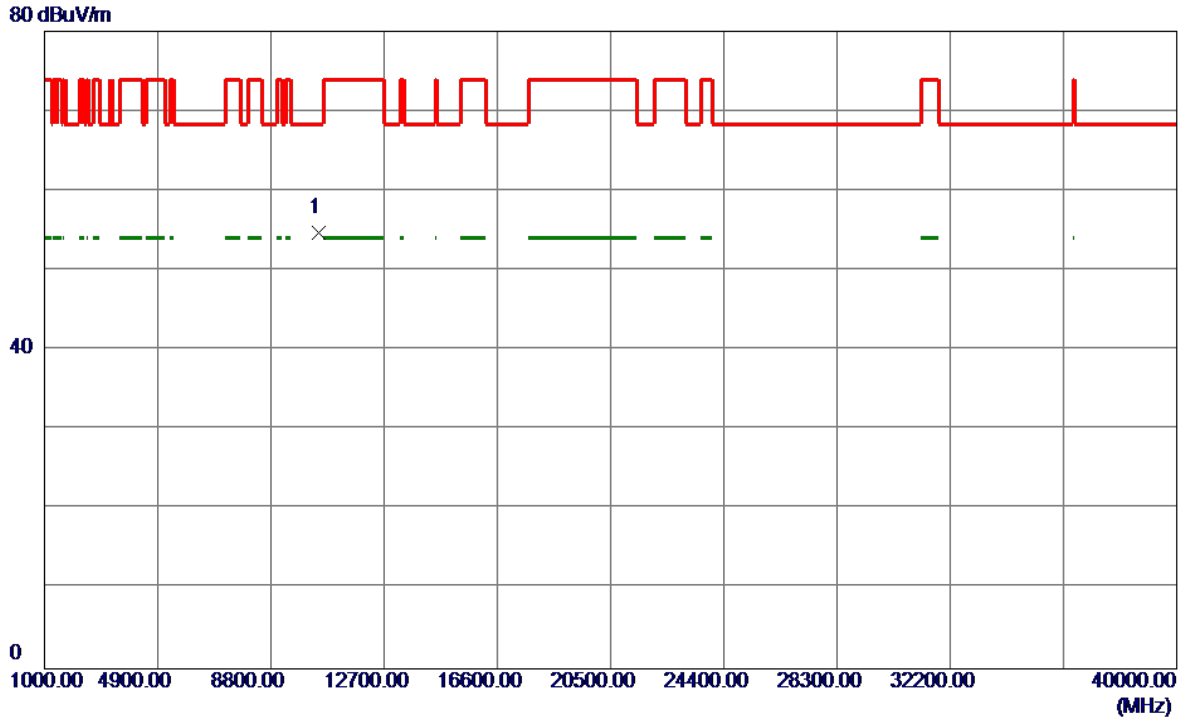

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10461.0000	39.76	14.96	54.72	68.30	-13.58	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

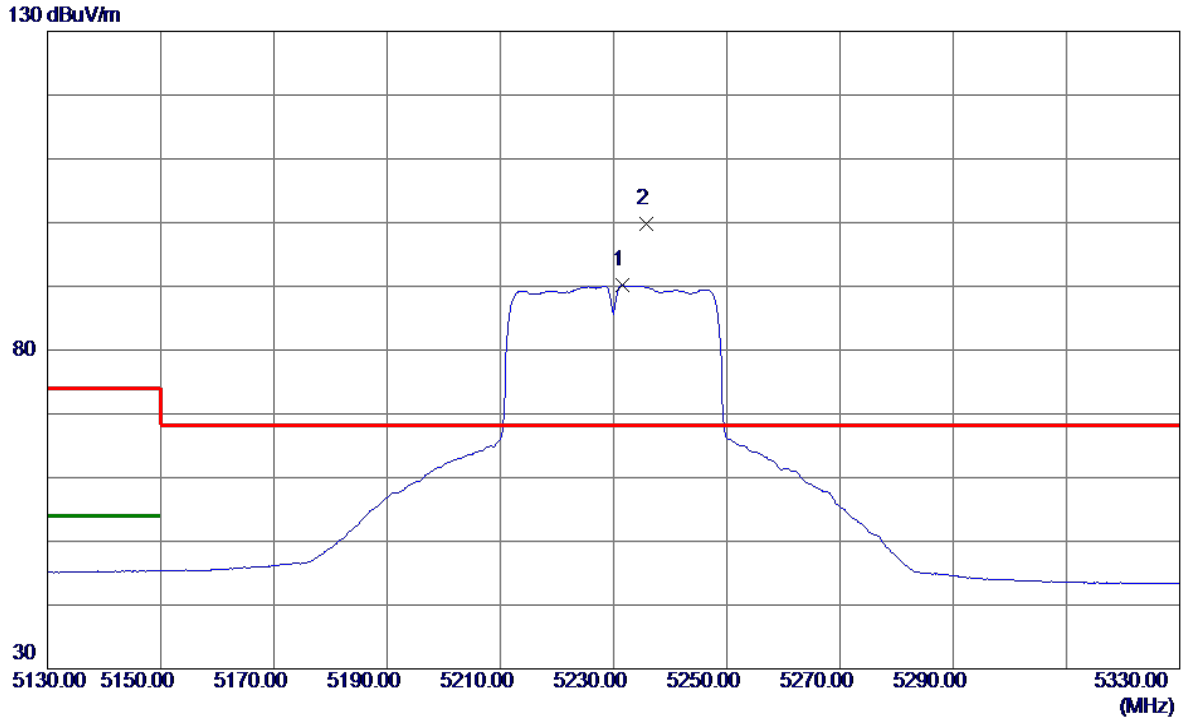

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5231.6000	73.11	17.05	90.16	999.00	-908.84	AVG	No Limit
2 *	5235.8000	82.69	17.06	99.75	68.30	31.45	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

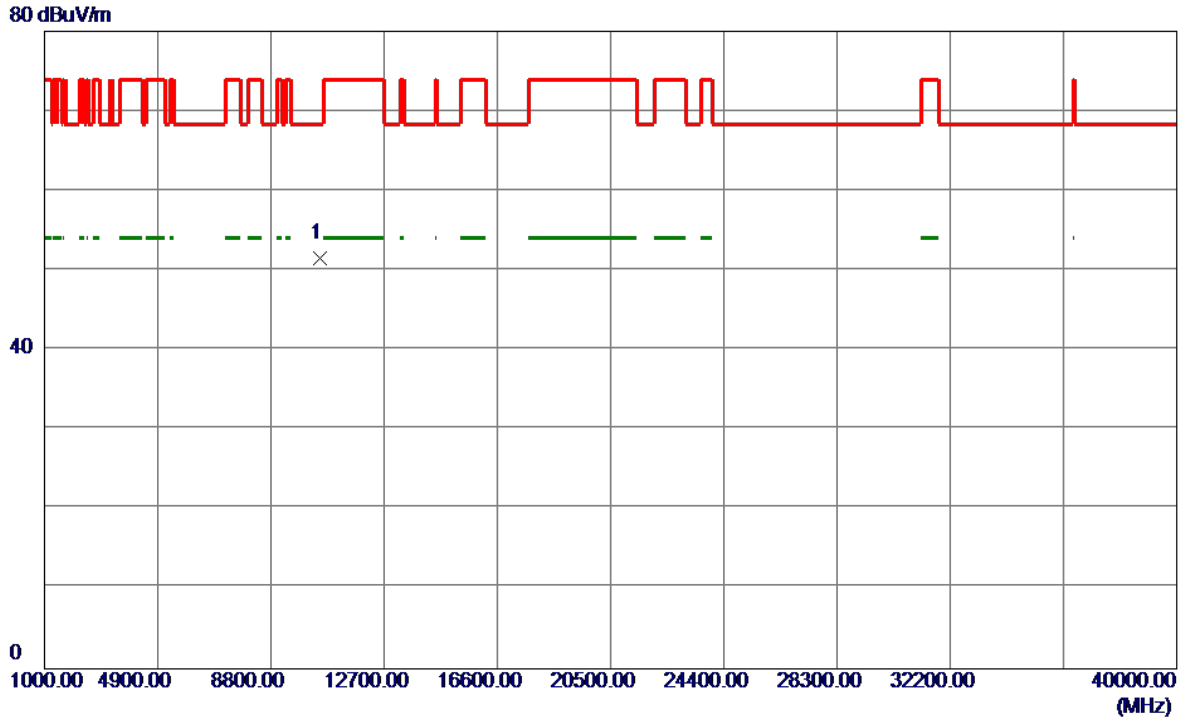

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.2000	36.58	14.99	51.57	68.30	-16.73	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

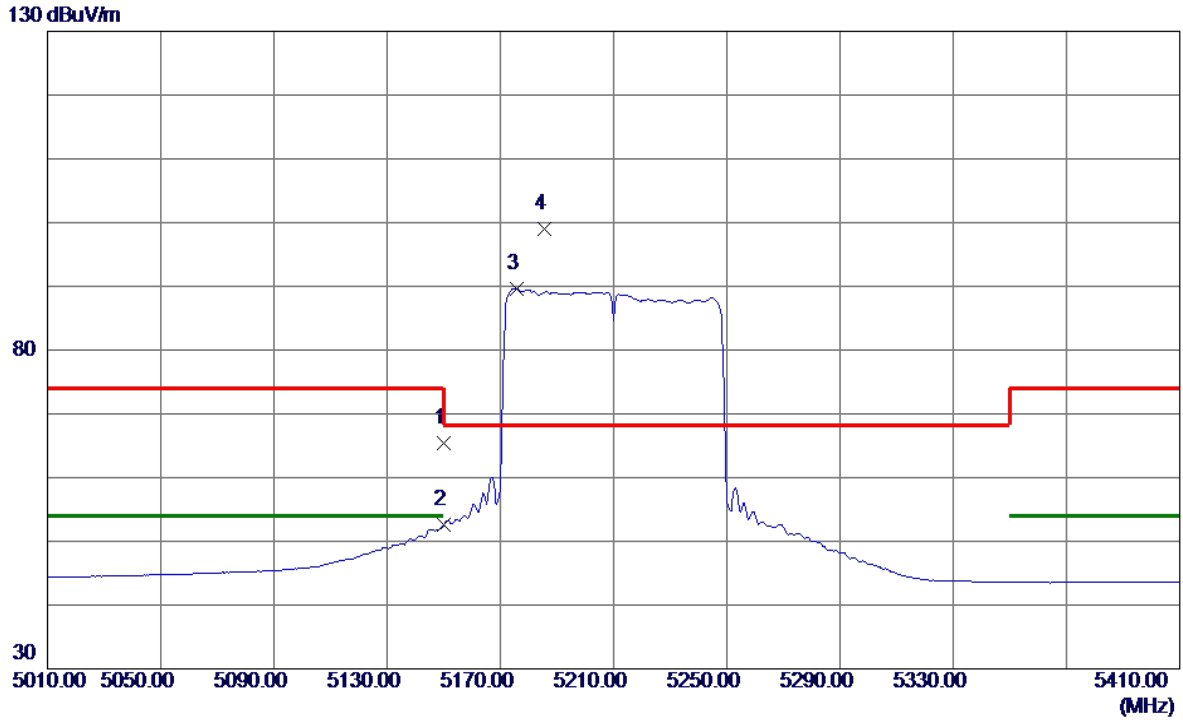

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.57	16.76	65.33	74.00	-8.67	Peak	
2	5150.0000	35.83	16.76	52.59	54.00	-1.41	AVG	
3	5175.6000	72.73	16.85	89.58	999.00	-909.42	AVG	No Limit
4 *	5185.6000	82.16	16.88	99.04	68.30	30.74	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

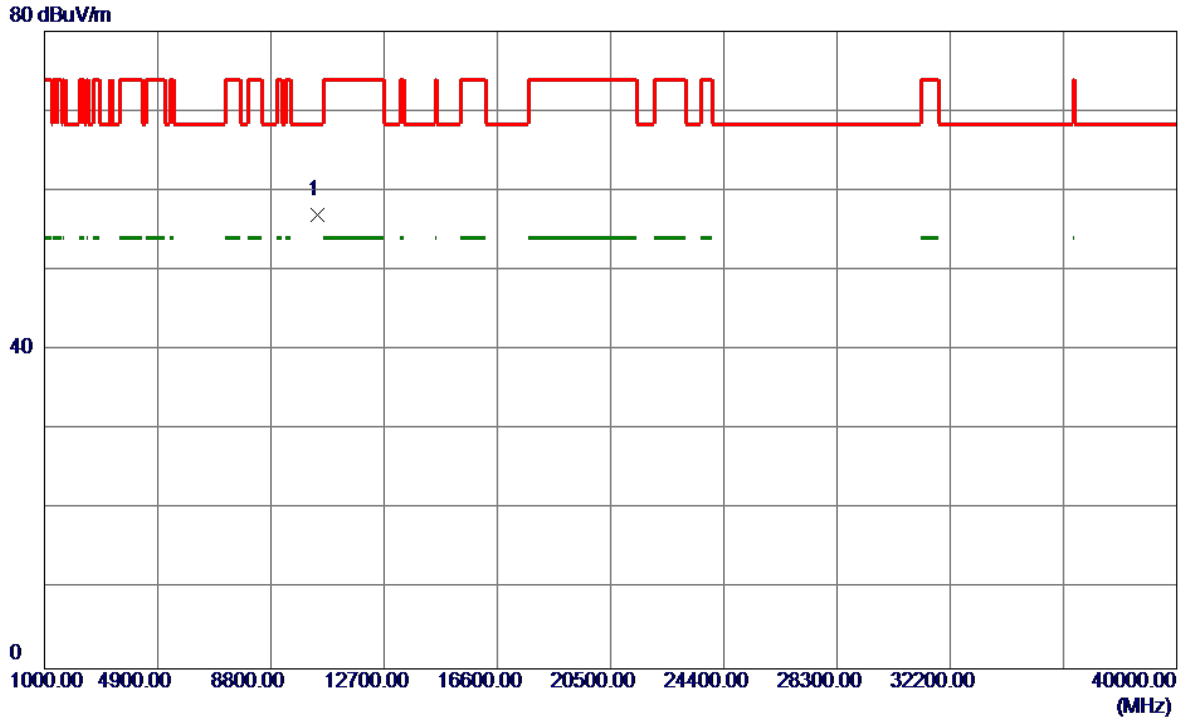


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	42.01	14.89	56.90	68.30	-11.40	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


130 dBuV/m

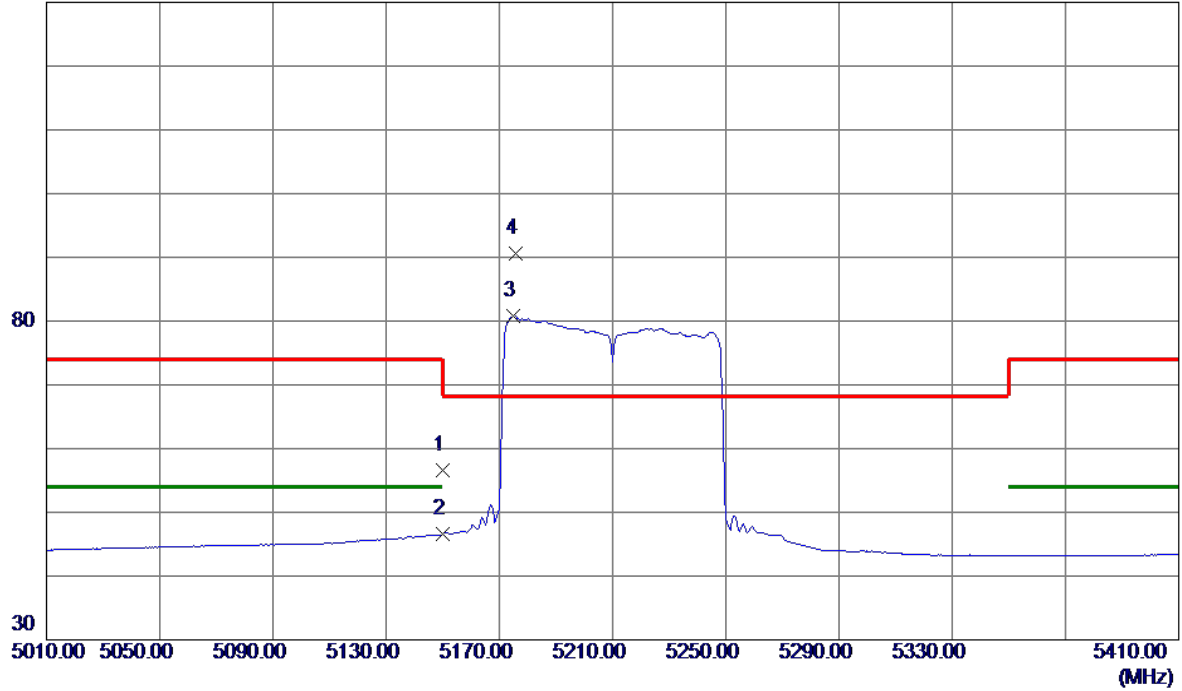

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.85	16.76	56.61	74.00	-17.39	Peak	
2	5150.0000	29.76	16.76	46.52	54.00	-7.48	AVG	
3	5174.8000	63.86	16.85	80.71	999.00	-918.29	AVG	No Limit
4 *	5175.6000	73.77	16.85	90.62	68.30	22.32	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

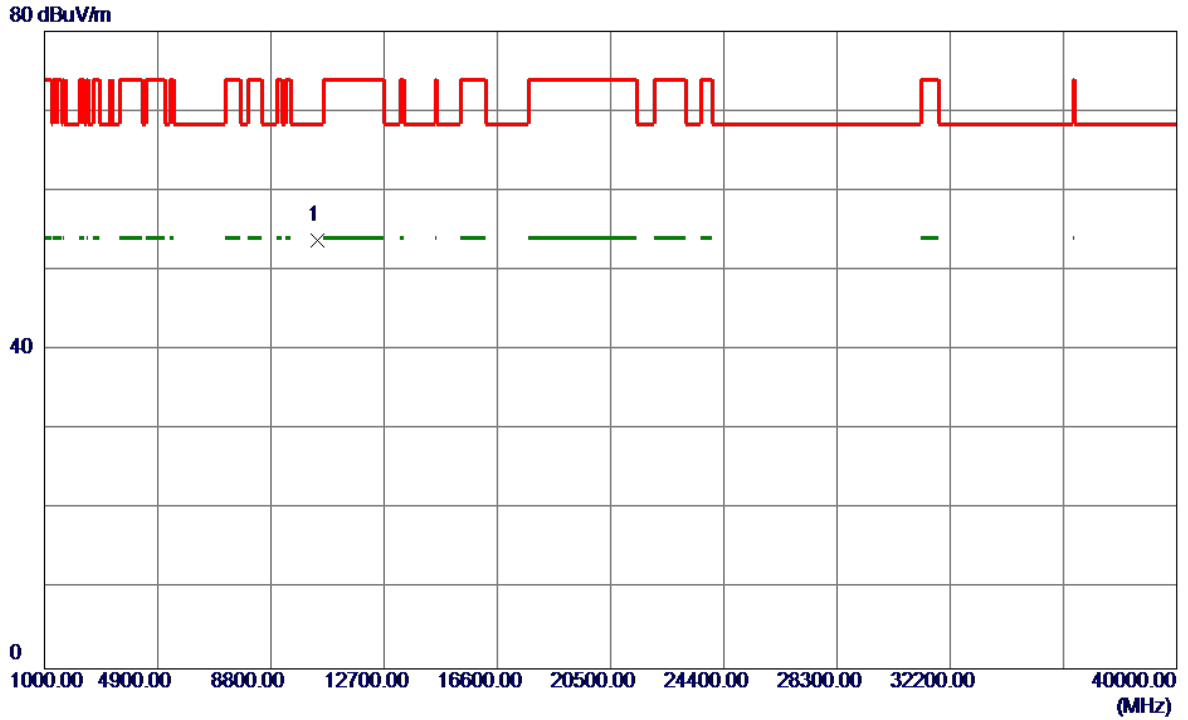

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.2000	38.89	14.89	53.78	68.30	-14.52	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

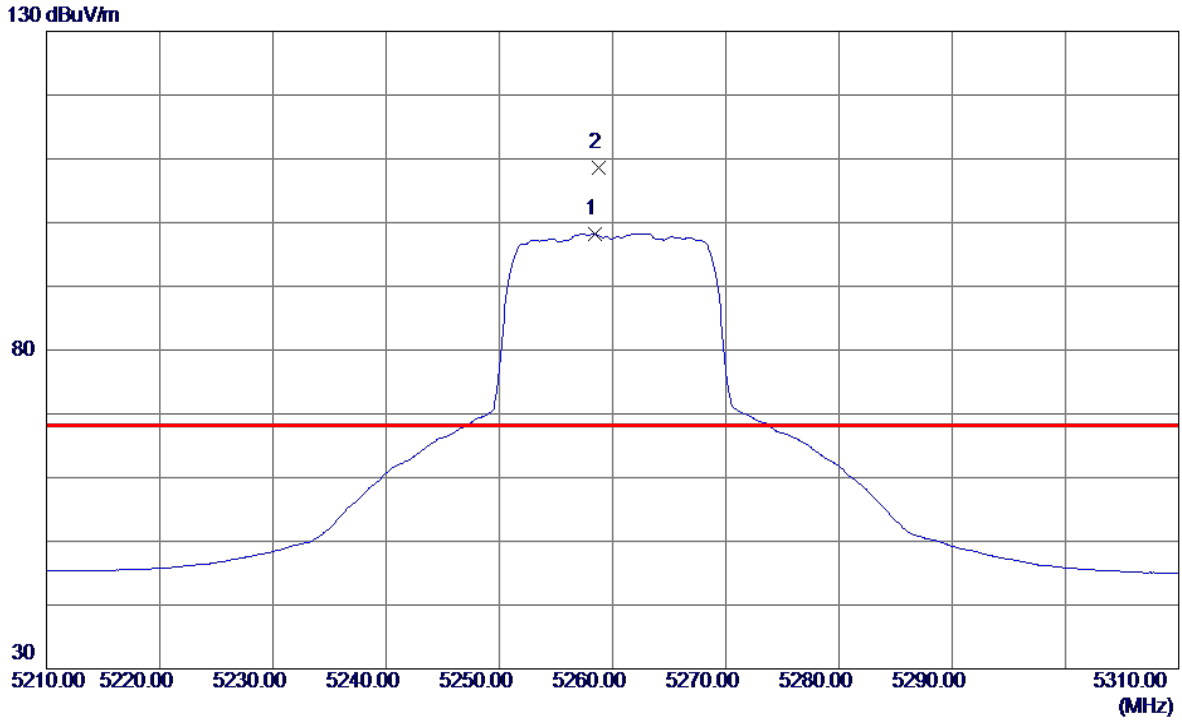

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5258.4000	81.05	17.14	98.19	999.00	-900.81	AVG	No Limit
2 *	5258.8000	91.43	17.14	108.57	68.30	40.27	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

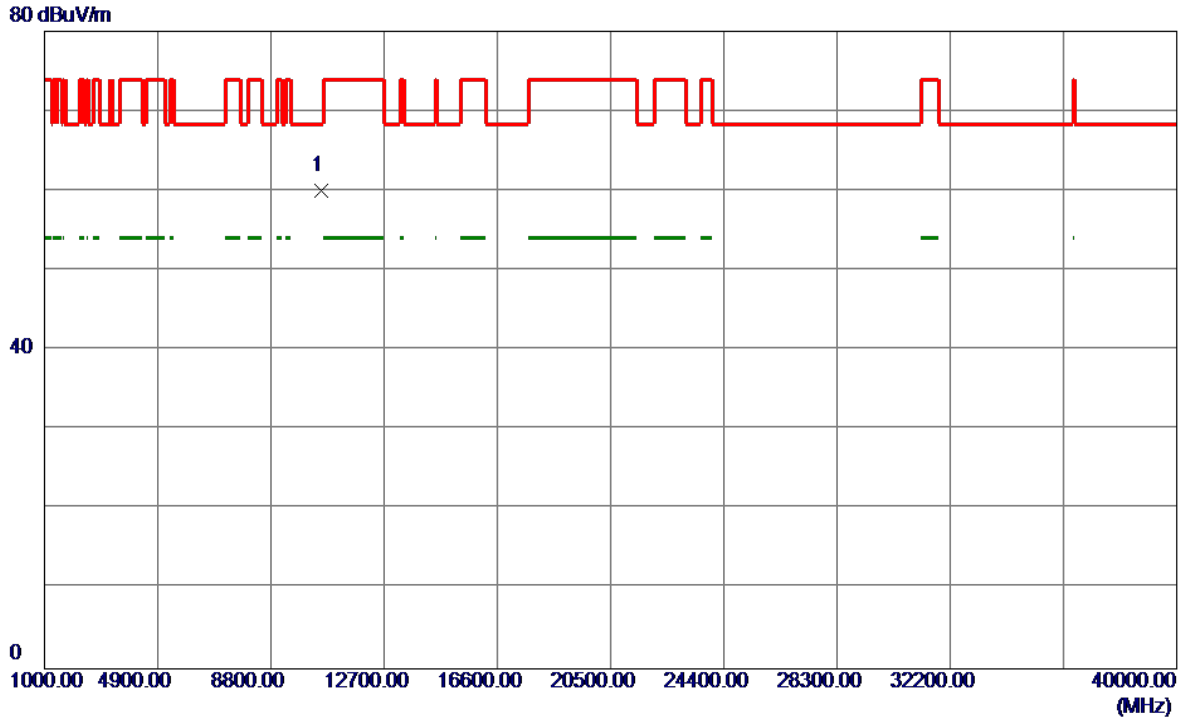

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10512.0000	44.96	15.04	60.00	68.30	-8.30	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

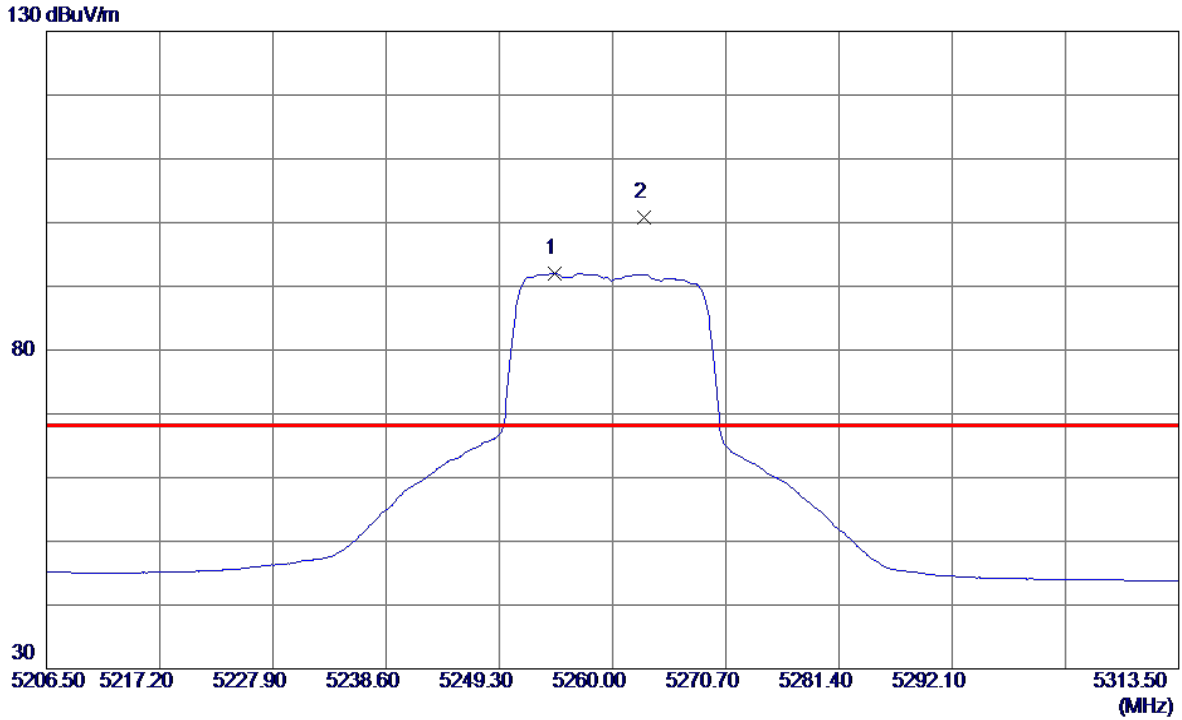

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5254.5430	74.85	17.13	91.98	999.00	-907.02	AVG	No Limit
2 *	5262.9960	83.72	17.16	100.88	68.30	32.58	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

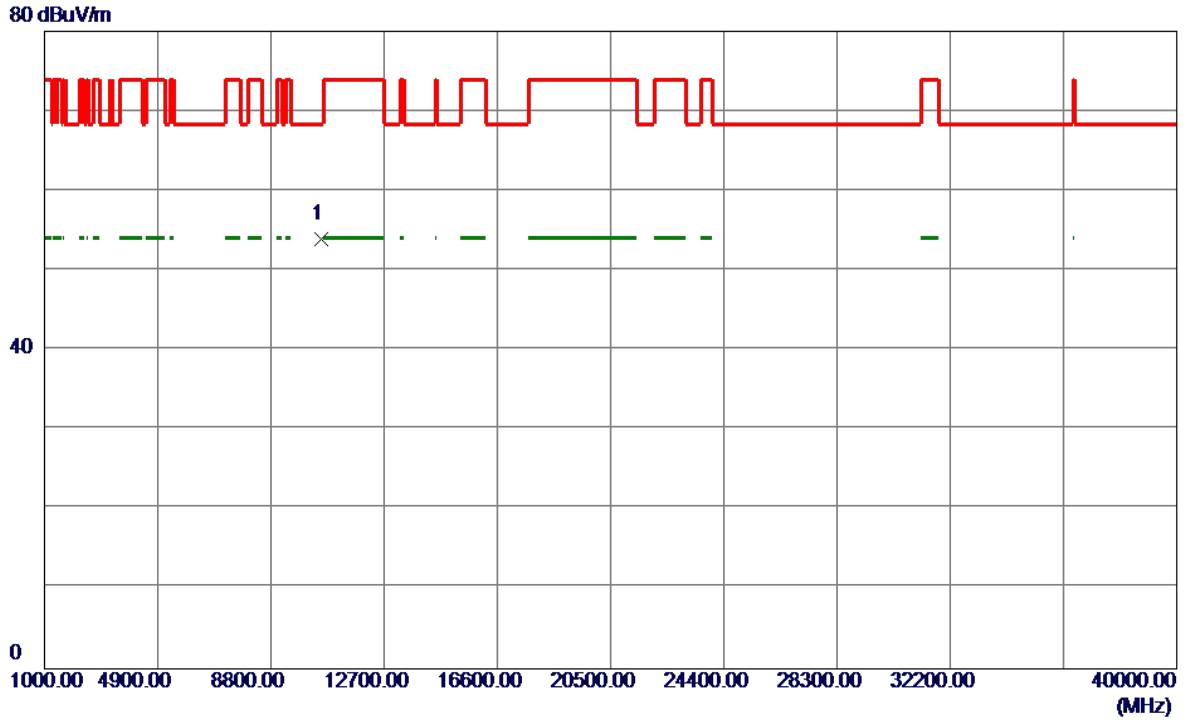

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10512.9000	38.82	15.04	53.86	68.30	-14.44	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Vertical

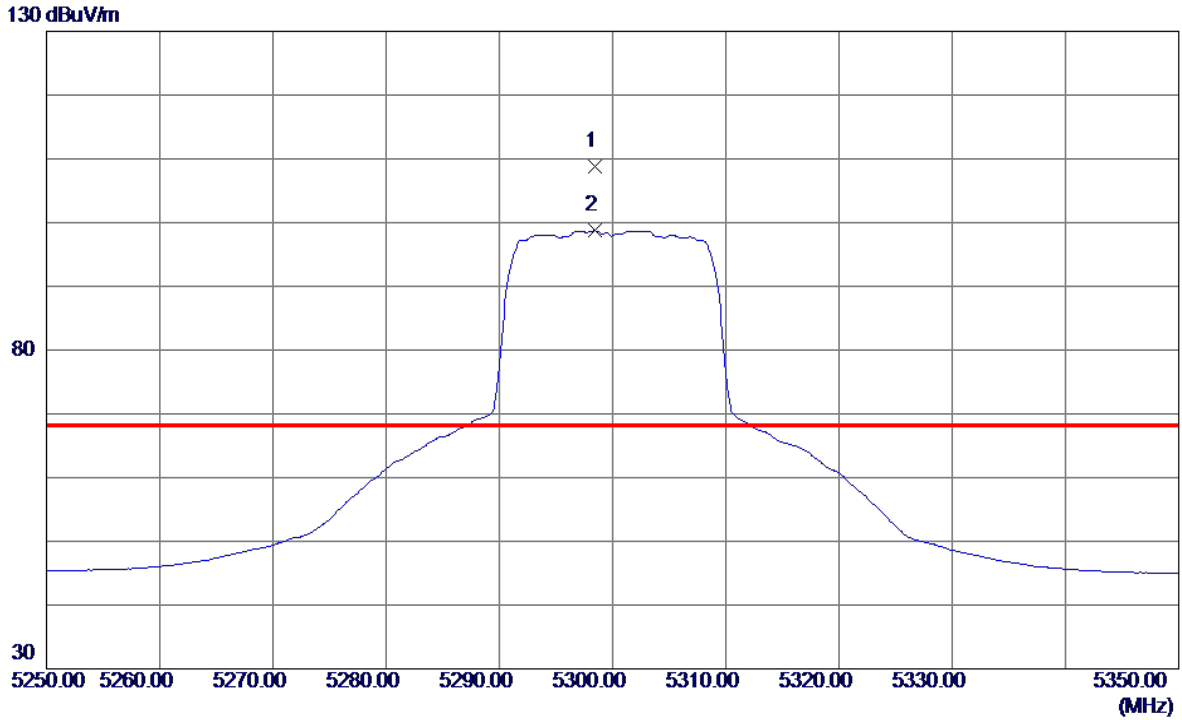

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5298.4000	91.55	17.28	108.83	68.30	40.53	Peak	No Limit
2	5298.4000	81.46	17.28	98.74	999.00	-900.26	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Vertical

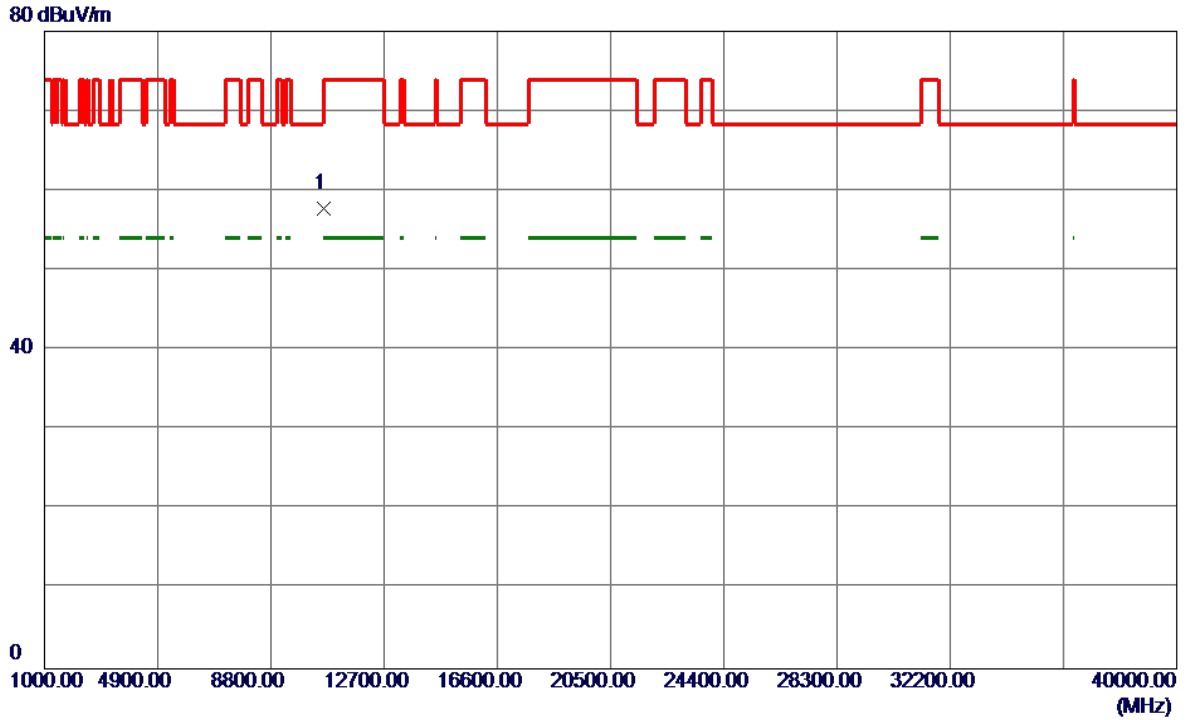

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10599.2000	42.52	15.21	57.73	68.30	-10.57	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Horizontal

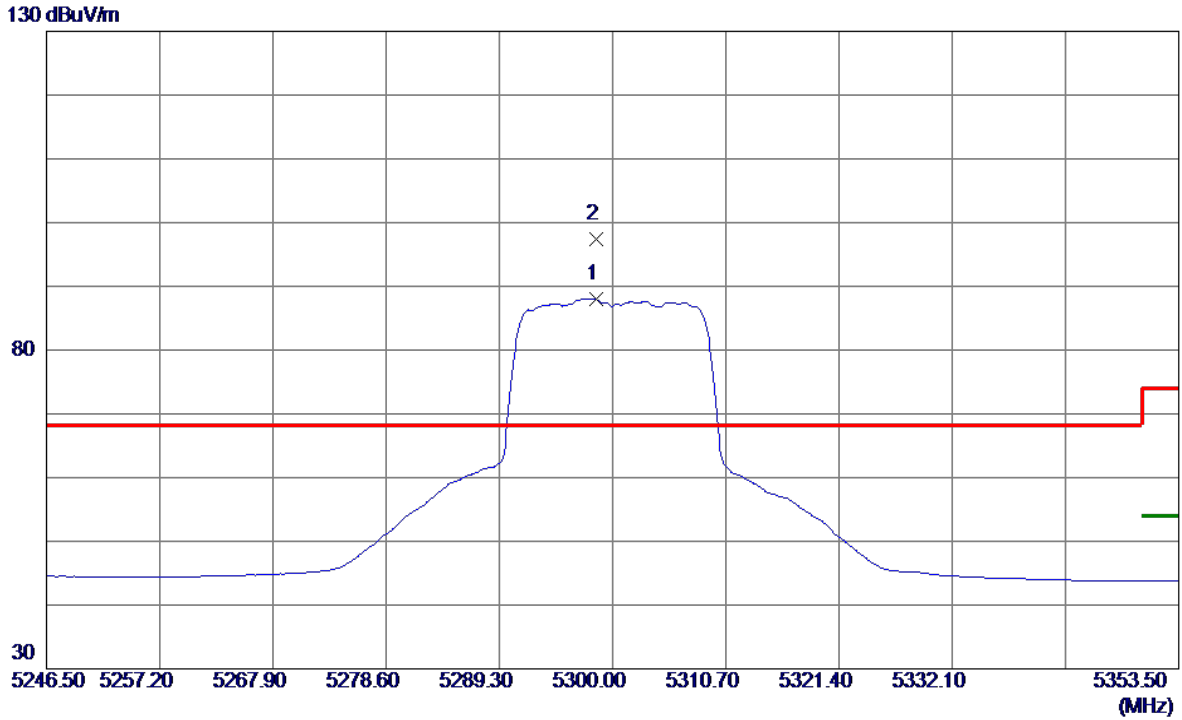

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5298.3950	70.70	17.28	87.98	999.00	-911.02	AVG	No Limit
2 *	5298.5019	80.03	17.28	97.31	68.30	29.01	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal

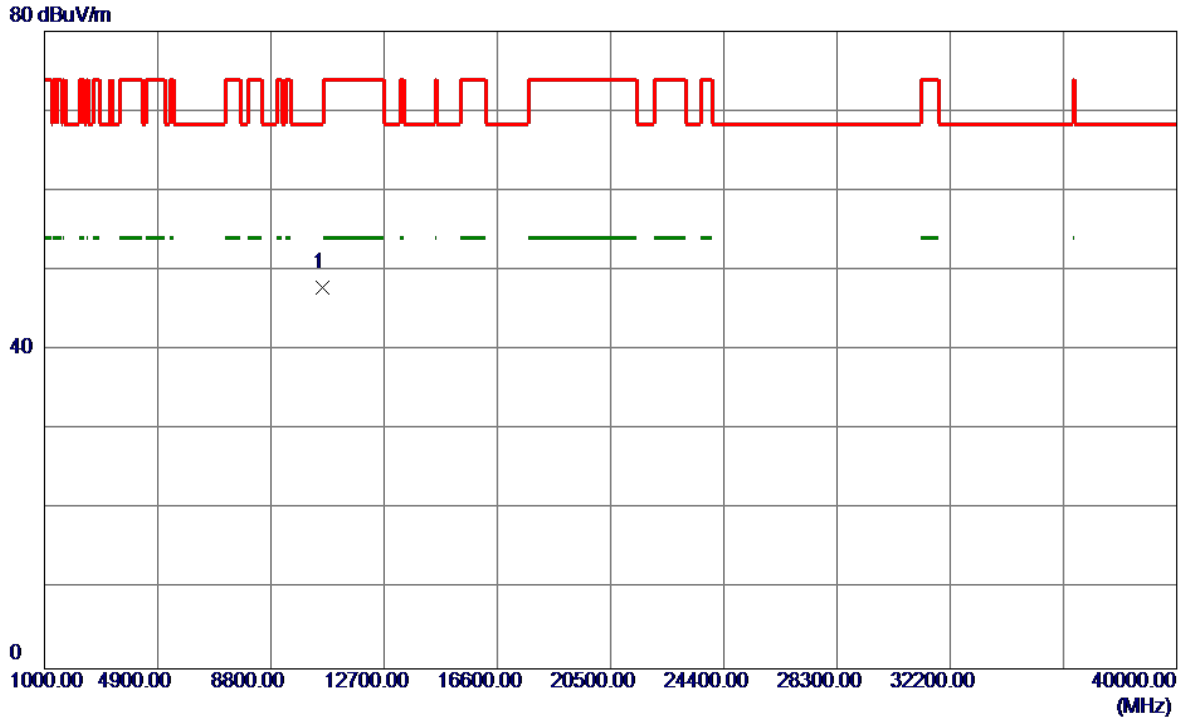


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10596.9000	32.60	15.21	47.81	68.30	-20.49	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical


130 dBuV/m

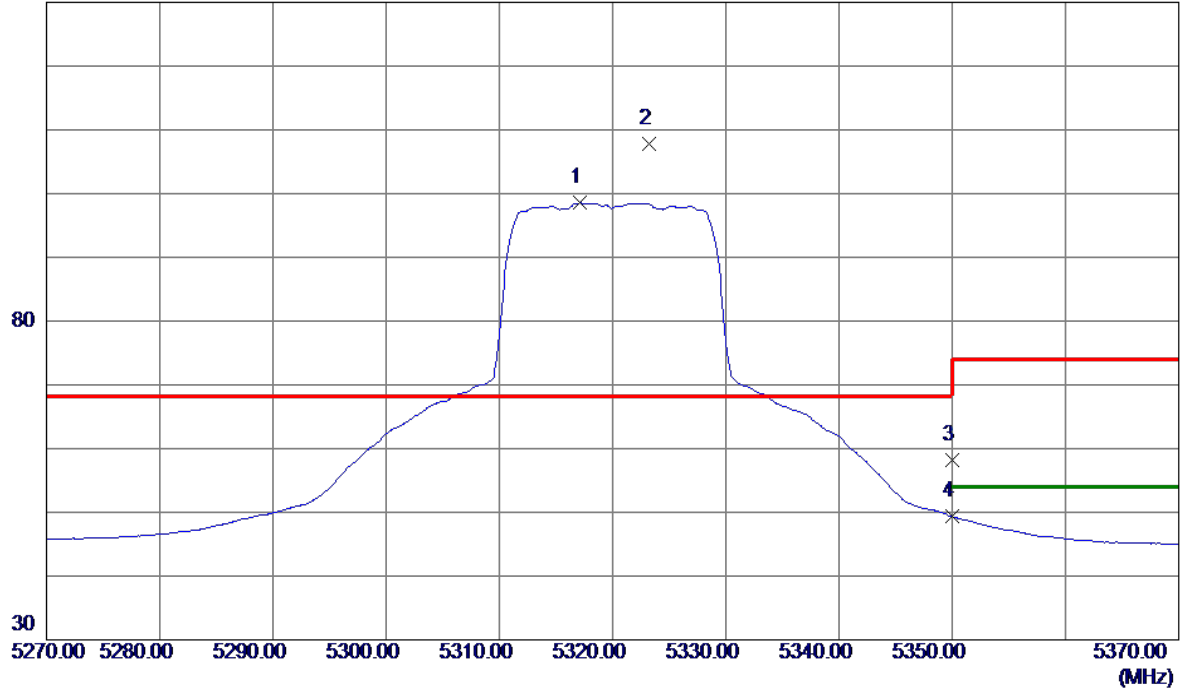

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5317.1000	81.16	17.35	98.51	999.00	-900.49	AVG	No Limit
2 *	5323.2000	90.50	17.37	107.87	68.30	39.57	Peak	No Limit
3	5350.0000	40.70	17.47	58.17	68.30	-10.13	Peak	
4	5350.0000	31.84	17.47	49.31	999.00	-949.69	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

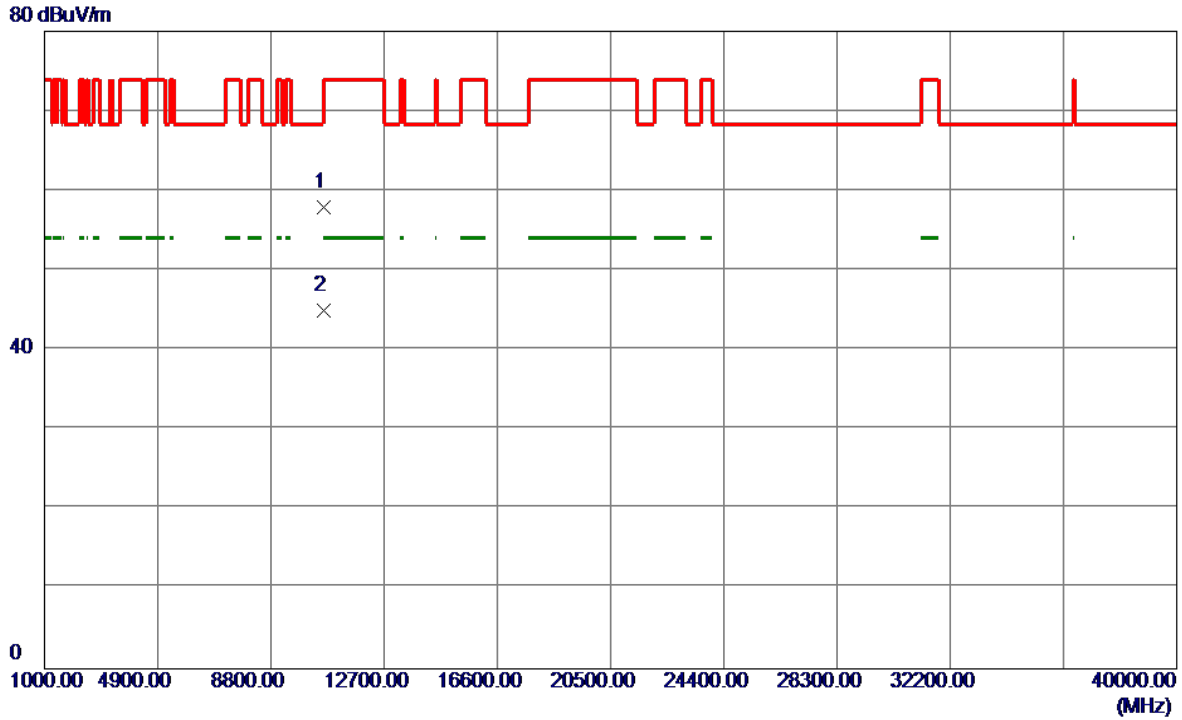

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10638.0000	42.58	15.28	57.86	74.00	-16.14	Peak	
2 *	10639.8000	29.70	15.29	44.99	54.00	-9.01	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

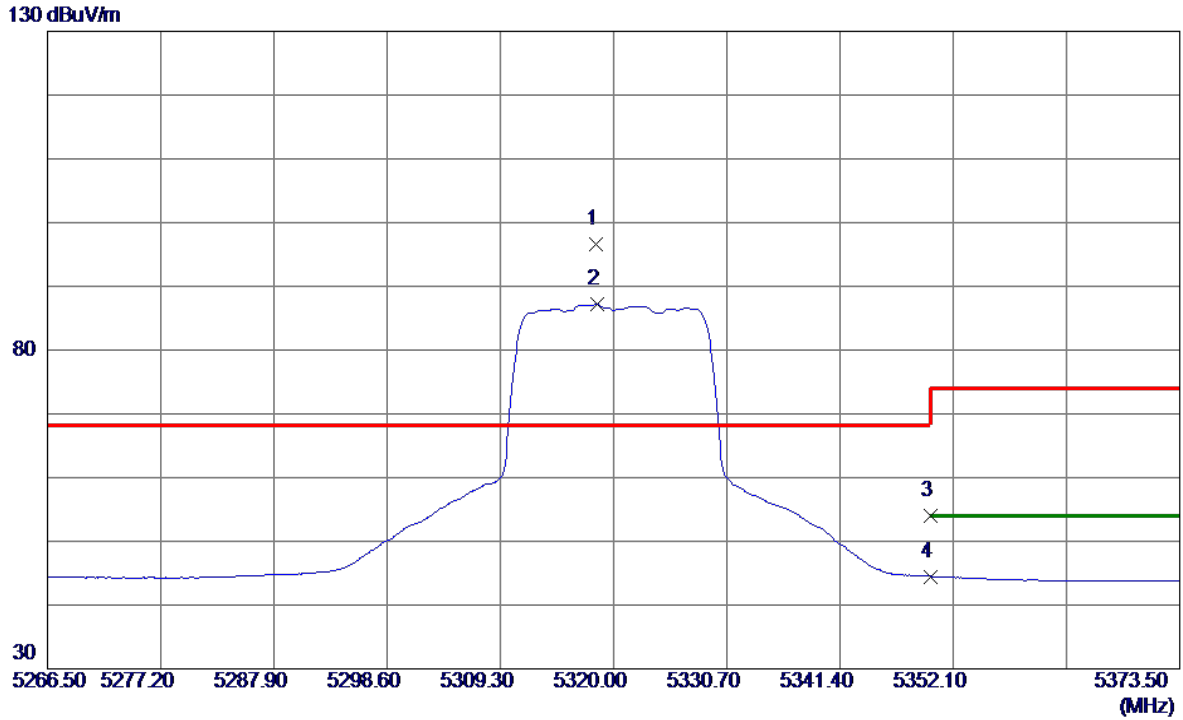

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.2879	79.22	17.35	96.57	68.30	28.27	Peak	No Limit
2	5318.3950	69.81	17.35	87.16	999.00	-911.84	AVG	No Limit
3	5350.0000	36.48	17.47	53.95	68.30	-14.35	Peak	
4	5350.0000	26.99	17.47	44.46	999.00	-954.54	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

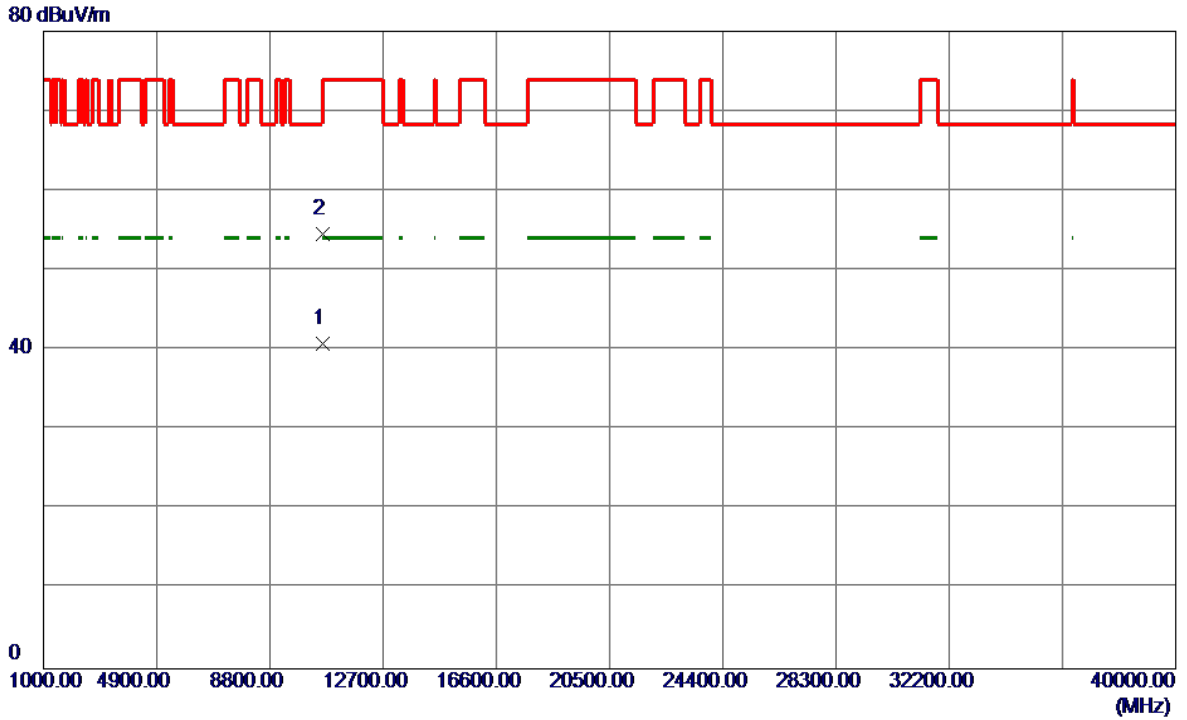

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10639.9500	25.47	15.29	40.76	54.00	-13.24	AVG	
2	10641.5500	39.30	15.29	54.59	74.00	-19.41	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

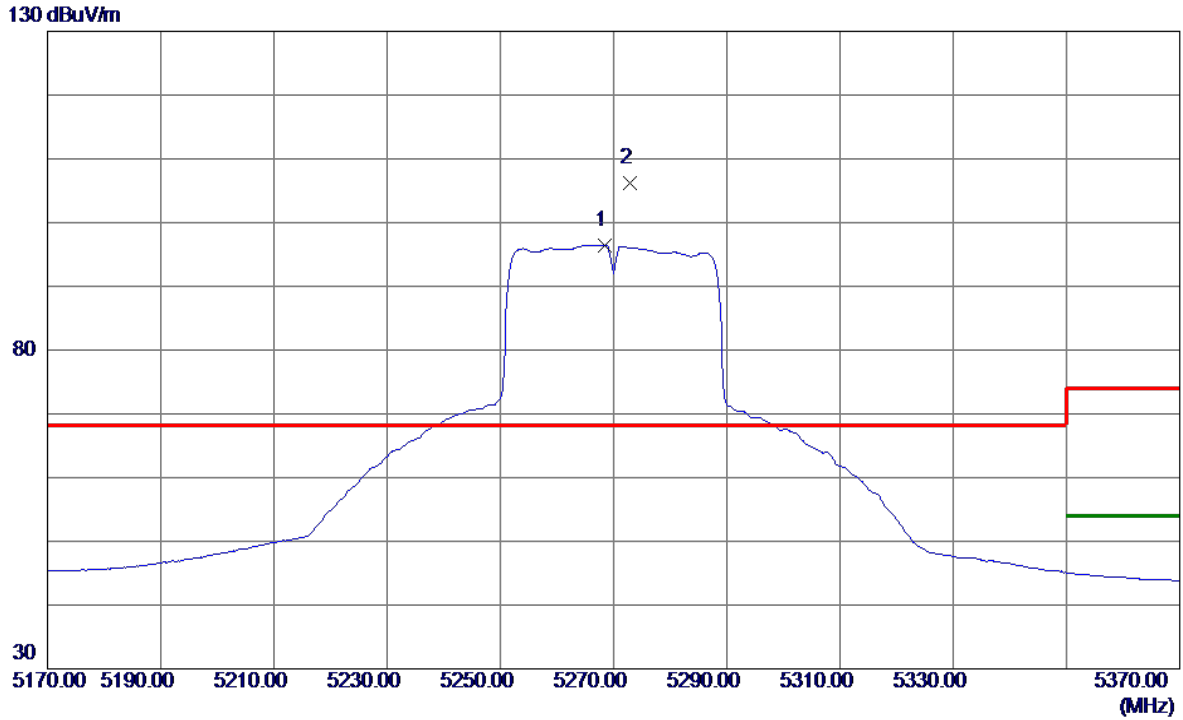

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5268.4000	79.31	17.18	96.49	999.00	-902.51	AVG	No Limit
2 *	5272.8000	88.98	17.19	106.17	68.30	37.87	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

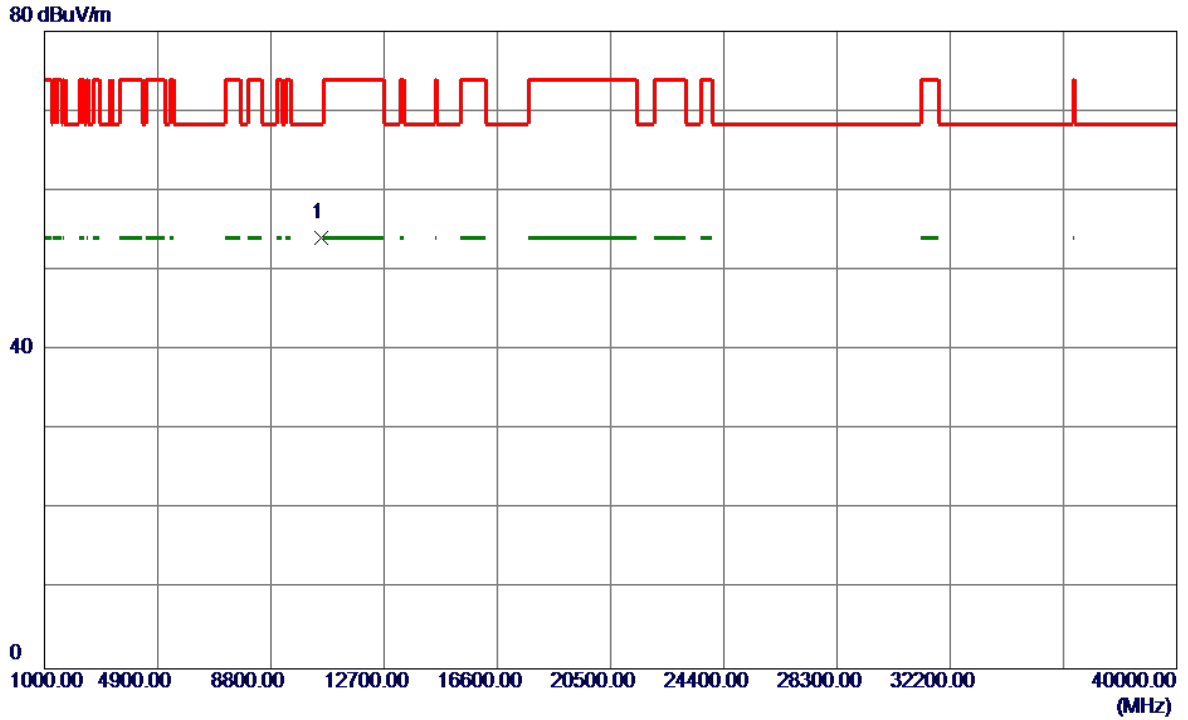

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.8000	38.94	15.10	54.04	68.30	-14.26	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Horizontal

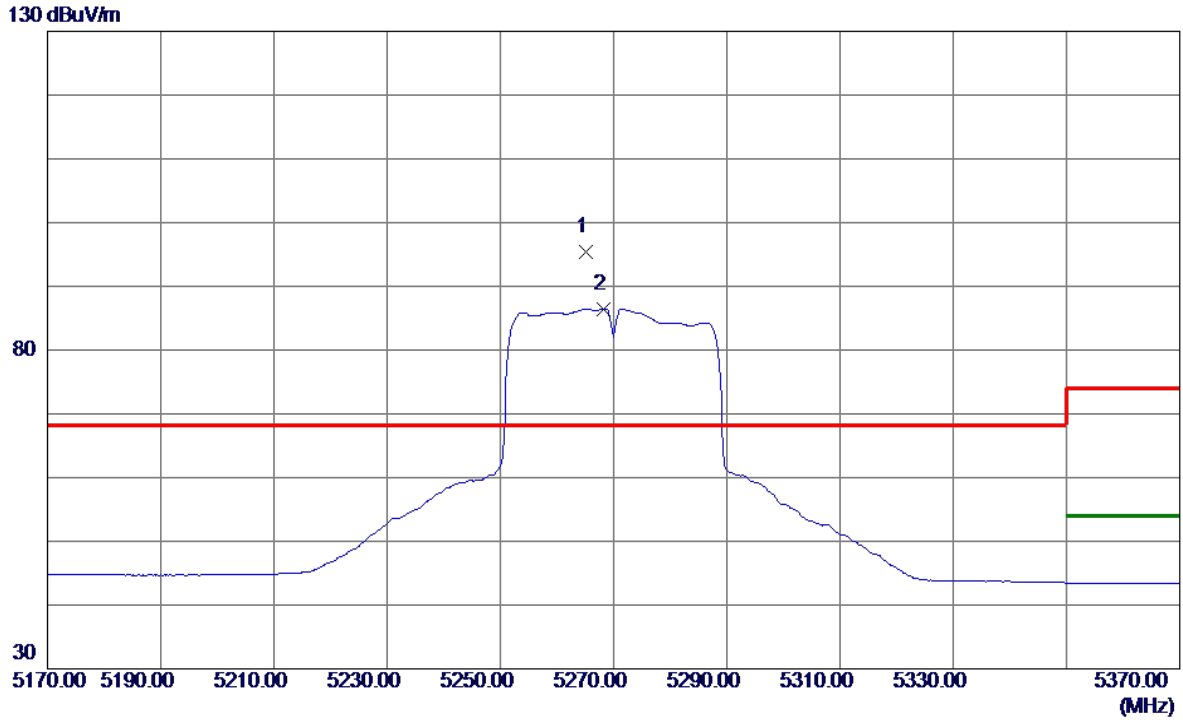

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5265.2000	78.27	17.17	95.44	68.30	27.14	Peak	No Limit
2	5268.2000	69.31	17.18	86.49	999.00	-912.51	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

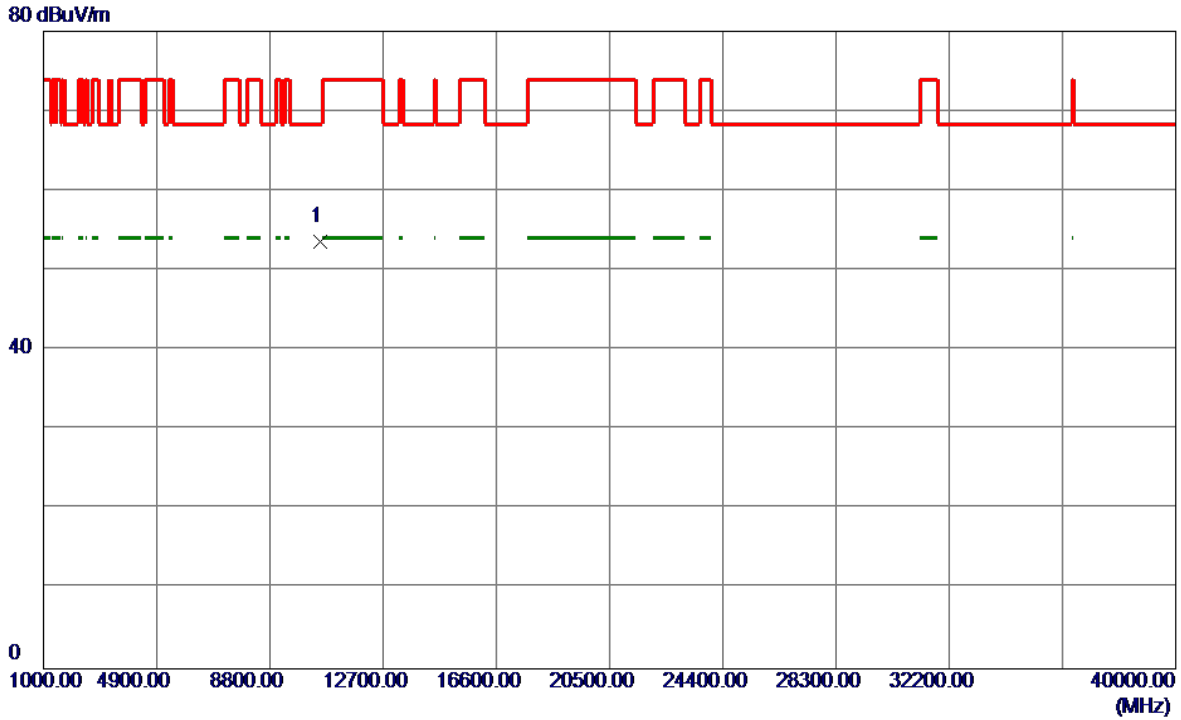


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10526.3000	38.56	15.07	53.63	68.30	-14.67	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical


130 dBuV/m

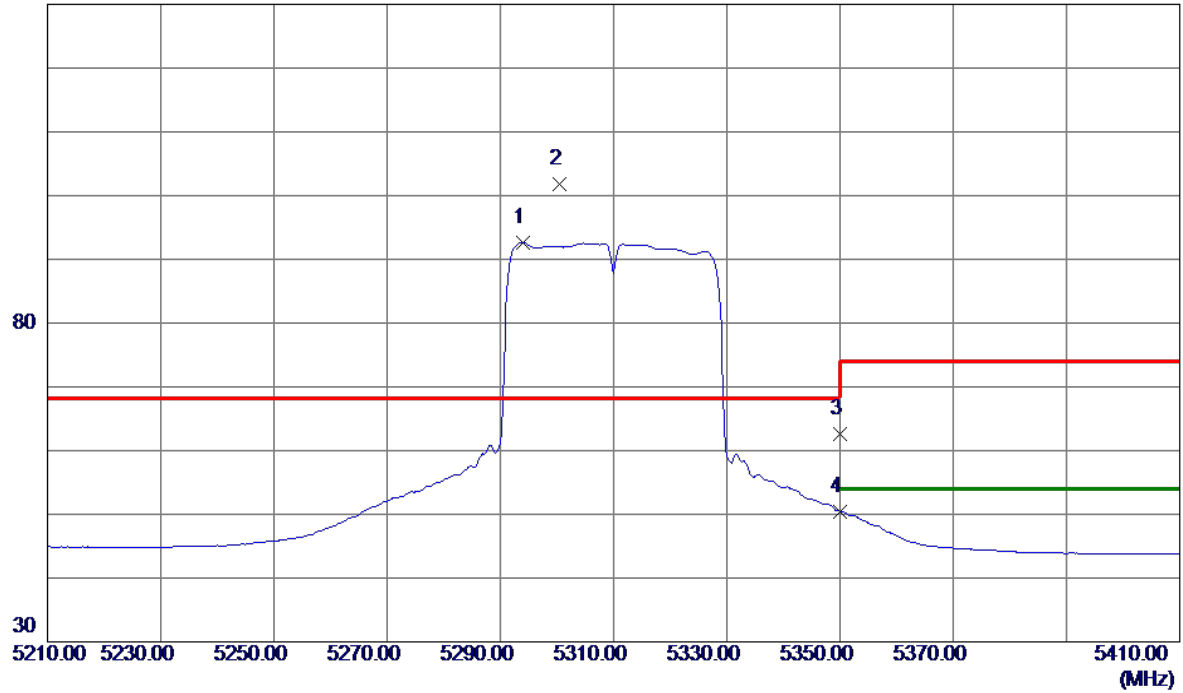

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5294.0000	75.34	17.27	92.61	999.00	-906.39	AVG	No Limit
2 *	5300.4000	84.53	17.29	101.82	68.30	33.52	Peak	No Limit
3	5350.0000	45.13	17.47	62.60	68.30	-5.70	Peak	
4	5350.0000	33.00	17.47	50.47	999.00	-948.53	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Vertical

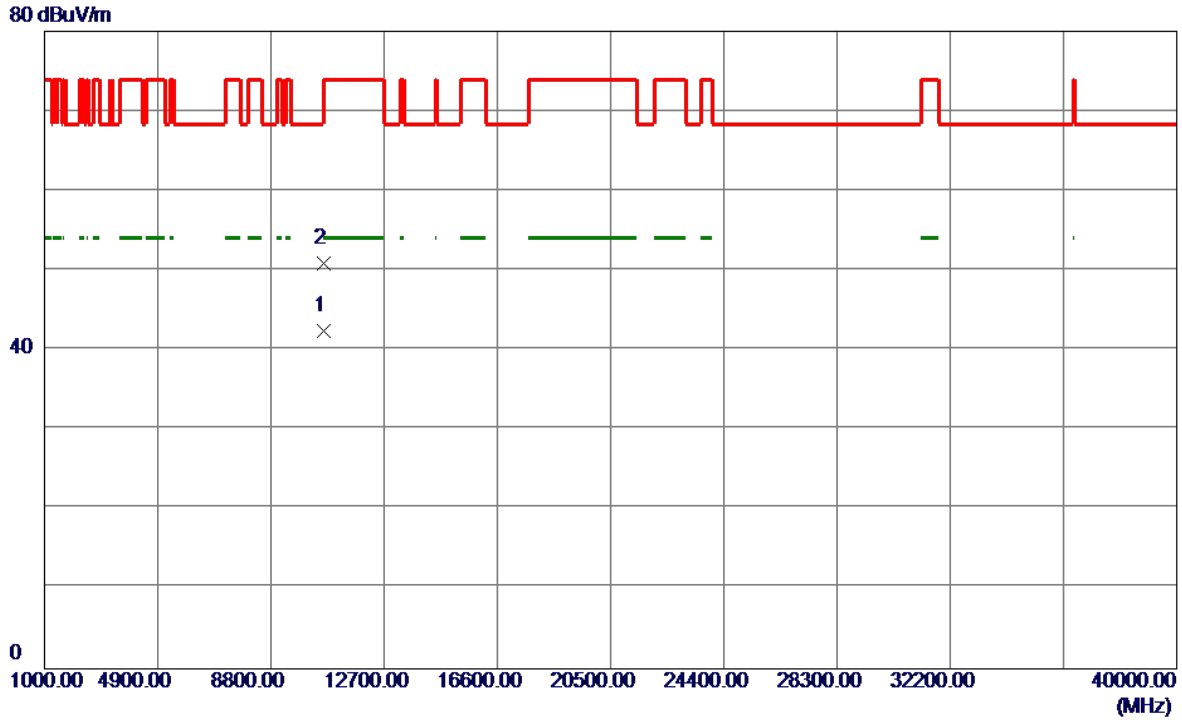

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10619.8000	27.14	15.25	42.39	54.00	-11.61	AVG	
2	10624.2000	35.55	15.26	50.81	74.00	-23.19	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Horizontal

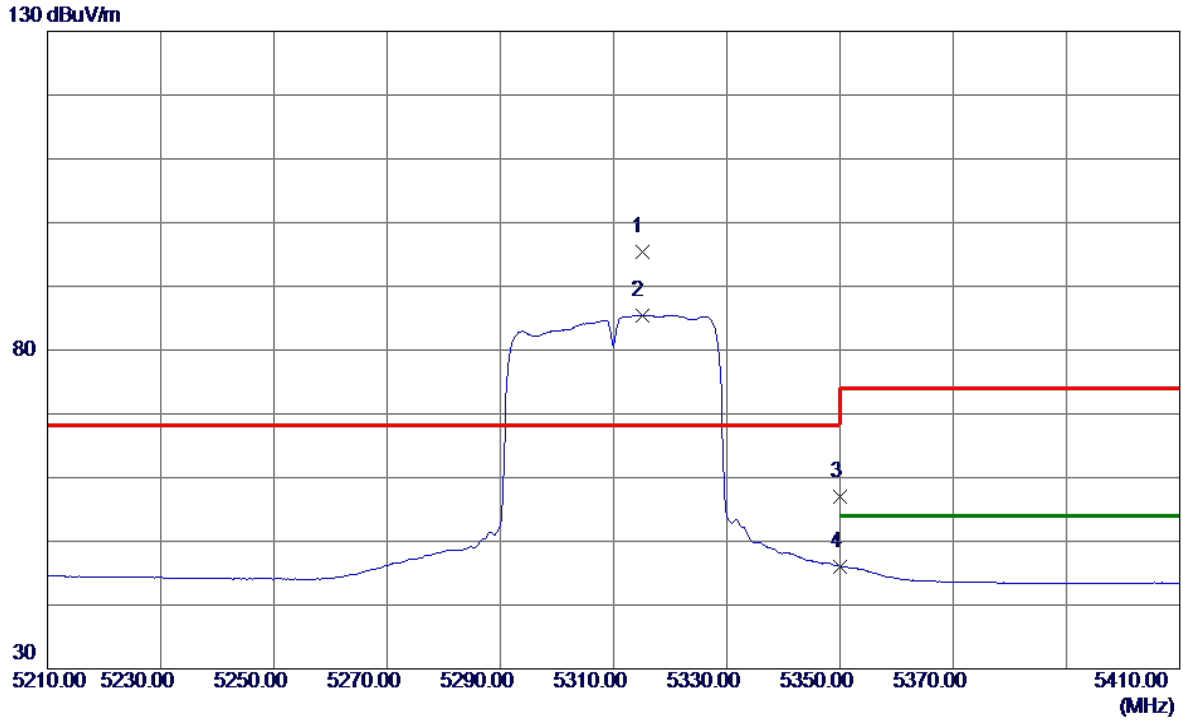

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5315.0000	77.98	17.34	95.32	68.30	27.02	Peak	No Limit
2	5315.0000	68.15	17.34	85.49	999.00	-913.51	AVG	No Limit
3	5350.0000	39.57	17.47	57.04	68.30	-11.26	Peak	
4	5350.0000	28.59	17.47	46.06	999.00	-952.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

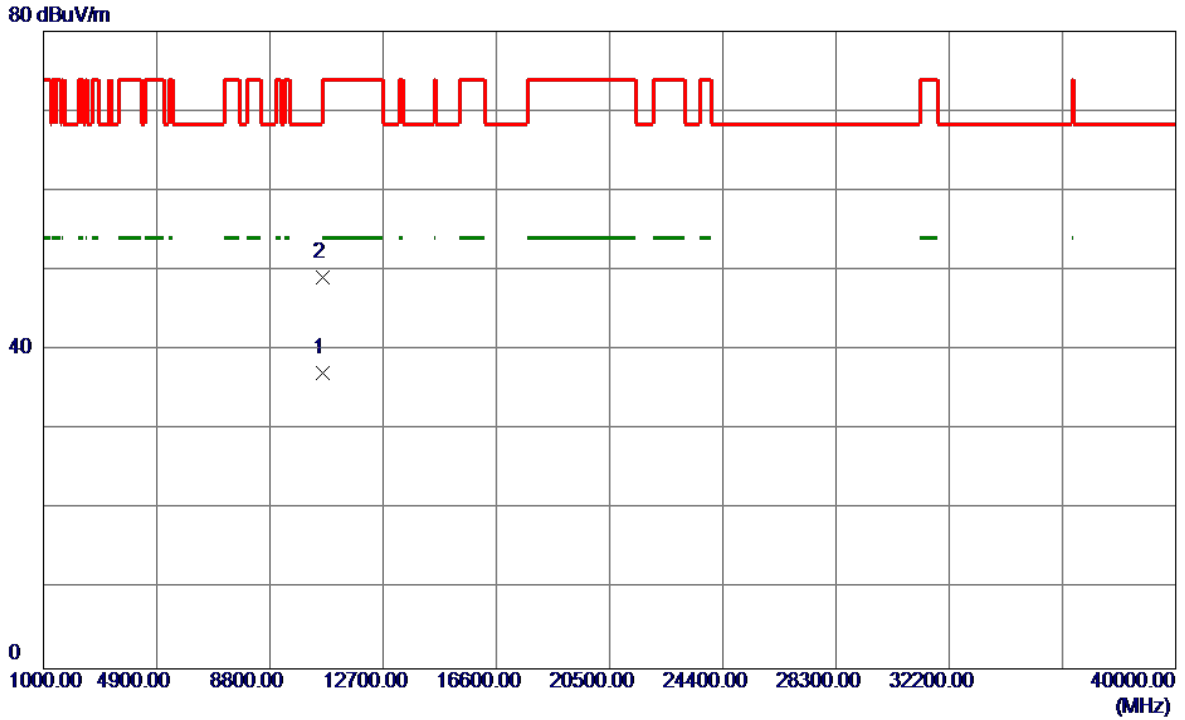


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.0000	21.89	15.25	37.14	54.00	-16.86	AVG	
2	10622.1000	33.88	15.25	49.13	74.00	-24.87	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical


130 dBuV/m

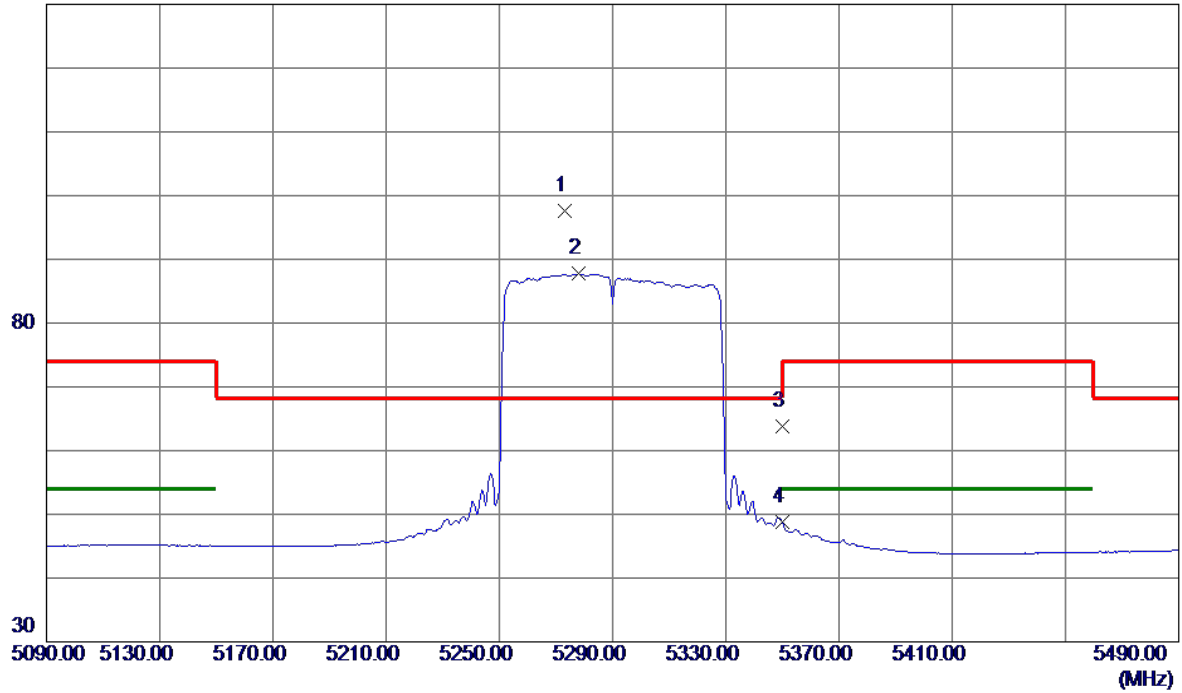

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5273.2000	80.34	17.19	97.53	68.30	29.23	Peak	No Limit
2	5278.0000	70.50	17.21	87.71	999.00	-911.29	AVG	No Limit
3	5350.0000	46.41	17.47	63.88	68.30	-4.42	Peak	
4	5350.0000	31.32	17.47	48.79	999.00	-950.21	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

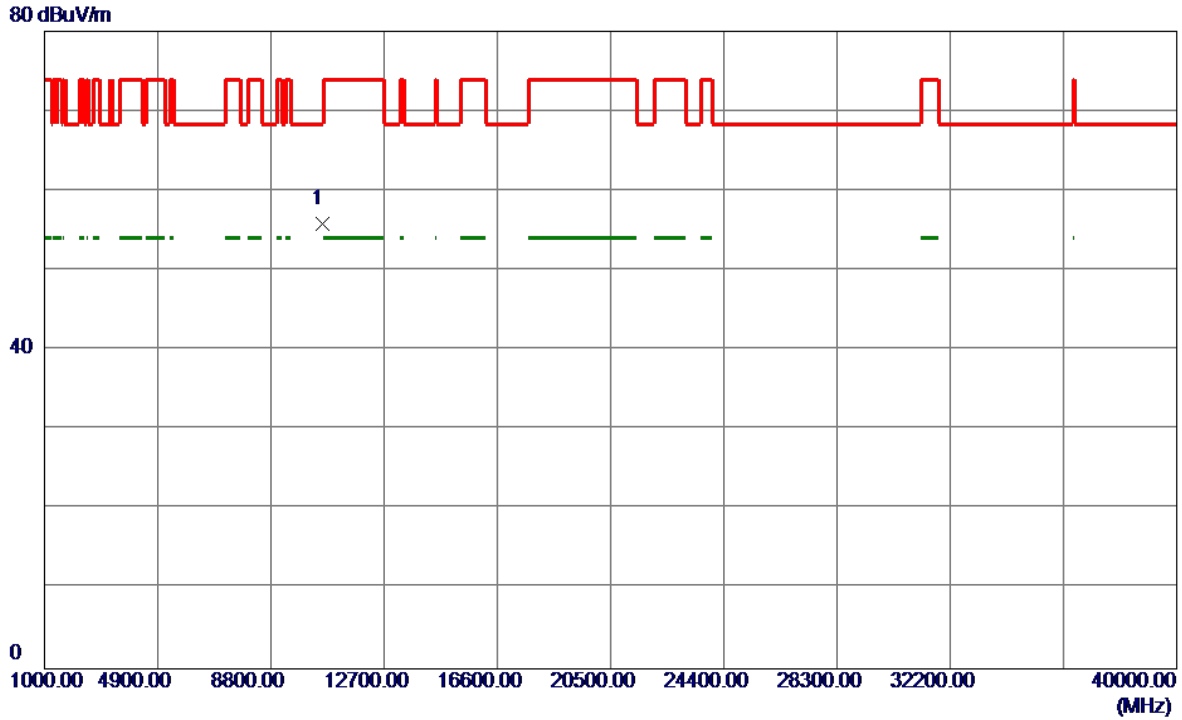

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10555.0000	40.77	15.13	55.90	68.30	-12.40	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

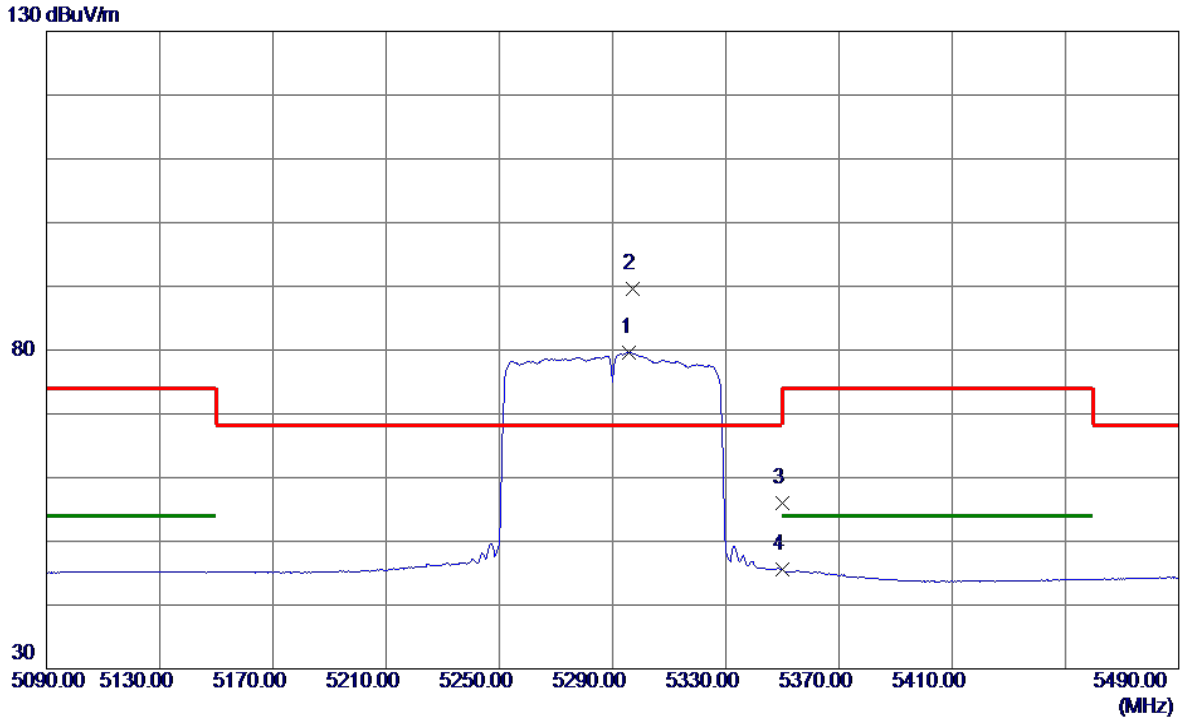

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5296.0000	62.41	17.27	79.68	999.00	-919.32	AVG	No Limit
2 *	5297.2000	72.24	17.28	89.52	68.30	21.22	Peak	No Limit
3	5350.0000	38.58	17.47	56.05	68.30	-12.25	Peak	
4	5350.0000	28.08	17.47	45.55	999.00	-953.45	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

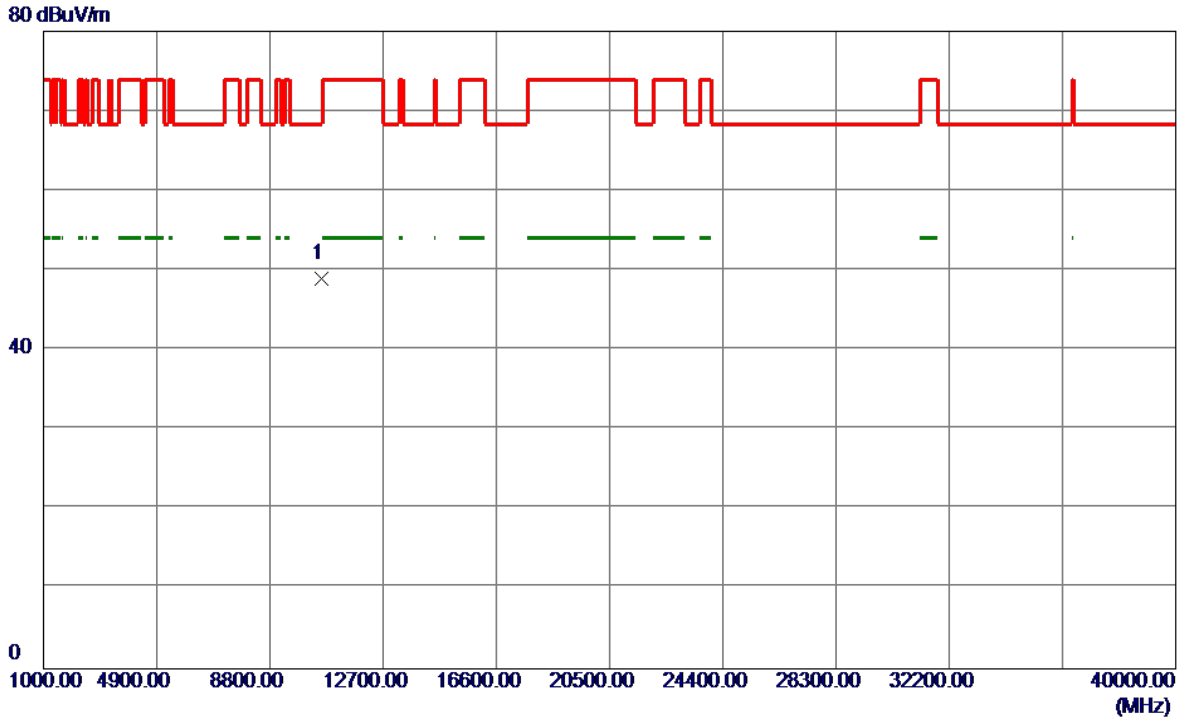


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10575.0000	33.84	15.16	49.00	68.30	-19.30	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical


130 dBuV/m

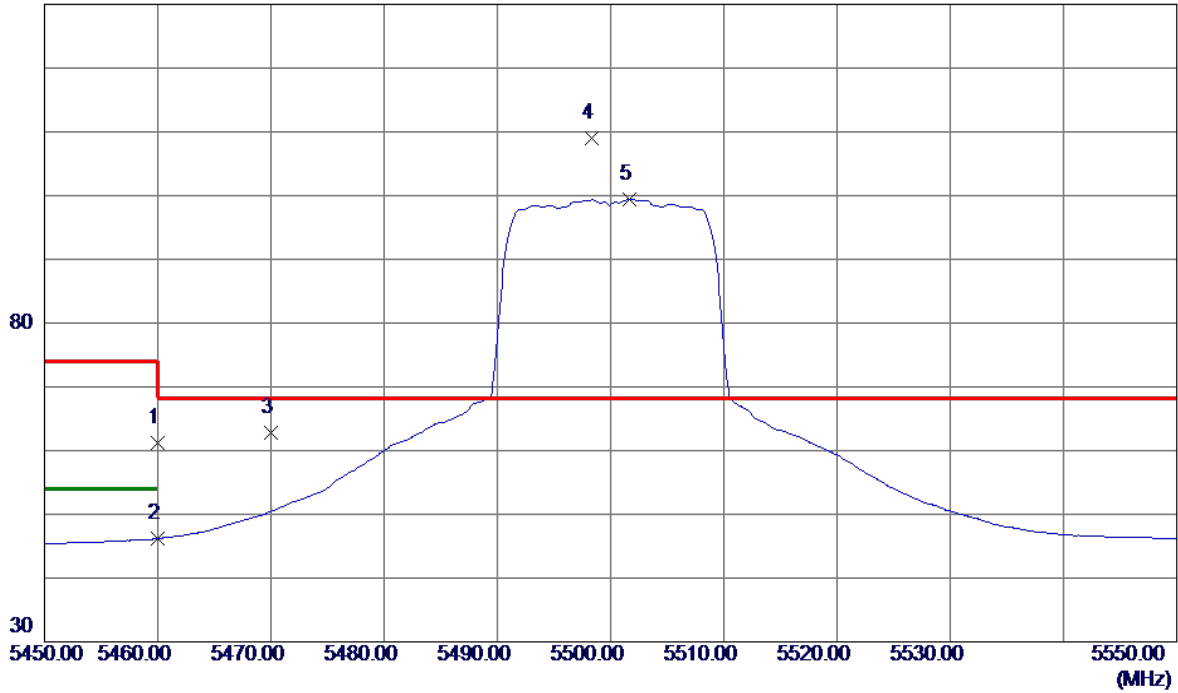

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	43.36	17.85	61.21	74.00	-12.79	Peak	
2	5460.0000	28.31	17.85	46.16	54.00	-7.84	AVG	
3	5470.0000	44.82	17.89	62.71	68.30	-5.59	Peak	
4 *	5498.3000	91.09	17.99	109.08	68.30	40.78	Peak	No Limit
5	5501.7000	81.40	18.00	99.40	999.00	-899.60	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

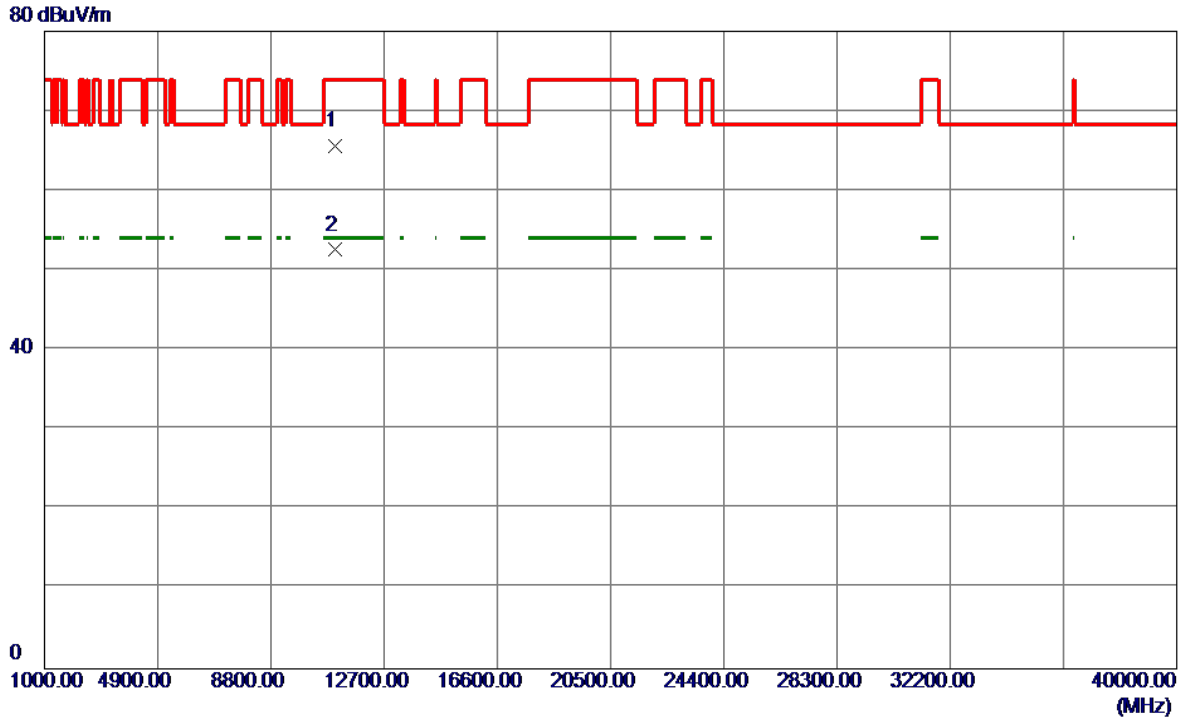


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10998.1000	49.61	15.98	65.59	74.00	-8.41	Peak	
2 *	10999.7000	36.58	15.98	52.56	54.00	-1.44	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal


130 dBuV/m

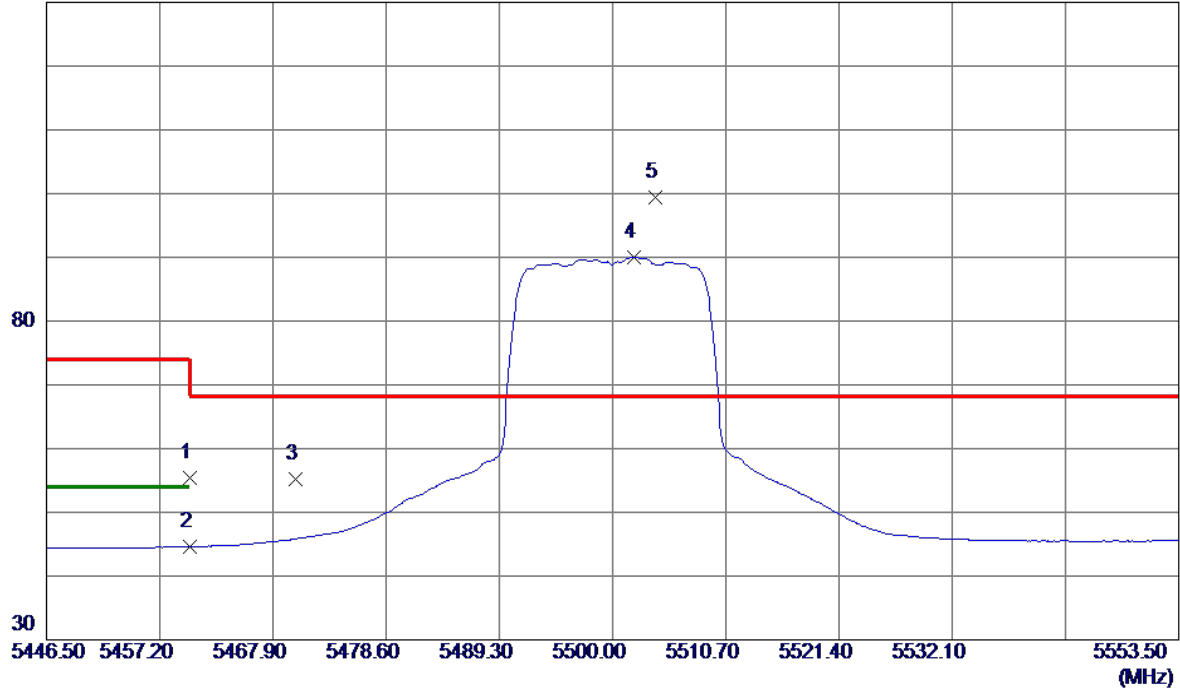

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.56	17.85	55.41	74.00	-18.59	Peak	
2	5460.0000	26.74	17.85	44.59	54.00	-9.41	AVG	
3	5470.0000	37.31	17.89	55.20	68.30	-13.10	Peak	
4	5502.0330	71.96	18.00	89.96	999.00	-909.04	AVG	No Limit
5 *	5504.0660	81.47	18.01	99.48	68.30	31.18	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Horizontal

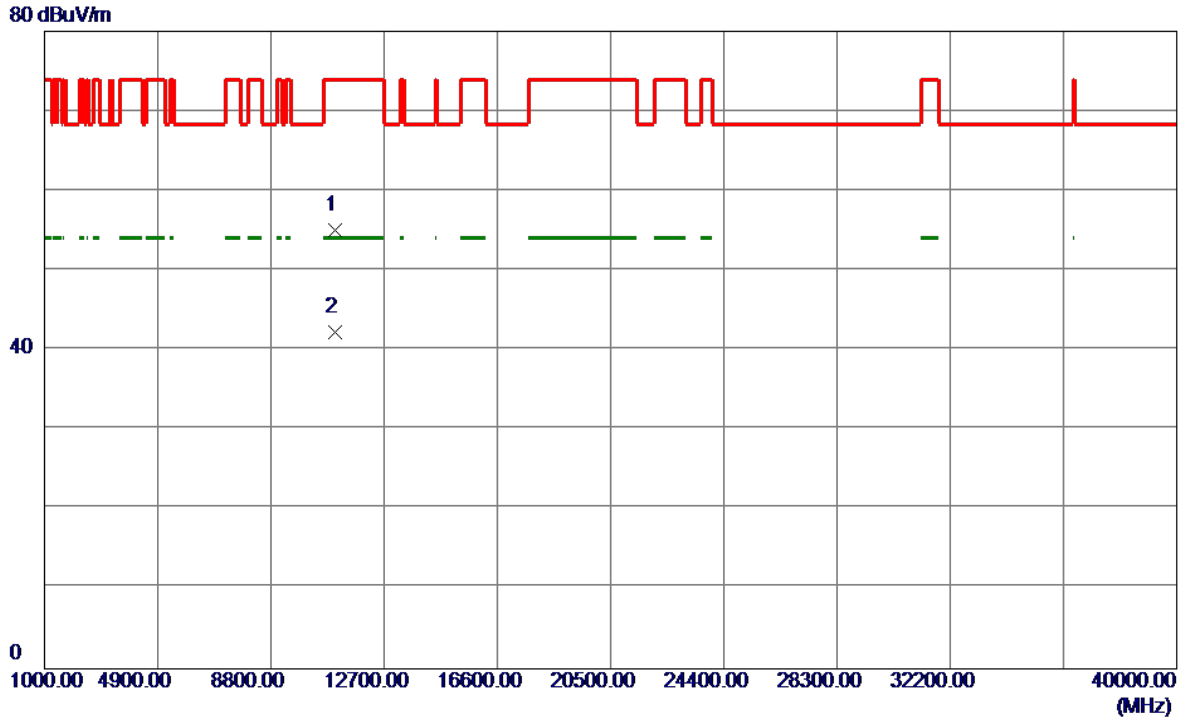

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10998.6500	39.02	15.98	55.00	74.00	-19.00	Peak	
2 *	10999.8000	26.19	15.98	42.17	54.00	-11.83	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Vertical

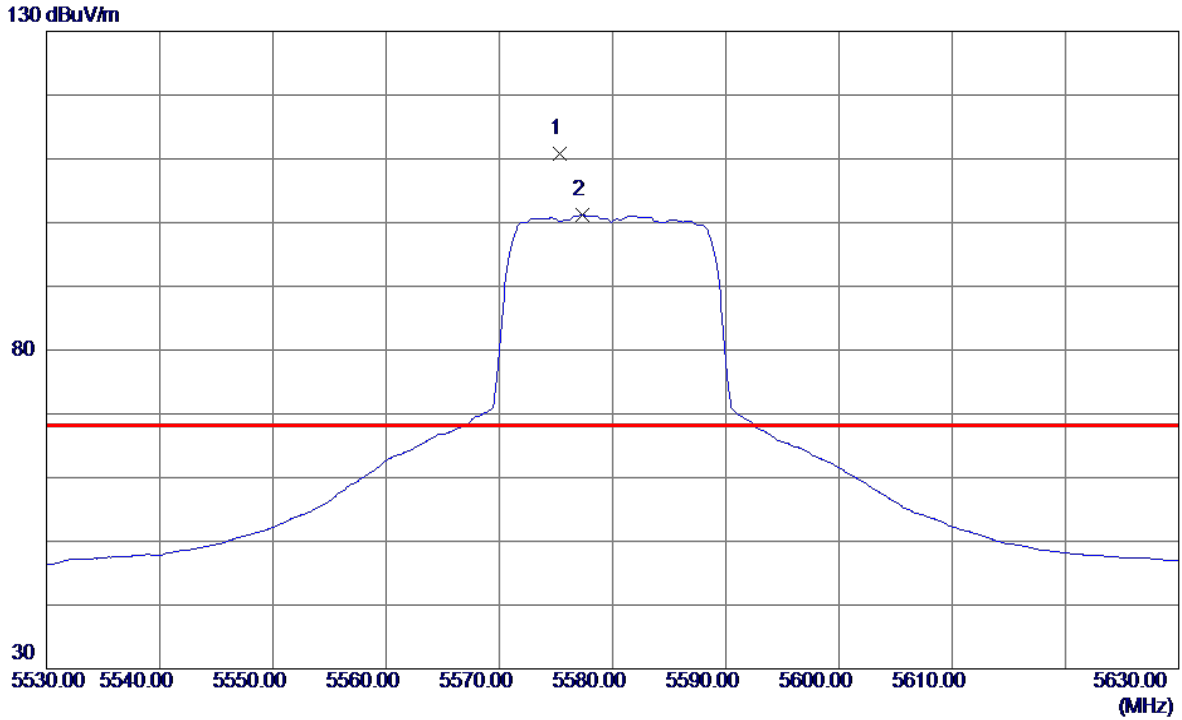

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5575.3000	92.53	18.33	110.86	68.30	42.56	Peak	No Limit
2	5577.3000	82.78	18.34	101.12	999.00	-897.88	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Vertical

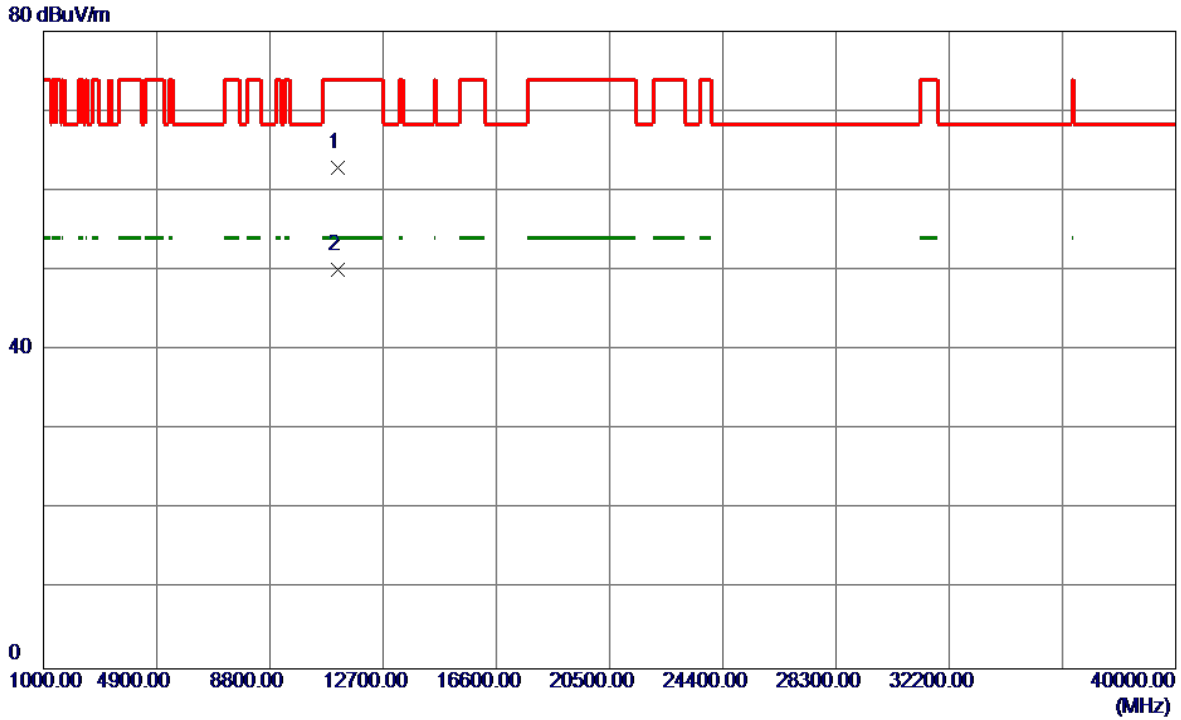

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11159.2000	46.48	16.38	62.86	74.00	-11.14	Peak	
2 *	11159.9000	33.69	16.38	50.07	54.00	-3.93	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Horizontal

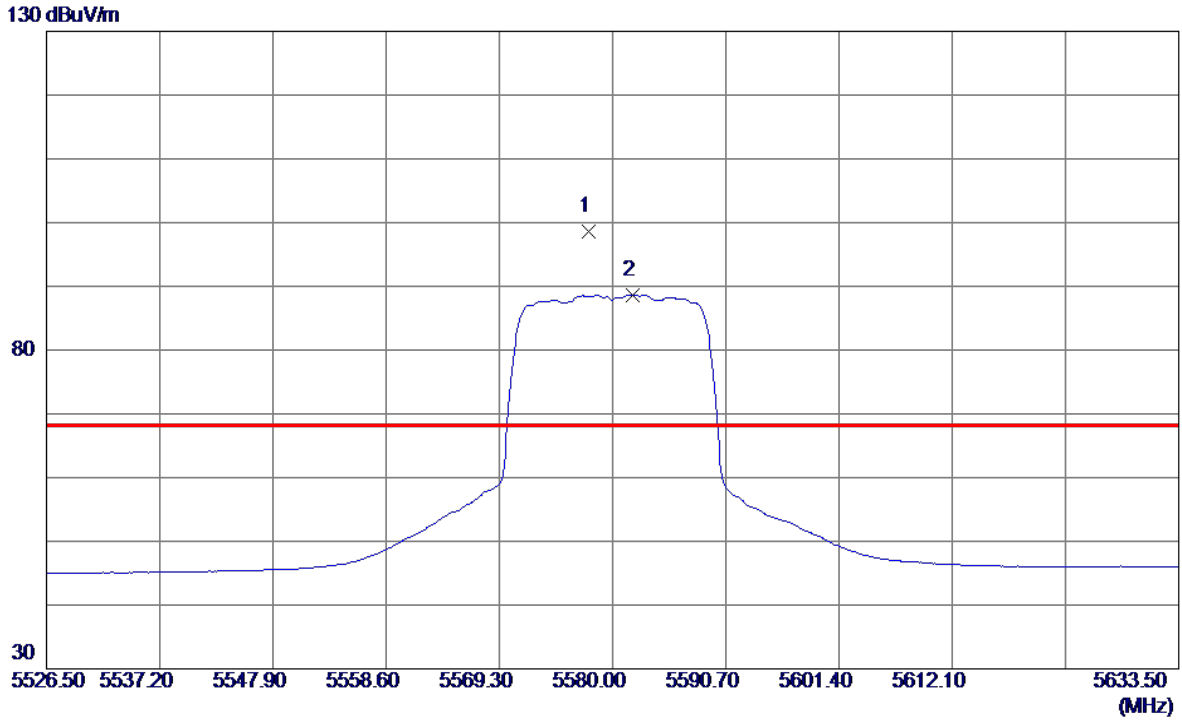

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5577.7530	80.34	18.34	98.68	68.30	30.38	Peak	No Limit
2	5581.9260	70.25	18.36	88.61	999.00	-910.39	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Horizontal

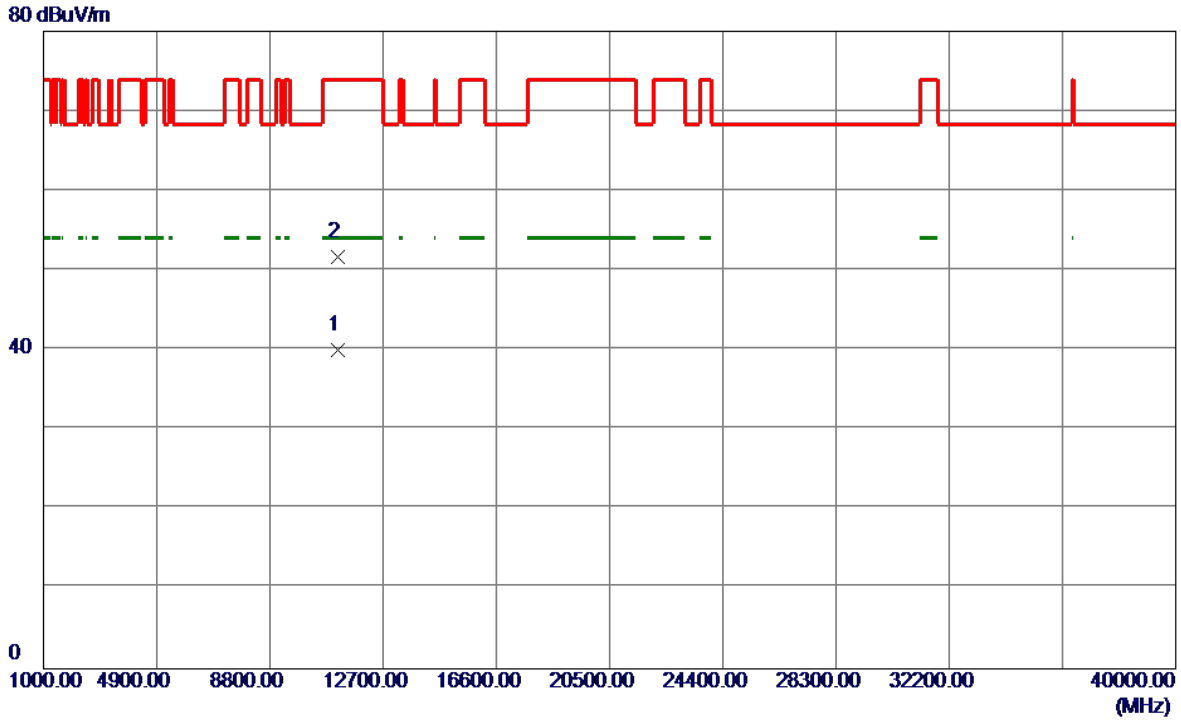

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11159.6000	23.65	16.38	40.03	54.00	-13.97	AVG	
2	11161.4500	35.34	16.38	51.72	74.00	-22.28	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Vertical

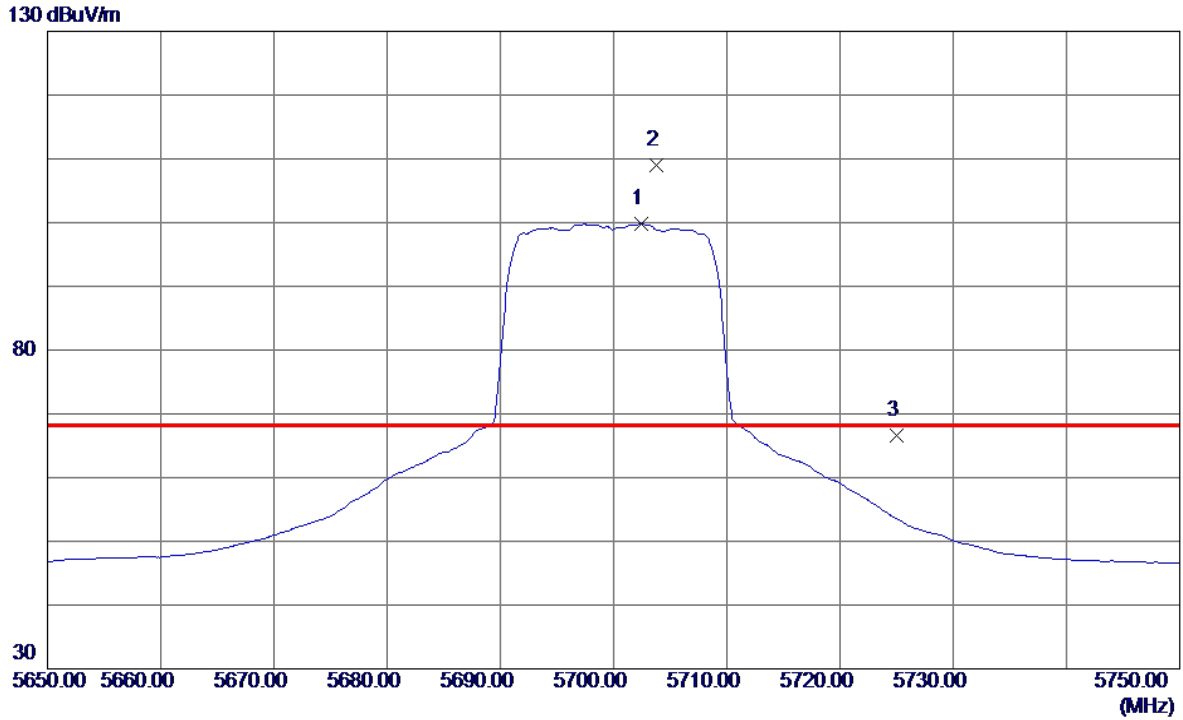

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5702.4000	80.85	18.89	99.74	999.00	-899.26	AVG	No Limit
2 *	5703.8000	90.20	18.90	109.10	68.30	40.80	Peak	No Limit
3	5725.0000	47.63	18.99	66.62	68.30	-1.68	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Vertical

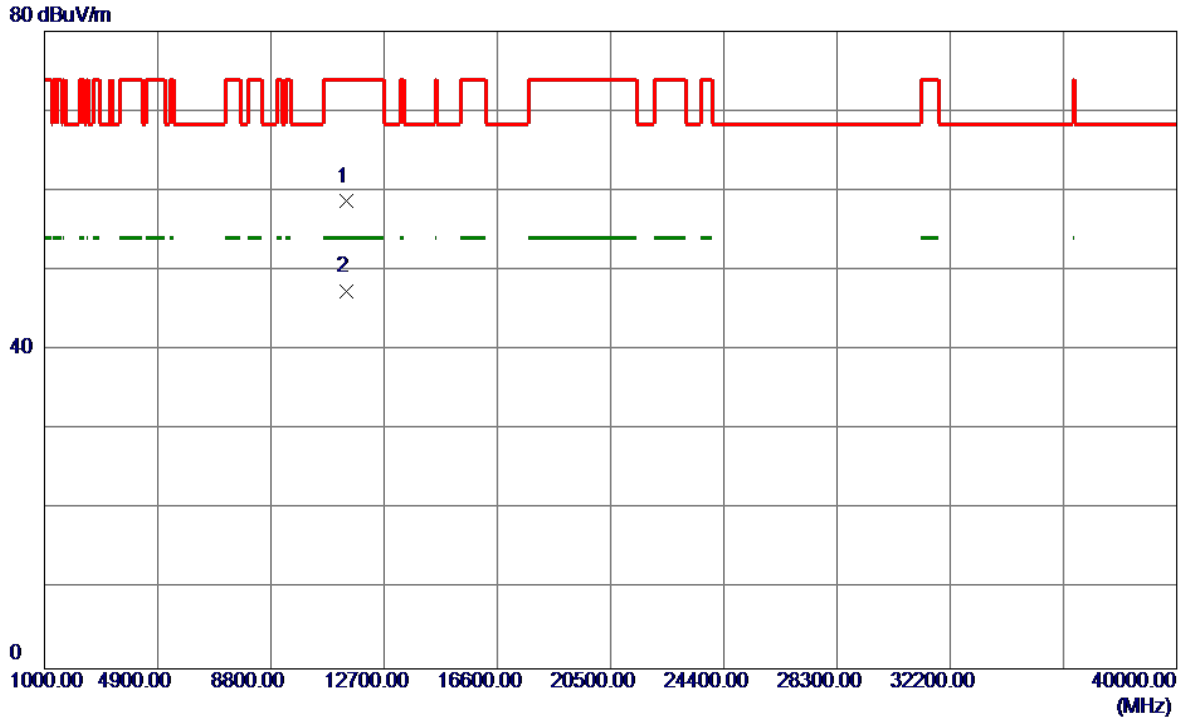

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11398.2000	41.66	16.98	58.64	74.00	-15.36	Peak	
2 *	11399.8000	30.31	16.98	47.29	54.00	-6.71	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Horizontal

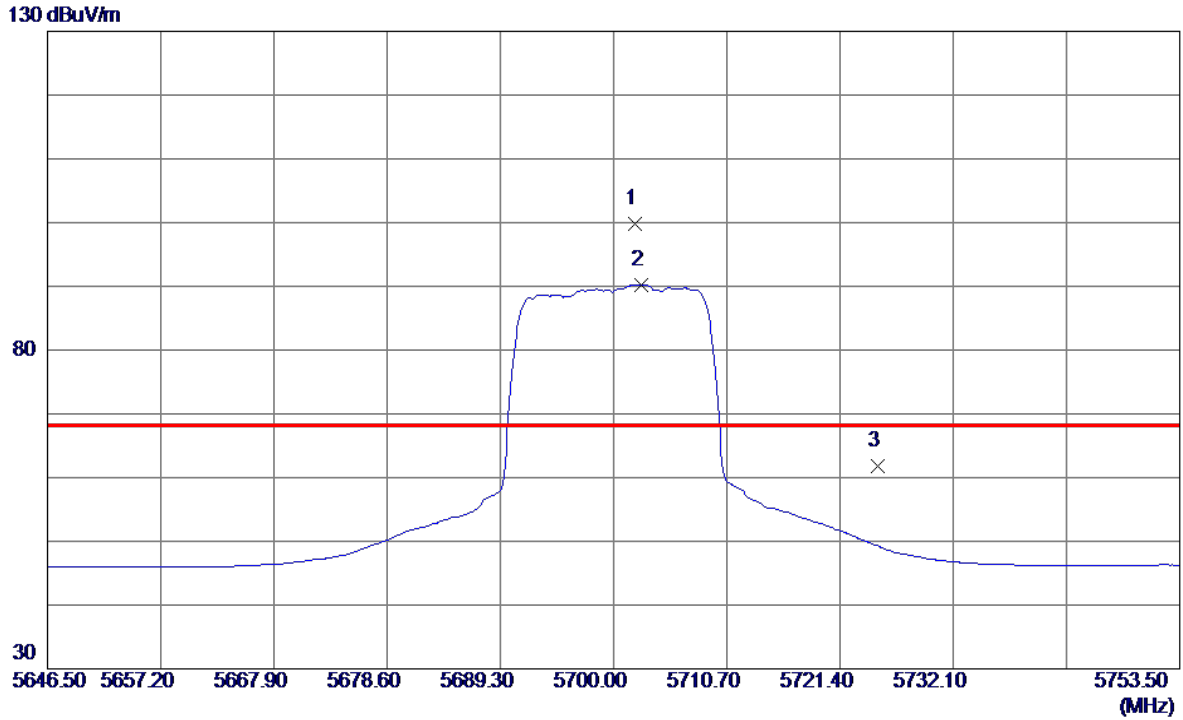

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5702.0330	80.96	18.89	99.85	68.30	31.55	Peak	No Limit
2	5702.5680	71.36	18.89	90.25	999.00	-908.75	AVG	No Limit
3	5725.0000	42.77	18.99	61.76	68.30	-6.54	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

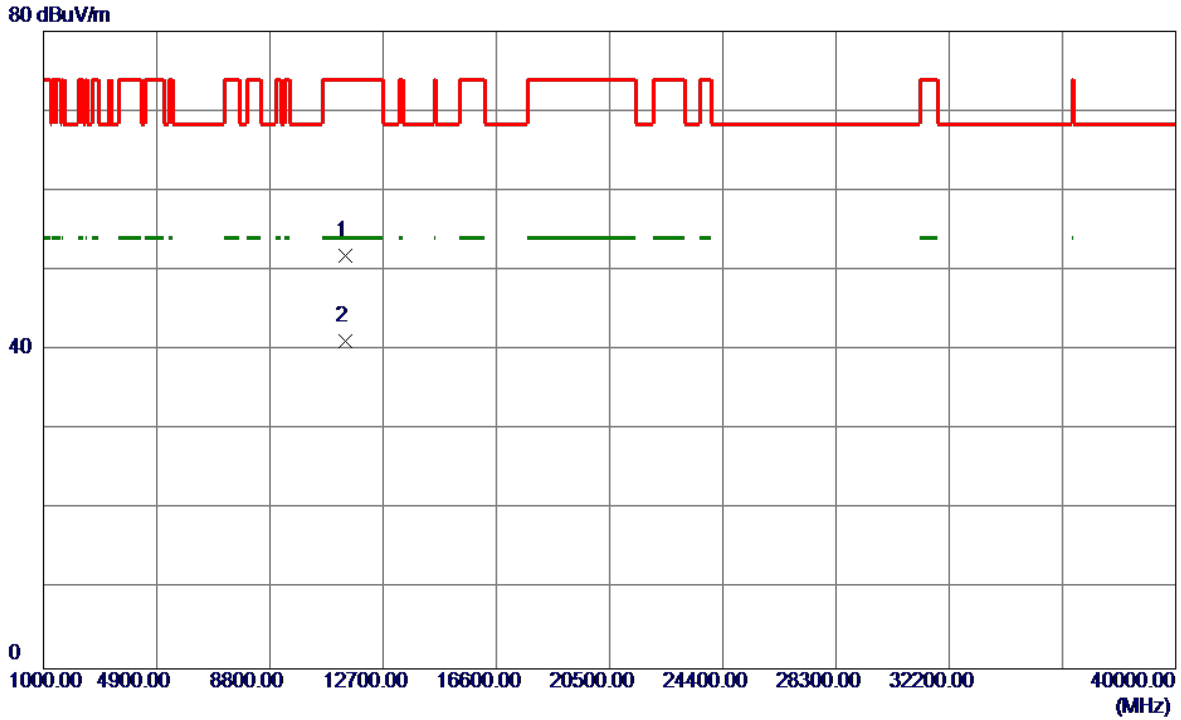


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11396.8500	34.86	16.97	51.83	74.00	-22.17	Peak	
2 *	11397.9500	24.17	16.97	41.14	54.00	-12.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical


130 dBuV/m

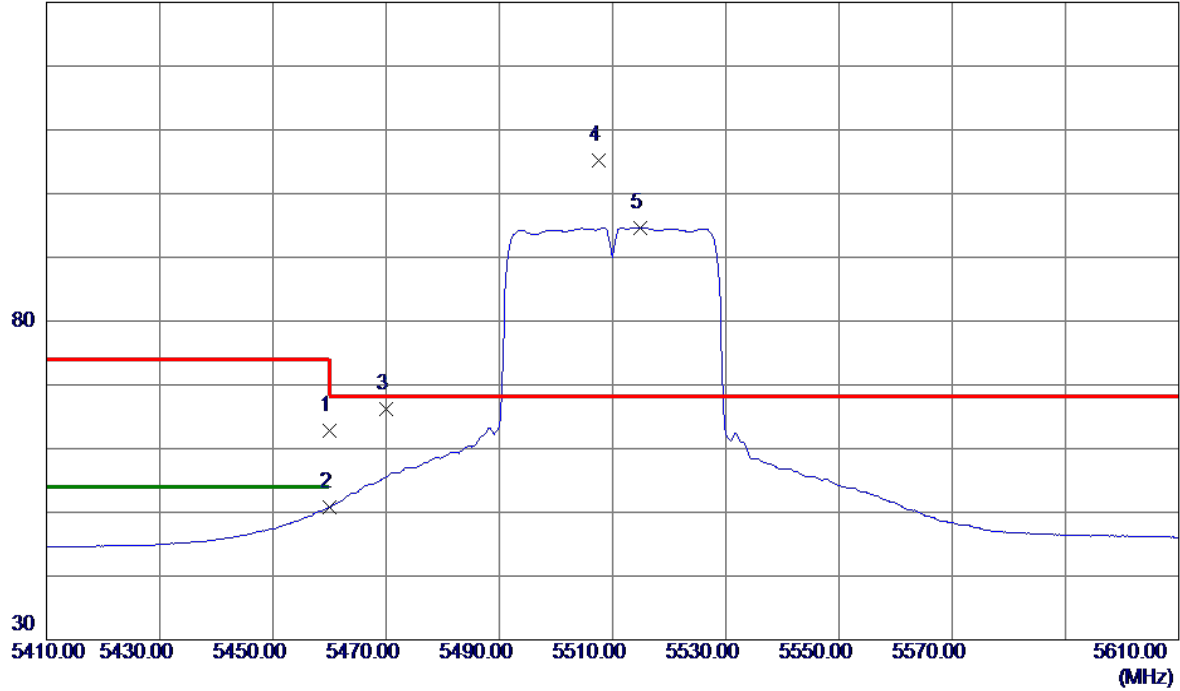

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	44.86	17.85	62.71	74.00	-11.29	Peak	
2	5460.0000	32.95	17.85	50.80	54.00	-3.20	AVG	
3	5470.0000	48.28	17.89	66.17	68.30	-2.13	Peak	
4 *	5507.6000	87.21	18.03	105.24	68.30	36.94	Peak	No Limit
5	5514.8000	76.56	18.06	94.62	999.00	-904.38	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

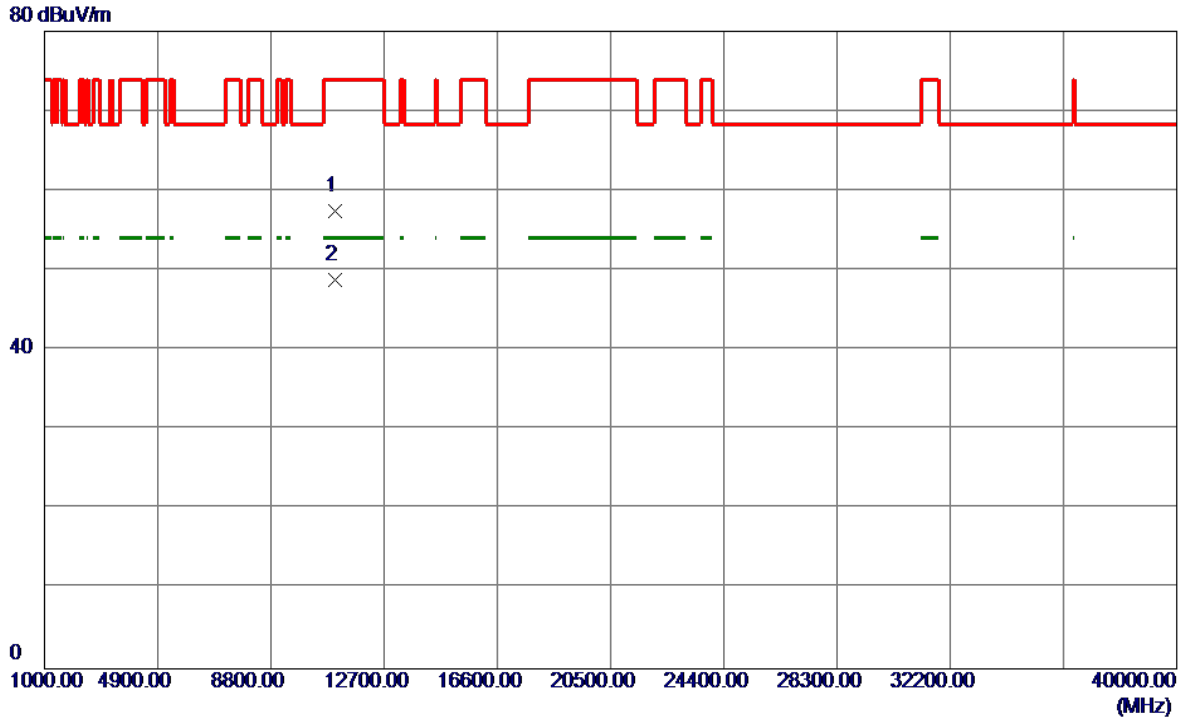


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10999.8000	41.52	15.98	57.50	74.00	-16.50	Peak	
2 *	11020.0000	32.74	16.03	48.77	54.00	-5.23	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

130 dBuV/m

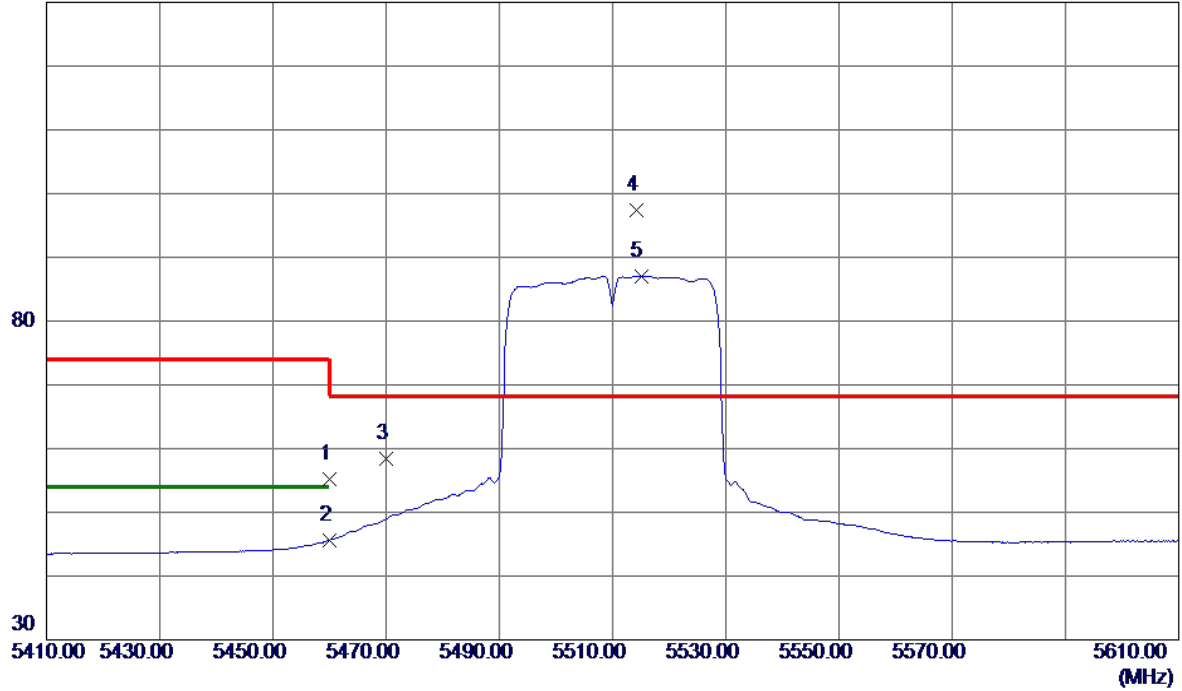

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.31	17.85	55.16	74.00	-18.84	Peak	
2	5460.0000	27.78	17.85	45.63	54.00	-8.37	AVG	
3	5470.0000	40.50	17.89	58.39	68.30	-9.91	Peak	
4 *	5514.2000	79.43	18.06	97.49	68.30	29.19	Peak	No Limit
5	5515.0000	69.03	18.06	87.09	999.00	-911.91	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11019.9000	24.91	16.03	40.94	54.00	-13.06	AVG	
2	11022.6000	36.59	16.04	52.63	74.00	-21.37	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

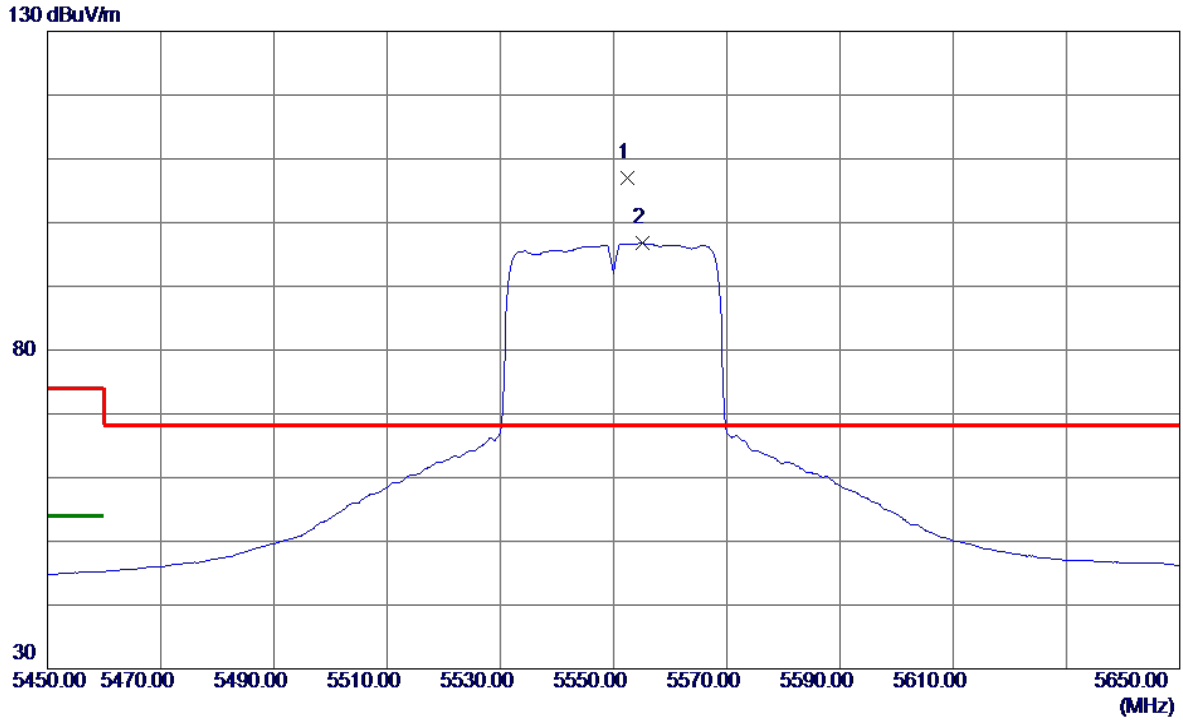

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5552.4000	88.83	18.23	107.06	68.30	38.76	Peak	No Limit
2	5555.2000	78.51	18.24	96.75	999.00	-902.25	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

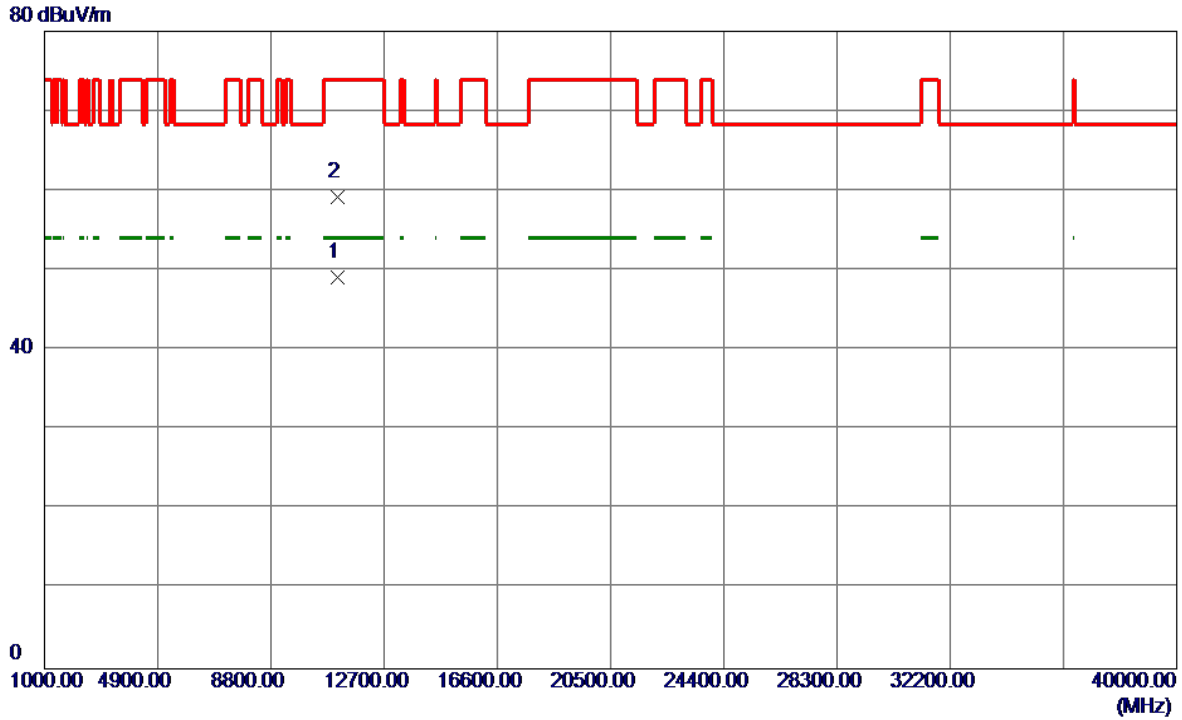

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.0000	32.82	16.23	49.05	54.00	-4.95	AVG	
2	11100.8000	42.97	16.23	59.20	74.00	-14.80	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

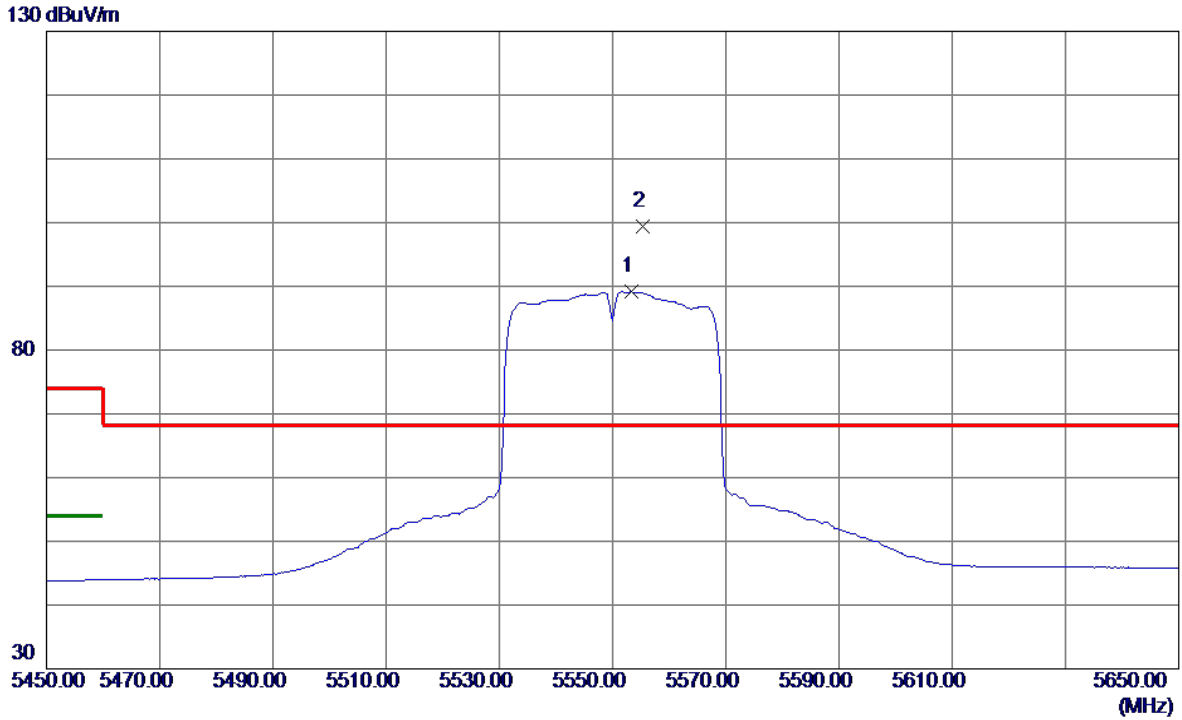

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5553.4000	70.92	18.23	89.15	999.00	-909.85	AVG	No Limit
2 *	5555.4000	81.09	18.24	99.33	68.30	31.03	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

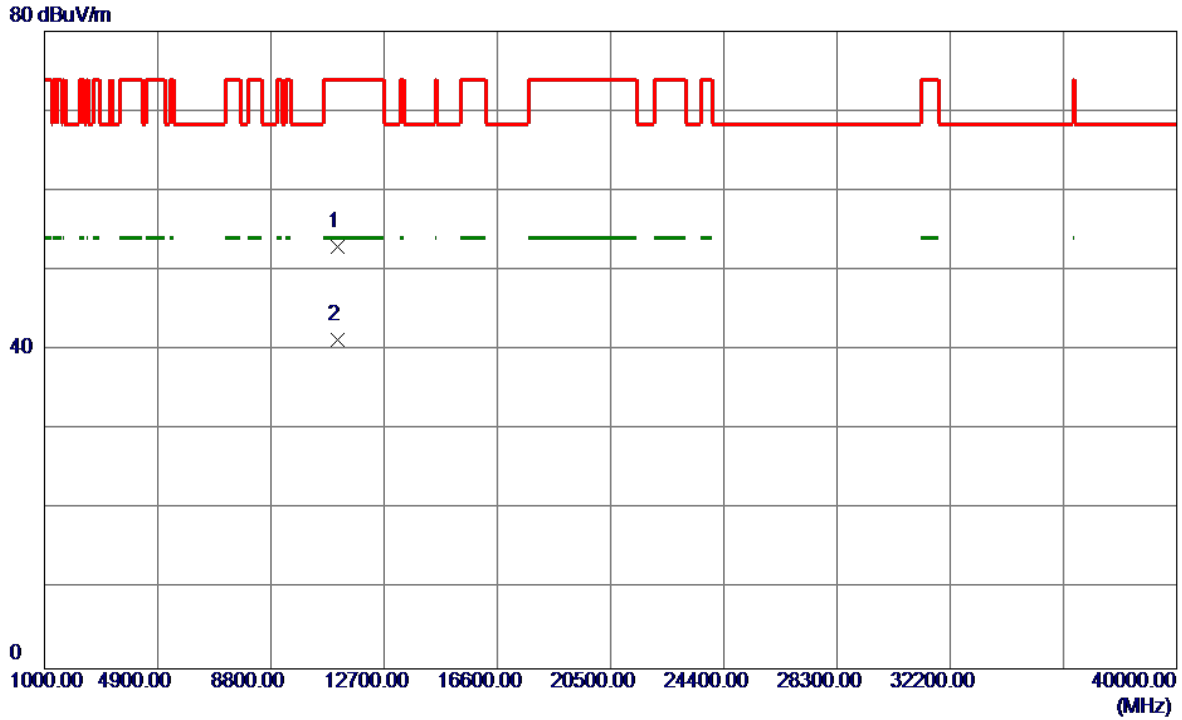


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11099.9000	36.65	16.23	52.88	74.00	-21.12	Peak	
2 *	11100.0000	24.98	16.23	41.21	54.00	-12.79	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical


130 dBuV/m

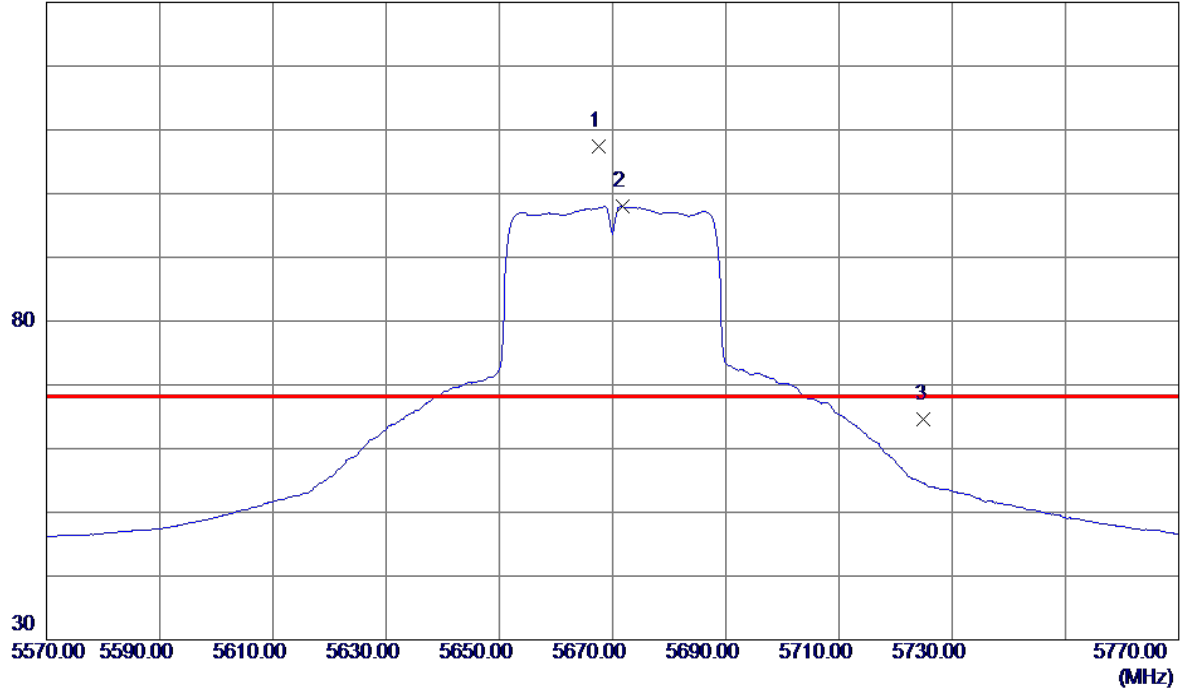

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5667.6000	88.67	18.74	107.41	68.30	39.11	Peak	No Limit
2	5671.8000	79.22	18.76	97.98	999.00	-901.02	AVG	No Limit
3	5725.0000	45.54	18.99	64.53	68.30	-3.77	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical

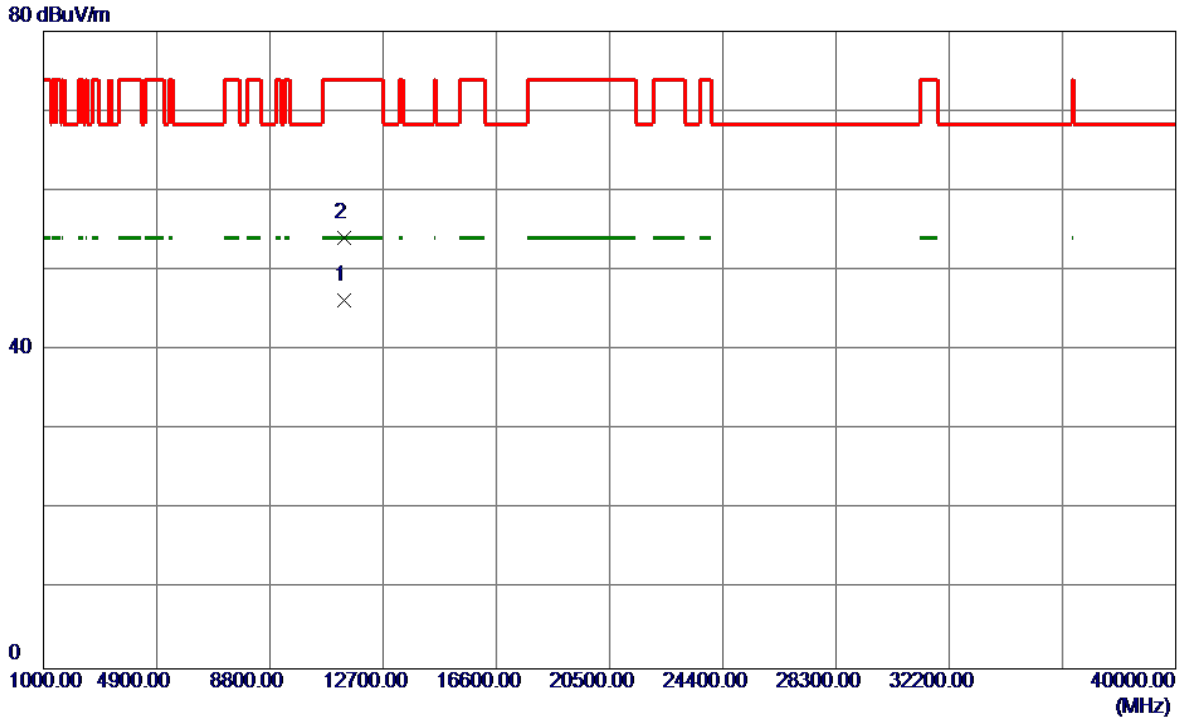

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.0000	29.39	16.83	46.22	54.00	-7.78	AVG	
2	11340.2000	37.26	16.83	54.09	74.00	-19.91	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

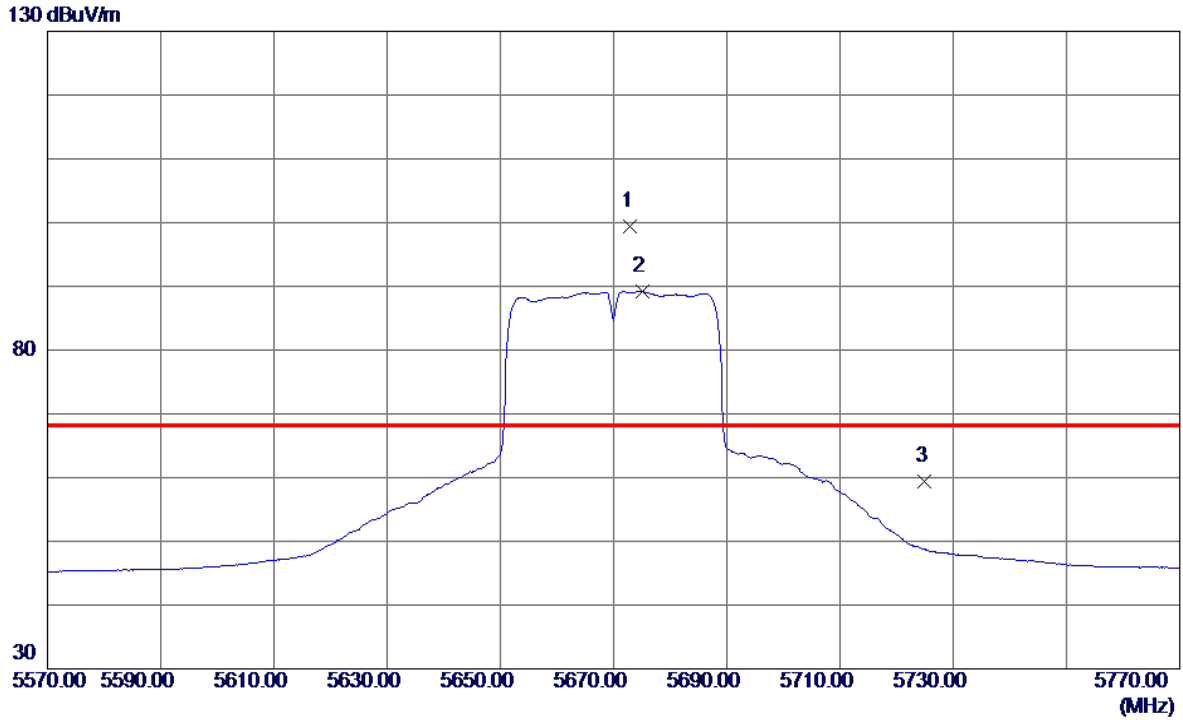

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5673.0000	80.63	18.76	99.39	68.30	31.09	Peak	No Limit
2	5675.2000	70.40	18.77	89.17	999.00	-909.83	AVG	No Limit
3	5725.0000	40.45	18.99	59.44	68.30	-8.86	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

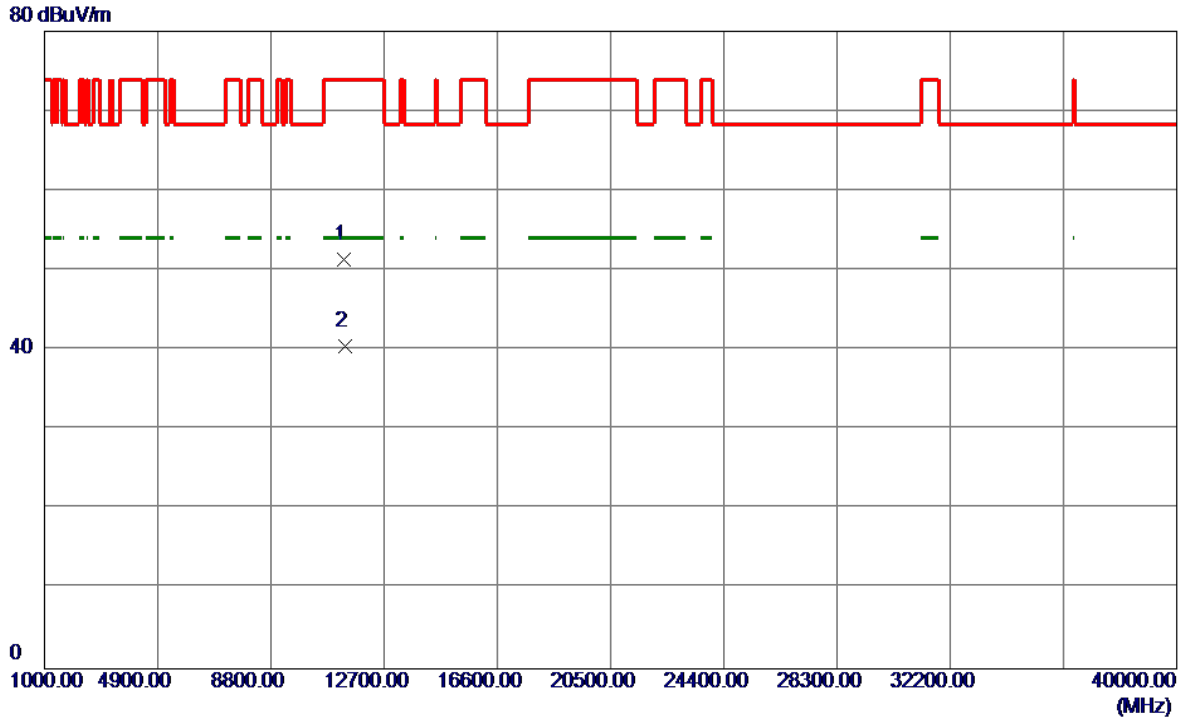

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11324.0000	34.51	16.79	51.30	74.00	-22.70	Peak	
2 *	11339.8500	23.70	16.83	40.53	54.00	-13.47	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

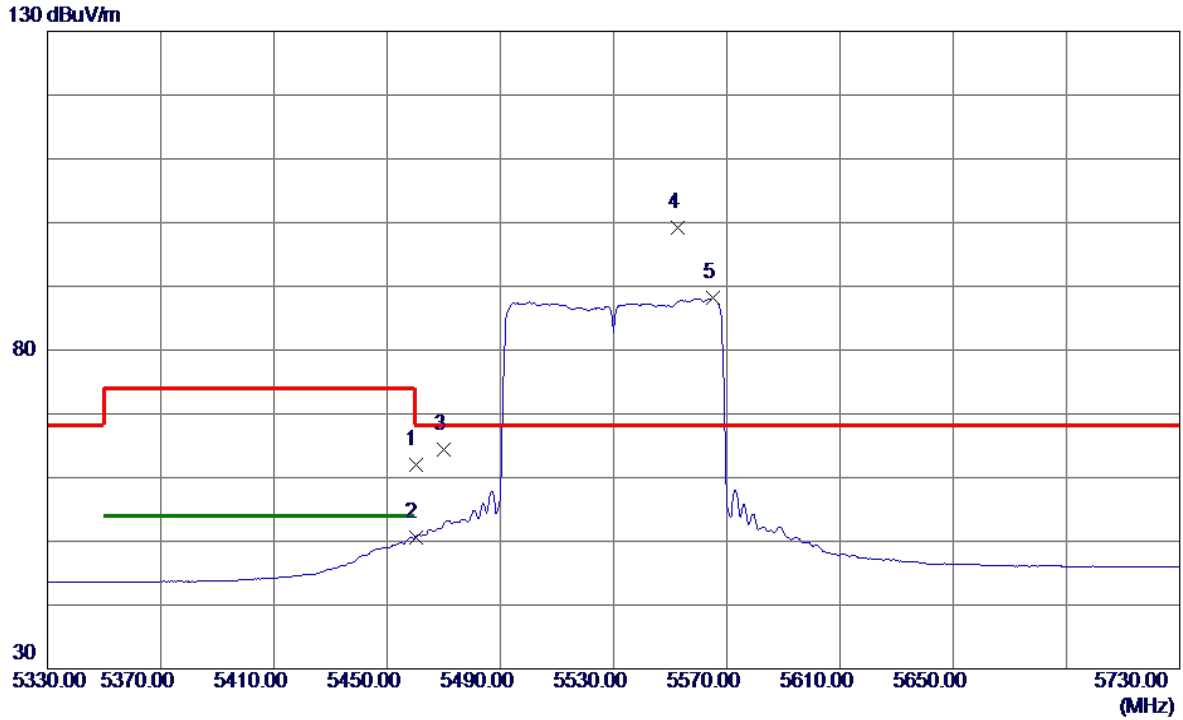

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	44.11	17.85	61.96	74.00	-12.04	Peak	
2	5460.0000	32.83	17.85	50.68	54.00	-3.32	AVG	
3	5470.0000	46.48	17.89	64.37	68.30	-3.93	Peak	
4 *	5552.8000	81.00	18.23	99.23	68.30	30.93	Peak	No Limit
5	5565.2000	69.84	18.28	88.12	999.00	-910.88	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

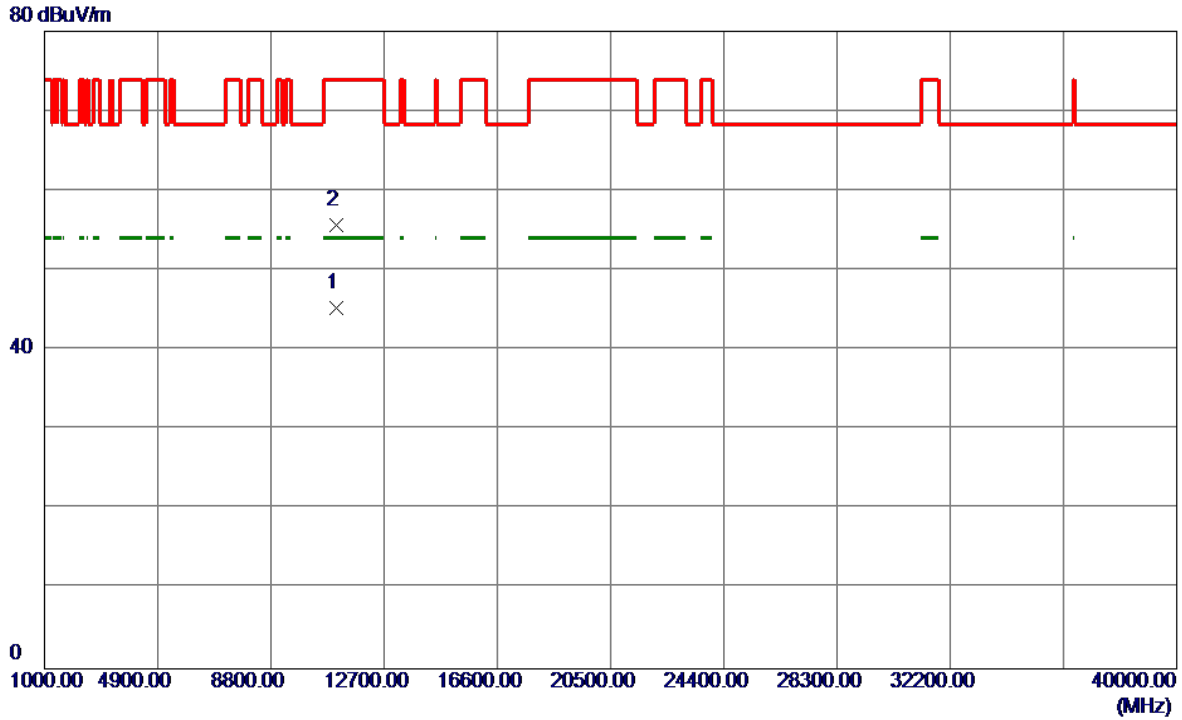


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	29.08	16.13	45.21	54.00	-8.79	AVG	
2	11060.4000	39.54	16.13	55.67	74.00	-18.33	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal


130 dBuV/m

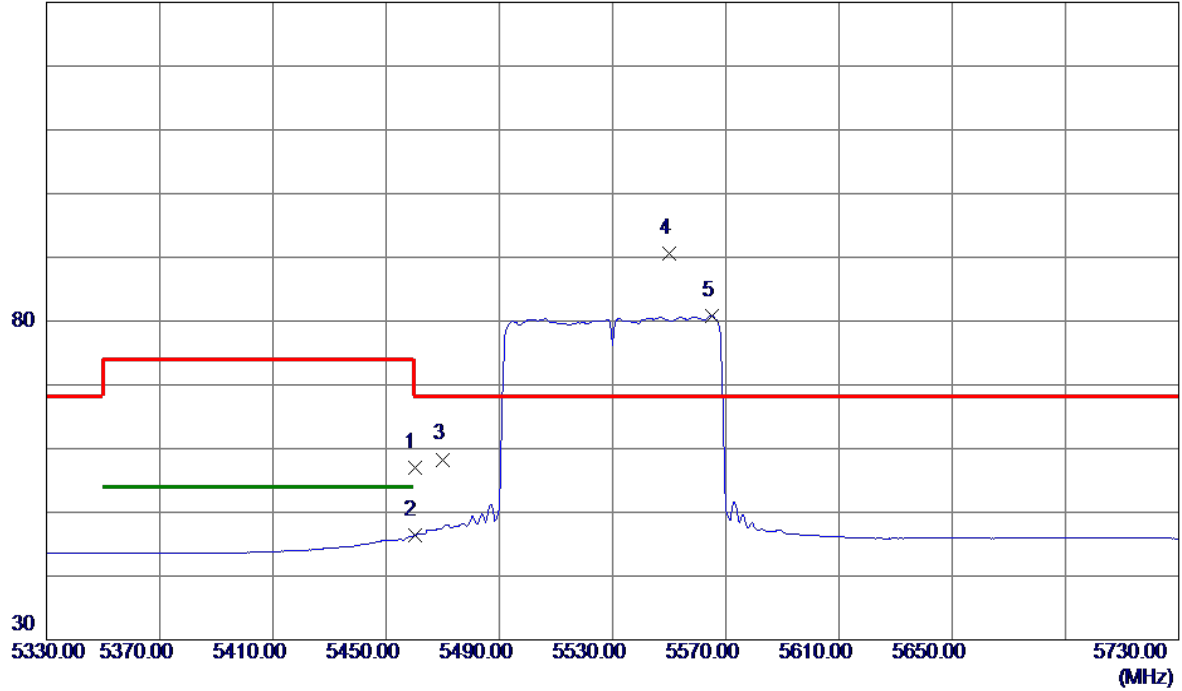

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.19	17.85	57.04	74.00	-16.96	Peak	
2	5460.0000	28.46	17.85	46.31	54.00	-7.69	AVG	
3	5470.0000	40.41	17.89	58.30	68.30	-10.00	Peak	
4 *	5550.0000	72.34	18.22	90.56	68.30	22.26	Peak	No Limit
5	5565.2000	62.50	18.28	80.78	999.00	-918.22	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

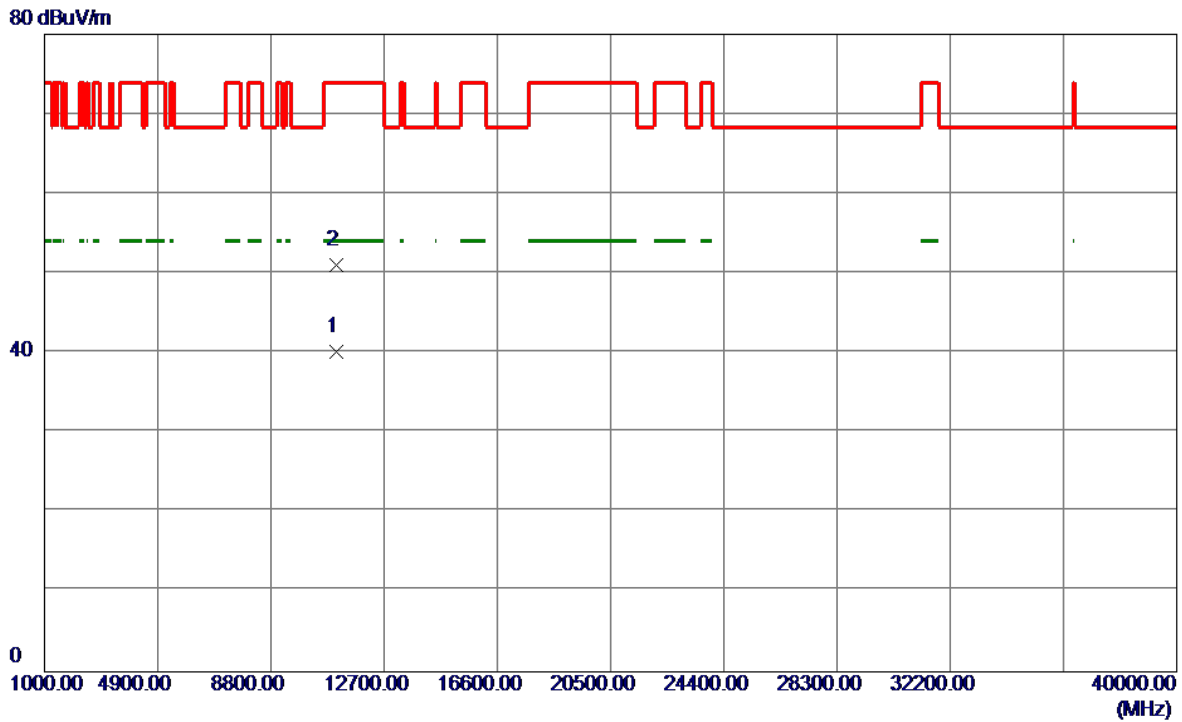

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11059.7000	23.97	16.13	40.10	54.00	-13.90	AVG	
2	11067.1000	34.87	16.15	51.02	74.00	-22.98	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

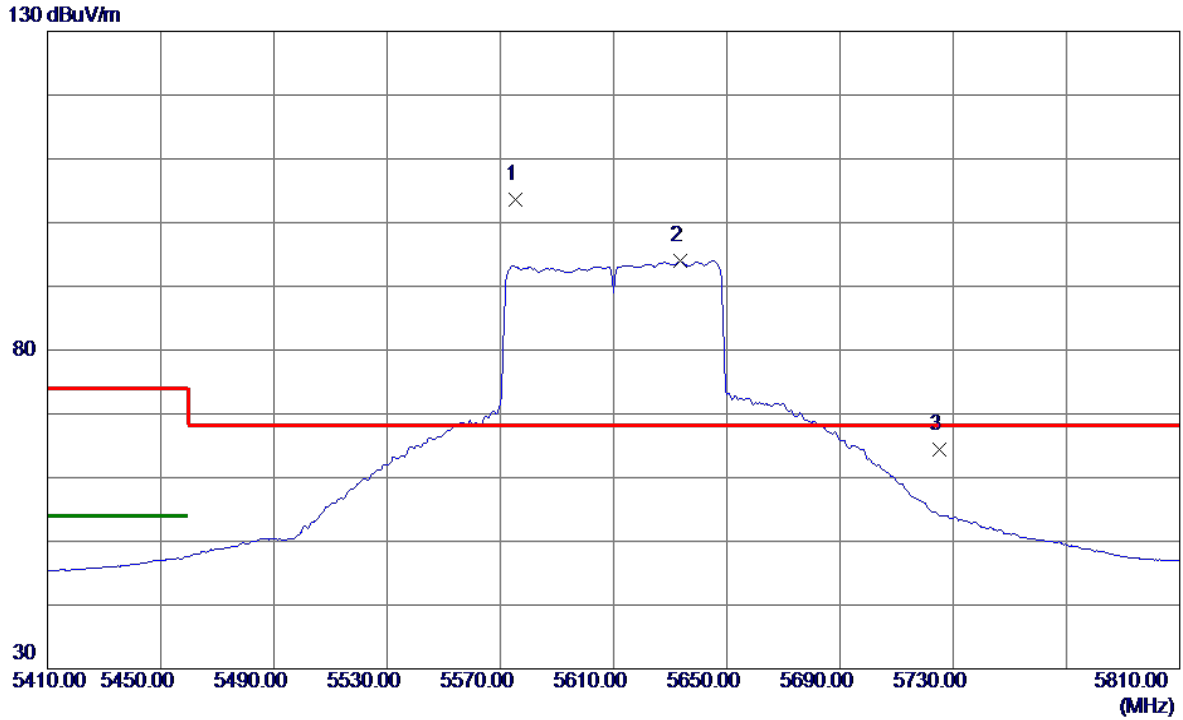

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5575.2000	85.19	18.33	103.52	68.30	35.22	Peak	No Limit
2	5633.6000	75.34	18.59	93.93	999.00	-905.07	AVG	No Limit
3	5725.0000	45.40	18.99	64.39	68.30	-3.91	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

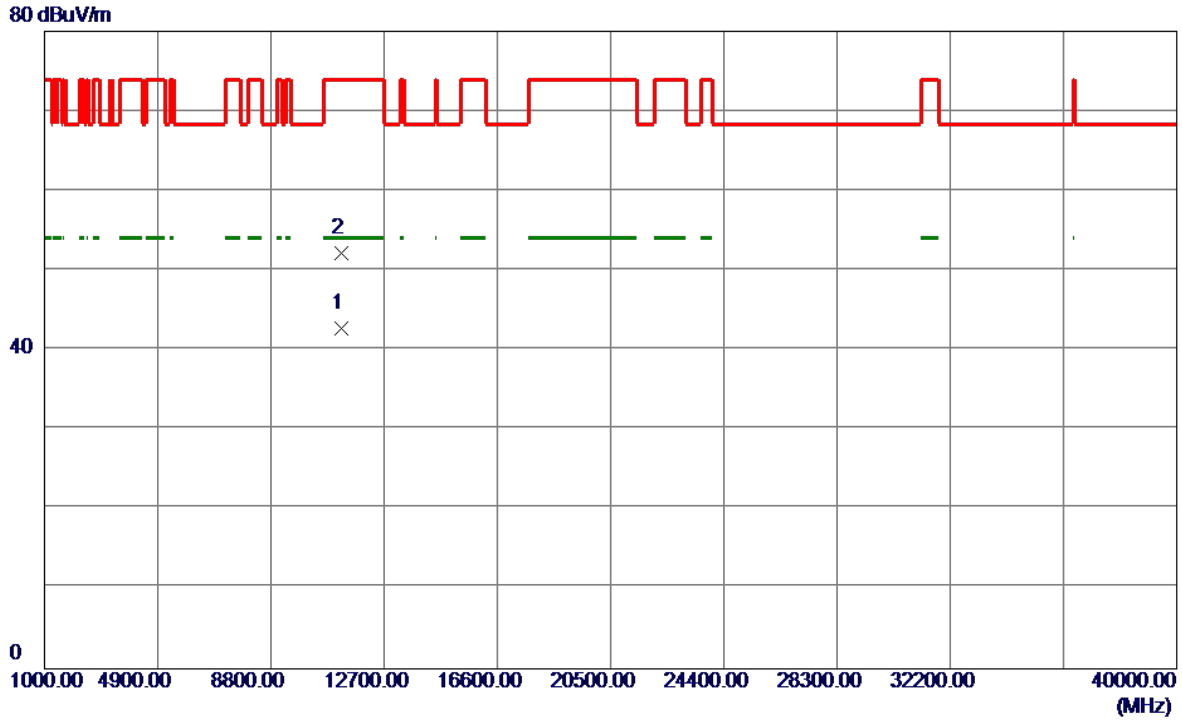

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11220.0000	26.13	16.53	42.66	54.00	-11.34	AVG	
2	11231.4000	35.59	16.56	52.15	74.00	-21.85	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

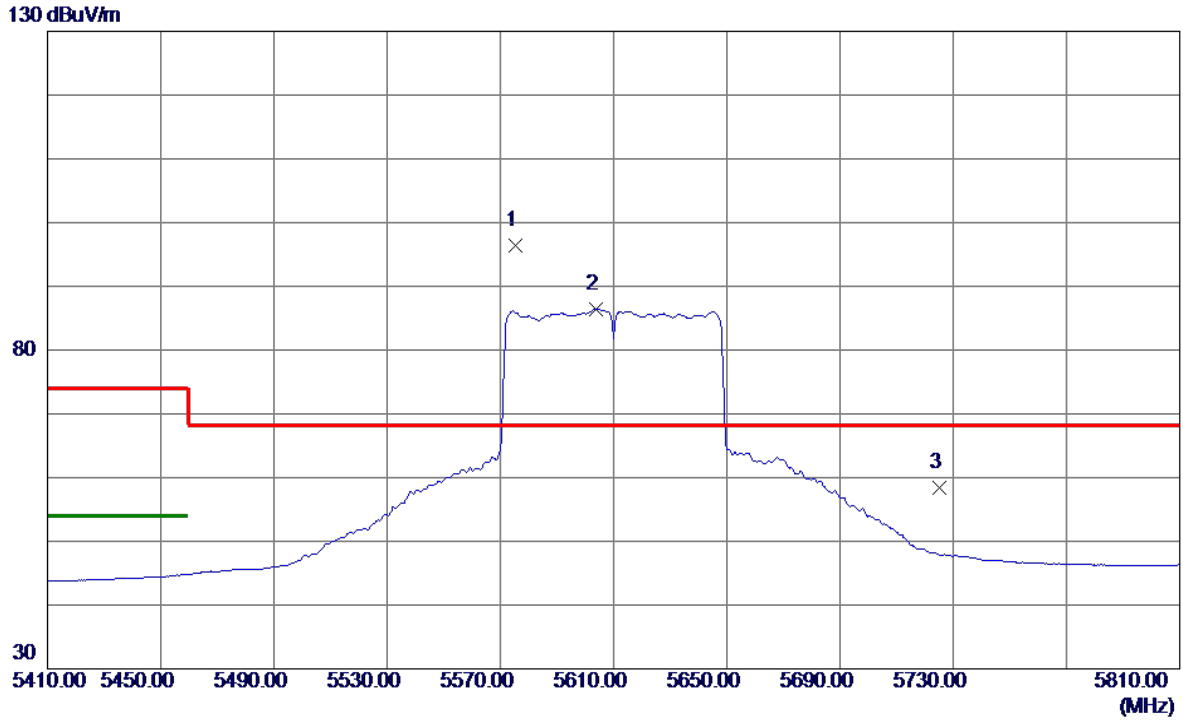

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5575.2000	78.02	18.33	96.35	68.30	28.05	Peak	No Limit
2	5603.6000	67.99	18.45	86.44	999.00	-912.56	AVG	No Limit
3	5725.0000	39.36	18.99	58.35	68.30	-9.95	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

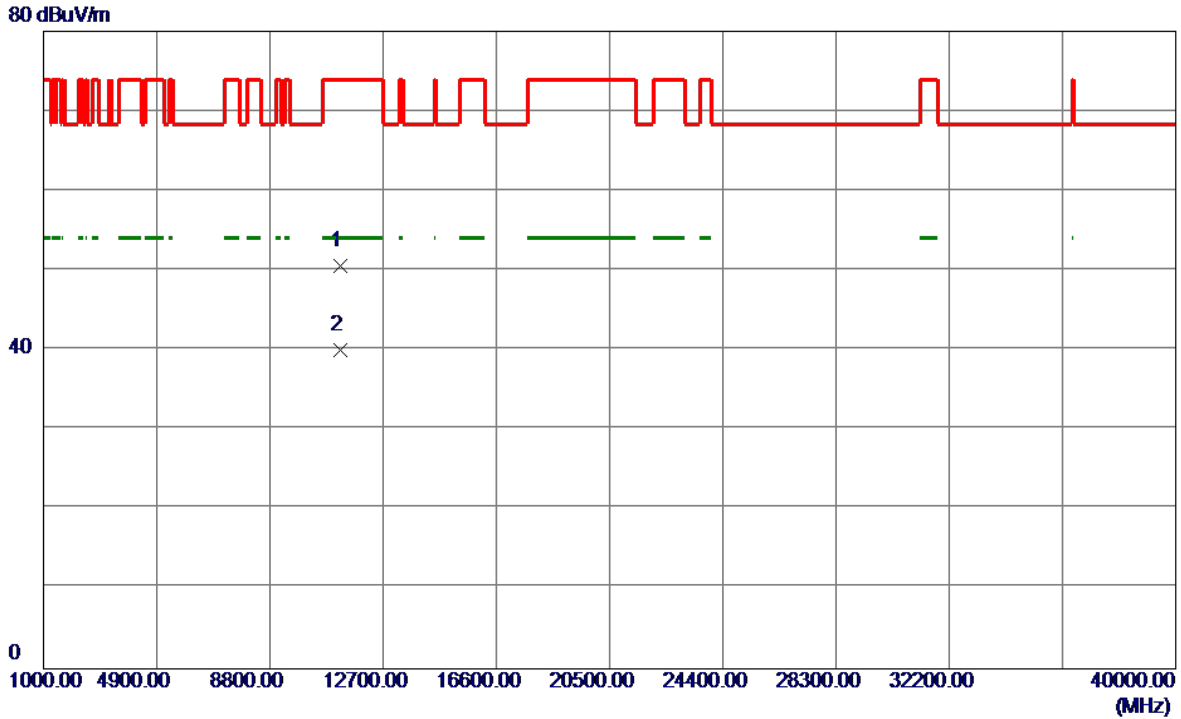

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11219.2000	34.00	16.53	50.53	74.00	-23.47	Peak	
2 *	11219.7000	23.53	16.53	40.06	54.00	-13.94	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

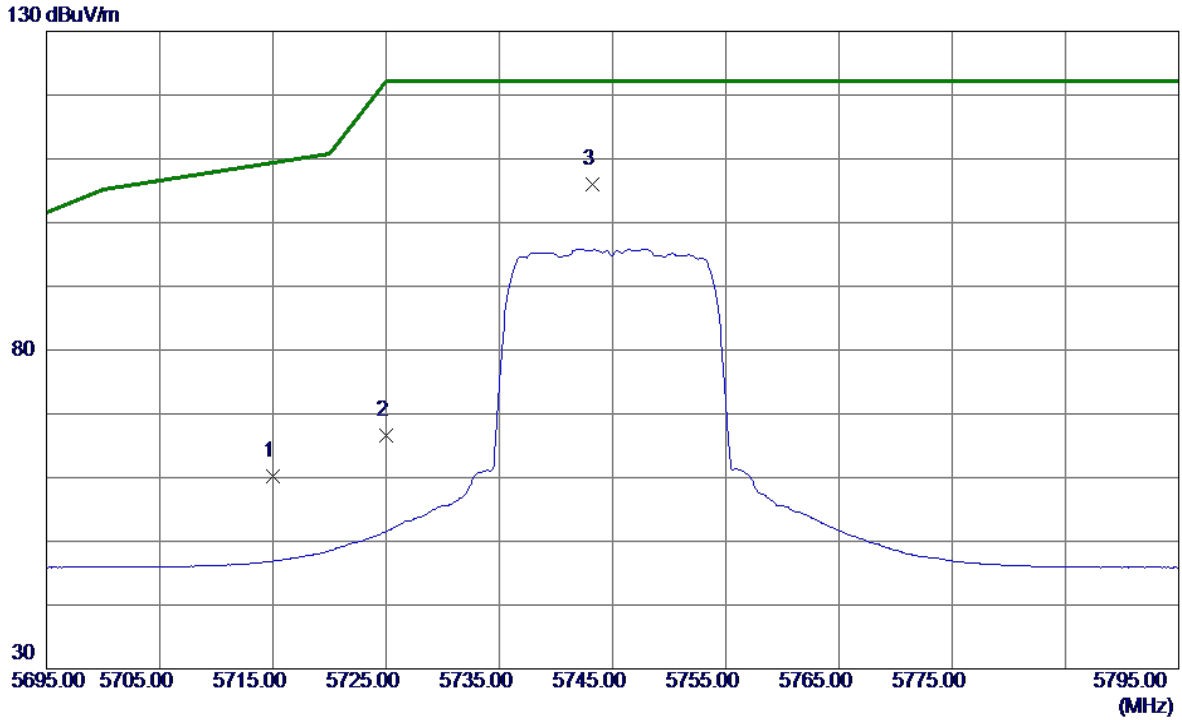

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.23	18.95	60.18	109.40	-49.22	Peak	
2	5725.0000	47.61	18.99	66.60	122.20	-55.60	Peak	
3 *	5743.2000	87.01	19.07	106.08	122.20	-16.12	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

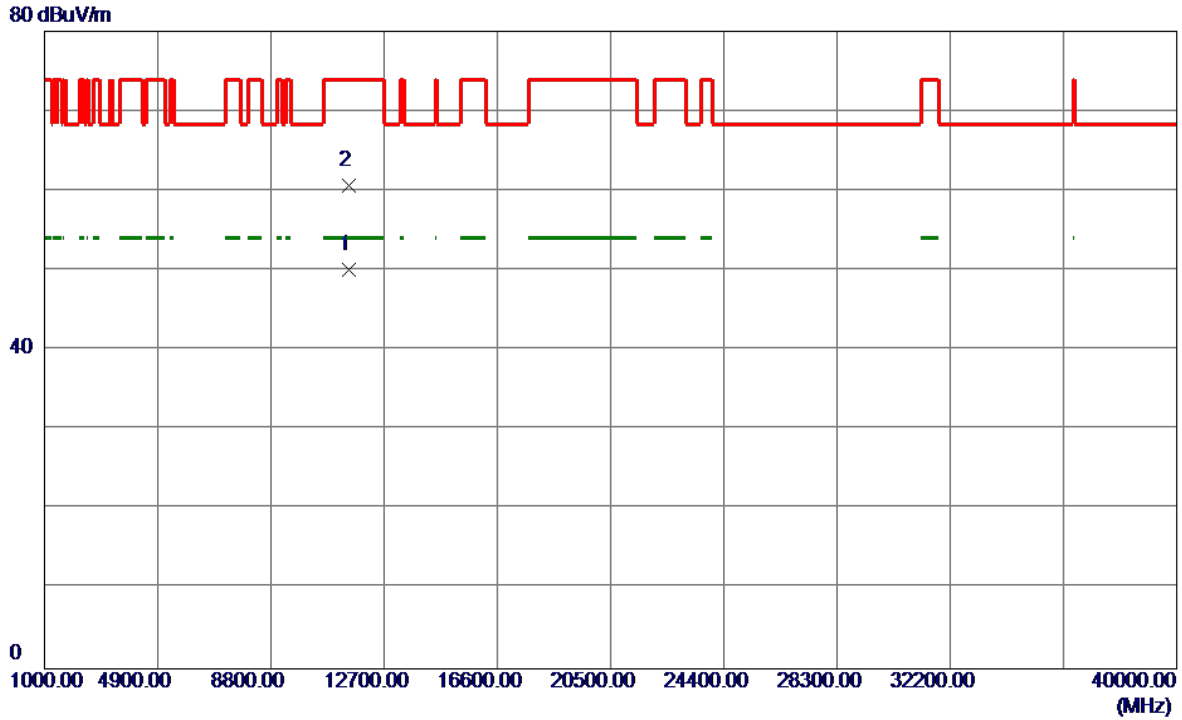

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.8000	32.84	17.20	50.04	54.00	-3.96	AVG	
2	11491.1000	43.42	17.21	60.63	74.00	-13.37	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

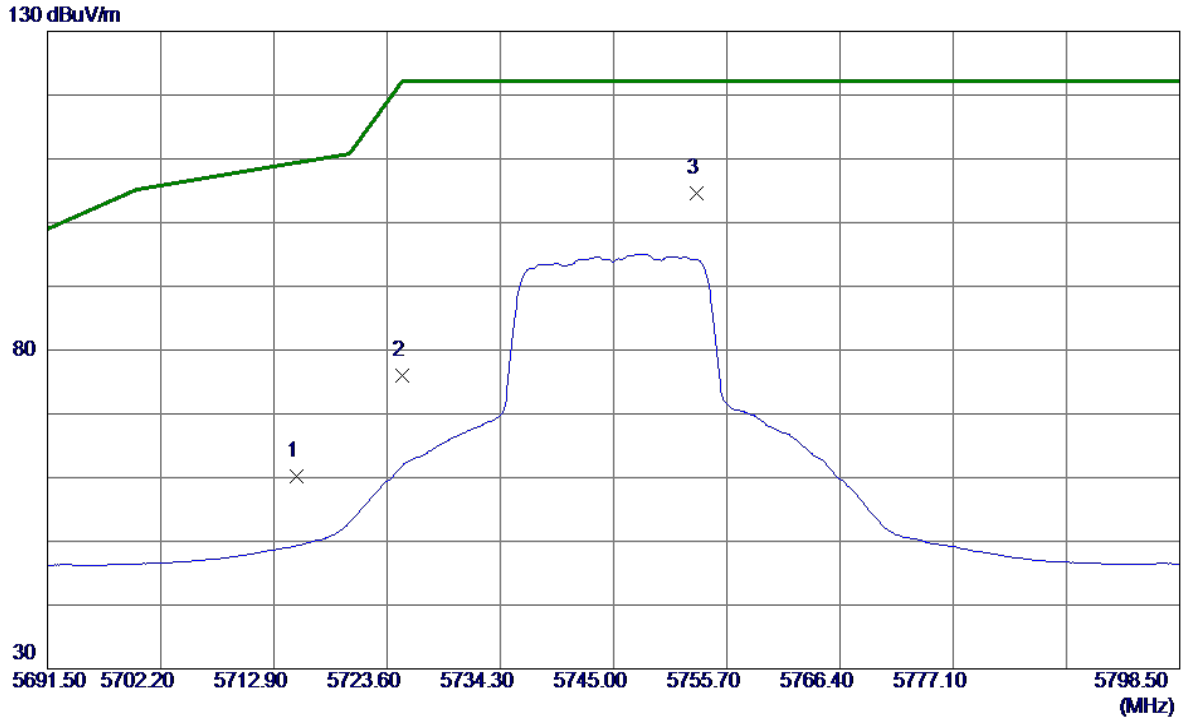

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.22	18.95	60.17	109.40	-49.23	Peak	
2	5725.0000	56.96	18.99	75.95	122.20	-46.25	Peak	
3 *	5752.8110	85.58	19.11	104.69	122.20	-17.51	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

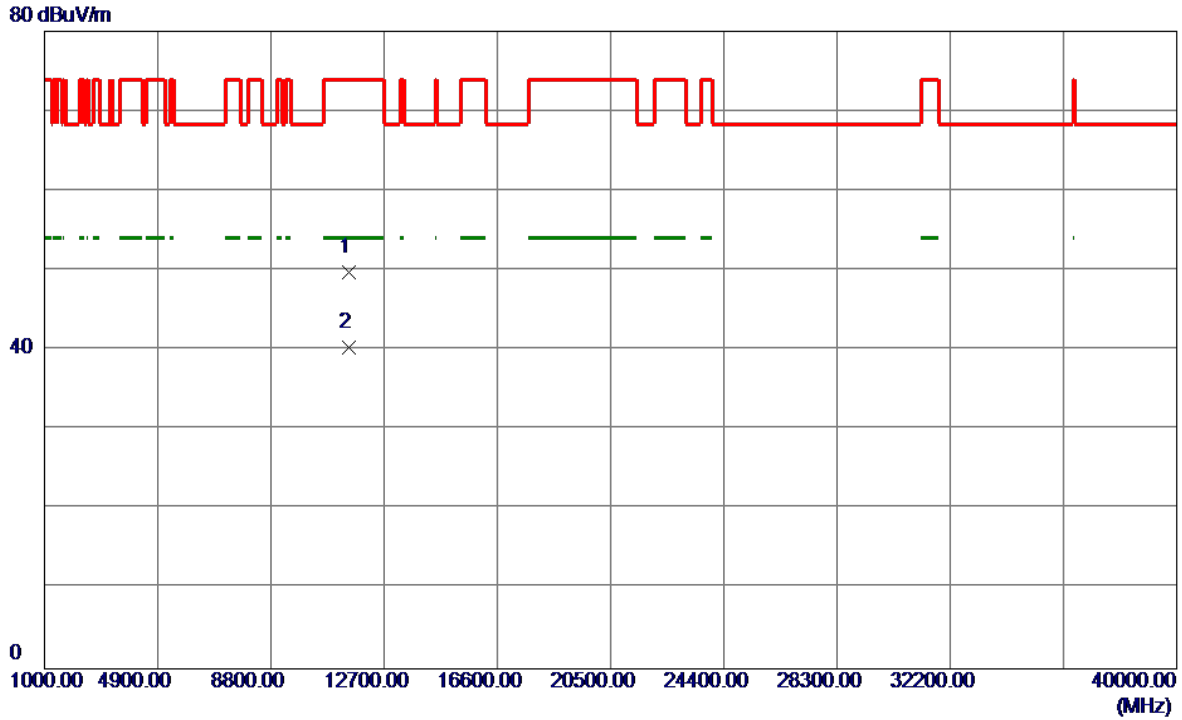

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11481.7000	32.51	17.18	49.69	74.00	-24.31	Peak	
2 *	11488.3000	23.19	17.20	40.39	54.00	-13.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

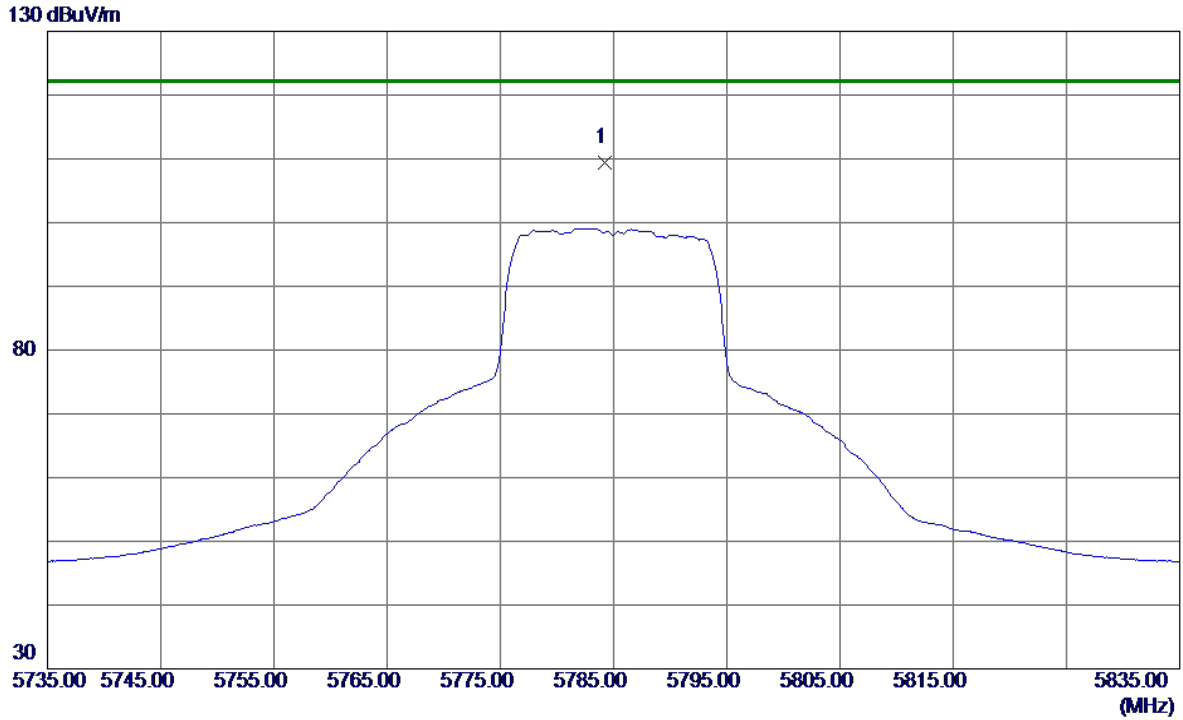

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5784.2000	90.09	19.25	109.34	122.20	-12.86	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

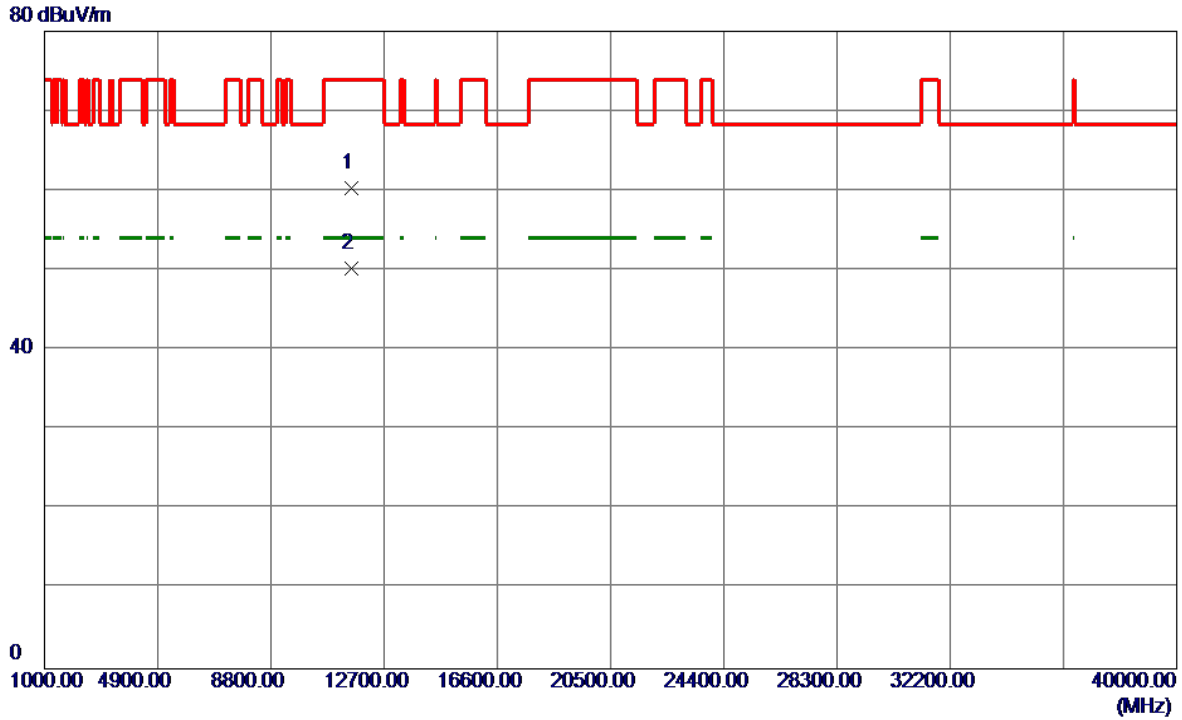

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11566.3000	43.06	17.33	60.39	74.00	-13.61	Peak	
2 *	11569.8000	32.90	17.34	50.24	54.00	-3.76	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

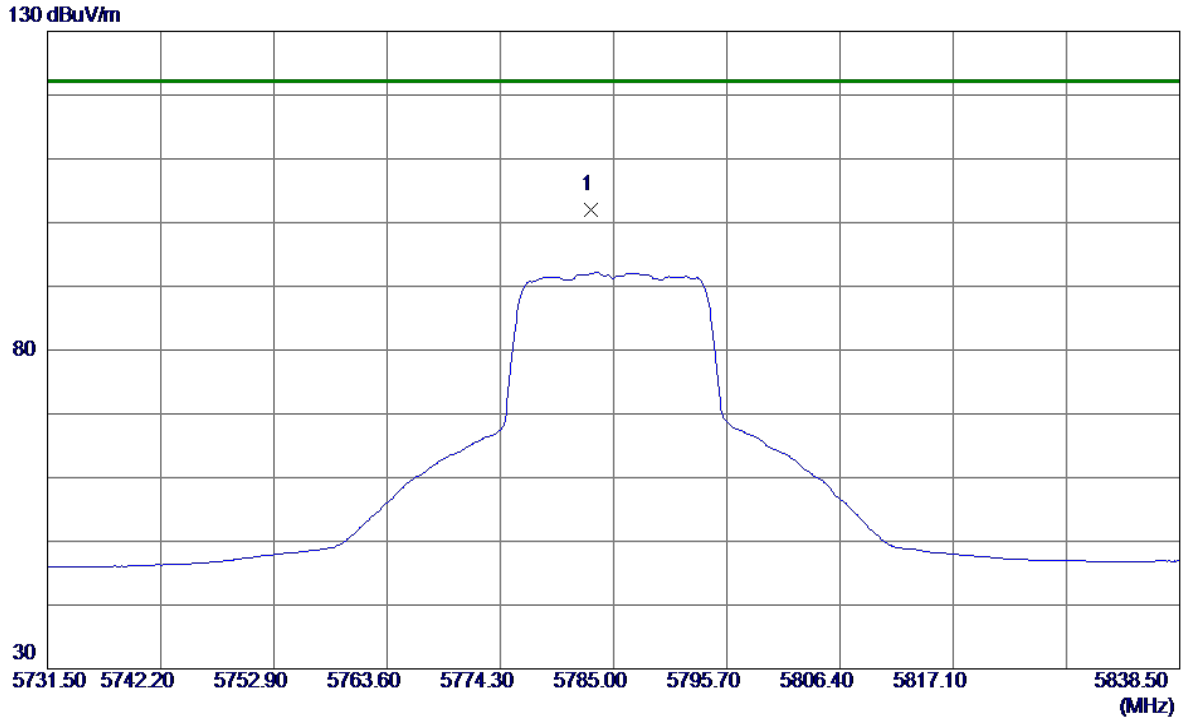

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5782.8600	82.71	19.25	101.96	122.20	-20.24	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

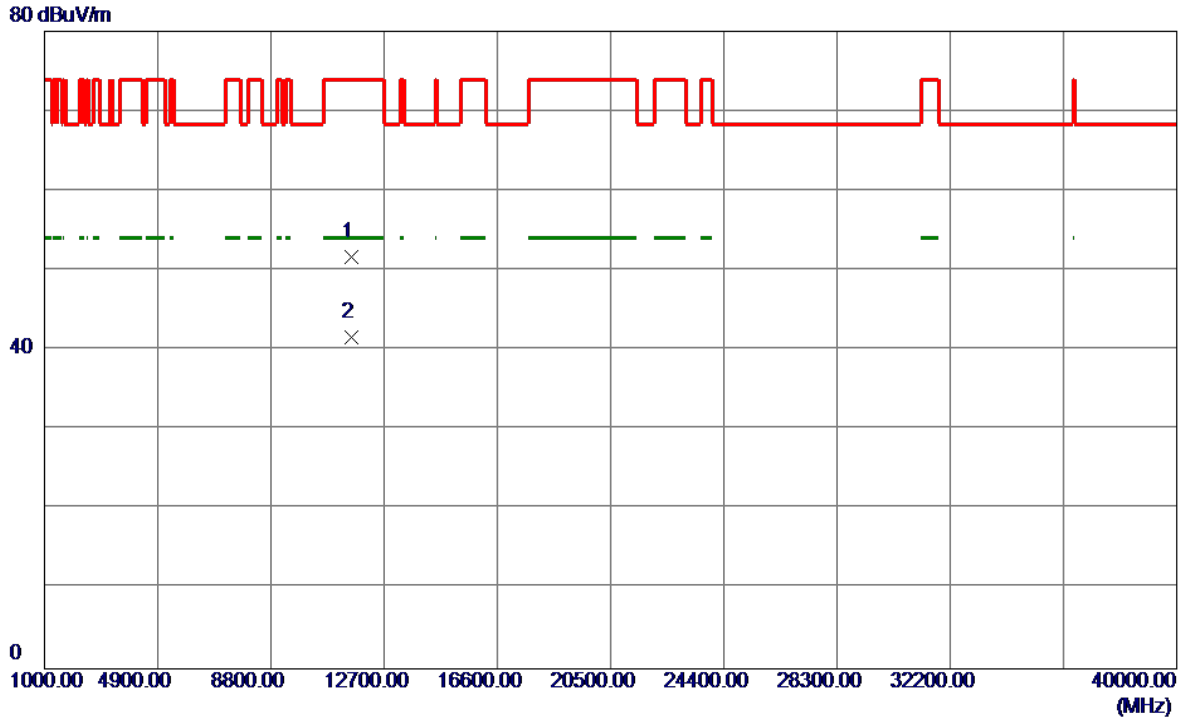

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11568.2000	34.41	17.34	51.75	74.00	-22.25	Peak	
2 *	11570.0000	24.32	17.34	41.66	54.00	-12.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

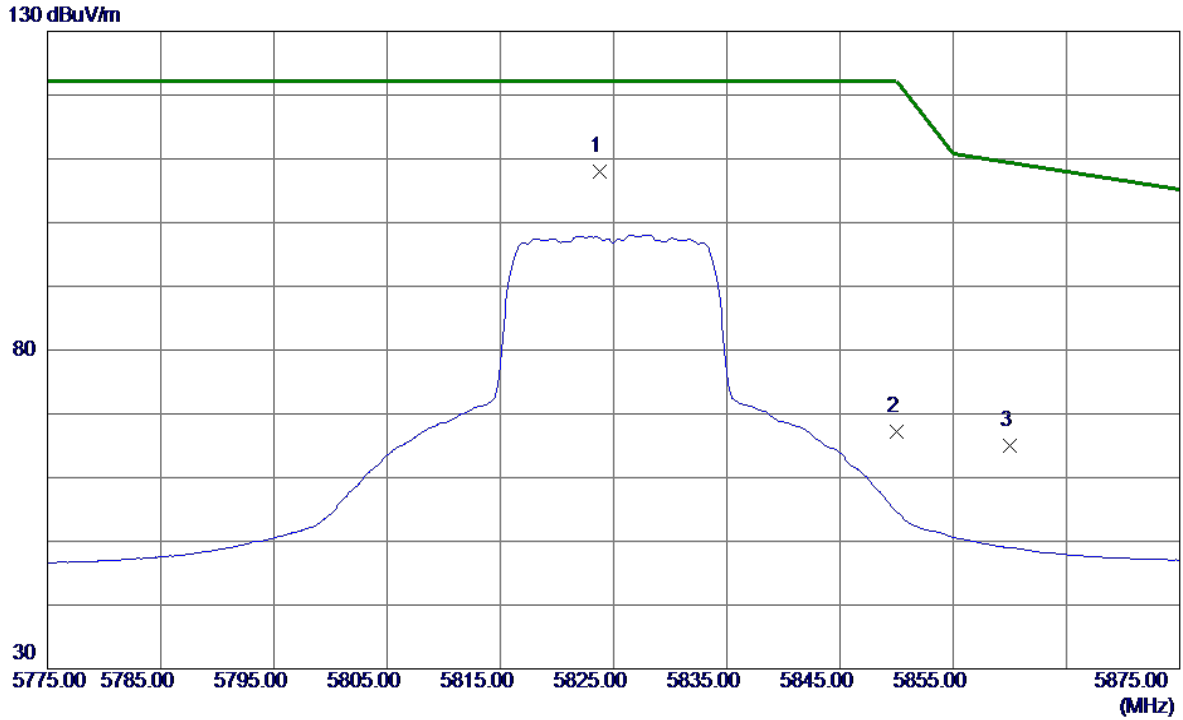

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.8000	88.65	19.43	108.08	122.20	-14.12	Peak	
2	5850.0000	47.62	19.55	67.17	122.20	-55.03	Peak	
3	5860.0000	45.50	19.59	65.09	109.40	-44.31	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

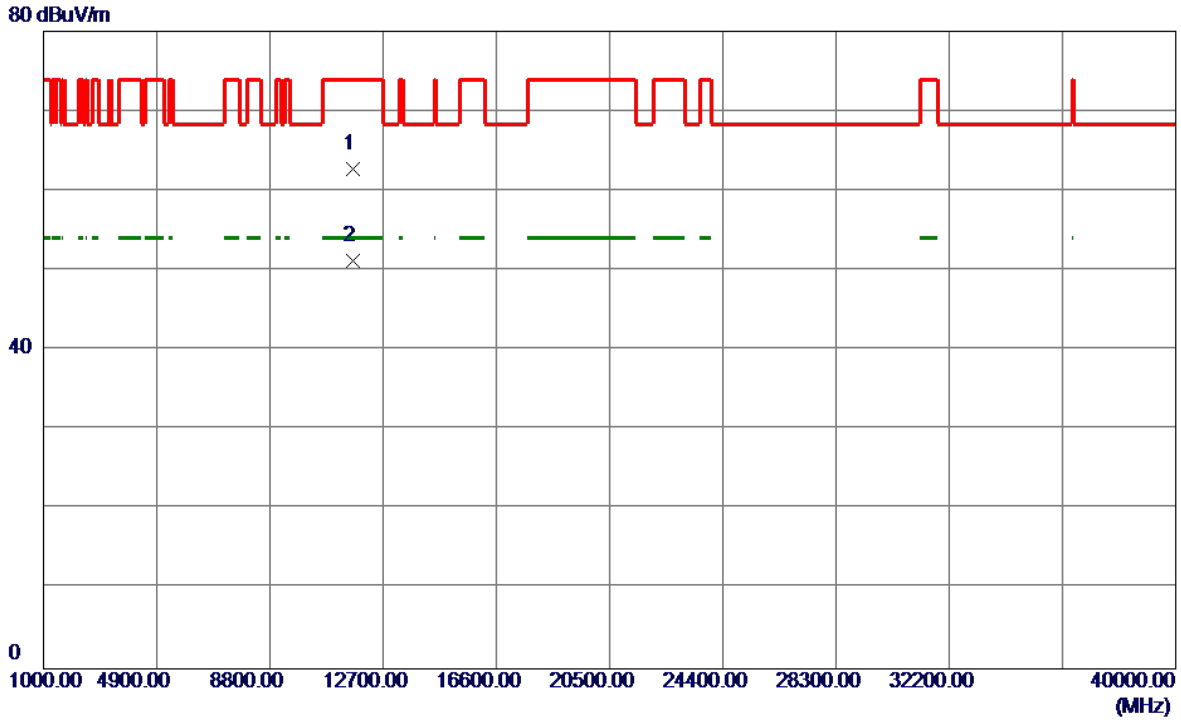

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.3000	45.24	17.47	62.71	74.00	-11.29	Peak	
2 *	11649.8000	33.69	17.47	51.16	54.00	-2.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

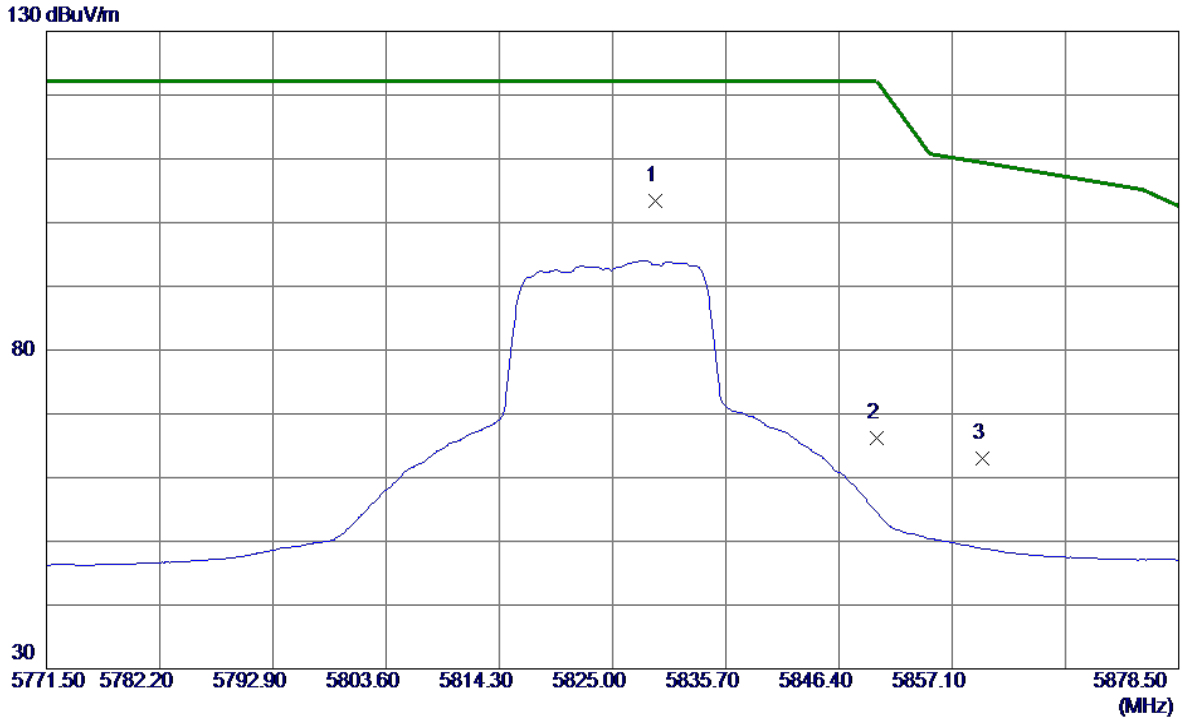

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5829.0660	83.87	19.45	103.32	122.20	-18.88	Peak	
2	5850.0000	46.57	19.55	66.12	122.20	-56.08	Peak	
3	5860.0000	43.48	19.59	63.07	109.40	-46.33	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

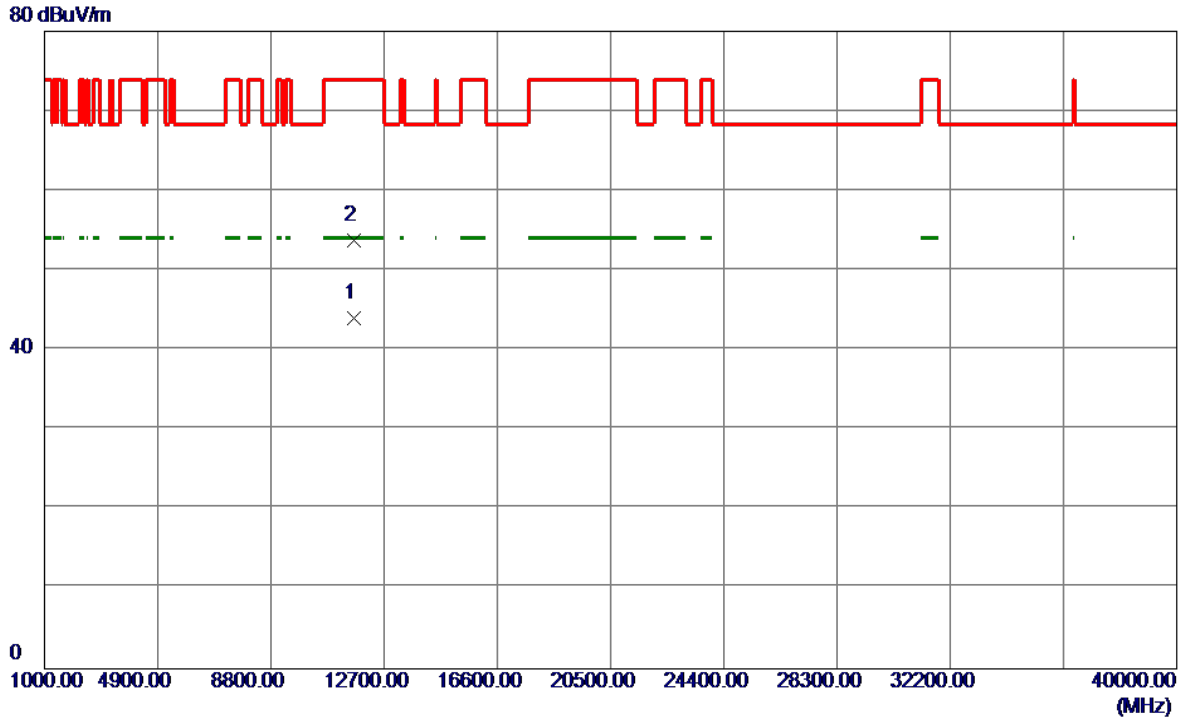

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.9000	26.52	17.47	43.99	54.00	-10.01	AVG	
2	11651.0000	36.26	17.47	53.73	74.00	-20.27	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

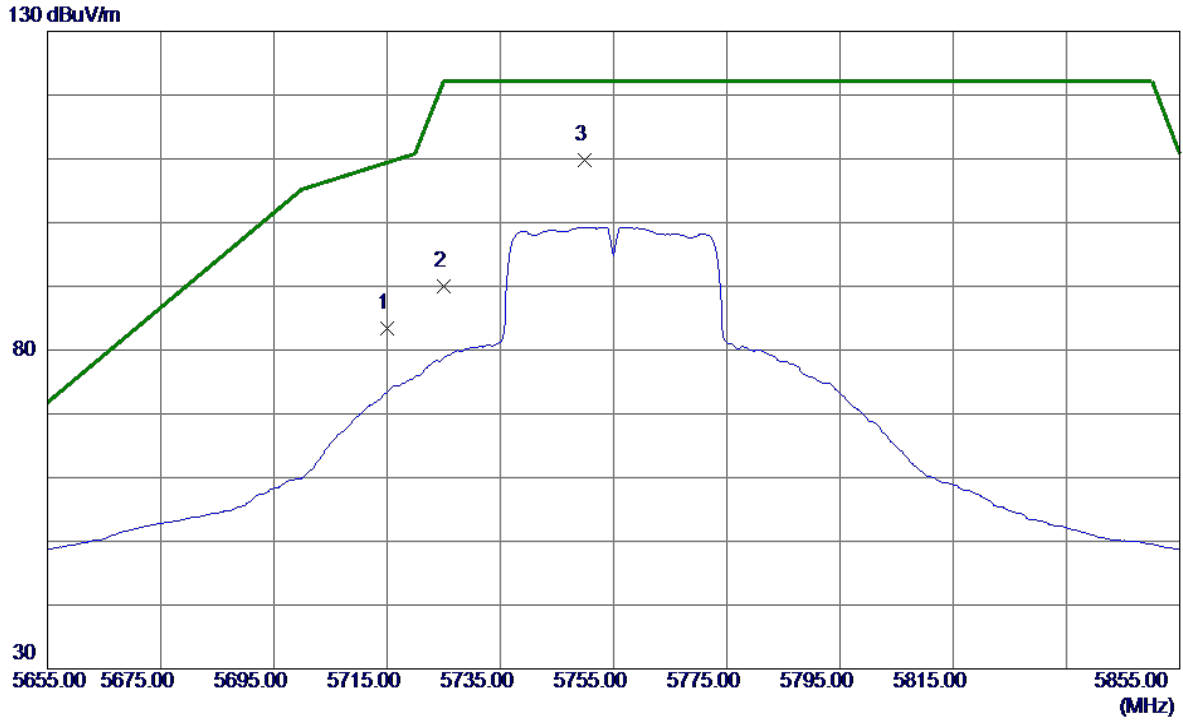

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	64.51	18.95	83.46	109.40	-25.94	Peak	
2	5725.0000	71.08	18.99	90.07	122.20	-32.13	Peak	
3 *	5749.8000	90.79	19.10	109.89	122.20	-12.31	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

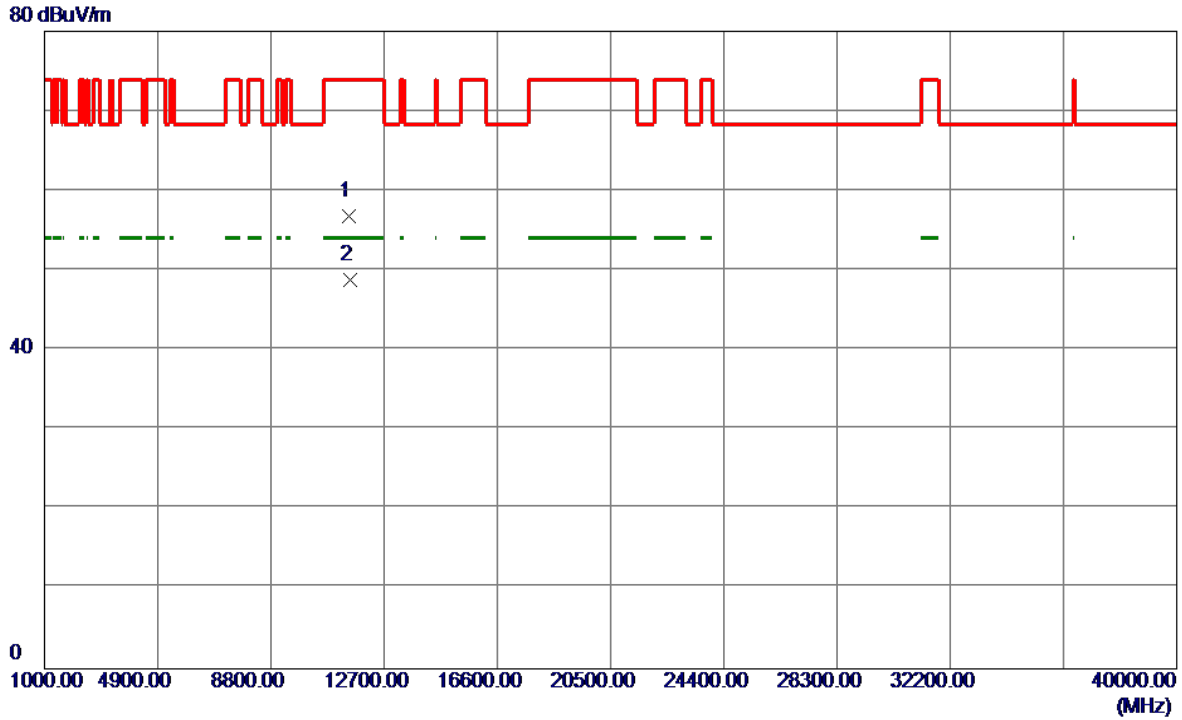

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11496.4000	39.60	17.22	56.82	74.00	-17.18	Peak	
2 *	11510.0000	31.55	17.25	48.80	54.00	-5.20	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

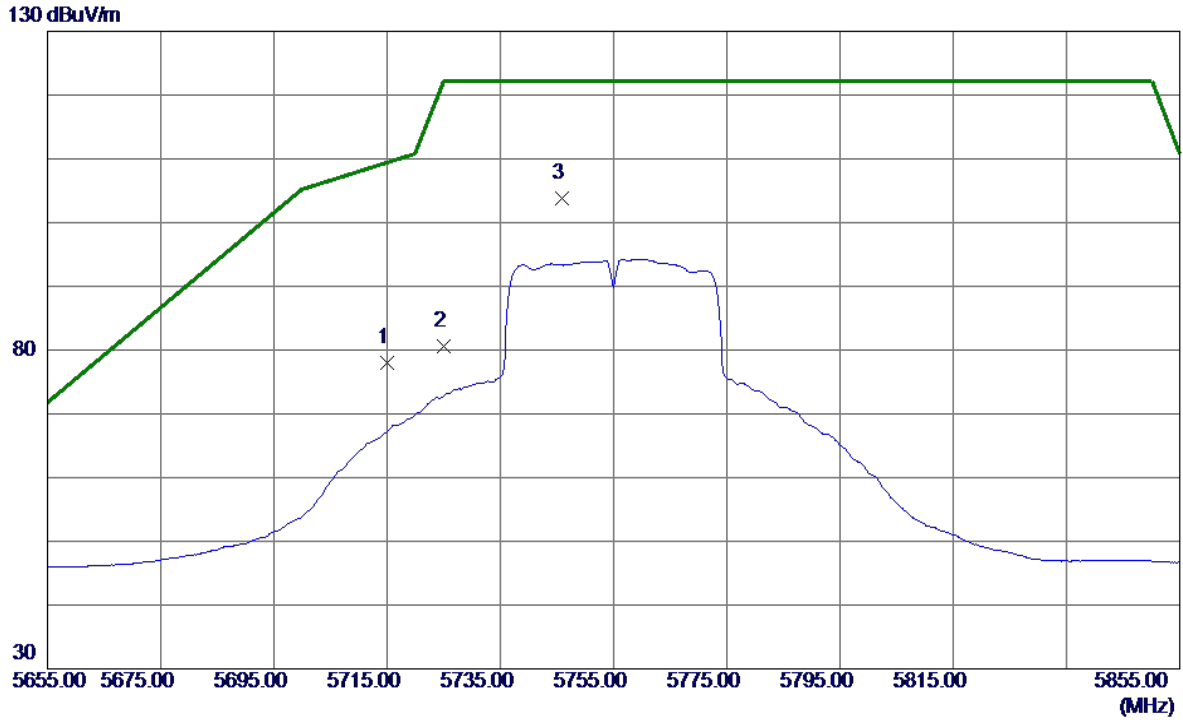

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	59.02	18.95	77.97	109.40	-31.43	Peak	
2	5725.0000	61.62	18.99	80.61	122.20	-41.59	Peak	
3 *	5745.8000	84.74	19.08	103.82	122.20	-18.38	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

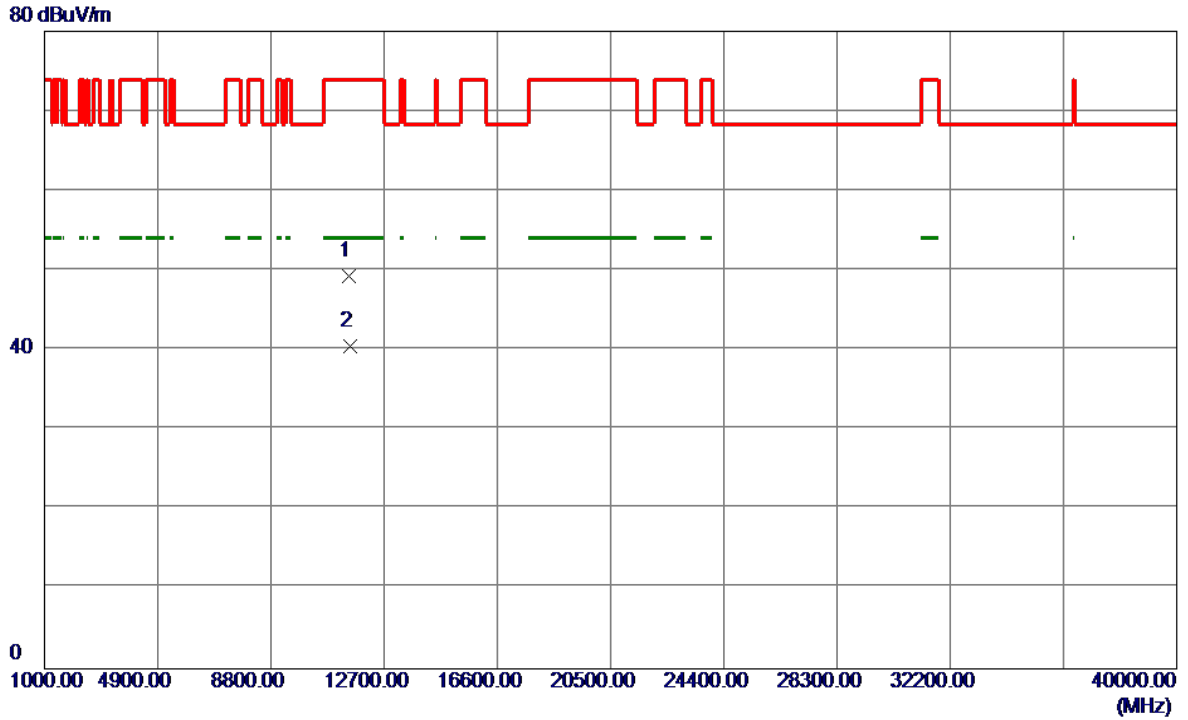

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.9000	32.12	17.20	49.32	74.00	-24.68	Peak	
2 *	11509.9000	23.29	17.25	40.54	54.00	-13.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

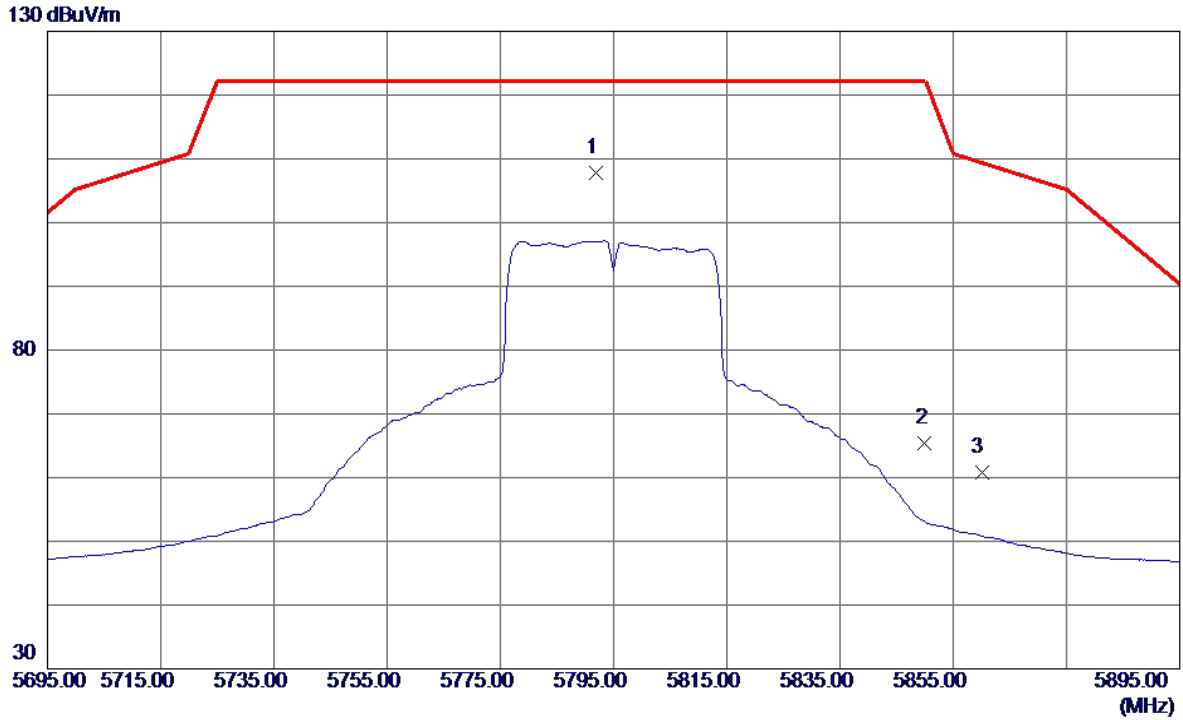

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.8000	88.44	19.29	107.73	122.20	-14.47	Peak	
2	5850.0000	45.85	19.55	65.40	122.20	-56.80	Peak	
3	5860.0000	41.22	19.59	60.81	109.40	-48.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

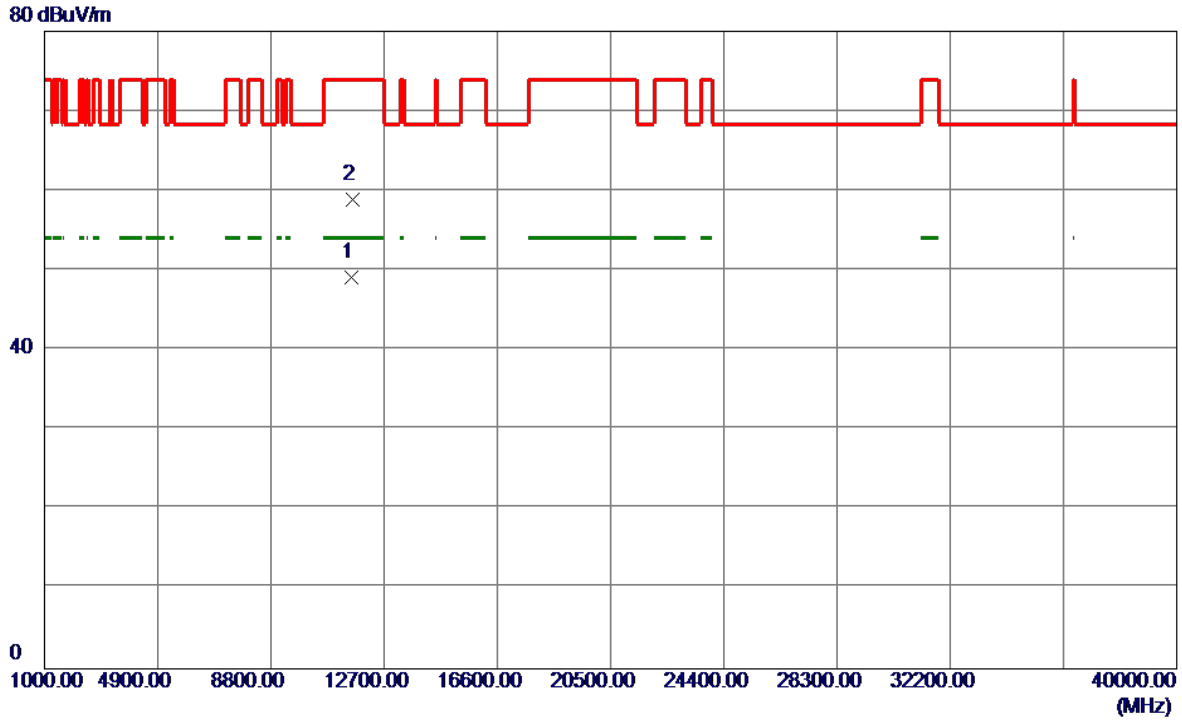

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.8000	31.80	17.37	49.17	54.00	-4.83	AVG	
2	11596.4000	41.43	17.38	58.81	74.00	-15.19	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

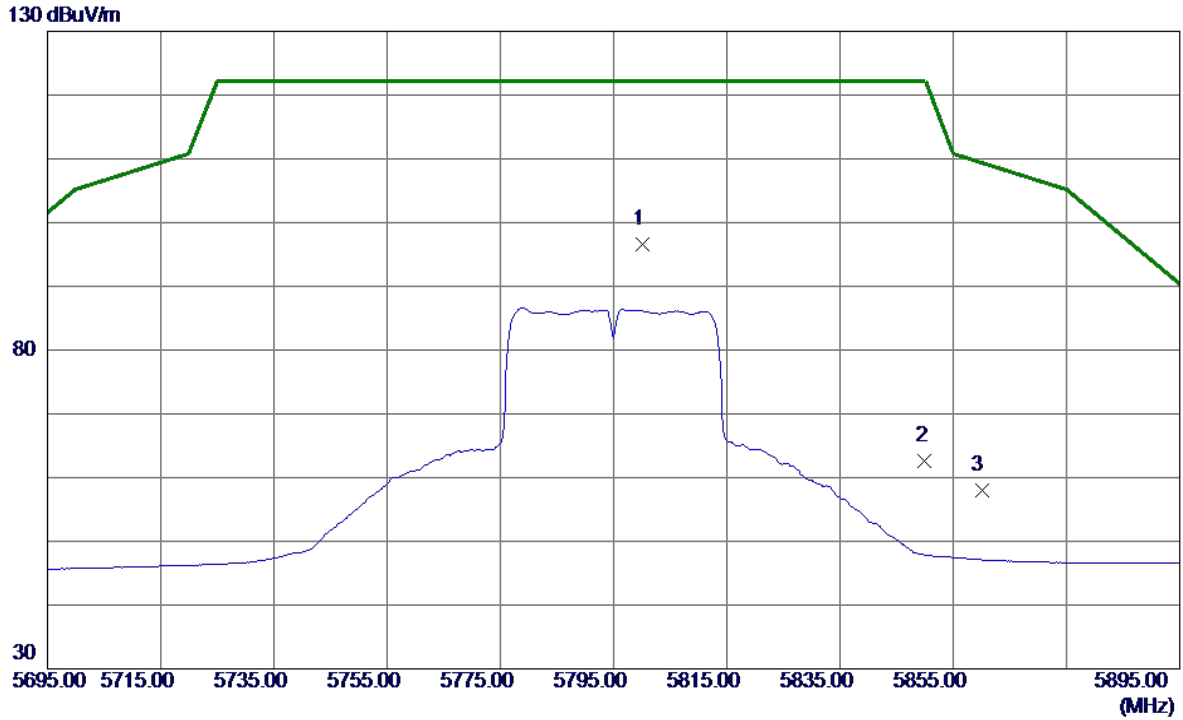

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5800.2000	77.27	19.32	96.59	122.20	-25.61	Peak	
2	5850.0000	43.07	19.55	62.62	122.20	-59.58	Peak	
3	5860.0000	38.36	19.59	57.95	109.40	-51.45	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

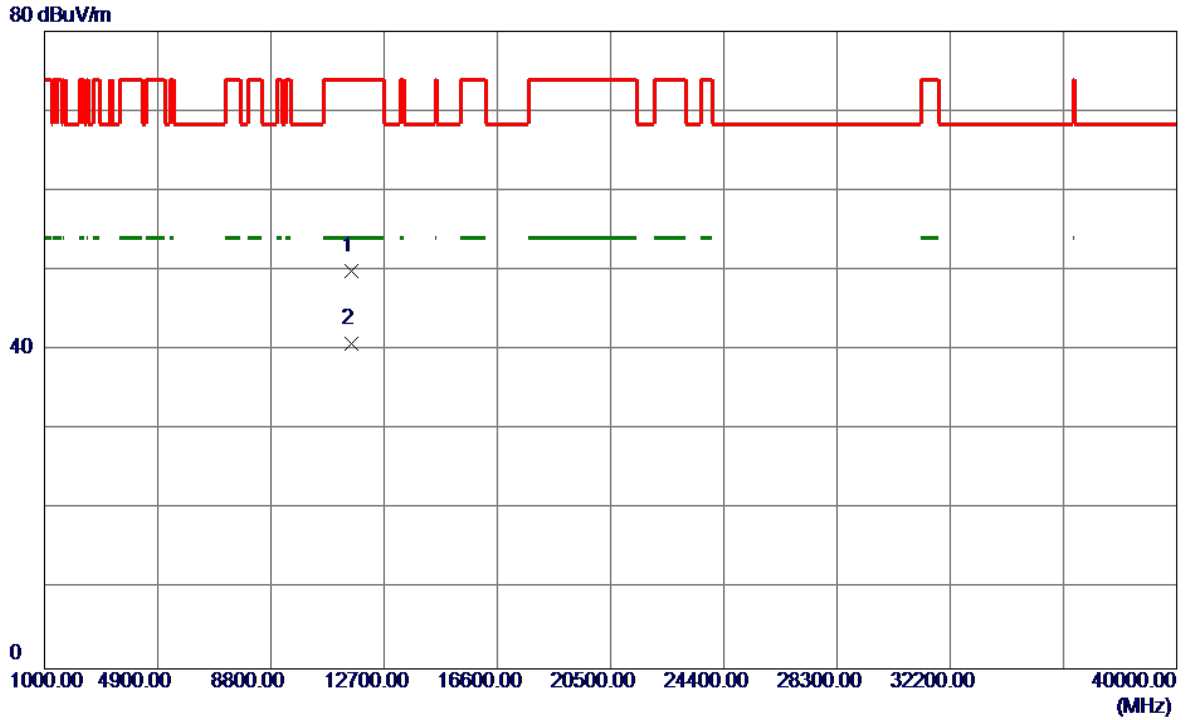

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.3000	32.58	17.37	49.95	74.00	-24.05	Peak	
2 *	11589.8000	23.42	17.37	40.79	54.00	-13.21	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

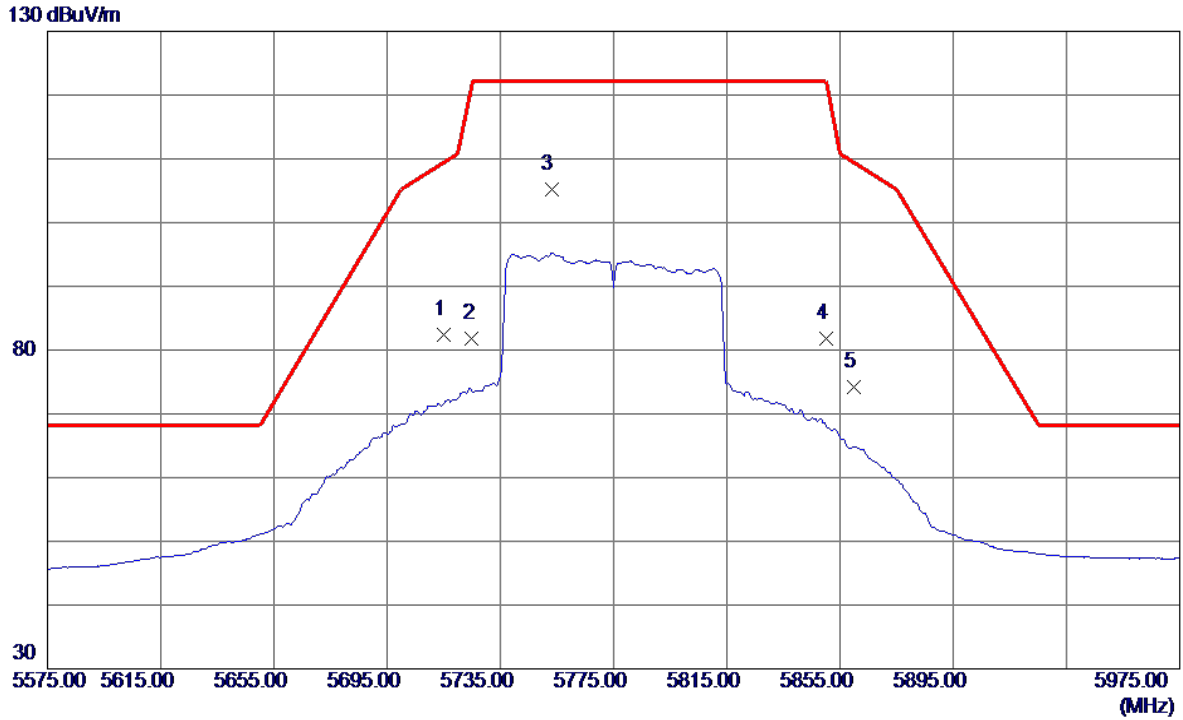

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	63.46	18.95	82.41	109.40	-26.99	Peak	
2	5725.0000	62.84	18.99	81.83	122.20	-40.37	Peak	
3 *	5753.0000	86.08	19.12	105.20	122.20	-17.00	Peak	
4	5850.0000	62.18	19.55	81.73	122.20	-40.47	Peak	
5	5860.0000	54.58	19.59	74.17	109.40	-35.23	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

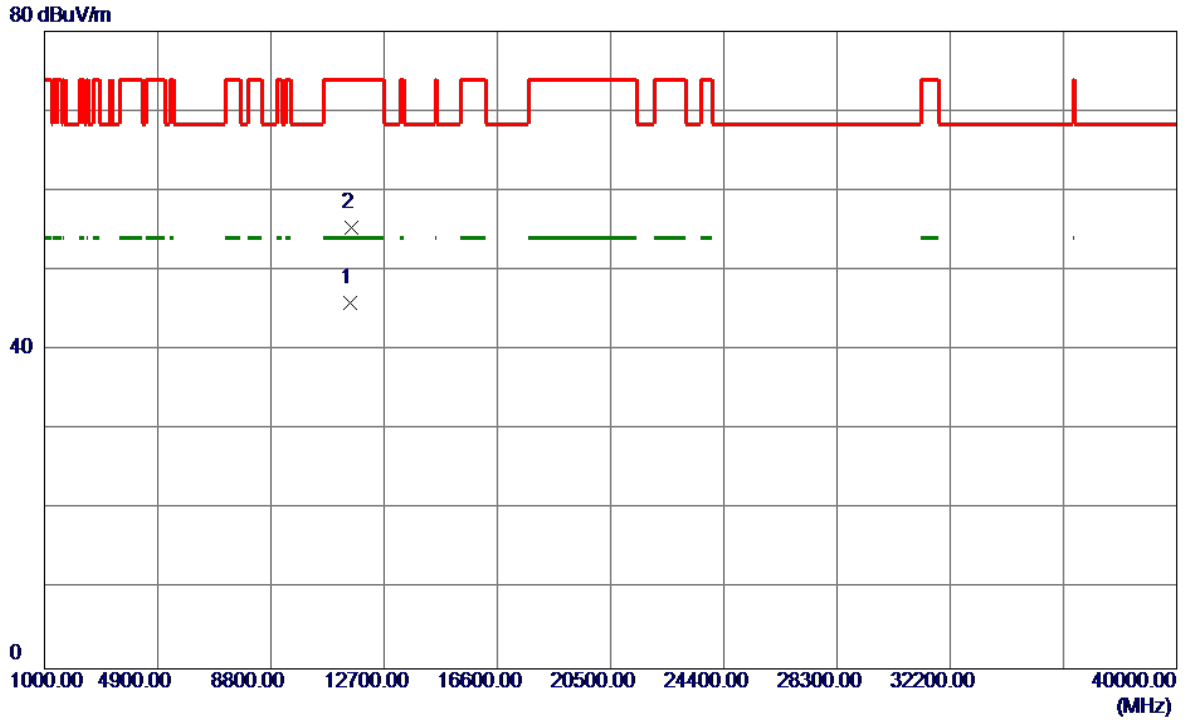

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11549.8000	28.53	17.31	45.84	54.00	-8.16	AVG	
2	11554.4000	38.07	17.32	55.39	74.00	-18.61	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

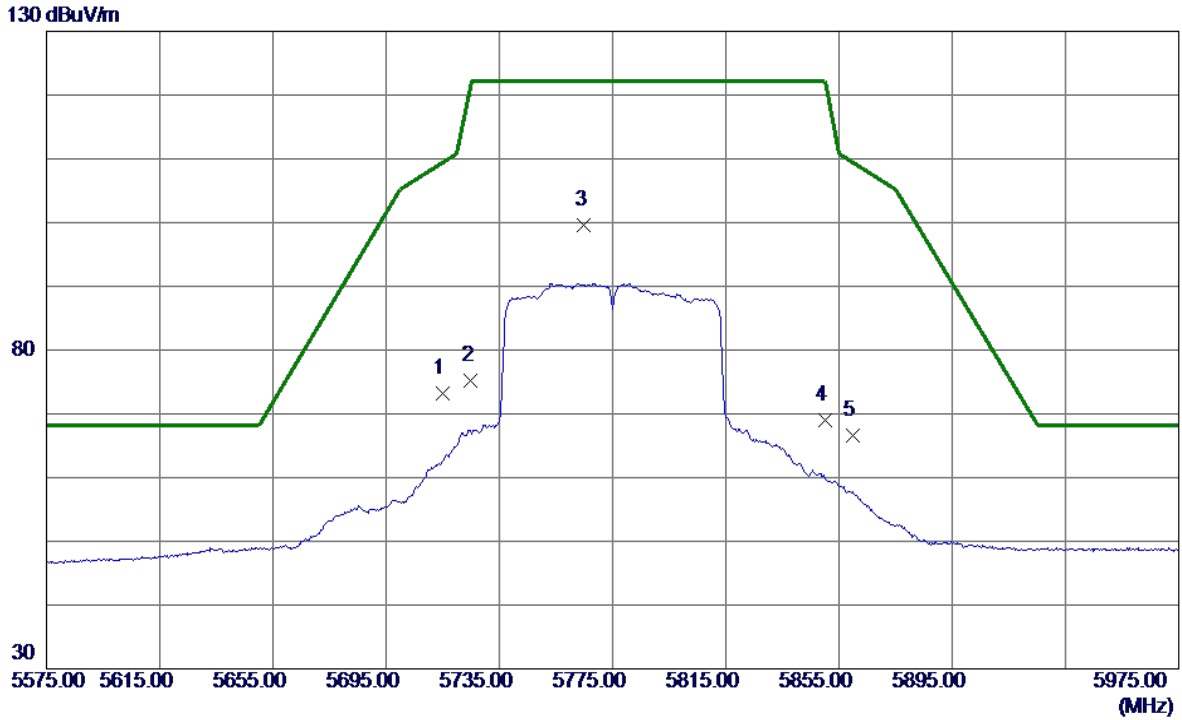

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	54.17	18.95	73.12	109.40	-36.28	Peak	
2	5725.0000	56.20	18.99	75.19	122.20	-47.01	Peak	
3 *	5765.0000	80.44	19.17	99.61	122.20	-22.59	Peak	
4	5850.0000	49.44	19.55	68.99	122.20	-53.21	Peak	
5	5860.0000	46.92	19.59	66.51	109.40	-42.89	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

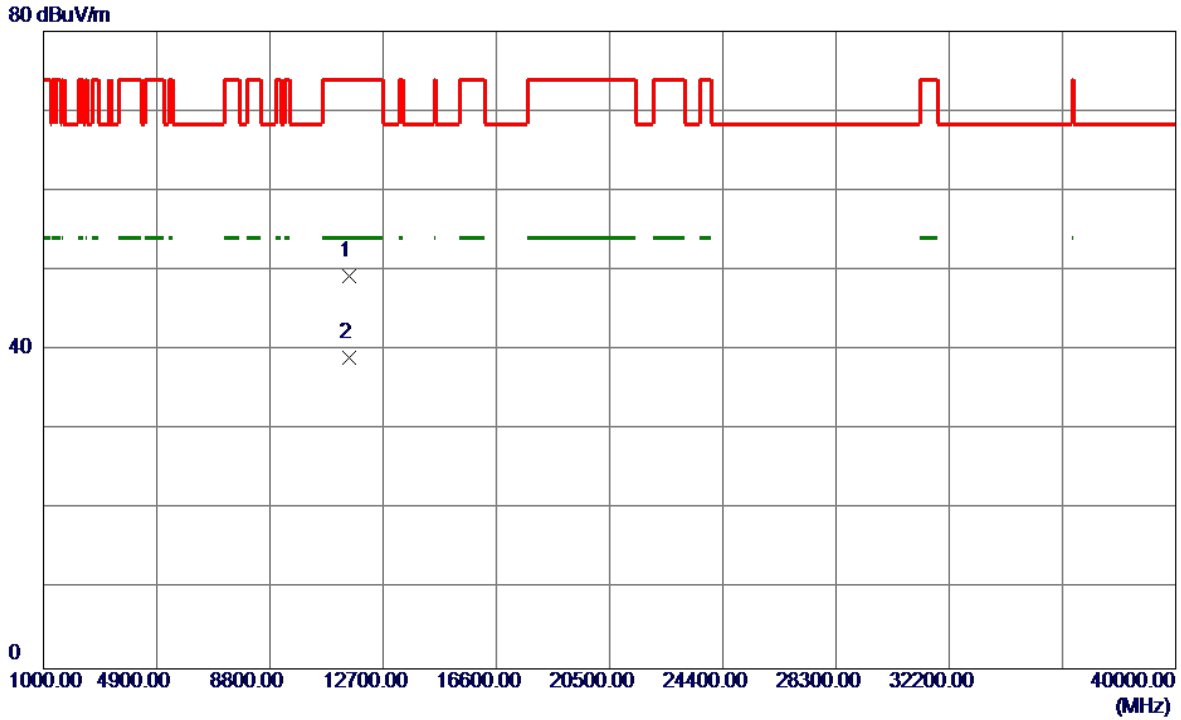

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11522.2000	32.04	17.27	49.31	74.00	-24.69	Peak	
2 *	11549.7000	21.77	17.31	39.08	54.00	-14.92	AVG	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

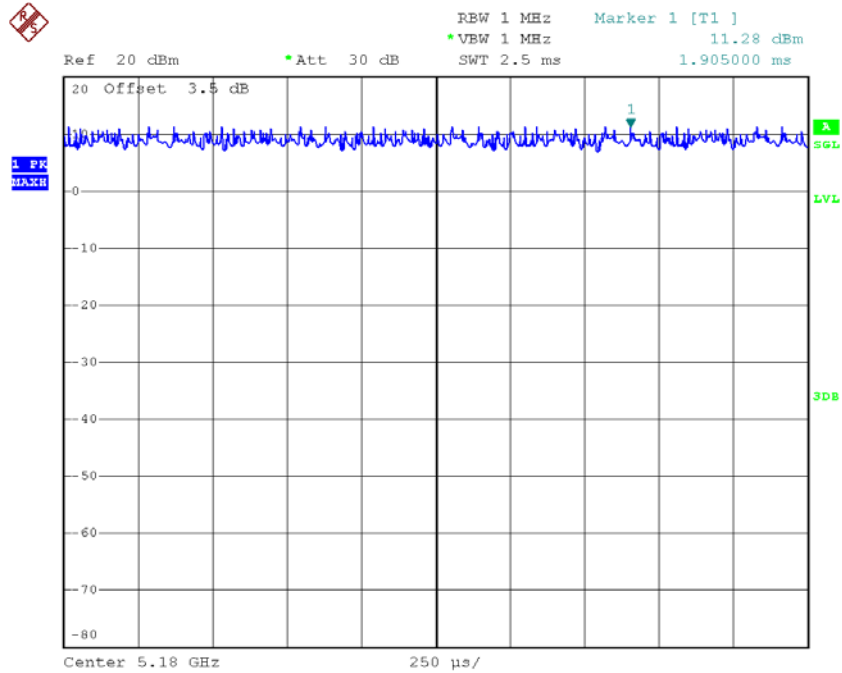

Date: 6.FEB.2018 15:51:50

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.00

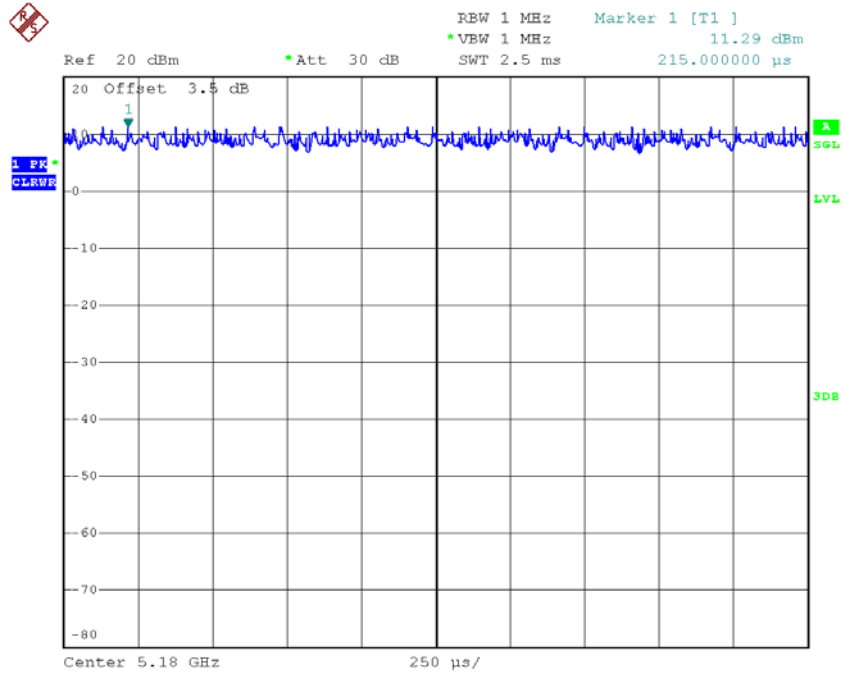

Date: 6.FEB.2018 15:51:57

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.00

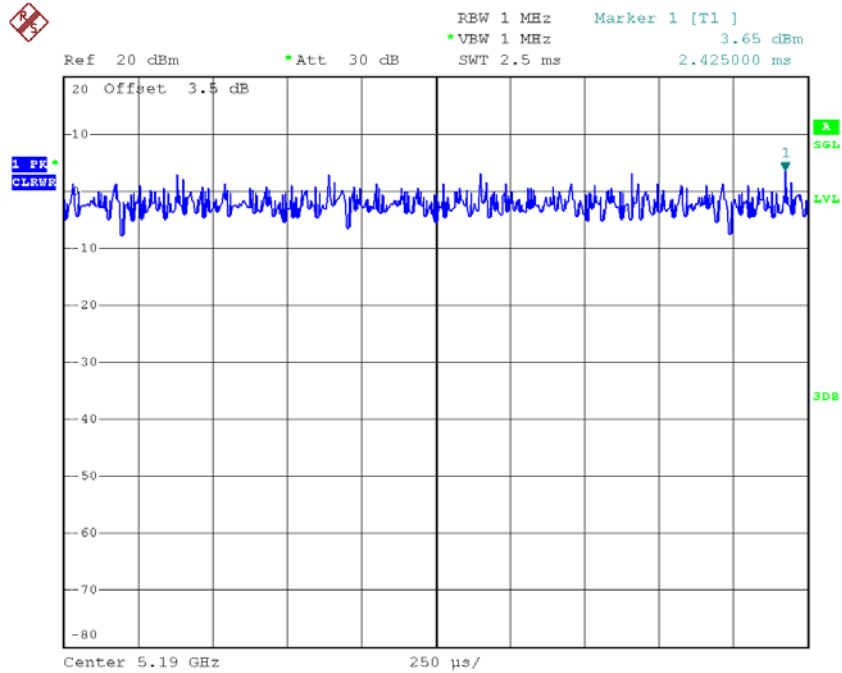

Date: 6.FEB.2018 15:52:39

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.00

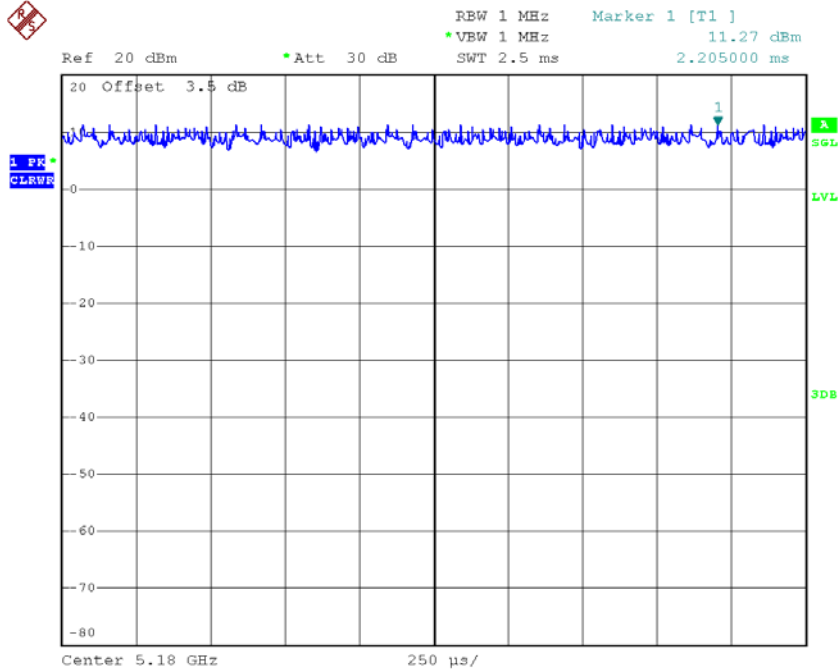

Date: 6.FEB.2018 15:52:03

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

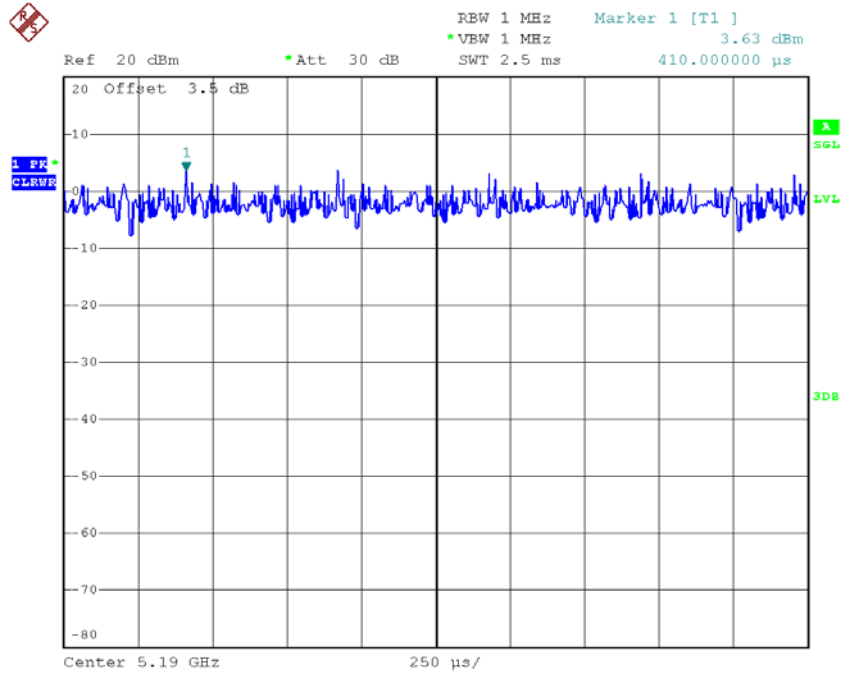

Date: 6.FEB.2018 15:52:45

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

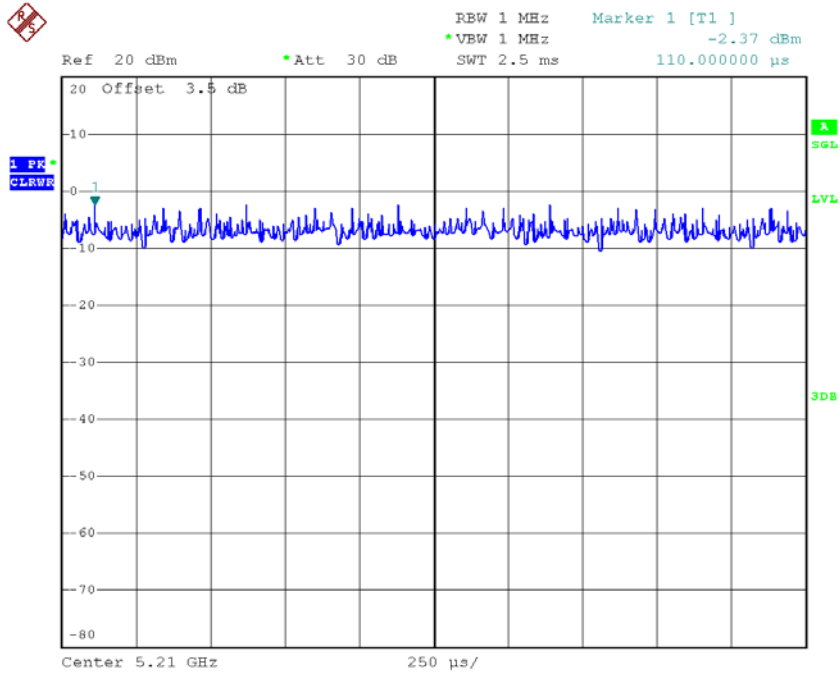


Date: 6.FEB.2018 15:53:22

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

ANT 2

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

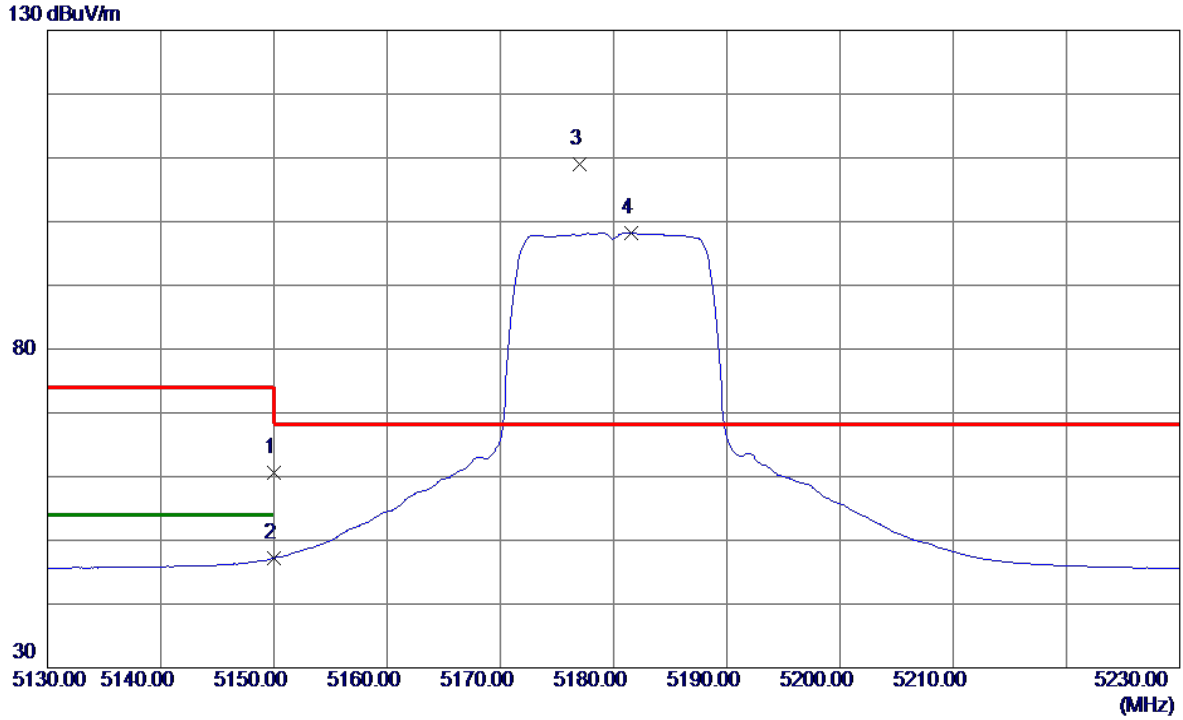

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.78	16.76	60.54	74.00	-13.46	Peak	
2	5150.0000	30.46	16.76	47.22	54.00	-6.78	AVG	
3 *	5177.0000	92.08	16.85	108.93	68.30	40.63	Peak	No Limit
4	5181.6000	81.36	16.87	98.23	999.00	-900.77	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

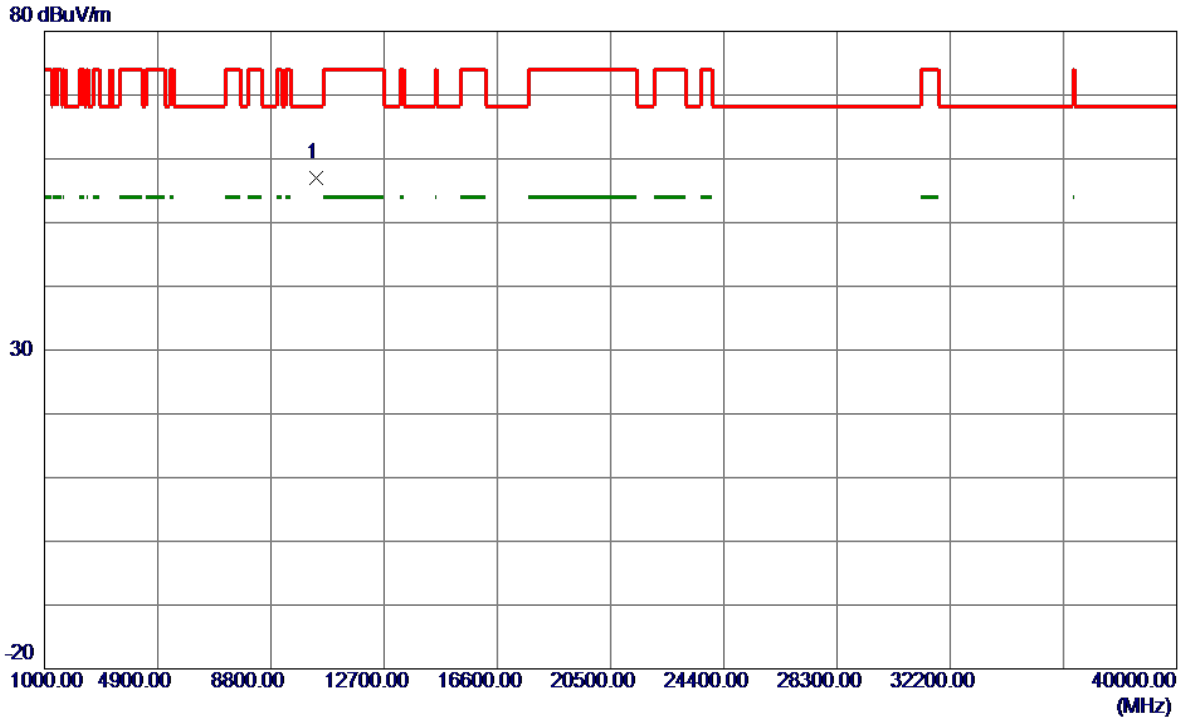


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10362.6000	42.50	14.58	57.08	68.30	-11.22	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal


130 dBuV/m

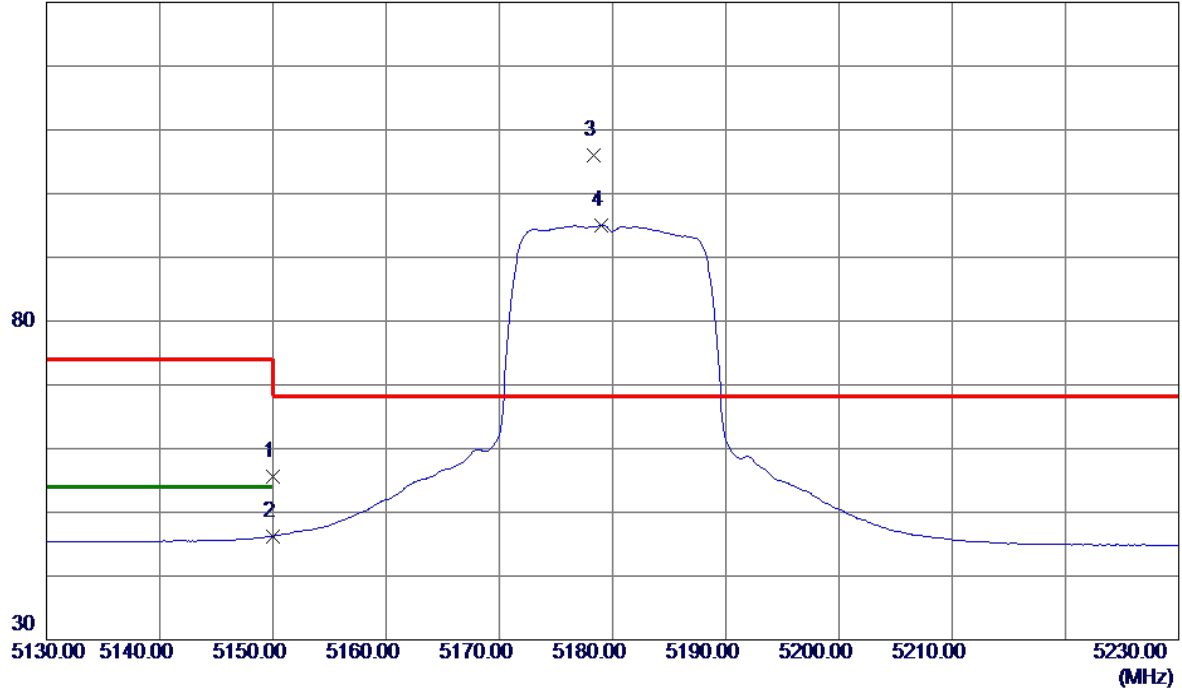

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.88	16.76	55.64	74.00	-18.36	Peak	
2	5150.0000	29.52	16.76	46.28	54.00	-7.72	AVG	
3 *	5178.3000	89.04	16.86	105.90	68.30	37.60	Peak	No Limit
4	5179.0000	78.17	16.86	95.03	999.00	-903.97	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

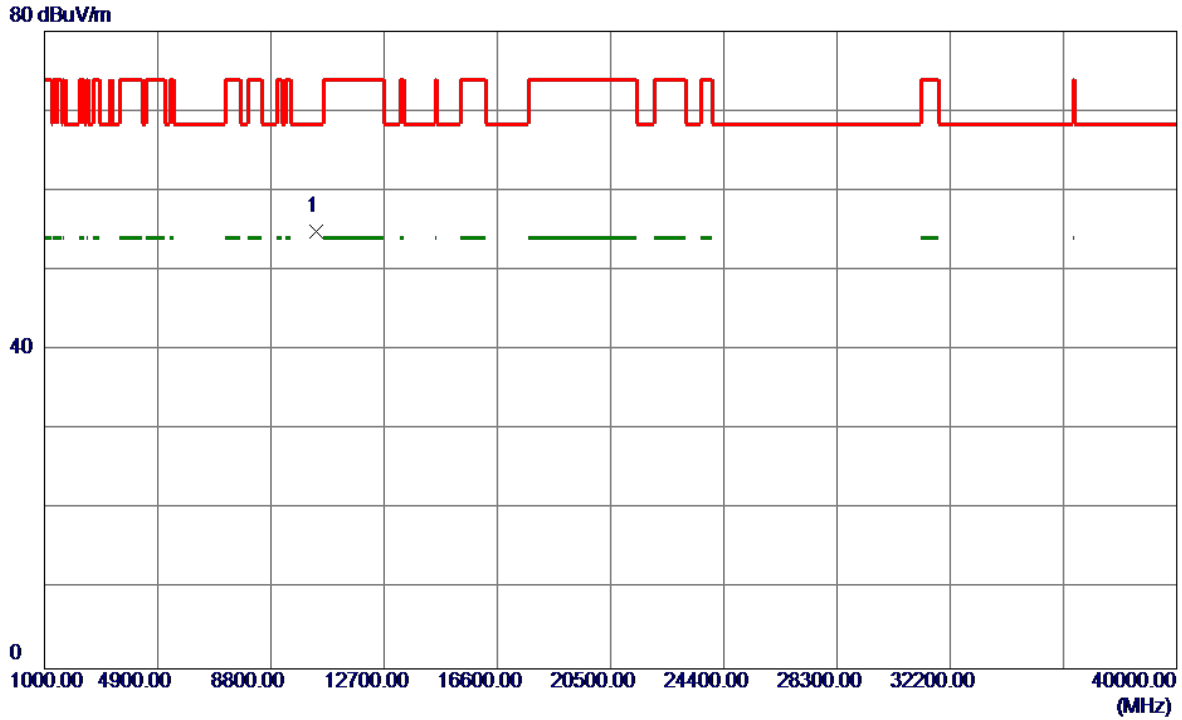

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10361.5500	40.28	14.58	54.86	68.30	-13.44	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

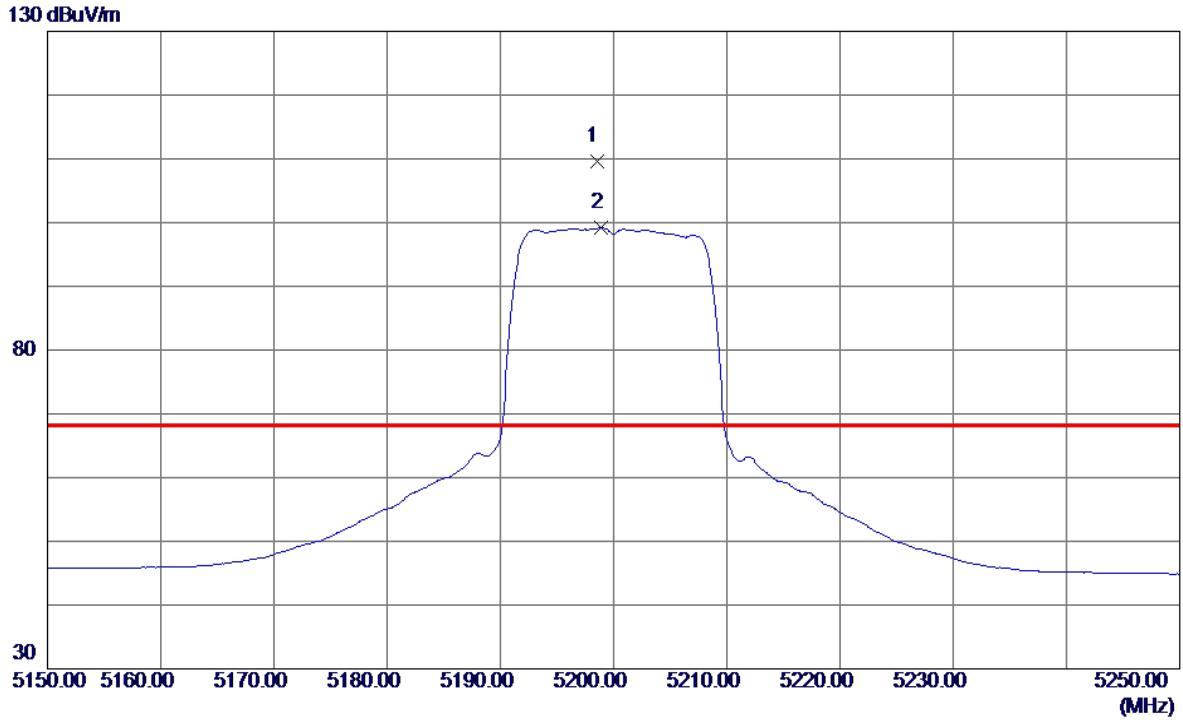

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5198.5000	92.66	16.93	109.59	68.30	41.29	Peak	No Limit
2	5198.9000	82.26	16.93	99.19	999.00	-899.81	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

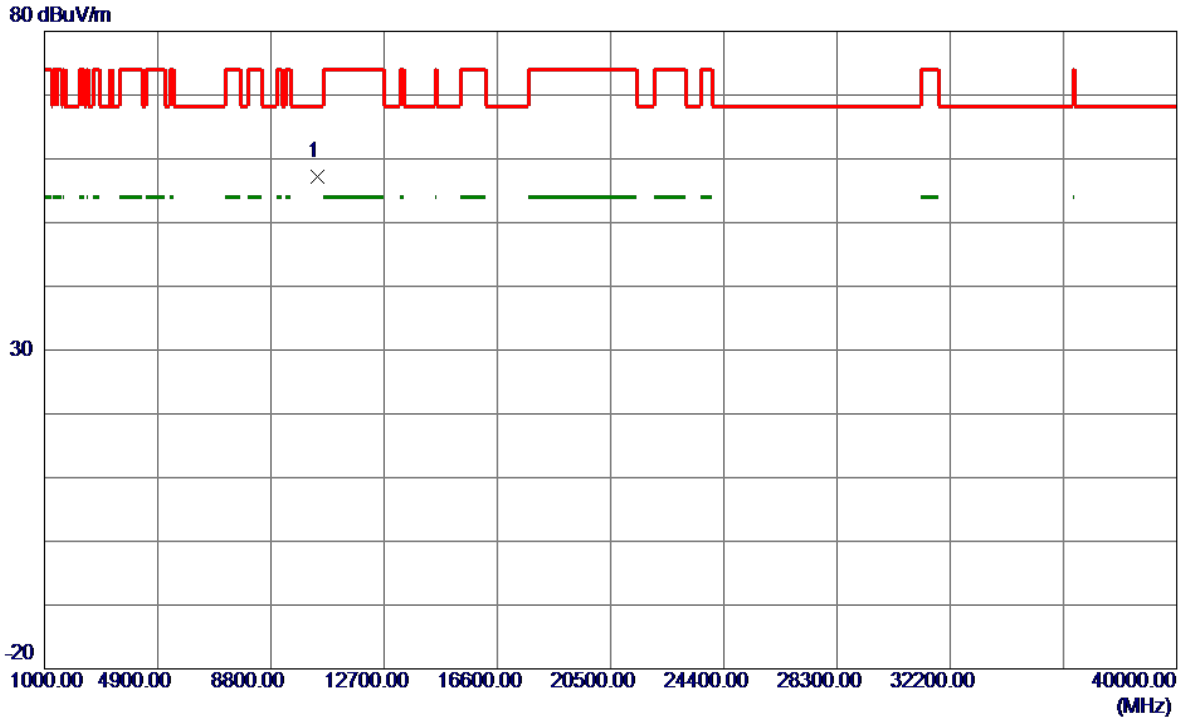

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10401.1000	42.63	14.64	57.27	68.30	-11.03	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Horizontal

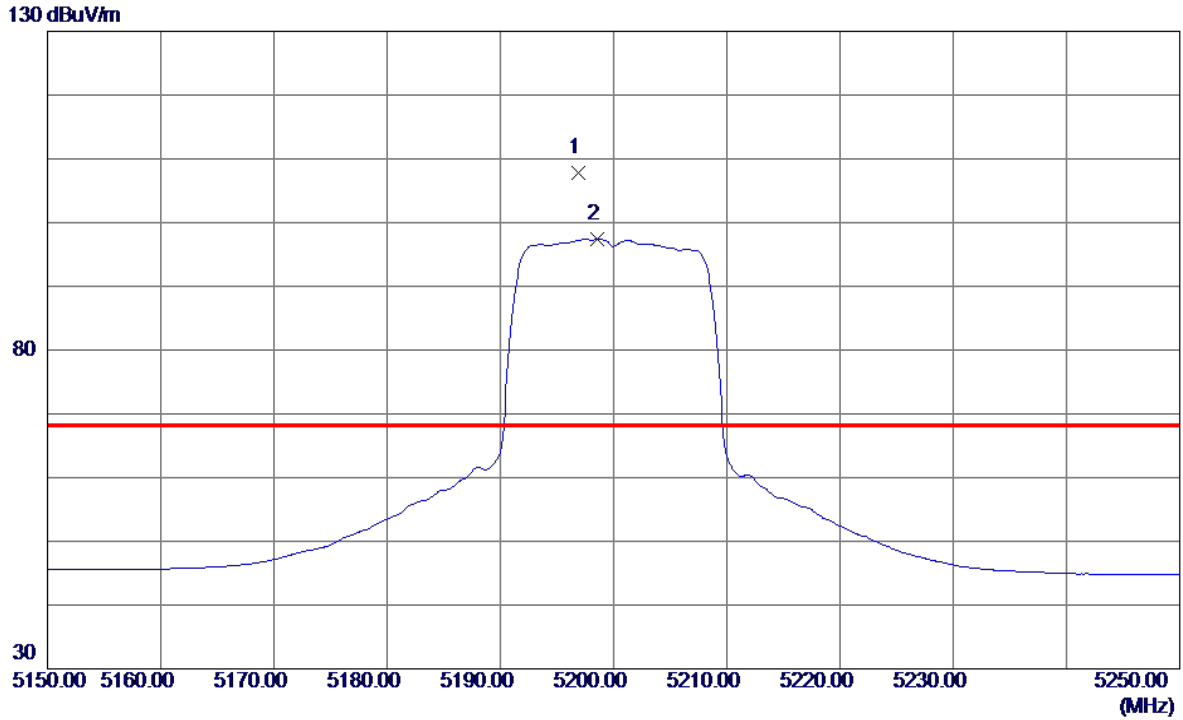

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5196.9000	90.85	16.92	107.77	68.30	39.47	Peak	No Limit
2	5198.6000	80.42	16.93	97.35	999.00	-901.65	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Horizontal

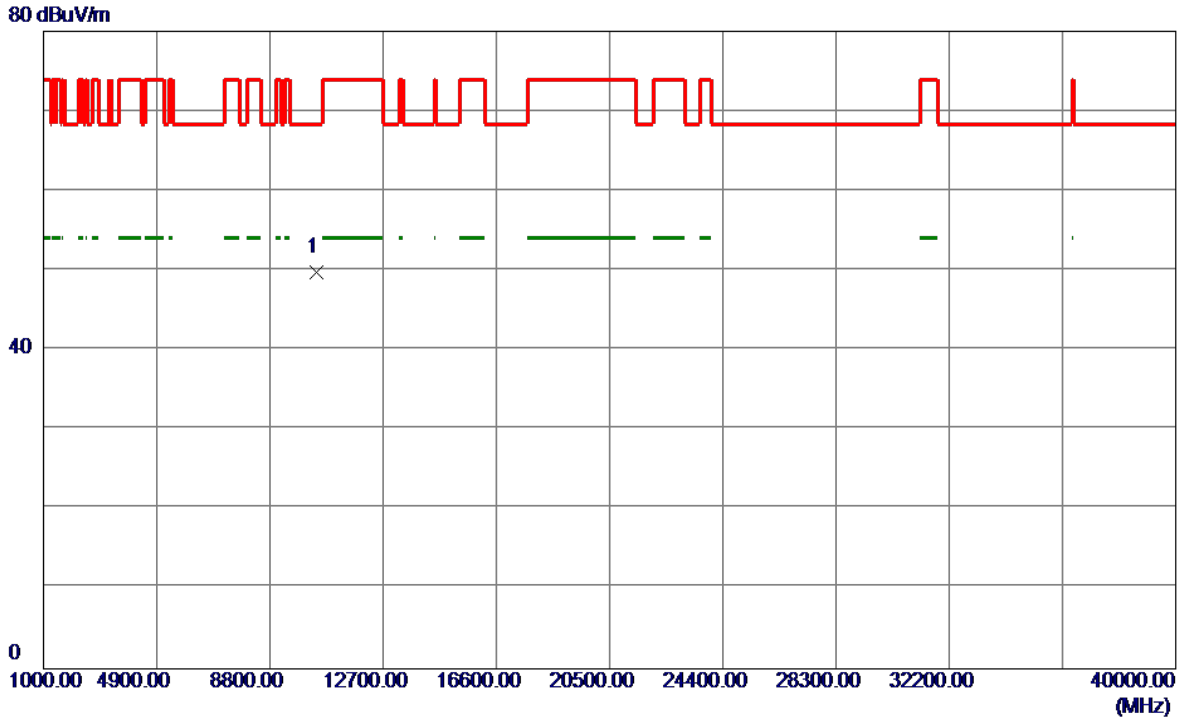

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10396.2699	35.11	14.63	49.74	68.30	-18.56	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

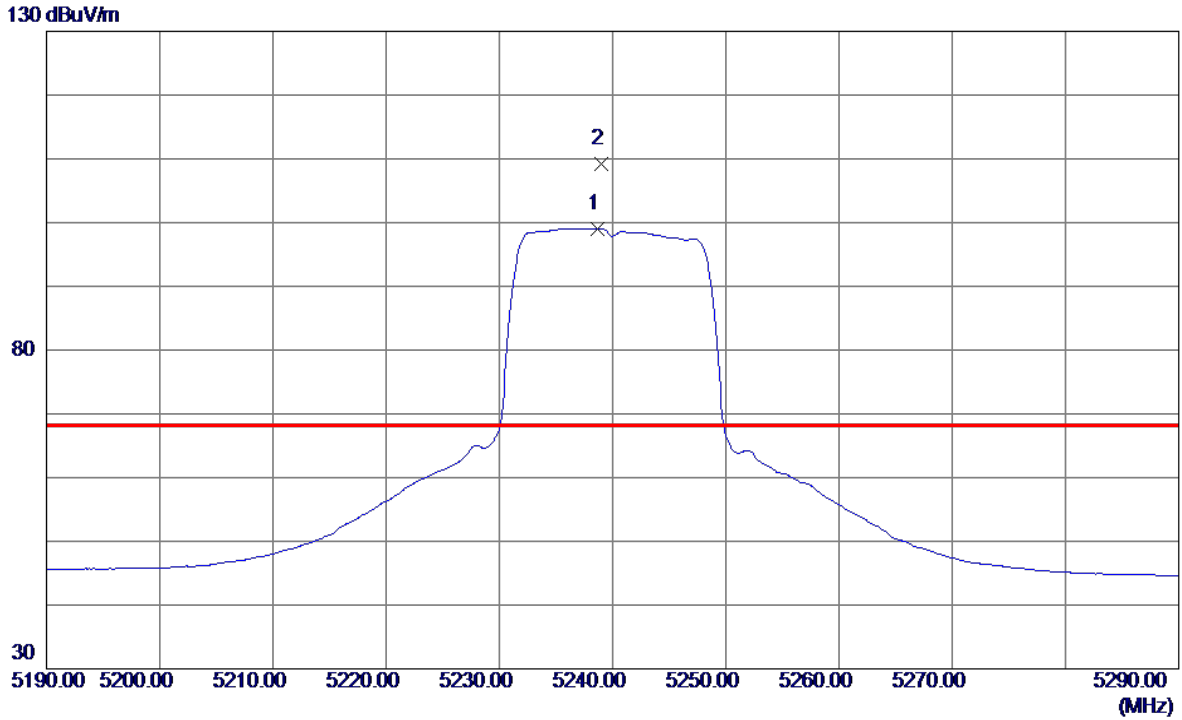

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5238.7000	81.98	17.07	99.05	999.00	-899.95	AVG	No Limit
2 *	5239.0000	92.18	17.07	109.25	68.30	40.95	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

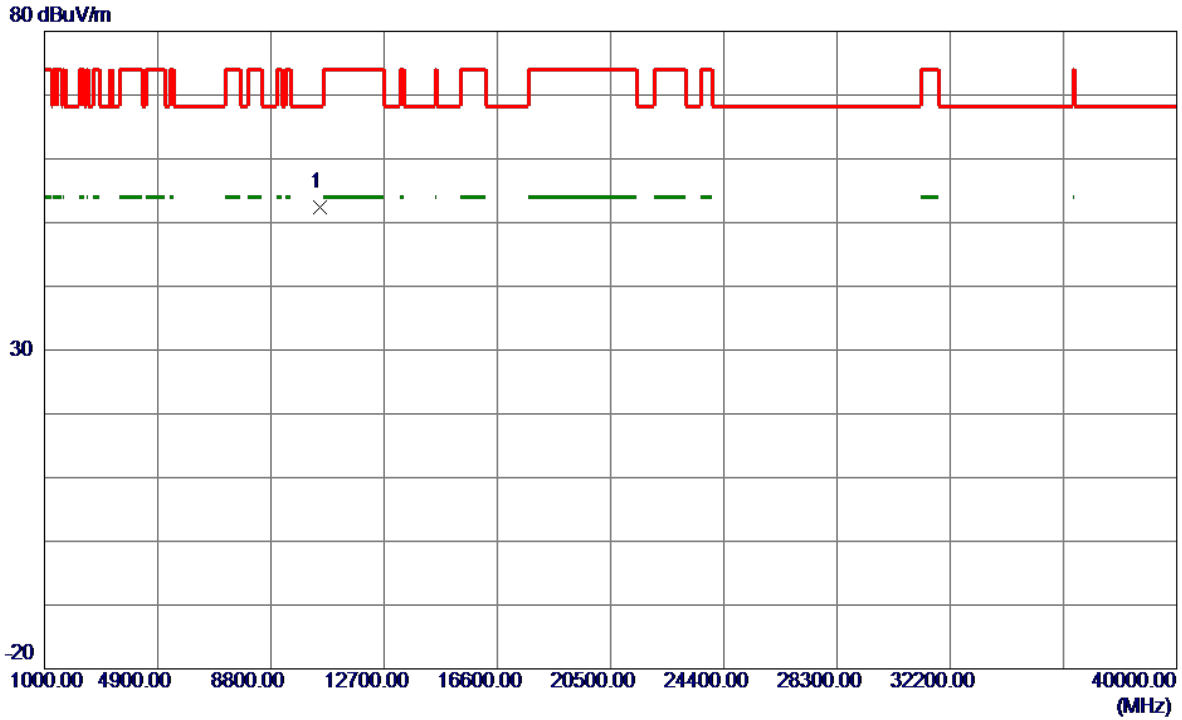

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10476.8000	37.71	14.75	52.46	68.30	-15.84	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

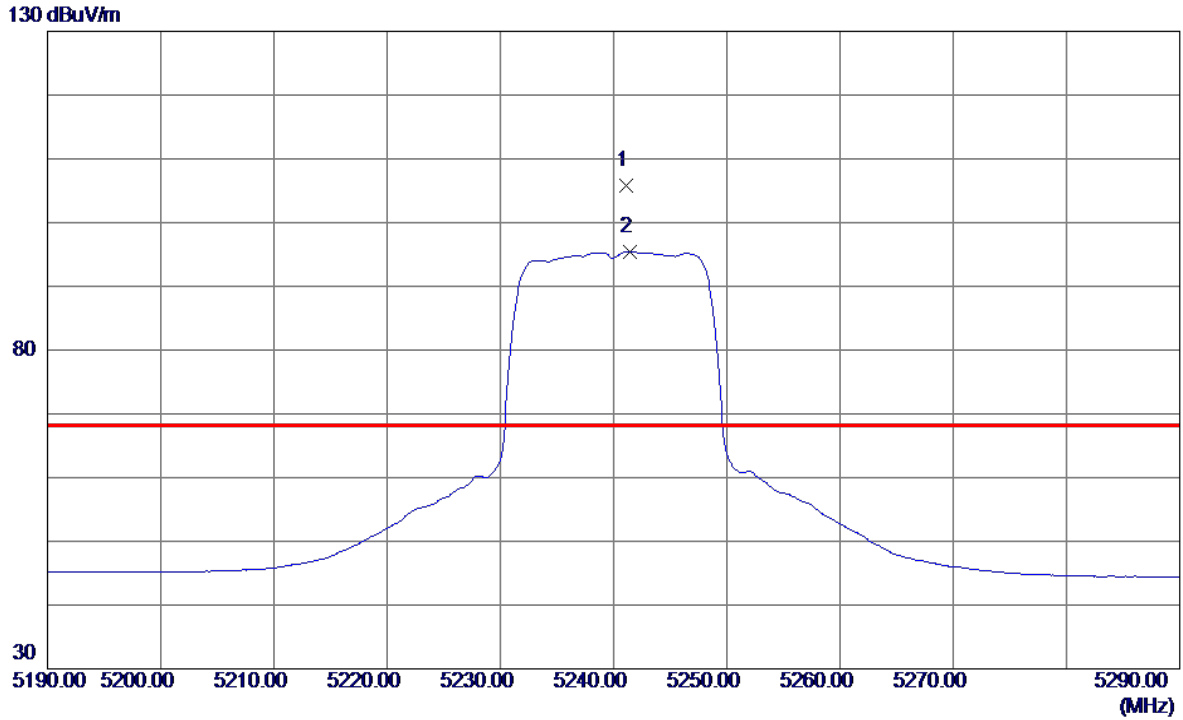

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5241.1000	88.65	17.08	105.73	68.30	37.43	Peak	No Limit
2	5241.4000	78.39	17.08	95.47	999.00	-903.53	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

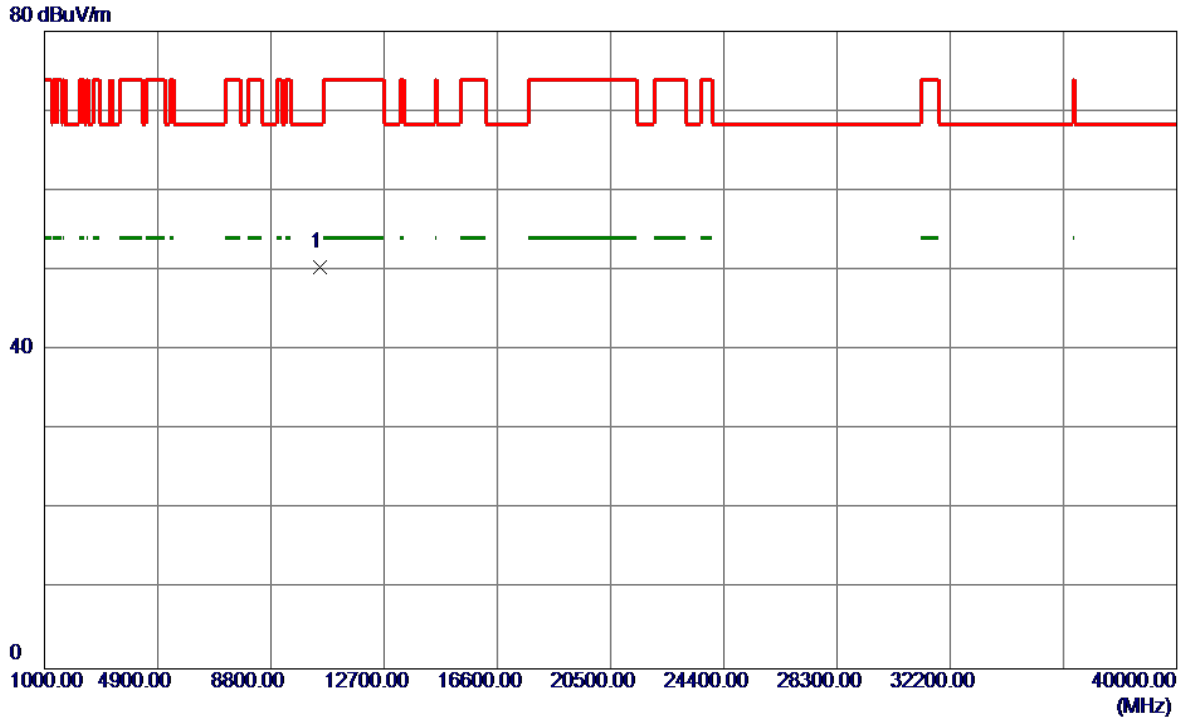


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10484.7200	35.60	14.76	50.36	68.30	-17.94	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical


130 dBuV/m

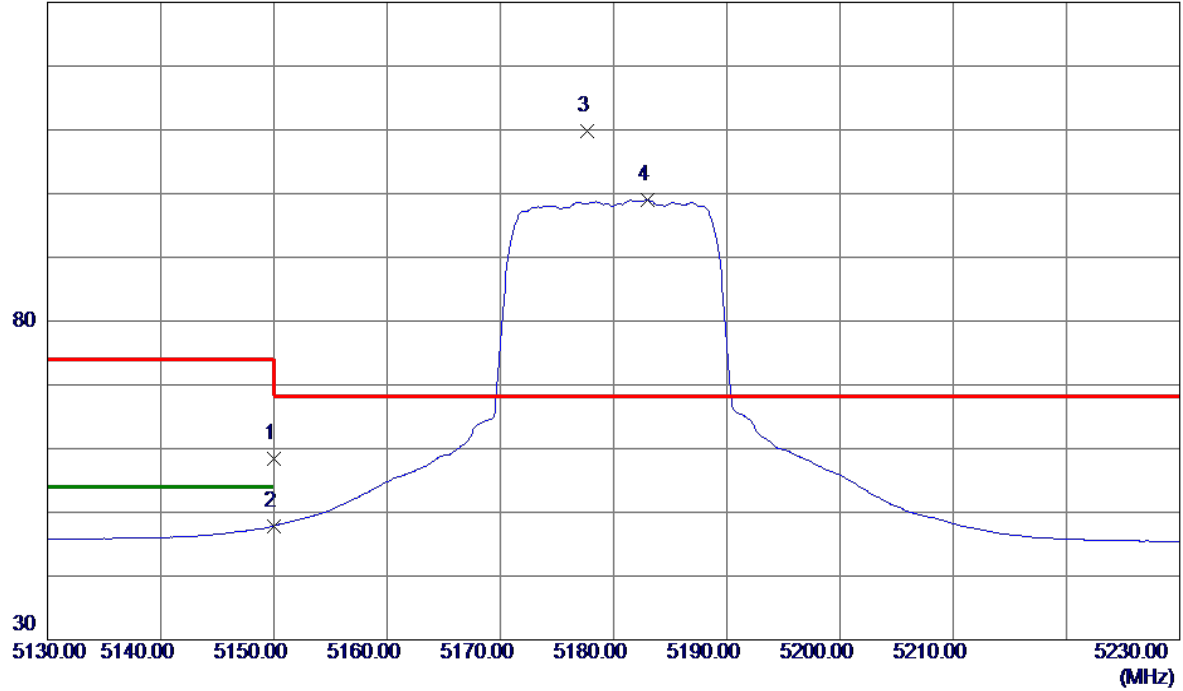

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	41.60	16.76	58.36	74.00	-15.64	Peak	
2	5150.0000	31.12	16.76	47.88	54.00	-6.12	AVG	
3 *	5177.7000	92.98	16.86	109.84	68.30	41.54	Peak	No Limit
4	5183.0000	82.04	16.88	98.92	999.00	-900.08	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

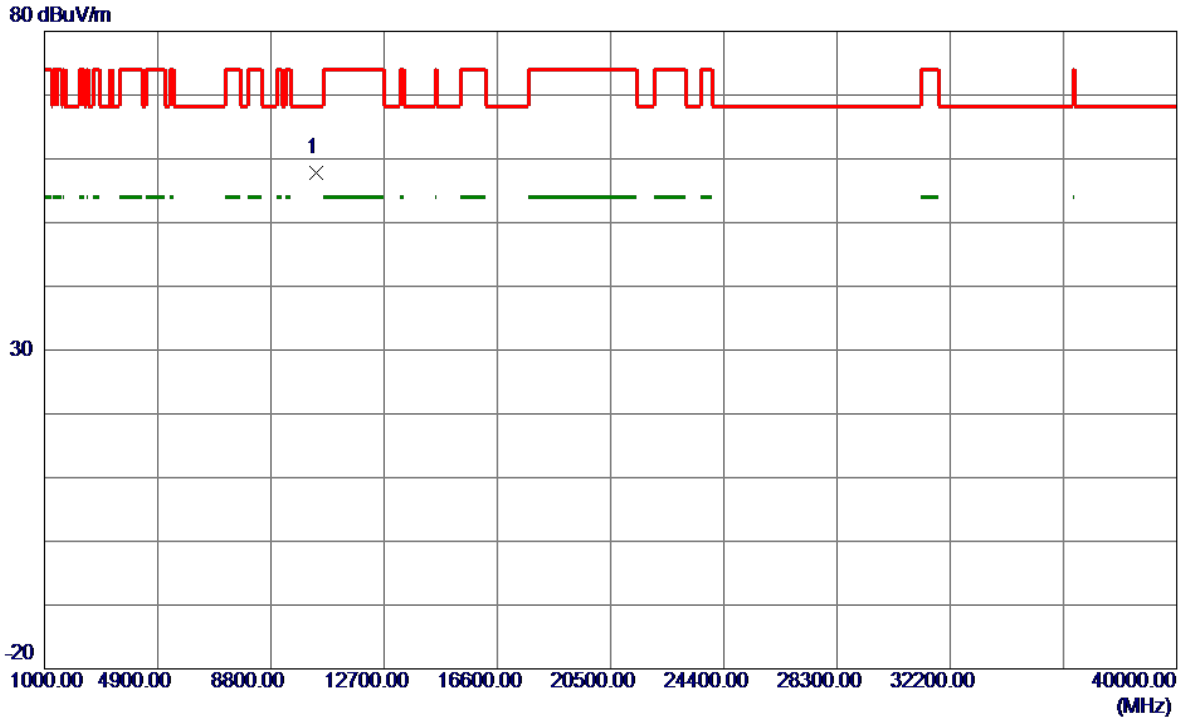

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10355.2500	43.18	14.57	57.75	68.30	-10.55	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

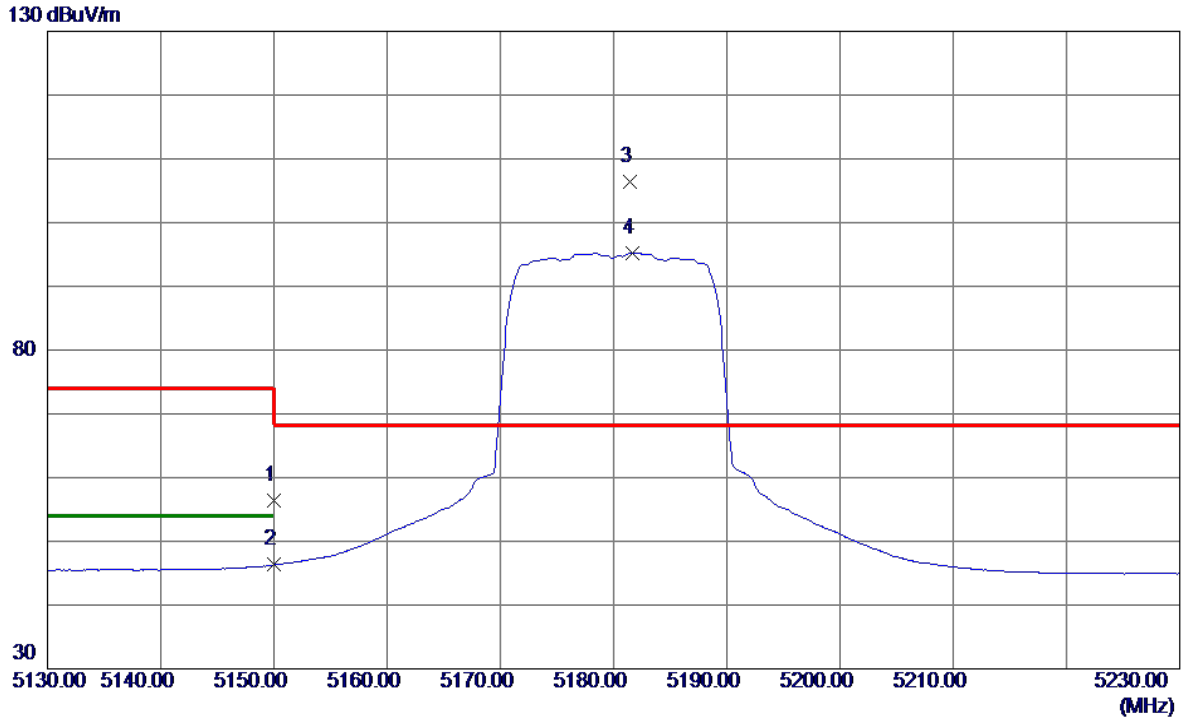

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.61	16.76	56.37	74.00	-17.63	Peak	
2	5150.0000	29.56	16.76	46.32	54.00	-7.68	AVG	
3 *	5181.4000	89.45	16.87	106.32	68.30	38.02	Peak	No Limit
4	5181.7000	78.30	16.87	95.17	999.00	-903.83	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

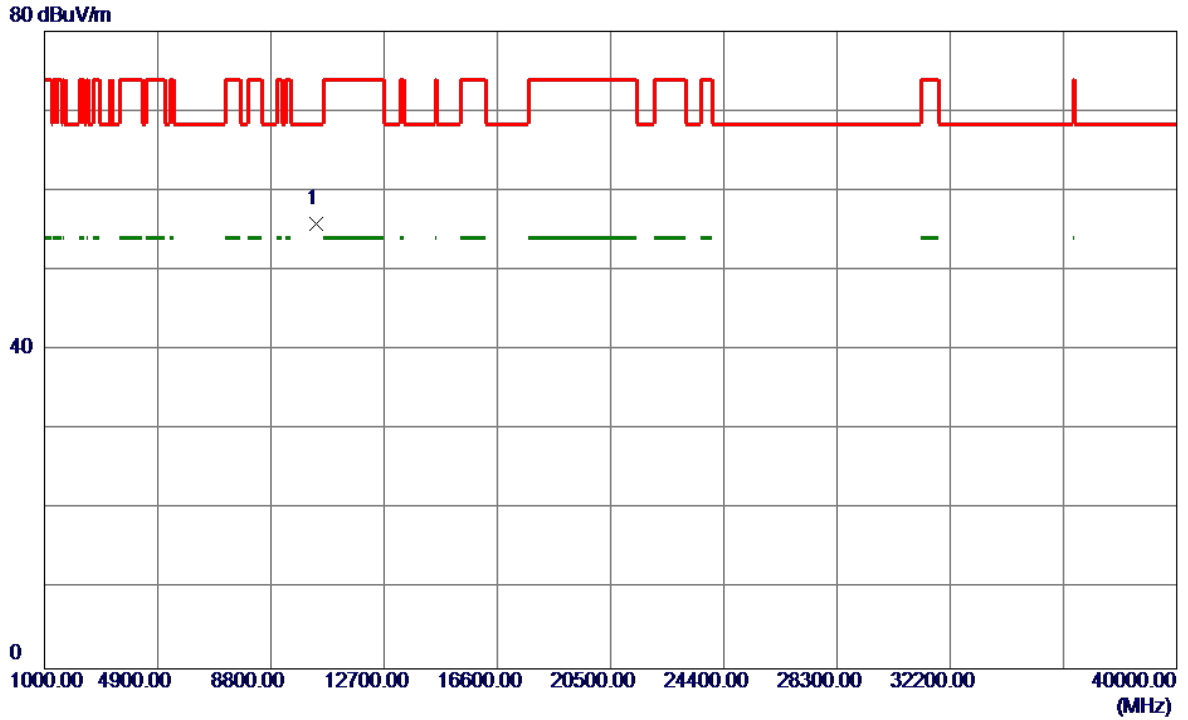


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.5300	41.31	14.58	55.89	68.30	-12.41	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Vertical


130 dBuV/m

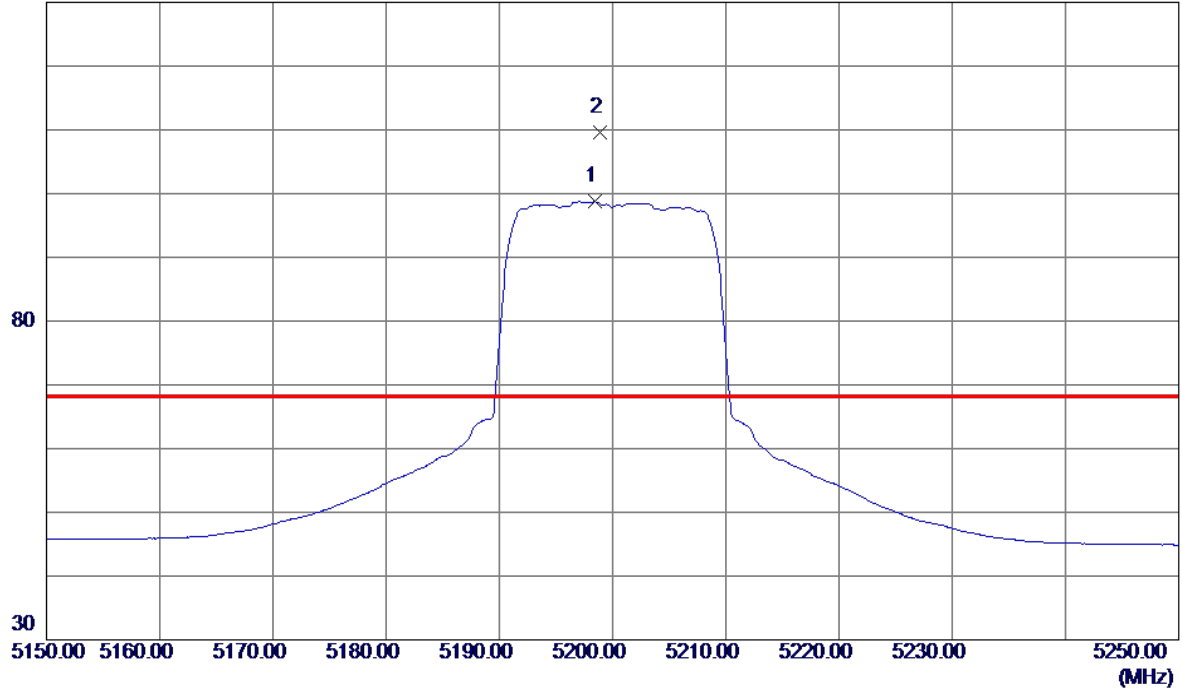

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5198.4000	81.81	16.93	98.74	999.00	-900.26	AVG	No Limit
2 *	5198.9000	92.62	16.93	109.55	68.30	41.25	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

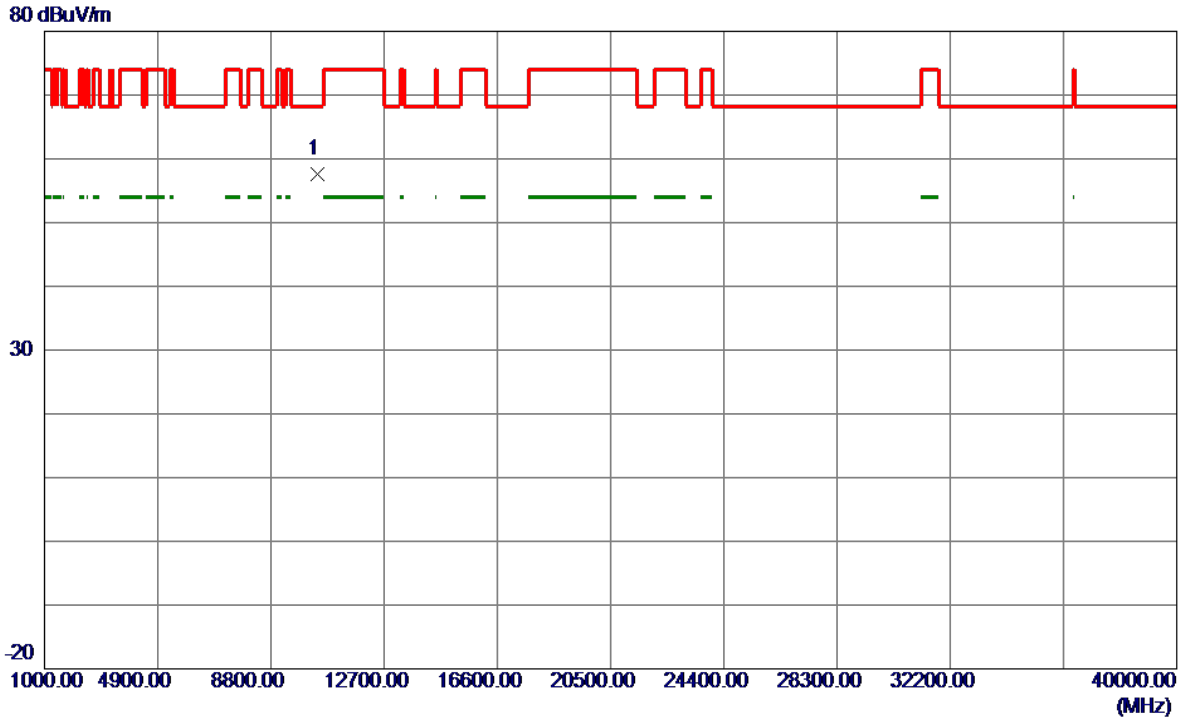

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.3000	43.01	14.64	57.65	68.30	-10.65	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

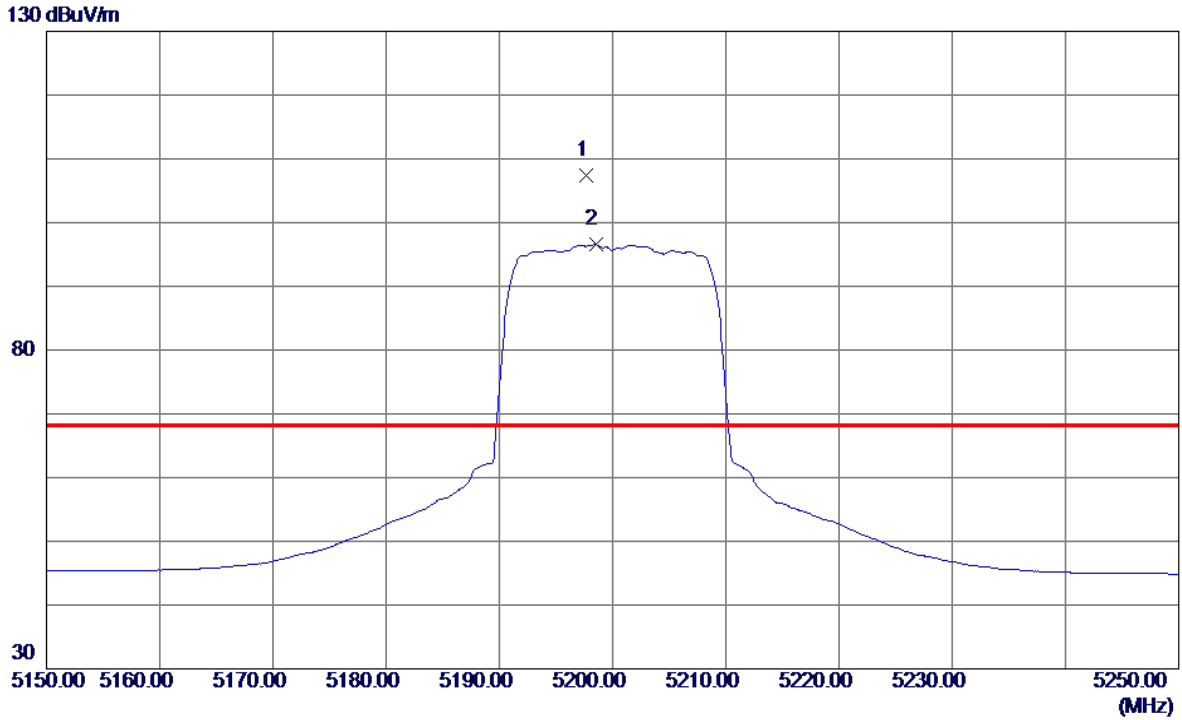

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5197.7000	90.47	16.93	107.40	68.30	39.10	Peak	No Limit
2	5198.5000	79.63	16.93	96.56	999.00	-902.44	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Horizontal

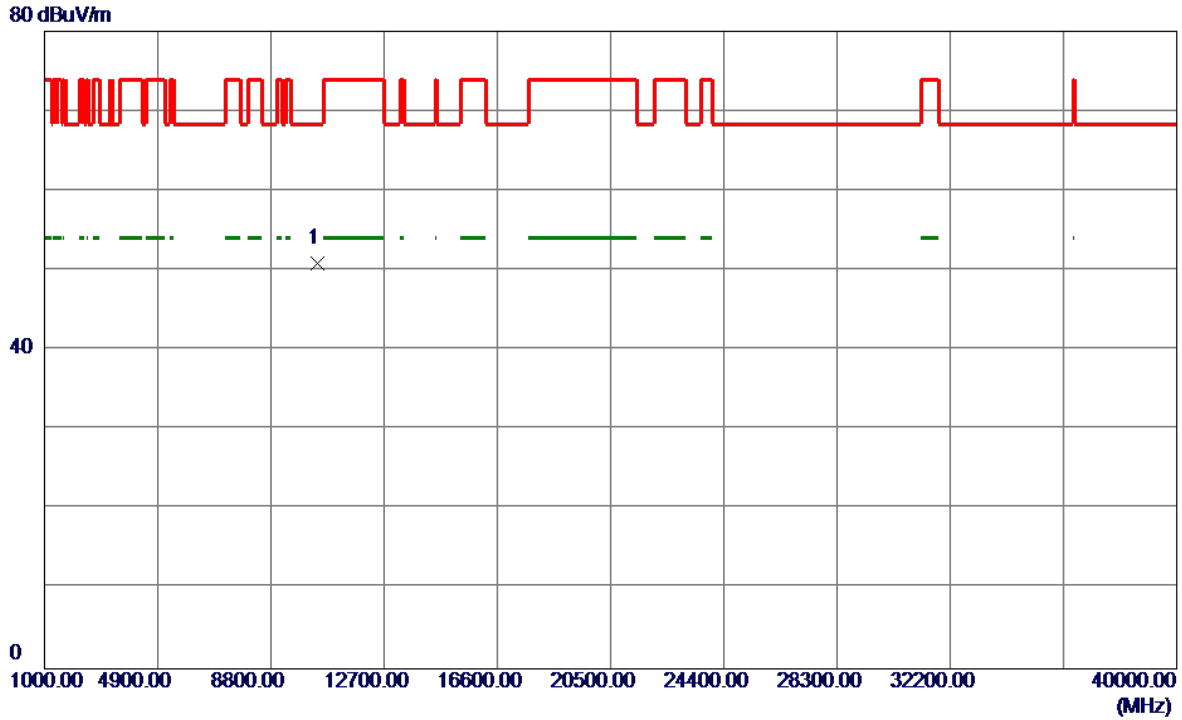


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10402.6700	36.20	14.64	50.84	68.30	-17.46	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical


130 dBuV/m

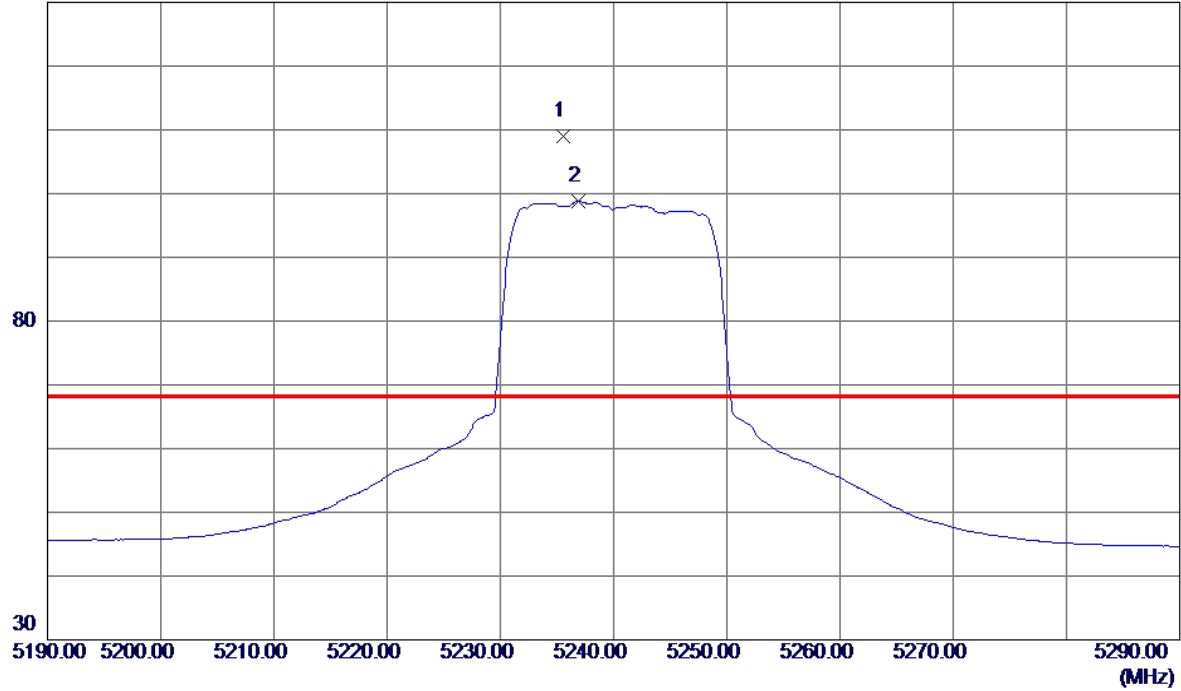

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5235.6000	91.88	17.06	108.94	68.30	40.64	Peak	No Limit
2	5236.9000	81.71	17.07	98.78	999.00	-900.22	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

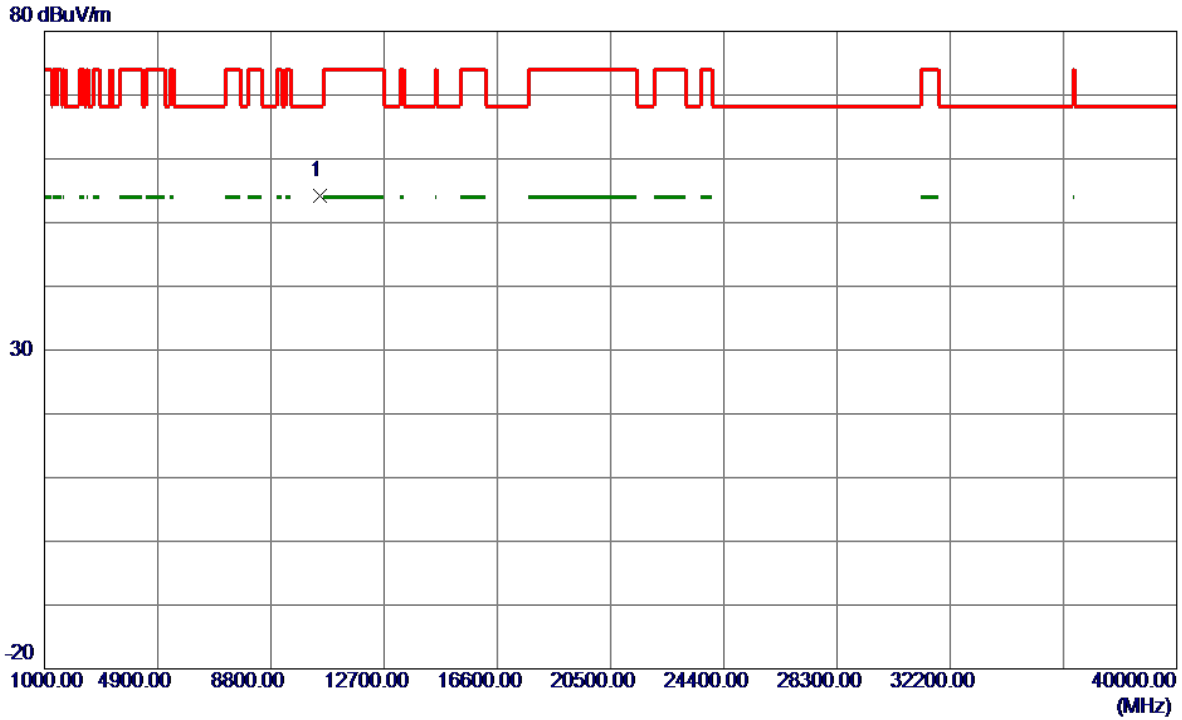

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.1000	39.48	14.75	54.23	68.30	-14.07	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

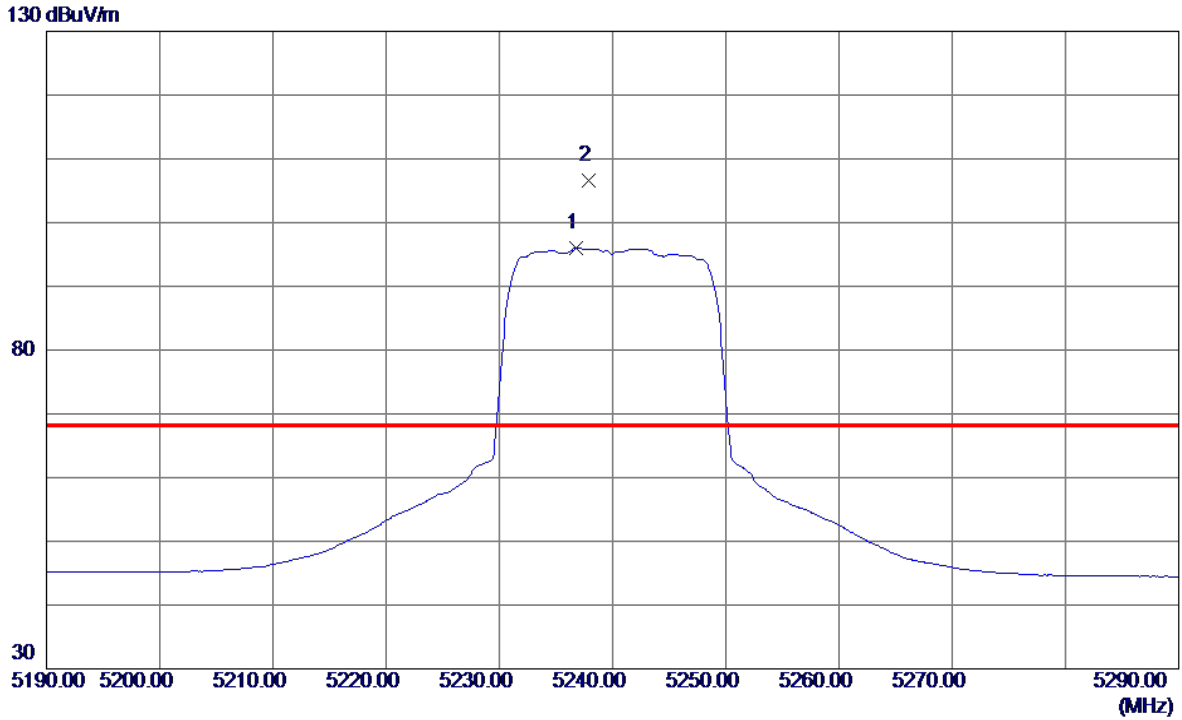

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5236.8000	78.90	17.07	95.97	999.00	-903.03	AVG	No Limit
2 *	5237.9000	89.52	17.07	106.59	68.30	38.29	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

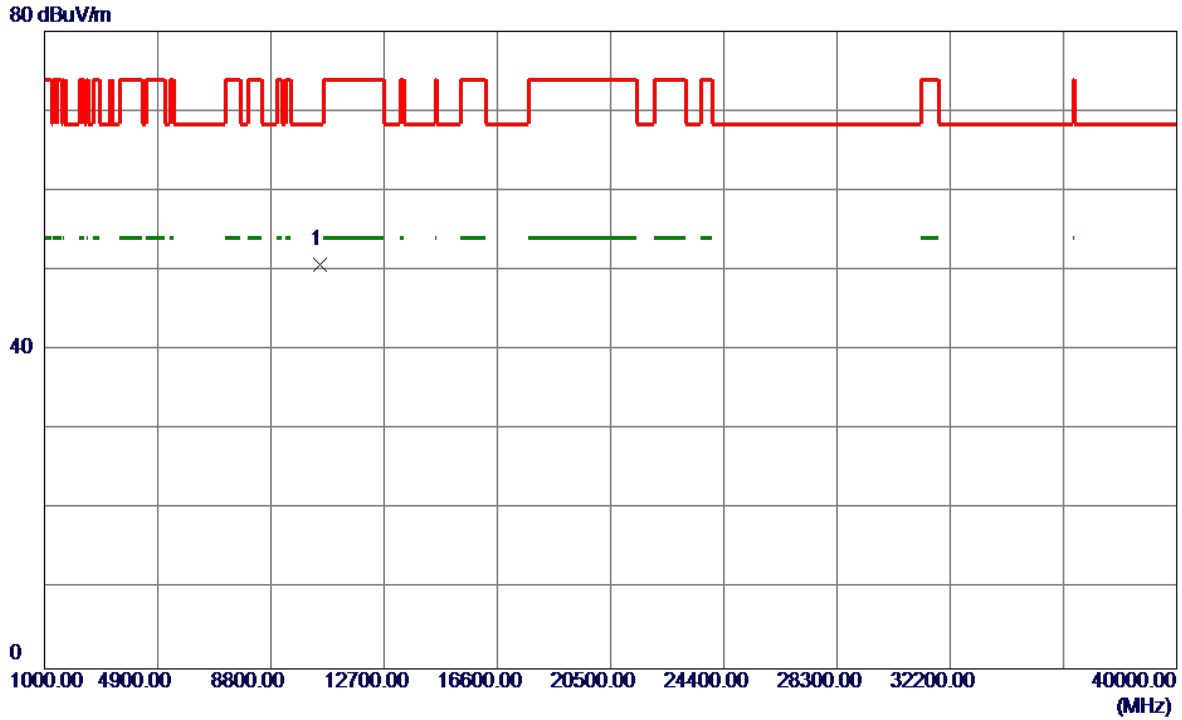

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10482.1800	35.91	14.75	50.66	68.30	-17.64	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

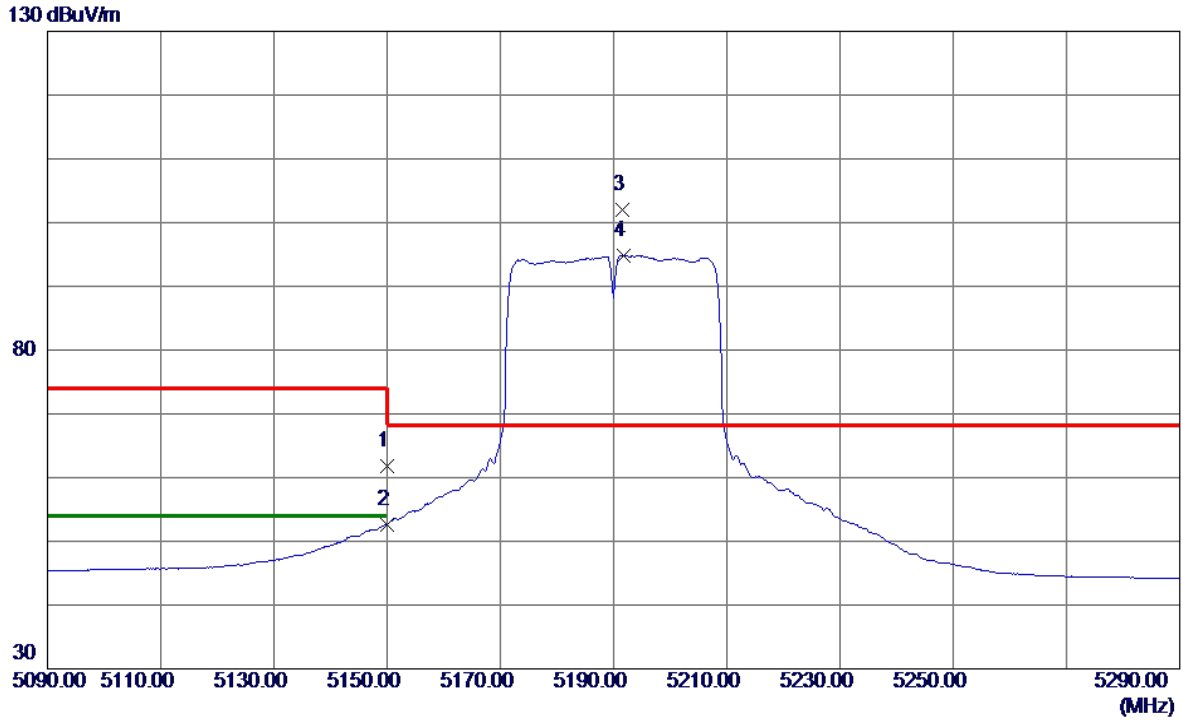

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.12	16.76	61.88	74.00	-12.12	Peak	
2	5150.0000	35.93	16.76	52.69	54.00	-1.31	AVG	
3 *	5191.6000	85.14	16.91	102.05	68.30	33.75	Peak	No Limit
4	5191.8000	77.93	16.91	94.84	999.00	-904.16	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

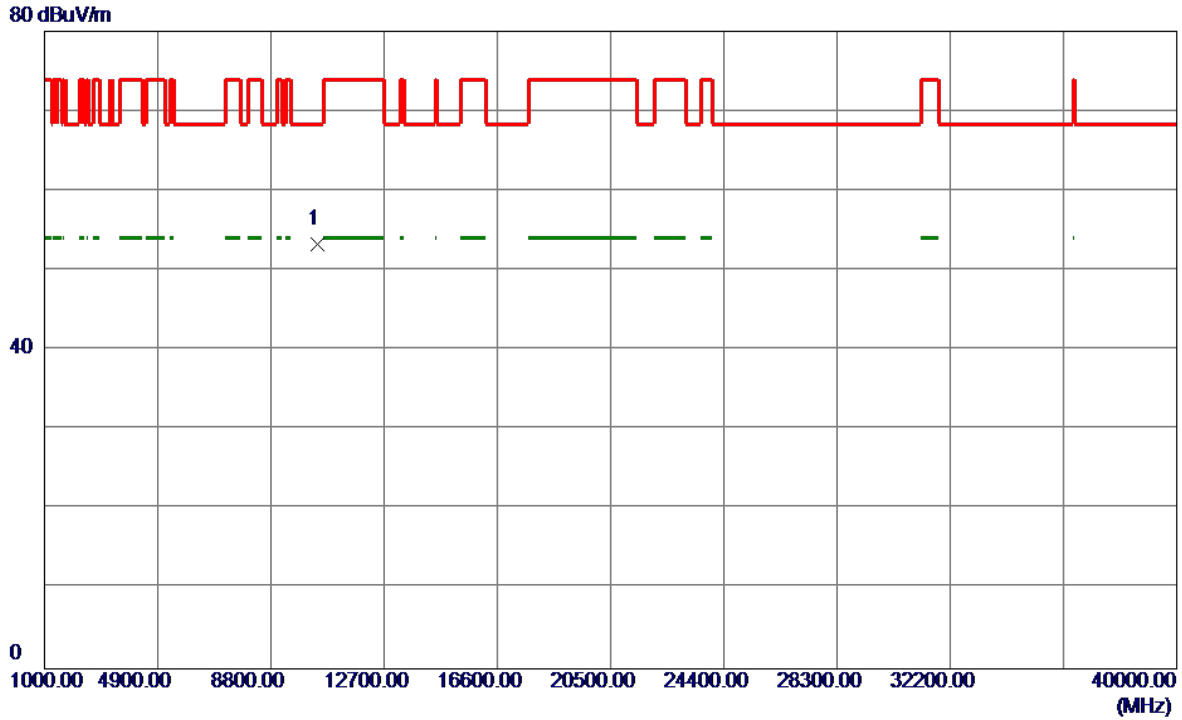

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10384.4500	38.61	14.62	53.23	68.30	-15.07	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

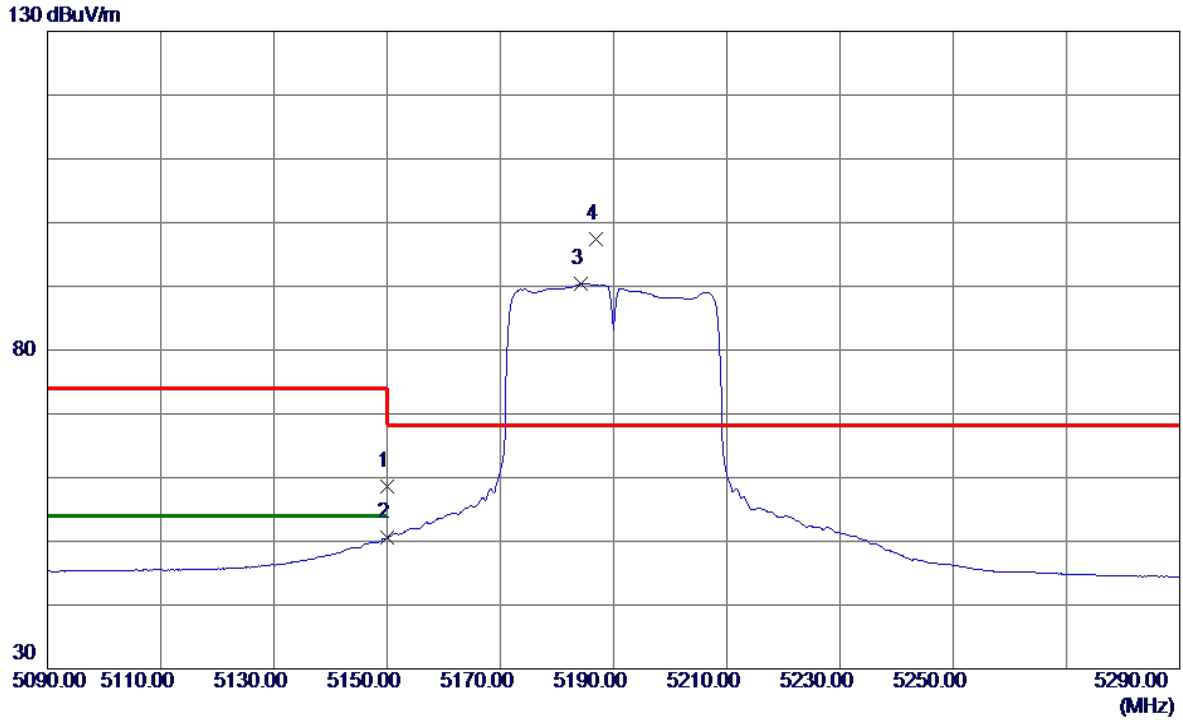

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	41.90	16.76	58.66	74.00	-15.34	Peak	
2	5150.0000	33.81	16.76	50.57	54.00	-3.43	AVG	
3	5184.2000	73.50	16.88	90.38	999.00	-908.62	AVG	No Limit
4 *	5186.8000	80.58	16.89	97.47	68.30	29.17	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

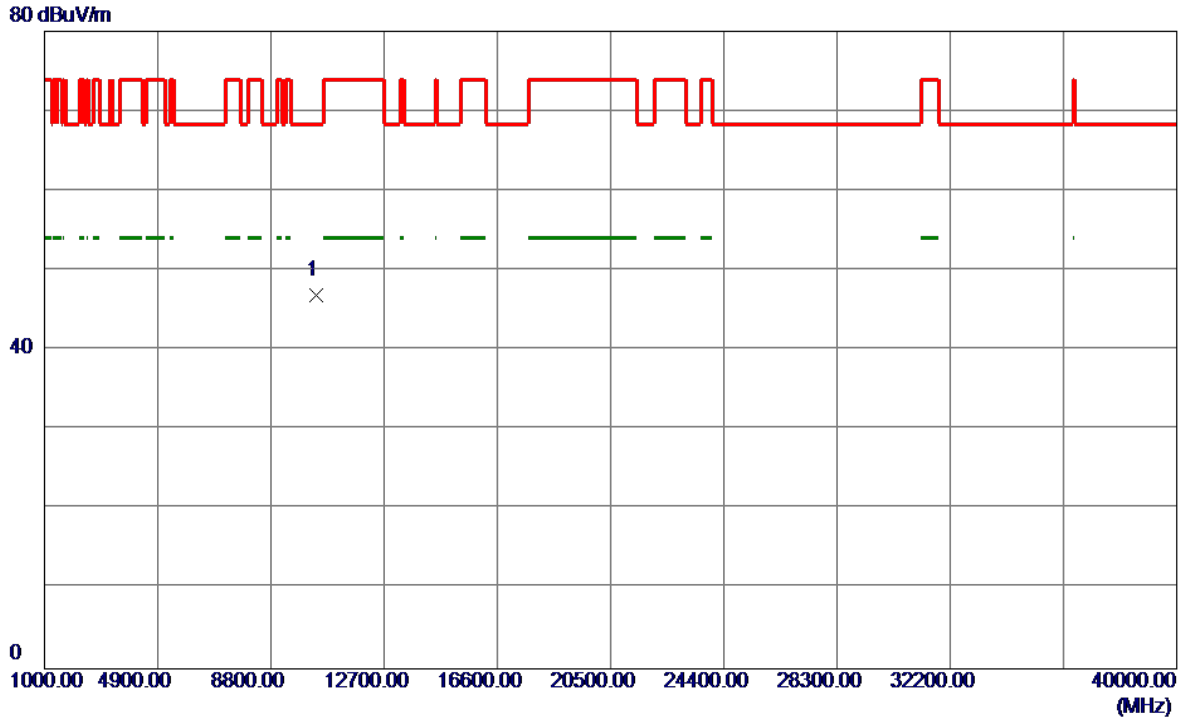

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10379.6000	32.30	14.61	46.91	68.30	-21.39	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

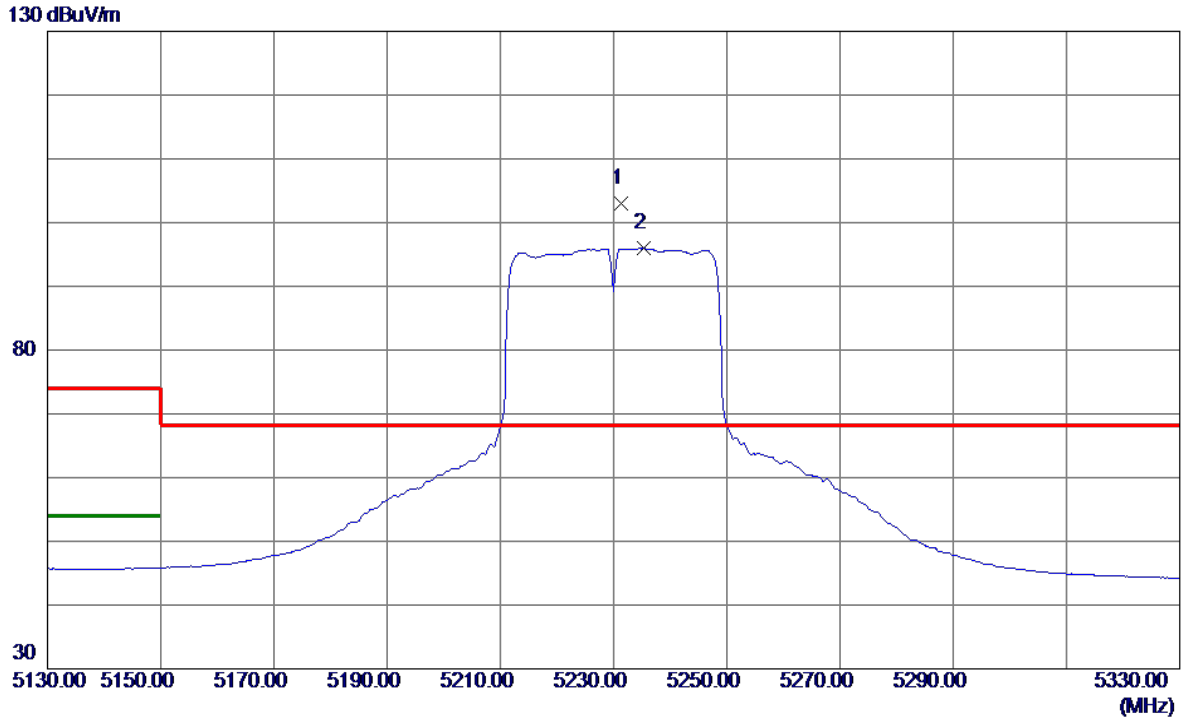

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5231.4000	86.04	17.05	103.09	68.30	34.79	Peak	No Limit
2	5235.4000	78.90	17.06	95.96	999.00	-903.04	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

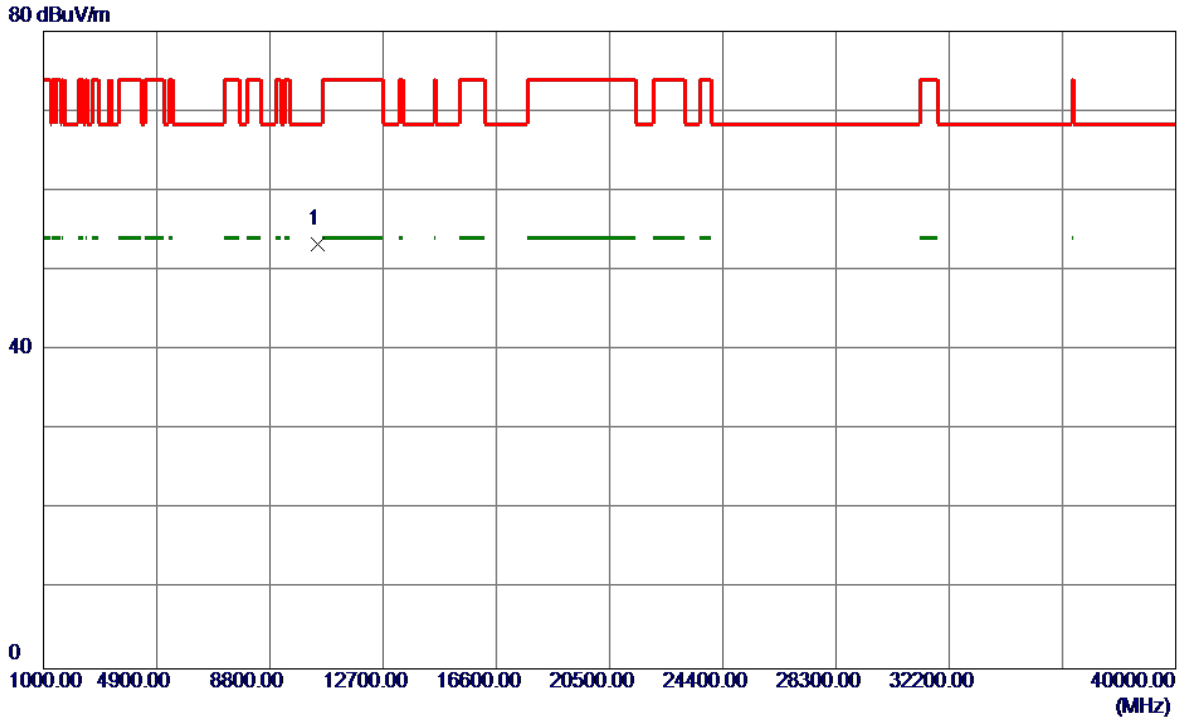

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.2500	38.61	14.72	53.33	68.30	-14.97	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

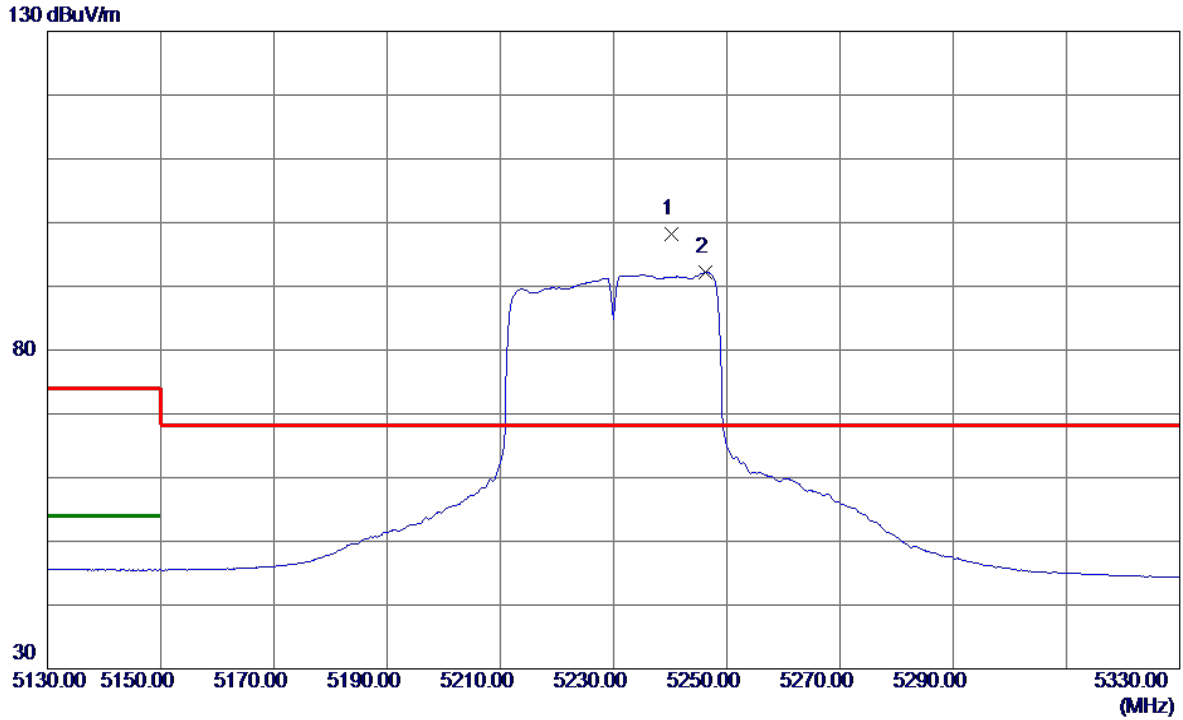

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5240.2000	81.18	17.08	98.26	68.30	29.96	Peak	No Limit
2	5246.2000	75.05	17.10	92.15	999.00	-906.85	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

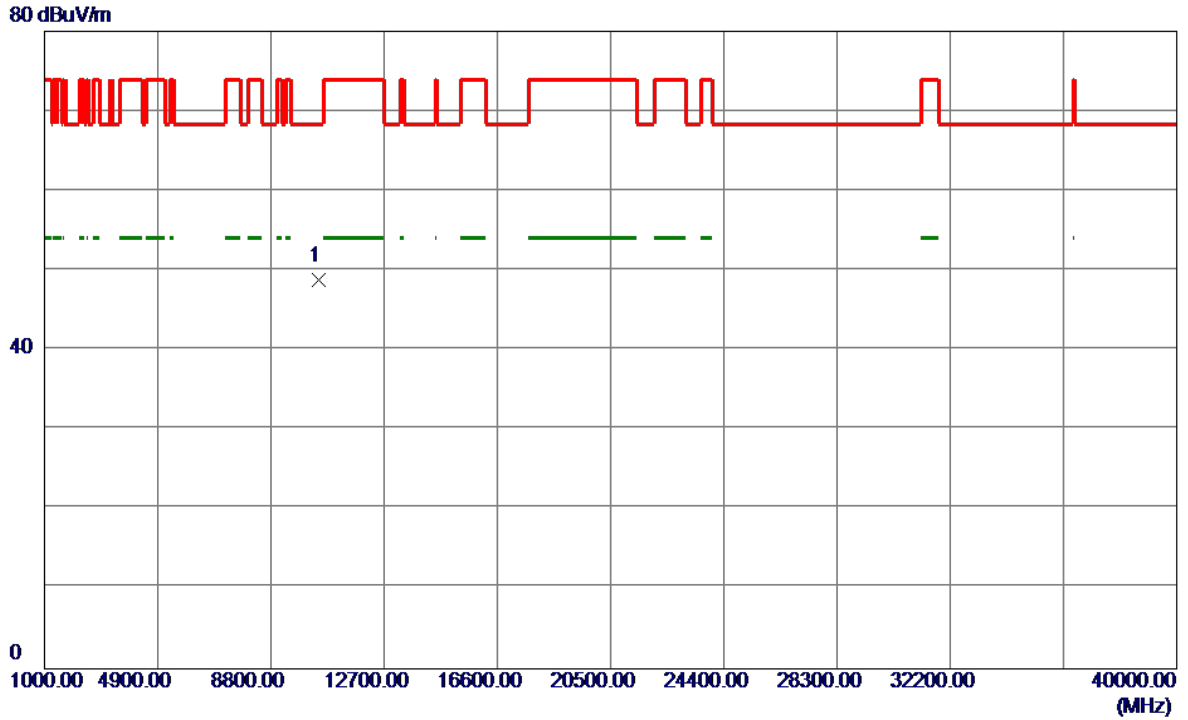

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10455.4100	34.00	14.72	48.72	68.30	-19.58	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

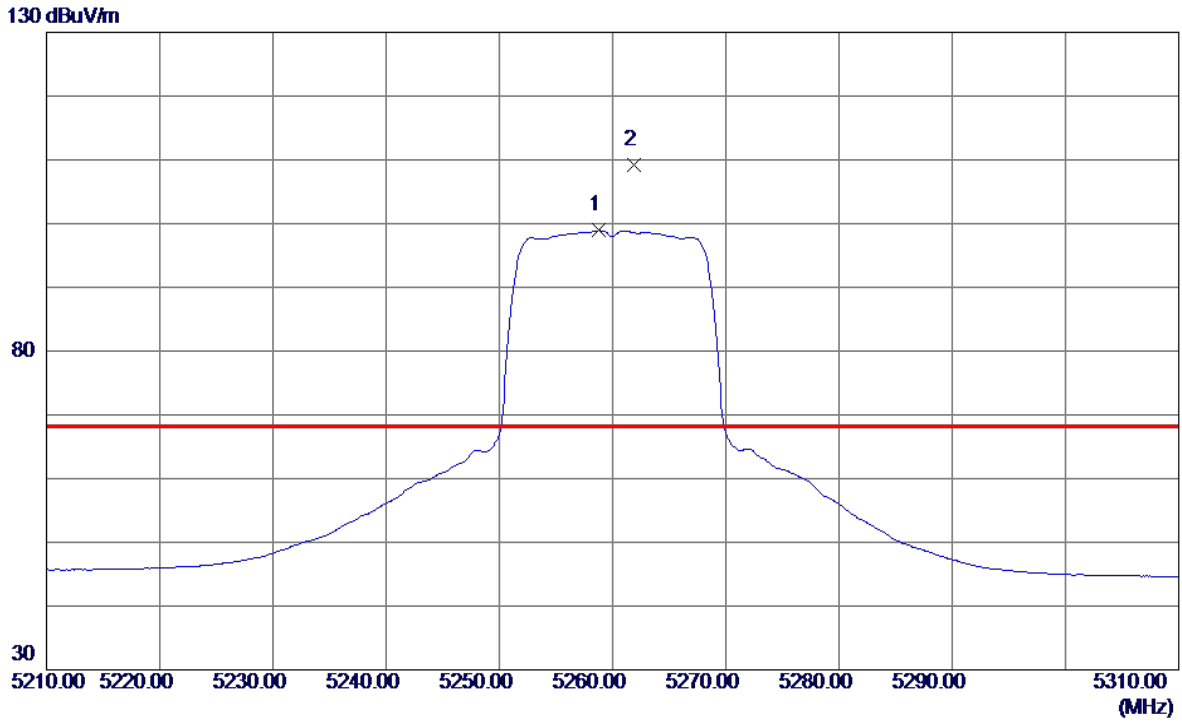

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5258.8000	81.78	17.14	98.92	999.00	-900.08	AVG	No Limit
2 *	5261.9000	92.03	17.15	109.18	68.30	40.88	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

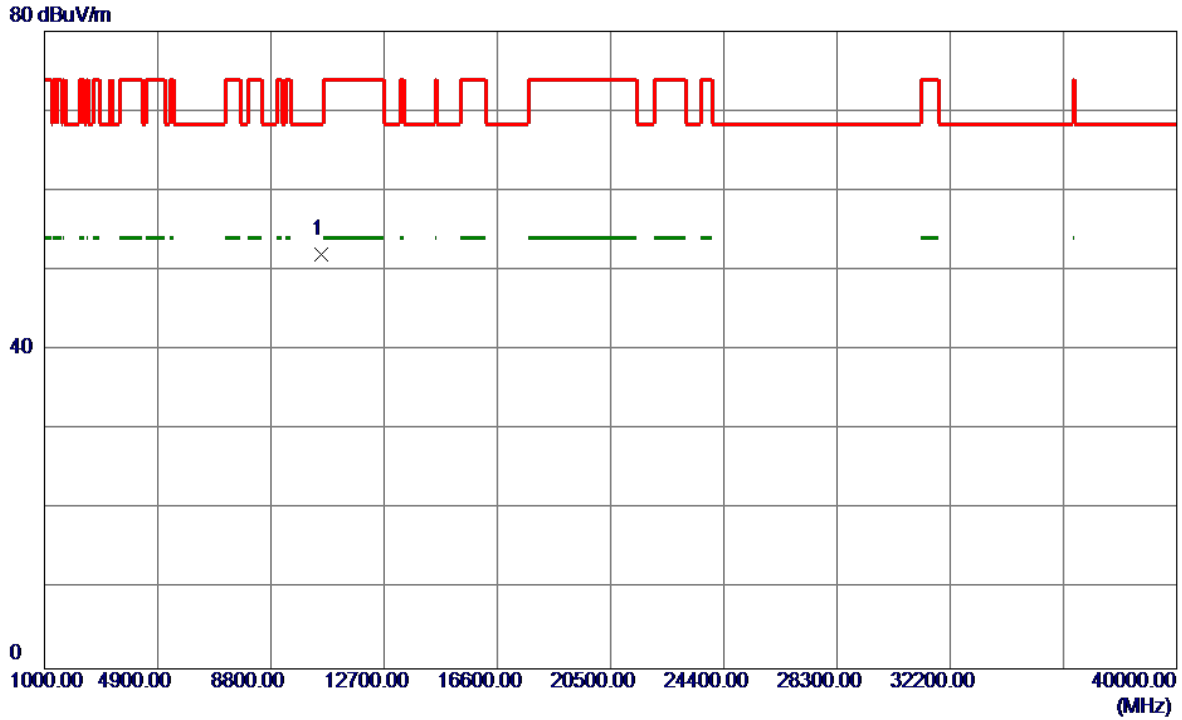

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.8500	37.15	14.83	51.98	68.30	-16.32	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

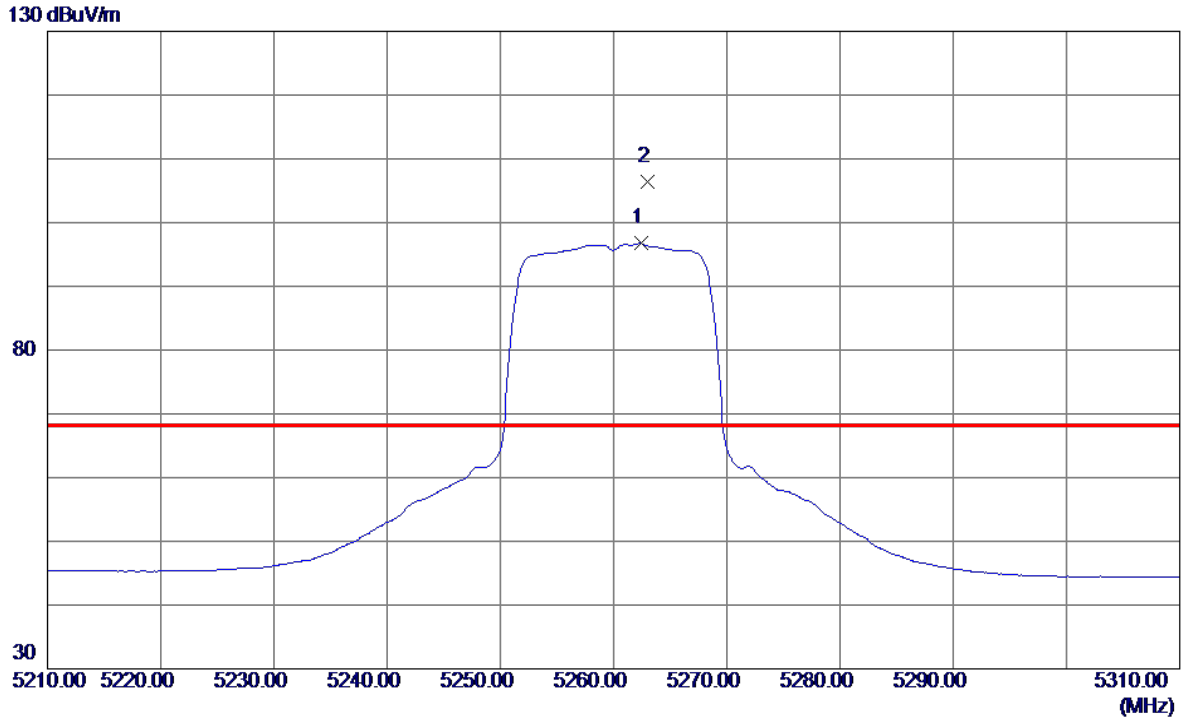

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5262.4000	79.58	17.16	96.74	999.00	-902.26	AVG	No Limit
2 *	5263.0000	89.28	17.16	106.44	68.30	38.14	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

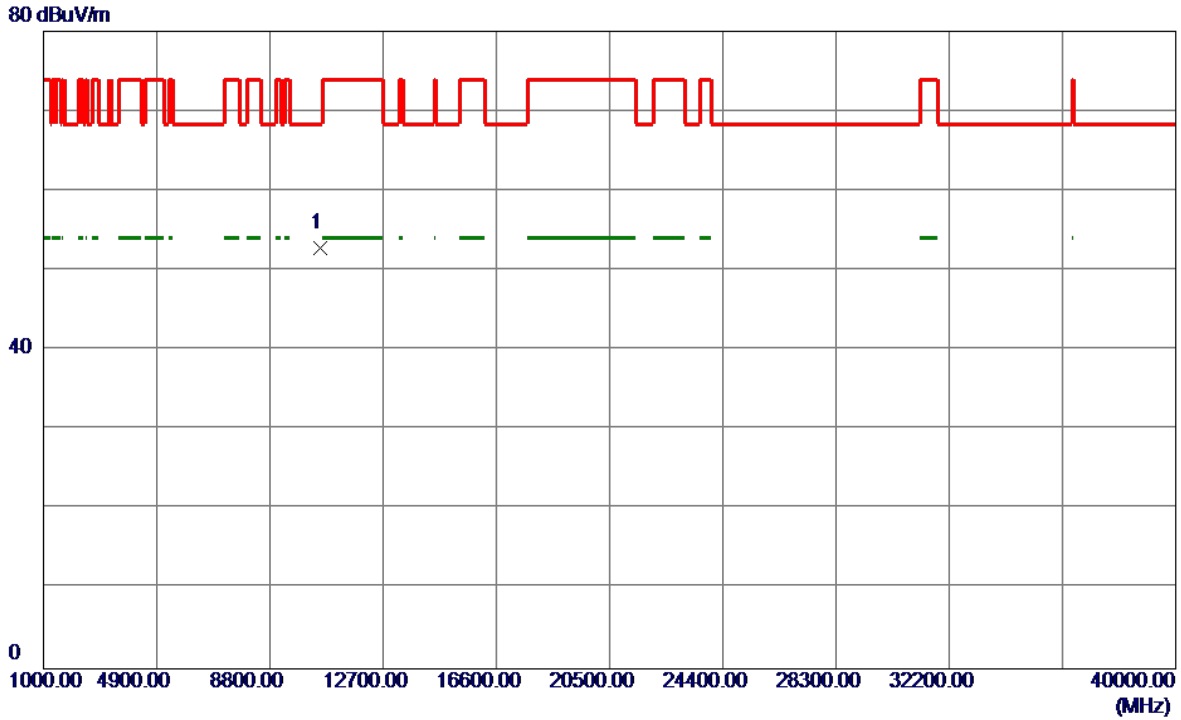

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10523.1100	37.92	14.83	52.75	68.30	-15.55	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Vertical

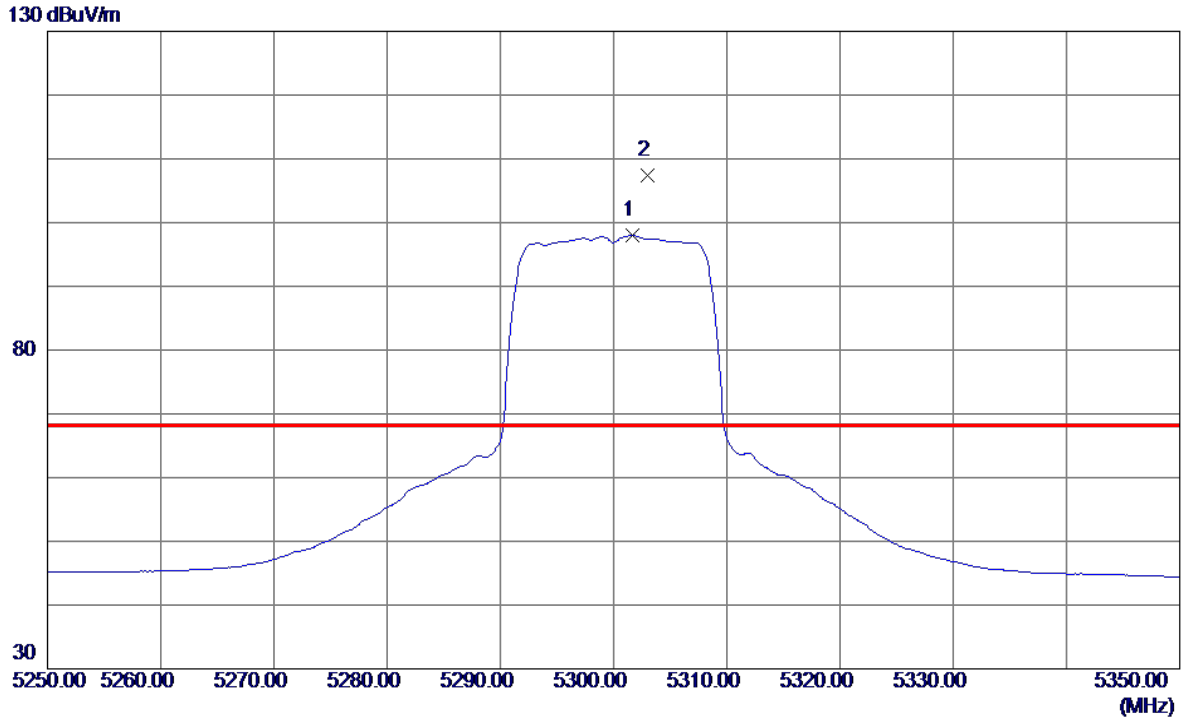

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5301.7000	80.74	17.29	98.03	999.00	-900.97	AVG	No Limit
2 *	5303.0000	90.13	17.30	107.43	68.30	39.13	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Vertical

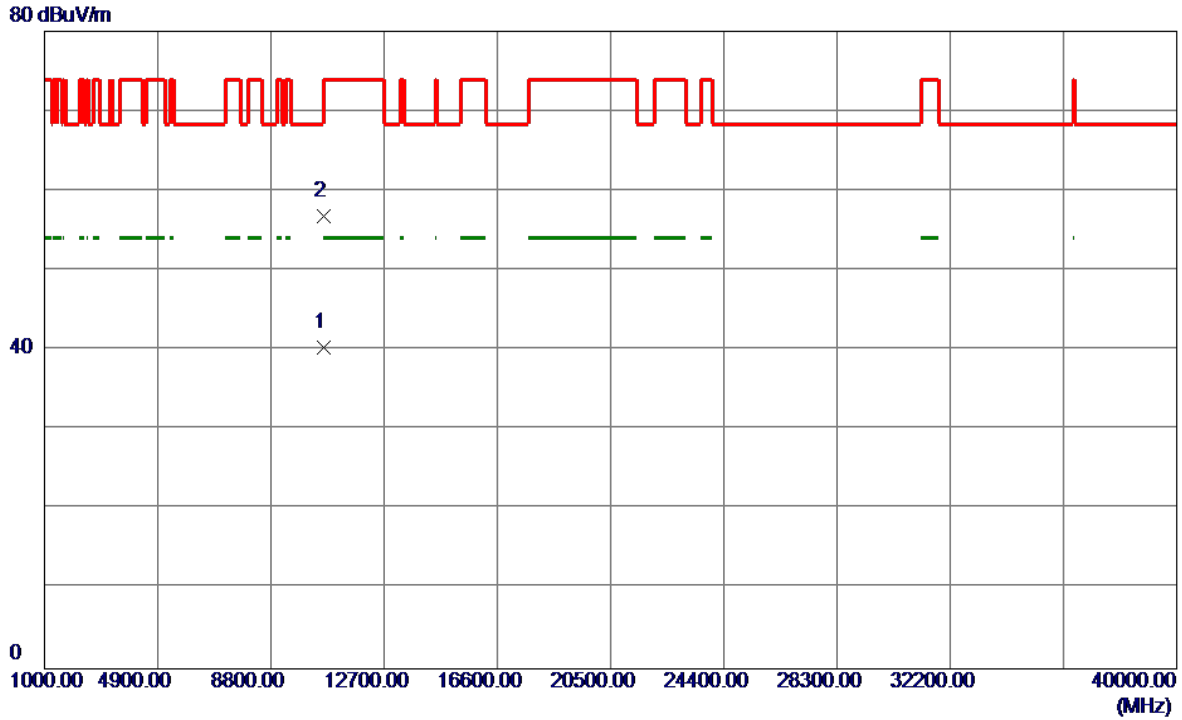

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10601.7000	25.32	14.99	40.31	54.00	-13.69	AVG	
2	10603.3500	41.83	15.00	56.83	74.00	-17.17	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Horizontal

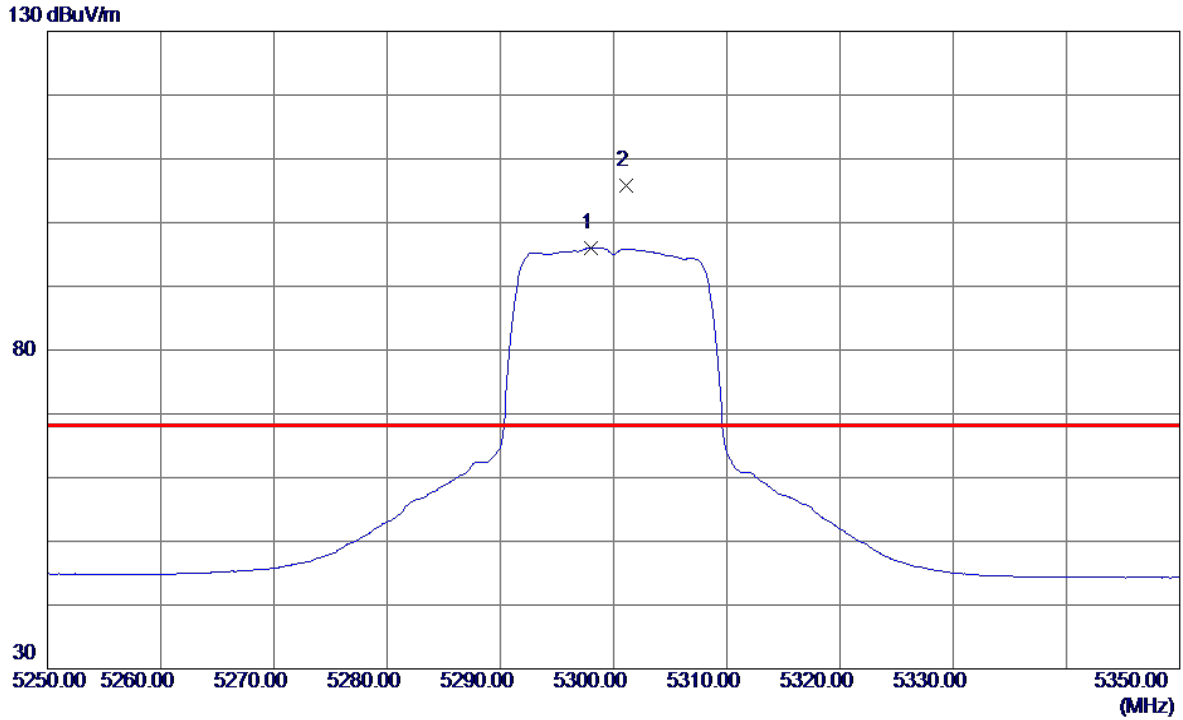

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5298.0000	78.81	17.28	96.09	999.00	-902.91	AVG	No Limit
2 *	5301.1000	88.49	17.29	105.78	68.30	37.48	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz

Horizontal

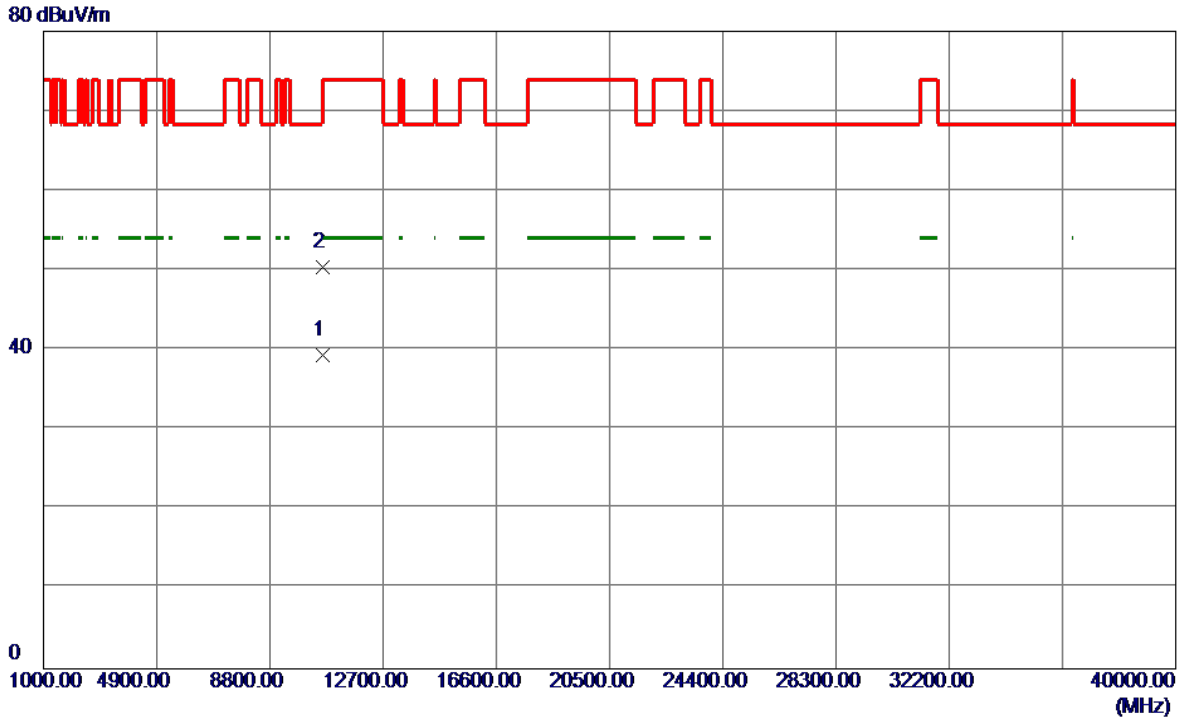


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0100	24.30	14.99	39.29	54.00	-14.71	AVG	
2	10609.3000	35.42	15.01	50.43	74.00	-23.57	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical


130 dBuV/m

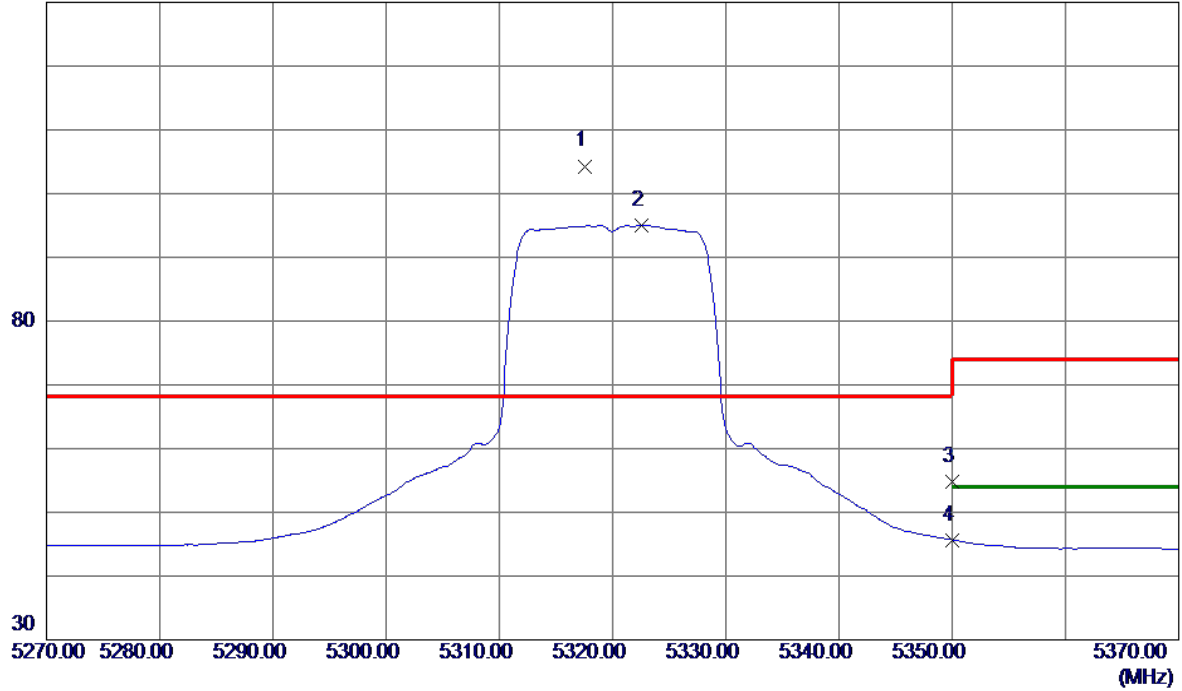

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5317.6000	86.95	17.35	104.30	68.30	36.00	Peak	No Limit
2	5322.6000	77.71	17.37	95.08	999.00	-903.92	AVG	No Limit
3	5350.0000	37.30	17.47	54.77	68.30	-13.53	Peak	
4	5350.0000	28.19	17.47	45.66	999.00	-953.34	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

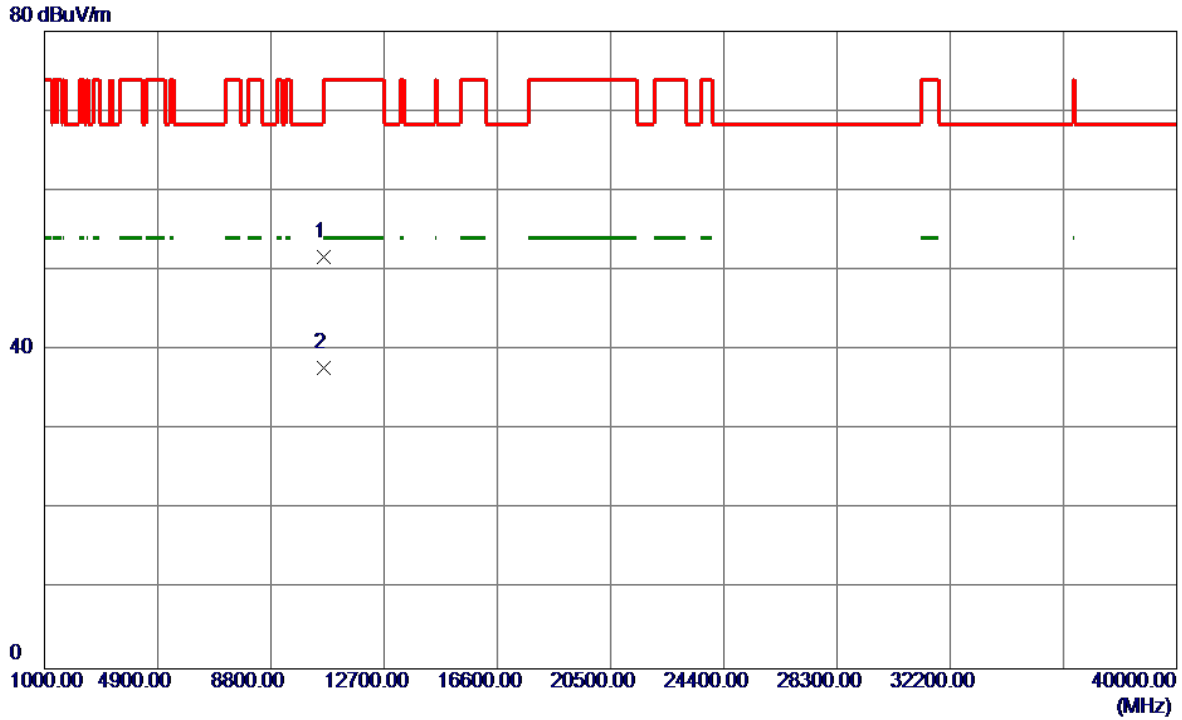

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10635.9500	36.63	15.07	51.70	74.00	-22.30	Peak	
2 *	10641.5500	22.62	15.08	37.70	54.00	-16.30	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

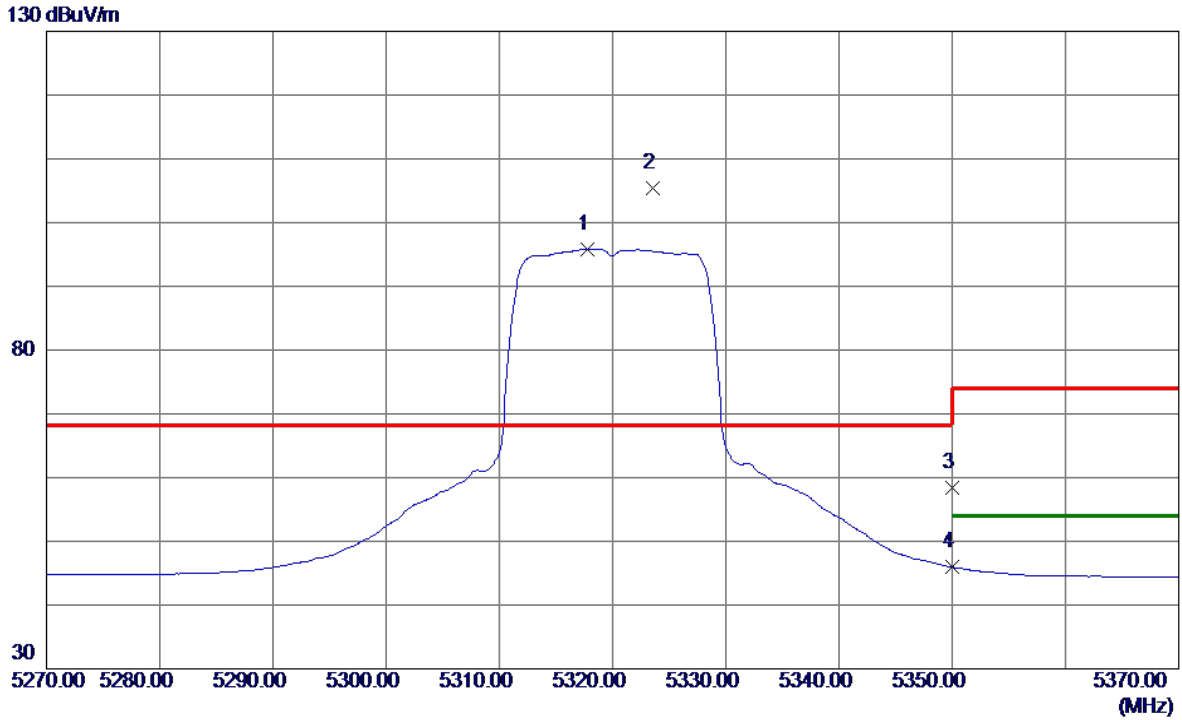

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5317.8000	78.49	17.35	95.84	999.00	-903.16	AVG	No Limit
2 *	5323.6000	88.01	17.37	105.38	68.30	37.08	Peak	No Limit
3	5350.0000	40.96	17.47	58.43	68.30	-9.87	Peak	
4	5350.0000	28.49	17.47	45.96	999.00	-953.04	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

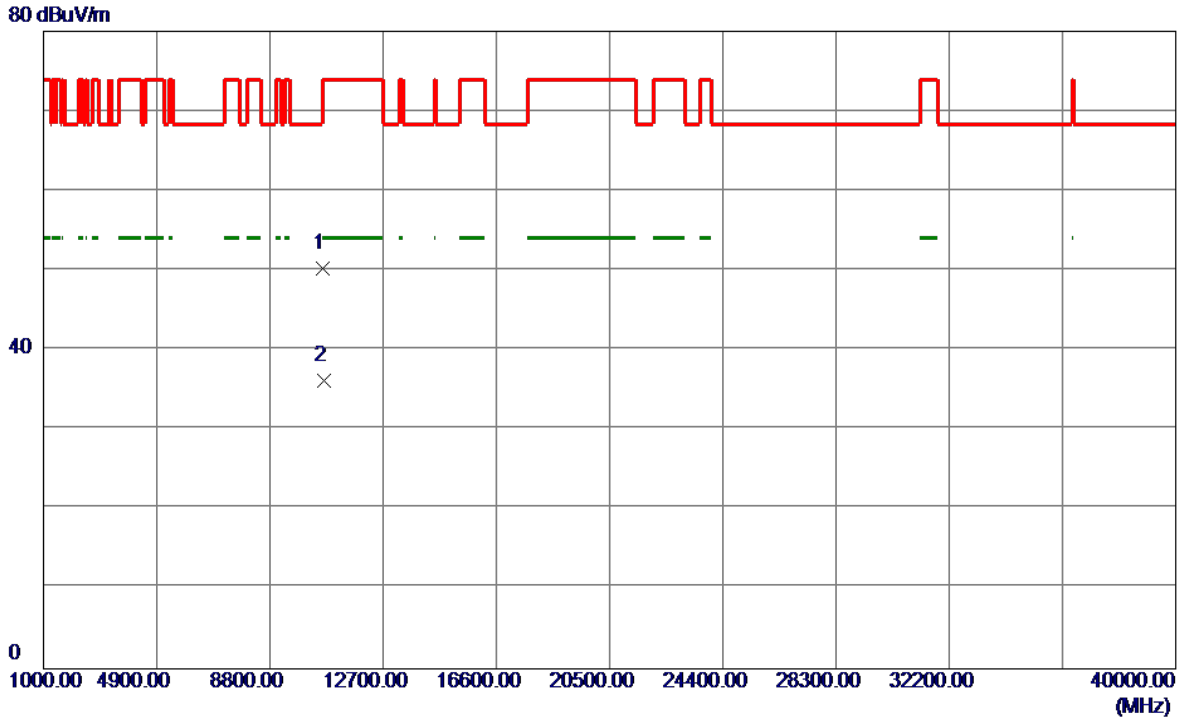

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10635.5800	35.15	15.06	50.21	74.00	-23.79	Peak	
2 *	10641.7200	21.01	15.08	36.09	54.00	-17.91	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

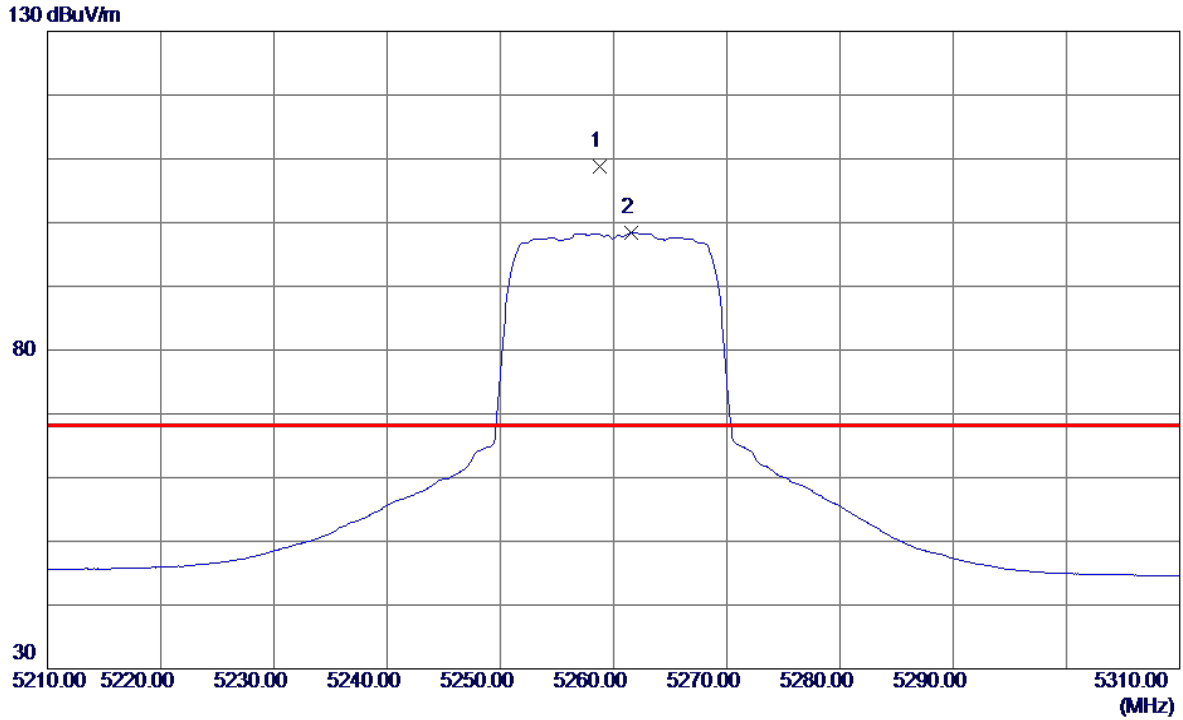

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5258.8000	91.64	17.14	108.78	68.30	40.48	Peak	No Limit
2	5261.6000	81.26	17.15	98.41	999.00	-900.59	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

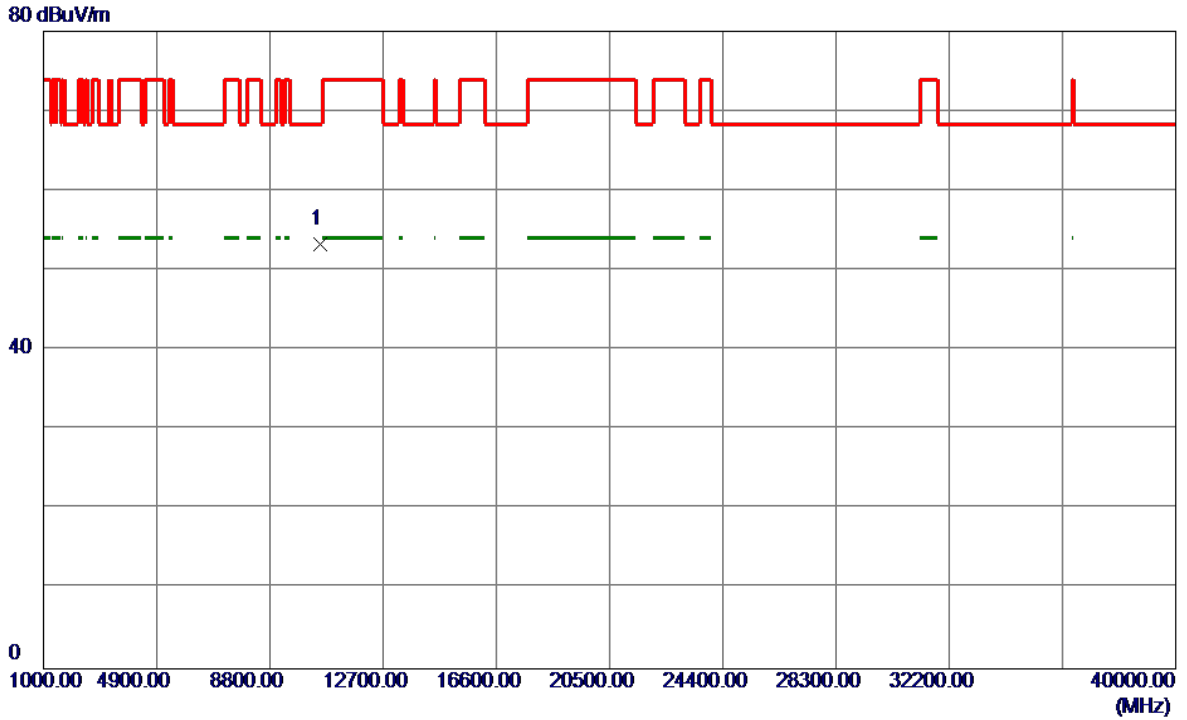

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10515.5500	38.44	14.81	53.25	68.30	-15.05	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

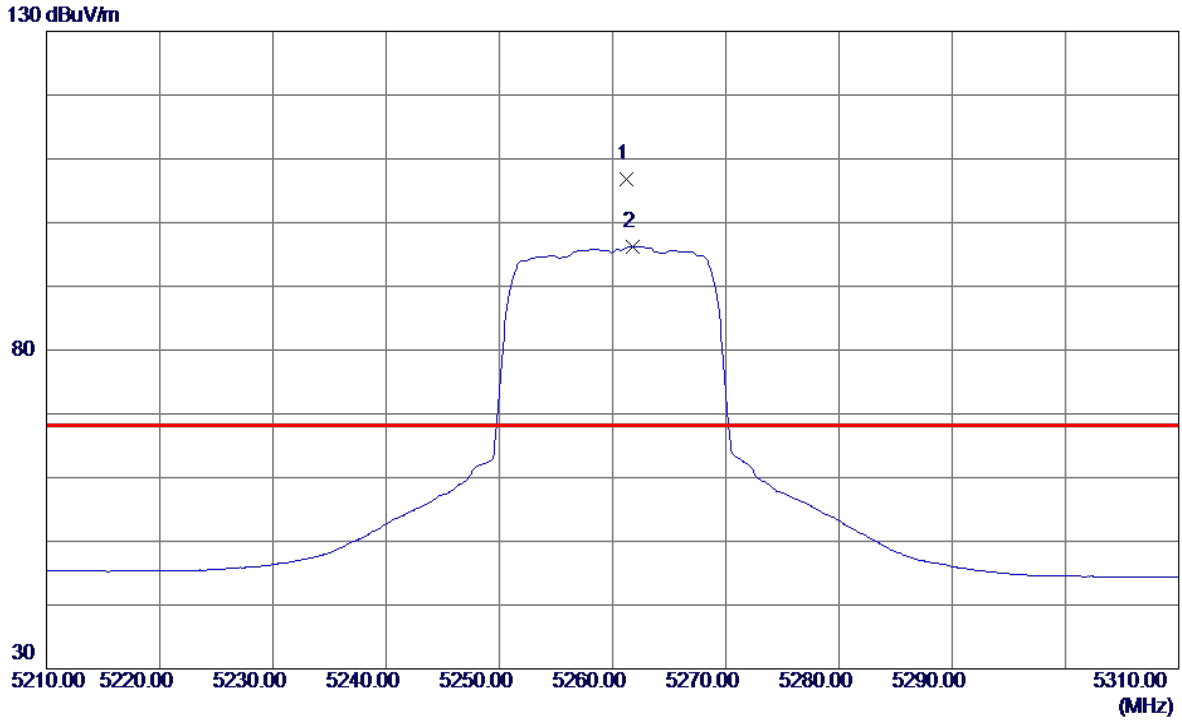

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5261.2000	89.59	17.15	106.74	68.30	38.44	Peak	No Limit
2	5261.8000	79.07	17.15	96.22	999.00	-902.78	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

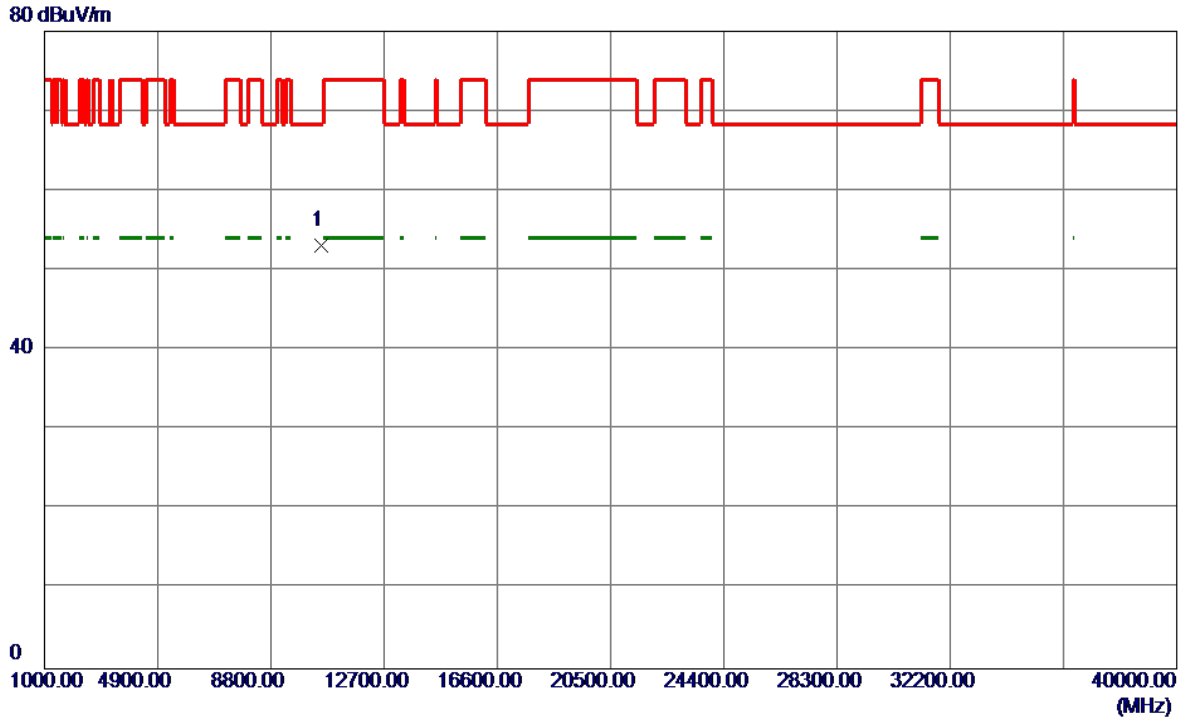

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10518.5400	38.27	14.82	53.09	68.30	-15.21	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Vertical

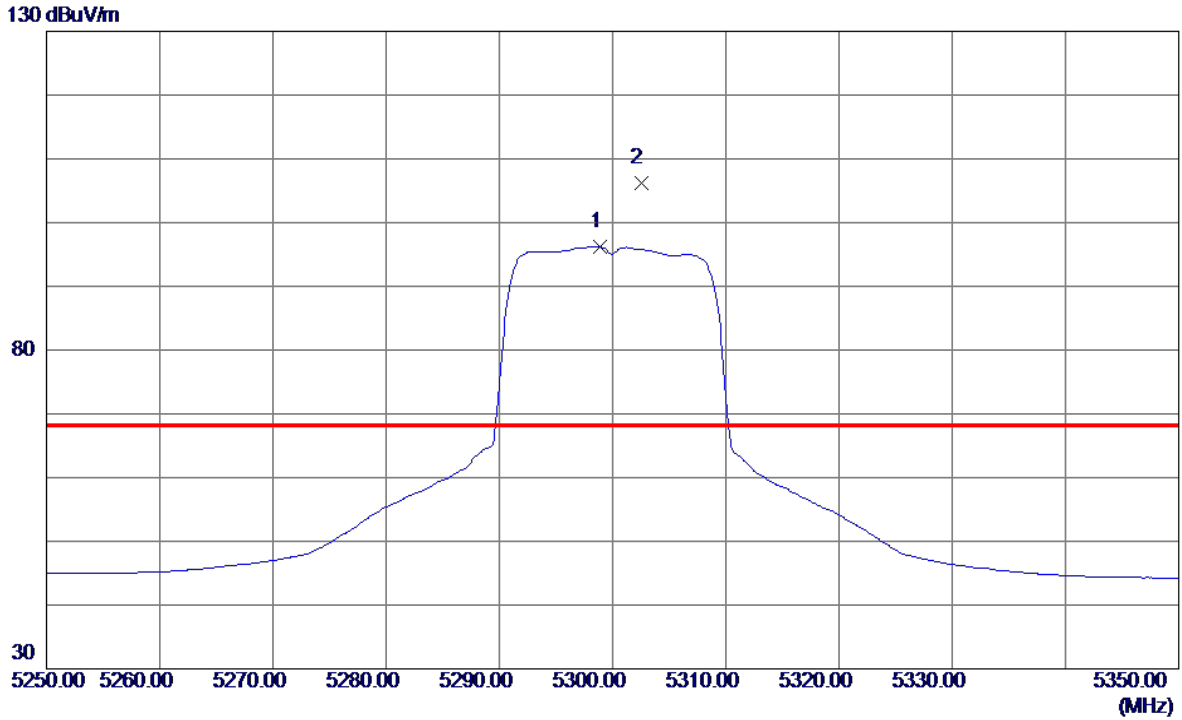

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5298.9000	78.88	17.28	96.16	999.00	-902.84	AVG	No Limit
2 *	5302.5000	88.97	17.30	106.27	68.30	37.97	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Vertical

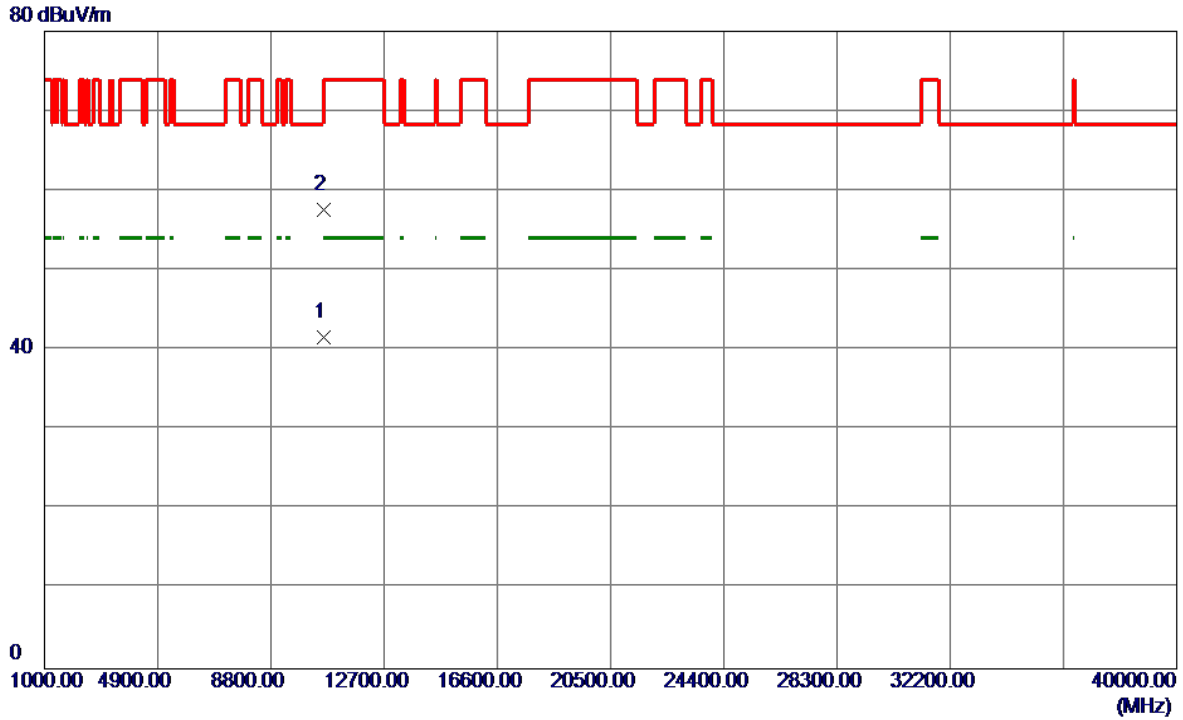

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.6000	26.65	14.99	41.64	54.00	-12.36	AVG	
2	10603.6500	42.52	15.00	57.52	74.00	-16.48	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Horizontal

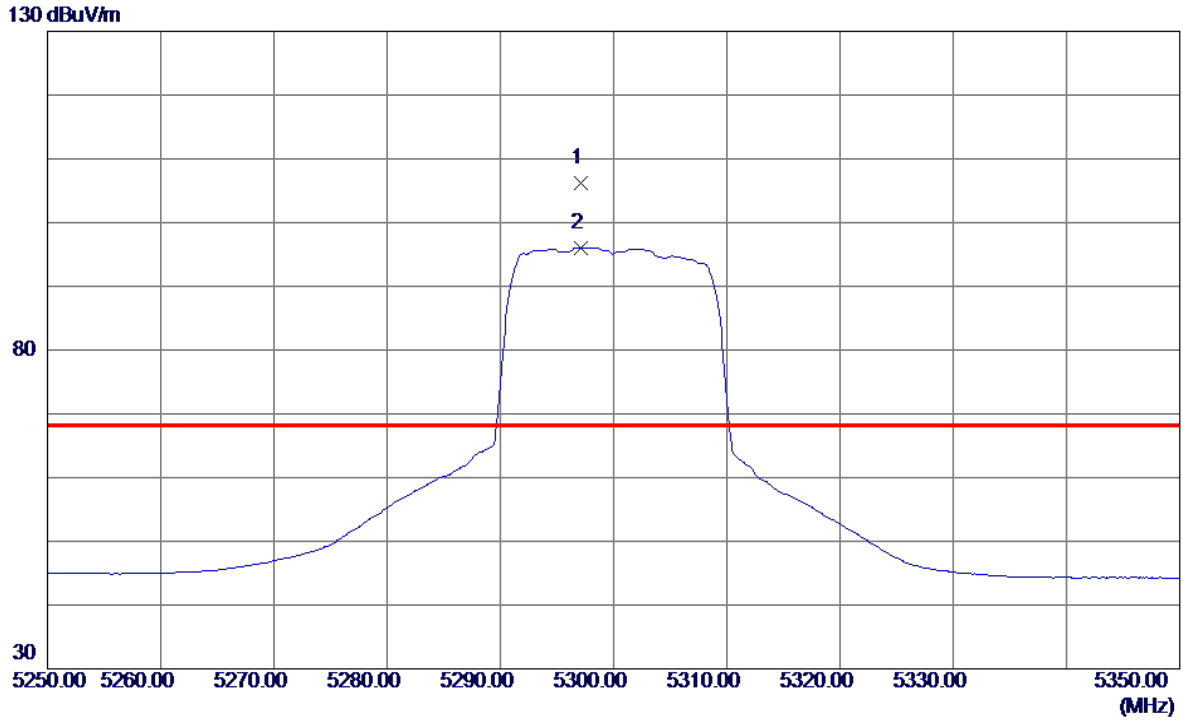

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5297.1000	88.86	17.28	106.14	68.30	37.84	Peak	No Limit
2	5297.1000	78.82	17.28	96.10	999.00	-902.90	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz

Horizontal

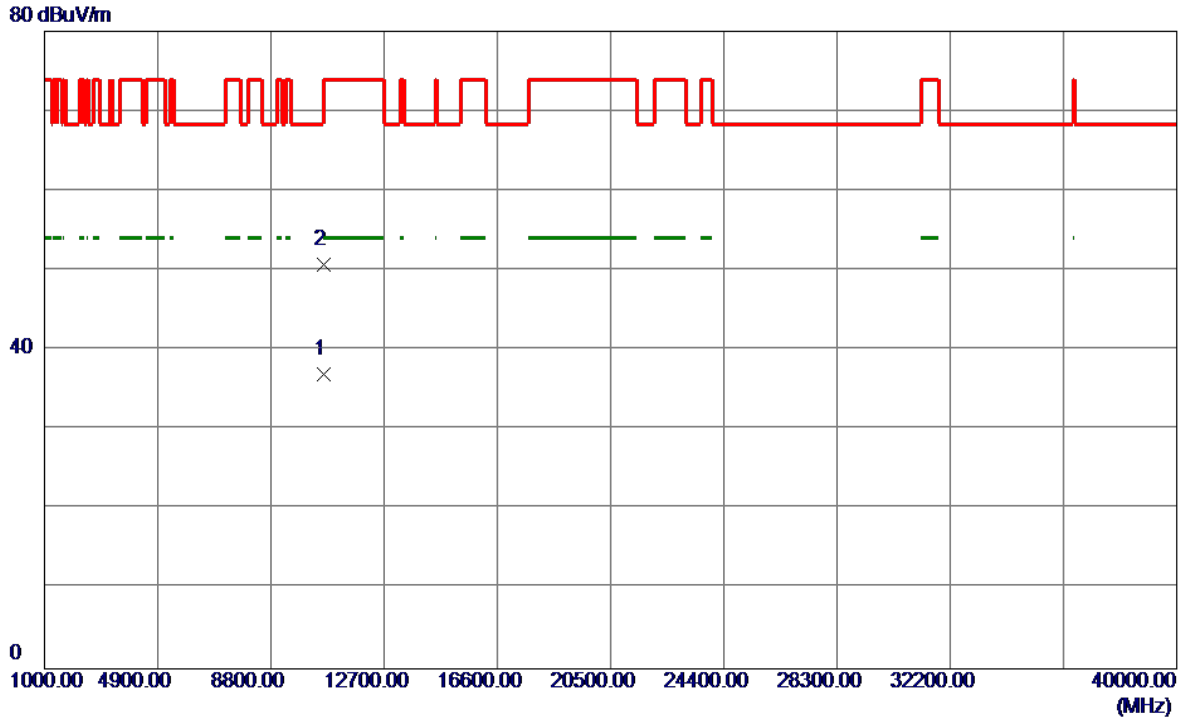


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10601.3200	21.99	14.99	36.98	54.00	-17.02	AVG	
2	10603.3400	35.75	15.00	50.75	74.00	-23.25	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical


130 dBuV/m

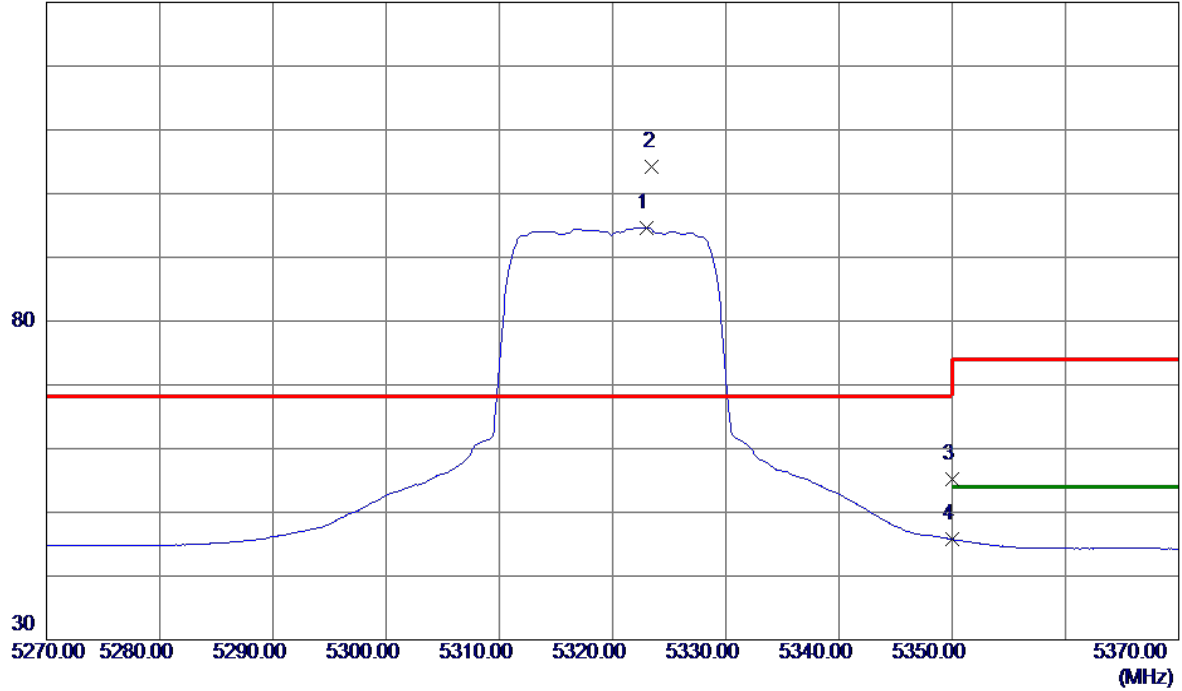

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5323.0000	77.25	17.37	94.62	999.00	-904.38	AVG	No Limit
2 *	5323.5000	86.86	17.37	104.23	68.30	35.93	Peak	No Limit
3	5350.0000	37.65	17.47	55.12	68.30	-13.18	Peak	
4	5350.0000	28.29	17.47	45.76	999.00	-953.24	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

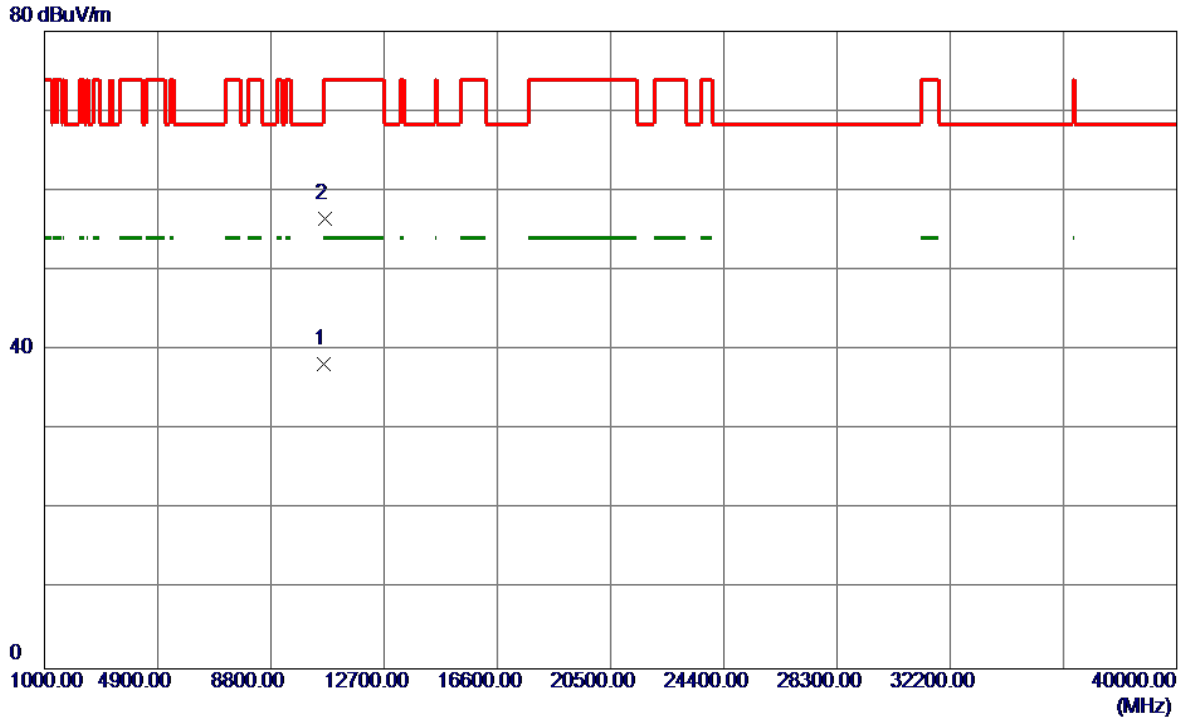

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10640.0000	23.14	15.07	38.21	54.00	-15.79	AVG	
2	10646.5000	41.43	15.09	56.52	74.00	-17.48	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

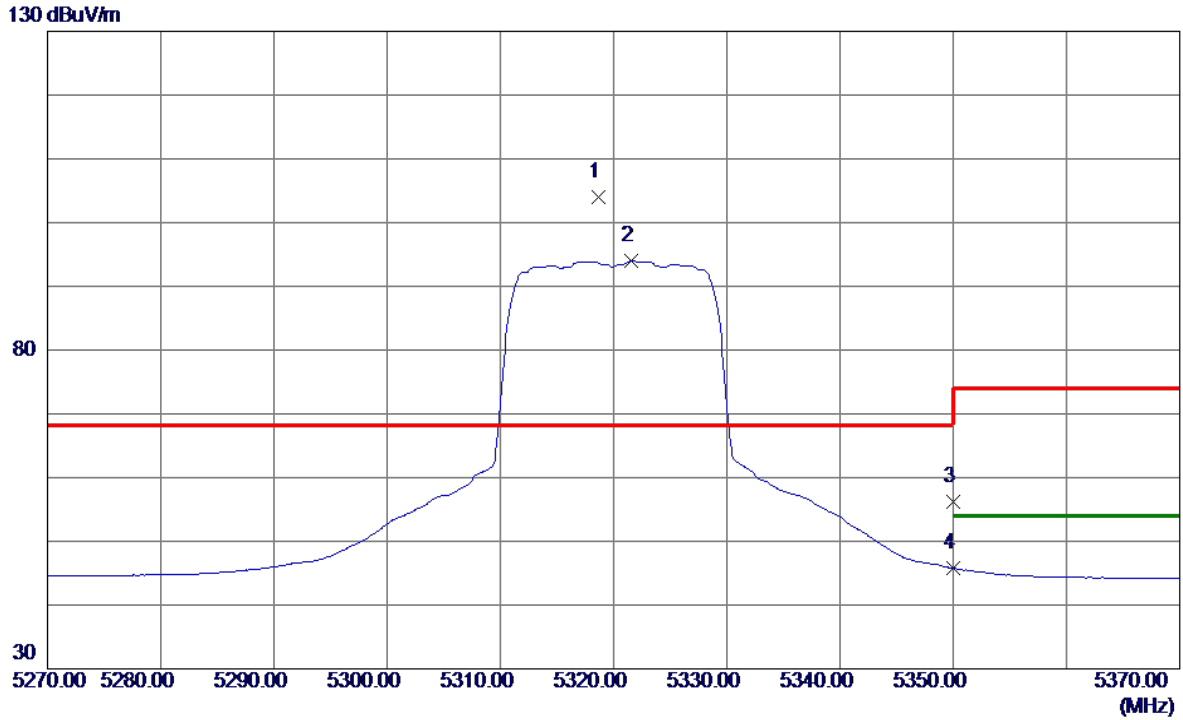

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.7000	86.70	17.35	104.05	68.30	35.75	Peak	No Limit
2	5321.6000	76.58	17.37	93.95	999.00	-905.05	AVG	No Limit
3	5350.0000	38.71	17.47	56.18	68.30	-12.12	Peak	
4	5350.0000	28.30	17.47	45.77	999.00	-953.23	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

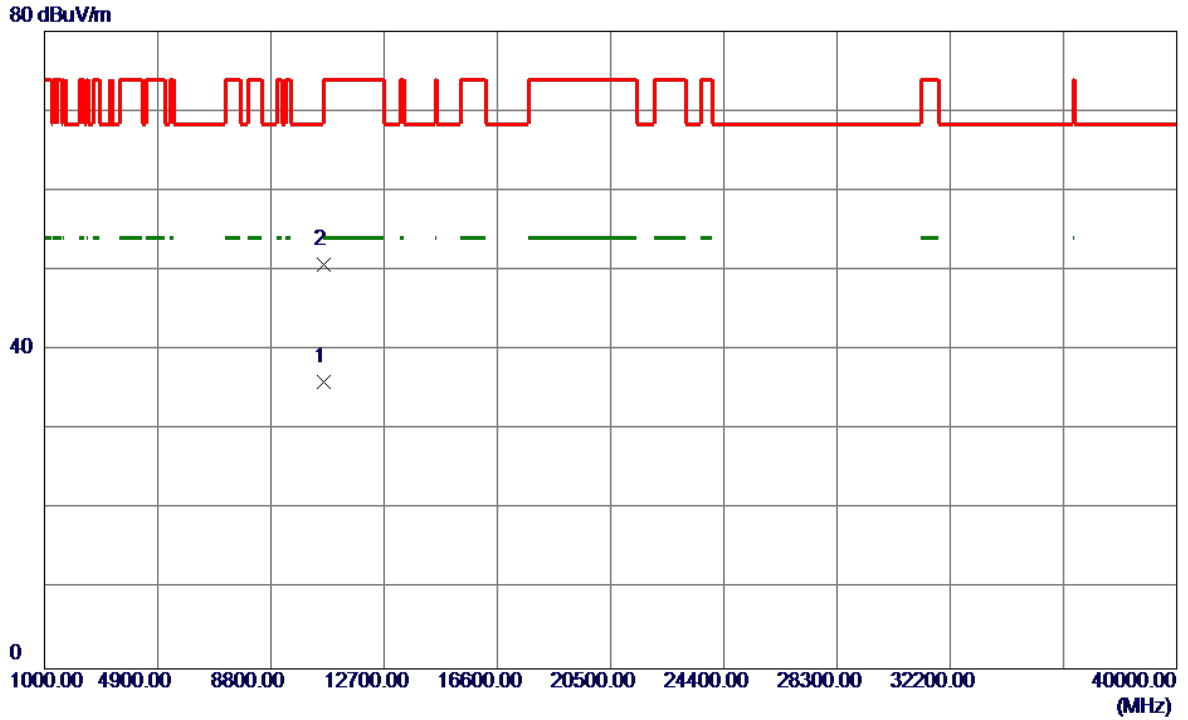

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10639.6800	20.91	15.07	35.98	54.00	-18.02	AVG	
2	10641.4000	35.71	15.08	50.79	74.00	-23.21	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

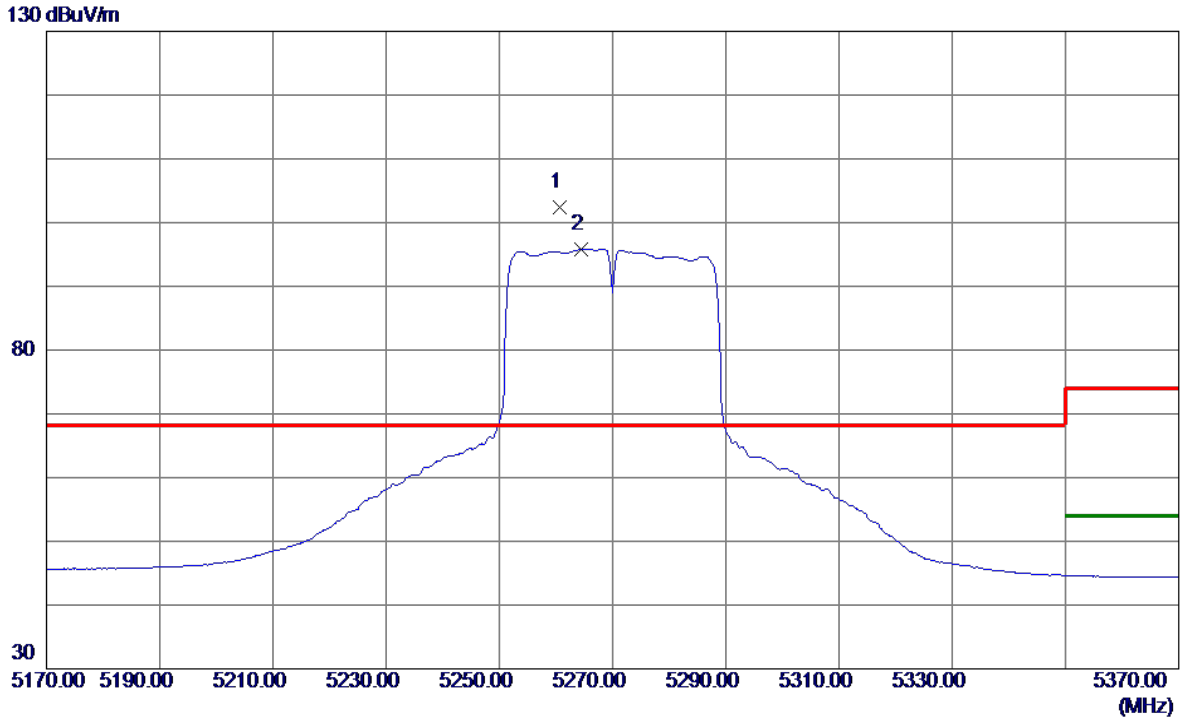

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5260.6000	85.20	17.15	102.35	68.30	34.05	Peak	No Limit
2	5264.4000	78.66	17.16	95.82	999.00	-903.18	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

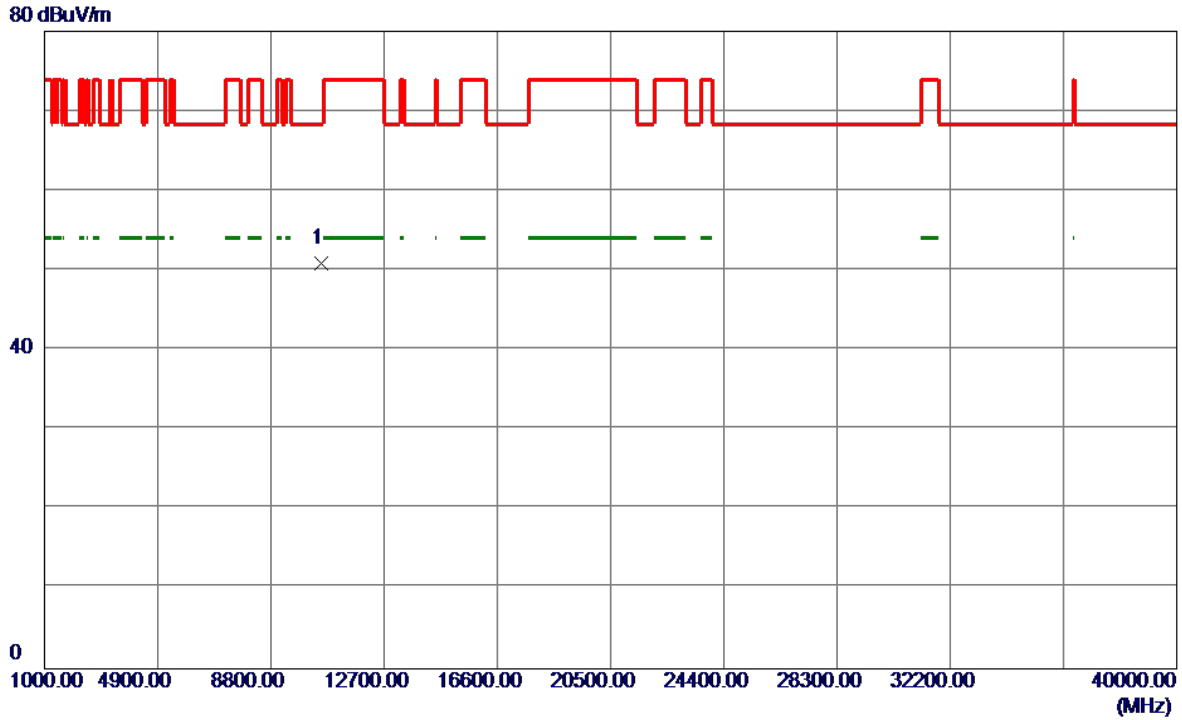

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10533.1000	36.07	14.85	50.92	68.30	-17.38	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

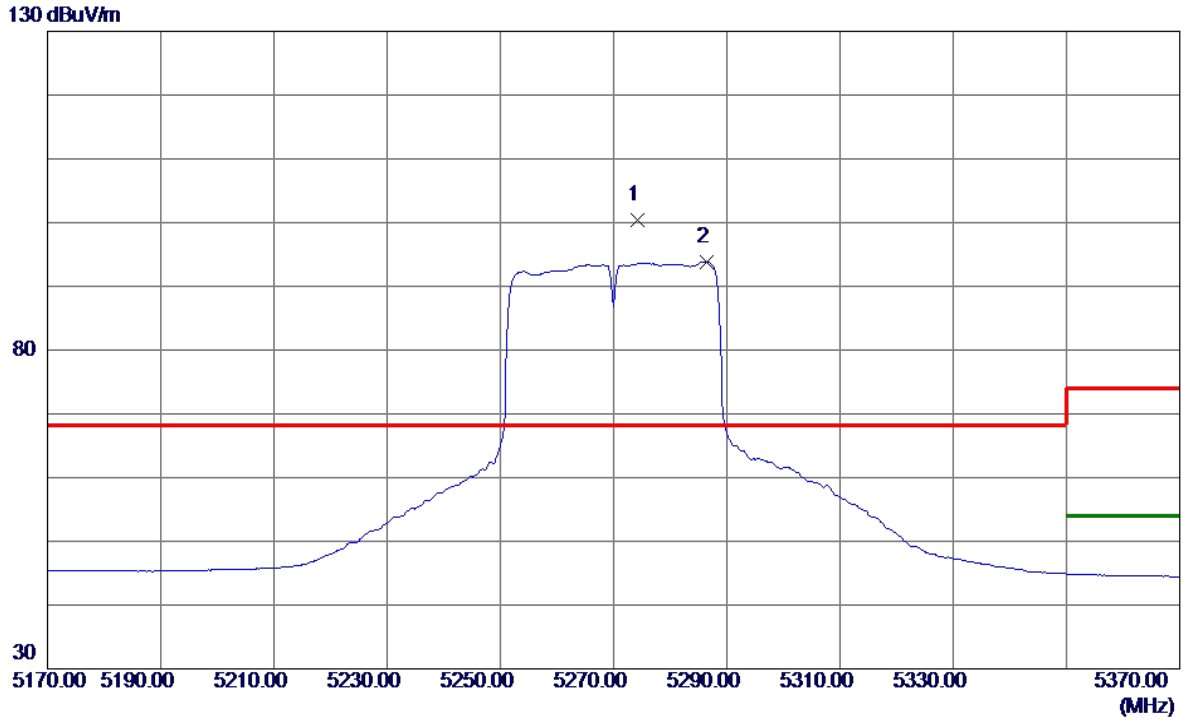

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5274.2000	83.18	17.20	100.38	68.30	32.08	Peak	No Limit
2	5286.4000	76.63	17.24	93.87	999.00	-905.13	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

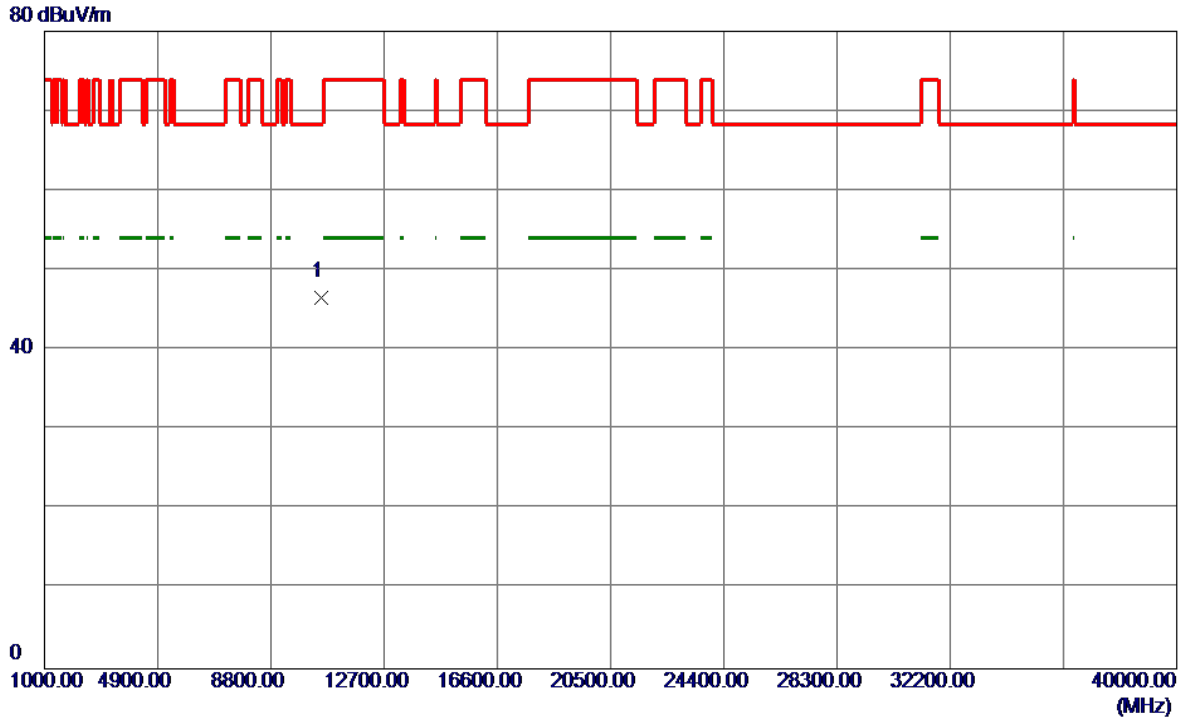

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10539.4600	31.78	14.86	46.64	68.30	-21.66	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

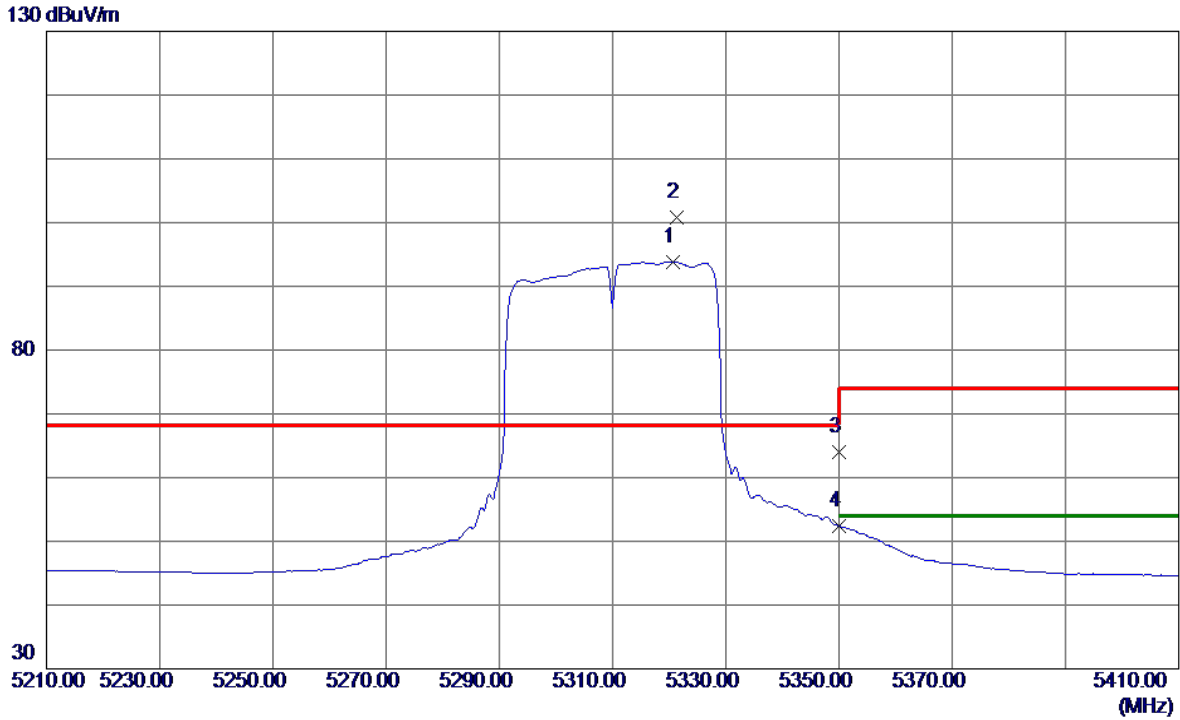

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5320.6000	76.45	17.36	93.81	999.00	-905.19	AVG	No Limit
2 *	5321.4000	83.45	17.36	100.81	68.30	32.51	Peak	No Limit
3	5350.0000	46.46	17.47	63.93	68.30	-4.37	Peak	
4	5350.0000	34.91	17.47	52.38	999.00	-946.62	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

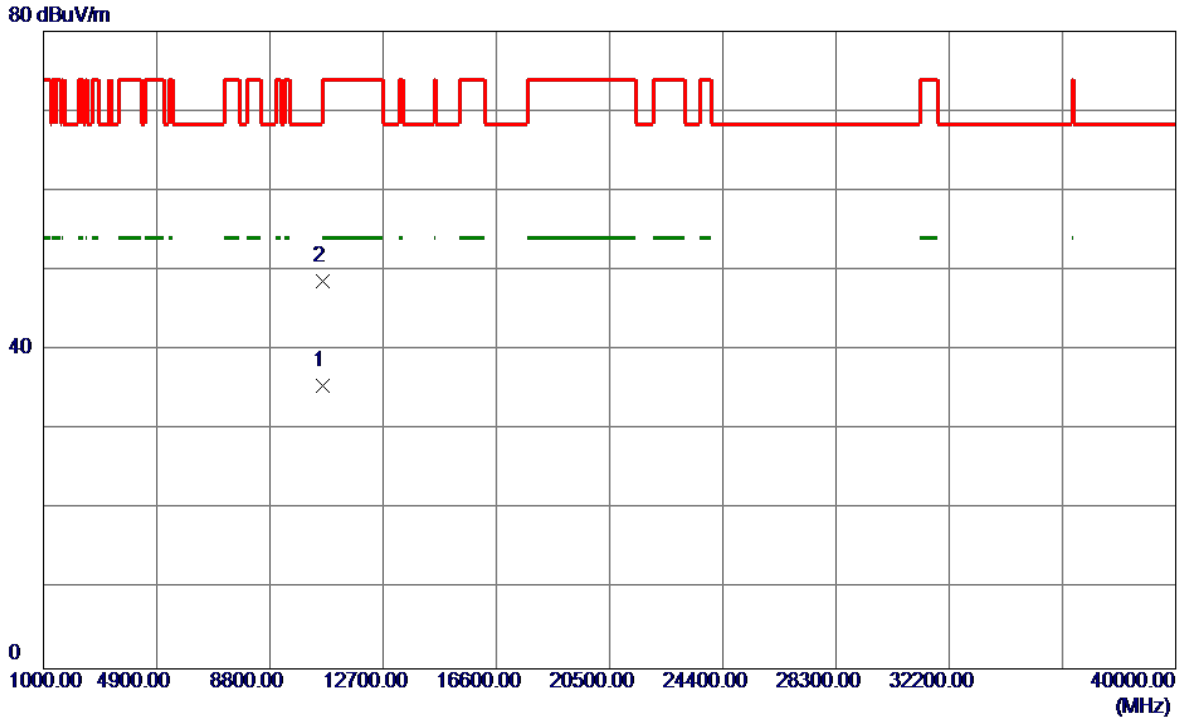


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10619.8200	20.50	15.03	35.53	54.00	-18.47	AVG	
2	10625.0400	33.65	15.04	48.69	74.00	-25.31	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal


130 dBuV/m

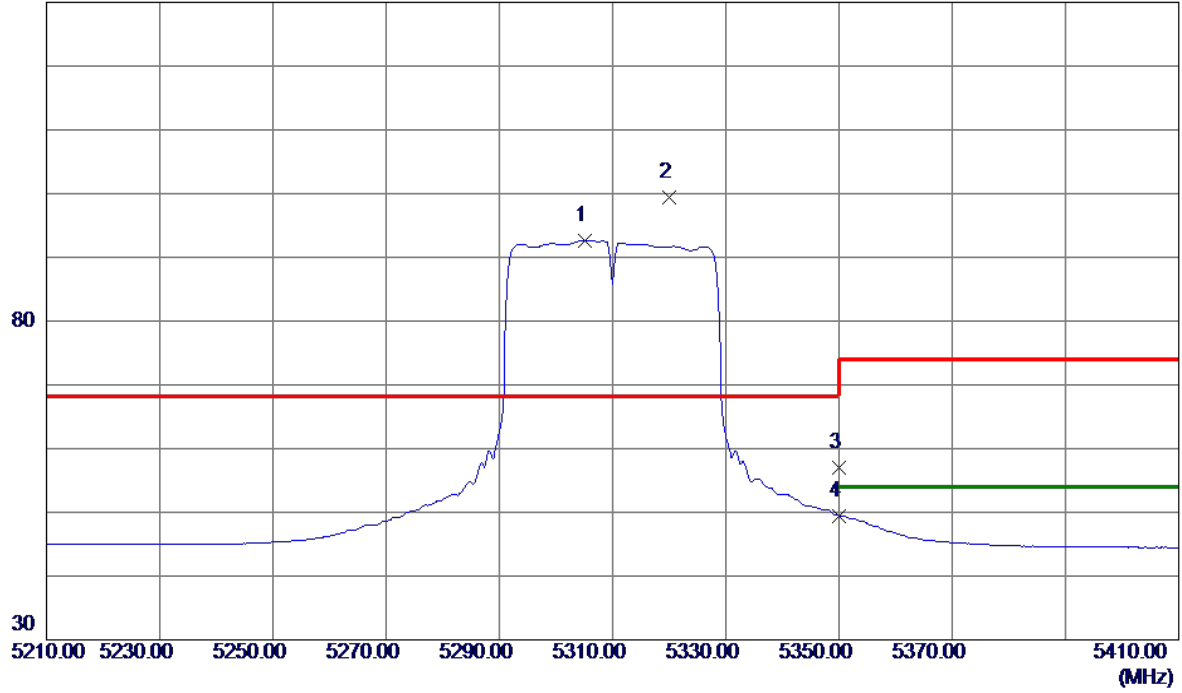

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5305.2000	75.31	17.31	92.62	999.00	-906.38	AVG	No Limit
2 *	5320.0000	82.00	17.36	99.36	68.30	31.06	Peak	No Limit
3	5350.0000	39.53	17.47	57.00	68.30	-11.30	Peak	
4	5350.0000	31.98	17.47	49.45	999.00	-949.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

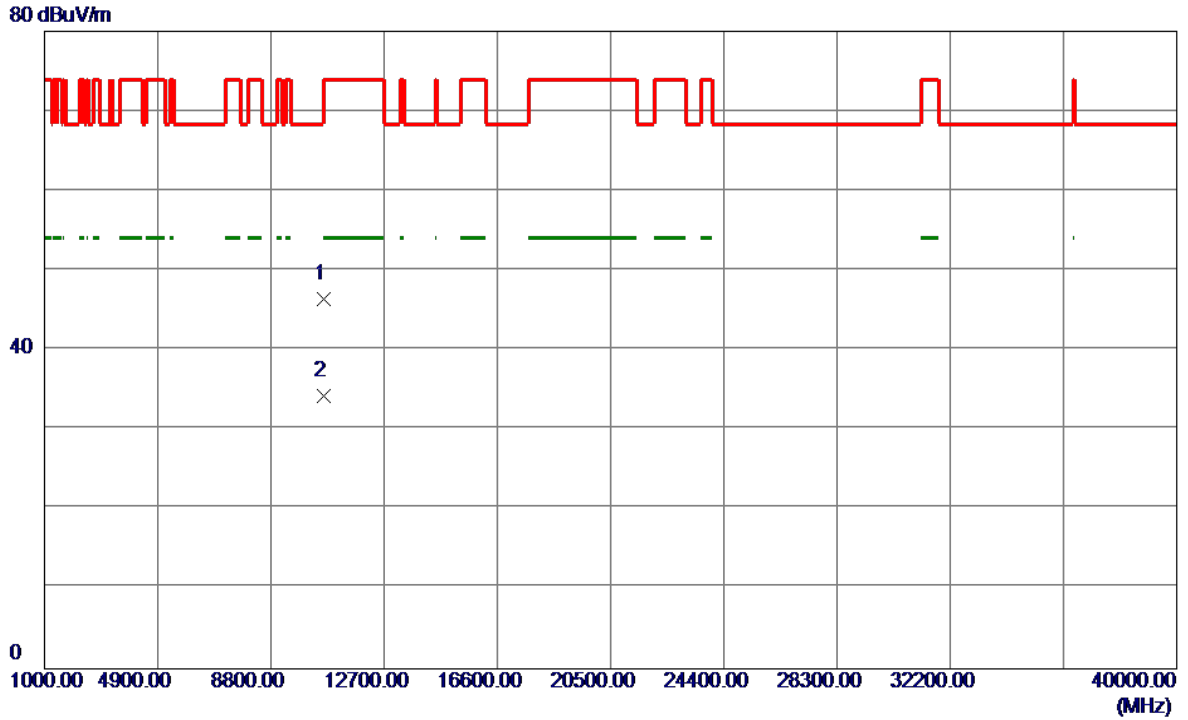


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10621.1300	31.42	15.03	46.45	74.00	-27.55	Peak	
2 *	10621.9100	19.22	15.04	34.26	54.00	-19.74	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical


130 dBuV/m

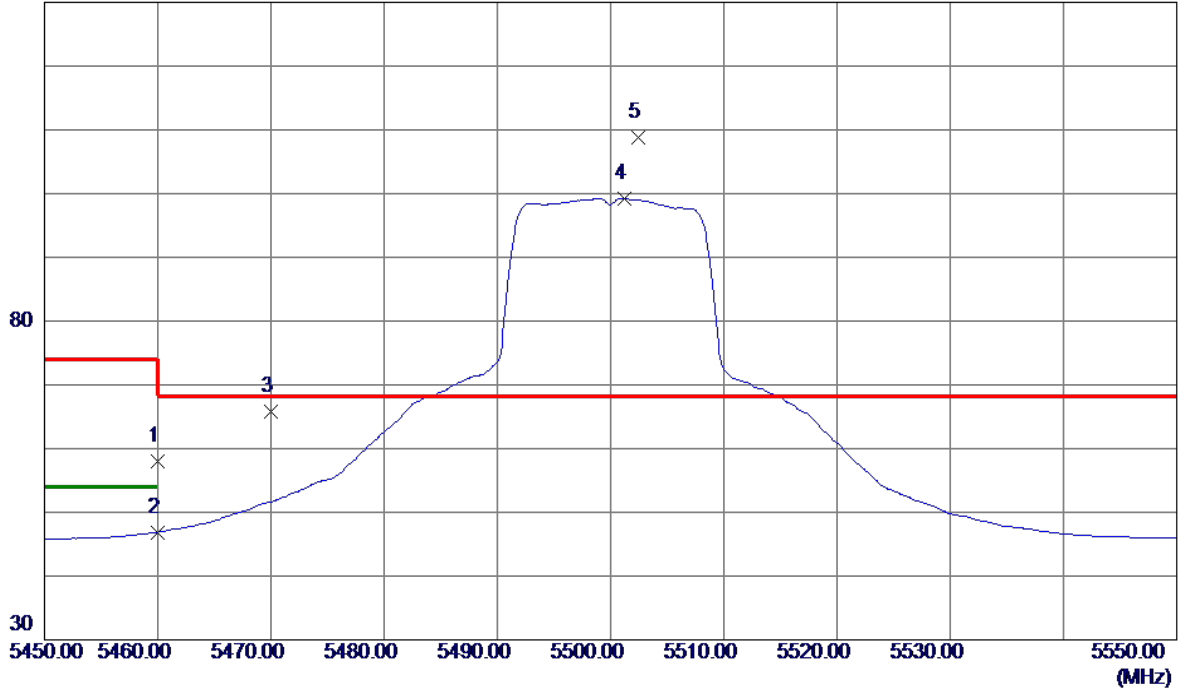

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.12	17.85	57.97	74.00	-16.03	Peak	
2	5460.0000	29.01	17.85	46.86	54.00	-7.14	AVG	
3	5470.0000	47.98	17.89	65.87	68.30	-2.43	Peak	
4	5501.2000	81.25	18.00	99.25	999.00	-899.75	AVG	No Limit
5 *	5502.4000	90.80	18.01	108.81	68.30	40.51	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

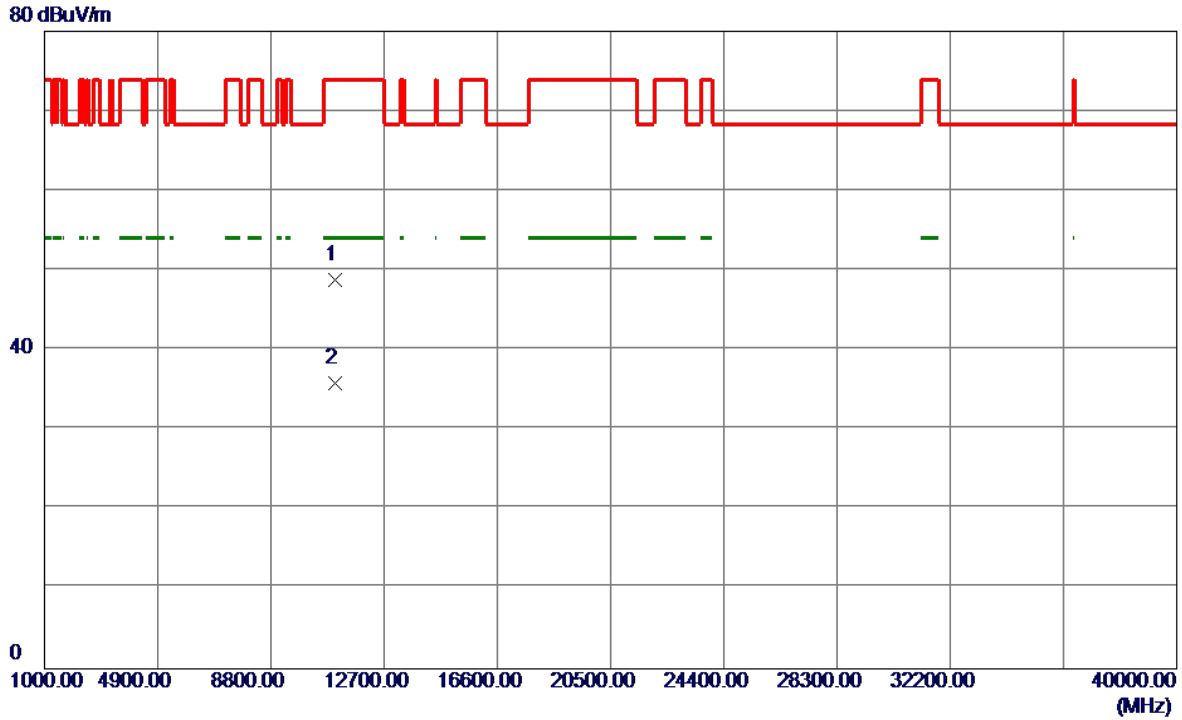

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11001.5500	43.60	5.20	48.80	74.00	-25.20	Peak	
2 *	11001.8000	30.60	5.20	35.80	54.00	-18.20	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

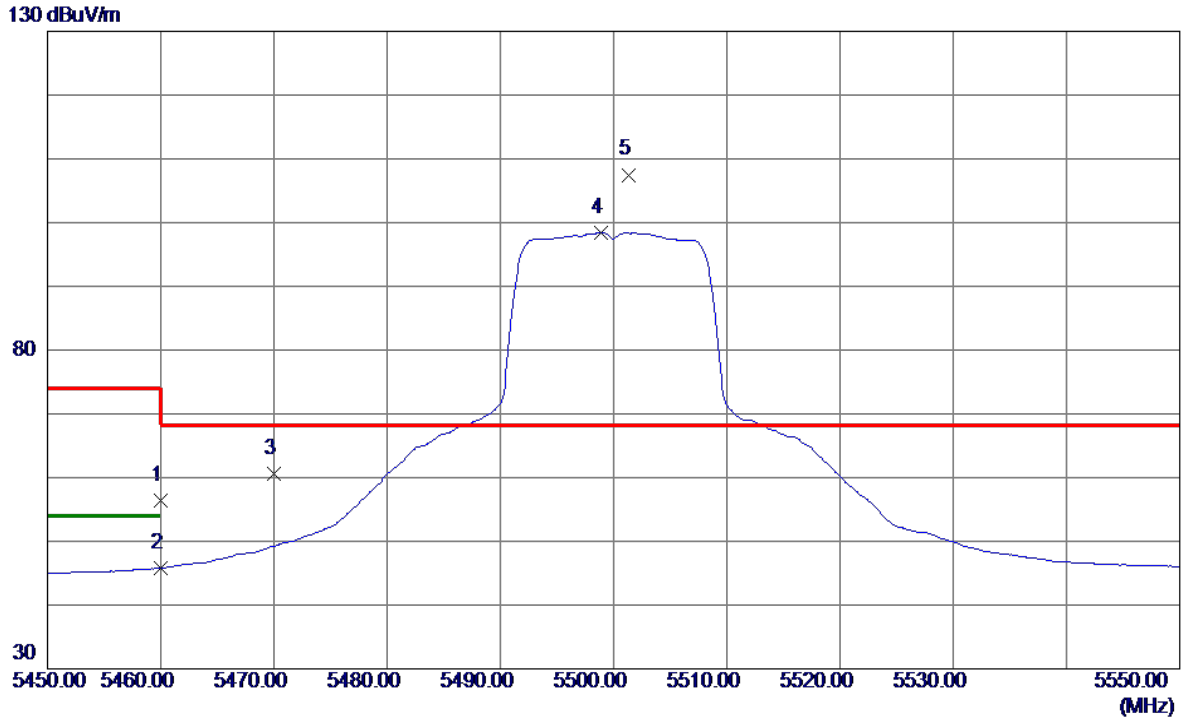

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.50	17.85	56.35	74.00	-17.65	Peak	
2	5460.0000	27.95	17.85	45.80	54.00	-8.20	AVG	
3	5470.0000	42.71	17.89	60.60	68.30	-7.70	Peak	
4	5498.9000	80.42	17.99	98.41	999.00	-900.59	AVG	No Limit
5 *	5501.3000	89.50	18.00	107.50	68.30	39.20	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

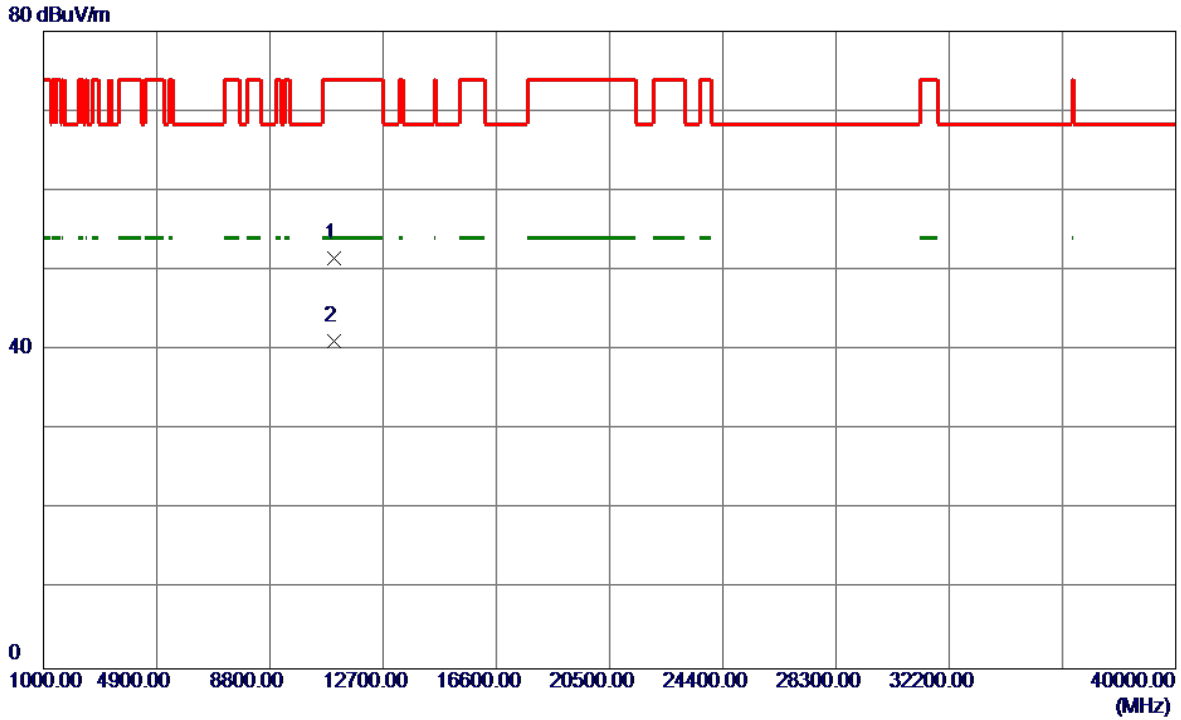

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10998.1000	35.76	15.83	51.59	74.00	-22.41	Peak	
2 *	11004.2000	25.24	15.84	41.08	54.00	-12.92	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Vertical

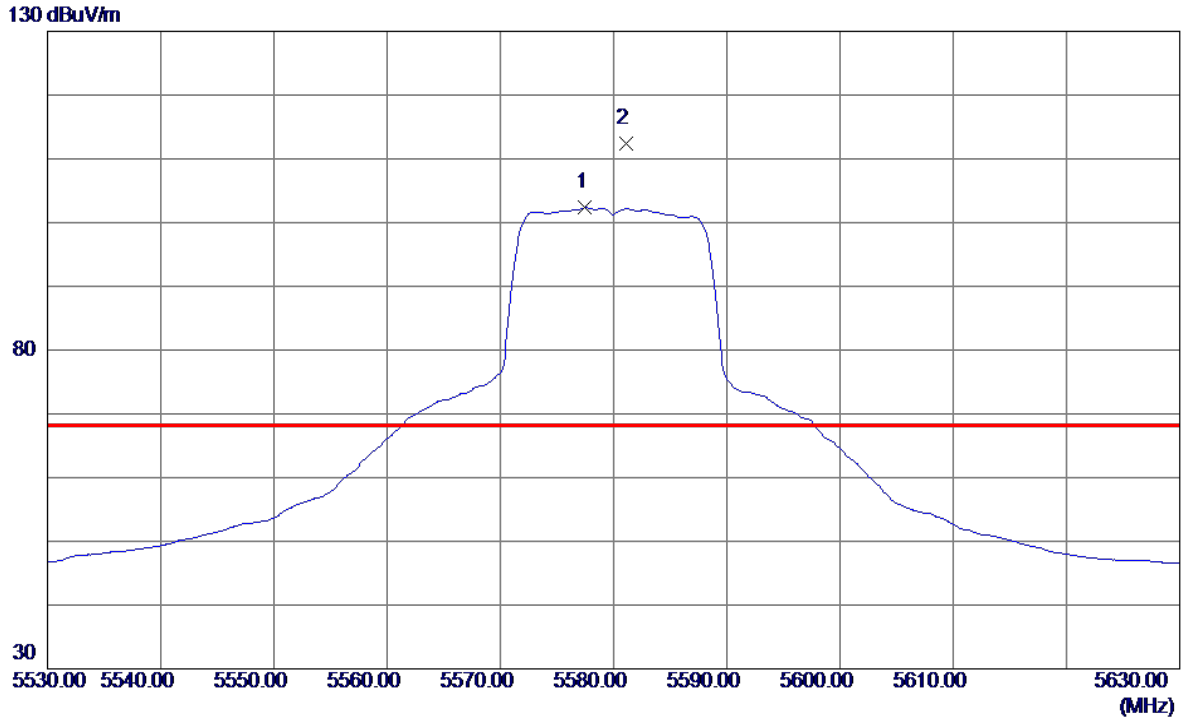

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5577.5000	84.01	18.34	102.35	999.00	-896.65	AVG	No Limit
2 *	5581.1000	94.02	18.35	112.37	68.30	44.07	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Vertical

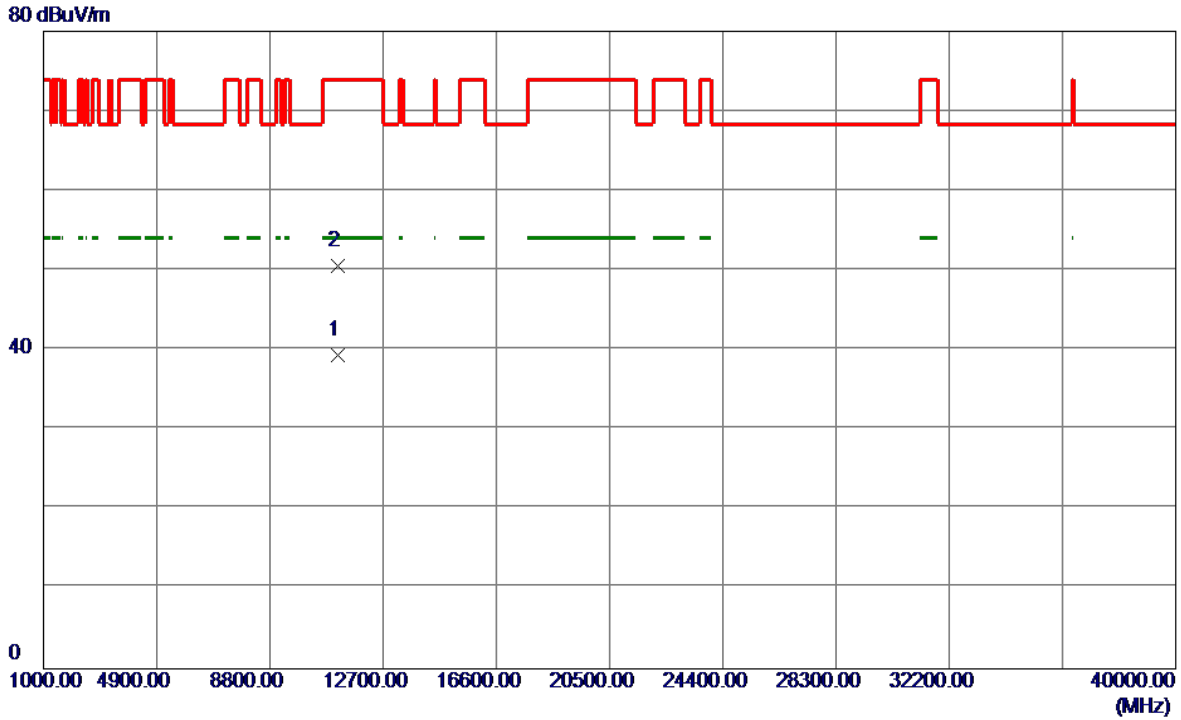

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11158.0000	33.79	5.52	39.31	54.00	-14.69	AVG	
2	11161.6000	45.10	5.52	50.62	74.00	-23.38	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Horizontal

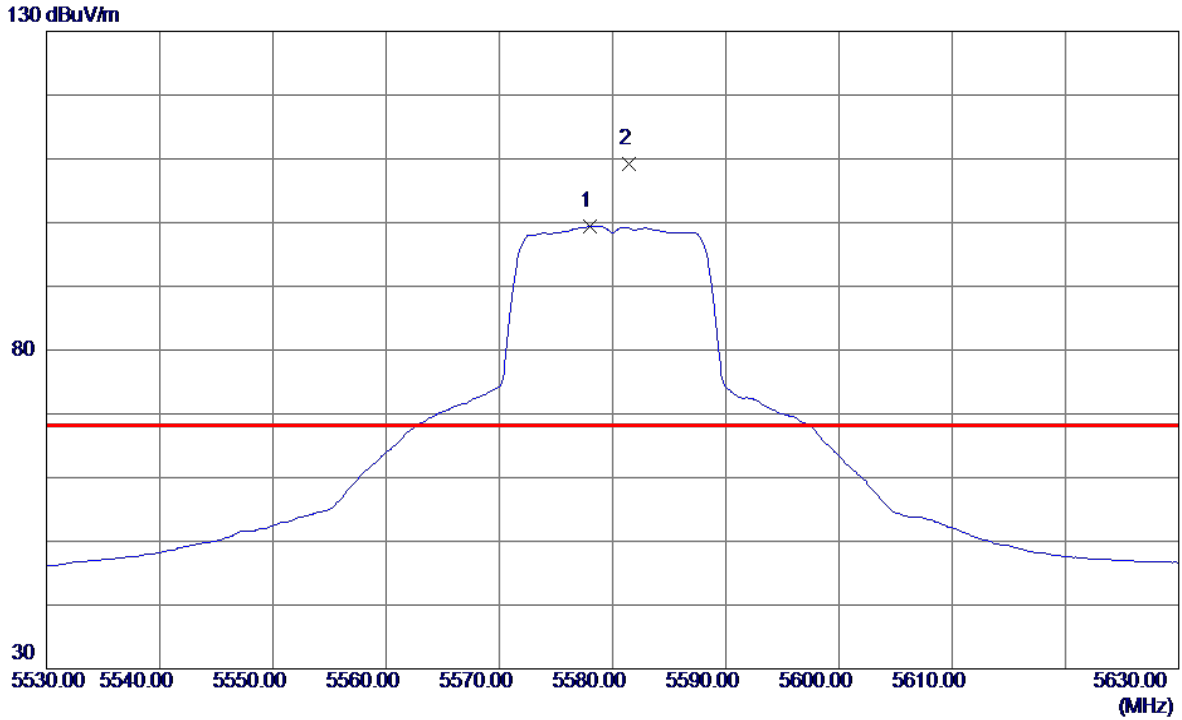

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5578.0000	81.01	18.34	99.35	999.00	-899.65	AVG	No Limit
2 *	5581.4000	90.84	18.36	109.20	68.30	40.90	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz

Horizontal

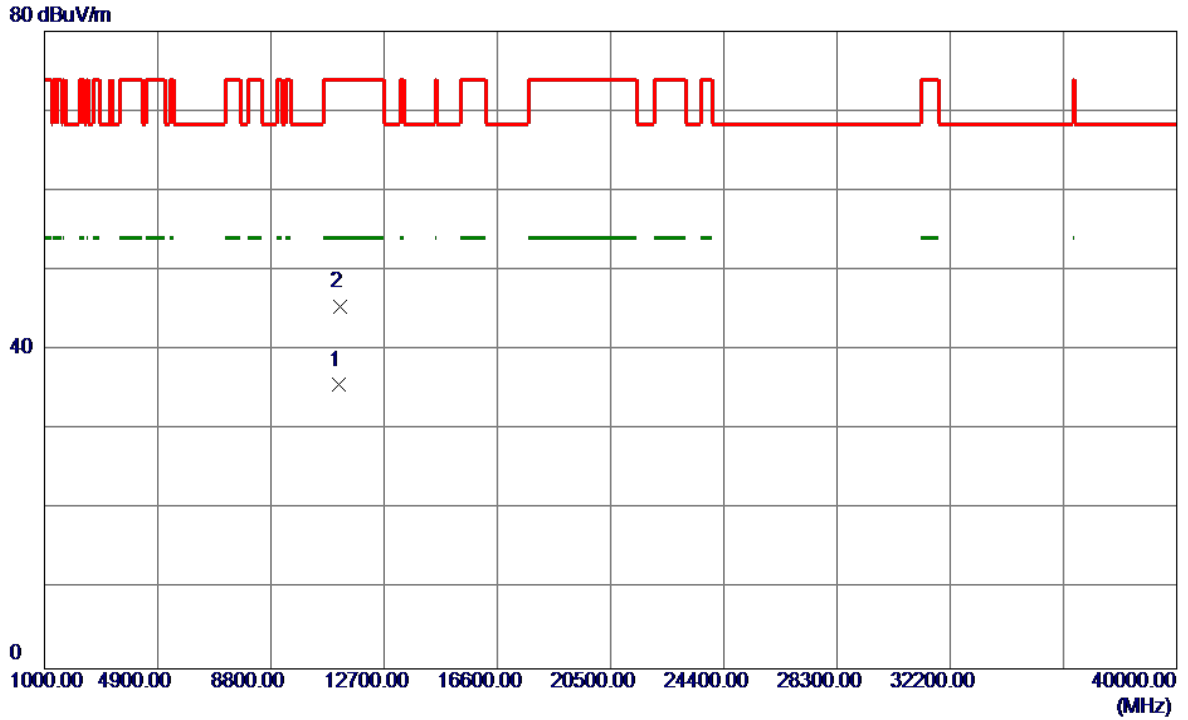


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11159.9000	19.39	16.21	35.60	54.00	-18.40	AVG	
2	11161.8000	29.21	16.21	45.42	74.00	-28.58	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical


130 dBuV/m

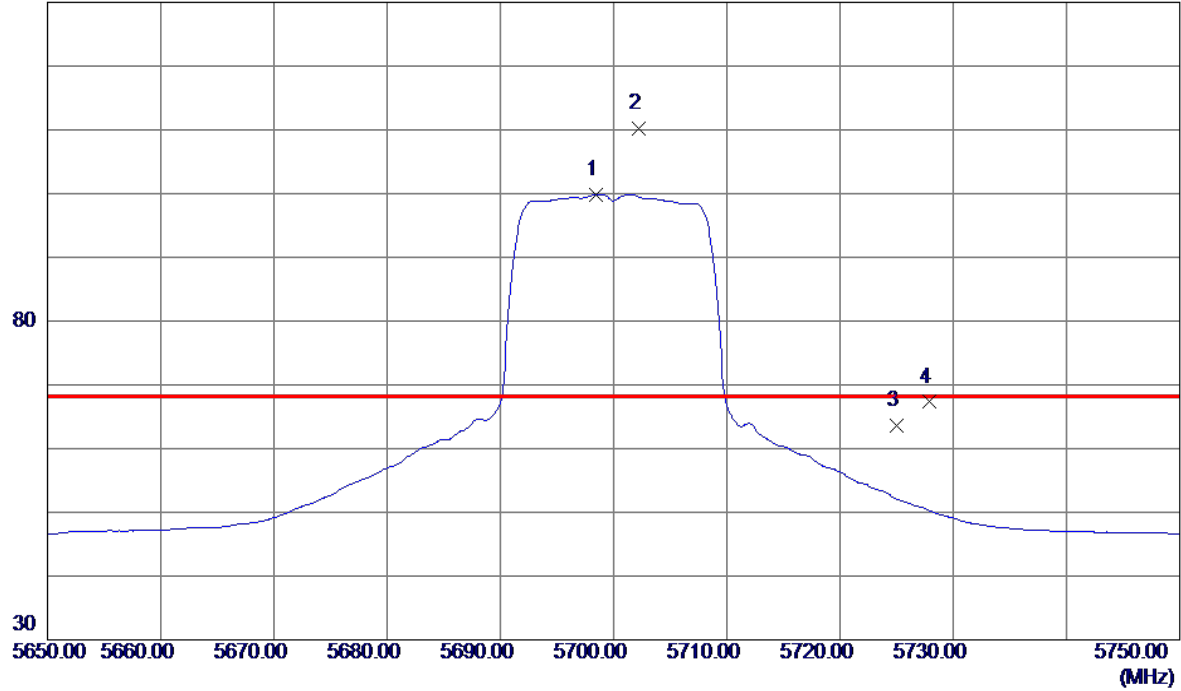

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.4000	80.93	18.87	99.80	999.00	-899.20	AVG	No Limit
2 *	5702.2000	91.32	18.89	110.21	68.30	41.91	Peak	No Limit
3	5725.0000	44.61	18.99	63.60	68.30	-4.70	Peak	
4	5727.9000	48.30	19.00	67.30	68.30	-1.00	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

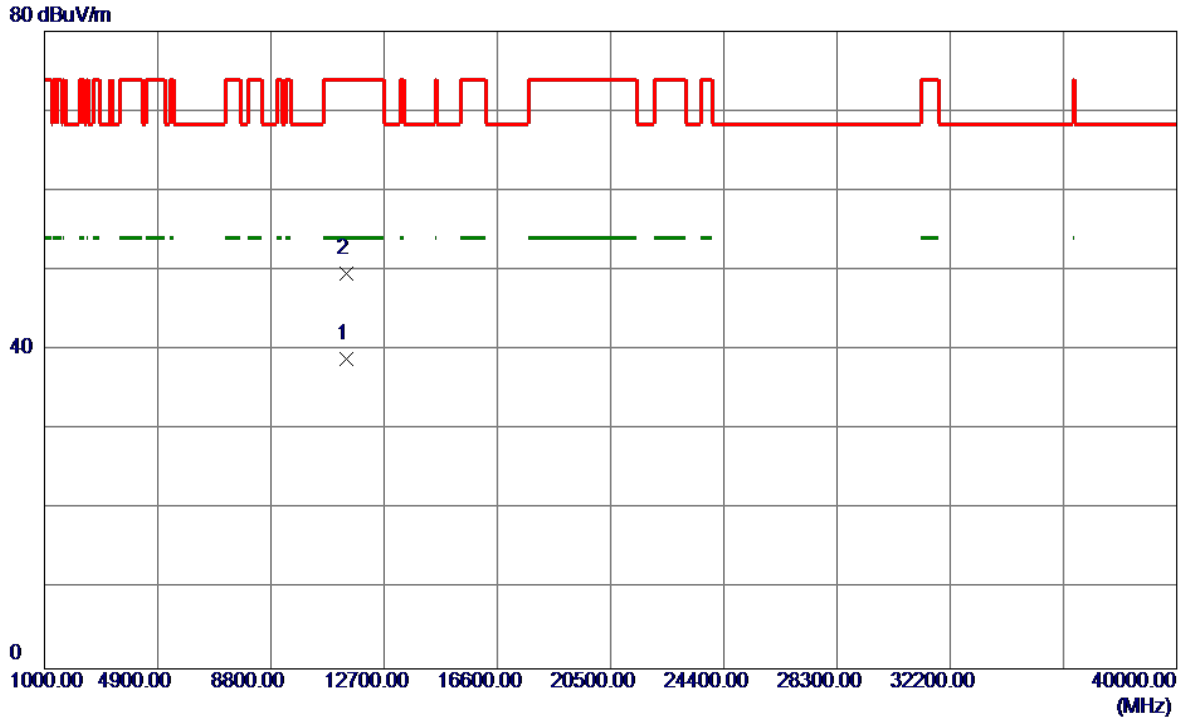

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11399.9000	32.90	6.00	38.90	54.00	-15.10	AVG	
2	11401.6000	43.60	6.00	49.60	74.00	-24.40	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

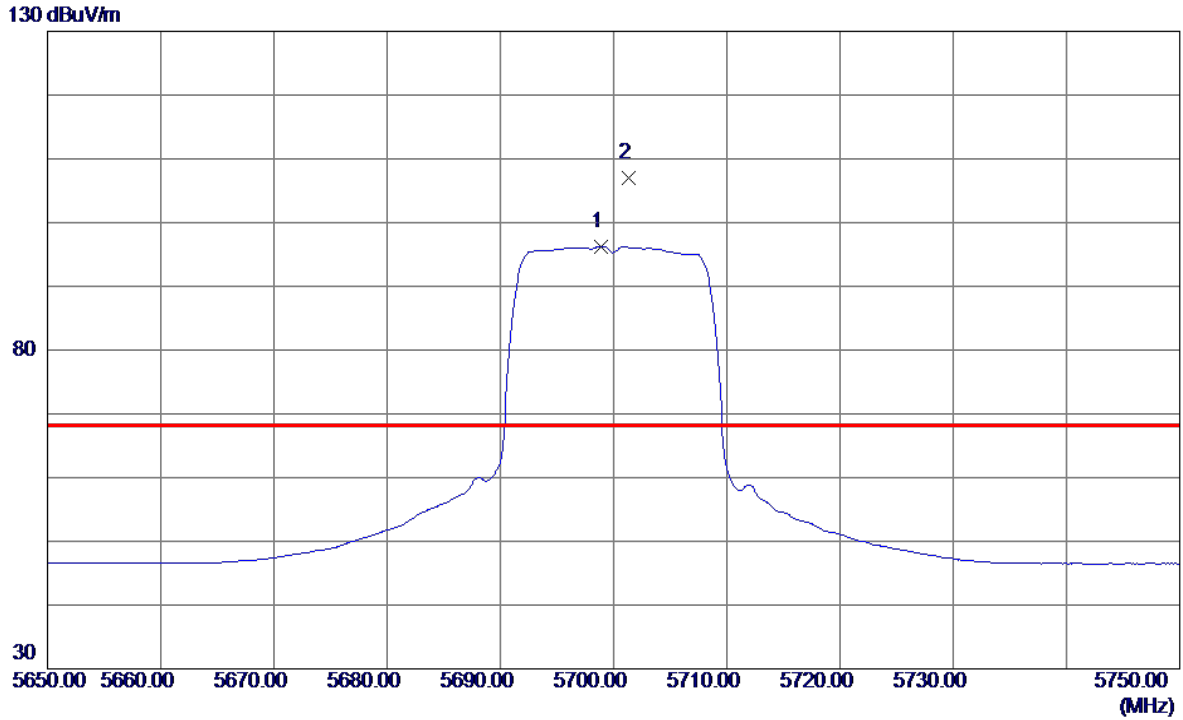

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.9000	77.39	18.88	96.27	999.00	-902.73	AVG	No Limit
2 *	5701.3000	88.04	18.89	106.93	68.30	38.63	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

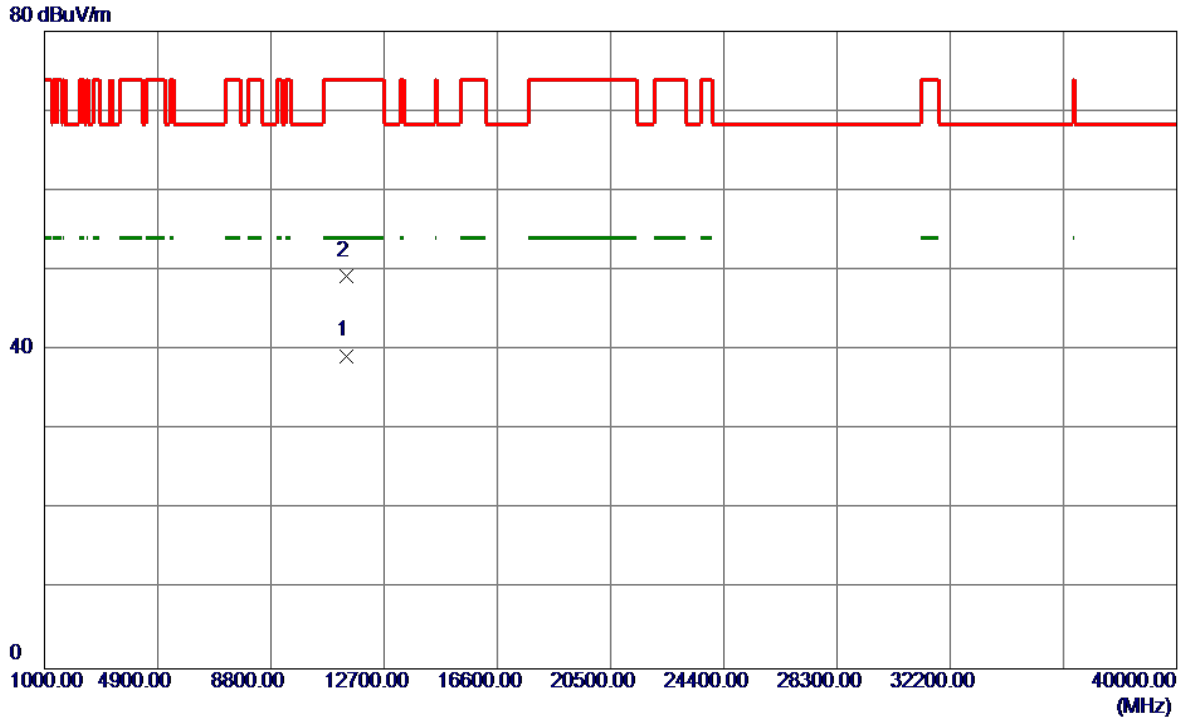

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	22.51	16.77	39.28	54.00	-14.72	AVG	
2	11400.5500	32.55	16.78	49.33	74.00	-24.67	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

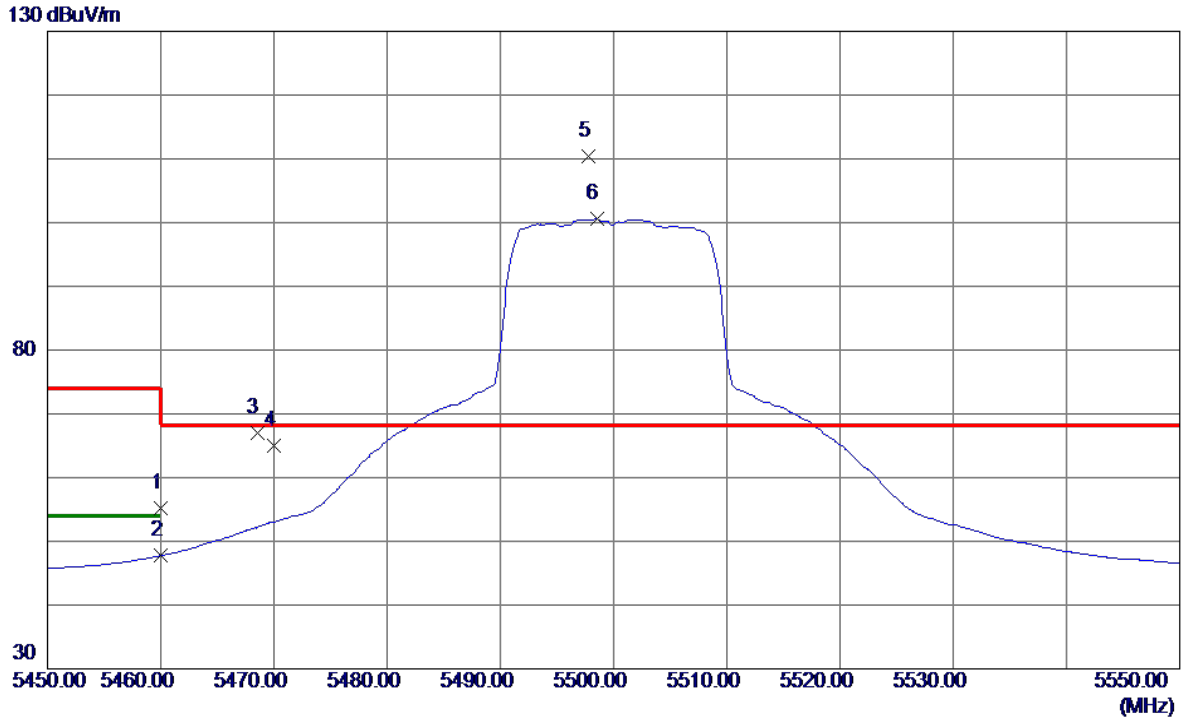

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.40	17.85	55.25	74.00	-18.75	Peak	
2	5460.0000	29.92	17.85	47.77	54.00	-6.23	AVG	
3	5468.5000	49.04	17.88	66.92	68.30	-1.38	Peak	
4	5470.0000	47.09	17.89	64.98	68.30	-3.32	Peak	
5 *	5497.8000	92.40	17.99	110.39	68.30	42.09	Peak	No Limit
6	5498.5000	82.59	17.99	100.58	999.00	-898.42	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

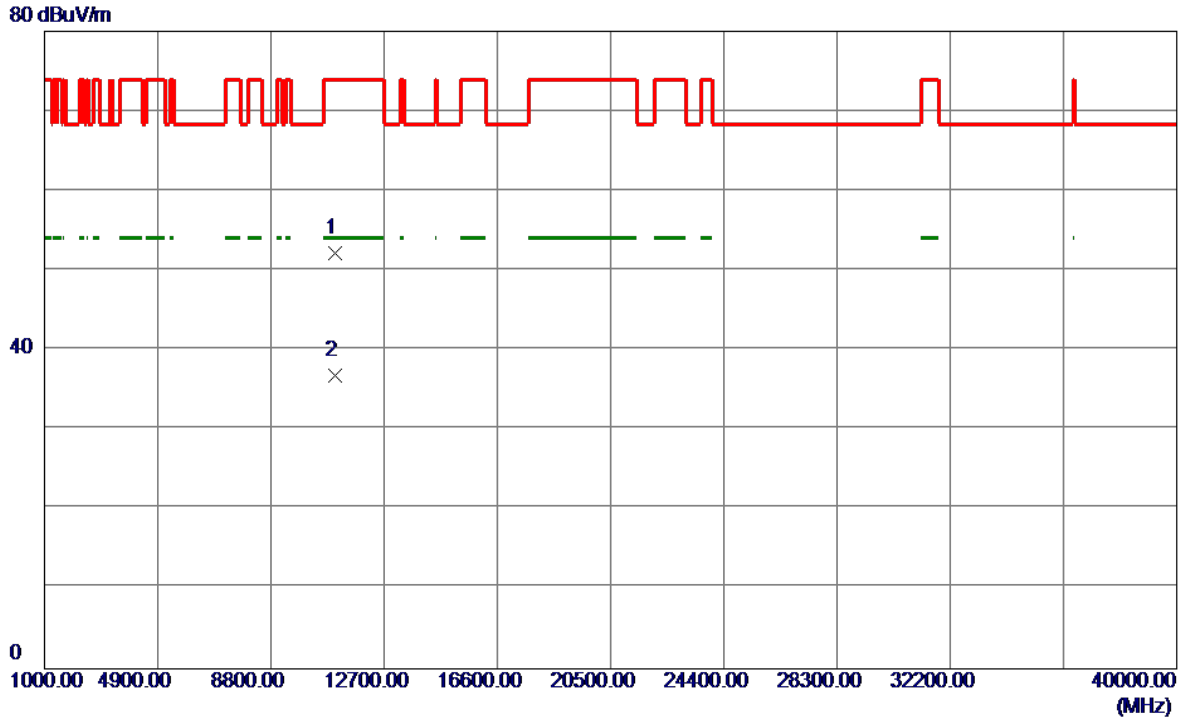

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10998.0000	46.90	5.20	52.10	74.00	-21.90	Peak	
2 *	11003.3000	31.60	5.21	36.81	54.00	-17.19	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

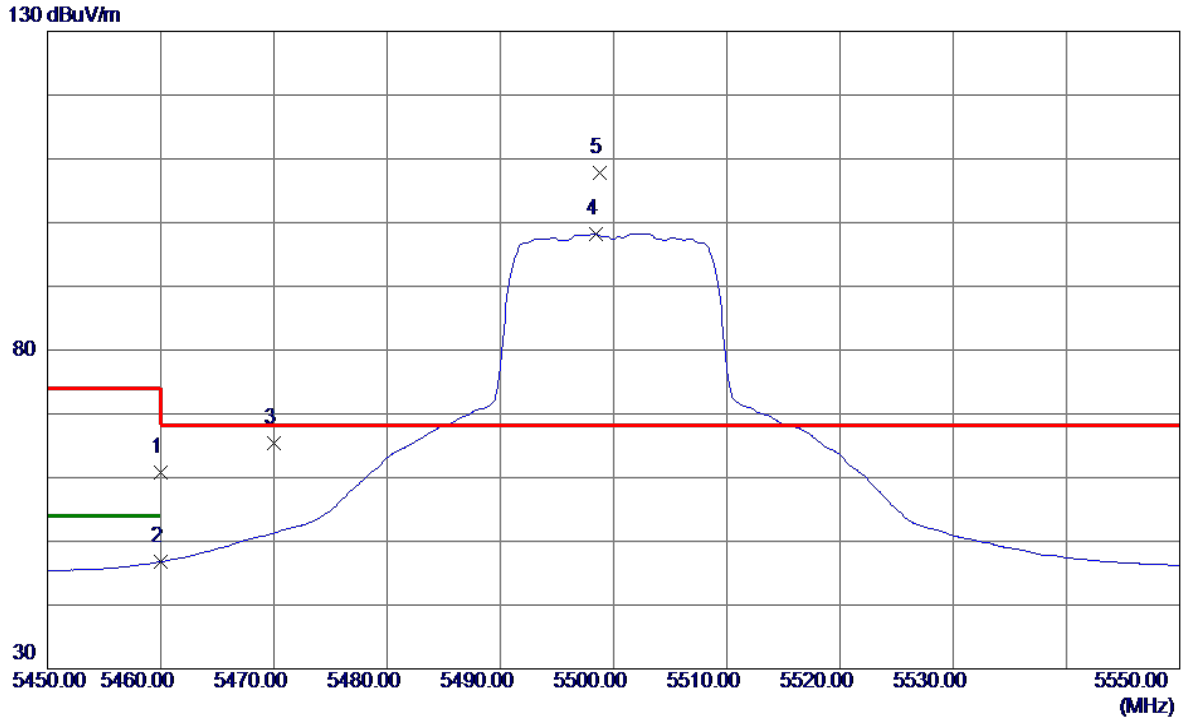

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	42.95	17.85	60.80	74.00	-13.20	Peak	
2	5460.0000	28.94	17.85	46.79	54.00	-7.21	AVG	
3	5470.0000	47.58	17.89	65.47	68.30	-2.83	Peak	
4	5498.4000	80.22	17.99	98.21	999.00	-900.79	AVG	No Limit
5 *	5498.8000	89.79	17.99	107.78	68.30	39.48	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

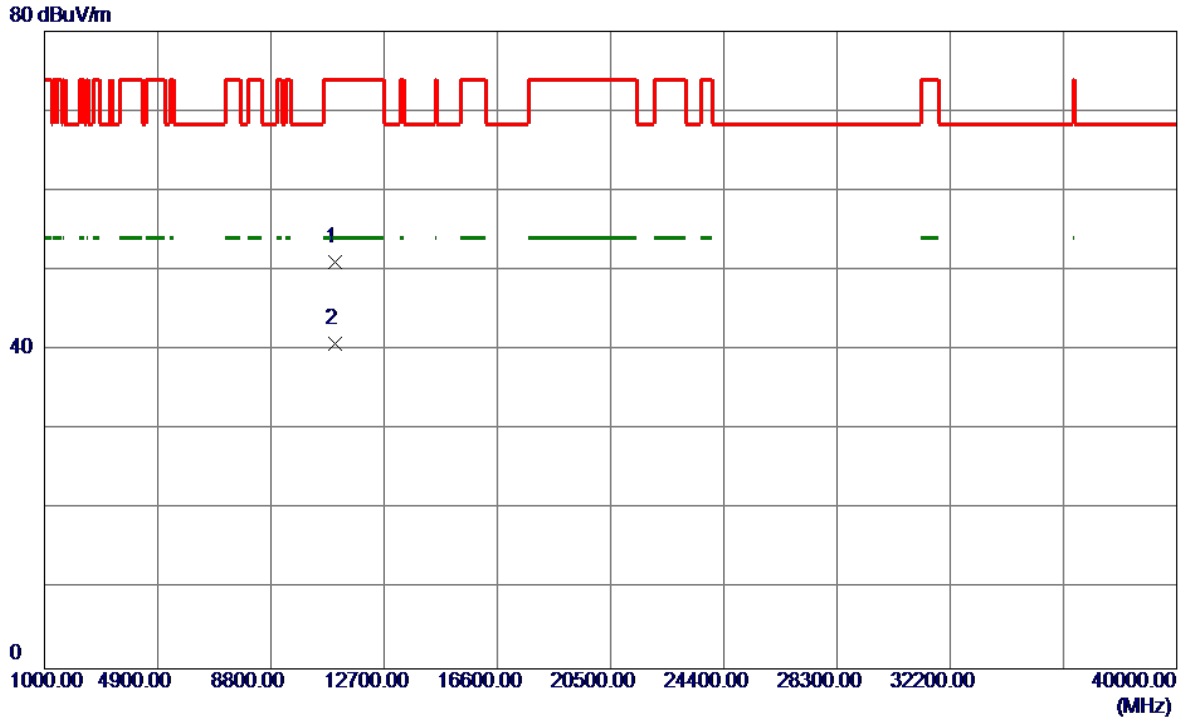

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10999.6000	35.21	15.83	51.04	74.00	-22.96	Peak	
2 *	11003.0000	24.89	15.84	40.73	54.00	-13.27	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Vertical

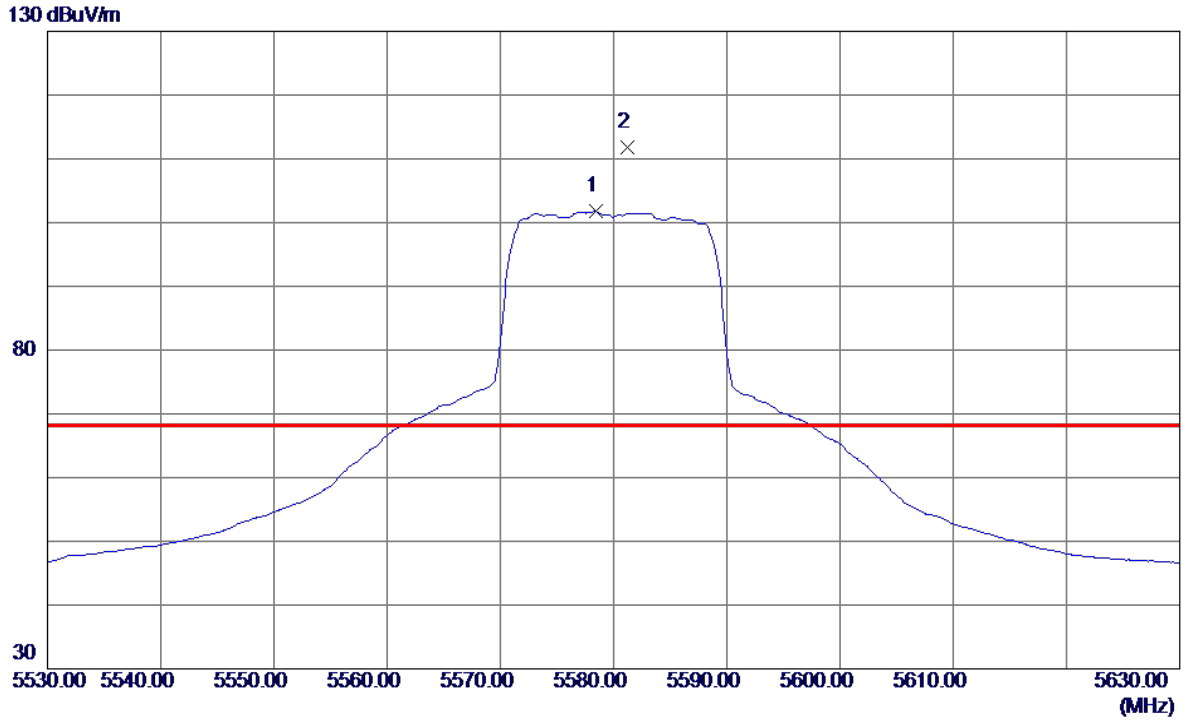

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5578.4000	83.39	18.34	101.73	999.00	-897.27	AVG	No Limit
2 *	5581.2000	93.46	18.35	111.81	68.30	43.51	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Vertical

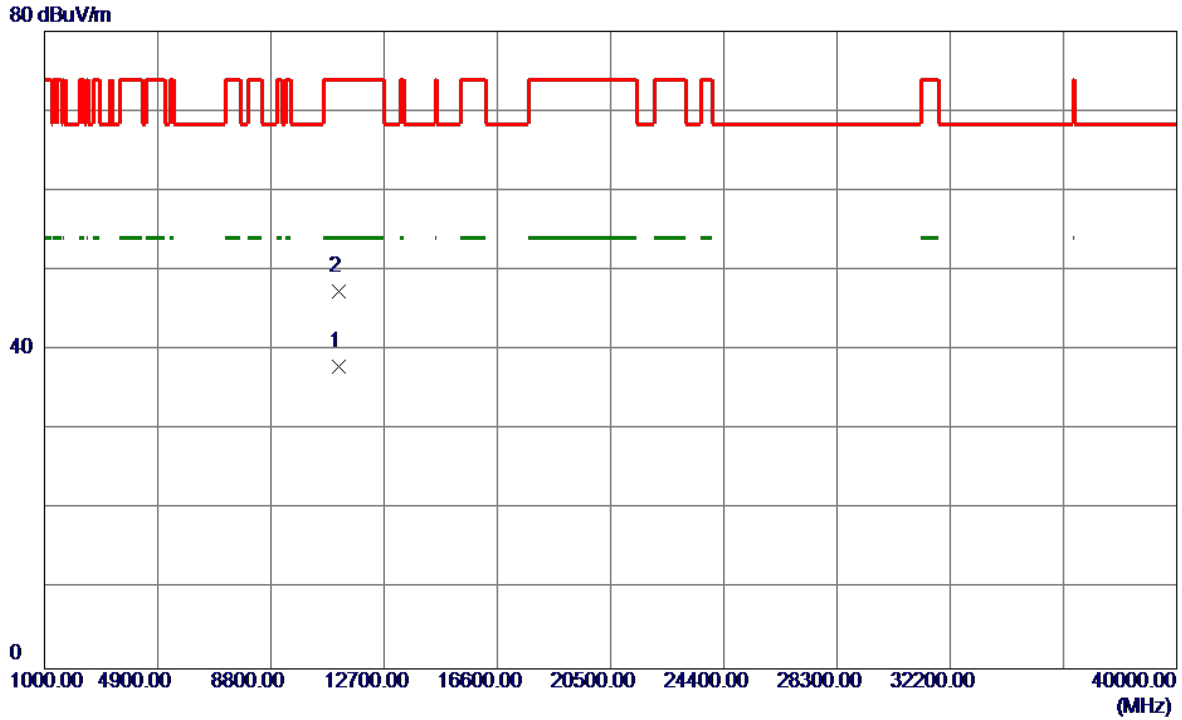

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11157.6000	32.35	5.52	37.87	54.00	-16.13	AVG	
2	11159.5500	41.90	5.52	47.42	74.00	-26.58	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Horizontal

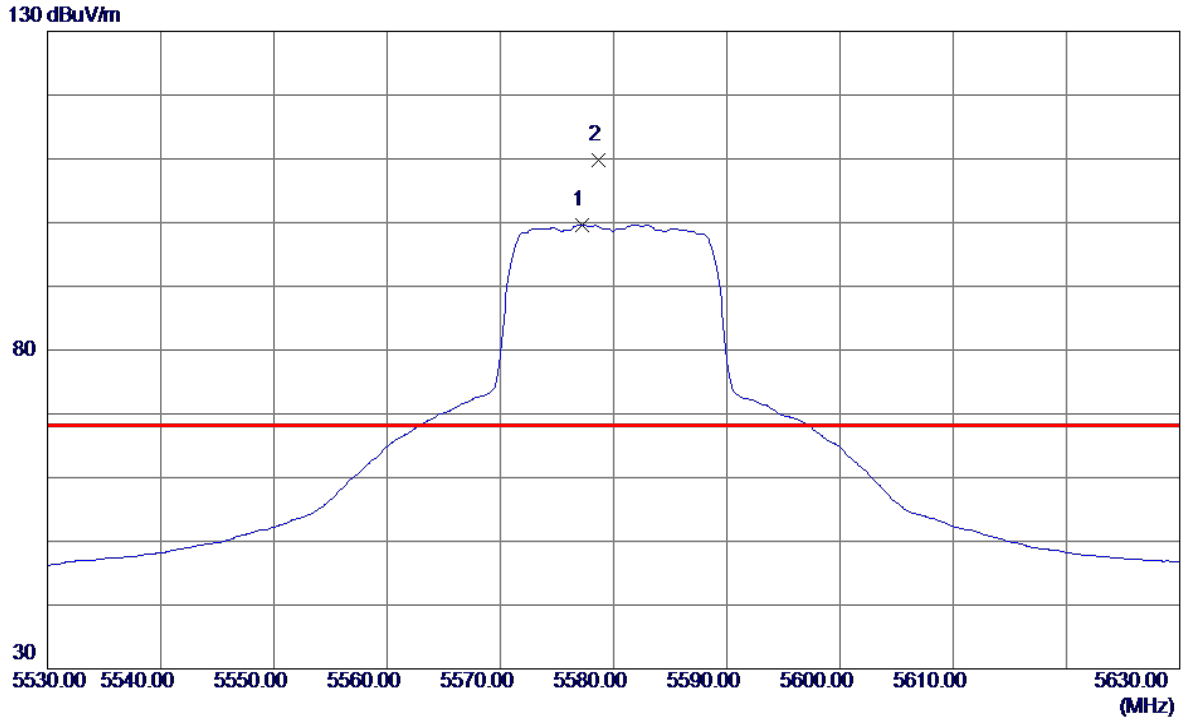

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5577.2000	81.25	18.34	99.59	999.00	-899.41	AVG	No Limit
2 *	5578.7000	91.47	18.34	109.81	68.30	41.51	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Horizontal

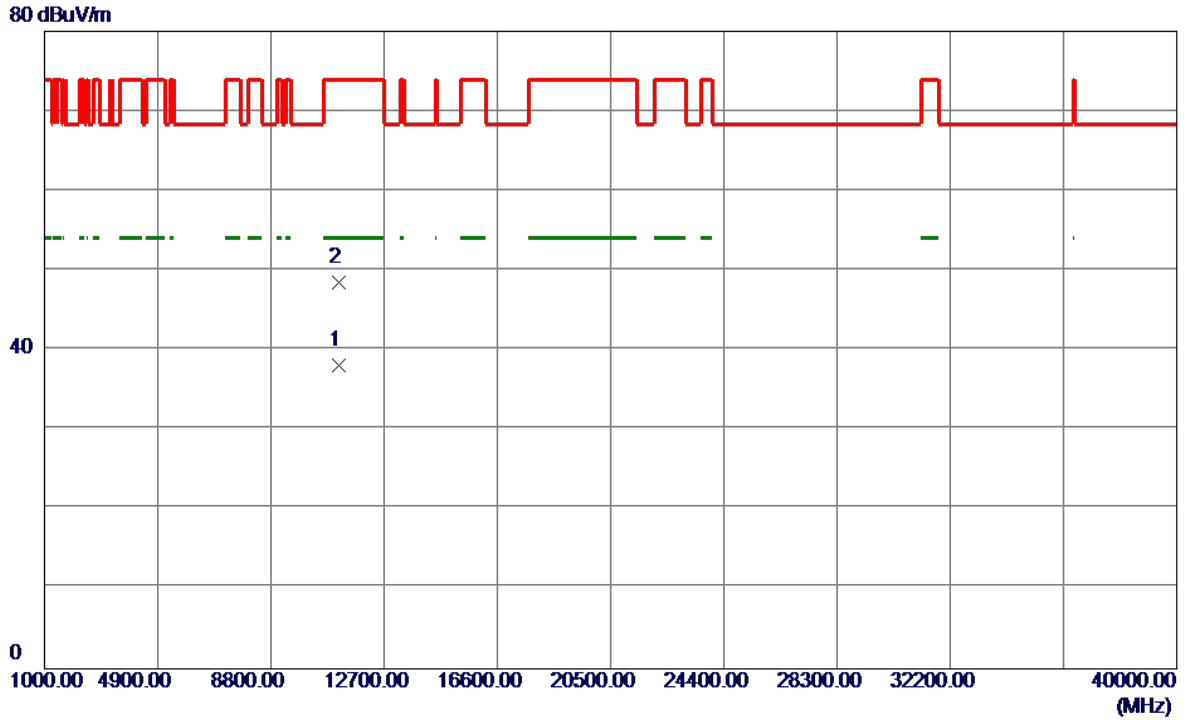

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11158.3000	21.93	16.20	38.13	54.00	-15.87	AVG	
2	11159.3500	32.25	16.21	48.46	74.00	-25.54	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

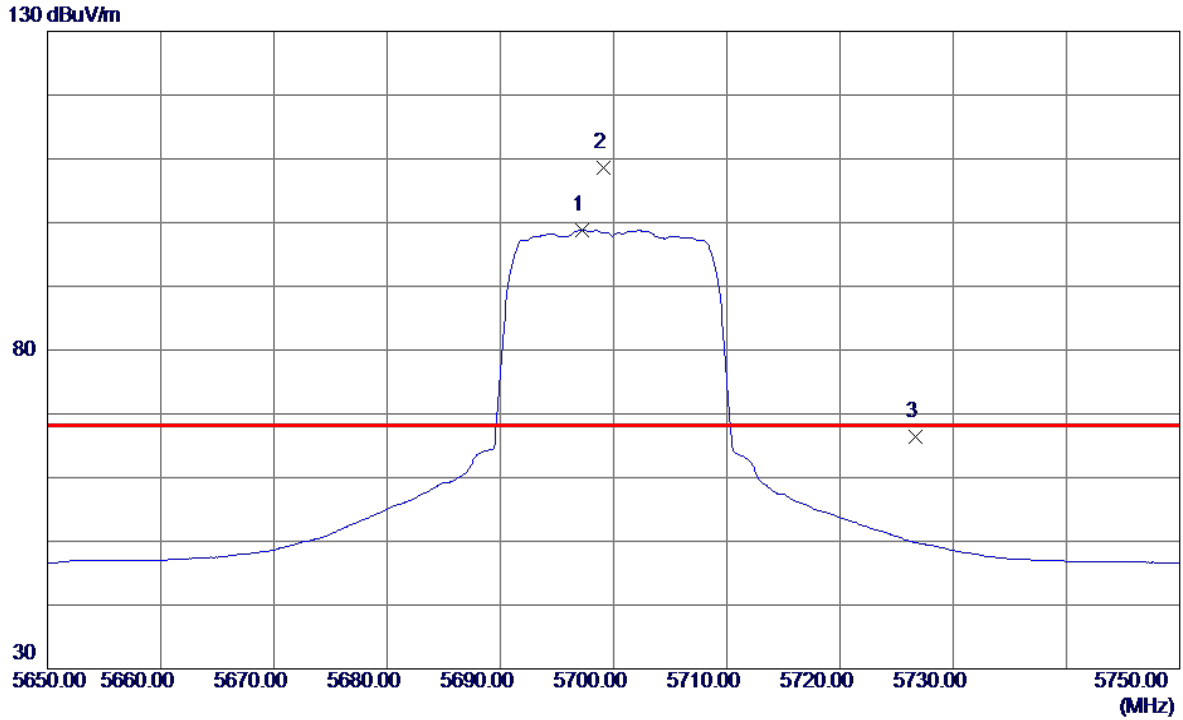

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5697.2000	79.93	18.87	98.80	999.00	-900.20	AVG	No Limit
2 *	5699.1000	89.67	18.88	108.55	68.30	40.25	Peak	No Limit
3	5726.7000	47.36	19.00	66.36	68.30	-1.94	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

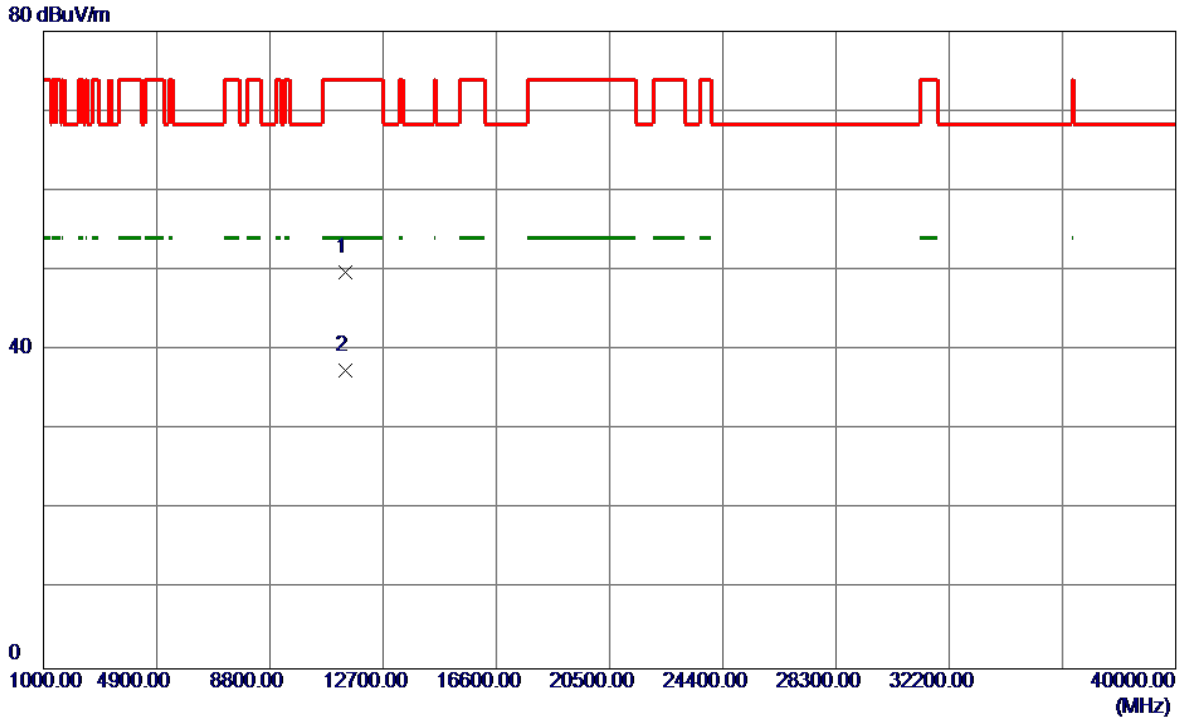

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	43.80	6.00	49.80	74.00	-24.20	Peak	
2 *	11400.0000	31.50	6.00	37.50	54.00	-16.50	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

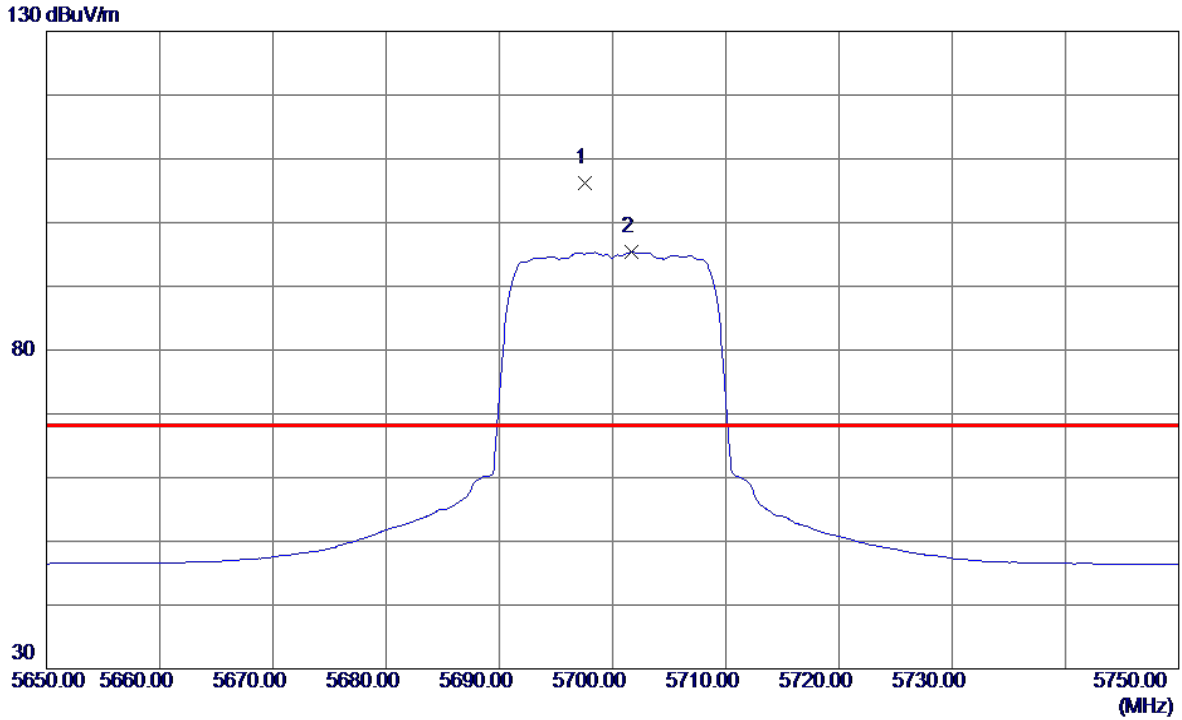

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5697.6000	87.34	18.87	106.21	68.30	37.91	Peak	No Limit
2	5701.7000	76.43	18.89	95.32	999.00	-903.68	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

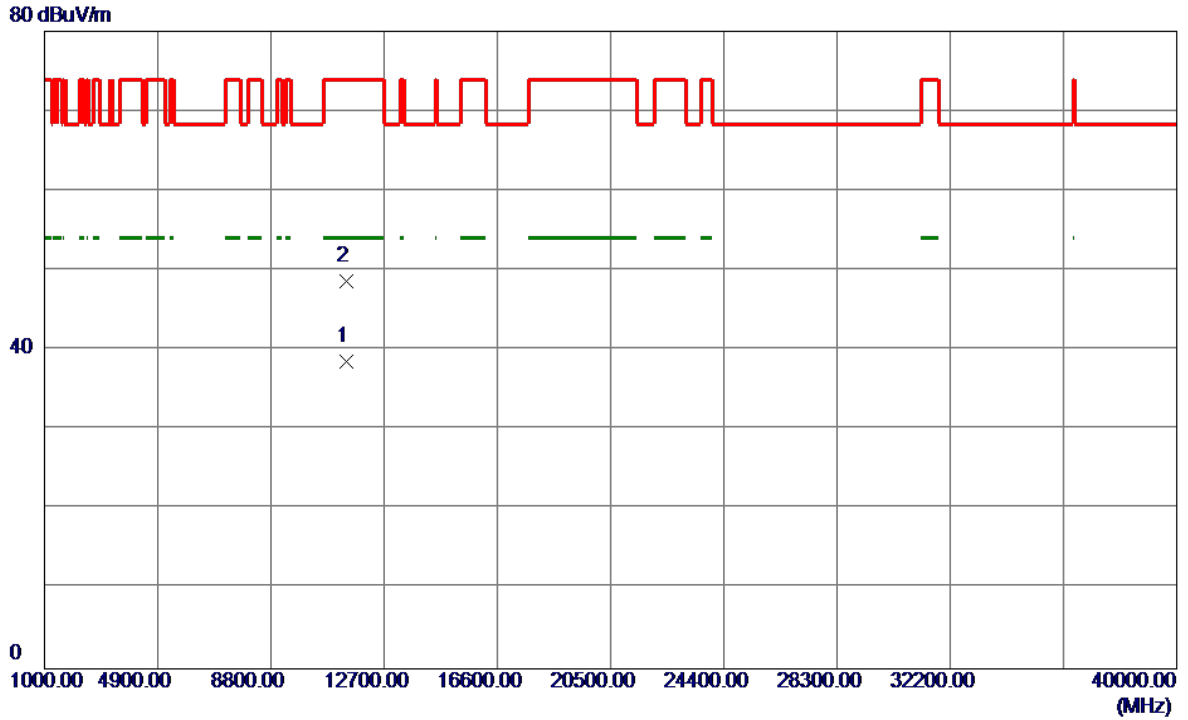


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11399.7500	21.86	16.77	38.63	54.00	-15.37	AVG	
2	11406.7000	31.89	16.79	48.68	74.00	-25.32	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

130 dBuV/m

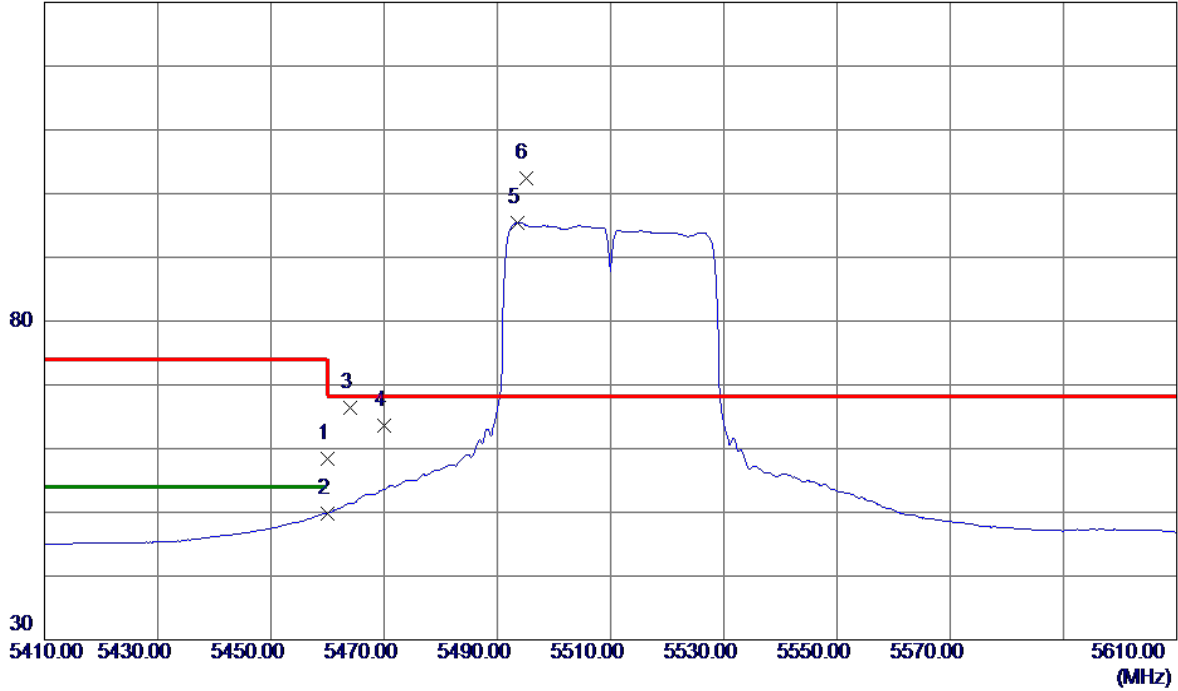

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.56	17.85	58.41	74.00	-15.59	Peak	
2	5460.0000	32.00	17.85	49.85	54.00	-4.15	AVG	
3	5464.0000	48.52	17.87	66.39	68.30	-1.91	Peak	
4	5470.0000	45.66	17.89	63.55	68.30	-4.75	Peak	
5	5493.6000	77.49	17.97	95.46	999.00	-903.54	AVG	No Limit
6 *	5495.0000	84.37	17.98	102.35	68.30	34.05	Peak	No Limit