


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

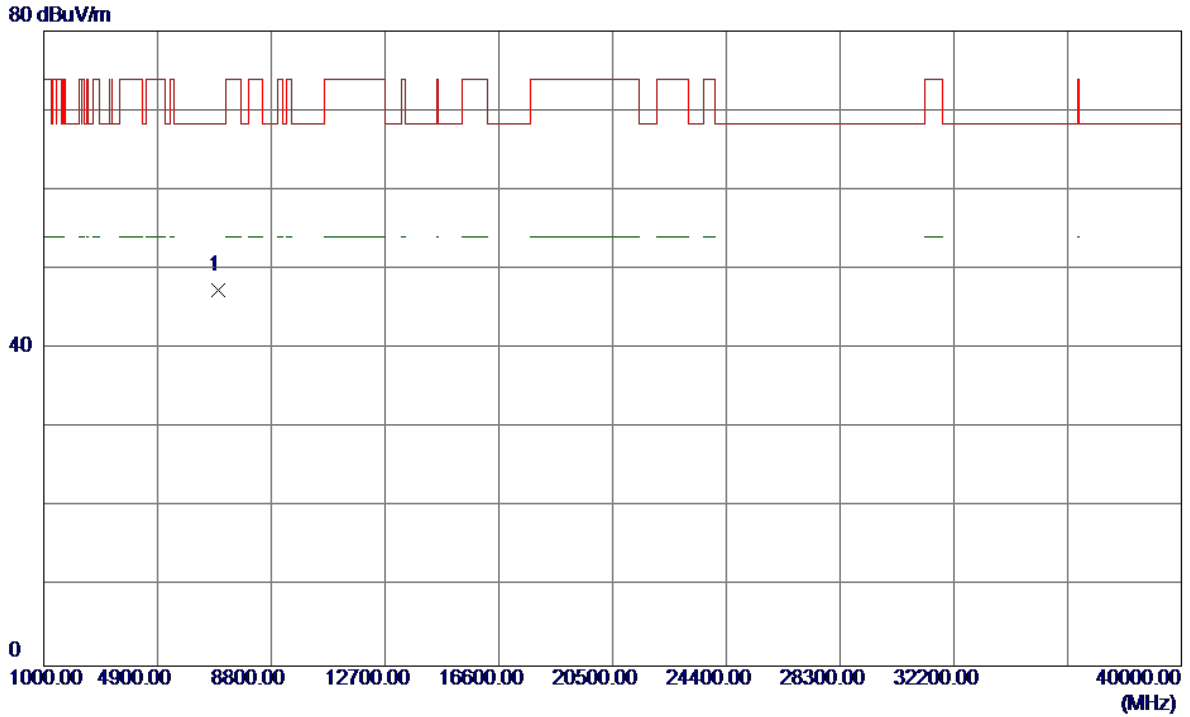


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.8100	37.52	9.89	47.41	68.30	-20.89	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal


115 dBuV/m

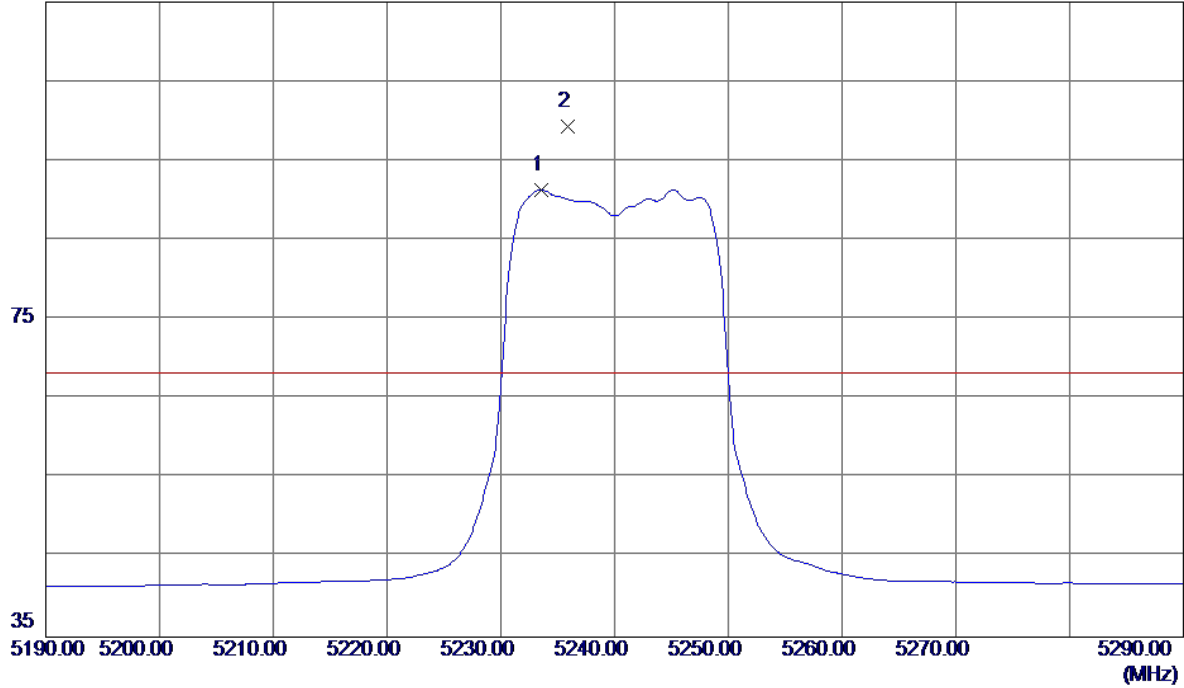

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5233.6000	51.19	40.13	91.32	999.00	-907.68	AVG	No Limit
2 *	5235.9000	59.14	40.14	99.28	68.30	30.98	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

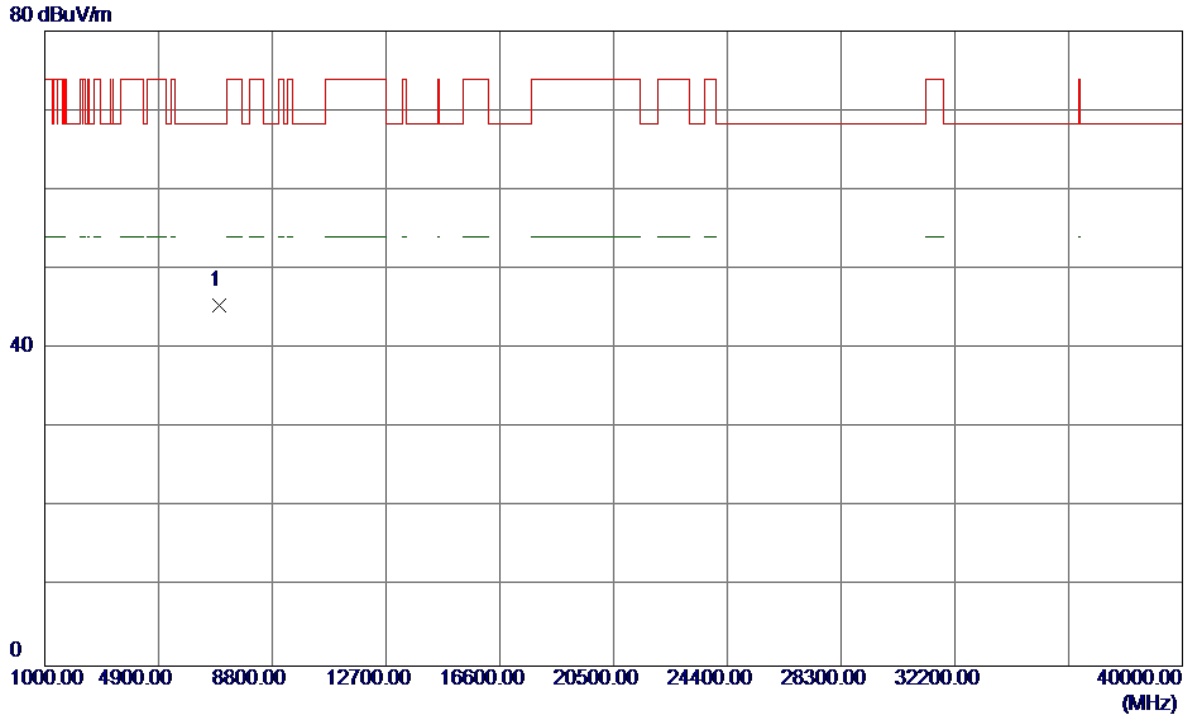


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.3150	35.59	9.89	45.48	68.30	-22.82	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


115 dBuV/m

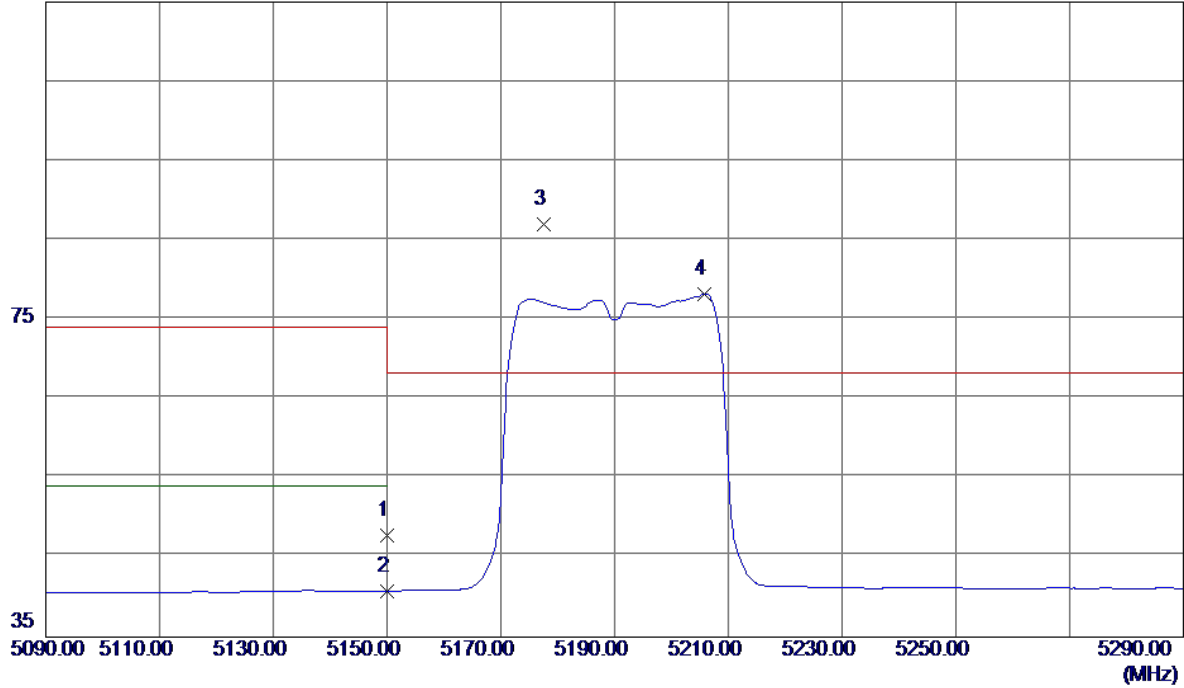

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	7.96	39.90	47.86	74.00	-26.14	Peak	
2	5150.0000	0.87	39.90	40.77	54.00	-13.23	AVG	
3 *	5177.6000	46.97	39.97	86.94	68.30	18.64	Peak	No L imit
4	5205.8000	38.17	40.05	78.22	999.00	-920.78	AVG	No L imit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

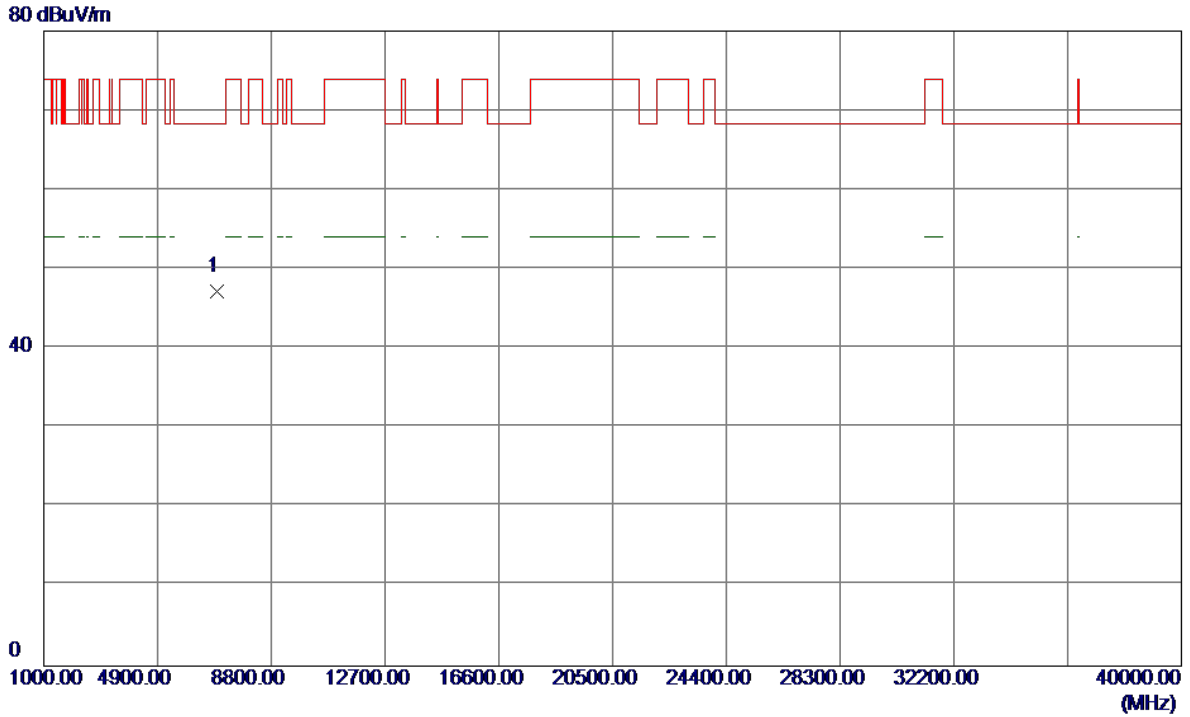


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6920.0250	37.34	9.85	47.19	68.30	-21.11	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


115 dBuV/m

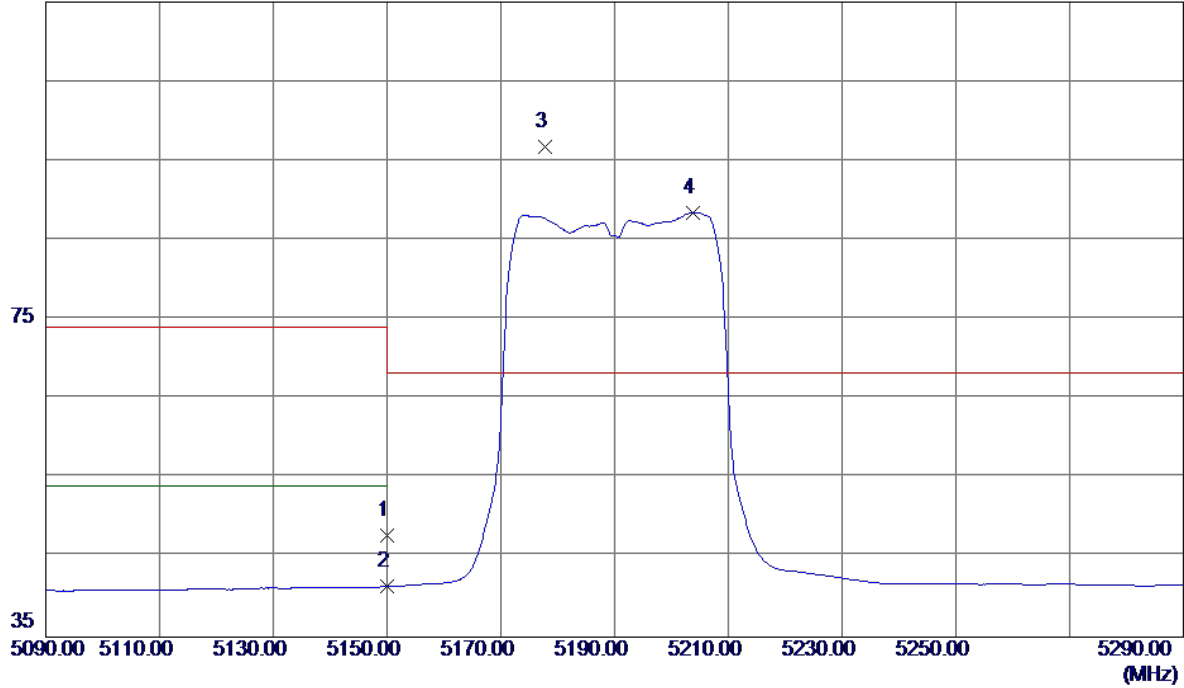

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	7.89	39.90	47.79	74.00	-26.21	Peak	
2	5150.0000	1.44	39.90	41.34	54.00	-12.66	AVG	
3 *	5177.8000	56.72	39.97	96.69	68.30	28.39	Peak	No Limit
4	5203.8000	48.44	40.05	88.49	999.00	-910.51	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

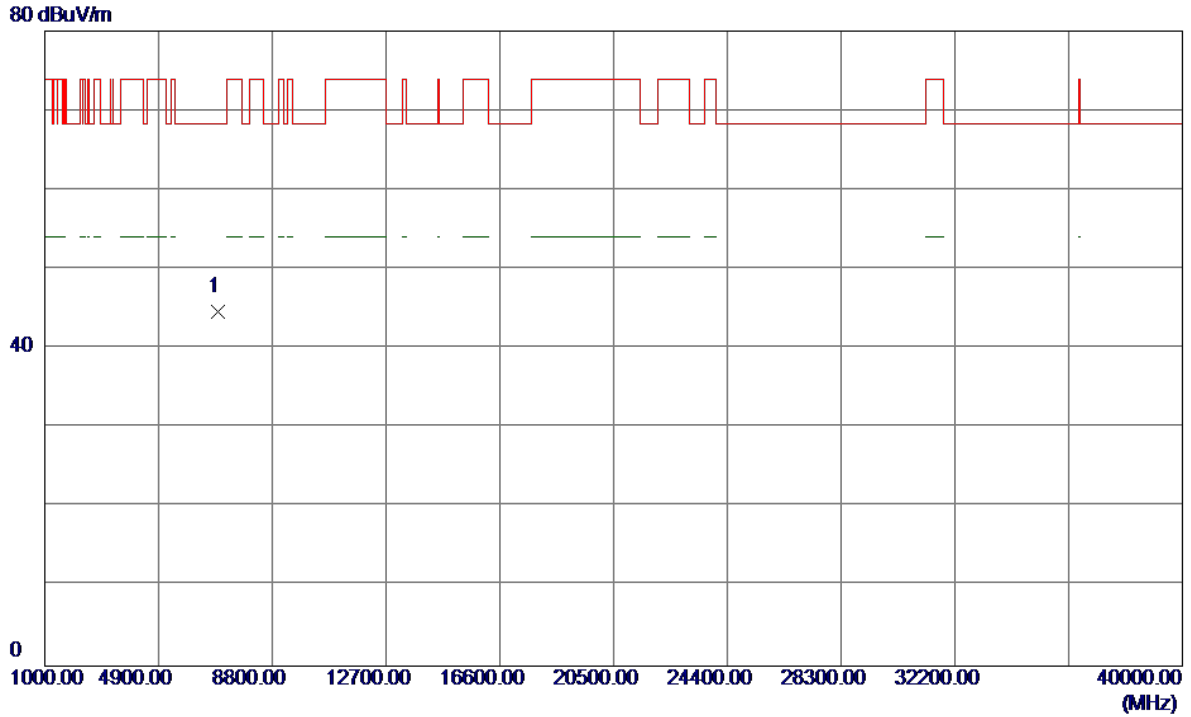


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6919.9950	34.79	9.85	44.64	68.30	-23.66	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical


115 dBuV/m

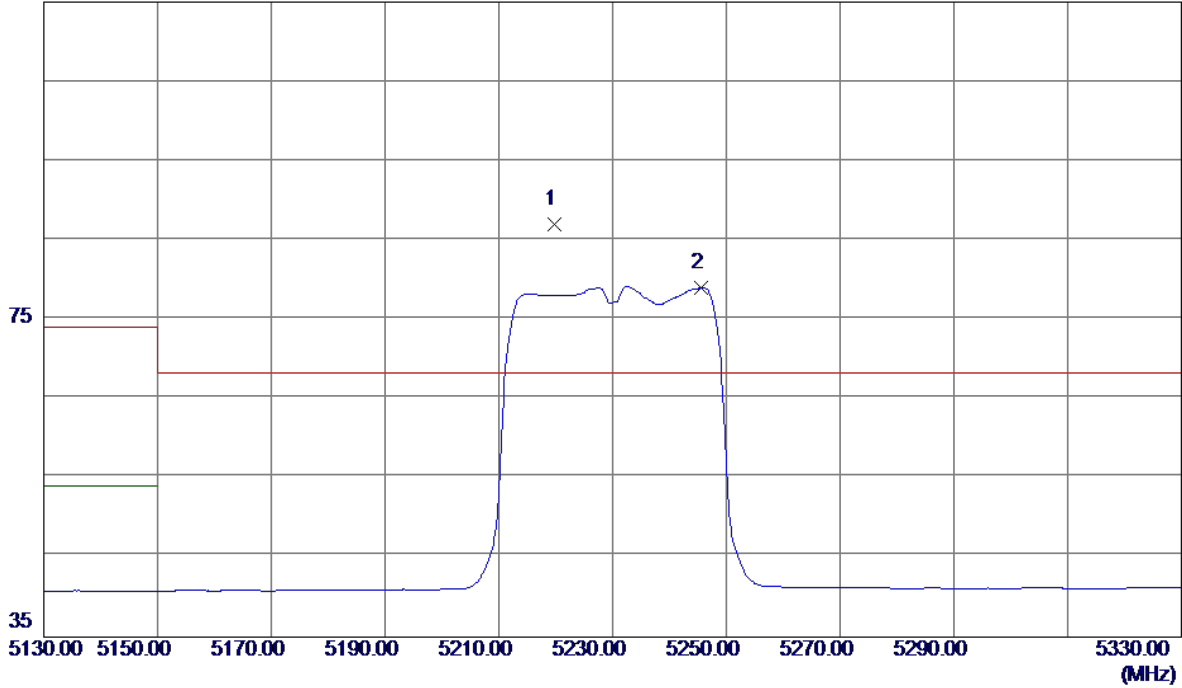

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5219.8000	46.86	40.09	86.95	68.30	18.65	Peak	No L imit
2	5245.6000	38.86	40.16	79.02	999.00	-919.98	AVG	No L imit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

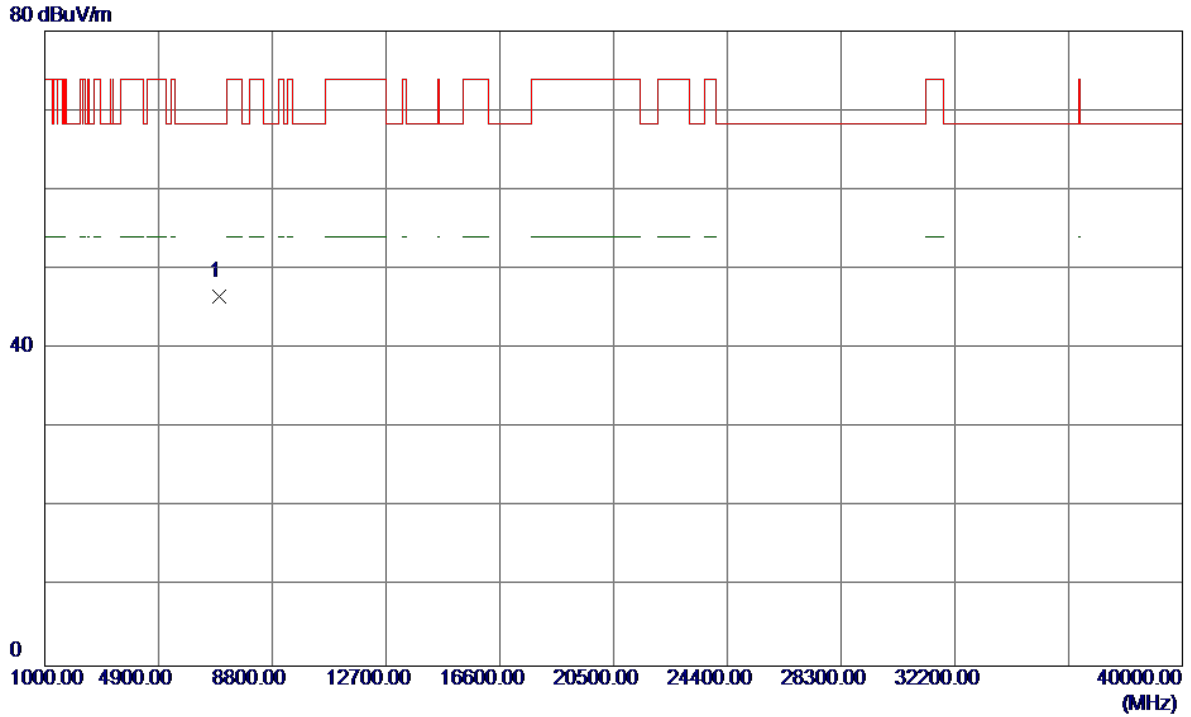


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.3000	36.72	9.88	46.60	68.30	-21.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal


115 dBuV/m

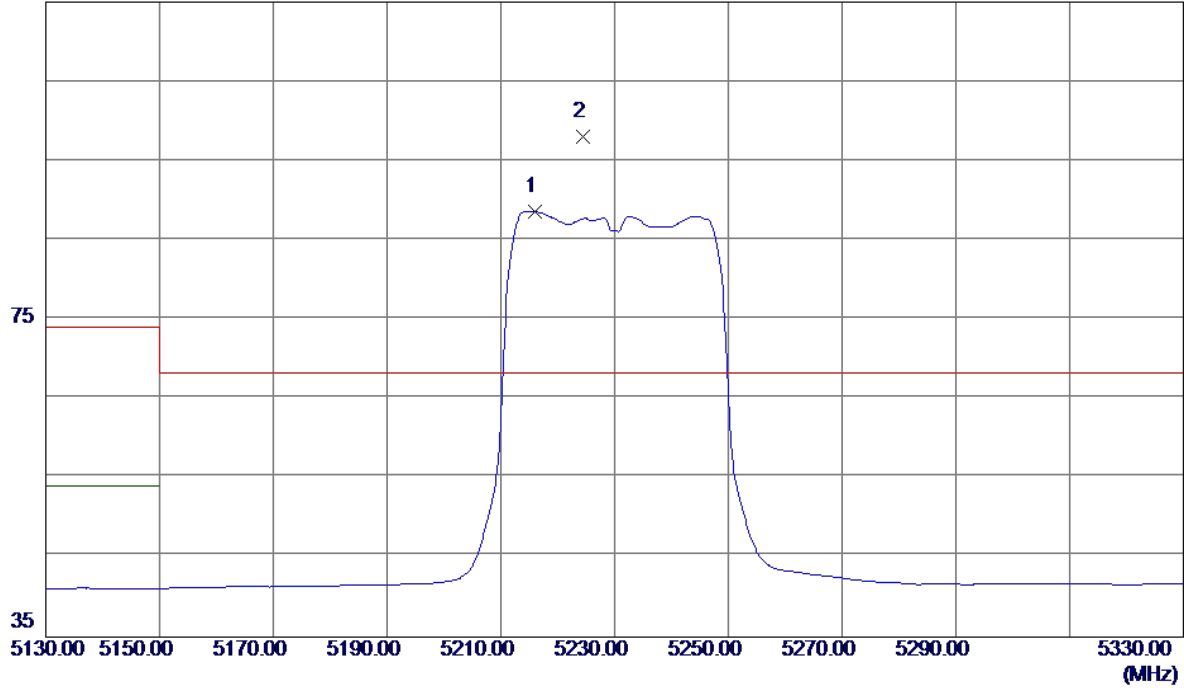

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5216.0000	48.51	40.08	88.59	999.00	-910.41	AVG	No Limit
2 *	5224.4000	57.96	40.10	98.06	68.30	29.76	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

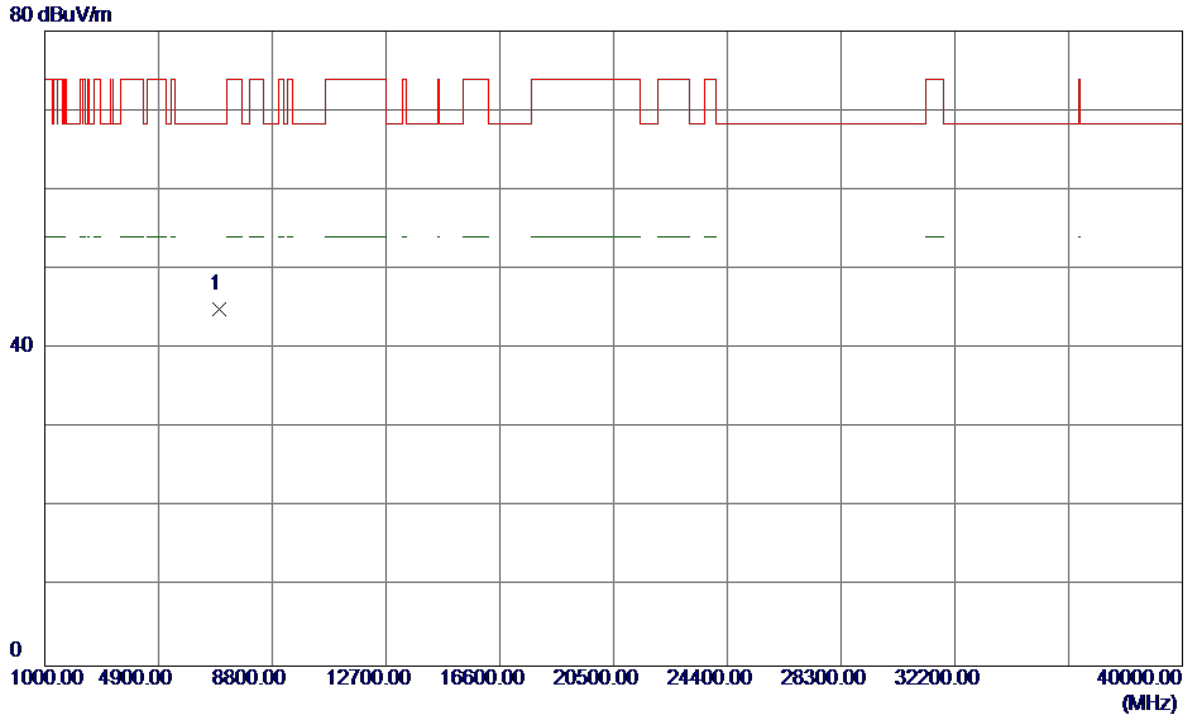


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.2500	35.13	9.88	45.01	68.30	-23.29	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


115 dBuV/m

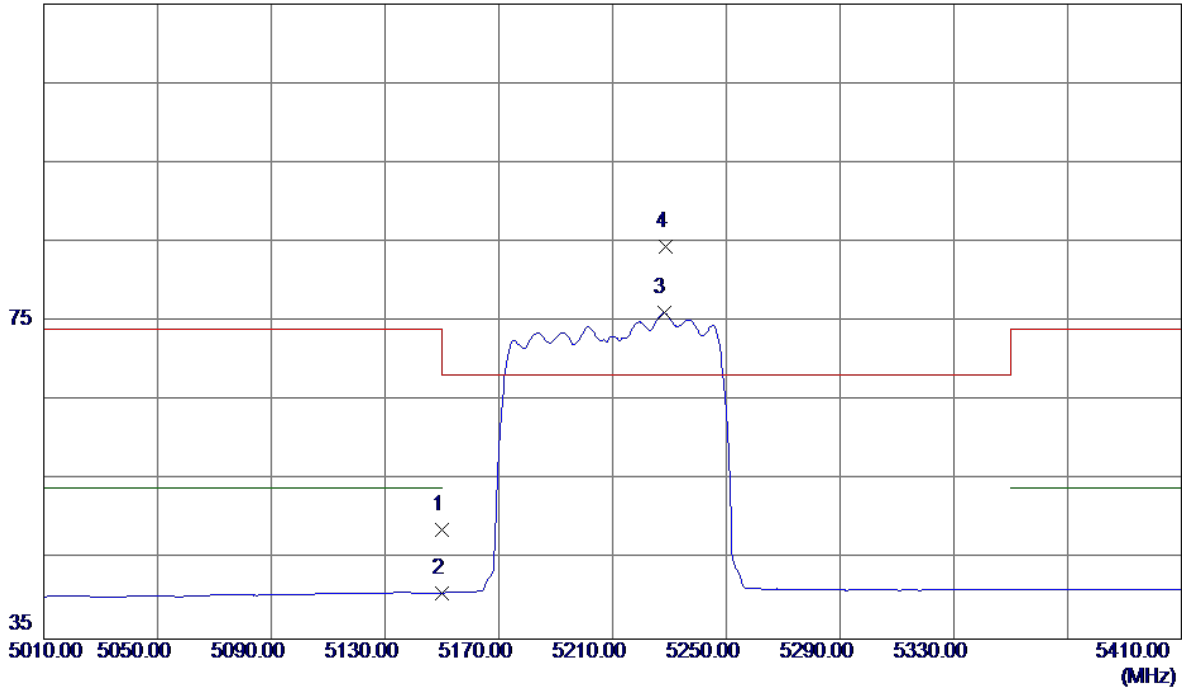

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	8.82	39.90	48.72	74.00	-25.28	Peak	
2	5150.0000	0.92	39.90	40.82	54.00	-13.18	AVG	
3	5228.0000	36.01	40.11	76.12	999.00	-922.88	AVG	No L limit
4 *	5228.8000	44.33	40.12	84.45	68.30	16.15	Peak	No L limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

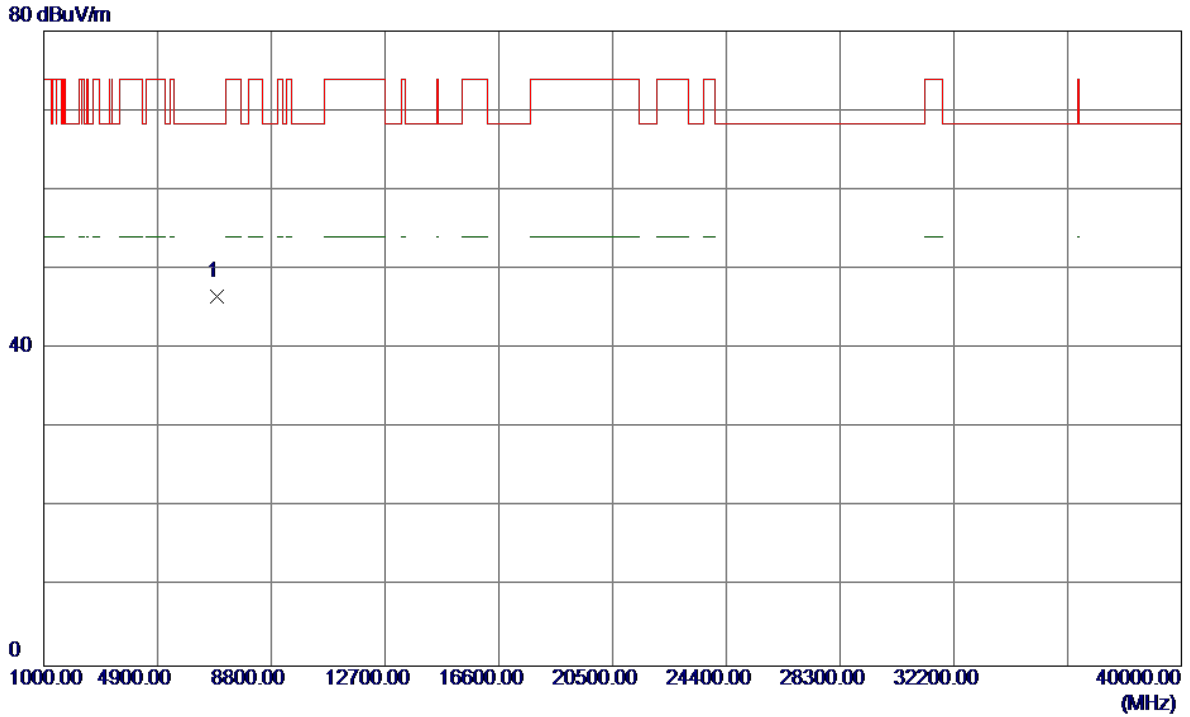


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6946.4400	36.75	9.87	46.62	68.30	-21.68	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


115 dBuV/m

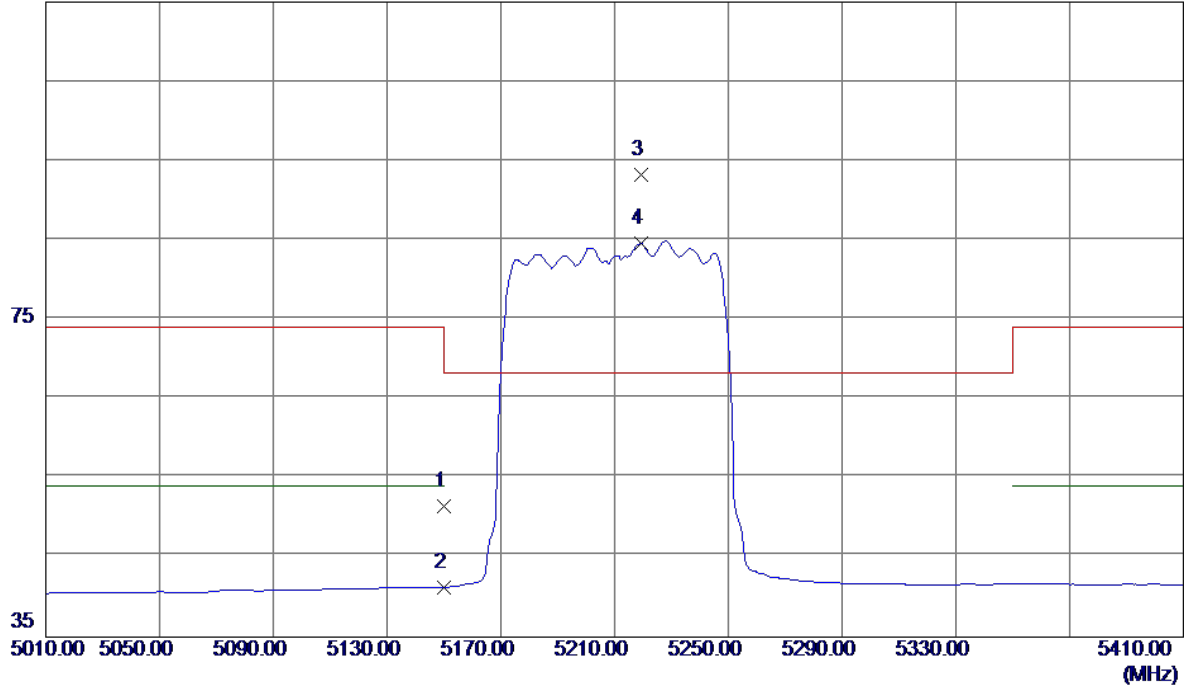

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	11.58	39.90	51.48	74.00	-22.52	Peak	
2	5150.0000	1.38	39.90	41.28	54.00	-12.72	AVG	
3 *	5219.2000	53.21	40.09	93.30	68.30	25.00	Peak	No Limit
4	5219.2000	44.49	40.09	84.58	999.00	-914.42	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

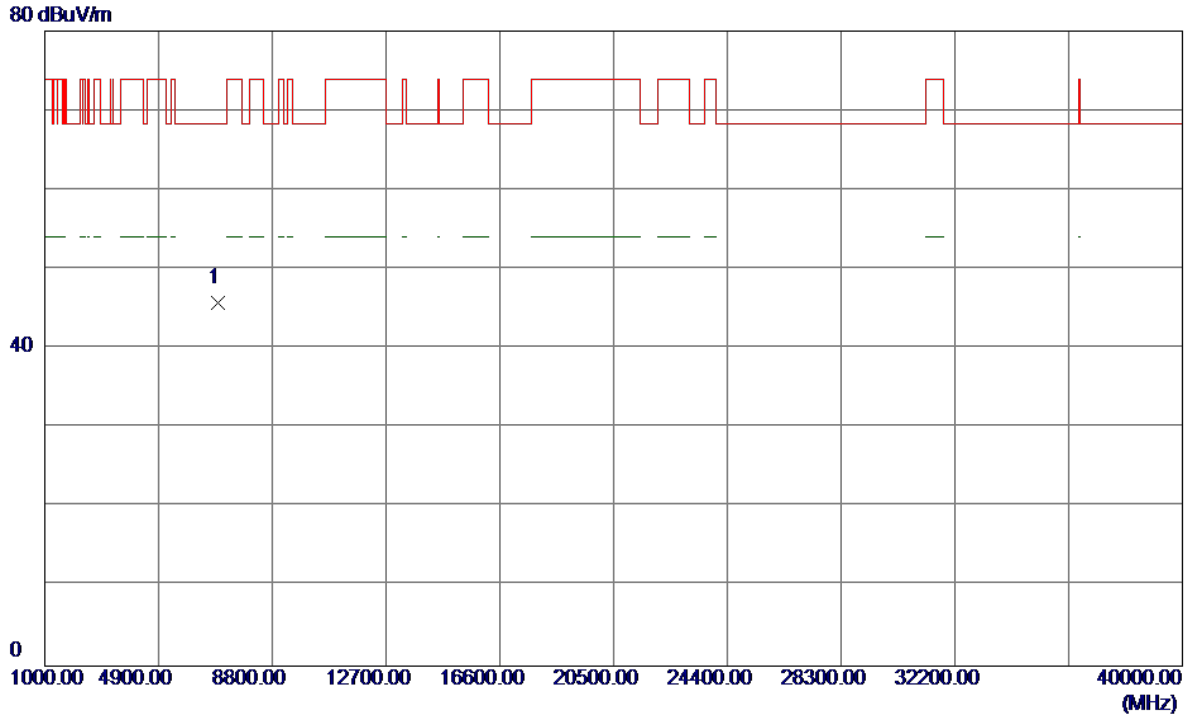


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6946.6000	35.85	9.87	45.72	68.30	-22.58	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical


115 dBuV/m

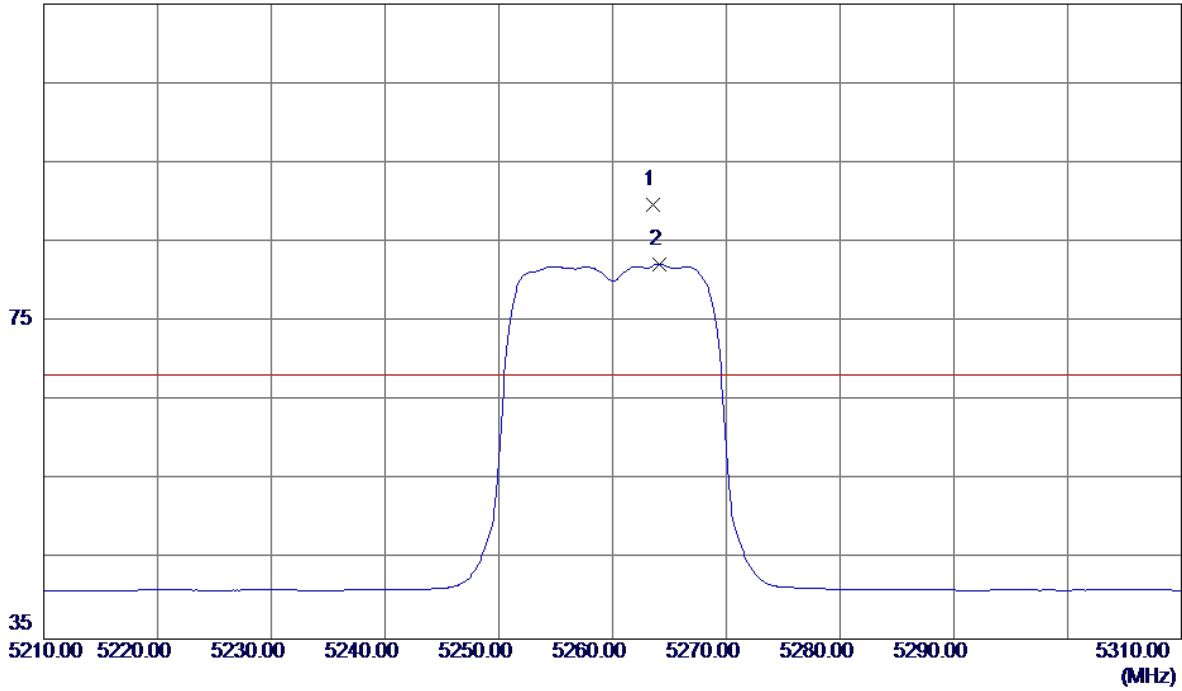

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5263.6000	49.44	40.21	89.65	68.30	21.35	Peak	No Limit
2	5264.1000	42.05	40.21	82.26	999.00	-916.74	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical

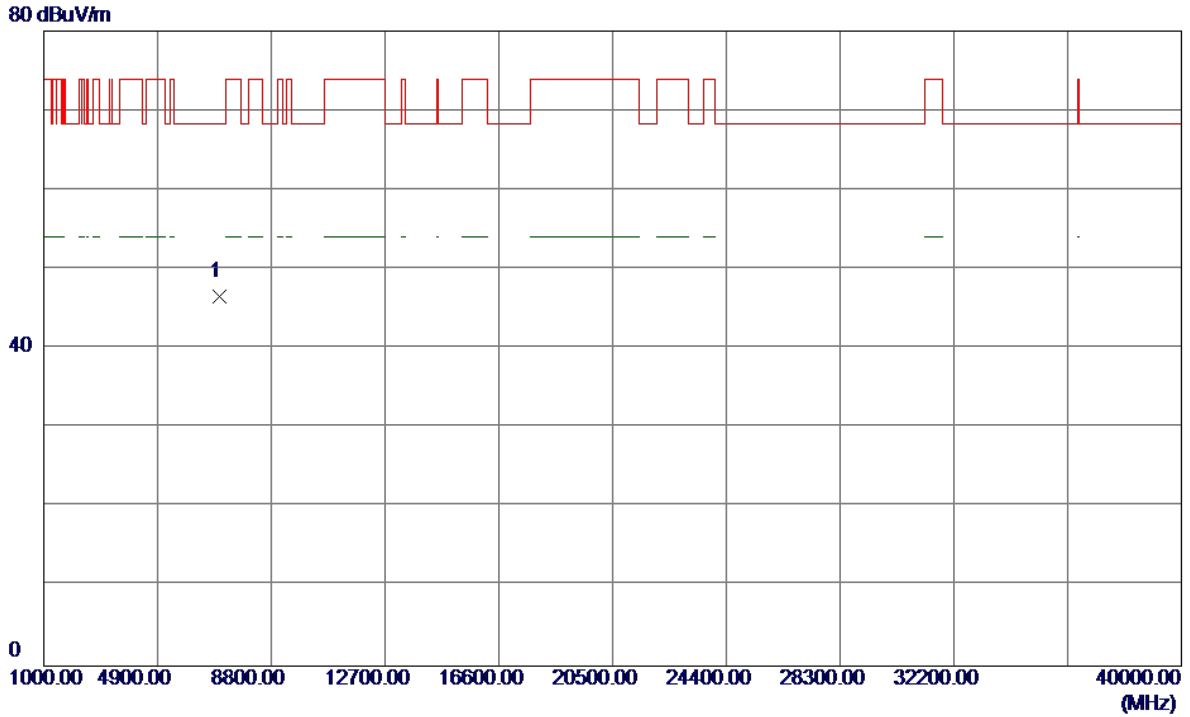


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7013.3500	36.70	9.93	46.63	68.30	-21.67	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal


115 dBuV/m

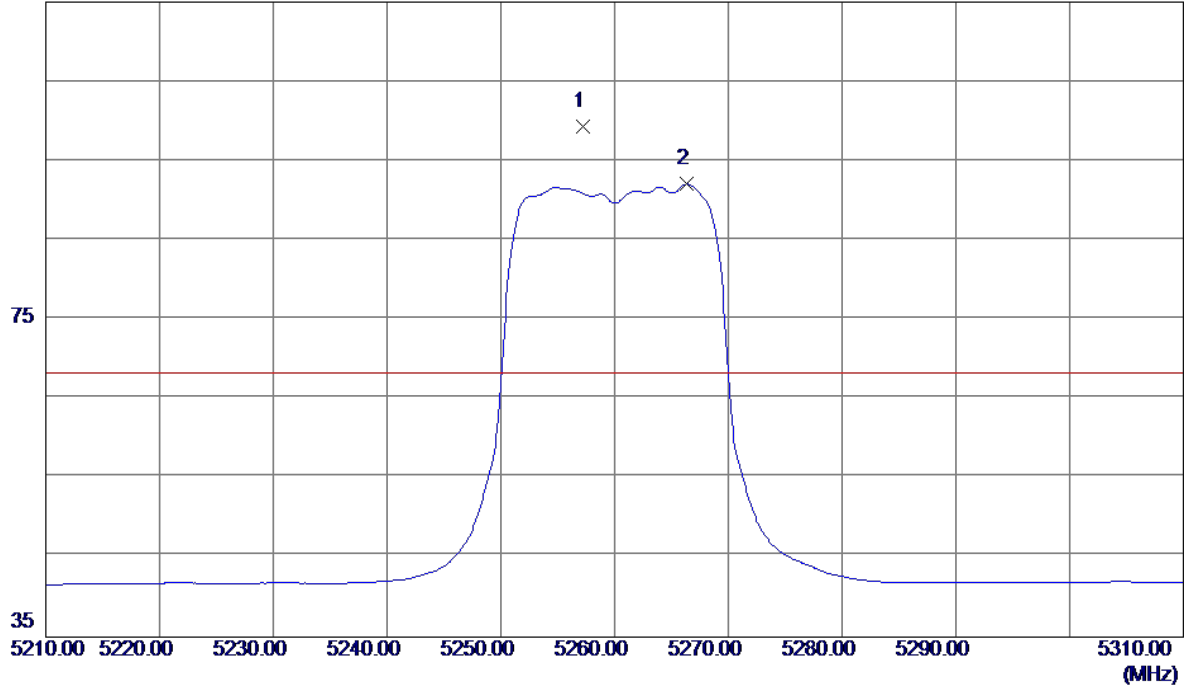

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5257.2000	59.15	40.19	99.34	68.30	31.04	Peak	No Limit
2	5266.3000	51.83	40.22	92.05	999.00	-906.95	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal

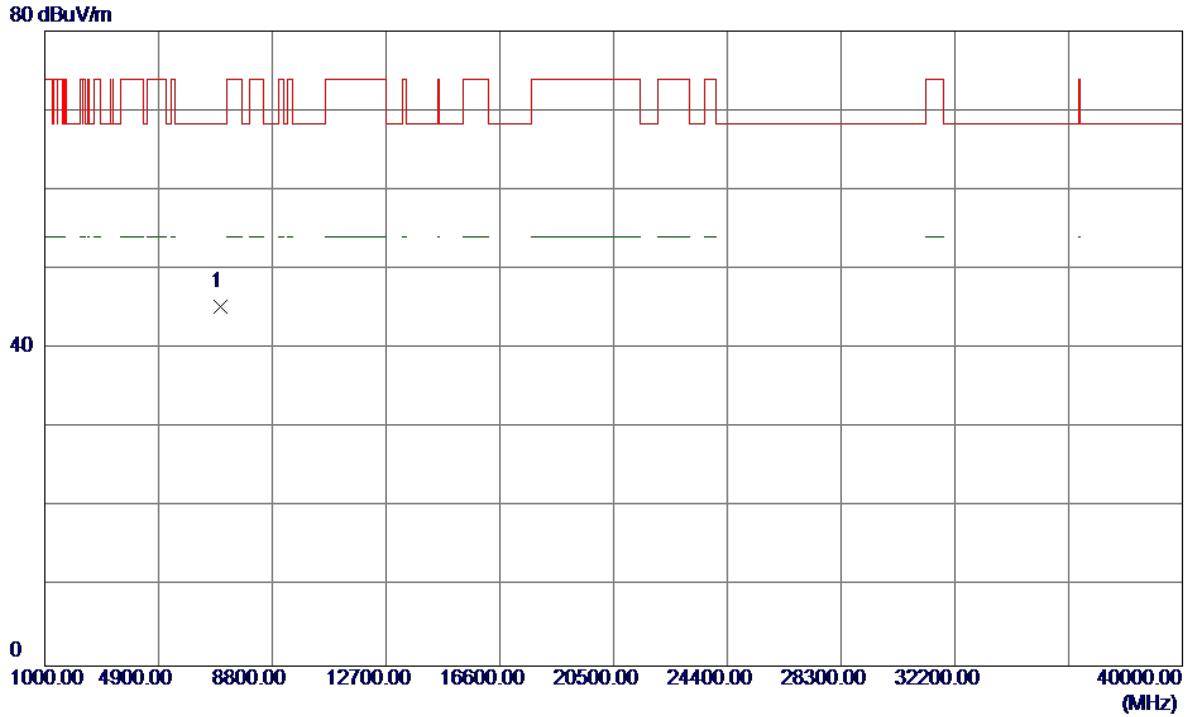


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7013.4600	35.28	9.93	45.21	68.30	-23.09	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Vertical


115 dBuV/m

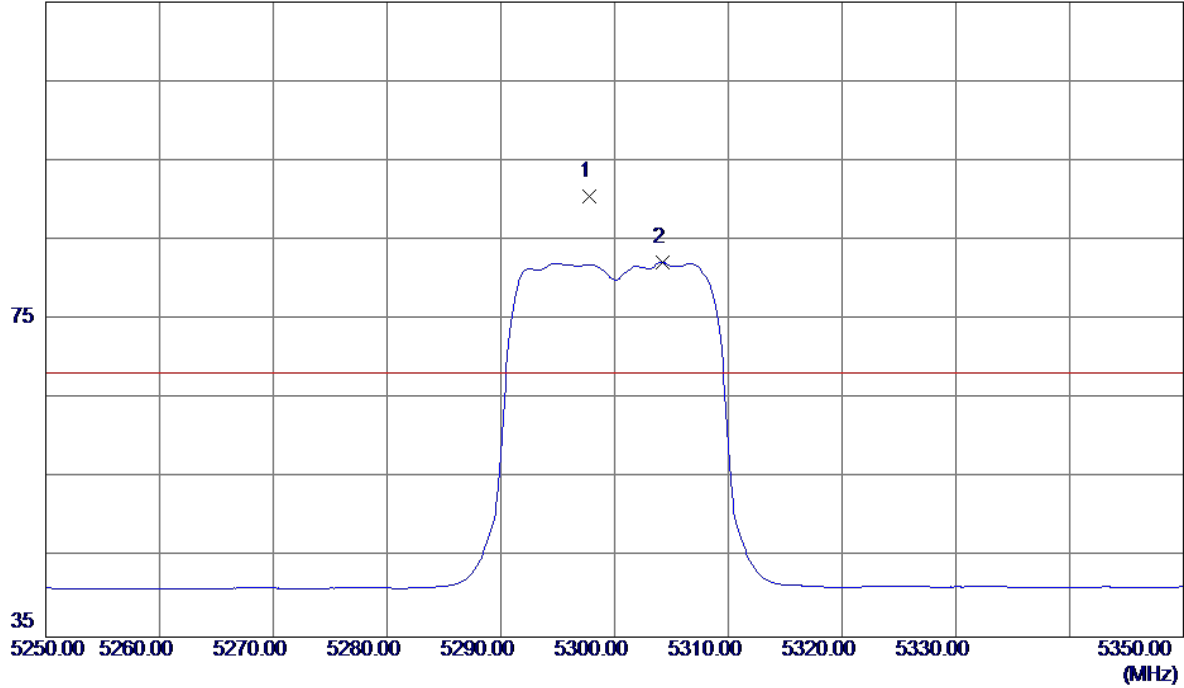

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5297.8000	50.29	40.31	90.60	68.30	22.30	Peak	No Limit
2	5304.2000	41.86	40.33	82.19	999.00	-916.81	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Vertical

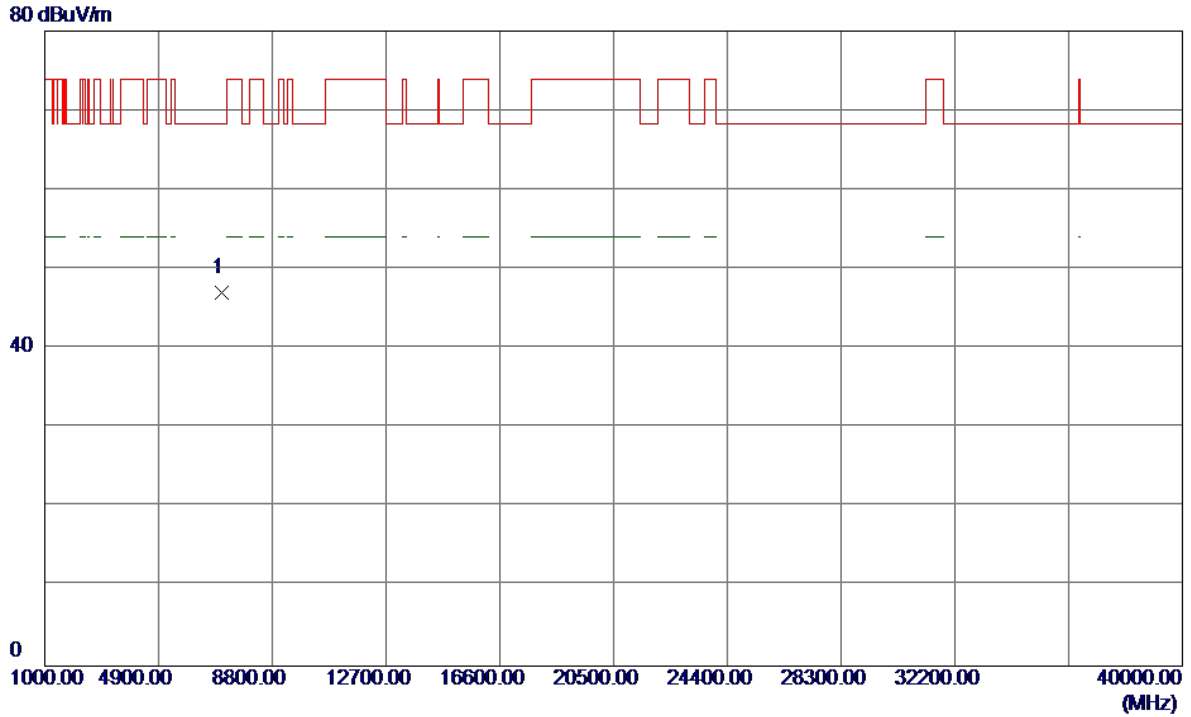


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7066.5900	37.08	10.03	47.11	68.30	-21.19	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal


115 dBuV/m

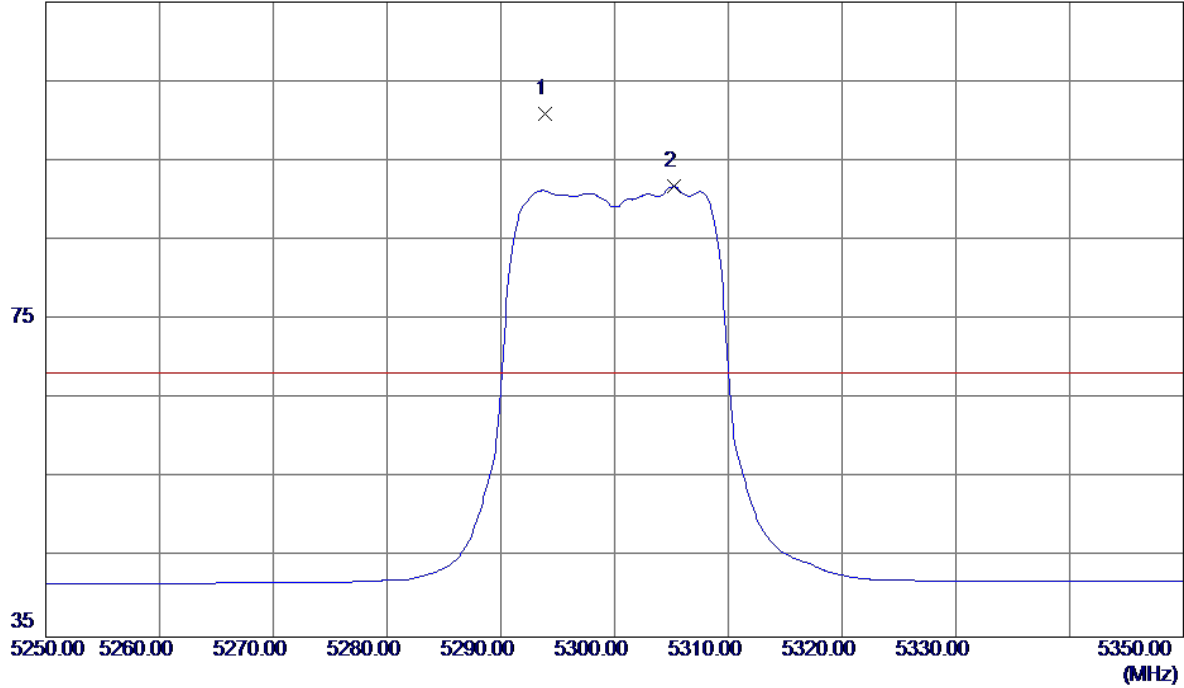

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5293.9000	60.59	40.30	100.89	68.30	32.59	Peak	No Limit
2	5305.2000	51.41	40.33	91.74	999.00	-907.26	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal

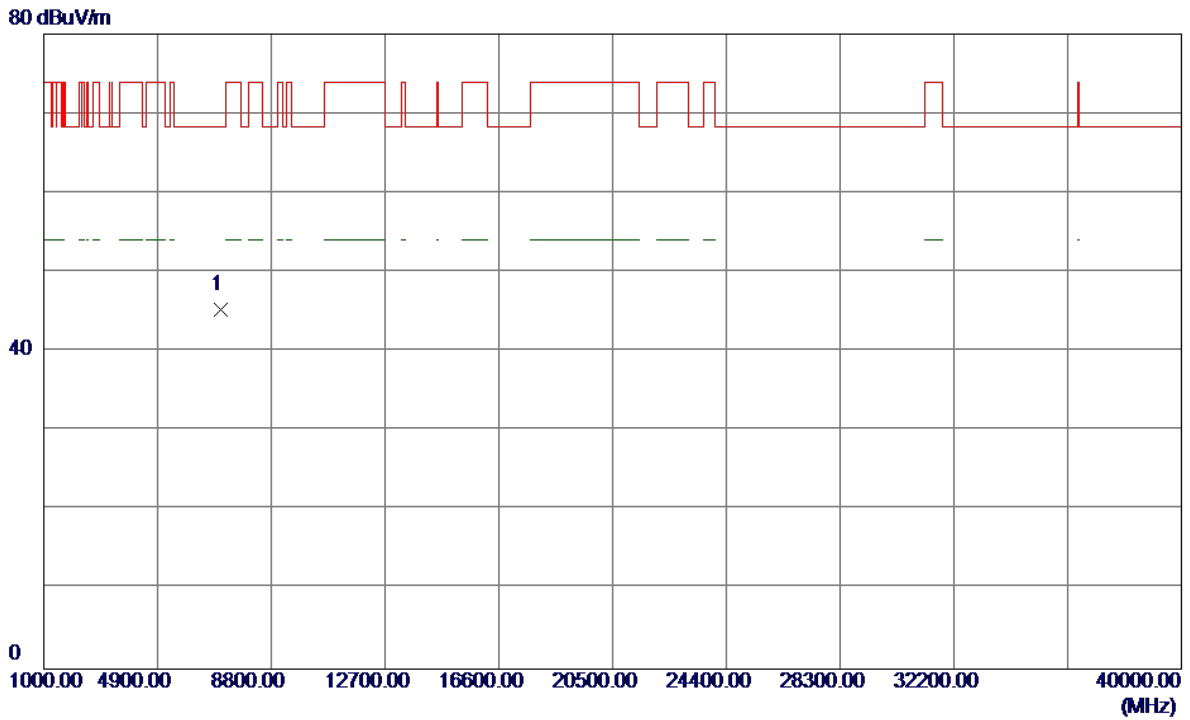


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7066.8900	35.31	10.03	45.34	68.30	-22.96	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical


115 dBuV/m

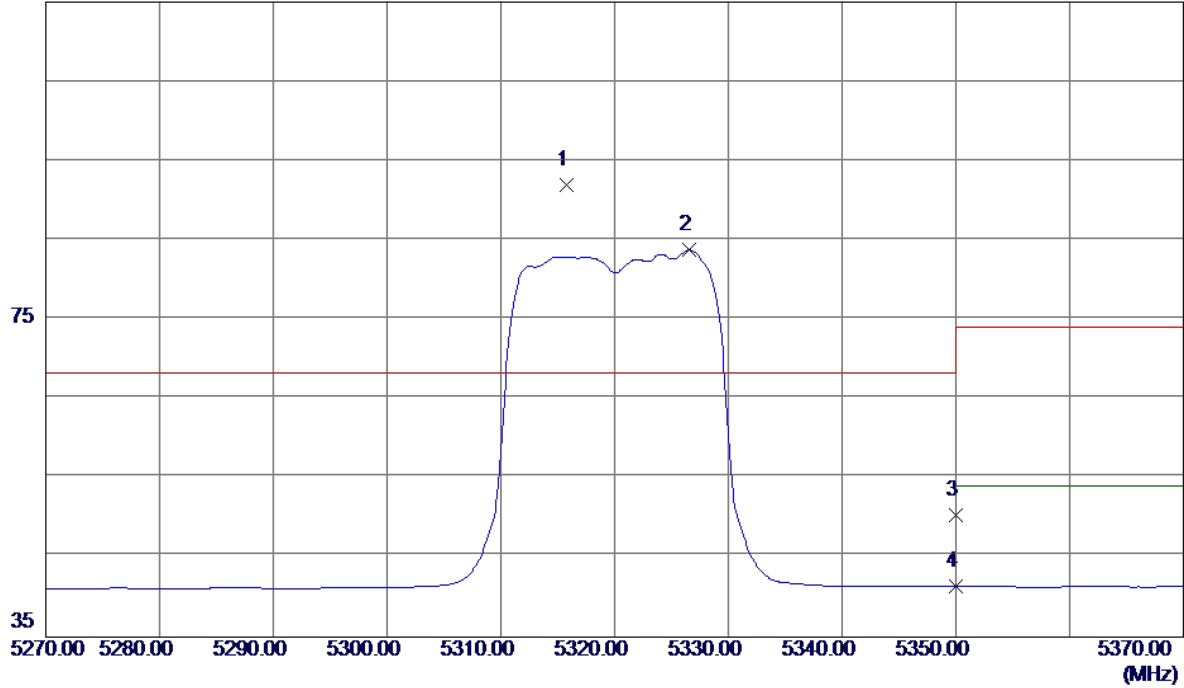

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5315.8000	51.54	40.36	91.90	68.30	23.60	Peak	No Limit
2	5326.6000	43.36	40.39	83.75	999.00	-915.25	AVG	No Limit
3	5350.0000	9.94	40.45	50.39	68.30	-17.91	Peak	
4	5350.0000	0.91	40.45	41.36	999.00	-957.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical

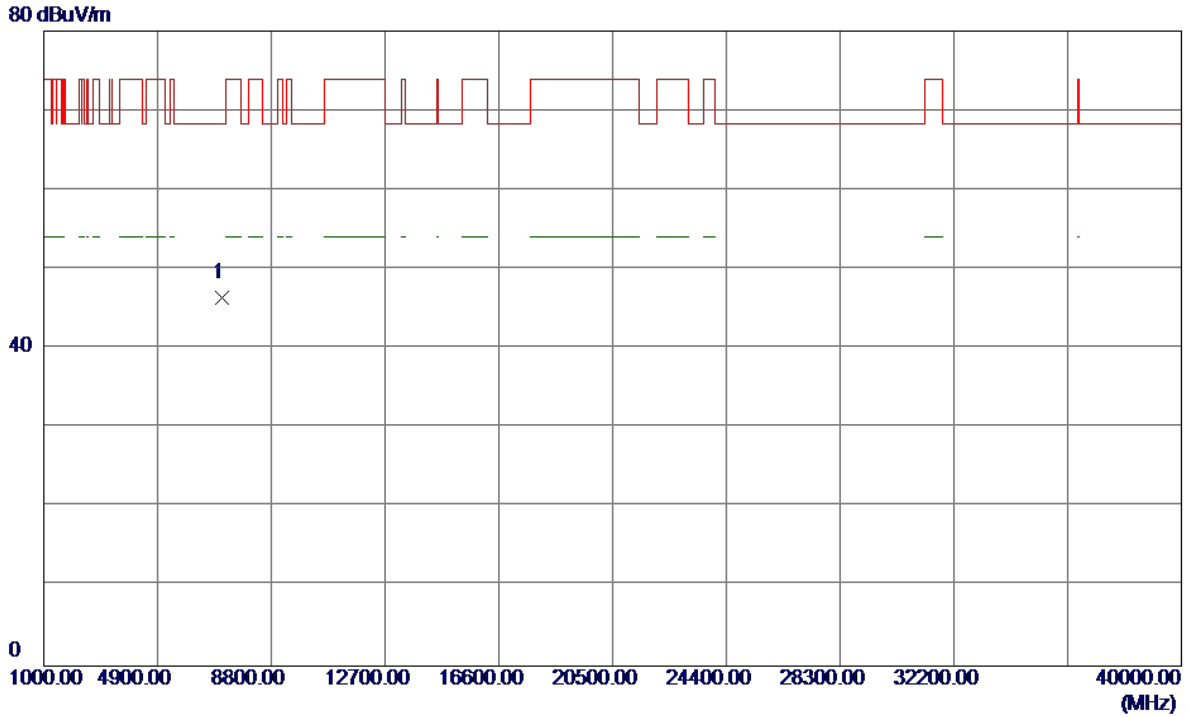


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7093.1650	36.29	10.08	46.37	68.30	-21.93	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal


115 dBuV/m

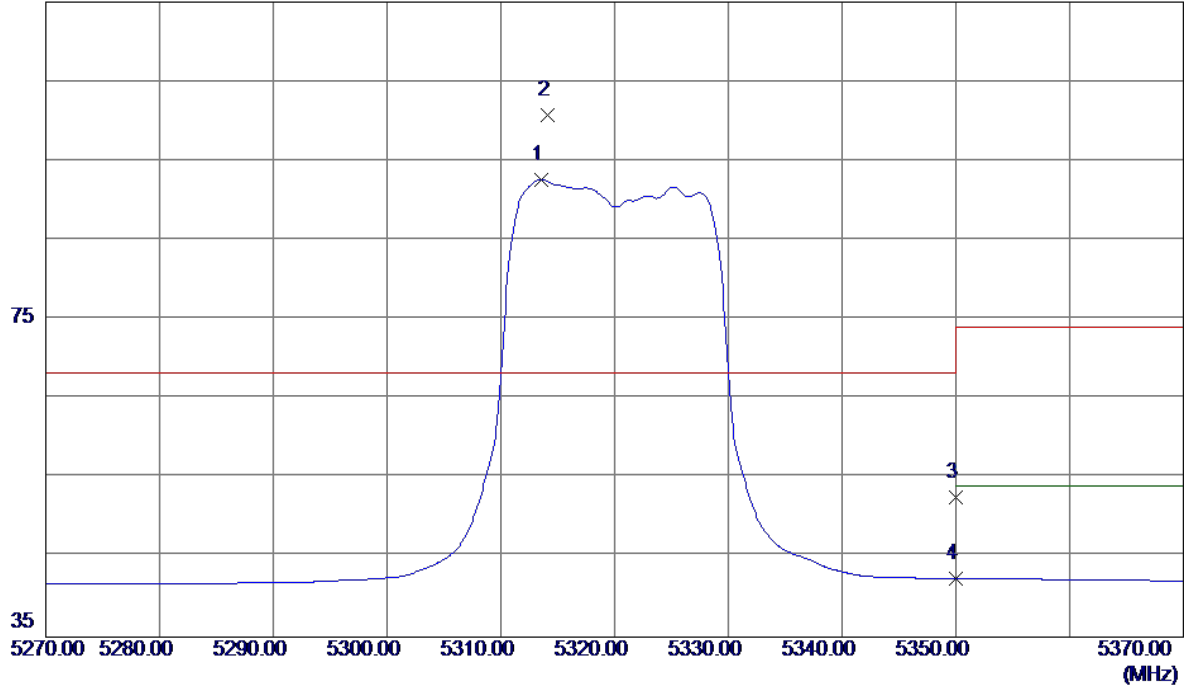

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5313.6000	52.26	40.35	92.61	999.00	-906.39	AVG	No Limit
2 *	5314.1000	60.34	40.35	100.69	68.30	32.39	Peak	No Limit
3	5350.0000	12.20	40.45	52.65	68.30	-15.65	Peak	
4	5350.0000	1.90	40.45	42.35	999.00	-956.65	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal

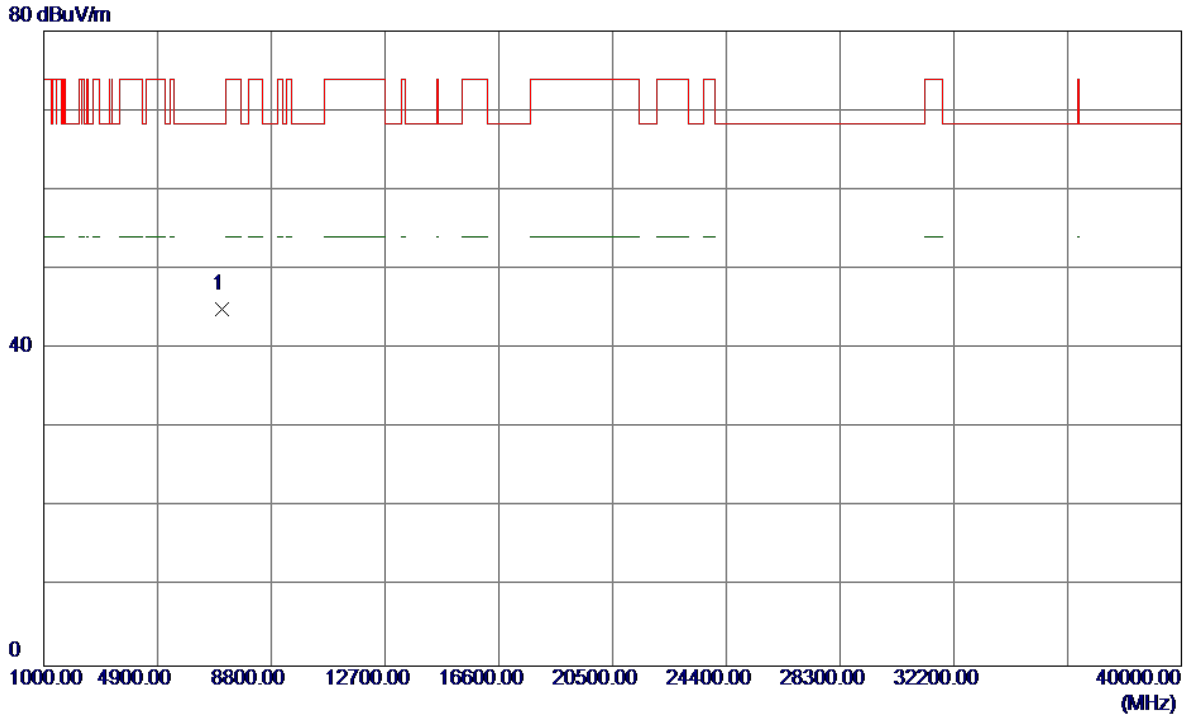


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7093.3050	34.91	10.08	44.99	68.30	-23.31	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical


115 dBuV/m

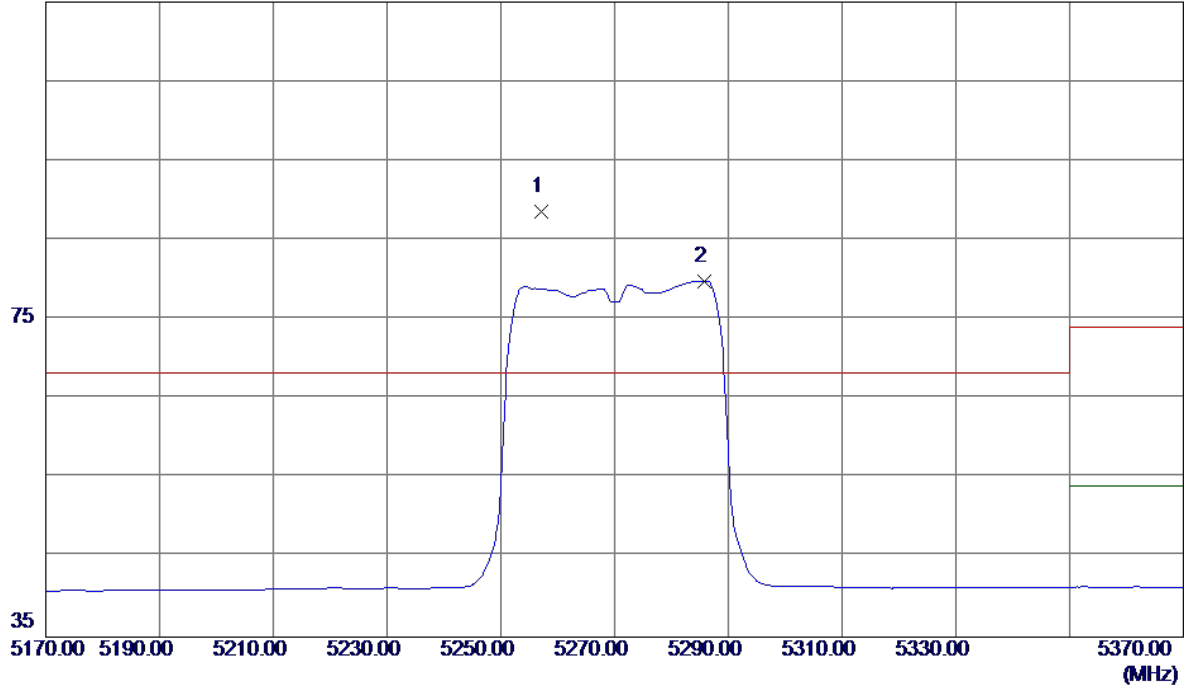

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5257.2000	48.41	40.19	88.60	68.30	20.30	Peak	No L imit
2	5285.8000	39.60	40.27	79.87	999.00	-919.13	AVG	No L imit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

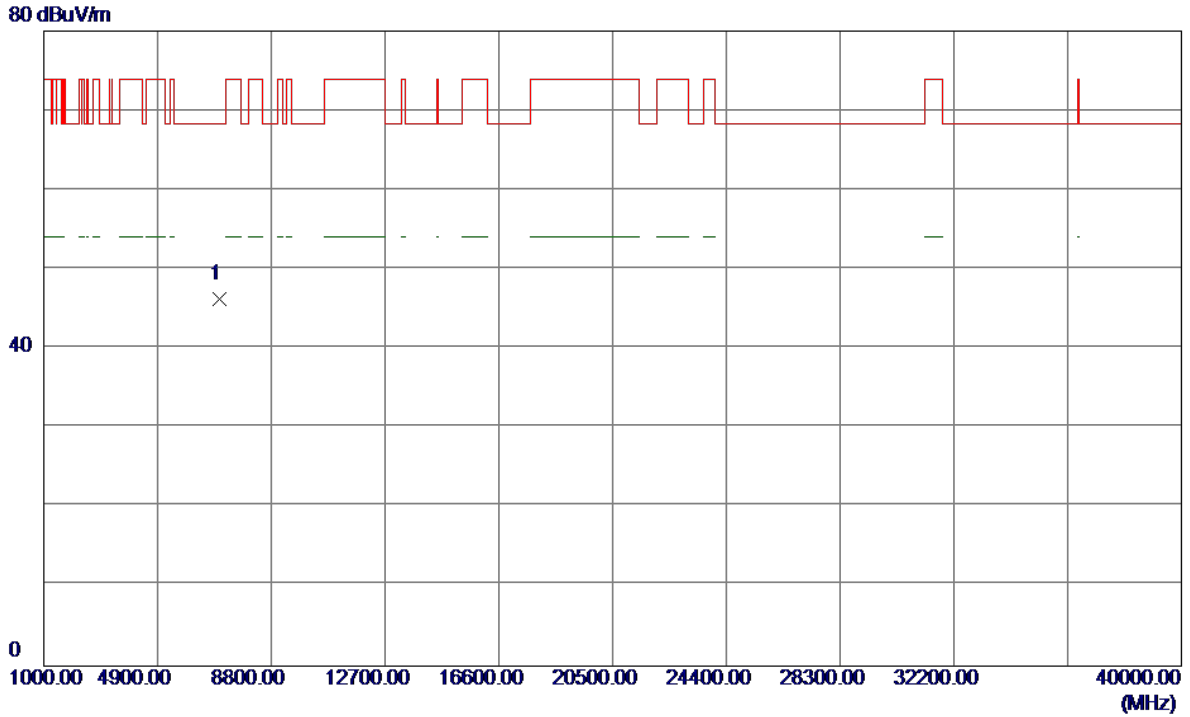


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7026.5800	36.28	9.95	46.23	68.30	-22.07	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal


115 dBuV/m

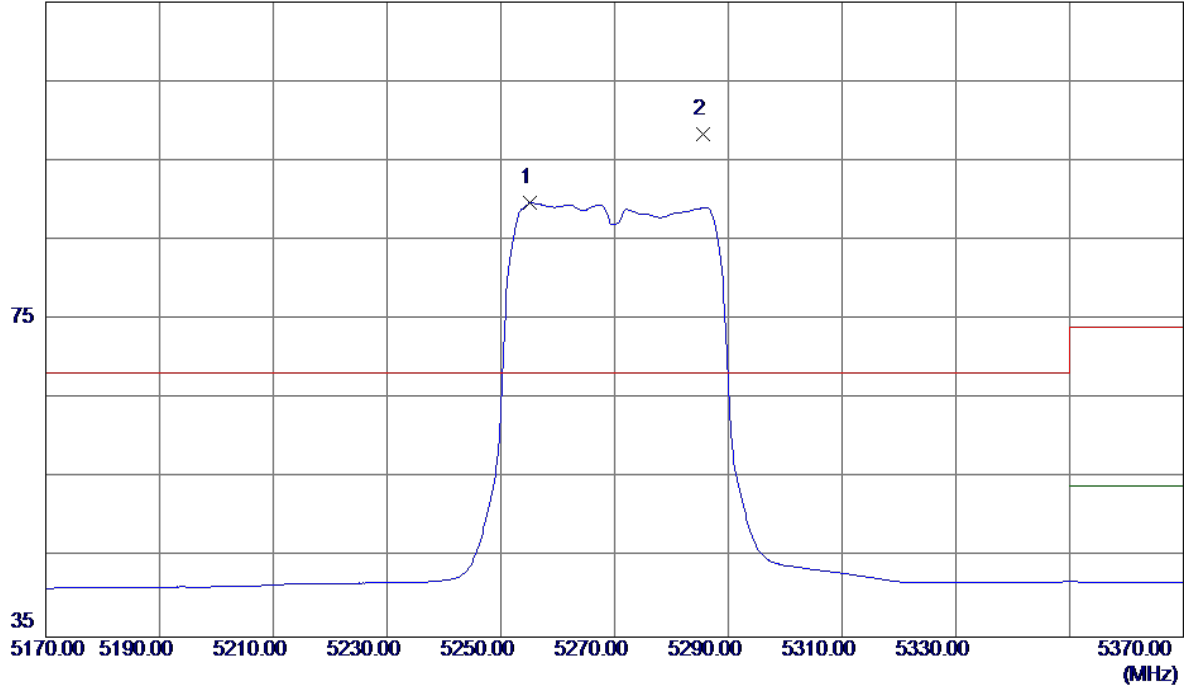

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5255.2000	49.53	40.19	89.72	999.00	-909.28	AVG	No Limit
2 *	5285.6000	58.07	40.27	98.34	68.30	30.04	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

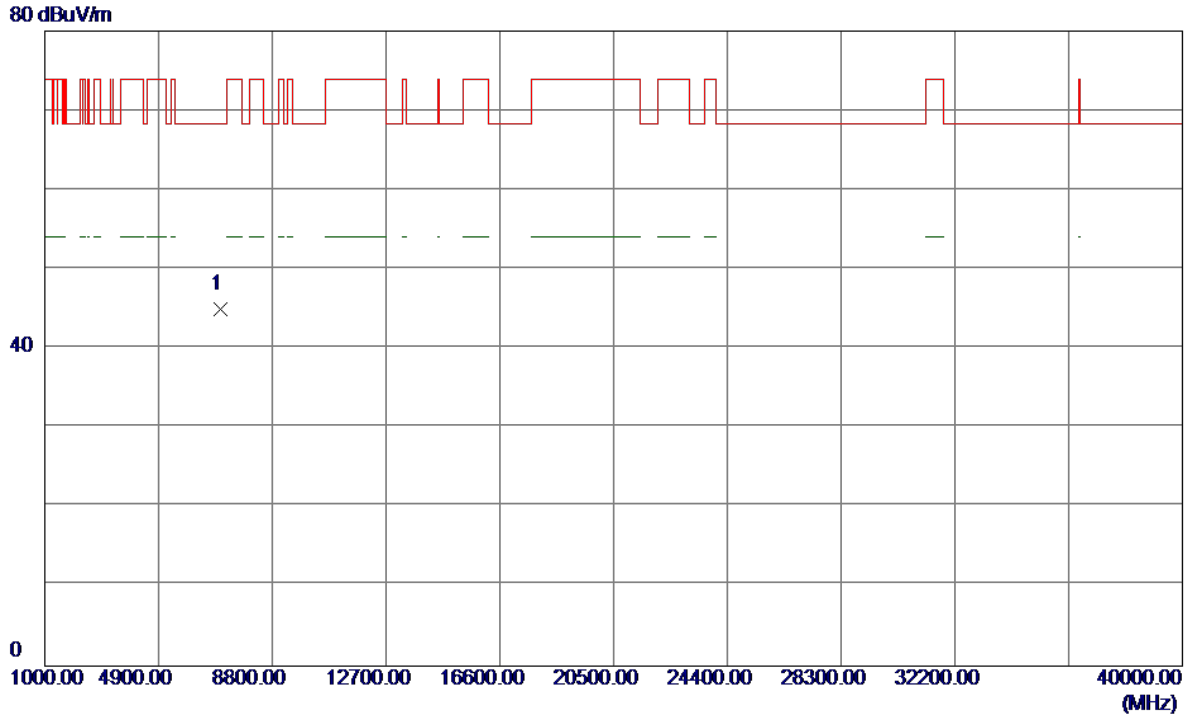


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7026.6850	34.95	9.95	44.90	68.30	-23.40	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical


115 dBuV/m

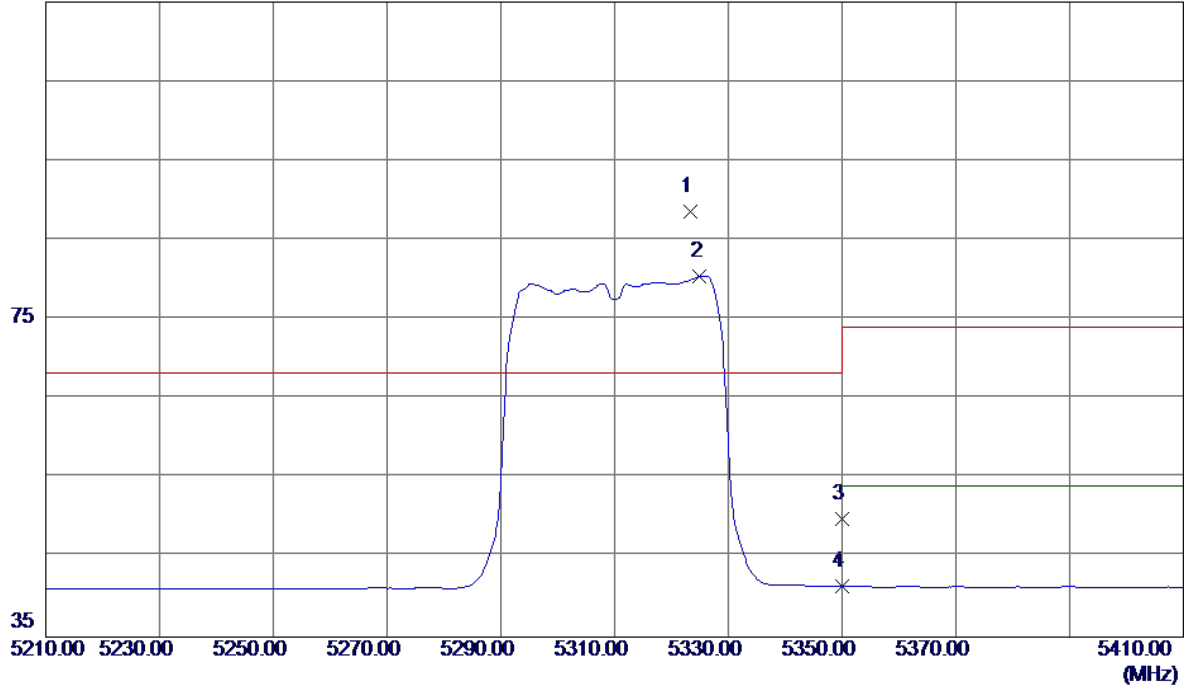

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5323.4000	48.25	40.38	88.63	68.30	20.33	Peak	No L imit
2	5325.0000	40.05	40.38	80.43	999.00	-918.57	AVG	No L imit
3	5350.0000	9.36	40.45	49.81	68.30	-18.49	Peak	
4	5350.0000	0.95	40.45	41.40	999.00	-957.60	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

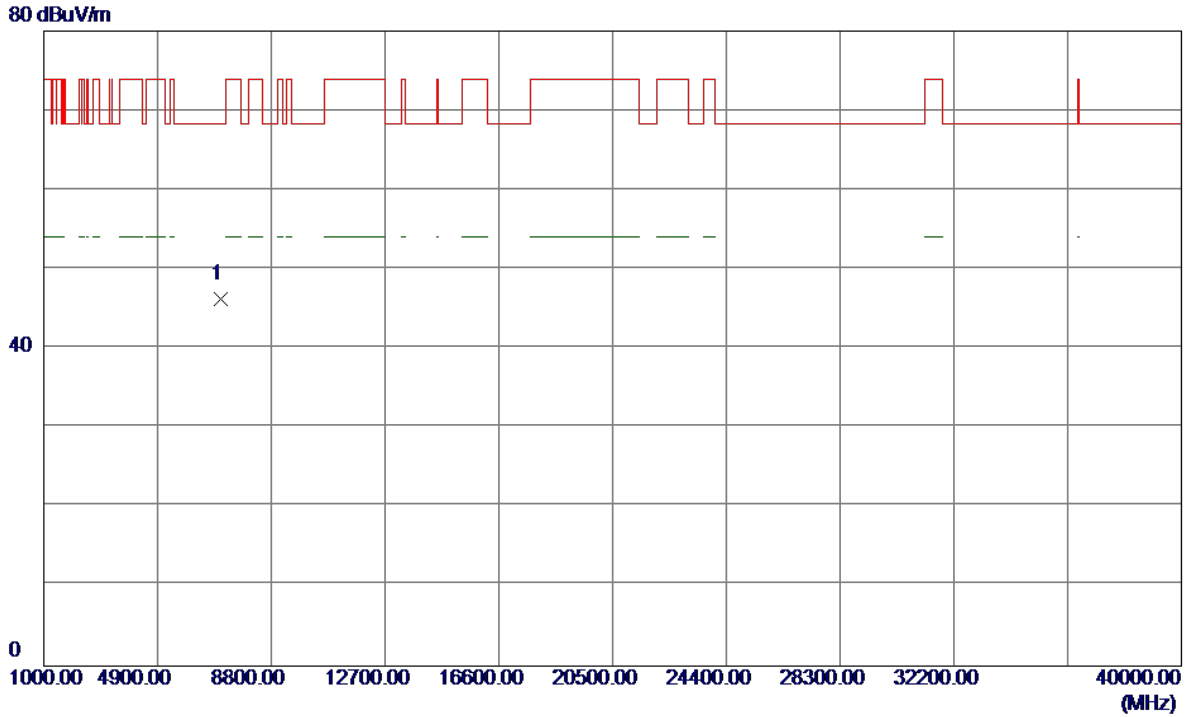


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7079.8400	36.14	10.05	46.19	68.30	-22.11	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal


115 dBuV/m

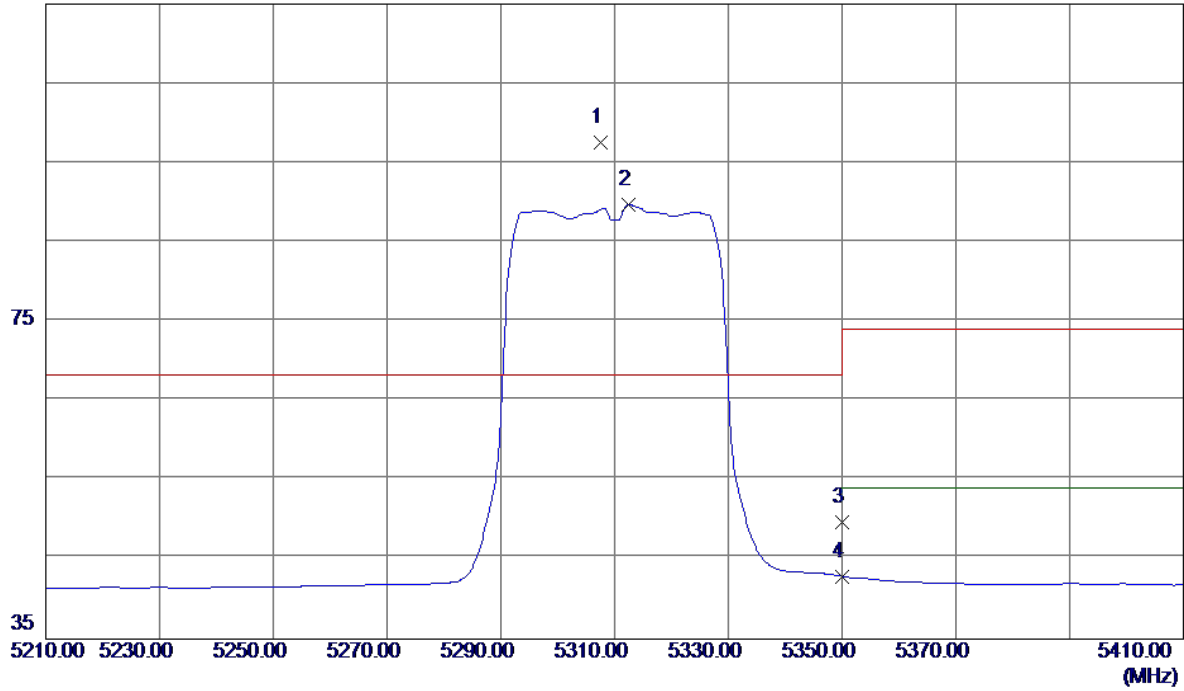

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5307.6000	57.23	40.33	97.56	68.30	29.26	Peak	No Limit
2	5312.4000	49.37	40.35	89.72	999.00	-909.28	AVG	No Limit
3	5350.0000	9.22	40.45	49.67	68.30	-18.63	Peak	
4	5350.0000	2.46	40.45	42.91	999.00	-956.09	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

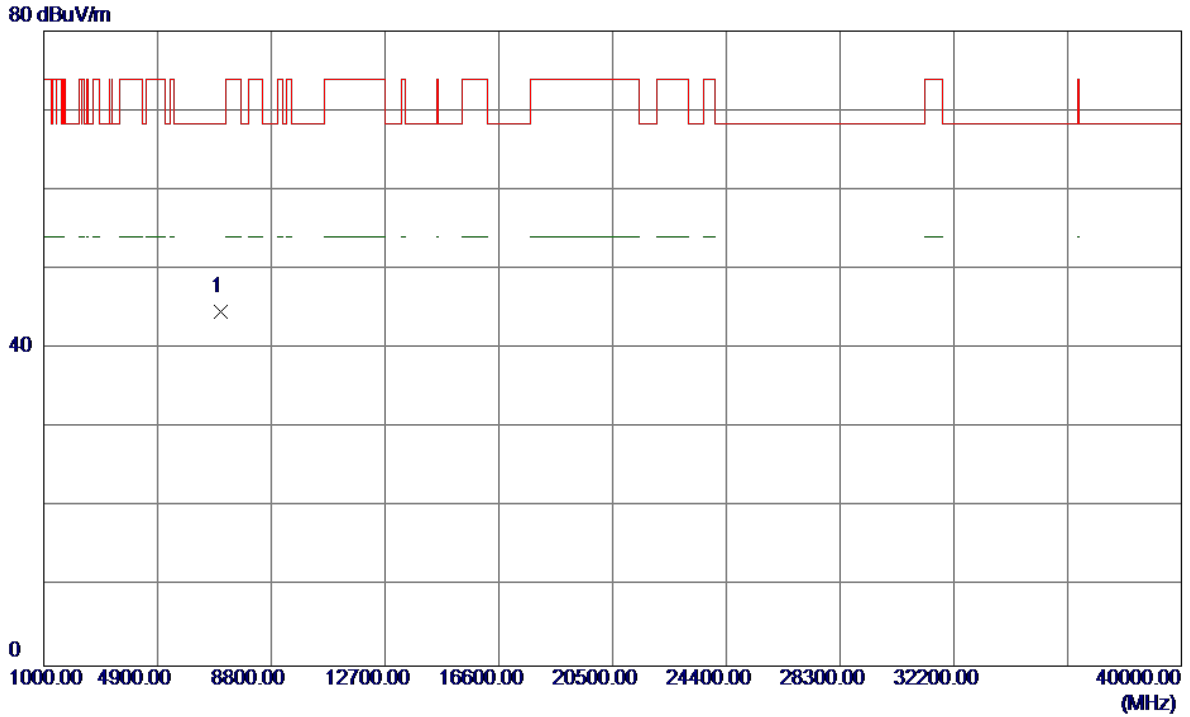


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7080.1350	34.53	10.05	44.58	68.30	-23.72	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical


115 dBuV/m

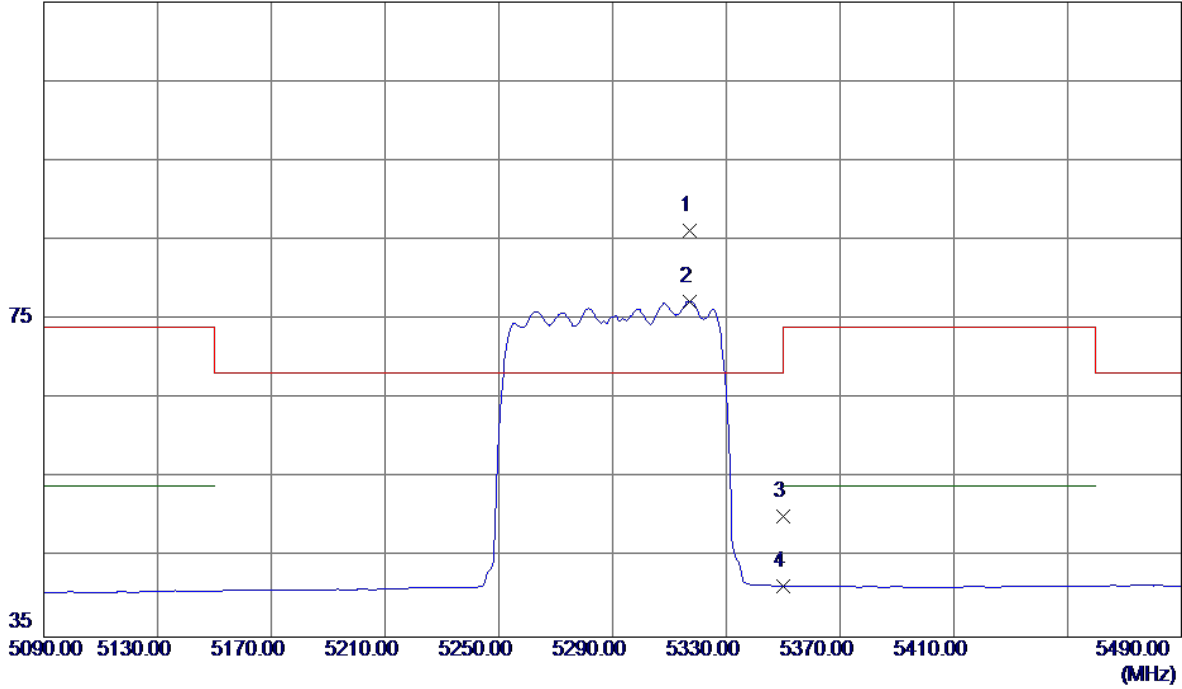

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5317.2000	45.84	40.36	86.20	68.30	17.90	Peak	No L imit
2	5317.2000	36.95	40.36	77.31	999.00	-921.69	AVG	No L imit
3	5350.0000	9.73	40.45	50.18	68.30	-18.12	Peak	
4	5350.0000	1.01	40.45	41.46	999.00	-957.54	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

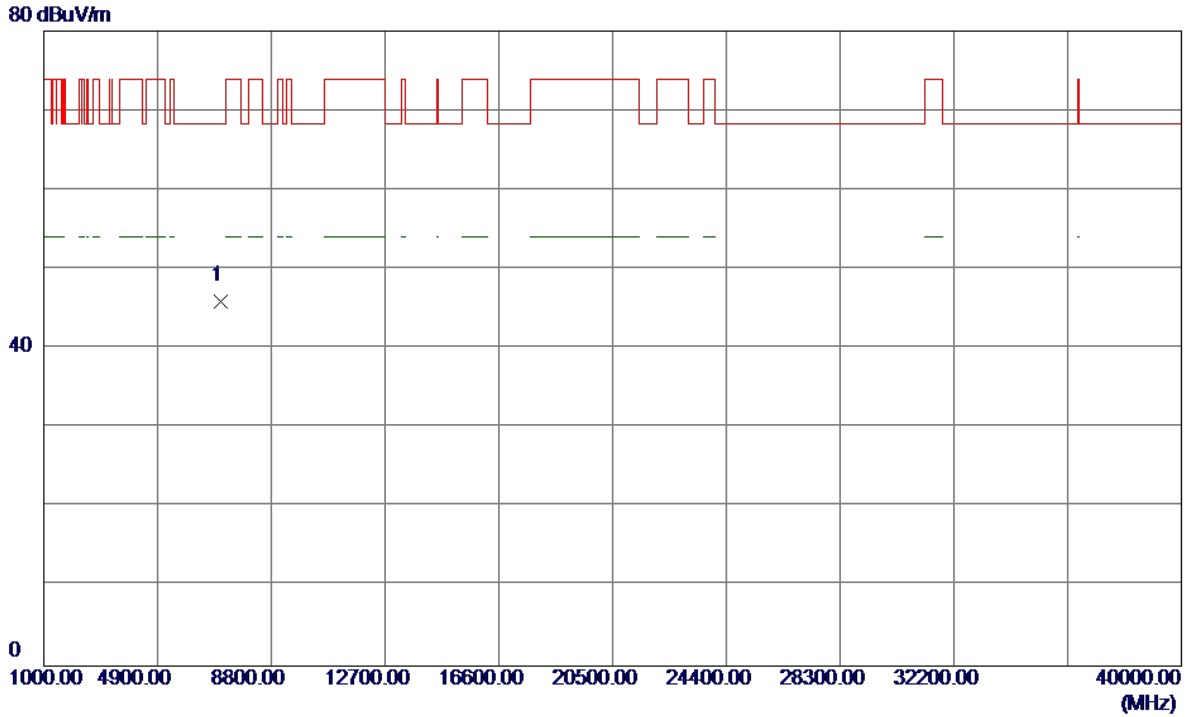


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7053.3000	36.00	10.00	46.00	68.30	-22.30	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal


115 dBuV/m

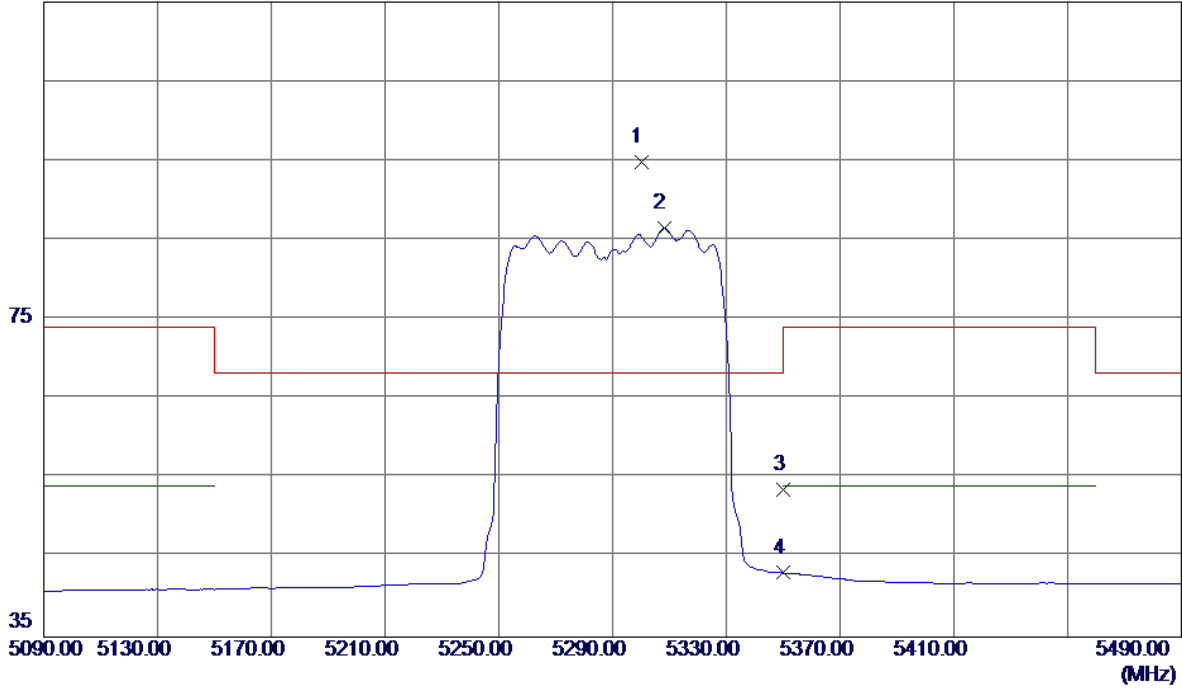

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5300.0000	54.60	40.31	94.91	68.30	26.61	Peak	No Limit
2	5308.0000	46.22	40.34	86.56	999.00	-912.44	AVG	No Limit
3	5350.0000	13.15	40.45	53.60	68.30	-14.70	Peak	
4	5350.0000	2.63	40.45	43.08	999.00	-955.92	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

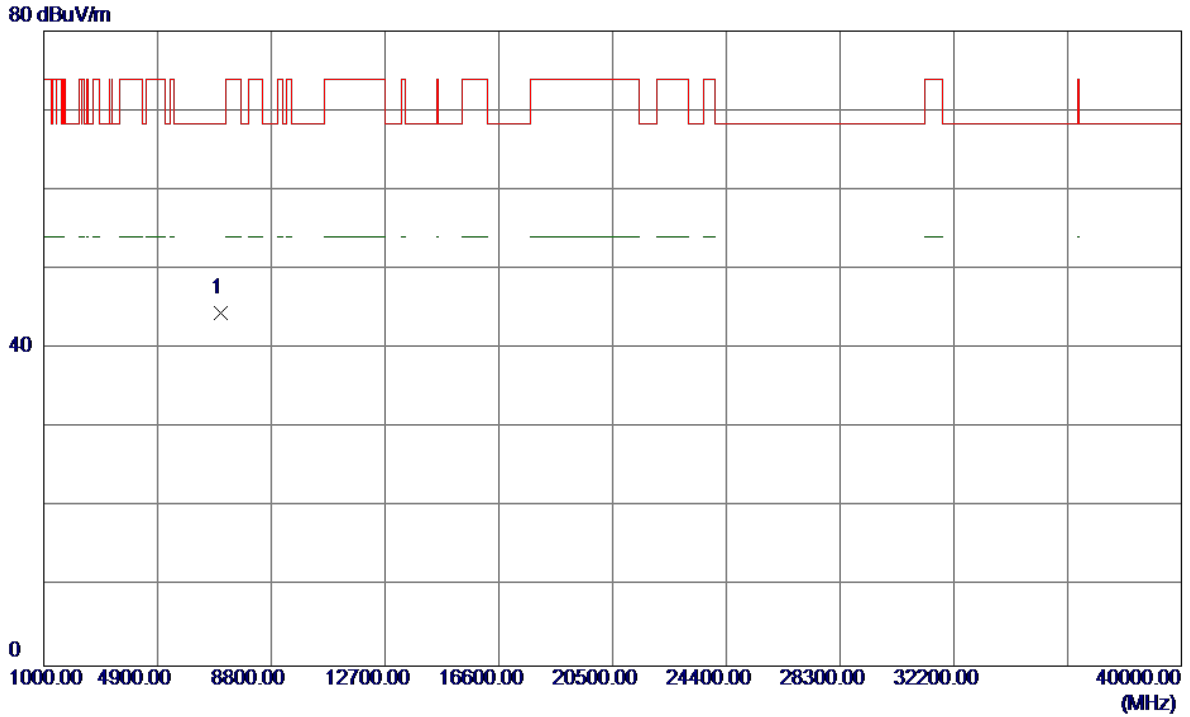


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7053.4950	34.51	10.00	44.51	68.30	-23.79	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical


115 dBuV/m

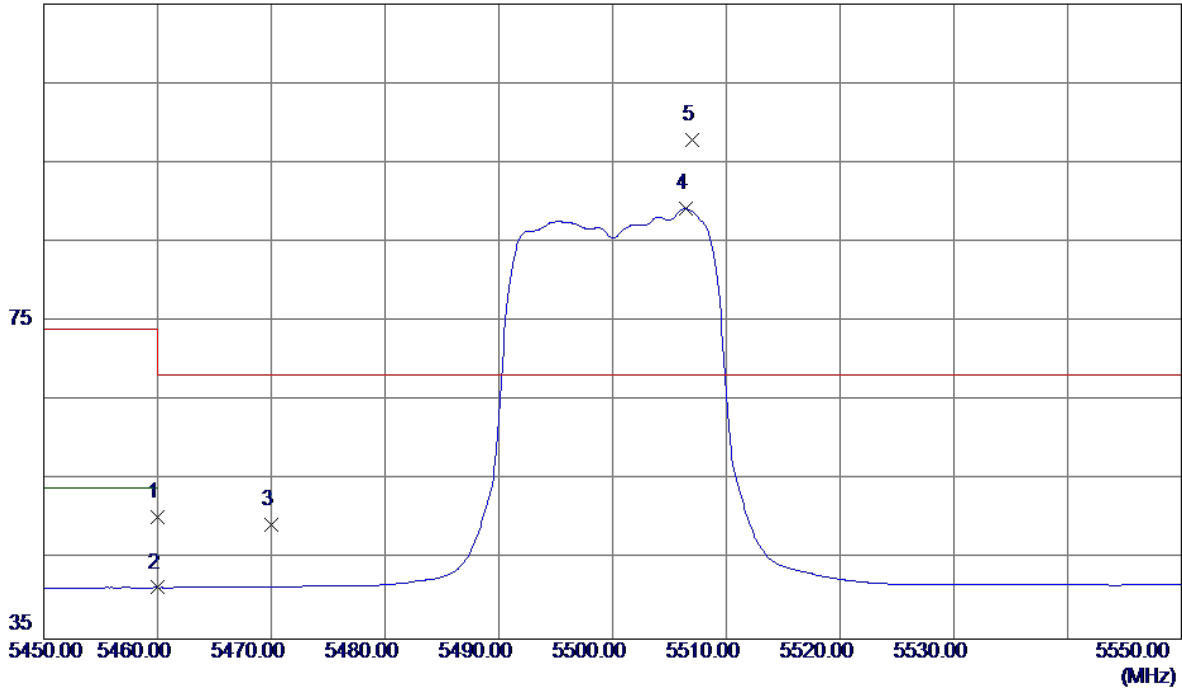

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.65	40.76	50.41	74.00	-23.59	Peak	
2	5460.0000	0.72	40.76	41.48	54.00	-12.52	AVG	
3	5470.0000	8.57	40.79	49.36	68.30	-18.94	Peak	
4	5506.4000	48.34	40.89	89.23	999.00	-909.77	AVG	No Limit
5 *	5507.0000	56.95	40.90	97.85	68.30	29.55	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

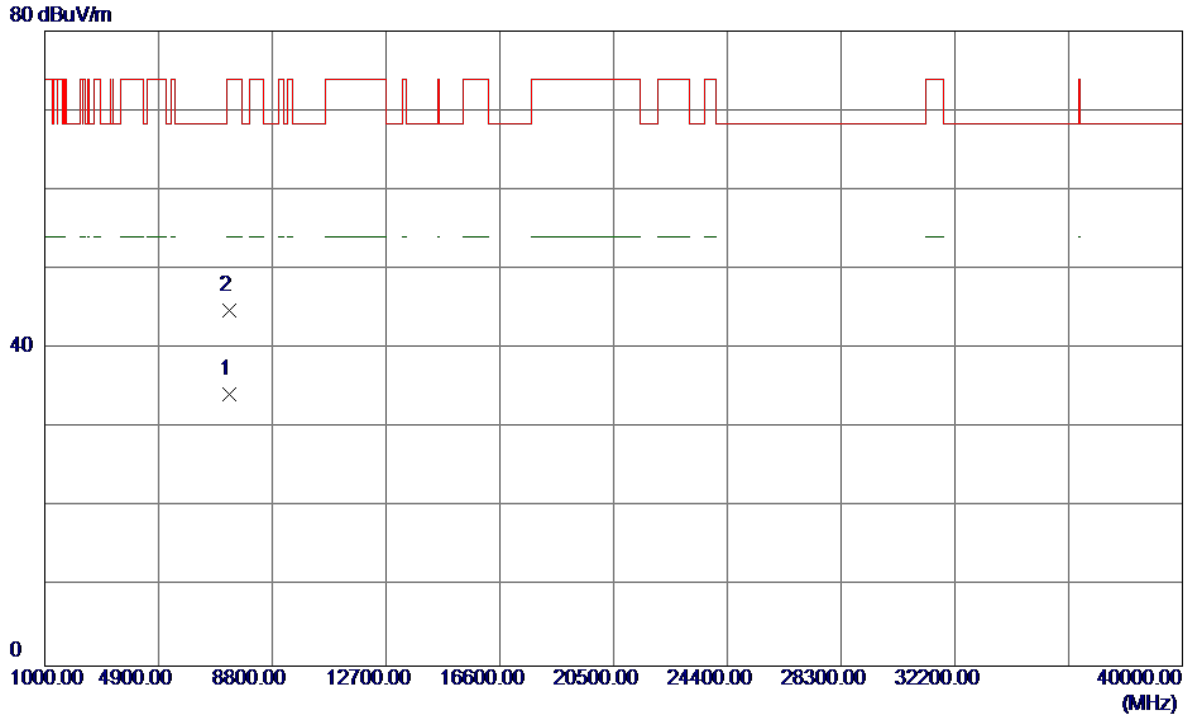


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7333.3100	23.68	10.53	34.21	54.00	-19.79	AVG	
2	7333.2850	34.33	10.53	44.86	74.00	-29.14	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal


115 dBuV/m

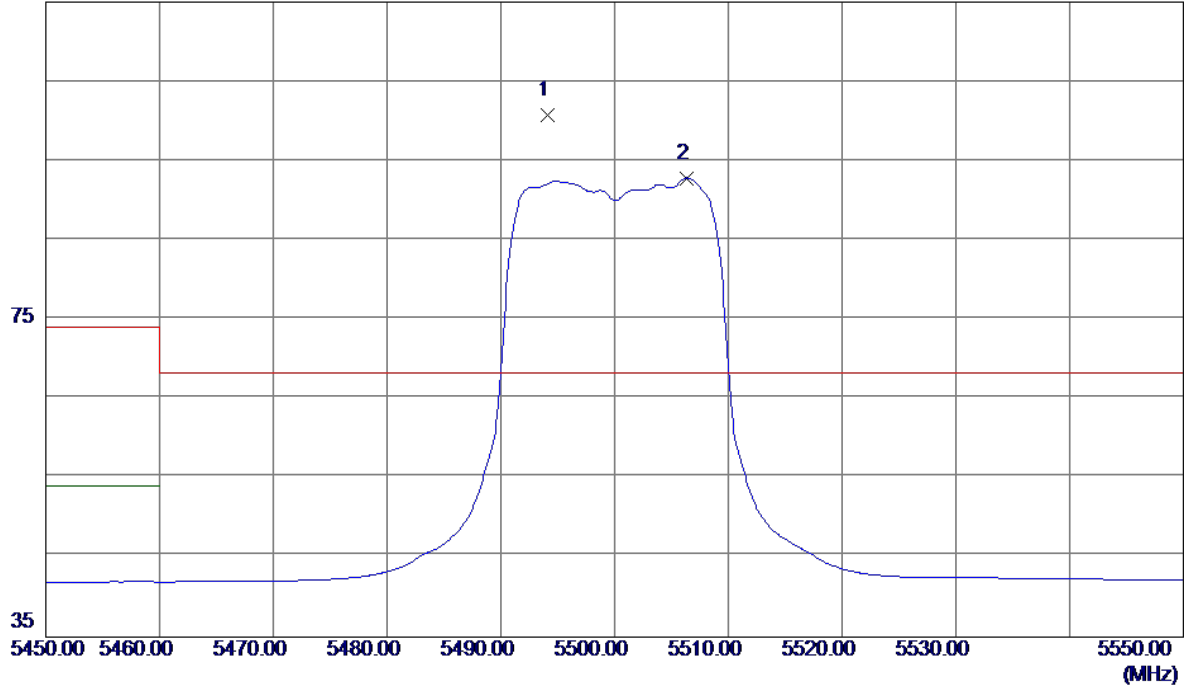

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5494.1000	59.87	40.85	100.72	68.30	32.42	Peak	No Limit
2	5506.3000	51.95	40.89	92.84	999.00	-906.16	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal

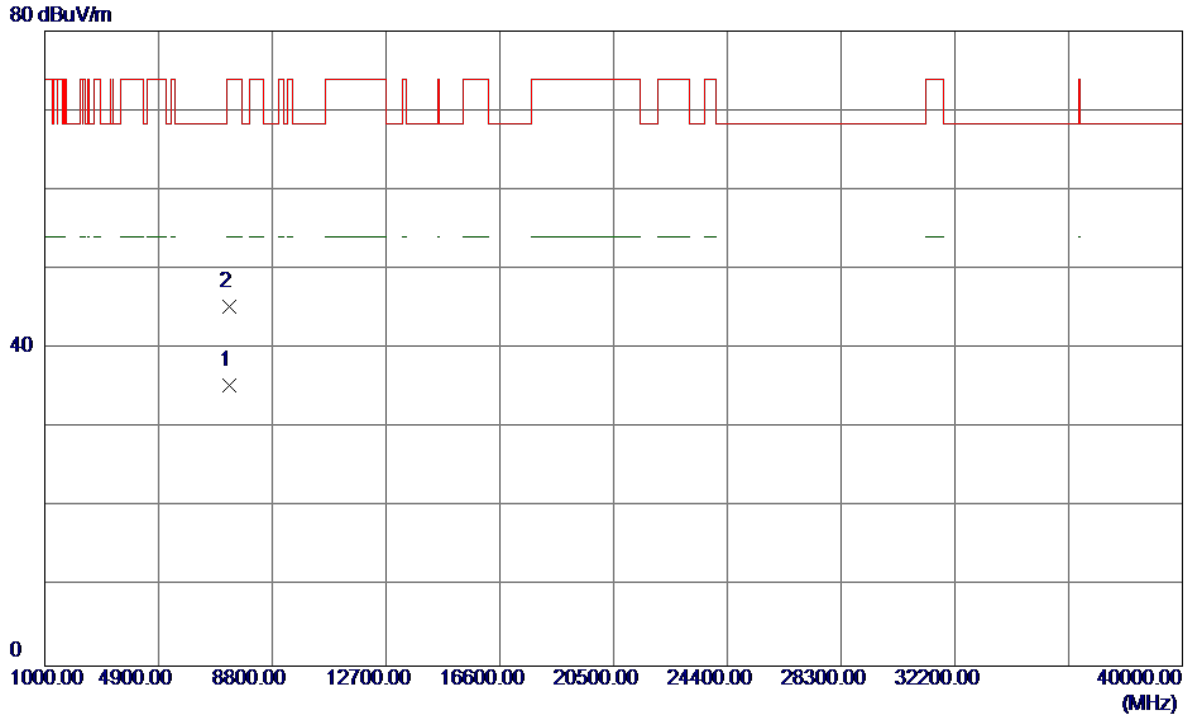


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7333.2250	24.81	10.53	35.34	54.00	-18.66	AVG	
2	7333.1000	34.74	10.53	45.27	74.00	-28.73	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical


115 dBuV/m

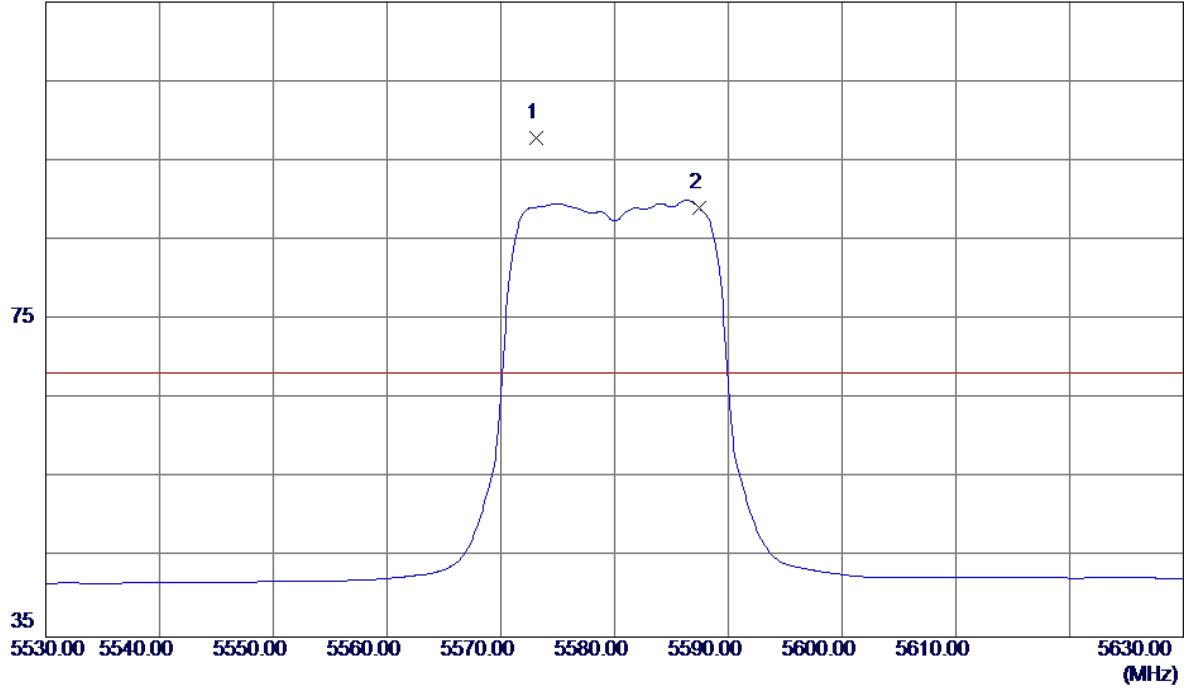

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5573.1000	56.80	41.14	97.94	68.30	29.64	Peak	No Limit
2	5587.4000	47.89	41.19	89.08	999.00	-909.92	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical

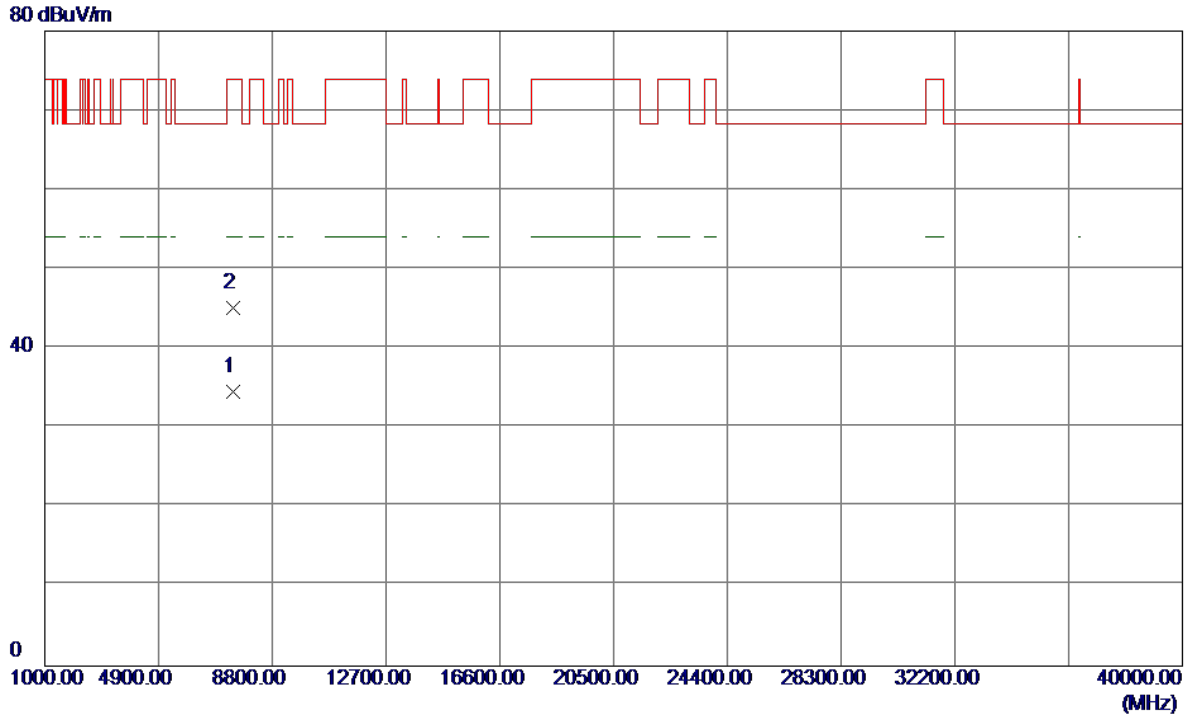


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7439.9450	23.89	10.73	34.62	54.00	-19.38	AVG	
2	7439.7900	34.43	10.73	45.16	74.00	-28.84	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal


115 dBuV/m

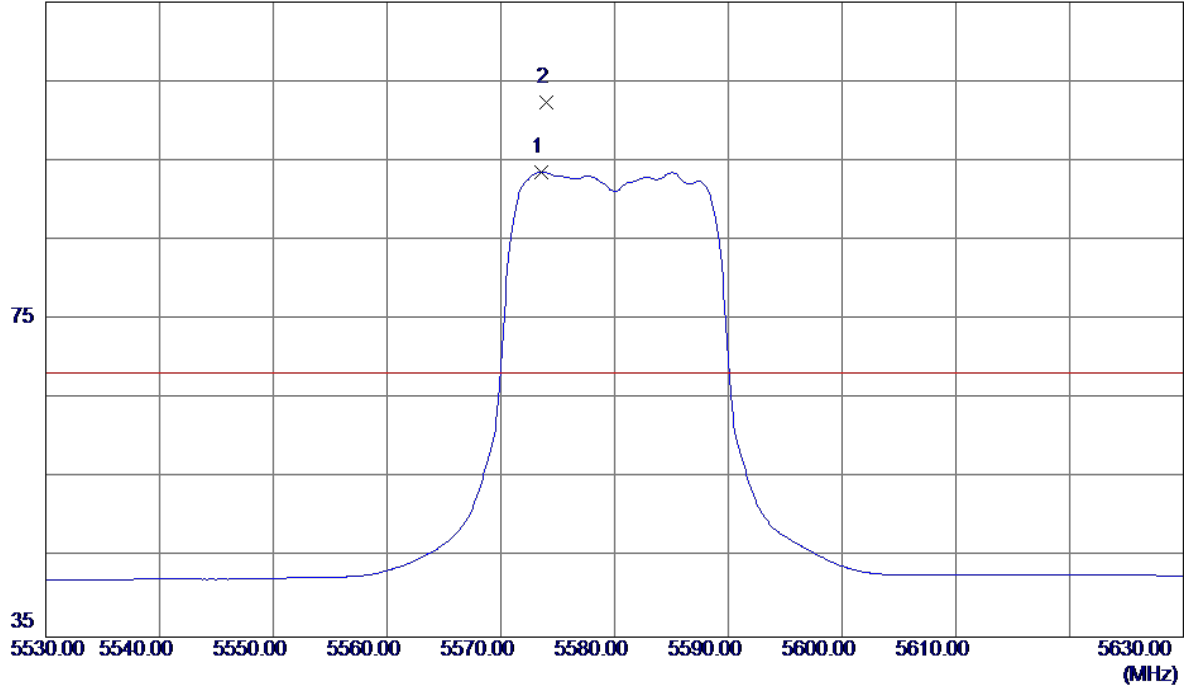

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5573.6000	52.45	41.14	93.59	999.00	-905.41	AVG	No Limit
2 *	5574.0000	61.29	41.14	102.43	68.30	34.13	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal

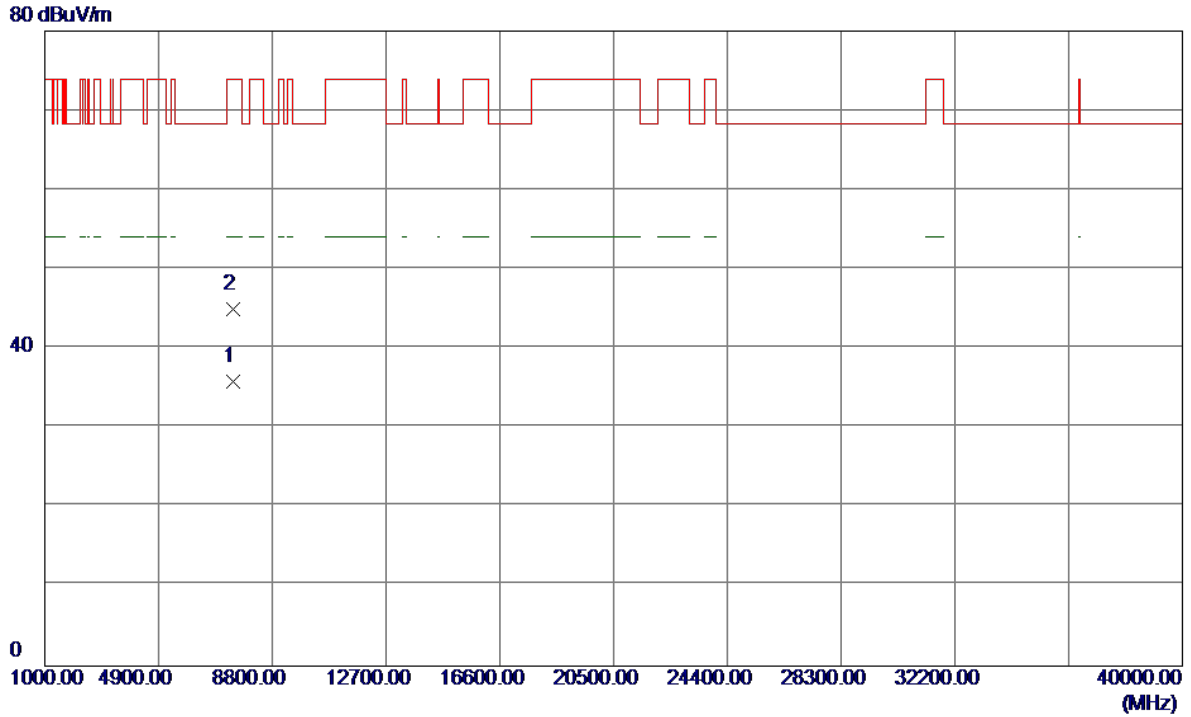


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7439.9000	25.07	10.73	35.80	54.00	-18.20	AVG	
2	7440.2200	34.30	10.73	45.03	74.00	-28.97	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical


115 dBuV/m

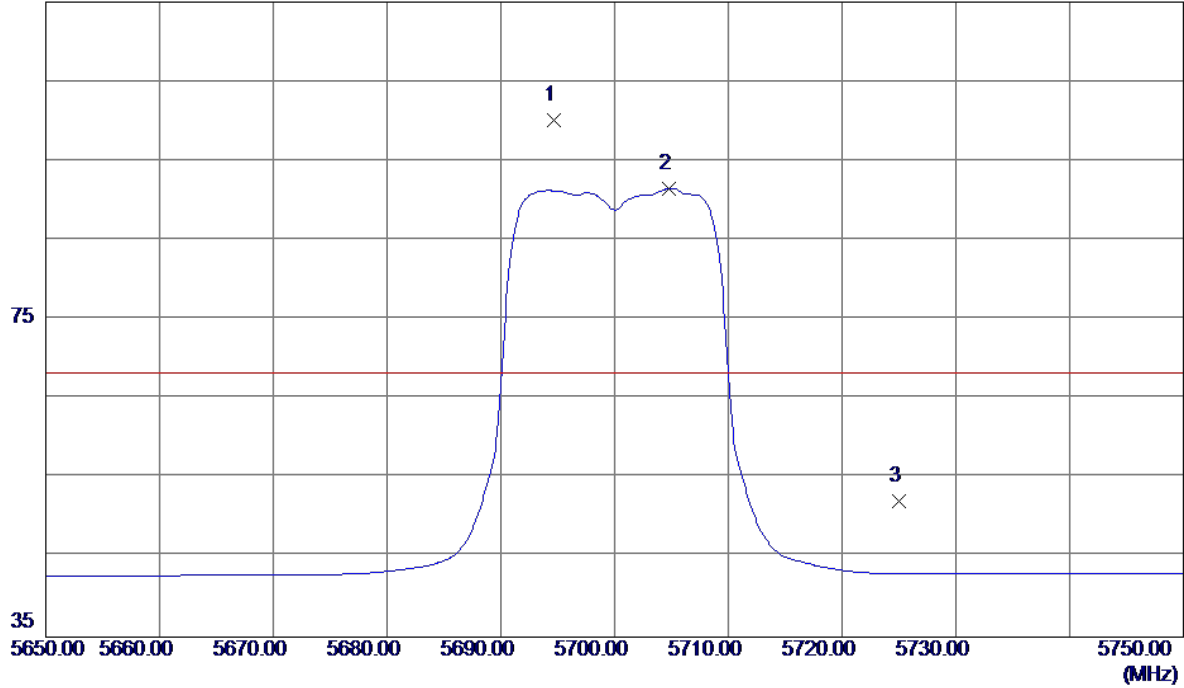

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5694.7000	58.47	41.59	100.06	68.30	31.76	Peak	No Limit
2	5704.8000	49.88	41.62	91.50	999.00	-907.50	AVG	No Limit
3	5725.0000	10.41	41.70	52.11	68.30	-16.19	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical

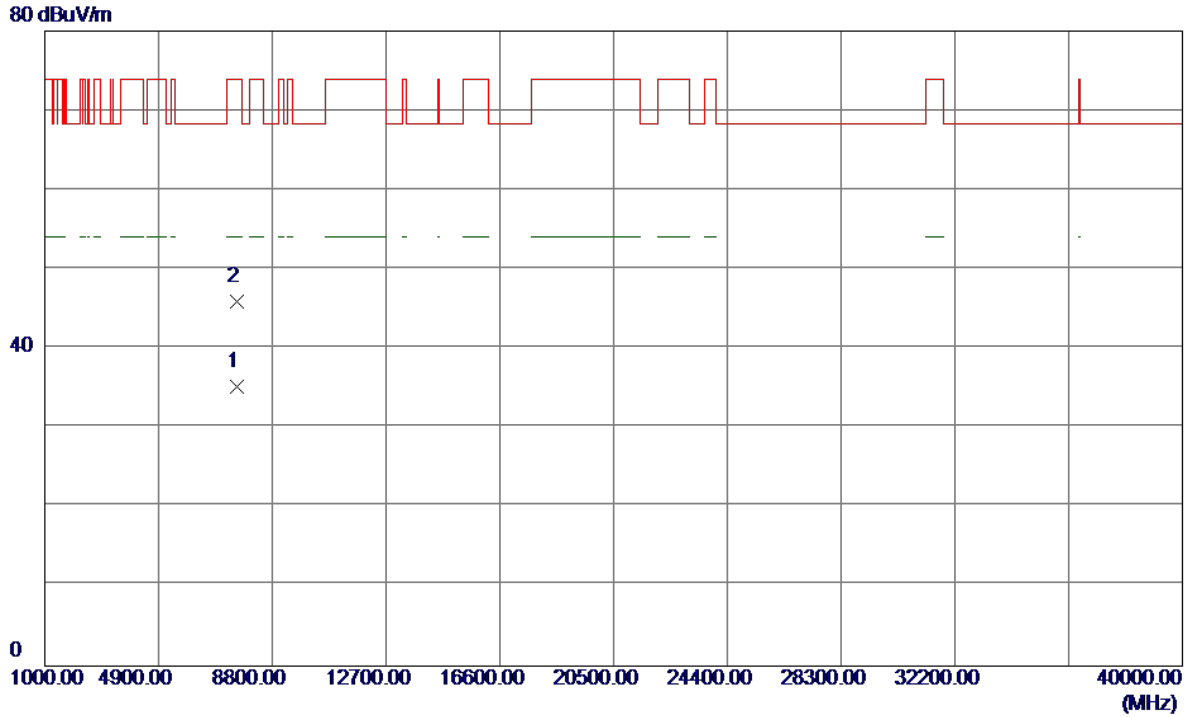


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7599.9600	24.29	10.84	35.13	54.00	-18.87	AVG	
2	7600.4600	35.00	10.84	45.84	74.00	-28.16	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal


115 dBuV/m

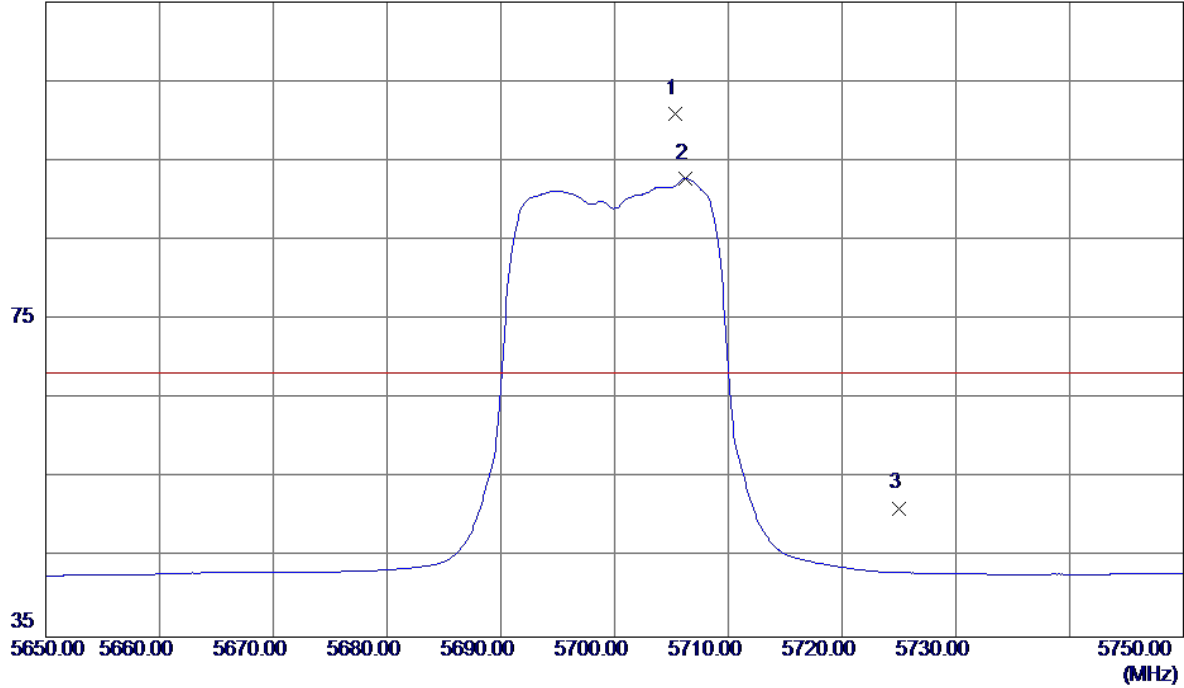

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5705.3000	59.30	41.63	100.93	68.30	32.63	Peak	No Limit
2	5706.2000	51.14	41.63	92.77	999.00	-906.23	AVG	No Limit
3	5725.0000	9.54	41.70	51.24	68.30	-17.06	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

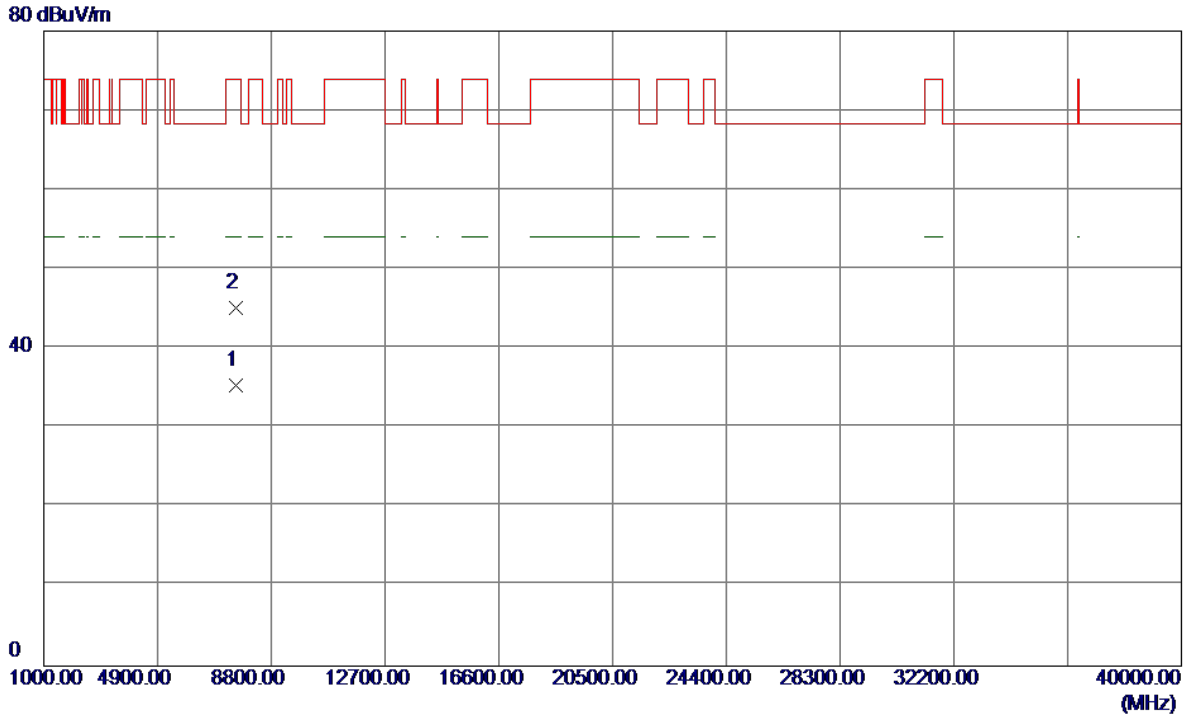


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7599.8800	24.54	10.84	35.38	54.00	-18.62	AVG	
2	7600.1700	34.24	10.84	45.08	74.00	-28.92	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical


115 dBuV/m

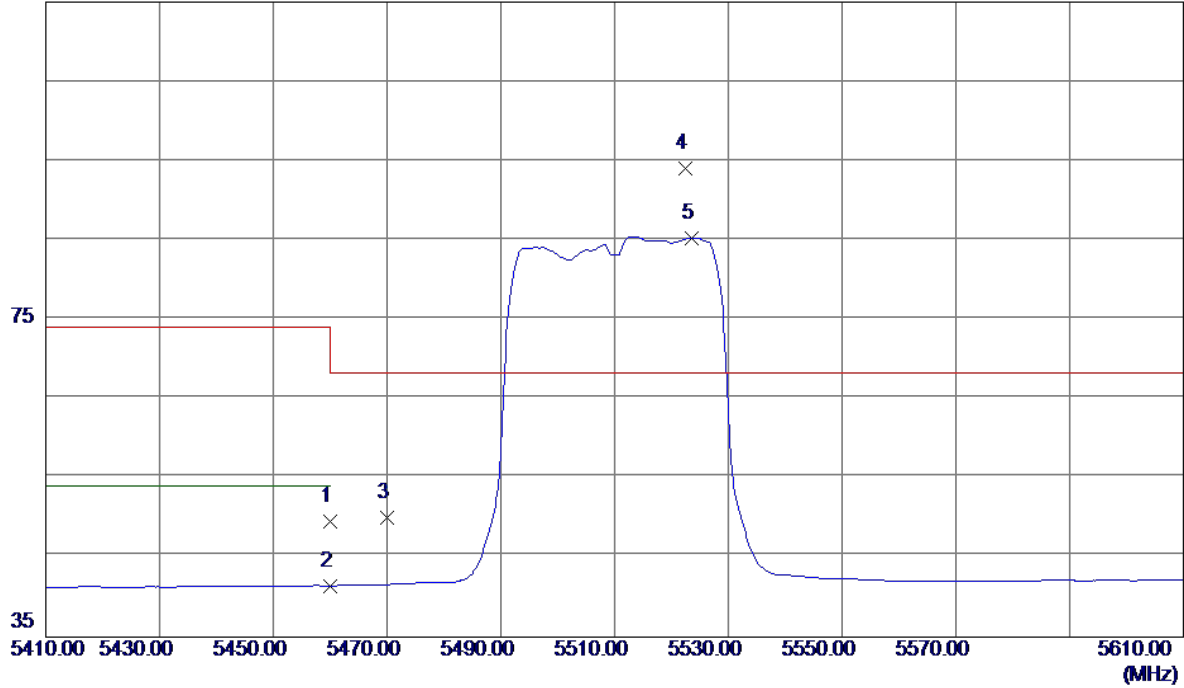

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	8.86	40.76	49.62	74.00	-24.38	Peak	
2	5460.0000	0.70	40.76	41.46	54.00	-12.54	AVG	
3	5470.0000	9.25	40.79	50.04	68.30	-18.26	Peak	
4 *	5522.4000	53.08	40.95	94.03	68.30	25.73	Peak	No L imit
5	5523.6000	44.32	40.96	85.28	999.00	-913.72	AVG	No L imit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

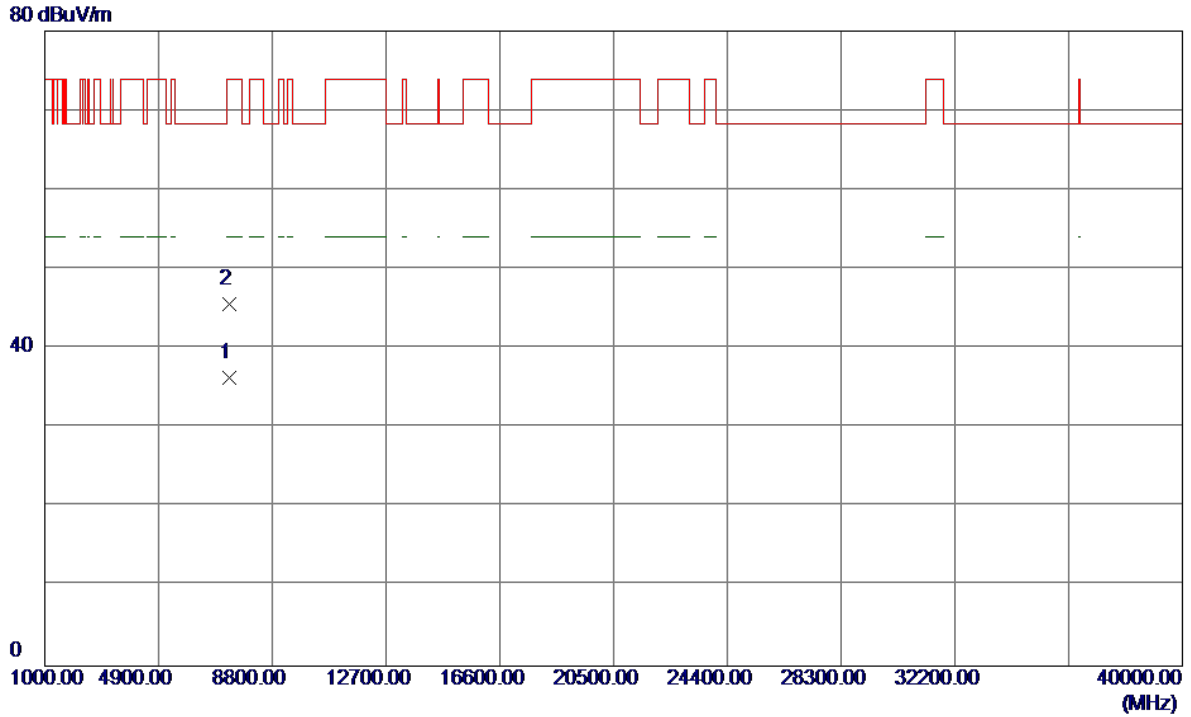


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7346.6250	25.76	10.55	36.31	54.00	-17.69	AVG	
2	7346.8400	34.97	10.55	45.52	74.00	-28.48	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal


115 dBuV/m

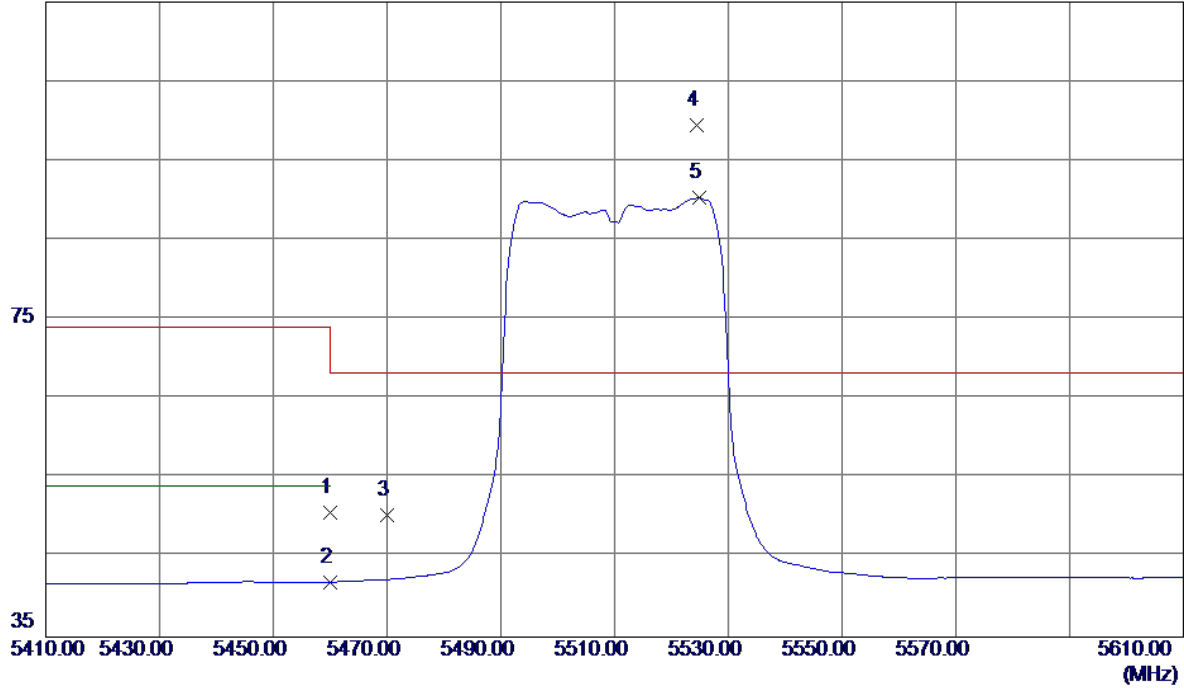

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.98	40.76	50.74	74.00	-23.26	Peak	
2	5460.0000	1.17	40.76	41.93	54.00	-12.07	AVG	
3	5470.0000	9.50	40.79	50.29	68.30	-18.01	Peak	
4 *	5524.4000	58.51	40.96	99.47	68.30	31.17	Peak	No Limit
5	5524.8000	49.38	40.96	90.34	999.00	-908.66	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

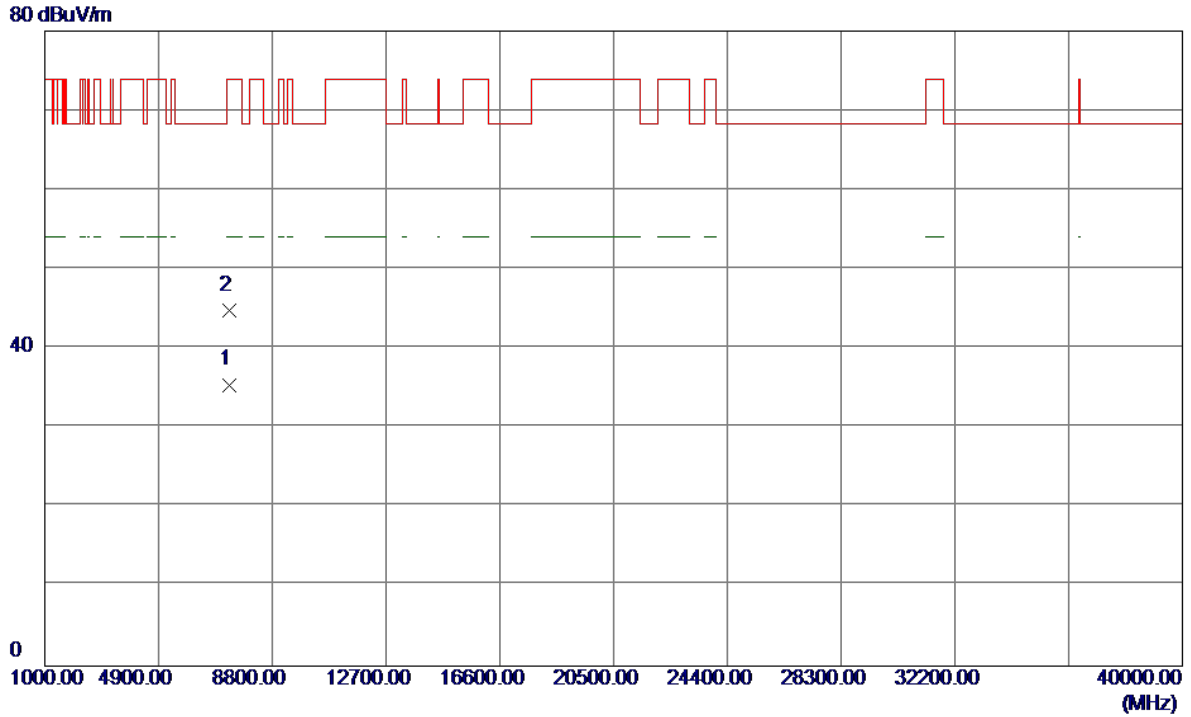


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7346.6050	24.89	10.55	35.44	54.00	-18.56	AVG	
2	7346.5300	34.23	10.55	44.78	74.00	-29.22	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical


115 dBuV/m

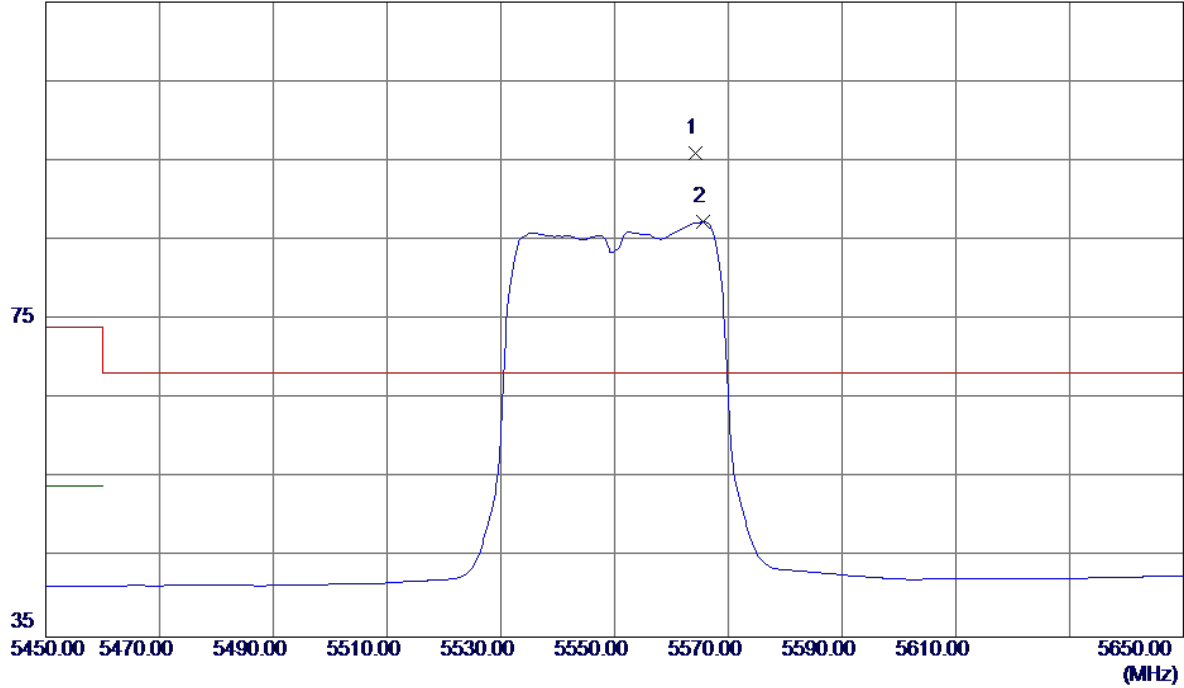

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5564.2000	54.79	41.11	95.90	68.30	27.60	Peak	No L imit
2	5565.6000	46.19	41.11	87.30	999.00	-911.70	AVG	No L imit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical

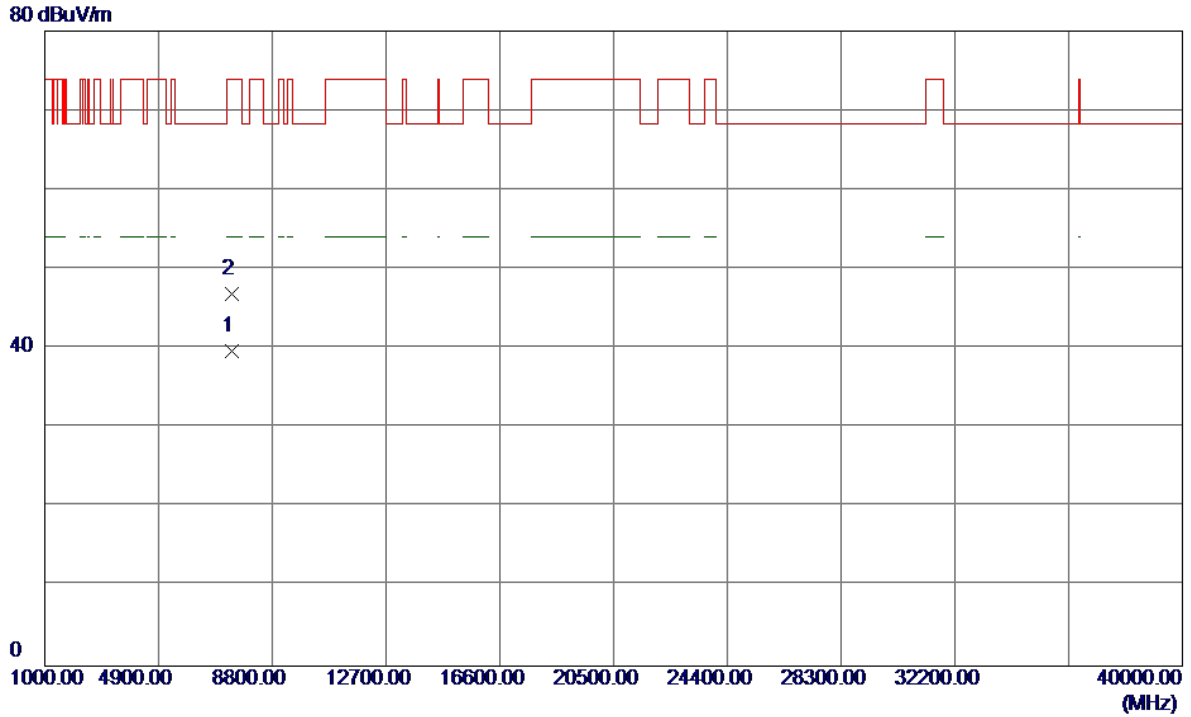


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7400.1100	29.01	10.65	39.66	54.00	-14.34	AVG	
2	7400.1950	36.25	10.65	46.90	74.00	-27.10	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal


115 dBuV/m

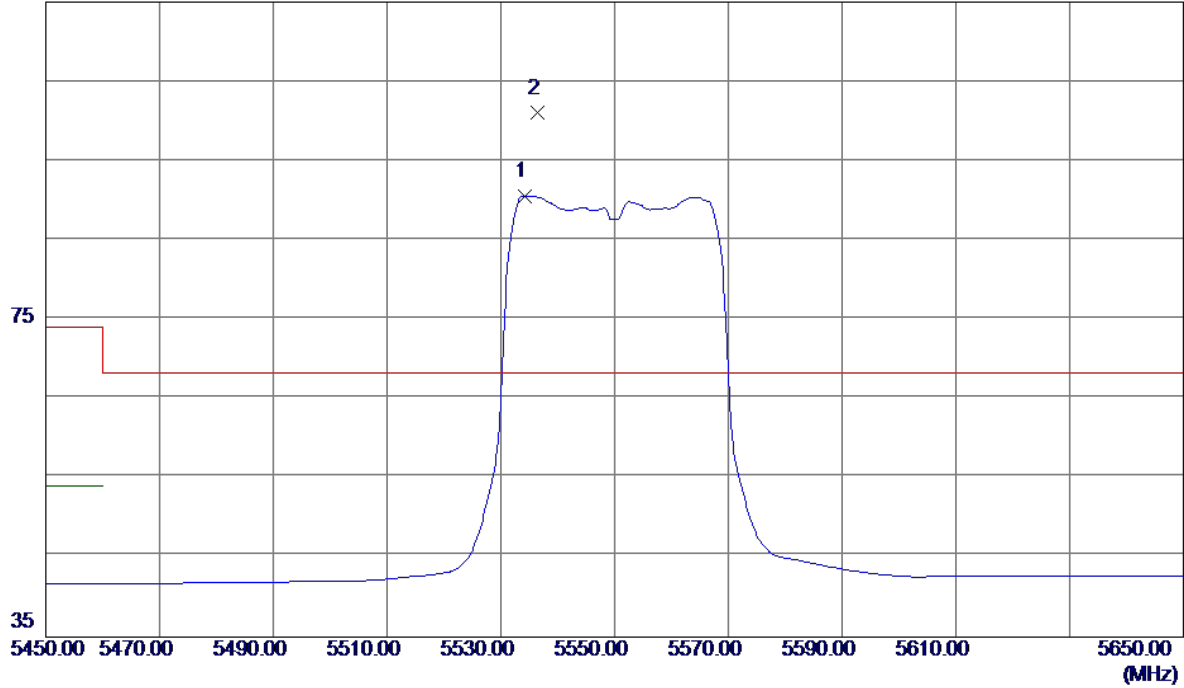

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5534.2000	49.60	41.00	90.60	999.00	-908.40	AVG	No Limit
2 *	5536.4000	60.00	41.00	101.00	68.30	32.70	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

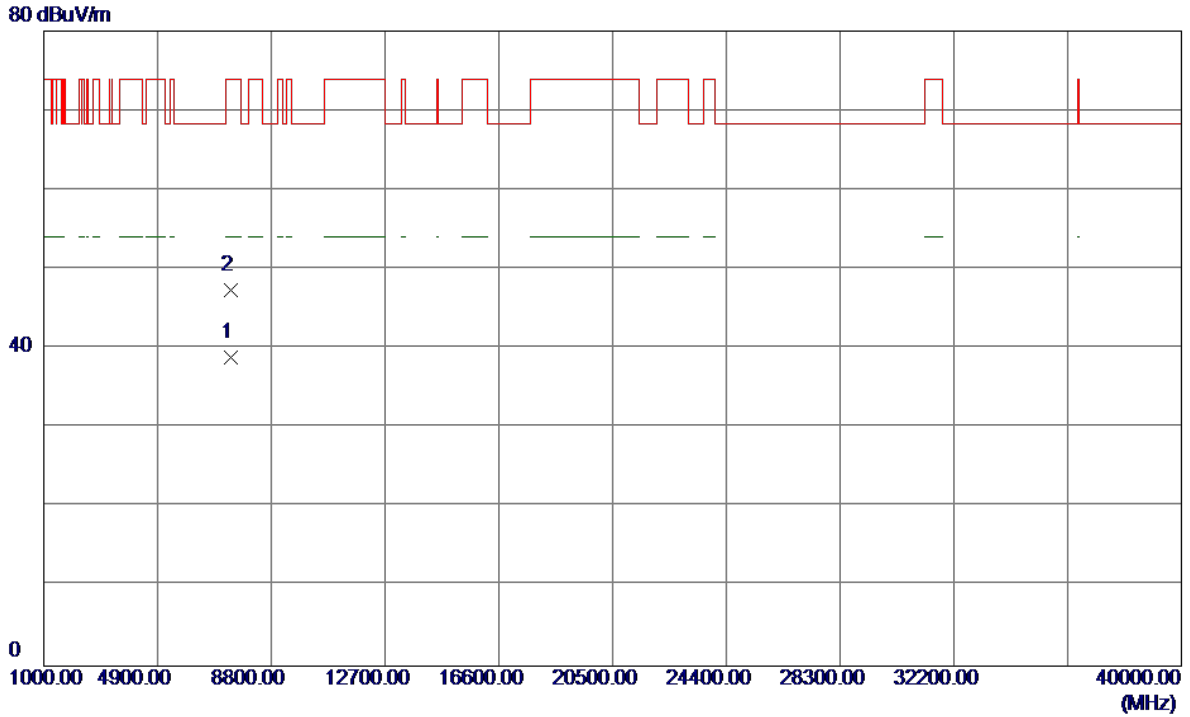


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7400.2150	28.26	10.65	38.91	54.00	-15.09	AVG	
2	7400.2250	36.71	10.65	47.36	74.00	-26.64	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical


115 dBuV/m

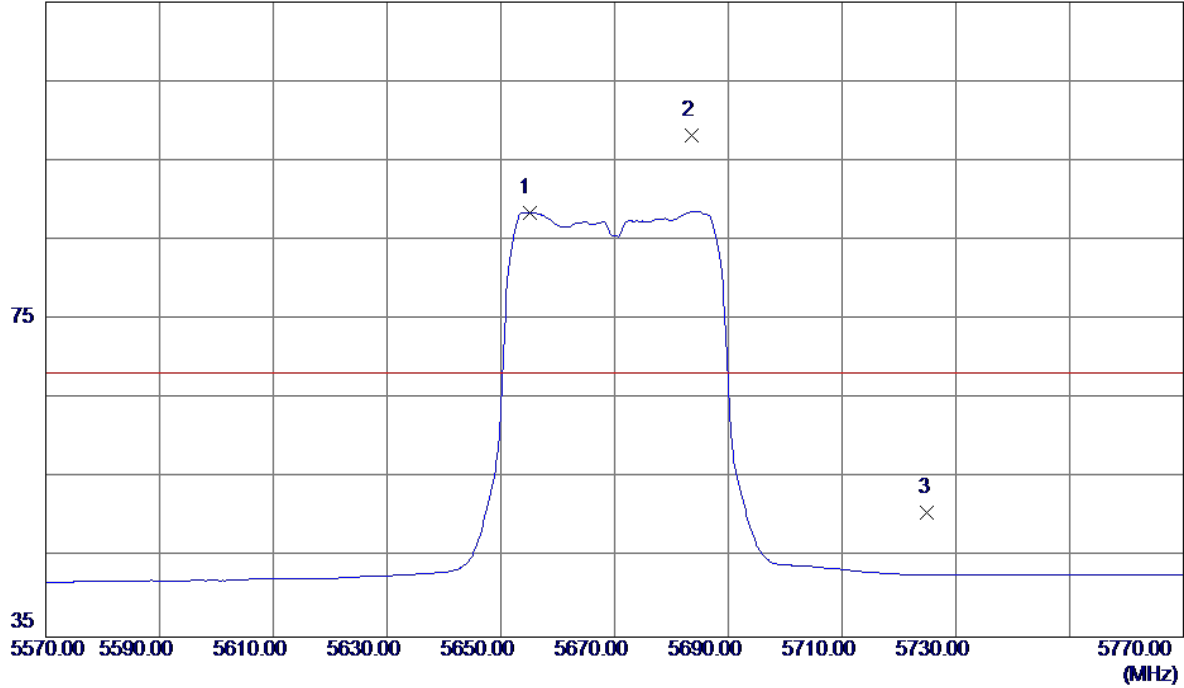

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5655.0000	47.04	41.44	88.48	999.00	-910.52	AVG	No L imit
2 *	5683.6000	56.58	41.55	98.13	68.30	29.83	Peak	No L imit
3	5725.0000	9.00	41.70	50.70	68.30	-17.60	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

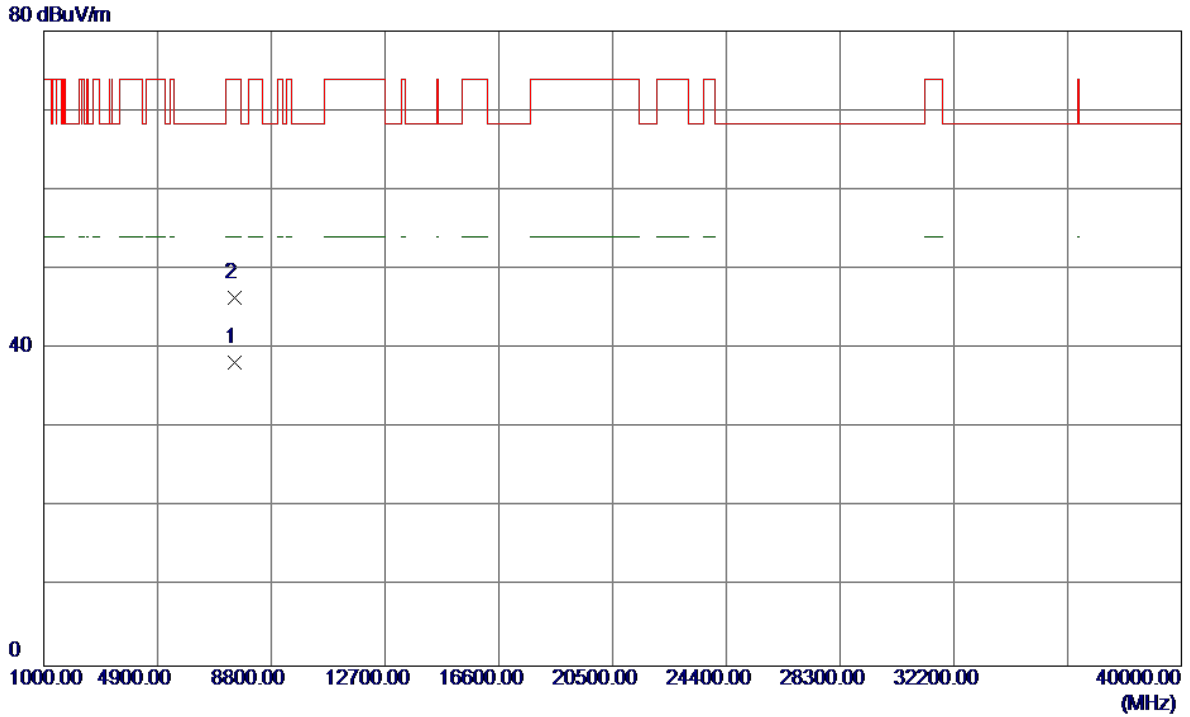


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7559.9600	27.44	10.84	38.28	54.00	-15.72	AVG	
2	7560.0150	35.54	10.84	46.38	74.00	-27.62	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal


115 dBuV/m

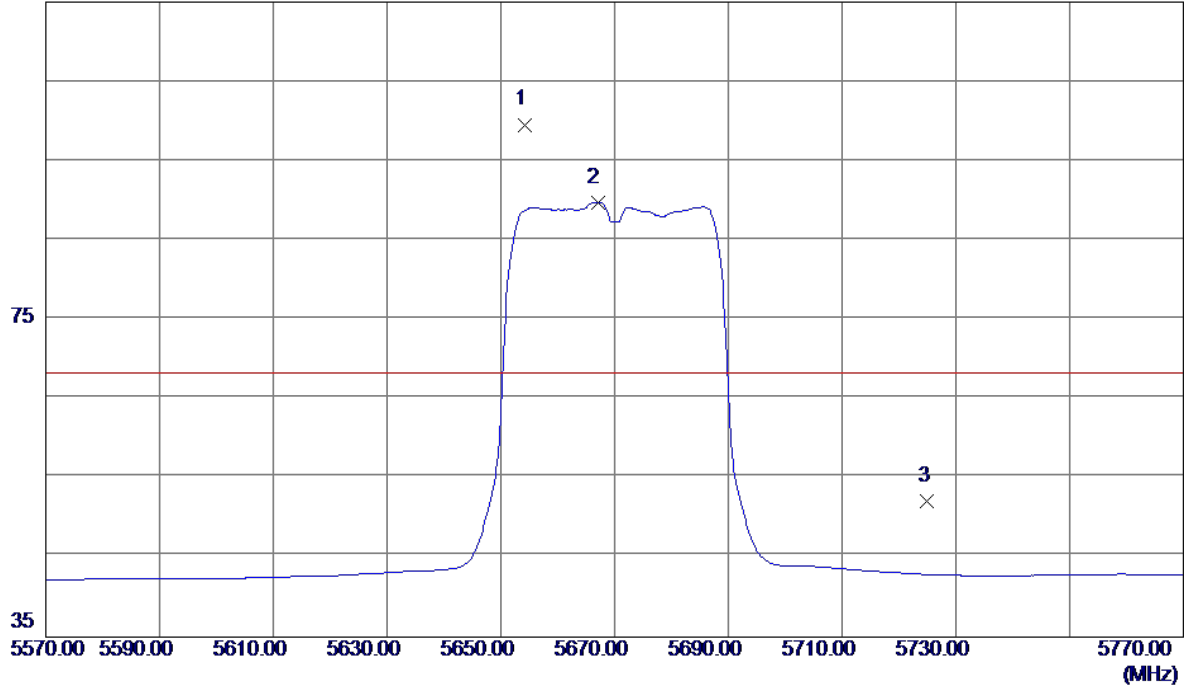

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5654.2000	58.12	41.44	99.56	68.30	31.26	Peak	No Limit
2	5667.0000	48.30	41.48	89.78	999.00	-909.22	AVG	No Limit
3	5725.0000	10.45	41.70	52.15	68.30	-16.15	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

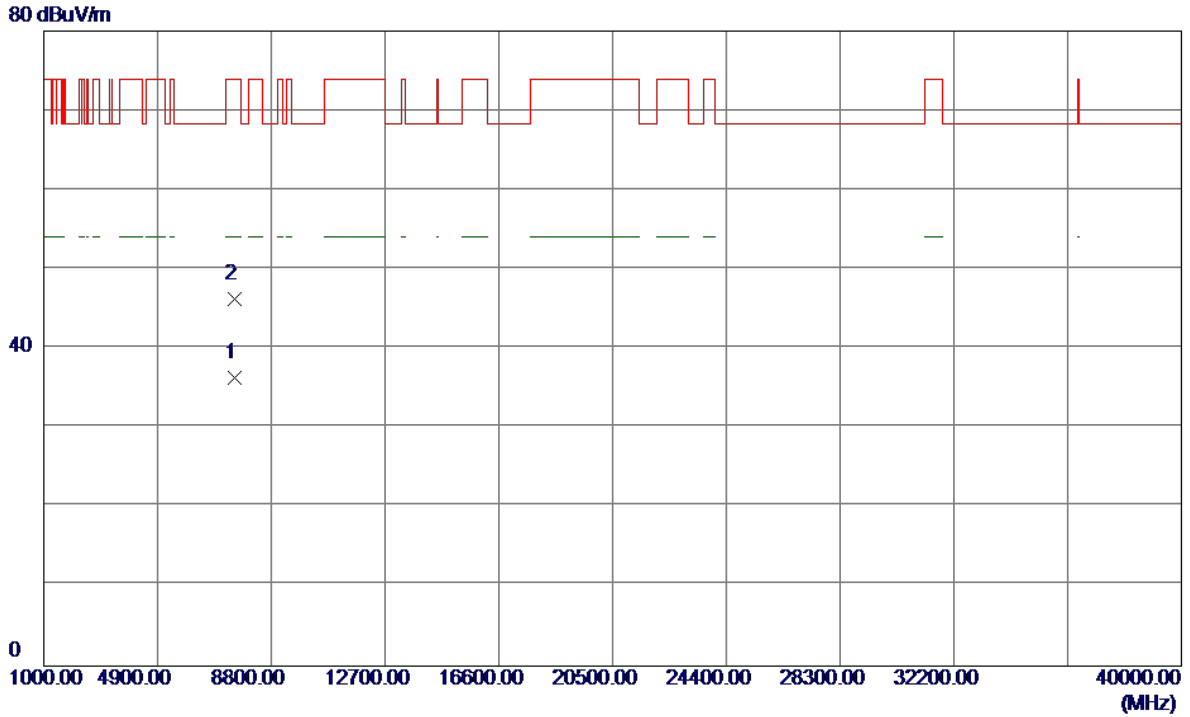


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7559.9250	25.49	10.84	36.33	54.00	-17.67	AVG	
2	7559.9200	35.45	10.84	46.29	74.00	-27.71	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical


115 dBuV/m

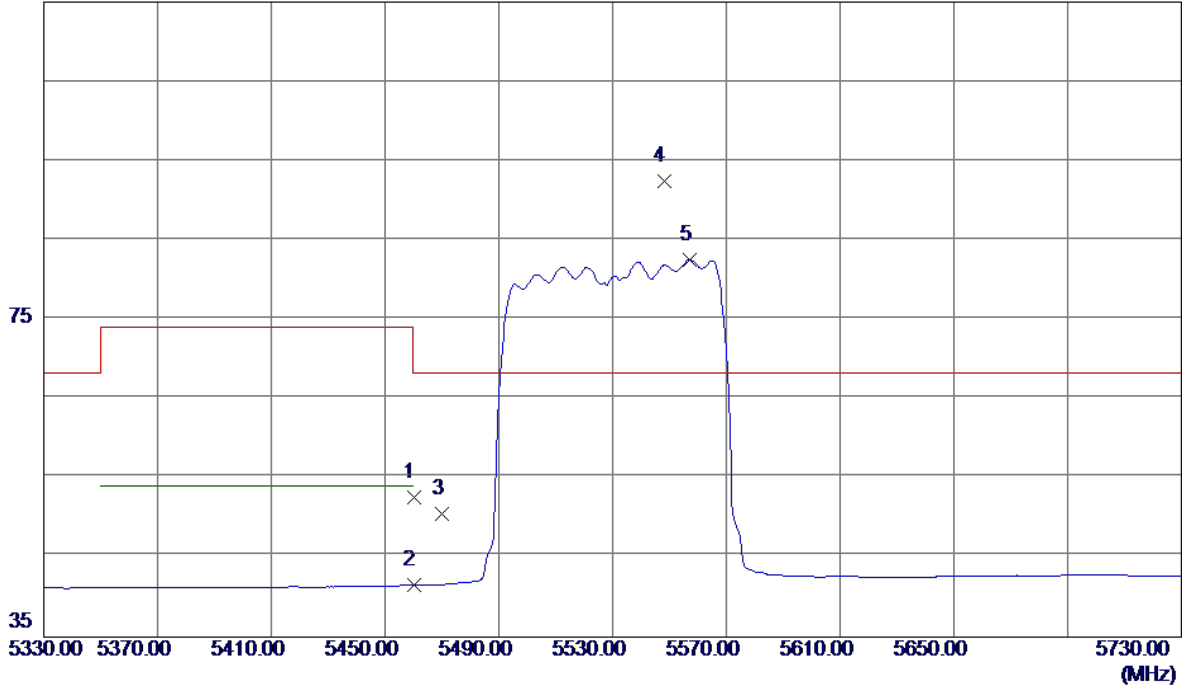

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	11.85	40.76	52.61	74.00	-21.39	Peak	
2	5460.0000	0.75	40.76	41.51	54.00	-12.49	AVG	
3	5470.0000	9.67	40.79	50.46	68.30	-17.84	Peak	
4 *	5548.0000	51.33	41.05	92.38	68.30	24.08	Peak	No L imit
5	5557.2000	41.42	41.08	82.50	999.00	-916.50	AVG	No L imit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

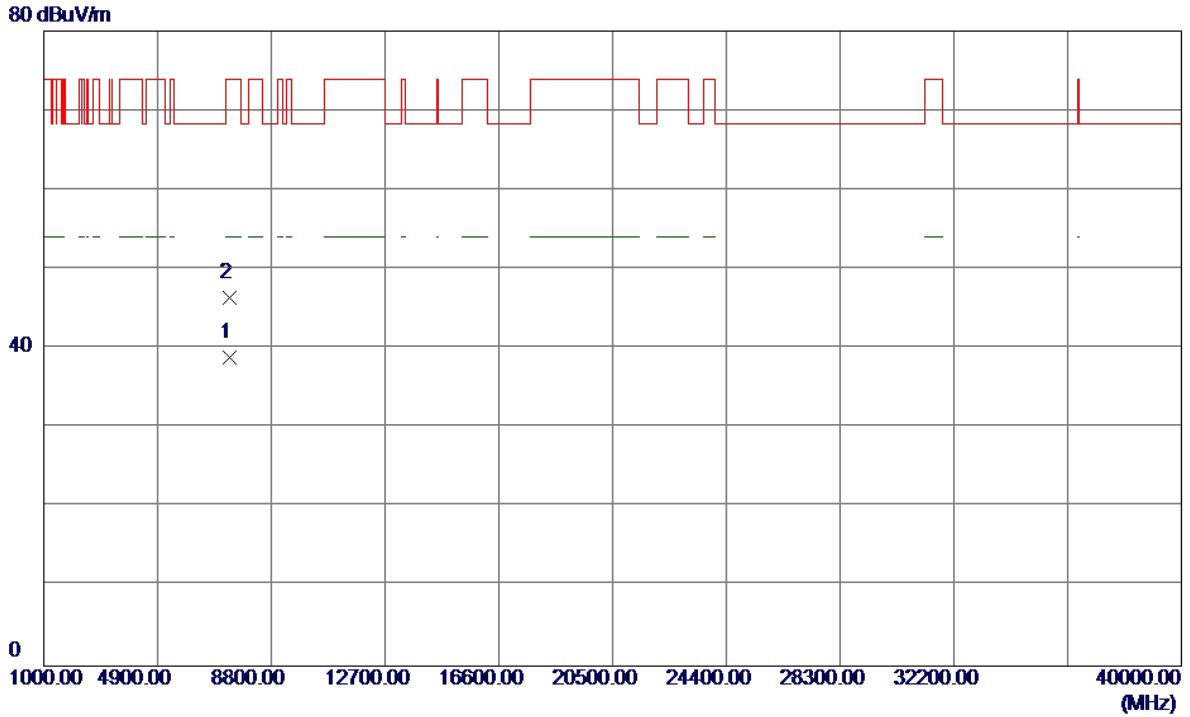


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7373.2850	28.21	10.60	38.81	54.00	-15.19	AVG	
2	7373.3200	35.85	10.60	46.45	74.00	-27.55	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal


115 dBuV/m

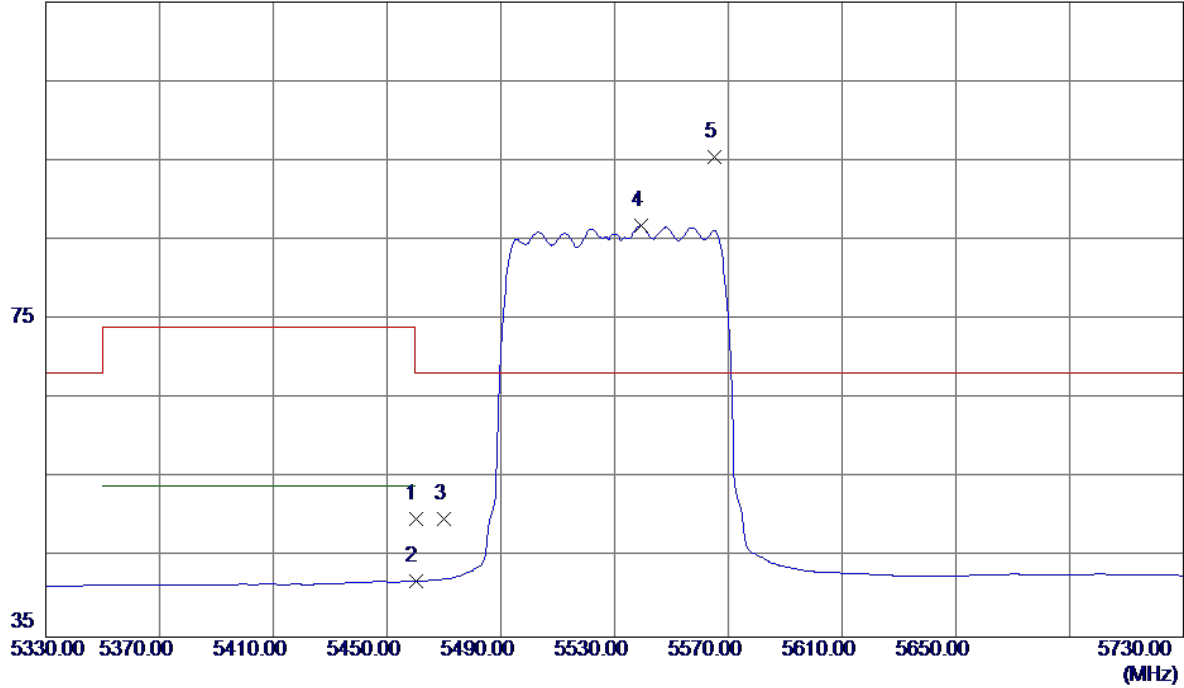

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.15	40.76	49.91	74.00	-24.09	Peak	
2	5460.0000	1.27	40.76	42.03	54.00	-11.97	AVG	
3	5470.0000	9.08	40.79	49.87	68.30	-18.43	Peak	
4	5539.2000	45.76	41.01	86.77	999.00	-912.23	AVG	No Limit
5 *	5565.2000	54.38	41.11	95.49	68.30	27.19	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

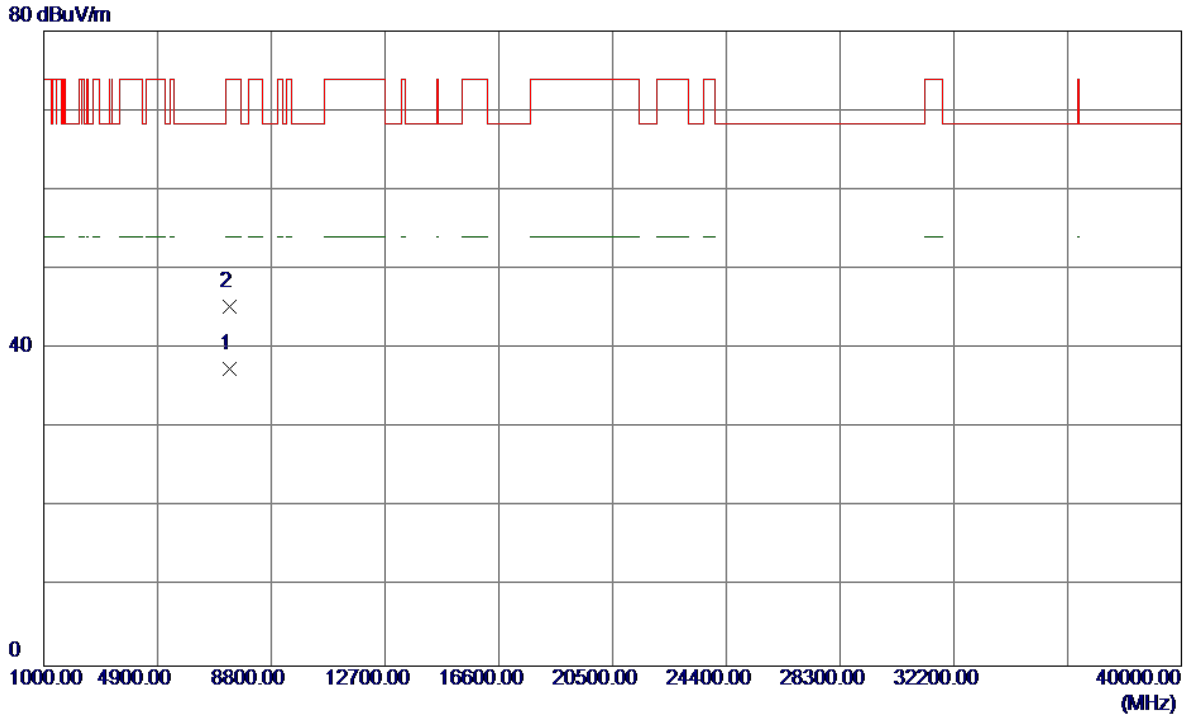


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7373.3350	26.88	10.60	37.48	54.00	-16.52	AVG	
2	7373.4400	34.67	10.60	45.27	74.00	-28.73	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical


115 dBuV/m

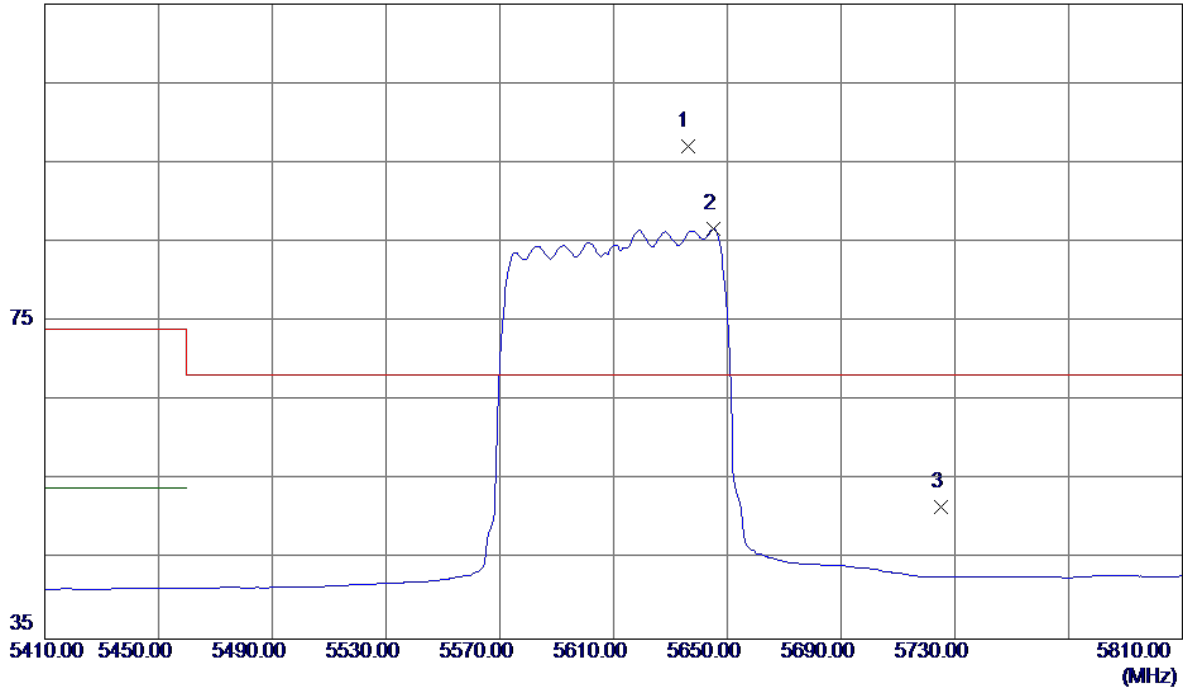

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5636.0000	55.69	41.37	97.06	68.30	28.76	Peak	No L imit
2	5645.2000	45.26	41.40	86.66	999.00	-912.34	AVG	No L imit
3	5725.0000	10.01	41.70	51.71	68.30	-16.59	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

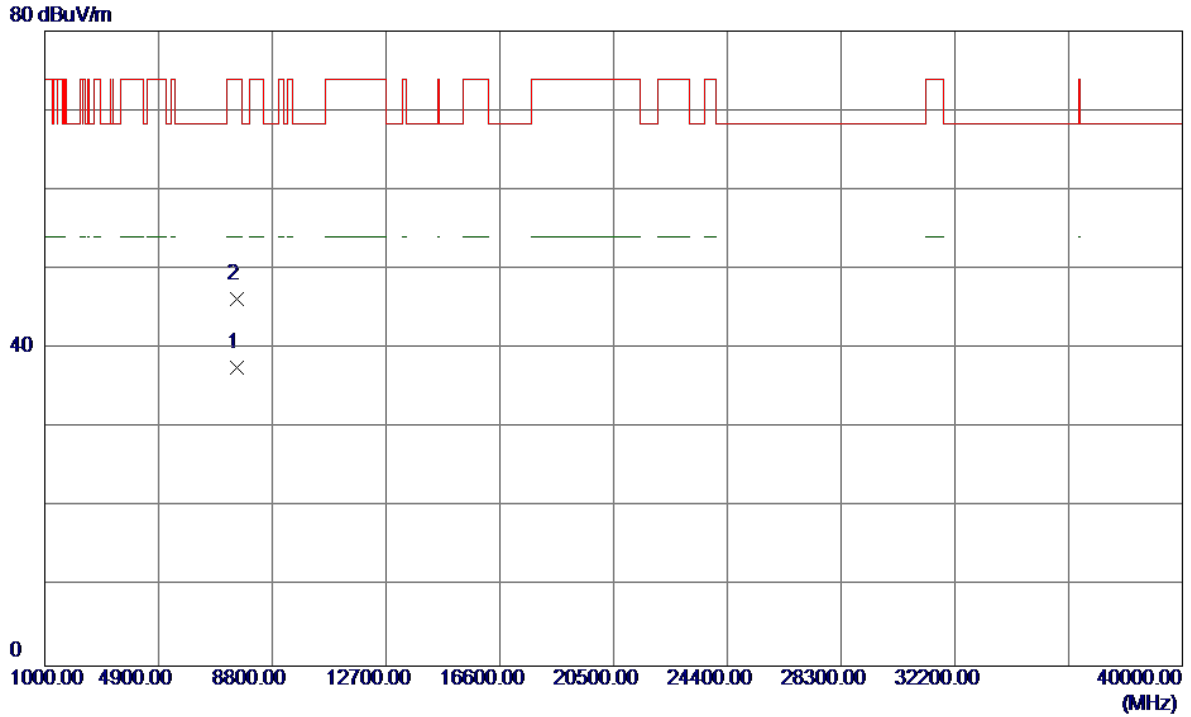


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7586.6200	26.79	10.84	37.63	54.00	-16.37	AVG	
2	7586.5100	35.46	10.84	46.30	74.00	-27.70	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal


115 dBuV/m

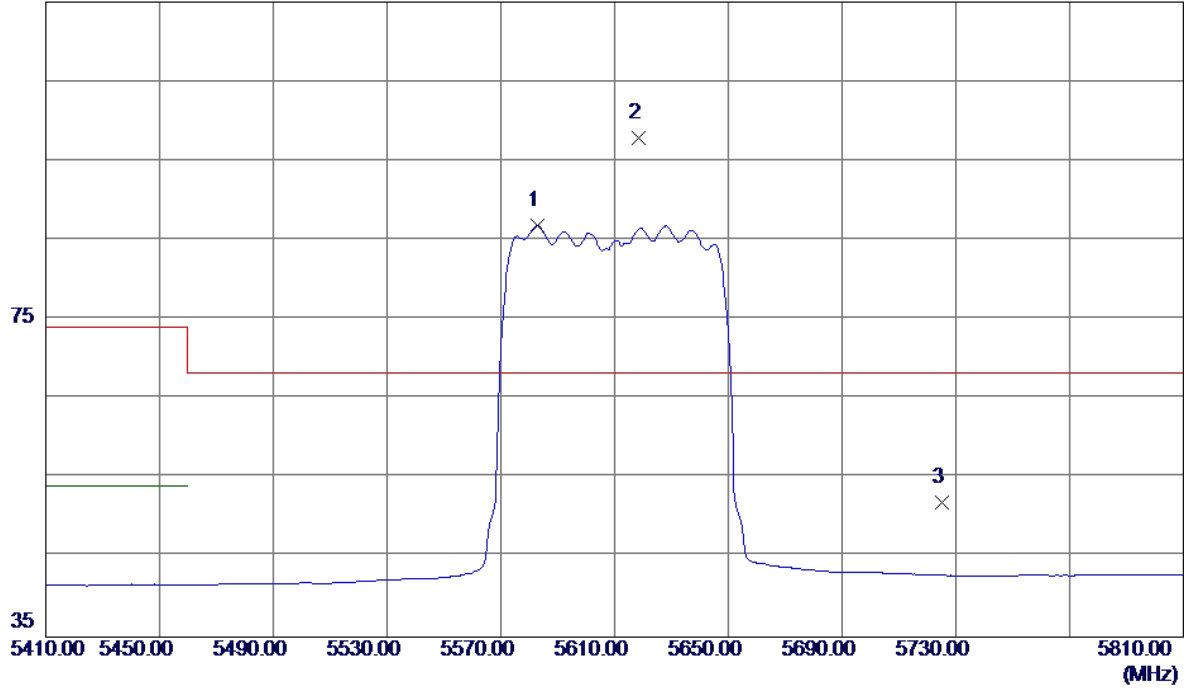

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5582.8000	45.63	41.17	86.80	999.00	-912.20	AVG	No Limit
2 *	5618.4000	56.56	41.31	97.87	68.30	29.57	Peak	No Limit
3	5725.0000	10.26	41.70	51.96	68.30	-16.34	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

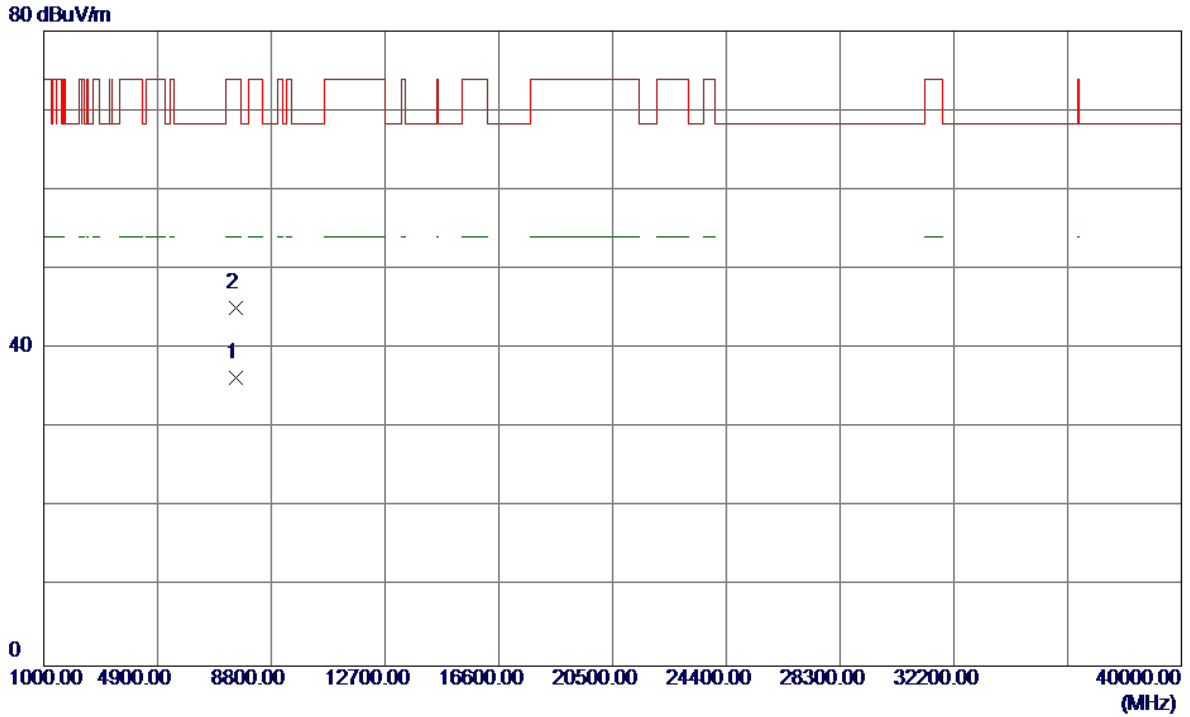

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7586.5750	25.41	10.84	36.25	54.00	-17.75	AVG	
2	7586.7300	34.30	10.84	45.14	74.00	-28.86	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

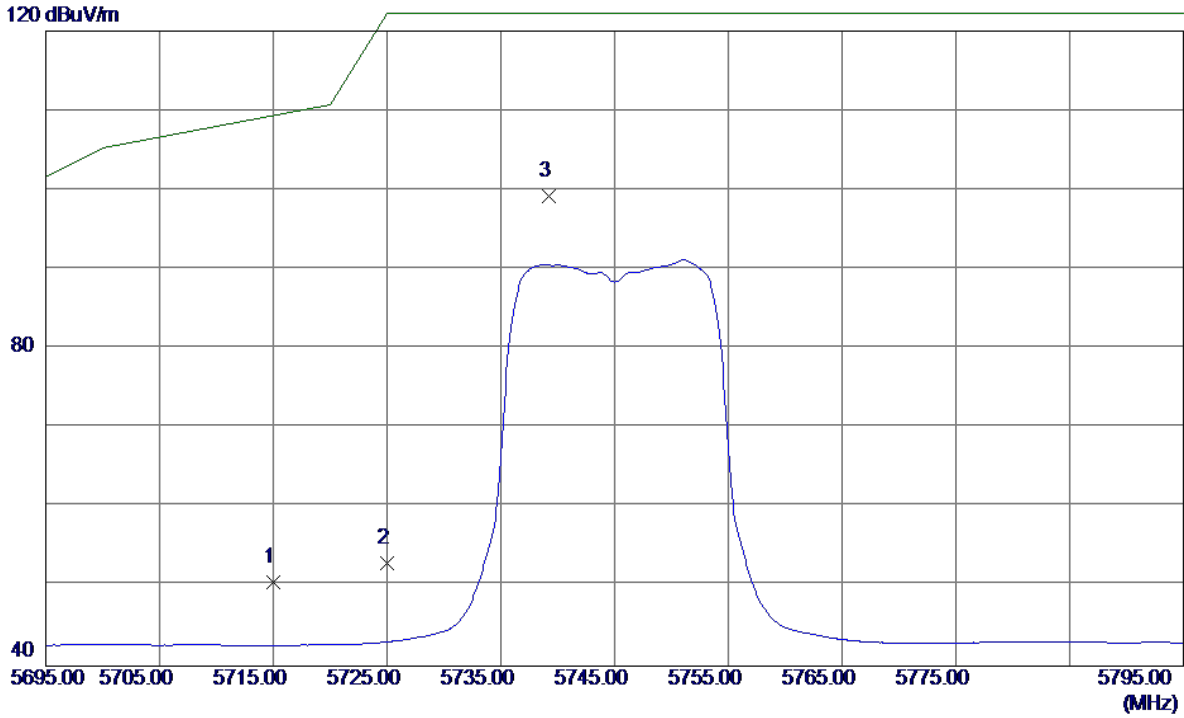

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	8.96	41.66	50.62	109.40	-58.78	Peak	
2	5725.0000	11.20	41.70	52.90	122.20	-69.30	Peak	
3 *	5739.2000	57.38	41.75	99.13	122.20	-23.07	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

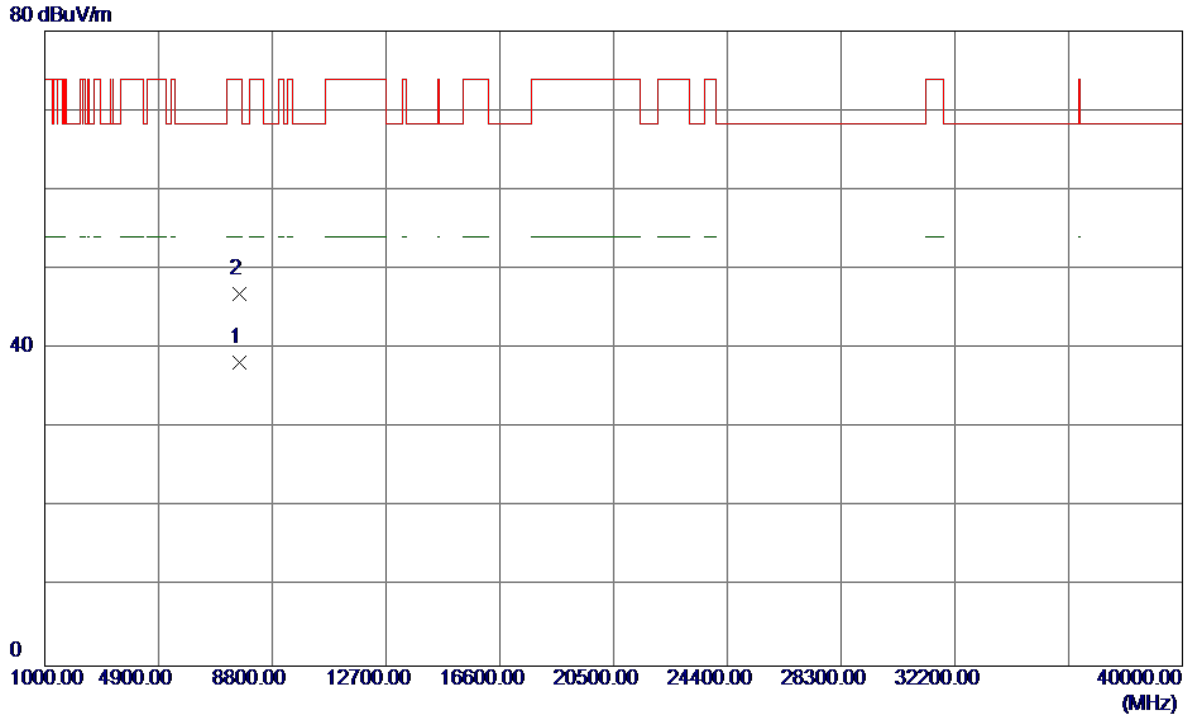

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7659.9700	27.37	10.84	38.21	54.00	-15.79	AVG	
2	7659.8500	36.11	10.84	46.95	74.00	-27.05	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

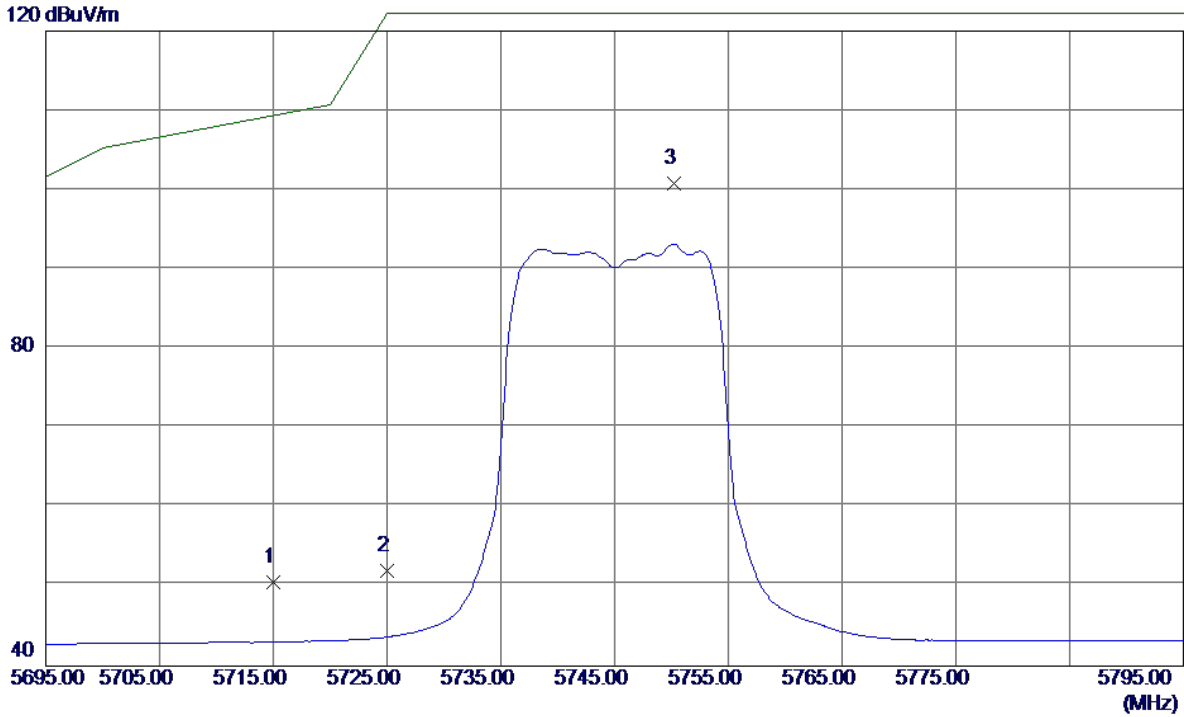

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	8.87	41.66	50.53	109.40	-58.87	Peak	
2	5725.0000	10.32	41.70	52.02	122.20	-70.18	Peak	
3 *	5750.2000	59.02	41.79	100.81	122.20	-21.39	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

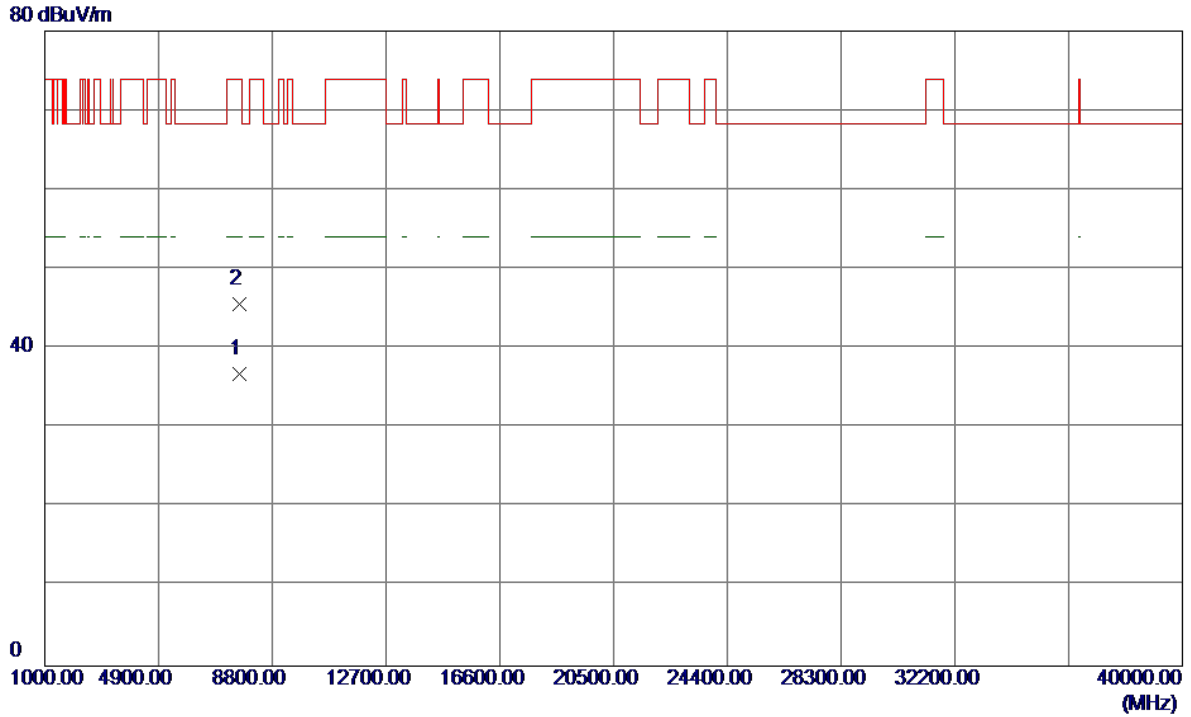

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7659.9450	25.96	10.84	36.80	54.00	-17.20	AVG	
2	7659.9450	34.70	10.84	45.54	74.00	-28.46	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

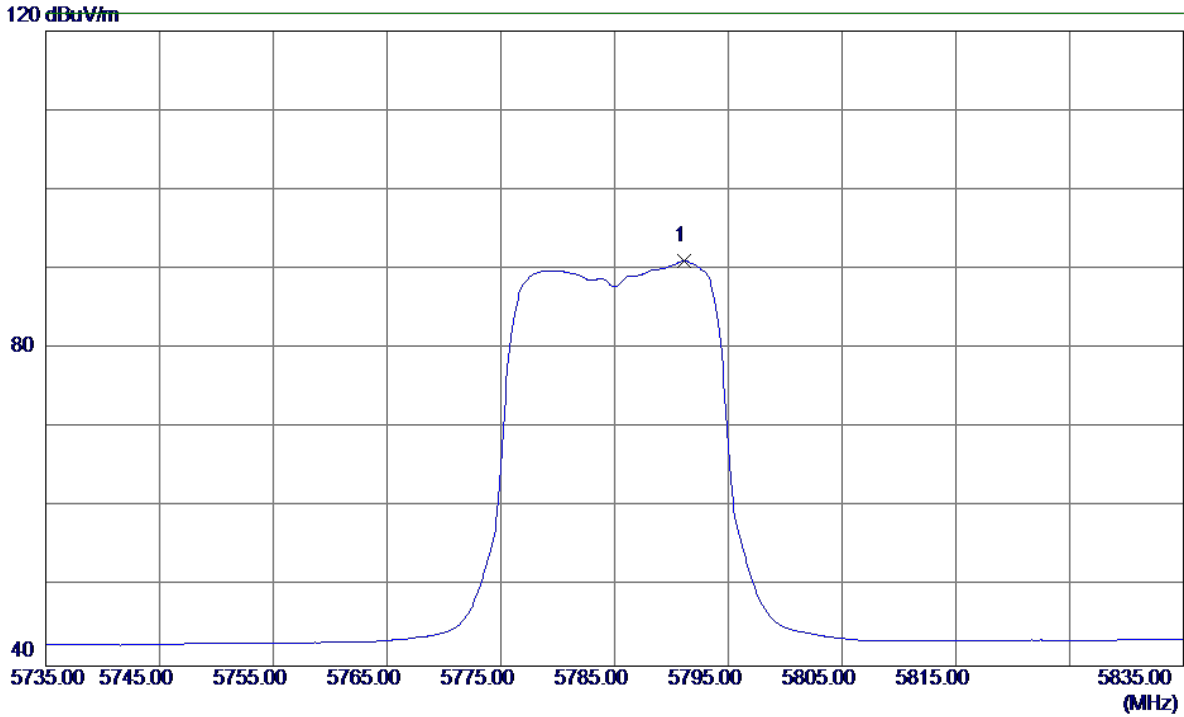

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.1000	49.13	41.94	91.07	122.20	-31.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

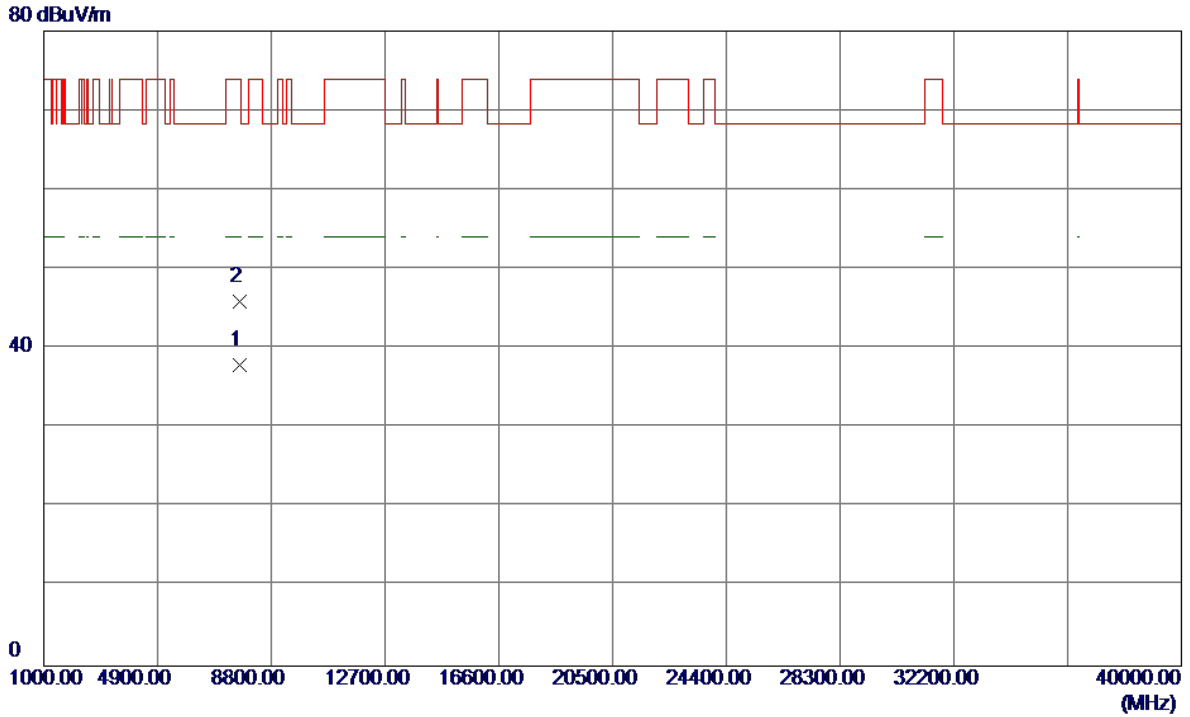

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.2800	27.06	10.84	37.90	54.00	-16.10	AVG	
2	7713.2950	35.01	10.84	45.85	74.00	-28.15	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

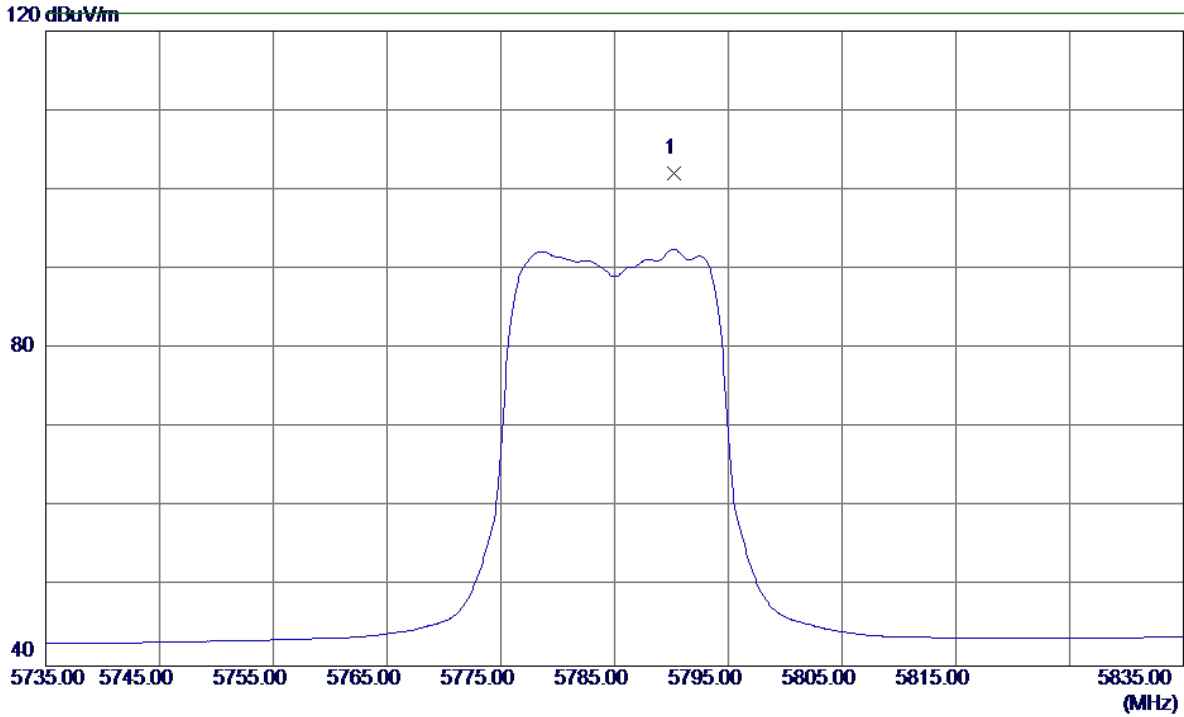

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5790.2000	60.14	41.94	102.08	122.20	-20.12	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

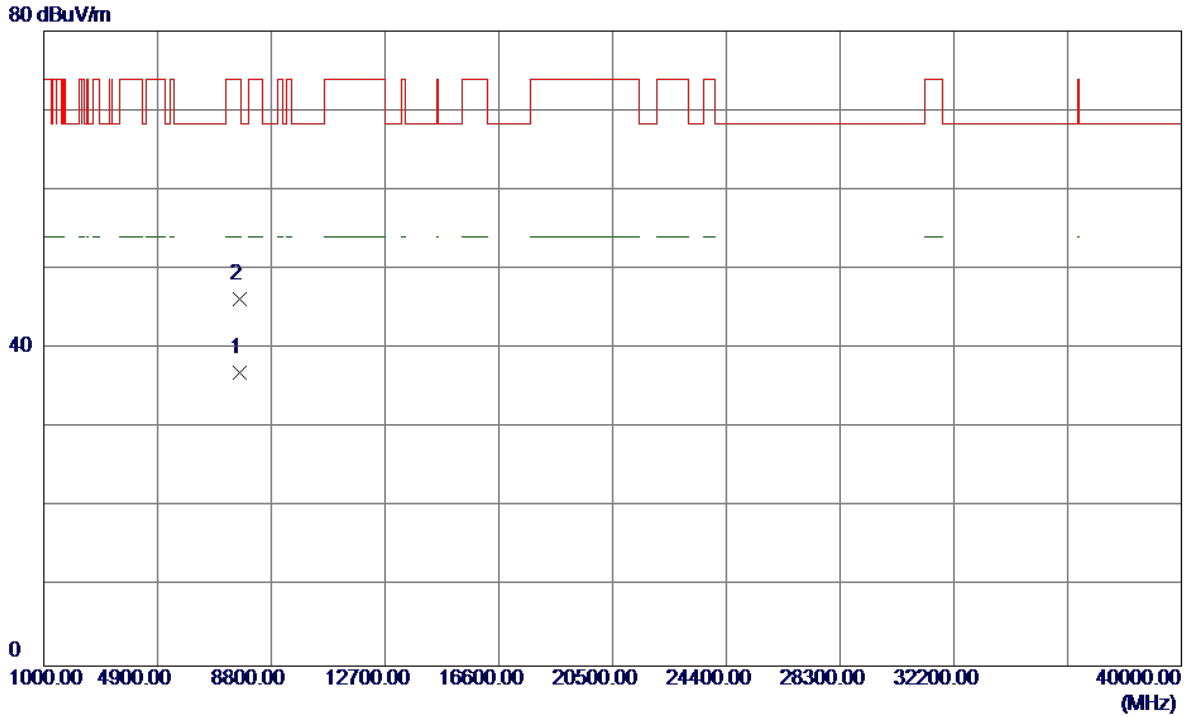

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.3500	26.06	10.84	36.90	54.00	-17.10	AVG	
2	7713.3150	35.43	10.84	46.27	74.00	-27.73	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

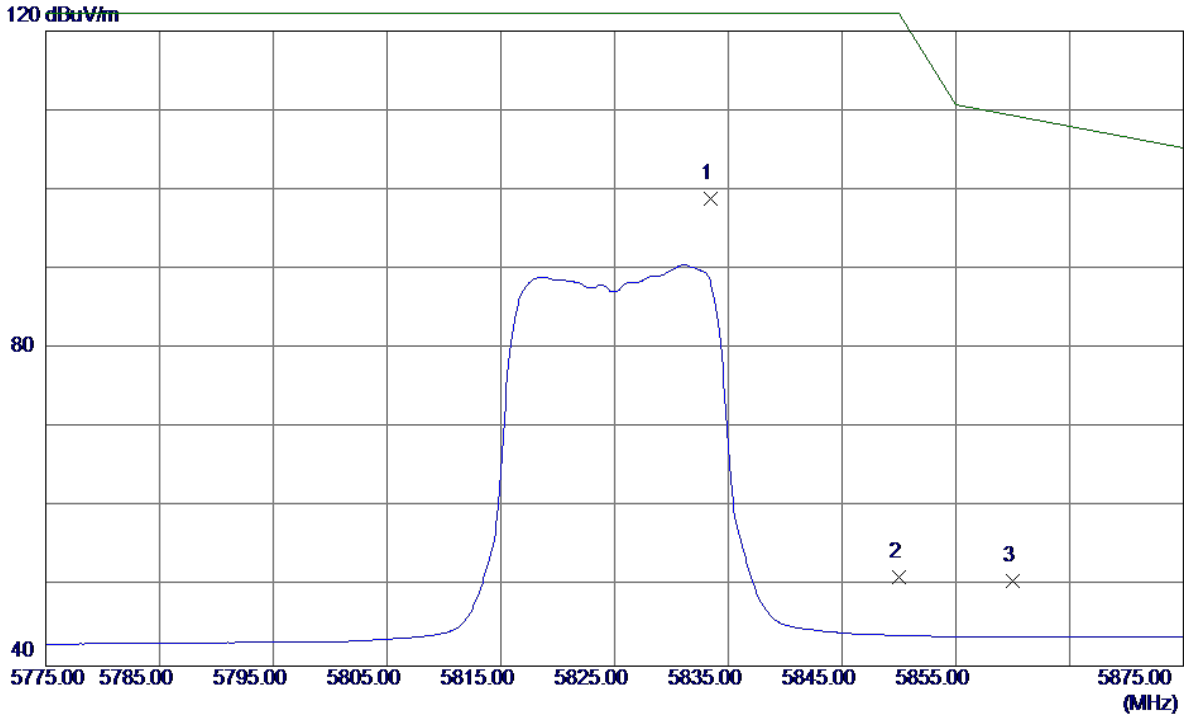

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5833.4000	56.75	42.10	98.85	122.20	-23.35	Peak	
2	5850.0000	9.04	42.16	51.20	122.20	-71.00	Peak	
3	5860.0000	8.46	42.19	50.65	109.40	-58.75	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

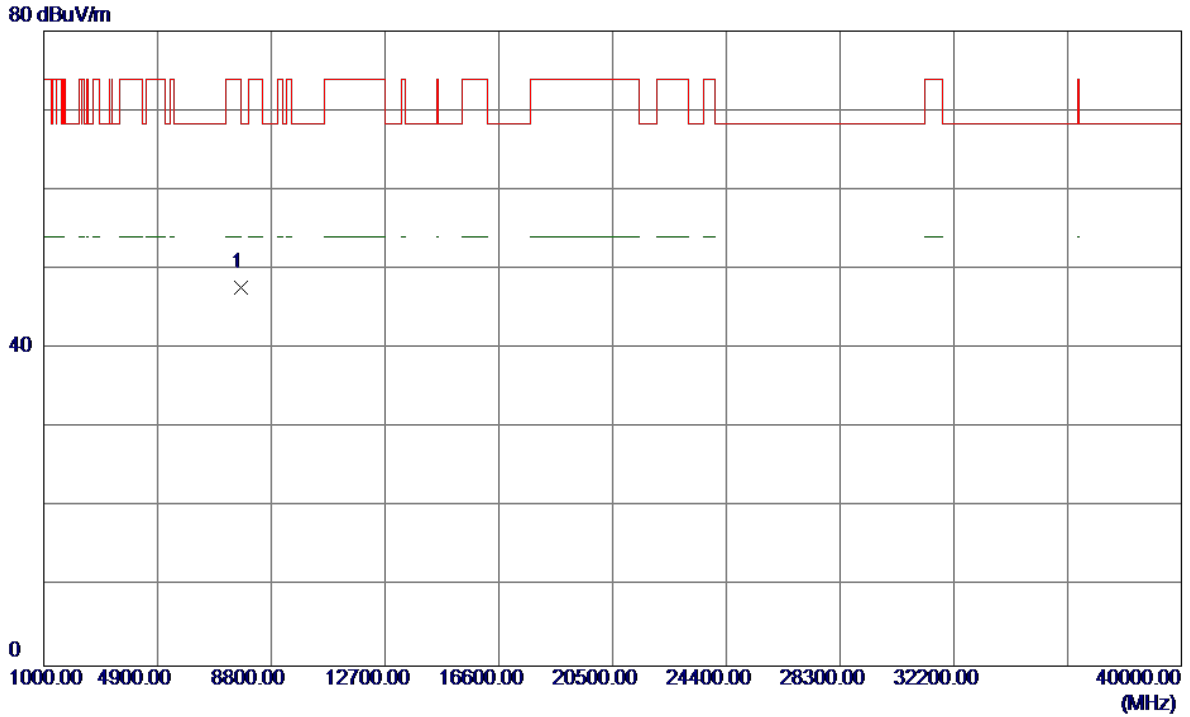

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.6200	36.91	10.83	47.74	68.30	-20.56	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

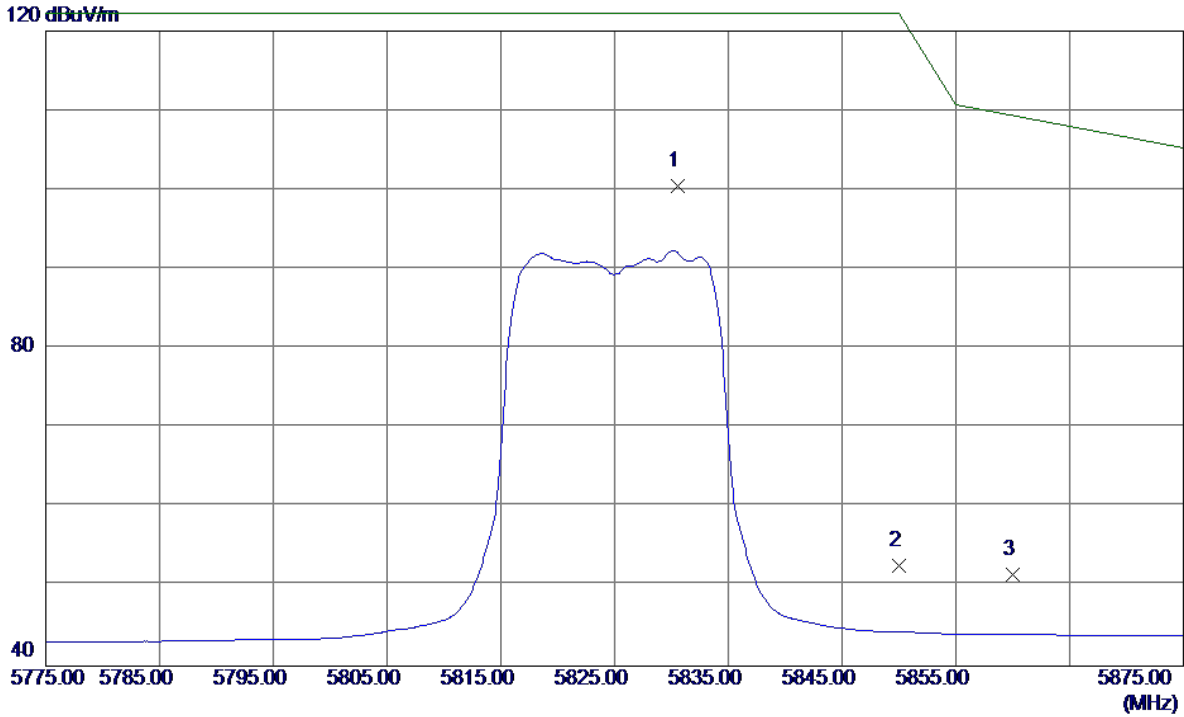

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5830.6000	58.38	42.09	100.47	122.20	-21.73	Peak	
2	5850.0000	10.41	42.16	52.57	122.20	-69.63	Peak	
3	5860.0000	9.40	42.19	51.59	109.40	-57.81	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

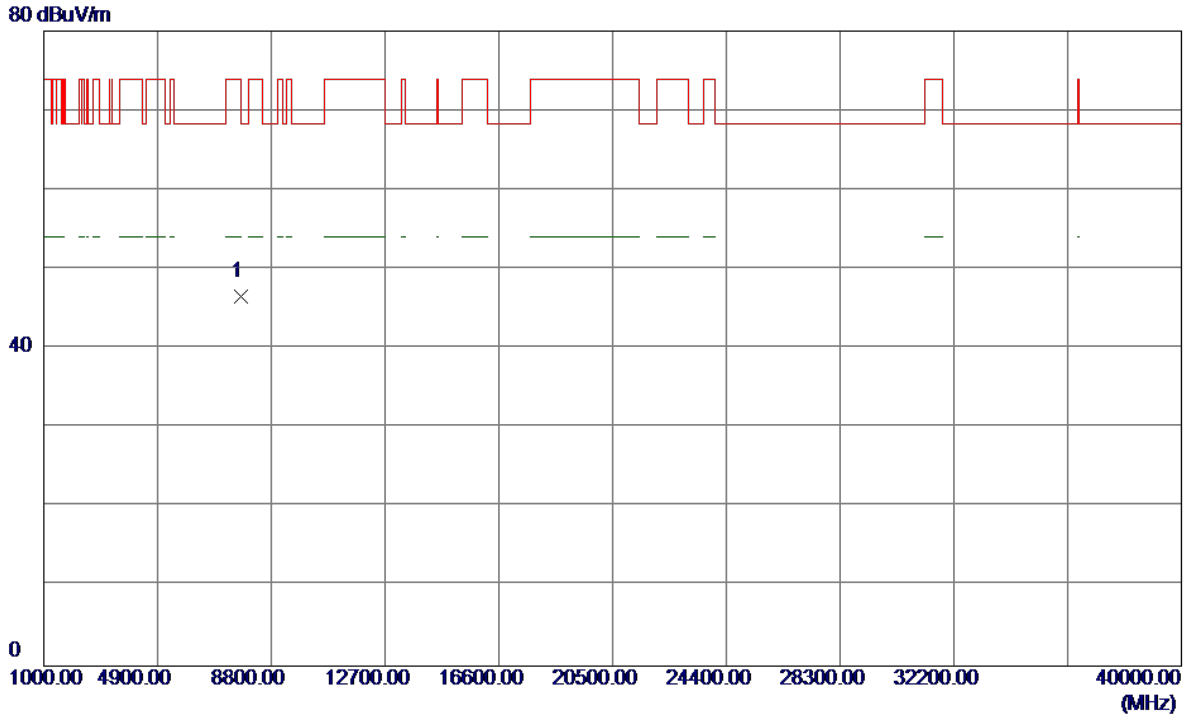

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.4250	35.68	10.83	46.51	68.30	-21.79	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

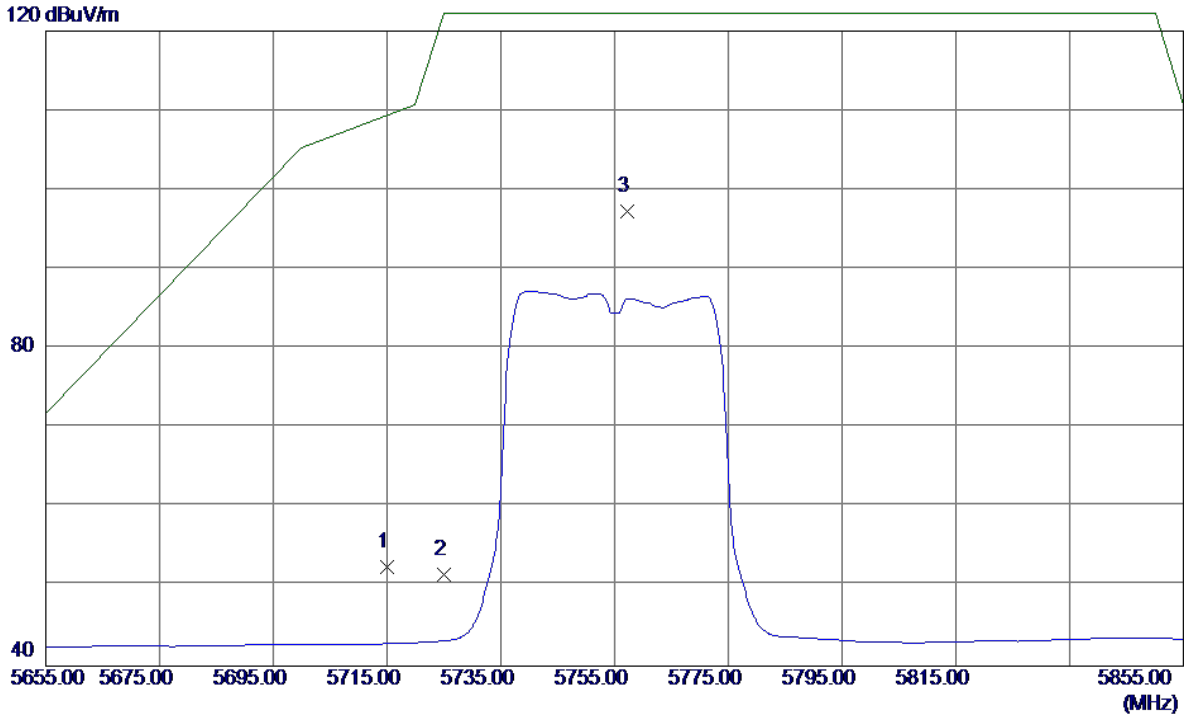

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	10.89	41.66	52.55	109.40	-56.85	Peak	
2	5725.0000	9.83	41.70	51.53	122.20	-70.67	Peak	
3 *	5757.2000	55.41	41.82	97.23	122.20	-24.97	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

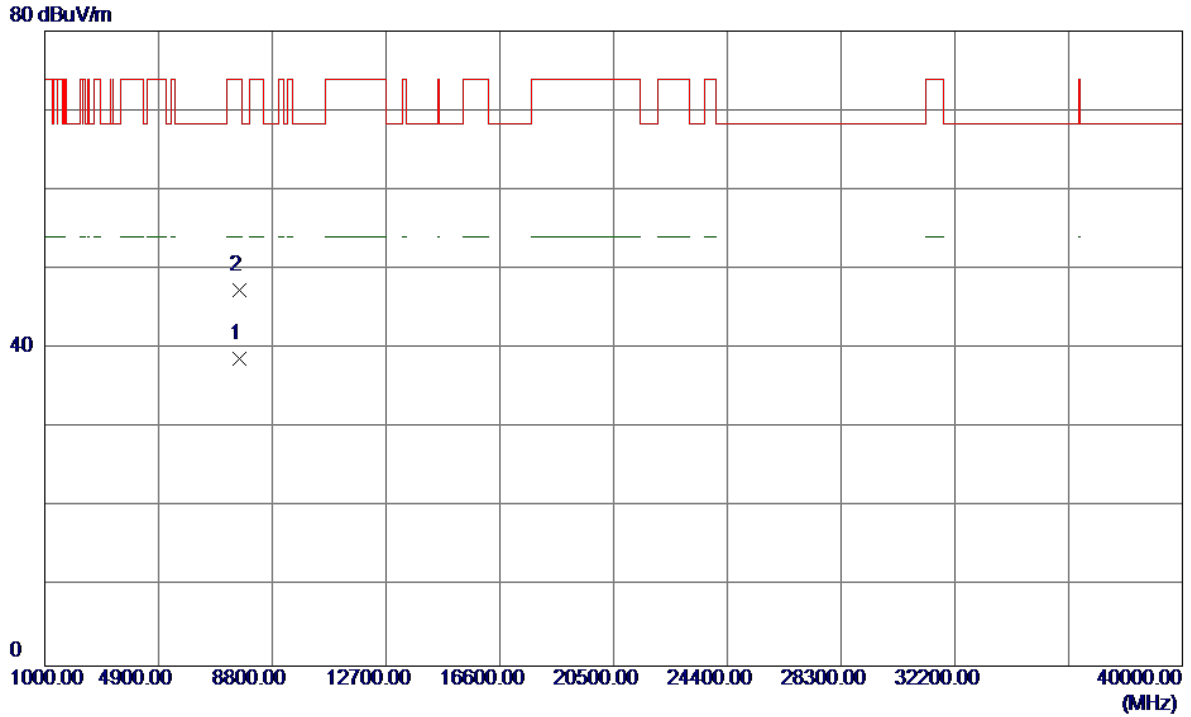

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7673.2950	27.89	10.84	38.73	54.00	-15.27	AVG	
2	7673.2450	36.56	10.84	47.40	74.00	-26.60	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

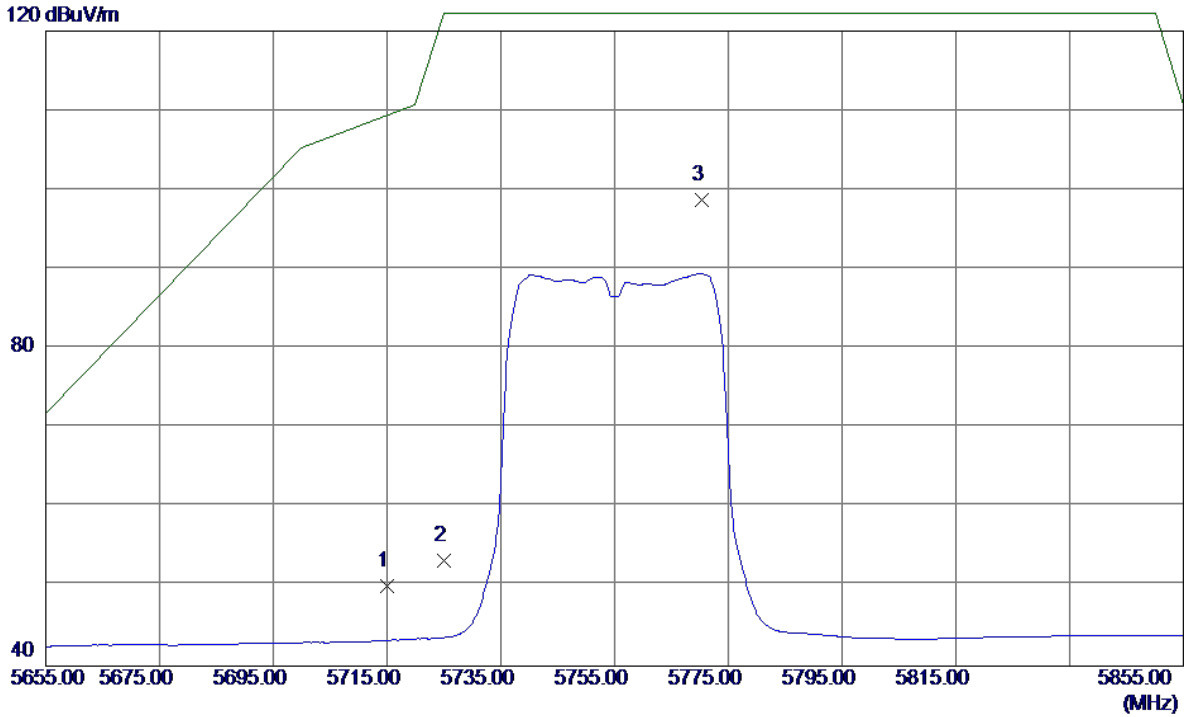

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	8.46	41.66	50.12	109.40	-59.28	Peak	
2	5725.0000	11.55	41.70	53.25	122.20	-68.95	Peak	
3 *	5770.4000	56.86	41.86	98.72	122.20	-23.48	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

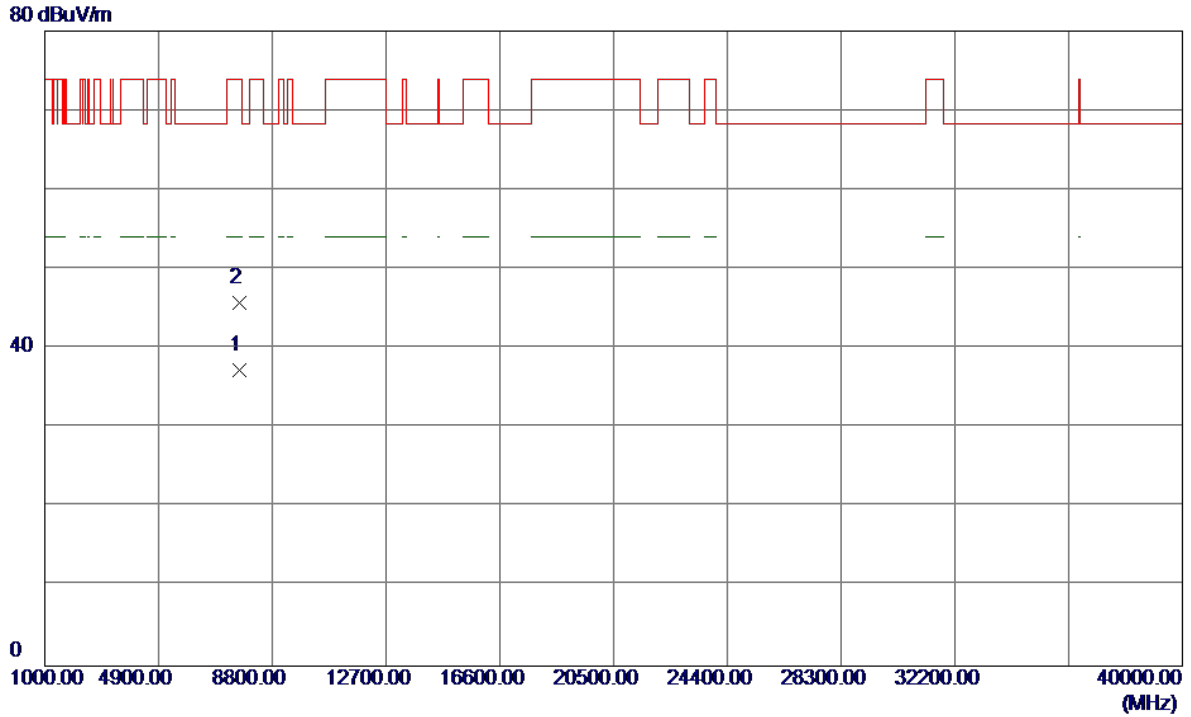

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7673.2400	26.42	10.84	37.26	54.00	-16.74	AVG	
2	7672.8950	34.97	10.84	45.81	74.00	-28.19	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

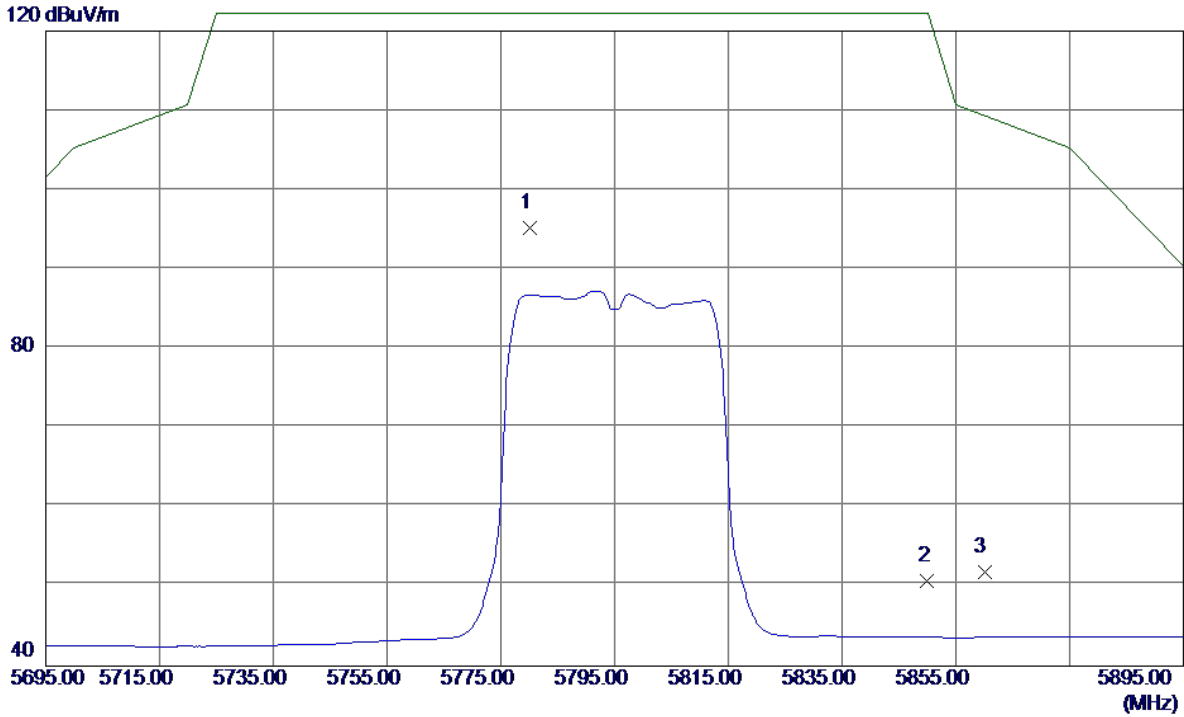

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5780.2000	53.27	41.90	95.17	122.20	-27.03	Peak	
2	5850.0000	8.61	42.16	50.77	122.20	-71.43	Peak	
3	5860.0000	9.65	42.19	51.84	109.40	-57.56	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

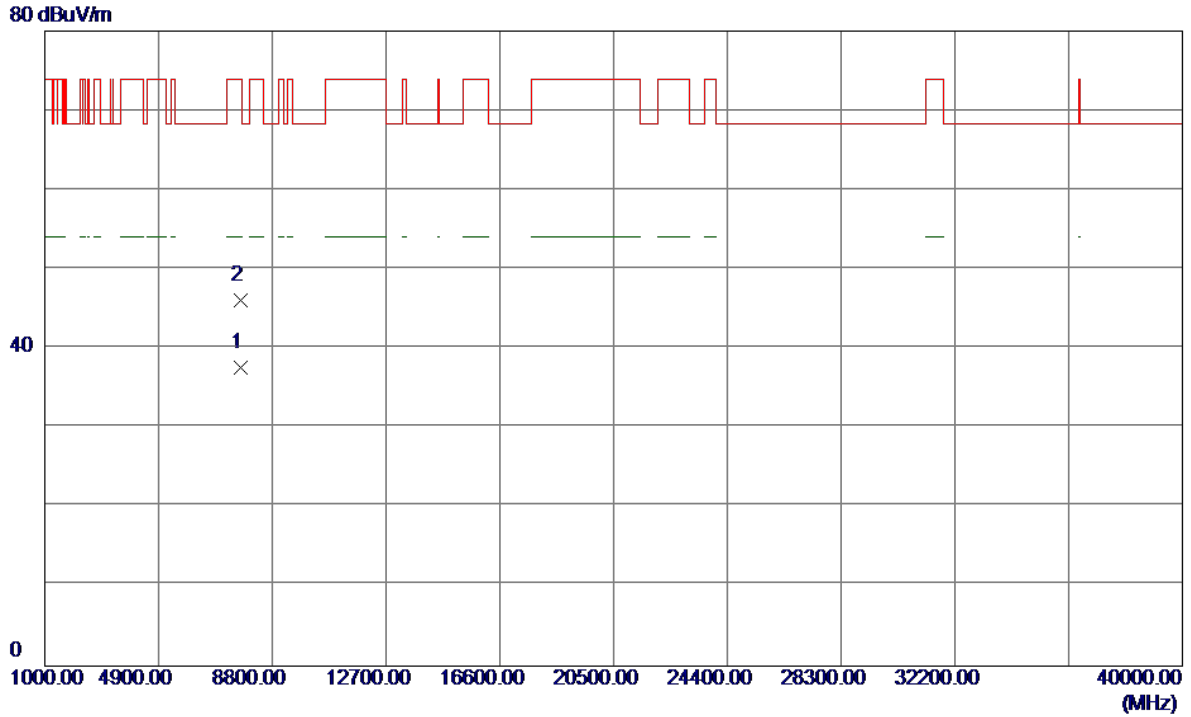

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.6350	26.83	10.84	37.67	54.00	-16.33	AVG	
2	7726.5750	35.21	10.84	46.05	74.00	-27.95	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

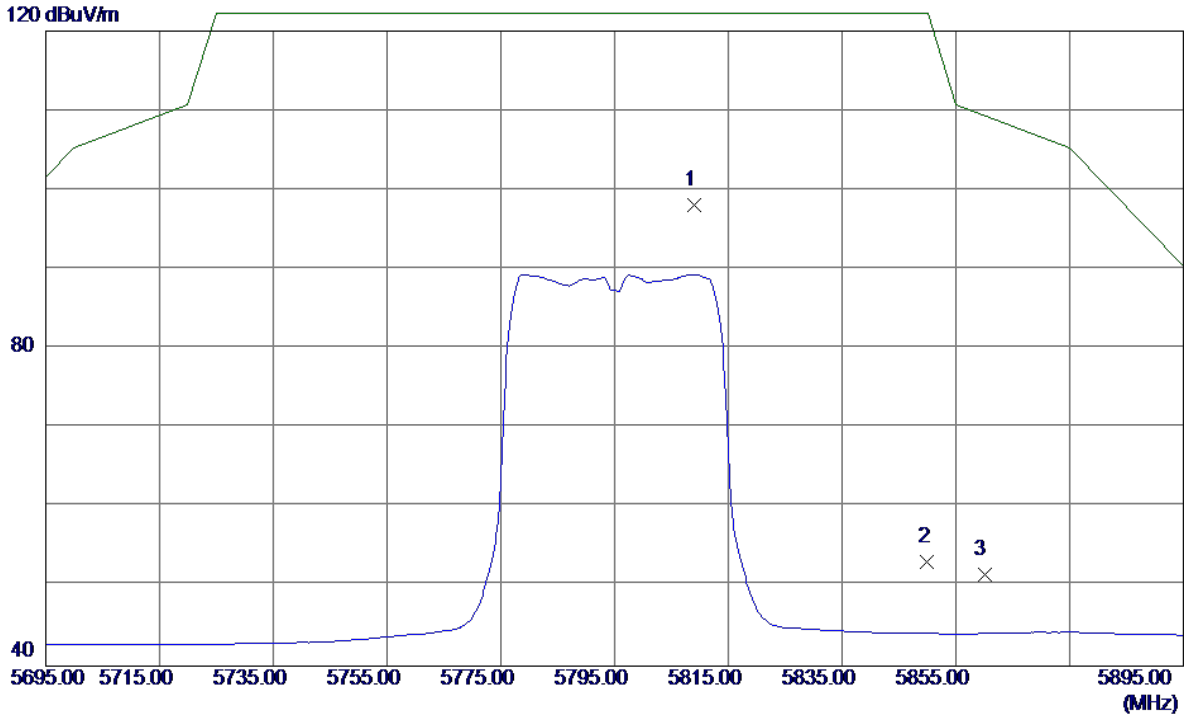

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5809.0000	56.11	42.01	98.12	122.20	-24.08	Peak	
2	5850.0000	10.90	42.16	53.06	122.20	-69.14	Peak	
3	5860.0000	9.29	42.19	51.48	109.40	-57.92	Peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

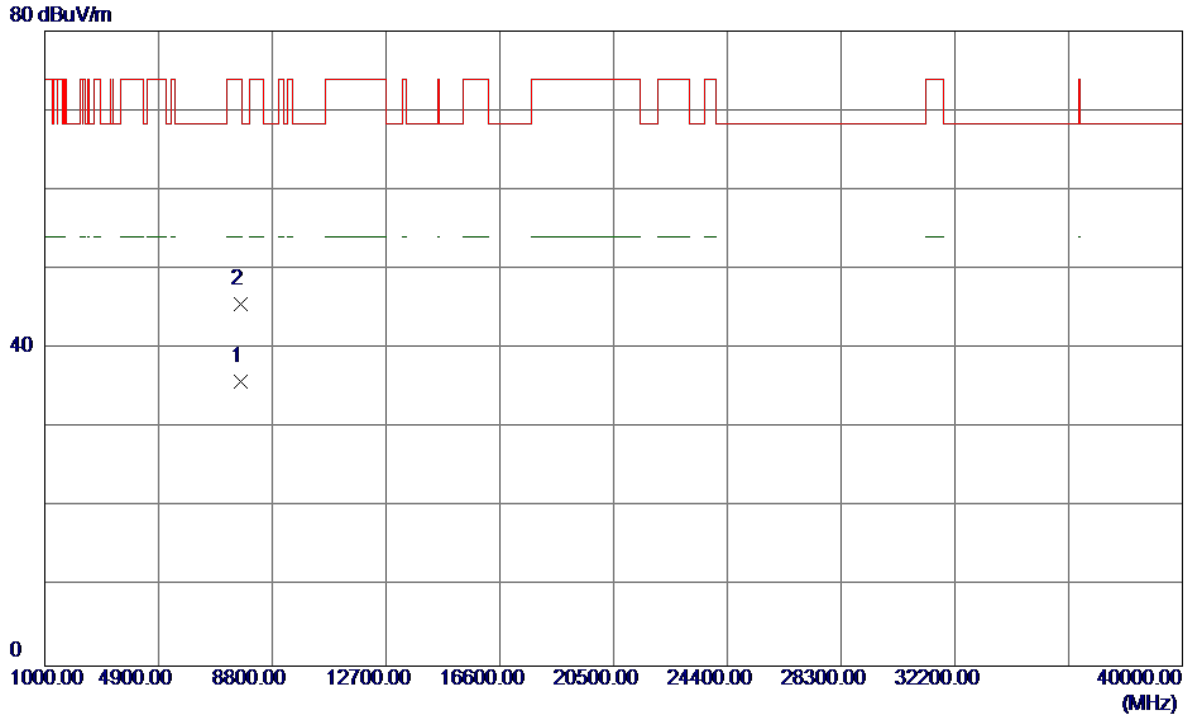

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.6300	24.95	10.84	35.79	54.00	-18.21	AVG	
2	7726.6250	34.83	10.84	45.67	74.00	-28.33	Peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

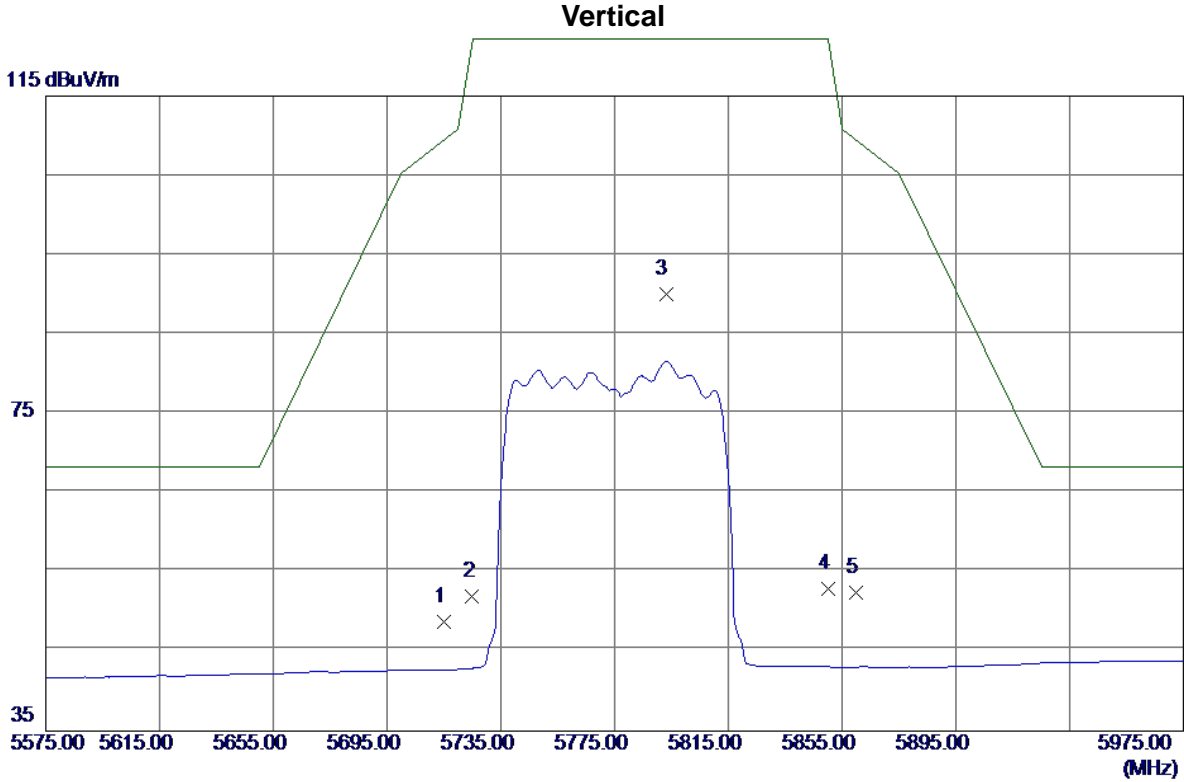

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	7.13	41.66	48.79	109.40	-60.61	Peak	
2	5725.0000	10.31	41.70	52.01	122.20	-70.19	Peak	
3 *	5793.0000	48.03	41.95	89.98	122.20	-32.22	Peak	
4	5850.0000	10.69	42.16	52.85	122.20	-69.35	Peak	
5	5860.0000	10.31	42.19	52.50	109.40	-56.90	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

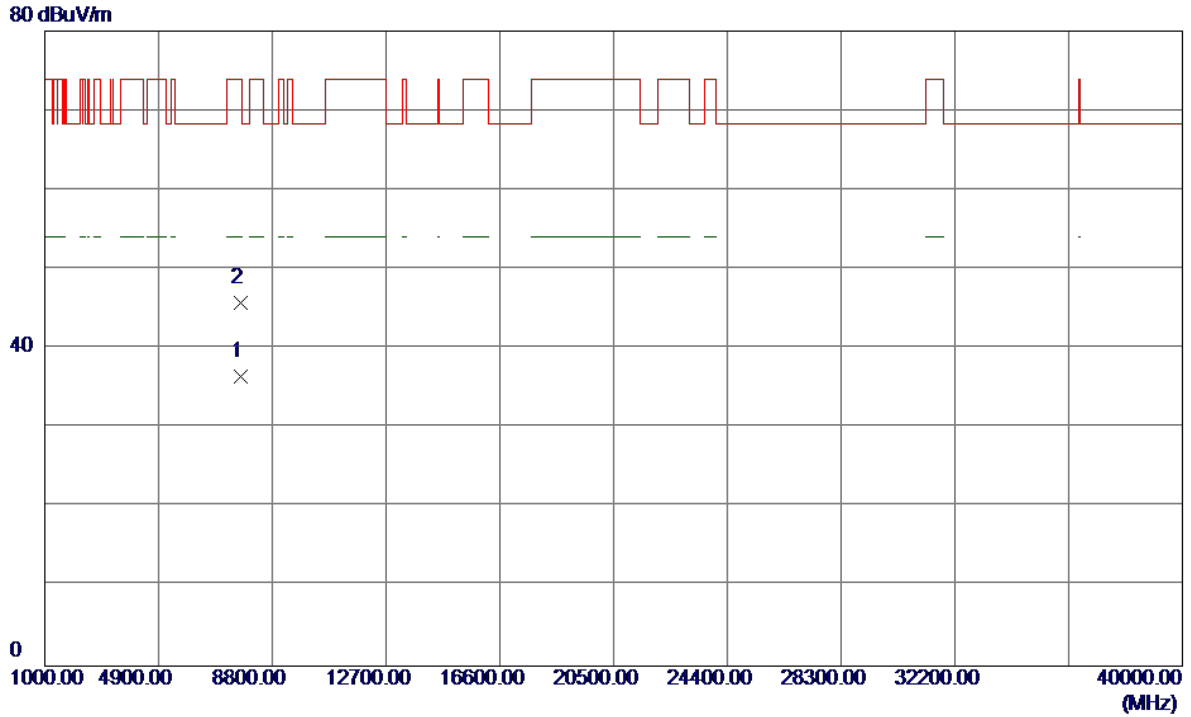


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7699.9450	25.69	10.84	36.53	54.00	-17.47	AVG	
2	7699.8050	34.85	10.84	45.69	74.00	-28.31	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal


123 dBuV/m

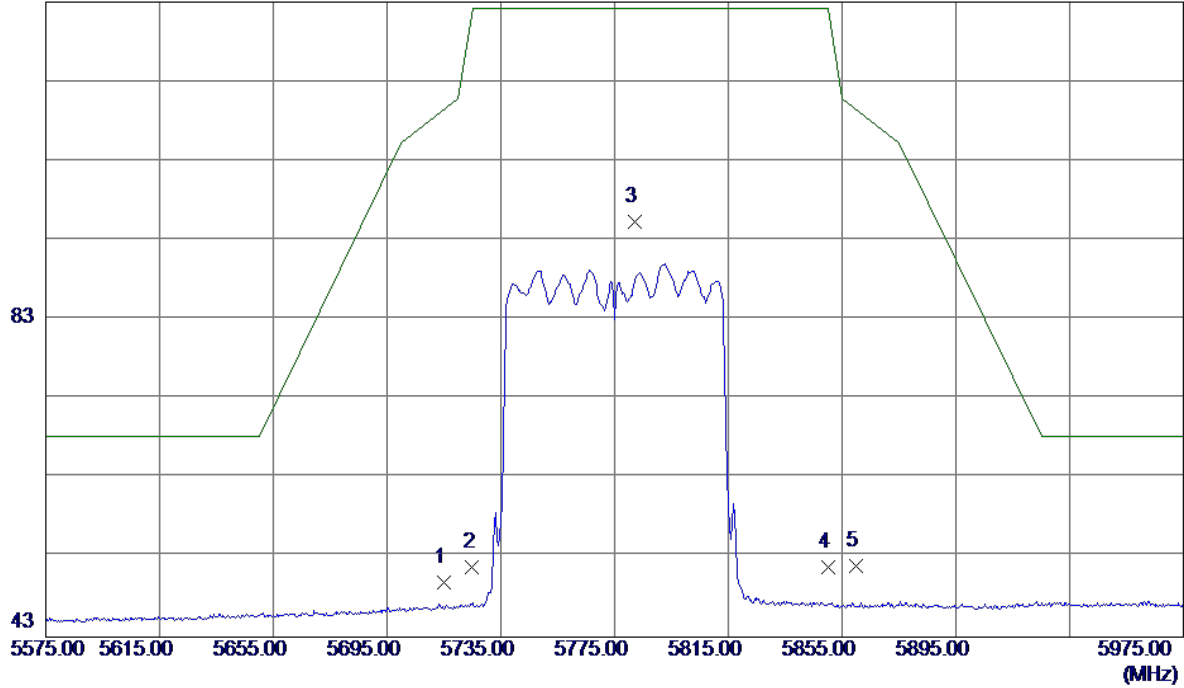

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	8.15	41.66	49.81	109.40	-59.59	Peak	
2	5725.0000	10.03	41.70	51.73	122.20	-70.47	Peak	
3 *	5782.2000	53.34	41.91	95.25	122.20	-26.95	Peak	
4	5850.0000	9.57	42.16	51.73	122.20	-70.47	Peak	
5	5860.0000	9.73	42.19	51.92	109.40	-57.48	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

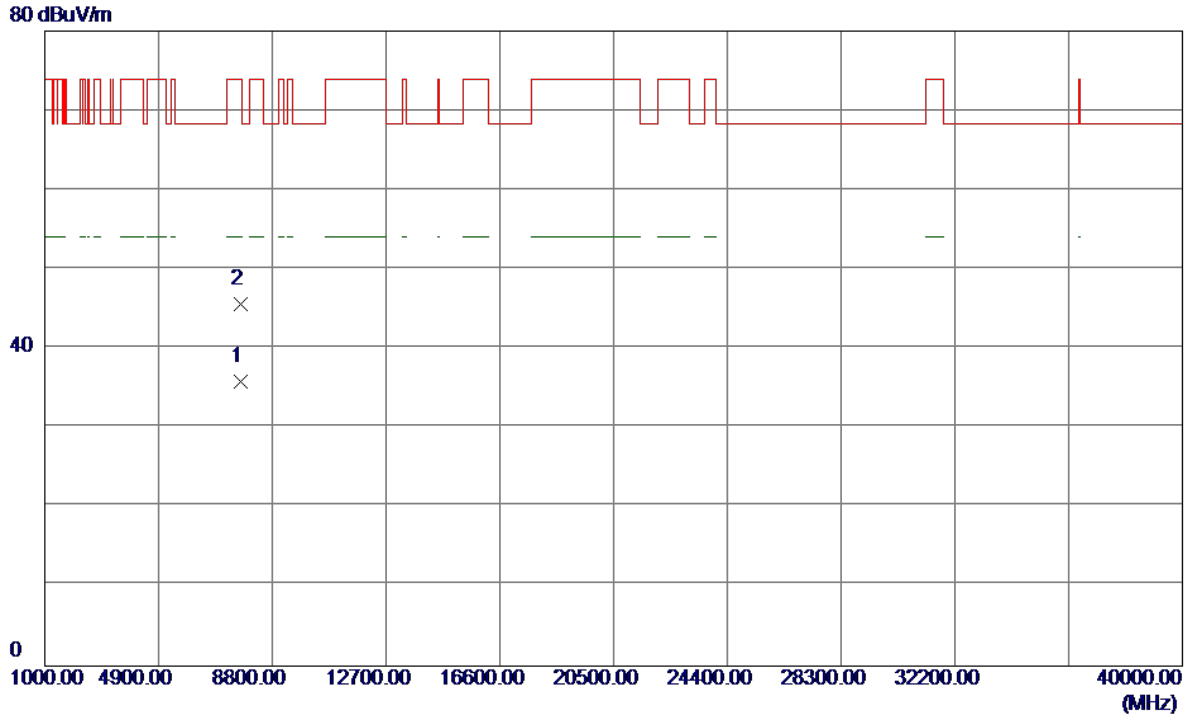

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7699.9550	25.06	10.84	35.90	54.00	-18.10	AVG	
2	7699.8500	34.69	10.84	45.53	74.00	-28.47	Peak	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.00

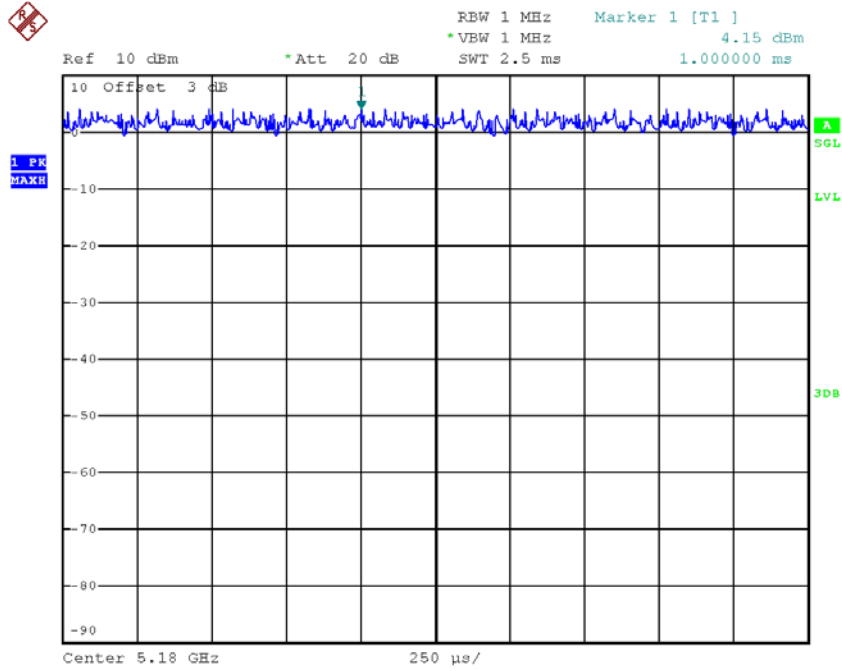

Date: 14.JAN.2018 10:56:19

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

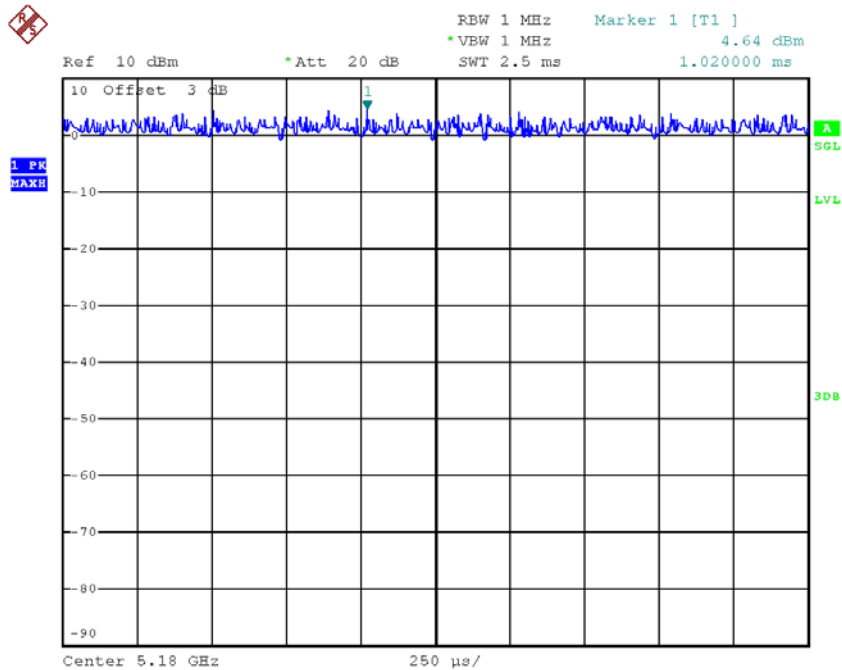

Date: 14.JAN.2018 10:57:23

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.00

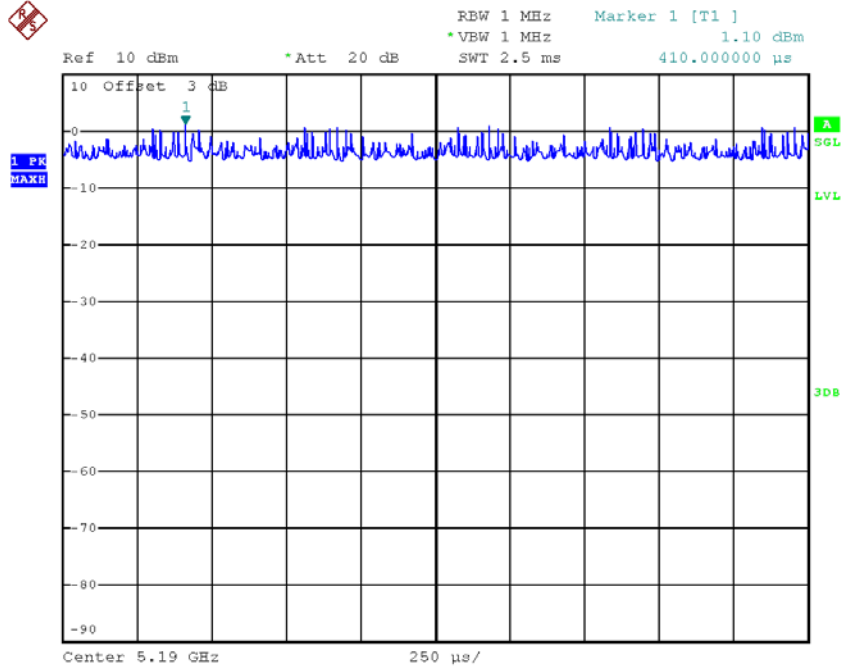

Date: 14.JAN.2018 10:59:22

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

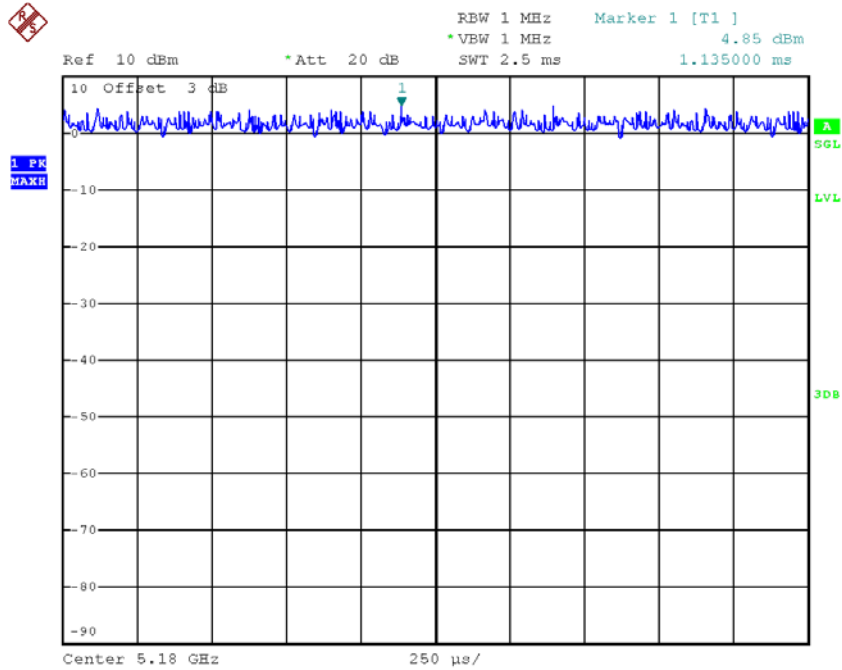

Date: 14.JAN.2018 10:58:19

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.00

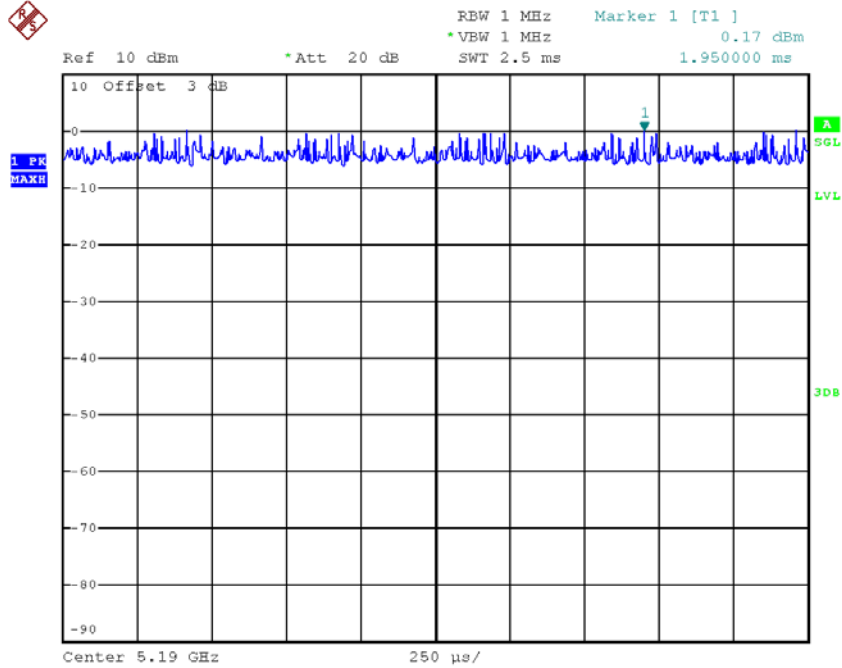

Date: 14.JAN.2018 11:00:20

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

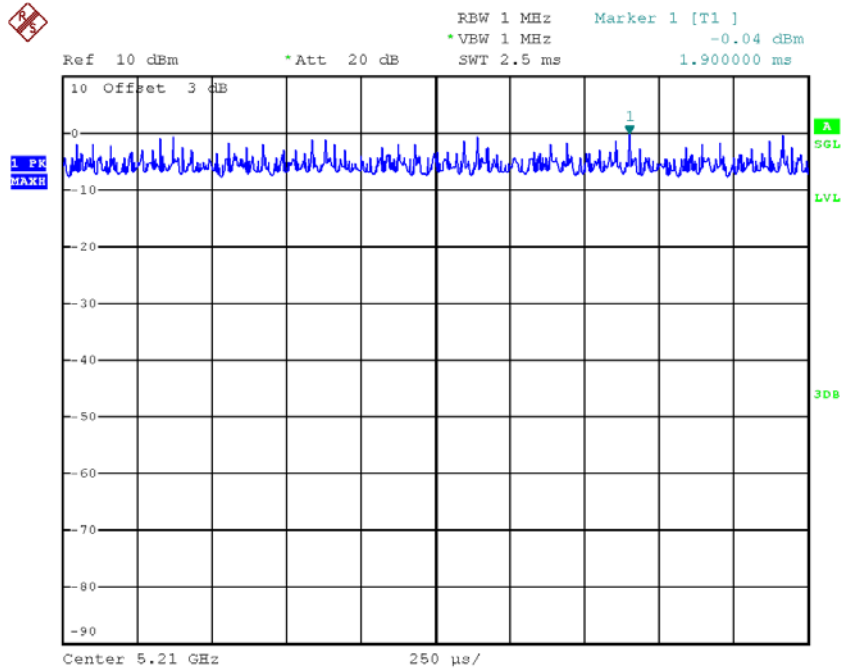


Date: 14.JAN.2018 11:01:06

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

APPENDIX E - BANDWIDTH


Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.29	16.90
CH40	5200	21.19	16.90
CH48	5240	21.19	16.90

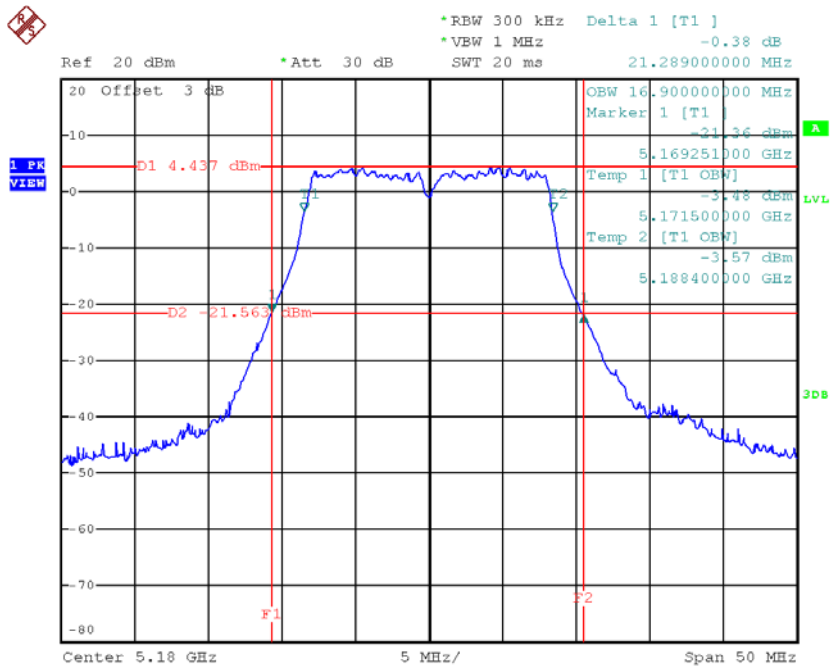TX CH36


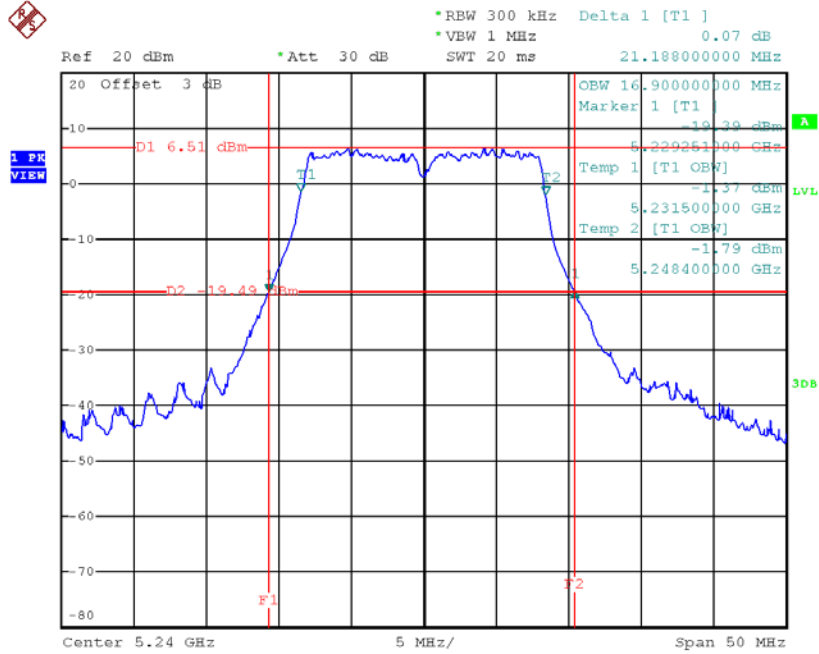
Date: 14.JAN.2018 12:41:26

TX CH40

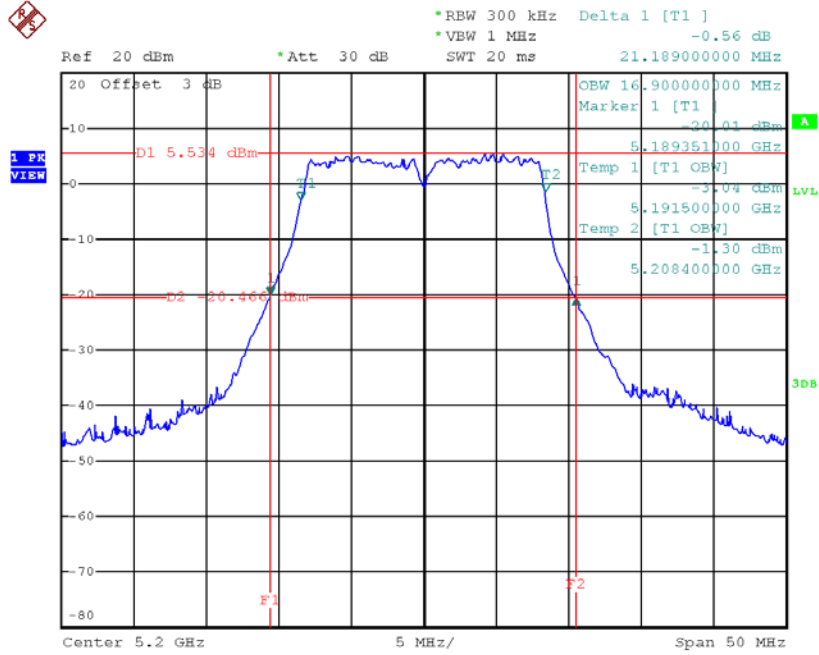

Date: 14.JAN.2018 12:39:56

TX CH48




Date: 14.JAN.2018 12:42:46

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.75	17.90
CH40	5200	21.55	17.90
CH48	5240	21.45	17.80

TX CH36

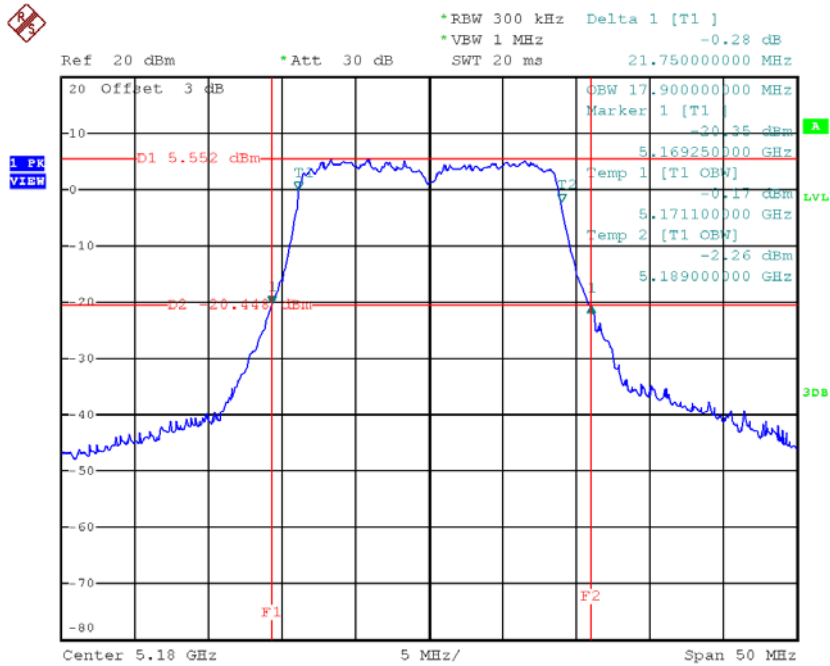


Date: 14.JAN.2018 13:03:57

TX CH40

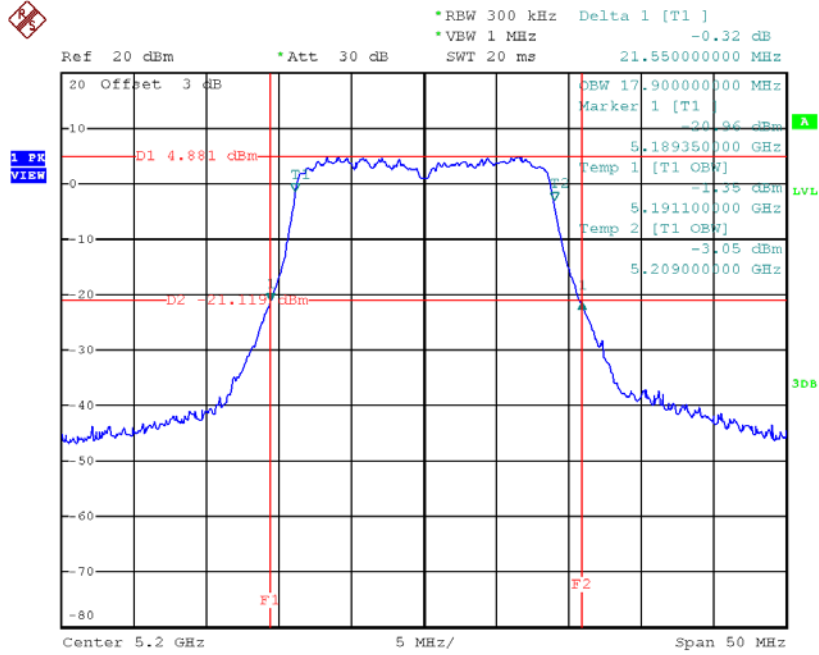

Date: 14.JAN.2018 13:11:25

TX CH48

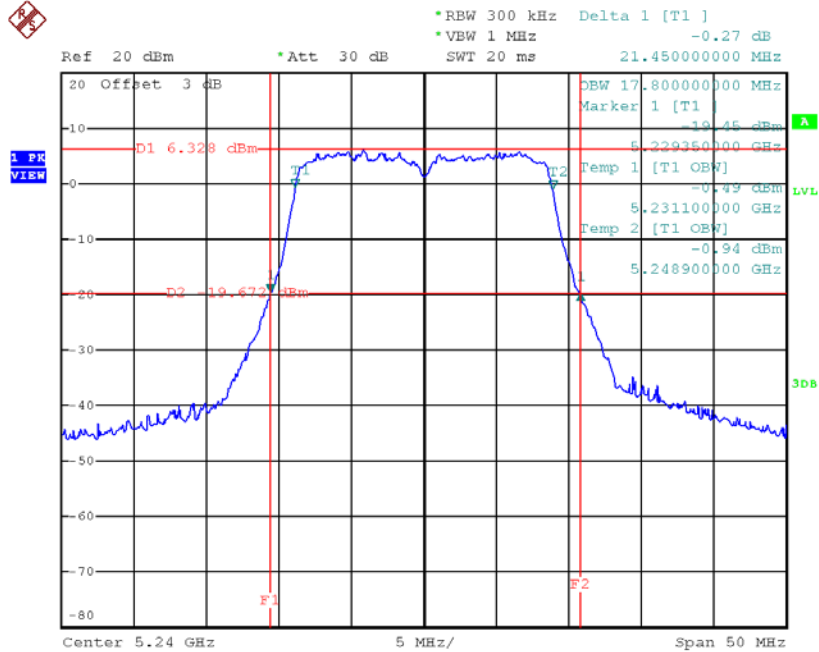


Date: 14.JAN.2018 13:15:43

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	42.60	37.40
CH46	5230	45.80	37.60

99% Occupied Bandwidth
TX CH38

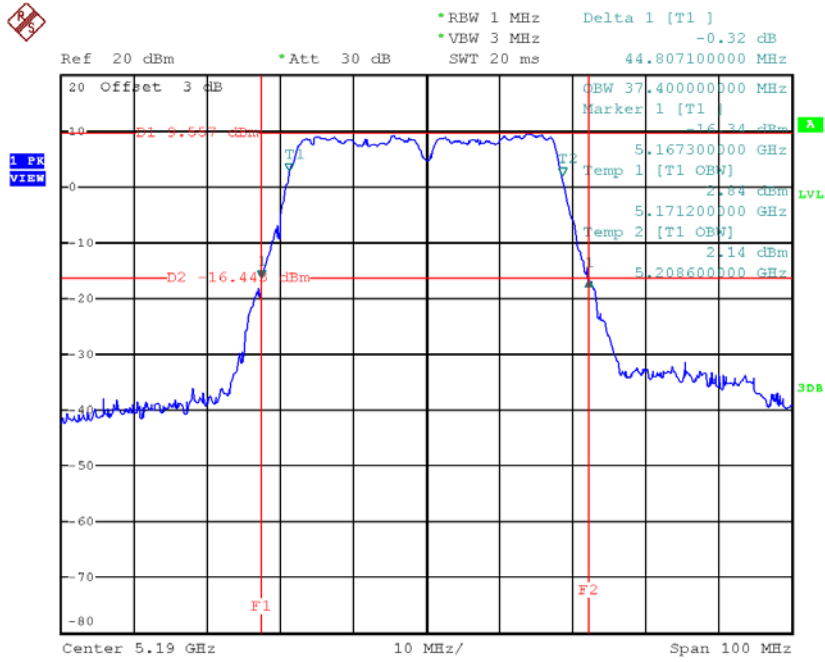


Date: 14.JAN.2018 14:04:03

26dB Bandwidth

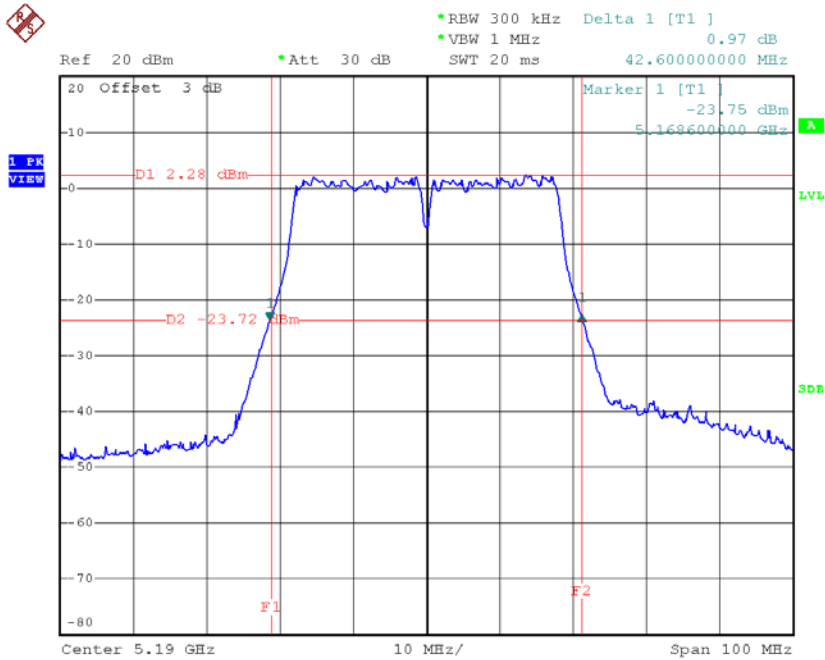


Date: 5.FEB.2018 14:05:41

99% Occupied Bandwidth TX CH46

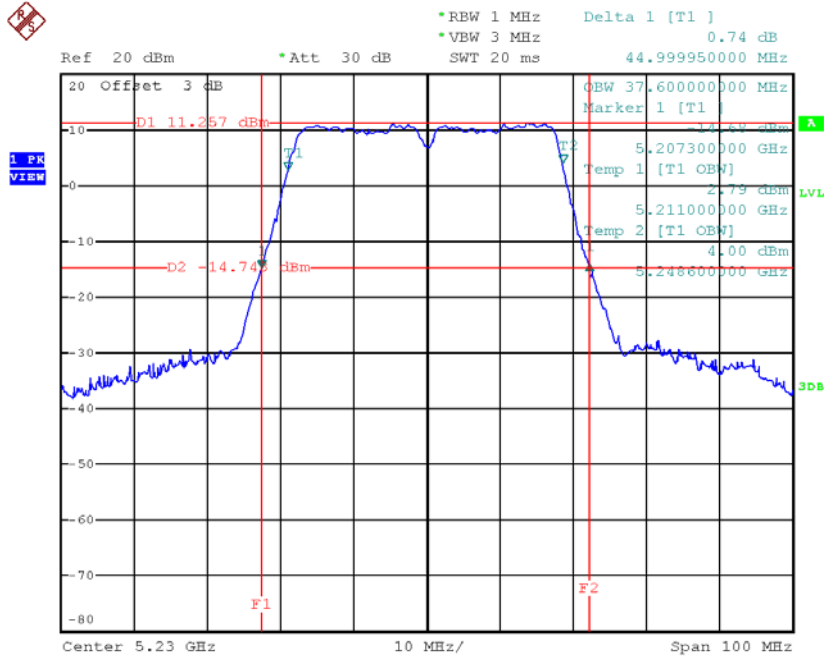

Date: 14.JAN.2018 14:06:49

26dB Bandwidth

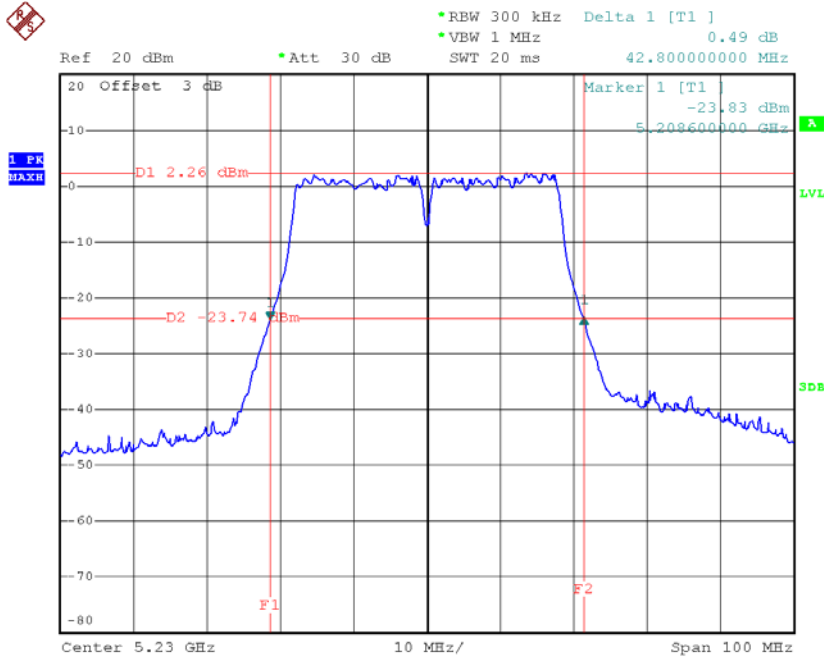


Date: 5.FEB.2018 14:57:24

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	21.19	16.90
CH60	5300	21.19	16.90
CH64	5320	21.19	16.90

TX CH52

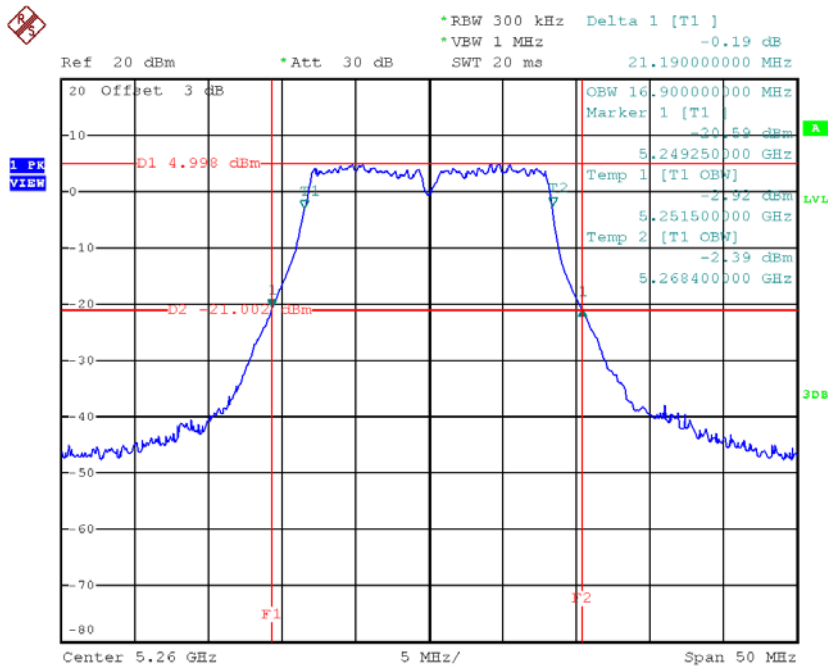


Date: 14.JAN.2018 12:44:19

TX CH60

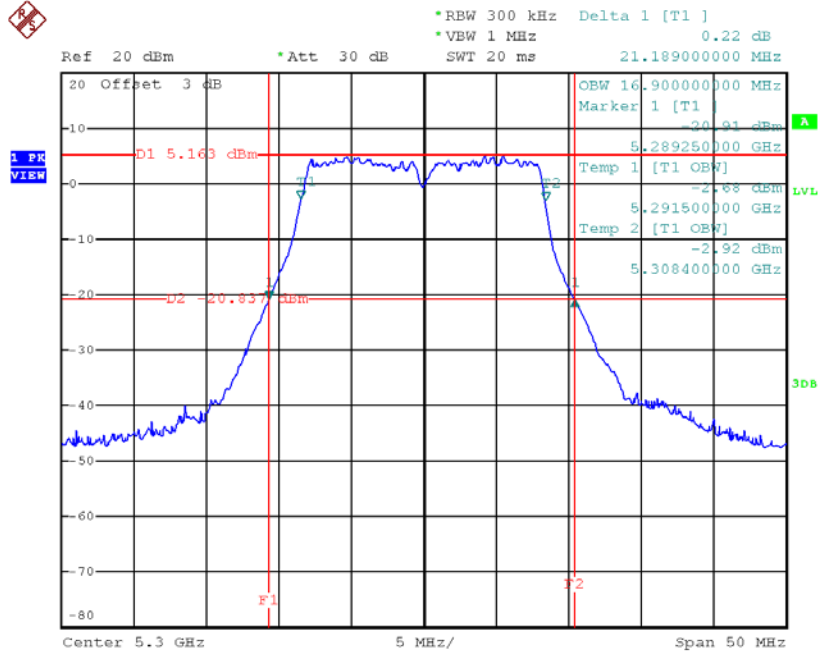

Date: 14.JAN.2018 12:45:27


TX CH64

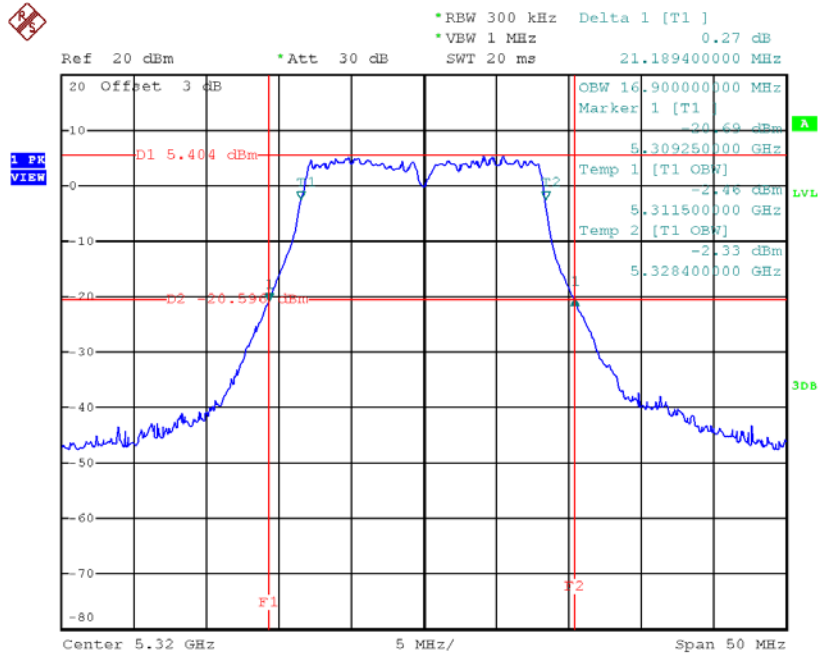

Date: 14.JAN.2018 12:47:14


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	21.36	17.80
CH60	5300	21.39	17.80
CH64	5320	21.49	17.80

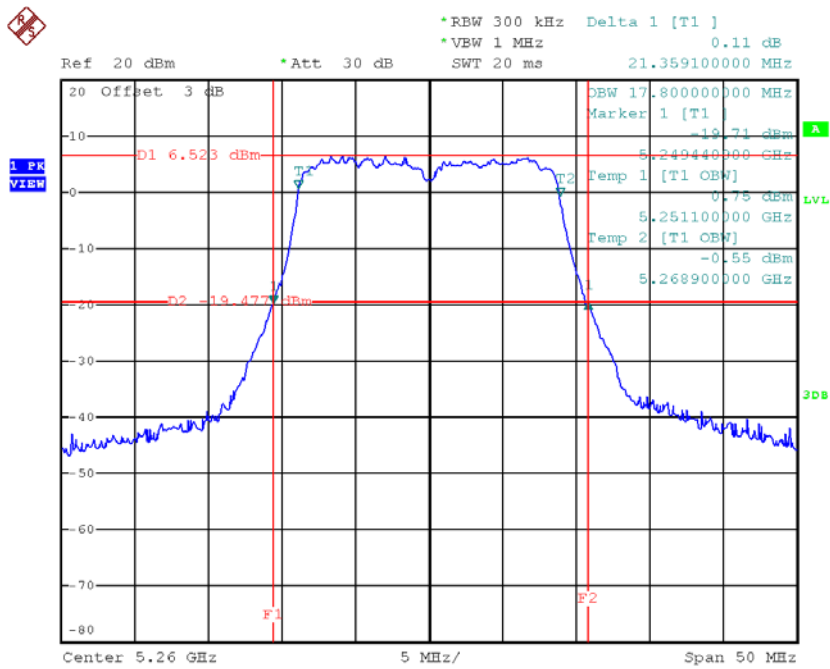TX CH52


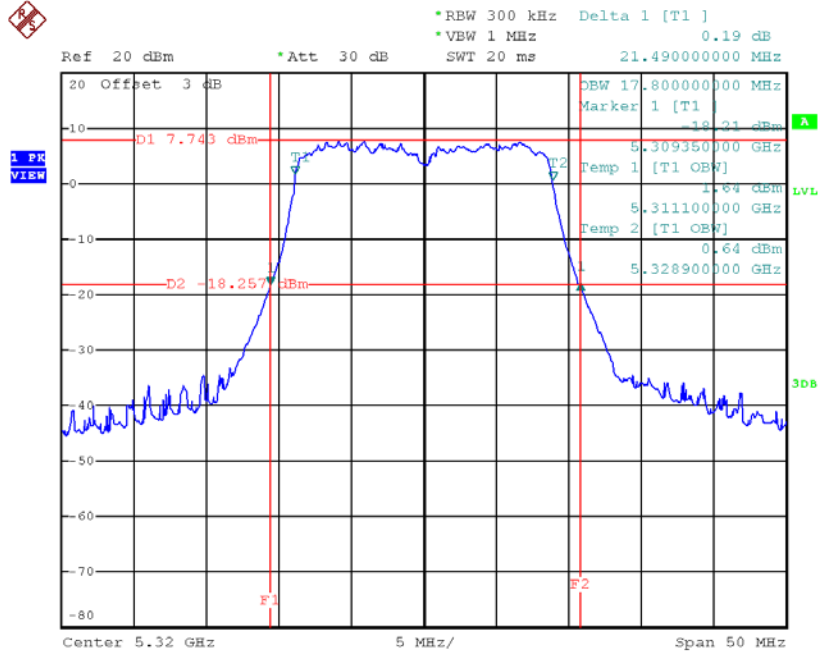
Date: 14.JAN.2018 13:17:06

TX CH60

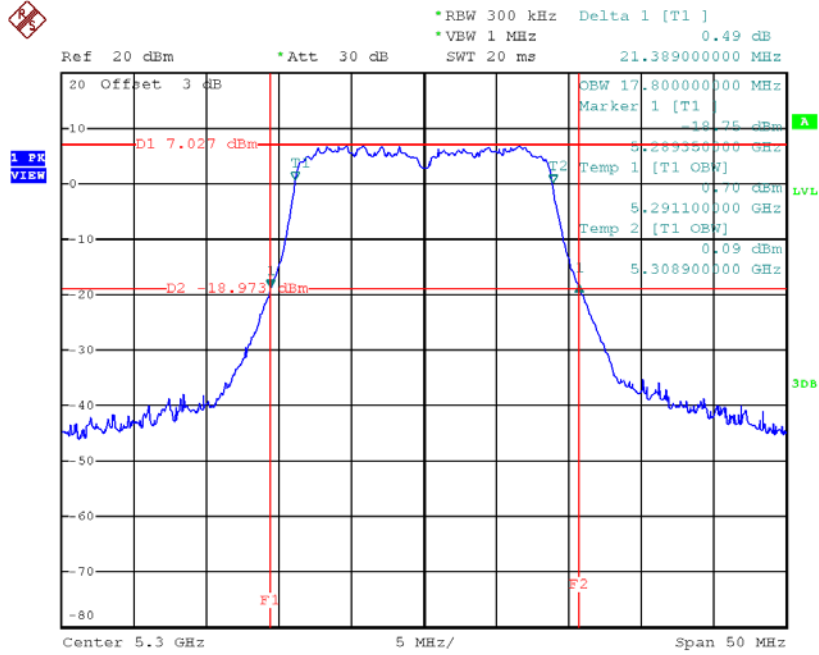

Date: 14.JAN.2018 13:20:23

TX CH64




Date: 14.JAN.2018 13:22:09

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	42.80	37.60
CH62	5310	42.80	37.40

99% Occupied Bandwidth TX CH54

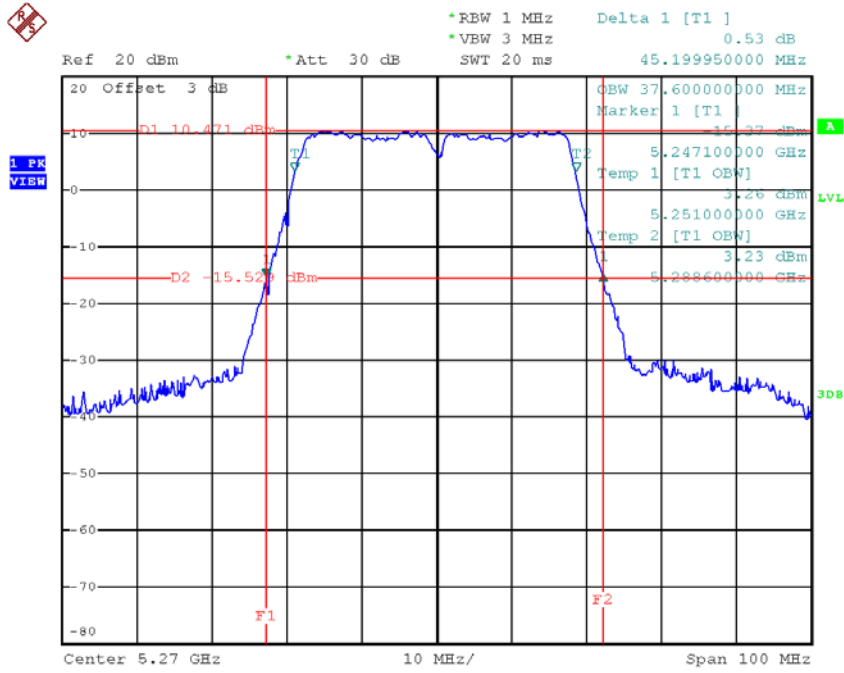


Date: 14.JAN.2018 16:58:38

26dB Bandwidth

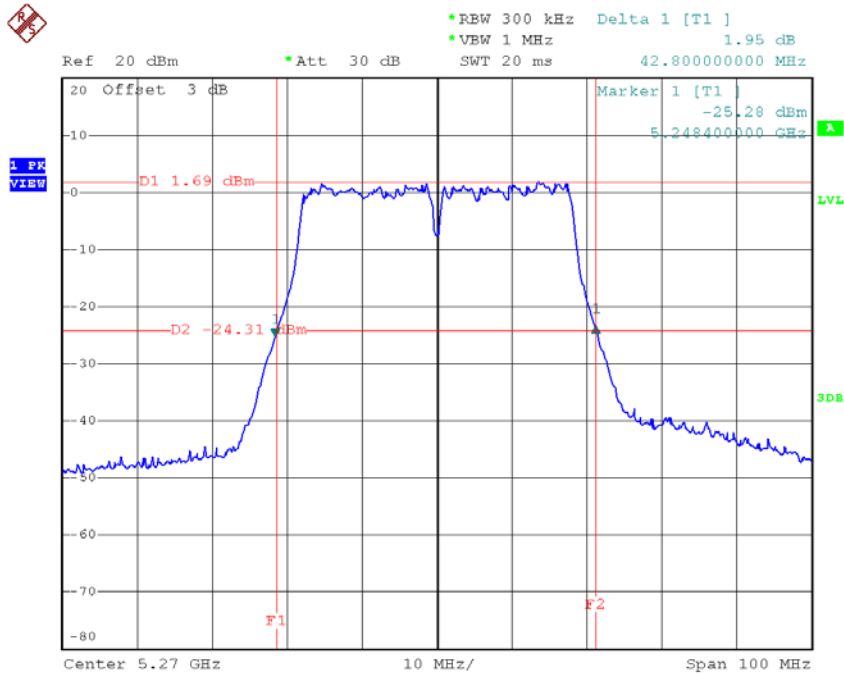


Date: 5.FEB.2018 15:03:48

99% Occupied Bandwidth TX CH62

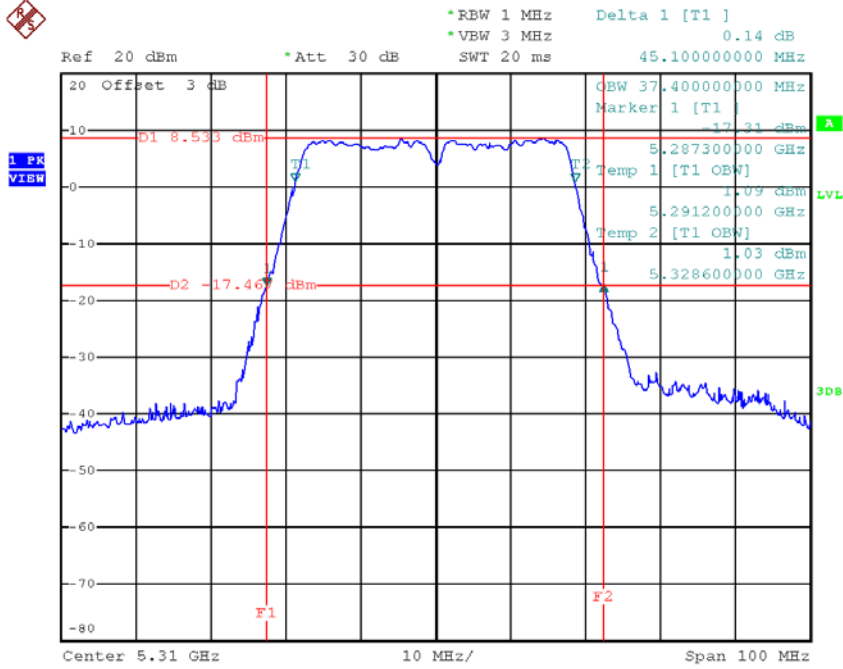

Date: 14.JAN.2018 14:13:14

26dB Bandwidth

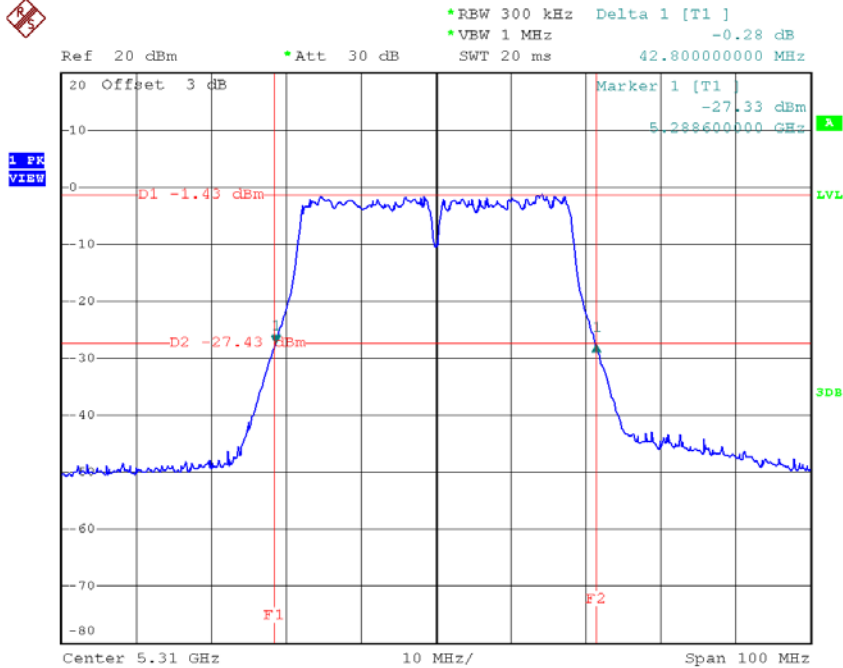


Date: 5.FEB.2018 15:10:29

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.19	16.90
CH116	5580	21.19	16.80
CH140	5700	21.19	16.90

TX CH100

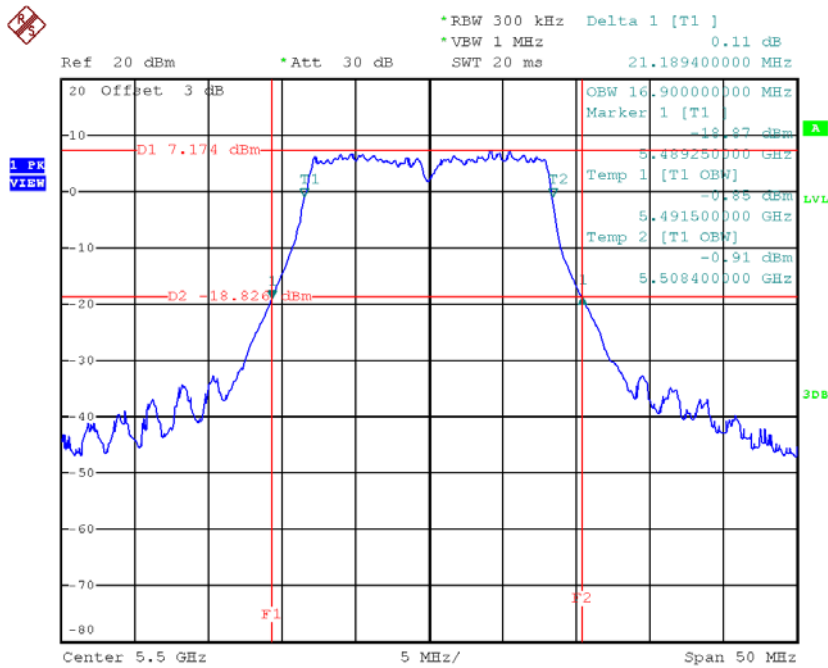


Date: 14.JAN.2018 12:49:32

TX CH116

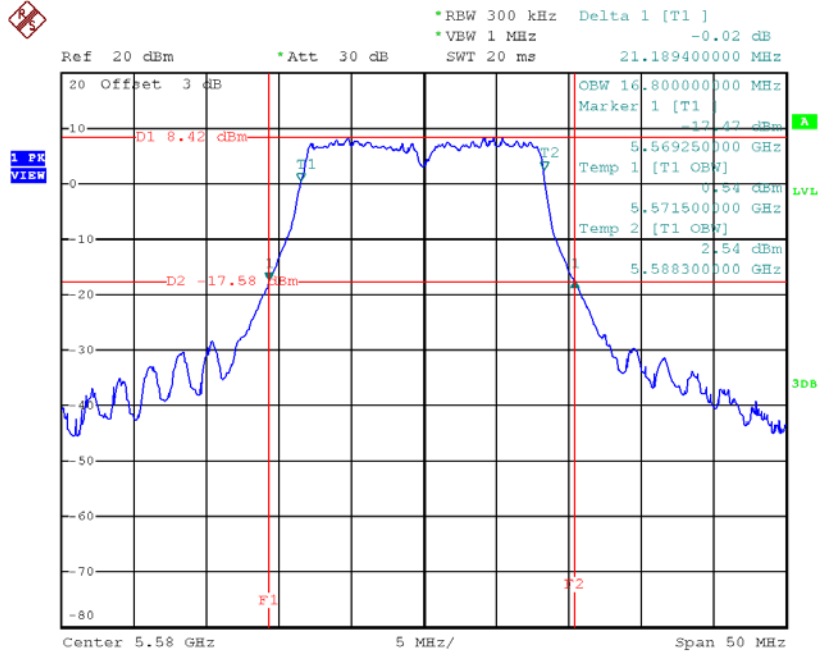

Date: 14.JAN.2018 12:52:34


TX CH140

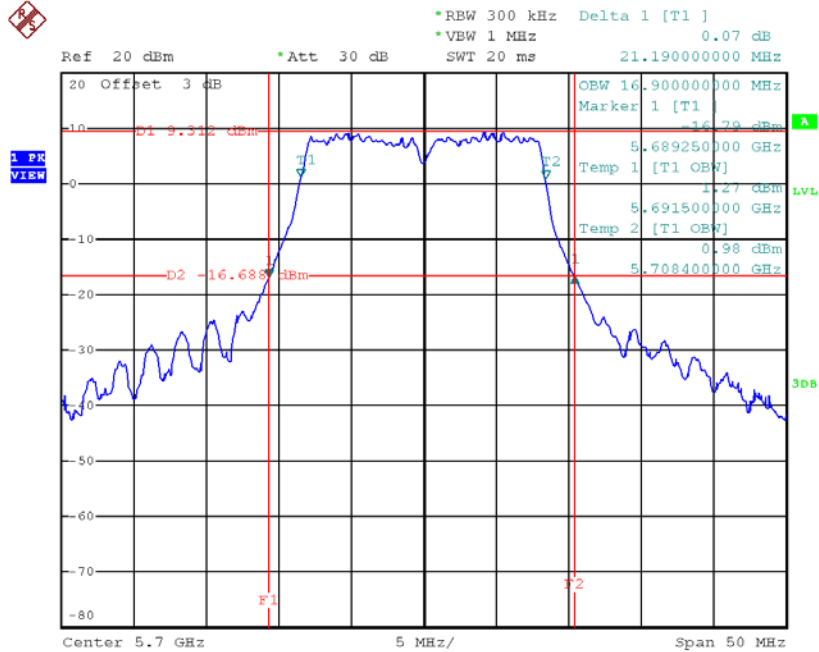

Date: 14.JAN.2018 12:53:41


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.29	17.80
CH116	5580	21.49	17.80
CH140	5700	21.45	17.80

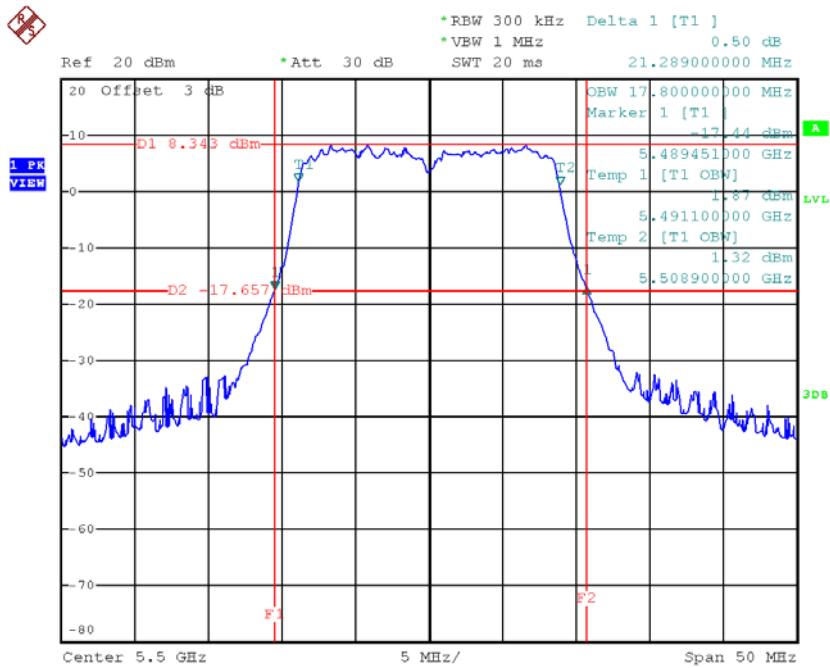TX CH100


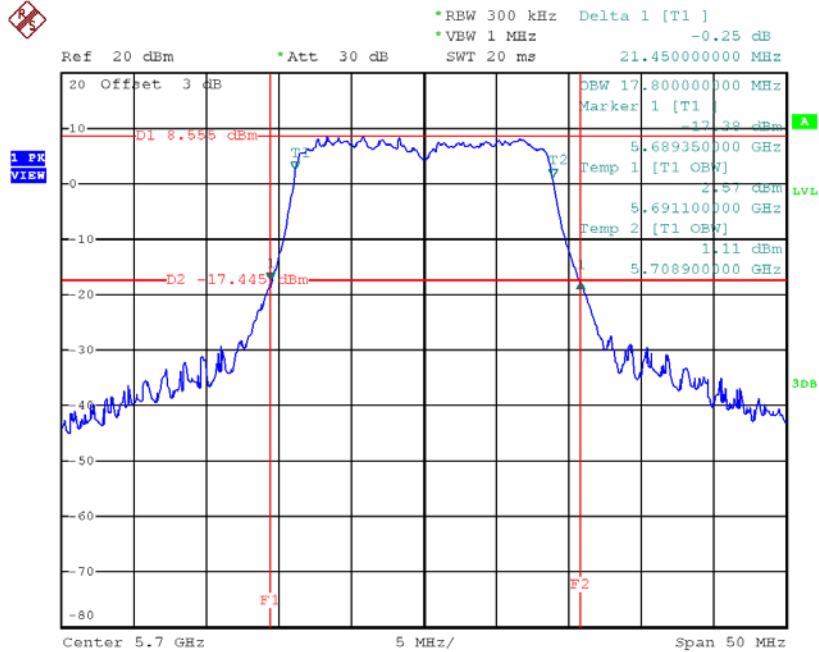
Date: 14.JAN.2018 13:23:37

TX CH116

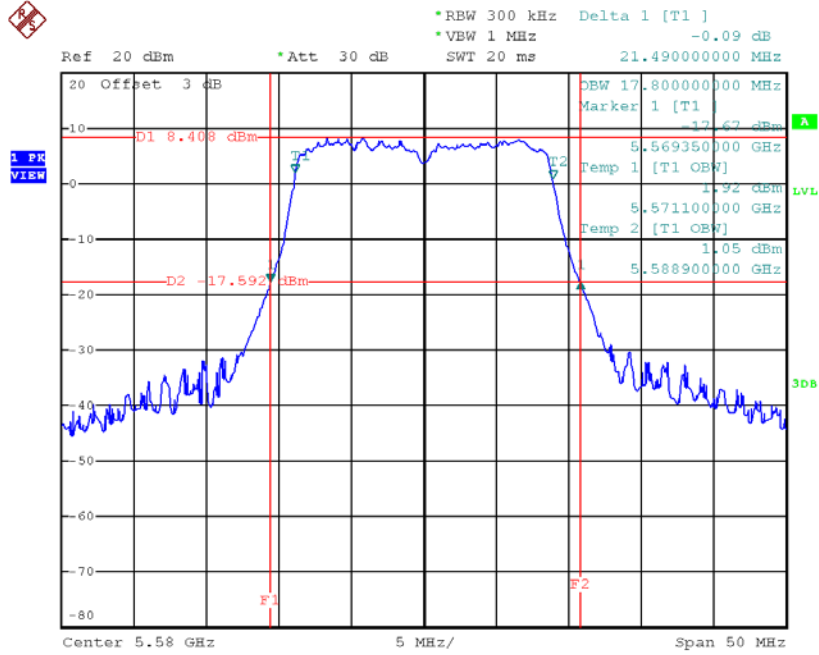

Date: 14.JAN.2018 18:00:36

TX CH140




Date: 14.JAN.2018 18:02:17

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	41.20	37.40
CH110	5550	41.20	37.40
CH134	5670	42.40	37.40

99% Occupied Bandwidth TX CH110

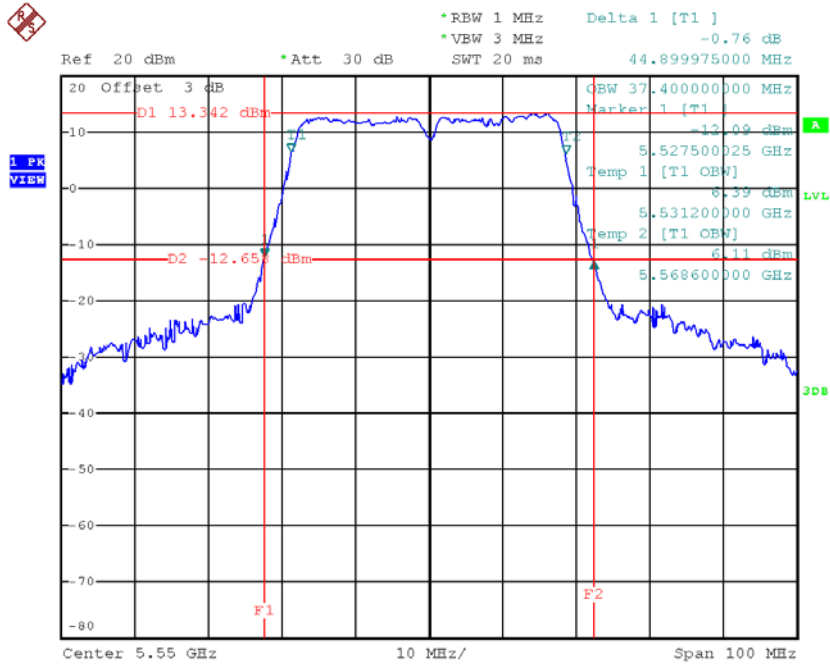


Date: 14.JAN.2018 16:45:17

26dB Bandwidth

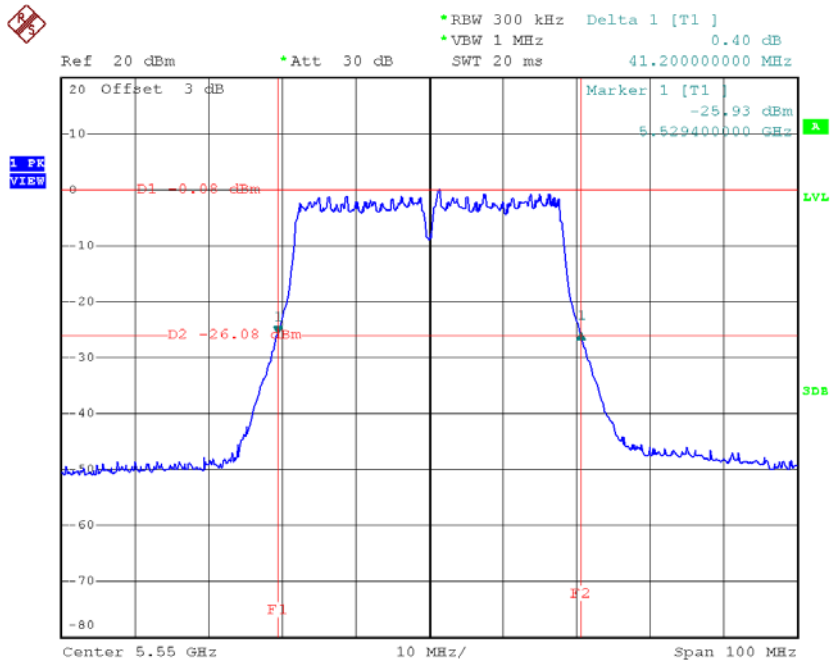


Date: 5.FEB.2018 18:46:42

99% Occupied Bandwidth TX CH134

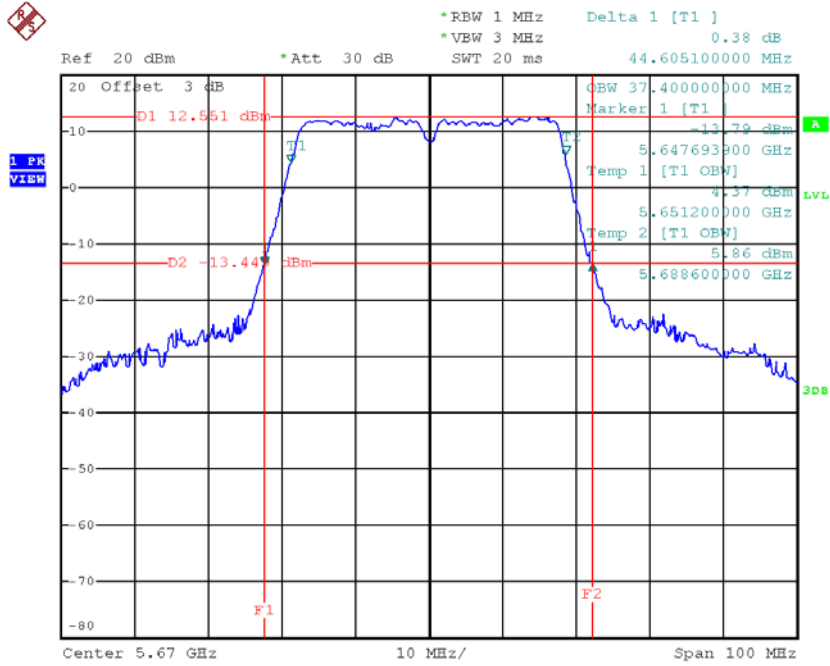

Date: 14.JAN.2018 14:17:48

26dB Bandwidth

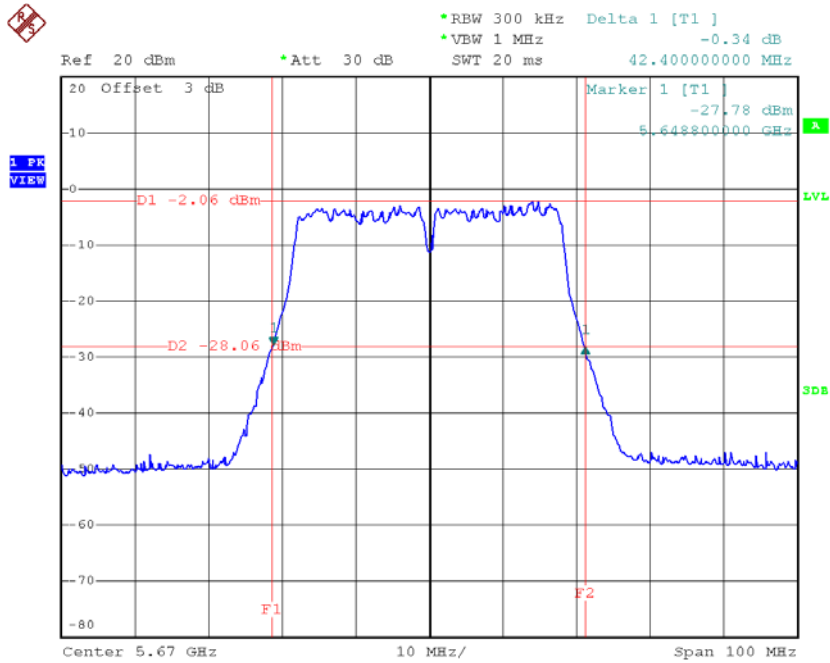


Date: 5.FEB.2018 18:53:00

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.65	16.50	>=500
CH157	5785	16.65	16.50	>=500
CH165	5825	16.65	16.50	>=500

TX CH 149

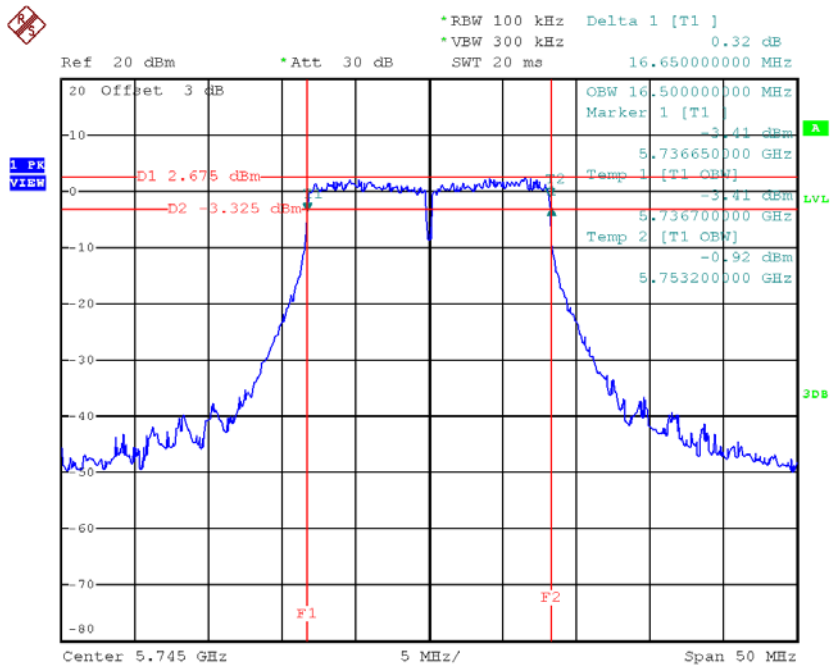


Date: 14.JAN.2018 12:54:53

TX CH 157

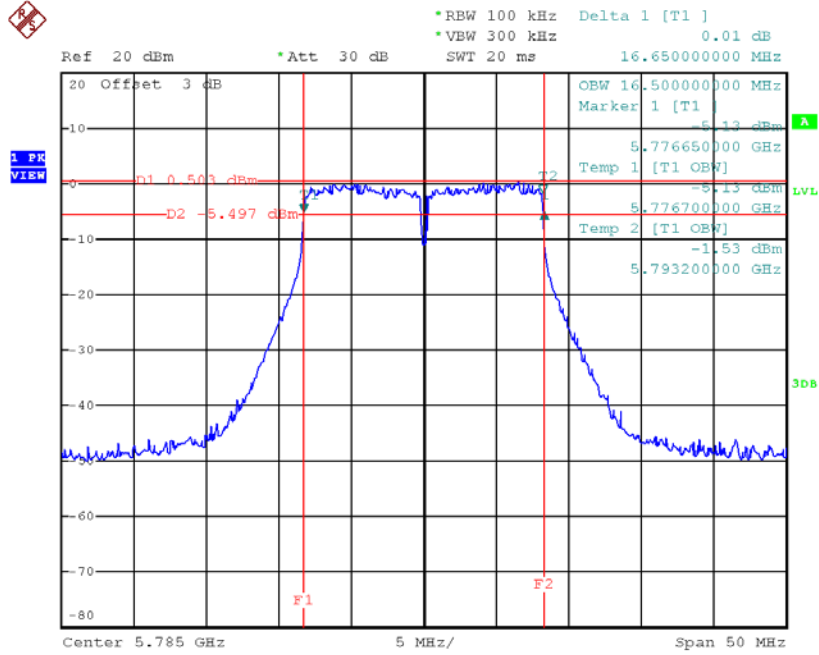

Date: 14.JAN.2018 12:56:08


TX CH 165

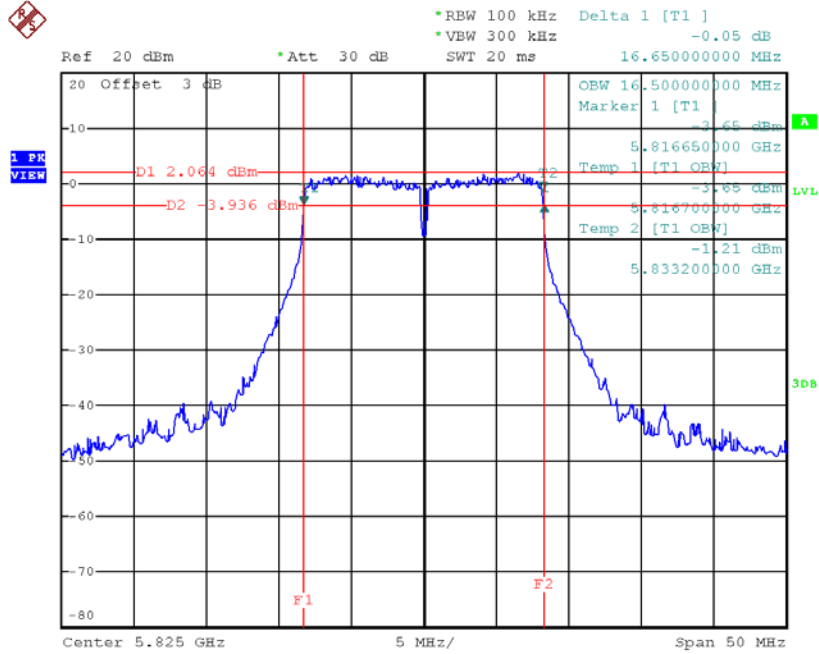

Date: 14.JAN.2018 12:57:40


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.75	17.60	>=500
CH157	5785	17.65	17.60	>=500
CH165	5825	17.80	17.60	>=500

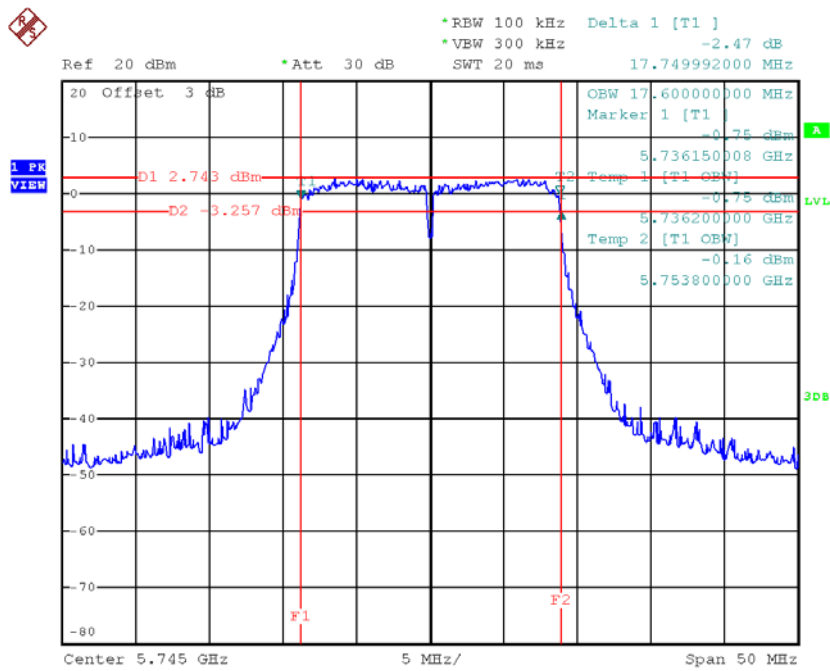TX CH 149


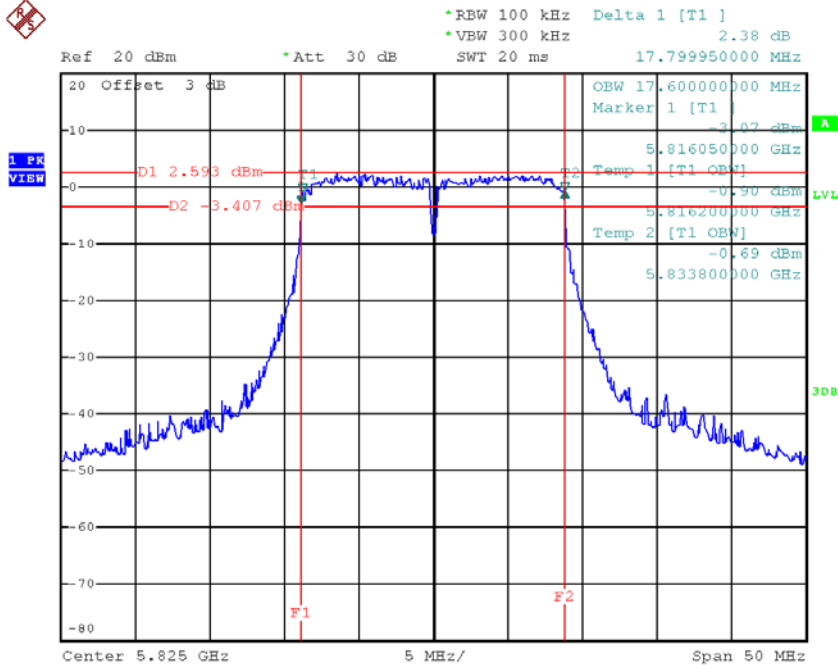
Date: 14.JAN.2018 13:30:11

TX CH 157

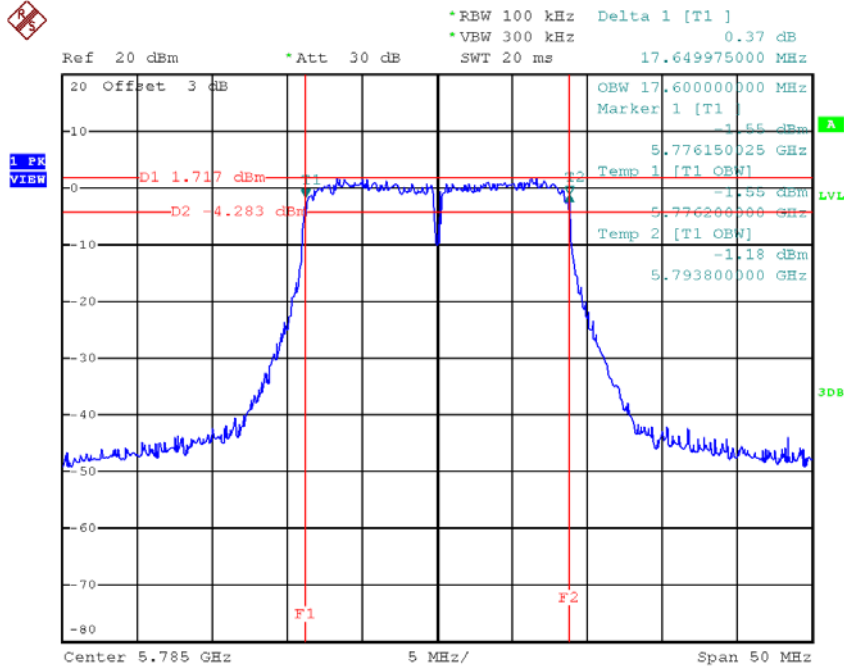

Date: 14.JAN.2018 18:05:34

TX CH 165




Date: 14.JAN.2018 13:34:01

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.90	36.40	>=500
CH159	5795	36.80	36.40	>=500

TX CH 151

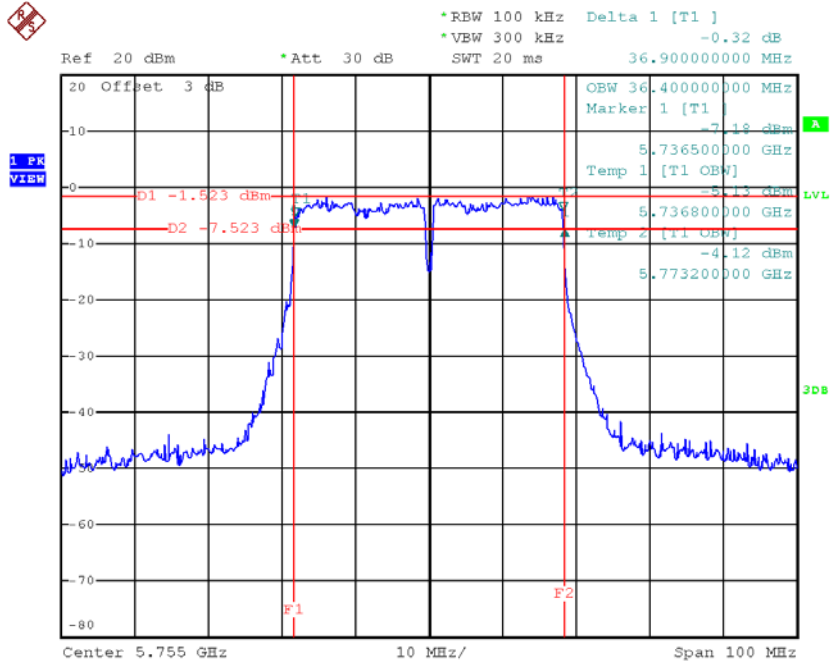

Date: 14.JAN.2018 14:27:37

TX CH 159

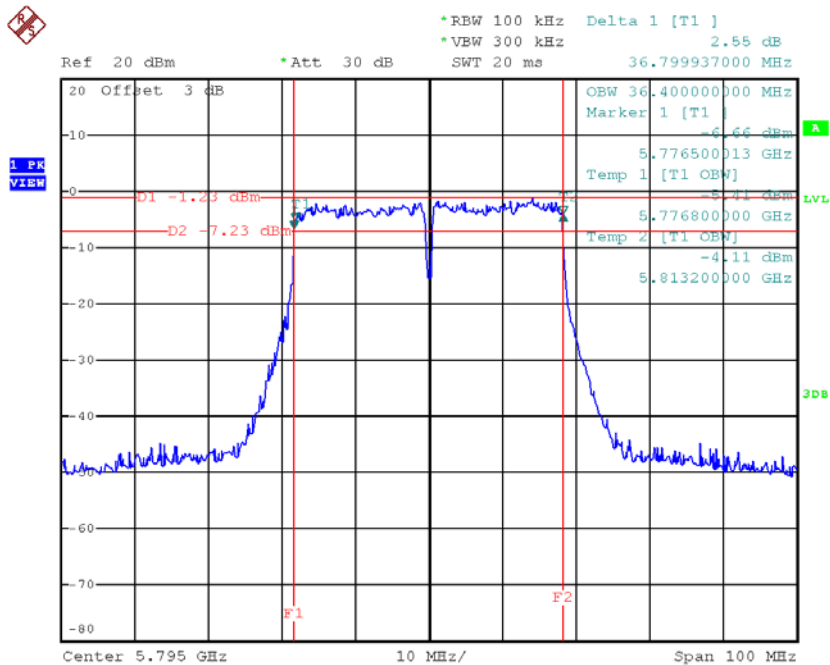


Date: 14.JAN.2018 14:24:08

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.19	17.90
CH40	5200	21.39	17.80
CH48	5240	21.10	17.90

TX CH36

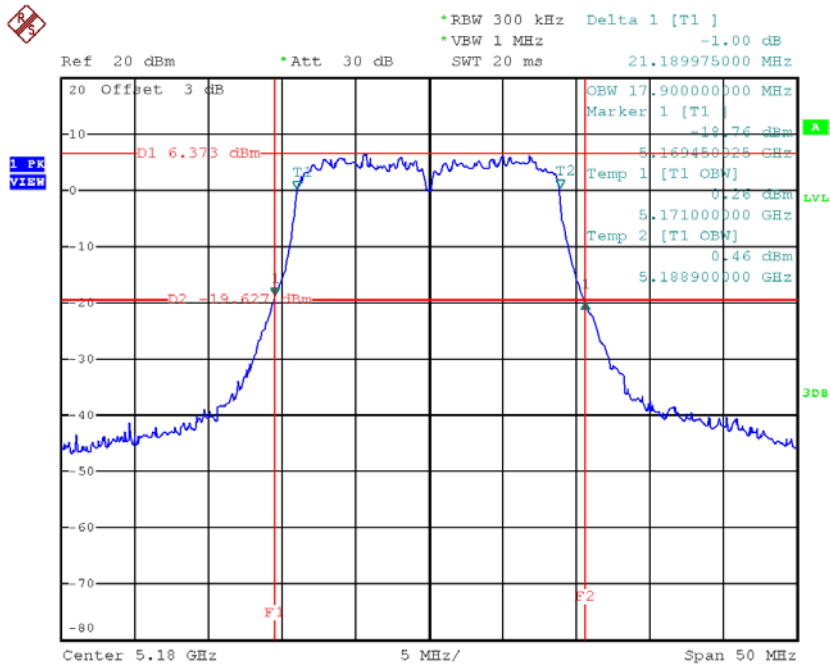


Date: 14.JAN.2018 13:37:30

TX CH40

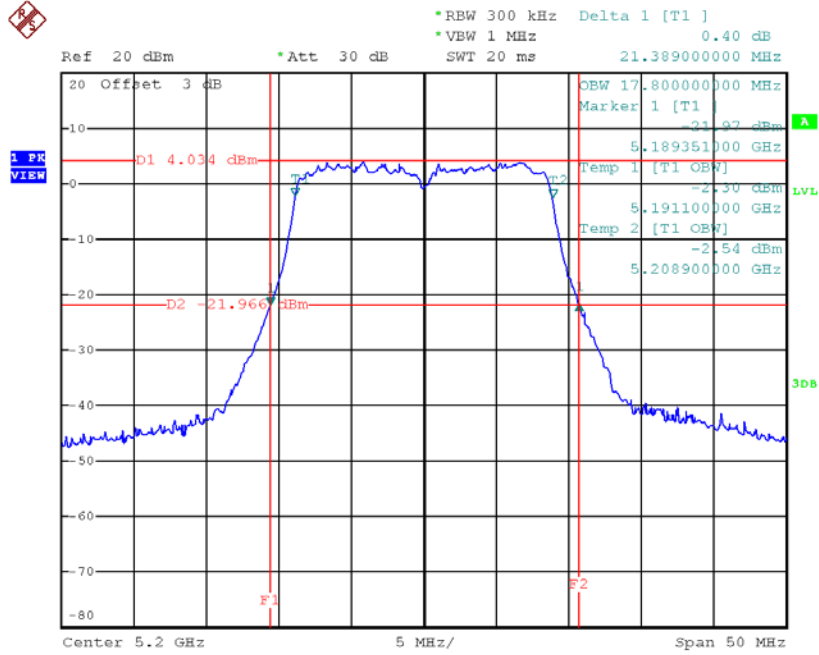

Date: 14.JAN.2018 18:09:06

TX CH48

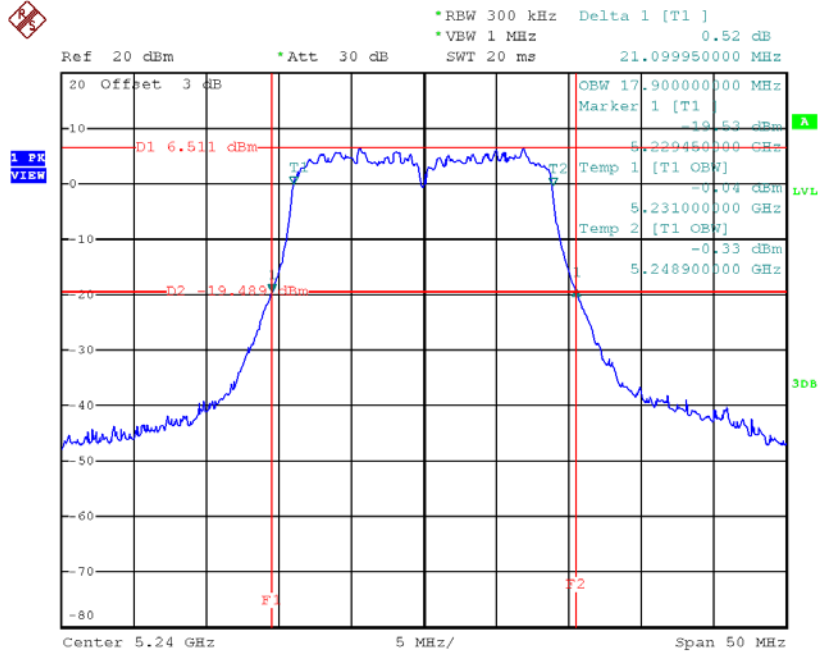


Date: 14.JAN.2018 13:43:47

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.00	37.00
CH46	5230	42.20	37.20

99% Occupied Bandwidth
TX CH38

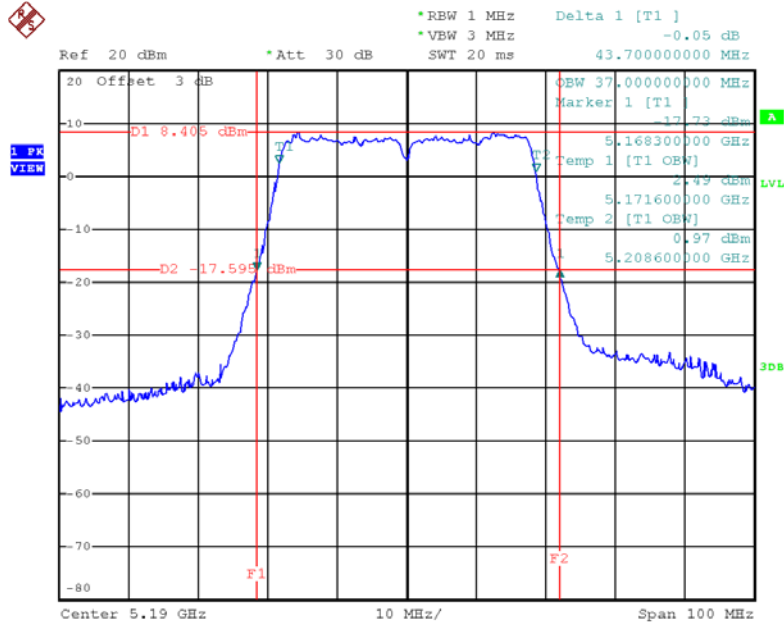


Date: 14.JAN.2018 14:30:22

26dB Bandwidth

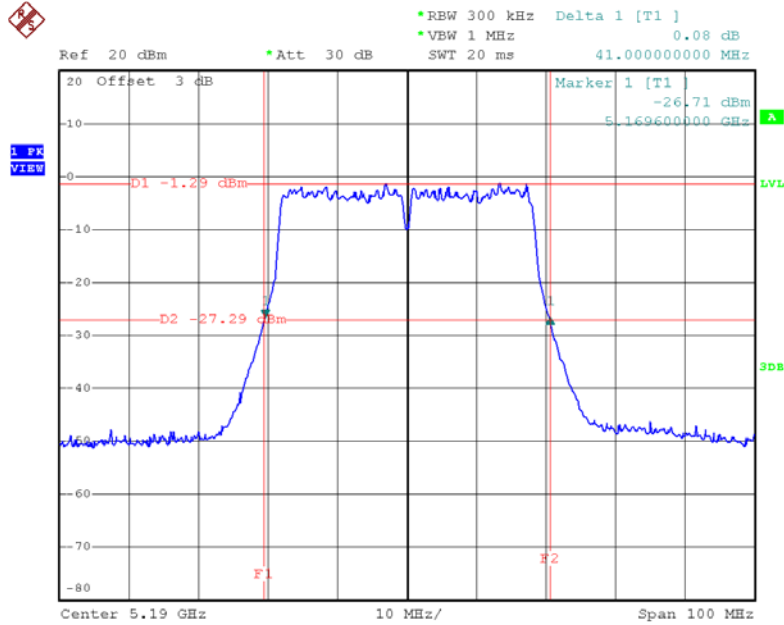


Date: 5.FEB.2018 19:48:44

99% Occupied Bandwidth
TX CH46

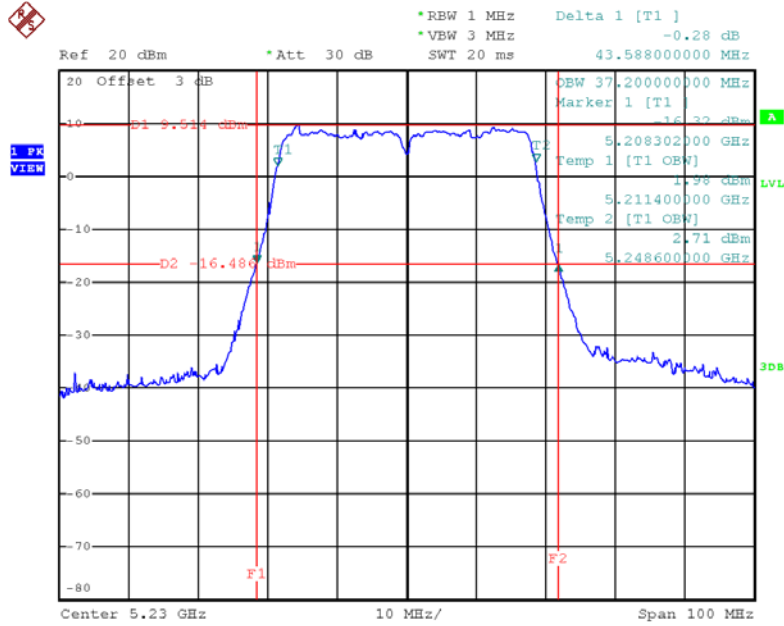

Date: 14.JAN.2018 14:31:40

26dB Bandwidth

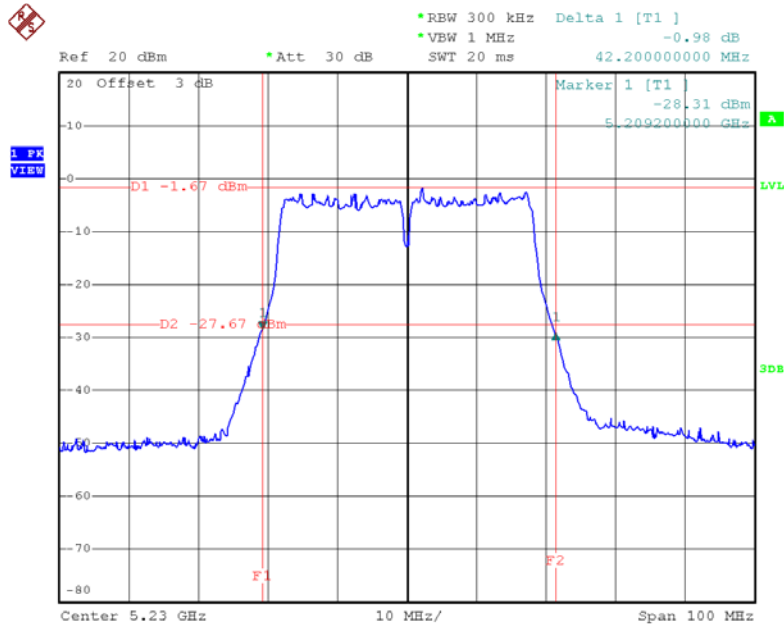

Date: 5.FEB.2018 21:02:08