


BTK

Bluetooth Headset M21

MAIN OPERATION

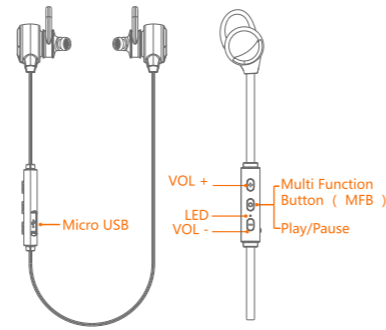

POWER SWITCH

- 1.Power ON: Press the MFB button for 2 seconds, the White LED will light for 1 second, with the voice prompt of "Power on".
2. Power OFF: Press the MFB button for 4 seconds, the Orange LED will light for 1 second, with the voice prompt of "Power Off".

PAIRING

- (Before using your headset, you must pair your headset with the mobile phone.)
1. Long press the MFB button for 4 seconds until the Orange and White LED flash alternately with the voice prompt of "Pairing".
 2. Turn on your Bluetooth function in your mobile and set to scan for Bluetooth device.
 3. In the pairing device list, select our headset "AOSO M21" to continue to pair with it.

- 4.After successfully paired," M21" will be connected to the mobile with the voice prompt of "Connected".

Important : If the Headset pairing status has been activated for 90 seconds, but the headset is still not paired to the mobile phone, it means pairing process has failed, please re-try the above pairing procedures from " 1 " to " 4 " .
Pair and connect with 2 phones simultaneously

1. Disable the Bluetooth function of the first paired phone and repeat the same pairing procedure with the second phone in the same manner as the first phone.
- 2.After successfully pairing with the second phone, turn on the first mobile phone Bluetooth function and manually select " M21 " to connect

- simultaneously.
- 3.When two phones are simultaneously connected, the user can than use the headset in the following scenarios:
- When taking call in one of the mobile phone, long press the MFB for 2 seconds to reject the call in another mobile phone.
 - Short press the MFB twice to hold the current call in one of the mobile phone and answer the call from the other mobile phone. Short press the MFB button again to re-connect to the first call after the second call is completed.
 - Short press the MFB once to hang up the current phone call and answer the coming call from another phone.

CALL

- 1.To answer an in-coming call, press the MFB once. To hang up an on-going call, press the MFB once during the call.
2. To reject the in-coming call, long press the MFB for 2 seconds.
- 3.Press the MFB twice for last number redial function.
- 4.To perform last number redial, double-click the MFB when the phone is playing music or during the standby status.

Voice dialing (Please make sure your mobile supports voice dialing function)

1. Long press the MFB for 1 second to start the voice dial function of the mobile phone. Press the MFB again for 1 second to exit from the voice dialing mode.

ADJUST VOLUME AND PLAY MUSIC

1. Press the MFB to play and pause the music
2. You may adjust the volume by press VOL+ or VOL-buttens.
3. Long press the VOL+ or VOL- button to select the next song or previous song respectively.




CHARGING AND BATTERY INDICATION

1. We suggest to charge the headset for 1 hour before the first use. The battery will be fully charged within 2 hours in the subsequent use.
2. When " M21 " talking time is below 10 minutes, " M21 " will voice prompt " Battery Low " to remind the user to charge the headset. At the same time, the Orange LED will start to flash.
3. When charging the headset the Orange LED will light up and turn White when " M21 " is fully charged.


SPECIFICATION

- 1.Model: M21
- 2.Blue tooth version: 4.1
3. DSP noise reduction
4. Support HFP, HSP, A2DP, AVRCP Bluetooth profiles
5. Support to Multi-connect function.(Connect 2 mobile phone simultaneously)
6. Dimension: Φ 19.5*11mm
7. Support iPhone/iPad battery indication.
8. Bluetooth normal distance range: 10M.
9. Battery Capacity: 3.7 V, 120mAH
- 10.Talk/Music time: 9-12H
11. Standby time: 450H
12. Support Voice Prompt
13. Please use the 5V 1A adapter to charger, otherwise it may damage the Headset.

CUSTOMER SERVICE



www.aotech.com



FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation