


|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz    |                         |

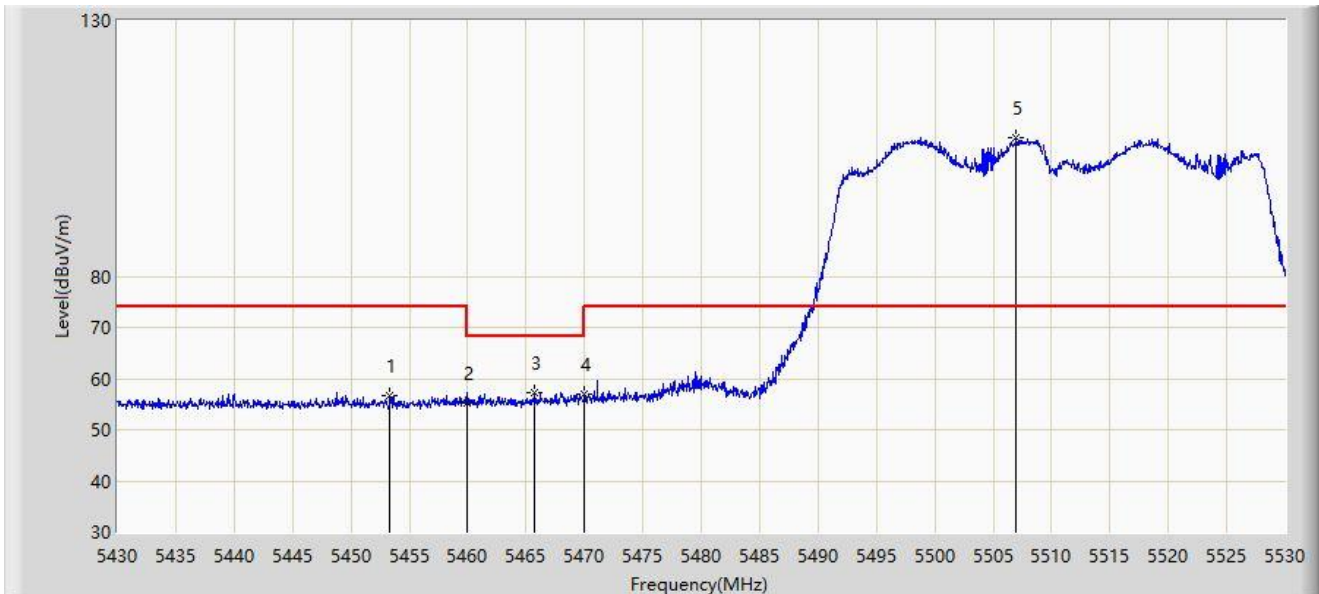


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5453.350        | 56.700                 | 53.143               | -17.300     | 74.000         | 3.557         | PK   |
| 2  |      | 5460.000        | 55.250                 | 51.620               | -18.750     | 74.000         | 3.630         | PK   |
| 3  | *    | 5465.750        | 57.202                 | 53.537               | -10.998     | 68.200         | 3.665         | PK   |
| 4  |      | 5470.000        | 56.859                 | 53.168               | -11.341     | 68.200         | 3.691         | PK   |
| 5  |      | 5507.000        | 107.070                | 103.250              | N/A         | N/A            | 3.821         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz    |                         |

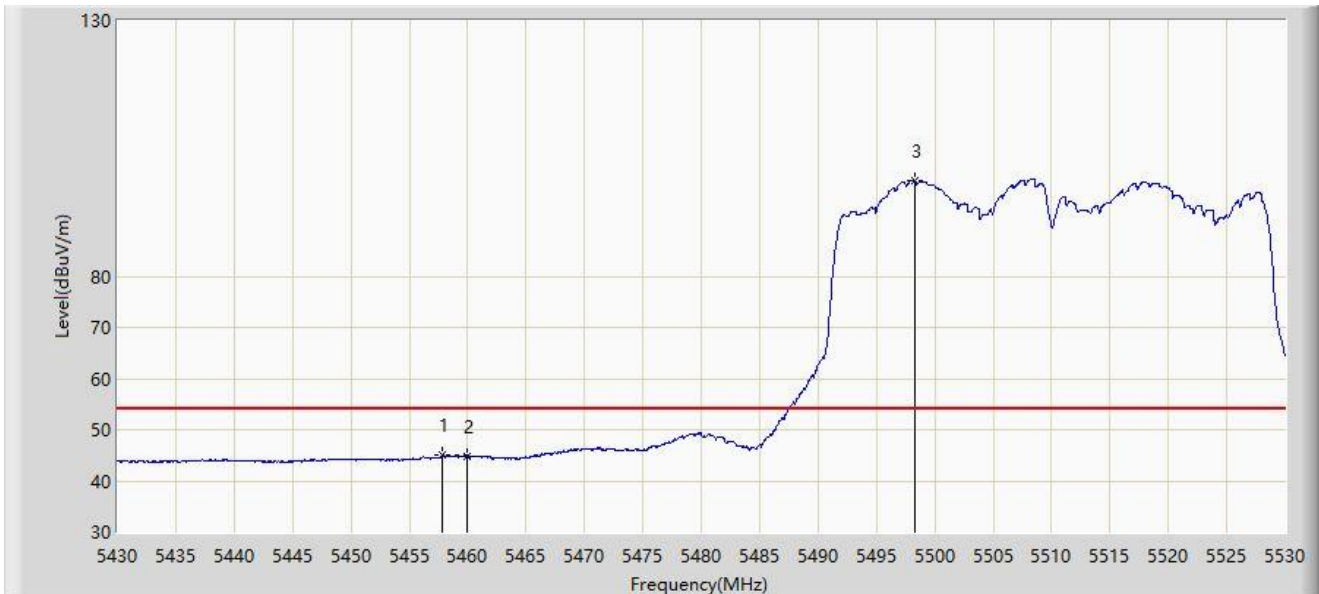


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5457.850        | 45.026                 | 41.409               | -8.974      | 54.000         | 3.618         | AV   |
| 2  |      | 5460.000        | 44.825                 | 41.195               | -9.175      | 54.000         | 3.630         | AV   |
| 3  |      | 5498.250        | 98.800                 | 94.897               | N/A         | N/A            | 3.903         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz    |                         |

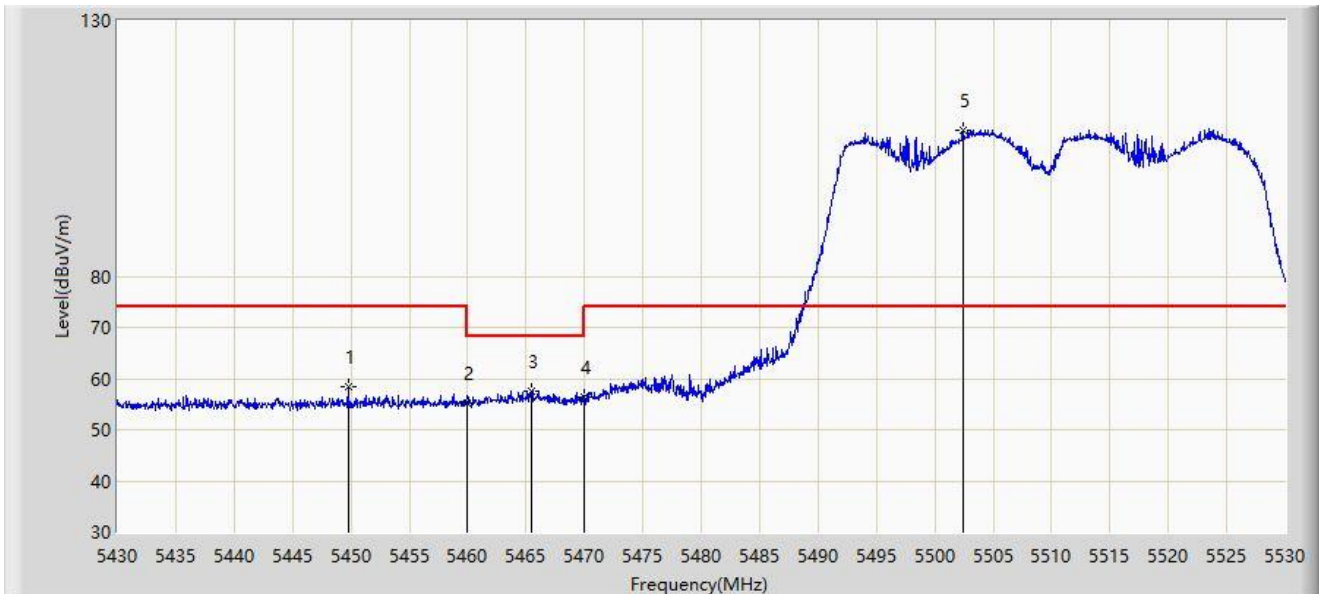


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5449.750        | 58.349                 | 54.796               | -15.651     | 74.000         | 3.554         | PK   |
| 2  |      | 5460.000        | 55.184                 | 51.554               | -18.816     | 74.000         | 3.630         | PK   |
| 3  | *    | 5465.500        | 57.494                 | 53.830               | -10.706     | 68.200         | 3.664         | PK   |
| 4  |      | 5470.000        | 56.304                 | 52.613               | -11.896     | 68.200         | 3.691         | PK   |
| 5  |      | 5502.400        | 108.487                | 104.623              | N/A         | N/A            | 3.864         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz    |                         |

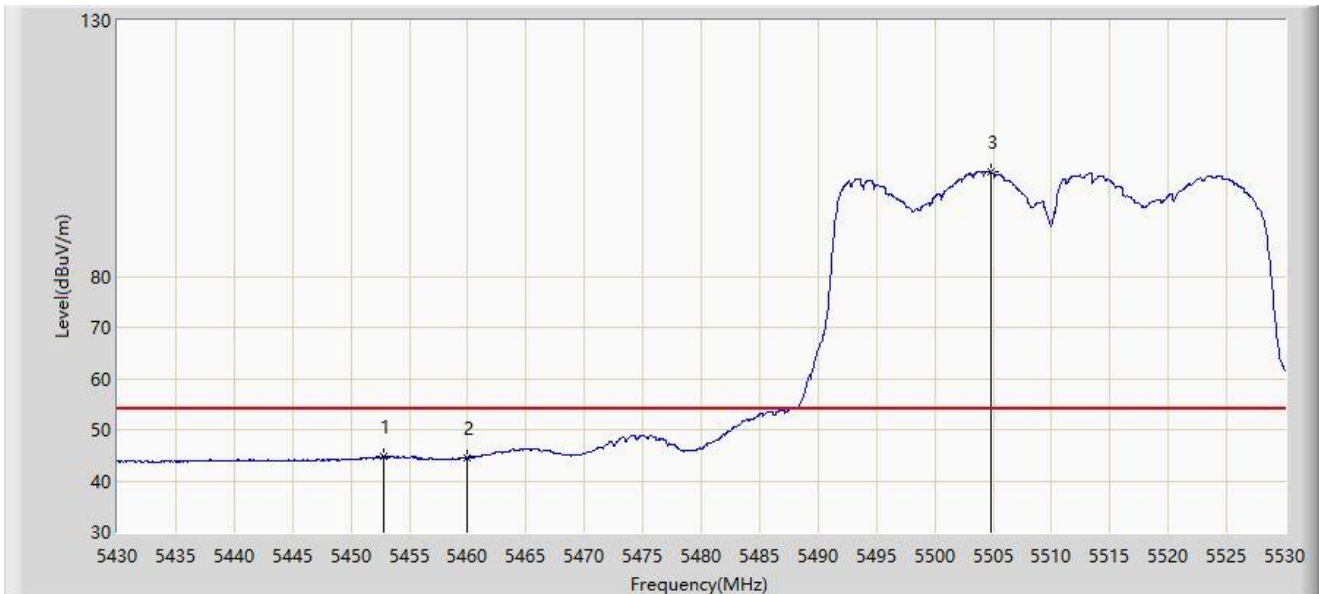


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5452.750        | 44.782                 | 41.225               | -9.218      | 54.000         | 3.557         | AV   |
| 2  |      | 5460.000        | 44.464                 | 40.834               | -9.536      | 54.000         | 3.630         | AV   |
| 3  |      | 5504.750        | 100.419                | 96.578               | N/A         | N/A            | 3.841         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-20   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz    |                         |

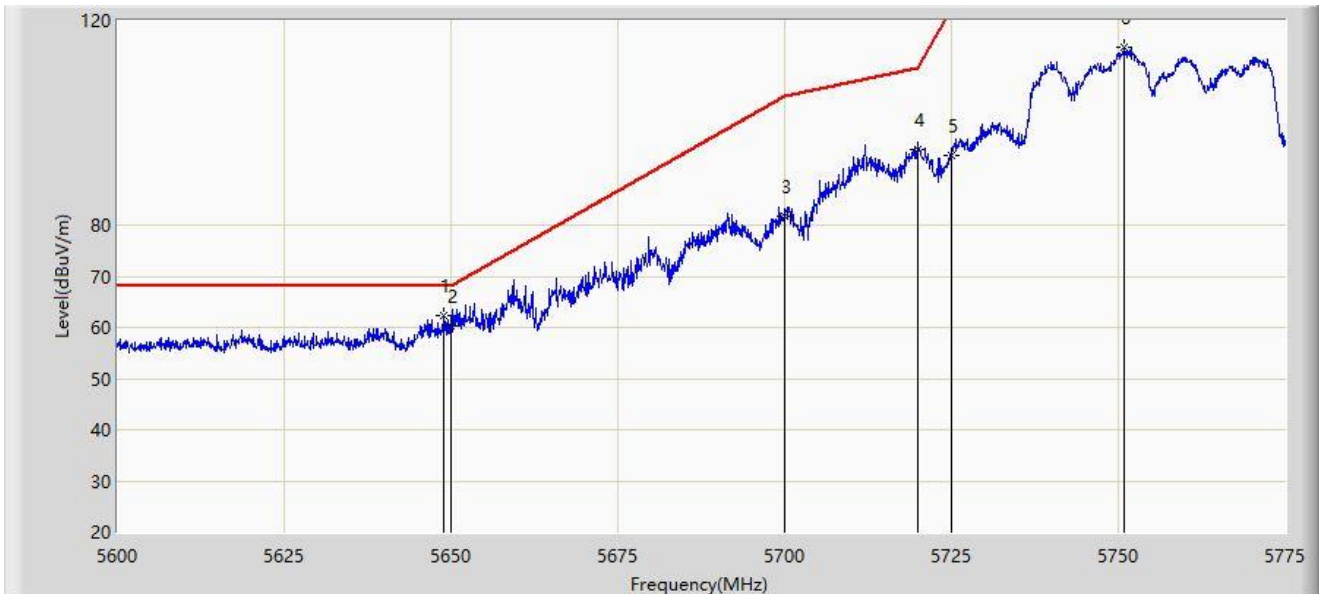


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5648.825        | 62.220                 | 58.333               | -5.980      | 68.200         | 3.887         | PK   |
| 2  |      | 5650.000        | 60.267                 | 56.353               | -7.933      | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 81.871                 | 77.956               | -23.329     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 94.737                 | 90.808               | -16.063     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 93.558                 | 89.615               | -28.642     | 122.200        | 3.943         | PK   |
| 6  |      | 5750.850        | 114.673                | 110.480              | N/A         | N/A            | 4.193         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-20   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz    |                         |

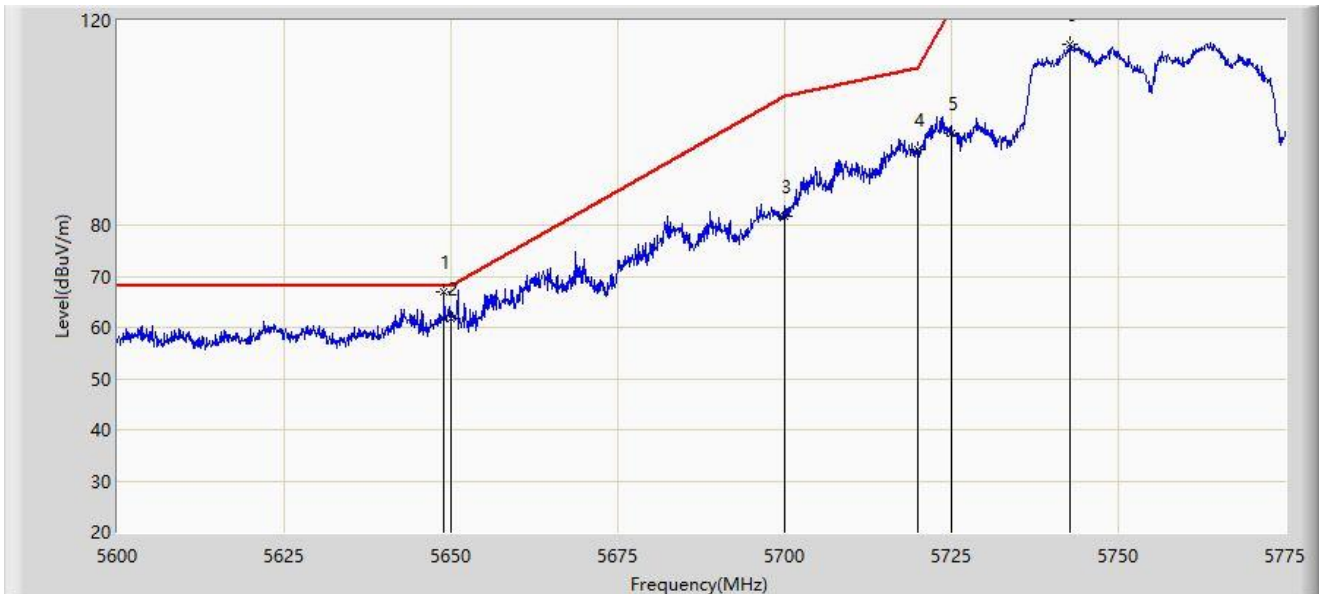


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5649.000        | 66.945                 | 63.054               | -1.255      | 68.200         | 3.891         | PK   |
| 2  |      | 5650.000        | 61.625                 | 57.711               | -6.575      | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 81.765                 | 77.850               | -23.435     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 94.639                 | 90.710               | -16.161     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 98.075                 | 94.132               | -24.125     | 122.200        | 3.943         | PK   |
| 6  |      | 5742.800        | 115.415                | 111.257              | N/A         | N/A            | 4.158         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-20   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz    |                         |

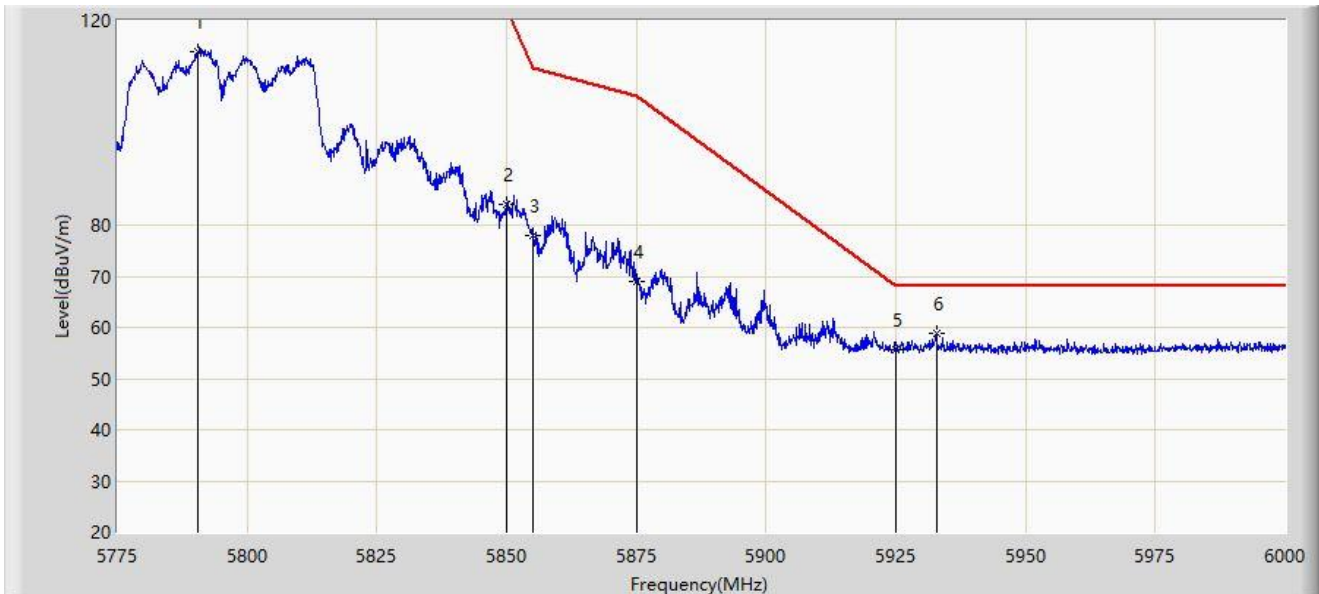


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5790.413        | 113.975                | 109.724              | N/A         | N/A            | 4.250         | PK   |
| 2  |      | 5850.000        | 84.044                 | 79.600               | -38.156     | 122.200        | 4.444         | PK   |
| 3  |      | 5855.000        | 77.910                 | 73.510               | -32.890     | 110.800        | 4.400         | PK   |
| 4  |      | 5875.000        | 68.988                 | 64.677               | -36.212     | 105.200        | 4.312         | PK   |
| 5  |      | 5925.000        | 55.517                 | 50.886               | -12.683     | 68.200         | 4.630         | PK   |
| 6  | *    | 5932.837        | 58.747                 | 54.137               | -9.453      | 68.200         | 4.610         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-20   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz    |                         |

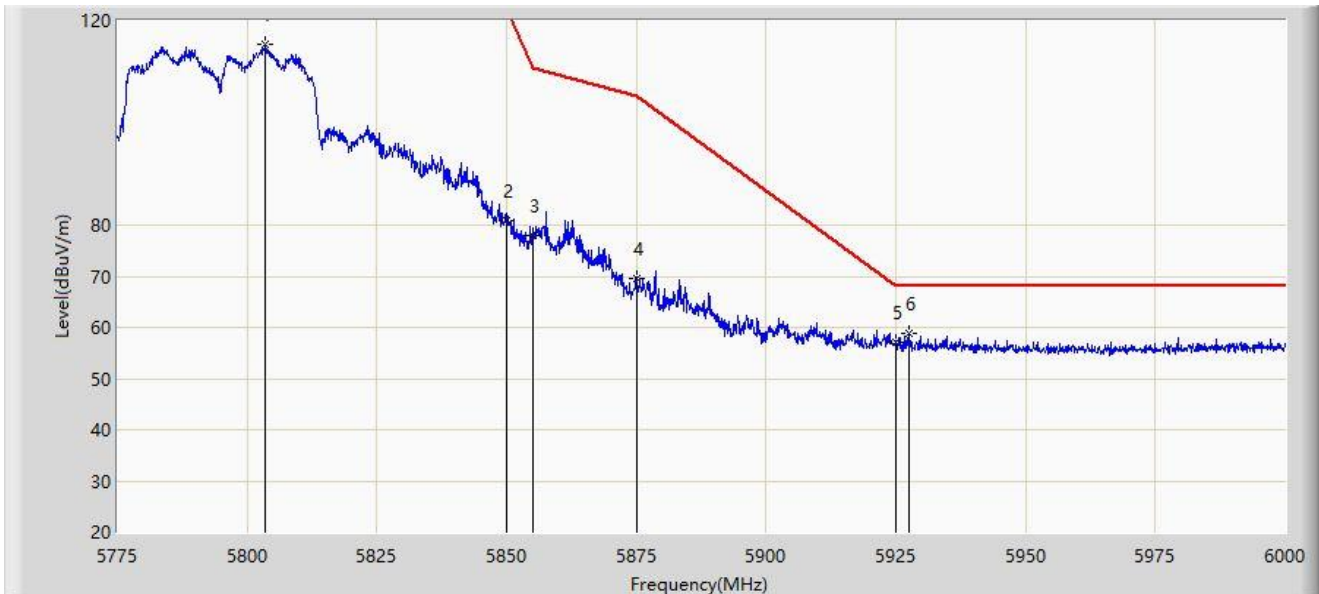


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5803.575        | 115.272                | 110.965              | N/A         | N/A            | 4.308         | PK   |
| 2  |      | 5850.000        | 80.831                 | 76.387               | -41.369     | 122.200        | 4.444         | PK   |
| 3  |      | 5855.000        | 78.081                 | 73.681               | -32.719     | 110.800        | 4.400         | PK   |
| 4  |      | 5875.000        | 69.540                 | 65.229               | -35.660     | 105.200        | 4.312         | PK   |
| 5  |      | 5925.000        | 57.226                 | 52.595               | -10.974     | 68.200         | 4.630         | PK   |
| 6  | *    | 5927.437        | 58.921                 | 54.288               | -9.279      | 68.200         | 4.634         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz    |                         |

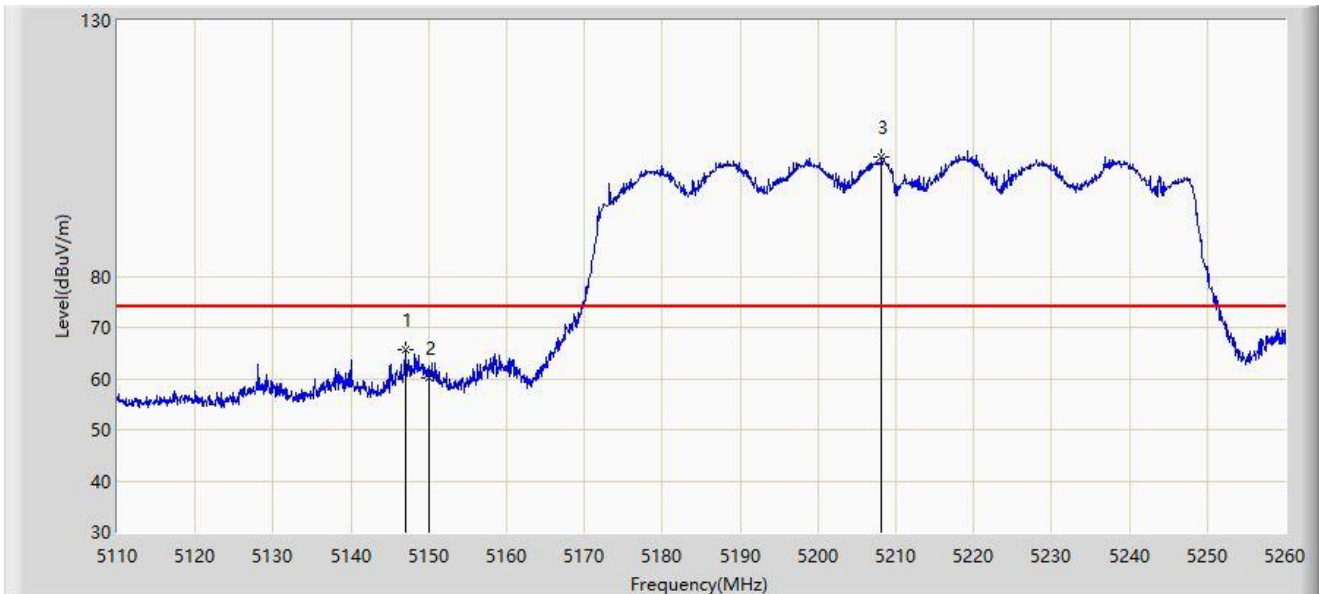


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5147.050        | 65.593                 | 61.946               | -8.407      | 74.000         | 3.646         | PK   |
| 2  |      | 5150.000        | 60.152                 | 56.511               | -13.848     | 74.000         | 3.641         | PK   |
| 3  |      | 5208.175        | 103.308                | 100.013              | N/A         | N/A            | 3.295         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz    |                         |

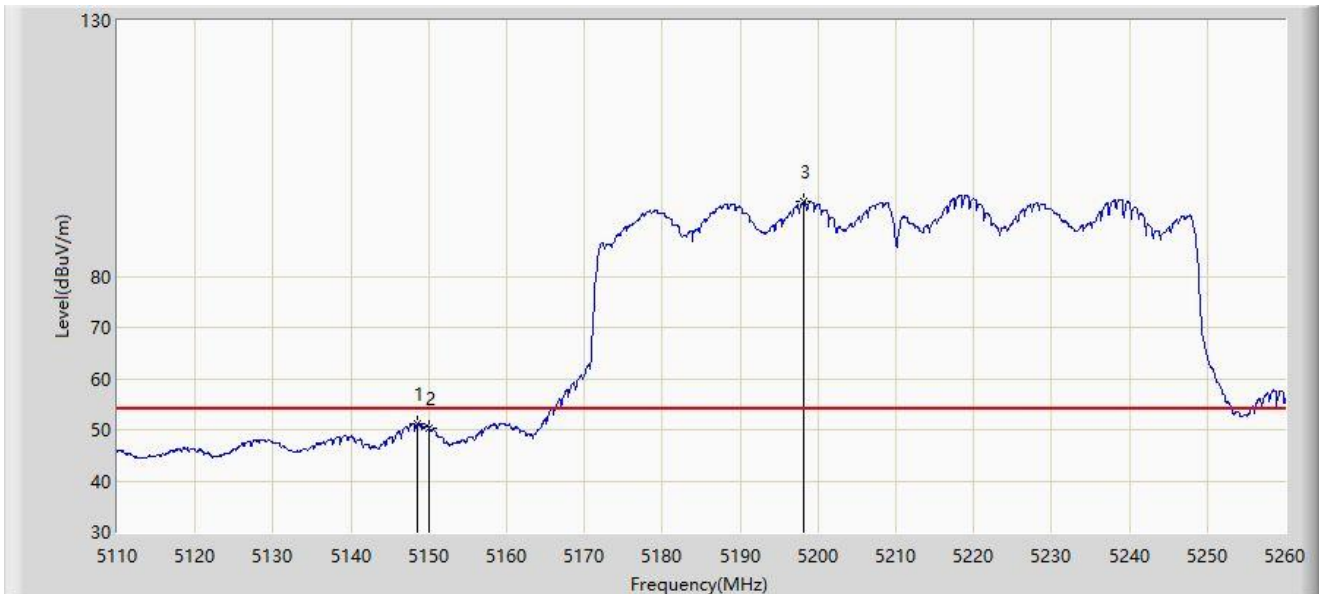


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.625        | 51.087                 | 47.440               | -2.913      | 54.000         | 3.647         | AV   |
| 2  |      | 5150.000        | 50.350                 | 46.709               | -3.650      | 54.000         | 3.641         | AV   |
| 3  |      | 5198.125        | 94.494                 | 91.203               | N/A         | N/A            | 3.291         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz    |                         |

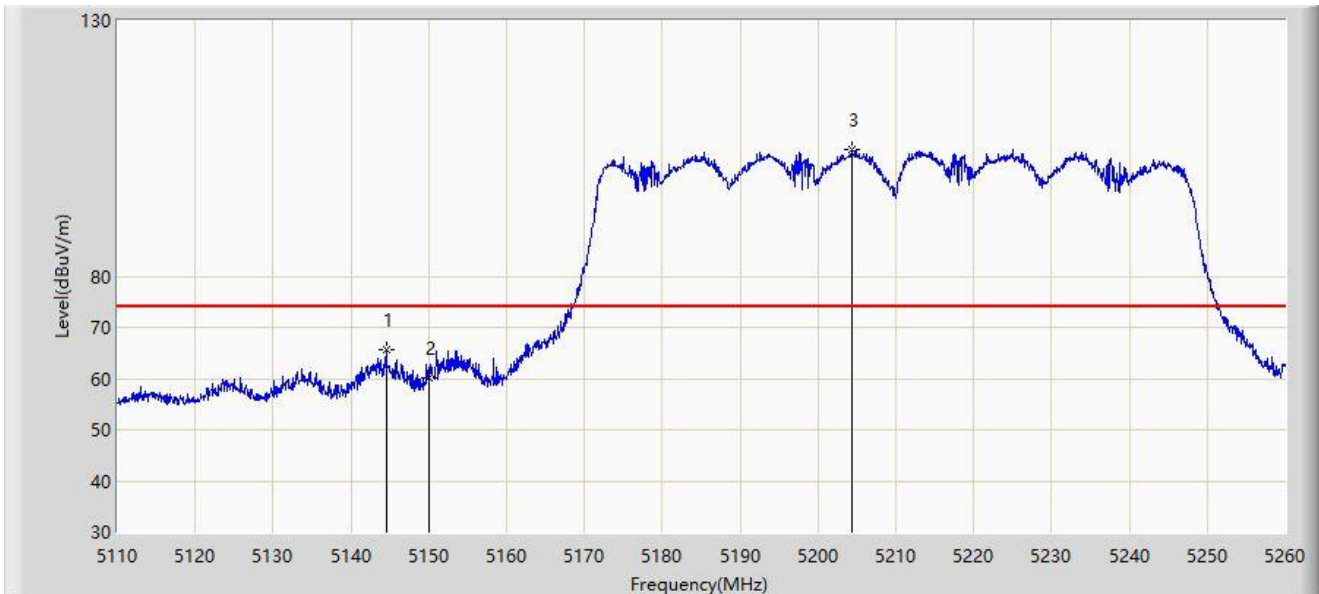


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5144.500        | 65.616                 | 61.977               | -8.384      | 74.000         | 3.638         | PK   |
| 2  |      | 5150.000        | 60.181                 | 56.540               | -13.819     | 74.000         | 3.641         | PK   |
| 3  |      | 5204.275        | 104.881                | 101.591              | N/A         | N/A            | 3.289         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz    |                         |

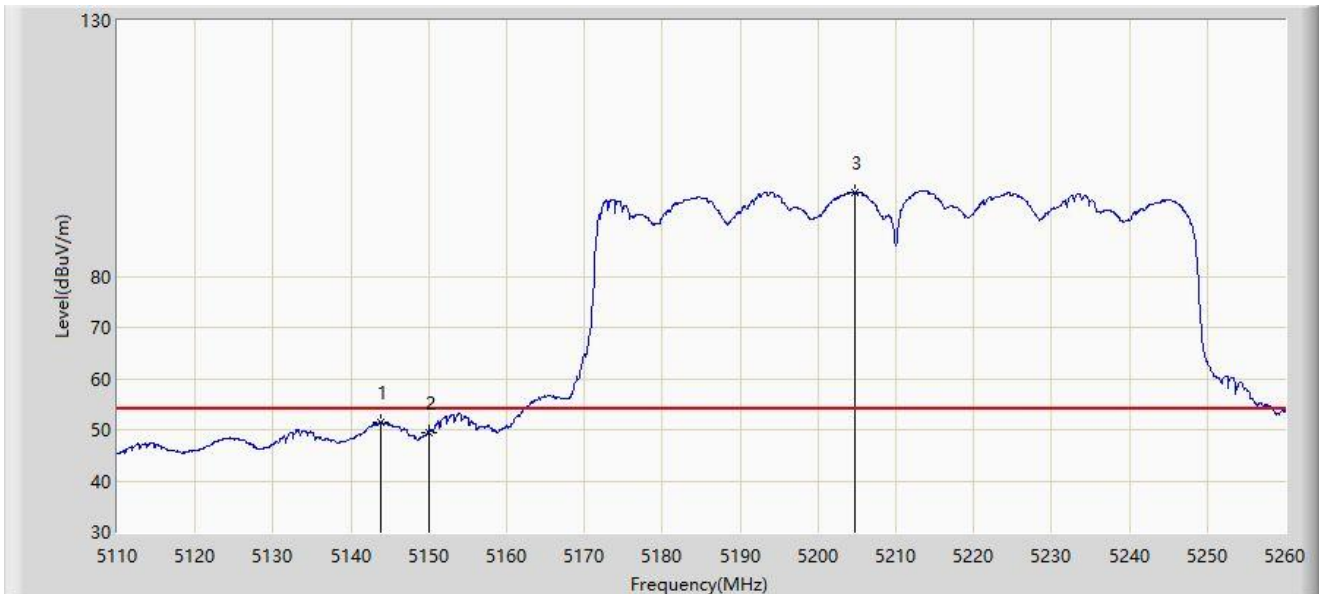


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5143.750        | 51.365                 | 47.728               | -2.635      | 54.000         | 3.637         | AV   |
| 2  |      | 5150.000        | 49.553                 | 45.912               | -4.447      | 54.000         | 3.641         | AV   |
| 3  |      | 5204.650        | 96.371                 | 93.081               | N/A         | N/A            | 3.290         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz    |                         |

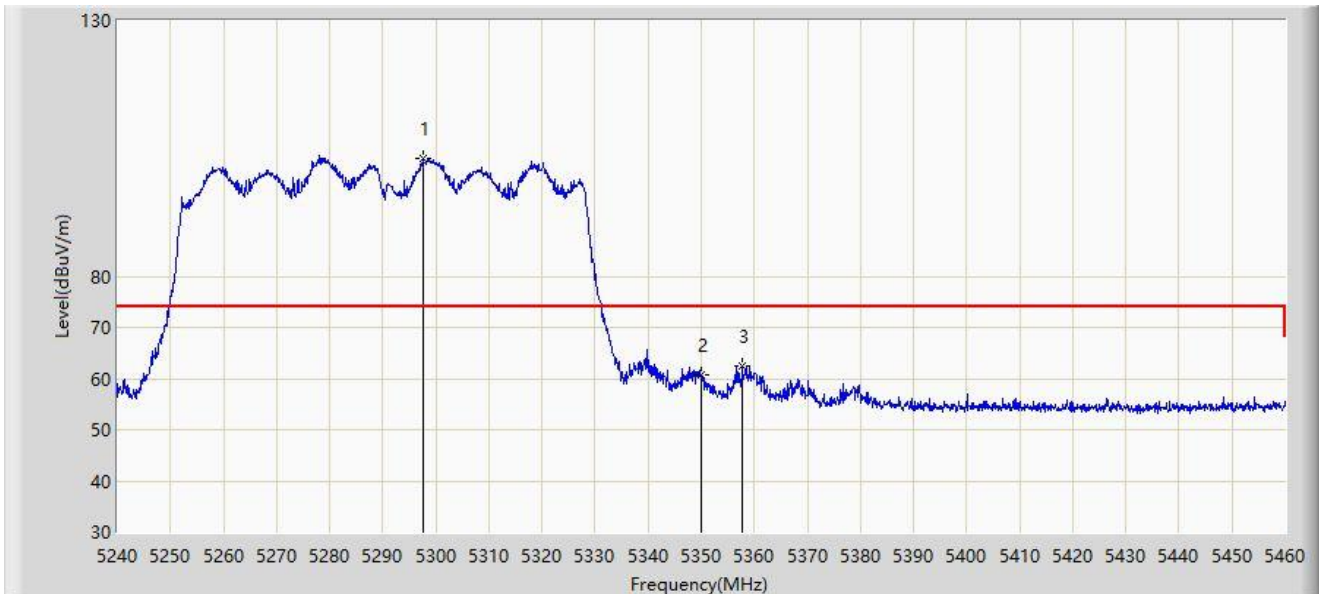


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5297.640        | 102.901                | 99.609               | N/A         | N/A            | 3.292         | PK   |
| 2  |      | 5350.000        | 60.730                 | 57.385               | -13.270     | 74.000         | 3.344         | PK   |
| 3  | *    | 5357.700        | 62.513                 | 59.219               | -11.487     | 74.000         | 3.294         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz    |                         |

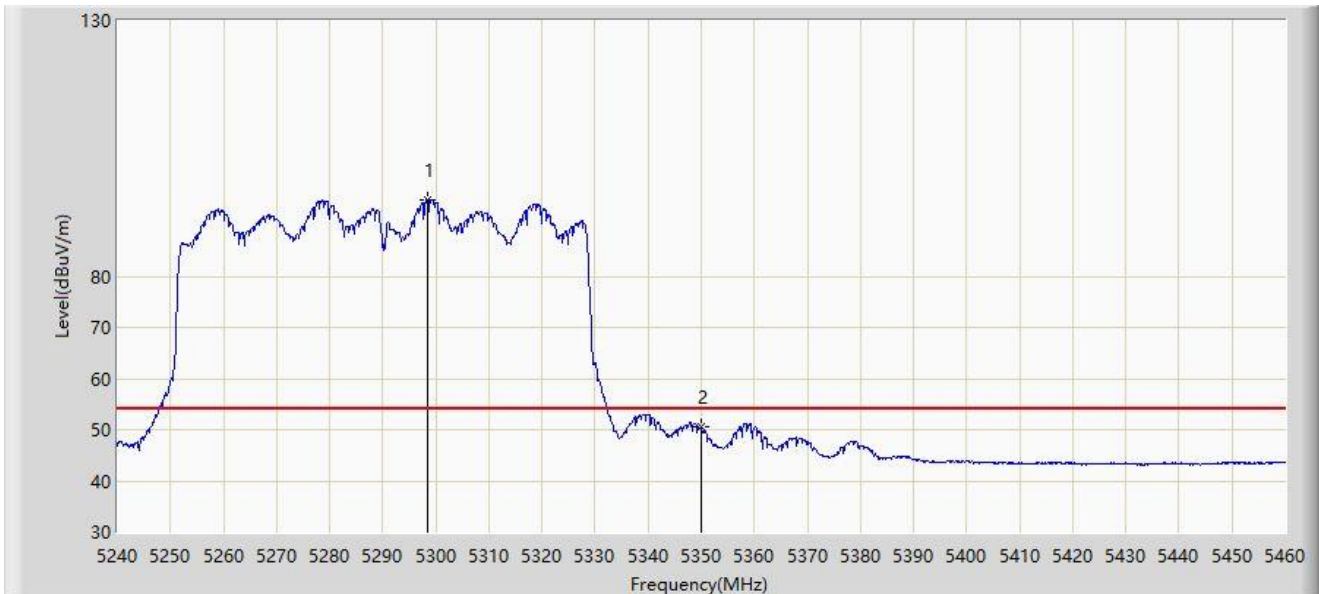


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5298.410        | 94.971                 | 91.679               | N/A         | N/A            | 3.293         | AV   |
| 2  | *    | 5350.000        | 50.495                 | 47.150               | -3.505      | 54.000         | 3.344         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz    |                         |

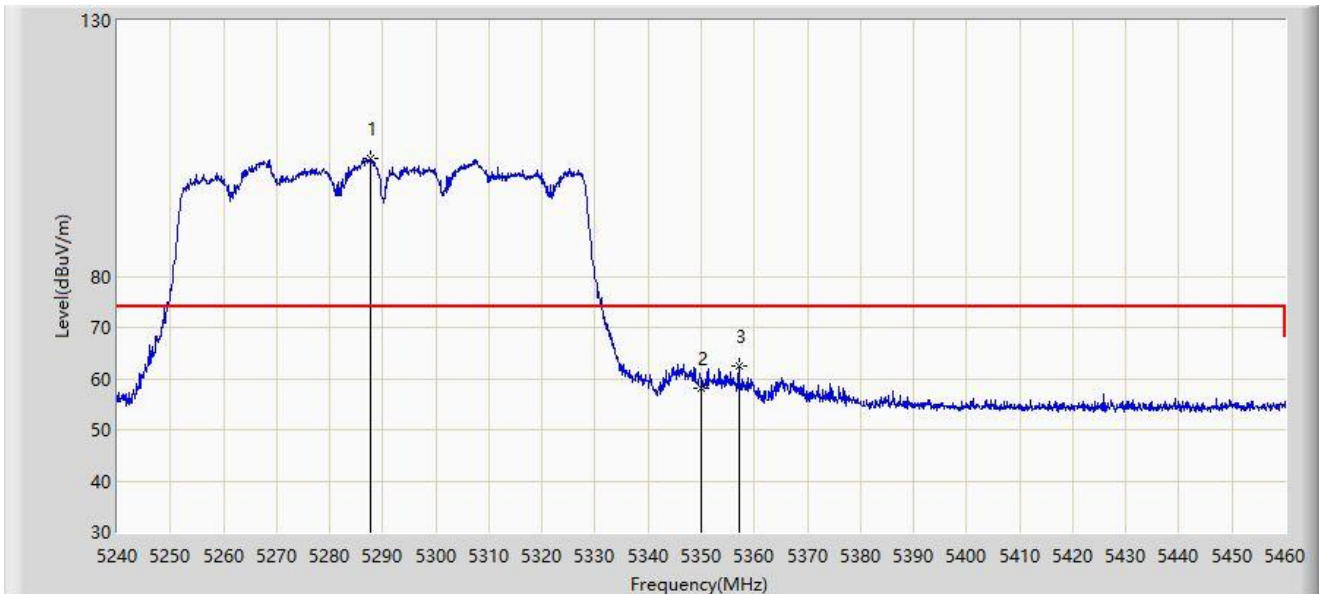


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5287.630        | 103.041                | 99.848               | N/A         | N/A            | 3.193         | PK   |
| 2  |      | 5350.000        | 57.973                 | 54.628               | -16.027     | 74.000         | 3.344         | PK   |
| 3  | *    | 5357.040        | 62.362                 | 59.066               | -11.638     | 74.000         | 3.296         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz    |                         |

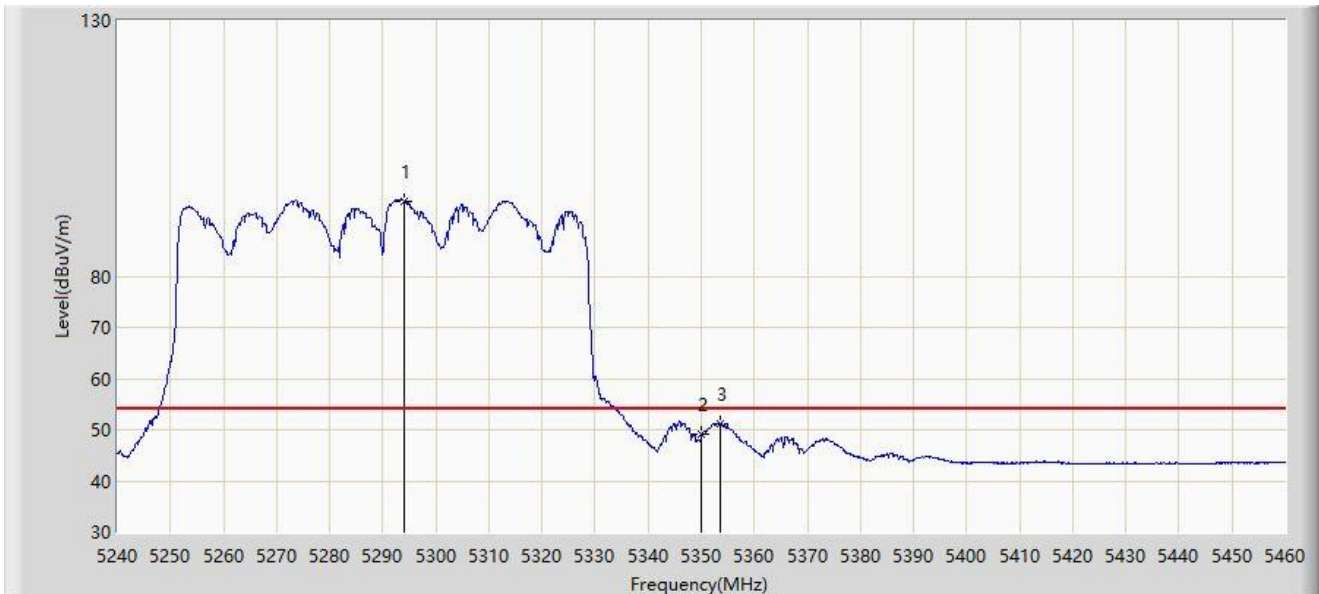


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5293.900        | 94.772                 | 91.497               | N/A         | N/A            | 3.276         | AV   |
| 2  |      | 5350.000        | 48.986                 | 45.641               | -5.014      | 54.000         | 3.344         | AV   |
| 3  | *    | 5353.630        | 51.198                 | 47.892               | -2.802      | 54.000         | 3.307         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz    |                         |

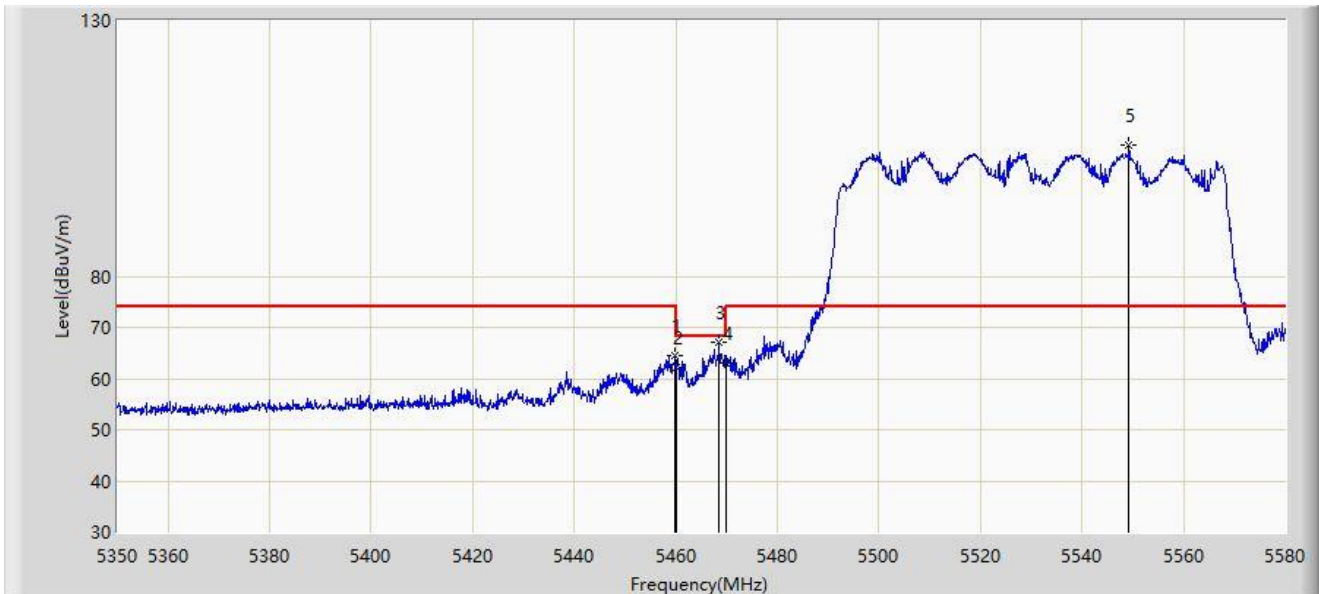


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5459.825        | 64.586                 | 60.957               | -9.414      | 74.000         | 3.629         | PK   |
| 2  |      | 5460.000        | 62.165                 | 58.535               | -11.835     | 74.000         | 3.630         | PK   |
| 3  | *    | 5468.565        | 67.139                 | 63.457               | -1.061      | 68.200         | 3.683         | PK   |
| 4  |      | 5470.000        | 63.187                 | 59.496               | -5.013      | 68.200         | 3.691         | PK   |
| 5  |      | 5549.295        | 105.692                | 101.988              | N/A         | N/A            | 3.703         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz    |                         |

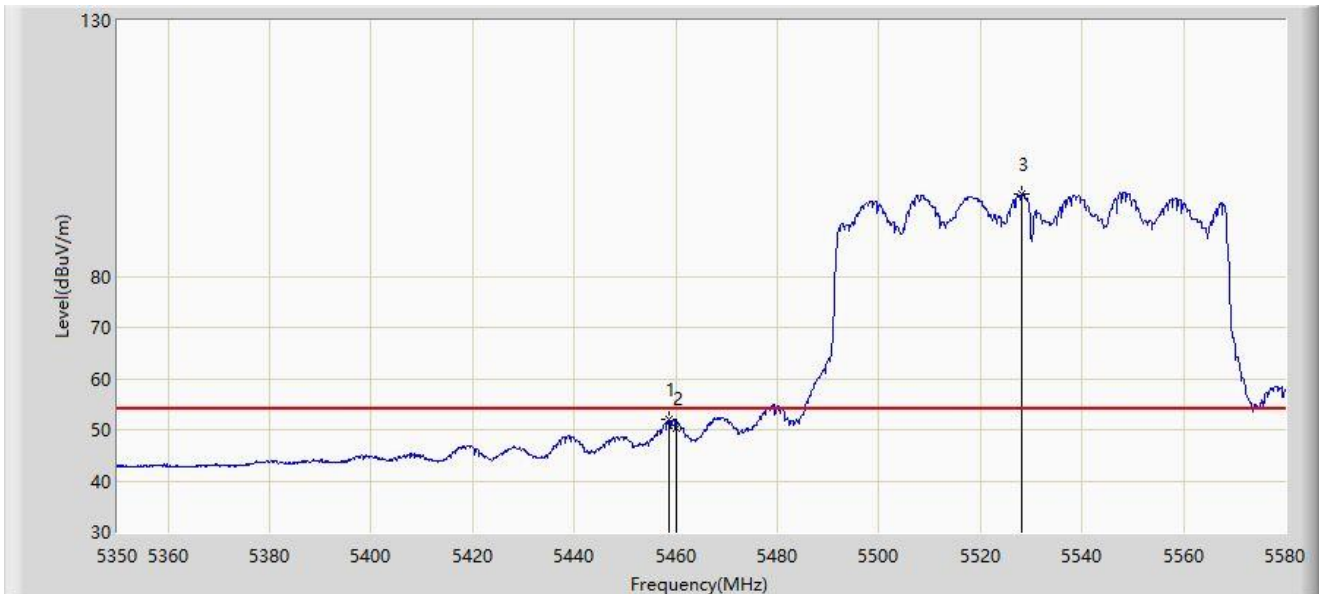


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5458.790        | 51.933                 | 48.310               | -2.067      | 54.000         | 3.623         | AV   |
| 2  |      | 5460.000        | 50.406                 | 46.776               | -3.594      | 54.000         | 3.630         | AV   |
| 3  |      | 5528.250        | 96.044                 | 92.449               | N/A         | N/A            | 3.596         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz    |                         |

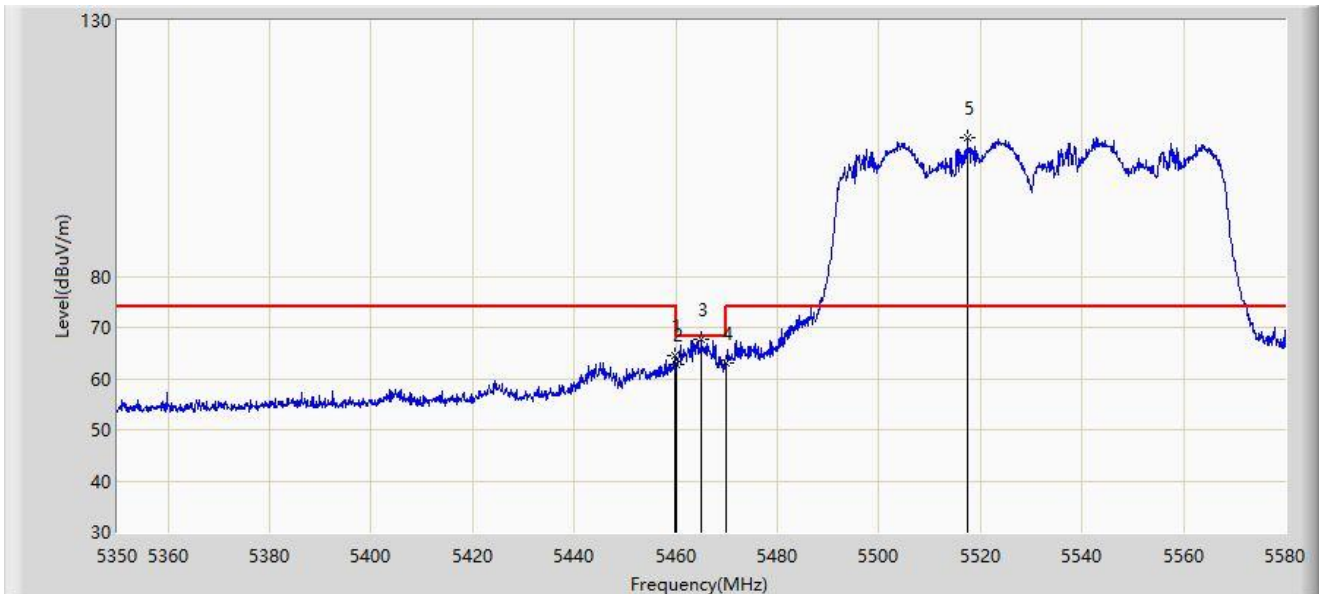


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5459.825        | 64.462                 | 60.833               | -9.538      | 74.000         | 3.629         | PK   |
| 2  |      | 5460.000        | 62.835                 | 59.205               | -11.165     | 74.000         | 3.630         | PK   |
| 3  | *    | 5465.115        | 67.815                 | 64.154               | -0.385      | 68.200         | 3.662         | PK   |
| 4  |      | 5470.000        | 63.160                 | 59.469               | -5.040      | 68.200         | 3.691         | PK   |
| 5  |      | 5517.440        | 106.988                | 103.277              | N/A         | N/A            | 3.711         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz    |                         |

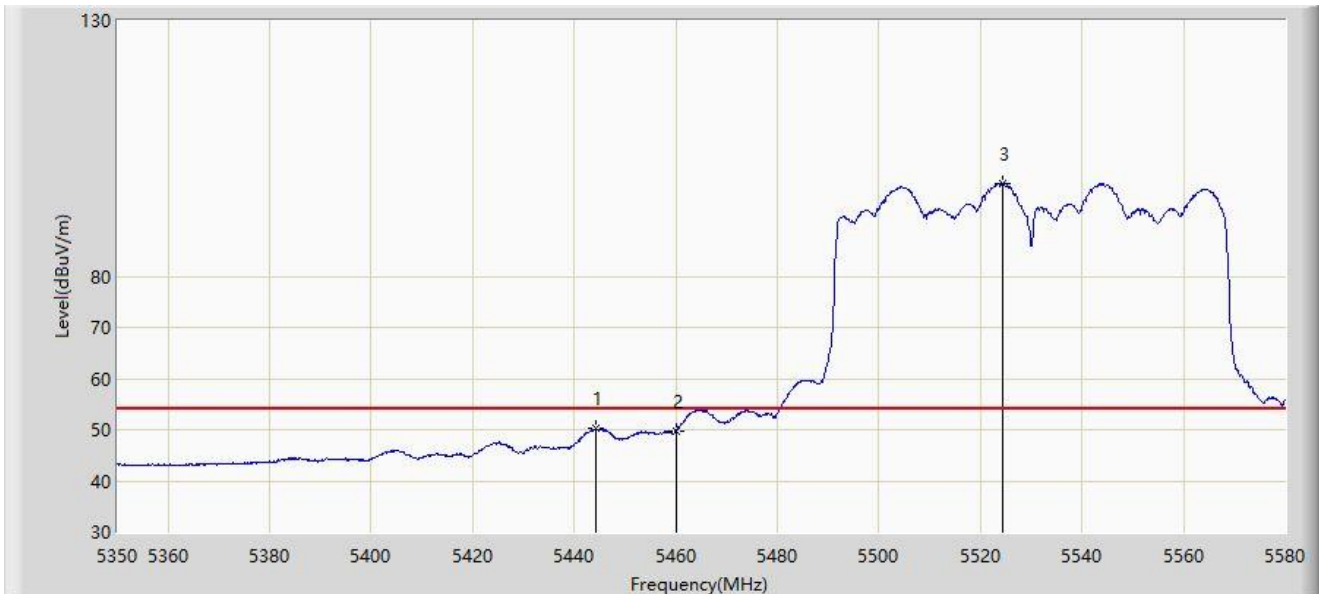

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5444.300        | 50.174                 | 46.627               | -3.826      | 54.000         | 3.547         | AV   |
| 2  |      | 5460.000        | 49.690                 | 46.060               | -4.310      | 54.000         | 3.630         | AV   |
| 3  |      | 5524.455        | 98.243                 | 94.608               | N/A         | N/A            | 3.635         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz    |                         |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5607.690        | 107.203                | 103.394              | N/A         | N/A            | 3.810         | PK   |
| 2  |      | 5725.000        | 54.578                 | 50.635               | -13.622     | 68.200         | 3.943         | PK   |
| 3  | *    | 5727.485        | 57.663                 | 53.700               | -10.537     | 68.200         | 3.963         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz    |                         |

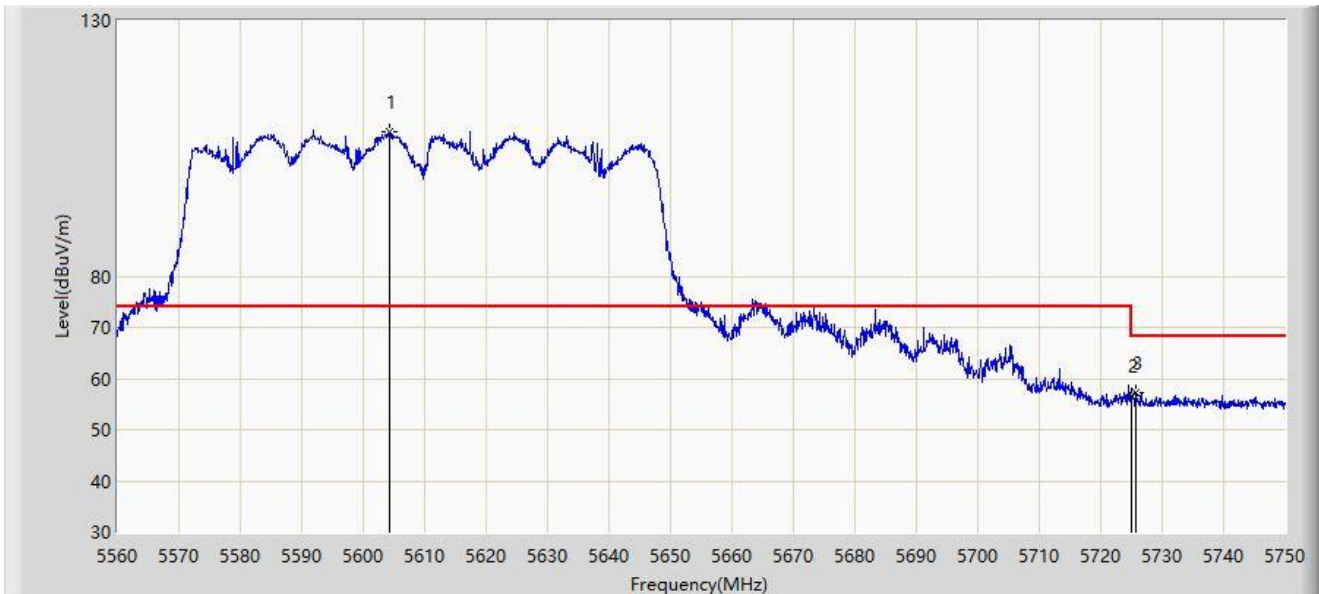


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5604.270        | 108.393                | 104.554              | N/A         | N/A            | 3.839         | PK   |
| 2  |      | 5725.000        | 56.530                 | 52.587               | -11.670     | 68.200         | 3.943         | PK   |
| 3  | *    | 5725.680        | 57.311                 | 53.366               | -10.889     | 68.200         | 3.945         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-20   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz    |                         |

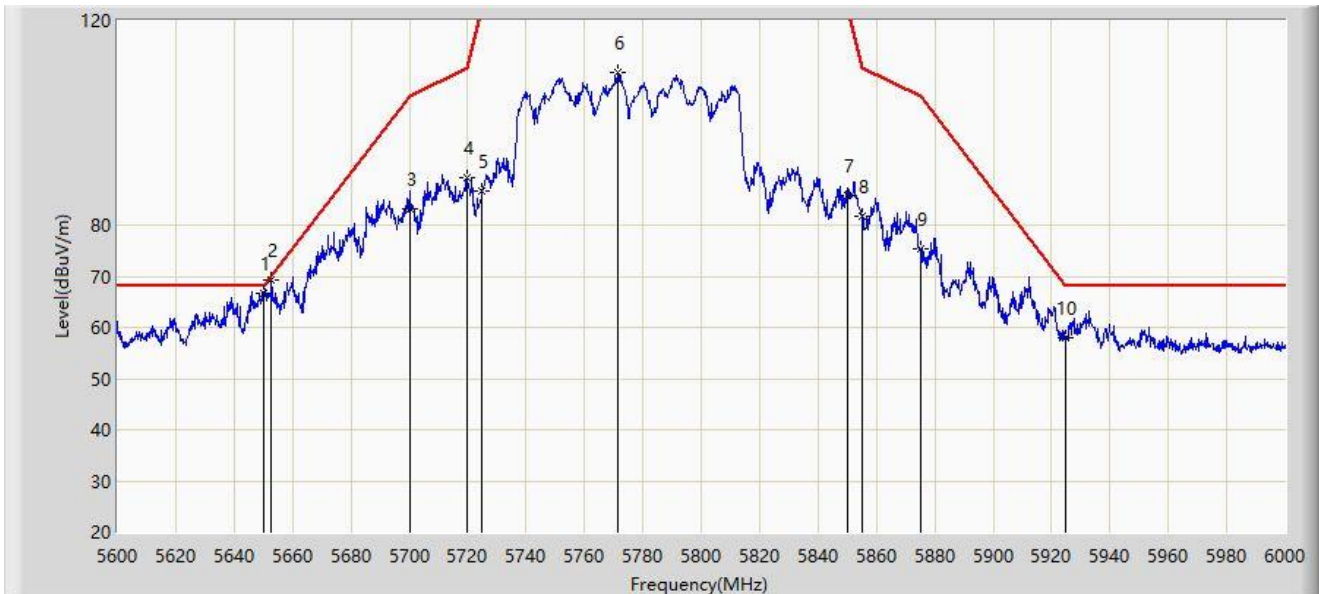


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5650.000        | 66.780                 | 62.866               | -1.420      | 68.200         | 3.914         | PK   |
| 2  | *    | 5652.800        | 69.154                 | 65.176               | -1.118      | 70.272         | 3.978         | PK   |
| 3  |      | 5700.000        | 83.152                 | 79.237               | -22.048     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 89.239                 | 85.310               | -21.561     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 86.729                 | 82.786               | -35.471     | 122.200        | 3.943         | PK   |
| 6  |      | 5771.600        | 109.833                | 105.643              | N/A         | N/A            | 4.190         | PK   |
| 7  |      | 5850.000        | 85.798                 | 81.354               | -36.402     | 122.200        | 4.444         | PK   |
| 8  |      | 5855.000        | 81.875                 | 77.475               | -28.925     | 110.800        | 4.400         | PK   |
| 9  |      | 5875.000        | 75.296                 | 70.985               | -29.904     | 105.200        | 4.312         | PK   |
| 10 |      | 5925.000        | 57.951                 | 53.320               | -10.249     | 68.200         | 4.630         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-20   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz    |                         |

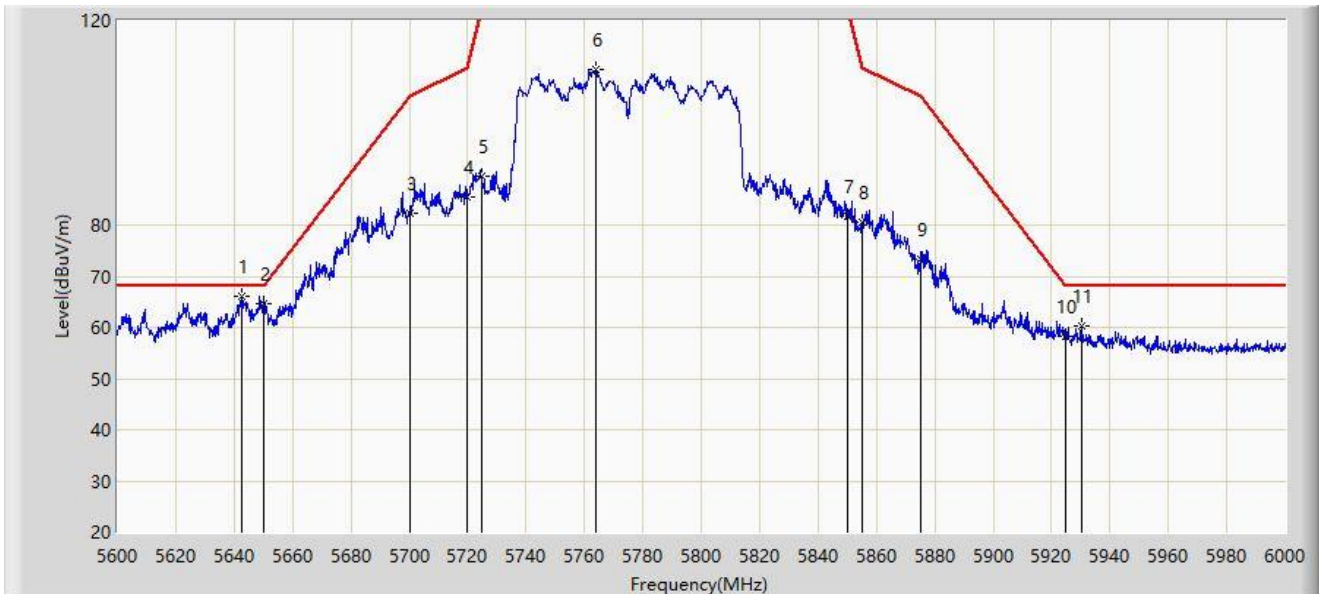


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5642.400        | 65.986                 | 62.247               | -2.214      | 68.200         | 3.739         | PK   |
| 2  |      | 5650.000        | 64.521                 | 60.607               | -3.679      | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 82.338                 | 78.423               | -22.862     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 85.528                 | 81.599               | -25.272     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 89.495                 | 85.552               | -32.705     | 122.200        | 3.943         | PK   |
| 6  |      | 5764.000        | 110.387                | 106.157              | N/A         | N/A            | 4.229         | PK   |
| 7  |      | 5850.000        | 81.875                 | 77.431               | -40.325     | 122.200        | 4.444         | PK   |
| 8  |      | 5855.000        | 80.445                 | 76.045               | -30.355     | 110.800        | 4.400         | PK   |
| 9  |      | 5875.000        | 73.373                 | 69.062               | -31.827     | 105.200        | 4.312         | PK   |
| 10 |      | 5925.000        | 58.195                 | 53.564               | -10.005     | 68.200         | 4.630         | PK   |
| 11 |      | 5930.200        | 60.345                 | 55.711               | -7.855      | 68.200         | 4.633         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz   |                         |

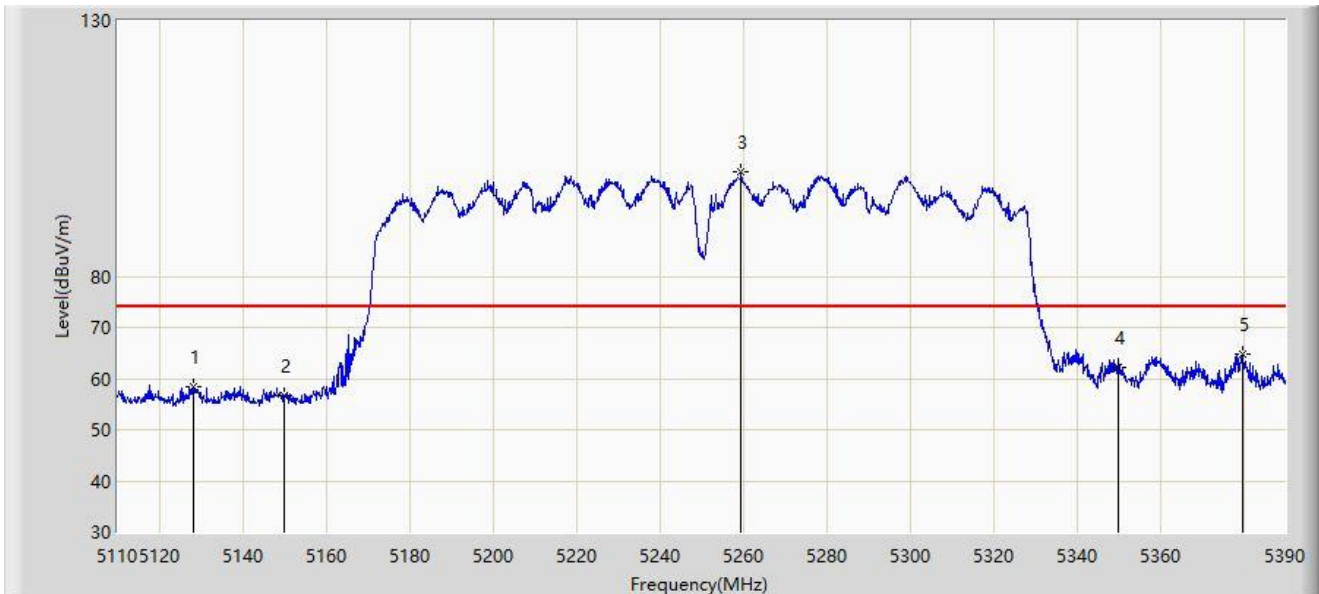


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5128.200        | 58.468                 | 54.922               | -15.532     | 74.000         | 3.547         | PK   |
| 2  |      | 5150.000        | 56.522                 | 52.881               | -17.478     | 74.000         | 3.641         | PK   |
| 3  |      | 5259.520        | 100.316                | 97.066               | N/A         | N/A            | 3.250         | PK   |
| 4  |      | 5350.000        | 62.187                 | 58.842               | -11.813     | 74.000         | 3.344         | PK   |
| 5  | *    | 5379.920        | 64.821                 | 61.320               | -9.179      | 74.000         | 3.501         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz   |                         |

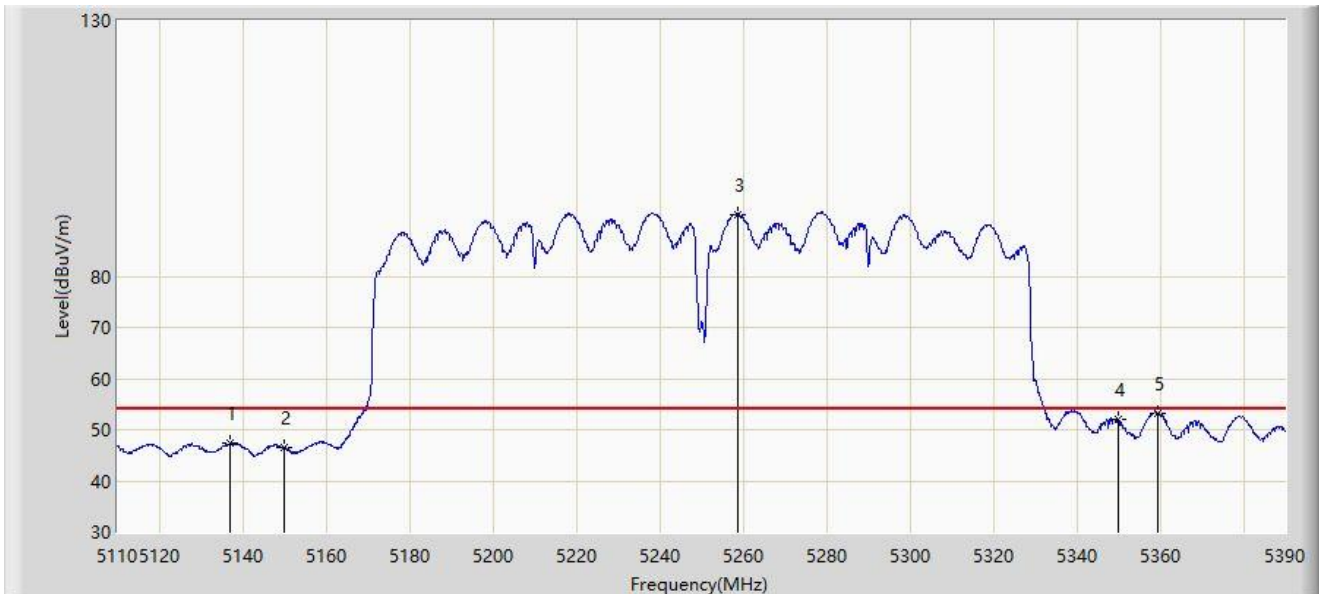


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5137.160        | 47.509                 | 43.892               | -6.491      | 54.000         | 3.616         | AV   |
| 2  |      | 5150.000        | 46.442                 | 42.801               | -7.558      | 54.000         | 3.641         | AV   |
| 3  |      | 5258.820        | 92.045                 | 88.789               | N/A         | N/A            | 3.256         | AV   |
| 4  |      | 5350.000        | 51.933                 | 48.588               | -2.067      | 54.000         | 3.344         | AV   |
| 5  | *    | 5359.340        | 53.158                 | 49.868               | -0.842      | 54.000         | 3.290         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz   |                         |

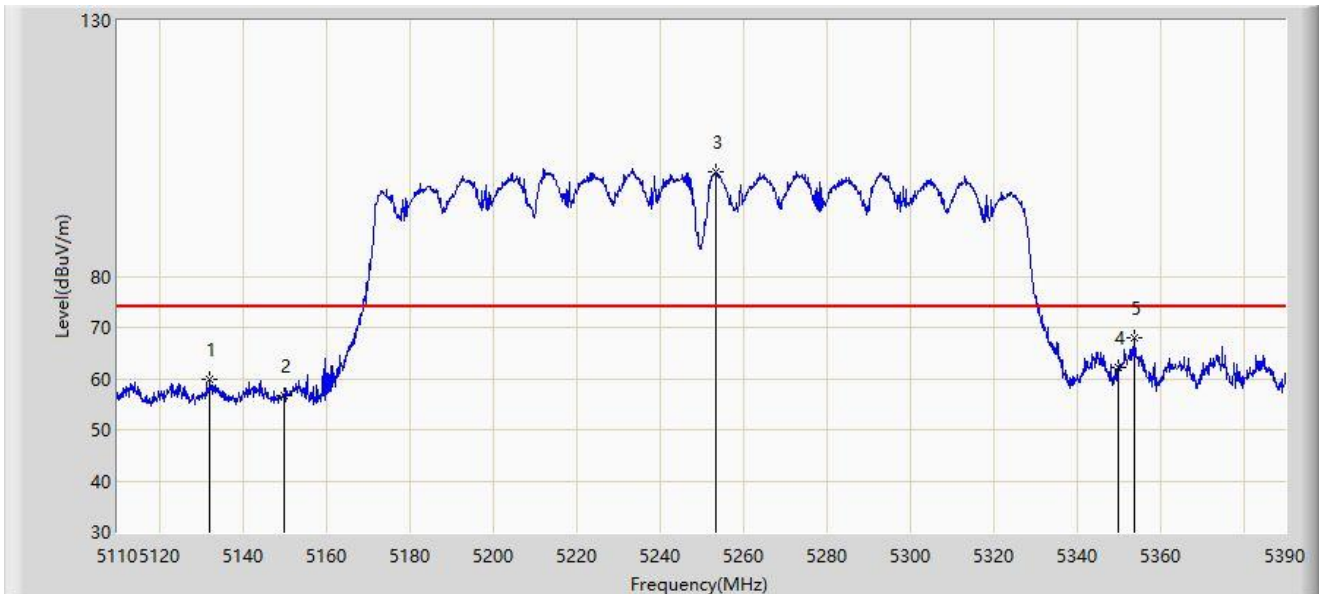


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5132.120        | 59.798                 | 56.206               | -14.202     | 74.000         | 3.592         | PK   |
| 2  |      | 5150.000        | 56.665                 | 53.024               | -17.335     | 74.000         | 3.641         | PK   |
| 3  |      | 5253.640        | 100.409                | 97.123               | N/A         | N/A            | 3.286         | PK   |
| 4  |      | 5350.000        | 62.194                 | 58.849               | -11.806     | 74.000         | 3.344         | PK   |
| 5  | *    | 5354.020        | 68.050                 | 64.745               | -5.950      | 74.000         | 3.304         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz   |                         |

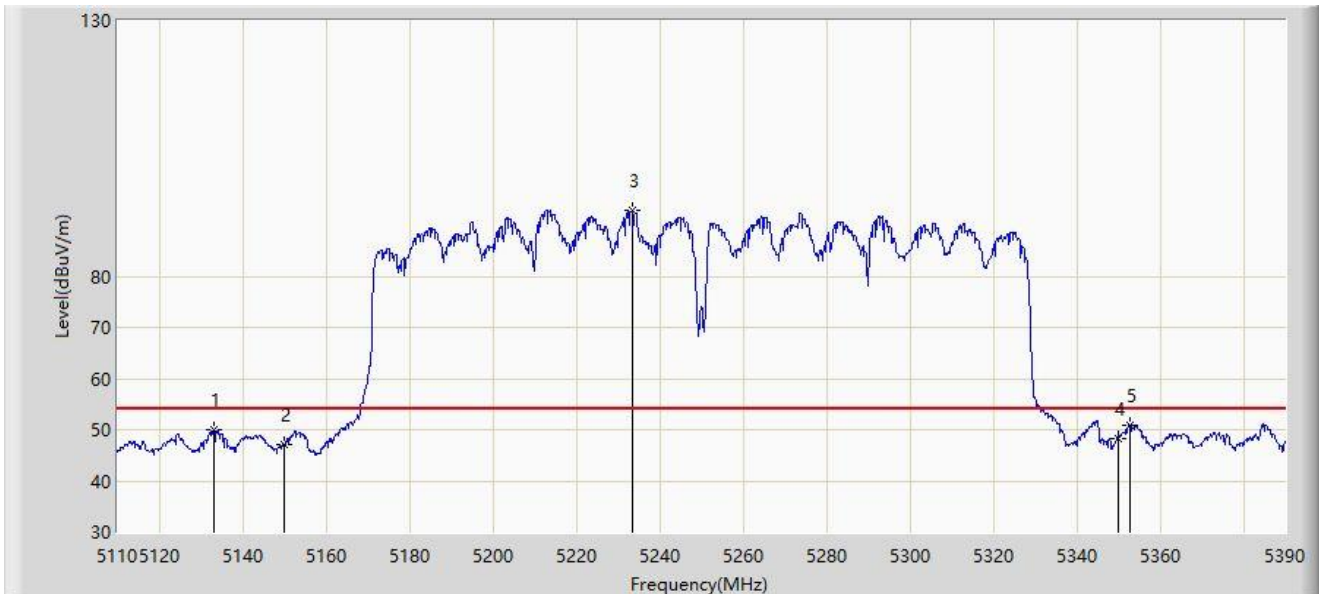


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5133.240        | 49.861                 | 46.258               | -4.139      | 54.000         | 3.603         | AV   |
| 2  |      | 5150.000        | 47.169                 | 43.528               | -6.831      | 54.000         | 3.641         | AV   |
| 3  |      | 5233.480        | 92.935                 | 89.559               | N/A         | N/A            | 3.375         | AV   |
| 4  |      | 5350.000        | 48.327                 | 44.982               | -5.673      | 54.000         | 3.344         | AV   |
| 5  | *    | 5352.760        | 50.822                 | 47.513               | -3.178      | 54.000         | 3.309         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz   |                         |

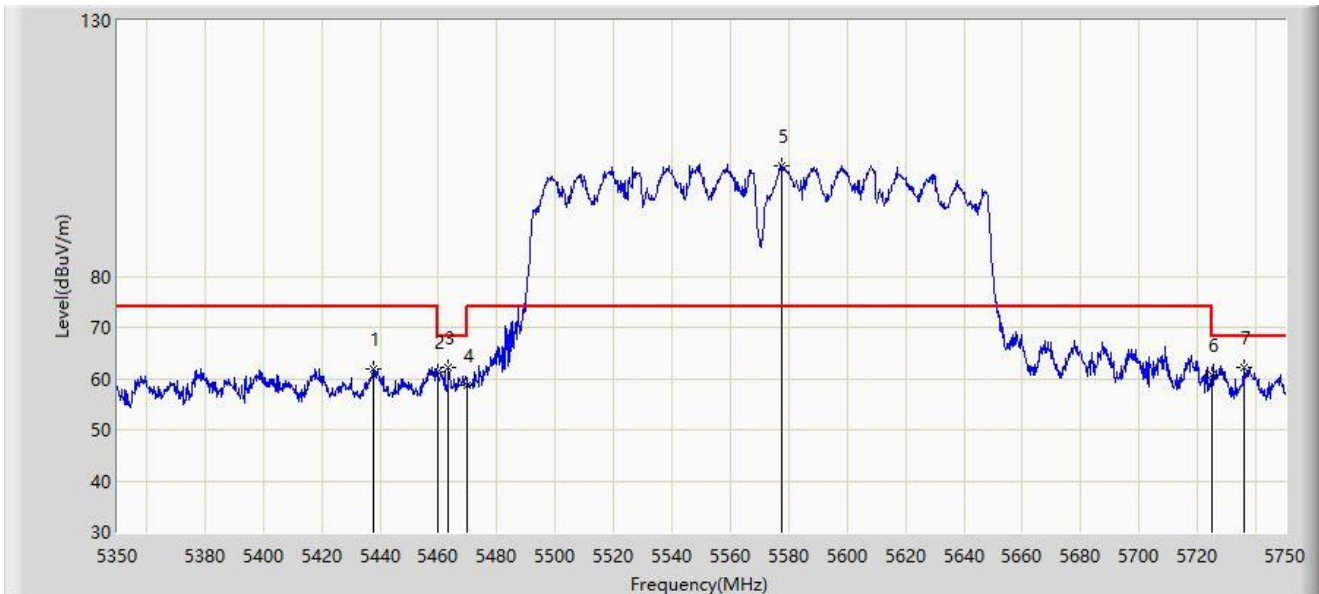


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5437.600        | 61.880                 | 58.341               | -12.120     | 74.000         | 3.539         | PK   |
| 2  |      | 5460.000        | 61.186                 | 57.556               | -12.814     | 74.000         | 3.630         | PK   |
| 3  |      | 5463.400        | 62.208                 | 58.557               | -5.992      | 68.200         | 3.651         | PK   |
| 4  |      | 5470.000        | 58.793                 | 55.102               | -9.407      | 68.200         | 3.691         | PK   |
| 5  |      | 5577.800        | 101.545                | 97.705               | N/A         | N/A            | 3.840         | PK   |
| 6  |      | 5725.000        | 60.693                 | 56.750               | -7.507      | 68.200         | 3.943         | PK   |
| 7  | *    | 5736.000        | 62.244                 | 58.173               | -5.956      | 68.200         | 4.072         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz   |                         |

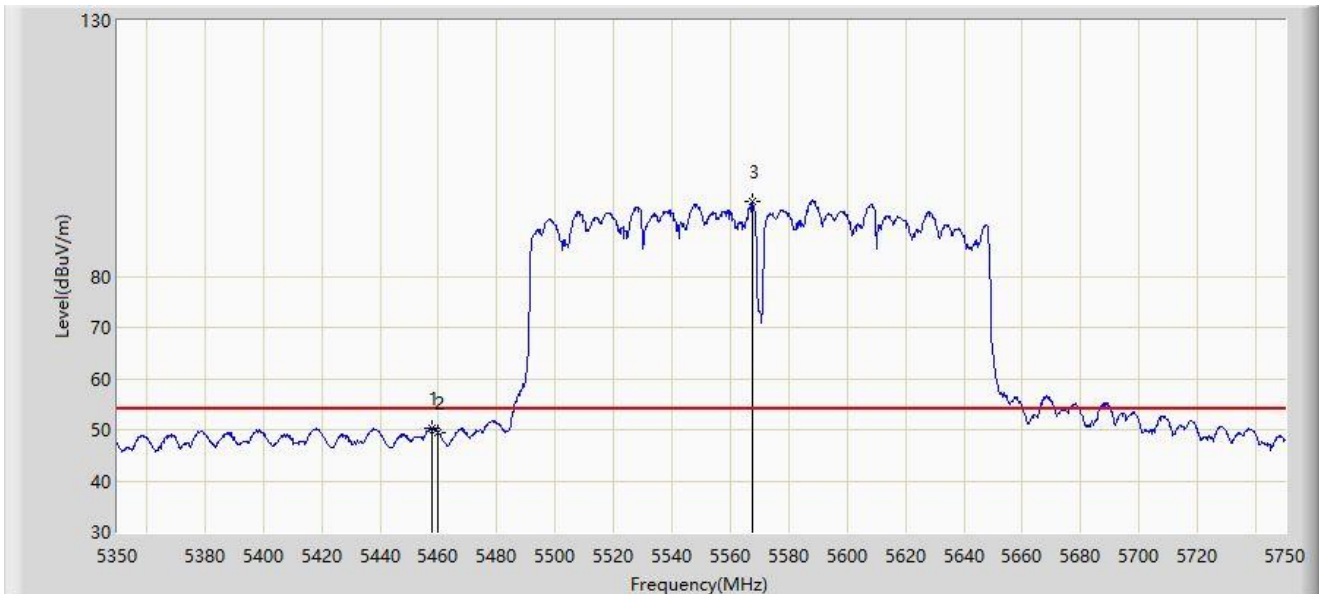


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5457.600        | 50.422                 | 46.806               | -3.578      | 54.000         | 3.615         | AV   |
| 2  |      | 5460.000        | 49.309                 | 45.679               | -4.691      | 54.000         | 3.630         | AV   |
| 3  |      | 5567.400        | 94.622                 | 90.822               | N/A         | N/A            | 3.800         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz   |                         |

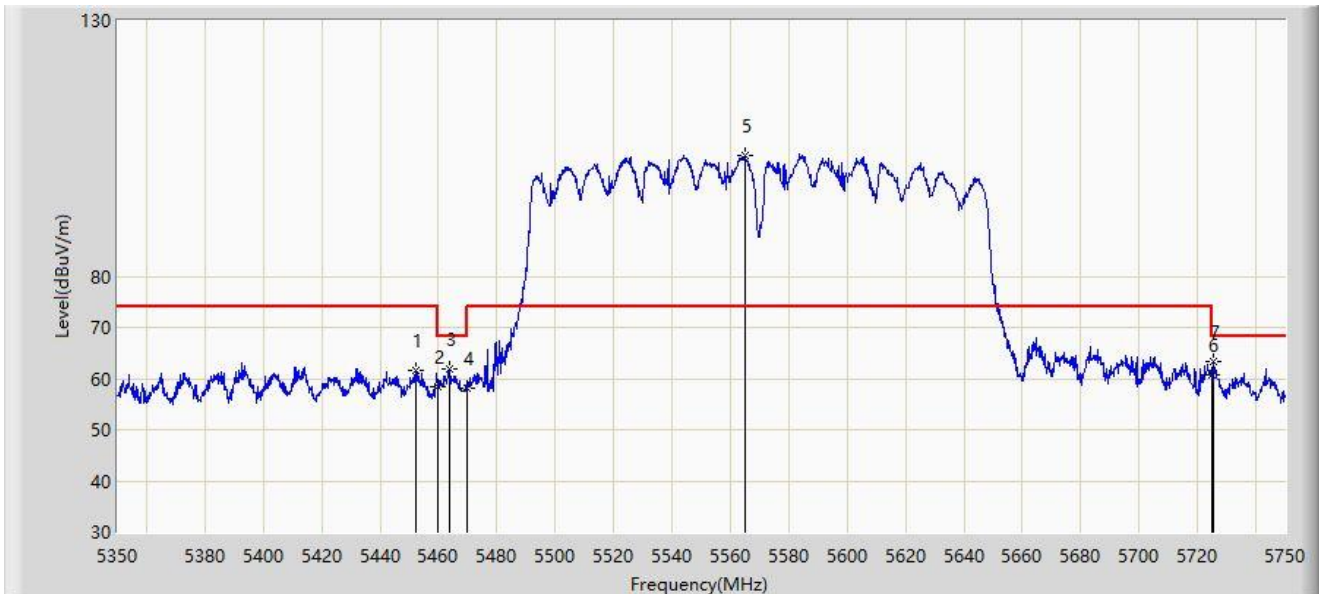


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5452.400        | 61.655                 | 58.099               | -12.345     | 74.000         | 3.556         | PK   |
| 2  |      | 5460.000        | 58.270                 | 54.640               | -15.730     | 74.000         | 3.630         | PK   |
| 3  |      | 5464.000        | 61.774                 | 58.119               | -6.426      | 68.200         | 3.655         | PK   |
| 4  |      | 5470.000        | 58.085                 | 54.394               | -10.115     | 68.200         | 3.691         | PK   |
| 5  |      | 5565.000        | 103.747                | 99.967               | N/A         | N/A            | 3.780         | PK   |
| 6  |      | 5725.000        | 60.656                 | 56.713               | -7.544      | 68.200         | 3.943         | PK   |
| 7  | *    | 5725.200        | 63.380                 | 59.436               | -4.820      | 68.200         | 3.944         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-23   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz   |                         |

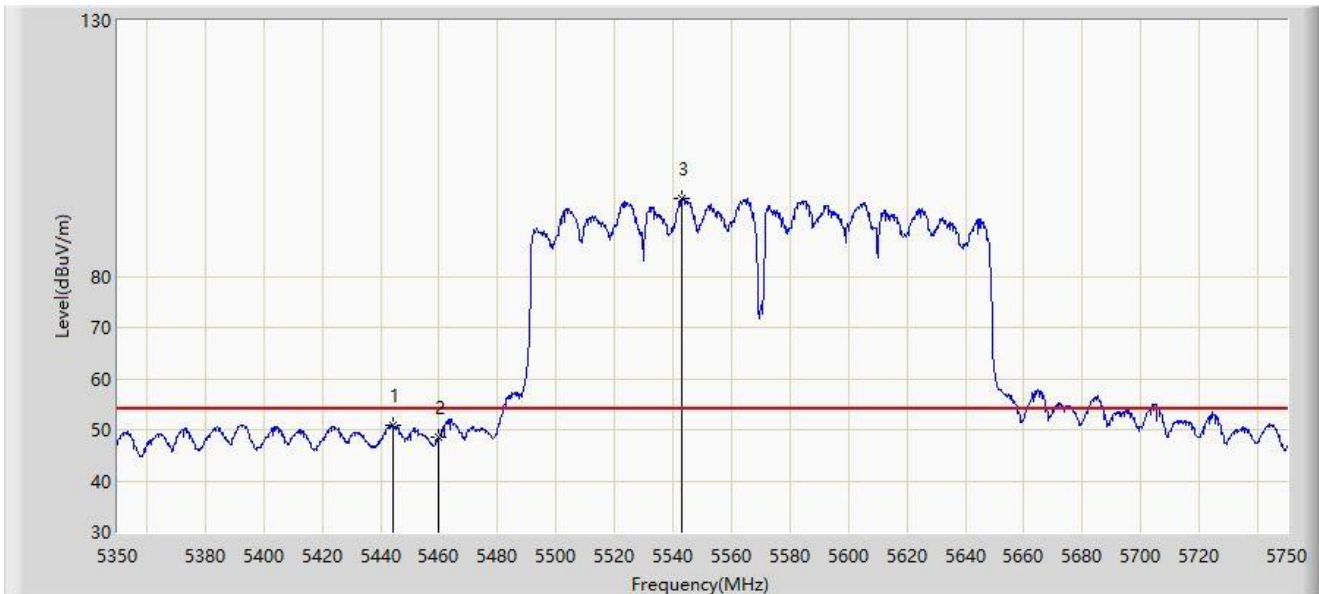


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5444.200        | 50.995                 | 47.448               | -3.005      | 54.000         | 3.546         | AV   |
| 2  |      | 5460.000        | 48.482                 | 44.852               | -5.518      | 54.000         | 3.630         | AV   |
| 3  |      | 5543.000        | 95.200                 | 91.543               | N/A         | N/A            | 3.657         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5180MHz     |                         |

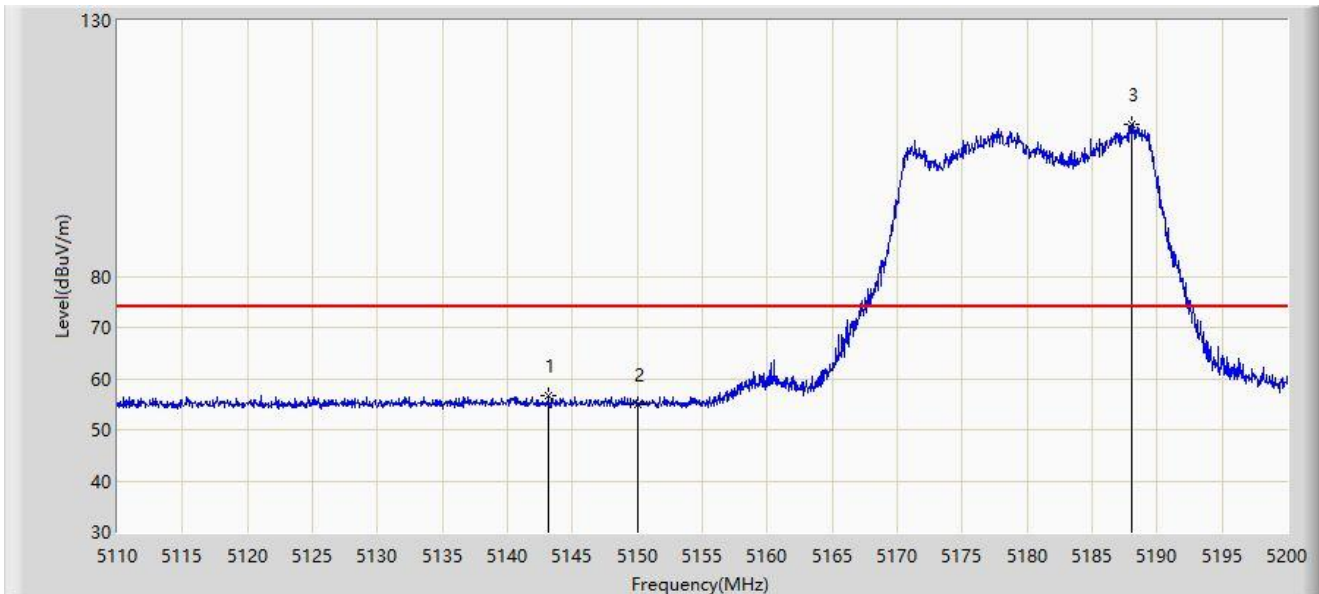


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5143.165        | 56.643                 | 53.008               | -17.357     | 74.000         | 3.634         | PK   |
| 2  |      | 5150.000        | 55.063                 | 51.422               | -18.937     | 74.000         | 3.641         | PK   |
| 3  |      | 5188.030        | 109.789                | 106.437              | N/A         | N/A            | 3.352         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5180MHz     |                         |

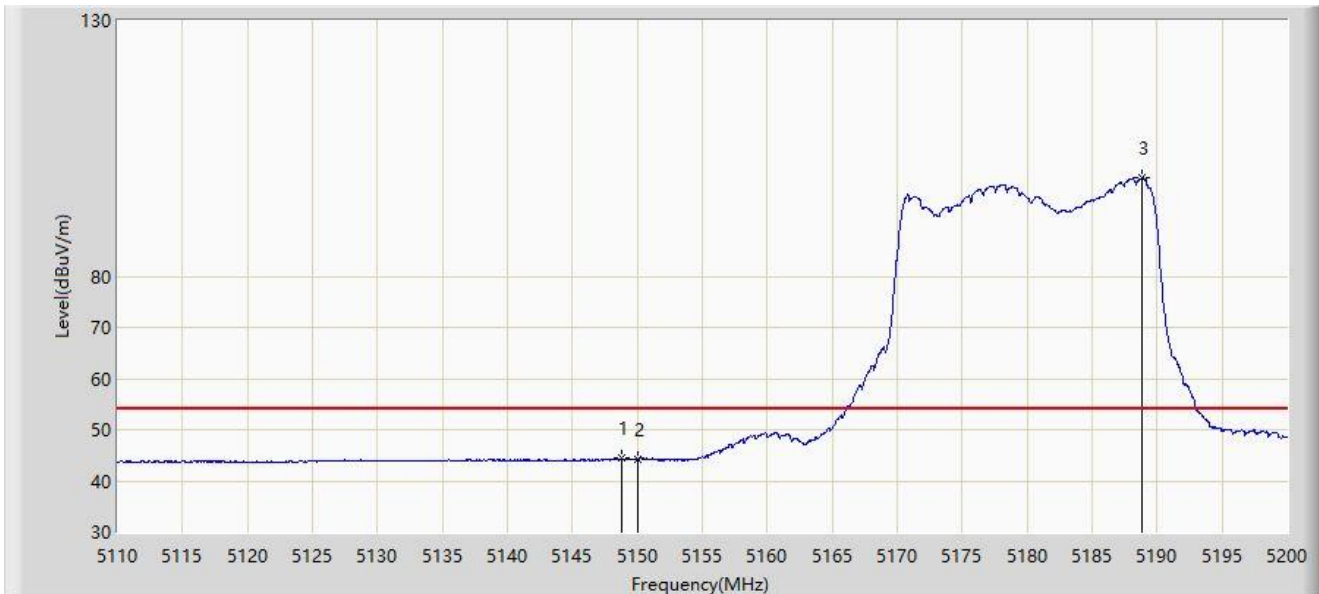


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.745        | 44.396                 | 40.750               | -9.604      | 54.000         | 3.647         | AV   |
| 2  |      | 5150.000        | 44.213                 | 40.572               | -9.787      | 54.000         | 3.641         | AV   |
| 3  |      | 5188.885        | 99.142                 | 95.795               | N/A         | N/A            | 3.346         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5180MHz     |                         |

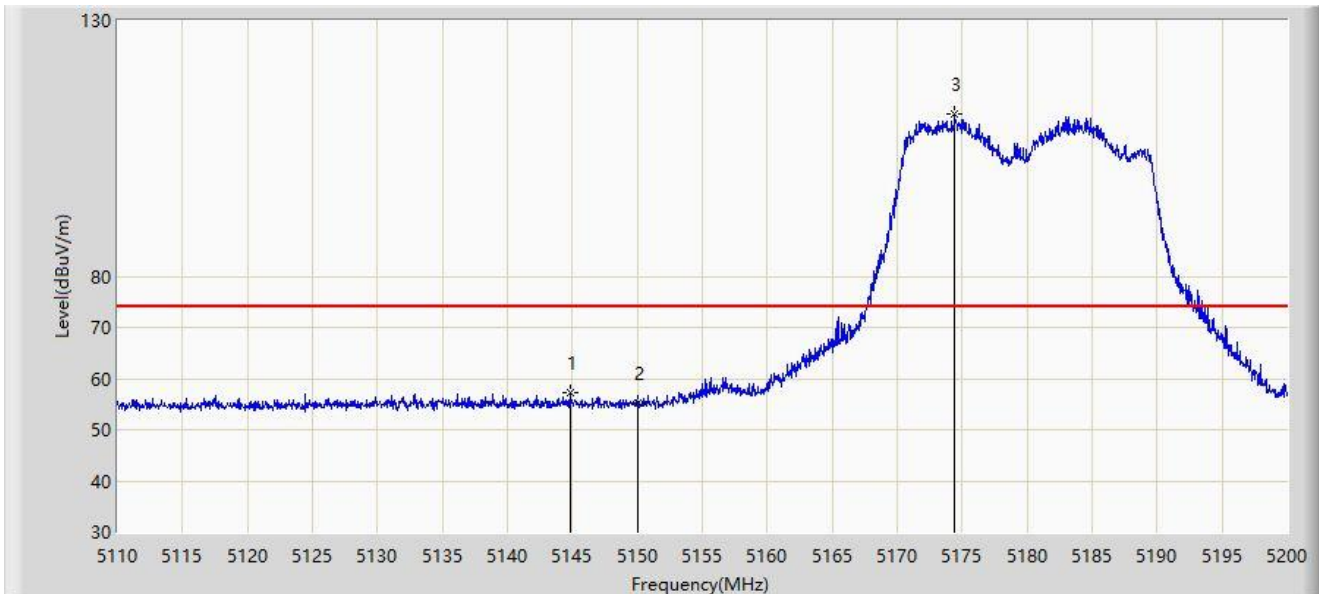


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5144.830        | 57.137                 | 53.497               | -16.863     | 74.000         | 3.640         | PK   |
| 2  |      | 5150.000        | 55.356                 | 51.715               | -18.644     | 74.000         | 3.641         | PK   |
| 3  |      | 5174.440        | 111.817                | 108.476              | N/A         | N/A            | 3.341         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5180MHz     |                         |

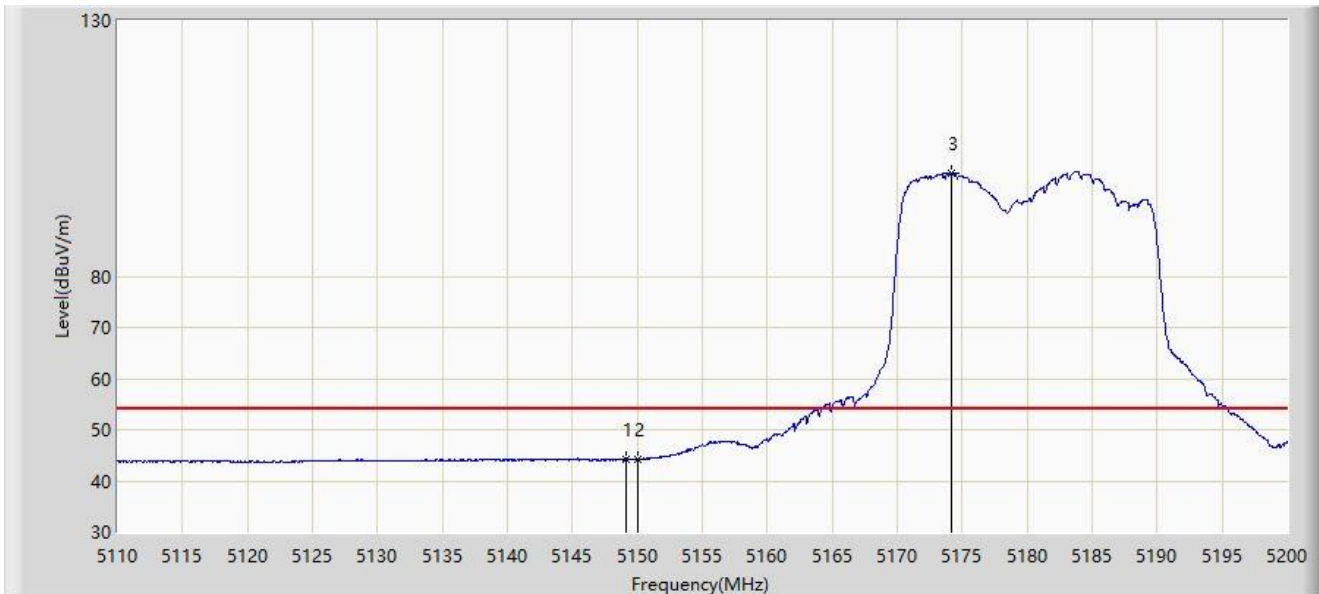


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.105        | 44.344                 | 40.699               | -9.656      | 54.000         | 3.644         | AV   |
| 2  |      | 5150.000        | 44.313                 | 40.672               | -9.687      | 54.000         | 3.641         | AV   |
| 3  |      | 5174.215        | 100.213                | 96.872               | N/A         | N/A            | 3.341         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5320MHz     |                         |

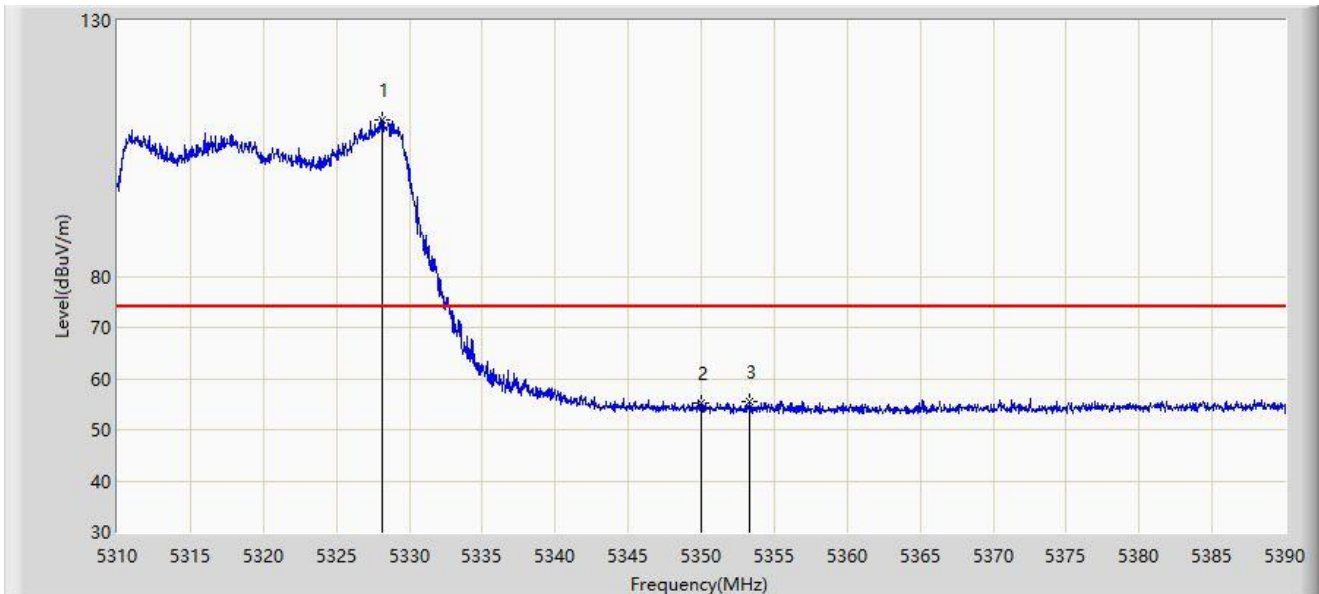


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5328.160        | 110.554                | 107.143              | N/A         | N/A            | 3.411         | PK   |
| 2  |      | 5350.000        | 55.270                 | 51.925               | -18.730     | 74.000         | 3.344         | PK   |
| 3  | *    | 5353.320        | 55.433                 | 52.126               | -18.567     | 74.000         | 3.307         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5320MHz     |                         |

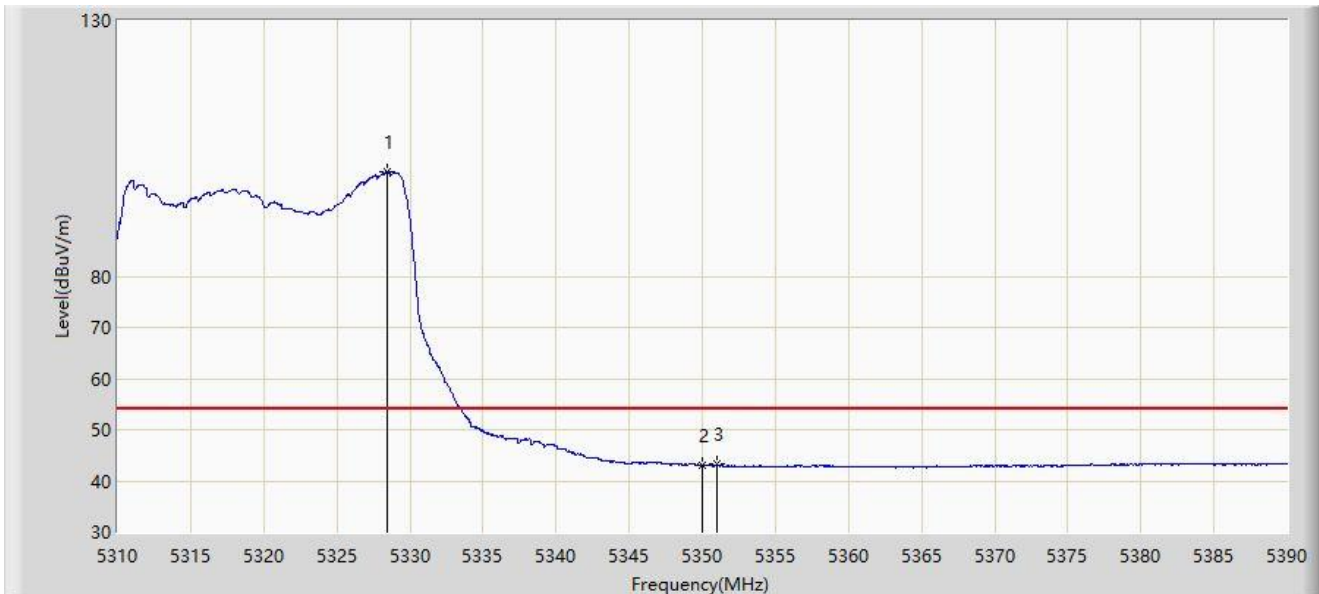


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5328.480        | 100.489                | 97.078               | N/A         | N/A            | 3.412         | AV   |
| 2  |      | 5350.000        | 43.068                 | 39.723               | -10.932     | 54.000         | 3.344         | AV   |
| 3  | *    | 5351.040        | 43.245                 | 39.918               | -10.755     | 54.000         | 3.327         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5320MHz     |                         |

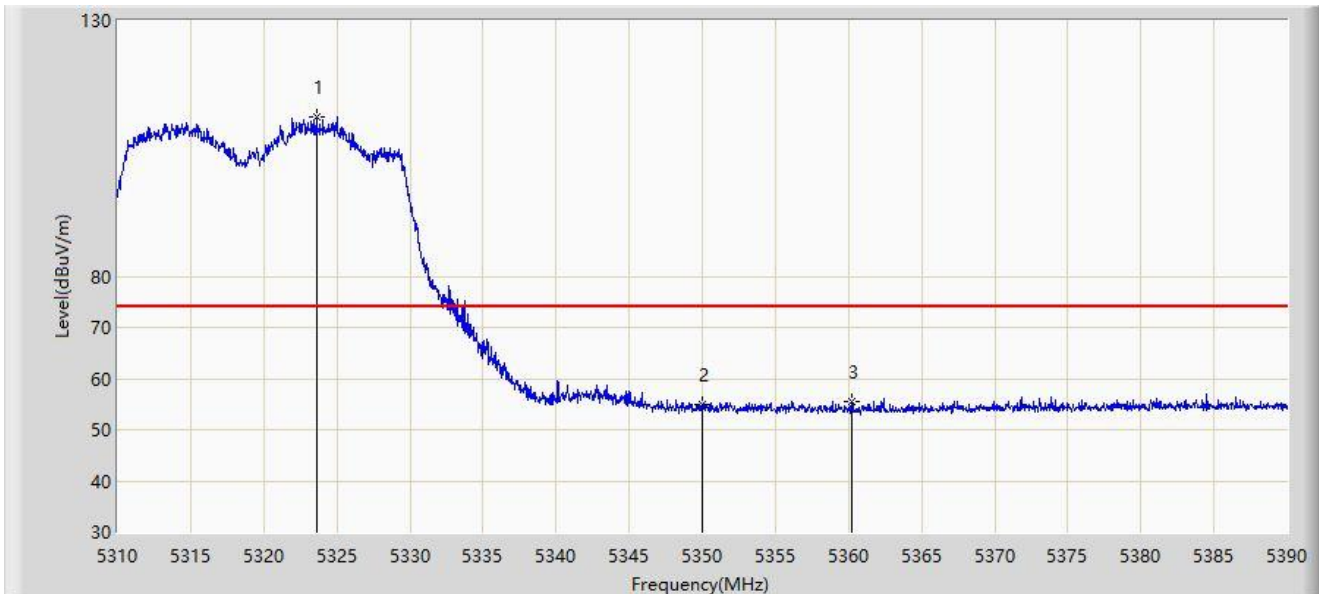


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5323.600        | 111.263                | 107.857              | N/A         | N/A            | 3.406         | PK   |
| 2  |      | 5350.000        | 54.898                 | 51.553               | -19.102     | 74.000         | 3.344         | PK   |
| 3  | *    | 5360.200        | 55.641                 | 52.354               | -18.359     | 74.000         | 3.287         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5320MHz     |                         |

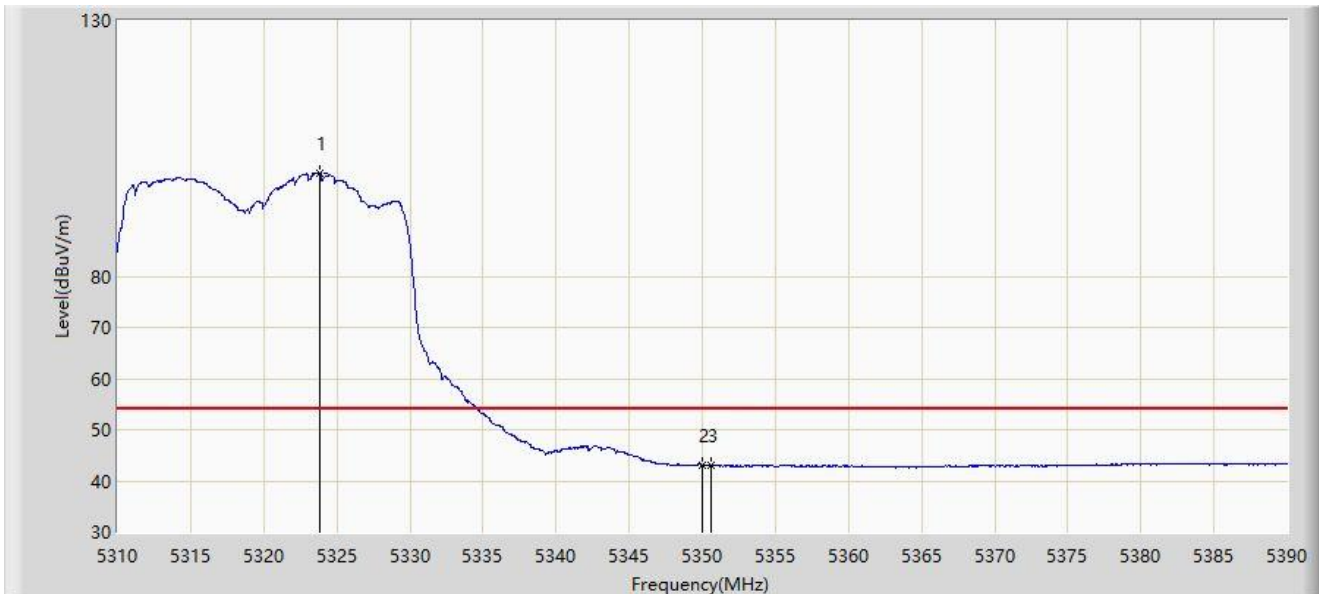


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5323.880        | 100.163                | 96.757               | N/A         | N/A            | 3.407         | AV   |
| 2  |      | 5350.000        | 43.107                 | 39.762               | -10.893     | 54.000         | 3.344         | AV   |
| 3  | *    | 5350.560        | 43.120                 | 39.785               | -10.880     | 54.000         | 3.335         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5500MHz     |                         |

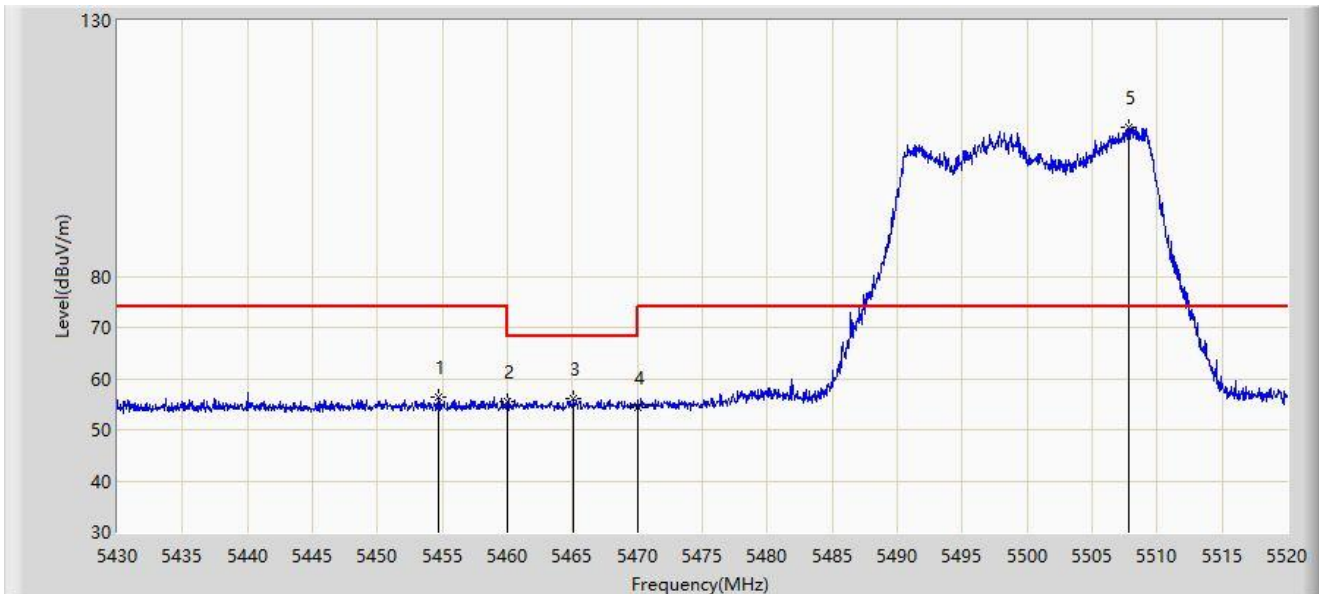


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5454.660        | 56.495                 | 52.925               | -17.505     | 74.000         | 3.570         | PK   |
| 2  |      | 5460.000        | 55.443                 | 51.813               | -18.557     | 74.000         | 3.630         | PK   |
| 3  | *    | 5465.100        | 56.231                 | 52.570               | -11.969     | 68.200         | 3.662         | PK   |
| 4  |      | 5470.000        | 54.303                 | 50.612               | -13.897     | 68.200         | 3.691         | PK   |
| 5  |      | 5507.805        | 109.113                | 105.300              | N/A         | N/A            | 3.813         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5500MHz     |                         |

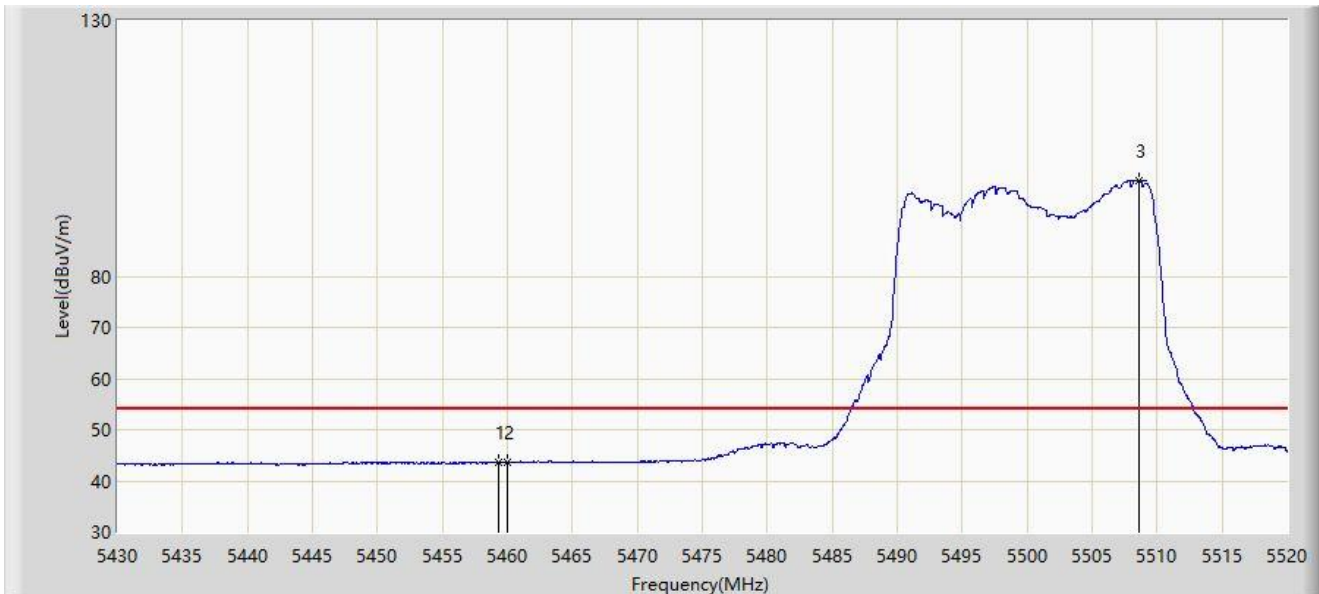


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5459.340        | 43.749                 | 40.123               | -10.251     | 54.000         | 3.626         | AV   |
| 2  |      | 5460.000        | 43.617                 | 39.987               | -10.383     | 54.000         | 3.630         | AV   |
| 3  |      | 5508.615        | 98.823                 | 95.018               | N/A         | N/A            | 3.806         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5500MHz     |                         |

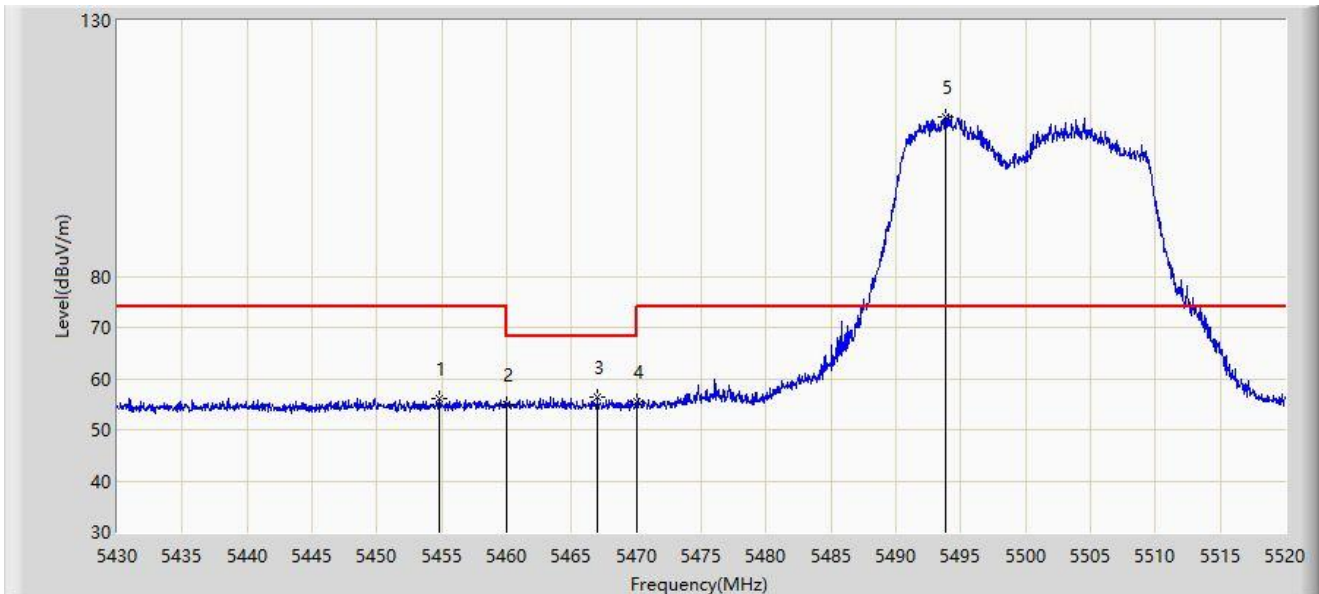


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5454.795        | 56.086                 | 52.513               | -17.914     | 74.000         | 3.573         | PK   |
| 2  |      | 5460.000        | 54.999                 | 51.369               | -19.001     | 74.000         | 3.630         | PK   |
| 3  | *    | 5466.990        | 56.328                 | 52.655               | -11.872     | 68.200         | 3.673         | PK   |
| 4  |      | 5470.000        | 55.559                 | 51.868               | -12.641     | 68.200         | 3.691         | PK   |
| 5  |      | 5493.810        | 111.260                | 107.316              | N/A         | N/A            | 3.944         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5500MHz     |                         |

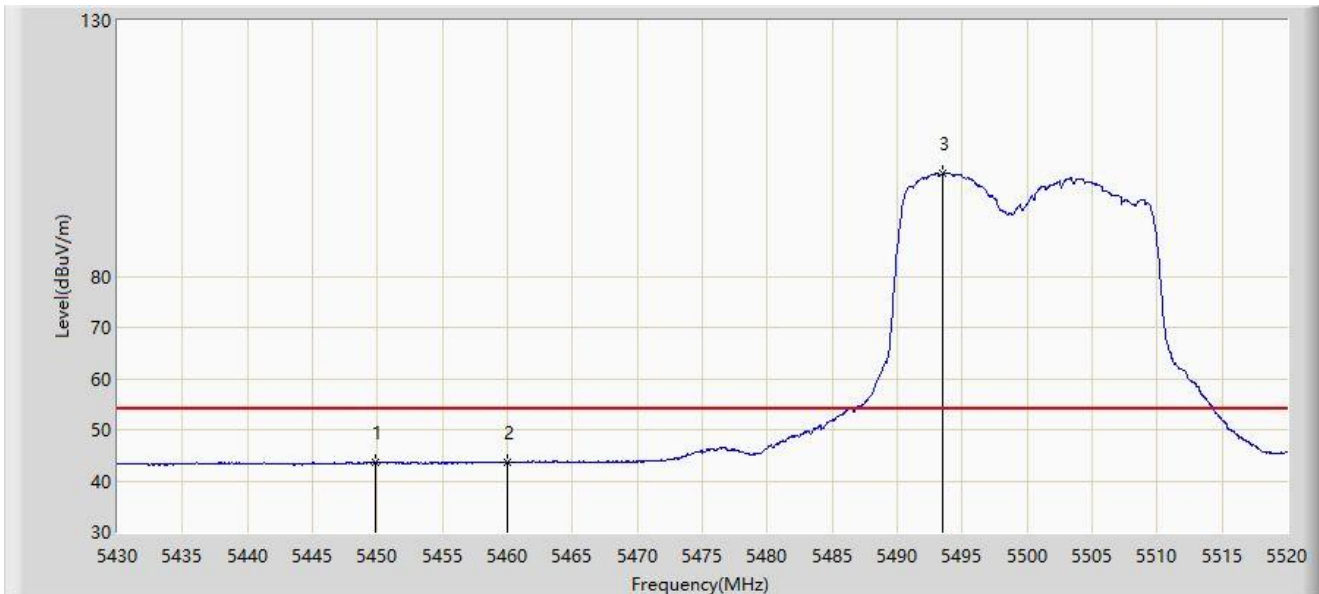


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5449.800        | 43.734                 | 40.181               | -10.266     | 54.000         | 3.553         | AV   |
| 2  |      | 5460.000        | 43.669                 | 40.039               | -10.331     | 54.000         | 3.630         | AV   |
| 3  |      | 5493.495        | 100.082                | 96.135               | N/A         | N/A            | 3.947         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5700MHz     |                         |

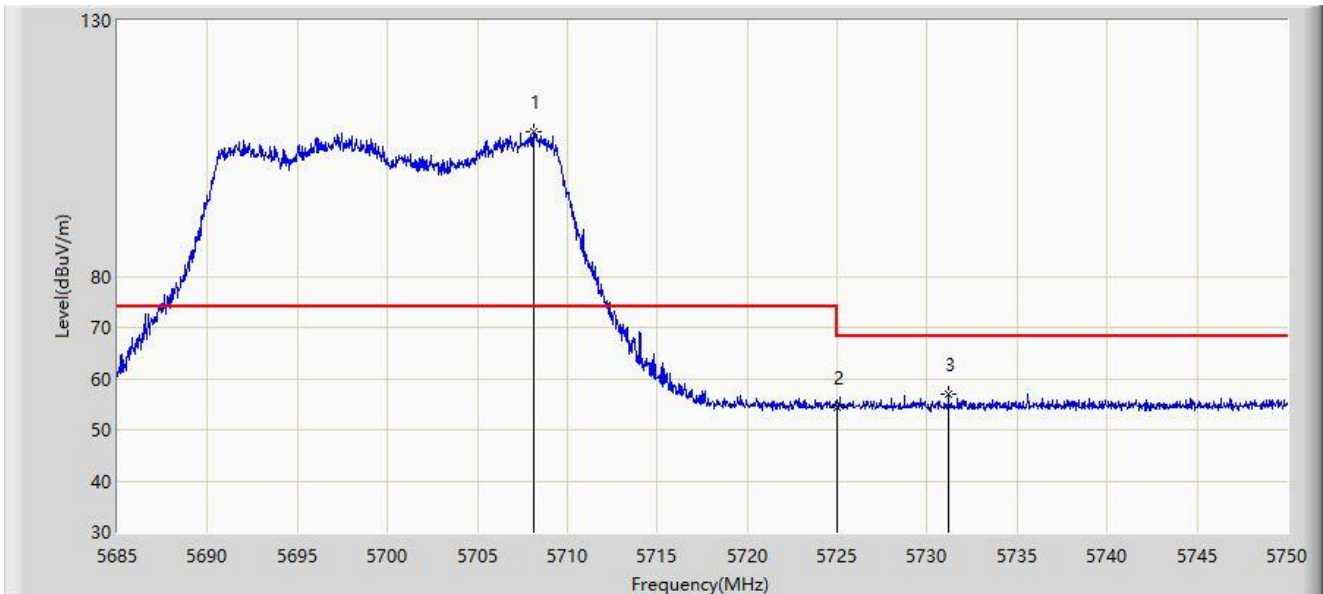


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5708.172        | 108.245                | 104.345              | N/A         | N/A            | 3.901         | PK   |
| 2  |      | 5725.000        | 54.435                 | 50.492               | -13.765     | 68.200         | 3.943         | PK   |
| 3  | *    | 5731.183        | 56.871                 | 52.861               | -11.329     | 68.200         | 4.010         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5700MHz     |                         |

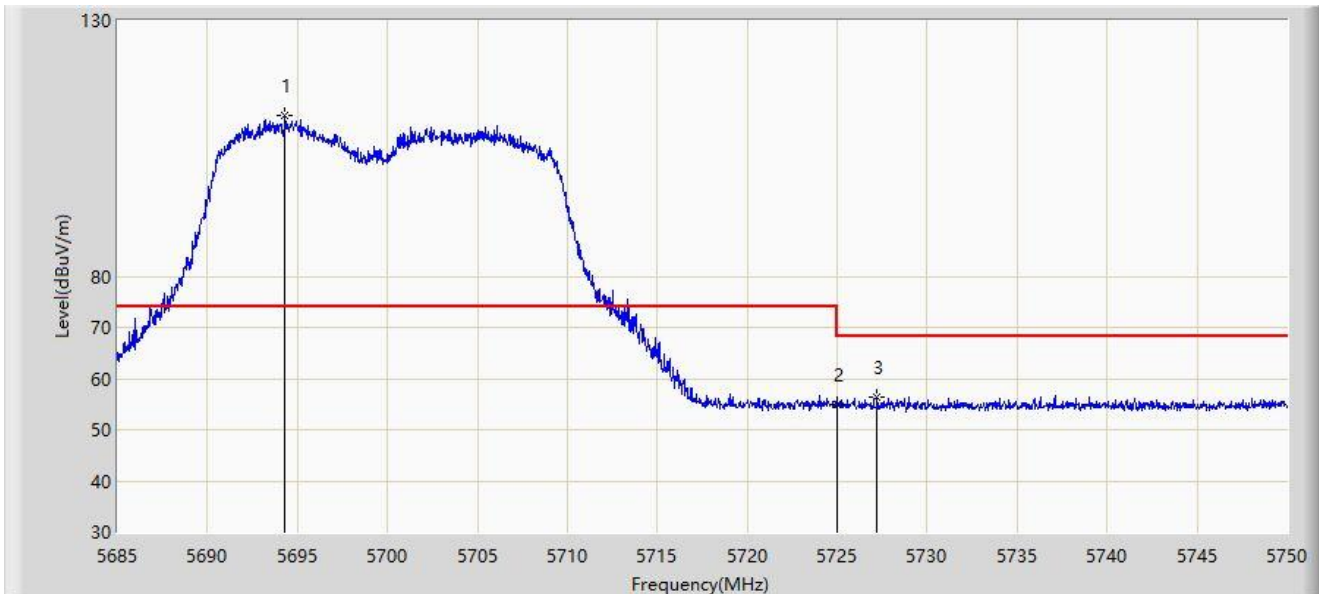


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5694.295        | 111.488                | 107.562              | N/A         | N/A            | 3.926         | PK   |
| 2  |      | 5725.000        | 55.027                 | 51.084               | -13.173     | 68.200         | 3.943         | PK   |
| 3  | *    | 5727.217        | 56.350                 | 52.390               | -11.850     | 68.200         | 3.960         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5745MHz     |                         |

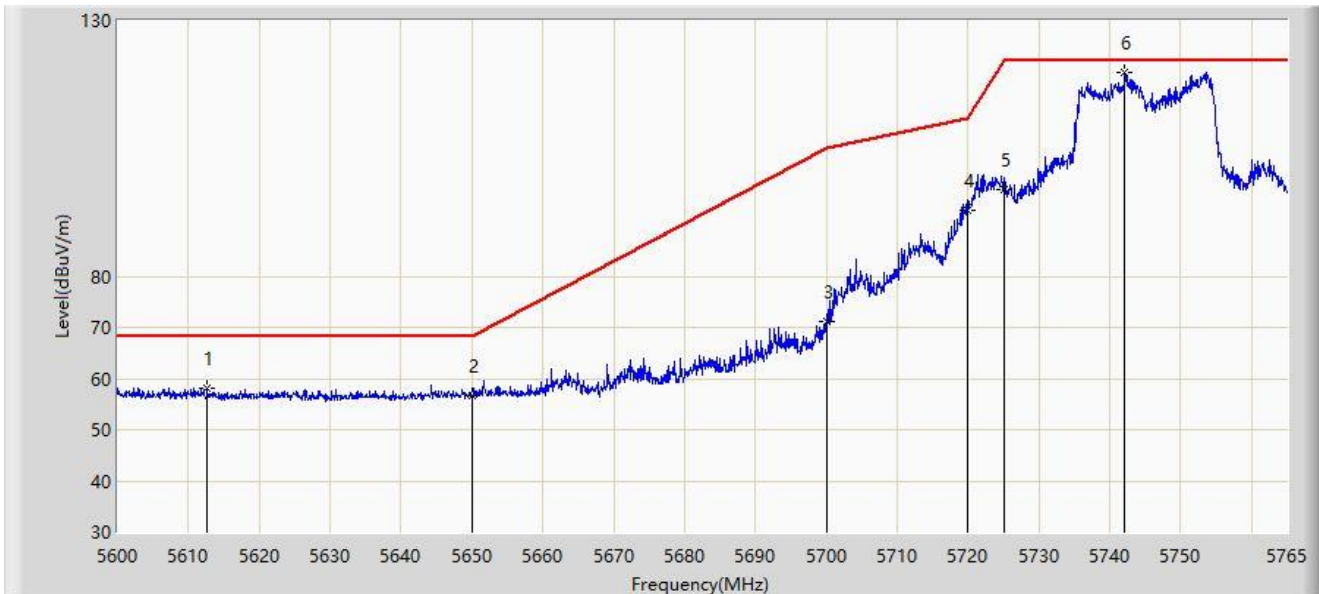


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5612.705        | 58.239                 | 54.461               | -9.961      | 68.200         | 3.777         | PK   |
| 2  |      | 5650.000        | 56.781                 | 52.867               | -11.419     | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 71.206                 | 67.291               | -33.994     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 92.878                 | 88.949               | -17.922     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 96.875                 | 92.932               | -25.325     | 122.200        | 3.943         | PK   |
| 6  |      | 5742.065        | 119.769                | 115.621              | N/A         | N/A            | 4.148         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5745MHz     |                         |

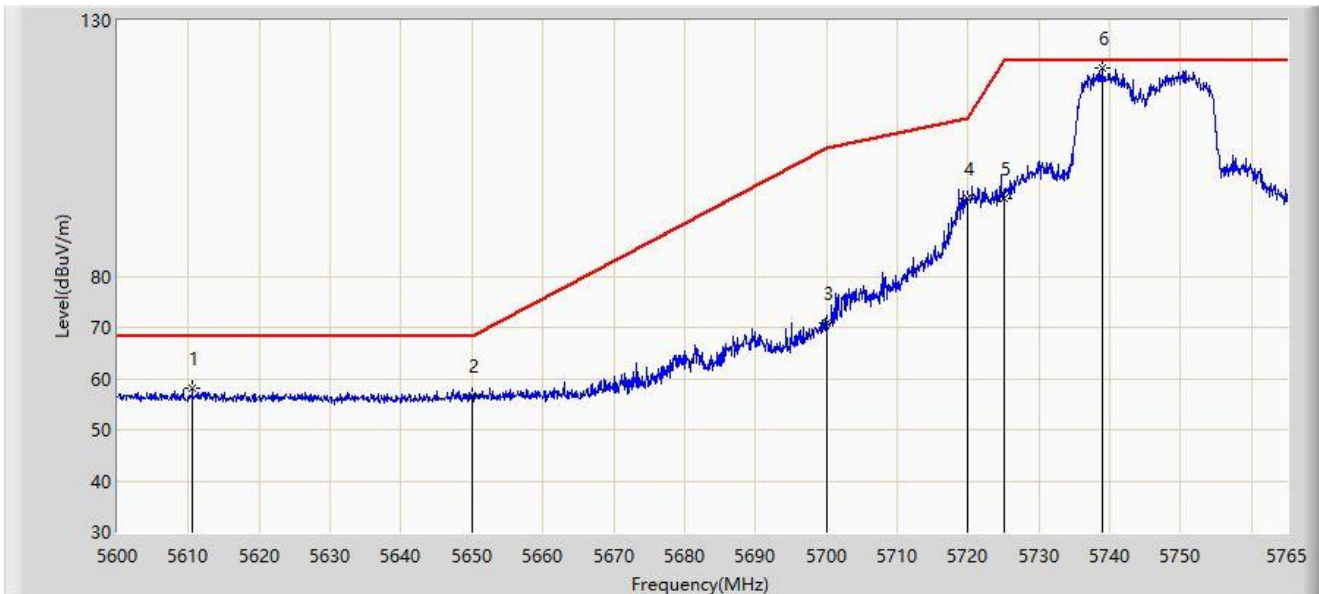


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5610.560        | 58.083                 | 54.292               | -10.117     | 68.200         | 3.791         | PK   |
| 2  |      | 5650.000        | 56.677                 | 52.763               | -11.523     | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 70.866                 | 66.951               | -34.334     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 95.134                 | 91.205               | -15.666     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 95.279                 | 91.336               | -26.921     | 122.200        | 3.943         | PK   |
| 6  |      | 5738.848        | 120.681                | 116.573              | N/A         | N/A            | 4.108         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5825MHz     |                         |

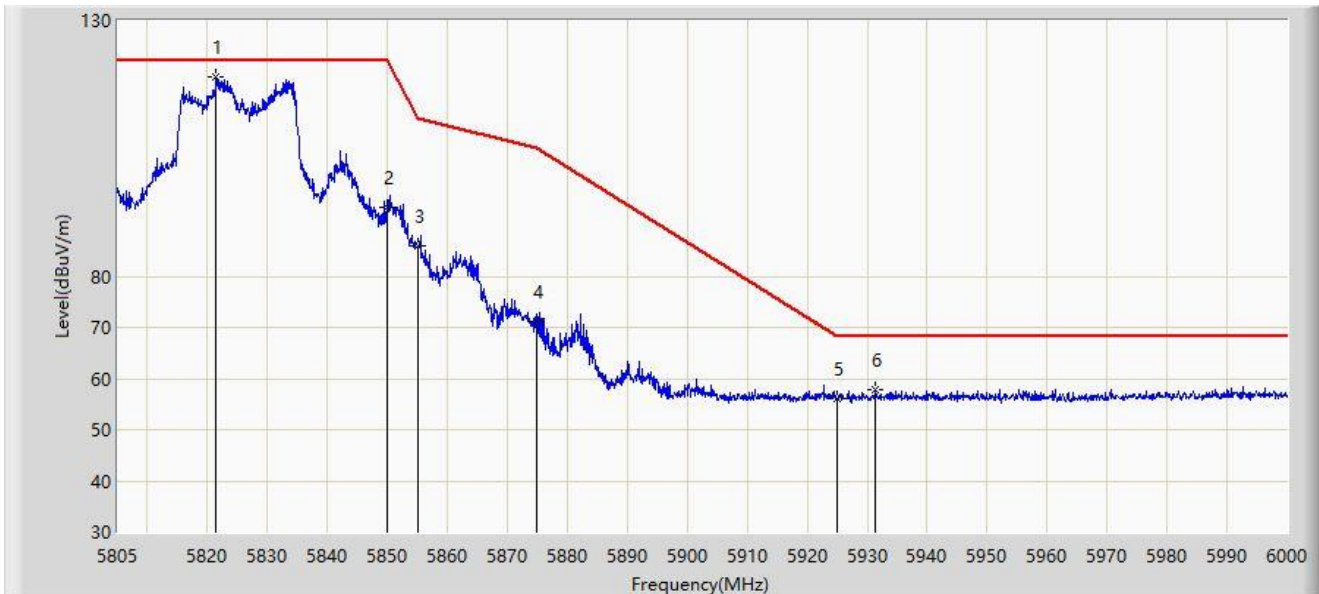


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5821.380        | 118.896                | 114.512              | N/A         | N/A            | 4.384         | PK   |
| 2  |      | 5850.000        | 93.417                 | 88.973               | -28.783     | 122.200        | 4.444         | PK   |
| 3  |      | 5855.000        | 86.043                 | 81.643               | -24.757     | 110.800        | 4.400         | PK   |
| 4  |      | 5875.000        | 71.265                 | 66.954               | -33.935     | 105.200        | 4.312         | PK   |
| 5  |      | 5925.000        | 56.151                 | 51.520               | -12.049     | 68.200         | 4.630         | PK   |
| 6  | *    | 5931.360        | 57.782                 | 53.158               | -10.418     | 68.200         | 4.623         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE20 at 5825MHz     |                         |

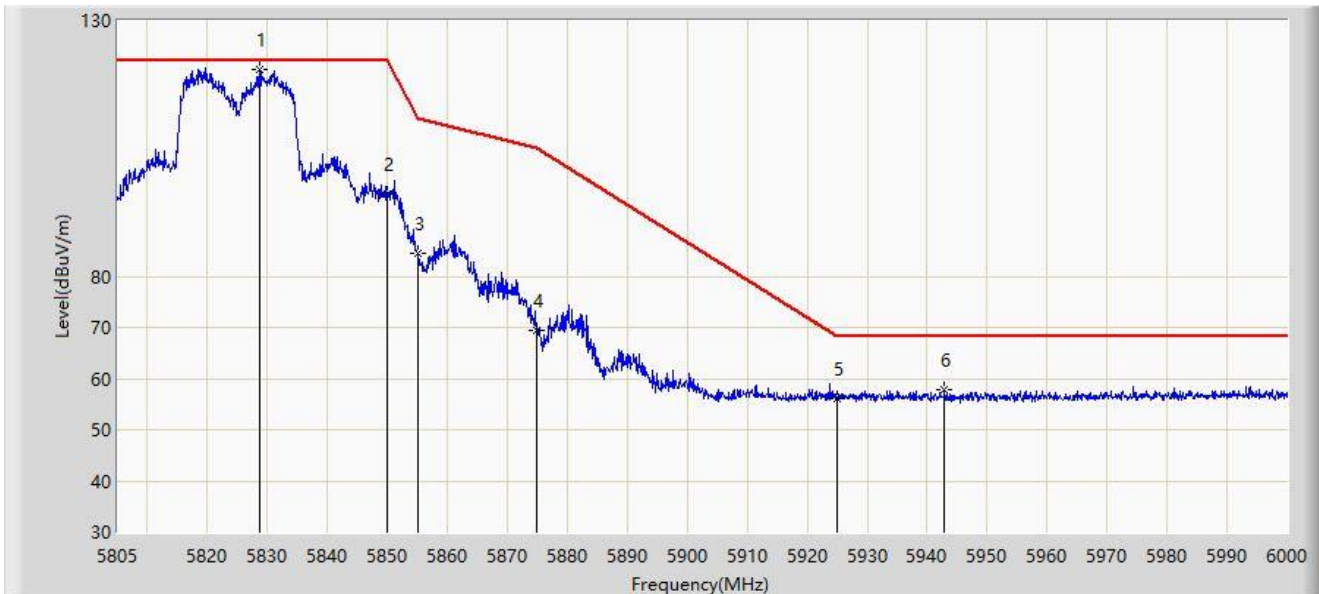

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5828.595        | 120.565                | 116.138              | N/A         | N/A            | 4.427         | PK   |
| 2  |      | 5850.000        | 96.066                 | 91.622               | -26.134     | 122.200        | 4.444         | PK   |
| 3  |      | 5855.000        | 84.564                 | 80.164               | -26.236     | 110.800        | 4.400         | PK   |
| 4  |      | 5875.000        | 69.477                 | 65.166               | -35.723     | 105.200        | 4.312         | PK   |
| 5  |      | 5925.000        | 56.057                 | 51.426               | -12.143     | 68.200         | 4.630         | PK   |
| 6  | *    | 5942.865        | 57.810                 | 53.287               | -10.390     | 68.200         | 4.524         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz     |                         |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.600        | 67.485                 | 63.843               | -6.515      | 74.000         | 3.643         | PK   |
| 2  |      | 5150.000        | 63.823                 | 60.182               | -10.177     | 74.000         | 3.641         | PK   |
| 3  |      | 5188.200        | 109.888                | 106.537              | N/A         | N/A            | 3.351         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz     |                         |

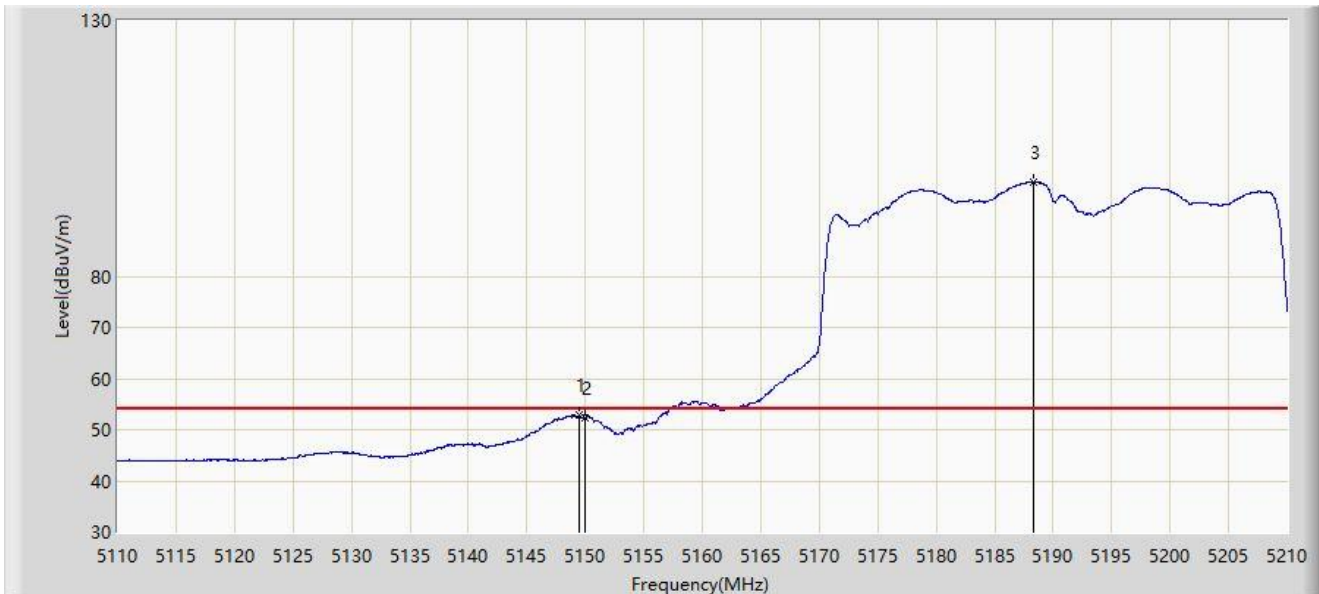

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.500        | 52.852                 | 49.209               | -1.148      | 54.000         | 3.642         | AV   |
| 2  |      | 5150.000        | 52.325                 | 48.684               | -1.675      | 54.000         | 3.641         | AV   |
| 3  |      | 5188.300        | 98.418                 | 95.068               | N/A         | N/A            | 3.350         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz     |                         |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5144.900        | 64.419                 | 60.779               | -9.581      | 74.000         | 3.641         | PK   |
| 2  |      | 5150.000        | 62.554                 | 58.913               | -11.446     | 74.000         | 3.641         | PK   |
| 3  |      | 5193.900        | 111.017                | 107.700              | N/A         | N/A            | 3.317         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz     |                         |

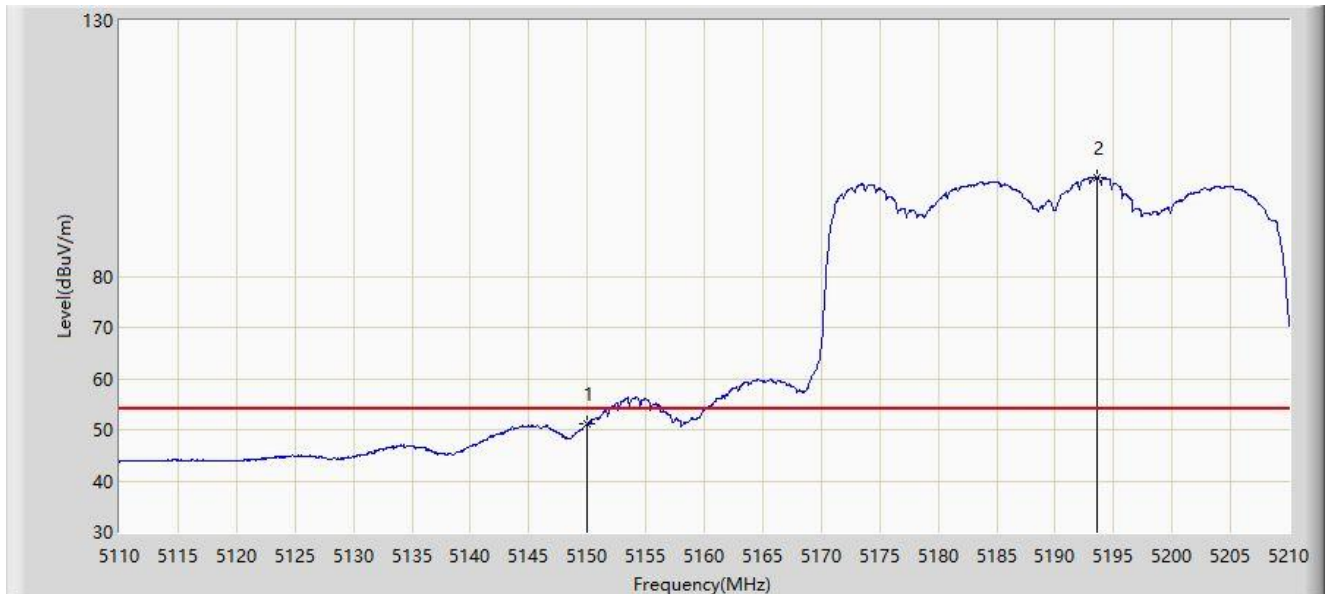


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5150.000        | 51.076                 | 47.435               | -2.924      | 54.000         | 3.641         | AV   |
| 2  |      | 5193.600        | 99.414                 | 96.096               | N/A         | N/A            | 3.318         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz     |                         |

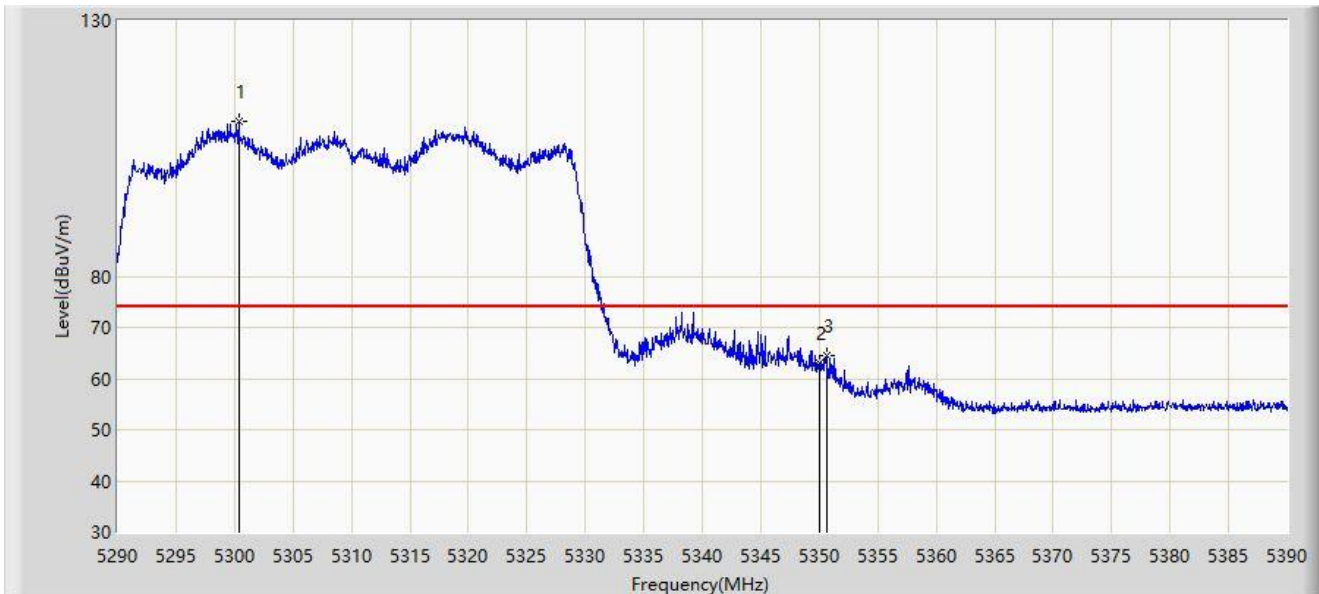


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5300.400        | 110.387                | 107.094              | N/A         | N/A            | 3.293         | PK   |
| 2  |      | 5350.000        | 63.090                 | 59.745               | -10.910     | 74.000         | 3.344         | PK   |
| 3  | *    | 5350.600        | 64.525                 | 61.190               | -9.475      | 74.000         | 3.334         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz     |                         |

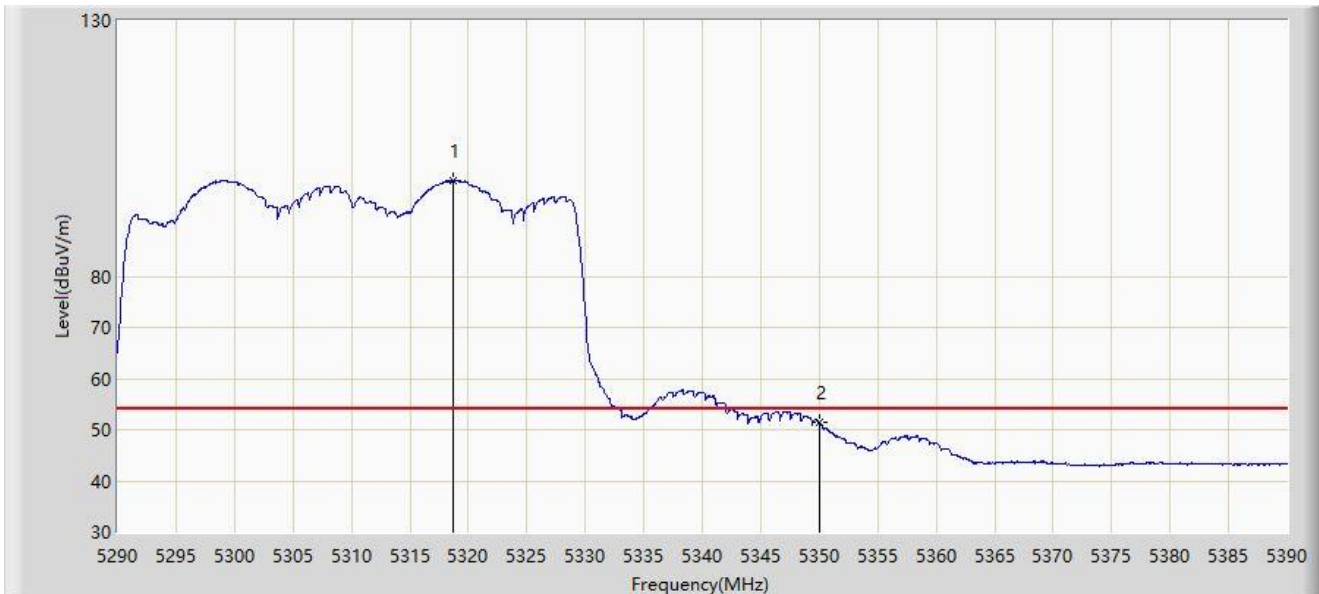


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5318.700        | 98.689                 | 95.289               | N/A         | N/A            | 3.400         | AV   |
| 2  | *    | 5350.000        | 51.405                 | 48.060               | -2.595      | 54.000         | 3.344         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz     |                         |

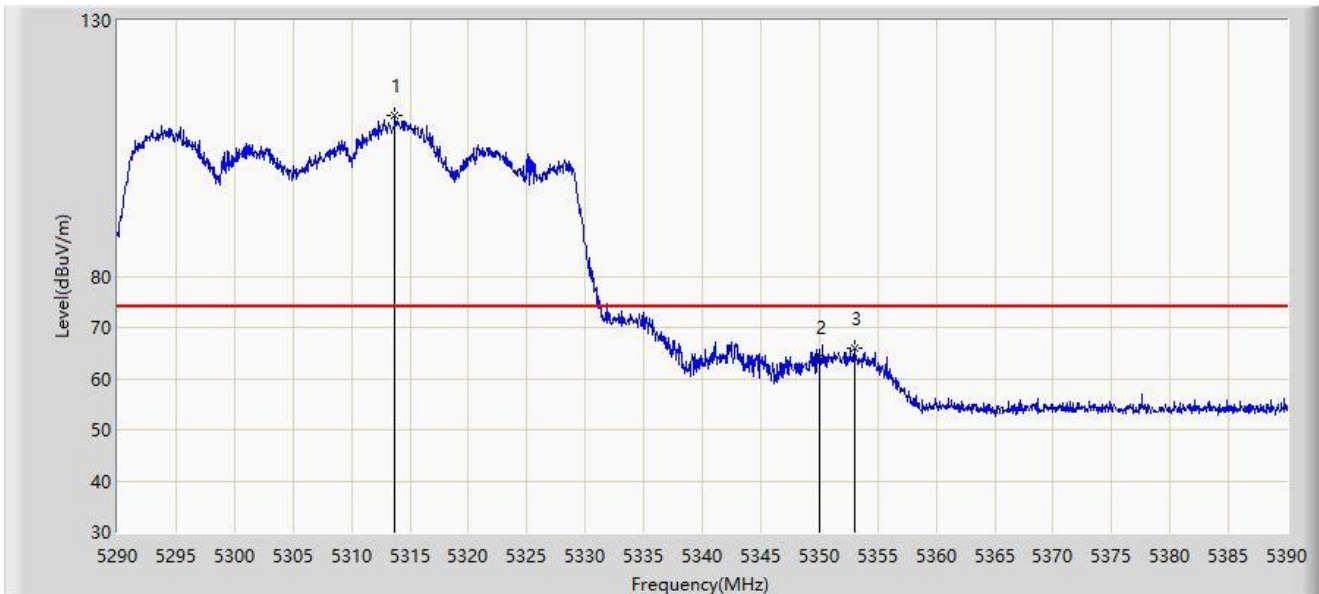


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5313.700        | 111.352                | 108.007              | N/A         | N/A            | 3.345         | PK   |
| 2  |      | 5350.000        | 64.284                 | 60.939               | -9.716      | 74.000         | 3.344         | PK   |
| 3  | *    | 5353.000        | 65.991                 | 62.683               | -8.009      | 74.000         | 3.308         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz     |                         |

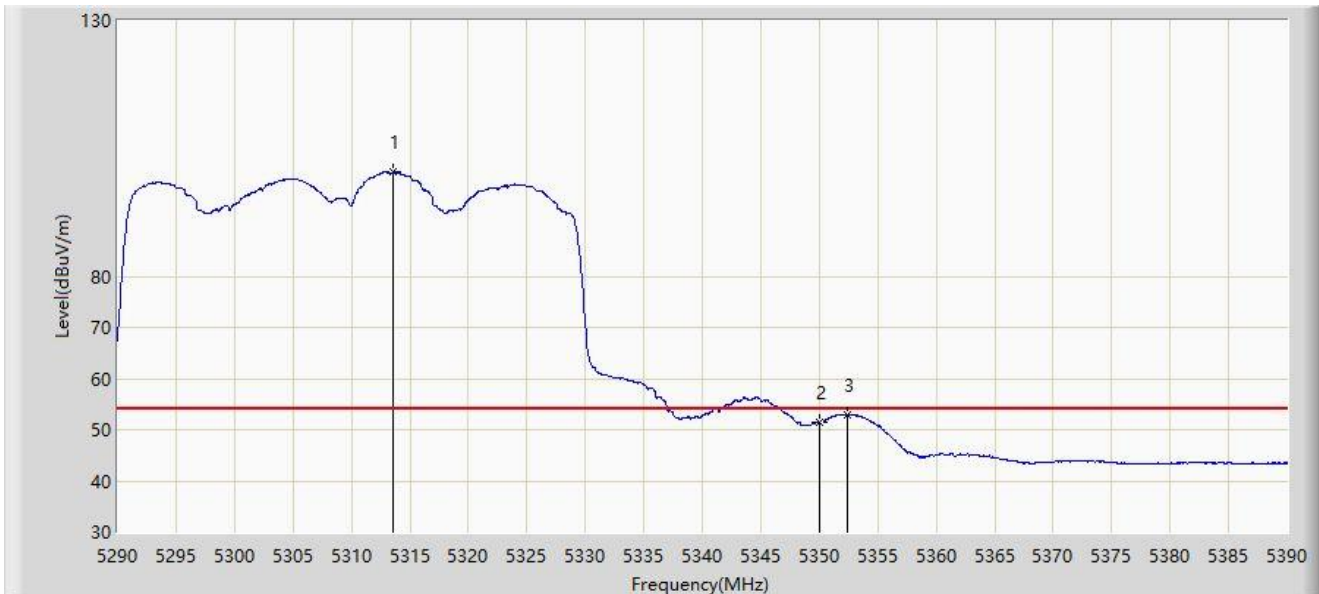


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5313.600        | 100.385                | 97.041               | N/A         | N/A            | 3.344         | AV   |
| 2  |      | 5350.000        | 51.574                 | 48.229               | -2.426      | 54.000         | 3.344         | AV   |
| 3  | *    | 5352.450        | 53.023                 | 49.713               | -0.977      | 54.000         | 3.310         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz     |                         |

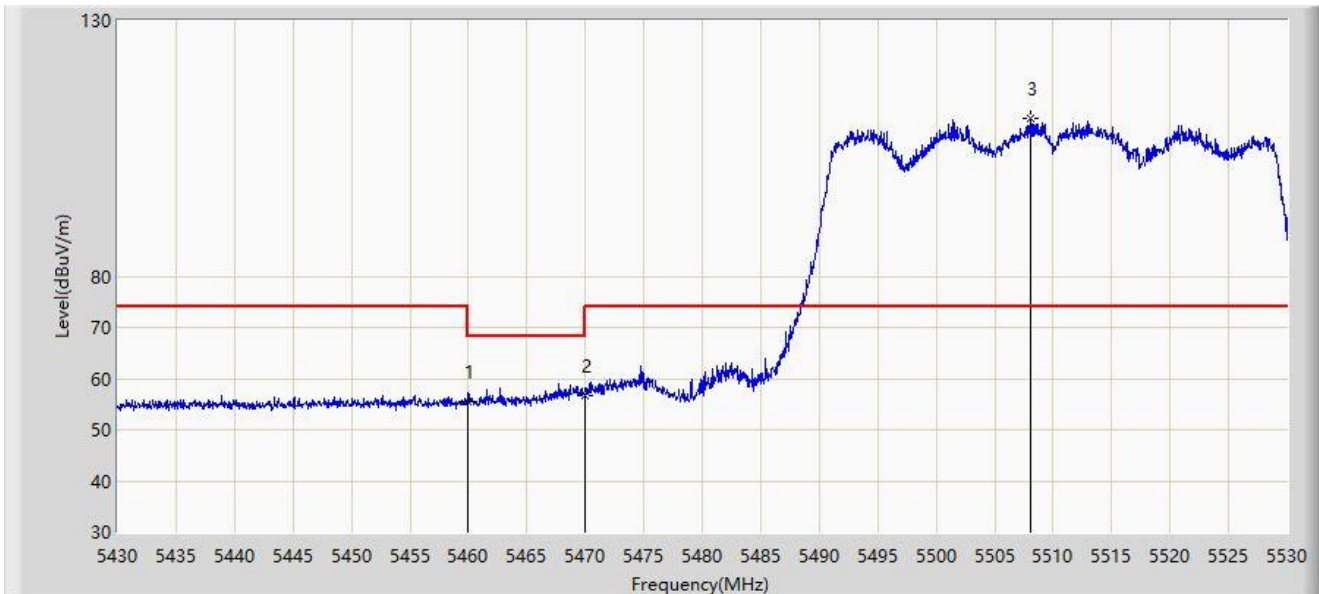


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5460.000        | 55.626                 | 51.996               | -18.374     | 74.000         | 3.630         | PK   |
| 2  | *    | 5470.000        | 56.781                 | 53.090               | -11.419     | 68.200         | 3.691         | PK   |
| 3  |      | 5508.100        | 110.783                | 106.973              | N/A         | N/A            | 3.810         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz     |                         |

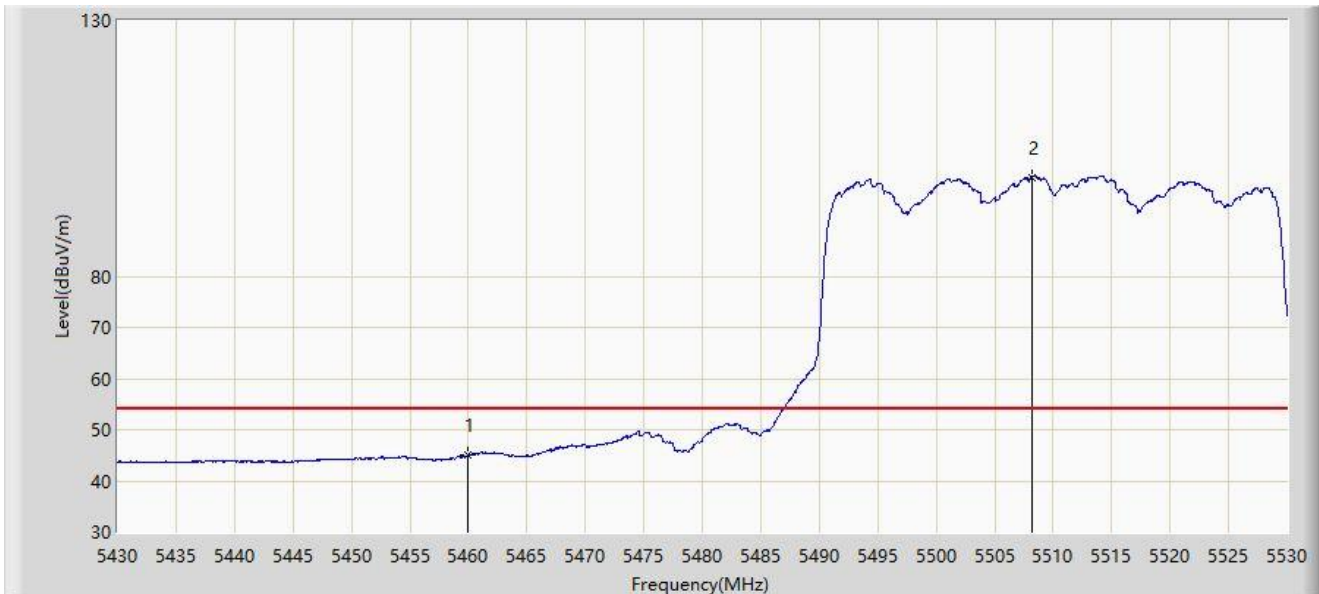


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 45.037                 | 41.407               | -8.963      | 54.000         | 3.630         | AV   |
| 2  |      | 5508.150        | 99.418                 | 95.608               | N/A         | N/A            | 3.810         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz     |                         |

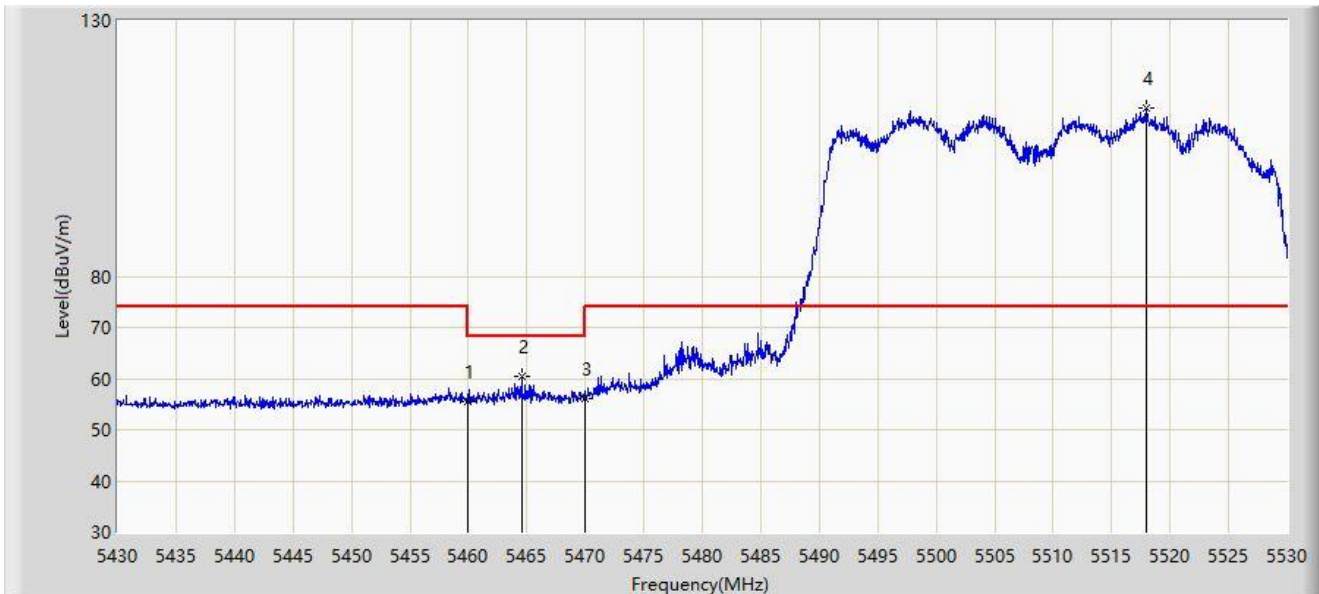


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5460.000        | 55.364                 | 51.734               | -18.636     | 74.000         | 3.630         | PK   |
| 2  | *    | 5464.550        | 60.367                 | 56.709               | -7.833      | 68.200         | 3.658         | PK   |
| 3  |      | 5470.000        | 56.044                 | 52.353               | -12.156     | 68.200         | 3.691         | PK   |
| 4  |      | 5518.000        | 112.759                | 109.054              | N/A         | N/A            | 3.705         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz     |                         |

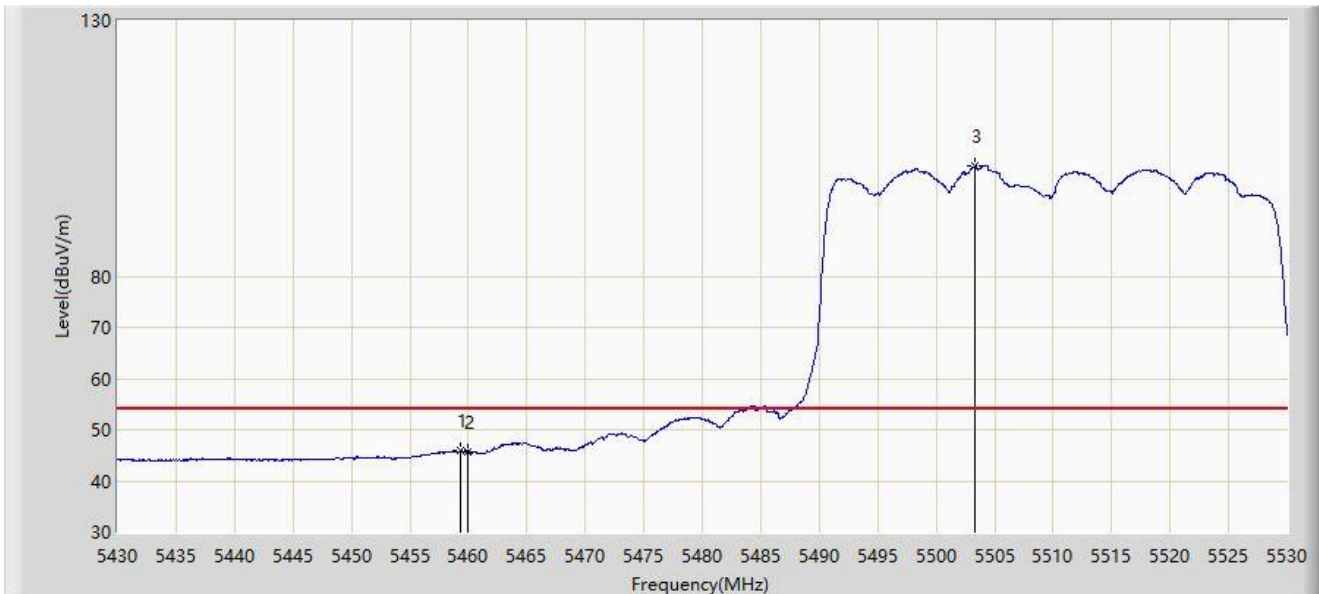


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5459.350        | 45.808                 | 42.182               | -8.192      | 54.000         | 3.627         | AV   |
| 2  |      | 5460.000        | 45.725                 | 42.095               | -8.275      | 54.000         | 3.630         | AV   |
| 3  |      | 5503.350        | 101.587                | 97.732               | N/A         | N/A            | 3.855         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5670MHz     |                         |

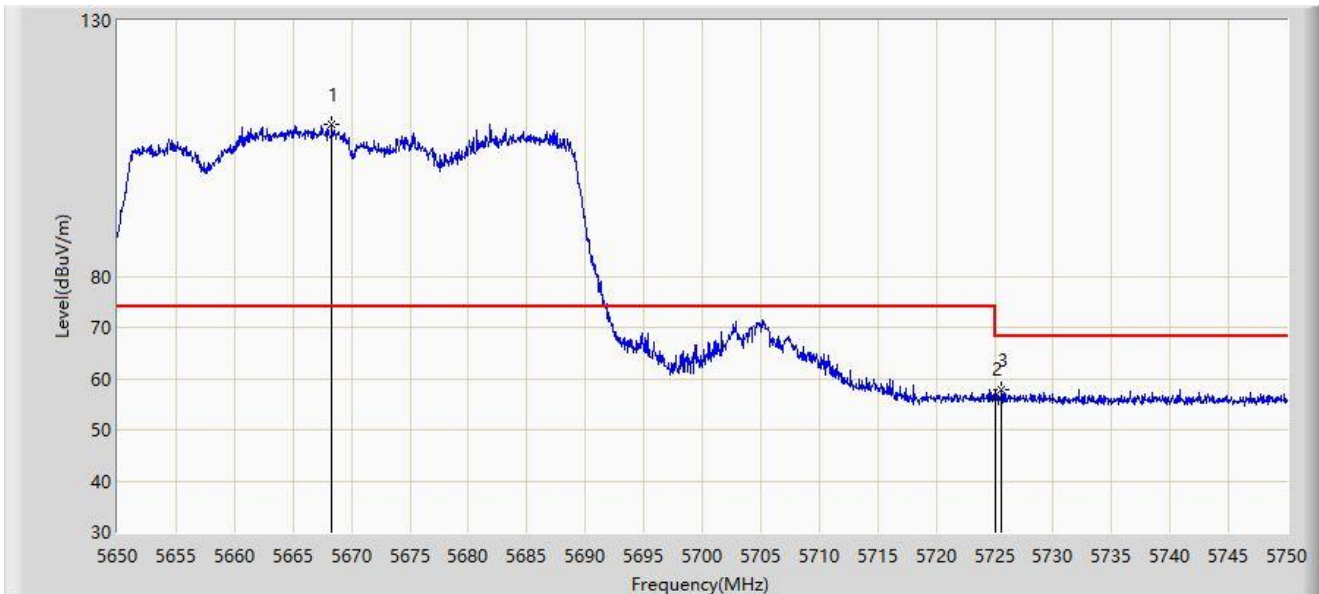


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5668.350        | 109.807                | 105.843              | N/A         | N/A            | 3.964         | PK   |
| 2  |      | 5725.000        | 56.226                 | 52.283               | -11.974     | 68.200         | 3.943         | PK   |
| 3  | *    | 5725.600        | 57.934                 | 53.989               | -10.266     | 68.200         | 3.944         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5670MHz     |                         |

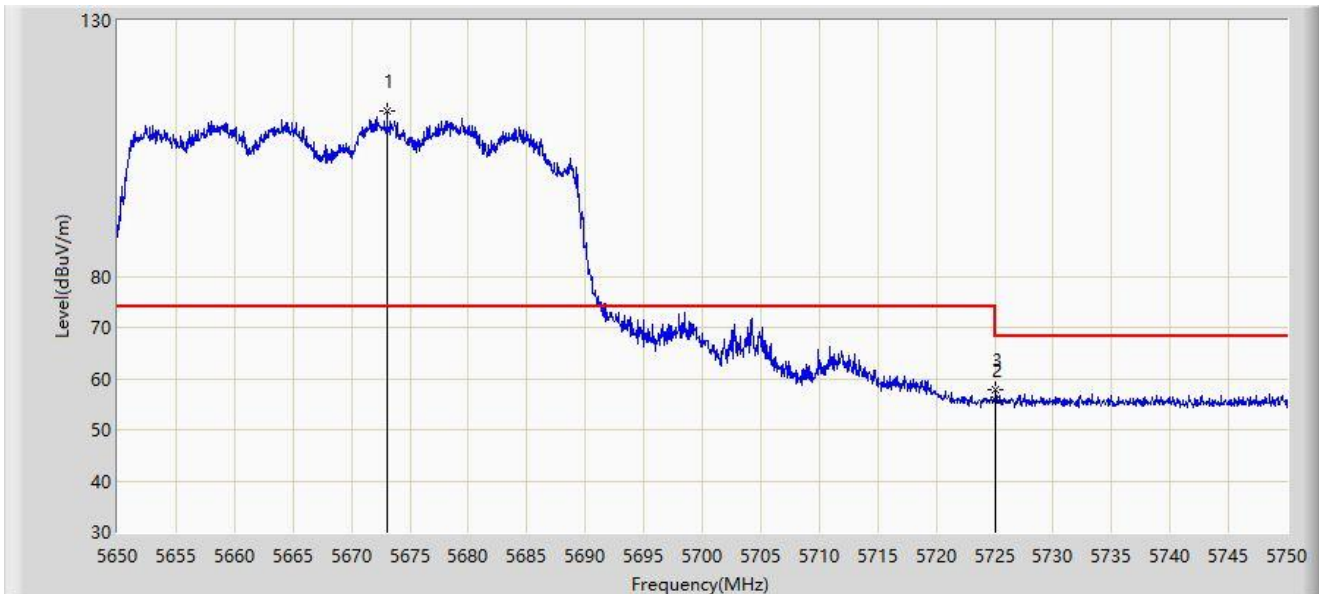


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5673.050        | 112.254                | 108.313              | N/A         | N/A            | 3.941         | PK   |
| 2  |      | 5725.000        | 55.866                 | 51.923               | -12.334     | 68.200         | 3.943         | PK   |
| 3  | *    | 5725.100        | 57.907                 | 53.964               | -10.293     | 68.200         | 3.944         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5755MHz     |                         |

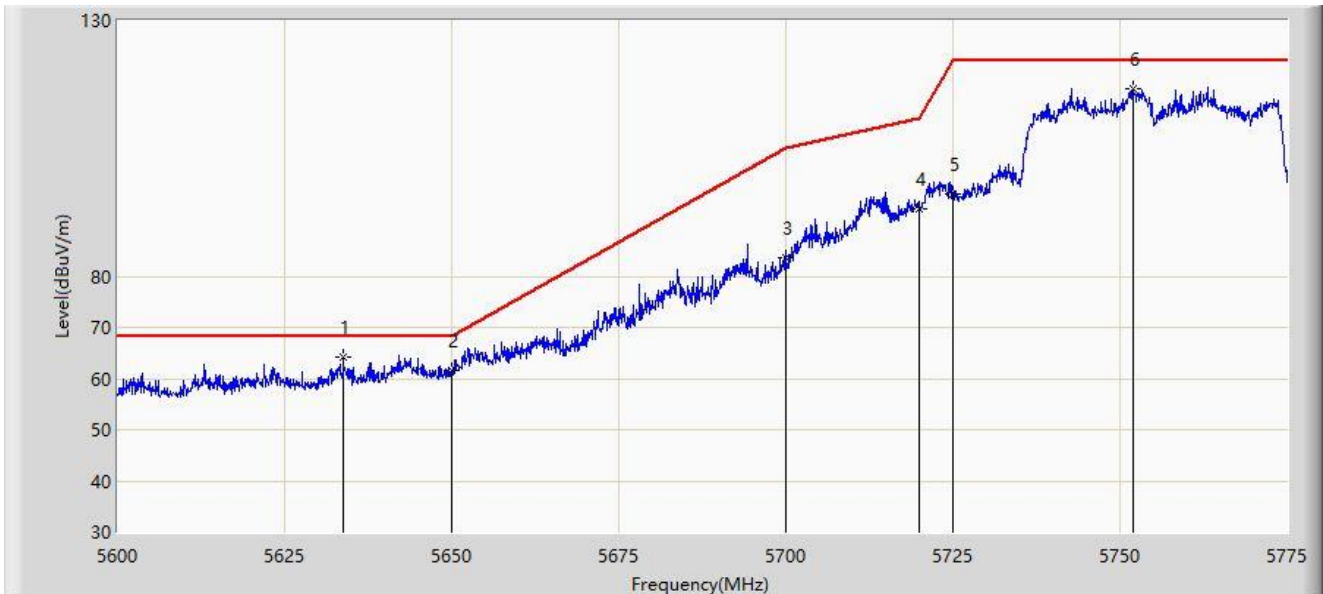


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5633.775        | 64.312                 | 60.653               | -3.888      | 68.200         | 3.658         | PK   |
| 2  |      | 5650.000        | 61.465                 | 57.551               | -6.735      | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 83.628                 | 79.713               | -21.572     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 93.220                 | 89.291               | -17.580     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 96.095                 | 92.152               | -26.105     | 122.200        | 3.943         | PK   |
| 6  |      | 5751.900        | 116.705                | 112.507              | N/A         | N/A            | 4.198         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5755MHz     |                         |

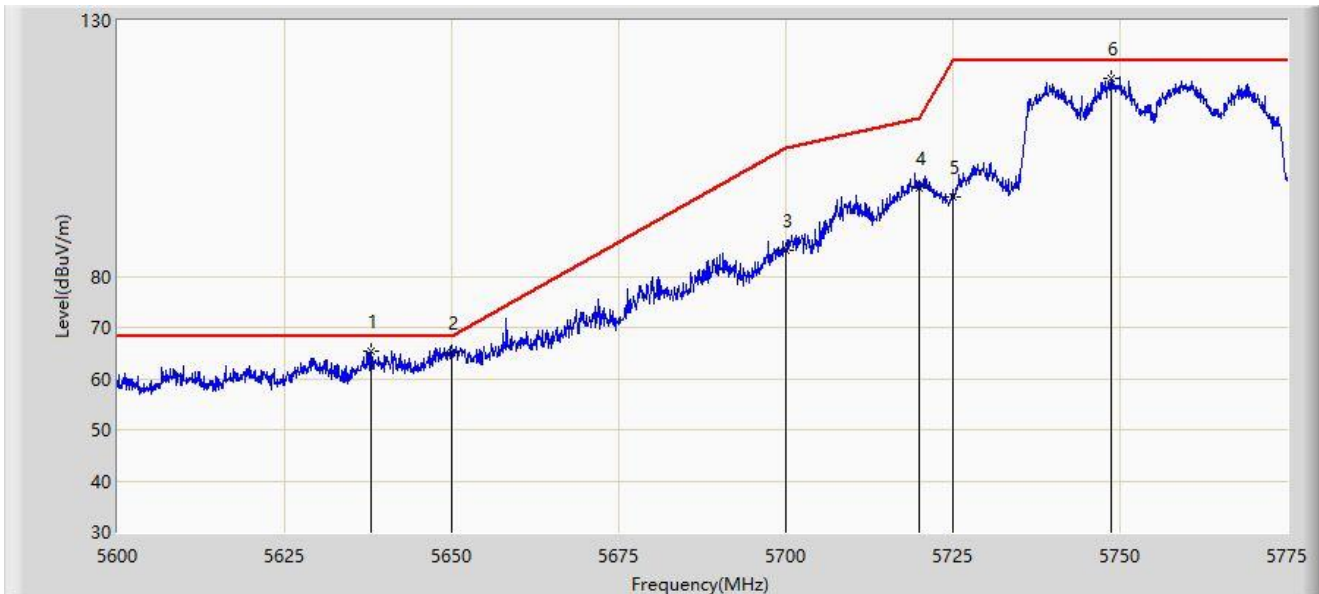


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5637.888        | 65.344                 | 61.678               | -2.856      | 68.200         | 3.667         | PK   |
| 2  |      | 5650.000        | 64.986                 | 61.072               | -3.214      | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 84.992                 | 81.077               | -20.208     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 97.285                 | 93.356               | -13.515     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 95.418                 | 91.475               | -26.782     | 122.200        | 3.943         | PK   |
| 6  |      | 5748.575        | 118.815                | 114.632              | N/A         | N/A            | 4.183         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5795MHz     |                         |

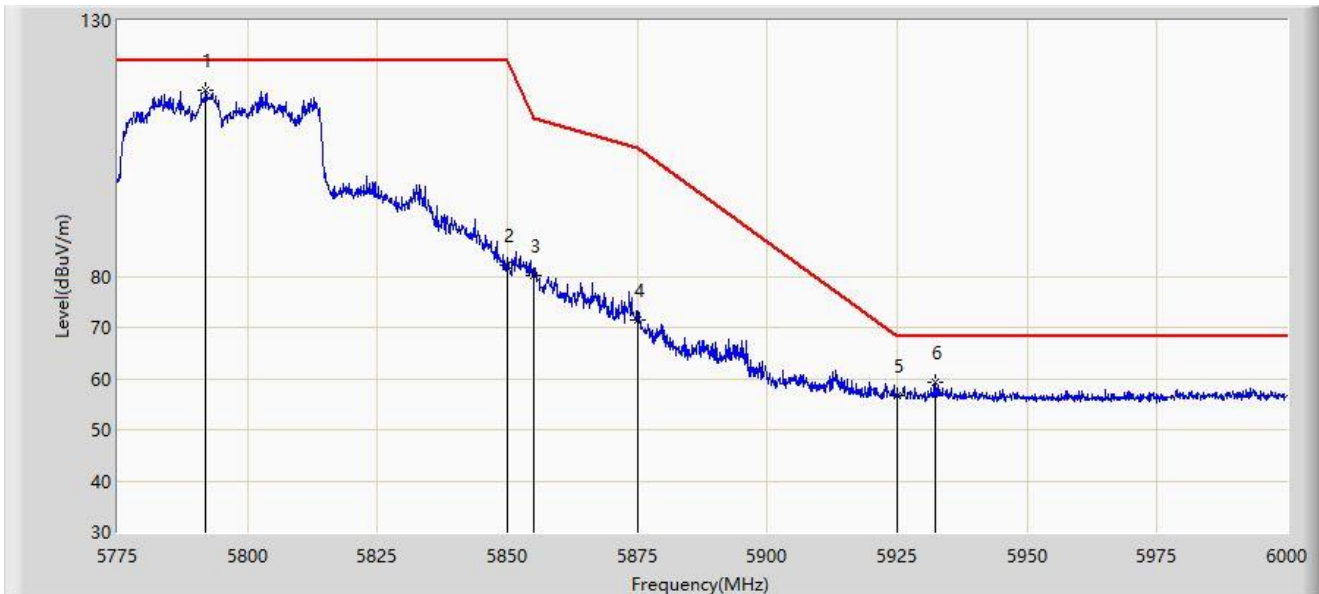


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5791.987        | 116.394                | 112.129              | N/A         | N/A            | 4.265         | PK   |
| 2  |      | 5850.000        | 82.200                 | 77.756               | -40.000     | 122.200        | 4.444         | PK   |
| 3  |      | 5855.000        | 80.129                 | 75.729               | -30.671     | 110.800        | 4.400         | PK   |
| 4  |      | 5875.000        | 71.552                 | 67.241               | -33.648     | 105.200        | 4.312         | PK   |
| 5  |      | 5925.000        | 56.693                 | 52.062               | -11.507     | 68.200         | 4.630         | PK   |
| 6  | *    | 5932.275        | 59.164                 | 54.549               | -9.036      | 68.200         | 4.615         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE40 at 5795MHz     |                         |

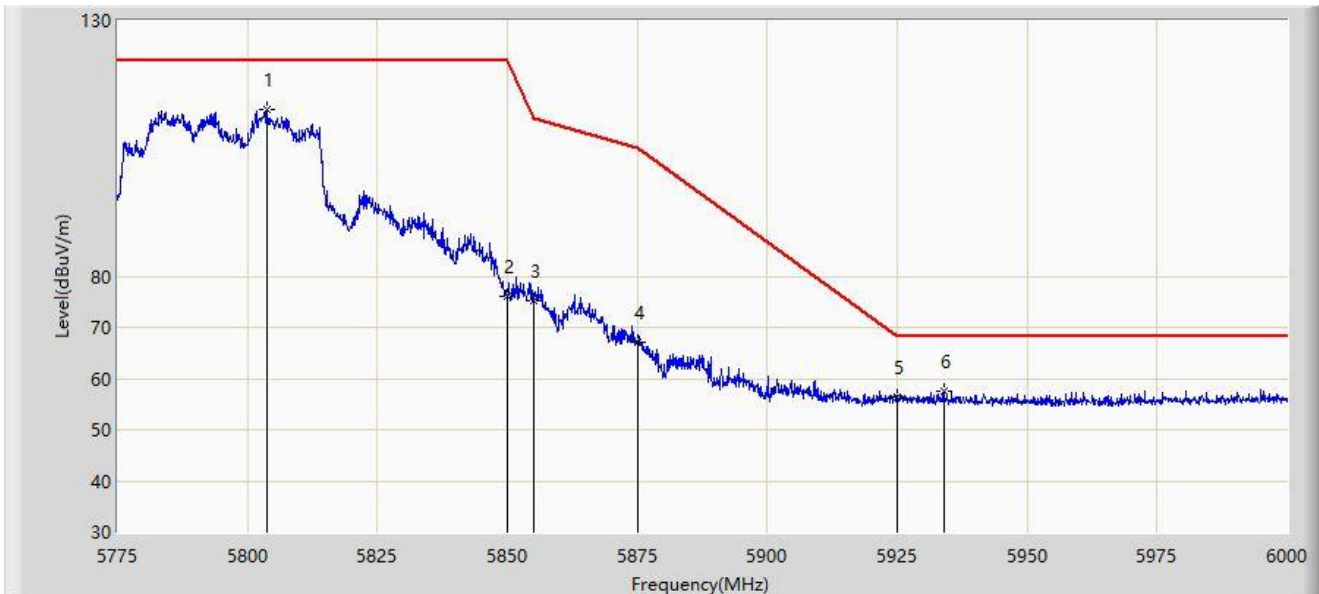


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5803.687        | 112.636                | 108.329              | N/A         | N/A            | 4.308         | PK   |
| 2  |      | 5850.000        | 76.127                 | 71.683               | -46.073     | 122.200        | 4.444         | PK   |
| 3  |      | 5855.000        | 75.110                 | 70.710               | -35.690     | 110.800        | 4.400         | PK   |
| 4  |      | 5875.000        | 67.054                 | 62.743               | -38.146     | 105.200        | 4.312         | PK   |
| 5  |      | 5925.000        | 56.334                 | 51.703               | -11.866     | 68.200         | 4.630         | PK   |
| 6  | *    | 5933.962        | 57.439                 | 52.839               | -10.761     | 68.200         | 4.601         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz     |                         |

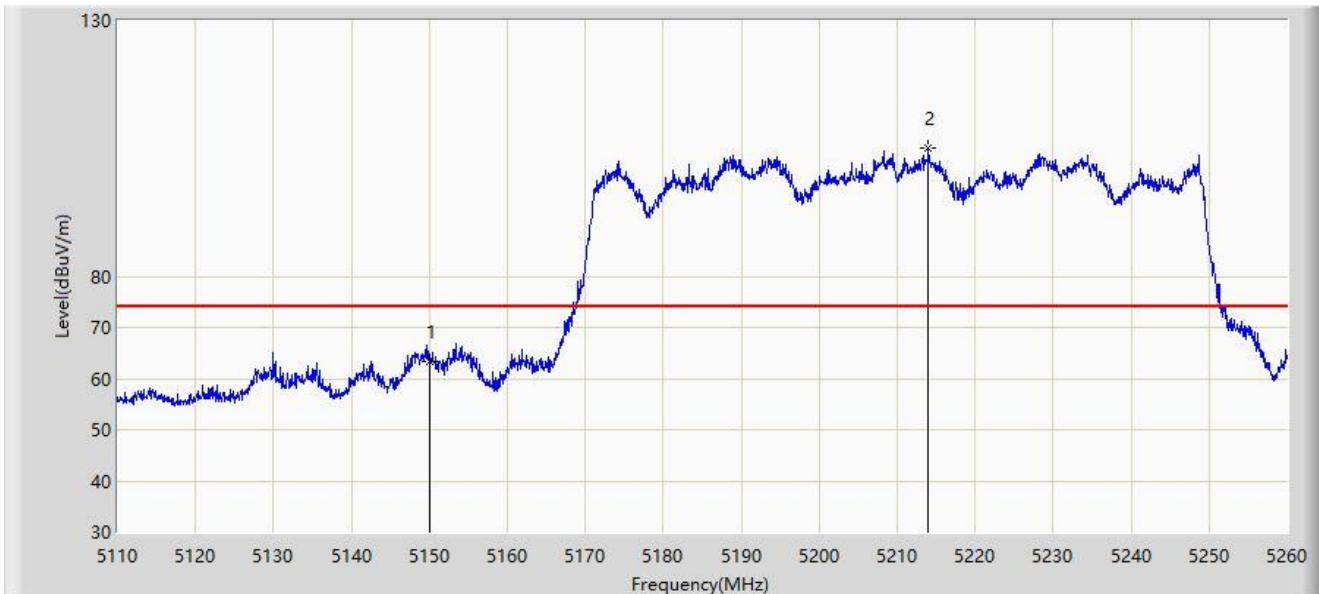


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5150.000        | 63.413                 | 59.772               | -10.587     | 74.000         | 3.641         | PK   |
| 2  |      | 5214.025        | 105.040                | 101.735              | N/A         | N/A            | 3.304         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz     |                         |

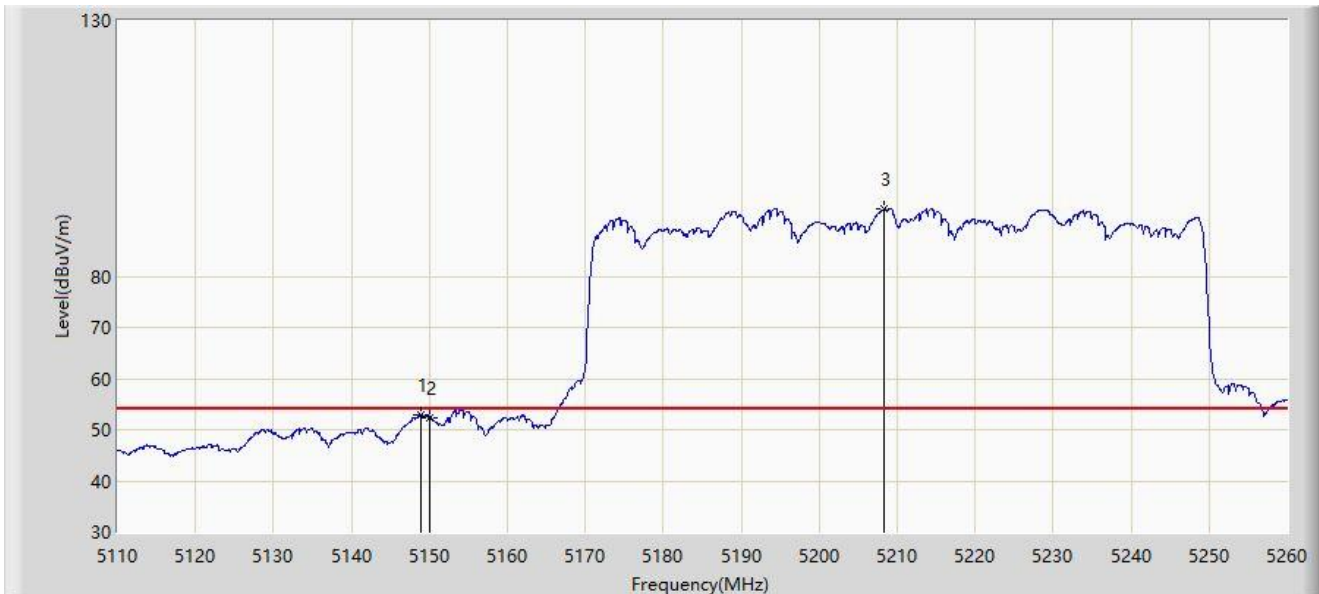

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.925        | 52.928                 | 49.283               | -1.072      | 54.000         | 3.645         | AV   |
| 2  |      | 5150.000        | 52.425                 | 48.784               | -1.575      | 54.000         | 3.641         | AV   |
| 3  |      | 5208.400        | 93.250                 | 89.954               | N/A         | N/A            | 3.296         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz     |                         |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5137.975        | 64.463                 | 60.844               | -9.537      | 74.000         | 3.619         | PK   |
| 2  |      | 5150.000        | 61.840                 | 58.199               | -12.160     | 74.000         | 3.641         | PK   |
| 3  |      | 5198.050        | 105.772                | 102.481              | N/A         | N/A            | 3.291         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz     |                         |

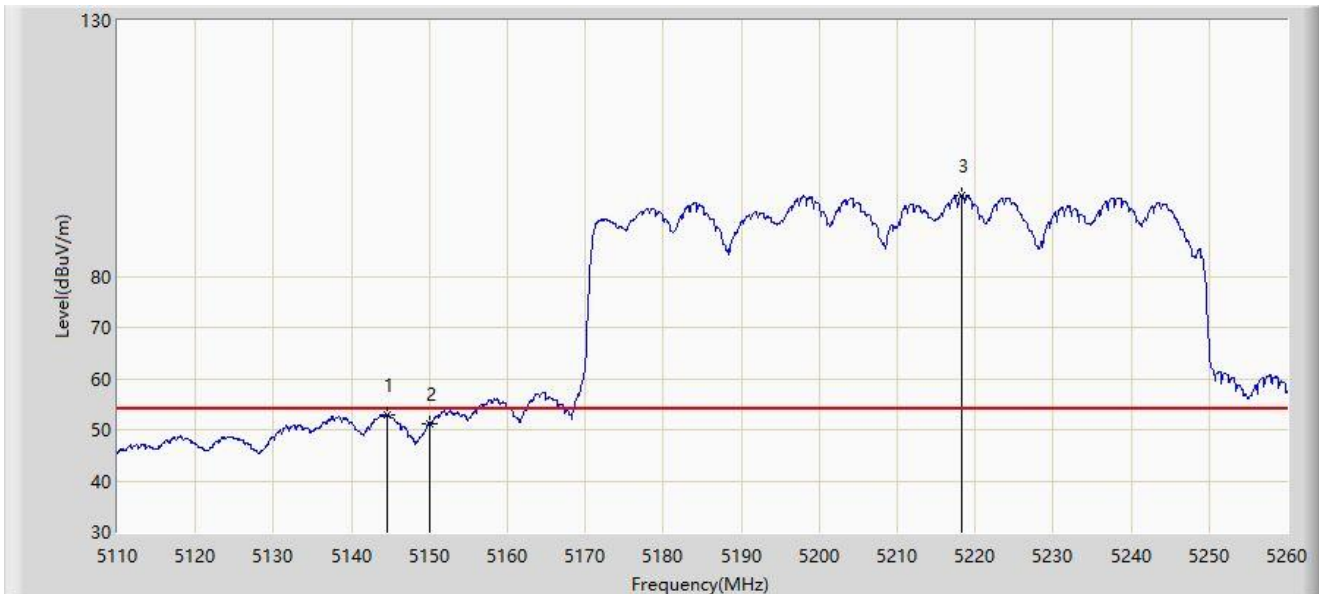


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5144.500        | 52.906                 | 49.267               | -1.094      | 54.000         | 3.638         | AV   |
| 2  |      | 5150.000        | 51.169                 | 47.528               | -2.831      | 54.000         | 3.641         | AV   |
| 3  |      | 5218.225        | 95.791                 | 92.481               | N/A         | N/A            | 3.310         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz     |                         |

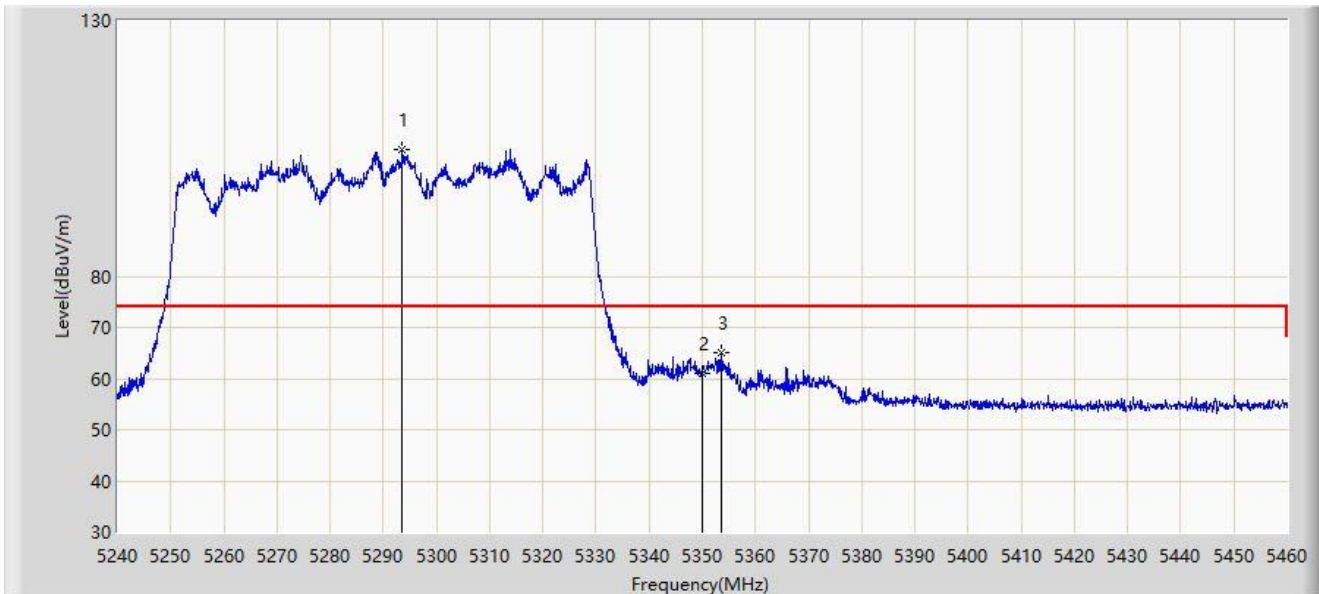


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5293.570        | 104.788                | 101.517              | N/A         | N/A            | 3.271         | PK   |
| 2  |      | 5350.000        | 61.081                 | 57.736               | -12.919     | 74.000         | 3.344         | PK   |
| 3  | *    | 5353.520        | 65.193                 | 61.886               | -8.807      | 74.000         | 3.307         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz     |                         |

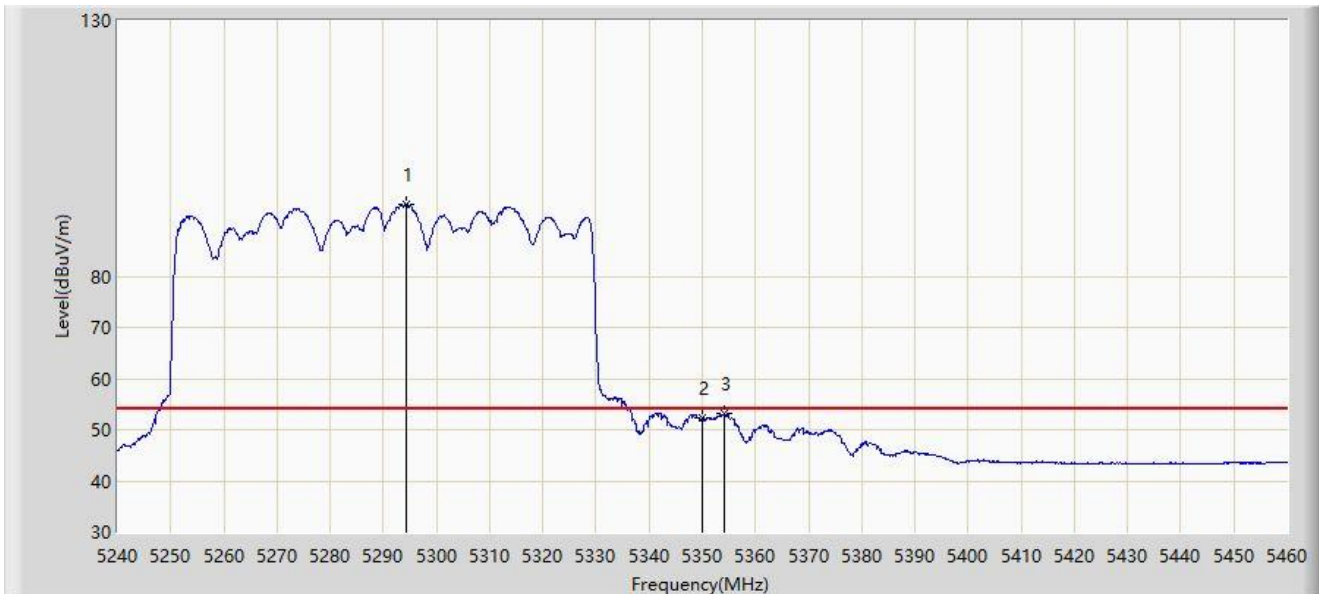


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5294.230        | 94.139                 | 90.860               | N/A         | N/A            | 3.279         | AV   |
| 2  |      | 5350.000        | 52.243                 | 48.898               | -1.757      | 54.000         | 3.344         | AV   |
| 3  | *    | 5354.180        | 53.075                 | 49.770               | -0.925      | 54.000         | 3.305         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz     |                         |

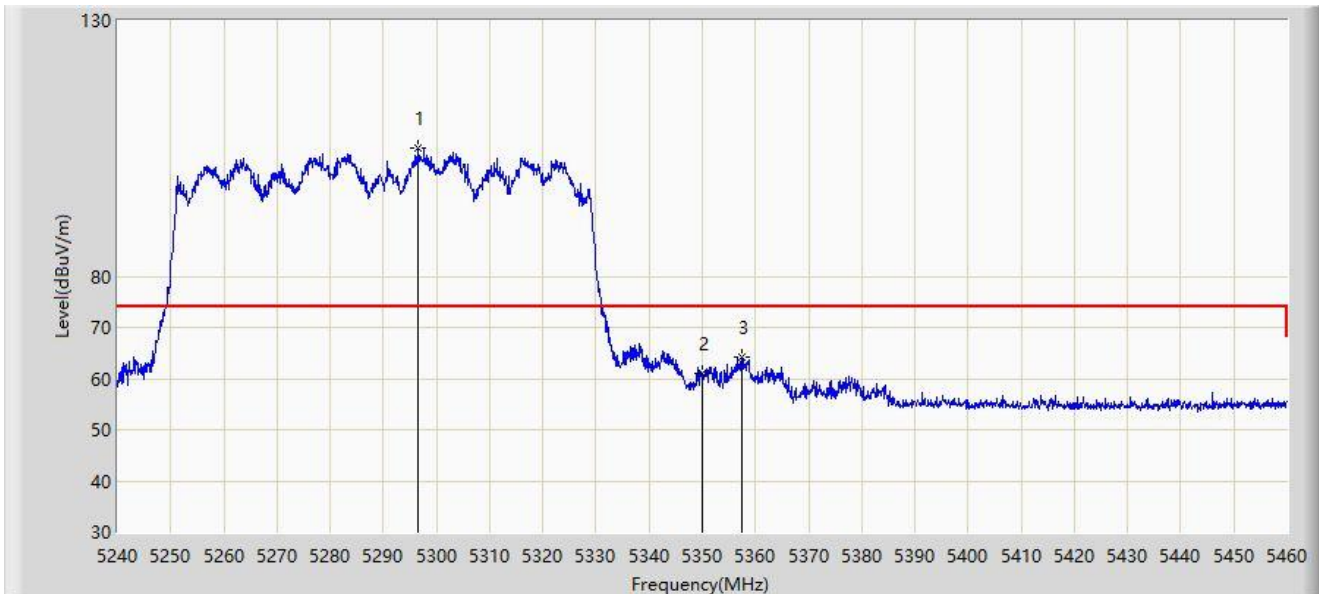


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5296.650        | 105.199                | 101.907              | N/A         | N/A            | 3.292         | PK   |
| 2  |      | 5350.000        | 61.010                 | 57.665               | -12.990     | 74.000         | 3.344         | PK   |
| 3  | *    | 5357.480        | 64.319                 | 61.024               | -9.681      | 74.000         | 3.295         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz     |                         |

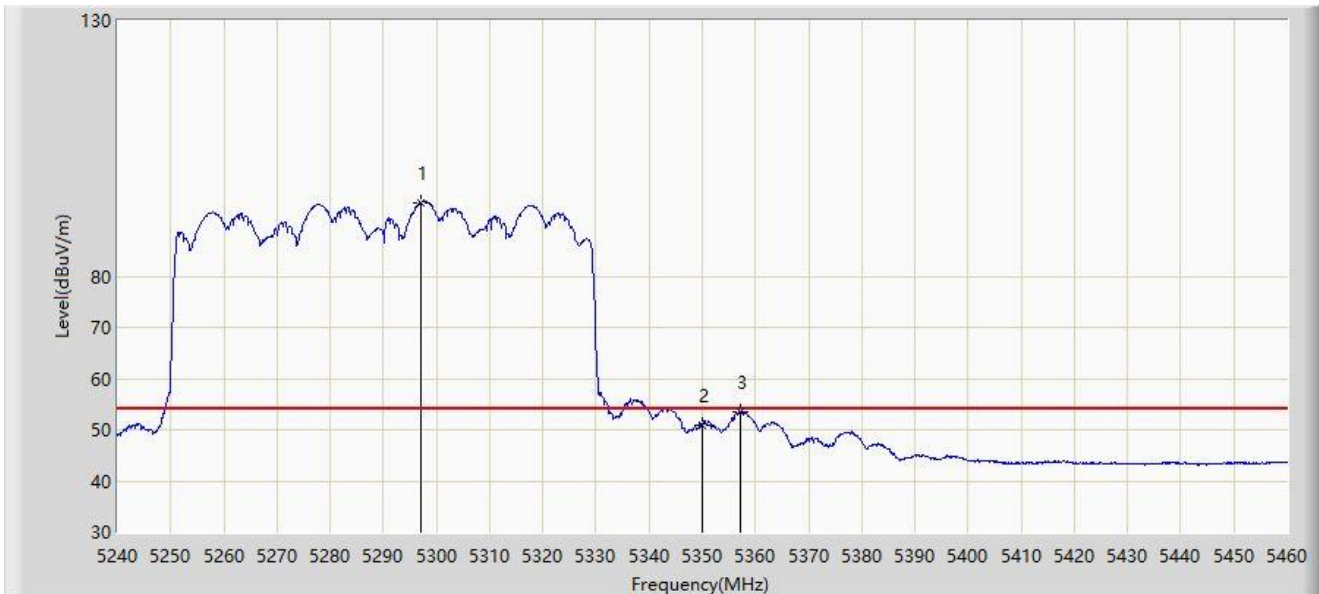


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5297.090        | 94.465                 | 91.173               | N/A         | N/A            | 3.292         | AV   |
| 2  |      | 5350.000        | 50.992                 | 47.647               | -3.008      | 54.000         | 3.344         | AV   |
| 3  | *    | 5357.150        | 53.537                 | 50.241               | -0.463      | 54.000         | 3.295         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz     |                         |

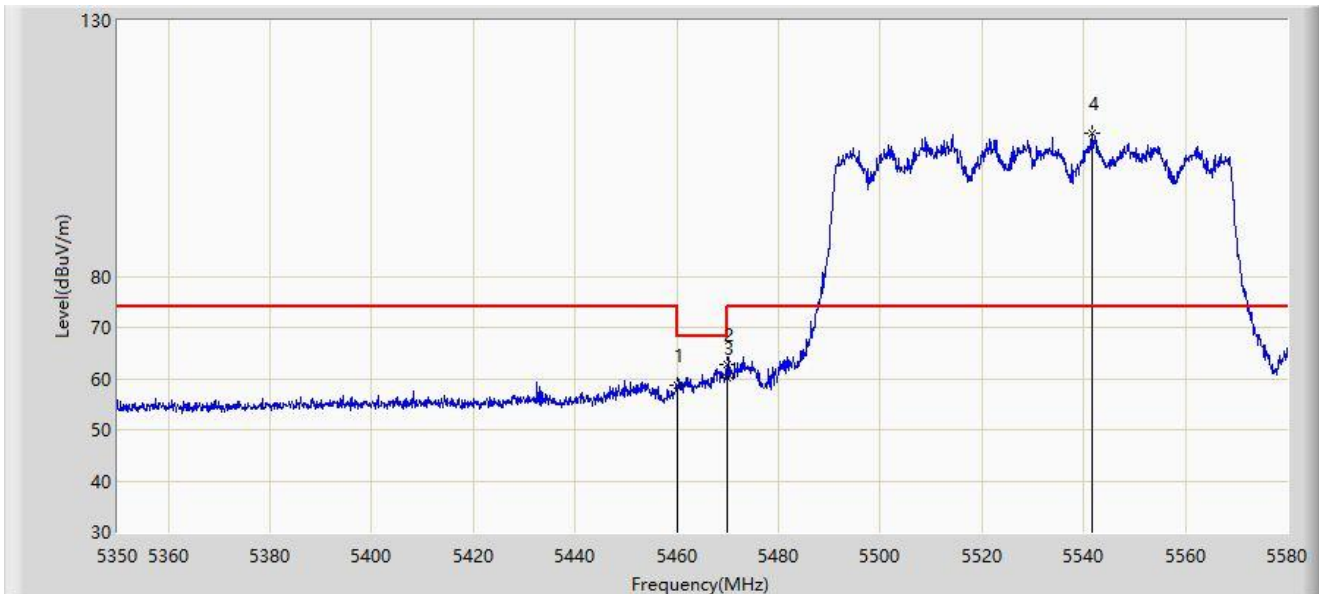


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5460.000        | 58.742                 | 55.112               | -15.258     | 74.000         | 3.630         | PK   |
| 2  | *    | 5469.830        | 62.834                 | 59.144               | -5.366      | 68.200         | 3.690         | PK   |
| 3  |      | 5470.000        | 60.197                 | 56.506               | -8.003      | 68.200         | 3.691         | PK   |
| 4  |      | 5541.590        | 107.892                | 104.251              | N/A         | N/A            | 3.641         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz     |                         |

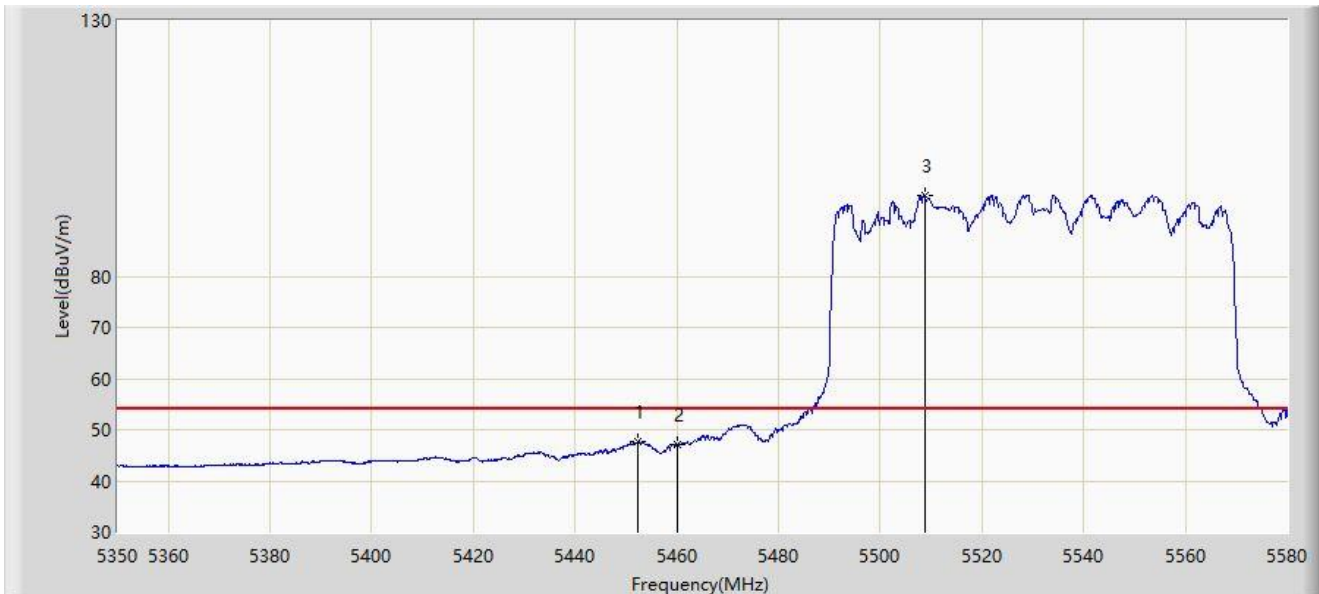


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5452.350        | 47.624                 | 44.068               | -6.376      | 54.000         | 3.556         | AV   |
| 2  |      | 5460.000        | 47.196                 | 43.566               | -6.804      | 54.000         | 3.630         | AV   |
| 3  |      | 5508.700        | 95.685                 | 91.881               | N/A         | N/A            | 3.805         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz     |                         |

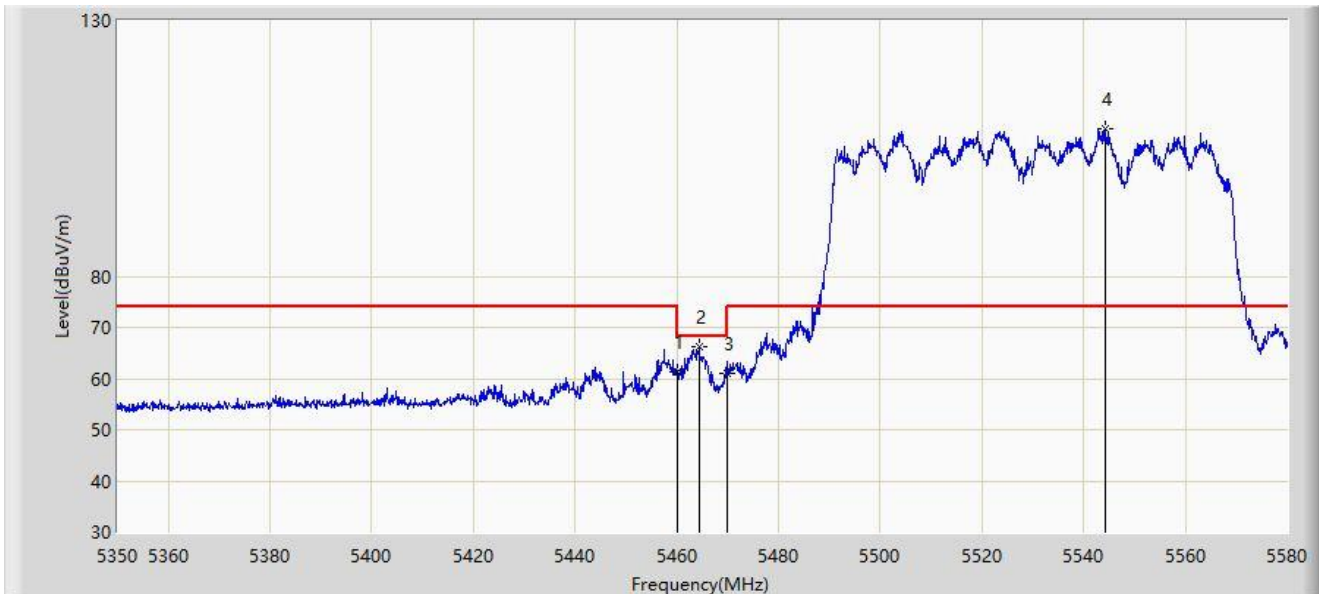


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5460.000        | 61.170                 | 57.540               | -12.830     | 74.000         | 3.630         | PK   |
| 2  | *    | 5464.425        | 66.204                 | 62.547               | -1.996      | 68.200         | 3.658         | PK   |
| 3  |      | 5470.000        | 60.875                 | 57.184               | -7.325      | 68.200         | 3.691         | PK   |
| 4  |      | 5544.120        | 108.963                | 105.294              | N/A         | N/A            | 3.670         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz     |                         |

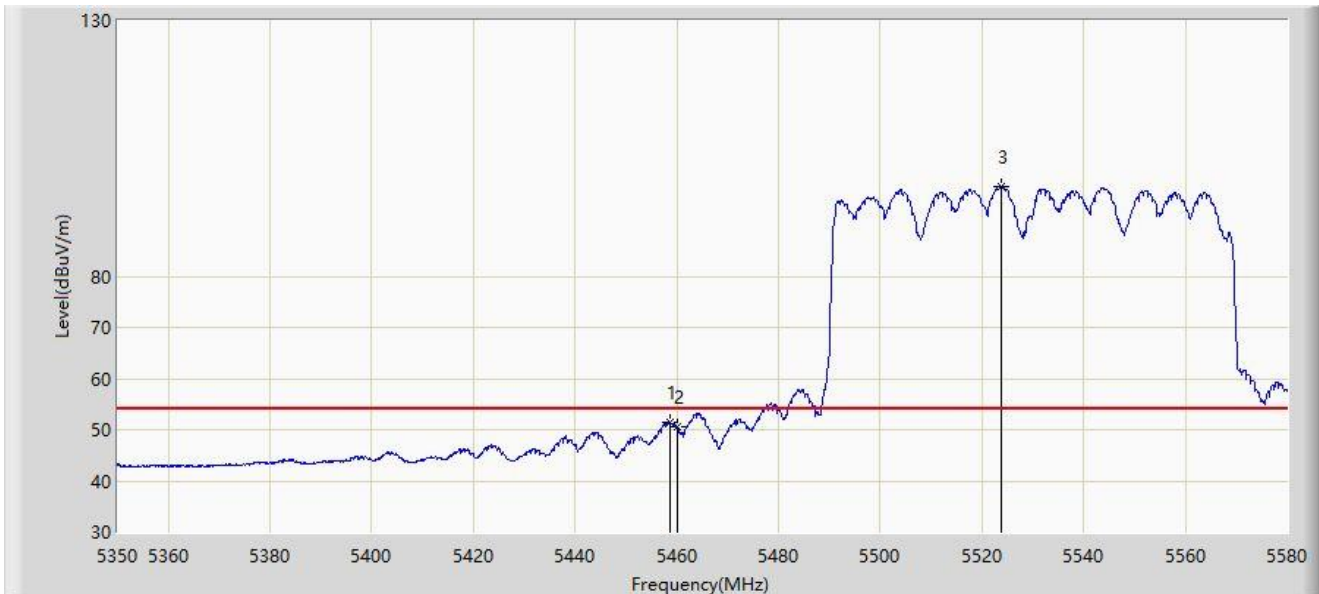

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5458.560        | 51.435                 | 47.813               | -2.565      | 54.000         | 3.621         | AV   |
| 2  |      | 5460.000        | 50.556                 | 46.926               | -3.444      | 54.000         | 3.630         | AV   |
| 3  |      | 5523.880        | 97.554                 | 93.913               | N/A         | N/A            | 3.641         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5610MHz     |                         |



| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5588.690        | 109.478                | 105.601              | N/A         | N/A            | 3.877         | PK   |
| 2  |      | 5725.000        | 57.099                 | 53.156               | -11.101     | 68.200         | 3.943         | PK   |
| 3  | *    | 5726.535        | 58.147                 | 54.196               | -10.053     | 68.200         | 3.952         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5610MHz     |                         |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5598.095        | 110.830                | 106.954              | N/A         | N/A            | 3.875         | PK   |
| 2  |      | 5725.000        | 56.611                 | 52.668               | -11.589     | 68.200         | 3.943         | PK   |
| 3  | *    | 5725.490        | 57.517                 | 53.573               | -10.683     | 68.200         | 3.944         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5775MHz     |                         |

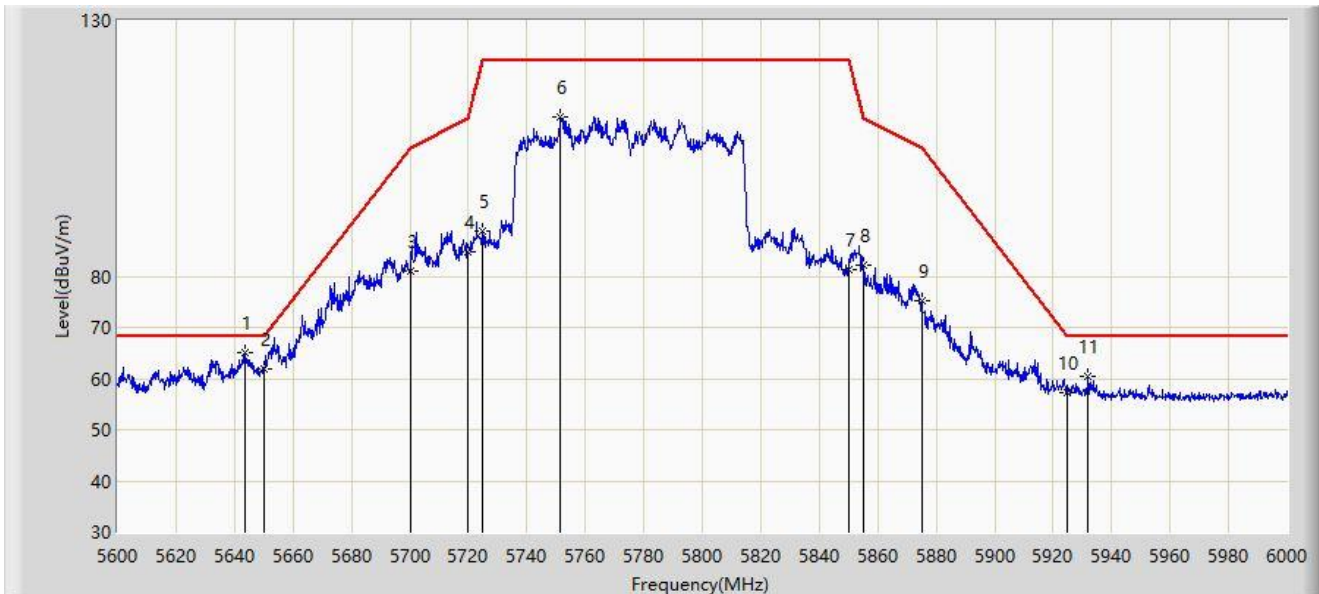


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5643.800        | 65.071                 | 61.300               | -3.129      | 68.200         | 3.771         | PK   |
| 2  |      | 5650.000        | 61.882                 | 57.968               | -6.318      | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 81.153                 | 77.238               | -24.047     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 84.681                 | 80.752               | -26.119     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 88.778                 | 84.835               | -33.422     | 122.200        | 3.943         | PK   |
| 6  |      | 5751.400        | 111.229                | 107.033              | N/A         | N/A            | 4.196         | PK   |
| 7  |      | 5850.000        | 81.207                 | 76.763               | -40.993     | 122.200        | 4.444         | PK   |
| 8  |      | 5855.000        | 82.220                 | 77.820               | -28.580     | 110.800        | 4.400         | PK   |
| 9  |      | 5875.000        | 75.151                 | 70.840               | -30.049     | 105.200        | 4.312         | PK   |
| 10 |      | 5925.000        | 57.168                 | 52.537               | -11.032     | 68.200         | 4.630         | PK   |
| 11 |      | 5932.000        | 60.339                 | 55.721               | -7.861      | 68.200         | 4.618         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-22   |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE80 at 5775MHz     |                         |

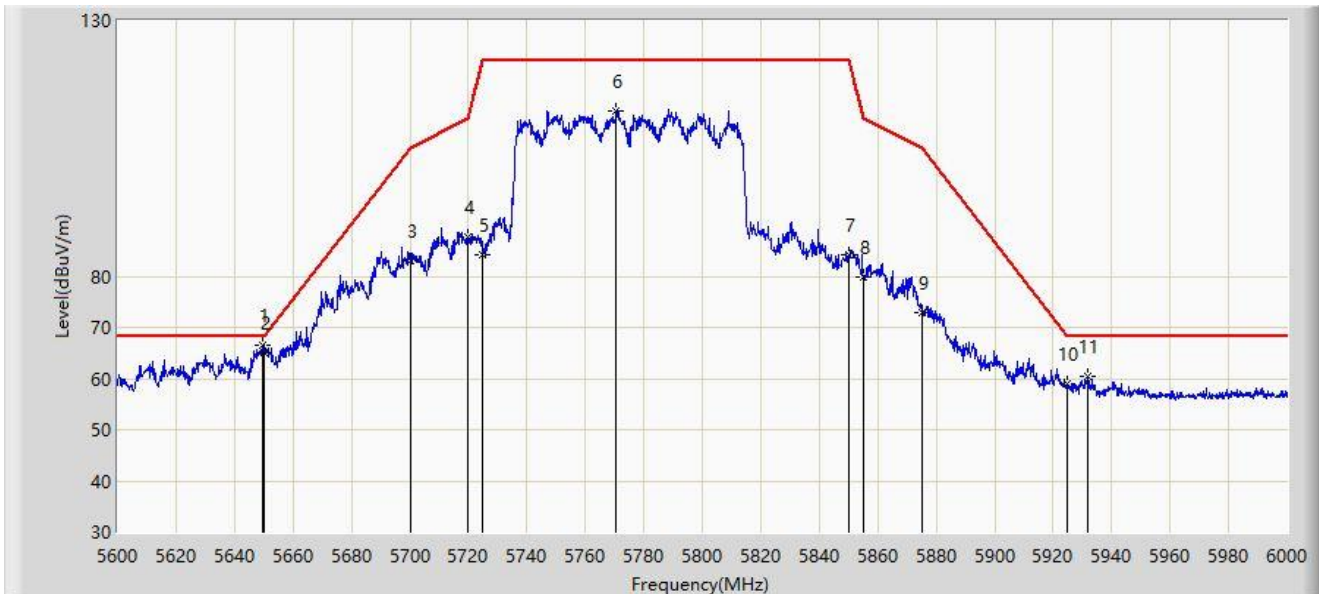


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5649.600        | 66.626                 | 62.721               | -1.574      | 68.200         | 3.905         | PK   |
| 2  |      | 5650.000        | 65.072                 | 61.158               | -3.128      | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 82.973                 | 79.058               | -22.227     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 87.707                 | 83.778               | -23.093     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 84.345                 | 80.402               | -37.855     | 122.200        | 3.943         | PK   |
| 6  |      | 5770.400        | 112.201                | 108.004              | N/A         | N/A            | 4.196         | PK   |
| 7  |      | 5850.000        | 84.159                 | 79.715               | -38.041     | 122.200        | 4.444         | PK   |
| 8  |      | 5855.000        | 79.961                 | 75.561               | -30.839     | 110.800        | 4.400         | PK   |
| 9  |      | 5875.000        | 72.995                 | 68.684               | -32.205     | 105.200        | 4.312         | PK   |
| 10 |      | 5925.000        | 58.902                 | 54.271               | -9.298      | 68.200         | 4.630         | PK   |
| 11 |      | 5932.000        | 60.308                 | 55.690               | -7.892      | 68.200         | 4.618         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE160 at 5250MHz    |                         |

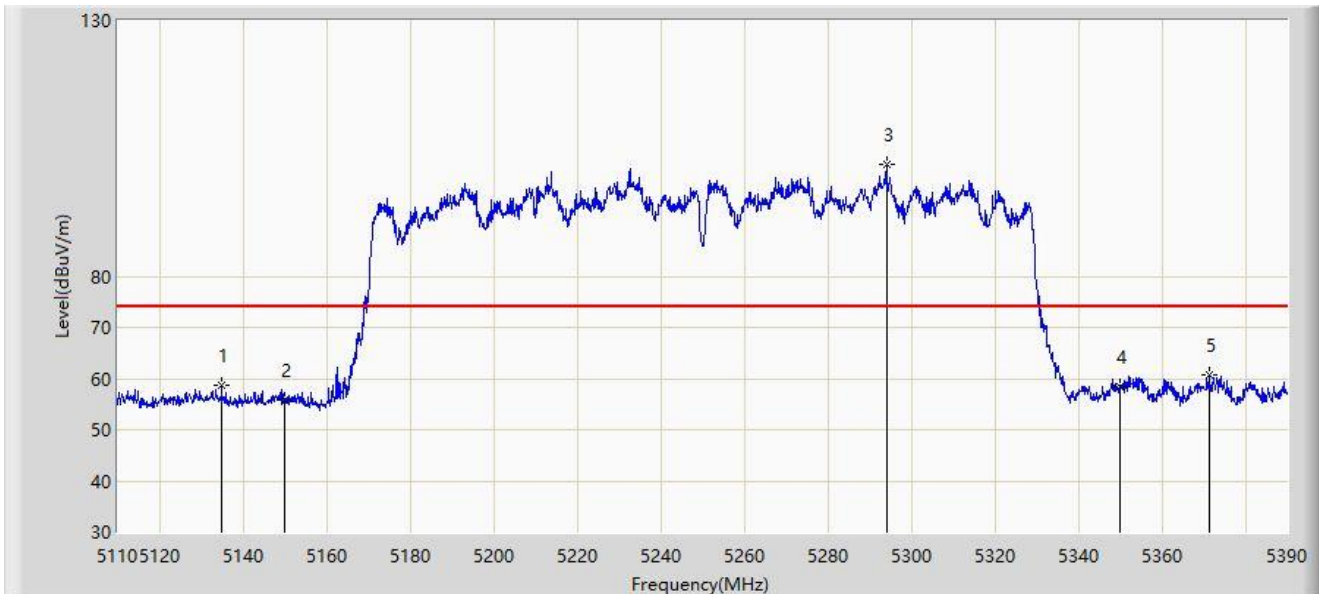


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5134.920        | 58.679                 | 55.069               | -15.321     | 74.000         | 3.611         | PK   |
| 2  |      | 5150.000        | 55.669                 | 52.028               | -18.331     | 74.000         | 3.641         | PK   |
| 3  |      | 5294.240        | 101.917                | 98.638               | N/A         | N/A            | 3.279         | PK   |
| 4  |      | 5350.000        | 58.429                 | 55.084               | -15.571     | 74.000         | 3.344         | PK   |
| 5  | *    | 5371.240        | 60.770                 | 57.442               | -13.230     | 74.000         | 3.328         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE160 at 5250MHz    |                         |

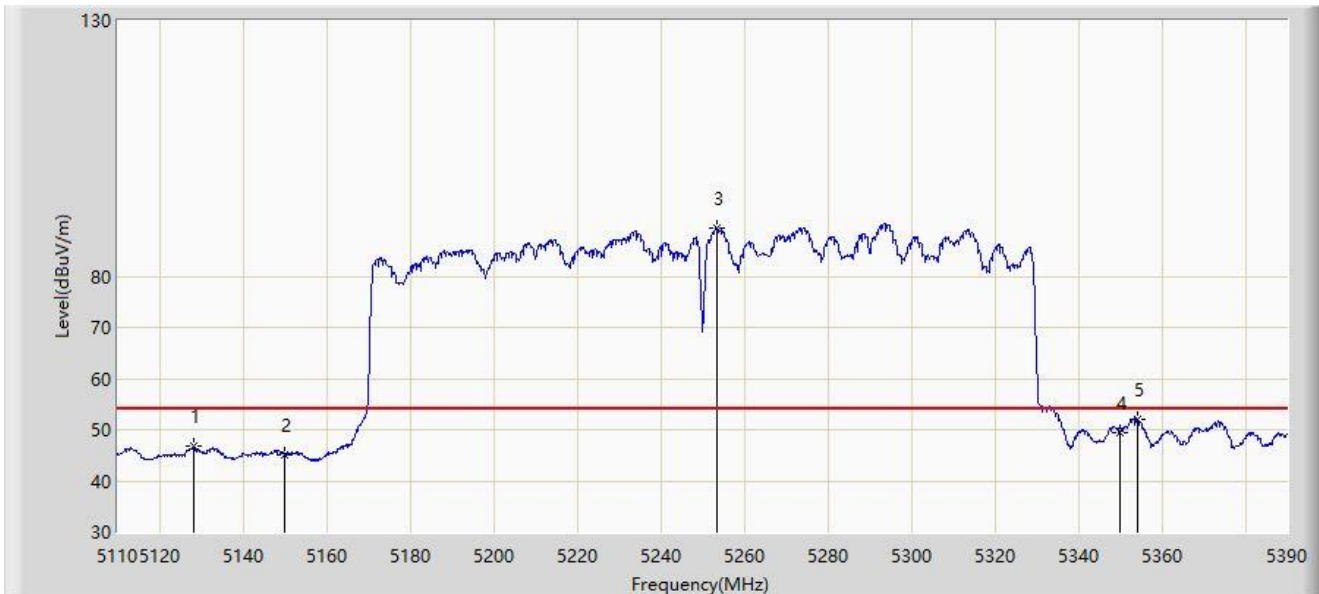


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5128.340        | 46.676                 | 43.129               | -7.324      | 54.000         | 3.548         | AV   |
| 2  |      | 5150.000        | 45.182                 | 41.541               | -8.818      | 54.000         | 3.641         | AV   |
| 3  |      | 5253.360        | 89.477                 | 86.190               | N/A         | N/A            | 3.287         | AV   |
| 4  |      | 5350.000        | 49.525                 | 46.180               | -4.475      | 54.000         | 3.344         | AV   |
| 5  | *    | 5354.160        | 52.167                 | 48.862               | -1.833      | 54.000         | 3.305         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE160 at 5250MHz    |                         |

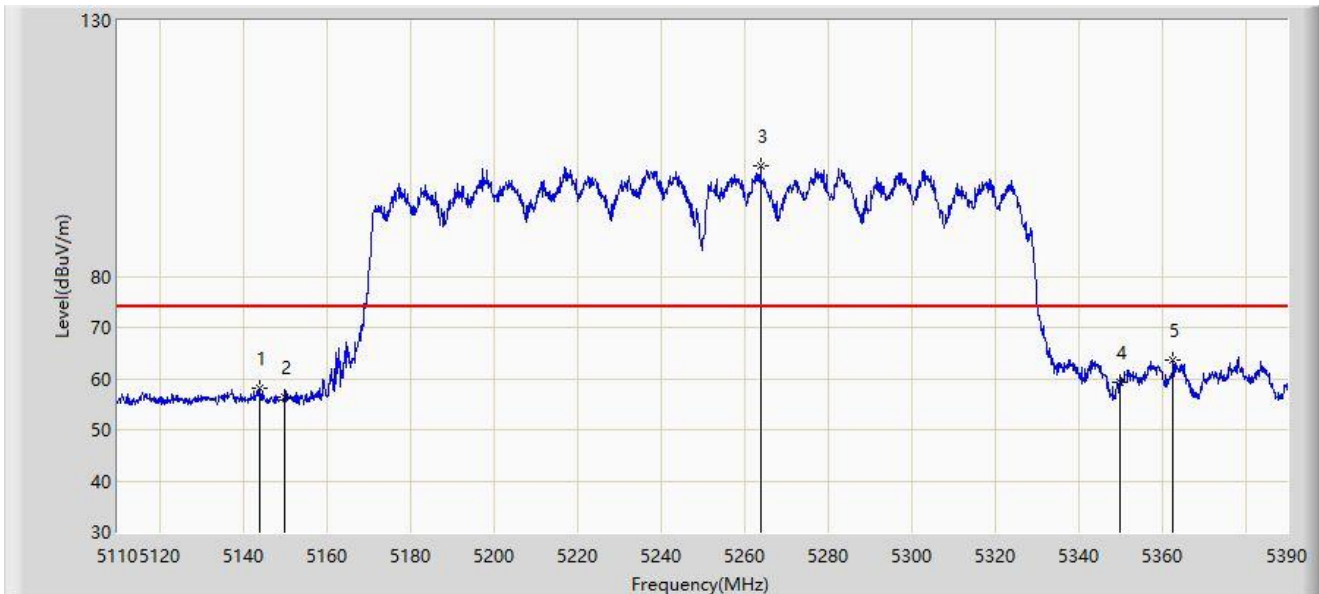


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5143.880        | 58.102                 | 54.465               | -15.898     | 74.000         | 3.637         | PK   |
| 2  |      | 5150.000        | 56.402                 | 52.761               | -17.598     | 74.000         | 3.641         | PK   |
| 3  |      | 5263.860        | 101.588                | 98.383               | N/A         | N/A            | 3.205         | PK   |
| 4  |      | 5350.000        | 59.346                 | 56.001               | -14.654     | 74.000         | 3.344         | PK   |
| 5  | *    | 5362.700        | 63.590                 | 60.310               | -10.410     | 74.000         | 3.280         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE160 at 5250MHz    |                         |

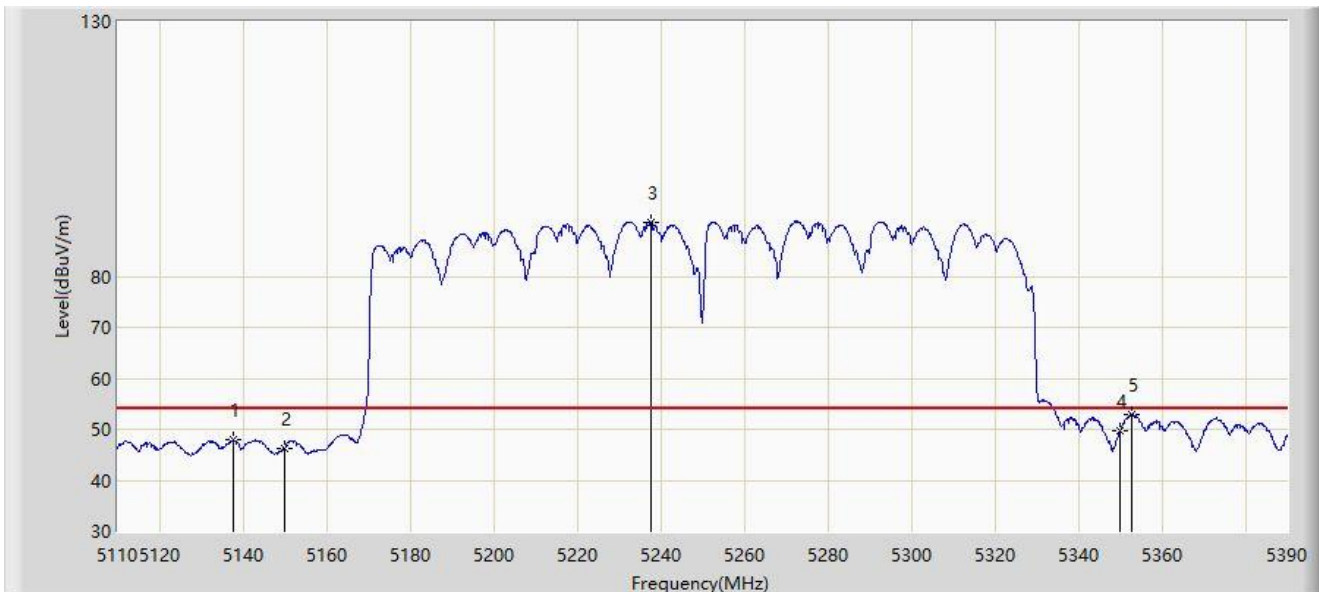


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5137.860        | 47.881                 | 44.262               | -6.119      | 54.000         | 3.619         | AV   |
| 2  |      | 5150.000        | 46.283                 | 42.642               | -7.717      | 54.000         | 3.641         | AV   |
| 3  |      | 5237.680        | 90.507                 | 87.137               | N/A         | N/A            | 3.369         | AV   |
| 4  |      | 5350.000        | 49.591                 | 46.246               | -4.409      | 54.000         | 3.344         | AV   |
| 5  | *    | 5352.900        | 52.864                 | 49.556               | -1.136      | 54.000         | 3.309         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE160 at 5570MHz    |                         |

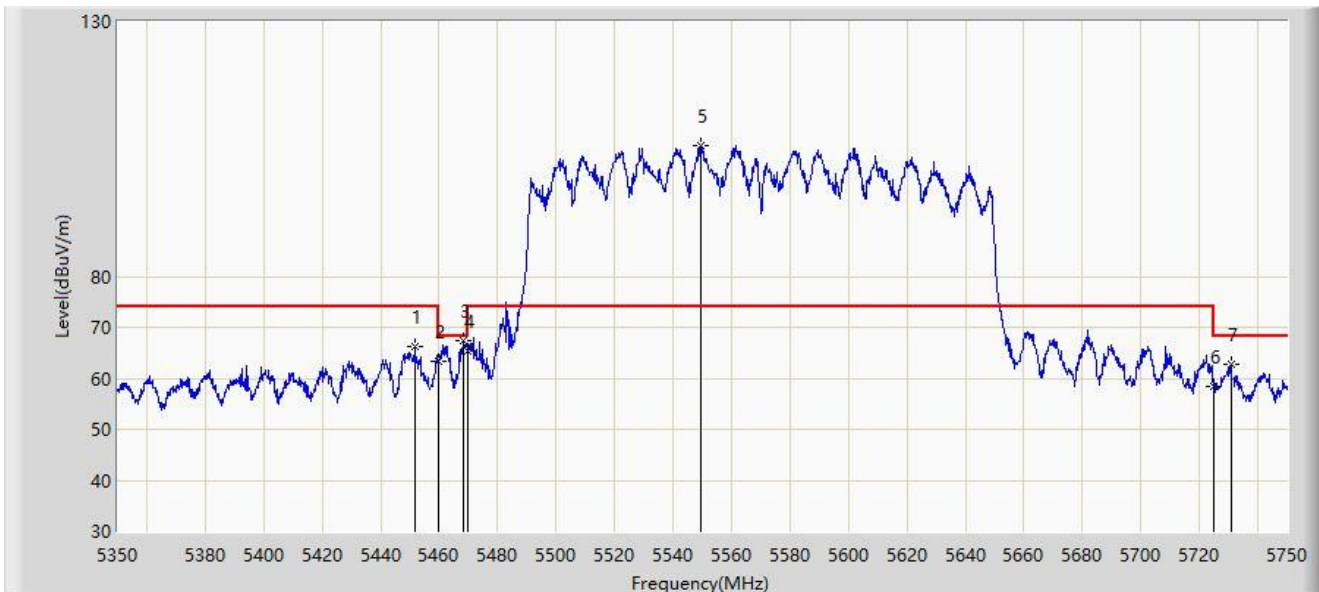


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5451.800        | 66.302                 | 62.747               | -7.698      | 74.000         | 3.555         | PK   |
| 2  |      | 5460.000        | 63.286                 | 59.656               | -10.714     | 74.000         | 3.630         | PK   |
| 3  | *    | 5468.400        | 67.452                 | 63.771               | -0.748      | 68.200         | 3.682         | PK   |
| 4  |      | 5470.000        | 65.458                 | 61.767               | -2.742      | 68.200         | 3.691         | PK   |
| 5  |      | 5549.600        | 105.563                | 101.859              | N/A         | N/A            | 3.704         | PK   |
| 6  |      | 5725.000        | 58.548                 | 54.605               | -9.652      | 68.200         | 3.943         | PK   |
| 7  |      | 5730.800        | 62.716                 | 58.710               | -5.484      | 68.200         | 4.005         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE160 at 5570MHz    |                         |

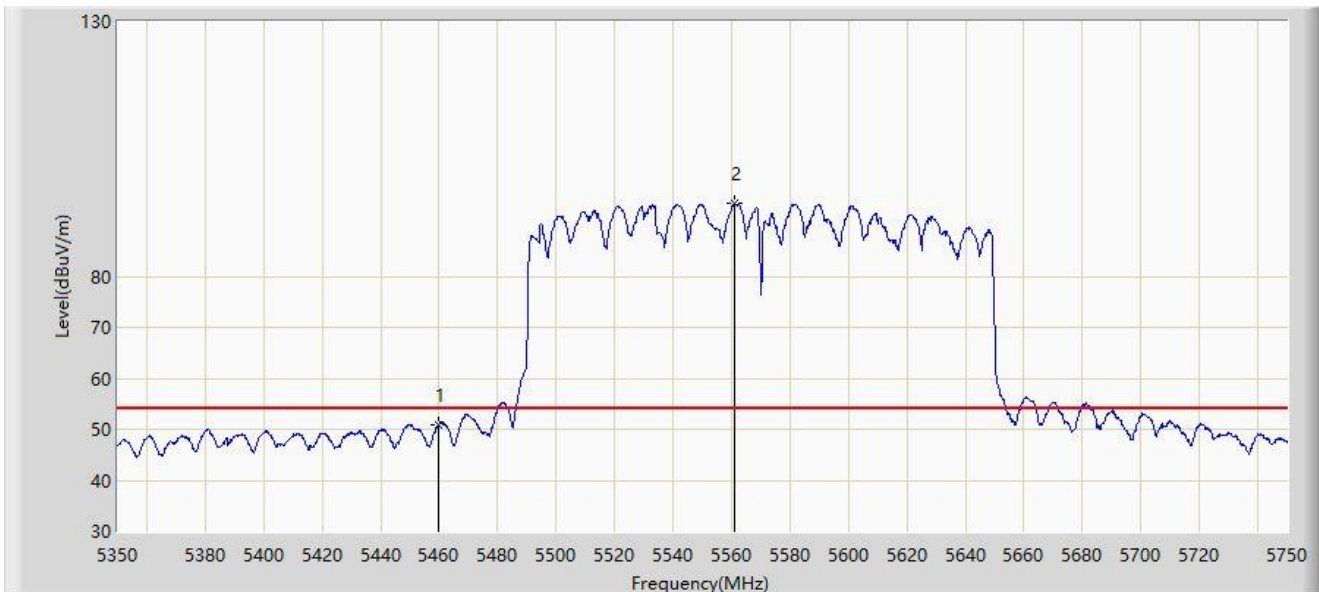


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 51.014                 | 47.384               | -2.986      | 54.000         | 3.630         | AV   |
| 2  |      | 5561.200        | 94.461                 | 90.709               | N/A         | N/A            | 3.753         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE160 at 5570MHz    |                         |

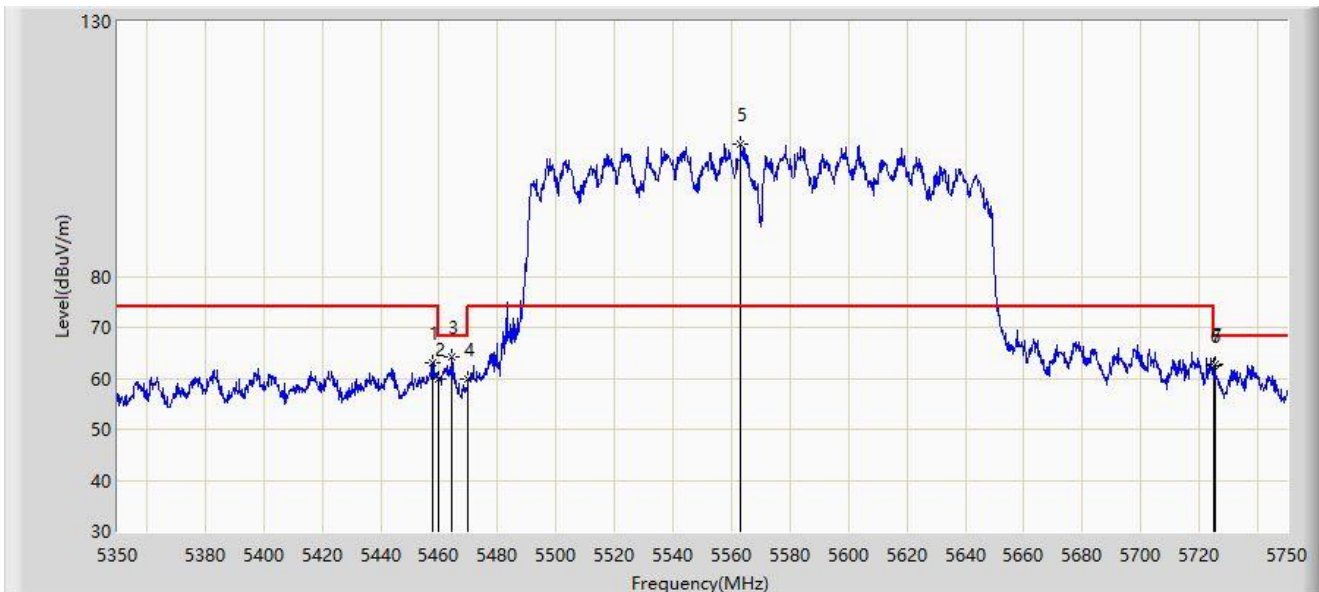


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5457.800        | 63.126                 | 59.509               | -10.874     | 74.000         | 3.617         | PK   |
| 2  |      | 5460.000        | 59.803                 | 56.173               | -14.197     | 74.000         | 3.630         | PK   |
| 3  | *    | 5464.400        | 64.174                 | 60.517               | -4.026      | 68.200         | 3.657         | PK   |
| 4  |      | 5470.000        | 59.965                 | 56.274               | -8.235      | 68.200         | 3.691         | PK   |
| 5  |      | 5563.000        | 106.068                | 102.303              | N/A         | N/A            | 3.766         | PK   |
| 6  |      | 5725.000        | 62.375                 | 58.432               | -5.825      | 68.200         | 3.943         | PK   |
| 7  |      | 5725.400        | 62.787                 | 58.843               | -5.413      | 68.200         | 3.944         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Site: WZ-AC1                                        | Test Date: 2022-11-24   |
| Limit: FCC_5G_RE(3m)                                | Engineer: Charles Zhang |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical      |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz     |
| Test Mode: Transmit by 802.11ax-HE160 at 5570MHz    |                         |

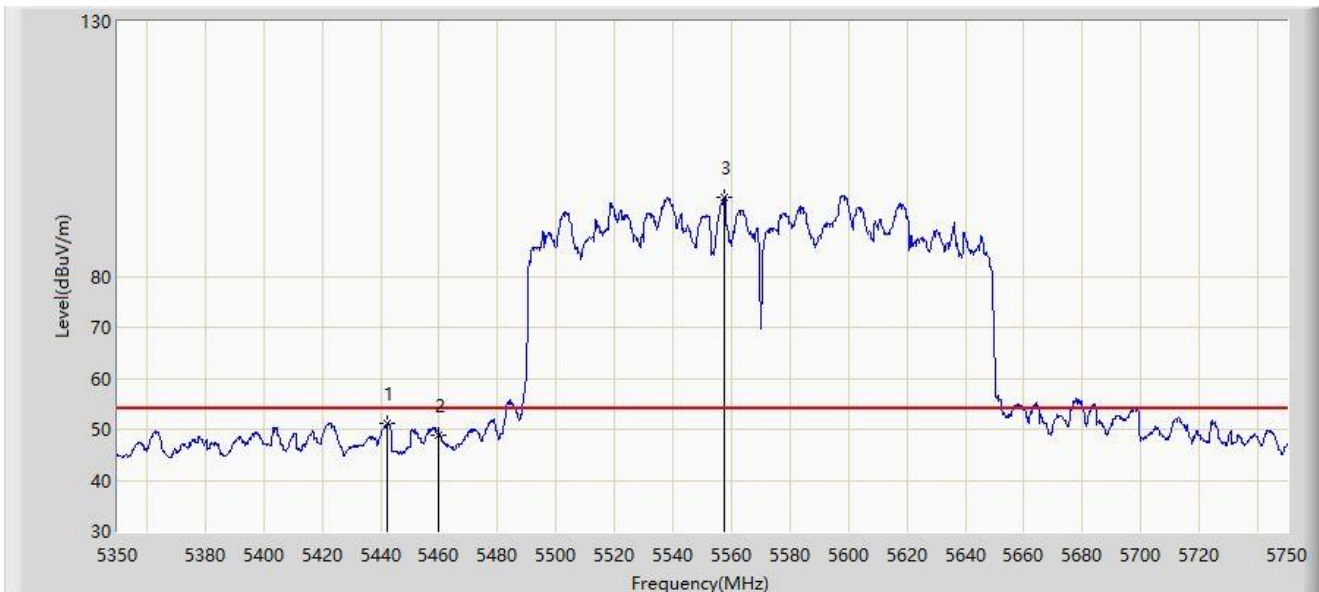

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5442.000        | 51.091                 | 47.547               | -2.909      | 54.000         | 3.545         | AV   |
| 2  |      | 5460.000        | 48.806                 | 45.176               | -5.194      | 54.000         | 3.630         | AV   |
| 3  |      | 5557.600        | 95.593                 | 91.867               | N/A         | N/A            | 3.726         | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

### For Antenna 5#

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal  |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz    |                       |

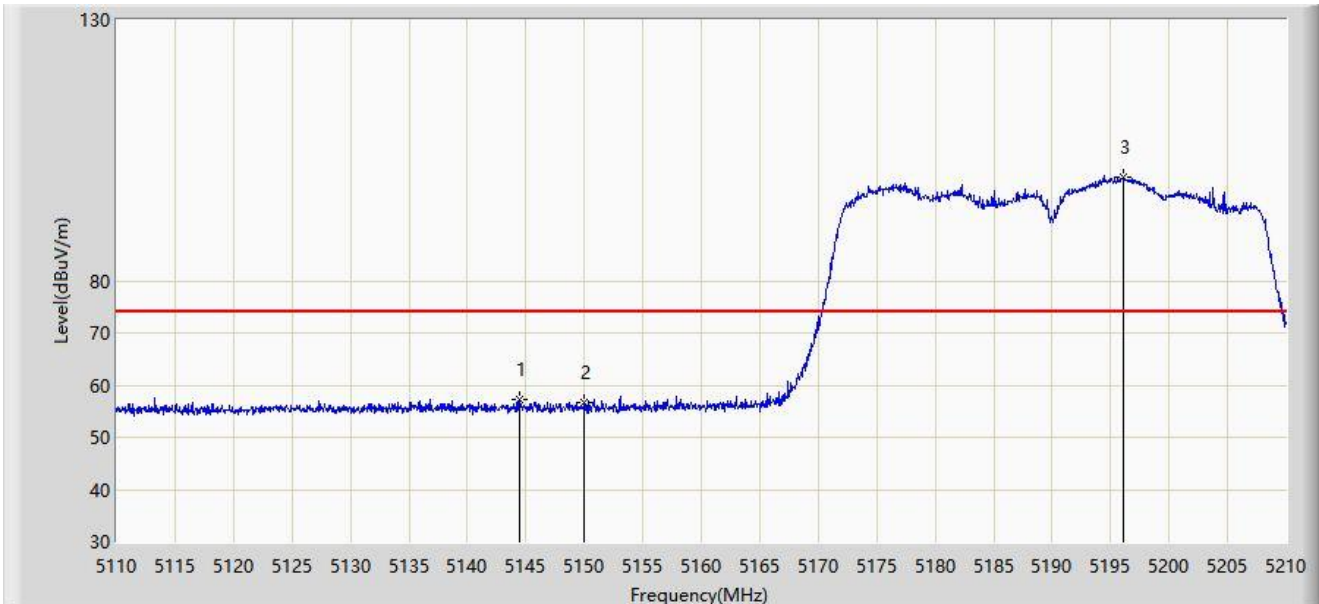


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5144.500        | 57.199                 | 53.560               | -16.801     | 74.000         | 3.638         | PK   |
| 2  |      | 5150.000        | 56.611                 | 52.970               | -17.389     | 74.000         | 3.641         | PK   |
| 3  |      | 5196.050        | 99.900                 | 96.596               | N/A         | N/A            | 3.304         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal  |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz    |                       |

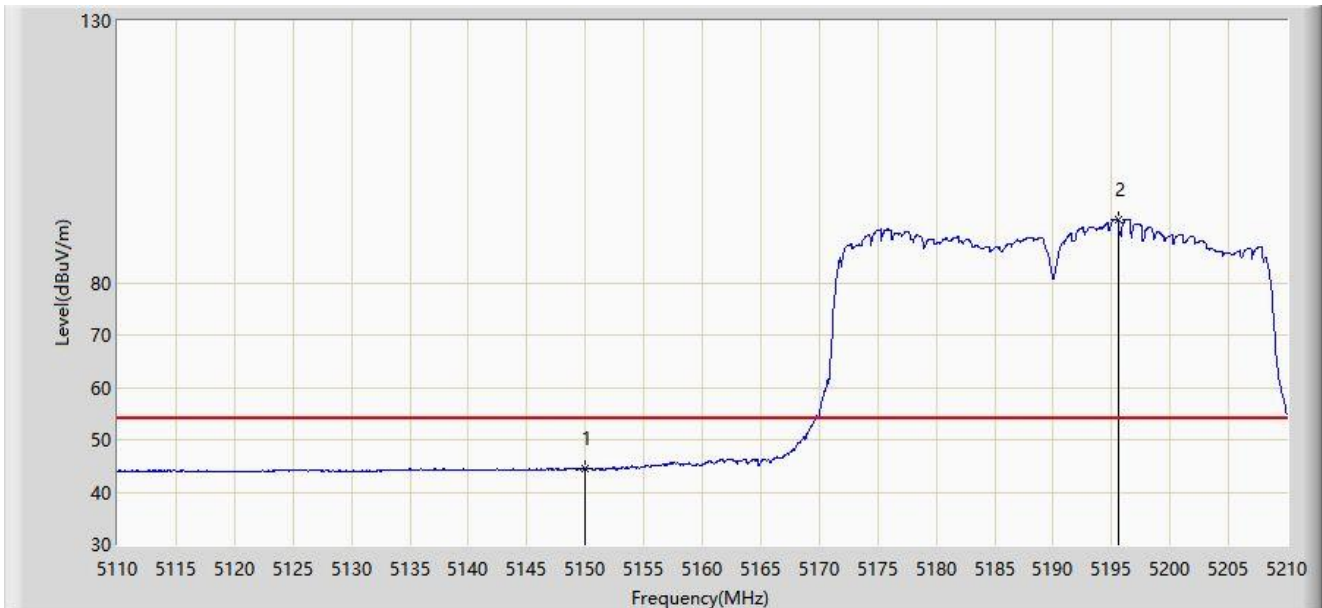


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5150.000        | 44.424                 | 40.783               | -9.576      | 54.000         | 3.641         | AV   |
| 2  |      | 5195.600        | 92.087                 | 88.781               | N/A         | N/A            | 3.307         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz    |                       |

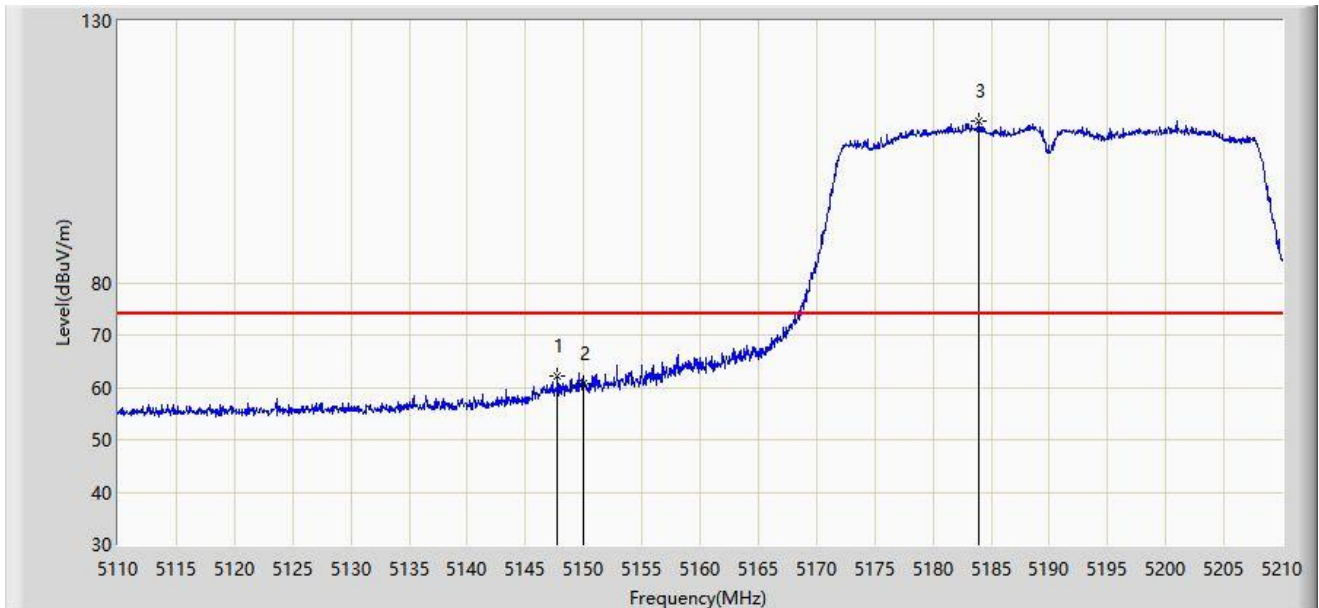


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5147.750        | 62.129                 | 58.480               | -11.871     | 74.000         | 3.649         | PK   |
| 2  |      | 5150.000        | 60.740                 | 57.099               | -13.260     | 74.000         | 3.641         | PK   |
| 3  |      | 5183.950        | 110.751                | 107.411              | N/A         | N/A            | 3.340         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz    |                       |

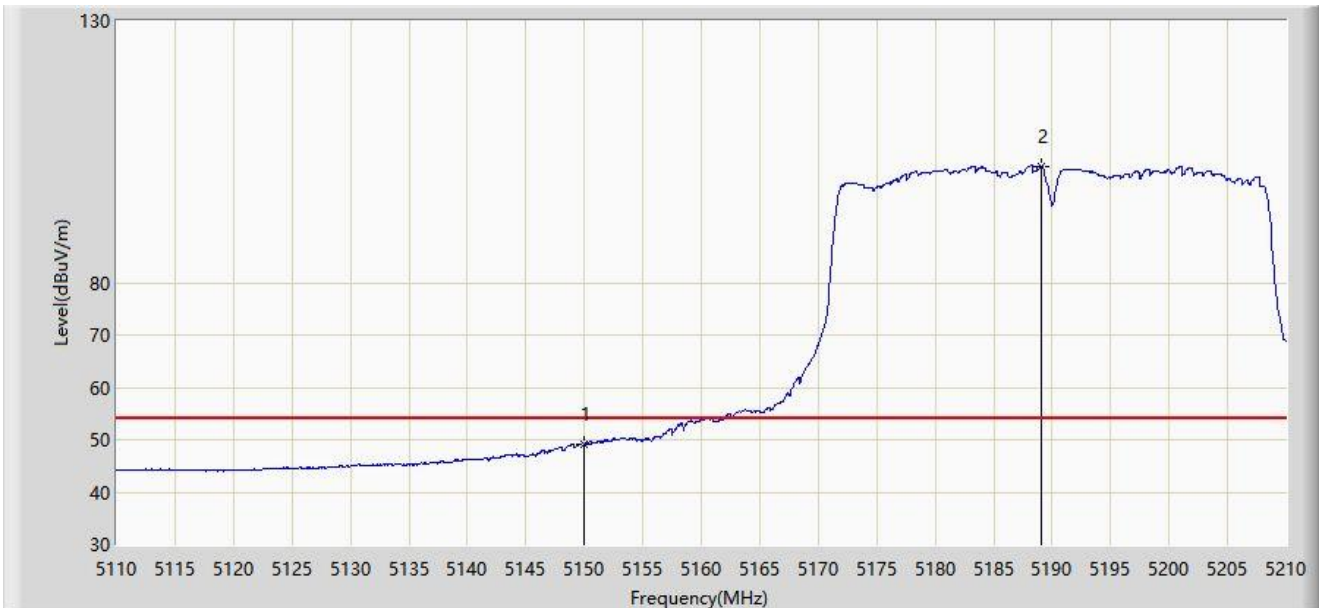


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5150.000        | 49.270                 | 45.629               | -4.730      | 54.000         | 3.641         | AV   |
| 2  |      | 5189.100        | 102.243                | 98.897               | N/A         | N/A            | 3.345         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal  |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz     |                       |

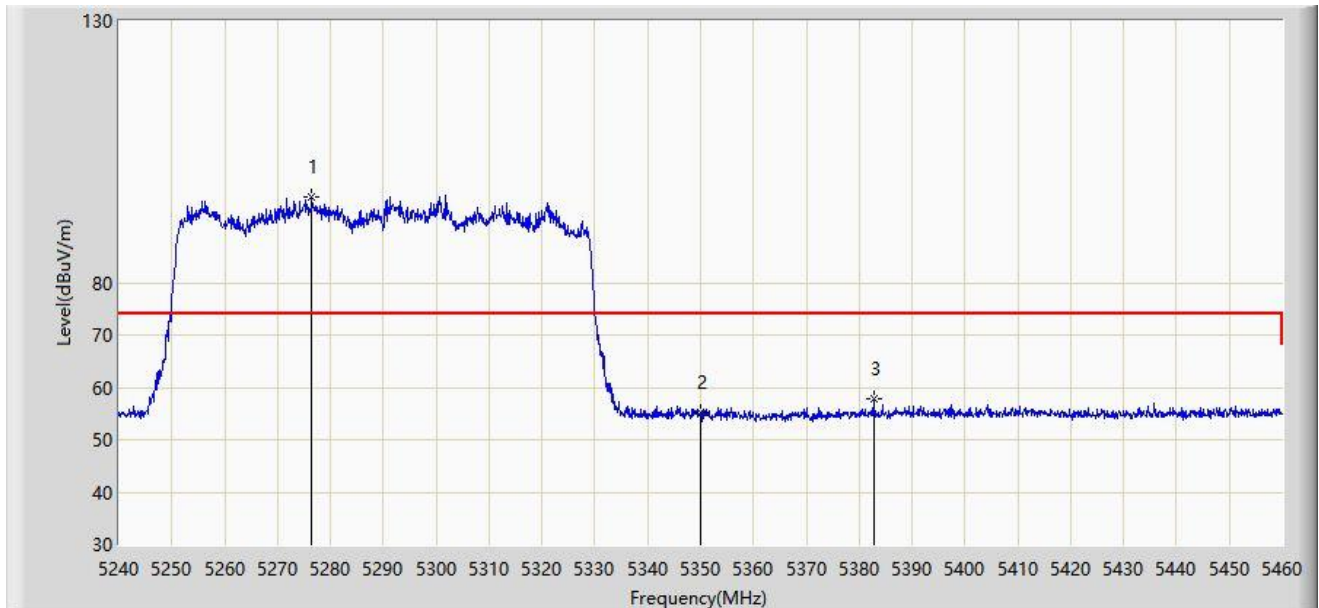


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5276.520        | 96.487                 | 93.380               | N/A         | N/A            | 3.108         | PK   |
| 2  |      | 5350.000        | 55.078                 | 51.733               | -18.922     | 74.000         | 3.344         | PK   |
| 3  | *    | 5382.670        | 57.701                 | 54.145               | -16.299     | 74.000         | 3.557         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal  |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz     |                       |

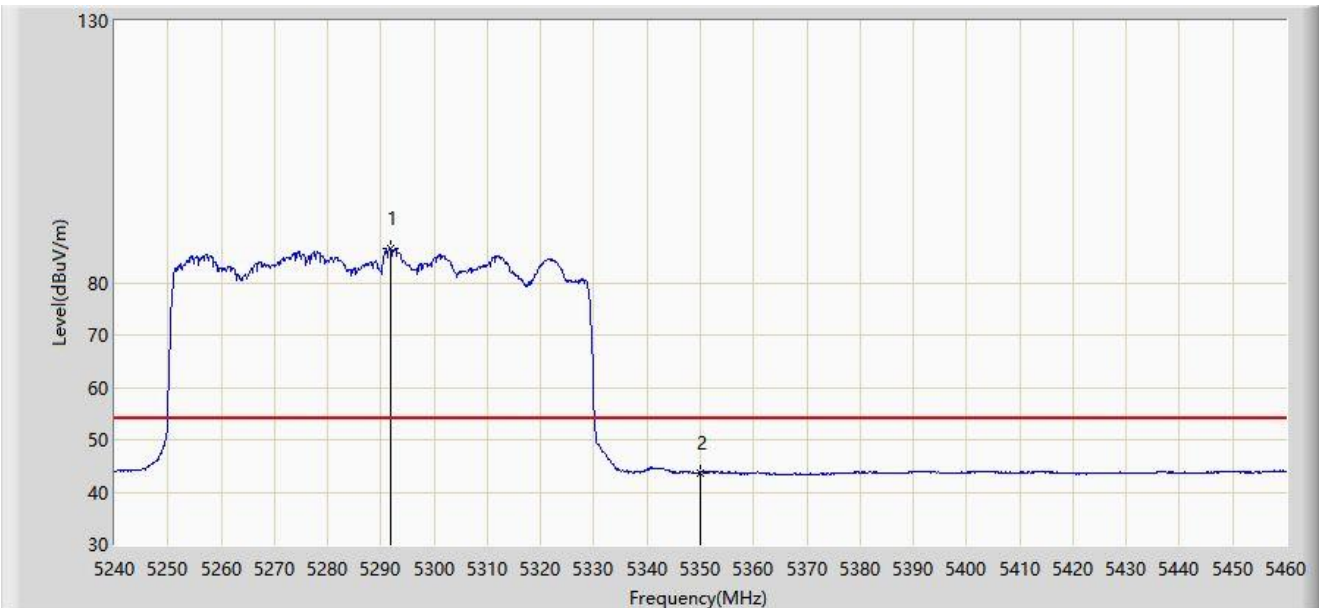


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5291.920        | 86.460                 | 83.211               | N/A         | N/A            | 3.249         | AV   |
| 2  | *    | 5350.000        | 43.715                 | 40.370               | -10.285     | 54.000         | 3.344         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz     |                       |

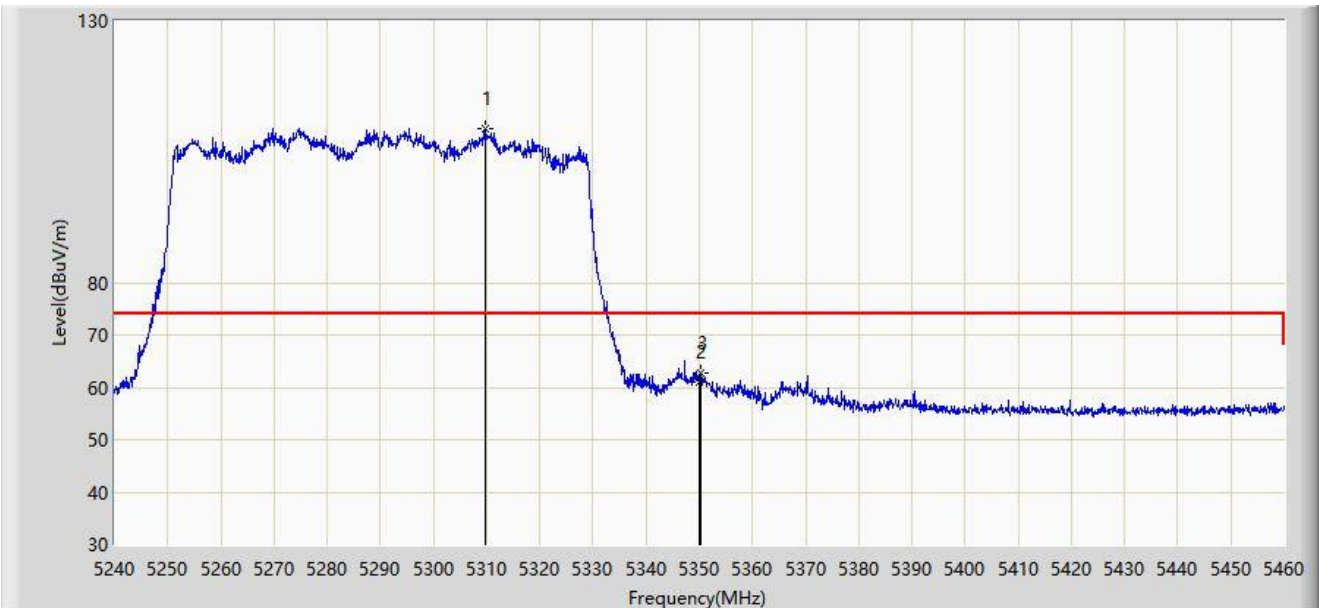


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5309.850        | 109.295                | 105.969              | N/A         | N/A            | 3.326         | PK   |
| 2  |      | 5350.000        | 61.100                 | 57.755               | -12.900     | 74.000         | 3.344         | PK   |
| 3  | *    | 5350.220        | 62.894                 | 59.553               | -11.106     | 74.000         | 3.342         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz     |                       |

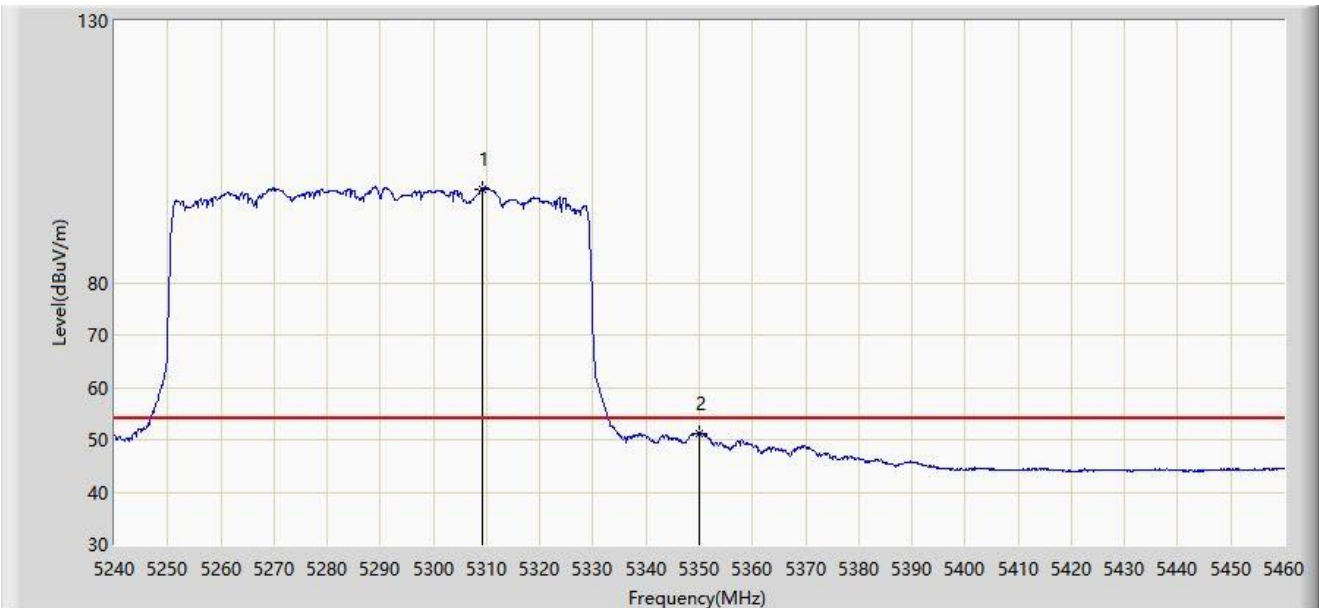


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5309.080        | 97.927                 | 94.604               | N/A         | N/A            | 3.323         | AV   |
| 2  | *    | 5350.000        | 51.099                 | 47.754               | -2.901      | 54.000         | 3.344         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal  |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz    |                       |

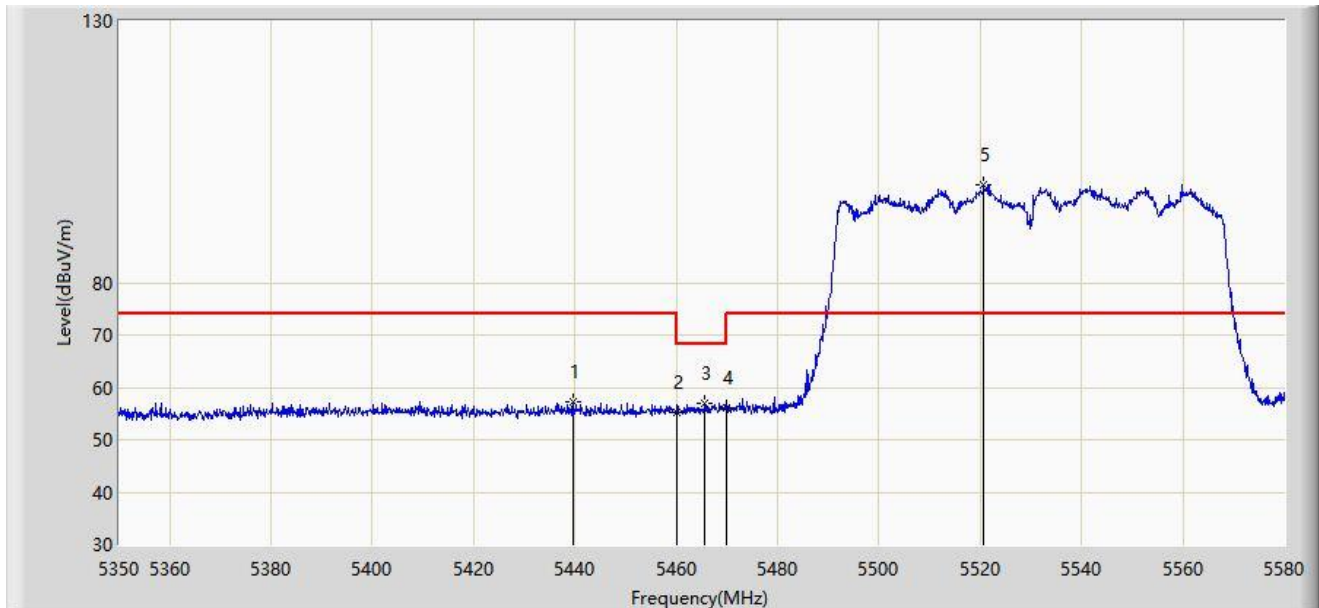


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5439.700        | 57.337                 | 53.796               | -16.663     | 74.000         | 3.541         | PK   |
| 2  |      | 5460.000        | 55.194                 | 51.564               | -18.806     | 74.000         | 3.630         | PK   |
| 3  | *    | 5465.690        | 56.963                 | 53.298               | -11.237     | 68.200         | 3.665         | PK   |
| 4  |      | 5470.000        | 55.954                 | 52.263               | -12.246     | 68.200         | 3.691         | PK   |
| 5  |      | 5520.660        | 98.592                 | 94.917               | N/A         | N/A            | 3.676         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal  |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz    |                       |

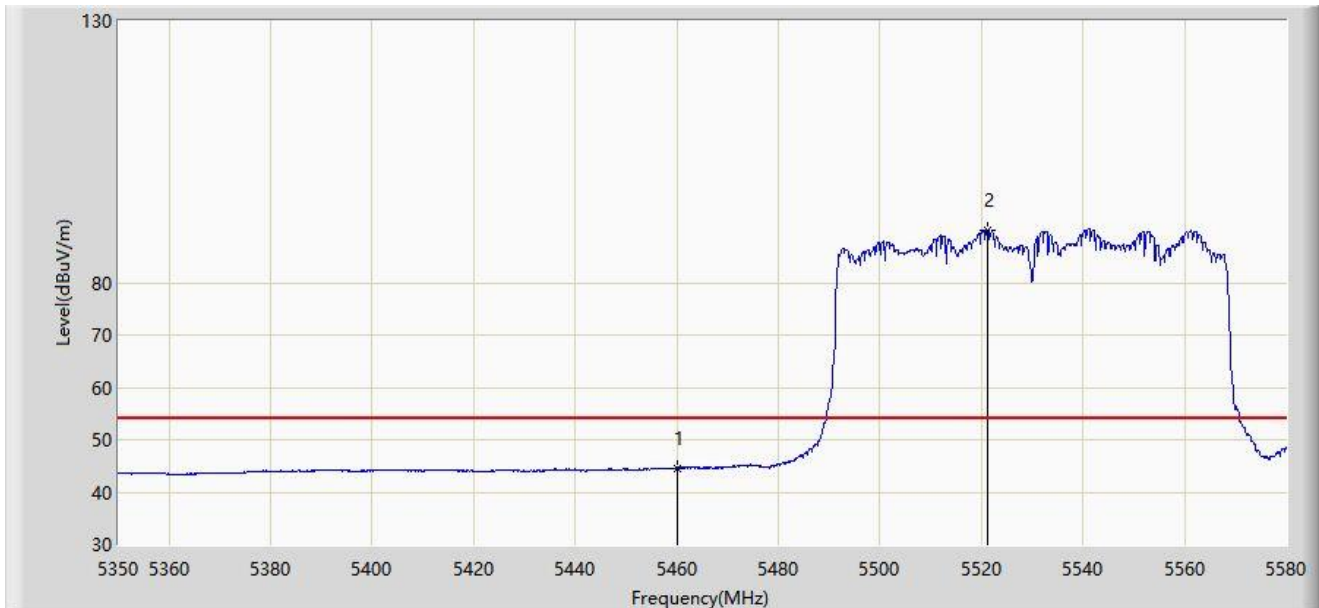


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 44.572                 | 40.942               | -9.428      | 54.000         | 3.630         | AV   |
| 2  |      | 5521.235        | 89.918                 | 86.249               | N/A         | N/A            | 3.669         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz    |                       |

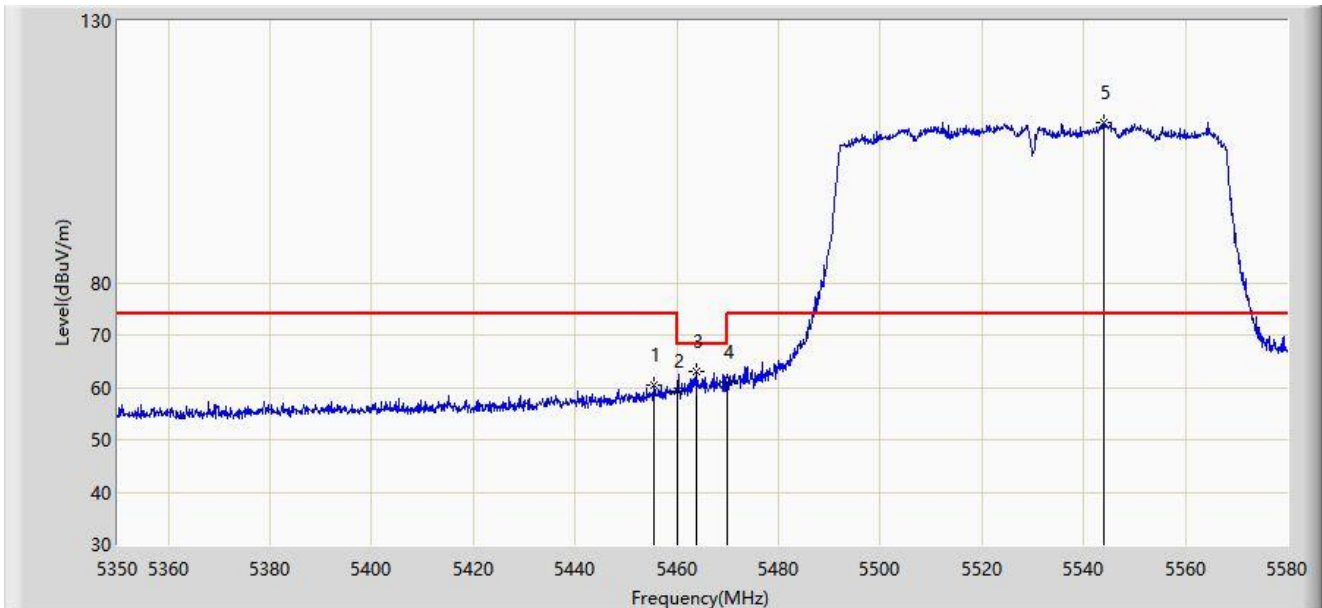


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5455.455        | 60.296                 | 56.711               | -13.704     | 74.000         | 3.584         | PK   |
| 2  |      | 5460.000        | 59.393                 | 55.763               | -14.607     | 74.000         | 3.630         | PK   |
| 3  | *    | 5463.965        | 63.118                 | 59.464               | -5.082      | 68.200         | 3.654         | PK   |
| 4  |      | 5470.000        | 61.001                 | 57.310               | -7.199      | 68.200         | 3.691         | PK   |
| 5  |      | 5543.890        | 110.628                | 106.961              | N/A         | N/A            | 3.666         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5G_RE(3m)                                | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz    |                       |

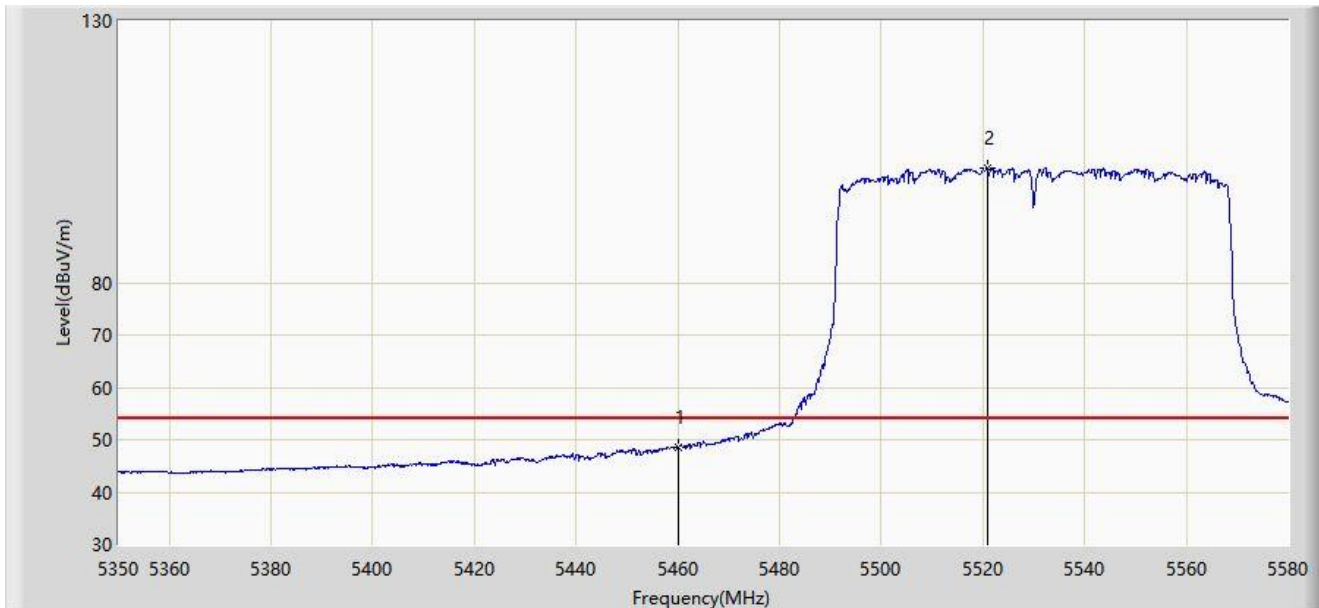


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 48.663                 | 45.033               | -5.337      | 54.000         | 3.630         | AV   |
| 2  |      | 5520.890        | 101.945                | 98.272               | N/A         | N/A            | 3.673         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Horizontal  |
| EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz    |                       |

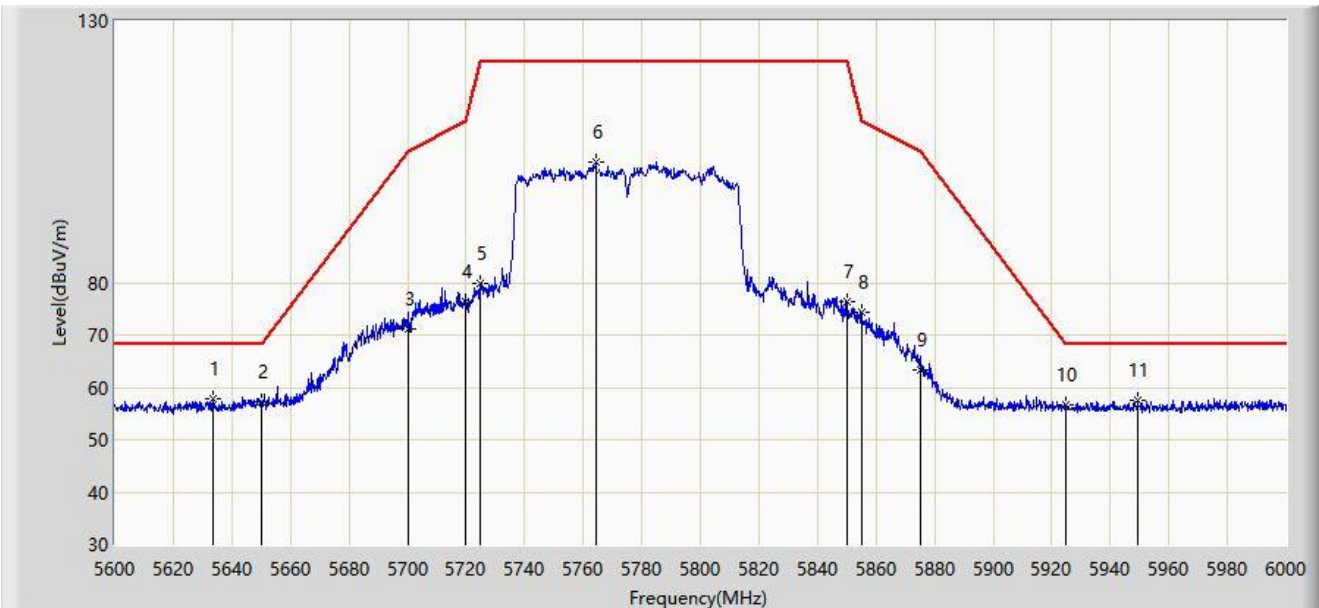


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5633.400        | 57.847                 | 54.187               | -10.353     | 68.200         | 3.660         | PK   |
| 2  |      | 5650.000        | 57.204                 | 53.290               | -10.996     | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 71.113                 | 67.198               | -34.087     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 76.395                 | 72.466               | -34.405     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 79.903                 | 75.960               | -42.297     | 122.200        | 3.943         | PK   |
| 6  |      | 5764.400        | 103.134                | 98.907               | N/A         | N/A            | 4.227         | PK   |
| 7  |      | 5850.000        | 76.279                 | 71.835               | -45.921     | 122.200        | 4.444         | PK   |
| 8  |      | 5855.000        | 74.239                 | 69.839               | -36.561     | 110.800        | 4.400         | PK   |
| 9  |      | 5875.000        | 63.199                 | 58.888               | -42.001     | 105.200        | 4.312         | PK   |
| 10 |      | 5925.000        | 56.731                 | 52.100               | -11.469     | 68.200         | 4.630         | PK   |
| 11 |      | 5949.400        | 57.524                 | 53.028               | -10.676     | 68.200         | 4.496         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                     |                       |
|-----------------------------------------------------|-----------------------|
| Site: WZ-AC1                                        | Test Date: 2022-12-23 |
| Limit: FCC_5.8G_RE(3m)                              | Engineer: Carl Jiang  |
| Probe: BBHA9120D_1167_1-18GHz                       | Polarity: Vertical    |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz    |                       |

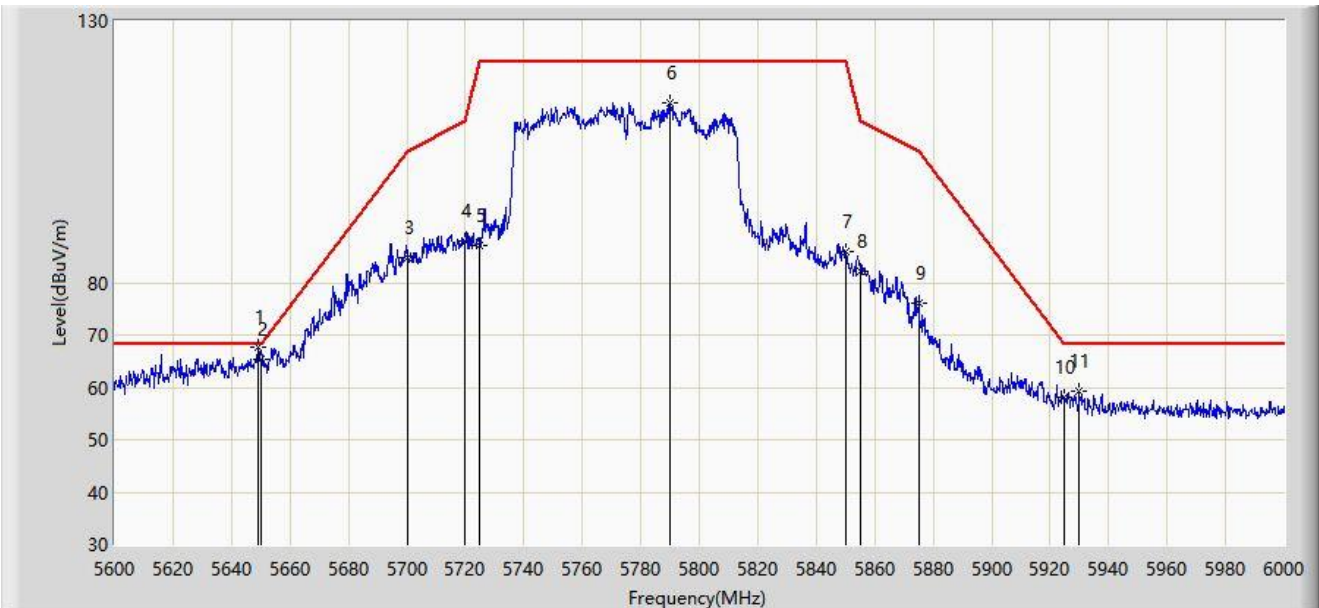

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5649.200        | 67.544                 | 63.649               | -0.656      | 68.200         | 3.895         | PK   |
| 2  |      | 5650.000        | 65.262                 | 61.348               | -2.938      | 68.200         | 3.914         | PK   |
| 3  |      | 5700.000        | 84.848                 | 80.933               | -20.352     | 105.200        | 3.916         | PK   |
| 4  |      | 5720.000        | 88.032                 | 84.103               | -22.768     | 110.800        | 3.929         | PK   |
| 5  |      | 5725.000        | 87.147                 | 83.204               | -35.053     | 122.200        | 3.943         | PK   |
| 6  |      | 5789.800        | 114.375                | 110.130              | N/A         | N/A            | 4.246         | PK   |
| 7  |      | 5850.000        | 85.954                 | 81.510               | -36.246     | 122.200        | 4.444         | PK   |
| 8  |      | 5855.000        | 82.236                 | 77.836               | -28.564     | 110.800        | 4.400         | PK   |
| 9  |      | 5875.000        | 76.222                 | 71.911               | -28.978     | 105.200        | 4.312         | PK   |
| 10 |      | 5925.000        | 58.232                 | 53.601               | -9.968      | 68.200         | 4.630         | PK   |
| 11 |      | 5929.800        | 59.206                 | 54.571               | -8.994      | 68.200         | 4.635         | PK   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

### A.9 AC Conducted Emissions Test Result

|                                                          |                       |
|----------------------------------------------------------|-----------------------|
| Site: WZ-SR2                                             | Test Date: 2022-12-23 |
| Limit: FCC_Part15.207_CE_AC Power                        | Engineer: Linda Wei   |
| Probe: ENV216_101683_Filter Off_E                        | Polarity: Line        |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module      | Power: AC 120V/60Hz   |
| <b>Test Mode:</b> Transmit by 802.11a at channel 5180MHz |                       |

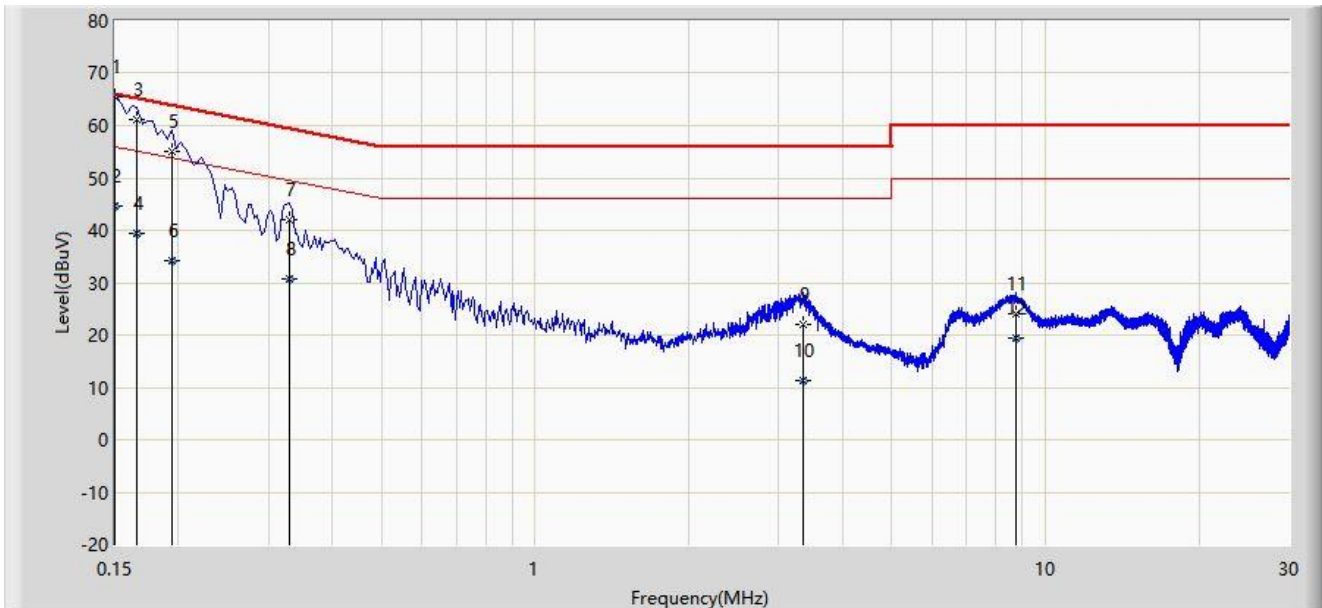


| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  | *    | 0.150           | 65.439               | 55.562               | -0.561      | 66.000       | 9.878       | QP   |
| 2  |      | 0.150           | 44.548               | 34.670               | -11.452     | 56.000       | 9.878       | AV   |
| 3  |      | 0.166           | 61.100               | 51.220               | -4.058      | 65.158       | 9.880       | QP   |
| 4  |      | 0.166           | 39.347               | 29.467               | -15.811     | 55.158       | 9.880       | AV   |
| 5  |      | 0.194           | 55.080               | 45.199               | -8.784      | 63.864       | 9.881       | QP   |
| 6  |      | 0.194           | 34.133               | 24.252               | -19.731     | 53.864       | 9.881       | AV   |
| 7  |      | 0.330           | 42.014               | 32.104               | -17.437     | 59.451       | 9.910       | QP   |
| 8  |      | 0.330           | 30.660               | 20.750               | -18.791     | 49.451       | 9.910       | AV   |
| 9  |      | 3.358           | 22.155               | 11.897               | -33.845     | 56.000       | 10.259      | QP   |
| 10 |      | 3.358           | 11.421               | 1.162                | -34.579     | 46.000       | 10.259      | AV   |
| 11 |      | 8.746           | 24.138               | 13.287               | -35.862     | 60.000       | 10.851      | QP   |
| 12 |      | 8.746           | 19.352               | 8.501                | -30.648     | 50.000       | 10.851      | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

|                                                          |                       |
|----------------------------------------------------------|-----------------------|
| Site: WZ-SR2                                             | Test Date: 2022-12-23 |
| Limit: FCC_Part15.207_CE_AC Power                        | Engineer: Linda Wei   |
| Probe: ENV216_101683_Filter Off_E                        | Polarity: Neutral     |
| EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module      | Power: AC 120V/60Hz   |
| <b>Test Mode:</b> Transmit by 802.11a at channel 5180MHz |                       |

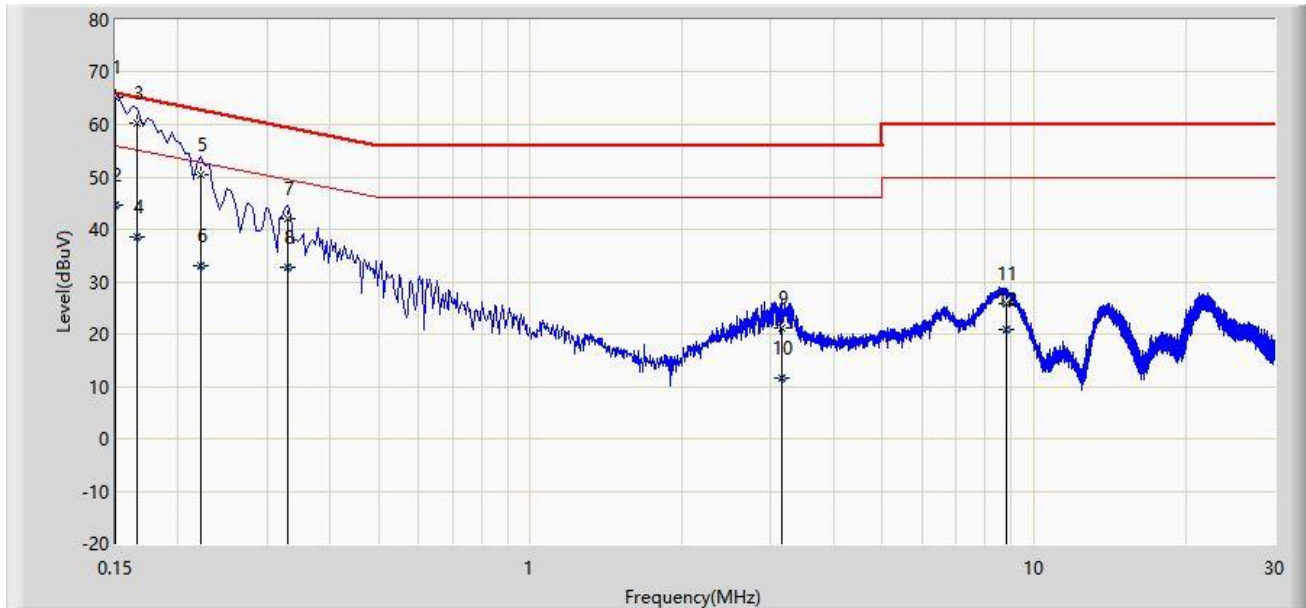

| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  | *    | 0.150           | 65.339               | 55.439               | -0.661      | 66.000       | 9.900       | QP   |
| 2  |      | 0.150           | 44.562               | 34.662               | -11.438     | 56.000       | 9.900       | AV   |
| 3  |      | 0.166           | 60.168               | 50.264               | -4.991      | 65.158       | 9.903       | QP   |
| 4  |      | 0.166           | 38.481               | 28.577               | -16.678     | 55.158       | 9.903       | AV   |
| 5  |      | 0.222           | 50.434               | 40.520               | -12.310     | 62.744       | 9.913       | QP   |
| 6  |      | 0.222           | 32.952               | 23.038               | -19.792     | 52.744       | 9.913       | AV   |
| 7  |      | 0.330           | 41.905               | 31.974               | -17.546     | 59.451       | 9.931       | QP   |
| 8  |      | 0.330           | 32.631               | 22.700               | -16.820     | 49.451       | 9.931       | AV   |
| 9  |      | 3.150           | 21.294               | 11.048               | -34.706     | 56.000       | 10.247      | QP   |
| 10 |      | 3.150           | 11.685               | 1.439                | -34.315     | 46.000       | 10.247      | AV   |
| 11 |      | 8.810           | 25.682               | 14.795               | -34.318     | 60.000       | 10.887      | QP   |
| 12 |      | 8.810           | 20.946               | 10.058               | -29.054     | 50.000       | 10.887      | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B – Test Setup Photograph**

Refer to “2301RSU015-UT” file.

## **Appendix C – EUT Photograph**

Refer to “2301RSU015-UE” file.

---

The End

---