

Wireless Field Panel Transceiver (FPX)

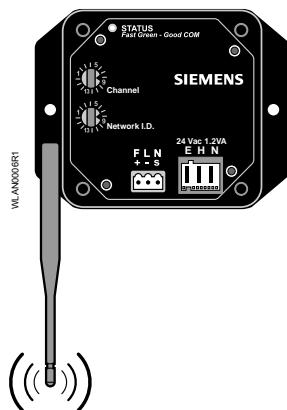


Figure 1. Wireless Field Panel Transceiver (FPX).

Product Description

The FPX (Figure 1) is mounted at or near the field panel and is powered by 24 Vac. The antenna can either be direct-mounted to the radio, or mounted remotely for installations where the location of the FPX would cause the antenna to be shielded. For example, when the FPX is mounted inside a field panel enclosure.

Product Numbers

563-005 Wireless Field Panel Transceiver (FPX)

563-007 Direct Mount Antenna

563-008 Remote Mount Antenna



Transceivers do not come with an antenna. Antenna(s) must be ordered separately.

Accessories

563-027

Pre-terminated Cable Kit (2 cables)
(One 14" Power and one 14" Comm. -
recommended for Factory Mounting)

Warning/Caution Notations



WARNING:

Personal injury/loss of life may occur if you do not follow the procedures as specified.



CAUTION:

Equipment damage or loss of data may occur if you do not follow the procedures as specified.

Expected Installation Time

5 minutes.

Tools

- Electro-Static Discharge wrist strap
- Small flat-blade screwdriver
- Cordless drill/driver set

Prerequisites

- All wiring must conform to NEC and local codes and regulations.
- 24 Vac Class II power source available.
- Any application specific hardware or devices installed.

Antenna Mounting

Direct Mount Antenna

The preferred mounting configuration is to mount the FPX outside the field panel cabinet in a location where it will establish the maximum number of communication links with FLNXs. For example, for a VAV application this will likely be above the field panel in the ceiling plenum (Figure 2).

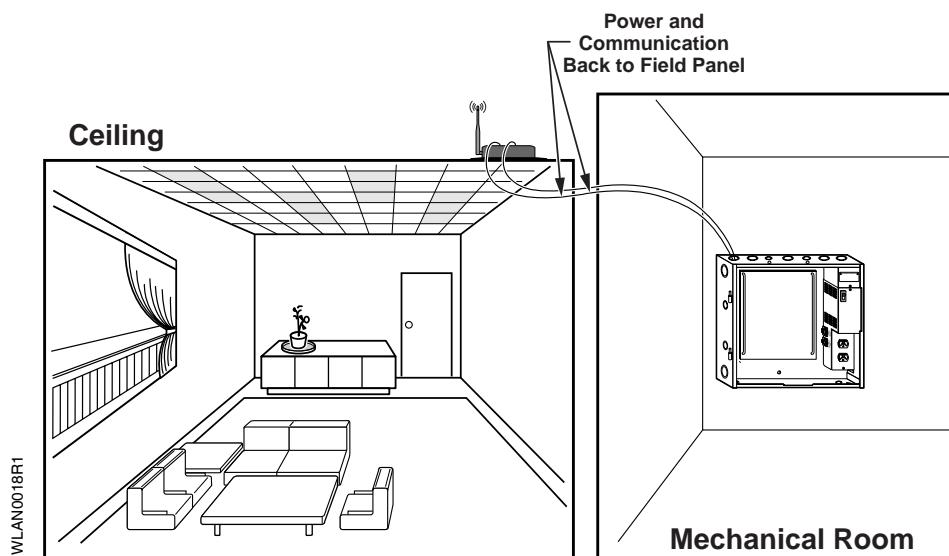


Figure 2. Radio mounted outside field panel enclosure.

Remote Mount Antenna

The FPX is mounted inside the field panel enclosure and the antenna is brought through a 1/2" knockout with the antenna extending out the top of the cabinet (Figure 3).

The antenna extension cable is 12" long.

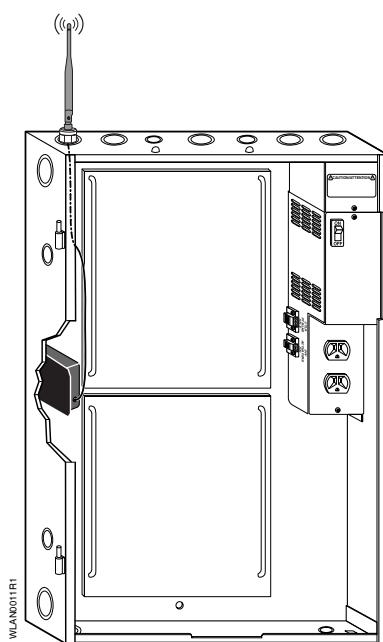


Figure 3. Radio mounted inside field panel enclosure.

Installation

1. Determine the optimal location of the FPX and antenna for RF communications.
2. Mount the FPX using screws, double-sided tape or velcro (included).
3. Connect the communication port of the FLN device to the FPX.
4. Connect 24 Vac power.
5. **For Remote Mount Antenna:** Locate the liquid tight fitting so that the antenna extension cable does not incur excessive pull force. At the desired enclosure location, punch a 1/2" knockout and use the locknut to secure the body of the liquid tight fitting into the knockout.
6. **For Remote Mount Antenna:** Route the antenna through the body of the liquid tight fitting (Figure 4). Hand-tighten the liquid tight fitting nut to secure the antenna in place.



Make certain the liquid tight fitting nut tightens on the antenna base (Figure 4) and not the antenna so that the antenna can be articulated.

7. Connect the antenna wire to the FPX.
8. Position the antenna in a vertical orientation (up or down).

The installation is complete.

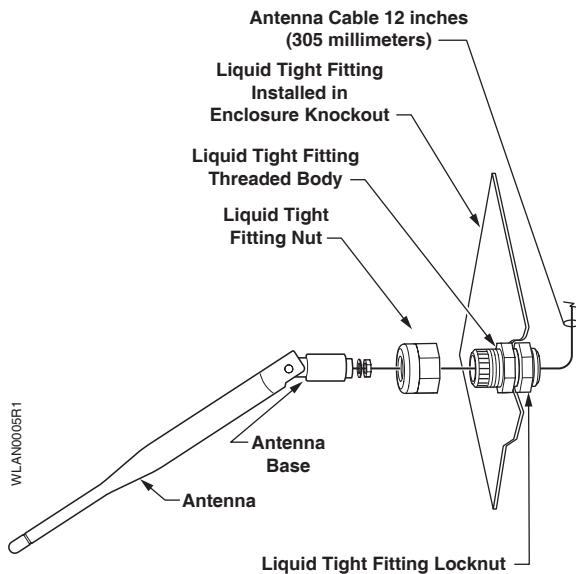


Figure 4. Remote Mount Antenna.

FCC NOTE:

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

To comply with FCC's RF exposure limits for general population / uncontrolled exposure, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Industrie Canada certification:

This device has been designed to operate with an antenna having a maximum gain of 5dBi. Antenna having a higher gain is strictly prohibited per regulations of Industry Canada. The required antenna impedance is 50Ω.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (EIRP) is not more than that required for successful communication.

The Wireless Field Panel Transceiver (FPX) is to be installed or replaced by professional installation personnel only.

Information in this document is based on specifications believed correct at the time of publication. The right is reserved to make changes as design improvements are introduced. Product or company names mentioned herein may be the trademarks of their respective owners.
© 2005 Siemens Building Technologies, Inc.