

WiFi6 2T2R Dual Bands Dual Concurrents mPCIe Card IEEE802.11ax/ac/a/b/g/n

AW7915-NPD

Brand Name : AsiaRF Co., Ltd.

MTK MT7915



WiFi6
11ax
2T2R
DBDC
1800Mbps

DESCRIPTION

AW7915-NPD is a WiFi6 Mini PCIe Module 2T2R based on Mediatek MT7915DAN which is a WiFi Mini PCIe single chip which supports 573+1201 Mbps PHY rate with PCIe2.1. It fully complies with IEEE 802.11ax/ac and IEEE 802.11 ac/a/b/g/n standards, offering feature-rich wireless connectivity at high standards, and delivering reliable, cost-effective throughput from an extended distance. The most important is one module could be Dual Bands Dual Concurrent (DBDC), means 2.4GHz and 5GHz simultaneously operated.

Optimized RF architecture and base band algorithms provide superb performance and low power consumption. Intelligent MAC design deploys a highly efficient offload engine and hardware data processing accelerators which completely offloads Wi-Fi task of the host processor. MT7915DAN is designed to support standard based features in the areas of security, quality of service and international regulations, giving end users the greatest performance any time and in any circumstance.

MT7915DAN is designed to support high data throughput over WiFi. The host interface PCIe is integrated to provide stable bandwidth between the host platform and MT7915DAN.

Deep sleep mode: Multiple power domains are implementing on chip. In deep sleep mode, the PMU could be further configured to be in a low power state to save the power consumption.

Two CPU systems: There are both 32-bits RISC MCU subsystem. The CPU has its local memory. There are several options of clock frequency to provide the optimal performance with the best power consumption. The 32-bit RISC MCU is used to do clock control, power management, and host interface configuration. PDMA (packet DMA) engines are integrated to support on-the-fly data buffer management.

MT7915DAN had the WiFi MAC and BBP subsystem and use with MT7975DN together, which provide the best-in-class radio and low power performance. And the Wi-Fi MAC and BBP subsystem and use with MT7975DN together, which provide the best-in-class radio and low power performance.

With the advent of 802.11ax/ac, multiuser MIMO (MU-MIMO) is defined. MT7915DAN supports MU-MIMO with different configurations.

AW7915-NPD is a WiFi6 Mini PCIe Module 2T2R based on Mediatek MT7915DAN which is a WiFi Mini PCIe single chip which supports 2401 Mbps PHY rate. It fully complies with IEEE 802.11ax/ac and IEEE 802.11 ac/a/b/g/n standards, offering feature-rich wireless connectivity at high standards, and delivering

reliable, cost-effective throughput from an extended distance. Dual Bands Dual Concurrent is

configurable.

Optimized RF architecture and baseband algorithms provide superb performance and low power consumption. Intelligent MAC design deploys a high efficient offload engine and hardware data processing accelerators which completely offloads Wi-Fi task of the host processor. MT7915DAN is designed to support standard based features in the areas of security, quality of service and international regulations, giving end users the greatest performance any time and in any circumstance.

MT7915DAN supports concurrent dual-band operation at 5GHz and 2.4GHz band (DBDC, Dual-Band-Dual-Concurrent). It enables diversified applications that require one link at 2.4GHz band, and the other at less crowded 5GHz band simultaneously.

MT7915DAN is designed to support high data throughput over WiFi. The host interface PCIe are integrated to provide stable bandwidth between the host platform and MT7915DAN. The clock rate of internal bus fabric can also support the throughput requirement. The clock rate of MCU is also configurable for different kinds of scenarios.

Deep sleep mode: Multiple power domains are implemented on chip. It defines a deep sleep mode, in which only the AON domain is powered on, while other OFF domains are shut off by the power switches integrated on chip. In deep sleep mode, the PMU could be further configured to be in a low power state to save the power consumption.

Two CPU systems: There are both 32-bits RISC MCU subsystem. The CPU has its local memory. There are several options of clock frequency to provide the optimal performance with the best power consumption. The 32-bit RISC MCU is used to do clock control, power management, and host interface configuration. PDMA (packet DMA) engines are integrated to support on-the-fly data buffer management.

MT7915DAN has the WiFi MAC and BBP subsystem and use with MT7975N together, which provide the best-in-class radio and low power performance.

MT7915DAN features PCIe2.1 for the host interface.

MT7915DAN has the Wi-Fi MAC and BBP subsystem and use with MT7975DN together, which provide the best-in-class radio and low power performance.

With the advent of 802.11ax/ac, multiuser MIMO (MU-MIMO) is defined. MT7915DAN supports MU-MIMO with different configurations. An AP is able to use its antenna arrays to transmit multiple frames to different clients at the same time and over the same frequency spectrum.

IC PMN:

WiFi6 2T2R Dual Bands Dual Concurrents DBDC mPCIe Card

Features:

- 2T2R in 2.4G+2T2R in 5G with support of up to 573+1201Mbps PHY rate
- Supports 20, 40, 80 channels
- HE MCS0-11 BW20/40/80MHz with Nss=1~2
- Short Guard Interval
- Space-time block code (STBC)
- Low Density Parity check (LDPC)
- Support digital pre-distortion to enhance PA performance
- Smoothing (channel estimation) extension to MIMO case
- Embedded ARM Cortex R4 processor for full host CPU offload
- Embedded 32-bit RISC microprocessor
- Support STBC, LDPC, TX Beamformer and RX Beamformer
- Decoded BW20/40/80 up to 4x2 MU matrix feedback
- Greenfield, mixed mode, legacy modes support
- Highly integrated RF with 40nm low power process
- Noise mitigation:
 - Supports background scan function for fast channel switching
 - Supports spectrum analysis for non-Wi-Fi signals
- Intelligent power saving
- WFA WMM, WMM PS (QoS)
- Integrate high efficiency internal 2.4G/5G PAs
- Intelligent Calibration (iCal) reduces the production time

Specification:

Standards	Wireless: IEEE 802.11ax/ac/b/g/n (2Tx2R)
Data Rate	IEEE 802.11ax 1201Mbps@TX/RX IEEE 802.11ac 1773Mbps@TX/RX IEEE 802.11a/n 600Mbps@TX/RX IEEE 802.11a/g 108Mbps IEEE 802.11b 22Mbps IEEE 802.11ac up to 1733Mbps
Receiver Sensitivity	11b: -99dBm@11Mbps 11g: -95dBm@54Mbps 11g/n: -90dBm@HT20,MCS7, -86dBm@HT40,MCS7 11a: -90Bm@54Mbps 11a/n: -85dBm@HT20,MCS7, -81dBm@HT40,MCS7 11ac: -90dBm+/-2dBm @VHT20 MCS8 11ac: -85dBm+/-2dBm @VHT40 MCS9 11ac: -68dBm+/-2dBm @VHT80 MCS9 11ax: -61dBm+/-2dBm @HE20 MCS11 11ax: -58dBm+/-2dBm @HE40 MCS11 11ax: -55dBm+/-2dBm @HE80 MCS11
Antenna	External Antenna connector (IPEX) x2
Frequency Range	US, Canada 2.412GHz~2.462 GHz (CH1~CH11) EU, Japan: 2.412GHz~2.472GHz (CH1~CH13) 5.150~5.250GHz、5.725~5.850GHz
Software	Security: 64/128-bit WEP Encryption, WPA, WPA2 Driver: Linux
Operating Voltage	DC 3.3V ± 5%
Temperature	Operating: 0°C ~ +70°C Storage : -20°C ~ +90°C
Humidity	Operating Humidity: 10%~90% non-condensing Storage Humidity: 10%~90% non-condensing
Dimension	50.95(H) x 30(W)mm


Power consumption maximum is 9.1W, average is 7W.
Main board Power Supply design please provide 3.3V 3.5A, minimum 3.3V 3A.

11ax related reading:

[Introduction to 802.11ax High-Efficiency Wireless - NI](#)

[IEEE 802.11ax - Wikipedia](#)

Mechanical Dimensions

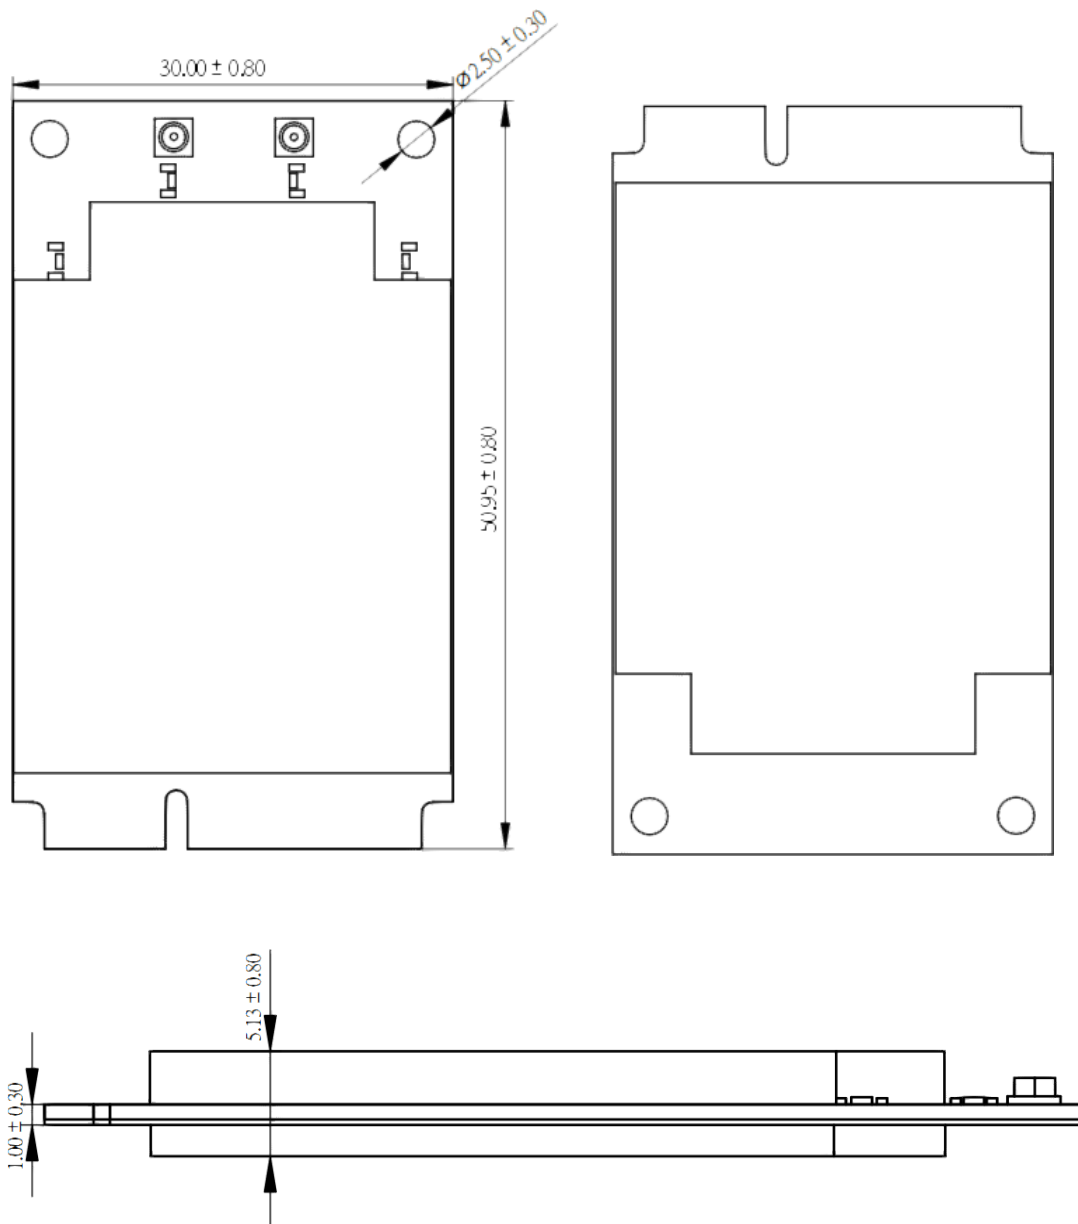


All dimensions are in mm


Pins define

PINS OUT

TOP SIDE

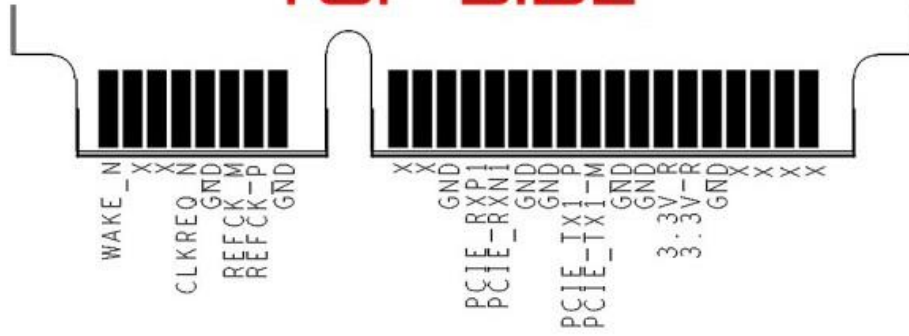

DOWN SIDE

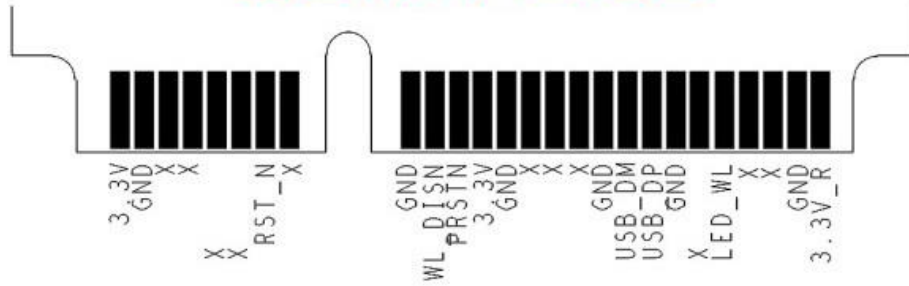

Packing information

Using antistatic tray.

One tray for 35pcs PCBA.

One carton for 23 trays=805 PCBAs

One tray for 35pcs PCBA



23 trays in one carton



Sealing carton



Carton label is as below:

One carton label



Compliance Information

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **20cm** between the radiator & your body.

ISED Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

Les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

This radio transmitter [IC: 9968A-AW7915NPD] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Frequency Band	Model Number	Antenna Type	Gain(dBi)
2400-2483.5MHz; 5150-5850MHz	ANT010-DAU	PCB	2.4GHz: 5.2 5GHz: 5.5
	ANT003	PCB	2.4GHz: 2.5 5GHz: 2.5
	A245005N	PCB	2.4GHz: 4 5GHz: 5.1
2400-2483.5MHz	A2405N	PCB	2.4GHz: 5.2
5150-5850MHz	A5005N	PCB	5GHz: 5
2400-2483.5MHz; 5150-5850MHz	A245004	Dipole	2.4GHz: 4 5GHz: 5.1
	A245002	Dipole	2.4GHz: 2 5GHz: 2

Le présent émetteur radio [IC: 9968A-AW7915NPD] a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour tout type figurant sur la liste, sont strictement interdits pour l'exploitation de l'émetteur.

Frequency Band	Model Number	Antenna Type	Gain(dBi)
2400-2483.5MHz; 5150-5850MHz	ANT010-DAU	PCB	2.4GHz: 5.2 5GHz: 5.5
	ANT003	PCB	2.4GHz: 2.5 5GHz: 2.5
	A245005N	PCB	2.4GHz: 4 5GHz: 5.1
2400-2483.5MHz	A2405N	PCB	2.4GHz: 5.2
5150-5850MHz	A5005N	PCB	5GHz: 5
2400-2483.5MHz; 5150-5850MHz	A245004	Dipole	2.4GHz: 4 5GHz: 5.1
	A245002	Dipole	2.4GHz: 2 5GHz: 2

ISED Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **20cm** between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de **20cm** de distance entre la source de rayonnement et votre corps.

The transmitter module may not be co-located with any other transmitter or antenna.

Le module émetteur peut ne pas être coimplanté avec un autre émetteur ou antenne.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités.

Sélection d'autres canaux n'est pas possible.

The OEM or integrator is obligated to adhere to these requirements and restrictions as a condition for using the module's certification. The OEM or integrator is responsible to perform the required additional host regulatory testing and/or obtaining the required host approvals for compliance.

This module is intended for OEM integrators under the following conditions:

1. Ensure that the end-user has no manual instructions to remove or install module.
2. This module is certified pursuant to Part 15 rules section 15.247, 15.407 and RSS-247.
3. The antenna listed below must include 0.3 dB cable loss compensation.

Frequency Band	Model Number	Antenna Type	Gain(dBi)
2400-2483.5MHz; 5150-5850MHz	ANT010-DAU	PCB	2.4GHz: 5.2 5GHz: 5.5
	ANT003	PCB	2.4GHz: 2.5 5GHz: 2.5
	A245005N	PCB	2.4GHz: 4 5GHz: 5.1
2400-2483.5MHz	A2405N	PCB	2.4GHz: 5.2
5150-5850MHz	A5005N	PCB	5GHz: 5
2400-2483.5MHz; 5150-5850MHz	A245004	Dipole	2.4GHz: 4 5GHz: 5.1
	A245002	Dipole	2.4GHz: 2 5GHz: 2

4. Label and compliance information

Label of the end product:

FCC:

The host product must be labeled in a visible area with the following " Contains FCC ID: TKZAW7915-NPD". The end product shall bear the following 15.19 statement: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

ISED:

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains transmitter module IC: 9968A-AW7915NPD" or "Contains IC: 9968A-AW7915NPD"

Contient le module d'émission IC: 9968A-AW7915NPD

The Host Model Number (HMN) must be indicated at any location on the exterior of the end product or product packaging or product literature which shall be available with the end product or online.

5. Information on test modes and additional testing requirements

This module has been approved under stand-alone configuration.

OEM integrator has be limited the operation channels in channel 1-11 for 2.4GHz band.

The separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093/RSS-102 and different antenna configurations.

The information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host can be found at KDB Publication 996369 D04.

OEM integrator is still responsible for testing their end product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

IMPORTANT NOTE: In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC/ISED authorization is no longer considered valid and the FCC/IC No. cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC/ISED authorization.

6. Additional testing, Part 15 Subpart B and ICES-003 disclaimer

Appropriate measurements (e.g. Part 15 Subpart B compliance) and if applicable additional equipment authorizations (e.g. SDoC) of the host product to be addressed by the integrator/manufacturer.

This module is only FCC/ISED authorized for the specific rule parts 15.247, 15.407/RSS-247 listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC/ISED rules that apply to the host product as being Part 15 Subpart B/ICES-003 compliant.

7. The user manual of the end product should include (information for OEMs):

The module must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product.

Information To Be Supplied to the End User by the OEM or Integrator

FCC:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

The antenna(s) used for this transmitter must be installed to provide a separation distance of at least **20 cm** from all persons.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The antenna(s) used for this transmitter must not transmit simultaneously with any other antenna or transmitter.

The end user manual shall include all required regulatory information/warning as shown in this document.

ISED:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

Les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

ISED Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **20cm** between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de **20cm** de distance entre la source de rayonnement et votre corps.

The transmitter module may not be co-located with any other transmitter or antenna.

Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités.

Sélection d'autres canaux n'est pas possible.

This radio transmitter [IC: 9968A-AW7915NPD] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Frequency Band	Model Number	Antenna Type	Gain(dBi)
2400-2483.5MHz; 5150-5850MHz	ANT010-DAU	PCB	2.4GHz: 5.2 5GHz: 5.5
	ANT003	PCB	2.4GHz: 2.5 5GHz: 2.5
	A245005N	PCB	2.4GHz: 4 5GHz: 5.1
2400-2483.5MHz	A2405N	PCB	2.4GHz: 5.2
5150-5850MHz	A5005N	PCB	5GHz: 5
2400-2483.5MHz; 5150-5850MHz	A245004	Dipole	2.4GHz: 4 5GHz: 5.1
	A245002	Dipole	2.4GHz: 2 5GHz: 2

Le présent émetteur radio [IC: 9968A-AW7915NPD] a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour tout type figurant sur la liste, sont strictement interdits pour l'exploitation de l'émetteur.

Frequency Band	Model Number	Antenna Type	Gain(dBi)
2400-2483.5MHz; 5150-5850MHz	ANT010-DAU	PCB	2.4GHz: 5.2 5GHz: 5.5
	ANT003	PCB	2.4GHz: 2.5 5GHz: 2.5
	A245005N	PCB	2.4GHz: 4 5GHz: 5.1
2400-2483.5MHz	A2405N	PCB	2.4GHz: 5.2
5150-5850MHz	A5005N	PCB	5GHz: 5
2400-2483.5MHz; 5150-5850MHz	A245004	Dipole	2.4GHz: 4 5GHz: 5.1
	A245002	Dipole	2.4GHz: 2 5GHz: 2

1. 取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

2. 本公司於說明書中提供所有必要資訊以指導使用者/安裝者正確的安裝及操作。

3. 本模組於取得認證後將依規定於模組本體標示審驗合格標籤，並要求平台廠商於平台上標示

「本產品內含射頻模組  CC XX xx LP yy Z z」。

OEM integration instructions:

This device is intended only for OEM integrators under the following conditions,
The module is only limited to installation in mobile applications. The antenna must be installed such that 20 cm is maintained between the antenna and users, and the transmitter module may not be co-located with any other transmit or antenna. The module shall be only used with the integral antenna(s) that has been originally tested and certified with this module.
As long as 3 conditions above are met, further transmitter test will not be required.
However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirement with this module installed (for example, digital device emission, PC peripheral requirements, etc.)

OEM integration instructions:

In the event that these conditions cannot be met (for example certain laptop configuration or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these and circumstance, the OEM integrator will be responsible for re-evaluating. The end product (including the transmitter) and obtaining a separate FCC authorization

End product labeling:

This transmitter module is authorization only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following,
"Contains Transmitter Module FCC ID: TKZAW7915-NPD or Contains FCC ID: TKZAW7915-NPD"

Information that must be placed in the end user manual:

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.