

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Report No.:** RFBECO-WTW-P20100054G-2

**FCC ID:** TLZ-CM276NF

**Product:** IEEE 802.11 2X2 MU-MIMO ac/a/b/g/n Wireless LAN + Bluetooth NGFF Module

**Brand:** AzureWave

**Model No.:** AW-CM276NF

**Received Date:** 2022/9/19

**Test Date:** 2022/10/3 ~ 2022/11/2

**Issued Date:** 2022/11/11

**Applicant:** AzureWave Technologies, Inc.

**Address:** 8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**FCC Registration /** 723255 / TW2022

**Designation Number:**

**Approved by:** \_\_\_\_\_, **Date:** 2022/11/11  
May Chen / Manager

This test report consists of 47 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Luna Yu / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate.....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Supplementary Information .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description .....	6
3.2 Antenna Description of EUT .....	7
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	10
3.5 Duty Cycle of Test Signal.....	11
3.6 Test Program Used and Operation Descriptions .....	12
3.7 Connection Diagram of EUT and Peripheral Devices .....	12
3.8 Configuration of Peripheral Devices and Cable Connections .....	13
<b>4 Test Instruments .....</b>	<b>14</b>
4.1 RF Output Power.....	14
4.2 AC Power Conducted Emissions .....	15
4.3 Unwanted Emissions below 1 GHz .....	16
4.4 Unwanted Emissions above 1 GHz.....	17
<b>5 Limits of Test Items.....</b>	<b>18</b>
5.1 RF Output Power.....	18
5.2 AC Power Conducted Emissions .....	19
5.3 Unwanted Emissions below 1 GHz .....	20
5.4 Unwanted Emissions above 1 GHz.....	21
<b>6 Test Arrangements.....</b>	<b>22</b>
6.1 RF Output Power.....	22
6.1.1 Test Setup .....	22
6.1.2 Test Procedure.....	22
6.2 AC Power Conducted Emissions .....	23
6.2.1 Test Setup .....	23
6.2.2 Test Procedure.....	23
6.3 Unwanted Emissions below 1 GHz .....	24
6.3.1 Test Setup .....	24
6.3.2 Test Procedure.....	25
6.4 Unwanted Emissions above 1 GHz.....	26
6.4.1 Test Setup .....	26
6.4.2 Test Procedure.....	26
<b>7 Test Results of Test Item .....</b>	<b>27</b>
7.1 RF Output Power.....	27
7.2 AC Power Conducted Emissions .....	28
7.3 Unwanted Emissions below 1 GHz .....	30
7.4 Unwanted Emissions above 1 GHz.....	32
<b>8 Pictures of Test Arrangements .....</b>	<b>46</b>
<b>9 Information of the Testing Laboratories .....</b>	<b>47</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBECO-WTW-P20100054G-2	Original release.	2022/11/11

## 1 Certificate

**Product:** IEEE 802.11 2X2 MU-MIMO ac/a/b/g/n Wireless LAN + Bluetooth NGFF Module

**Brand:** AzureWave

**Test Model:** AW-CM276NF

**Sample Status:** Engineering sample

**Applicant:** AzureWave Technologies, Inc.

**Test Date:** 2022/10/3 ~ 2022/11/2

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Measurement** ANSI C63.10-2013

**procedure:** KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247 (a)(1)	RF Output Power	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	NA	Refer to Note 1
15.247(a)(1) (iii)	Dwell Time on Each Channel	NA	Refer to Note 1
15.247(a)(1)	Hopping Channel Separation	NA	Refer to Note 1
15.247(a)(1)	20 dB Bandwidth	NA	Refer to Note 1
15.247(d)	Conducted Out of Band Emissions	NA	Refer to Note 1
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -16.60 dB at 24.00391 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -8.0 dB at 30.07 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -10.2 dB at 2390.00, 2483.50 MHz
15.203	Antenna Requirement	Pass	Antenna connector is I-PEX not a standard connector.

### Notes:

1. RF Output Power & AC Power Conducted Emissions & Unwanted Emissions Measurement were performed for this addendum. The others testing data refer to original test report.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.4 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.0 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	IEEE 802.11 2X2 MU-MIMO ac/a/b/g/n Wireless LAN + Bluetooth NGFF Module
Brand	AzureWave
Test Model	AW-CM276NF
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	Up to 3Mbps
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	79
Output Power	4.345 mW (6.38 dBm)

Note:

- This is a supplementary report of Report No.: RFBECO-WTW-P20100054F-3. The differences between them are as below information:
  - ◆ Add PCB Antenna "FML2.4W45A-160-MHF4L". (Refer to section 3.2)
- According to above condition, there are RF Output Power & AC Power Conducted Emissions & Unwanted Emissions Measurement need to be performed. All data for meeting the requirement is verified.
- There are WLAN, BT technology used for the EUT.
- Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	Bluetooth
2	WLAN (5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
- Lynwave (5-PP005049), Unictron (PC-W09-01) antenna was added. According to the judgment on the EUT specification, the new antenna has the same characteristics and type under the same frequency band except the gain is smaller than the original application, so the highest gain evaluated in the original reports was for the final test.

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Original								
Antenna Set	Brand	Model	Chain No.	Antenna Net. Gain (dBi)	Frequency Range (MHz)	Antenna Type	Connector Type	Cable Length
1	MAG.LAYERS	MSA-4008-25GC1-A1	Chain 0(Aux)	2.98	2400~2500	PIFA	i-pex(MHF)	15cm
				5.16	4900~5900			
			Chain 1(Main)	2.98	2400~2500			
				5.16	4900~5900			
2	Bondale	G-RA0K10090176-1436B	Chain 0(Aux)	1.9	2400~2500	Dipole	RP-SMA	120mm
				3.6	4900~5800			
			Chain 1(Main)	1.9	2400~2500			
				3.6	4900~5800			
3	San Jose	UEN-201	Chain 0(Aux)	2.4	2400~2500	Dipole	RP-SMA	120mm
				4.4	4900~5800			
			Chain 1(Main)	2.4	2400~2500			
				4.4	4900~5800			
4	Unictron	H2B1PC1A1C175L	Chain 0(Aux)	1.6	2400-2500	PCB	I-pex	100±5mm
				4.8	5150~5850			
			Chain 1(Main)	1.6	2400-2500	PCB	I-pex	100±5mm
				4.8	5150~5850			
5	LSR	001-0012	Chain 0(Aux)	2	2400-2500	Dipole	RP-SMA	100mm
				2	5150~5850			
			Chain 1(Main)	2	2400-2500	Dipole	RP-SMA	100mm
				2	5150~5850			
6	Laird	MAF94051	Chain 0(Aux)	2.4	2400-2500	Dipole	RP-SMA	100mm
				3.4	5150~5850			
			Chain 1(Main)	2.4	2400-2500	Dipole	RP-SMA	100mm
				3.4	5150~5850			
7	Taoglas	GW.59.3153	Chain 0(Aux)	2.86	2400-2500	Dipole	RP-SMA	100mm
				4.74	5150~5850			
			Chain 1(Main)	2.86	2400-2500	Dipole	RP-SMA	100mm
				4.74	5150~5850			
8	Chang Hong	DA-2458-02-SMR	Chain 0(Aux)	2.85	2400-2500	Dipole	RP-SMA	100mm
				2.17	5150~5850			
			Chain 1(Main)	2.85	2400-2500	Dipole	RP-SMA	100mm
				3.13	5150~5850			
9	Unictron	H2B1PD1A1C385L	Chain 0(Aux)	2.8	2400-2500	PCB	I-pex	100mm
				4.2	5150~5850			
			Chain 1(Main)	2.8	2400-2500	PCB	I-pex	100mm
				4.2	5150~5850			
10	Molex	2042811100	Chain 0(Aux)	2.562	2400-2500	PCB	I-pex	100mm
				3.094	5150~5850			
			Chain 1(Main)	2.562	2400-2500	PCB	I-pex	100mm
				3.094	5150~5850			

Antenna Set	Brand	Model	Chain No.	Antenna Net. Gain (dBi)	Frequency Range (MHz)	Antenna Type	Connector Type	Cable Length
11	Molex	1461531100	Chain 0(Aux)	1.829	2400-2500	PCB	I-pex	100mm
				2.485	5150~5850			
			Chain 1(Main)	1.829	2400-2500	PCB	I-pex	
				2.485	5150~5850			
12	MAG.LAYERS	MSA-4008-25GC1-A2	Chain 0(Aux)	2.98	2400-2500	PIFA	i-pex(MHF)	NA
				5.16	5150~5850			
			Chain 1(Main)	2.98	2400-2500	PIFA	i-pex(MHF)	
				5.16	5150~5850			
13	lynwave	5-PP005049	Chain 0(Aux)	2.7	2400-2500	PCB	IPEX 4L	30mm
				4.4	5150~5850			
			Chain 1(Main)	2.7	2400-2500	PCB	IPEX 4L	
				4.5	5150~5850			
14	Unictron	PC-W09-01	Chain 0(Aux)	1.41	2400~2500	Dipole	ipex 4L	110 mm
				2.89	5150~5850			
		PC-W09-01	Chain 1(Main)	1.31	2400~2500	Dipole	ipex 4L	
				2.92	5150~5850			
15	INPAQ	WA-M-LB-01-128	Chain 0(Aux)	2.68	2400-2500	PIFA	ipex(MHF)	145 mm
				4.19	5150-5850			
		WA-M-LB-02-262	Chain 1(Main)	2.44	2400-2500	PIFA	ipex(MHF)	
				4.08	5150-5850			
<b>Newly</b>								
Antenna Set	Brand	Model	Chain No.	Antenna Net. Gain (dBi)	Frequency Range (MHz)	Antenna Type	Connector Type	Cable Length
16	Nissei Limited	FML2.4W45A-160-MHF4L	Chain 0(Aux)	3.13	2400-2500	PCB	ipex(MHF)	160 mm
				4.94	5150~5850			
			Chain 1(Main)	3.13	2400-2500	PCB	ipex(MHF)	
				4.94	5150~5850			

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.



### 3.3 Channel List

79 channels are provided for BT-EDR:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### 3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. PCB Ant. can be used in the following ways: X-axis/ Y-axis/ Z-axis/. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	1. PCB Ant. Worst Condition: For Unwanted Emission below 1 GHz: Y-axis, For Unwanted Emission above 1 GHz: Y-axis 2. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below:

Test Item	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	0, 39, 78	GFSK	DH5
		8DPSK	3DH5
AC Power Conducted Emissions	0	8DPSK	3DH5
Unwanted Emissions below 1 GHz	0	8DPSK	3DH5
Unwanted Emissions above 1 GHz	0, 39, 78	GFSK	DH5
		8DPSK	3DH5

### 3.5 Duty Cycle of Test Signal

**GFSK:** Duty cycle = 2.91 ms / 100 ms x 100% = 2.9%


**8DPSK:** Duty cycle = 2.9 ms / 100 ms x 100% = 2.9%

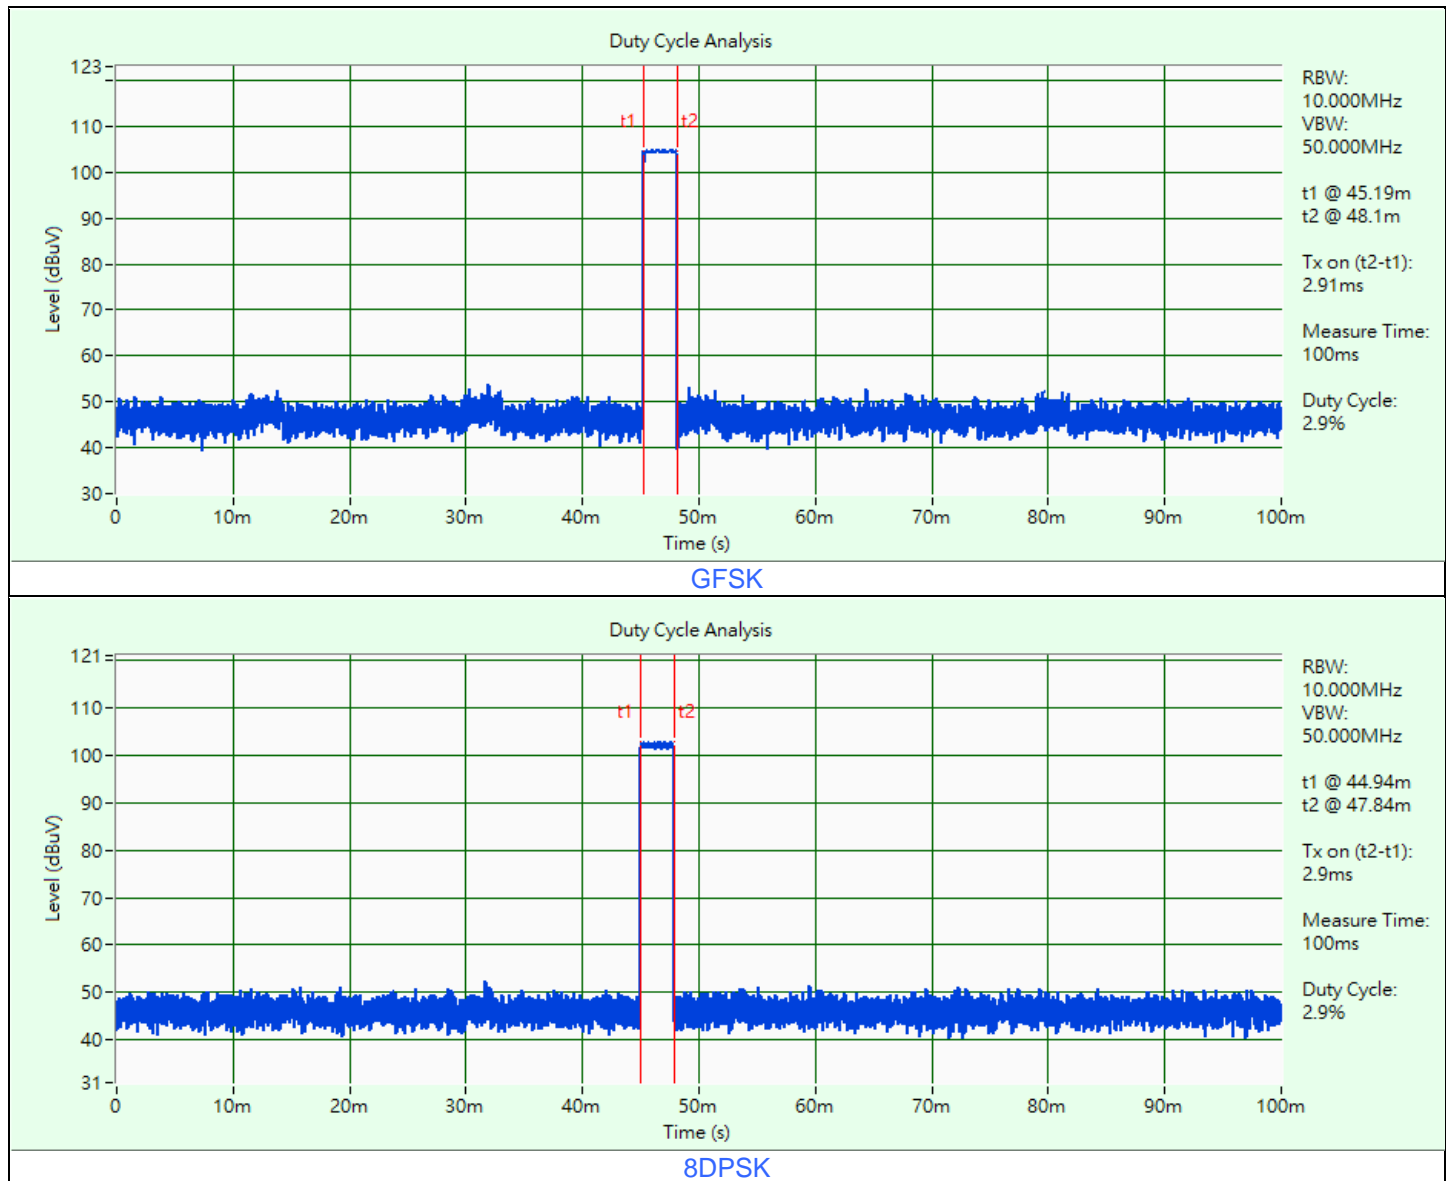

### 3.6 Test Program Used and Operation Descriptions

Controlling software (DUT labtool (1.0.0.109)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

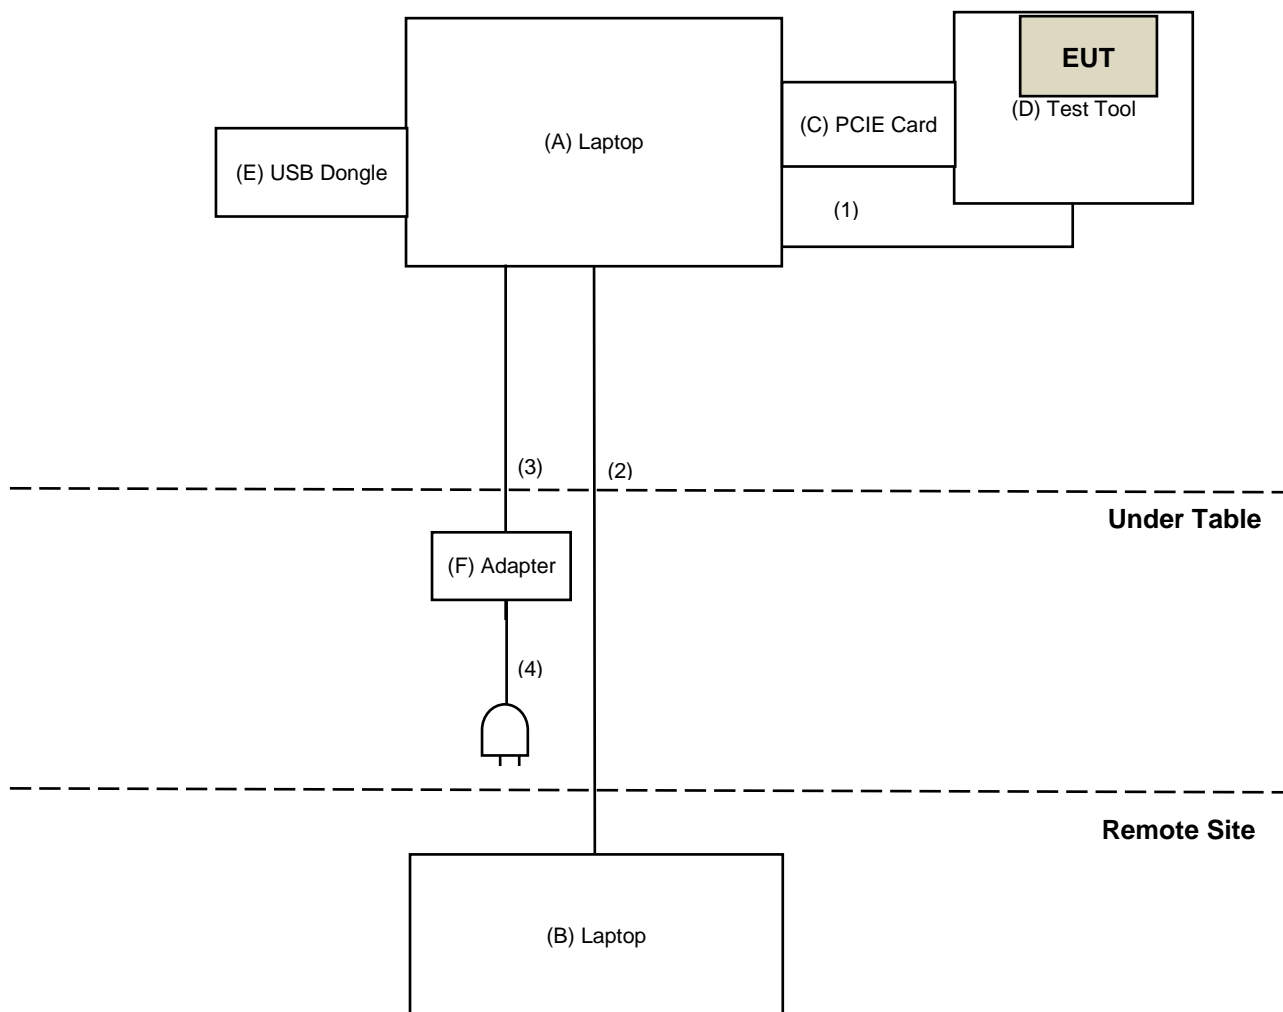

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	DELL	E6420	482T3R1	DoC	Provided by Lab
B	Laptop	DELL	P88G	G1WJL42	PD93165NG	Provided by Lab
C	PCIE Card	AzureWave	N/A	N/A	N/A	Supplied by applicant
D	Test Tool	AzureWave	N/A	N/A	N/A	Supplied by applicant
E	USB Dongle	Transcend	N/A	N/A	N/A	Supplied by applicant
F	Adapter	DELL	LA90PM111	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB Cable	1	1.4	Yes	0	Provided by Lab
2	RJ-45 Cable	1	10	No	0	Provided by Lab
3	DC Cable	1	1.8	No	0	Provided by Lab
4	AC Cable	1	1.5	No	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Power Meter Anritsu	ML2495A	1529002	2022/6/22	2023/6/21
Pulse Power Sensor Anritsu	MA2411B	1726434	2022/6/22	2023/6/21
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2022/11/2

#### 4.2 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohms Terminator	50	3	2021/10/27	2022/10/26
Fixed attenuator STI	STI02-2200-10	005	2022/8/24	2023/8/23
LISN R&S	ESH3-Z5	848773/004	2021/10/29	2022/10/28
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2022/8/24	2023/8/23
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A
TEST RECEIVER R&S	ESCS 30	847124/029	2021/10/13	2022/10/12

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2022/10/3

### 4.3 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	N/A	N/A
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	2022/9/14	2023/9/13
LOOP ANTENNA Electro-Metrics	EM-6879	264	2022/3/18	2023/3/17
Pre_Amplifier Agilent	8447D	2944A10636	2022/3/19	2023/3/18
Pre_Amplifier Mini-Circuits	ZFL-1000VH2	QA0838008	2022/10/4	2023/10/3
RF Coaxial Cable COMMATE/PEWC	8D	966-3-2	2022/2/26	2023/2/25
		966-3-3	2022/2/26	2023/2/25
		966-4-1	2022/3/8	2023/3/7
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/1/6	2023/1/5
		LOOPCAB-002	2022/1/6	2023/1/5
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer KEYSIGHT	N9030B	MY57142938	2022/4/26	2023/4/25
Test Receiver KEYSIGHT	N9038A	MY59050100	2022/6/20	2023/6/19
Trilog Broadband Antenna Schwarzbeck	VULB 9168	9168-361	2022/10/21	2023/10/20

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2022/11/1



#### 4.4 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9170	9170-739	2021/11/14	2022/11/13
	BBHA9120-D	9120D-406	2021/11/14	2022/11/13
Pre_Amplifier EMCI	EMC12630SE	980384	2022/1/10	2023/1/9
	EMC184045SE	980387	2022/1/10	2023/1/9
RF Cable EMCI	EMC104-SM-SM-6000	210201	2022/5/10	2023/5/9
RF Cable-Frequency range: 1- 40GHz EMCI	EMC102-KM-KM-1200	160924	2022/1/10	2023/1/9
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2022/3/8	2023/3/7
	EMC104-SM-SM-1500	180504	2022/4/25	2023/4/24
	EMC104-SM-SM-2000	180601	2022/6/6	2023/6/5
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer KEYSIGHT	N9030B	MY57142938	2022/4/26	2023/4/25
Test Receiver KEYSIGHT	N9038A	MY59050100	2022/6/20	2023/6/19

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2022/10/12 ~ 2022/10/22

## 5 Limits of Test Items

### 5.1 RF Output Power

The Maximum Output Power Measurement is 125 mW (21 dBm).

## 5.2 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.3 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Notes:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

#### 5.4 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup

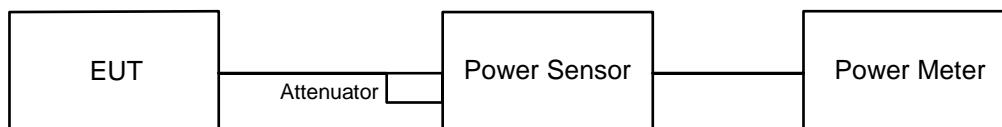

#### 6.1.2 Test Procedure

##### Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

##### Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

## 6.2 AC Power Conducted Emissions

### 6.2.1 Test Setup

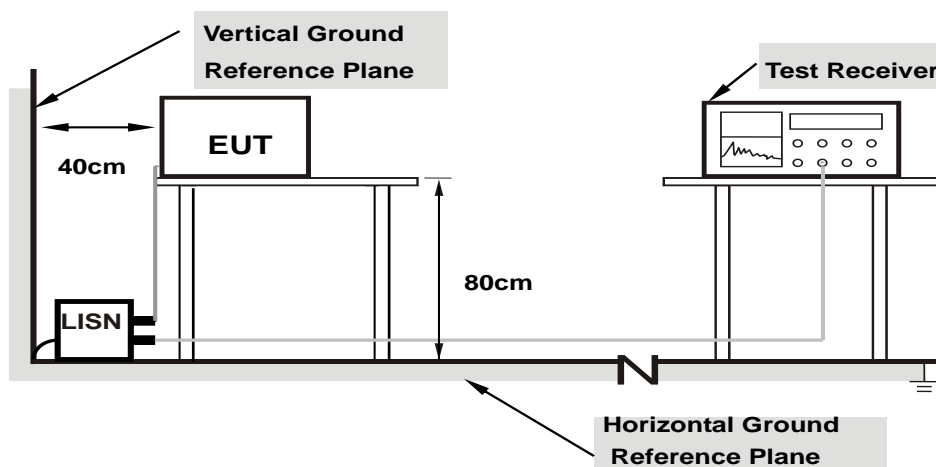

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.2.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


### 6.3 Unwanted Emissions below 1 GHz

#### 6.3.1 Test Setup

##### For Radiated emission below 30 MHz

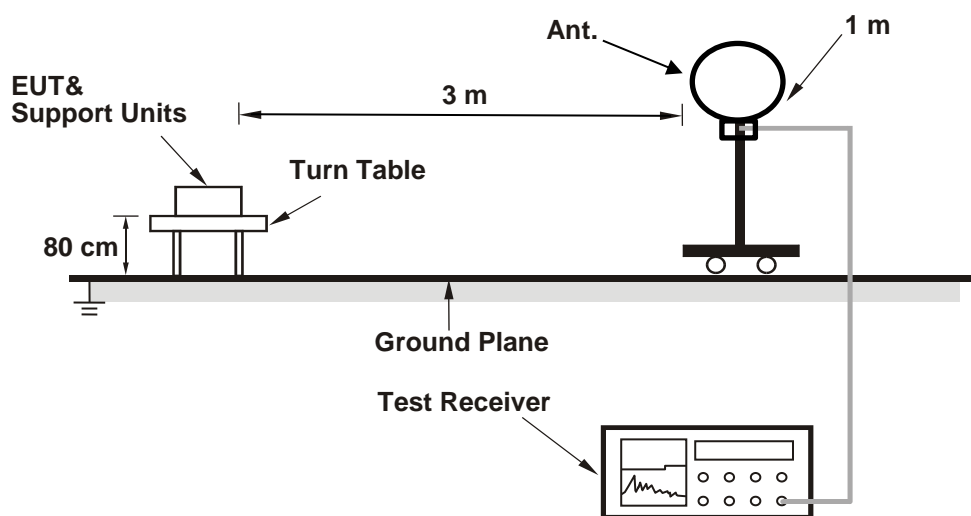

##### For Radiated emission above 30 MHz

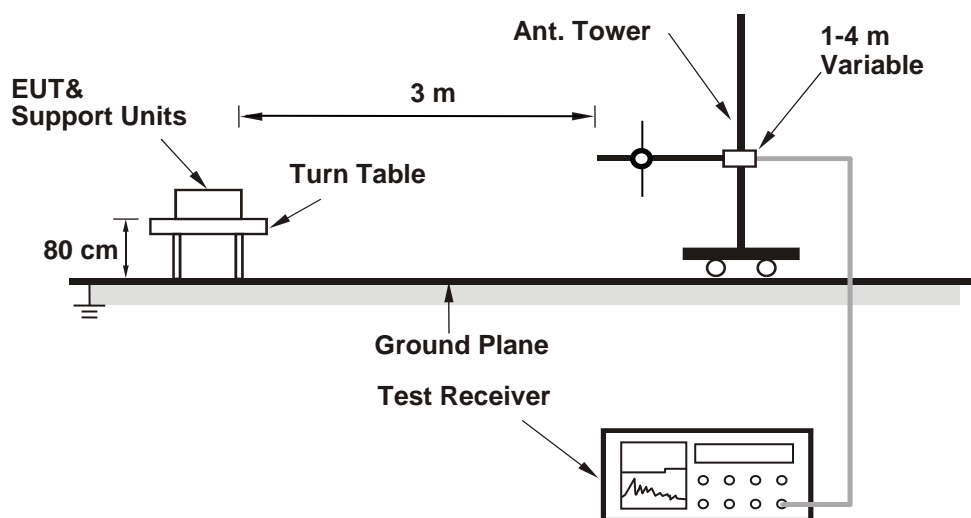

For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 6.3.2 Test Procedure

#### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

#### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.4 Unwanted Emissions above 1 GHz

### 6.4.1 Test Setup

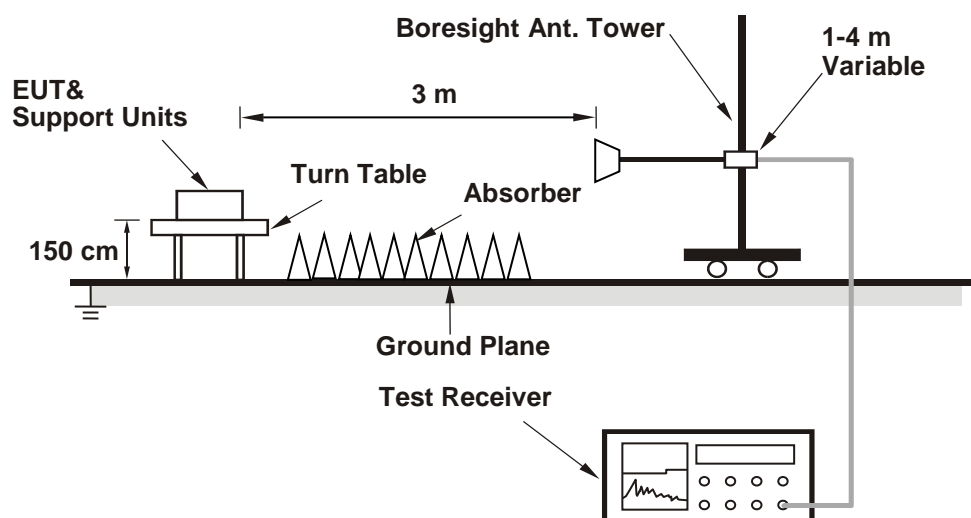

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.4.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- According to ANSI C63.10 section 6.6.4 and 4.1.4.2.2. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. For duty cycle correction factor values, see the Test Signal Duty Cycle section in this report.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Eric Peng
--------------	---------	---------------------------	--------------	------------	-----------

#### For Peak Power

##### GFSK

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	2.63	4.20	21	Pass
39	2441	2.523	4.02	21	Pass
78	2480	2.399	3.80	21	Pass

Note: The antenna gain is 3.13 dBi < 6 dBi, so the output power limit shall not be reduced.

##### 8DPSK

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	4.345	6.38	21	Pass
39	2441	3.656	5.63	21	Pass
78	2480	3.673	5.65	21	Pass

Note: The antenna gain is 3.13 dBi < 6 dBi, so the output power limit shall not be reduced.

#### For Average Power

##### GFSK

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	2.265	3.55
39	2441	2.158	3.34
78	2480	2.089	3.20

##### 8DPSK

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	2.333	3.68
39	2441	2.213	3.45
78	2480	2.065	3.15

## 7.2 AC Power Conducted Emissions


RF Mode	BT 8DPSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Carter Lin		

### Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.96	32.75	19.33	42.71	29.29	65.79	55.79	-23.08	-26.50
2	0.22422	9.96	25.61	12.98	35.57	22.94	62.66	52.66	-27.09	-29.72
3	0.49375	9.97	22.38	14.69	32.35	24.66	56.10	46.10	-23.75	-21.44
4	4.74609	10.19	20.29	13.48	30.48	23.67	56.00	46.00	-25.52	-22.33
5	10.17188	10.50	23.51	18.35	34.01	28.85	60.00	50.00	-25.99	-21.15
<b>6</b>	<b>24.00391</b>	<b>11.16</b>	<b>22.56</b>	<b>22.24</b>	<b>33.72</b>	<b>33.40</b>	<b>60.00</b>	<b>50.00</b>	<b>-26.28</b>	<b>-16.60</b>

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

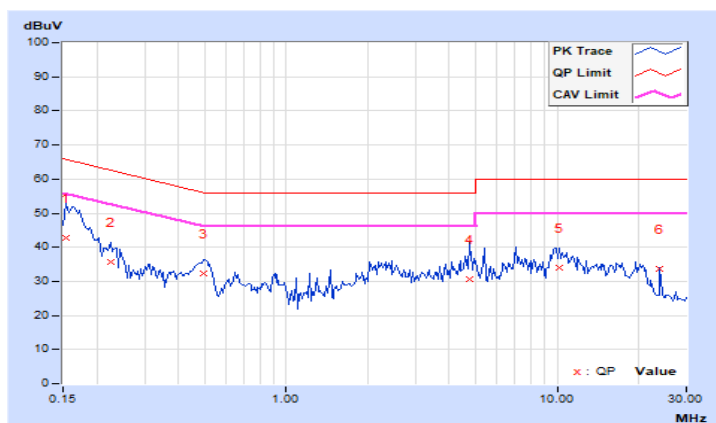


<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Carter Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.93	33.65	6.66	43.58	16.59	66.00	56.00	-22.42	-39.41
2	0.19297	9.94	32.73	18.46	42.67	28.40	63.91	53.91	-21.24	-25.51
3	0.48594	9.94	22.42	9.18	32.36	19.12	56.24	46.24	-23.88	-27.12
4	2.27344	10.03	22.57	14.57	32.60	24.60	56.00	46.00	-23.40	-21.40
5	9.60156	10.35	24.38	17.91	34.73	28.26	60.00	50.00	-25.27	-21.74
6	24.00000	10.85	21.45	21.18	32.30	32.03	60.00	50.00	-27.70	-17.97

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

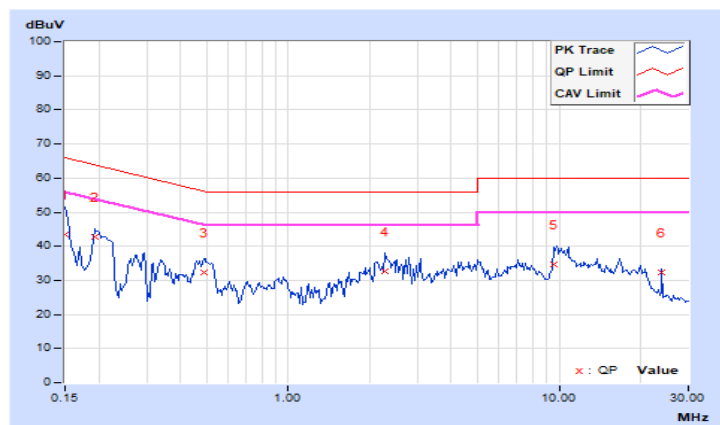

### 7.3 Unwanted Emissions below 1 GHz


<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Nelson Teng		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.75	30.0 QP	40.0	-10.0	1.48 H	274	38.2	-8.2
2	161.07	28.2 QP	43.5	-15.3	1.05 H	297	36.5	-8.3
3	251.18	31.0 QP	46.0	-15.0	1.58 H	252	40.5	-9.5
4	316.57	26.6 QP	46.0	-19.4	1.03 H	168	33.5	-6.9
5	452.11	28.0 QP	46.0	-18.0	1.08 H	328	31.7	-3.7
6	538.05	27.7 QP	46.0	-18.3	1.04 H	332	29.9	-2.2

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

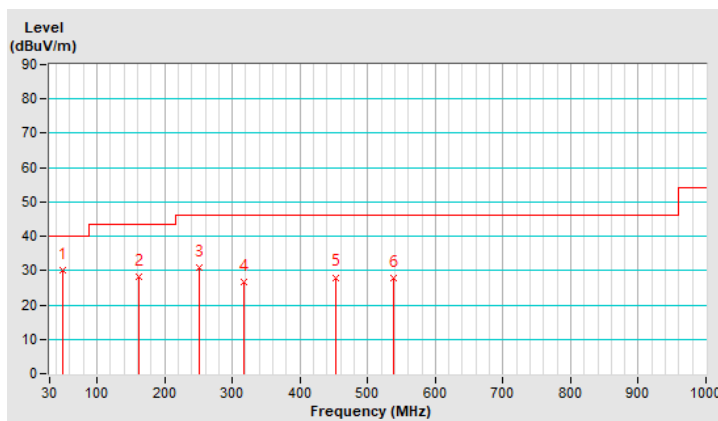


<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	30.07	32.0 QP	40.0	-8.0	1.06 V	341	41.2	-9.2
2	93.23	28.2 QP	43.5	-15.3	1.42 V	296	41.8	-13.6
3	172.70	27.2 QP	43.5	-16.3	1.06 V	161	36.3	-9.1
4	256.44	30.5 QP	46.0	-15.5	1.55 V	181	39.8	-9.3
5	308.59	26.8 QP	46.0	-19.2	1.01 V	360	34.1	-7.3
6	559.17	31.0 QP	46.0	-15.0	1.47 V	247	32.7	-1.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

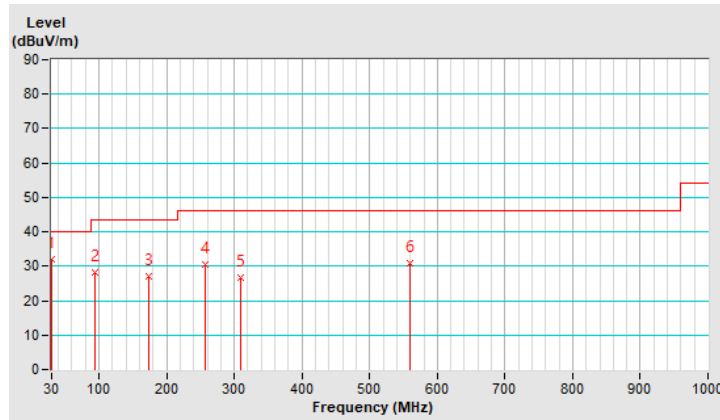


#### 7.4 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	BT GFSK	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.5 PK	74.0	-18.5	1.51 H	35	56.3	-0.8
2	2390.00	43.7 AV	54.0	-10.3	1.51 H	35	44.5	-0.8
3	*2402.00	95.9 PK			1.51 H	35	96.7	-0.8
4	*2402.00	65.2 AV			1.51 H	35	66.0	-0.8
5	4804.00	44.3 PK	74.0	-29.7	1.43 H	50	40.3	4.0
6	4804.00	13.6 AV	54.0	-40.4	1.43 H	50	9.6	4.0

#### Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.91 \text{ ms} / 100 \text{ ms}) = -30.7 \text{ dB}$

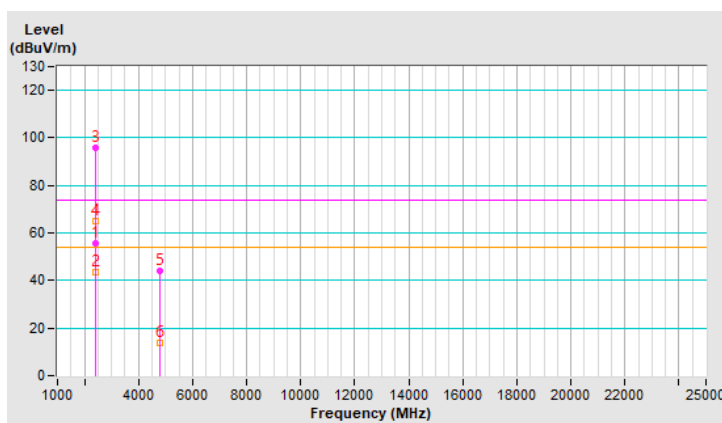




<b>RF Mode</b>	BT GFSK	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.5 PK	74.0	-18.5	1.28 V	186	56.3	-0.8
2	<b>2390.00</b>	<b>43.8 AV</b>	<b>54.0</b>	<b>-10.2</b>	<b>1.28 V</b>	<b>186</b>	<b>44.6</b>	<b>-0.8</b>
3	*2402.00	100.9 PK			1.28 V	186	101.7	-0.8
4	*2402.00	70.2 AV			1.28 V	186	71.0	-0.8
5	4804.00	48.4 PK	74.0	-25.6	1.94 V	341	44.4	4.0
6	4804.00	17.7 AV	54.0	-36.3	1.94 V	341	13.7	4.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.91 \text{ ms} / 100 \text{ ms}) = -30.7 \text{ dB}$

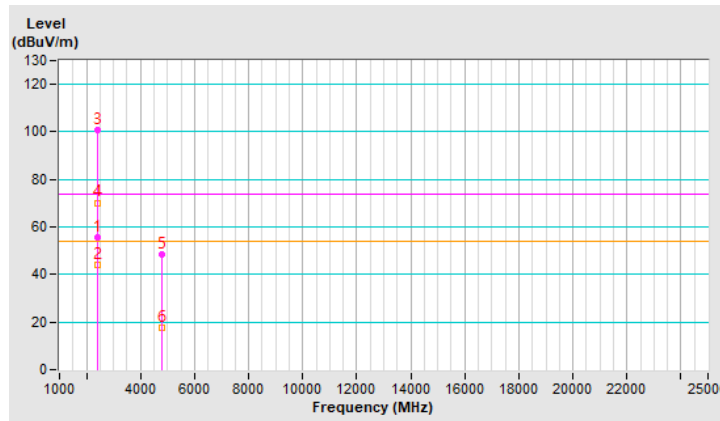


<b>RF Mode</b>	BT GFSK	<b>Channel</b>	CH 39 : 2441 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	93.7 PK			1.31 H	42	94.6	-0.9
2	*2441.00	63.0 AV			1.31 H	42	63.9	-0.9
3	4882.00	44.4 PK	74.0	-29.6	1.44 H	62	40.5	3.9
4	4882.00	13.7 AV	54.0	-40.3	1.44 H	62	9.8	3.9
5	7323.00	45.7 PK	74.0	-28.3	1.90 H	152	35.5	10.2
6	7323.00	15.0 AV	54.0	-39.0	1.90 H	152	4.8	10.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.91 \text{ ms} / 100 \text{ ms}) = -30.7 \text{ dB}$

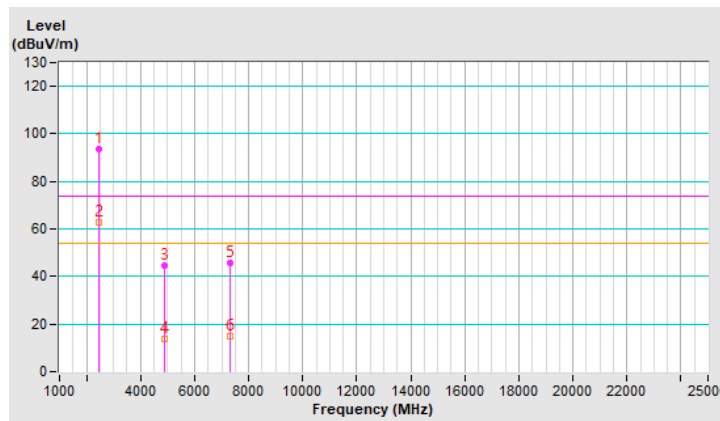


<b>RF Mode</b>	BT GFSK	<b>Channel</b>	CH 39 : 2441 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	99.9 PK			1.19 V	179	100.8	-0.9
2	*2441.00	69.2 AV			1.19 V	179	70.1	-0.9
3	4882.00	48.6 PK	74.0	-25.4	1.95 V	347	44.7	3.9
4	4882.00	17.9 AV	54.0	-36.1	1.95 V	347	14.0	3.9
5	7323.00	46.1 PK	74.0	-27.9	2.27 V	58	35.9	10.2
6	7323.00	15.4 AV	54.0	-38.6	2.27 V	58	5.2	10.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.91 \text{ ms} / 100 \text{ ms}) = -30.7 \text{ dB}$

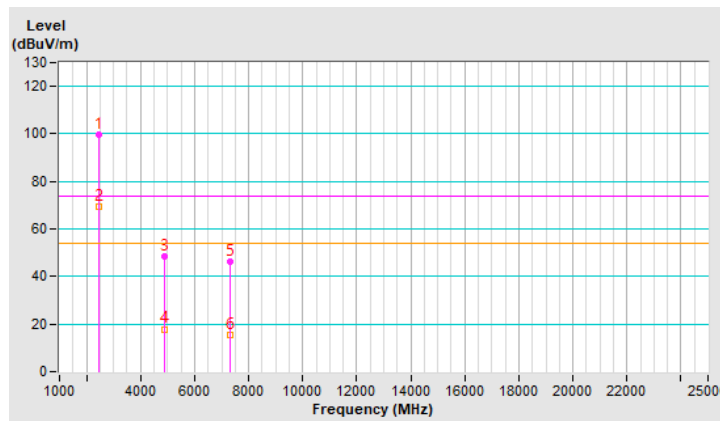


<b>RF Mode</b>	BT GFSK	<b>Channel</b>	CH 78 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	94.0 PK			1.35 H	30	94.9	-0.9
2	*2480.00	63.3 AV			1.35 H	30	64.2	-0.9
3	2483.50	54.7 PK	74.0	-19.3	1.35 H	30	55.7	-1.0
4	2483.50	43.4 AV	54.0	-10.6	1.35 H	30	44.4	-1.0
5	4960.00	44.7 PK	74.0	-29.3	1.39 H	60	40.7	4.0
6	4960.00	14.0 AV	54.0	-40.0	1.39 H	60	10.0	4.0
7	7440.00	45.5 PK	74.0	-28.5	1.89 H	162	35.0	10.5
8	7440.00	14.8 AV	54.0	-39.2	1.89 H	162	4.3	10.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.91 \text{ ms} / 100 \text{ ms}) = -30.7 \text{ dB}$

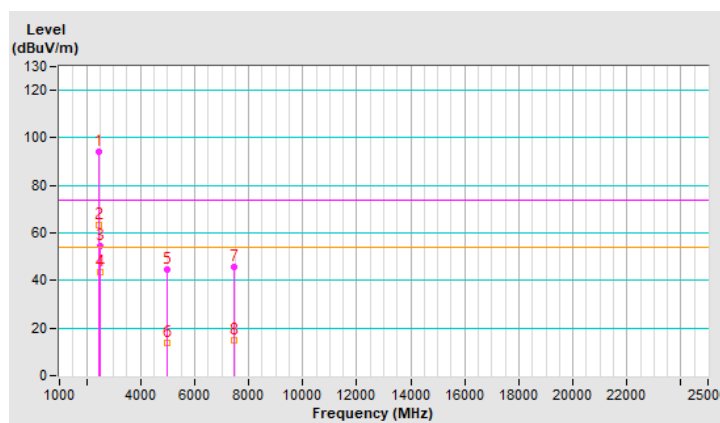


<b>RF Mode</b>	BT GFSK	<b>Channel</b>	CH 78 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	99.4 PK			1.24 V	189	100.3	-0.9
2	*2480.00	68.7 AV			1.24 V	189	69.6	-0.9
3	2483.50	54.8 PK	74.0	-19.2	1.24 V	189	55.8	-1.0
4	2483.50	43.6 AV	54.0	-10.4	1.24 V	189	44.6	-1.0
5	4960.00	48.1 PK	74.0	-25.9	1.97 V	332	44.1	4.0
6	4960.00	17.4 AV	54.0	-36.6	1.97 V	332	13.4	4.0
7	7440.00	45.8 PK	74.0	-28.2	2.23 V	71	35.3	10.5
8	7440.00	15.1 AV	54.0	-38.9	2.23 V	71	4.6	10.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.91 \text{ ms} / 100 \text{ ms}) = -30.7 \text{ dB}$

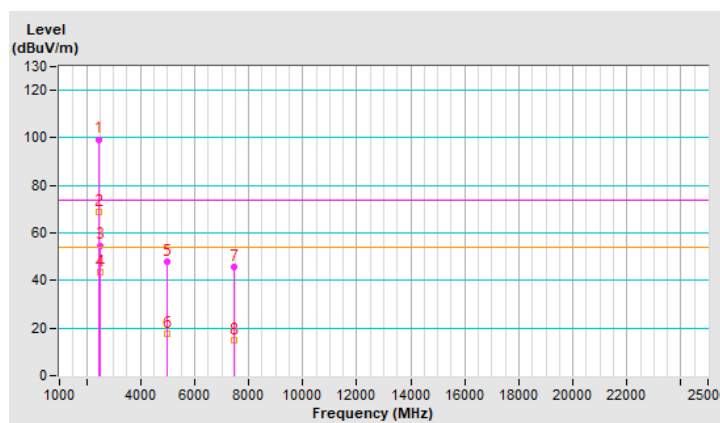


<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.5 PK	74.0	-18.5	1.50 H	36	56.3	-0.8
2	<b>2390.00</b>	<b>43.8 AV</b>	<b>54.0</b>	<b>-10.2</b>	<b>1.50 H</b>	<b>36</b>	<b>44.6</b>	<b>-0.8</b>
3	*2402.00	97.2 PK			1.50 H	36	98.0	-0.8
4	*2402.00	66.4 AV			1.50 H	36	67.2	-0.8
5	4804.00	44.6 PK	74.0	-29.4	1.44 H	74	40.6	4.0
6	4804.00	13.8 AV	54.0	-40.2	1.44 H	74	9.8	4.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.9 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

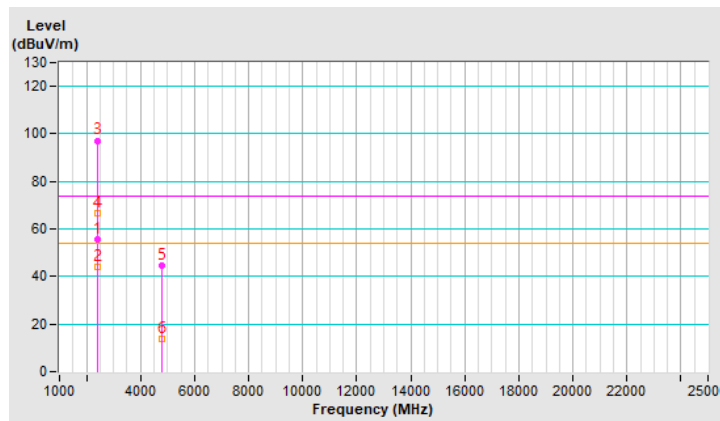


<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	1.27 V	188	56.2	-0.8
2	<b>2390.00</b>	<b>43.8 AV</b>	<b>54.0</b>	<b>-10.2</b>	<b>1.27 V</b>	<b>188</b>	<b>44.6</b>	<b>-0.8</b>
3	*2402.00	102.1 PK			1.27 V	188	102.9	-0.8
4	*2402.00	71.3 AV			1.27 V	188	72.1	-0.8
5	4804.00	48.1 PK	74.0	-25.9	1.93 V	318	44.1	4.0
6	4804.00	17.3 AV	54.0	-36.7	1.93 V	318	13.3	4.0

**Remarks:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.9 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

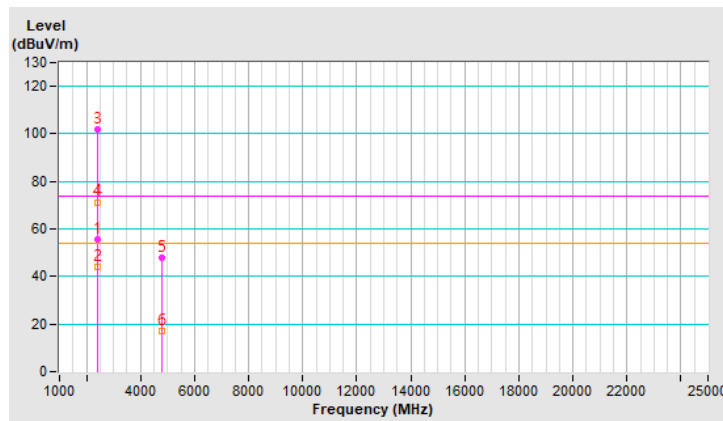


<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 39 : 2441 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	95.8 PK			1.80 H	40	96.7	-0.9
2	*2441.00	65.0 AV			1.80 H	40	65.9	-0.9
3	4882.00	44.7 PK	74.0	-29.3	1.48 H	64	40.8	3.9
4	4882.00	13.9 AV	54.0	-40.1	1.48 H	64	10.0	3.9
5	7323.00	46.0 PK	74.0	-28.0	1.89 H	146	35.8	10.2
6	7323.00	15.2 AV	54.0	-38.8	1.89 H	146	5.0	10.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.9 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

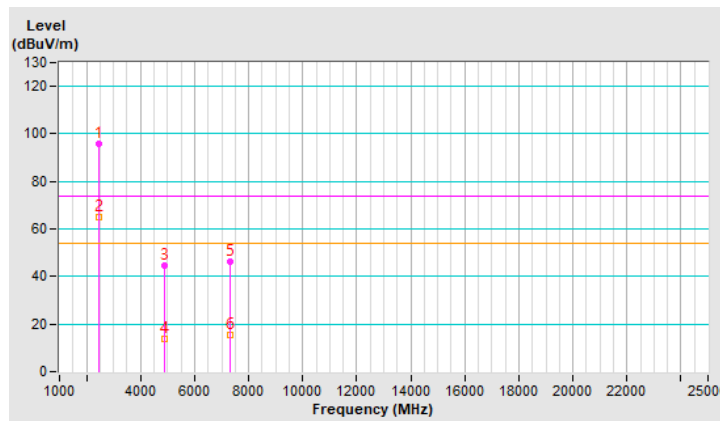




<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 39 : 2441 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	101.2 PK			1.17 V	197	102.1	-0.9
2	*2441.00	70.4 AV			1.17 V	197	71.3	-0.9
3	4882.00	48.6 PK	74.0	-25.4	1.91 V	321	44.7	3.9
4	4882.00	17.8 AV	54.0	-36.2	1.91 V	321	13.9	3.9
5	7323.00	46.2 PK	74.0	-27.8	2.19 V	77	36.0	10.2
6	7323.00	15.4 AV	54.0	-38.6	2.19 V	77	5.2	10.2

**Remarks:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.9 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

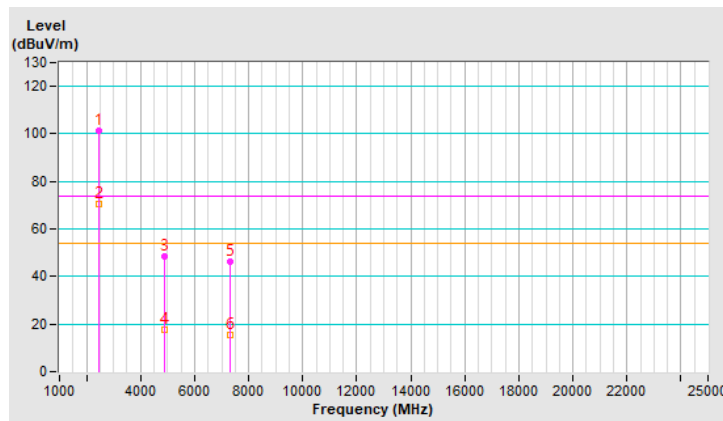


<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 78 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	95.1 PK			1.82 H	30	96.0	-0.9
2	*2480.00	64.3 AV			1.82 H	30	65.2	-0.9
3	2483.50	54.8 PK	74.0	-19.2	1.82 H	30	55.8	-1.0
4	2483.50	43.5 AV	54.0	-10.5	1.82 H	30	44.5	-1.0
5	4960.00	45.0 PK	74.0	-29.0	1.44 H	54	41.0	4.0
6	4960.00	14.2 AV	54.0	-39.8	1.44 H	54	10.2	4.0
7	7440.00	45.1 PK	74.0	-28.9	1.91 H	159	34.6	10.5
8	7440.00	14.3 AV	54.0	-39.7	1.91 H	159	3.8	10.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.9 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

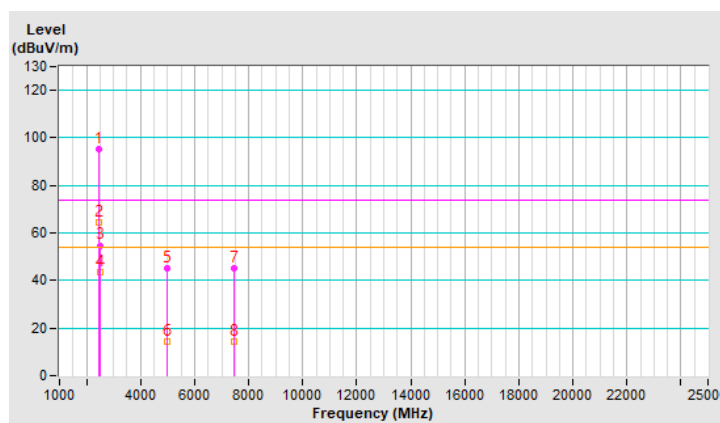


<b>RF Mode</b>	BT 8DPSK	<b>Channel</b>	CH 78 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 MHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ryan Du		


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	100.8 PK			1.21 V	189	101.7	-0.9
2	*2480.00	70.0 AV			1.21 V	189	70.9	-0.9
3	2483.50	55.3 PK	74.0	-18.7	1.21 V	189	56.3	-1.0
<b>4</b>	<b>2483.50</b>	<b>43.8 AV</b>	<b>54.0</b>	<b>-10.2</b>	<b>1.21 V</b>	<b>189</b>	<b>44.8</b>	<b>-1.0</b>
5	4960.00	47.9 PK	74.0	-26.1	1.97 V	345	43.9	4.0
6	4960.00	17.1 AV	54.0	-36.9	1.97 V	345	13.1	4.0
7	7440.00	46.5 PK	74.0	-27.5	2.24 V	63	36.0	10.5
8	7440.00	15.7 AV	54.0	-38.3	2.24 V	63	5.2	10.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.9 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

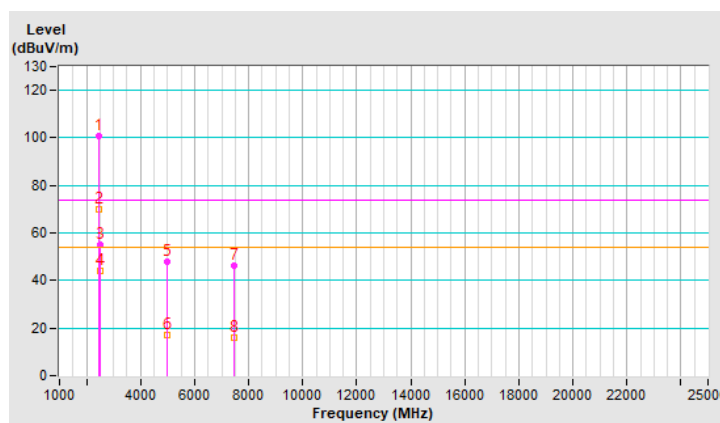

## Plot of Band Edge

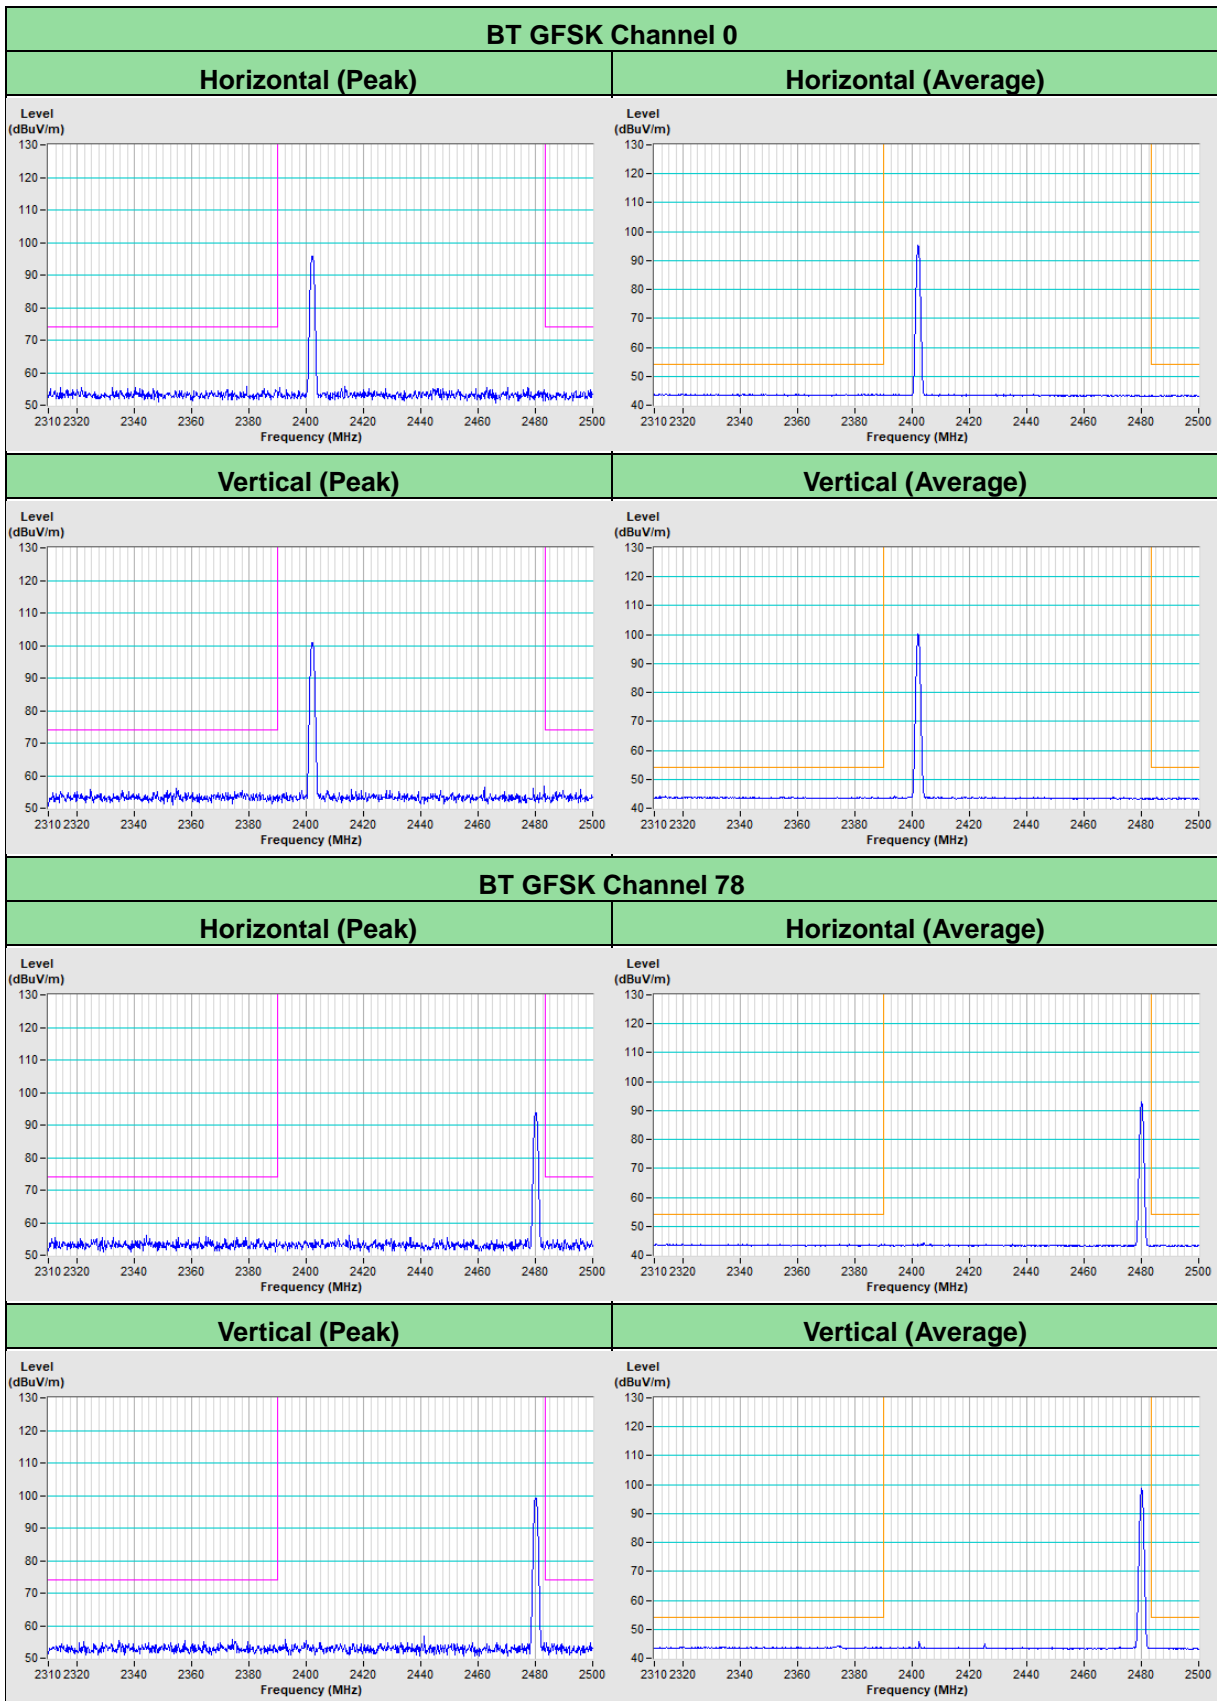



## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---