




TEST REPORT

Product Name: Reader
FCC ID: TQ4-XC-RF700
Trademark:  Invengo
Model Number: XC-RF700
Prepared For: Invengo Information Technology Co., Ltd.
Address: 27th and 28th Floor, Hi-Tech Zone Union Tower, NO.63, Gaoxin South 10th Road, Yuehai Sub-district, Nanshan District, Shenzhen, China
Manufacturer: Invengo Information Technology Co., Ltd.
Address: 27th and 28th Floor, Hi-Tech Zone Union Tower, NO.63, Gaoxin South 10th Road, Yuehai Sub-district, Nanshan District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Aug. 19, 2024
Sample tested Date: Aug. 19, 2024 to Sep. 04, 2024
Issue Date: Sep. 04, 2024
Report No.: CTB240904025RF
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is RFID radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

| Test Report Declaration | Page |
|---|-----------|
| 1. VERSION | 4 |
| 2. TEST SUMMARY | 5 |
| 3. MEASUREMENT UNCERTAINTY | 6 |
| 4. PRODUCT INFORMATION AND TEST SETUP | 7 |
| 4.1 Product Information | 7 |
| 4.2 Test Setup Configuration | 7 |
| 4.3 Support Equipment | 7 |
| 4.4 Channel List | 8 |
| 4.5 Test Mode | 8 |
| 4.6 Test Environment | 8 |
| 5. TEST FACILITY AND TEST INSTRUMENT USED | 9 |
| 5.1 Test Facility | 9 |
| 5.2 Test Instrument Used | 9 |
| 6. AC POWER LINE CONDUCTED EMISSION | 12 |
| 6.1 Block Diagram Of Test Setup | 12 |
| 6.2 Limit | 12 |
| 6.3 Test procedure | 12 |
| 6.4 Test Result | 13 |
| 7. RADIATED SPURIOUS EMISSION | 15 |
| 7.1 Block Diagram Of Test Setup | 15 |
| 7.2 Limit | 15 |
| 7.3 Test procedure | 16 |
| 7.4 Test Result | 17 |
| 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS | 22 |
| 8.1 Block Diagram Of Test Setup | 22 |
| 8.2 Limit | 22 |
| 8.3 Test procedure | 22 |
| 8.4 Test Result | 23 |
| 9. CONDUCTED PEAK OUTPUT POWER | 26 |
| 9.1 Block Diagram Of Test Setup | 26 |
| 9.2 Limit | 26 |
| 9.3 Test procedure | 26 |
| 9.4 Test Result | 26 |
| 10. 20DB OCCUPIED BANDWIDTH | 28 |
| 10.1 Block Diagram Of Test Setup | 28 |
| 10.2 Limit | 28 |
| 10.3 Test procedure | 28 |
| 10.4 Test Result | 28 |
| 11. CARRIER FREQUENCIES SEPARATION | 30 |
| 11.1 Block Diagram Of Test Setup | 30 |

- 11.2 Limit 30
- 11.3 Test procedure 30
- 11.4 Test Result 30
- 12. HOPPING CHANNEL NUMBER 32**
- 12.1 Block Diagram Of Test Setup 32
- 12.2 Limit 32
- 12.3 Test procedure 32
- 12.4 Test Result 32
- 13. DWELL TIME 33**
- 13.1 Block Diagram Of Test Setup 33
- 13.2 Limit 33
- 13.3 Test procedure 33
- 13.4 Test Result 33
- 14. ANTENNA REQUIREMENT 35**
- 15. EUT TEST SETUP PHOTOGRAPHS 36**

(Note: N/A means not applicable)



1. VERSION

| Report No. | Issue Date | Description | Approved |
|----------------|---------------|-------------|----------|
| CTB240904025RF | Sep. 04, 2024 | Original | Valid |

2. TEST SUMMARY

The Product has been tested according to the following specifications:

| Test Item | Test Requirement | Test method | Result |
|--|--|------------------|--------|
| AC Power Line Conducted Emission | 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| Radiated Spurious emissions | 47 CFR Part 15 Subpart C Section 15.205/15.209/15.247(d) | ANSI C63.10-2013 | PASS |
| Band edge and RF Conducted Spurious Emissions | 47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a) | ANSI C63.10-2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15 Subpart C Section 15.247 (b)(2) | ANSI C63.10-2013 | PASS |
| 20dB Occupied Bandwidth | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Carrier Frequencies Separation | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Hopping Channel Number | 47 CFR Part 15 Subpart C Section 15.247 (b) | ANSI C63.10-2013 | PASS |
| Dwell Time | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Antenna Requirement | 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS |

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Item | Uncertainty |
|---|-------------|
| Occupancy bandwidth | U=±54.3Hz |
| Conducted output power Above 1G | U=±1.0dB |
| Conducted output power below 1G | U=±0.9dB |
| Power Spectral Density , Conduction | U=±1.0dB |
| Conduction spurious emissions | U=±2.8dB |
| Out of band emission | U=±54Hz |
| 3m chamber Radiated spurious emission(30MHz-1GHz) | U=±4.3dB |
| 3m chamber Radiated spurious emission(1GHz-18GHz) | U=±4.5dB |
| humidity uncertainty | U=±5.3% |
| Temperature uncertainty | U=±0.59°C |
| Supply voltages | U=±3% |
| Time | U=±5% |

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): XC-RF700
 Model Description: N/A
 Hardware Version: V1.0
 Software Version: V1.0

 Operation Frequency: 902.75-927.25MHz
 Max. RF output power: 29.184dBm
 Type of Modulation: ASK
 Antenna installation: External antenna
 Antenna Gain: 6.4dBi
 Ratings: DC: 24.0V 0.6A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

| No. | Device Type | Brand | Model | Series No. | Data Cable | Power Cord |
|-----|-------------|-----------------------------|---------------|------------|------------|------------|
| 1. | Laptop | DELL | Vostro 5490 | N/A | / | / |
| 2 | AC adapter | Quanhan Enterprise Co., LTD | FSP060-DAA N3 | N/A | / | |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.

4.4 Channel List

| Channel List | | | | | | | |
|--------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1 | 902.75 | 14 | 909.25 | 27 | 915.75 | 40 | 922.25 |
| 2 | 903.25 | 15 | 909.75 | 28 | 916.25 | 41 | 922.75 |
| 3 | 903.75 | 16 | 910.25 | 29 | 916.75 | 42 | 923.25 |
| 4 | 904.25 | 17 | 910.75 | 30 | 917.25 | 43 | 923.75 |
| 5 | 904.75 | 18 | 911.25 | 31 | 917.75 | 44 | 924.25 |
| 6 | 905.25 | 19 | 911.75 | 32 | 918.25 | 45 | 924.75 |
| 7 | 905.75 | 20 | 912.25 | 33 | 918.75 | 46 | 925.25 |
| 8 | 906.25 | 21 | 912.75 | 34 | 919.25 | 47 | 925.75 |
| 9 | 906.75 | 22 | 913.25 | 35 | 919.75 | 48 | 926.25 |
| 10 | 907.25 | 23 | 913.75 | 36 | 920.25 | 49 | 926.75 |
| 11 | 907.75 | 24 | 914.25 | 37 | 920.75 | 50 | 927.25 |
| 12 | 908.25 | 25 | 914.75 | 38 | 921.25 | | |
| 13 | 908.75 | 26 | 915.25 | 39 | 921.75 | | |

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

| Test mode | Low channel | Middle channel | High channel |
|---------------------|-------------|----------------|--------------|
| Transmitting (8FSK) | 902.75MHz | 914.75MHz | 927.25MHz |
| Receiving (8FSK) | 902.75MHz | 914.75MHz | 927.25MHz |

4.6 Test Environment

| | |
|----------------------------|------|
| Humidity(%): | 54 |
| Atmospheric Pressure(kPa): | 101 |
| Normal Voltage(AC): | 120V |
| Normal Temperature(°C) | 23 |
| Low Temperature(°C) | 0 |
| High Temperature(°C) | 40 |

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

| No. | Equipment | Manufacturer | Type No. | Serial No. | Firmware Version | Calibrated until |
|-----|---|--------------|-----------------------|--------------|-------------------------|------------------|
| 1 | Spectrum Analyzer | Agilent | N9020A | MY52090073 | A.14.16 | 2025/6/28 |
| 2 | Power Sensor | Agilent | U2021XA | MY56120032 | / | 2025/6/28 |
| 3 | Power Sensor | Agilent | U2021XA | MY56120034 | / | 2025/6/28 |
| 4 | Communication test set | R&S | CMW500 | 108058 | V3.5.80 | 2025/6/28 |
| 5 | Spectrum Analyzer | KEYSIGHT | N9020A | MY51289897 | A.14.16 | 2025/6/28 |
| 6 | Signal Generator | Agilent | N5181A | MY50140365 | A.01.60 | 2025/6/28 |
| 7 | Vector signal generator | Agilent | N5182A | MY47420195 | A.01.87 | 2025/6/28 |
| 8 | Communication test set | Agilent | E5515C | MY50102567 | B.19.07 (E1962B) | 2025/6/28 |
| 9 | 2.4 GHz Filter | Shenxiang | MSF2400-2483.5MS-1154 | 20181015001 | / | 2025/6/30 |
| 10 | 5 GHz Filter | Shenxiang | MSF5150-5850MS-1155 | 20181015001 | / | 2025/6/30 |
| 11 | Filter | Xingbo | XBLBQ-DZA120 | 190821-1-1 | / | 2025/6/30 |
| 12 | BT&WI-FI Automatic test software | Microwave | MTS8310 | Ver. 2.0.0.0 | / | / |
| 13 | Rohde & Schwarz SFU Broadcast Test System | R&S | SFU | 101017 | / | 2025/6/28 |
| 14 | Temperature humidity chamber | Hongjing | TH-80CH | DG-15174 | / | 2025/6/28 |
| 15 | 234G Automatic test software | Microwave | MTS8200 | Ver. 2.0.0.0 | / | / |
| 16 | 966 chamber | C.R.T. | 966 | / | / | 2027/6/21 |
| 17 | Receiver | R&S | ESPI | 100362 | RF_ATTEN_7 (104489/003) | 2025/6/28 |
| 18 | Amplifier | HP | 8447E | 2945A02747 | / | 2025/6/28 |
| 19 | Amplifier | Agilent | 8449B | 3008A01838 | / | 2025/6/28 |
| 20 | TRILOG Broadband Antenna | Schwarzbeck | VULB 9168 | 00869 | / | 2025/6/28 |
| 21 | Double Ridged Broadband Horn Antenna | Schwarzbeck | BBHA9120D | 01911 | / | 2025/6/28 |

| | | | | | | |
|----|-------------------|-------------|------------|------------|---------|-----------|
| 22 | EMI test software | Fala | EZ-EMC | FA-03A2 RE | / | / |
| 23 | Loop Antenna | Schwarzbeck | FMZB 1519B | 1519B-224 | / | 2025/6/28 |
| 24 | loop antenna | ZHINAN | ZN30900A | GTS534 | / | / |
| 25 | 40G Horn antenna | A/H/System | SAS-574 | 588 | / | 2025/6/28 |
| 26 | Amplifier | AEROFLEX | Aeroflex | 097 | / | 2025/6/28 |
| 27 | Power Metter | KEYSIGHT | N1912AP | N/A | A.05.00 | 2025/6/28 |


| Continuous disturbance | | | | | | |
|------------------------|------------------------|---------------|--------------|------------|---------------------|------------------|
| No. | Equipment | Manufacturer | Model No. | Serial No. | Firmware version | Calibrated until |
| 1 | 843 Shield Room | C/ R/ T | 843 | / | / | 2027/6/21 |
| 2 | AMN | ROHDE&SCHWARZ | ESH3-Z5 | 831551852 | / | 2025/6/30 |
| 3 | Pulse limiter | ROHDE&SCHWARZ | ESH3Z2 | 357881052 | / | 2025/6/28 |
| 4 | EMI TEST RECEIVER | ROHDE&SCHWARZ | ESCI | 100428 | V4.42.SP3 | 2025/6/30 |
| 5 | Coaxial cable | ZDECL | Z302S | 18091904 | / | 2025/6/30 |
| 6 | ISN | Schwarzbeck | NTFM8158 | 183 | / | 2025/6/30 |
| 7 | Voltage sensor | Schwarzbeck | TK 9420 | 01189 | / | 2024/11/16 |
| 8 | EZ-EMC | Frad | EMC-con3A1.1 | / | / | / |
| 9 | Current Probe | FCC | F-52B | 199453 | / | 2025/5/27 |
| 10 | Communication test set | R&S | CMW500 | 108058 | B.19.07 (E1962B) | 2025/6/28 |
| 11 | Communication test set | Agilent | E5515C | MY50102567 | V3.5.80 | 2025/6/28 |

| Radiated emission(No.1 Chamber) | | | | | | |
|---------------------------------|--------------------------------------|---------------|--------------------|------------|----------------------------|------------------|
| No. | Equipment | Manufacturer | Model No. | Serial No. | Firmware version | Calibrated until |
| 1 | 966 Chamber | C/ R/ T | 966 | / | / | 2027/6/21 |
| 2 | Double Ridged Broadband Horn Antenna | Schwarzbeck | BBHA 9120 D | 01911 | / | 2025/7/06 |
| 3 | TRILOG Broadband Antenna | Schwarzbeck | VULB 9168 | 00869 | / | 2025/6/29 |
| 4 | Amplifier | Agilent | 8449B | 3008A01838 | / | 2025/6/30 |
| 5 | Amplifier | HP | 8447E | 2945A02747 | / | 2025/6/28 |
| 6 | loop antenna | Schwarzbeck | FMZB 1519B | 1519B-224 | / | 2025/6/29 |
| 7 | EMI TEST RECEIVER | ROHDE&SCHWARZ | ESPI | 100362 | RF_ATTEN_7 (104489/003) | 2025/6/28 |
| 8 | Spectrum Analyzer | KEYSIGHT | N9020A | MY51289897 | A.14.16 | 2025/6/28 |
| 9 | Coaxial cable | ETS | RFC-SNS-100-NMS-80 | / | / | 2025/6/28 |

| | | | | | | |
|----|------------------------|---------|---------------------|--------------------|---------------------|-----------|
| 10 | Coaxial cable | ETS | RFC-SN-100-NMS-20 | / | / | 2025/6/28 |
| 11 | Coaxial cable | ETS | RFC-SNS-100-SMS-20 | / | / | 2025/6/28 |
| 12 | Coaxial cable | ETS | RFC-NNS-100-NMS-300 | / | / | 2025/6/28 |
| 13 | EMI test software | Frad | EZ-EMC | Ver/ FA-03A2 RE | / | / |
| 14 | Communication test set | R&S | CMW500 | 108058 | B.19.07 (E1962B) | 2025/6/28 |
| 15 | Communication test set | Agilent | E5515C | MY50102567 | V3.5.80 | 2025/6/28 |

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

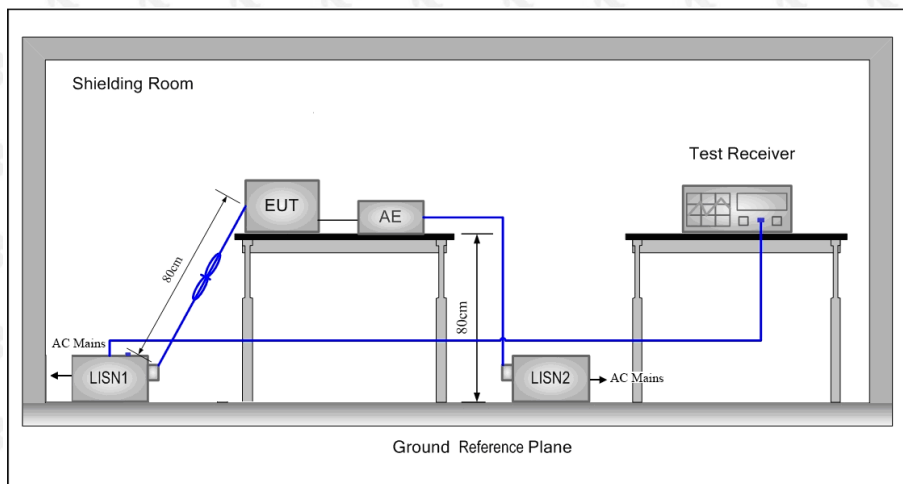

6.2 Limit

| Frequency (MHz) | Maximum RF Line Voltage (dB μ V) | | | |
|-----------------|--------------------------------------|------|---------|--------|
| | CLASS A | | CLASS B | |
| | Q.P. | Ave. | Q.P. | Ave. |
| 0.15 - 0.50 | 79 | 66 | 66-56* | 56-46* |
| 0.50 - 5.00 | 73 | 60 | 56 | 46 |
| 5.00 - 30.0 | 73 | 60 | 60 | 50 |


* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


6.4 Test Result

L:

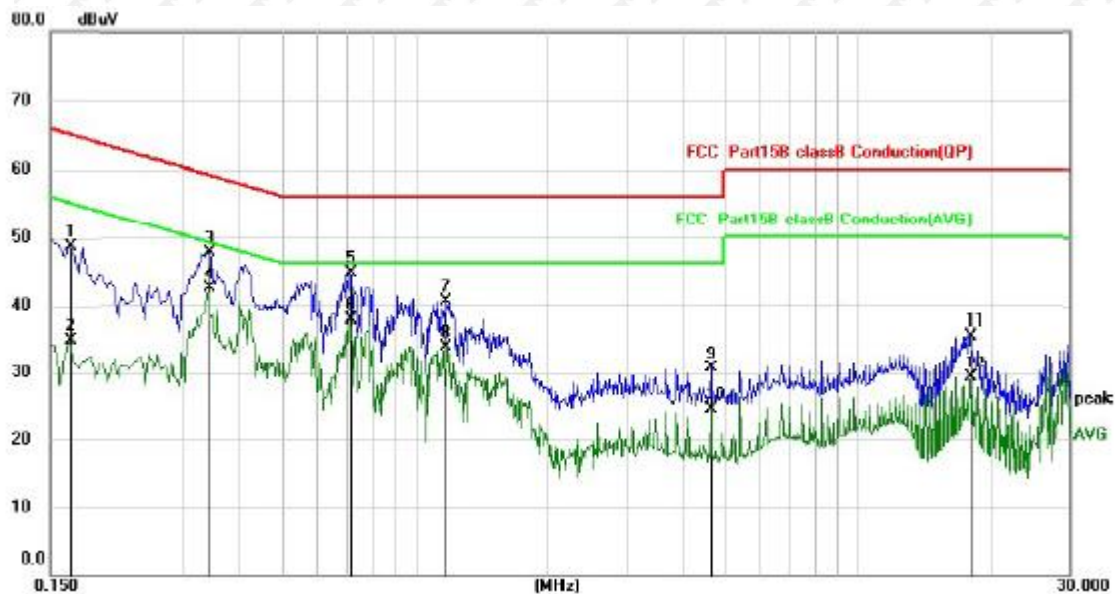

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Detector |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | |
| 1 | | 0.1660 | 37.96 | 10.83 | 48.79 | 65.16 | -16.37 | QP |
| 2 | | 0.1660 | 24.00 | 10.83 | 34.83 | 55.16 | -20.33 | AVG |
| 3 | | 0.3420 | 36.86 | 10.61 | 47.47 | 59.15 | -11.68 | QP |
| 4 | * | 0.3420 | 31.60 | 10.61 | 42.21 | 49.15 | -6.94 | AVG |
| 5 | | 0.7139 | 33.77 | 10.73 | 44.50 | 56.00 | -11.50 | QP |
| 6 | | 0.7139 | 27.02 | 10.73 | 37.75 | 46.00 | -8.25 | AVG |
| 7 | | 1.1739 | 29.29 | 11.06 | 40.35 | 56.00 | -15.65 | QP |
| 8 | | 1.1739 | 22.87 | 11.06 | 33.93 | 46.00 | -12.07 | AVG |
| 9 | | 4.6658 | 18.53 | 12.17 | 30.70 | 56.00 | -25.30 | QP |
| 10 | | 4.6658 | 12.36 | 12.17 | 24.53 | 46.00 | -21.47 | AVG |
| 11 | | 17.8900 | 22.12 | 13.48 | 35.60 | 60.00 | -24.40 | QP |
| 12 | | 17.8900 | 15.86 | 13.48 | 29.34 | 50.00 | -20.66 | AVG |

N:

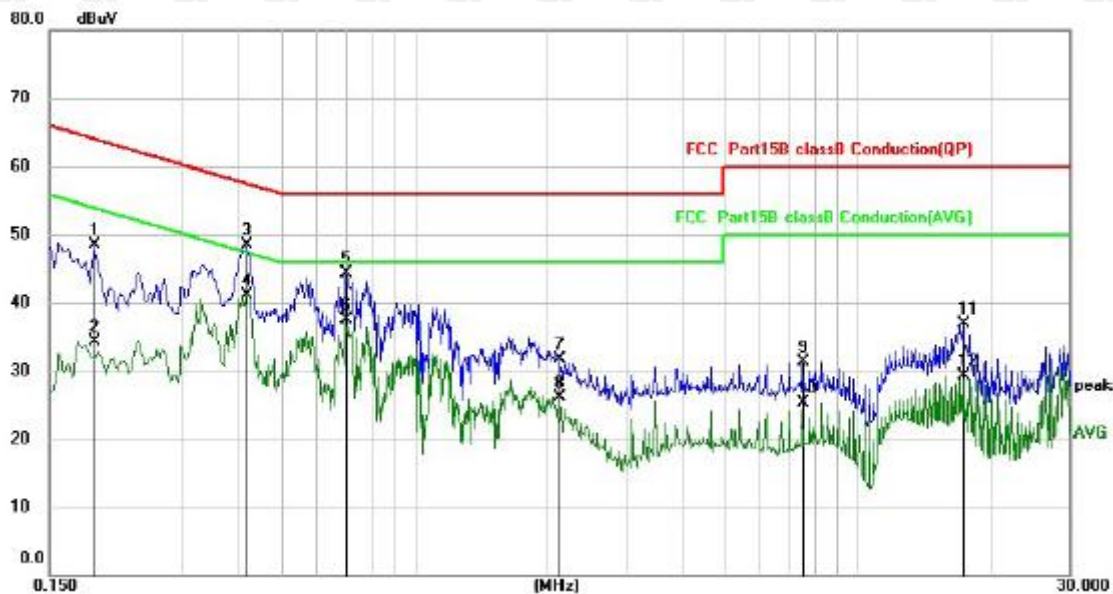

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV | Limit dBuV | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|---------------------|---------------|------------|----------|
| 1 | | 0.1900 | 37.69 | 10.75 | 48.44 | 64.04 | -15.60 | QP |
| 2 | | 0.1900 | 23.48 | 10.75 | 34.23 | 54.04 | -19.81 | AVG |
| 3 | | 0.4180 | 38.00 | 10.56 | 48.56 | 57.49 | -8.93 | QP |
| 4 | * | 0.4180 | 30.46 | 10.56 | 41.02 | 47.49 | -6.47 | AVG |
| 5 | | 0.6980 | 33.52 | 10.72 | 44.24 | 56.00 | -11.76 | QP |
| 6 | | 0.6980 | 26.85 | 10.72 | 37.57 | 46.00 | -8.43 | AVG |
| 7 | | 2.1300 | 20.10 | 11.61 | 31.71 | 56.00 | -24.29 | QP |
| 8 | | 2.1300 | 14.51 | 11.61 | 26.12 | 46.00 | -19.88 | AVG |
| 9 | | 7.5179 | 18.29 | 12.99 | 31.28 | 60.00 | -28.72 | QP |
| 10 | | 7.5179 | 12.28 | 12.99 | 25.27 | 50.00 | -24.73 | AVG |
| 11 | | 17.3659 | 23.37 | 13.46 | 36.83 | 60.00 | -23.17 | QP |
| 12 | | 17.3659 | 15.89 | 13.46 | 29.35 | 50.00 | -20.65 | AVG |

Remark:

- Factor = Cable loss + LISN factor, Margin = Limit – Level
- All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- All the test modes completed for test. Only the worst result of GFSK Low Channel was reported.

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

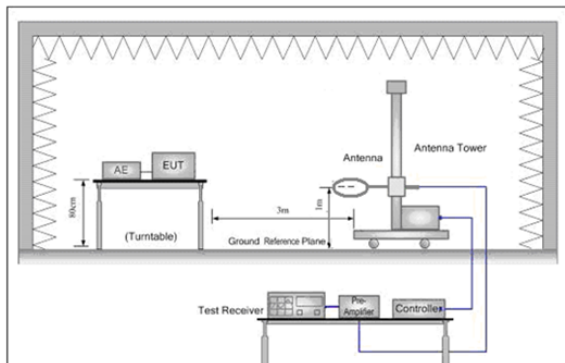


Figure 1. Below 30MHz

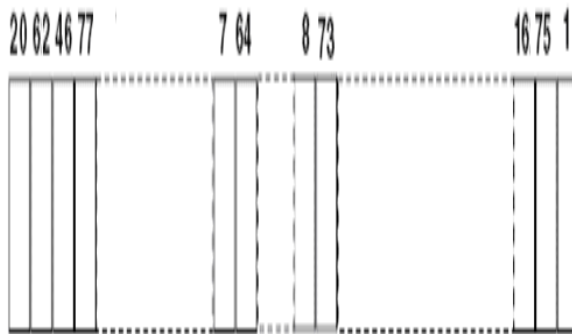


Figure 2. 30MHz to 1GHz

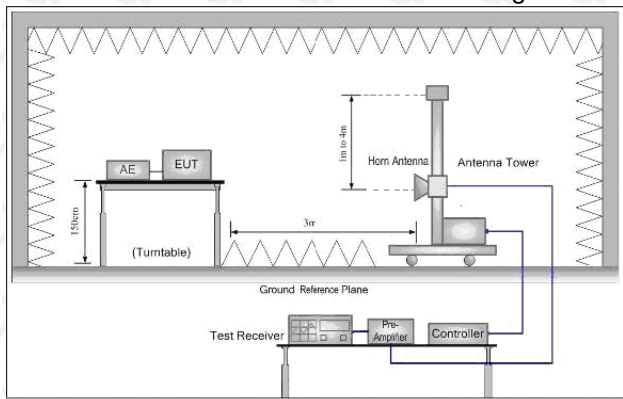


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

| Frequency | Field strength (microvolt/meter) | Limit (dB μ V/m) | Remark | Measurement distance (m) |
|-------------------|----------------------------------|-----------------------|------------|--------------------------|
| 0.009MHz-0.490MHz | 2400/F (kHz) | - | - | 300 |
| 0.490MHz-1.705MHz | 24000/F (kHz) | - | - | 30 |
| 1.705MHz-30MHz | 30 | - | - | 30 |
| 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1GHz | 500 | 54.0 | Average | 3 |

Note: a.15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

b. The lower limit shall apply at the transition frequencies.

c. Emission level(dBuV/m)=20log Emission level(uV/m)

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

| Frequency | Detector | RBW | VBW | Remark |
|-------------------|------------|---------|--------|------------|
| 0.009MHz-0.090MHz | Peak | 10kHz | 30KHz | Peak |
| 0.009MHz-0.090MHz | Average | 10kHz | 30KHz | Average |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30KHz | Quasi-peak |
| 0.110MHz-0.490MHz | Peak | 10kHz | 30KHz | Peak |
| 0.110MHz-0.490MHz | Average | 10kHz | 30KHz | Average |
| 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| 30MHz-1GHz | Quasi-peak | 100 kHz | 300KHz | Quasi-peak |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | Peak | 1MHz | 10Hz | Average |

7.4 Test Result

Low channel below 1GHz Test Results:

Antenna polarity: H



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | | 44.5086 | 31.80 | -6.77 | 25.03 | 40.00 | -14.97 | QP |
| 2 | | 160.0646 | 25.93 | -0.84 | 25.09 | 43.50 | -18.41 | QP |
| 3 | | 361.7137 | 35.27 | -1.55 | 33.72 | 46.00 | -12.28 | QP |
| 4 | | 401.8383 | 35.69 | -0.67 | 35.02 | 46.00 | -10.98 | QP |
| 5 | | 768.7481 | 31.64 | 6.77 | 38.41 | 46.00 | -7.59 | QP |
| 6 | * | 932.2713 | 32.41 | 8.49 | 40.90 | 46.00 | -5.10 | QP |

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level.

Antenna polarity: V
80.0 dBuV/m



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | * | 42.2280 | 43.18 | -6.84 | 36.34 | 40.00 | -3.66 | QP |
| 2 | | 64.8864 | 30.39 | -7.99 | 22.40 | 40.00 | -17.60 | QP |
| 3 | | 153.2002 | 28.82 | -2.21 | 26.61 | 43.50 | -16.89 | QP |
| 4 | | 308.9125 | 34.52 | -2.71 | 31.81 | 46.00 | -14.19 | QP |
| 5 | | 768.7481 | 32.59 | 6.77 | 39.36 | 46.00 | -6.64 | QP |
| 6 | ! | 932.2714 | 32.92 | 8.49 | 41.41 | 46.00 | -4.59 | QP |

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level

Note: ANT 1/2 have been tested and passed, only showed the worst mode ANT 1 in this report, and ANT 1/2 can't transmit simultaneously .

Above 1 GHz Test Results:
CH Low

Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 1805.5 | 108.36 | -5.84 | 52.69 | 74 | -21.31 | peak |
| 1805.5 | 95.58 | -5.84 | 43.65 | 54 | -10.35 | AVG |
| 2708.25 | 56.40 | -3.64 | 52.76 | 74 | -21.24 | peak |
| 2708.25 | 47.21 | -3.64 | 43.57 | 54 | -10.43 | AVG |
| 3611 | 58.21 | -0.95 | 57.26 | 74 | -16.74 | peak |
| 3611 | 48.15 | -0.95 | 47.20 | 54 | -6.80 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 1805.5 | 108.37 | -5.84 | 52.69 | 74 | -21.31 | peak |
| 1805.5 | 95.48 | -5.84 | 43.65 | 54 | -10.35 | AVG |
| 2708.25 | 56.28 | -3.64 | 52.64 | 74 | -21.36 | peak |
| 2708.25 | 47.21 | -3.64 | 43.57 | 54 | -10.43 | AVG |
| 3611 | 58.24 | -0.95 | 57.29 | 74 | -16.71 | peak |
| 3611 | 48.17 | -0.95 | 47.22 | 54 | -6.78 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 1829.5 | 108.32 | -5.71 | 52.67 | 74 | -21.33 | peak |
| 1829.5 | 95.14 | -5.71 | 45.61 | 54 | -8.39 | AVG |
| 2744.25 | 56.02 | -3.51 | 52.51 | 74 | -21.49 | peak |
| 2744.25 | 46.86 | -3.51 | 43.35 | 54 | -10.65 | AVG |
| 3659 | 58.10 | -0.82 | 57.28 | 74 | -16.72 | peak |
| 3659 | 48.01 | -0.82 | 47.19 | 54 | -6.81 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 1829.5 | 108.29 | -5.71 | 52.67 | 74 | -21.33 | peak |
| 1829.5 | 95.22 | -5.71 | 45.61 | 54 | -8.39 | AVG |
| 2744.25 | 56.12 | -3.51 | 52.61 | 74 | -21.39 | peak |
| 2744.25 | 46.72 | -3.51 | 43.21 | 54 | -10.79 | AVG |
| 3659 | 58.13 | -0.82 | 57.31 | 74 | -16.69 | peak |
| 3659 | 47.95 | -0.82 | 47.13 | 54 | -6.87 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High
Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 1854.5 | 56.36 | -5.65 | 52.36 | 74 | -21.64 | peak |
| 1854.5 | 47.23 | -5.65 | 46.89 | 54 | -7.11 | AVG |
| 2781.75 | 56.24 | -3.43 | 52.81 | 74 | -21.19 | peak |
| 2781.75 | 47.36 | -3.43 | 43.93 | 54 | -10.07 | AVG |
| 3709 | 57.37 | -0.75 | 56.62 | 74 | -17.38 | peak |
| 3709 | 47.58 | -0.75 | 46.83 | 54 | -7.17 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 1854.5 | 56.38 | -5.65 | 52.36 | 74 | -21.64 | peak |
| 1854.5 | 47.22 | -5.65 | 46.89 | 54 | -7.11 | AVG |
| 2781.75 | 56.19 | -3.43 | 52.76 | 74 | -21.24 | peak |
| 2781.75 | 47.43 | -3.43 | 44.00 | 54 | -10.00 | AVG |
| 3709 | 57.37 | -0.75 | 56.62 | 74 | -17.38 | peak |
| 3709 | 47.61 | -0.75 | 46.86 | 54 | -7.14 | AVG |


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2). All modes of operation were investigated and the worst-case emissions are reported.
- (3). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.
- (4) ANT 1/2 have been tested and passed, only showed the worst mode ANT 1 in this report, and ANT 1/2 can't transmit simultaneously .

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

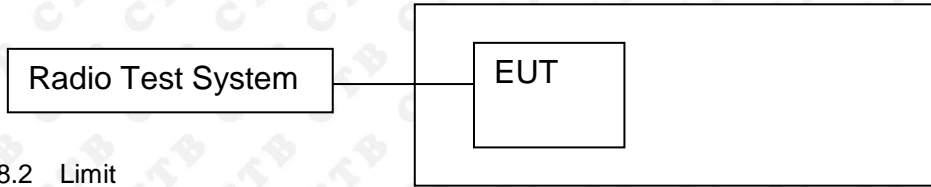


8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

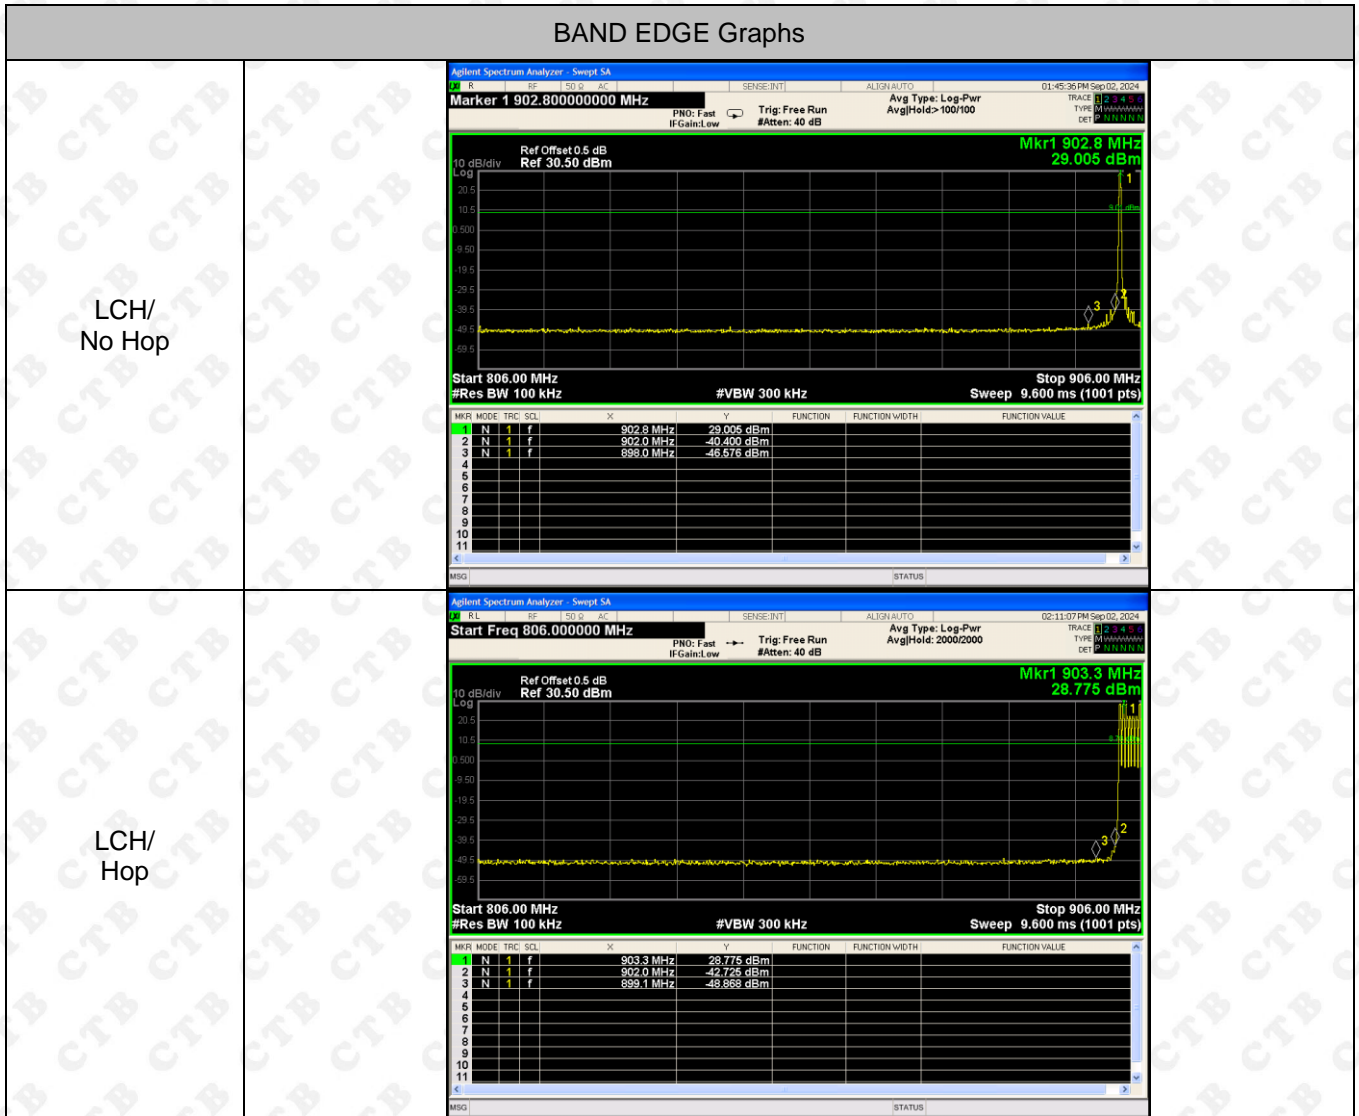

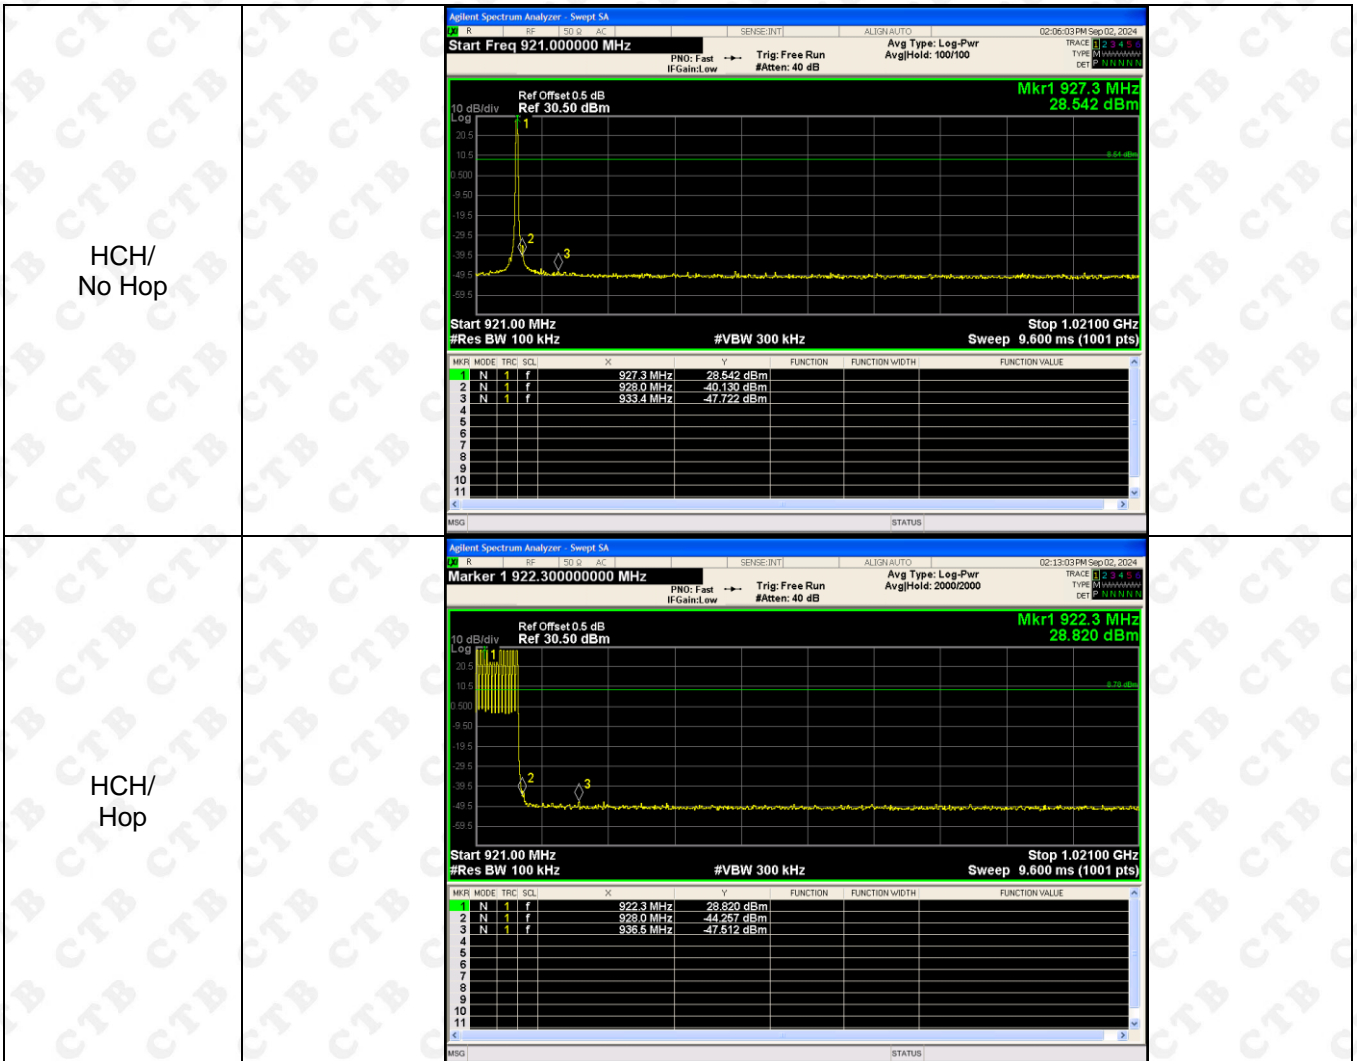


RF Conducted Spurious Emissions Graphs

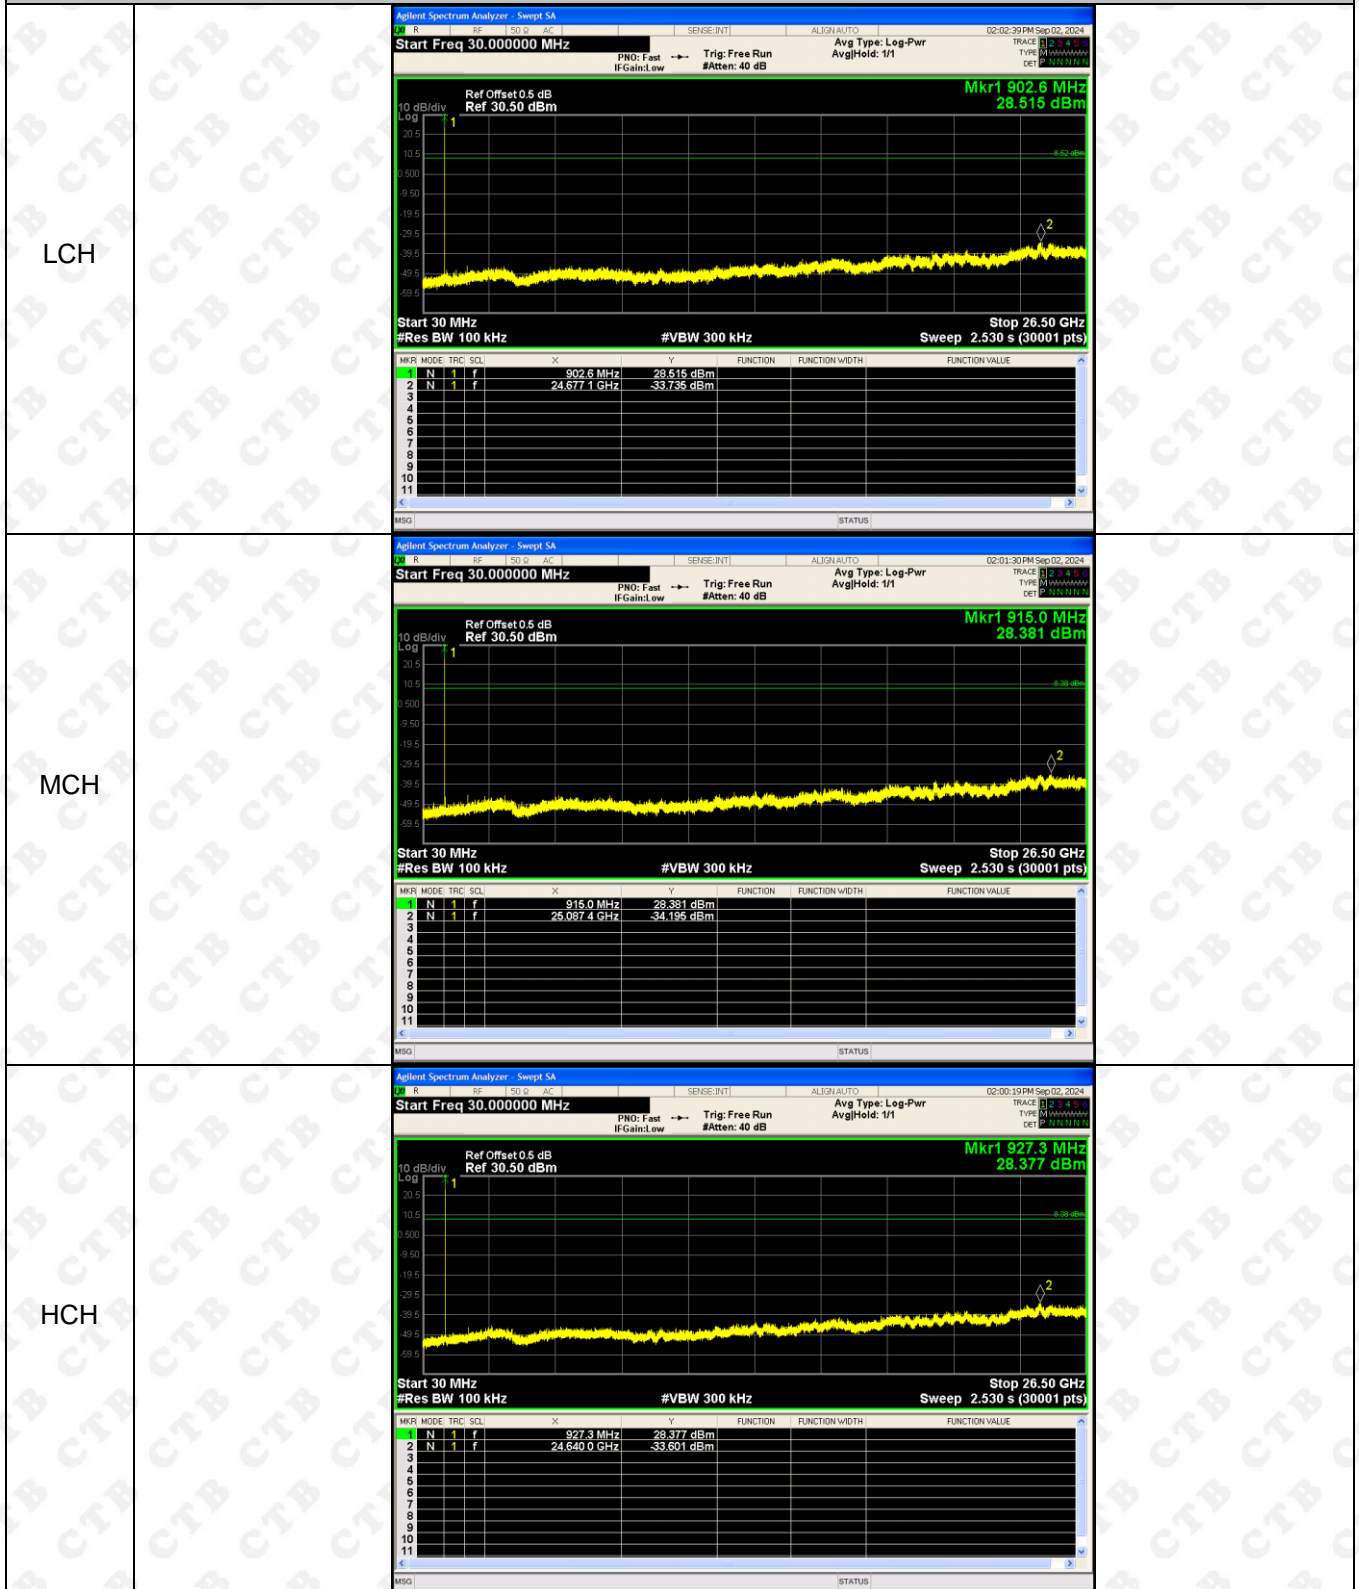

Note: ANT 1/2 have been tested and passed, only showed the worst mode ANT 1 in this report, and ANT 1/2 can't transmit simultaneously .

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

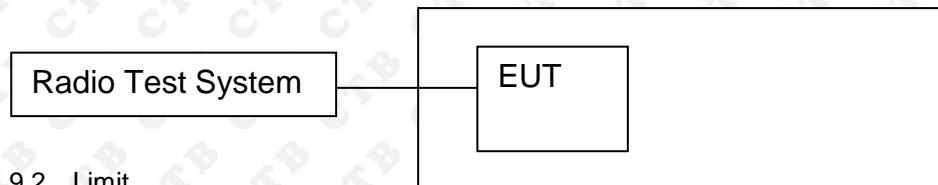

9.2 Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Peak output Power: $1W=30dBm$

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Antenna Gain: 6.4dBi

| Channel. | Maximum Peak Output Power [dBm] | Limit [dBm] | Verdict |
|----------|---------------------------------|-------------|---------|
| LCH | 29.184 | 30 | PASS |
| MCH | 28.608 | 30 | PASS |
| HCH | 28.792 | 30 | PASS |


Test Graph:

| Graphs | |
|--------|--|
| LCH | |
| MCH | |
| HCH | |

Note: ANT 1/2 have been tested and passed, only showed the worst mode ANT 1 in this report, and ANT 1/2 can't transmit simultaneously .

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

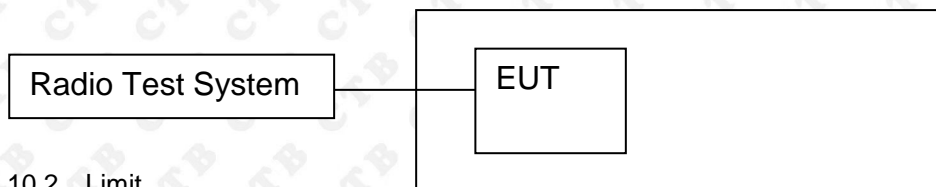

10.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

10.3 Test procedure


1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

| Frequency | 20dB Bandwidth (kHz) | Result |
|--------------|----------------------|-------------|
| Low channel | 76.69 | PASS |
| Mid channel | 76.25 | PASS |
| High channel | 76.18 | PASS |

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.


Test Graph:

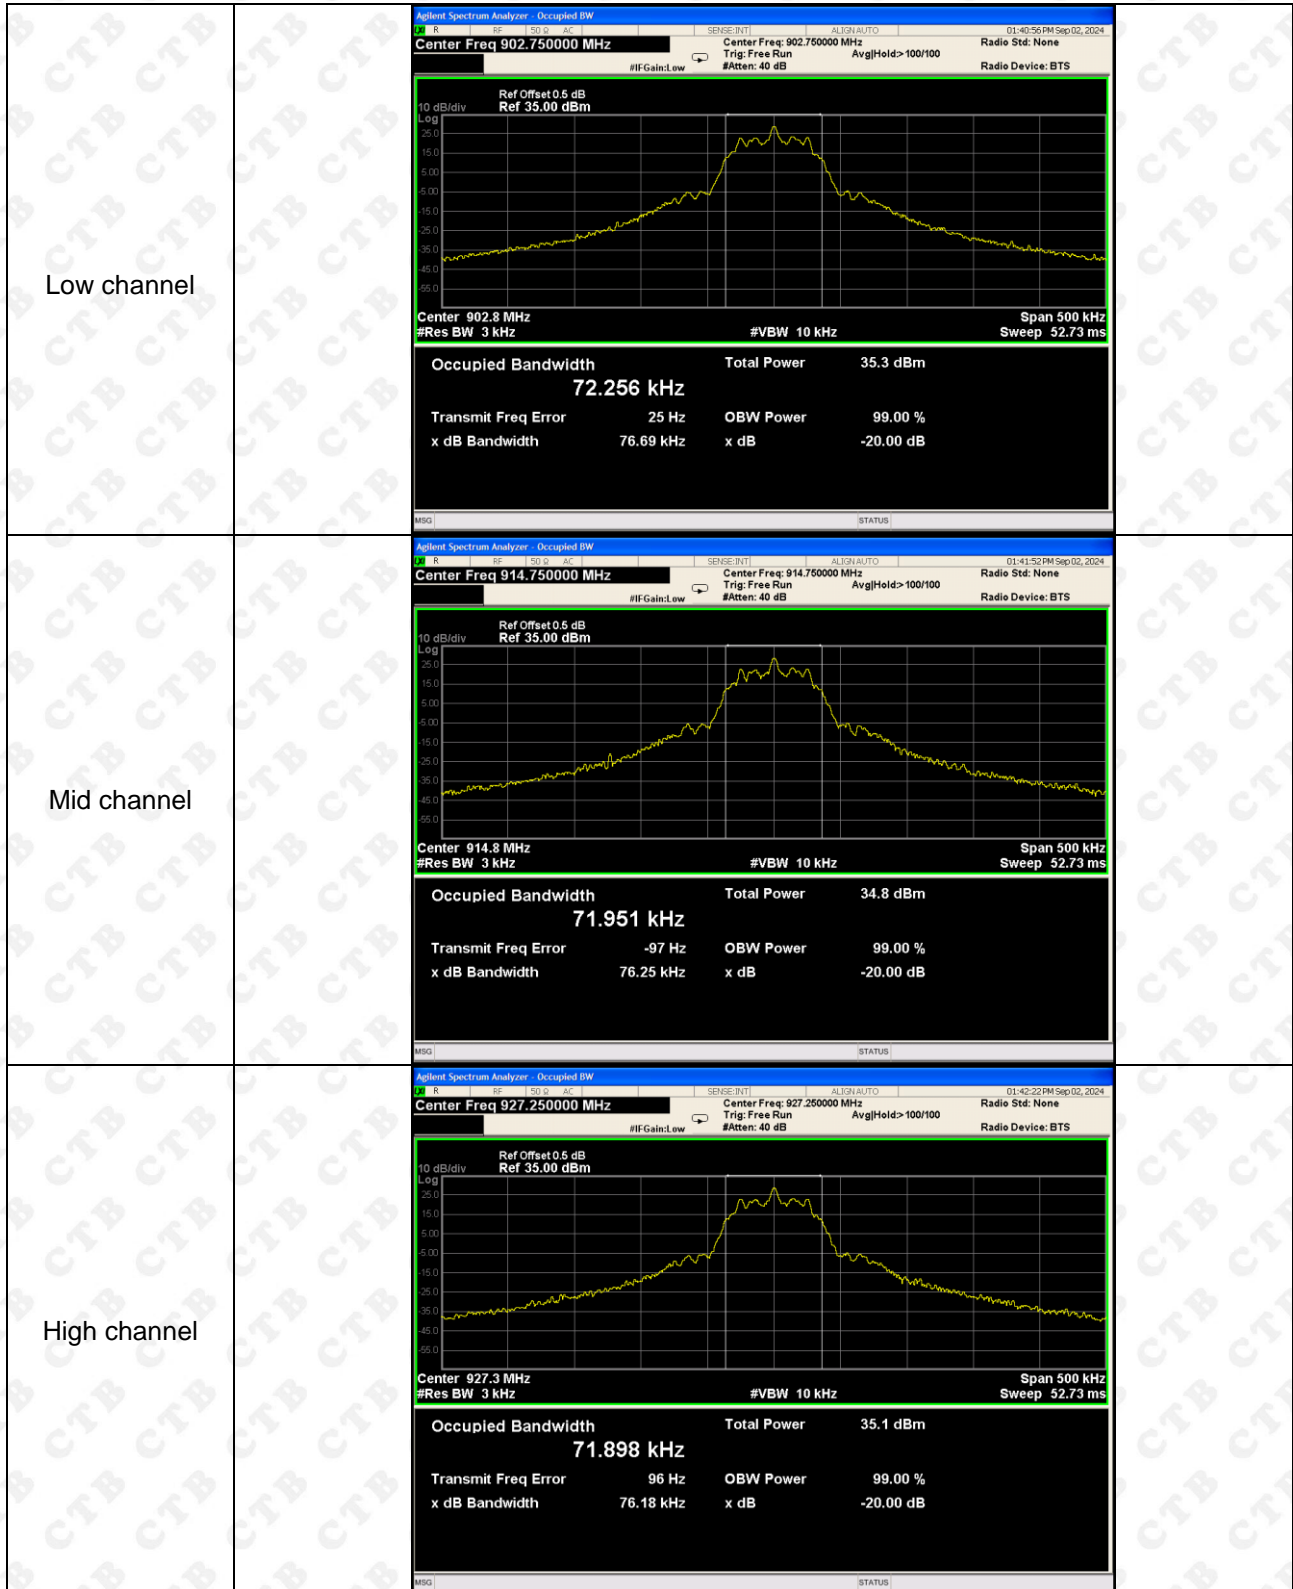

Note: ANT 1/2 have been tested and passed, only showed the worst mode ANT 1 in this report, and ANT 1/2 can't transmit simultaneously .

11. CARRIERFREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

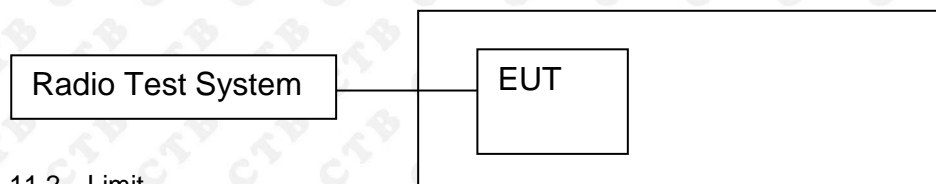

11.2 Limit

At least 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

11.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 10kHz. VBW = 30kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

| Channel. | Carrier Frequency Separation [MHz] | Verdict |
|----------|------------------------------------|---------|
| LCH | 0.500 | PASS |
| MCH | 0.500 | PASS |
| HCH | 0.500 | PASS |

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

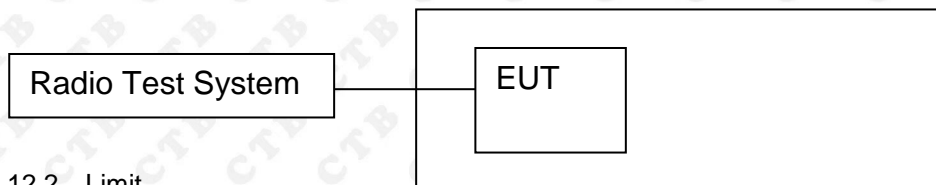

12.2 Limit


Frequency hopping systems in the 920-928 MHz band shall use at least 50 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


| Mode | Channel. | Number of Hopping Channel | Verdict |
|------|----------|---------------------------|---------|
| 8FSK | Hop | 50 | PASS |

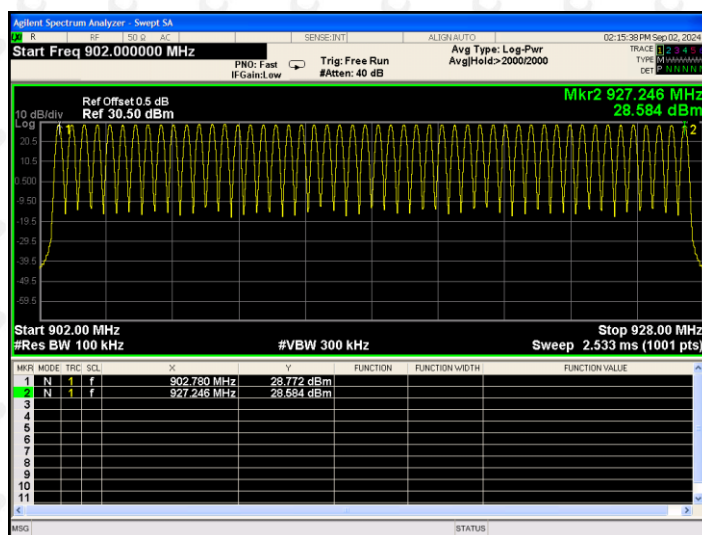

Note: ANT 1/2 have been tested and passed, only showed the worst mode ANT 1 in this report, and ANT 1/2 can't transmit simultaneously .

13. DWELL TIME

13.1 Block Diagram Of Test Setup

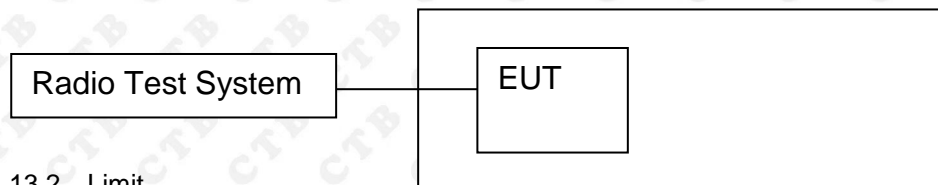

13.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


13.4 Test Result

| Channel | No. of transmission in 20s(a) | Pulse Time (ms)(b) | Total Dwell Time in 20s (ms) (c) | Limit (ms) | Verdict |
|---------|-------------------------------|--------------------|----------------------------------|------------|---------|
| LCH | 2 | 198 | 396 | 400 | PASS |
| MCH | 2 | 198 | 396 | 400 | PASS |
| HCH | 2 | 199 | 398 | 400 | PASS |

Remark: Total dwell time in 20s, c=(a)*(b)

Test Graph

Graphs

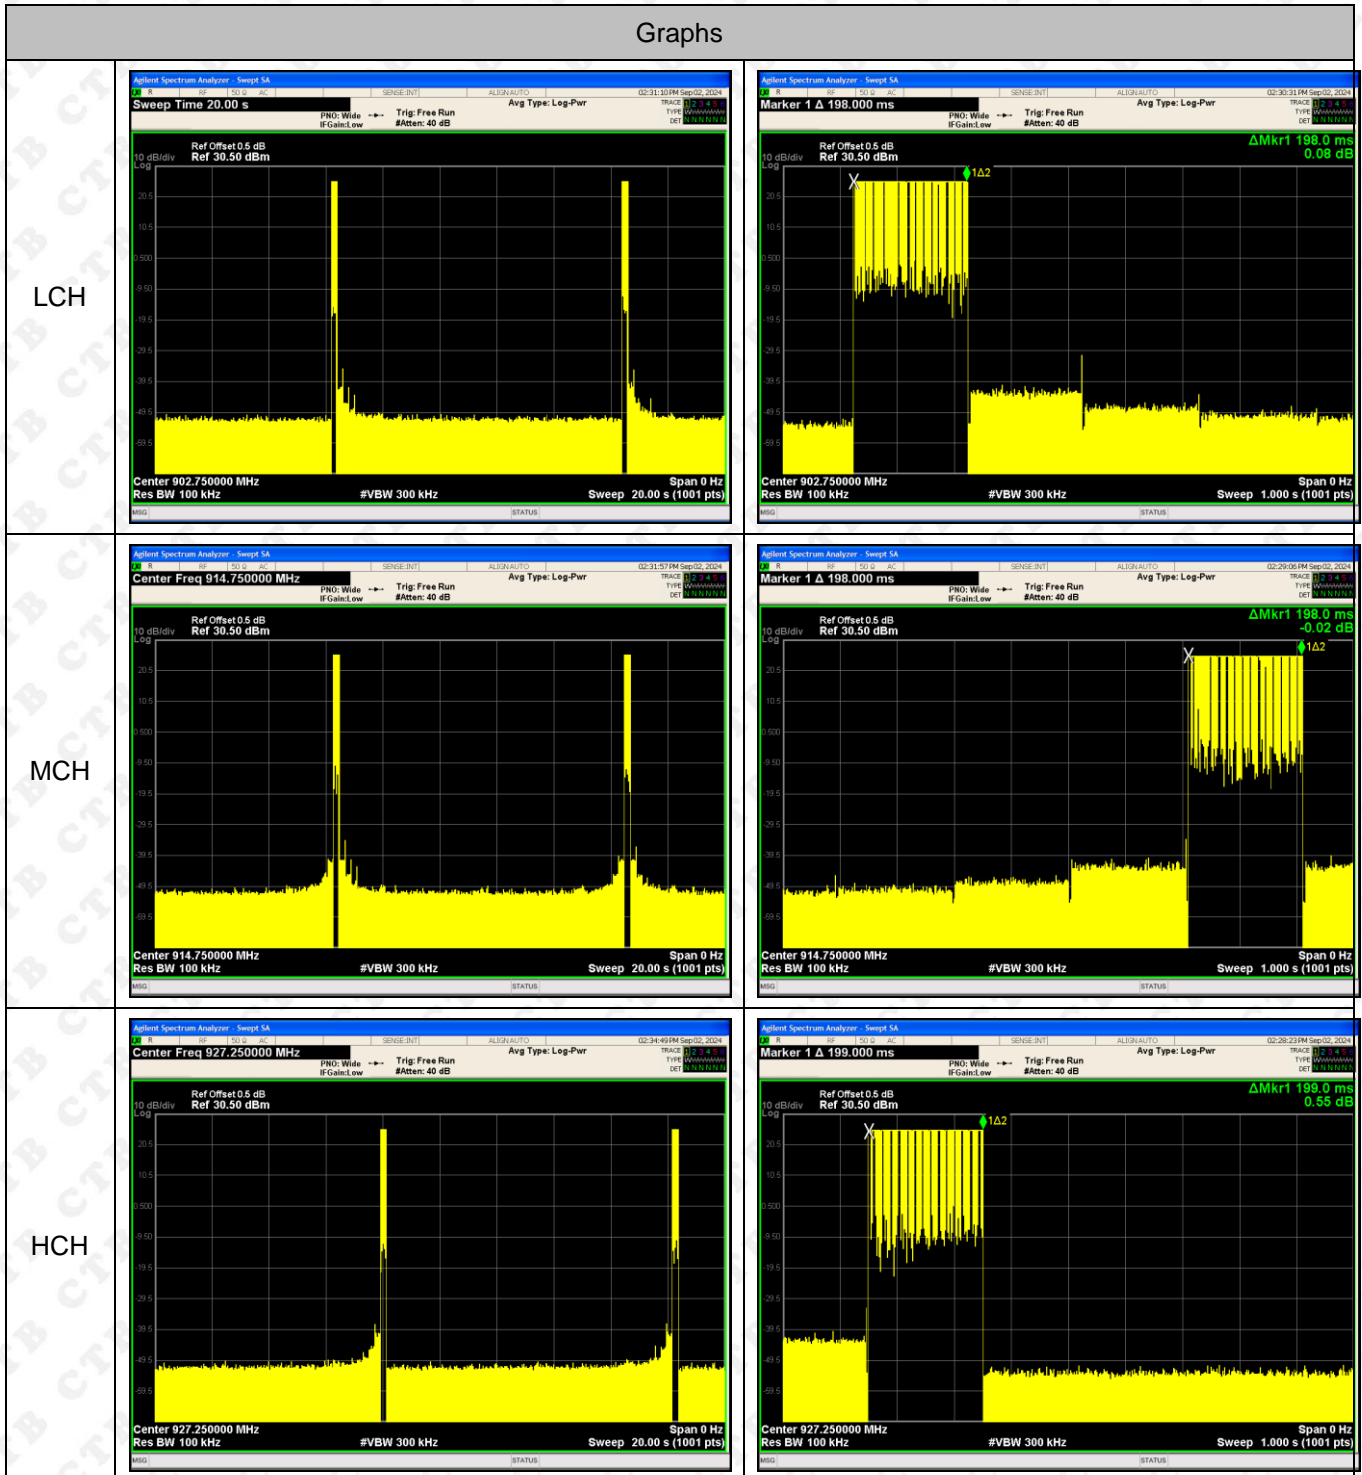

Note: ANT 1/2 have been tested and passed, only showed the worst mode ANT 1 in this report, and ANT 1/2 can't transmit simultaneously .

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is 6.4dBi.

15. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

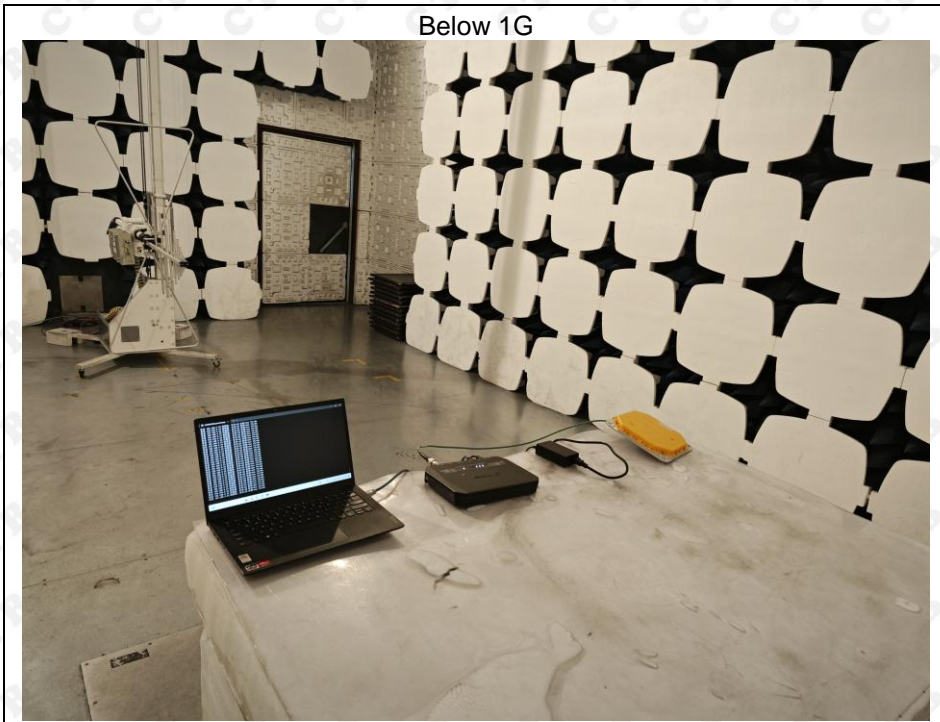

Above 1G



Conducted emission



※※※※ END OF REPORT ※※※※