

Iqua Elite Dual Microphone Bluetooth headset BHS-808 User Guide



Fig. 1


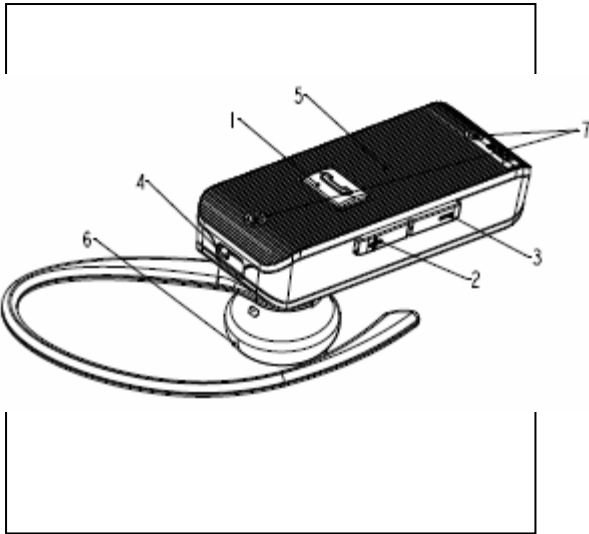


Fig. 2

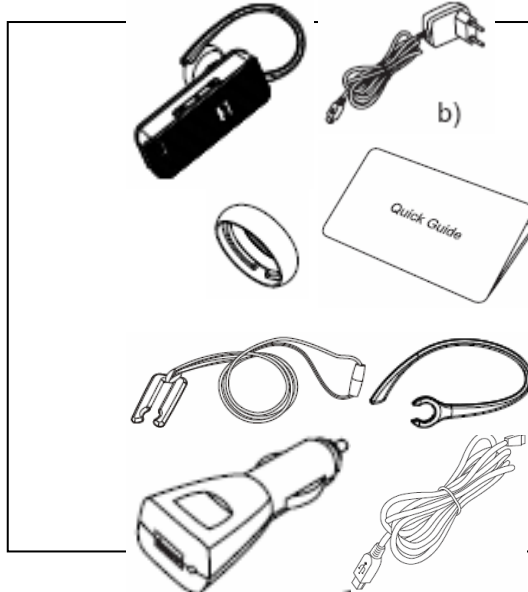

The Bluetooth word mark and logos are owned by Bluetooth SIG, Inc. and any use of such marks by IQUA is licensed. Other trademarks and trade names belong to their respective owners.

Under no circumstances does IQUA assume any liability for loss of or damage to or corruption of data, for any loss of profit, loss of business, revenues, contracts, anticipated savings increased costs or expenses or for any indirect, special, incidental or consequential damages howsoever caused.

[CE-symbol] **1313** [FCC-symbol] FCC ID: **TUFBHS-808**

Federal Communications Commission (FCC) Statement

15.21 You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b) NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause interference and

This device must accept any interference, including interference that may cause undesired operation of the device.

Please note that language names always transited e.g. German = Deutsch

Showing the page number where the user guide content of that language is. (25 languages in total)

English	1
Finnish	2
Swedish	
Norwegian	
Danish	
German	
Italian	
French	
Spanish	
Portuguese	
Dutch	
Turkish	
Greek	
Hungarian	
Hebrew	
Russian	
Arabian	
Simplified Chinese	
Traditional Chinese	
Thai	
Japanese	
Hindi	
Vietnamese	
Bahasa Indonesia	
Bahasa Malaysia	

[Translation starts] Refer to Fig 1 and Fig 2
Overview of the product

1. Multifunction button
2. Volume + button

3. Volume – button
4. Charging connector
5. Indicator Light
6. Earpiece
7. Microphones

Sales package content:

- a. Headset
- b. Earhook
- c. 2 ear plugs (one on headset)
- d. Wall charger
- e. Quick guide

In selected markets:

- f. Carrying strap
- g. Extra earhook
- h. Car charger
- i. USB charging cable

Product specifications

Model	BHS-808
Size of headset	45 x 18 x 21mm
Weight	10 g
Talk time	Up to 4.5 hours with headset,
Standby time	Up to 100 hours with headset
Charging time	Within 2 hours
Battery type	Li-Polymer battery
Bluetooth Standard	Bluetooth 2.0+EDR
Supported BT profiles	Handsfree (HFP) 1.5 and Headset (HSP) 1.1
Paired devices connections	Up to 8, up to two active
Operating Distance	10 meters
Voice Prompts:	English, Russian, and German
Operating temperature range	-20°C to +70°C
Storage temperature range	-40°C to +85°C

Getting started

Charging the battery

Before using BHS-808, you must first charge the headset for approximately 2 hours. When fully charged, the headset provides up to 4.5 hours of talk time and up to 100 hours of standby time. Always use the charger provided in the sales package.

1. Connect the charger cable to BHS-808.
2. Plug the charger into a wall socket. The red LED light on permanently.
3. When the battery is fully charged, red LED turns off.

Switching on and off

To switch on the BHS-808

When the headset is powered off, press and hold the **Multifunction** -button until the red light flashes once.

To switch off the BHS-808

When the headset is powered on, press the **Multifunction** -button until the red light flashes once and then turns off.

Pairing the Bluetooth headset to a Bluetooth mobile phone

Pairing is the process for linking BHS-808 with your Bluetooth enabled mobile phone. After this process is completed, you can use the BHS-808 with the paired mobile phone. BHS-808 can be paired with up to 8 compatible phones, and it can be connected to 2 mobile phones at the same time. Once it is paired with 8 phones, the 9th paired device will replace the 1st paired device.

1. When the headset is powered off, press and hold the **Multifunction** -button until the blue and red lights start flashing alternately .
2. Release the button. BHS-808 is now in pairing mode, waiting for your mobile phone to contact it.
3. Complete the pairing with your mobile phone. Please refer your mobile phone manual for details on how to search and pair. When phone has found the headset, it will show **Iqua Elite** on its screen. In order to pair with the phone, enter the PIN code **0000**.
4. After pairing, BHS-808 will automatically connect to your mobile phone. After pairing, some phones do not automatically connect to the headset. If this is the case, please ensure that you connect the phone to the headset (please refer to your mobile phone manual). Once pairing and connection are completed, the blue light starts flashing slowly.

* For latest compatibility information please visit www.iqua.com

Dual connection

With the dual connection feature you can connect 2 phones to the BHS-808 and answer which ever phone rings.

When the BHS-808 is connected with first mobile phone,

1. Press the Vol+ and Vol- button simultaneously, BHS-808 will disconnect with first mobile phone and enter into the pairing mode.
2. Repeat the pairing process for the second mobile phone.
3. **Power off and power on the headset then it will be auto-connected with 2 mobile phones.**

Disconnecting BHS-808 from your phone

Easiest way to disconnect BHS-808 and your phone is simply switch off the BHS-808.

Reconnecting the paired BHS-808 to your phone

To reconnect the BHS-808 to the last connected phone, simply switch on the headset to be pairing mode, and it will automatically connect to your phone. Otherwise, make the connection in the phone menu as instructed in the user guide of the phone. You can activate again the reconnecting by pressing the **Multifunction** –button briefly.

Call Functions

Answer a call

When you receive a call, you hear a voice prompt through the headset. Press the **Multifunction** -button briefly to answer the incoming call. You will hear a tone once the call is answered.

End a call

To end an active call, press the **Multifunction**-button. You will hear a voice prompt when the call is ended.

Reject a call

When you receive an incoming call that you do not want to answer, simply press the **Multifunction**-button until you hear a voice prompt and call is rejected.

Redial the last dialed number

To place a call to the last dialed number, press the **Vol+** button when no call is in progress. You will hear a voice prompt when the call is in progress. Please note some phone models do not support redial. With some phone models, press the **Vol +** button again to dial the number displayed on the phone.

Voice dialing (when supported by the phone)

To activate a voice dialing feature of your phone, press the **Vol-** button when no call is in progress. You will hear a voice prompt. This will indicate that you can start saying the voice tag. Refer to the mobile phone manual for details. Please note, some phone models do not support voice dialing.

Call waiting

If a new call comes in during another call you want to answer, you can hold the current call and answer to incoming call by pressing the **multifunction**-button briefly. You will hear a sound when the new call is answered. When you want to end the new call and switch back to the first call press the **Multifunction**-button until the call is transferred.

Call transferring (when supported by the phone)

To transfer an active call from BHS-808 to your mobile phone, press the **Vol+** button until you hear a sound the call is transferred to your phone. To transfer an active call from your mobile phone to BHS-808, press the **Vol+** button until you hear a sound or use the functions of your phone as instructed in its user guide.

Adjusting volume

Press the **Vol+** button briefly to increase the volume. Press the **Vol-** button briefly to decrease the volume.

Mute / unmute an active call

You can mute/ unmute BHS-808 during an ongoing call by pressing the **Vol-** button until you hear a voice prompt.

Change the language for voice prompt

The headset supports up to 3 languages for voice prompt: **English / Russian / German**. When the headset is on, briefly press both **Vol+** and **Vol-** simultaneously you will hear a voice prompt for the corresponding language.

Erase Paired Devices

The BHS-808 can be paired with up to 8 Bluetooth devices. To reset the pairing list to BHS-808, briefly press both **Multifunction-button** and **Vol-** buttons simultaneously.

Light indication summary

The BHS-808 headset's LED lights can be either red or blue and usually accompanied by a sound signal.

Power on	Red light flashes once
Power off	Red light flashes once then turns off
Standby but no Bluetooth connection	Blue light flashes rapidly
Bluetooth connection on	Blue light flashes slowly
Pairing mode	Blue and red lights flash alternately
Battery charging	Red light permanently on
Battery charge completed	Red light turns off

Power management

This product is powered by a built-in rechargeable battery which can not be changed. Do not attempt to replace the battery. Rechargeable battery can be charged and discharged hundreds of times, but it will eventually wear out. After a period of time that will vary depending on the use and usage conditions you may find that the built-in battery will power your product for only a couple of hours requiring you to charge more frequently.

Do charge your device only with the charger provided in the sales package. Unplug the charger when not in use. Do not leave the device connected to the charger for longer period than needed, since overcharging may shorten the battery lifetime.

If left unused a fully charged battery will discharge itself over time.

Temperature extremes may affect the ability of the battery to charge. Always try to keep the device between 15 °C and 25 °C (59 °F and 77 °F). Leaving the device in hot or cold places such as in closed car in summer or winter conditions will reduce the capacity and lifetime of the battery. A device with hot or cold battery may not work for a while even when the battery is fully charged. Battery performance is particularly limited in temperatures well below freezing. Do not charge in humid environment.

Care and Maintenance

- Do not expose the device to liquid, moisture or humidity as it is not waterproof.
- Do not use or store the device in dusty, dirty areas. Its moving parts and electronic components can be damaged.
- Do not store the device in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the device in cold areas. When the device returns to its normal temperature, moisture can form inside the device and damage electronic circuit boards.
- Do not drop, knock, or shake the device. Rough handling can break internal circuit boards and fine mechanics.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
- Use a soft, clean, dry cloth to clean any lenses.
- Do not expose your device to contact with sharp objects as this will cause scratches and damage.
- Do not stick anything inside the device as this may damage internal components.
- Do not dismantle the device or the charger as they do not contain serviceable parts and taking apart the device may expose you to dangerous voltages or other hazards
- Act according to your local rules and do not dispose of this product as part of your normal household waste. Follow the applicable separate collection system for electrical and electronic products.

[WEEE-symbol]

How to get service for my IQUA Product?

If you believe that you are entitled to a repair or replacement of your IQUA product based on your statutory rights under the applicable national laws relating to the sale of consumer products or warranty given by the retailer who has sold the IQUA Product to you, please contact your retailer.

DECLARATION OF CONFORMITY

We, Iqua Ltd., declare under our sole responsibility, that the product, BHS-808, conforms with the provisions of the following Council Directive: 1999/5/EC. A copy of the Declaration of Conformity can be found at http://www.iqua.com/declaration_of_conformity. **[Translation ends]**

[footer]

Copyright © 2008 Iqua Ltd