



## FCC TEST REPORT

**FCC ID: 2A7ZC-SG5**

On Behalf of

**GEOMATE POSITIONING PTE. LTD.**

**Geodetic GNSS Receiver**

**Model No.: SG5**

Prepared for : GEOMATE POSITIONING PTE. LTD.  
Address : 808 FRENCH ROAD #04-167 KITCHENER COMPLEX  
SINGAPORE(200808)

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
518103, Shenzhen, Guangdong, China

Report Number : A2302040-C01-R01  
Date of Receipt : February 14, 2023  
Date of Test : February 14, 2023- February 24, 2023  
Date of Report : February 24, 2023  
Version Number : V0

## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
<b>1. Summary of Standards And Results -----</b>	<b>5</b>
1.1. Description of Standards and Results -----	5
<b>2. General Information -----</b>	<b>6</b>
2.1. Description of Device (EUT) -----	6
2.2. Accessories of Device (EUT) -----	7
2.3. Tested Supporting System Details-----	7
2.4. Block Diagram of connection between EUT and simulators -----	7
2.5. Test Mode -----	8
2.6. Test Conditions -----	9
2.7. Test Facility-----	9
2.8. Measurement Uncertainty -----	9
2.9. Test Equipment List -----	10
<b>3. Test Results and Measurement Data-----</b>	<b>12</b>
3.1. Transmitter Power (Conducted)-----	12
3.2. Occupied Bandwidth and Emission Mask -----	14
3.3. Spurious Emissions(conducted) -----	20
3.4. Radiated Spurious Emission-----	24
3.5. Transient Frequency Behavior -----	29
3.6. Behavior Frequency Stability -----	31
3.7. Modulation Characteristic-----	34
3.8. Adjacent channel power -----	35
<b>4. Test setup photo-----</b>	<b>38</b>
4.1. Photos of Radiated emission -----	38
<b>5. EUT photo-----</b>	<b>39</b>

## TEST REPORT DECLARATION

Applicant : GEOMATE POSITIONING PTE. LTD.  
Address : 808 FRENCH ROAD #04-167 KITCHENER COMPLEX SINGAPORE(200808)  
Manufacturer : GEOMATE POSITIONING PTE. LTD.  
Address : 808 FRENCH ROAD #04-167 KITCHENER COMPLEX SINGAPORE(200808)  
EUT Description : Geodetic GNSS Receiver  
(A) Model No. : SG5  
(B) Trademark : 

Measurement Standard Used:

**FCC CFR Title 47 Part 90, FCC CFR Title 47 Part 2,**

**ANSI TIA-603-E:2016**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 2, Part 90, RSS-119, RSS-Gen limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.


After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen  
Project Engineer



Approved by (name + signature).....: Reak Yang  
Project Manager



Date of issue.....: February 24, 2023

## Revision History

Revision	Issue Date	Revisions	Revised By
V0	February 24, 2023	Initial released Issue	Yannis Wen

## 1. Summary Of Standards And Results

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Transmitter Power(Conducted)	FCC PART 90	§90.205,	P
Occupied Bandwidth & Emission Mask	FCC PART 90	§90.209, §90.210	P
Spurious Emissions(conducted)	FCC PART 90	§90.210,	P
Spurious Emissions(Radiated)	FCC PART 90	§90.210,	P
Transient Frequency Behavior	FCC PART 90	§90.214,	P
Frequency Stability	FCC PART 90	§90.213,	P
Modulation Characteristics - Audio Frequency Response	FCC PART 2 FCC PART 90	§2.1047(a), §90.207	N/A
Modulation Characteristics - Modulation Limiting	FCC PART 2 FCC PART 90	§2.1047(b), §90.207	N/A
Adjacent channel power	FCC PART 90	§90.221	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.			

## 2. General Information

### 2.1. Description of Device (EUT)

Description : Geodetic GNSS Receiver  
Trademark :   
Model Number : SG5  
DIFF. : N/A  
Test Voltage : DC 5V from adapter, DC 7.2V from Battery

#### UHF

Operation frequency : 410MHz-470MHz  
Conducted Power : 1W(30dBm)  
Channel spacing : 12.5KHz, 25KHz  
Modulation type : GMSK  
Antenna Type : Rodl Antenna, Maximum Gain is 4.0dBi  
Software version : V1.0  
Hardware version : V1.7.4

Remark: 6.25KHz channel spacing transmit only with 4-FSK modulation.

*Note: All Conducted Power have been tested, and recorded the worst case 1W(30dBm) results in this report.*


## 2.2. Accessories of Device (EUT)

Accessories : /  
Manufacturer : /  
Model : /  
Ratings : /

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	DC Power	JUNKE	JK120100	/	/

## 2.4. Block Diagram of connection between EUT and simulators

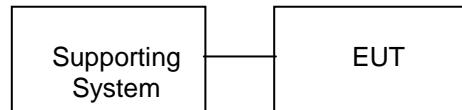

The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

## 2.5. Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Item	Description of operation mode	Note
1	GMSK+CS12.5KHz+TX	at maximum rated power for transmitter
2	GMSK+CS25KHz+TX	at maximum rated power for transmitter

Note: The worst case modes for all test are the item 1 and item 3.

### Description Operation Frequency

GMSK		
Test Channel	Channel spacing (KHz)	Frequency(MHz)
Low	12.5	410.050
	25	410.050
Mid	12.5	451.000
	25	451.000
High	12.5	469.950
	25	469.950

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35 °C	24 °C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd  
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
 Registration Number: 293631

July 15, 2019 Certificated by IC  
 Registration Number: CN0085

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V) 2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V) 3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H) 4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4x10-8
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9. Test Equipment List

Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last cal.	Cal. Due day
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2022.08.22	2023.08.21
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2022.08.22	2023.08.21
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2021.08.30	2023.08.29
Filter	KANGMAI	ZLPF-LDC-100 0- 1959	/	1209002075	2022.08.22	2023.08.21
Filter	WAINWRIGHT	WHKX2.80 /18G- 12SS	/	SN1	2022.08.22	2023.08.21
RF Cable	Resenberger	Cable 4	/	PE1	2022.08.22	2023.08.21
CMU200	ROHDE&SCHWARZ	CMU200	V5.21	116785	2022.08.22	2023.08.21
Signal Analyzer	Agilent	N9020A	A.14.16	MY499100060	2022.08.22	2023.08.21
vector Signal	Agilent	N5182A	/	MY49060042	2022.08.22	2023.08.21
vector Signal	Agilent	E4438C	/	US44271917	2022.08.22	2023.08.21
Amplifier	HP	HP8347A	/	2834A00455	2022.08.22	2023.08.21
Amplifier	Agilent	8449B	/	3008A02664	2022.08.22	2023.08.21
Filter	SKET	HPF_1-18G-55 dB	/	N/A	2022.08.22	2023.08.21
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2022.08.22	2023.08.21
Bilog Antenna	SCHWARZBECK	VULB 9168	/	9168-627	2021.08.30	2023.08.29
9*6*6 anechoic	CHENYU	9*6*6	/	N/A	2022.05.17	2025.05.16
RF Cable	Resenberger	Cable 1	/	RE1	2022.08.22	2023.08.21
RF Cable	Resenberger	Cable 2	/	RE2	2022.08.22	2023.08.21
RF Cable	Resenberger	Cable 3	/	CE1	2022.08.22	2023.08.21
Power Sensor	DARE	RPR3006W	/	15100041SNO 91	2022.08.22	2023.08.21
Power Sensor	DARE	RPR3006W	/	15100041SNO 92	2022.08.22	2023.08.21
CMW500	ROHDE&SCHWARZ	CMW500	V 3.7.22	1201.0002K50-117239-sM	2022.08.22	2023.08.21
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2021.08.30	2023.08.29
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-880	/	100631	2022.04.21	2023.04.20
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

<b>Software Information</b>			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	farad	Alpha-3A1
CE	EZ-EMC	farad	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

### 3. Test Results and Measurement Data

#### 3.1. Transmitter Power (Conducted)

##### 3.1.1. Test Specification

<b>Test Requirement:</b>	Part 90.205, RSS-119(5.4)
<b>Test Method:</b>	FCC part 2.1046
<b>Limits:</b>	Please refer section FCC Part 90.205 and , RSS-119(5.4)
<b>Test Setup:</b>	
<b>Test Procedure:</b>	a) Connect the equipment as illustrated. b) Turn on the power meter c) Record value
<b>Test Result:</b>	PASS

### 3.1.2. Test Results


GMSK mode (1W):						
Channel spacing (KHz)	Frequency (MHz)	Maximum Conducted Output Power(Peak) (dBm)	Maximum ERP (dBm)	Stated ERP Power (dBm)	Conducted Output Power Limit (dBm)	Result
12.5	410.050	29.821	31.671	29.242	30±1	PASS
25	410.050	29.772	31.622	29.597	30±1	PASS
12.5	440.000	29.943	31.793	29.302	30±1	PASS
25	440.000	29.817	31.667	29.335	30±1	PASS
12.5	469.950	29.813	31.663	29.056	30±1	PASS
25	469.950	29.754	31.604	29.793	30±1	PASS

GMSK mode (0.5W):						
Channel spacing (KHz)	Frequency (MHz)	Maximum Conducted Output Power(Peak) (dBm)	Maximum ERP (dBm)	Stated ERP Power (dBm)	Conducted Output Power Limit (dBm)	Result
12.5	410.050	29.645	33.512	26.695	26.99±1	PASS
25	410.050	29.186	33.052	26.819	26.99±1	PASS
12.5	440.000	28.369	32.236	26.996	26.99±1	PASS
25	440.000	28.728	32.595	26.648	26.99±1	PASS
12.5	469.950	25.883	29.750	26.135	26.99±1	PASS
25	469.950	26.792	30.659	26.813	26.99±1	PASS

Note: 1.  $ERP = \text{Maximum Conducted Output Power(Peak)} + \text{Antenna Gain} - 2.15dB$

### 3.2. Occupied Bandwidth and Emission Mask

#### 3.2.1. Test Specification
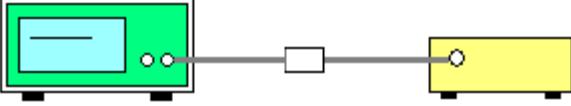
<b>Test Requirement:</b>	FCC Part 90.209, FCC Part 90.210, RSS-119(5.5)
<b>Test Setup:</b>	
<b>Test Procedure:</b>	The resolution bandwidth of the spectrum analyzer was set at 300 Hz and the spectrum was recorded in the Frequency band $\pm$ 50KHz from the carrier frequency for Occupied Bandwidth, the resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the Frequency band $\pm$ 100KHz from the carrier frequency for Emission Mask.
<b>Test Result:</b>	PASS

### 3.2.2. Test data

#### Occupied Bandwidth:

GMSK 12.5KHz Channel Spacing:					
Channel	Frequency (MHz)	26dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	99% Occupied Bandwidth Limit (KHz)	Result
Low	410.050	10.04	7.085	11.25	PASS
Mid	440.000	9.827	7.207	11.25	PASS
High	469.950	9.852	7.103	11.25	PASS

GMSK 25KHz Channel Spacing:					
Channel	Frequency (MHz)	26dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	99% Occupied Bandwidth Limit (KHz)	Result
Low	410.050	13.33	10.667	20	PASS
Mid	440.000	13.52	10.395	20	PASS
High	469.950	14.80	10.423	20	PASS

#### Emission Mask:

GMSK 12.5KHz Channel Spacing:				
Channel	Frequency (MHz)	Applicable Mask	RBW	Result
Low	410.050	D	100Hz	PASS
Mid	440.000	D	100Hz	PASS
High	469.950	D	100Hz	PASS

GMSK 25KHz Channel Spacing:				
Channel	Frequency (MHz)	Applicable Mask	RBW	Result
Low	410.050	C	100Hz	PASS
Mid	440.000	C	100Hz	PASS
High	469.950	C	100Hz	PASS

Test plots as follows:

### GMSK 12.5KHz Channel Spacing: Occupied Bandwidth


Low: 410.050MHz



Mid: 440.000MHz



High: 470.000MHz

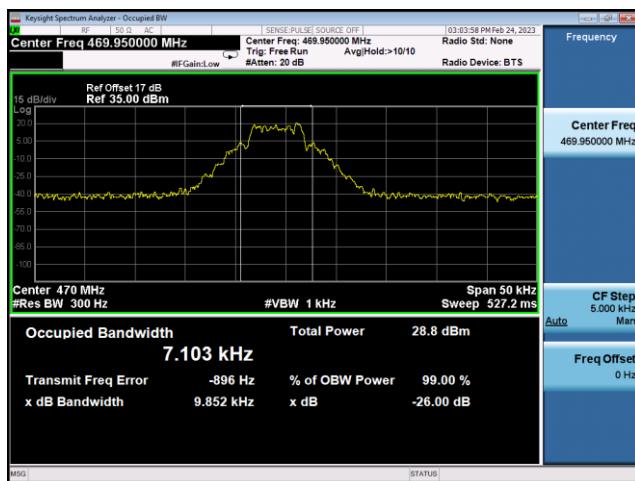


## GMSK 25KHz Channel Spacing: Occupied Bandwidth


Low: 410.050MHz



Mid: 440.000MHz

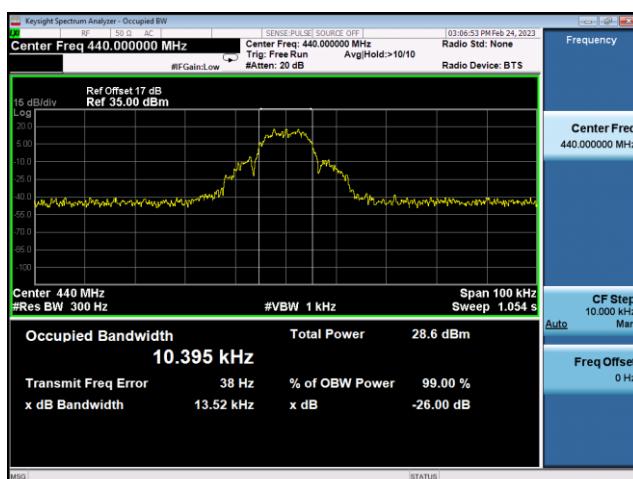


High: 469.850MHz

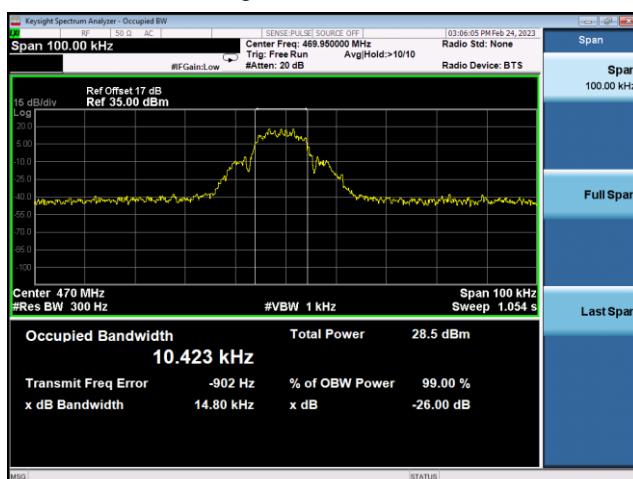


## GMSK 12.5KHz Channel Spacing: Emission Mask


Low: 410.050MHz

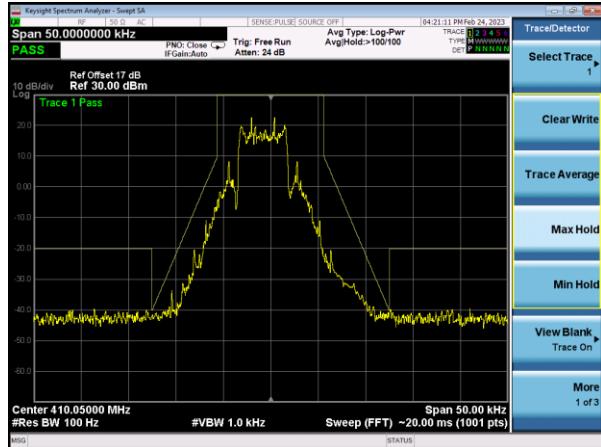

Mid: 440.000MHz

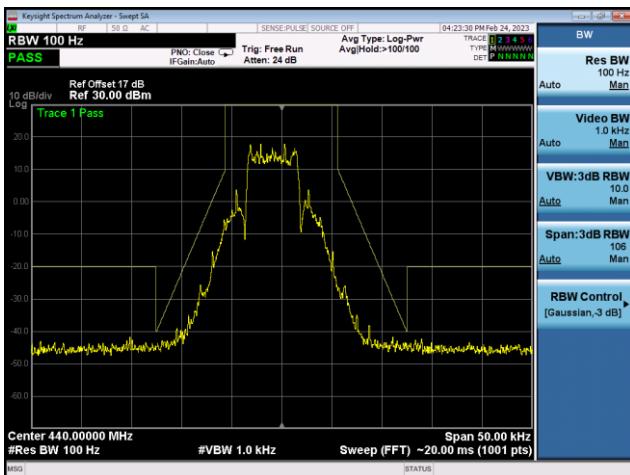


High: 469.950MHz

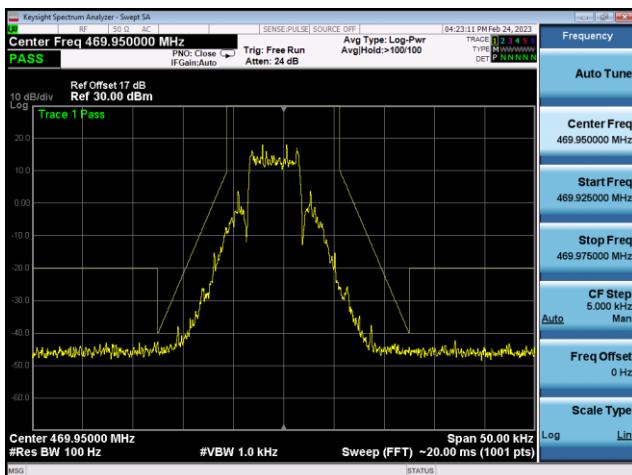


## GMSK 25KHz Channel Spacing: Emission Mask


Low: 410.050MHz

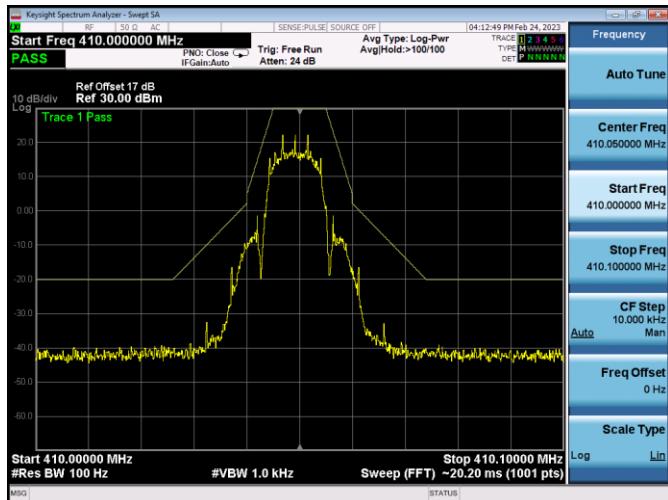

Mid: 440.000MHz

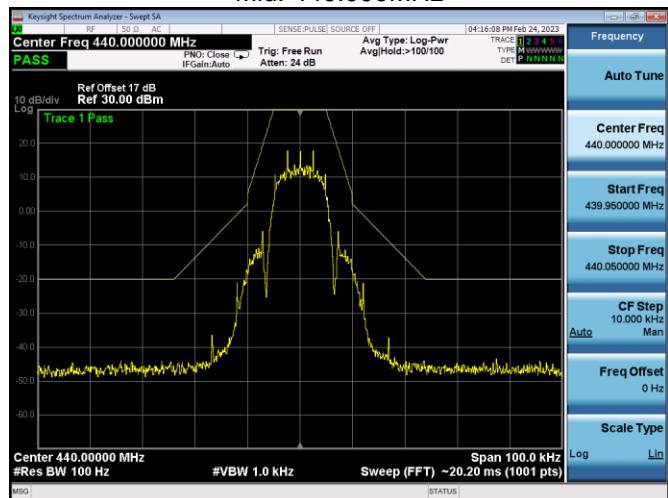

High: 469.950MHz

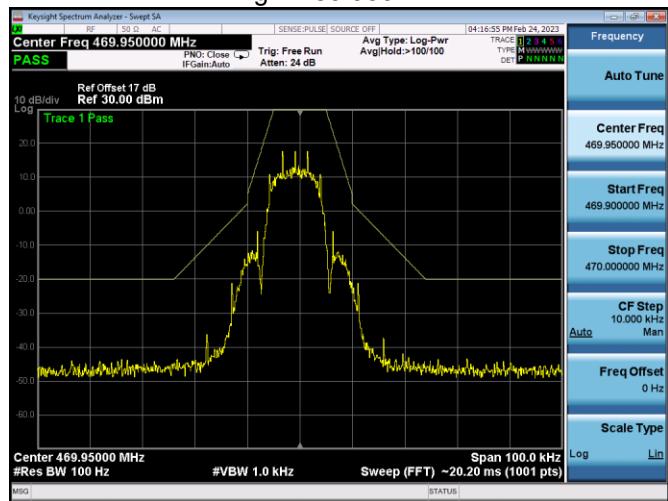

### 3.3. Spurious Emissions(conducted)

#### 3.3.1. Test Specification

<b>Test Requirement:</b>	FCC Part 90.210, RSS-119(5.8)
<b>Test Setup:</b>	 <p><b>Spectrum Analyzer</b>      <b>EUT</b></p>
<b>Test Limit:</b>	<p>Modulation Type: GMSK</p> <p>FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 12:</p> <p>For 6.25 bandwidth:</p> <p>On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 6.25 kHz at least:</p> $55 + 10 \log (P_{watts}) = 55 + 10 \log (1.0) = 55.00 \text{ dB}$ <p>Calculation: Limit (dBm) = <math>EL - 55 - 10 \log_{10} (TP)</math></p> <p>Notes: EL is the emission level of the Output Power expressed in dBm,</p> <p>In this application, the EL is 30 dBm for High rated power.</p> <p>High: Limit (dBm) = <math>30 - 55 - 10 \log (3.0) = -25 \text{ dBm}</math></p> <p>For 12.5 bandwidth:</p> <p>On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz at least:</p> $50 + 10 \log (P_{watts}) = 50 + 10 \log (1.0) = 50.00 \text{ dB}$ <p>Note: In general, the worst case attenuation requirement shown above was applied.</p> <p>Calculation: Limit (dBm) = <math>EL - 50 - 10 \log_{10} (TP)</math></p> <p>Notes: EL is the emission level of the Output Power expressed in dBm,</p> <p>In this application, the EL is 30 dBm for High rated power.</p> <p>Limit (dBm) = <math>30.00 - 50 - 10 \log (1.0) = -20 \text{ dBm}</math></p> <p>For 25 kHz bandwidth:</p> <p>On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 62.5 kHz at least:</p> $43 + 10 \log (P_{watts}) = 43 + 10 \log (1.0) = 43.00 \text{ dB}$ <p>Note: In general, the worst case attenuation requirement shown above was applied.</p> <p>Calculation: Limit (dBm) = <math>EL - 43 - 10 \log_{10} (TP)</math></p> <p>In this application, the EL is 30 dBm for High rated power.</p> <p>Limit (dBm) = <math>30.00 - 43 - 10 \log (1.0) = -13 \text{ dBm}</math></p> <p>Note: 1. In general, the worst case attenuation requirement shown above was applied.</p> <p>For emission inside from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of channel spacing, emission mask limit should be compliant.</p> <p>2. The measurement frequency range from 9 KHz to 5 GHz.</p> <p>3. *** means that the emission level is too low to be measured or at least 20 dB down than the limit.</p> <p>4. ERP for below 1GHz and EIRP above 1GHz.</p>

<b>Test Result:</b>	PASS
---------------------	------

### 3.3.2. Test data

Test plots as follows:

## GMSK 12.5KHz Channel Spacing:

Low: 410.050MHz



Mid: 440.000MHz




High: 469.950MHz



**GMSK 25KHz Channel Spacing:**


Low: 410.050MHz

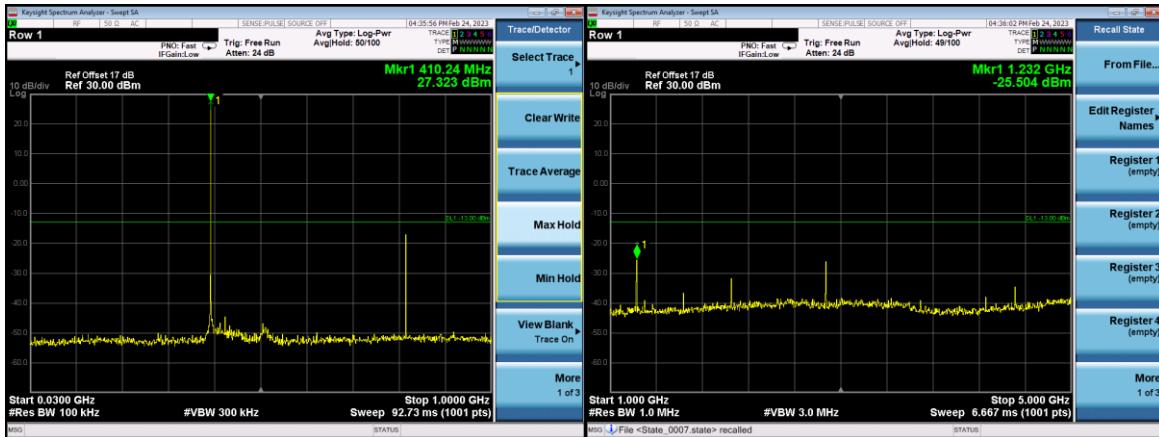

Mid: 440.000MHz




High: 469.950MHz

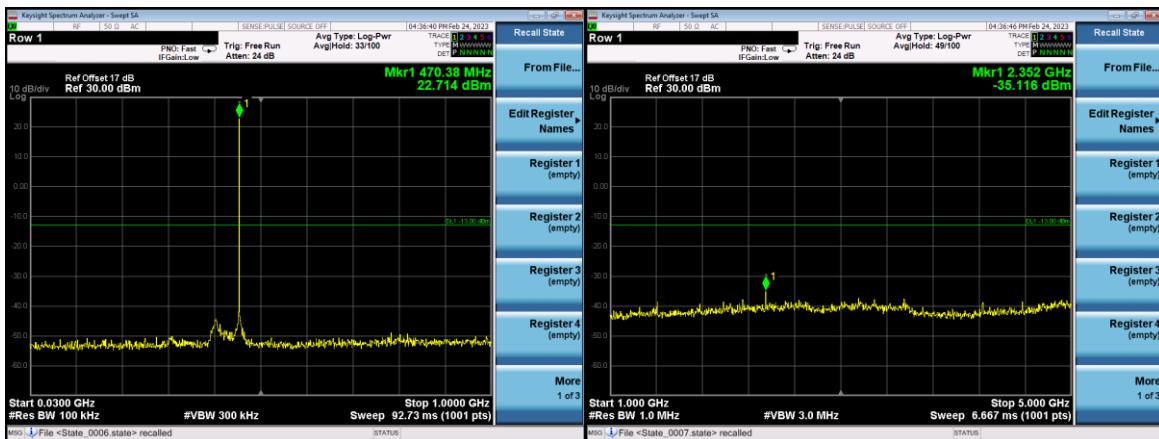

### 3.4. Radiated Spurious Emission

#### 3.4.1. Test Specification
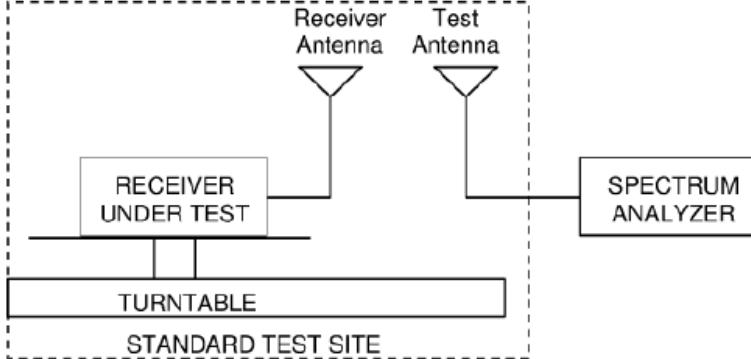
<b>Test Requirement:</b>	FCC Part 90.210, RSS-119(5.8)															
<b>Test Method:</b>	ANSI C63.26															
<b>Measurement Distance:</b>	3 m															
<b>Antenna Polarization:</b>	Horizontal & Vertical															
<b>Operation mode:</b>	Refer to item 4.1															
<b>Receiver Setup:</b>	<table border="1"> <tr> <th>Frequency</th> <th>RBW</th> <th>VBW</th> </tr> <tr> <td>9kHz- 150kHz</td> <td>200Hz</td> <td>1kHz</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>9kHz</td> <td>30kHz</td> </tr> <tr> <td>30MHz-1GHz</td> <td>100KHz</td> <td>300KHz</td> </tr> <tr> <td>Above 1GHz</td> <td>1MHz</td> <td>3MHz</td> </tr> </table>	Frequency	RBW	VBW	9kHz- 150kHz	200Hz	1kHz	150kHz- 30MHz	9kHz	30kHz	30MHz-1GHz	100KHz	300KHz	Above 1GHz	1MHz	3MHz
Frequency	RBW	VBW														
9kHz- 150kHz	200Hz	1kHz														
150kHz- 30MHz	9kHz	30kHz														
30MHz-1GHz	100KHz	300KHz														
Above 1GHz	1MHz	3MHz														
<b>Limit:</b>	<p>For equipment using 25 kHz channel spacing, on any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least <math>43 + 10\log(P)</math> dB.</p> <p>For equipment using 12.5 kHz channel spacing, on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least <math>50 + 10 \log(P)</math> dB or 70 dB, whichever is the lesser attenuation.</p>															
<b>Test setup:</b>																
<b>Test Procedure:</b>	<p>The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.</p> <p>The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.</p> <p>The frequency range up to teeth harmonic of the fundamental frequency was investigated.</p> <p>Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a</p>															

	<p>non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Spurious emissions in dB =10, 1g (TXpwr in Watts/0.001)-the absolute level Spurious attenuation limit in dB =50+10 Log10 (power out in Watts) for EUT with a 12.5 kHz and 25KHz channel bandwidth.</p>
<b>Test results:</b>	PASS

### 3.4.2. Test Data

#### GMSK:

Test Mode: Low: 410.050MHz, Channel Spacing 12.5KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
150.753	-91.107	V	0.24	31.35	-59.997	-20	-39.997
359.807	-95.290	V	0.26	31.34	-64.210	-20	-44.210
671.423	-94.293	V	0.42	31.24	-63.473	-20	-43.473
862.653	-95.852	V	0.58	30.71	-65.722	-20	-45.722
1263.815	-84.355	V	1.23	26.38	-59.205	-20	-39.205
3863.073	-83.587	V	1.68	25.47	-59.797	-20	-39.797
287.133	-93.035	H	0.43	31.24	-62.225	-20	-42.225
400.204	-90.196	H	0.45	30.68	-59.966	-20	-39.966
478.017	-95.372	H	0.64	30.85	-65.162	-20	-45.162
676.575	-96.213	H	0.79	31.12	-65.883	-20	-45.883
1369.176	-85.496	H	1.29	26.12	-60.666	-20	-40.666
3258.122	-80.867	H	1.62	25.41	-57.077	-20	-37.077

Test Mode: Mid: 440.000MHz, Channel Spacing 12.5KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
157.911	-95.114	V	0.24	31.35	-64.004	-20	-44.004
362.588	-91.286	V	0.26	31.34	-60.206	-20	-40.206
669.972	-93.476	V	0.42	31.24	-62.656	-20	-42.656
862.586	-97.348	V	0.58	30.71	-67.218	-20	-47.218
1263.083	-88.482	V	1.23	26.38	-63.332	-20	-43.332
3857.439	-85.169	V	1.68	25.47	-61.379	-20	-41.379
292.620	-95.865	H	0.43	31.24	-65.055	-20	-45.055
397.340	-96.072	H	0.45	30.68	-65.842	-20	-45.842
477.536	-101.463	H	0.64	30.85	-71.253	-20	-51.253
682.949	-101.117	H	0.79	31.12	-70.787	-20	-50.787
1366.759	-82.777	H	1.29	26.12	-57.947	-20	-37.947
3262.627	-80.996	H	1.62	25.41	-57.206	-20	-37.206

Test Mode: High: 469.950MHz, Channel Spacing 12.5KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
149.819	-94.090	V	0.24	31.35	-62.980	-20	-42.980
366.378	-93.809	V	0.26	31.34	-62.729	-20	-42.729
671.133	-96.978	V	0.42	31.24	-66.158	-20	-46.158
866.455	-96.898	V	0.58	30.71	-66.768	-20	-46.768
1259.762	-84.353	V	1.23	26.38	-59.203	-20	-39.203
3860.704	-80.162	V	1.68	25.47	-56.372	-20	-36.372
292.127	-96.159	H	0.43	31.24	-65.349	-20	-45.349
407.252	-93.607	H	0.45	30.68	-63.377	-20	-43.377
476.193	-94.923	H	0.64	30.85	-64.713	-20	-44.713
679.120	-97.393	H	0.79	31.12	-67.063	-20	-47.063
1371.936	-86.953	H	1.29	26.12	-62.123	-20	-42.123
3265.395	-80.446	H	1.62	25.41	-56.656	-20	-36.656

Test Mode: Low: 410.050MHz, Channel Spacing 25KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
146.884	-93.721	V	0.24	31.35	-62.611	-13	-49.611
361.661	-92.771	V	0.26	31.34	-61.691	-13	-48.691
672.403	-92.920	V	0.42	31.24	-62.100	-13	-49.100
869.253	-93.413	V	0.58	30.71	-63.283	-13	-50.283
1260.906	-81.491	V	1.23	26.38	-56.341	-13	-43.341
3859.099	-79.842	V	1.68	25.47	-56.052	-13	-43.052
289.522	-95.392	H	0.43	31.24	-64.582	-13	-51.582
400.914	-97.240	H	0.45	30.68	-67.010	-13	-54.010
476.804	-94.821	H	0.64	30.85	-64.611	-13	-51.611
681.363	-96.436	H	0.79	31.12	-66.106	-13	-53.106
1370.675	-85.401	H	1.29	26.12	-60.571	-13	-47.571
3261.429	-79.257	H	1.62	25.41	-55.467	-13	-42.467

Test Mode; Mid: 440.000MHz, Channel Spacing 25KHz


Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
157.631	-94.435	V	0.24	31.35	-63.325	-13	-50.325
364.164	-92.911	V	0.26	31.34	-61.831	-13	-48.831
672.658	-93.875	V	0.42	31.24	-63.055	-13	-50.055
857.656	-94.594	V	0.58	30.71	-64.464	-13	-51.464
1261.789	-85.585	V	1.23	26.38	-60.435	-13	-47.435
3860.792	-82.786	V	1.68	25.47	-58.996	-13	-45.996
286.101	-97.367	H	0.43	31.24	-66.557	-13	-53.557
404.305	-98.828	H	0.45	30.68	-68.598	-13	-55.598
472.706	-98.206	H	0.64	30.85	-67.996	-13	-54.996
684.044	-94.915	H	0.79	31.12	-64.585	-13	-51.585
1372.293	-84.663	H	1.29	26.12	-59.833	-13	-46.833
3261.991	-80.460	H	1.62	25.41	-56.670	-13	-42.260

Test Mode: High: 469.950MHz, Channel Spacing 25KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
150.444	-97.556	V	0.24	31.35	-66.446	-13	-53.446
360.103	-92.186	V	0.26	31.34	-61.106	-13	-48.106
671.514	-93.257	V	0.42	31.24	-62.437	-13	-49.437
863.778	-98.604	V	0.58	30.71	-68.474	-13	-55.474
1256.913	-80.815	V	1.23	26.38	-55.665	-13	-42.665
3854.891	-77.811	V	1.68	25.47	-54.021	-13	-41.021
288.493	-99.068	H	0.43	31.24	-68.258	-13	-55.258
398.954	-96.267	H	0.45	30.68	-66.037	-13	-53.037
474.968	-98.739	H	0.64	30.85	-68.529	-13	-55.529
681.111	-95.974	H	0.79	31.12	-65.644	-13	-52.644
1372.828	-82.933	H	1.29	26.12	-58.103	-13	-45.103
3265.247	-81.305	H	1.62	25.41	-57.515	-13	-44.515

### 3.5. Transient Frequency Behavior

#### 3.5.1. Test Specification
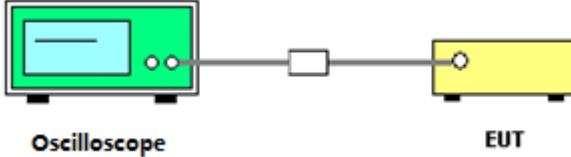
<b>Test Requirement:</b>	FCC Part 90.214, RSS-119(5.9)																																																		
<b>Test Setup:</b>	 <p style="text-align: center;"><b>Oscilloscope</b>                                    <b>EUT</b></p>																																																		
<b>Test Limit</b>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Channel Bandwidth (kHz)</th> <th rowspan="2">Time Intervals (Notes 1, 2)</th> <th rowspan="2">Maximum Frequency Difference (kHz)</th> <th colspan="2">Transient Duration Limit (ms)</th> </tr> <tr> <th>138.1-174 MHz</th> <th>406.1-512 MHz</th> </tr> </thead> <tbody> <tr> <td rowspan="3">25</td> <td><math>t_1</math></td> <td><math>\pm 25</math></td> <td>5</td> <td>10</td> </tr> <tr> <td><math>t_2</math></td> <td><math>\pm 12.5</math></td> <td>20</td> <td>25</td> </tr> <tr> <td><math>t_3</math></td> <td><math>\pm 25</math></td> <td>5</td> <td>10</td> </tr> <tr> <td rowspan="3">12.5</td> <td><math>t_1</math></td> <td><math>\pm 12.5</math></td> <td>5</td> <td>10</td> </tr> <tr> <td><math>t_2</math></td> <td><math>\pm 6.25</math></td> <td>20</td> <td>25</td> </tr> <tr> <td><math>t_3</math></td> <td><math>\pm 12.5</math></td> <td>5</td> <td>10</td> </tr> <tr> <td rowspan="3">6.25</td> <td><math>t_1</math></td> <td><math>\pm 6.25</math></td> <td>5</td> <td>10</td> </tr> <tr> <td><math>t_2</math></td> <td><math>\pm 3.125</math></td> <td>20</td> <td>25</td> </tr> <tr> <td><math>t_3</math></td> <td><math>\pm 6.25</math></td> <td>5</td> <td>10</td> </tr> </tbody> </table>					Channel Bandwidth (kHz)	Time Intervals (Notes 1, 2)	Maximum Frequency Difference (kHz)	Transient Duration Limit (ms)		138.1-174 MHz	406.1-512 MHz	25	$t_1$	$\pm 25$	5	10	$t_2$	$\pm 12.5$	20	25	$t_3$	$\pm 25$	5	10	12.5	$t_1$	$\pm 12.5$	5	10	$t_2$	$\pm 6.25$	20	25	$t_3$	$\pm 12.5$	5	10	6.25	$t_1$	$\pm 6.25$	5	10	$t_2$	$\pm 3.125$	20	25	$t_3$	$\pm 6.25$	5	10
Channel Bandwidth (kHz)	Time Intervals (Notes 1, 2)	Maximum Frequency Difference (kHz)	Transient Duration Limit (ms)																																																
			138.1-174 MHz	406.1-512 MHz																																															
25	$t_1$	$\pm 25$	5	10																																															
	$t_2$	$\pm 12.5$	20	25																																															
	$t_3$	$\pm 25$	5	10																																															
12.5	$t_1$	$\pm 12.5$	5	10																																															
	$t_2$	$\pm 6.25$	20	25																																															
	$t_3$	$\pm 12.5$	5	10																																															
6.25	$t_1$	$\pm 6.25$	5	10																																															
	$t_2$	$\pm 3.125$	20	25																																															
	$t_3$	$\pm 6.25$	5	10																																															
<b>Test Procedure:</b>	<p>The EUT was set in the climate chamber and connected to an external DC power supply and AC power supply. The RF output was directly connected to Oscilloscope. The coupling loss of the additional cables was recorded and taken in account for all the measurements. The result was recorded.</p>																																																		
<b>Test Result:</b>	PASS																																																		


### 3.5.2. Test data

Test Plots for channel spacing 25KHz, EUT power setting: Maximum.

Power On




Power Off

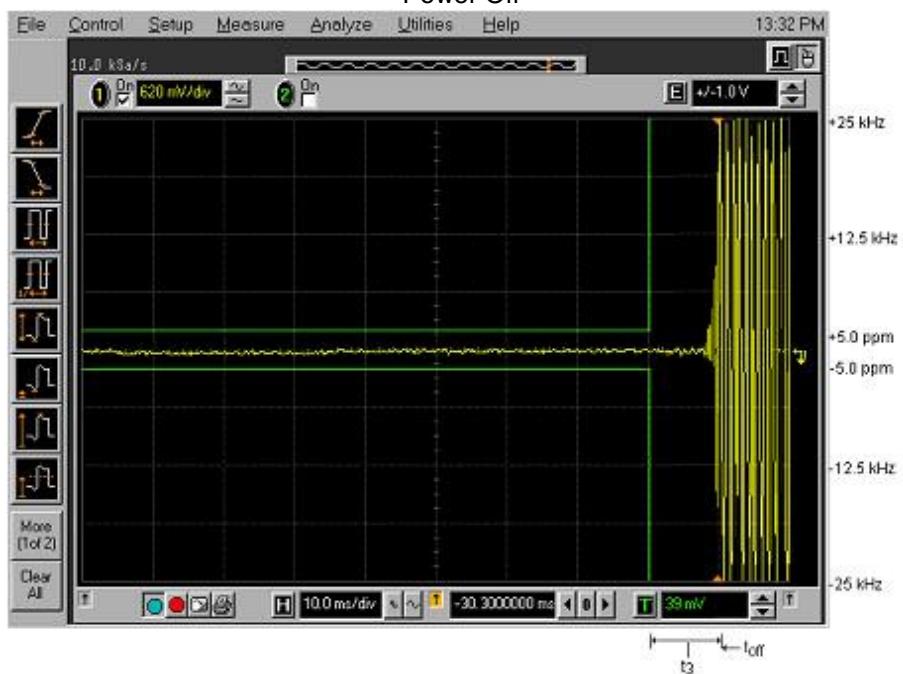

Remark: Only list the worst data for channel spacing 25KHz, modulation GMSK.

### 3.6. Behavior Frequency Stability

#### 3.6.1. Test Specification
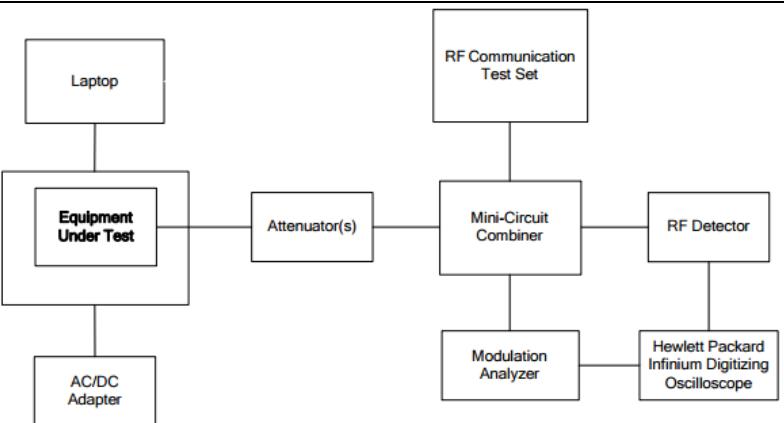
<b>Test Requirement:</b>	FCC Part 90.213, RSS-119(5.3)
<b>Test Method:</b>	ANSI C63.26, RSS-Gen
<b>Test Setup:</b>	 <pre> graph TD     Laptop[Laptop] --- EUT[Equipment Under Test]     EUT --- ACDC[AC/DC Adapter]     EUT --- Attenuator[Attenuator(s)]     Attenuator --- MiniCircuit[Mini-Circuit Combiner]     MiniCircuit --- RFDetector[RF Detector]     RFDetector --- ModulationAnalyzer[Modulation Analyzer]     ModulationAnalyzer --- Oscilloscope[Hewlett Packard Infinium Digitizing Oscilloscope]     RFCommunication[RF Communication Test Set] --- MiniCircuit   </pre>
<b>Test Procedure:</b>	<p>Method of Measurement:      After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply or AC power supply and the voltage was adjusted in the required ranges.</p>
<b>Test Result:</b>	PASS

## 3.6.2. Test data

Conclusion: PASS			
Mode	Voltage (V)	Frequency error (Hz)	frequency error (ppm)
Middle Channel 12.5KHz Channel Spacing	3.6	4	0.0089
	3.5	4	0.0089
	3.4	3	0.0067
	3.3	2	0.0044
	3.2	2	0.0044
	3.1	3	0.0067
Limit	2.5ppm		
Middle Channel 25KHz Channel Spacing	3.6	4	0.0089
	3.5	5	0.0111
	3.4	4	0.0089
	3.3	5	0.0111
	3.2	3	0.0067
	3.1	4	0.0089
Limit	5ppm		

Mode	Temperature (°C)	Frequency error (Hz)	frequency error (ppm)
Middle Channel 12.5KHz Channel Spacing	-20	10	0.0222
	-10	7	0.0155
	0	7	0.0155
	10	8	0.0177
	20	6	0.0133
	30	7	0.0155
	40	8	0.0177
	50	10	0.0222
Limit		2.5ppm	
Middle Channel 25KHz Channel Spacing	-20	15	0.0333
	-10	16	0.0355
	0	13	0.0288
	10	14	0.0310
	20	10	0.0222
	30	14	0.0310
	40	15	0.0333
	50	16	0.0355
Limit		5ppm	

### 3.7. Modulation Characteristic

<b>Test Requirement:</b>	FCC Part 90.207
<b>Test Result:</b>	According to FCC § 2.1047(d), Part 22, 74, 90 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


### 3.8. Adjacent channel power

<b>Test Requirement:</b>	FCC Part 90.221														
<b>Test Setup:</b>	 <p><b>Spectrum Analyzer</b>                                    <b>EUT</b></p>														
<b>Test Limit:</b>	<p>Maximum adjacent power levels for frequencies in the 450–470 MHz band, no need compliance with below -36dBm:</p> <table border="1"> <thead> <tr> <th>Frequency offset</th> <th>Maximum ACP (dBc) for devices 1 watt and less</th> <th>Maximum ACP (dBc) for devices above 1 watt</th> </tr> </thead> <tbody> <tr> <td>25 kHz .....</td> <td>-55 dBc</td> <td>-60 dBc</td> </tr> <tr> <td>50 kHz .....</td> <td>-70 dBc</td> <td>-70 dBc</td> </tr> <tr> <td>75 kHz .....</td> <td>-70 dBc</td> <td>-70 dBc</td> </tr> </tbody> </table>			Frequency offset	Maximum ACP (dBc) for devices 1 watt and less	Maximum ACP (dBc) for devices above 1 watt	25 kHz .....	-55 dBc	-60 dBc	50 kHz .....	-70 dBc	-70 dBc	75 kHz .....	-70 dBc	-70 dBc
Frequency offset	Maximum ACP (dBc) for devices 1 watt and less	Maximum ACP (dBc) for devices above 1 watt													
25 kHz .....	-55 dBc	-60 dBc													
50 kHz .....	-70 dBc	-70 dBc													
75 kHz .....	-70 dBc	-70 dBc													
<b>Test method:</b>	<p>The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the Frequency band 0Kz from the wanted frequency</p>														
<b>Test result:</b>	Pass.														

GMSK 25KHz spacing 450MHz-470MHz

Carrier frequency (MHz)	Test Frequency (MHz)	Test Value (dBm)	Limit (dBm)	Result
450.000	449.925	-63.703	30-70=-40	PASS
	449.95	-64.132	30-70=-40	PASS
	449.975	-63.481	30-55=-25	PASS
	450.025	-62.927	30-55=-25	PASS
	450.05	-63.174	30-70=-40	PASS
	450.075	-64.177	30-70=-40	PASS
469.950	469.875	-63.116	30-70=-40	PASS
	469.900	-61.855	30-70=-40	PASS
	469.925	-61.221	30-55=-25	PASS
	469.975	-61.650	30-55=-25	PASS
	470.000	-62.921	30-70=-40	PASS
	470.025	-63.108	30-70=-40	PASS



## GMSK 25KHz spacing 450MHz-470MHz

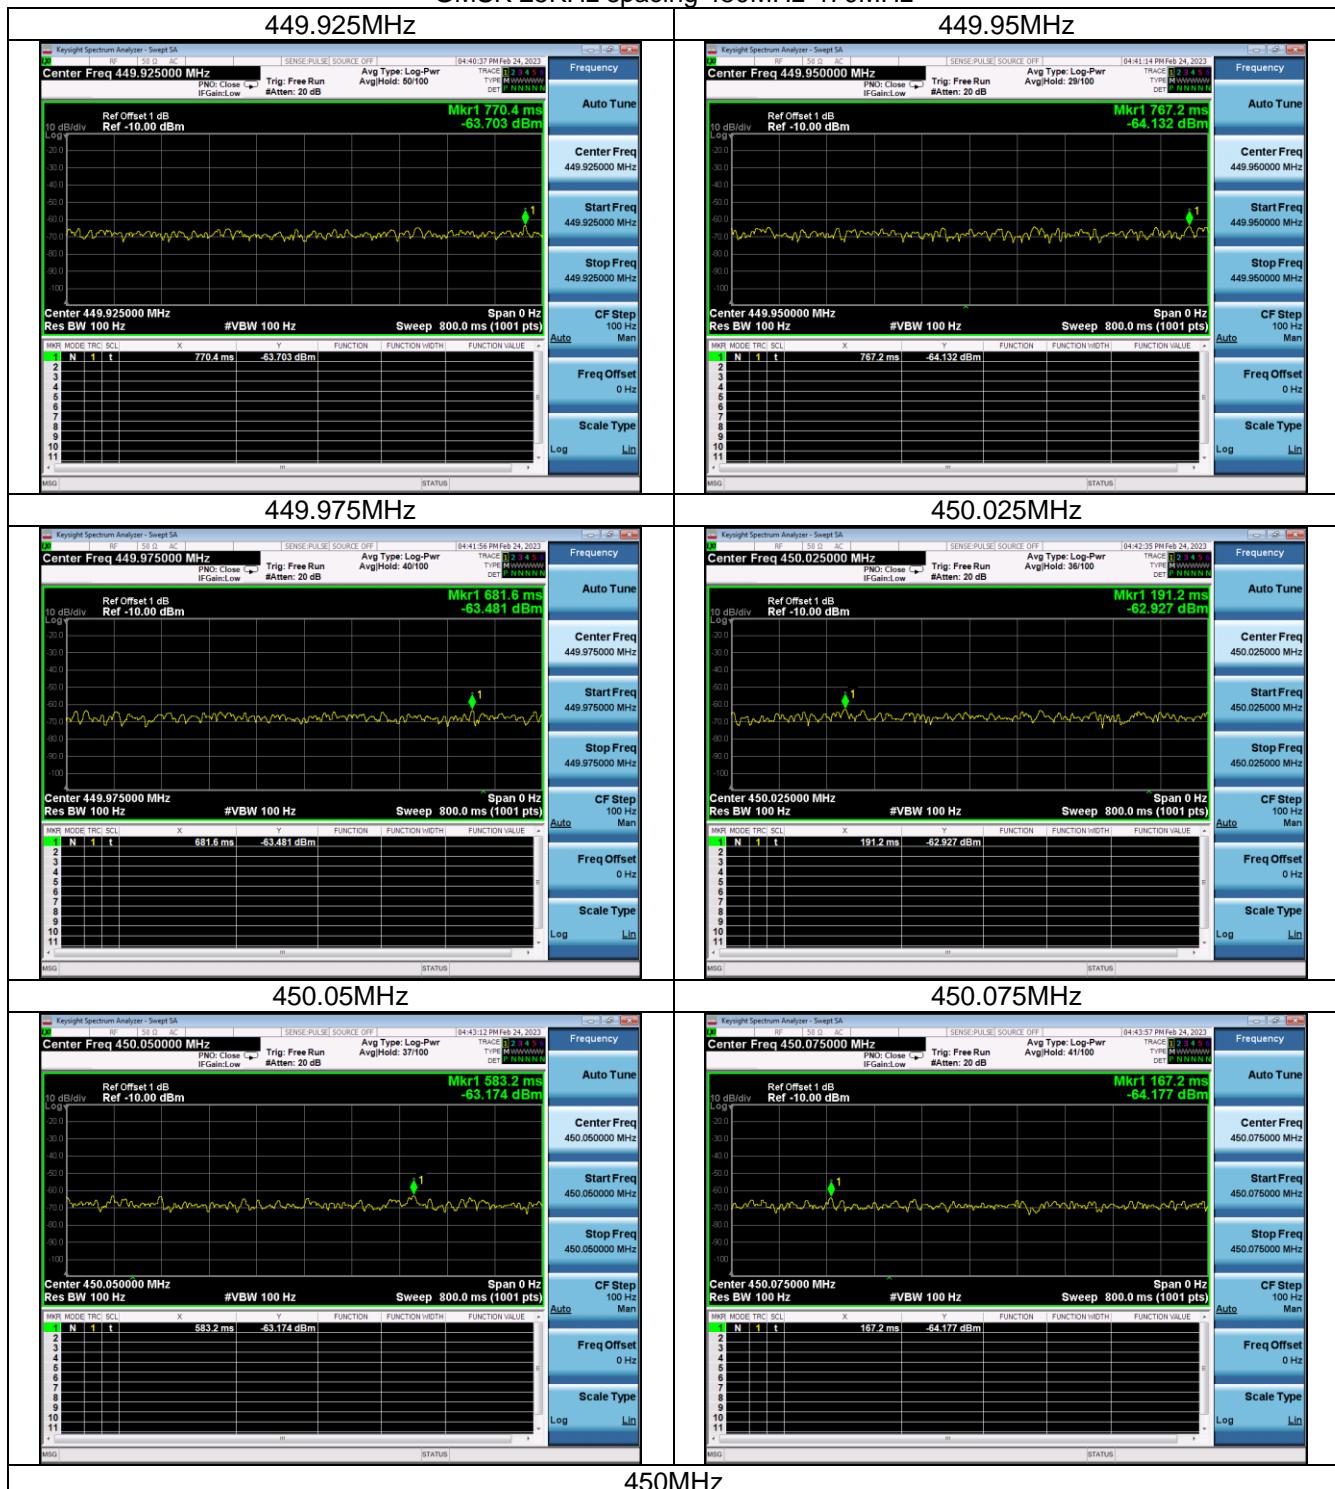



## 4. Test Setup Photo

### 4.1. Photos of Radiated emission

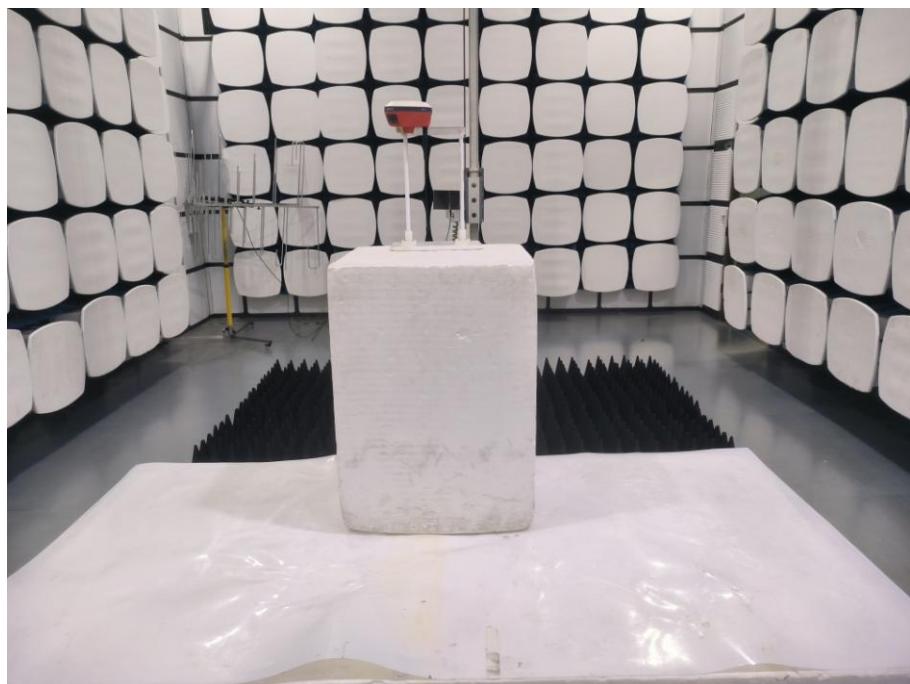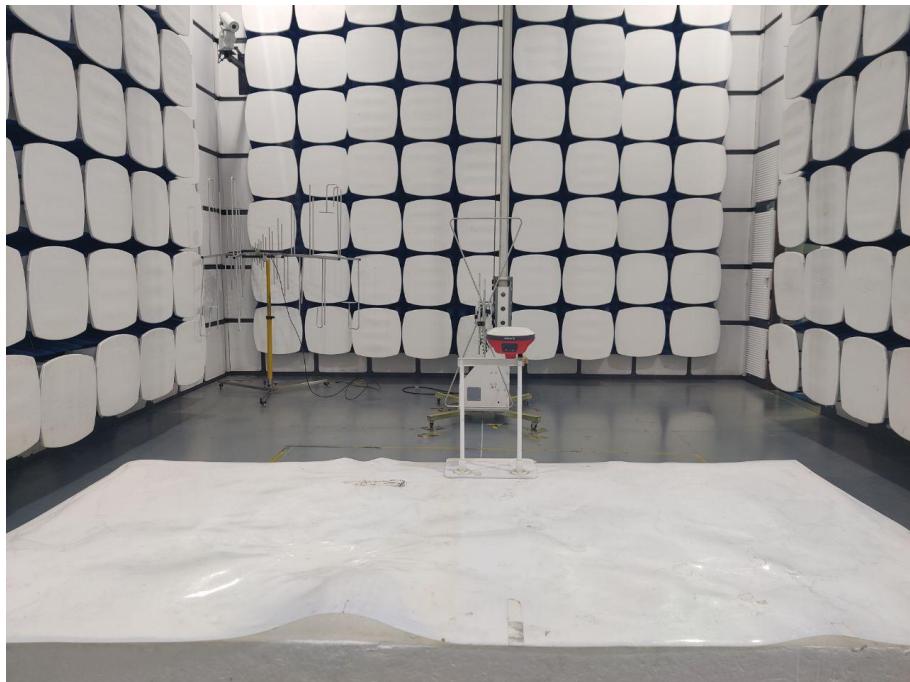

## 5. EUT Photo

Please refer to the report A2302040-C01-R01.

----- END OF REPORT-----