


Site: WZ-AC1	Test Date: 2022-07-19
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

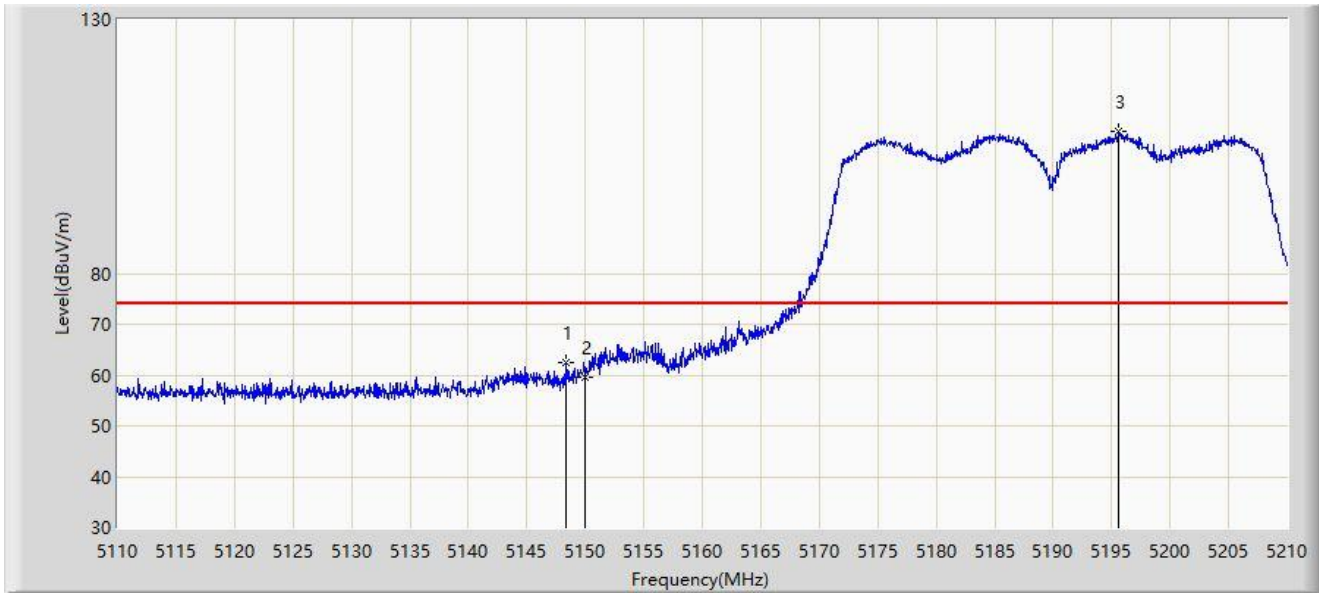


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.300	62.418	58.178	-11.582	74.000	4.241	PK
2		5150.000	59.484	55.248	-14.516	74.000	4.236	PK
3		5195.650	107.852	103.852	N/A	N/A	4.000	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-19
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

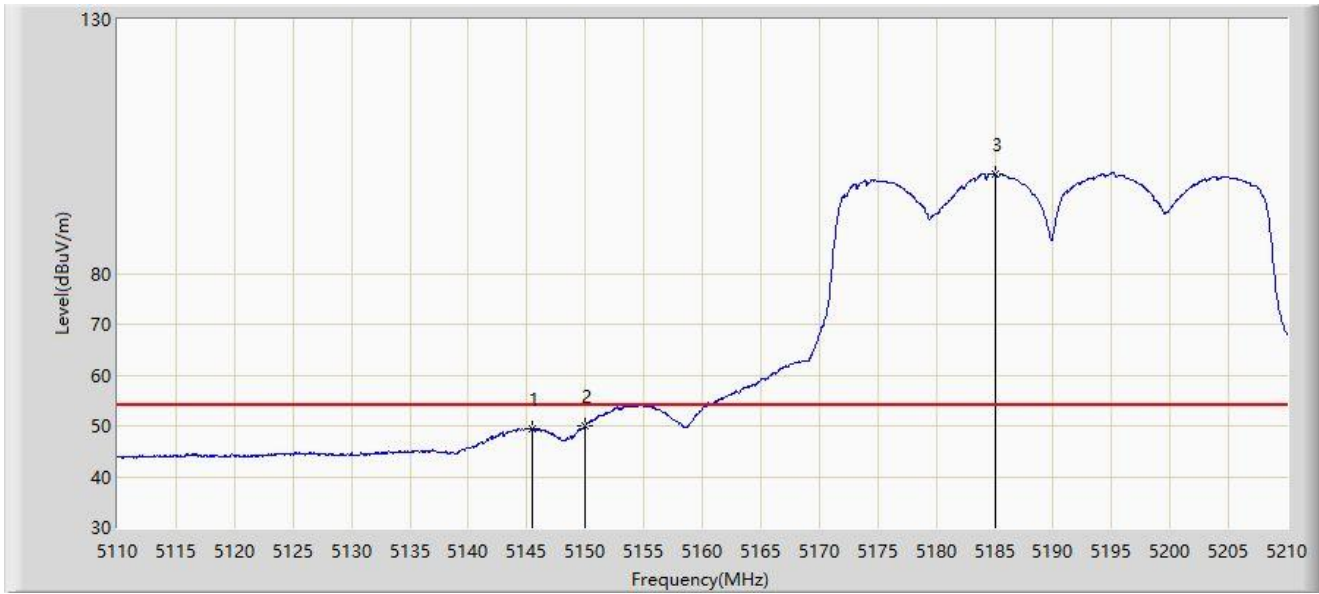


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5145.450	49.468	45.244	-4.532	54.000	4.224	AV
2	*	5150.000	49.933	45.697	-4.067	54.000	4.236	AV
3		5185.050	99.661	95.656	N/A	N/A	4.005	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-19
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

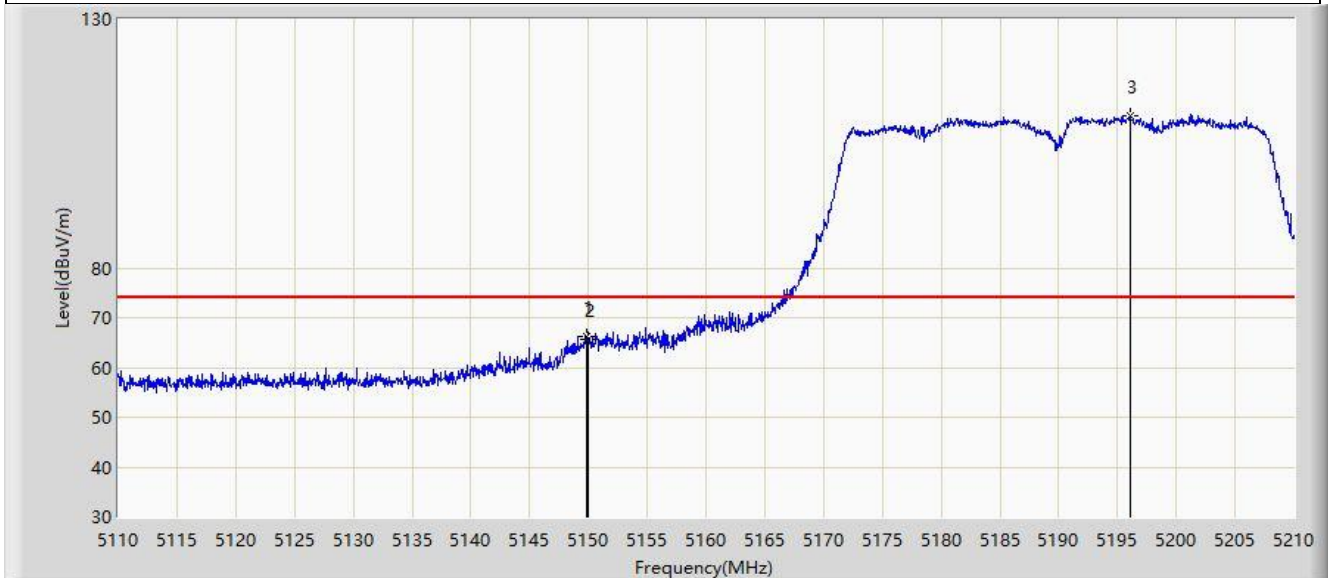


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.800	66.224	61.988	-7.776	74.000	4.237	PK
2		5150.000	65.636	61.400	-8.364	74.000	4.236	PK
3		5196.100	110.694	106.695	N/A	N/A	4.000	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-19
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

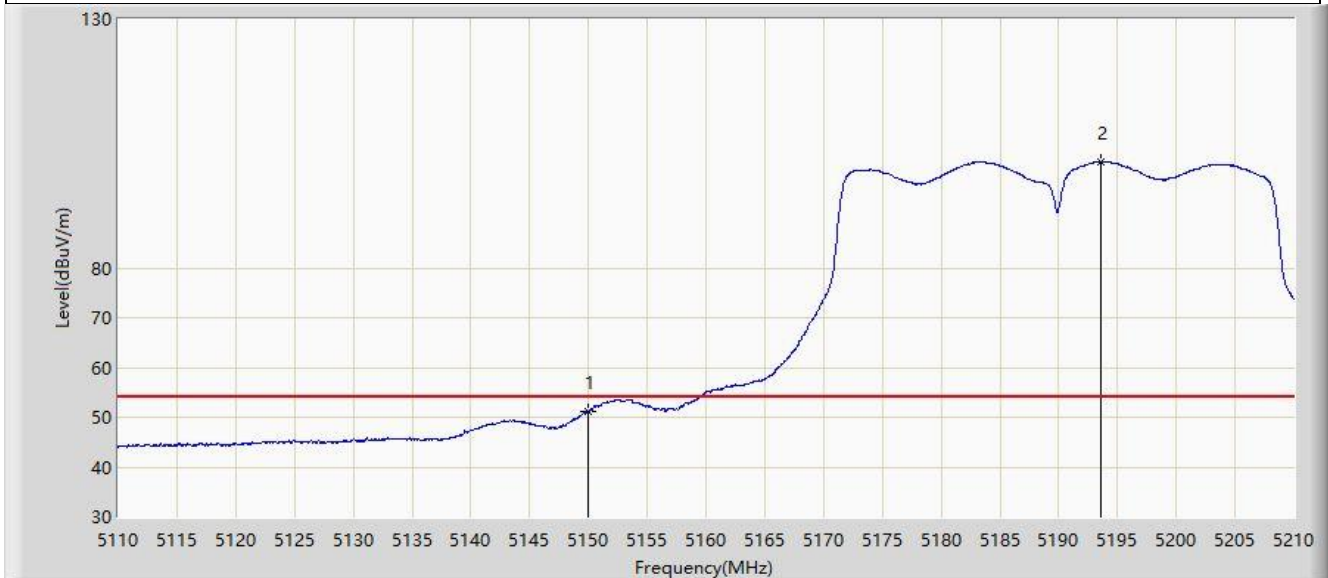


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	51.188	46.952	-2.812	54.000	4.236	AV
2		5193.600	101.290	97.284	N/A	N/A	4.006	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

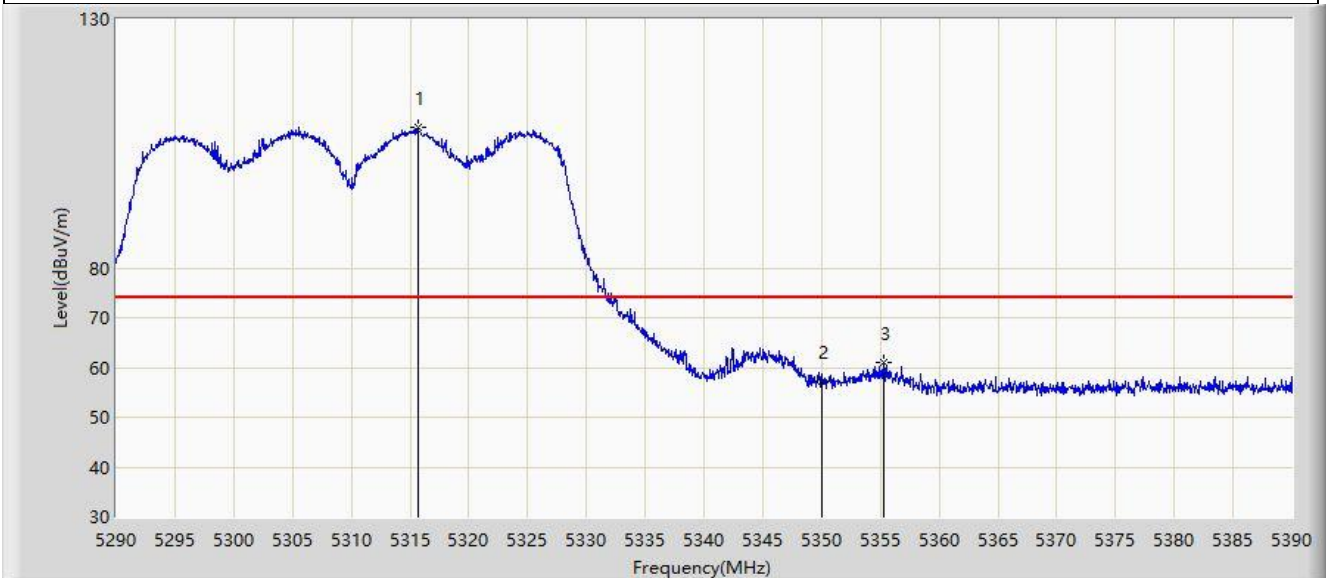


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5315.650	108.255	104.195	N/A	N/A	4.060	PK
2		5350.000	57.329	53.392	-16.671	74.000	3.937	PK
3	*	5355.350	60.952	57.074	-13.048	74.000	3.878	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-19
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

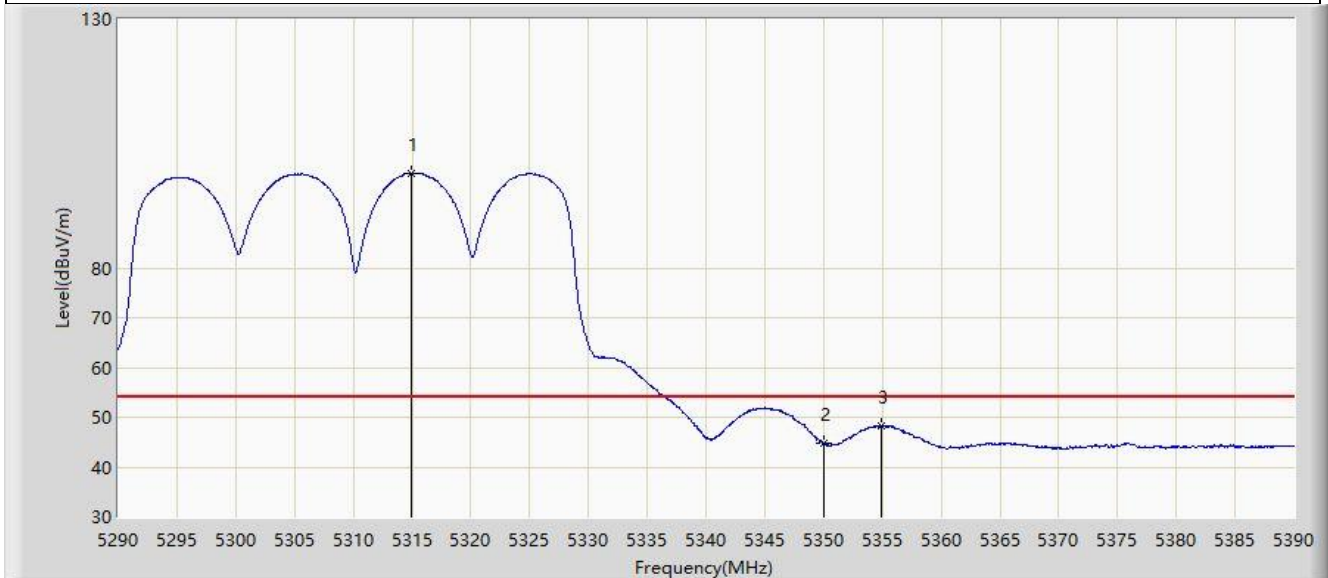


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5314.900	99.103	95.052	N/A	N/A	4.051	AV
2		5350.000	44.898	40.961	-9.102	54.000	3.937	AV
3	*	5354.950	48.185	44.305	-5.815	54.000	3.880	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

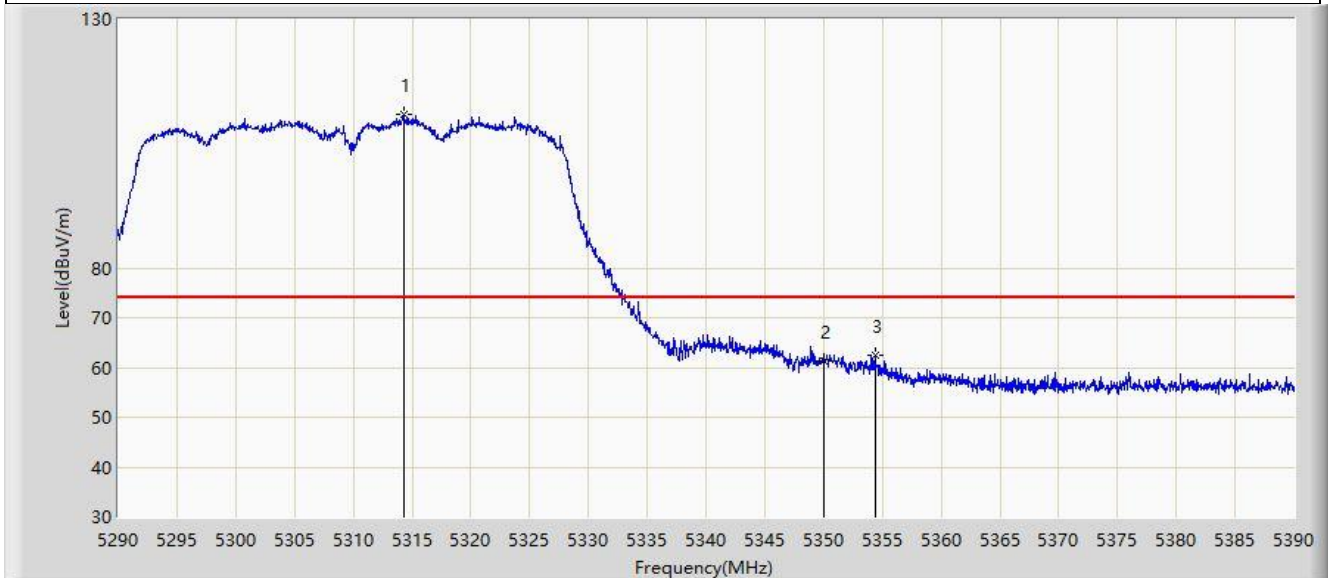


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5314.350	110.905	106.860	N/A	N/A	4.045	PK
2		5350.000	61.238	57.301	-12.762	74.000	3.937	PK
3	*	5354.350	62.448	58.564	-11.552	74.000	3.884	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

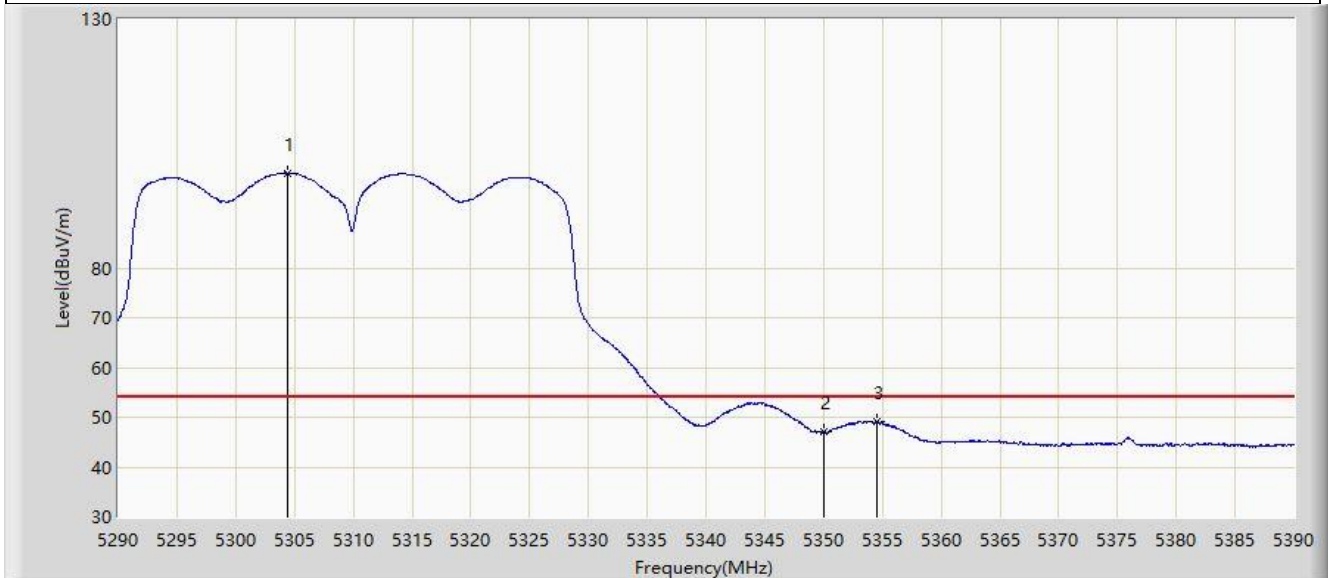


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5304.400	99.116	95.103	N/A	N/A	4.013	AV
2		5350.000	47.019	43.082	-6.981	54.000	3.937	AV
3	*	5354.500	49.112	45.229	-4.888	54.000	3.883	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

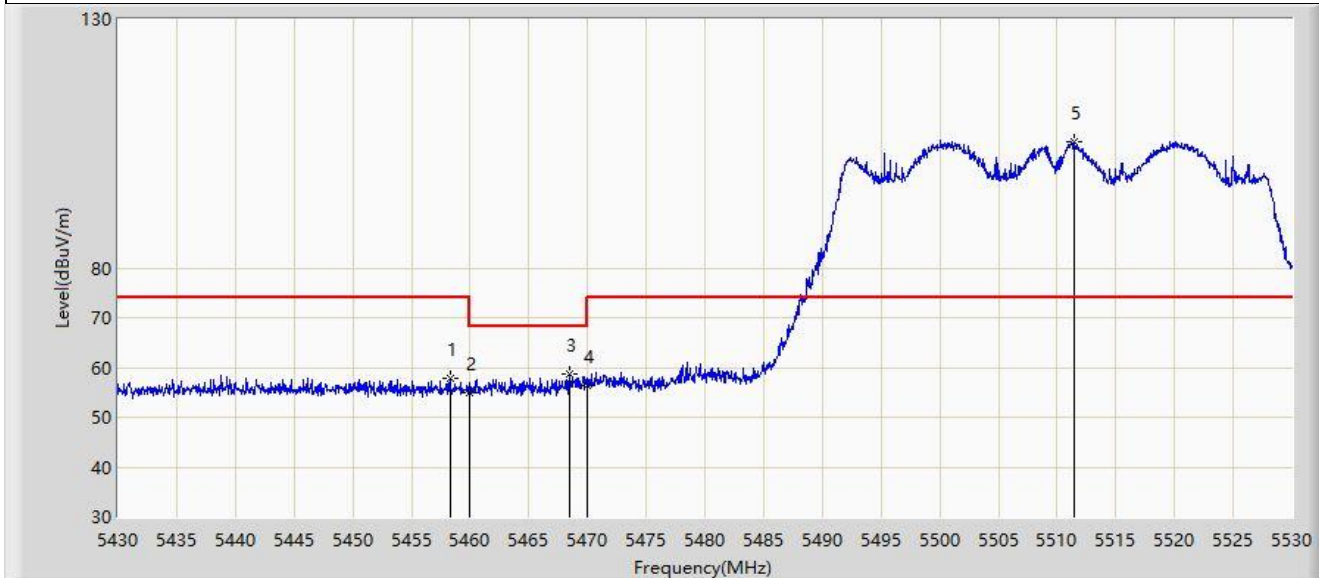


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.300	57.903	53.980	-16.097	74.000	3.923	PK
2		5460.000	54.893	50.961	-19.107	74.000	3.932	PK
3	*	5468.450	58.575	54.601	-9.625	68.200	3.974	PK
4		5470.000	56.331	52.349	-11.869	68.200	3.982	PK
5		5511.400	105.444	101.383	N/A	N/A	4.060	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

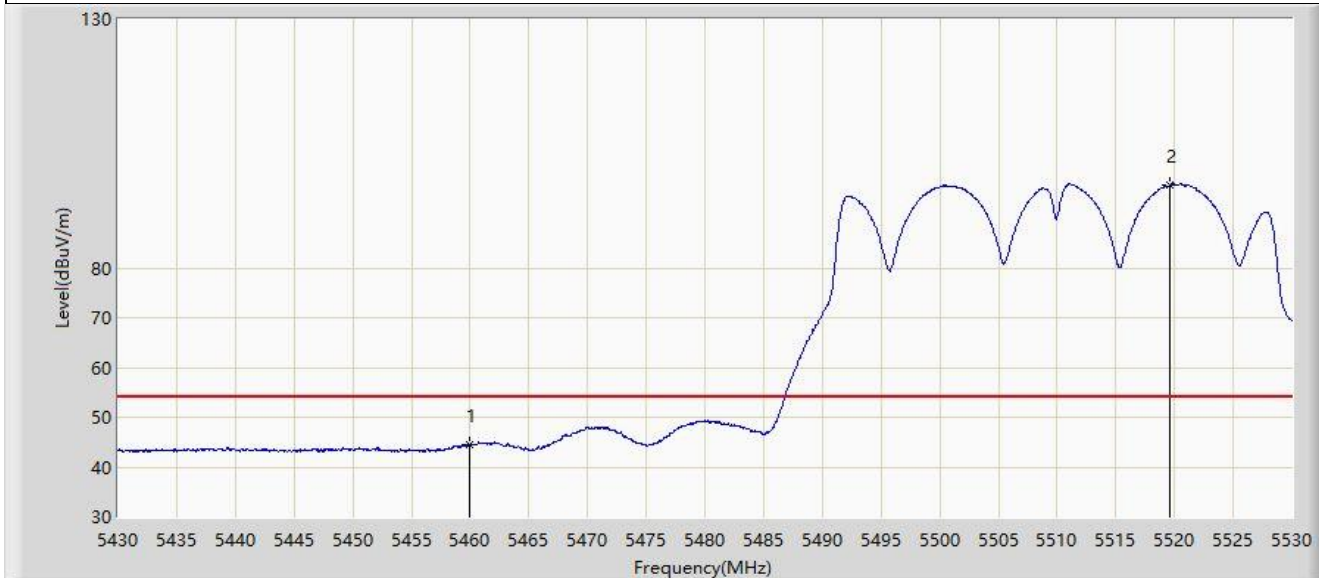


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	44.450	40.518	-9.550	54.000	3.932	AV
2		5519.600	96.664	92.692	N/A	N/A	3.972	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

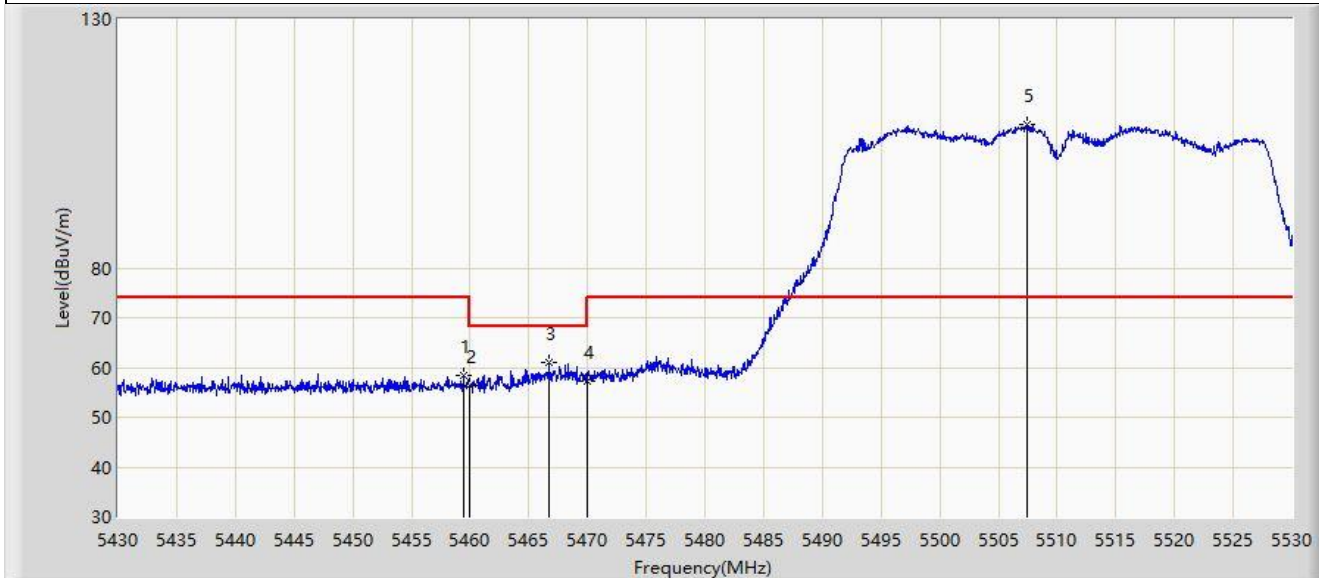


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5459.450	58.369	54.440	-15.631	74.000	3.930	PK
2		5460.000	56.359	52.427	-17.641	74.000	3.932	PK
3	*	5466.750	61.117	57.151	-7.083	68.200	3.966	PK
4		5470.000	57.322	53.340	-10.878	68.200	3.982	PK
5		5507.500	108.773	104.676	N/A	N/A	4.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

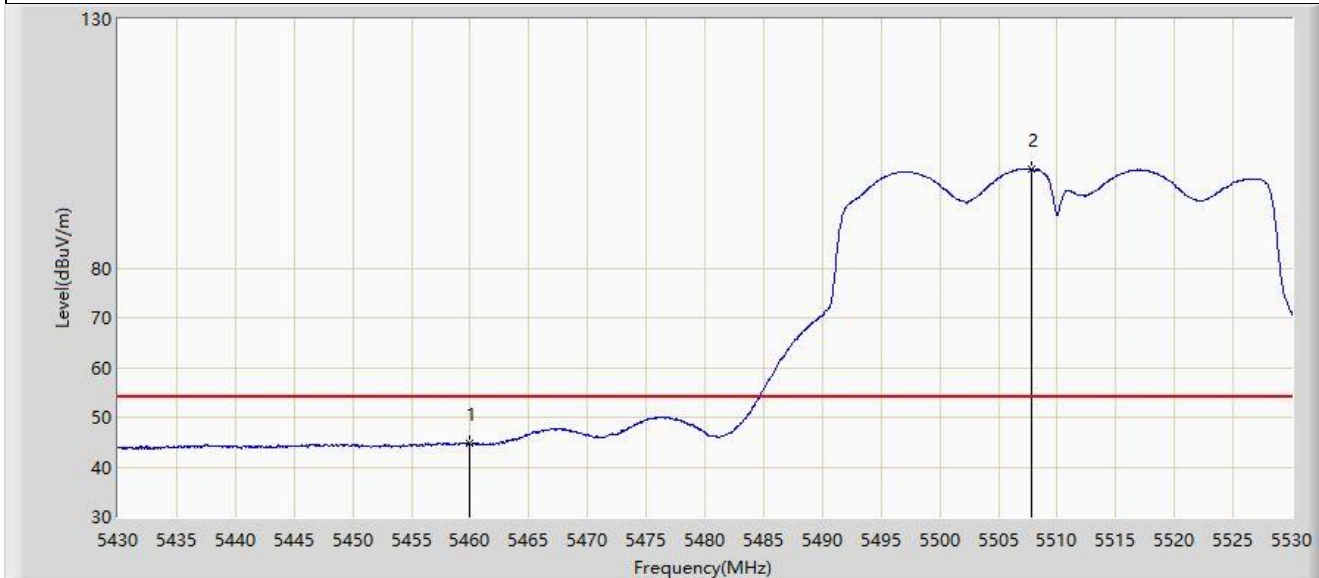


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	44.706	40.774	-9.294	54.000	3.932	AV
2		5507.850	99.799	95.705	N/A	N/A	4.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

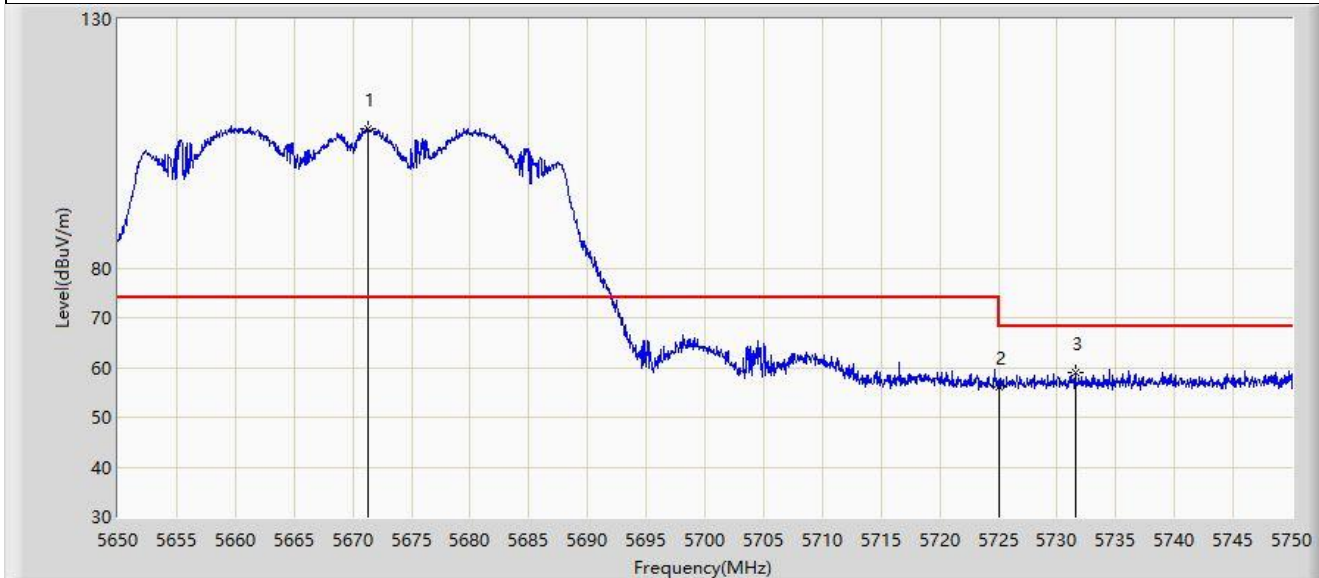


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5671.300	108.095	103.637	N/A	N/A	4.458	PK
2		5725.000	56.119	51.570	-12.081	68.200	4.549	PK
3	*	5731.550	59.084	54.452	-9.116	68.200	4.632	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

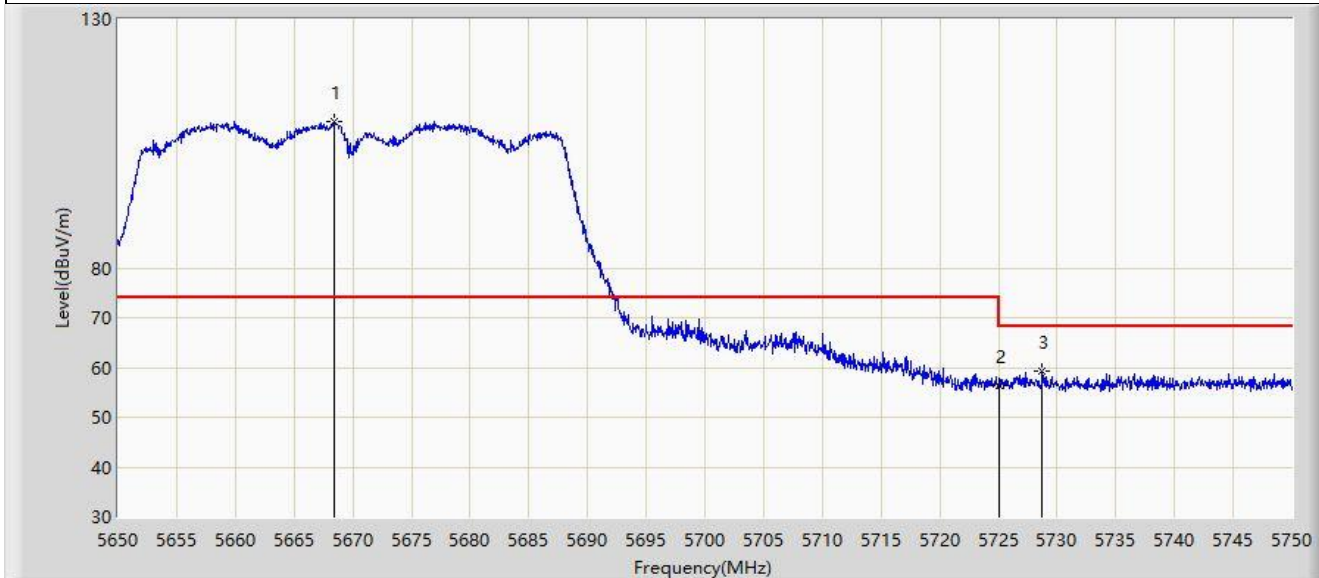


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.450	109.462	104.991	N/A	N/A	4.471	PK
2		5725.000	56.392	51.843	-11.808	68.200	4.549	PK
3	*	5728.700	59.333	54.742	-8.867	68.200	4.591	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

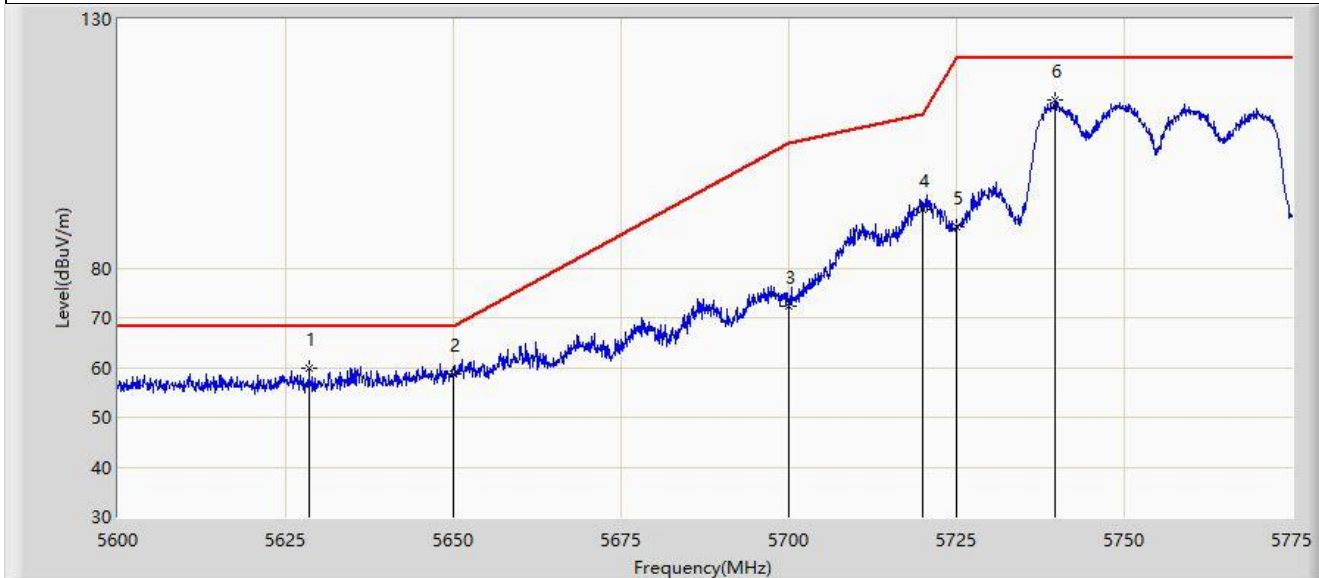


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5628.525	59.941	55.832	-8.259	68.200	4.110	PK
2		5650.000	58.631	54.248	-9.569	68.200	4.382	PK
3		5700.000	72.306	67.832	-32.894	105.200	4.474	PK
4		5720.000	91.789	87.266	-19.011	110.800	4.523	PK
5		5725.000	88.357	83.808	-33.843	122.200	4.549	PK
6		5739.650	113.674	108.926	N/A	N/A	4.748	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

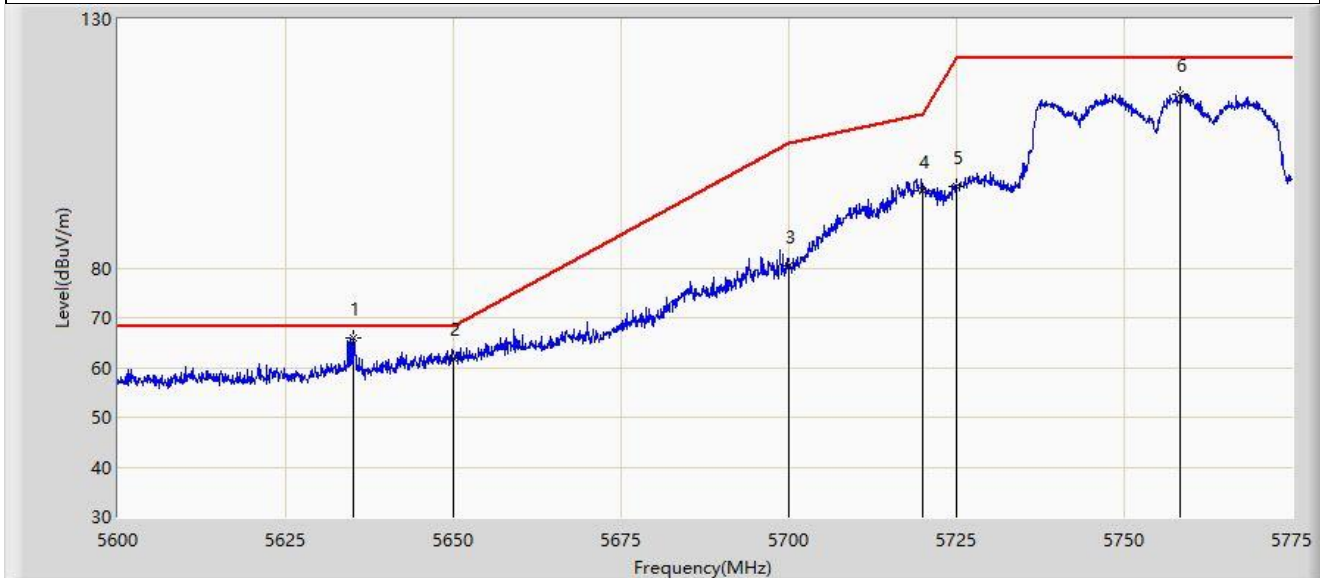


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5635.000	65.956	61.860	-2.244	68.200	4.097	PK
2		5650.000	61.748	57.365	-6.452	68.200	4.382	PK
3		5700.000	80.460	75.986	-24.740	105.200	4.474	PK
4		5720.000	95.640	91.117	-15.160	110.800	4.523	PK
5		5725.000	96.485	91.936	-25.715	122.200	4.549	PK
6		5758.375	115.019	110.136	N/A	N/A	4.882	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

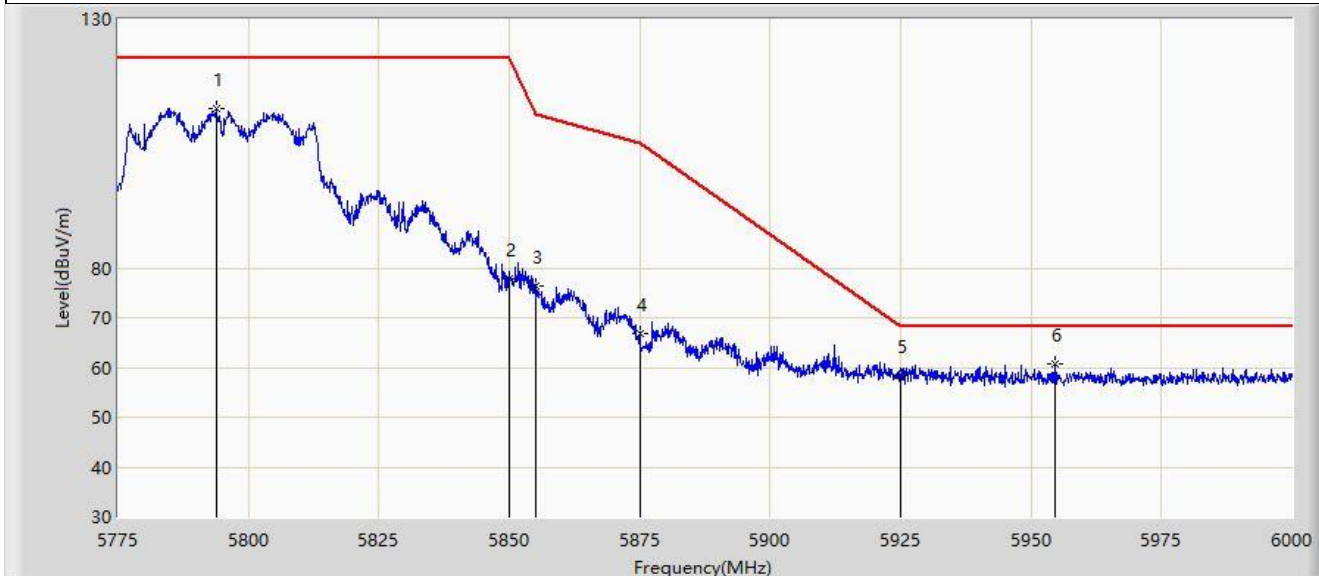


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5793.900	112.085	107.116	N/A	N/A	4.970	PK
2		5850.000	77.890	72.729	-44.310	122.200	5.161	PK
3		5855.000	76.500	71.393	-34.300	110.800	5.107	PK
4		5875.000	66.926	61.921	-38.274	105.200	5.006	PK
5		5925.000	58.269	52.954	-9.931	68.200	5.315	PK
6	*	5954.663	60.836	55.669	-7.364	68.200	5.167	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

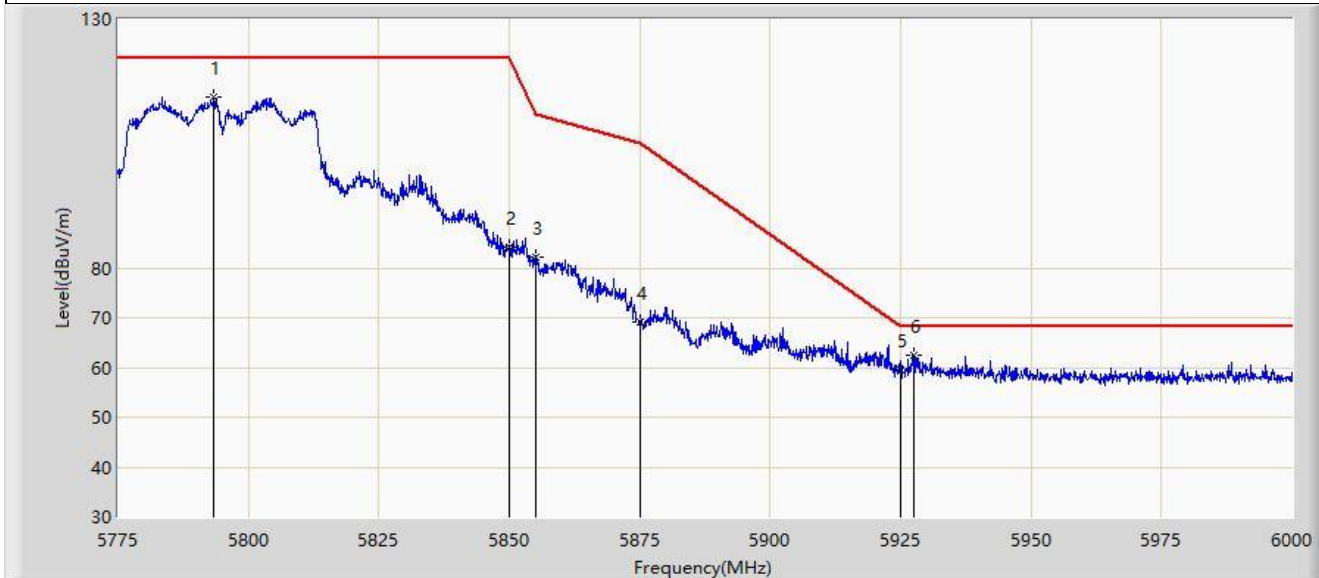


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5793.450	114.484	109.519	N/A	N/A	4.965	PK
2		5850.000	84.272	79.111	-37.928	122.200	5.161	PK
3		5855.000	82.139	77.032	-28.661	110.800	5.107	PK
4		5875.000	69.240	64.235	-35.960	105.200	5.006	PK
5		5925.000	59.567	54.252	-8.633	68.200	5.315	PK
6	*	5927.550	62.515	57.200	-5.685	68.200	5.316	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

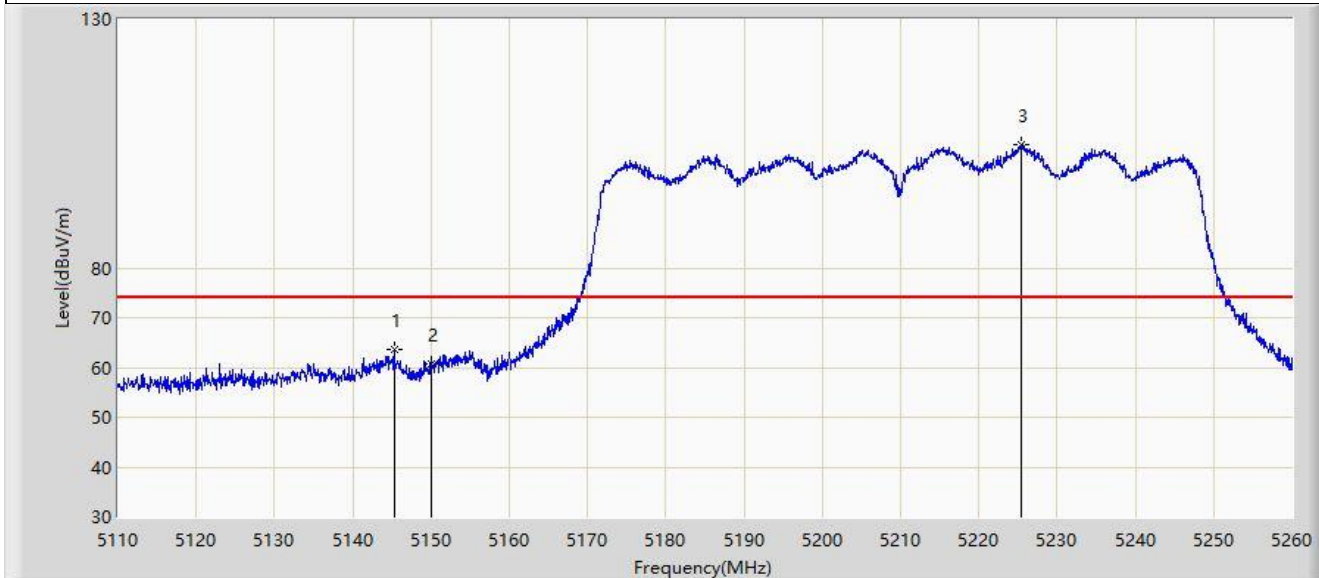


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5145.250	63.518	59.295	-10.482	74.000	4.223	PK
2		5150.000	60.687	56.451	-13.313	74.000	4.236	PK
3		5225.425	104.768	100.691	N/A	N/A	4.077	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

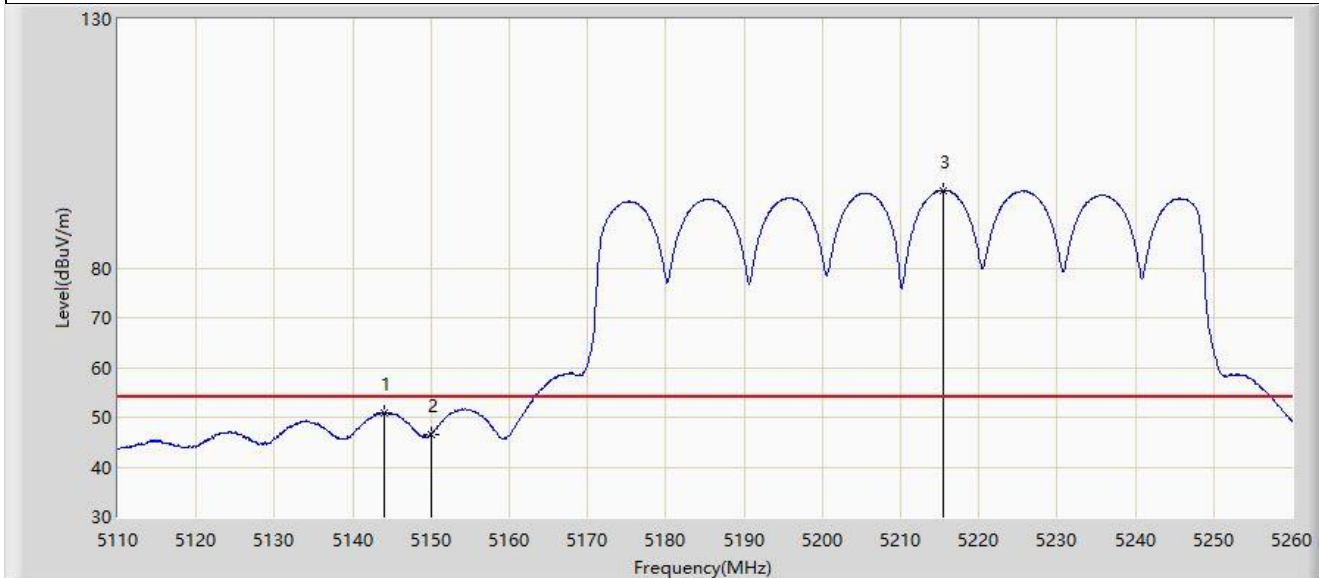


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5143.975	50.810	46.595	-3.190	54.000	4.215	AV
2		5150.000	46.542	42.306	-7.458	54.000	4.236	AV
3		5215.375	95.526	91.481	N/A	N/A	4.045	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

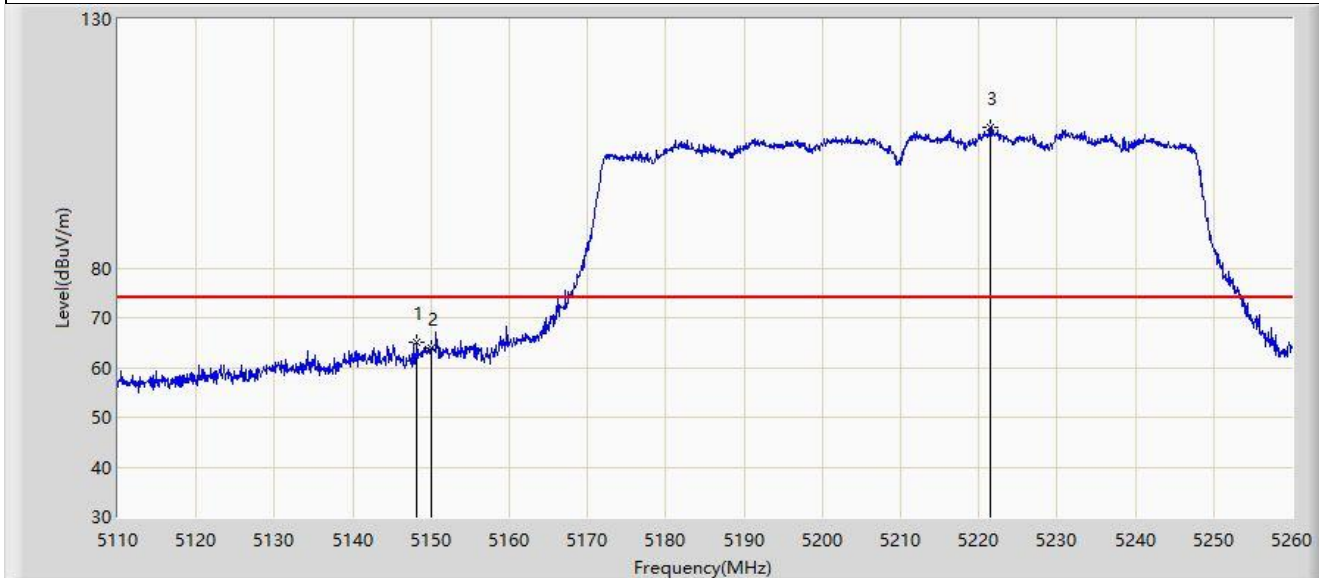


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.100	64.939	60.699	-9.061	74.000	4.240	PK
2		5150.000	63.830	59.594	-10.170	74.000	4.236	PK
3		5221.525	108.177	104.119	N/A	N/A	4.058	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

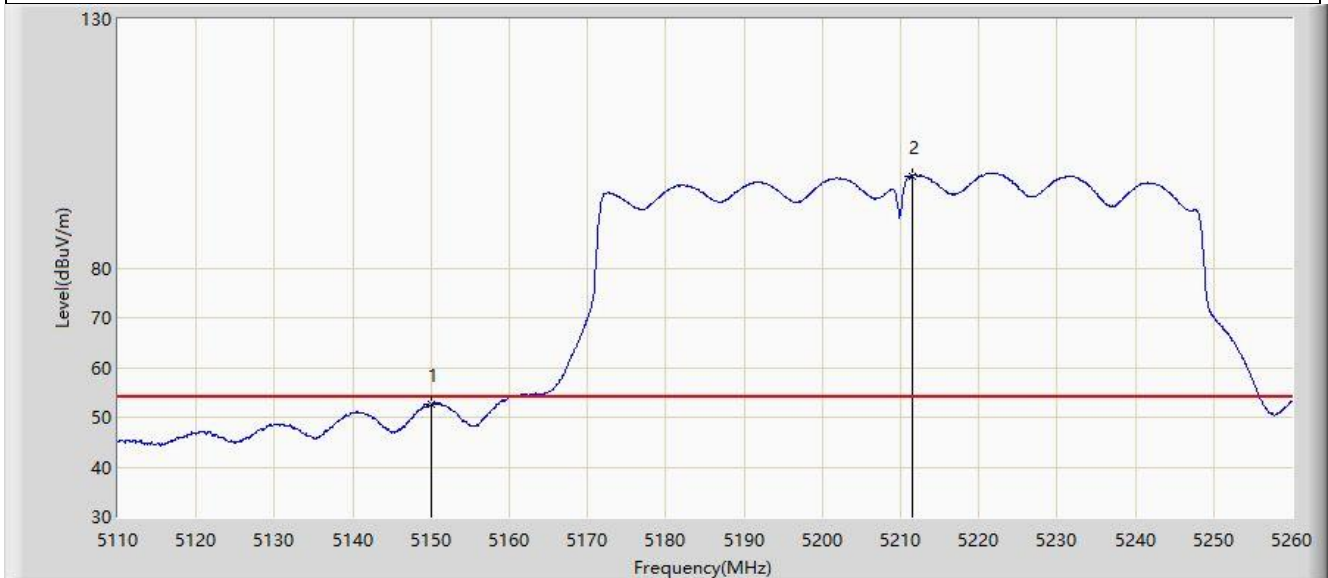


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	52.706	48.470	-1.294	54.000	4.236	AV
2		5211.475	98.549	94.519	N/A	N/A	4.030	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

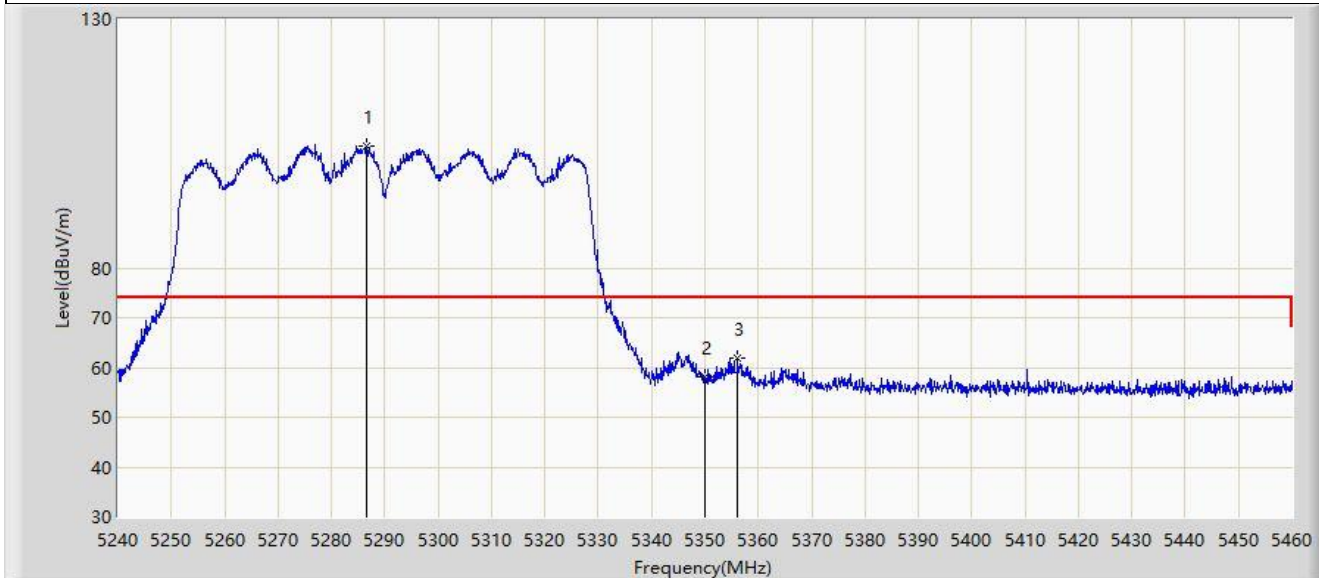


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5286.640	104.437	100.528	N/A	N/A	3.908	PK
2		5350.000	58.014	54.077	-15.986	74.000	3.937	PK
3	*	5356.160	61.977	58.104	-12.023	74.000	3.873	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

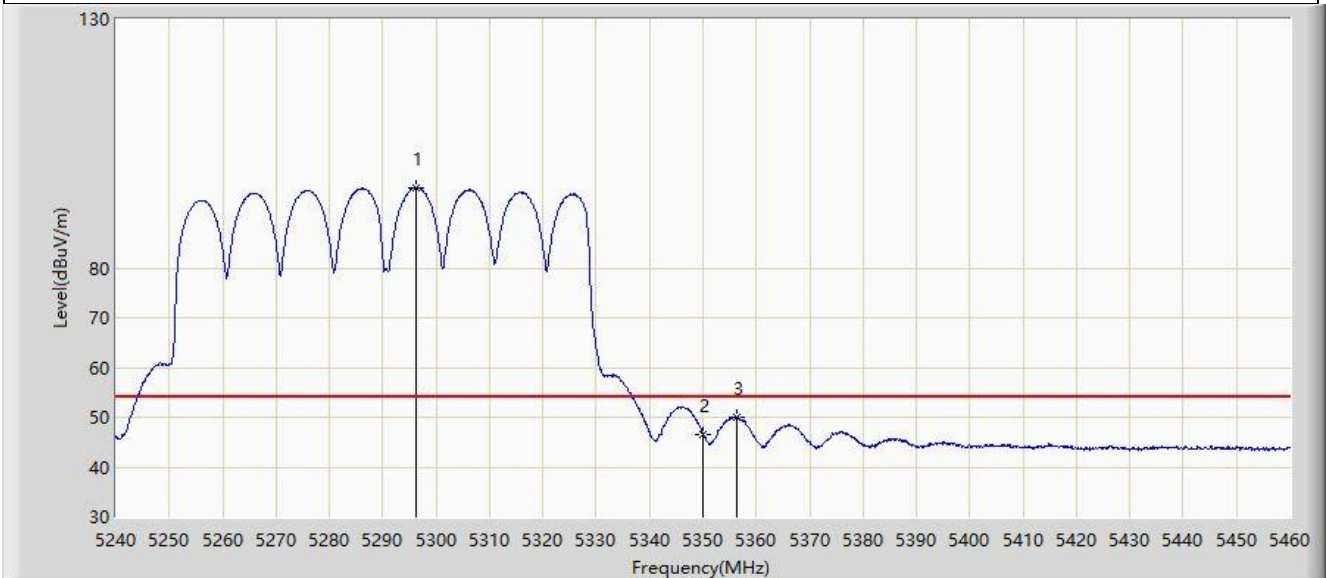


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5296.320	96.192	92.182	N/A	N/A	4.010	AV
2		5350.000	46.630	42.693	-7.370	54.000	3.937	AV
3	*	5356.380	50.065	46.194	-3.935	54.000	3.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

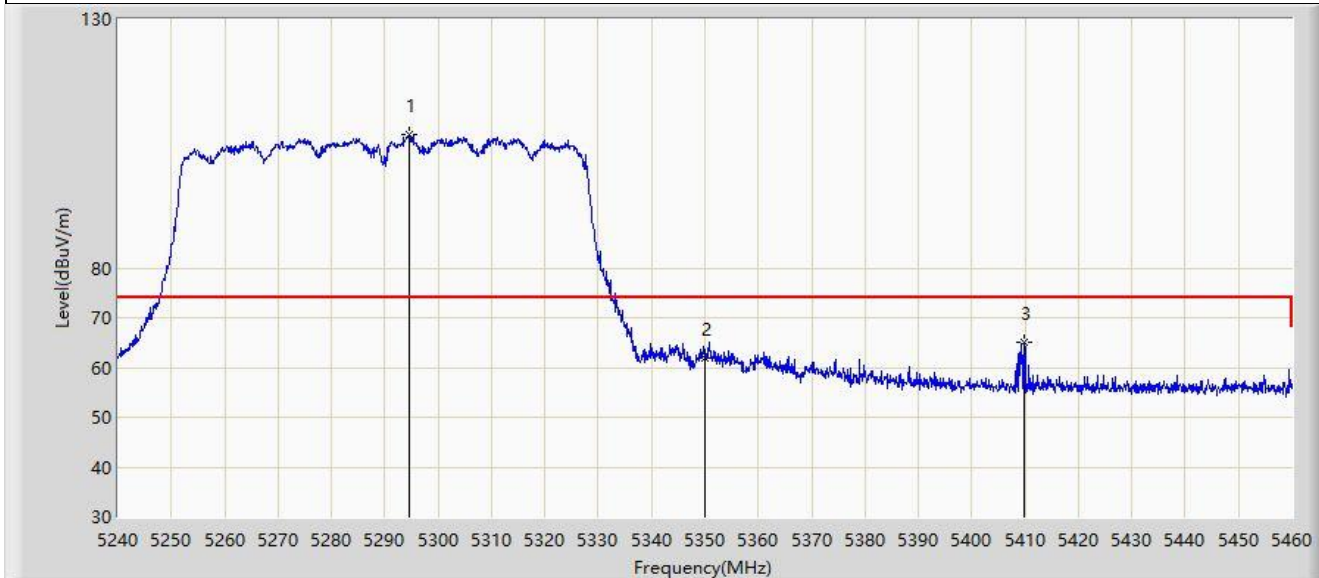


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5294.450	106.925	102.923	N/A	N/A	4.003	PK
2		5350.000	61.856	57.919	-12.144	74.000	3.937	PK
3	*	5409.950	65.169	61.125	-8.831	74.000	4.044	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

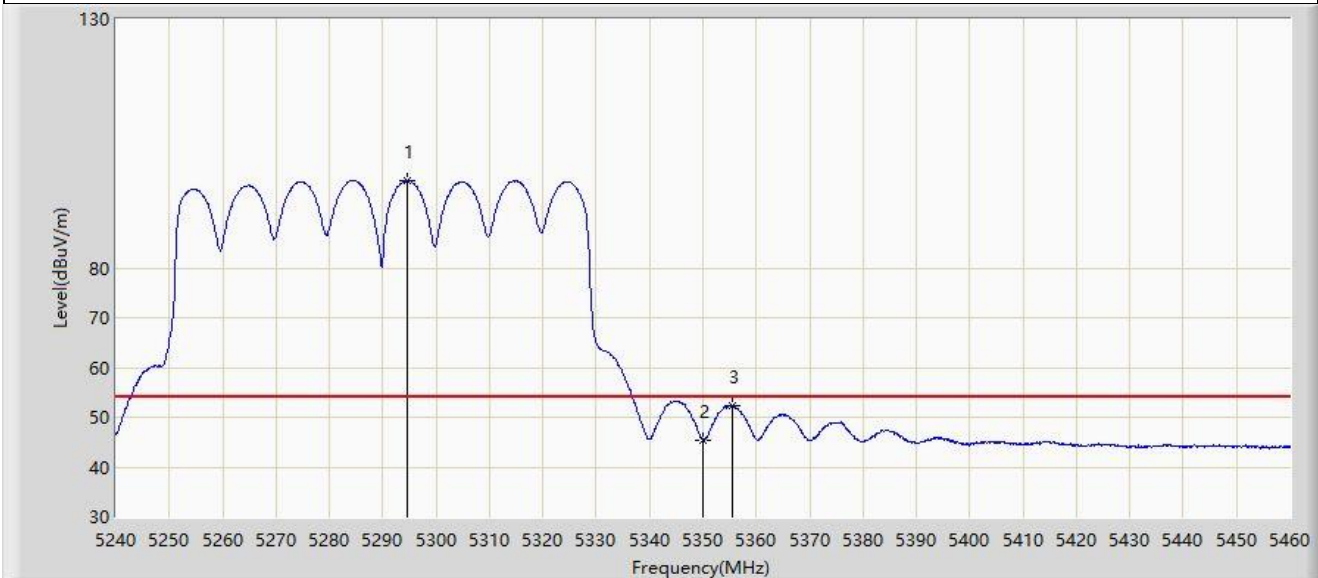


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5294.450	97.557	93.555	N/A	N/A	4.003	AV
2		5350.000	45.405	41.468	-8.595	54.000	3.937	AV
3	*	5355.610	52.253	48.377	-1.747	54.000	3.876	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

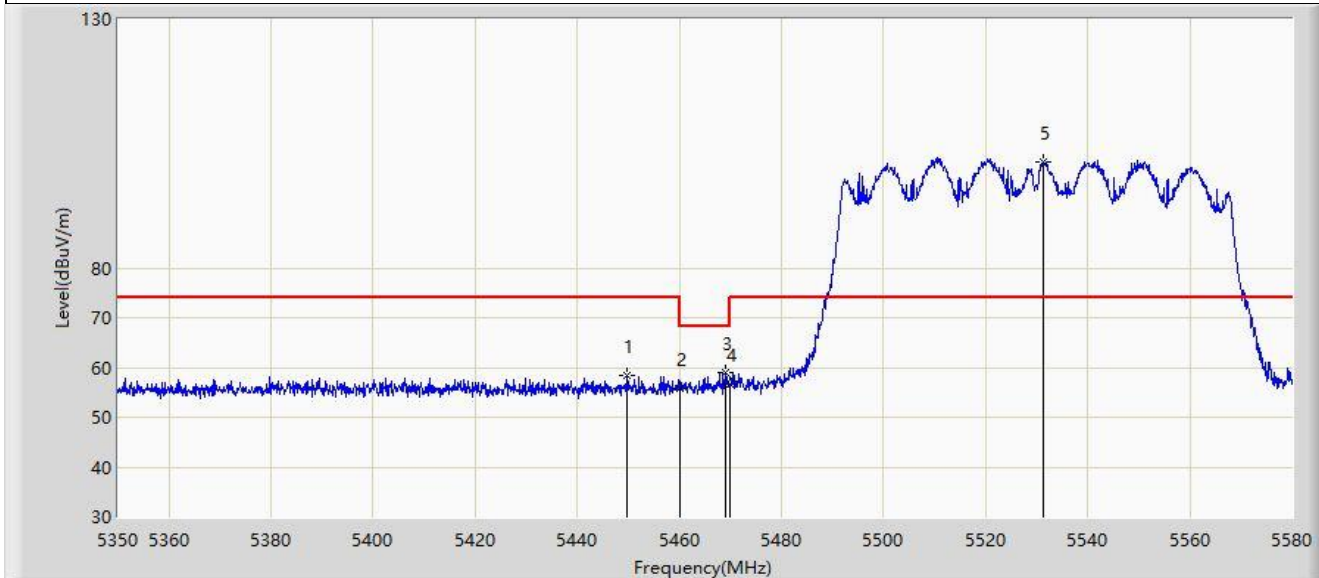


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5449.590	58.272	54.405	-15.728	74.000	3.868	PK
2		5460.000	55.721	51.789	-18.279	74.000	3.932	PK
3	*	5469.140	58.999	55.021	-9.201	68.200	3.978	PK
4		5470.000	56.591	52.609	-11.609	68.200	3.982	PK
5		5531.240	101.366	97.476	N/A	N/A	3.889	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

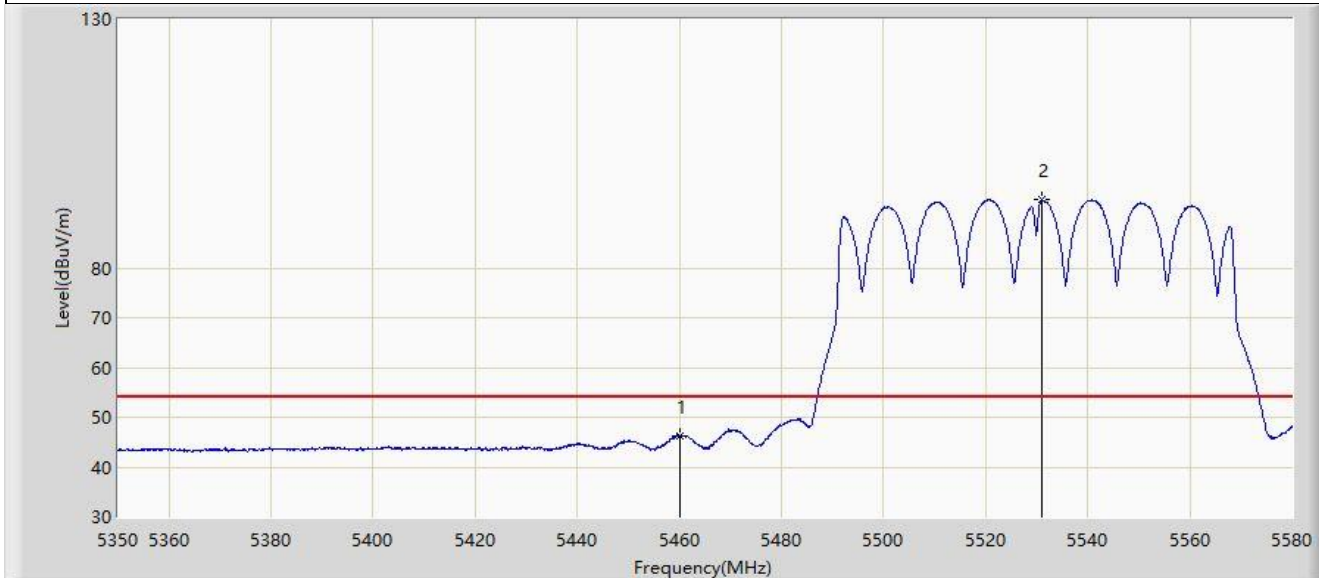


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5460.000	46.286	42.354	-7.714	54.000	3.932	AV
2		5531.010	93.707	89.818	N/A	N/A	3.889	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

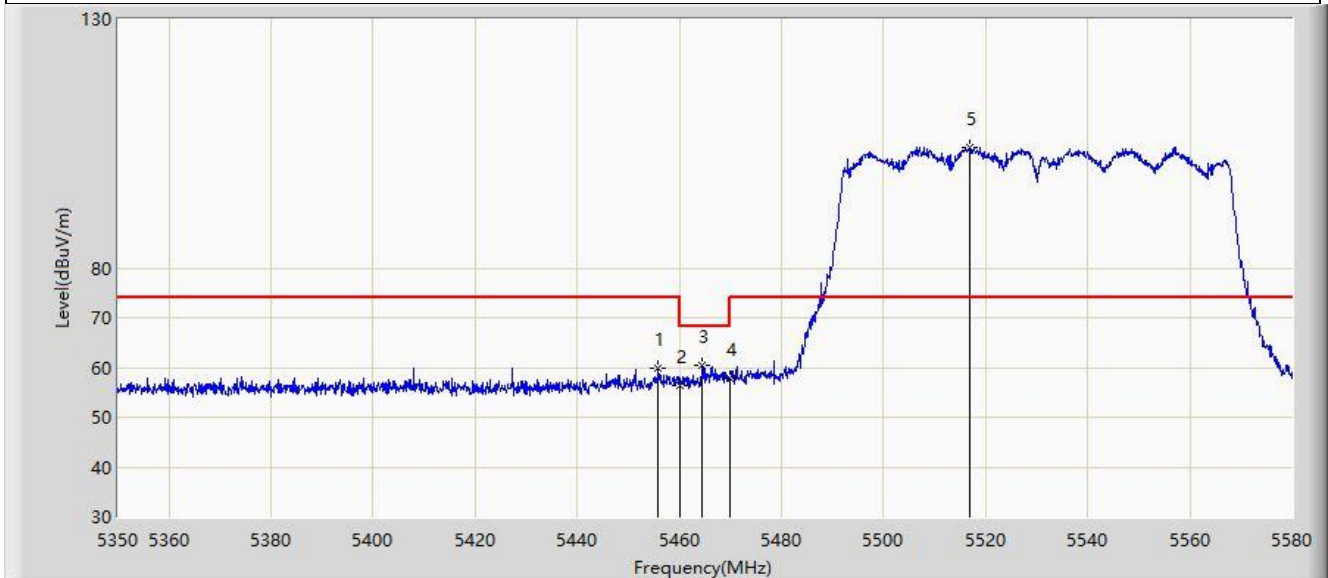


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5455.915	59.993	56.094	-14.007	74.000	3.899	PK
2		5460.000	56.453	52.521	-17.547	74.000	3.932	PK
3	*	5464.425	60.402	56.448	-7.798	68.200	3.955	PK
4		5470.000	57.910	53.928	-10.290	68.200	3.982	PK
5		5516.980	104.087	100.087	N/A	N/A	4.000	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

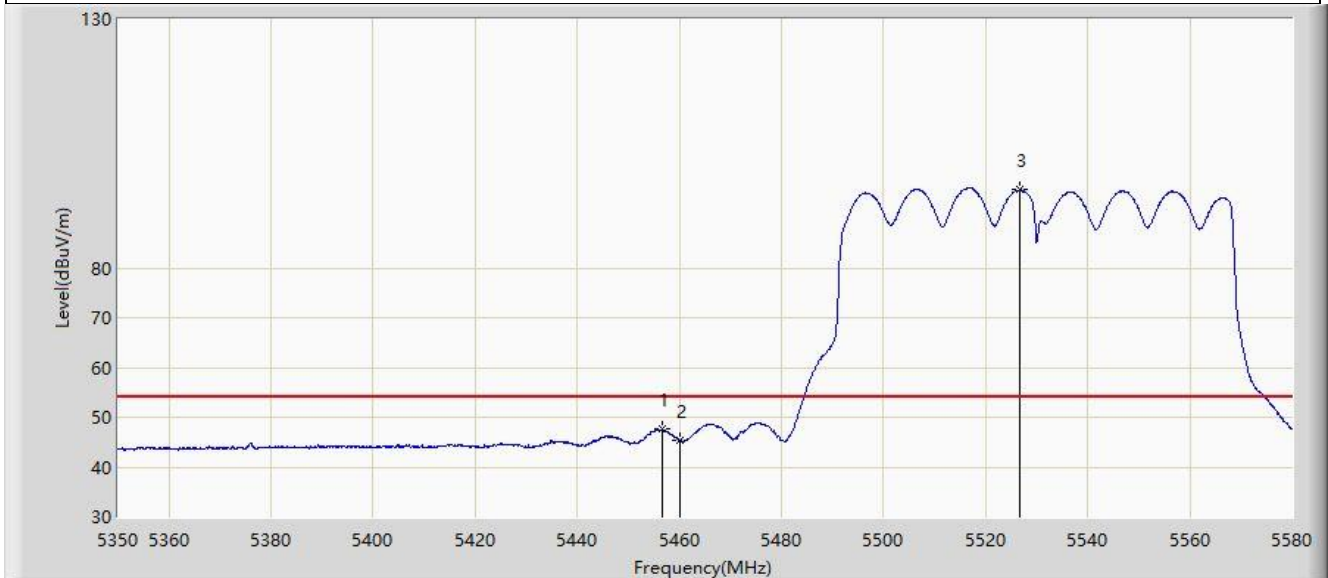


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5456.605	47.663	43.752	-6.337	54.000	3.911	AV
2		5460.000	45.417	41.485	-8.583	54.000	3.932	AV
3		5526.755	95.700	91.799	N/A	N/A	3.901	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

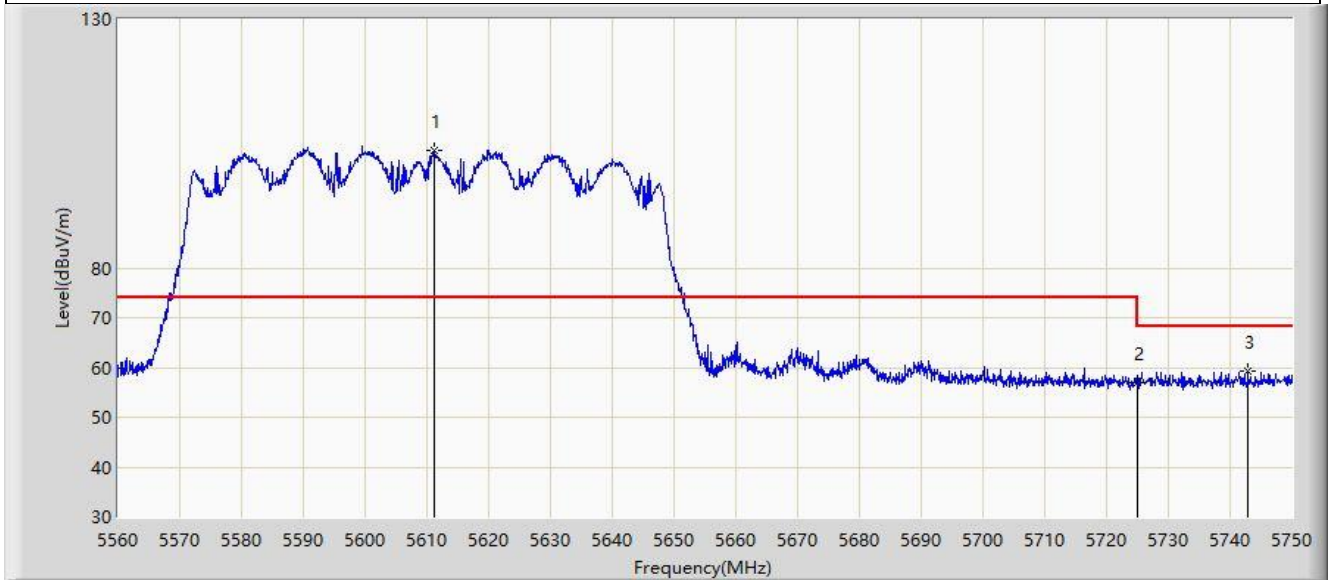


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5611.110	103.503	99.312	N/A	N/A	4.191	PK
2		5725.000	57.023	52.474	-11.177	68.200	4.549	PK
3	*	5742.875	59.398	54.604	-8.802	68.200	4.794	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

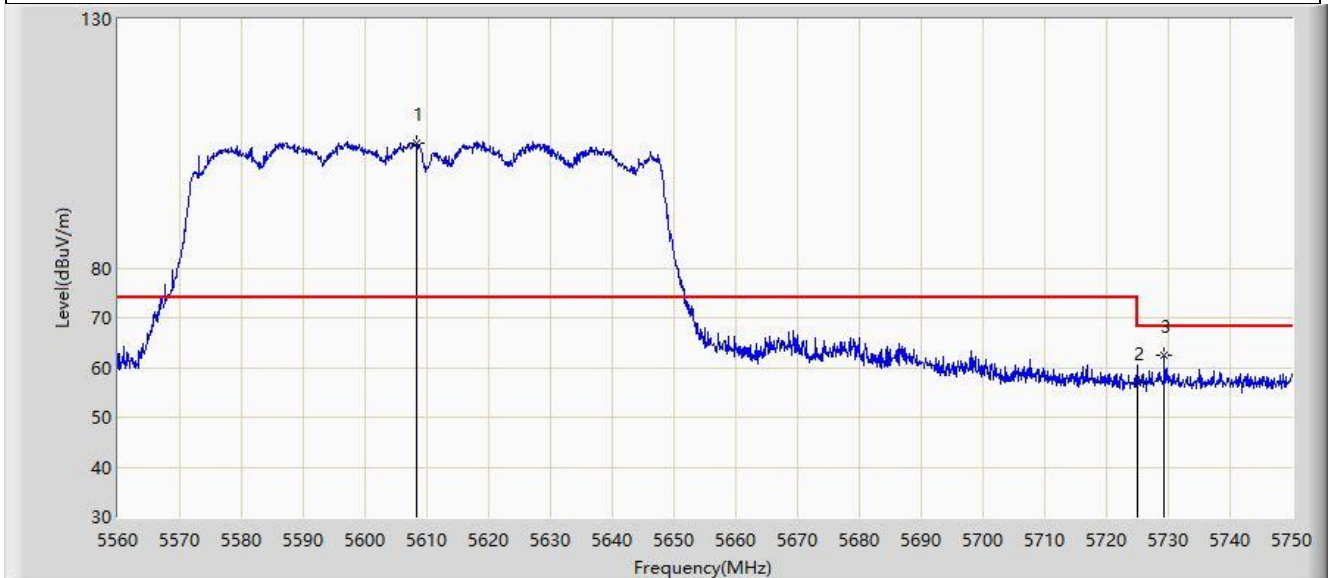


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5608.355	105.194	100.992	N/A	N/A	4.203	PK
2		5725.000	56.839	52.290	-11.361	68.200	4.549	PK
3	*	5729.385	62.320	57.719	-5.880	68.200	4.602	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

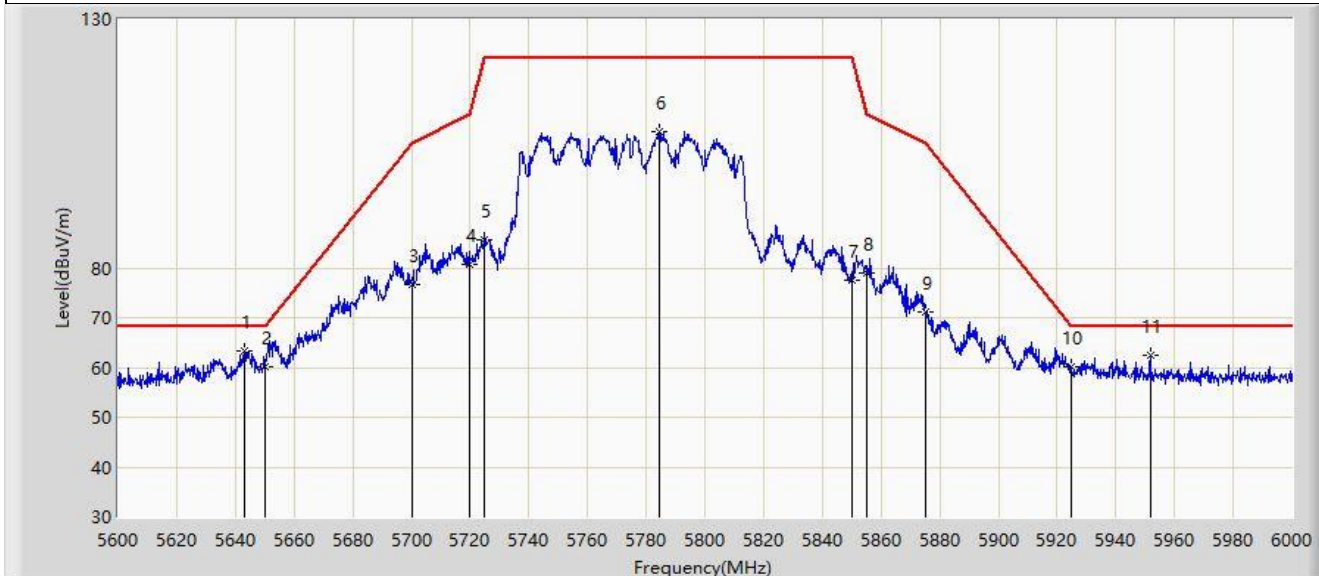


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.000	63.435	59.231	-4.765	68.200	4.204	PK
2		5650.000	60.246	55.863	-7.954	68.200	4.382	PK
3		5700.000	76.743	72.269	-28.457	105.200	4.474	PK
4		5720.000	80.627	76.104	-30.173	110.800	4.523	PK
5		5725.000	85.538	80.989	-36.662	122.200	4.549	PK
6		5784.600	107.250	102.371	N/A	N/A	4.879	PK
7		5850.000	77.635	72.474	-44.565	122.200	5.161	PK
8		5855.000	79.080	73.973	-31.720	110.800	5.107	PK
9		5875.000	71.204	66.199	-33.996	105.200	5.006	PK
10		5925.000	60.153	54.838	-8.047	68.200	5.315	PK
11		5951.800	62.541	57.371	-5.659	68.200	5.170	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

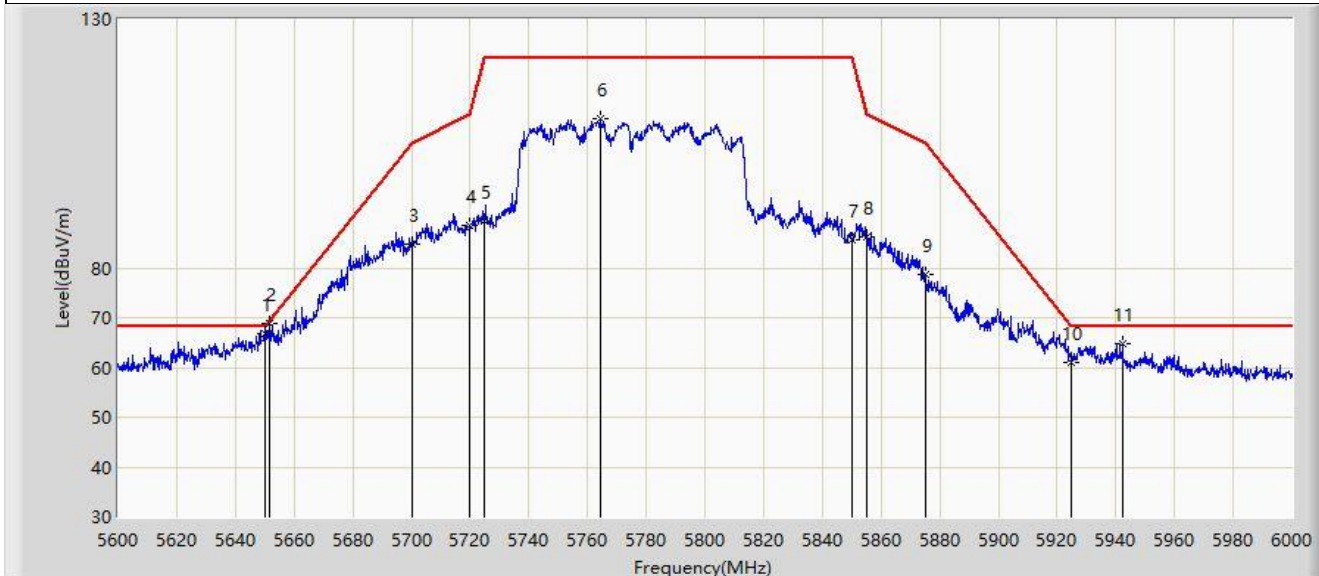


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5650.000	66.803	62.420	-1.397	68.200	4.382	PK
2	*	5651.800	68.957	64.529	-0.580	69.538	4.428	PK
3		5700.000	84.719	80.245	-20.481	105.200	4.474	PK
4		5720.000	88.421	83.898	-22.379	110.800	4.523	PK
5		5725.000	89.287	84.738	-32.913	122.200	4.549	PK
6		5764.200	110.018	105.129	N/A	N/A	4.890	PK
7		5850.000	85.737	80.576	-36.463	122.200	5.161	PK
8		5855.000	86.365	81.258	-24.435	110.800	5.107	PK
9		5875.000	78.743	73.738	-26.457	105.200	5.006	PK
10		5925.000	61.075	55.760	-7.125	68.200	5.315	PK
11		5942.400	64.642	59.442	-3.558	68.200	5.200	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

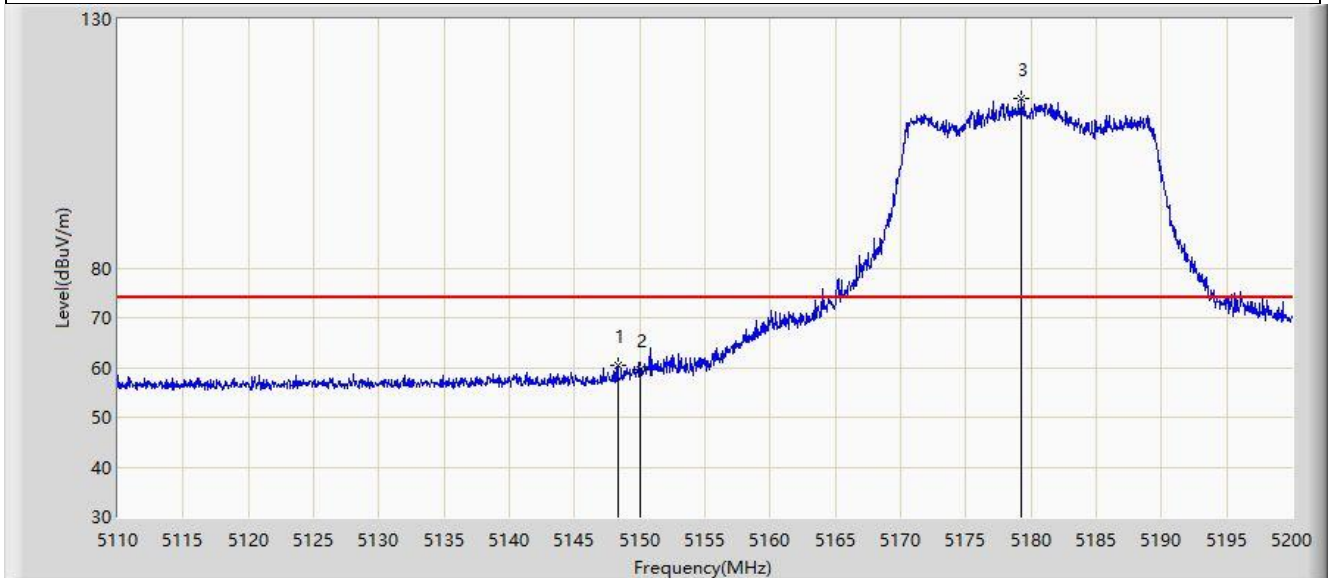


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.295	60.452	56.212	-13.548	74.000	4.241	PK
2		5150.000	59.464	55.228	-14.536	74.000	4.236	PK
3		5179.255	114.005	110.024	N/A	N/A	3.981	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

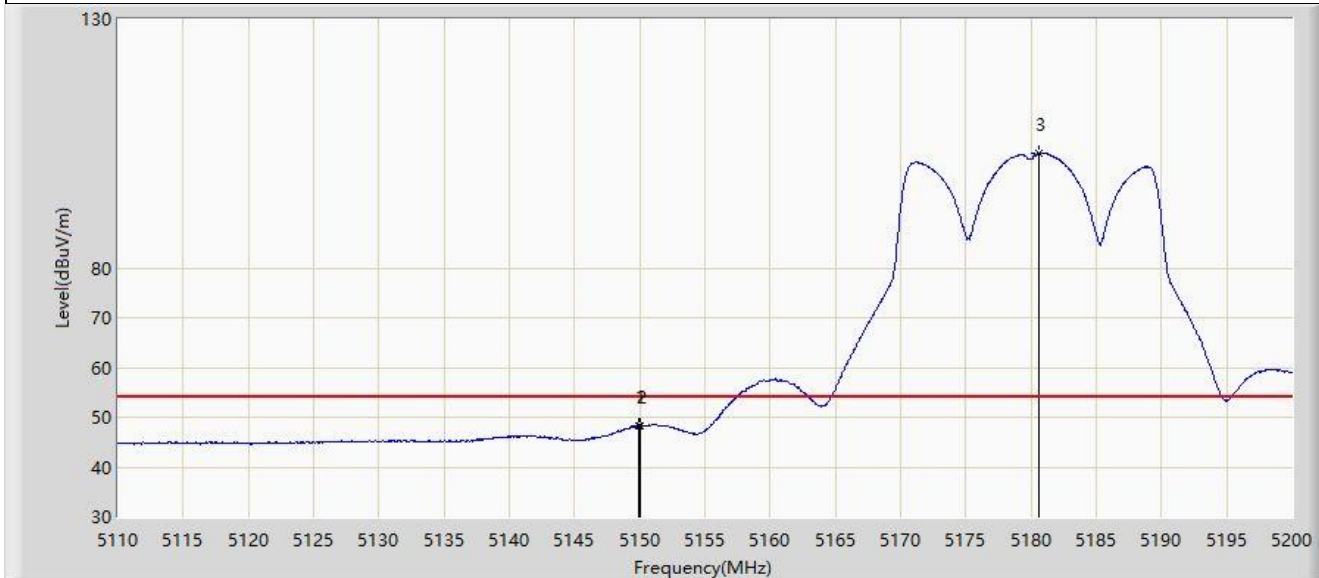


No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1	*	5149.915	48.273	44.037	-5.727	54.000	4.236	AV
2		5150.000	48.216	43.980	-5.784	54.000	4.236	AV
3		5180.650	102.971	98.990	N/A	N/A	3.981	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

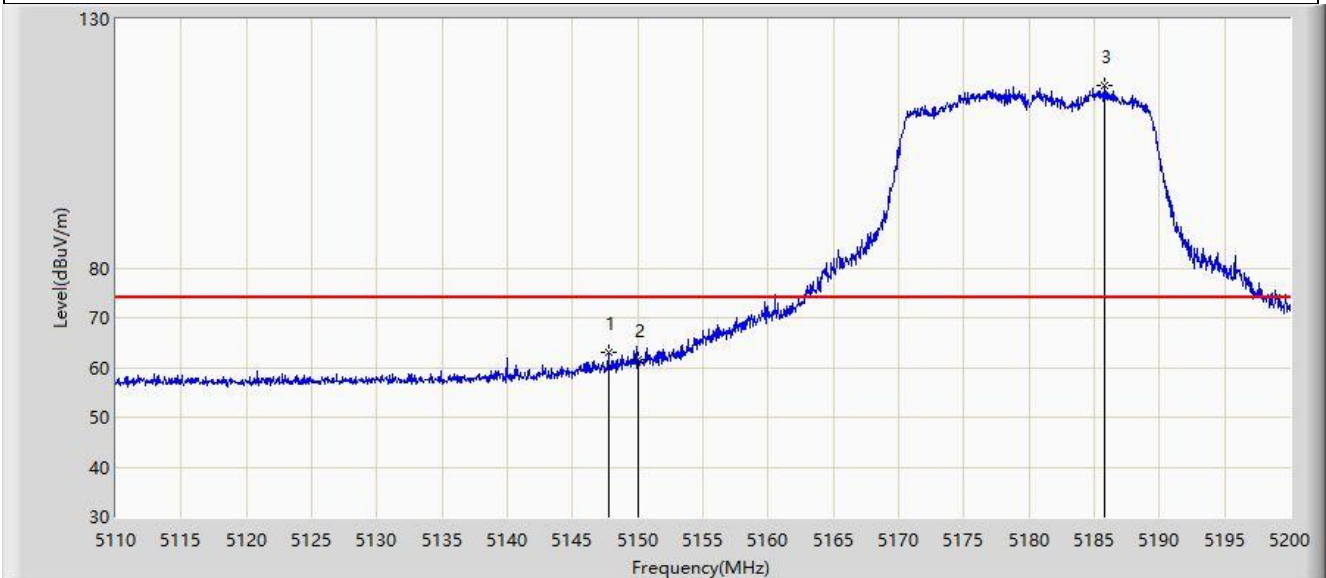


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.755	63.166	58.927	-10.834	74.000	4.239	PK
2		5150.000	61.555	57.319	-12.445	74.000	4.236	PK
3		5185.780	116.754	112.743	N/A	N/A	4.010	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

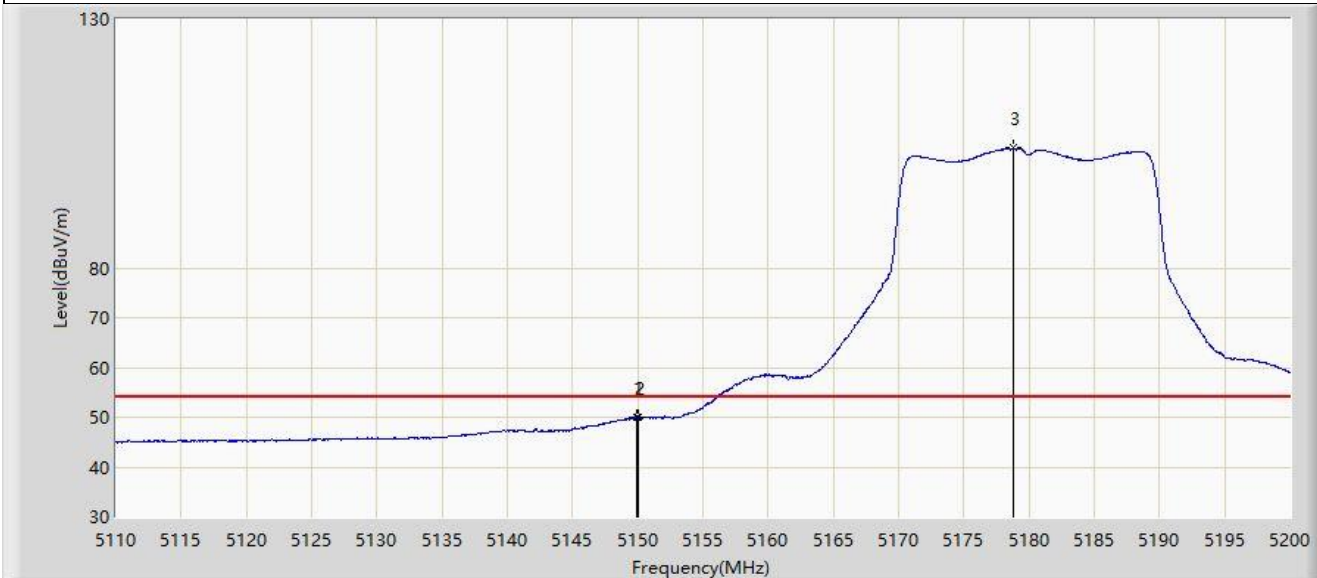


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.915	49.980	45.744	-4.020	54.000	4.236	AV
2		5150.000	49.974	45.738	-4.026	54.000	4.236	AV
3		5178.760	104.102	100.121	N/A	N/A	3.982	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

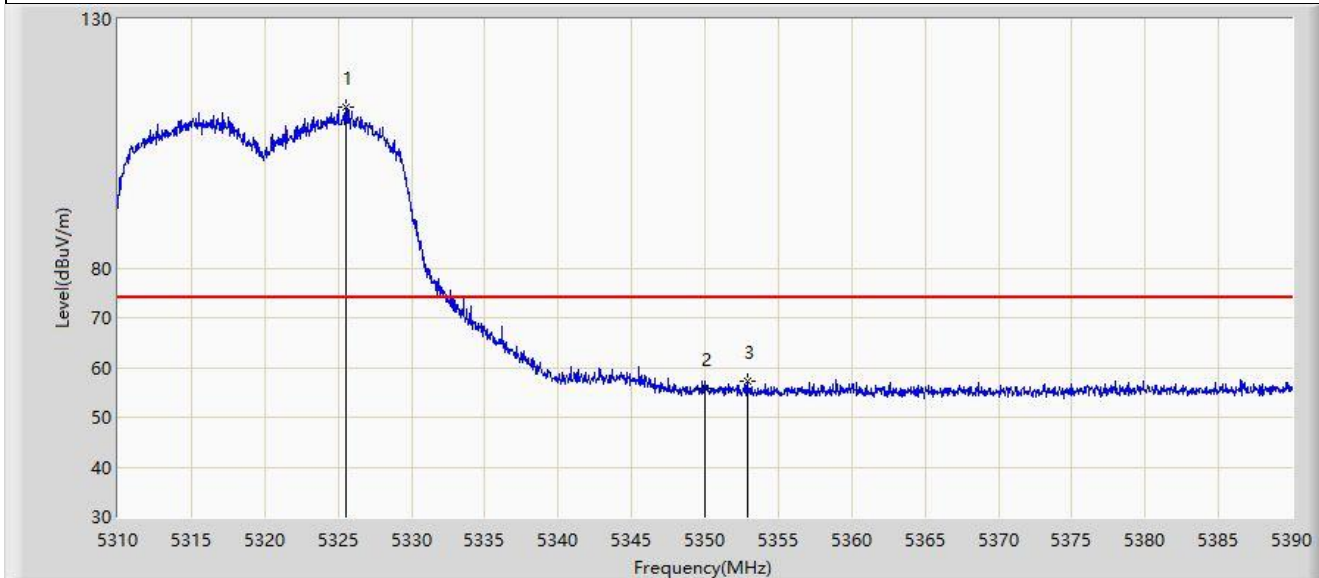


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5325.560	112.344	108.274	N/A	N/A	4.070	PK
2		5350.000	55.690	51.753	-18.310	74.000	3.937	PK
3	*	5352.880	57.301	53.408	-16.699	74.000	3.893	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

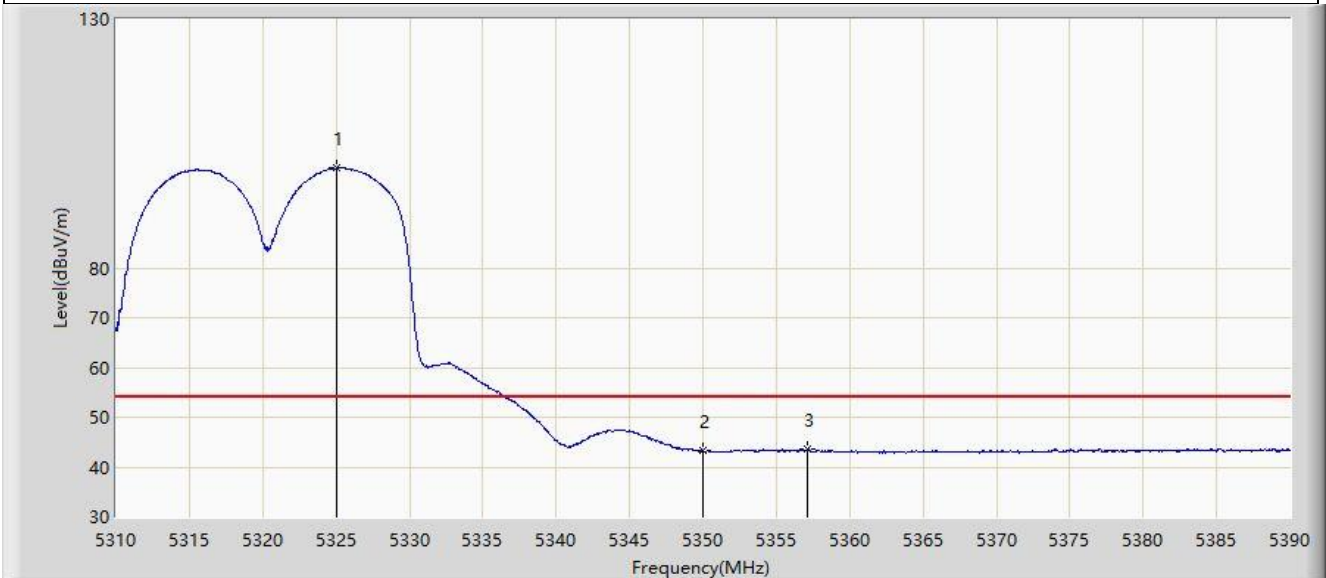


No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1		5325.080	100.085	96.014	N/A	N/A	4.071	AV
2		5350.000	43.249	39.312	-10.751	54.000	3.937	AV
3	*	5357.160	43.527	39.660	-10.473	54.000	3.866	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

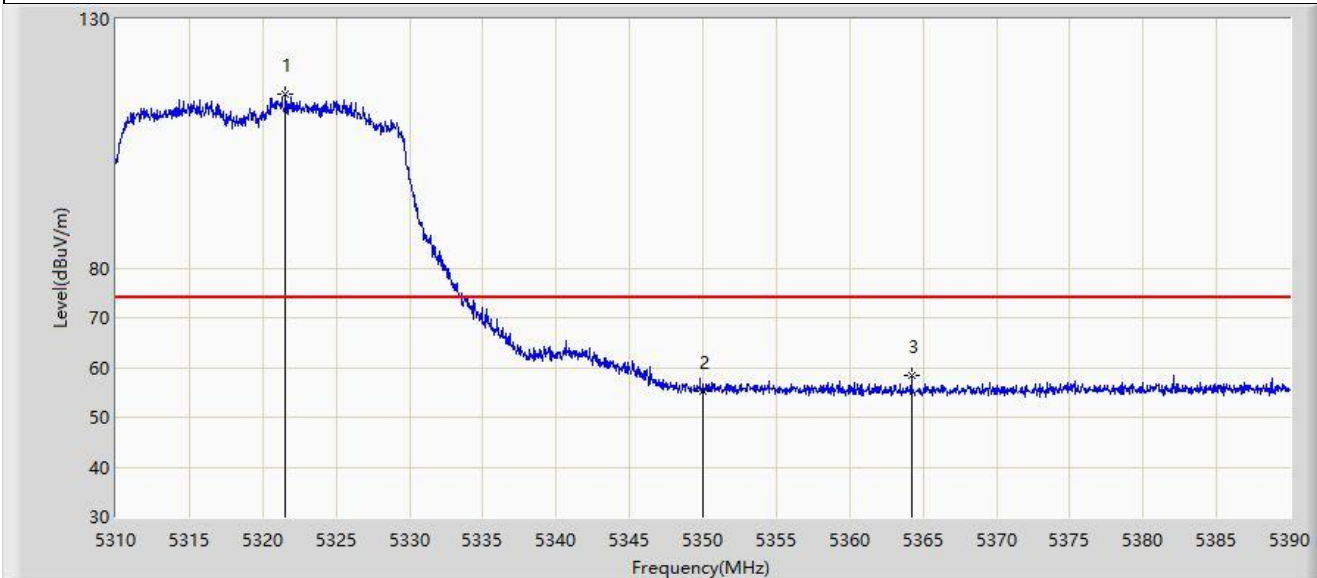


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.560	114.792	110.714	N/A	N/A	4.078	PK
2		5350.000	55.337	51.400	-18.663	74.000	3.937	PK
3	*	5364.200	58.527	54.703	-15.473	74.000	3.824	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

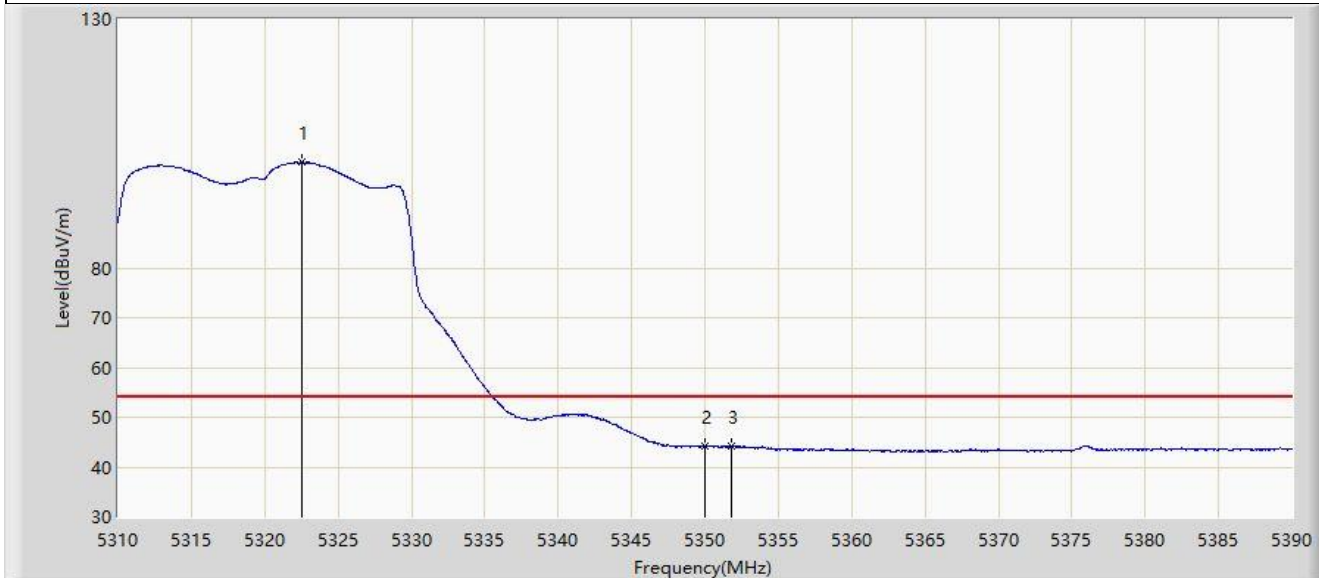


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.520	101.253	97.177	N/A	N/A	4.076	AV
2		5350.000	44.066	40.129	-9.934	54.000	3.937	AV
3	*	5351.760	44.195	40.292	-9.805	54.000	3.902	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

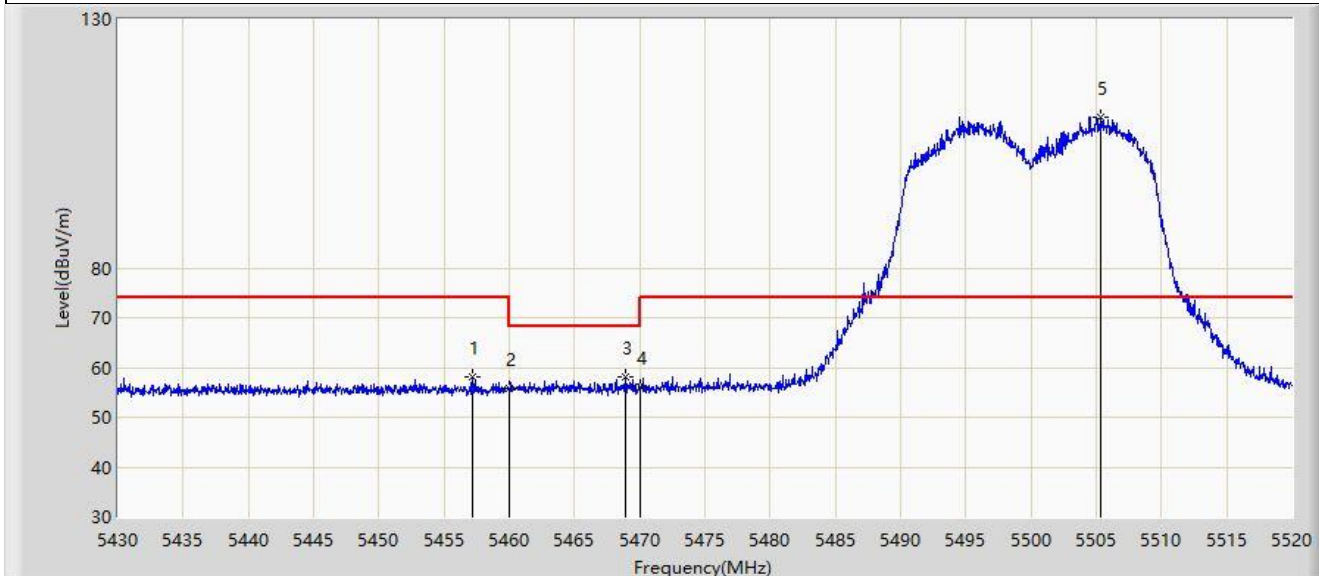


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5457.135	58.206	54.288	-15.794	74.000	3.918	PK
2		5460.000	55.699	51.767	-18.301	74.000	3.932	PK
3	*	5468.925	58.085	54.108	-10.115	68.200	3.977	PK
4		5470.000	56.034	52.052	-12.166	68.200	3.982	PK
5		5505.375	110.421	106.304	N/A	N/A	4.116	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

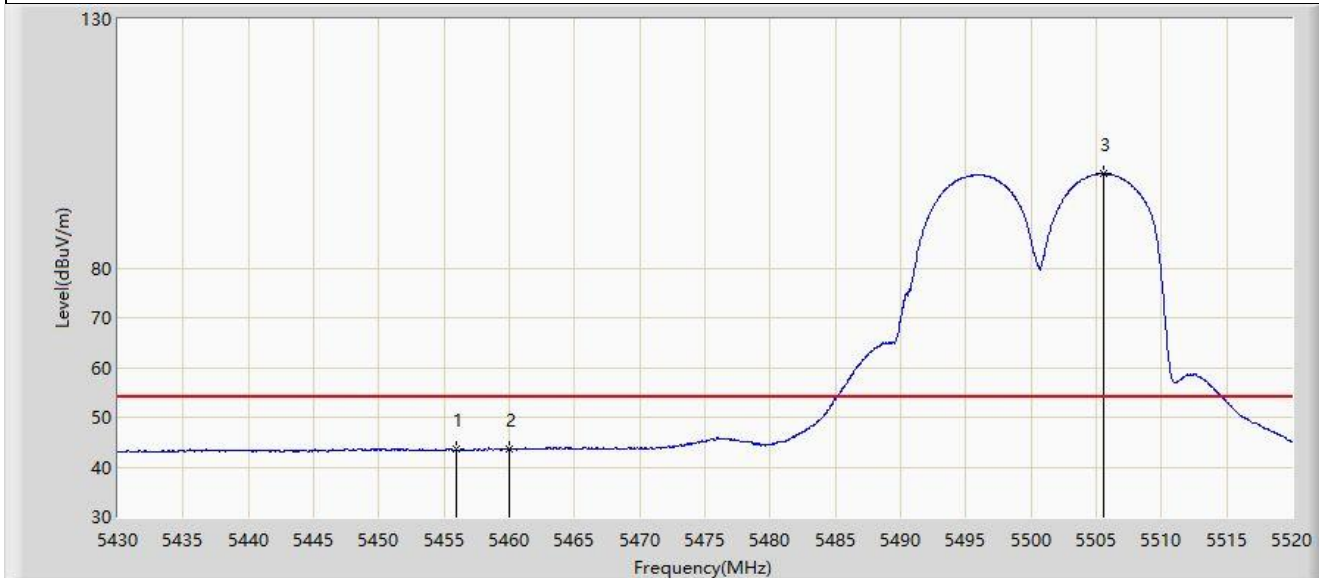


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5455.965	43.615	39.715	-10.385	54.000	3.899	AV
2		5460.000	43.555	39.623	-10.445	54.000	3.932	AV
3		5505.555	98.951	94.836	N/A	N/A	4.115	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

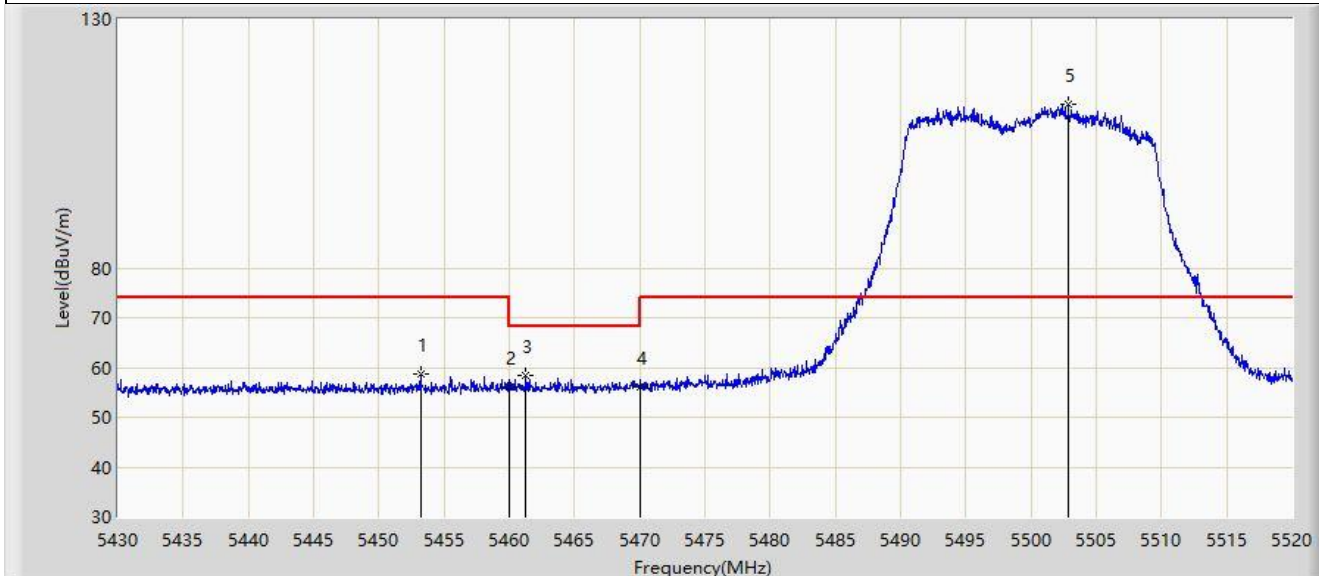


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.220	58.782	54.916	-15.218	74.000	3.867	PK
2		5460.000	56.008	52.076	-17.992	74.000	3.932	PK
3	*	5461.230	58.540	54.602	-9.660	68.200	3.939	PK
4		5470.000	56.002	52.020	-12.198	68.200	3.982	PK
5		5502.855	112.766	108.626	N/A	N/A	4.139	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

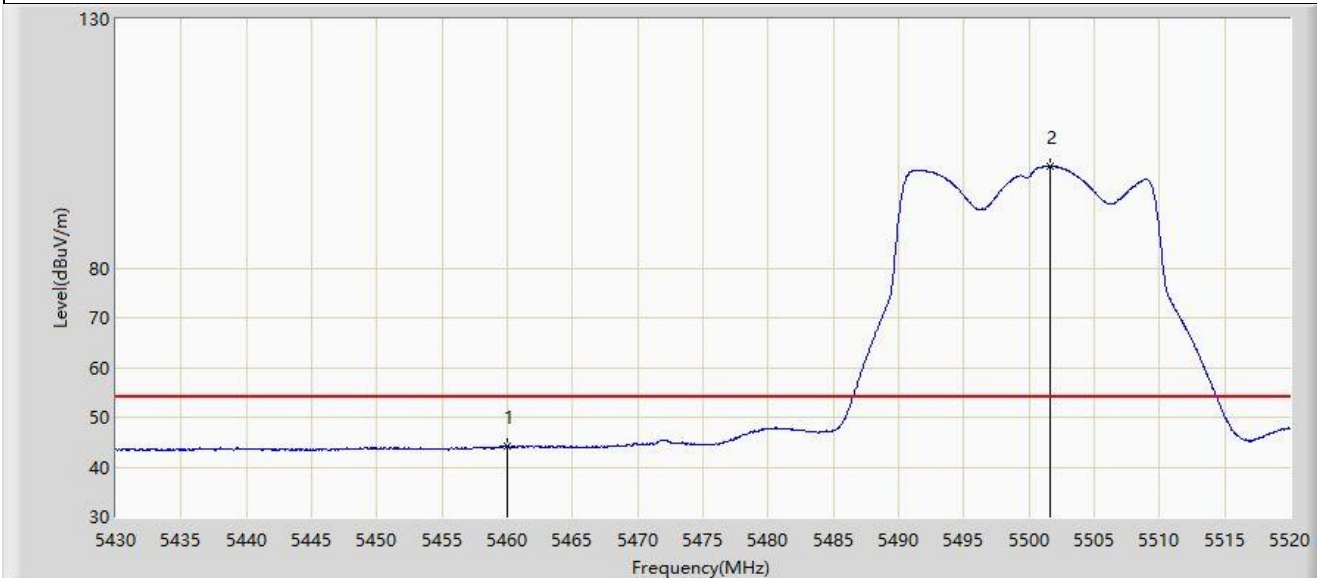


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	44.062	40.130	-9.938	54.000	3.932	AV
2		5501.595	100.418	96.267	N/A	N/A	4.151	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

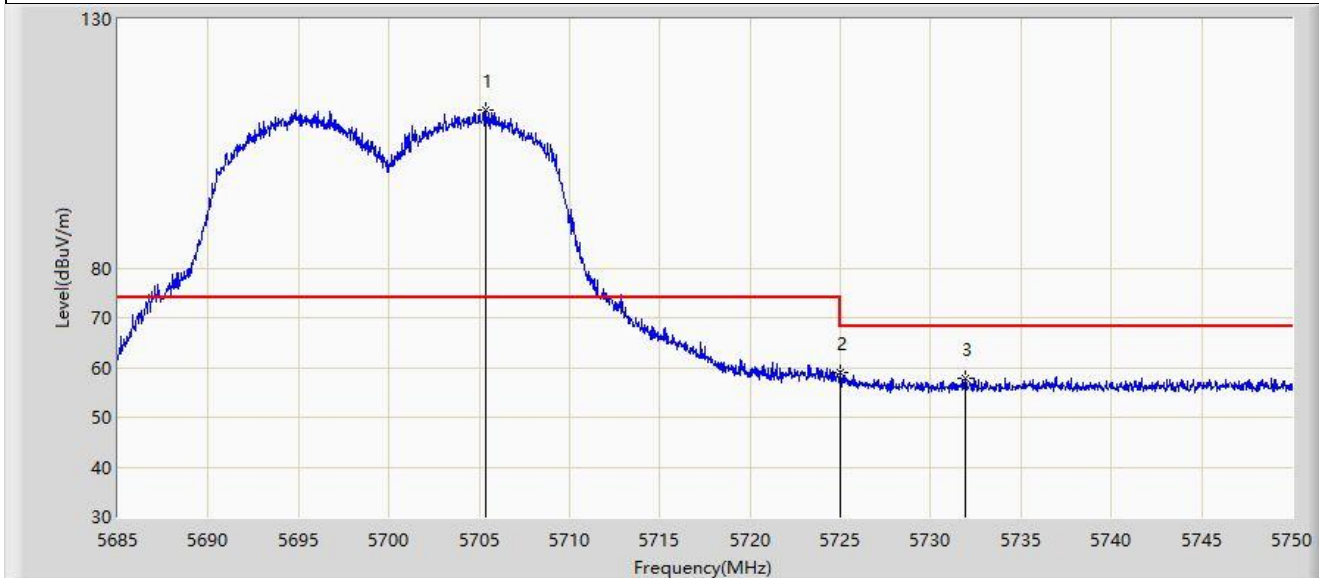


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5705.345	111.596	107.127	N/A	N/A	4.469	PK
2	*	5725.000	58.876	54.327	-9.324	68.200	4.549	PK
3		5731.897	57.933	53.296	-10.267	68.200	4.638	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

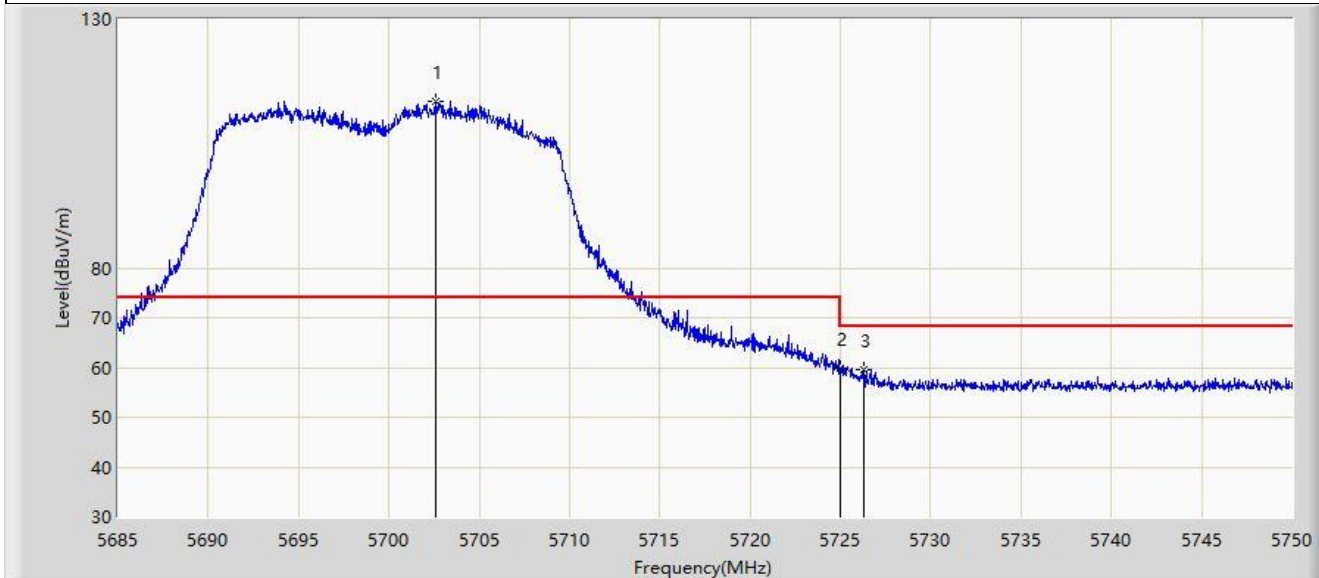


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.583	113.491	109.020	N/A	N/A	4.471	PK
2	*	5725.000	59.790	55.241	-8.410	68.200	4.549	PK
3		5726.275	59.670	55.113	-8.530	68.200	4.557	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

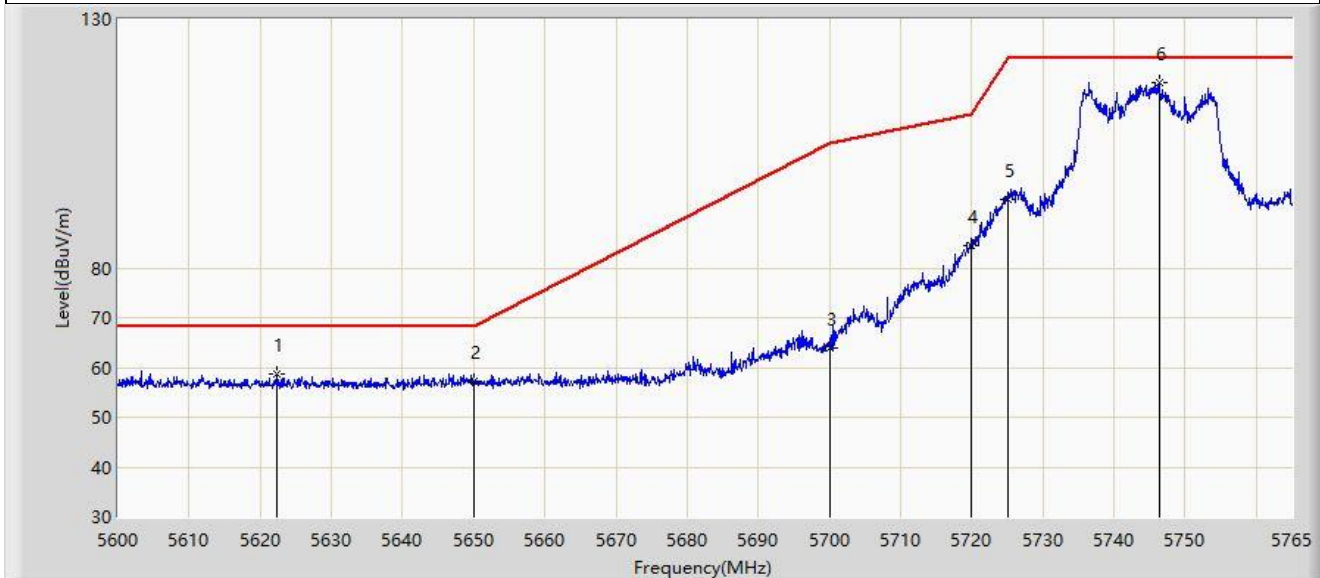


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5622.357	58.645	54.514	-9.555	68.200	4.131	PK
2		5650.000	57.188	52.805	-11.012	68.200	4.382	PK
3		5700.000	63.819	59.345	-41.381	105.200	4.474	PK
4		5720.000	84.598	80.075	-26.202	110.800	4.523	PK
5		5725.000	93.731	89.182	-28.469	122.200	4.549	PK
6		5746.355	117.333	112.521	N/A	N/A	4.812	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

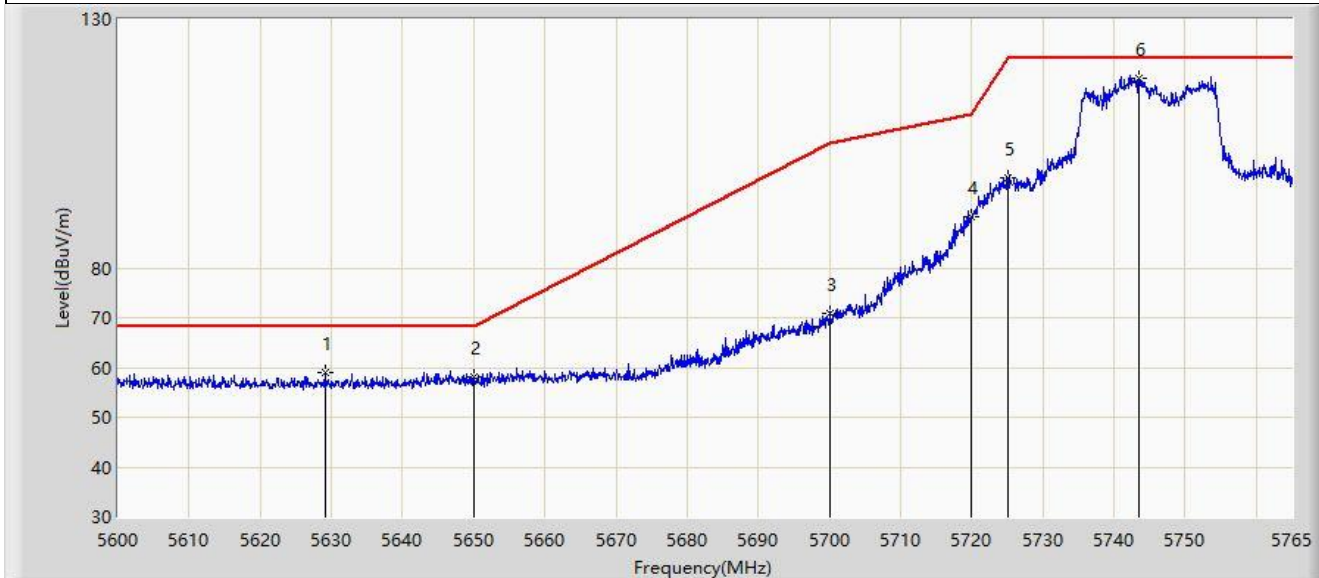


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5629.123	59.052	54.944	-9.148	68.200	4.107	PK
2		5650.000	58.161	53.778	-10.039	68.200	4.382	PK
3		5700.000	70.930	66.456	-34.270	105.200	4.474	PK
4		5720.000	90.241	85.718	-20.559	110.800	4.523	PK
5		5725.000	98.167	93.618	-24.033	122.200	4.549	PK
6		5743.550	118.064	113.266	N/A	N/A	4.798	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

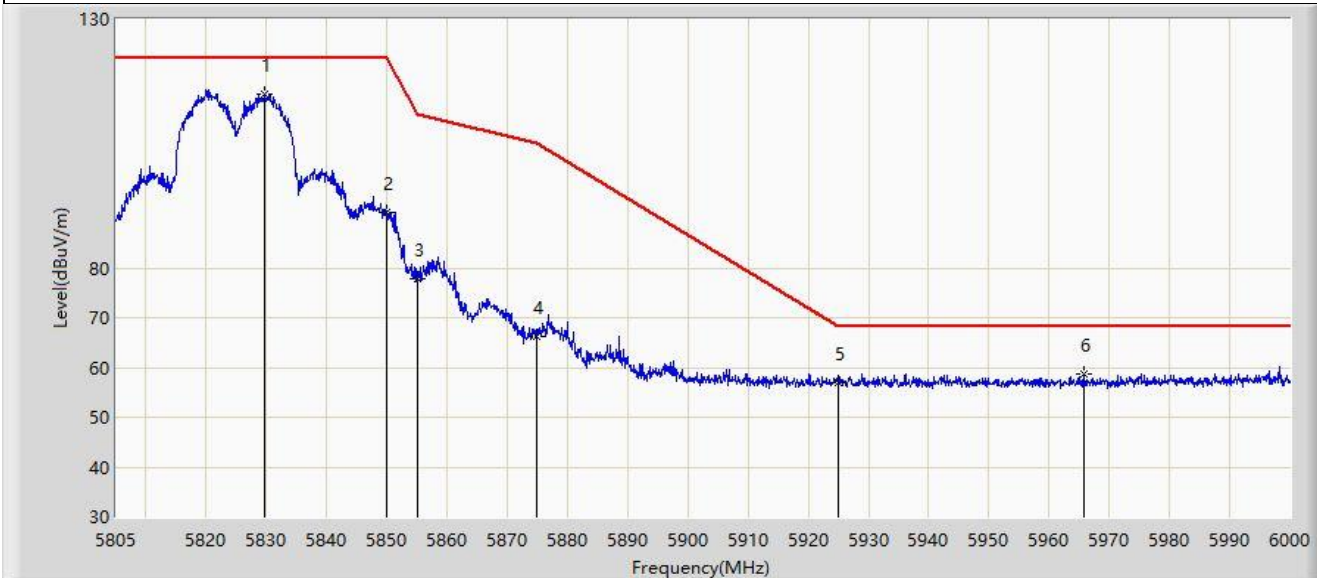


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5829.667	114.996	109.849	N/A	N/A	5.147	PK
2		5850.000	91.058	85.897	-31.142	122.200	5.161	PK
3		5855.000	77.694	72.587	-33.106	110.800	5.107	PK
4		5875.000	66.196	61.191	-39.004	105.200	5.006	PK
5		5925.000	56.903	51.588	-11.297	68.200	5.315	PK
6	*	5965.875	58.783	53.654	-9.417	68.200	5.129	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

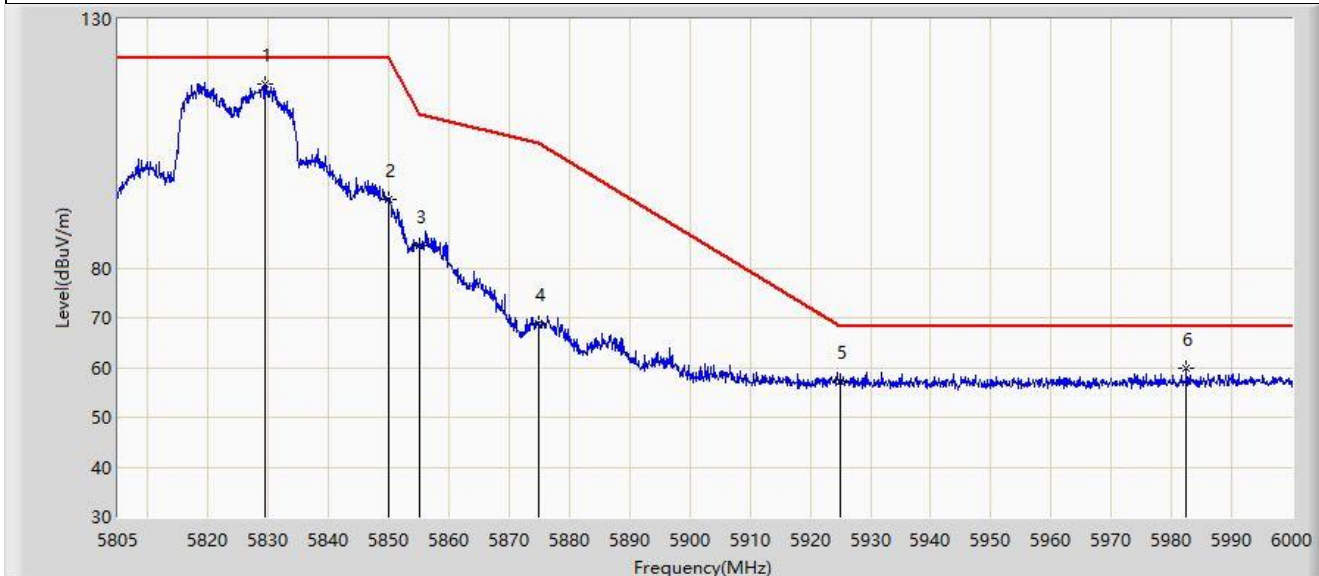


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5829.375	116.885	111.736	N/A	N/A	5.149	PK
2		5850.000	93.628	88.467	-28.572	122.200	5.161	PK
3		5855.000	84.402	79.295	-26.398	110.800	5.107	PK
4		5875.000	68.980	63.975	-36.220	105.200	5.006	PK
5		5925.000	57.384	52.069	-10.816	68.200	5.315	PK
6	*	5982.450	59.960	54.744	-8.240	68.200	5.216	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

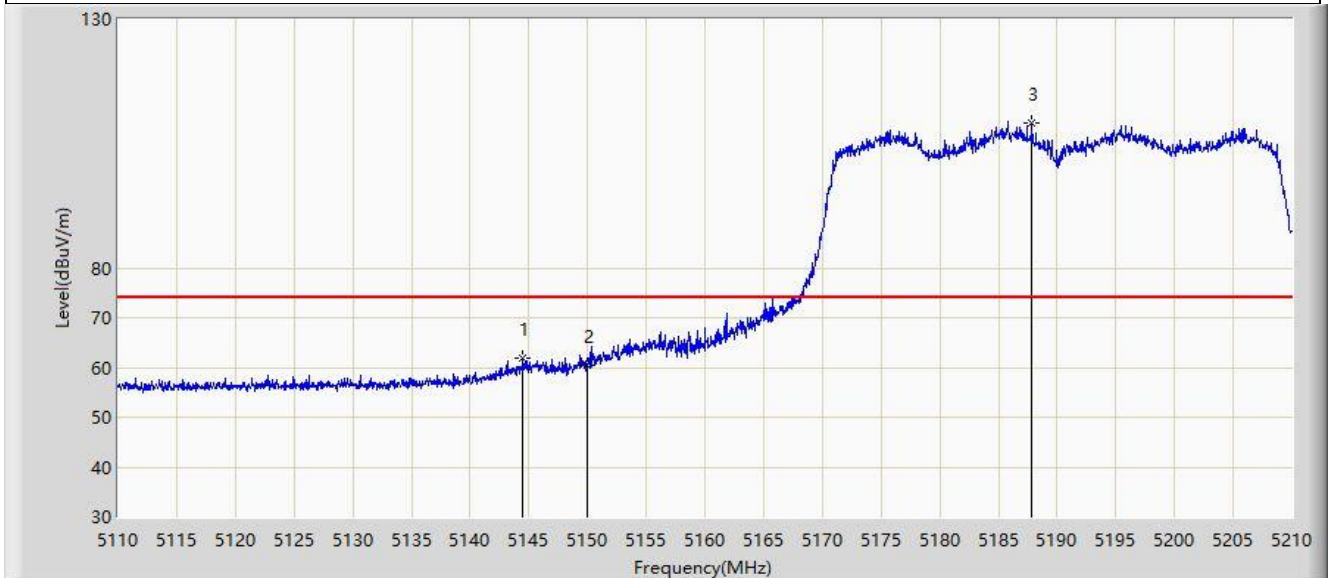


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5144.450	61.988	57.770	-12.012	74.000	4.217	PK
2		5150.000	60.555	56.319	-13.445	74.000	4.236	PK
3		5187.850	109.124	105.102	N/A	N/A	4.022	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

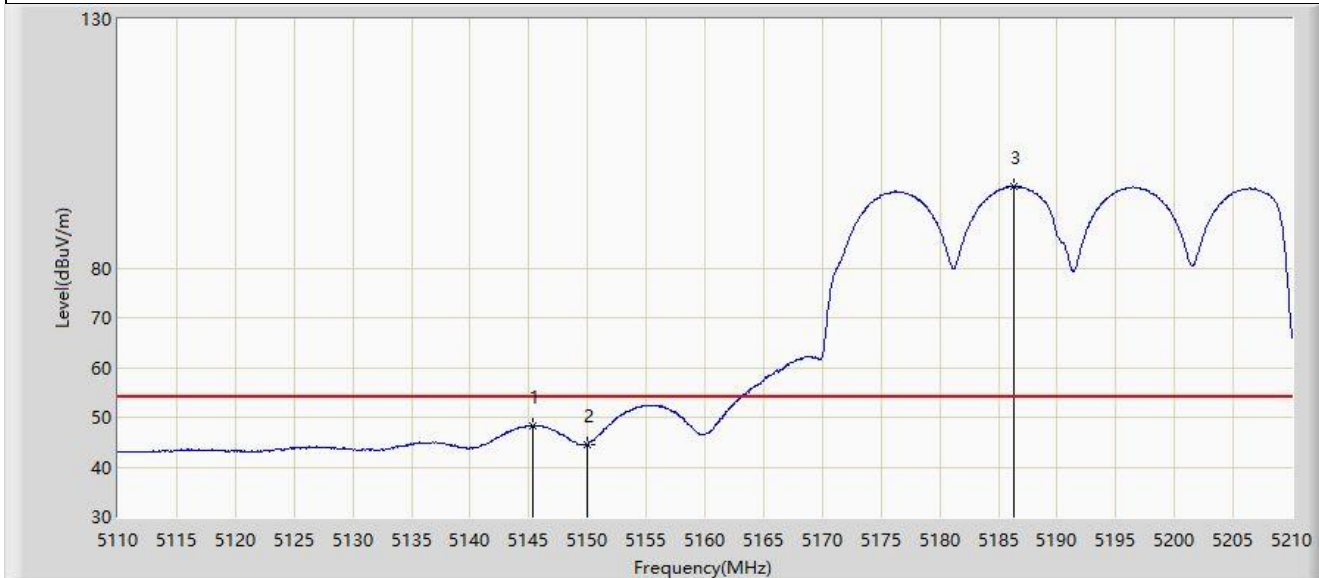


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.400	48.262	44.038	-5.738	54.000	4.224	AV
2		5150.000	44.503	40.267	-9.497	54.000	4.236	AV
3		5186.300	96.368	92.353	N/A	N/A	4.016	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

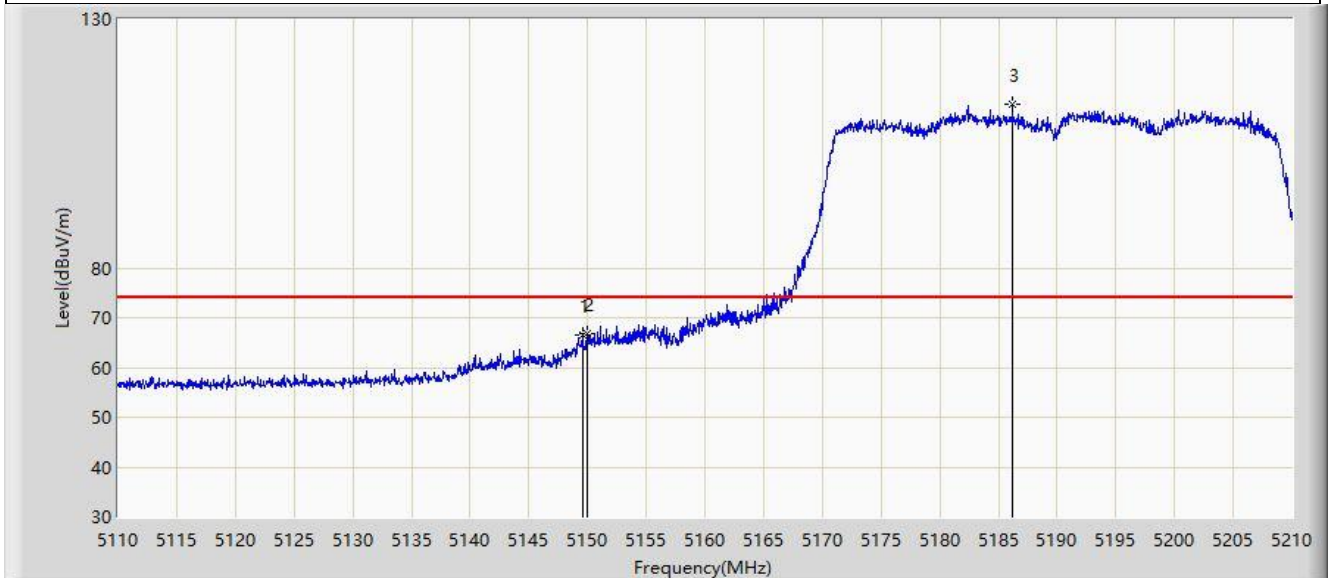


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5149.550	66.486	62.249	-7.514	74.000	4.237	PK
2	*	5150.000	66.924	62.688	-7.076	74.000	4.236	PK
3		5186.200	112.760	108.746	N/A	N/A	4.015	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

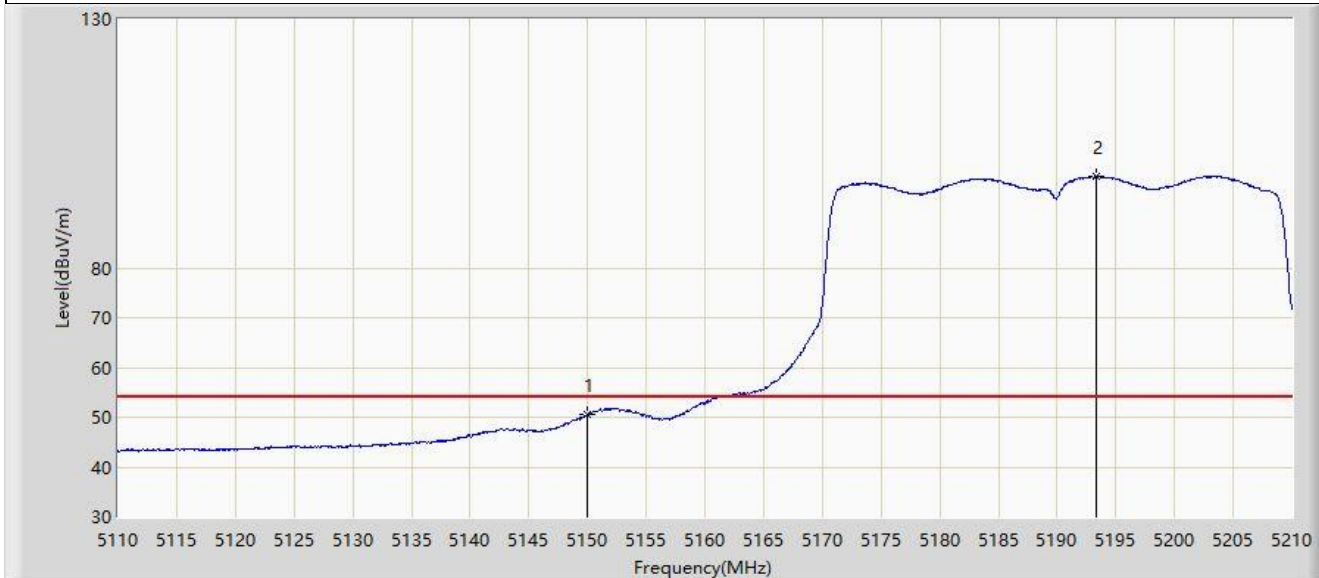


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	50.476	46.240	-3.524	54.000	4.236	AV
2		5193.300	98.422	94.415	N/A	N/A	4.007	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

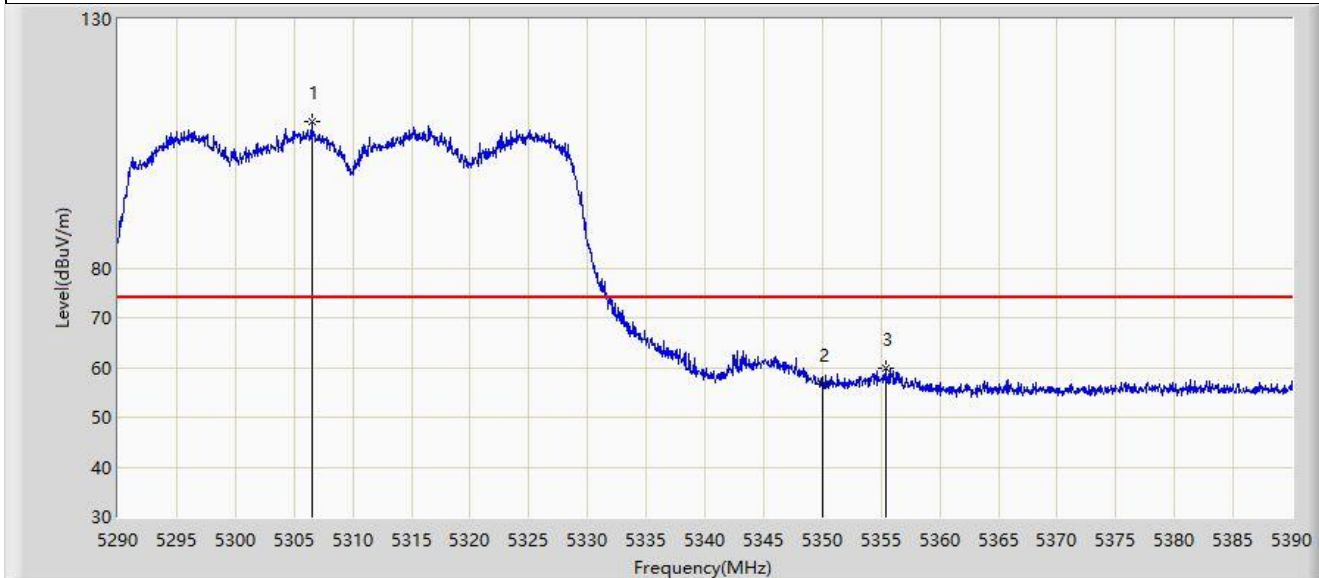


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.500	109.510	105.492	N/A	N/A	4.018	PK
2		5350.000	56.598	52.661	-17.402	74.000	3.937	PK
3	*	5355.450	59.779	55.902	-14.221	74.000	3.878	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

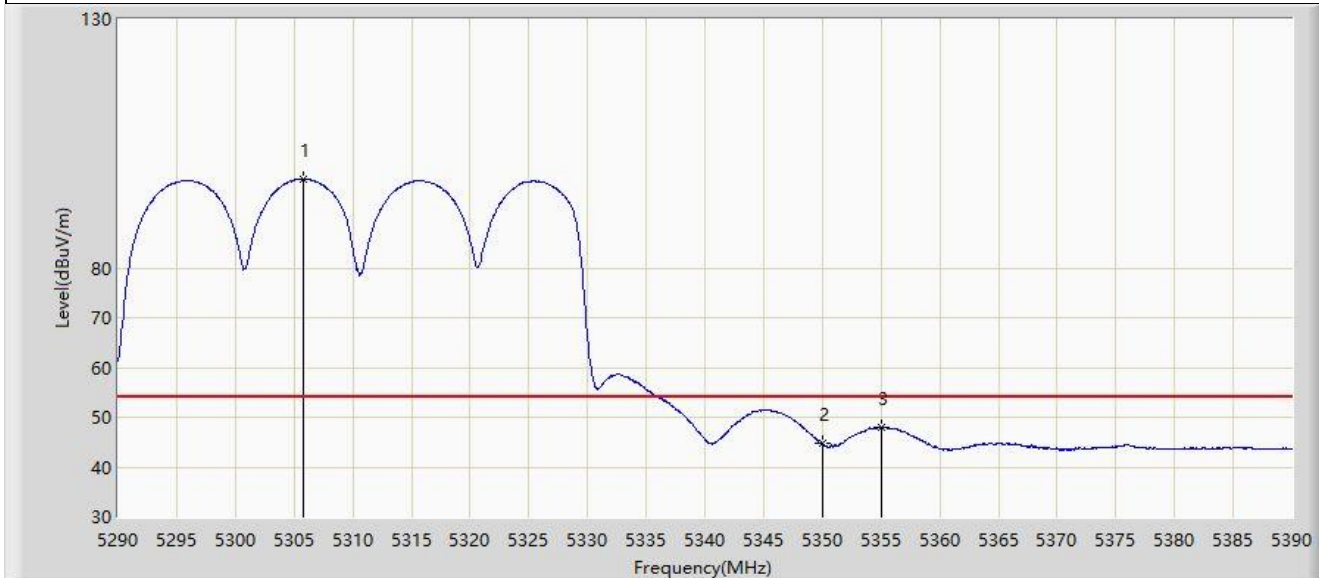


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5305.750	97.864	93.848	N/A	N/A	4.015	AV
2		5350.000	44.638	40.701	-9.362	54.000	3.937	AV
3	*	5355.100	47.996	44.117	-6.004	54.000	3.879	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

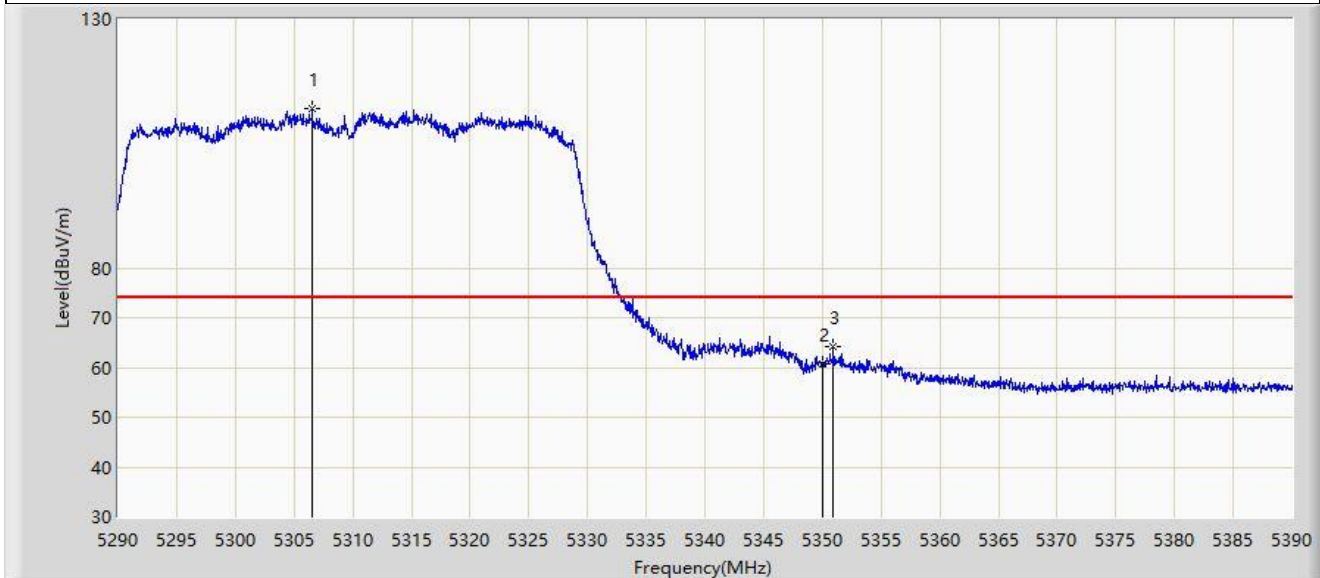


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.550	111.986	107.968	N/A	N/A	4.018	PK
2		5350.000	60.614	56.677	-13.386	74.000	3.937	PK
3	*	5350.900	64.148	60.228	-9.852	74.000	3.920	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

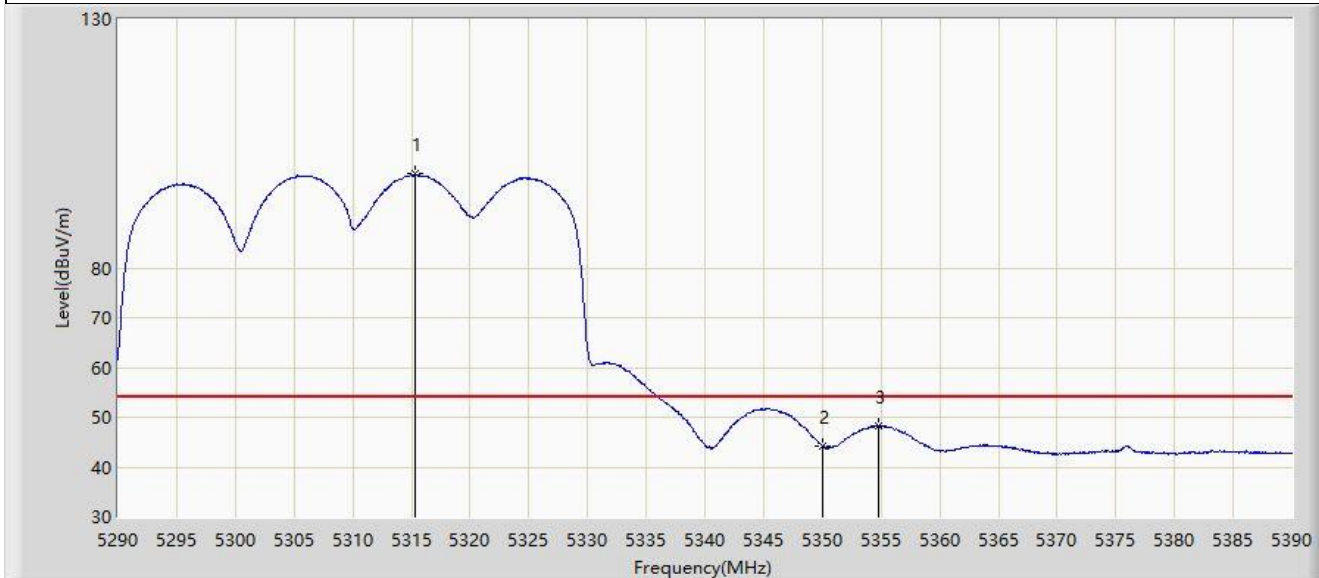


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.300	98.845	94.789	N/A	N/A	4.056	AV
2		5350.000	44.299	40.362	-9.701	54.000	3.937	AV
3	*	5354.750	48.202	44.321	-5.798	54.000	3.881	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

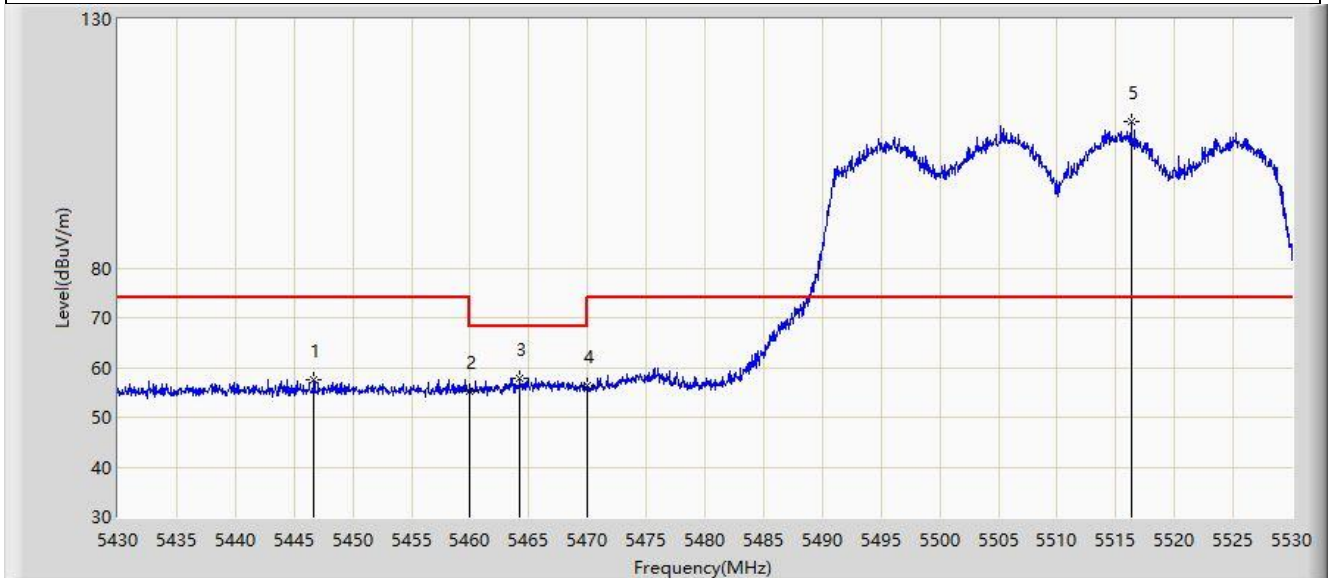


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5446.700	57.509	53.641	-16.491	74.000	3.869	PK
2		5460.000	55.356	51.424	-18.644	74.000	3.932	PK
3	*	5464.250	57.871	53.918	-10.329	68.200	3.954	PK
4		5470.000	56.418	52.436	-11.782	68.200	3.982	PK
5		5516.300	109.477	105.470	N/A	N/A	4.008	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

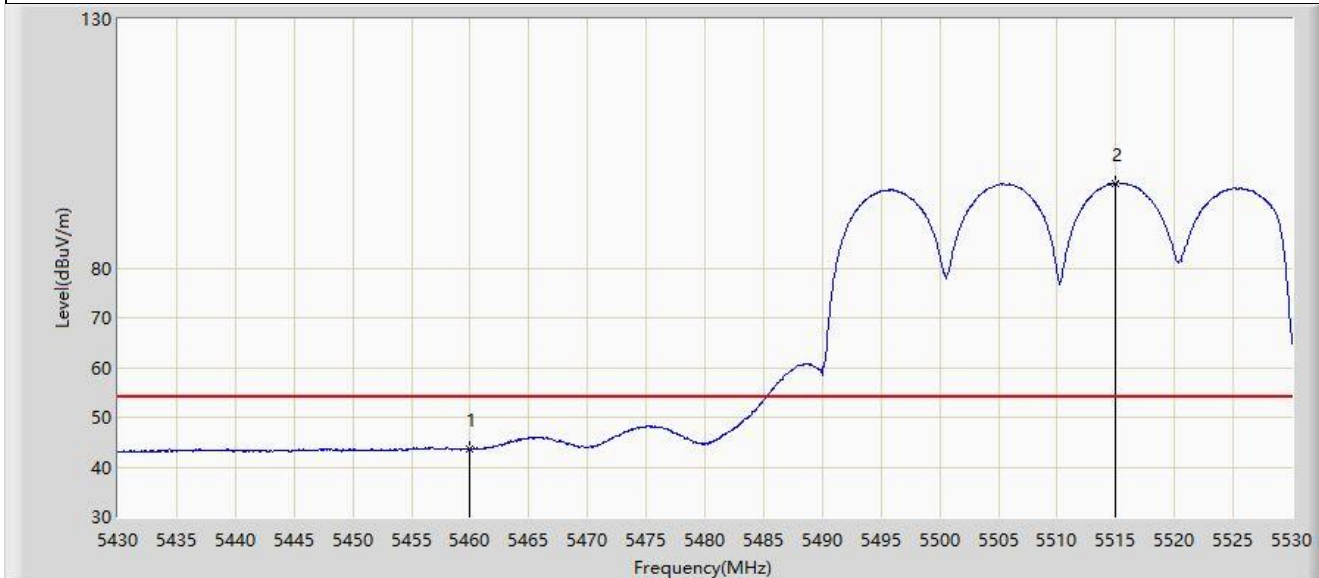


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	43.602	39.670	-10.398	54.000	3.932	AV
2		5515.000	97.049	93.027	N/A	N/A	4.022	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

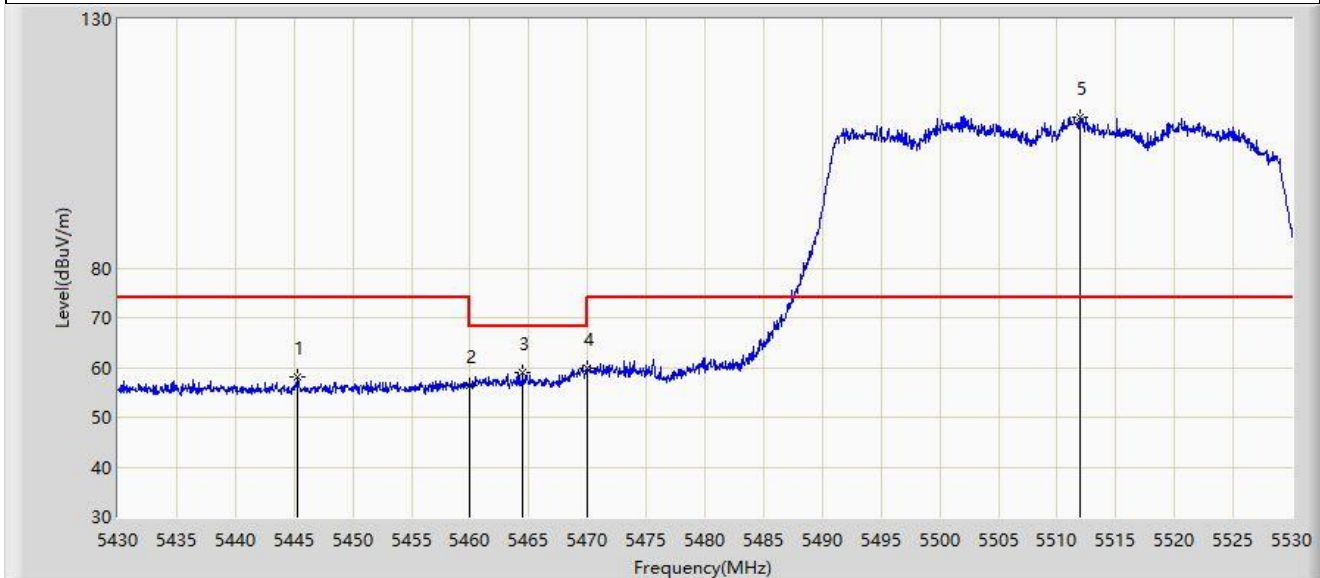


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5445.350	58.093	54.224	-15.907	74.000	3.868	PK
2		5460.000	56.442	52.510	-17.558	74.000	3.932	PK
3		5464.450	58.878	54.924	-9.322	68.200	3.955	PK
4	*	5470.000	59.732	55.750	-8.468	68.200	3.982	PK
5		5512.000	110.325	106.271	N/A	N/A	4.054	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

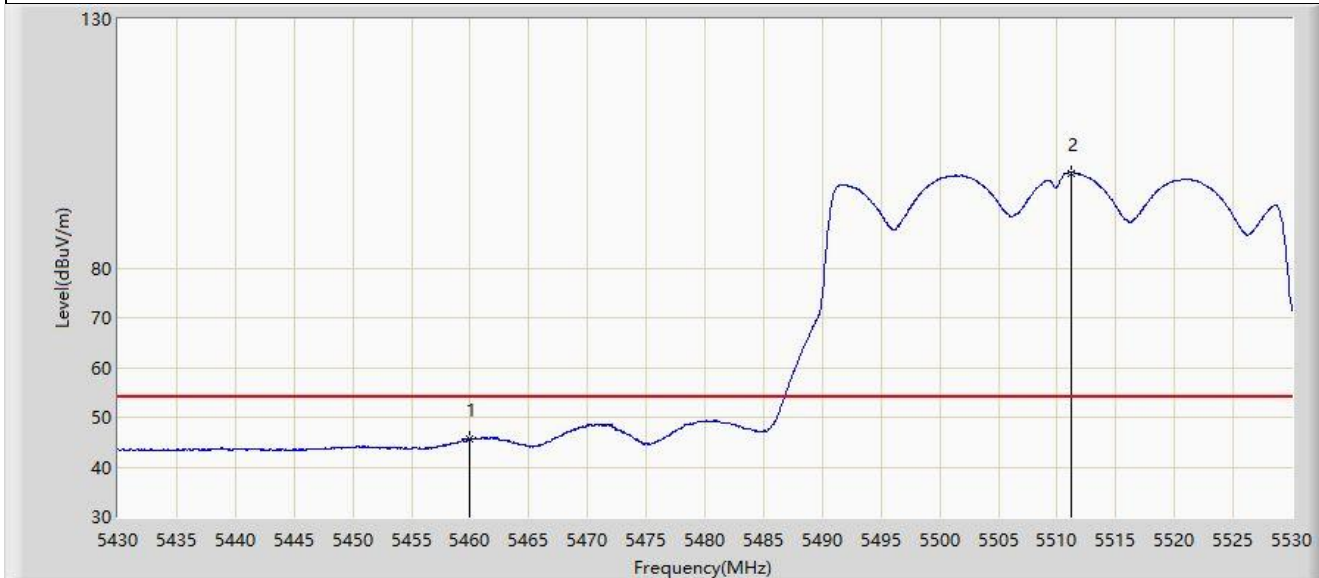


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.566	41.634	-8.434	54.000	3.932	AV
2		5511.150	99.113	95.050	N/A	N/A	4.063	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

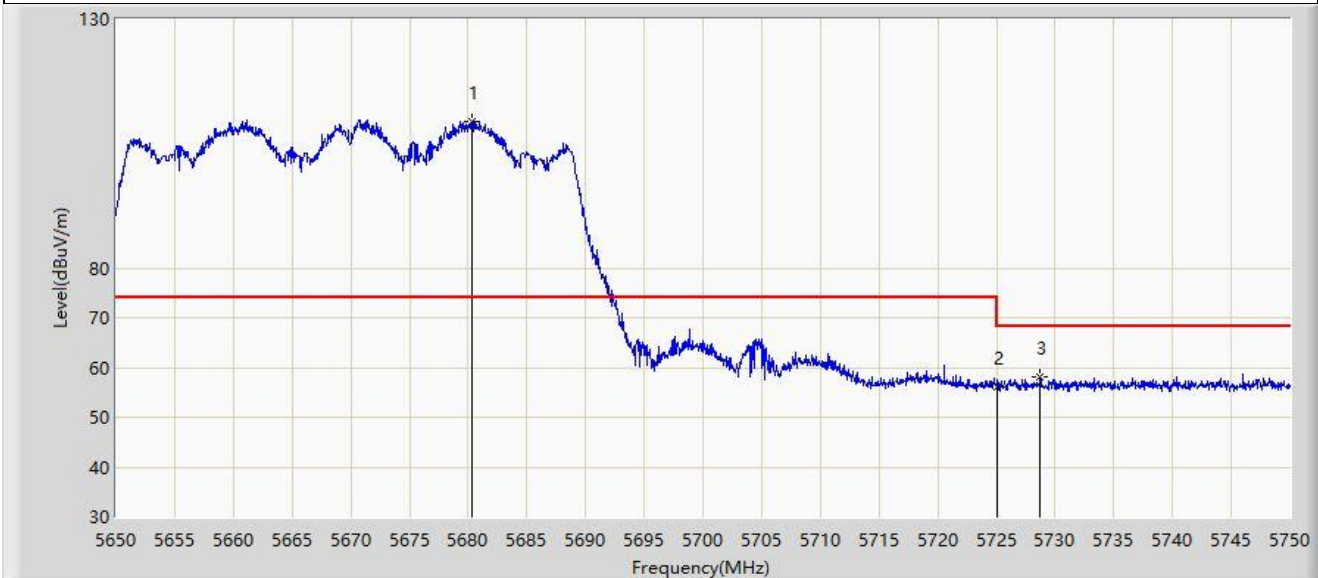


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5680.350	109.382	104.904	N/A	N/A	4.478	PK
2		5725.000	56.112	51.563	-12.088	68.200	4.549	PK
3	*	5728.750	58.124	53.532	-10.076	68.200	4.592	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

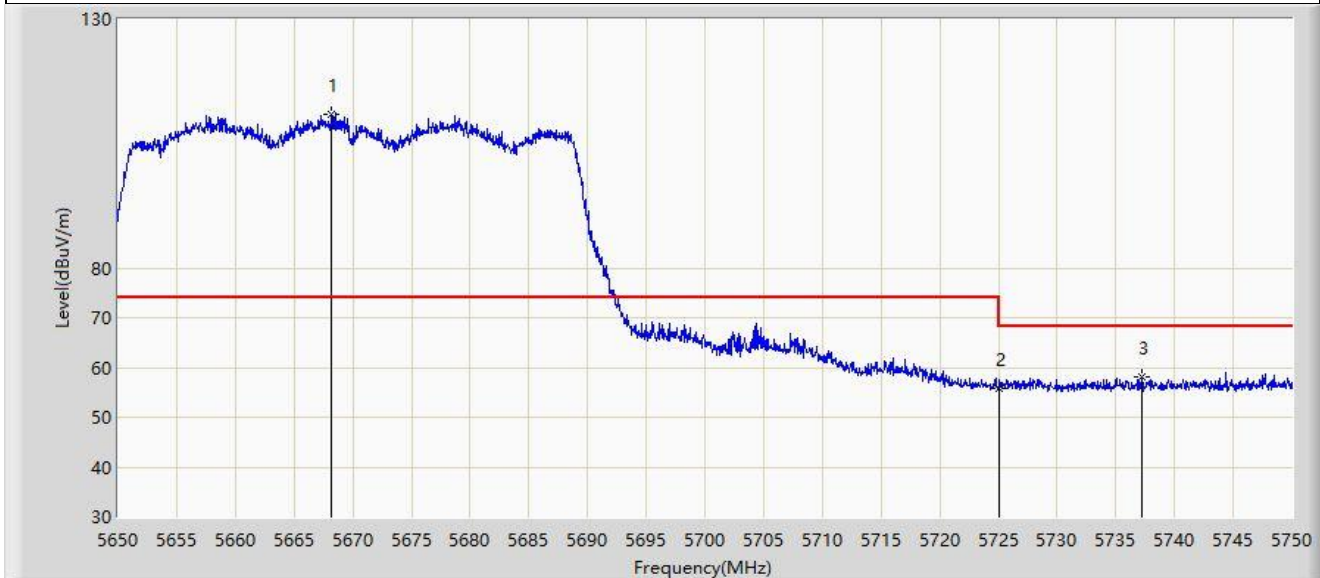


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.200	110.948	106.476	N/A	N/A	4.472	PK
2		5725.000	55.787	51.238	-12.413	68.200	4.549	PK
3	*	5737.250	58.113	53.399	-10.087	68.200	4.713	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

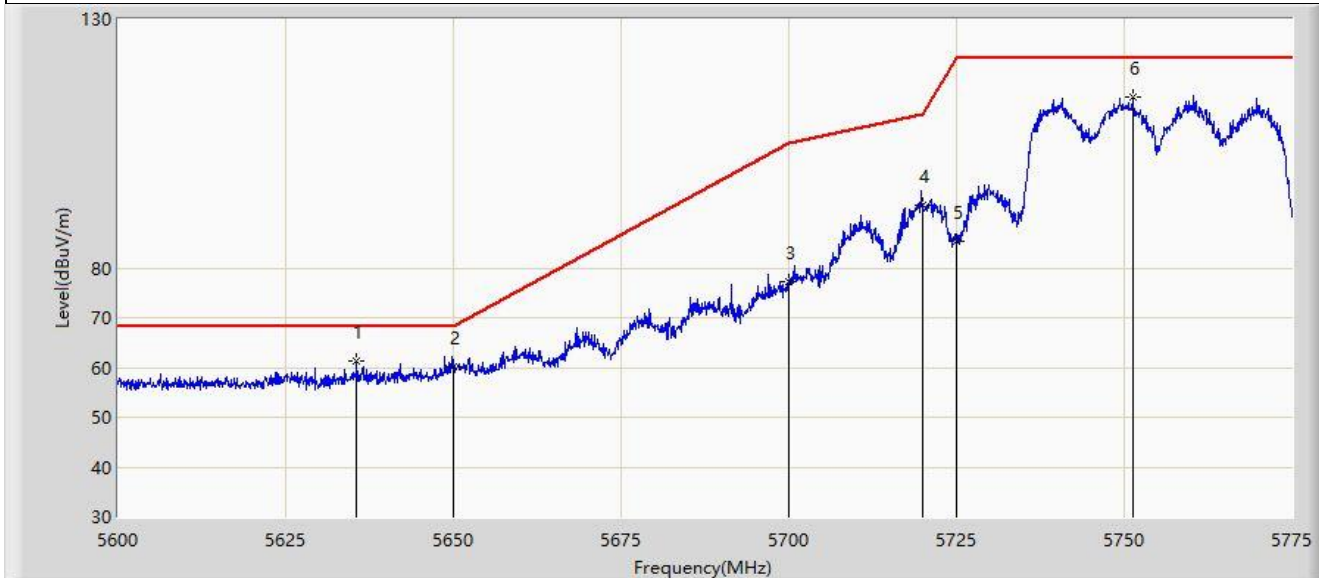


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5635.612	61.415	57.320	-6.785	68.200	4.095	PK
2		5650.000	60.136	55.753	-8.064	68.200	4.382	PK
3		5700.000	77.354	72.880	-27.846	105.200	4.474	PK
4		5720.000	92.549	88.026	-18.251	110.800	4.523	PK
5		5725.000	85.446	80.897	-36.754	122.200	4.549	PK
6		5751.288	114.411	109.570	N/A	N/A	4.841	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

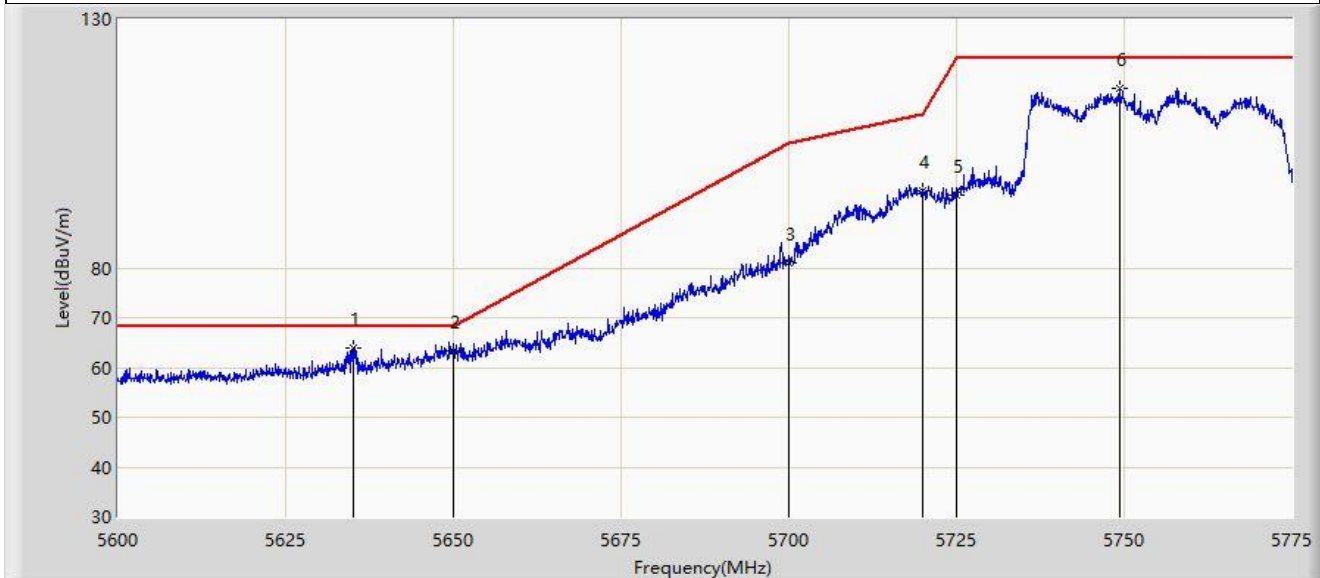


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5635.087	64.008	59.912	-4.192	68.200	4.096	PK
2		5650.000	63.469	59.086	-4.731	68.200	4.382	PK
3		5700.000	81.110	76.636	-24.090	105.200	4.474	PK
4		5720.000	95.429	90.906	-15.371	110.800	4.523	PK
5		5725.000	94.706	90.157	-27.494	122.200	4.549	PK
6		5749.362	116.197	111.367	N/A	N/A	4.830	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

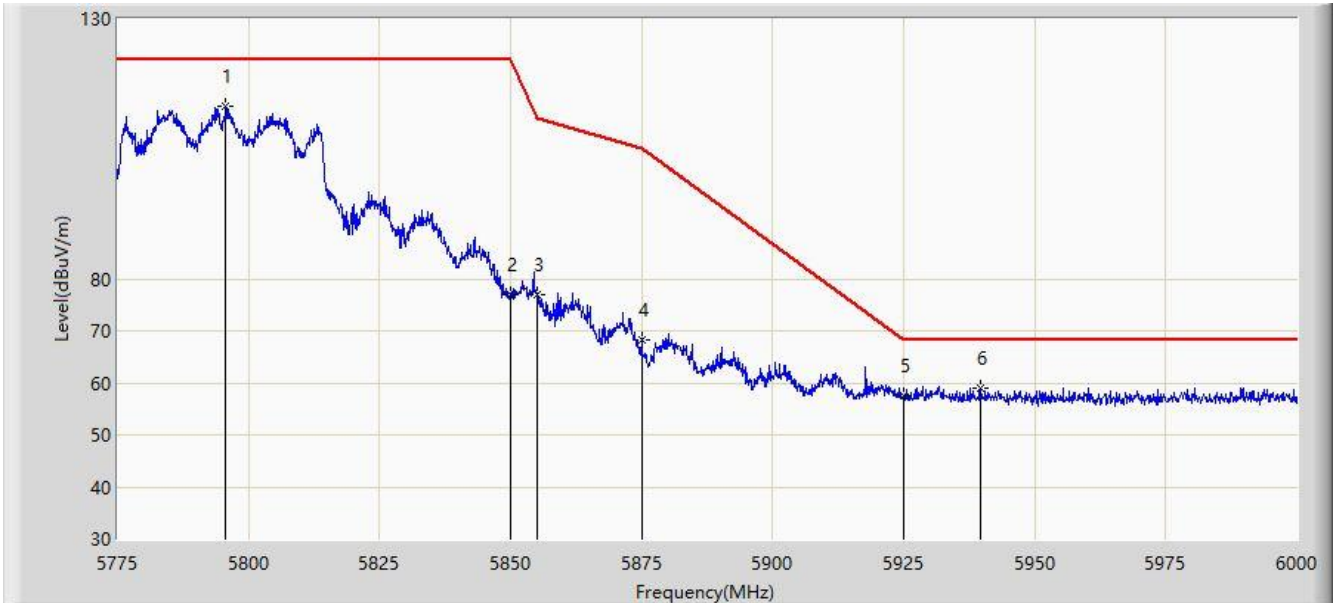


N	Fl	M	Frequency	Measure	Reading	Over Limit	Limit	Factor	Type
o	ag	ark	(MHz)	Level	Level	(dB)	(dBuV/m)		
				(dBuV/m)	(dBuV)				
1		*	5795.700	113.274	108.288	N/A	N/A	4.986	PK
2			5850.000	76.901	71.740	-45.299	122.200	5.161	PK
3			5855.000	76.842	71.735	-33.958	110.800	5.107	PK
4			5875.000	68.244	63.239	-36.956	105.200	5.006	PK
5			5925.000	57.599	52.284	-10.601	68.200	5.315	PK
6			5939.700	59.061	53.837	-9.139	68.200	5.225	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

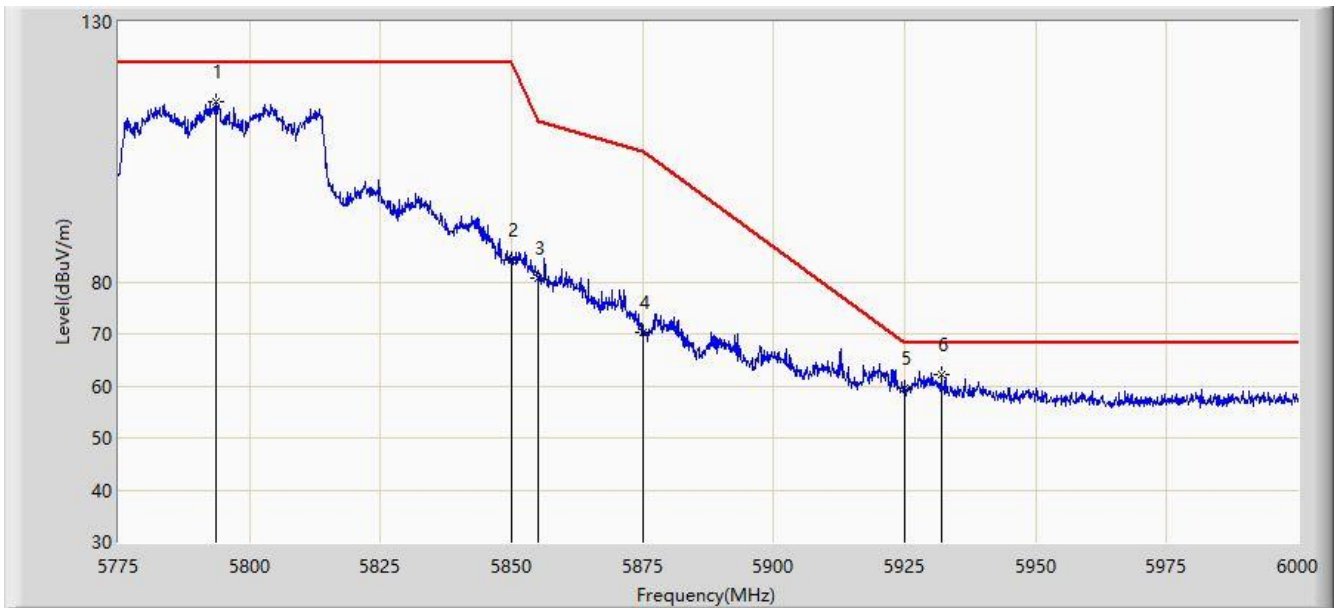


N	Fl	M	Frequency	Measure	Reading	Over Limit	Limit	Factor	Type
o	ag	ar	(MHz)	Level	Level	(dB)	(dBuV/m)		
	k	k		(dBuV/m)	(dBuV)				
1			5793.562	114.732	109.766	N/A	N/A	4.966	PK
2			5850.000	84.188	79.027	-38.012	122.200	5.161	PK
3			5855.000	80.814	75.707	-29.986	110.800	5.107	PK
4			5875.000	70.263	65.258	-34.937	105.200	5.006	PK
5			5925.000	59.432	54.117	-8.768	68.200	5.315	PK
6		*	5931.937	62.313	57.016	-5.887	68.200	5.297	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

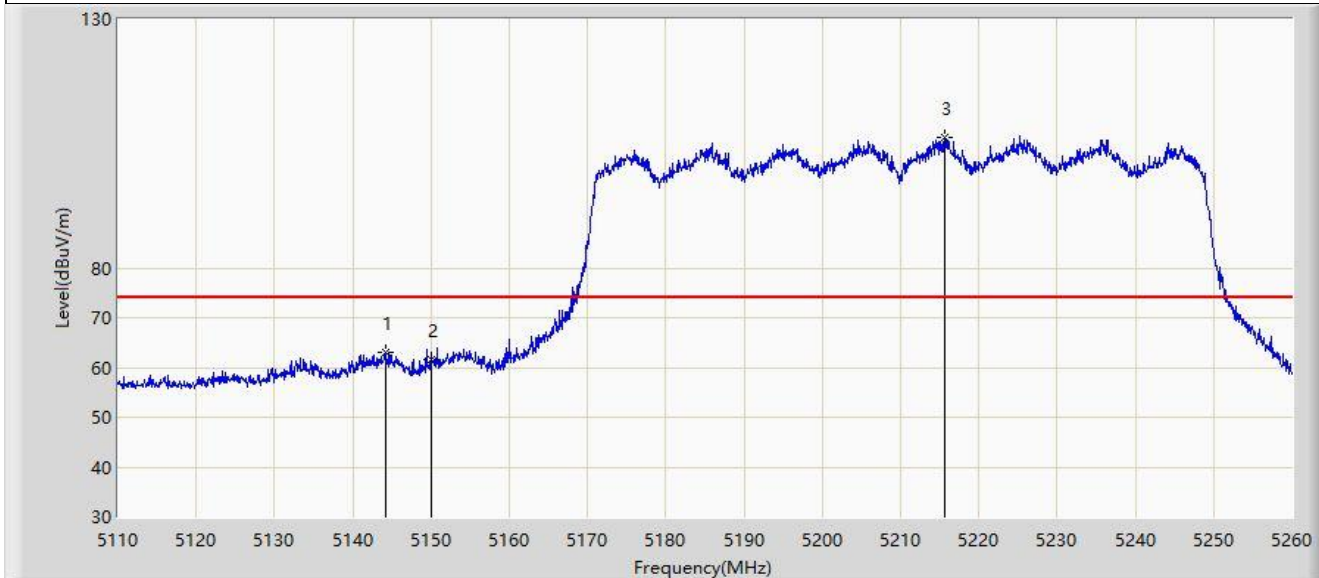


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5144.125	63.140	58.925	-10.860	74.000	4.215	PK
2		5150.000	61.457	57.221	-12.543	74.000	4.236	PK
3		5215.600	106.193	102.147	N/A	N/A	4.045	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

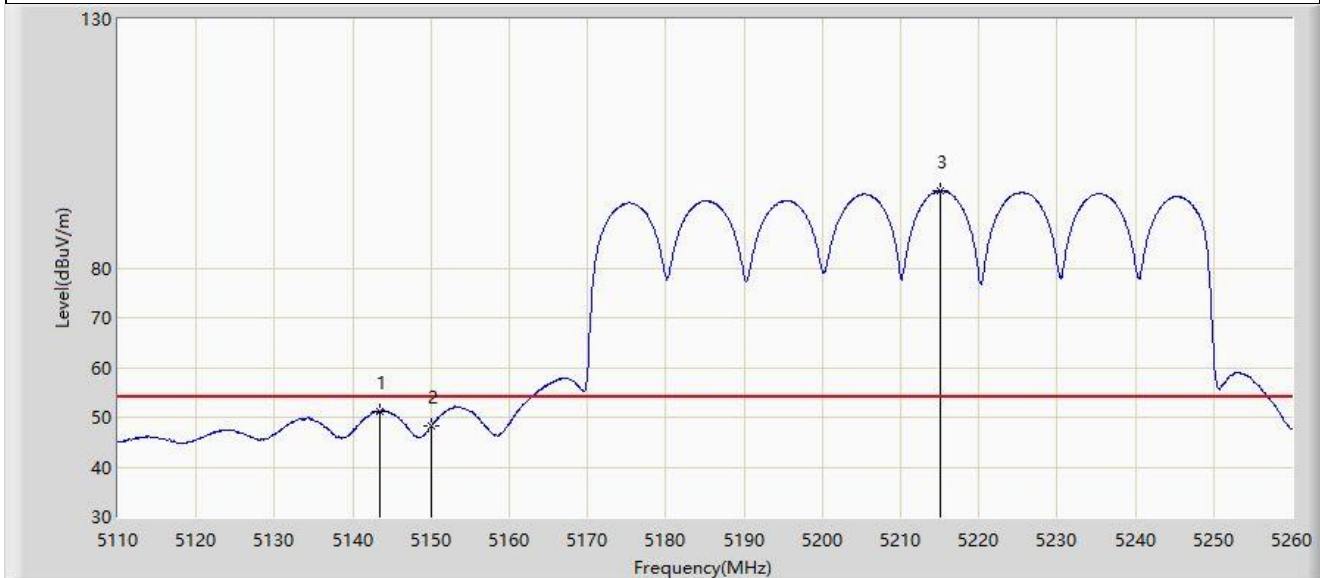


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5143.525	51.291	47.079	-2.709	54.000	4.212	AV
2		5150.000	48.119	43.883	-5.881	54.000	4.236	AV
3		5215.150	95.387	91.343	N/A	N/A	4.044	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

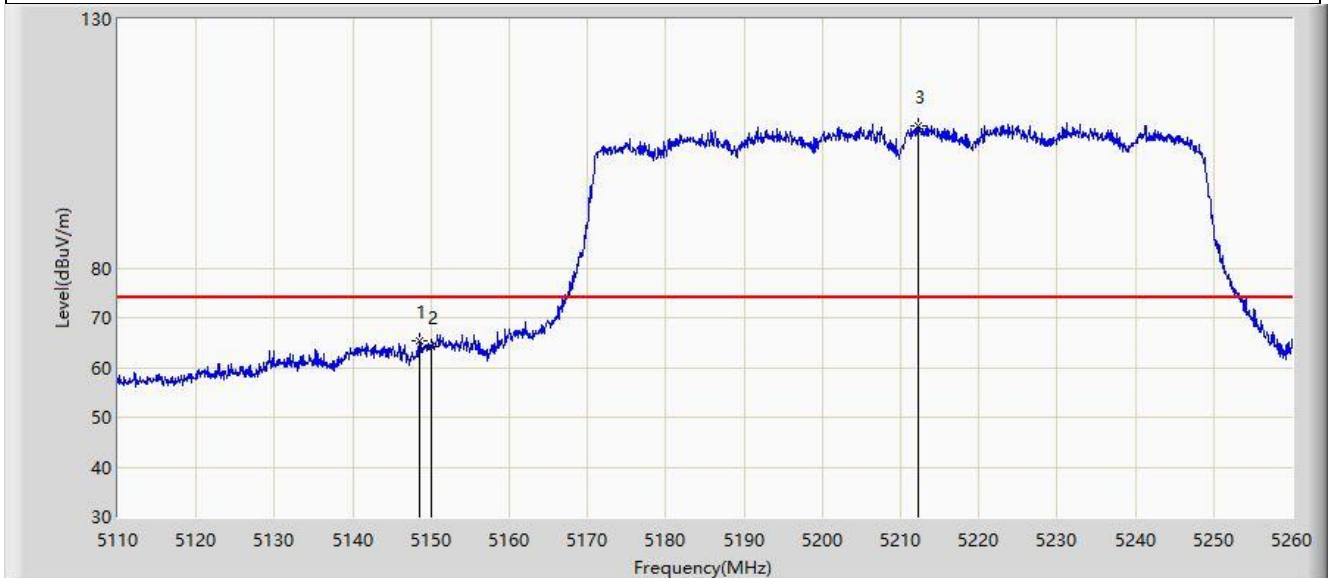


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.625	65.313	61.074	-8.687	74.000	4.239	PK
2		5150.000	64.224	59.988	-9.776	74.000	4.236	PK
3		5212.225	108.680	104.647	N/A	N/A	4.034	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

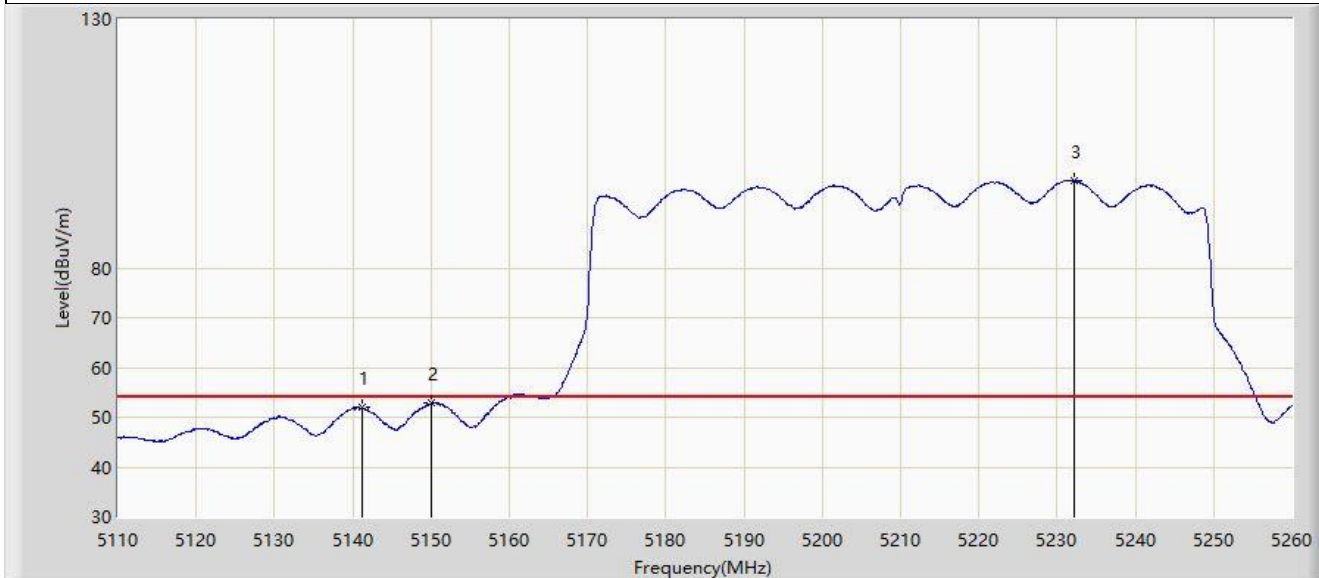


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5141.275	51.926	47.729	-2.074	54.000	4.197	AV
2	*	5150.000	52.787	48.551	-1.213	54.000	4.236	AV
3		5232.250	97.560	93.431	N/A	N/A	4.129	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

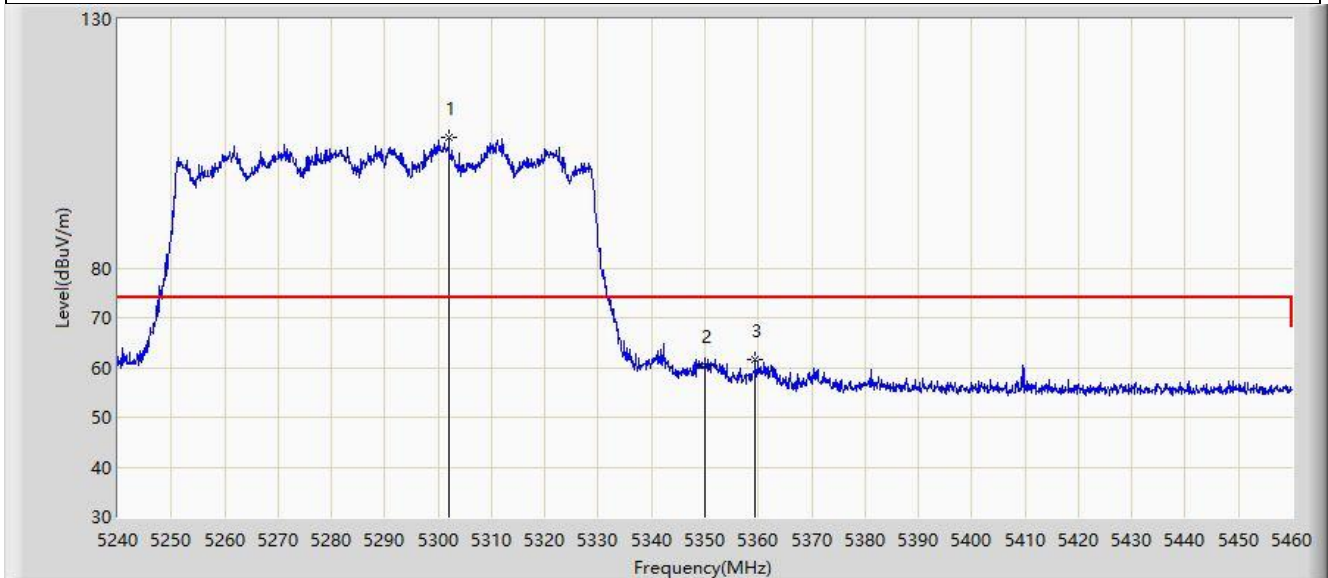


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5302.040	106.149	102.141	N/A	N/A	4.007	PK
2		5350.000	60.533	56.596	-13.467	74.000	3.937	PK
3	*	5359.460	61.613	57.760	-12.387	74.000	3.853	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

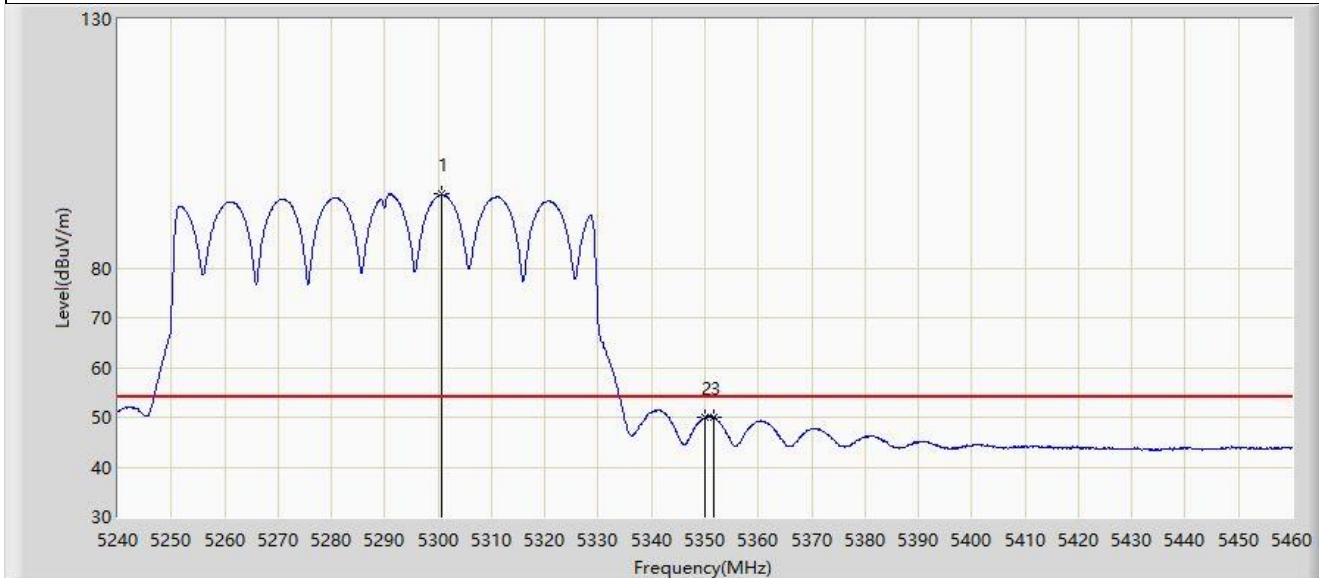


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5300.610	94.794	90.788	N/A	N/A	4.007	AV
2		5350.000	50.040	46.103	-3.960	54.000	3.937	AV
3	*	5351.650	50.041	46.136	-3.959	54.000	3.905	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

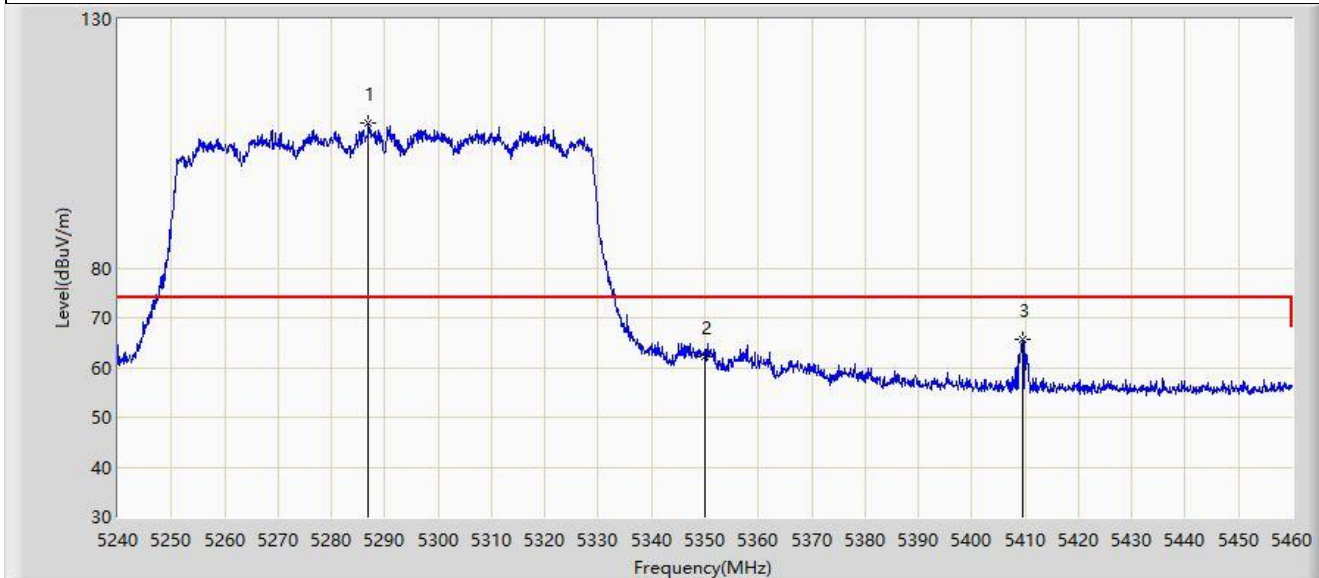


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5286.970	109.240	105.327	N/A	N/A	3.913	PK
2		5350.000	62.285	58.348	-11.715	74.000	3.937	PK
3	*	5409.620	65.584	61.538	-8.416	74.000	4.046	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

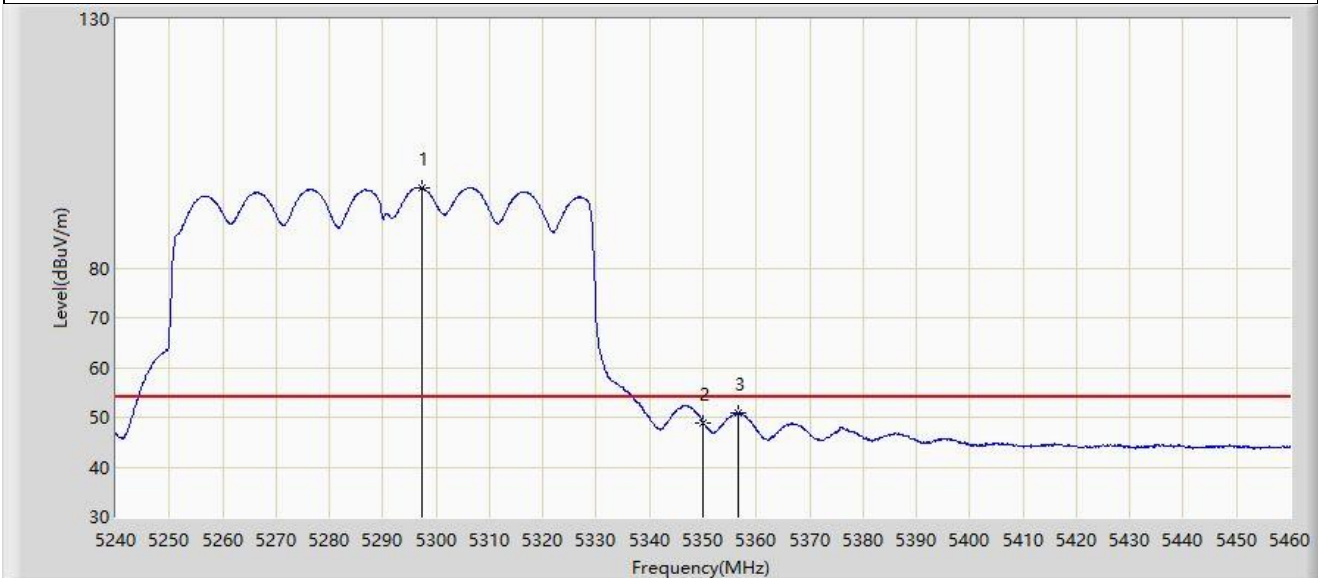


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5297.310	96.027	92.018	N/A	N/A	4.009	AV
2		5350.000	48.914	44.977	-5.086	54.000	3.937	AV
3	*	5356.710	50.769	46.900	-3.231	54.000	3.869	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

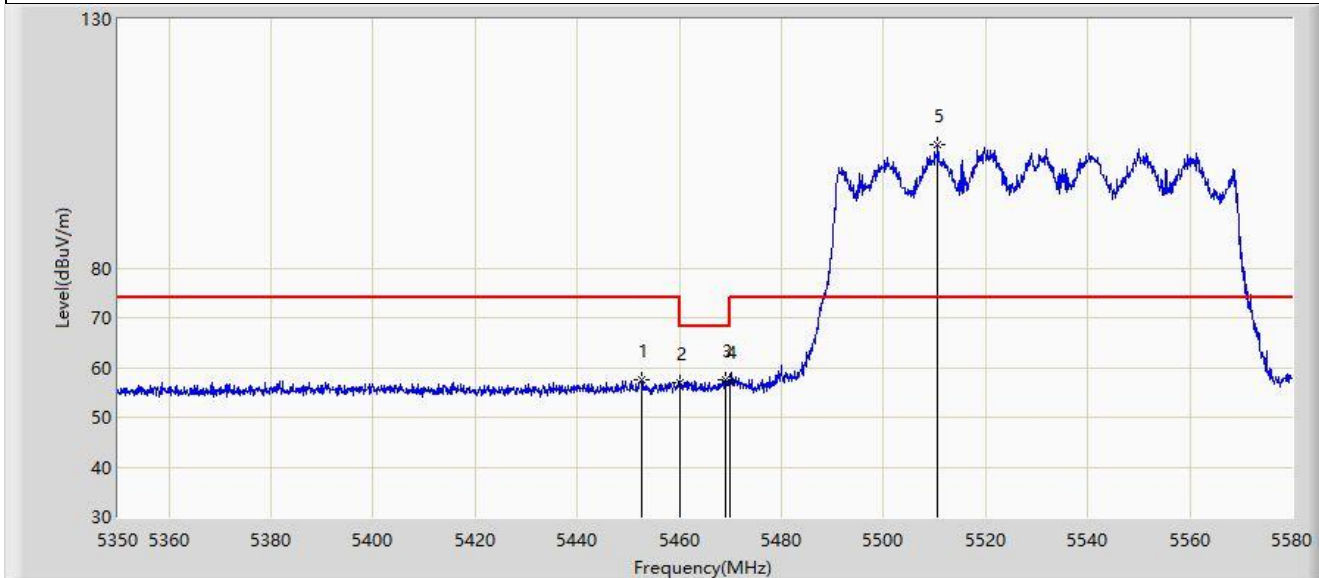


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5452.695	57.480	53.614	-16.520	74.000	3.867	PK
2		5460.000	57.020	53.088	-16.980	74.000	3.932	PK
3	*	5468.910	57.620	53.643	-10.580	68.200	3.977	PK
4		5470.000	57.242	53.260	-10.958	68.200	3.982	PK
5		5510.655	104.824	100.756	N/A	N/A	4.069	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

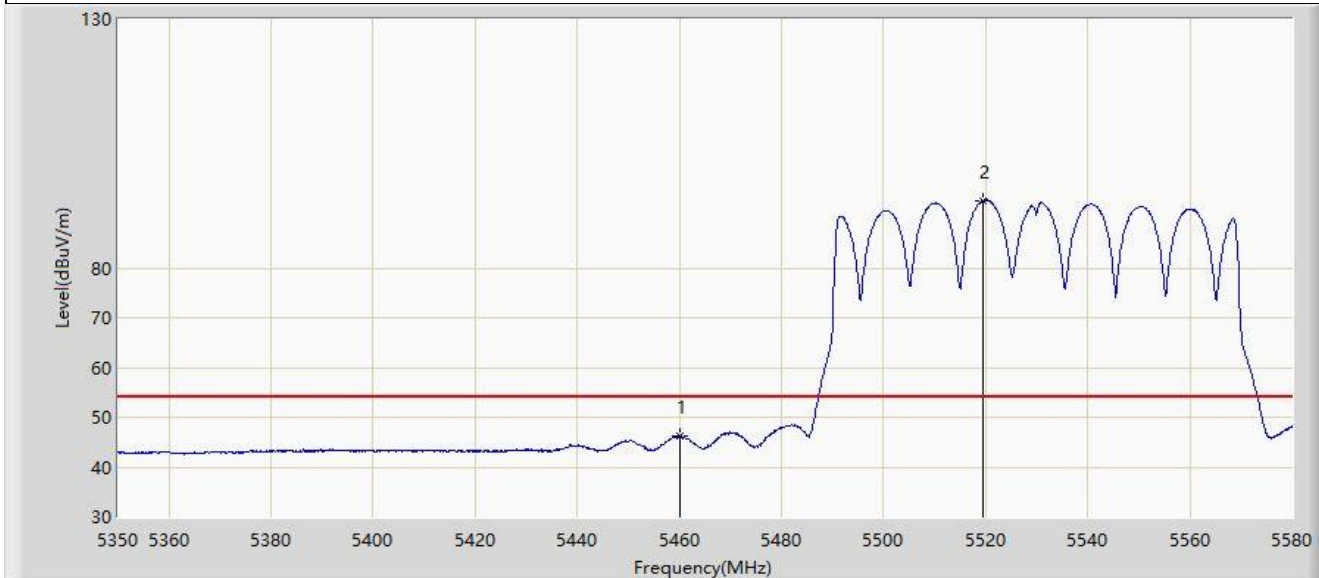


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	46.124	42.192	-7.876	54.000	3.932	AV
2		5519.510	93.560	89.587	N/A	N/A	3.973	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

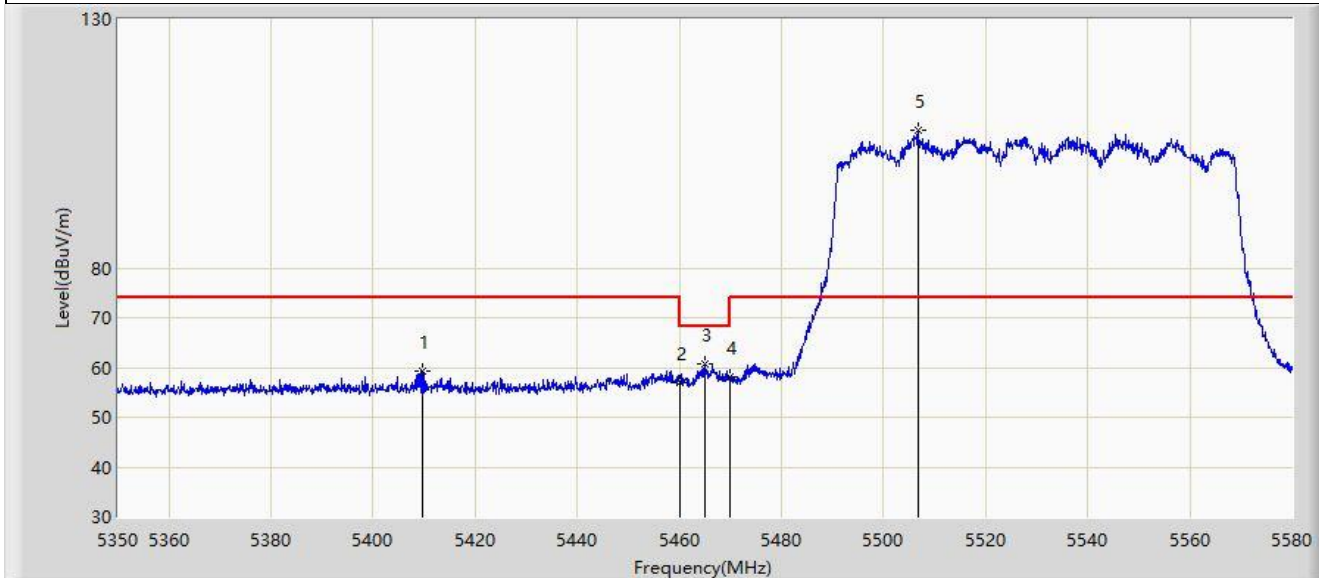


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5409.570	59.395	55.348	-14.605	74.000	4.046	PK
2		5460.000	57.014	53.082	-16.986	74.000	3.932	PK
3	*	5464.885	60.746	56.790	-7.454	68.200	3.956	PK
4		5470.000	58.097	54.115	-10.103	68.200	3.982	PK
5		5506.745	107.694	103.590	N/A	N/A	4.105	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

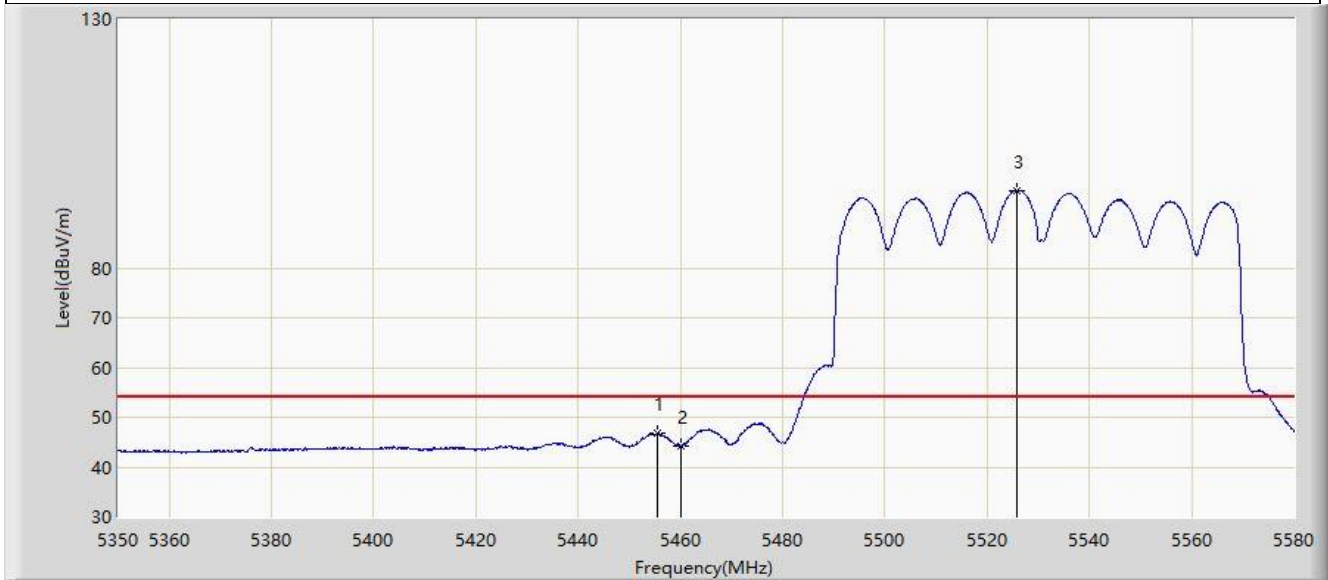


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5455.455	46.830	42.939	-7.170	54.000	3.891	AV
2		5460.000	44.283	40.351	-9.717	54.000	3.932	AV
3		5525.835	95.645	91.735	N/A	N/A	3.909	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

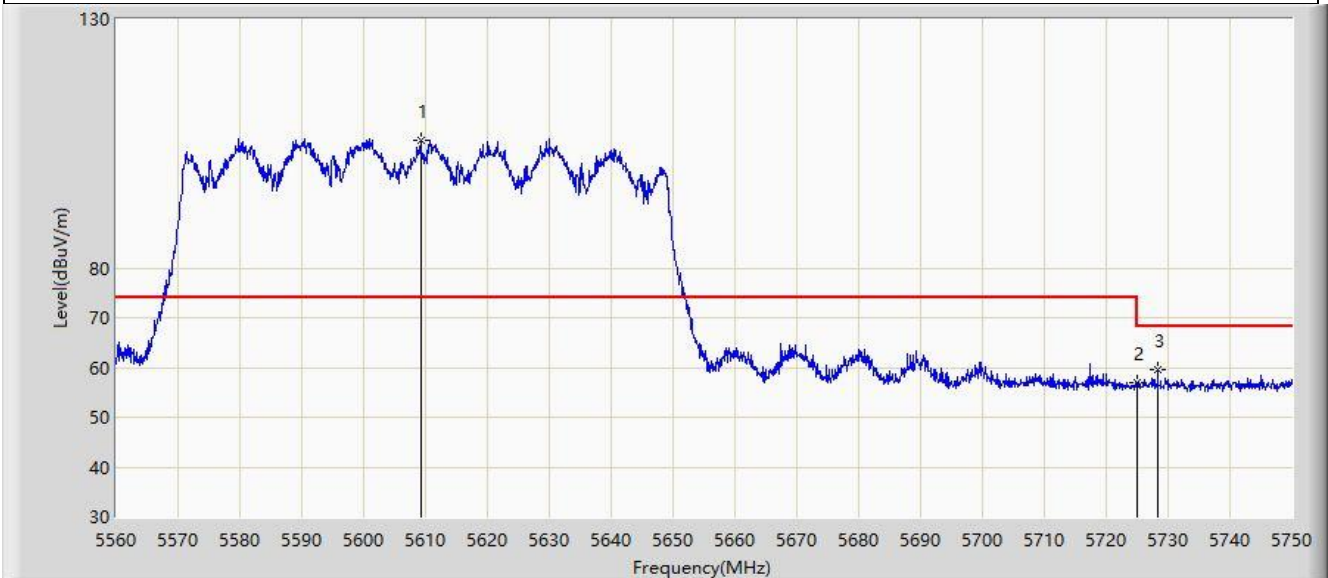


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5609.210	105.781	101.582	N/A	N/A	4.198	PK
2		5725.000	56.908	52.359	-11.292	68.200	4.549	PK
3	*	5728.340	59.645	55.059	-8.555	68.200	4.586	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.209_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

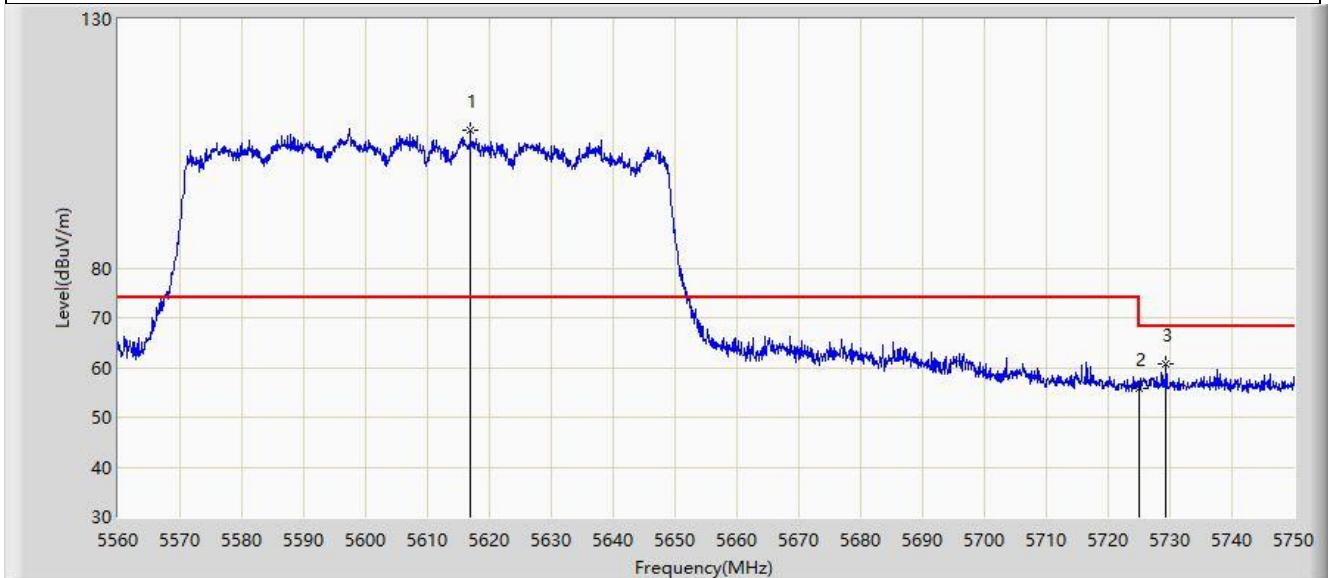


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5616.905	107.635	103.468	N/A	N/A	4.167	PK
2		5725.000	55.676	51.127	-12.524	68.200	4.549	PK
3	*	5729.385	60.810	56.209	-7.390	68.200	4.602	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

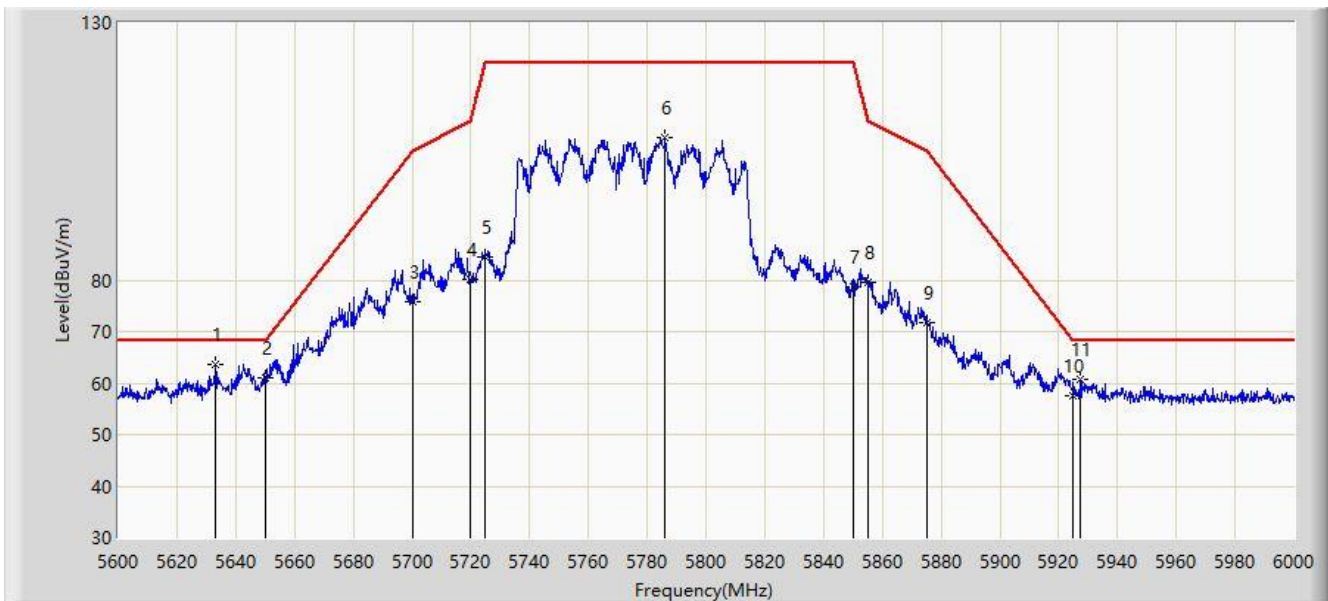


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5633.200	63.548	59.448	-4.652	68.200	4.100	PK
2		5650.000	61.119	56.736	-7.081	68.200	4.382	PK
3		5700.000	75.886	71.412	-29.314	105.200	4.474	PK
4		5720.000	80.081	75.558	-30.719	110.800	4.523	PK
5		5725.000	84.558	80.009	-37.642	122.200	4.549	PK
6		5786.200	107.814	102.919	N/A	N/A	4.895	PK
7		5850.000	78.796	73.635	-43.404	122.200	5.161	PK
8		5855.000	79.640	74.533	-31.160	110.800	5.107	PK
9		5875.000	71.774	66.769	-33.426	105.200	5.006	PK
10		5925.000	57.567	52.252	-10.633	68.200	5.315	PK
11		5927.400	60.613	55.298	-7.587	68.200	5.315	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-07-20
Limit: FCC Part 15.407_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

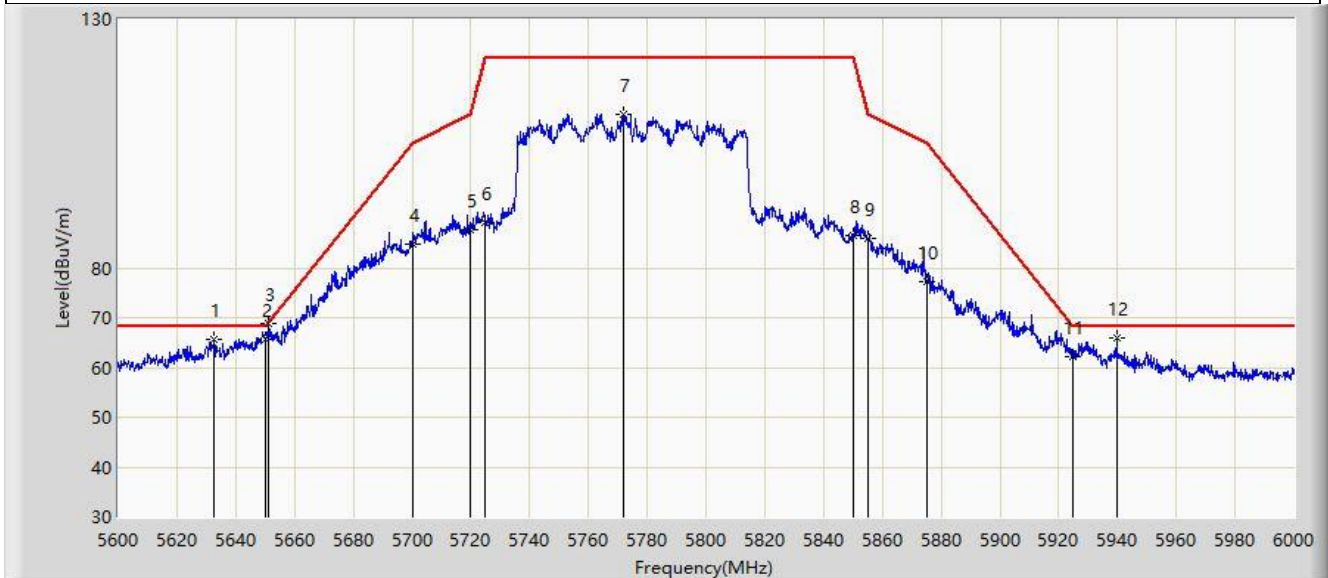

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5632.800	65.736	61.635	-2.464	68.200	4.100	PK
2		5650.000	65.714	61.331	-2.486	68.200	4.382	PK
3	*	5651.200	68.699	64.286	-0.393	69.092	4.413	PK
4		5700.000	84.855	80.381	-20.345	105.200	4.474	PK
5		5720.000	87.539	83.016	-23.261	110.800	4.523	PK
6		5725.000	88.991	84.442	-33.209	122.200	4.549	PK
7		5772.000	110.839	105.981	N/A	N/A	4.858	PK
8		5850.000	86.594	81.433	-35.606	122.200	5.161	PK
9		5855.000	85.810	80.703	-24.990	110.800	5.107	PK
10		5875.000	77.152	72.147	-28.048	105.200	5.006	PK
11		5925.000	62.032	56.717	-6.168	68.200	5.315	PK
12		5939.600	65.846	60.621	-2.354	68.200	5.226	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2022/08/24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bob Zhang
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by a at channel 5785MHz	

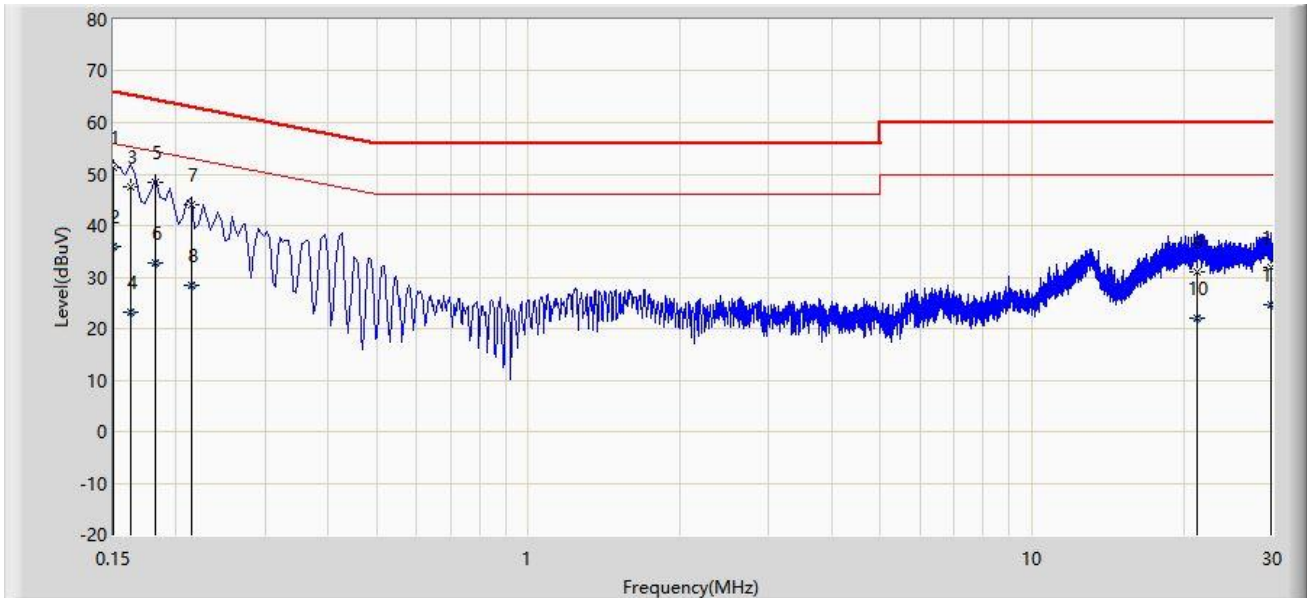


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.150	51.297	41.420	-14.703	66.000	9.878	QP
2		0.150	35.814	25.937	-20.186	56.000	9.878	AV
3		0.162	47.639	37.759	-17.722	65.361	9.880	QP
4		0.162	23.164	13.284	-32.197	55.361	9.880	AV
5		0.182	48.268	38.388	-16.126	64.394	9.880	QP
6		0.182	32.619	22.739	-21.775	54.394	9.880	AV
7		0.214	44.122	34.239	-18.927	63.049	9.884	QP
8		0.214	28.489	18.605	-24.560	53.049	9.884	AV
9		21.234	30.871	19.243	-29.129	60.000	11.629	QP
10		21.234	21.925	10.296	-28.075	50.000	11.629	AV
11		29.742	31.974	19.812	-28.026	60.000	12.163	QP
12		29.742	24.571	12.408	-25.429	50.000	12.163	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2022/08/24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bob Zhang
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by a at channel 5785MHz	

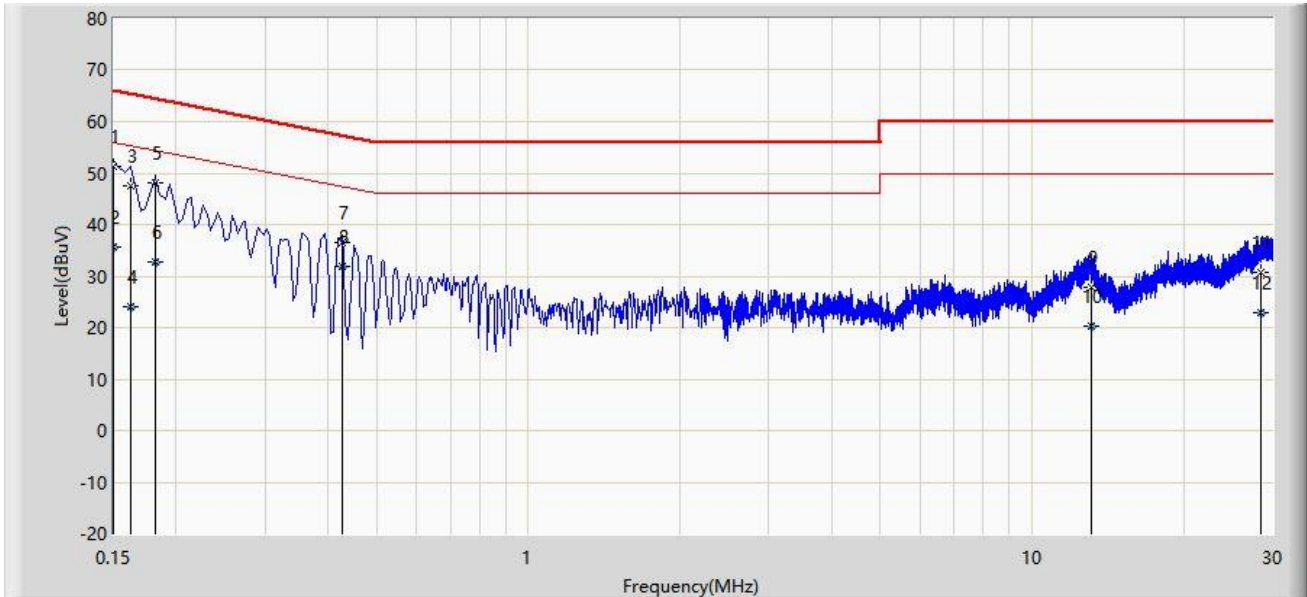

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.150	51.194	41.294	-14.806	66.000	9.900	QP
2		0.150	35.784	25.883	-20.216	56.000	9.900	AV
3		0.162	47.408	37.506	-17.952	65.361	9.903	QP
4		0.162	23.916	14.013	-31.445	55.361	9.903	AV
5		0.182	48.109	38.203	-16.285	64.394	9.907	QP
6		0.182	32.674	22.767	-21.720	54.394	9.907	AV
7		0.426	36.438	26.490	-20.893	57.330	9.948	QP
8		0.426	31.780	21.833	-15.550	47.330	9.948	AV
9		13.070	27.783	16.702	-32.217	60.000	11.081	QP
10		13.070	20.269	9.189	-29.731	50.000	11.081	AV
11		28.510	30.708	18.611	-29.292	60.000	12.098	QP
12		28.510	22.957	10.860	-27.043	50.000	12.098	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2206RSU048-UT” file.

Appendix C – EUT Photograph

Refer to “2206RSU048-UE” file.

————— The End —————