


Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.407_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

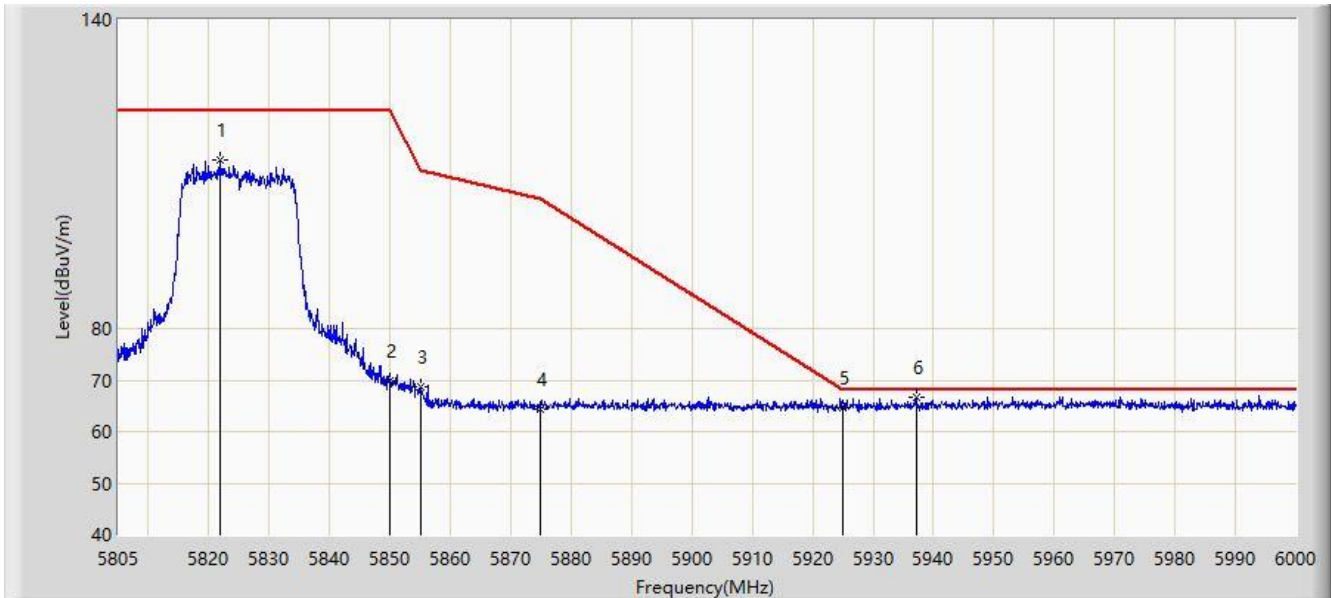


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5821.770	112.622	116.226	N/A	N/A	-3.604	PK
2		5850.000	69.794	73.542	-52.406	122.200	-3.747	PK
3		5855.000	68.568	72.308	-42.232	110.800	-3.740	PK
4		5875.000	64.377	67.966	-40.823	105.200	-3.589	PK
5		5925.000	64.708	68.298	-3.492	68.200	-3.589	PK
6	*	5937.210	66.530	69.992	-1.670	68.200	-3.462	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.407_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

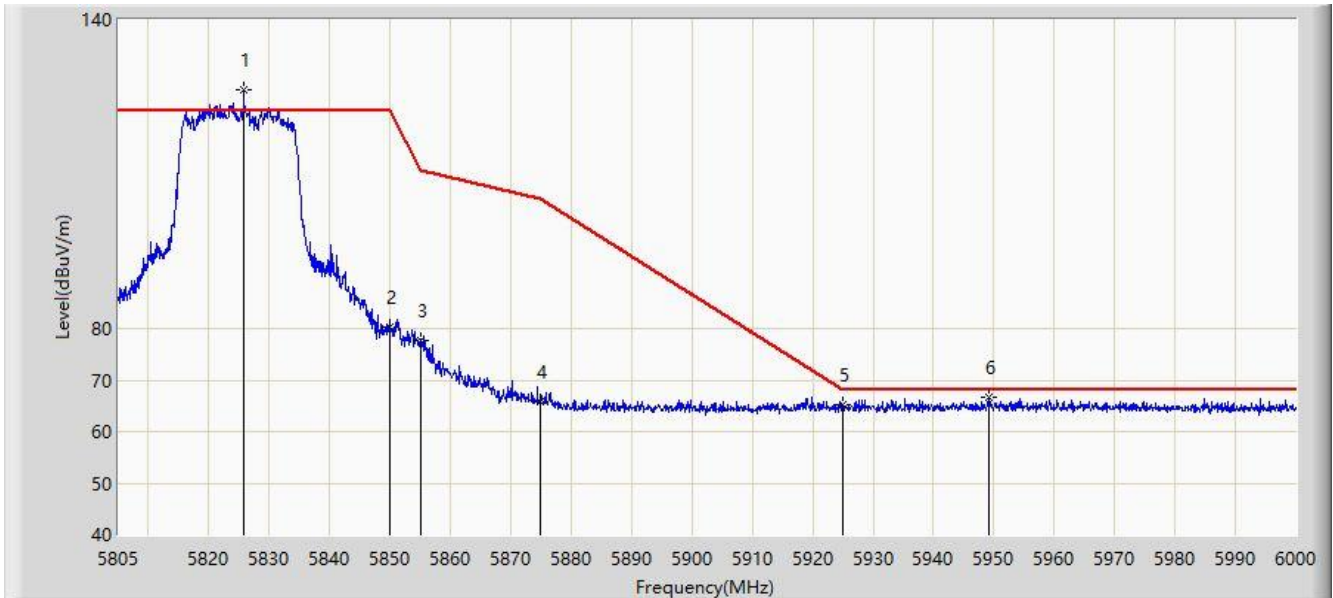


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5825.768	126.346	130.039	N/A	N/A	-3.694	PK
2		5850.000	80.178	83.926	-42.022	122.200	-3.747	PK
3		5855.000	77.769	81.509	-33.031	110.800	-3.740	PK
4		5875.000	65.792	69.381	-39.408	105.200	-3.589	PK
5		5925.000	65.103	68.693	-3.097	68.200	-3.589	PK
6	*	5949.105	66.728	70.080	-1.472	68.200	-3.351	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

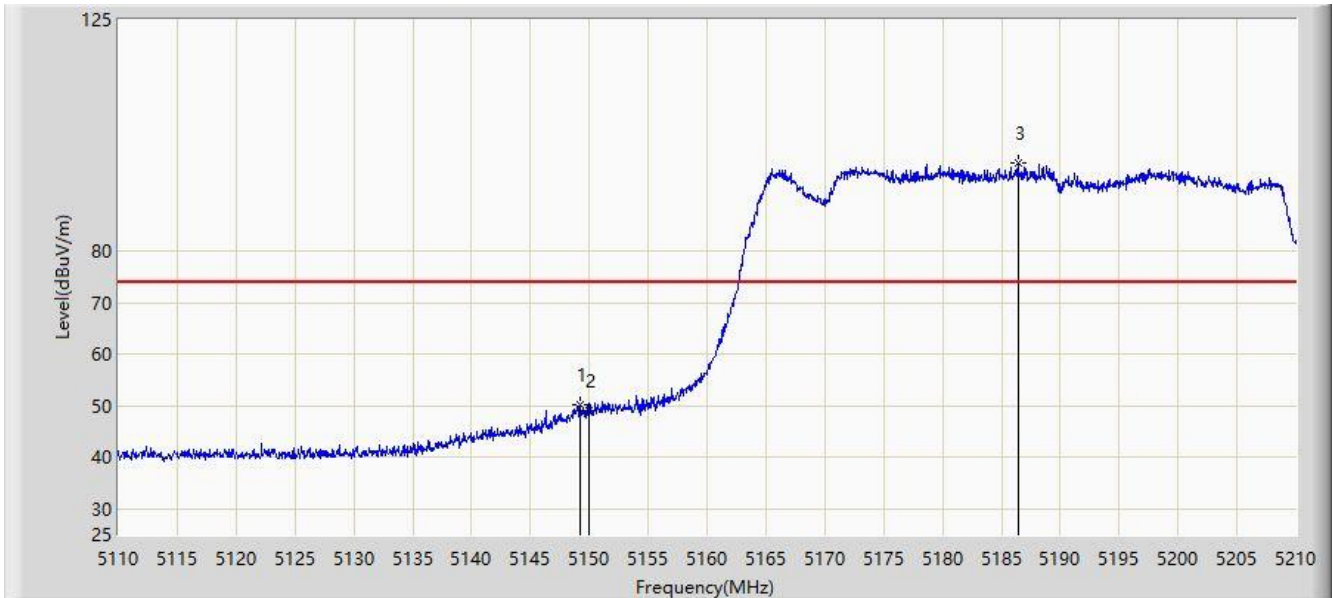


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.200	50.182	50.639	-23.818	74.000	-0.457	PK
2		5150.000	49.122	49.424	-24.878	74.000	-0.302	PK
3		5186.400	97.092	58.376	N/A	N/A	38.716	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

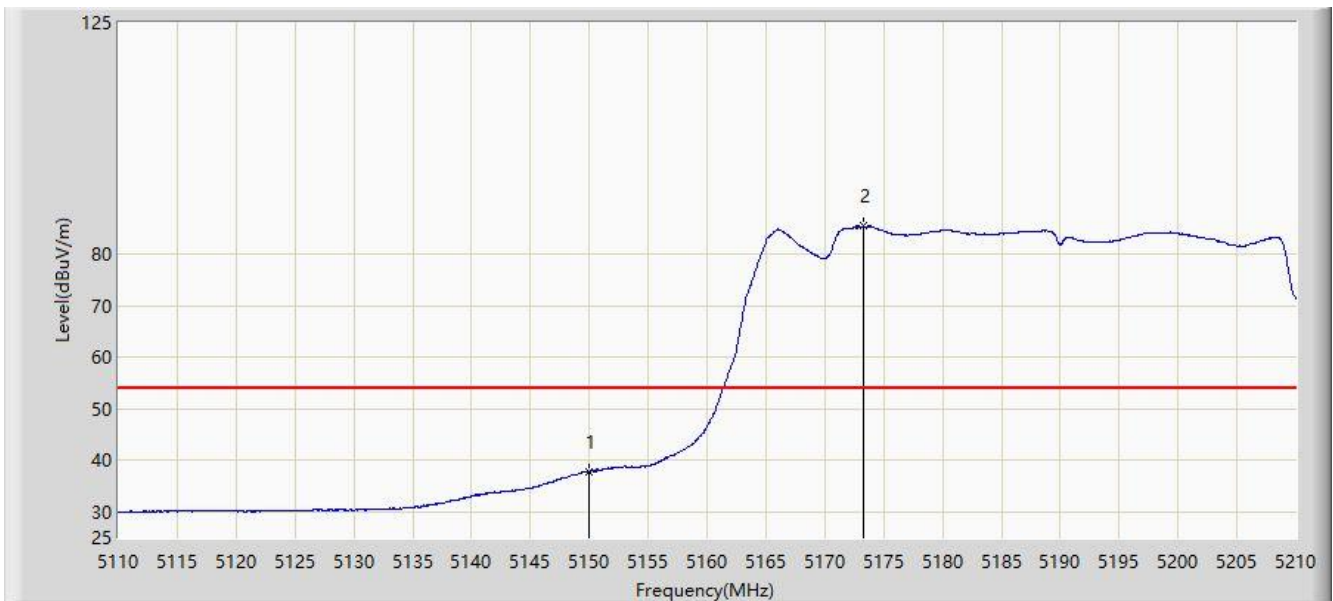

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	37.820	38.122	-16.180	54.000	-0.302	AV
2		5173.300	85.440	36.062	N/A	N/A	49.378	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	



No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.850	66.761	67.087	-7.239	74.000	-0.326	PK
2		5150.000	65.995	66.297	-8.005	74.000	-0.302	PK
3		5200.000	113.999	73.621	N/A	N/A	40.377	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	53.466	53.768	-0.534	54.000	-0.302	AV
2		5200.000	101.885	61.507	N/A	N/A	40.377	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

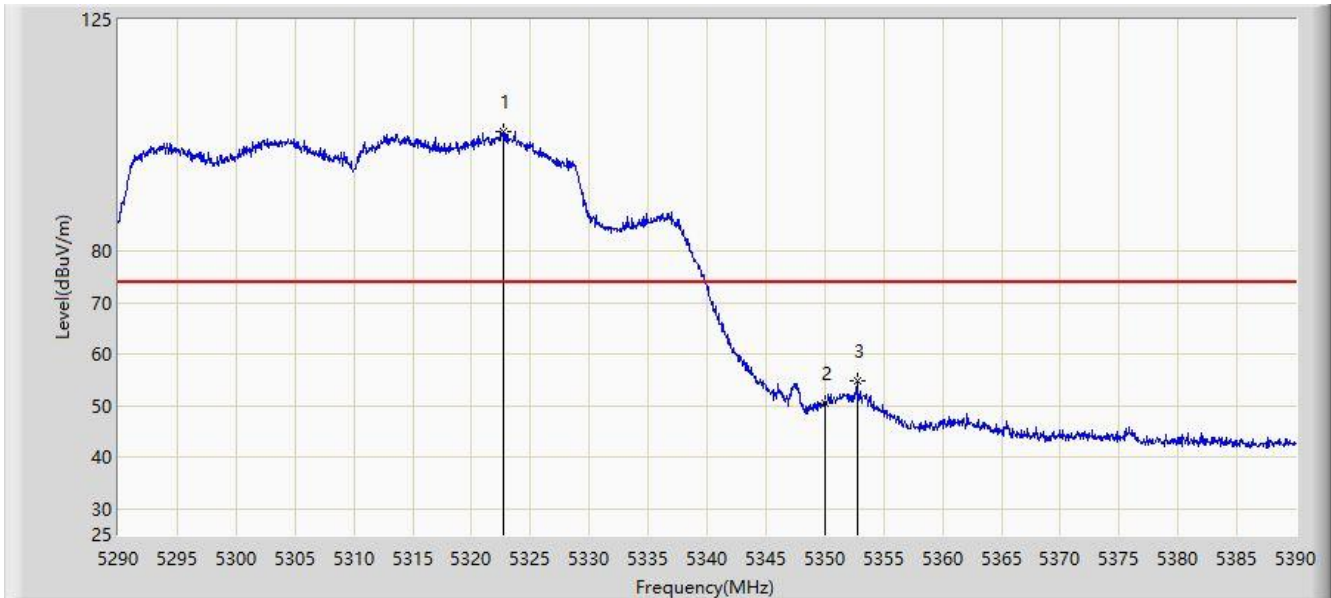


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5322.650	103.387	59.198	N/A	N/A	44.189	PK
2		5350.000	50.636	49.314	-23.364	74.000	1.322	PK
3	*	5352.750	54.751	54.357	-19.249	74.000	0.394	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

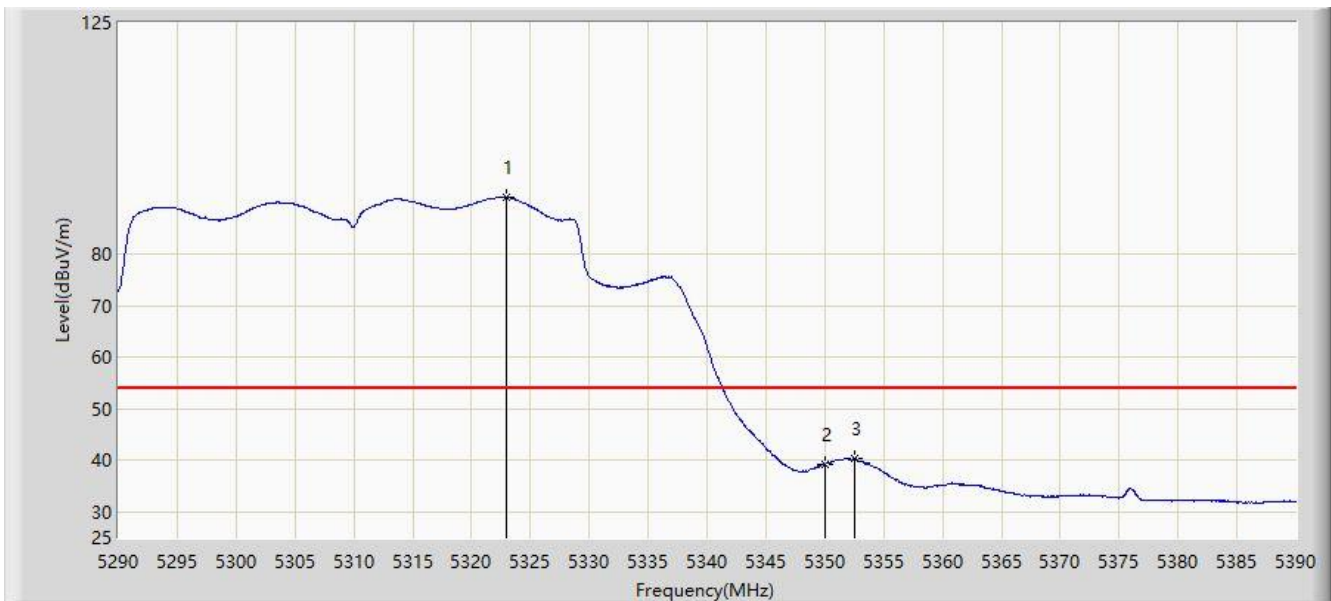


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5322.900	91.025	46.847	N/A	N/A	44.178	AV
2		5350.000	39.283	37.961	-14.717	54.000	1.322	AV
3	*	5352.500	40.325	39.858	-13.675	54.000	0.467	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

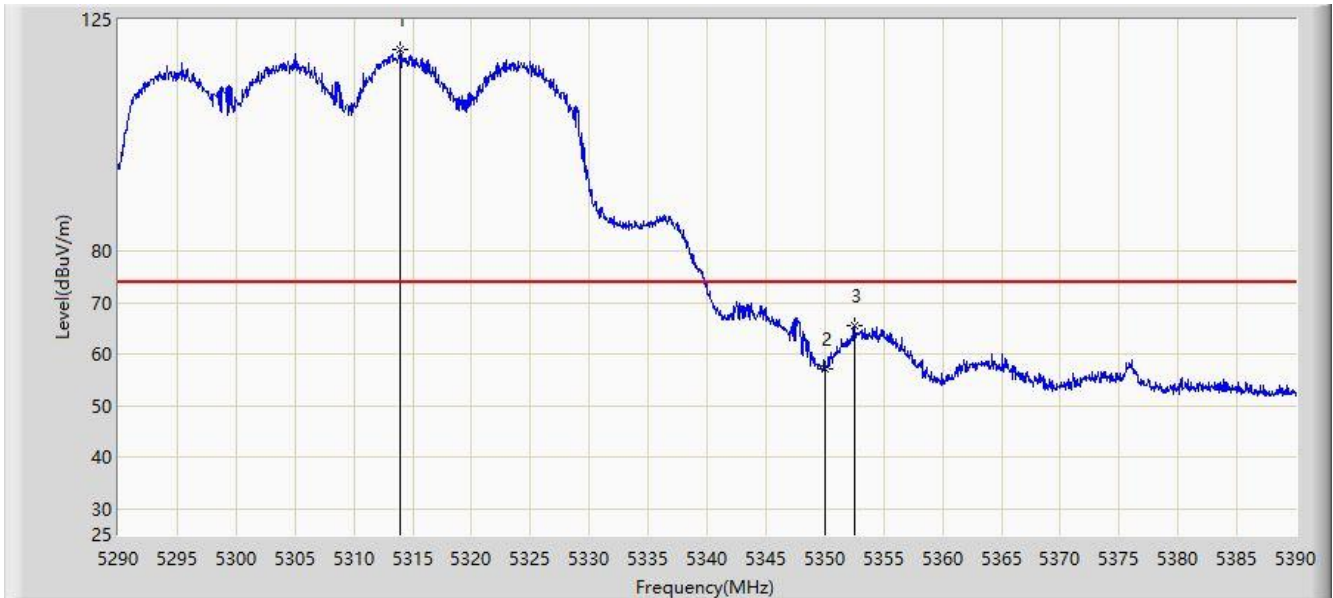


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5313.950	119.148	69.857	N/A	N/A	49.290	PK
2		5350.000	57.272	55.950	-16.728	74.000	1.322	PK
3	*	5352.500	65.482	65.015	-8.518	74.000	0.467	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

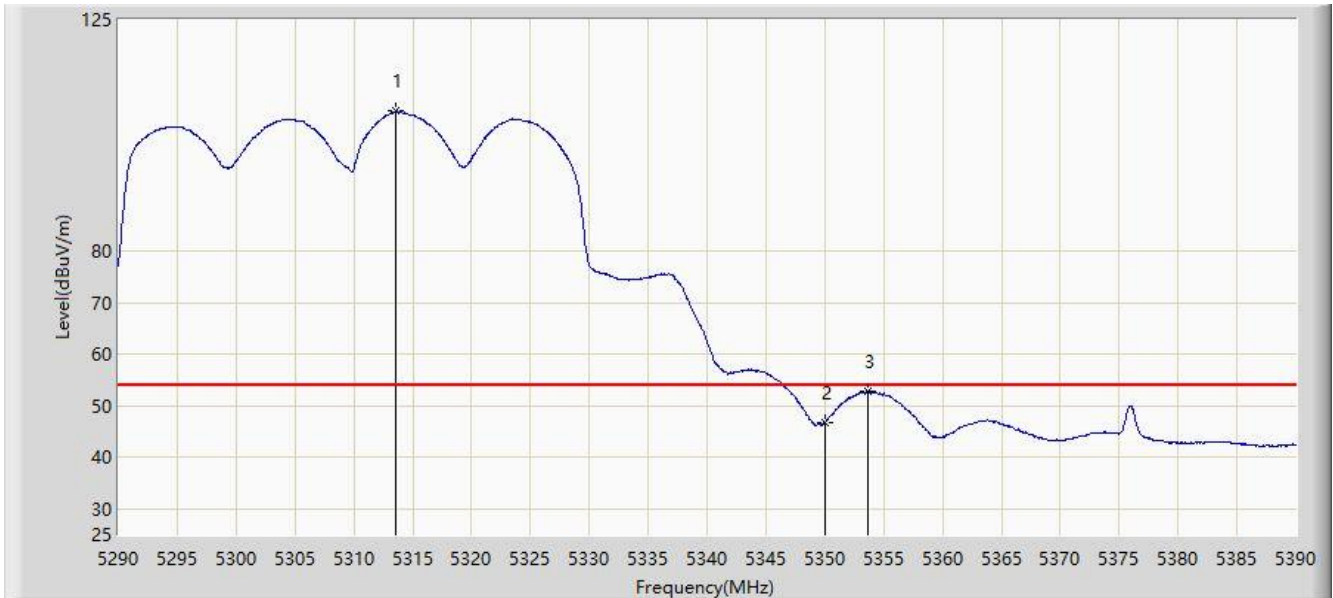


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5313.600	107.237	57.624	N/A	N/A	49.613	AV
2		5350.000	46.675	45.353	-7.325	54.000	1.322	AV
3	*	5353.700	52.802	52.665	-1.198	54.000	0.137	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

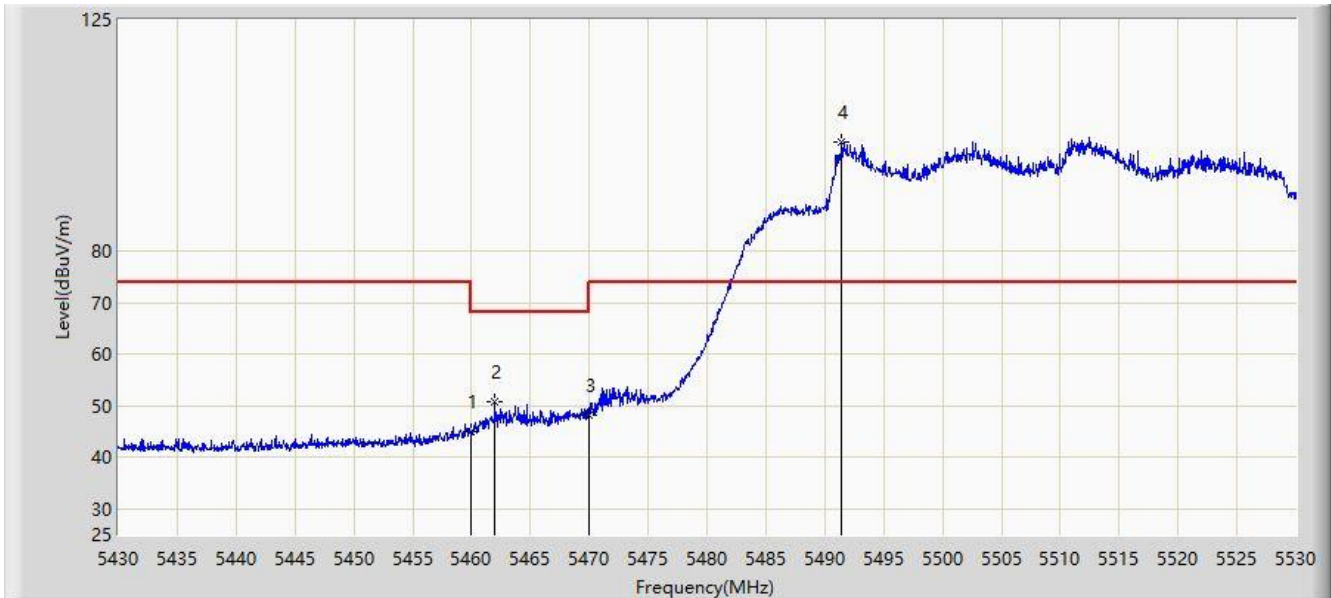


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	44.886	45.777	-29.114	74.000	-0.891	PK
2	*	5462.000	50.830	51.502	-17.370	68.200	-0.672	PK
3		5470.000	48.174	47.352	-20.026	68.200	0.823	PK
4		5491.400	101.276	54.517	N/A	N/A	46.759	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

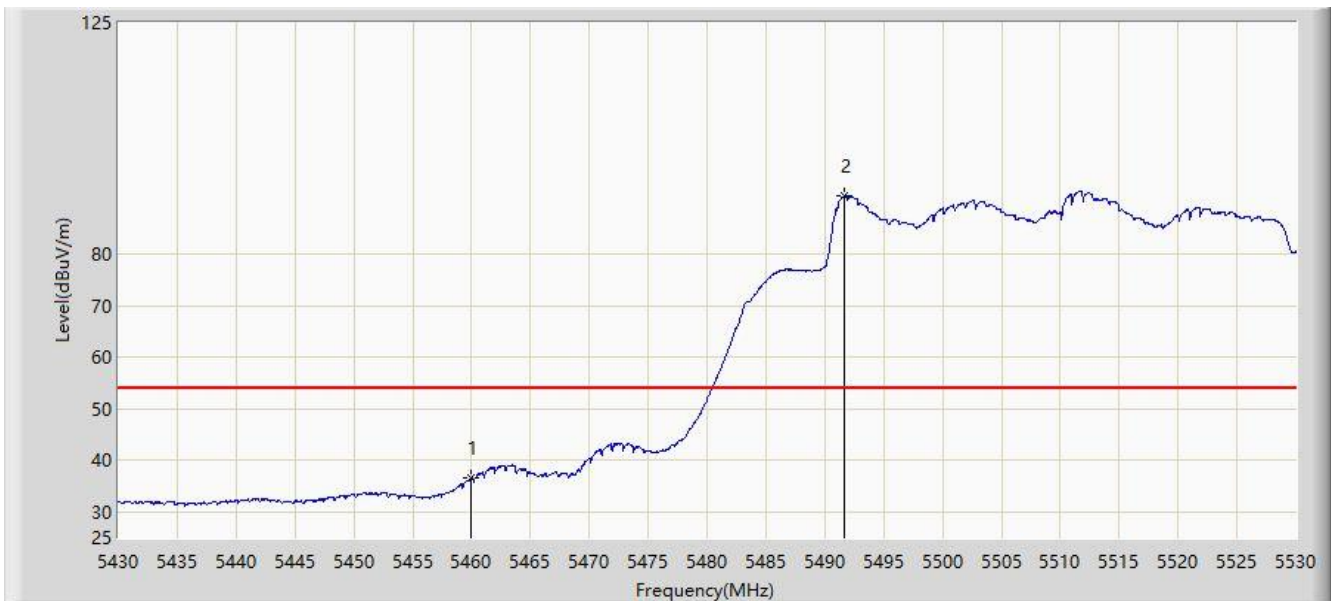


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	36.651	37.542	-17.349	54.000	-0.891	AV
2		5491.600	91.307	44.269	N/A	N/A	47.038	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

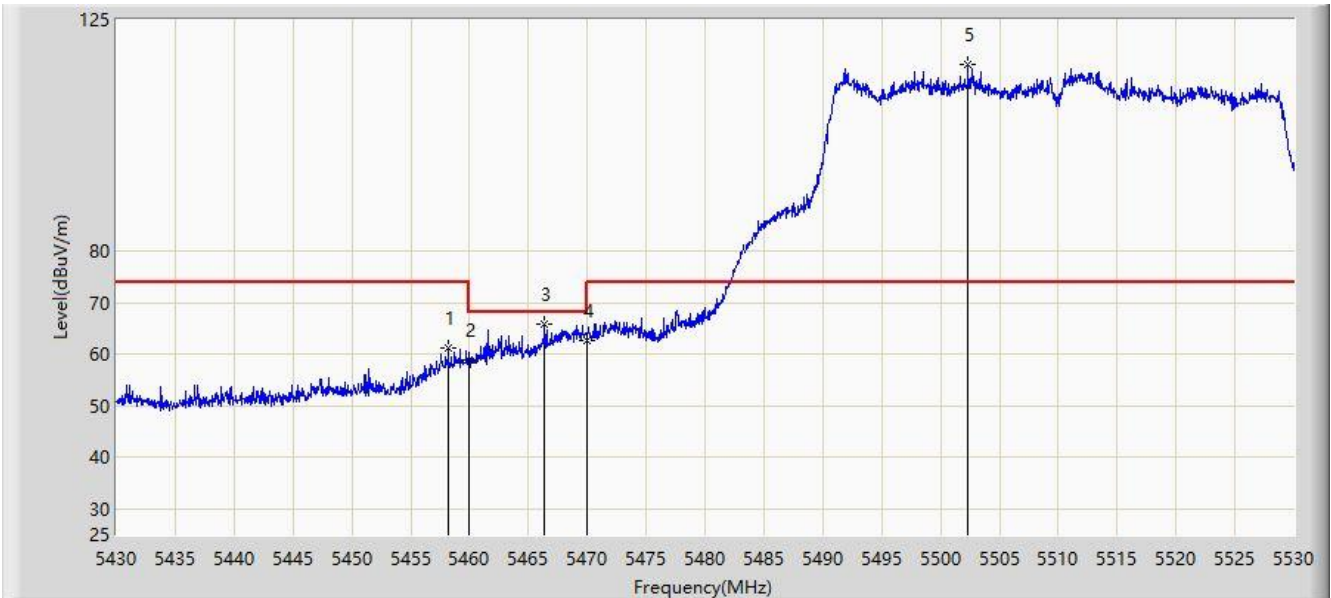


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.200	61.092	62.105	-12.908	74.000	-1.013	PK
2		5460.000	58.894	59.785	-15.106	74.000	-0.891	PK
3	*	5466.400	66.014	66.006	-2.186	68.200	0.007	PK
4		5470.000	62.758	61.936	-5.442	68.200	0.823	PK
5		5502.300	116.264	73.213	N/A	N/A	43.051	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

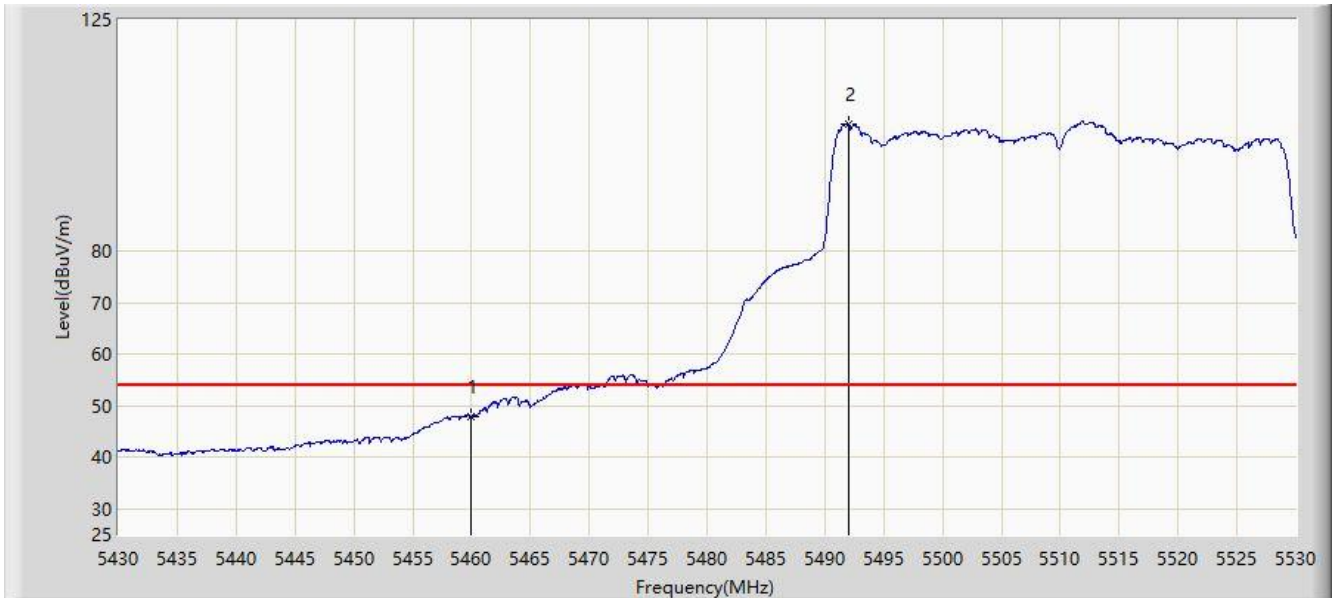


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	47.858	48.749	-6.142	54.000	-0.891	AV
2		5492.000	104.771	57.387	N/A	N/A	47.384	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2022-11-01
Limit: FCC_Part 15.209_RE(3m)	Engineer: Arvin
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: hAP ax3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

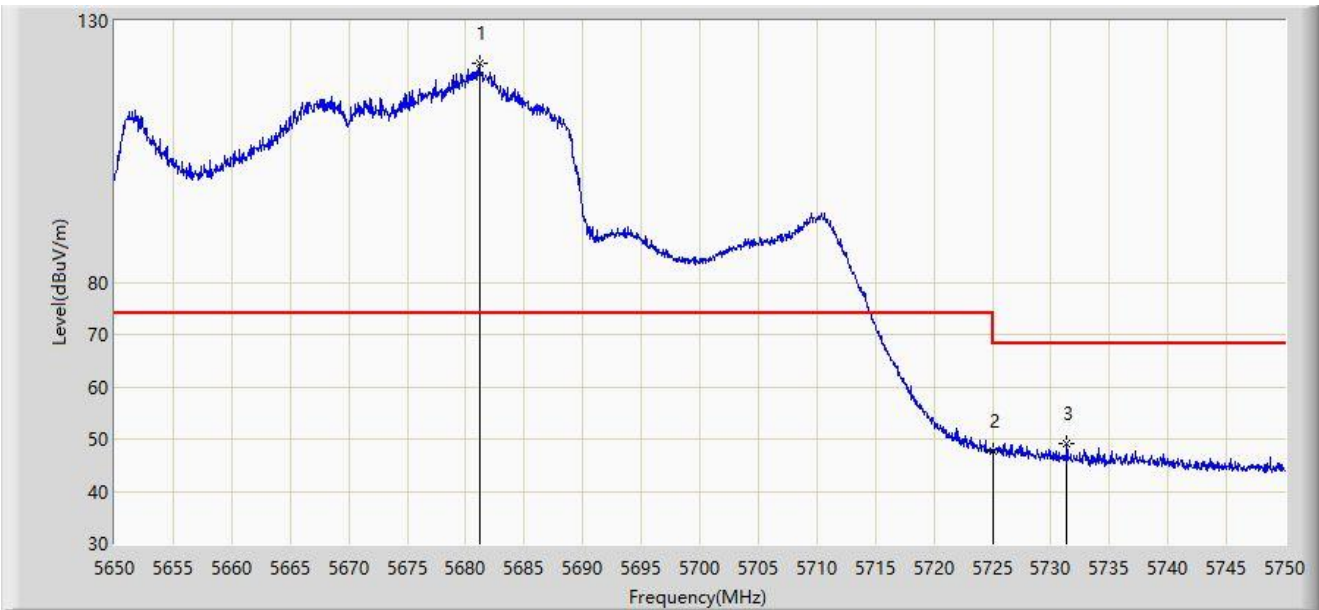


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5681.150	121.880	76.993	N/A	N/A	44.888	PK
2		5725.000	47.660	49.255	-20.540	68.200	-1.596	PK
3	*	5731.350	49.106	52.730	-19.094	68.200	-3.624	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2022-11-01
Limit: FCC_Part 15.209_RE(3m)	Engineer: Arvin
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: hAP ax3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

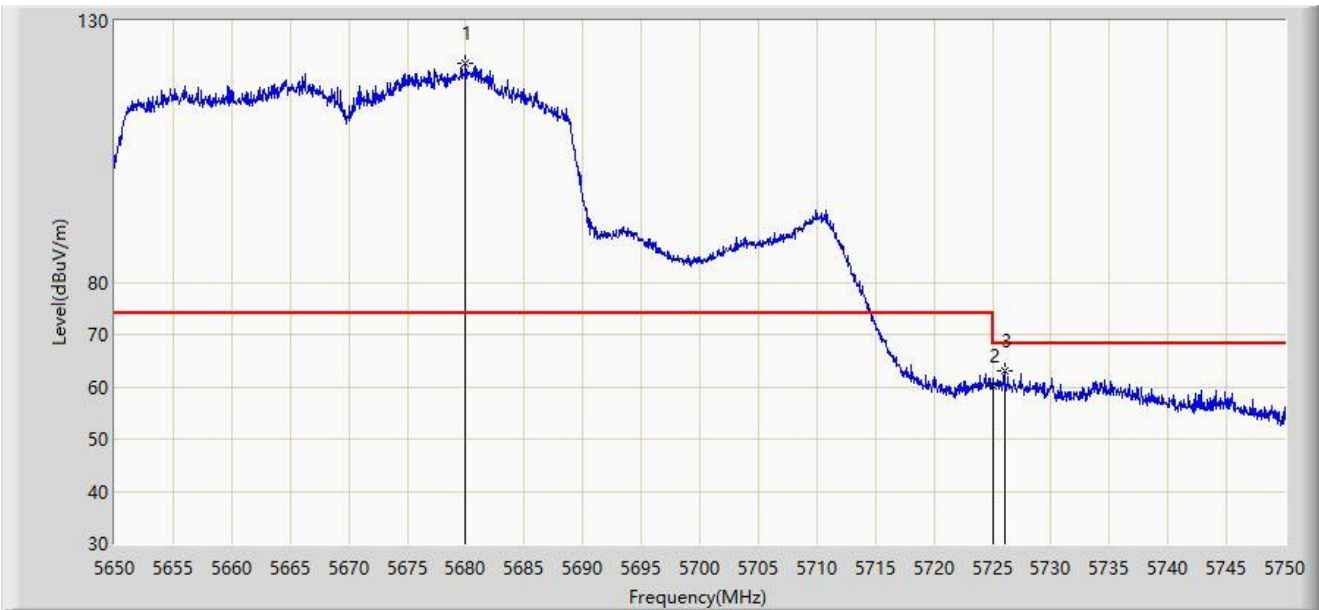


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5680.000	121.955	78.569	N/A	N/A	43.386	PK
2		5725.000	60.177	61.772	-8.023	68.200	-1.596	PK
3	*	5726.050	62.915	65.079	-5.285	68.200	-2.164	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-10-12
Limit: FCC_Part 15.407_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: hAP ax3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5710MHz	

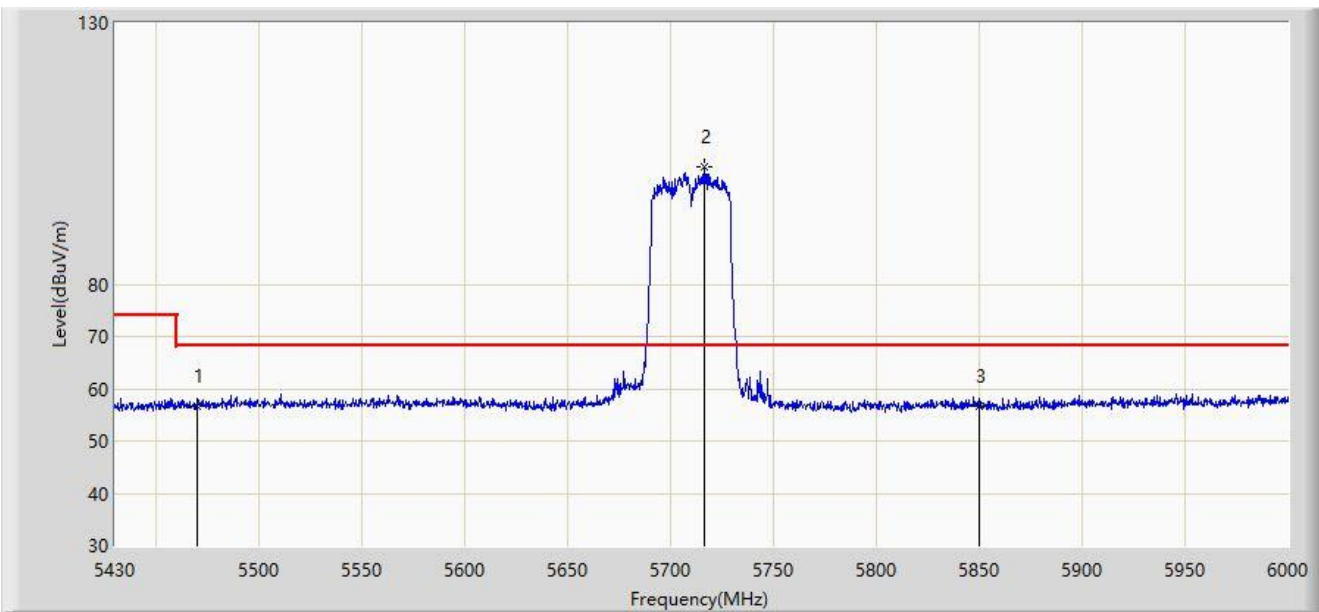


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5470.000	56.685	50.232	-11.515	68.200	6.453	PK
2		5716.710	102.388	95.917	N/A	N/A	6.472	PK
3	*	5850.000	56.729	49.650	-11.471	68.200	7.080	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-10-12
Limit: FCC_Part 15.407_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: hAP ax3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5710MHz	

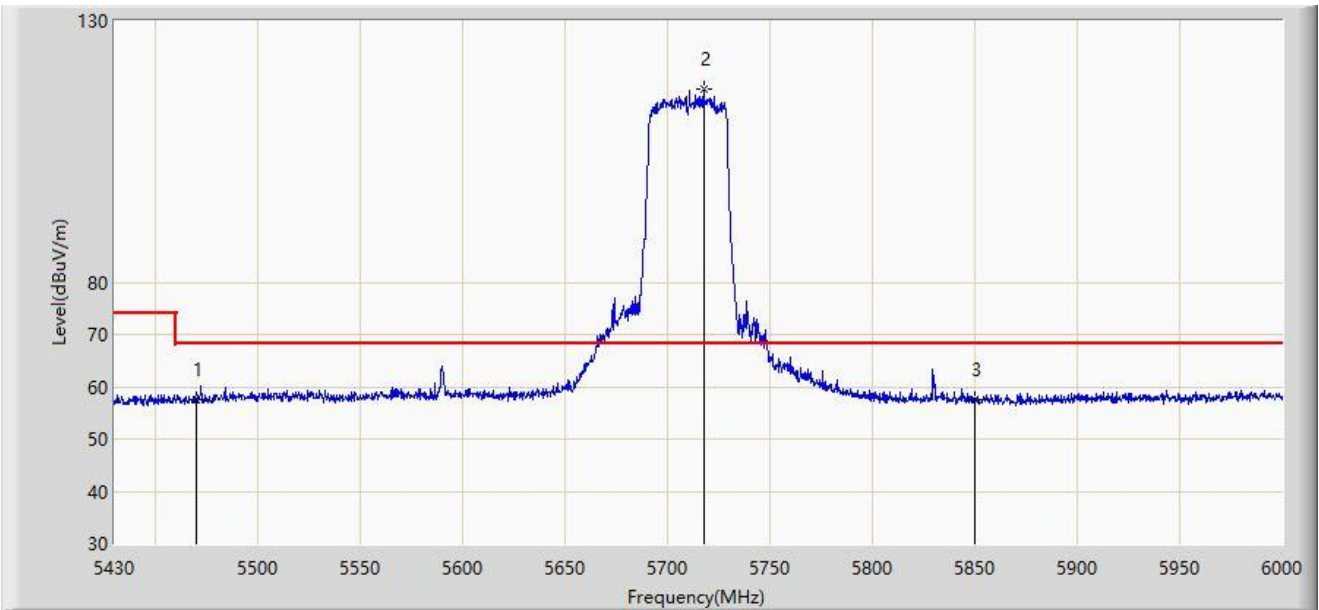


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5470.000	57.601	51.148	-10.599	68.200	6.453	PK
2		5717.565	116.889	110.415	N/A	N/A	6.473	PK
3		5850.000	57.415	50.336	-10.785	68.200	7.080	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.407_RE(3m)	Engineer: Barry Wu
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

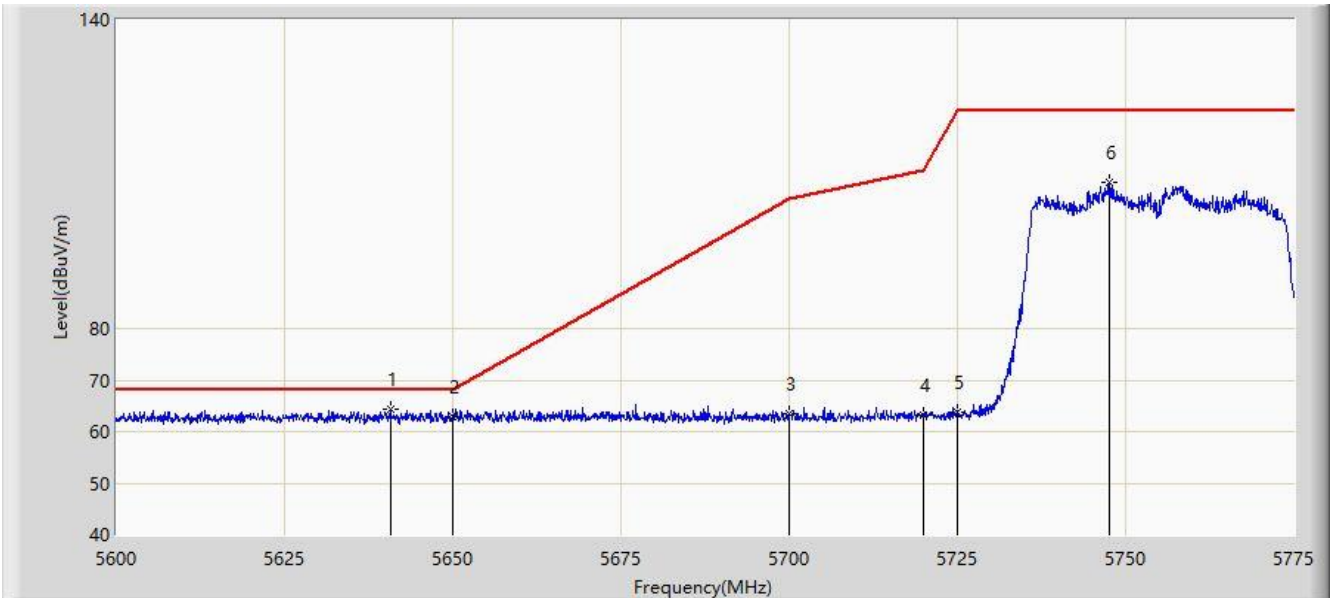


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5640.687	64.223	65.564	-3.977	68.200	-1.341	PK
2		5650.000	62.885	64.142	-5.315	68.200	-1.257	PK
3		5700.000	63.343	64.626	-41.857	105.200	-1.283	PK
4		5720.000	63.068	64.295	-47.732	110.800	-1.228	PK
5		5725.000	63.799	65.003	-58.401	122.200	-1.204	PK
6		5747.525	108.291	109.471	N/A	N/A	-1.180	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.407_RE(3m)	Engineer: Barry Wu
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

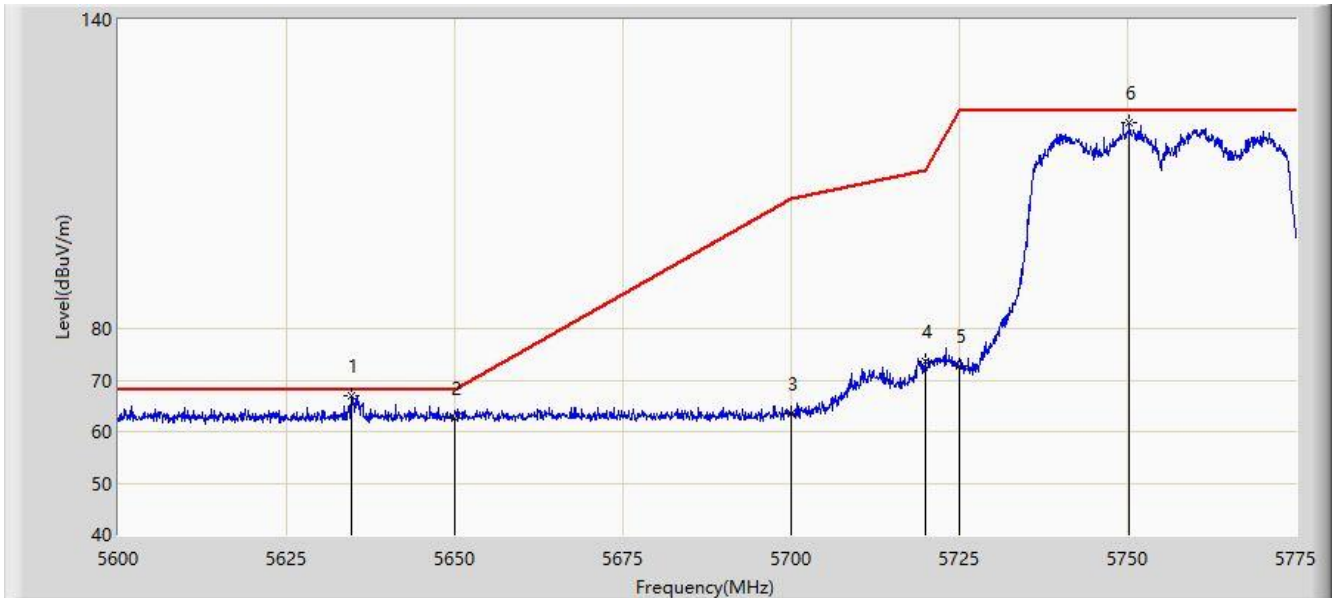


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.737	66.915	68.278	-1.285	68.200	-1.363	PK
2		5650.000	62.589	63.846	-5.611	68.200	-1.257	PK
3		5700.000	63.469	64.752	-41.731	105.200	-1.283	PK
4		5720.000	73.752	74.979	-37.048	110.800	-1.228	PK
5		5725.000	72.789	73.993	-49.411	122.200	-1.204	PK
6		5750.237	119.905	121.064	N/A	N/A	-1.159	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.407_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

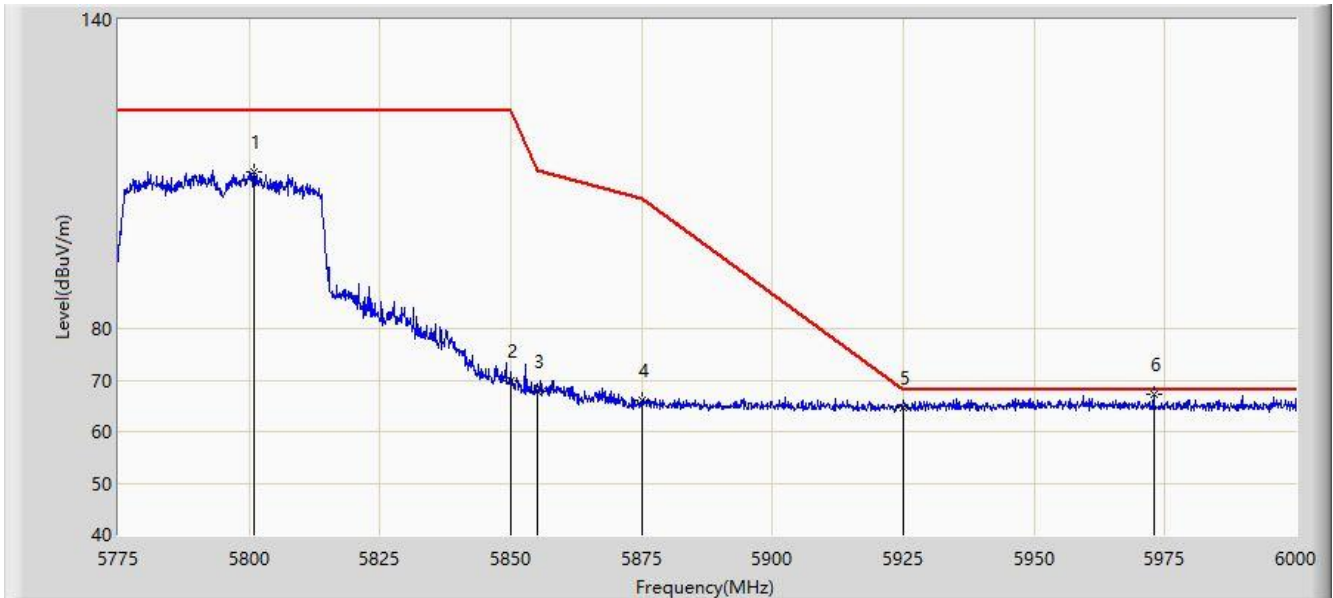


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5800.875	110.397	113.885	N/A	N/A	-3.488	PK
2		5850.000	69.780	73.528	-52.420	122.200	-3.747	PK
3		5855.000	67.810	71.550	-42.990	110.800	-3.740	PK
4		5875.000	66.079	69.668	-39.121	105.200	-3.589	PK
5		5925.000	64.571	68.161	-3.629	68.200	-3.589	PK
6	*	5972.888	67.178	70.552	-1.022	68.200	-3.374	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.407_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

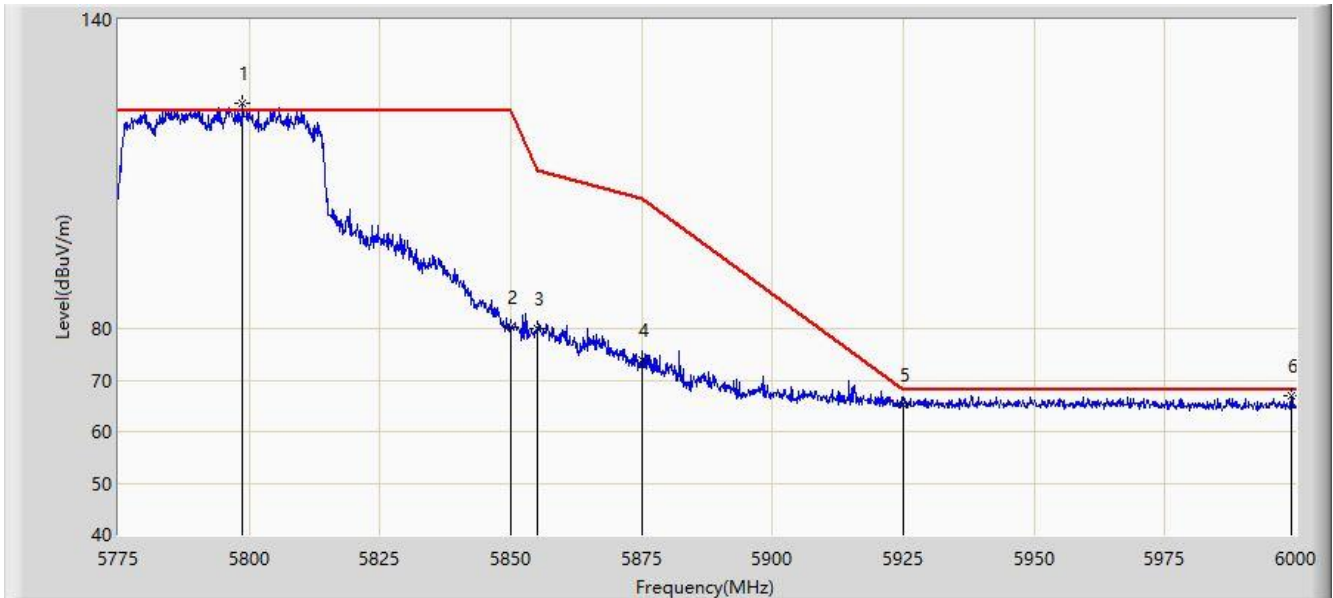


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5798.737	123.670	127.184	N/A	N/A	-3.514	PK
2		5850.000	80.271	84.019	-41.929	122.200	-3.747	PK
3		5855.000	80.053	83.793	-30.747	110.800	-3.740	PK
4		5875.000	73.911	77.500	-31.289	105.200	-3.589	PK
5		5925.000	65.214	68.804	-2.986	68.200	-3.589	PK
6	*	5999.100	66.990	70.419	-1.210	68.200	-3.429	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

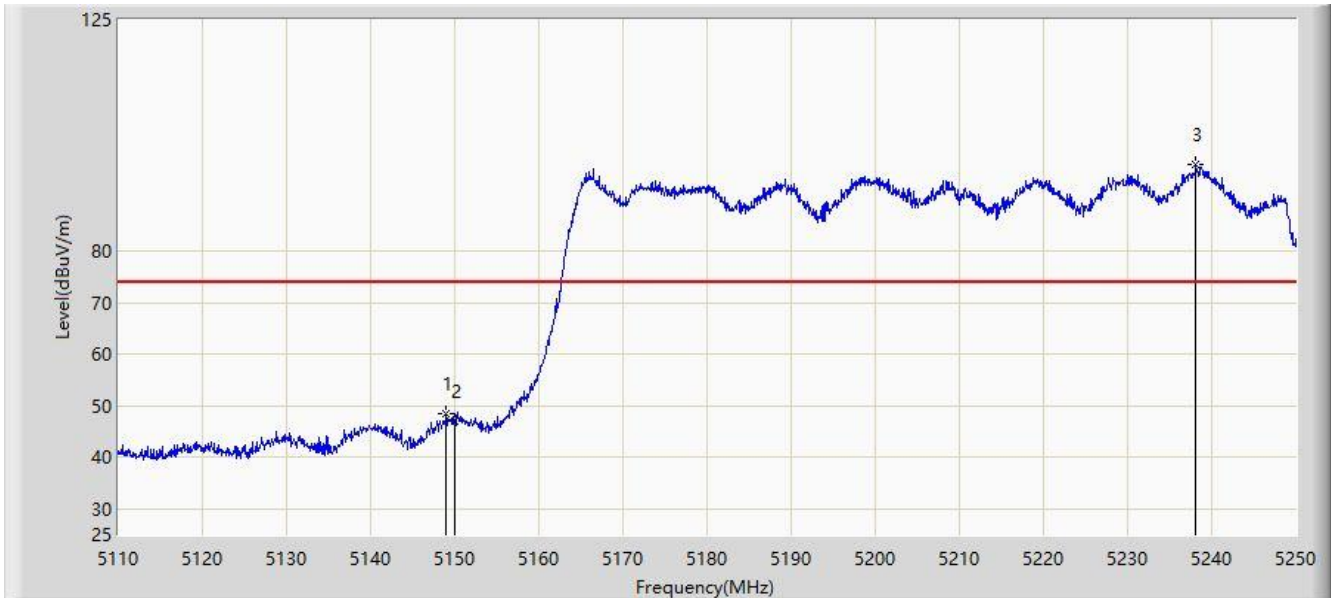


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.990	48.442	48.943	-25.558	74.000	-0.501	PK
2		5150.000	47.058	47.360	-26.942	74.000	-0.302	PK
3		5238.100	96.906	47.322	N/A	N/A	49.585	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

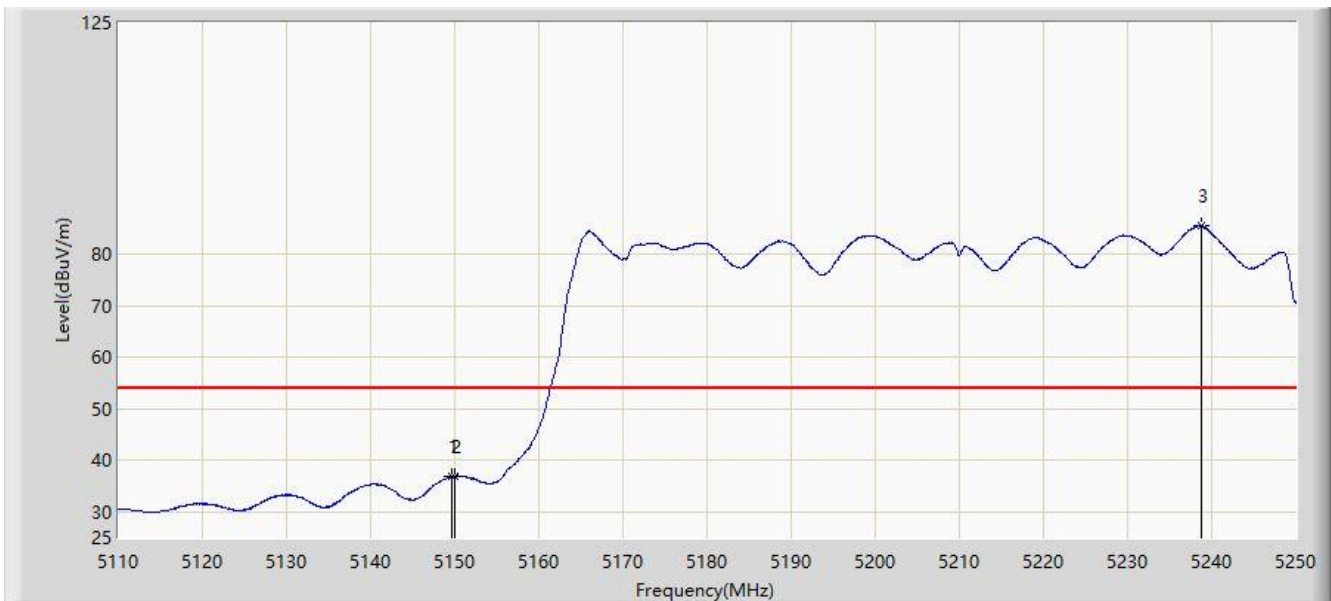


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.620	36.970	37.341	-17.030	54.000	-0.371	AV
2		5150.000	36.836	37.138	-17.164	54.000	-0.302	AV
3		5238.800	85.650	35.106	N/A	N/A	50.544	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

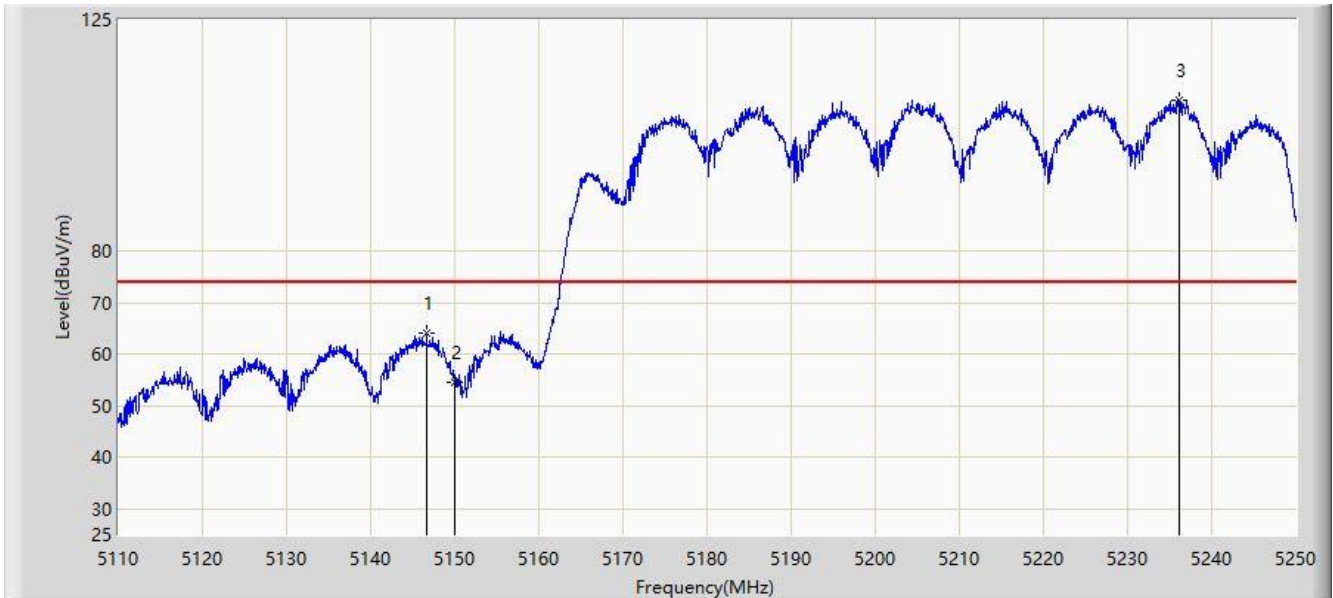


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5146.680	64.116	64.988	-9.884	74.000	-0.871	PK
2		5150.000	54.615	54.917	-19.385	74.000	-0.302	PK
3		5236.140	109.459	63.587	N/A	N/A	45.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

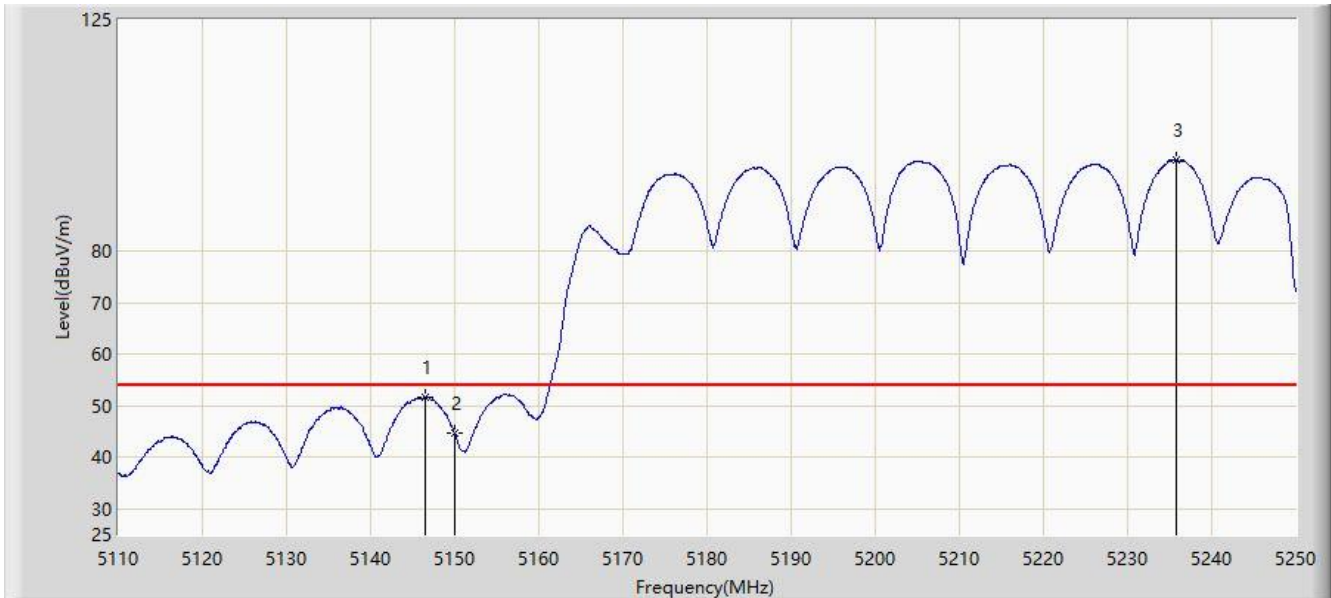

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5146.470	51.649	52.568	-2.351	54.000	-0.919	AV
2		5150.000	44.664	44.966	-9.336	54.000	-0.302	AV
3		5235.790	97.810	52.519	N/A	N/A	45.292	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	



No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5280.135	100.539	52.242	N/A	N/A	48.297	PK
2		5350.000	49.098	47.776	-24.902	74.000	1.322	PK
3	*	5409.705	57.503	60.095	-16.497	74.000	-2.592	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	



No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5280.555	88.985	40.212	N/A	N/A	48.772	AV
2	*	5350.000	38.489	37.167	-15.511	54.000	1.322	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5276.565	113.567	69.675	N/A	N/A	43.893	PK
2		5350.000	61.555	60.233	-12.445	74.000	1.322	PK
3	*	5409.810	67.454	70.044	-6.546	74.000	-2.589	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

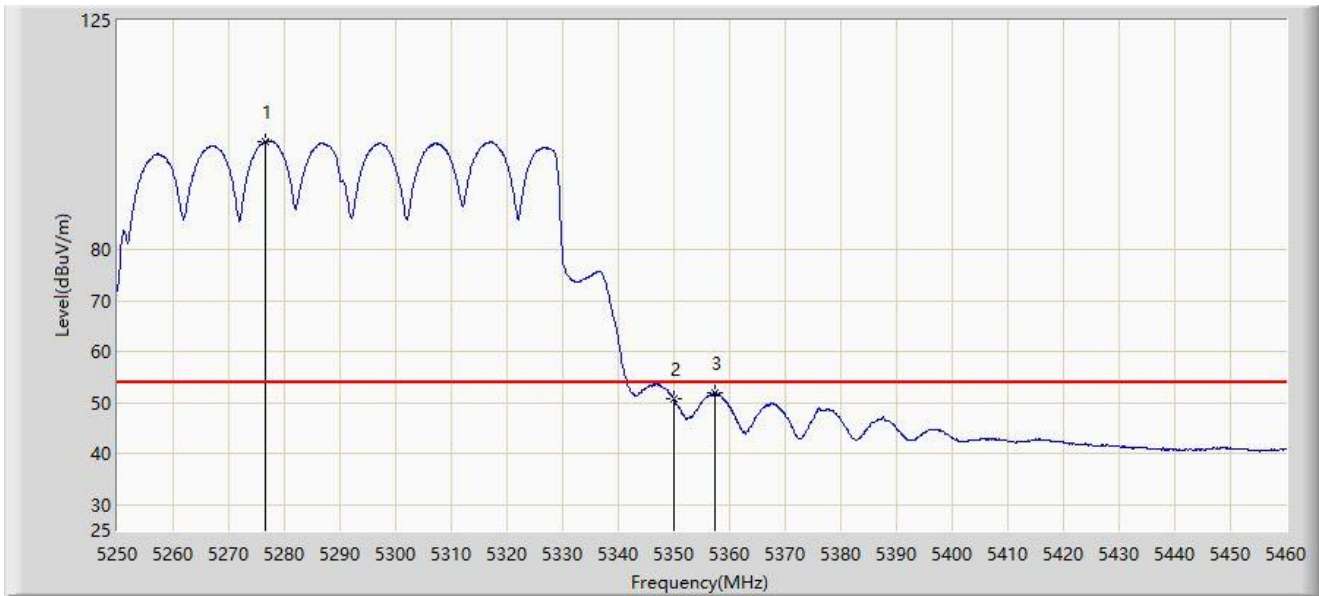


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5276.670	101.344	57.361	N/A	N/A	43.983	AV
2		5350.000	50.689	49.367	-3.311	54.000	1.322	AV
3	*	5357.415	51.972	52.529	-2.028	54.000	-0.558	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

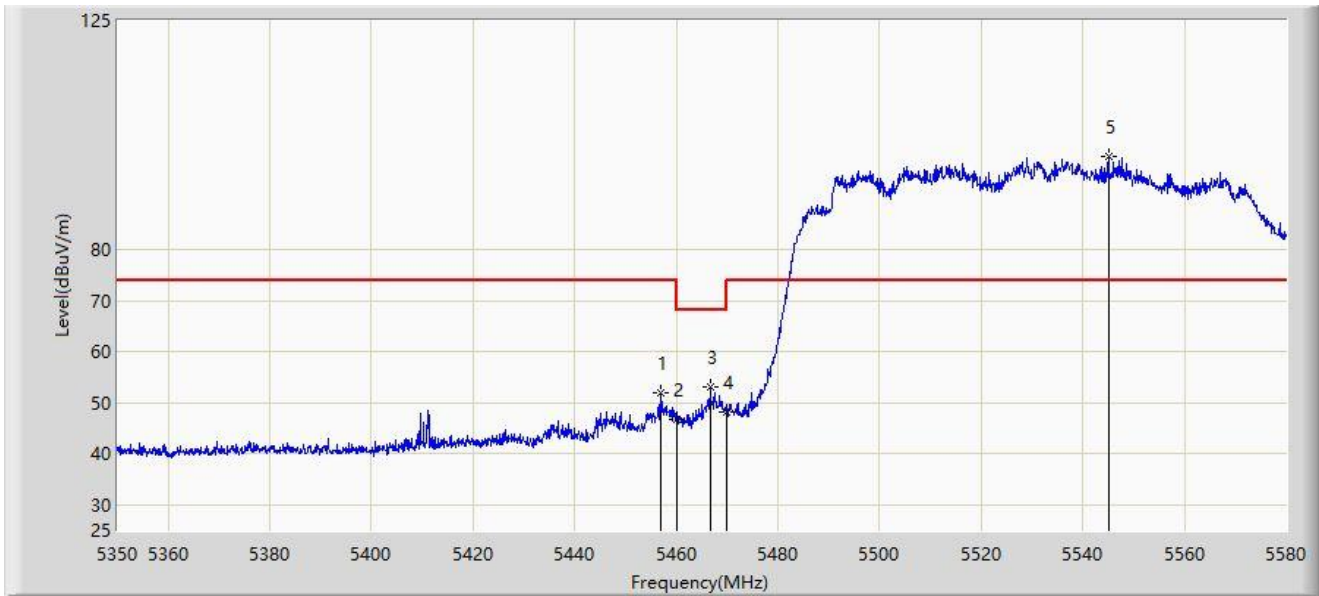

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5456.950	51.919	53.056	-22.081	74.000	-1.137	PK
2		5460.000	46.662	47.553	-27.338	74.000	-0.891	PK
3	*	5466.610	53.224	53.183	-14.976	68.200	0.041	PK
4		5470.000	48.132	47.310	-20.068	68.200	0.823	PK
5		5545.040	98.389	56.983	N/A	N/A	41.406	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5456.145	39.559	40.758	-14.441	54.000	-1.199	AV
2		5460.000	38.105	38.996	-15.895	54.000	-0.891	AV
3		5531.010	88.259	37.752	N/A	N/A	50.508	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

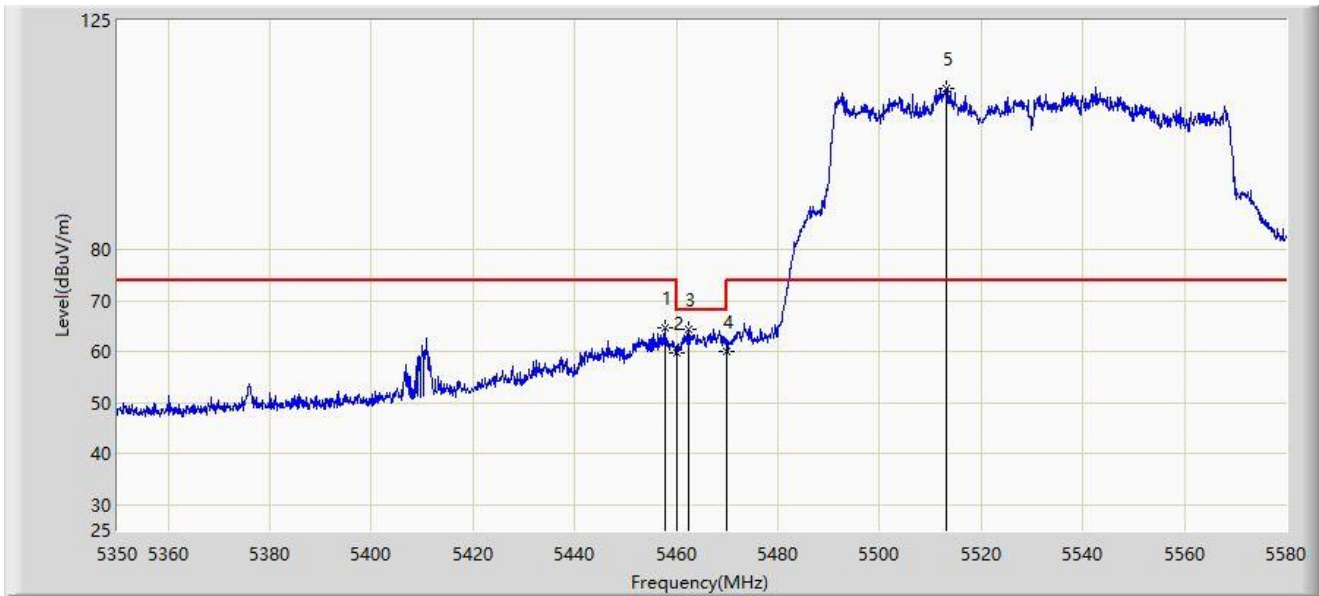


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5457.755	64.739	65.826	-9.261	74.000	-1.087	PK
2		5460.000	59.872	60.763	-14.128	74.000	-0.891	PK
3	*	5462.355	64.444	65.098	-3.756	68.200	-0.653	PK
4		5470.000	60.186	59.364	-8.014	68.200	0.823	PK
5		5513.070	111.788	68.109	N/A	N/A	43.678	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

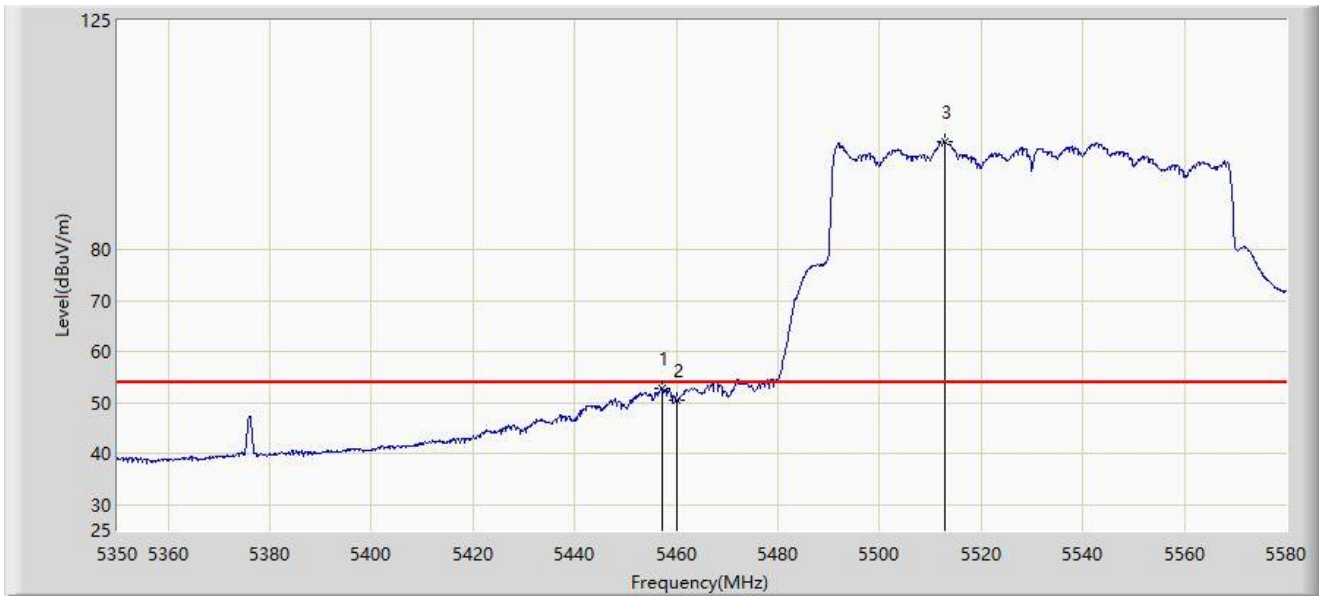


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5457.180	52.811	53.941	-1.189	54.000	-1.131	AV
2		5460.000	50.467	51.358	-3.533	54.000	-0.891	AV
3		5512.955	101.160	57.637	N/A	N/A	43.523	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

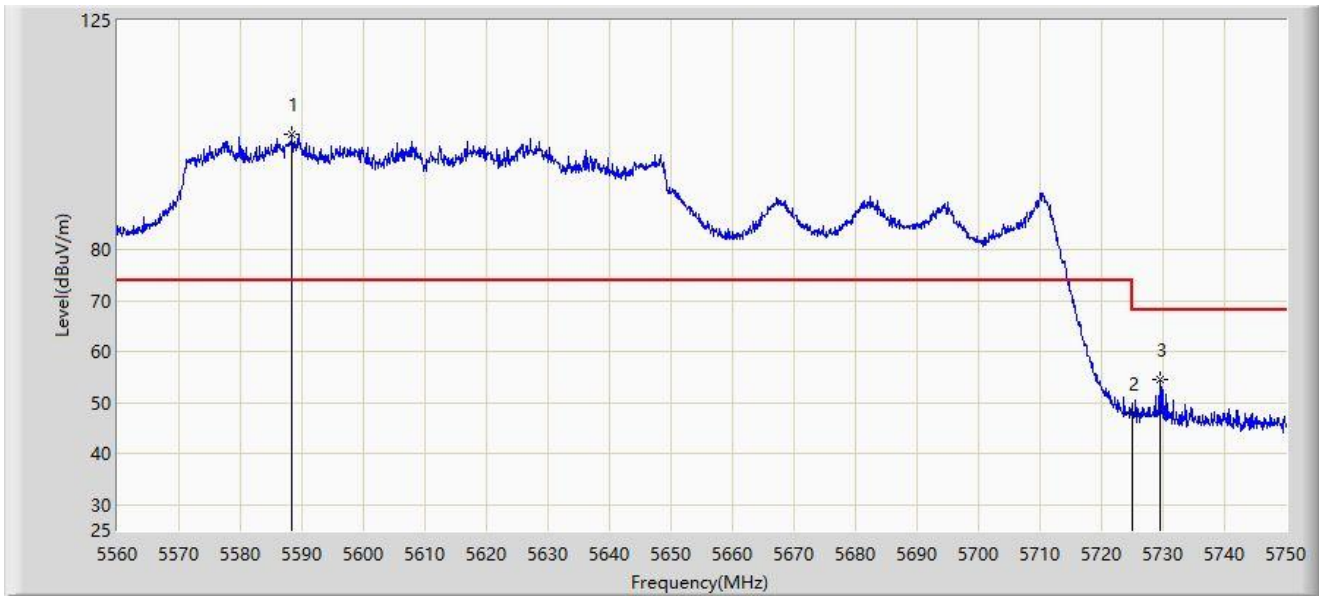


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5588.405	102.683	57.410	N/A	N/A	45.273	PK
2		5725.000	47.893	45.328	-20.307	68.200	2.565	PK
3	*	5729.575	54.547	53.730	-13.653	68.200	0.817	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

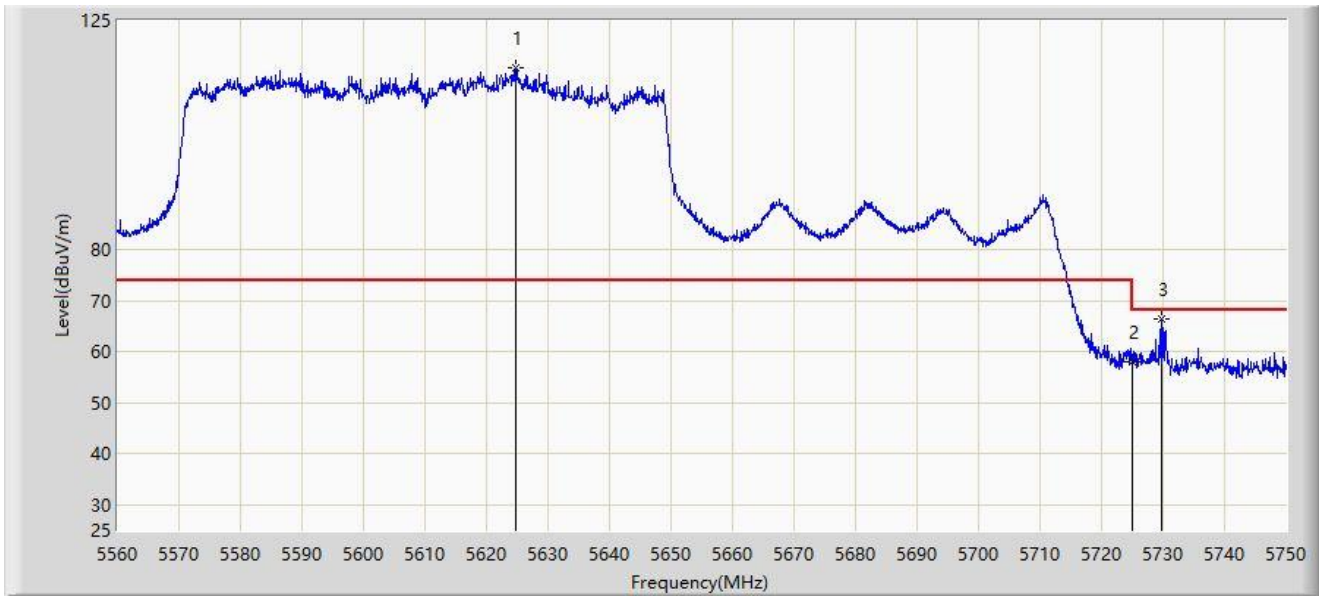


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5624.790	115.811	74.444	N/A	N/A	41.367	PK
2		5725.000	58.162	55.597	-10.038	68.200	2.565	PK
3	*	5729.765	66.367	65.587	-1.833	68.200	0.780	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-10-12
Limit: FCC_Part 15.407_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: hAP ax3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5690MHz	

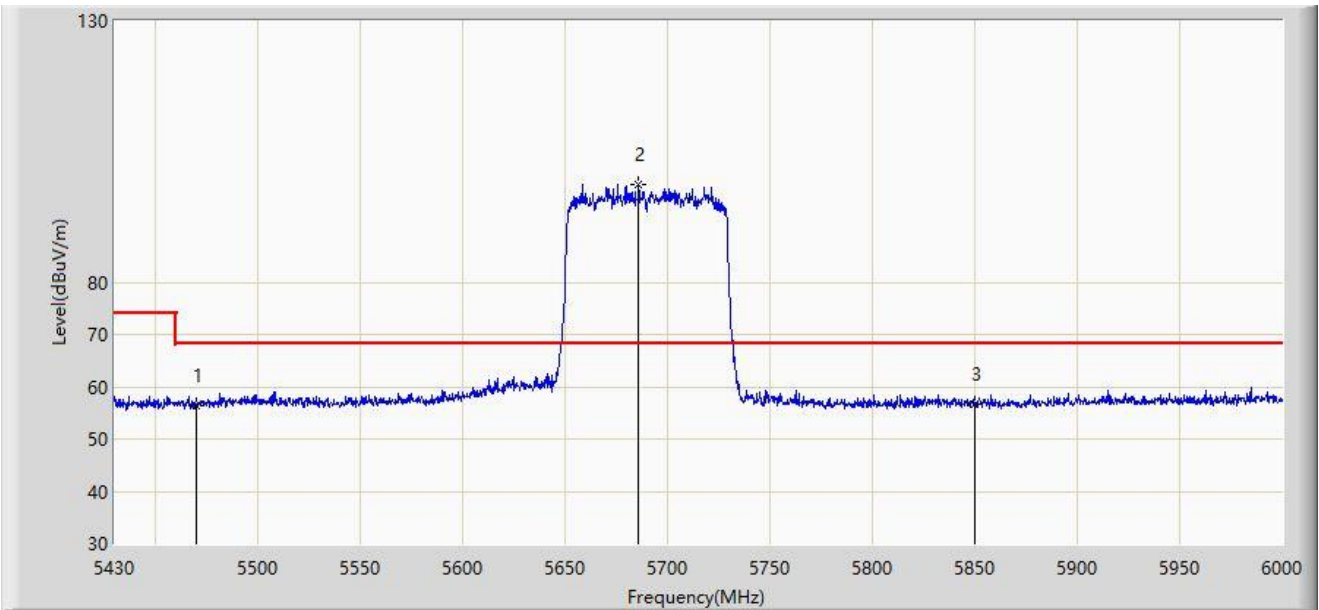


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5470.000	56.469	50.016	-11.731	68.200	6.453	PK
2		5685.930	98.616	92.104	N/A	N/A	6.512	PK
3	*	5850.000	56.557	49.478	-11.643	68.200	7.080	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2022-10-12
Limit: FCC_Part 15.407_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: hAP ax3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5690MHz	

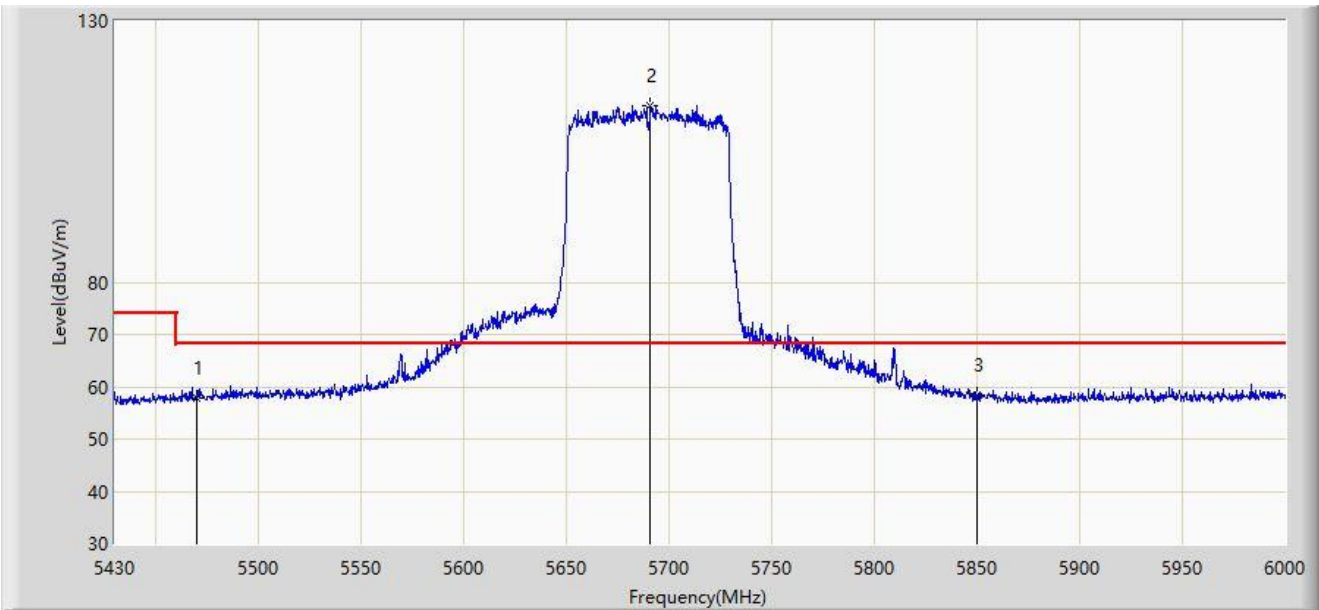


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5470.000	57.910	51.457	-10.290	68.200	6.453	PK
2		5691.060	113.709	107.204	N/A	N/A	6.504	PK
3	*	5850.000	58.337	51.258	-9.863	68.200	7.080	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.407_RE(3m)	Engineer: Barry Wu
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

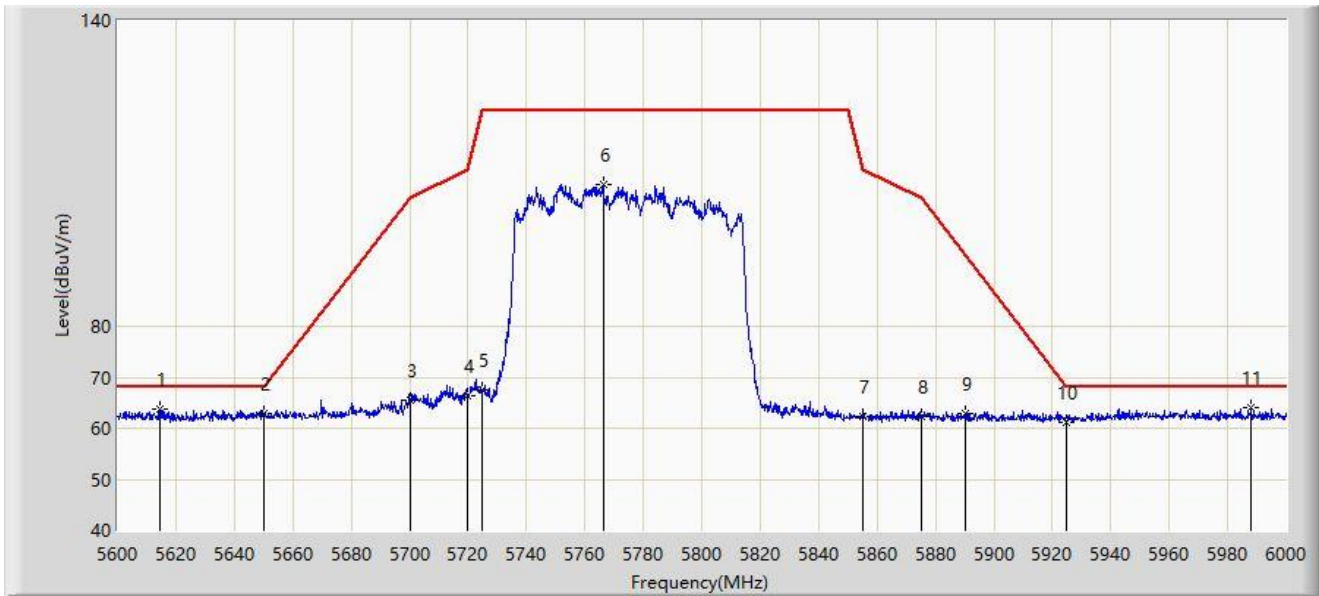


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5614.400	63.880	65.264	-4.320	68.200	-1.384	PK
2		5650.000	62.914	64.171	-5.286	68.200	-1.257	PK
3		5700.000	65.627	66.910	-39.573	105.200	-1.283	PK
4		5720.000	66.341	67.568	-44.459	110.800	-1.228	PK
5		5725.000	67.644	68.848	-54.556	122.200	-1.204	PK
6		5766.200	107.766	108.799	N/A	N/A	-1.033	PK
7		5855.000	62.206	63.296	-48.594	110.800	-1.090	PK
8		5875.000	62.432	63.406	-42.768	105.200	-0.974	PK
9		5890.000	62.950	63.899	-31.150	94.100	-0.950	PK
10		5925.000	61.070	62.100	-7.130	68.200	-1.029	PK
11	*	5988.200	63.970	64.832	-4.230	68.200	-0.862	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2022-07-20
Limit: FCC_Part 15.407_RE(3m)	Engineer: Barry Wu
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: hAP ax ³	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

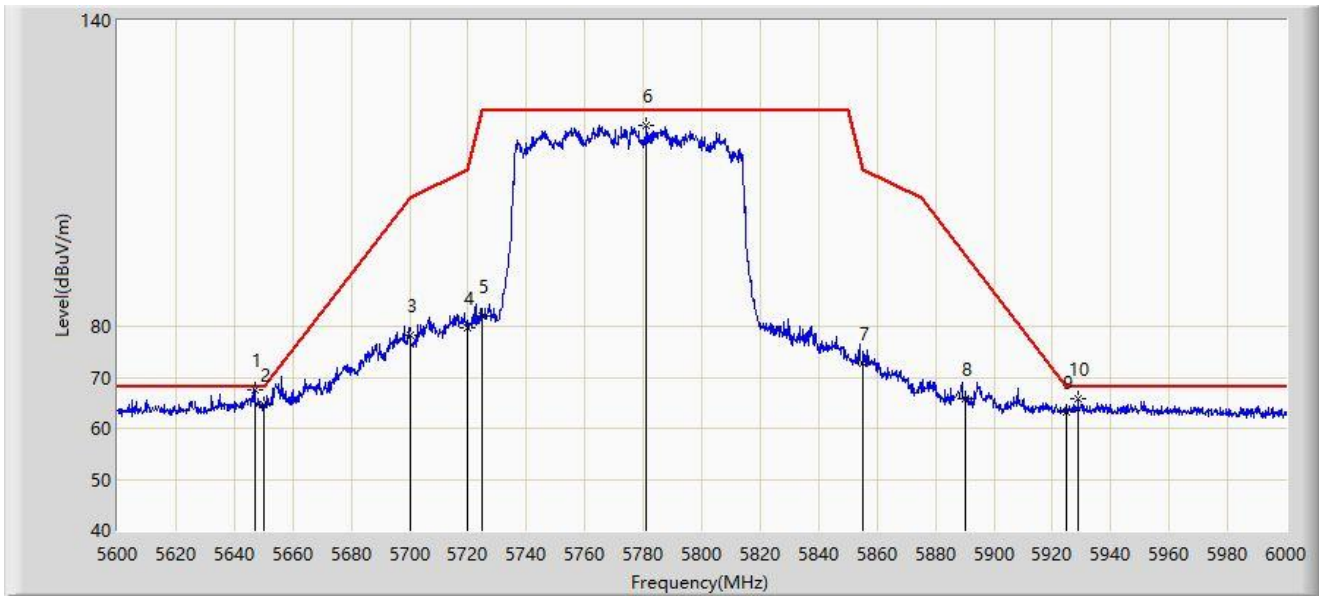

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.000	67.523	68.807	-0.677	68.200	-1.284	PK
2		5650.000	64.510	65.767	-3.690	68.200	-1.257	PK
3		5700.000	78.307	79.590	-26.893	105.200	-1.283	PK
4		5720.000	79.583	80.810	-31.217	110.800	-1.228	PK
5		5725.000	82.088	83.292	-40.112	122.200	-1.204	PK
6		5781.200	119.555	120.477	N/A	N/A	-0.922	PK
7		5855.000	72.836	73.926	-37.964	110.800	-1.090	PK
8		5890.000	65.872	66.821	-28.228	94.100	-0.950	PK
9		5925.000	63.203	64.233	-4.997	68.200	-1.029	PK
10		5928.800	65.780	66.767	-2.420	68.200	-0.987	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2022-09-07
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: hAP ax3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5785MHz	

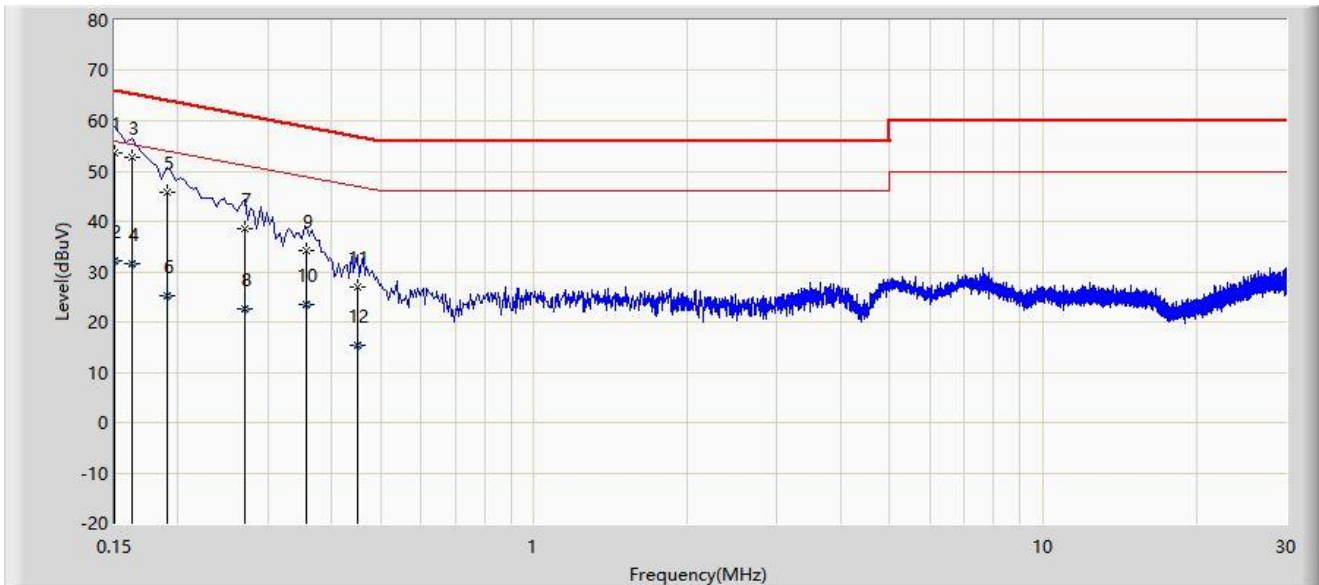


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.150	53.577	43.700	-12.423	66.000	9.878	QP
2		0.150	32.095	22.217	-23.905	56.000	9.878	AV
3		0.162	52.724	42.844	-12.637	65.361	9.880	QP
4		0.162	31.480	21.600	-23.880	55.361	9.880	AV
5		0.190	45.863	35.983	-18.174	64.037	9.880	QP
6		0.190	25.138	15.258	-28.899	54.037	9.880	AV
7		0.270	38.545	28.649	-22.573	61.118	9.896	QP
8		0.270	22.504	12.608	-28.614	51.118	9.896	AV
9		0.358	34.079	24.163	-24.695	58.775	9.916	QP
10		0.358	23.560	13.644	-25.215	48.775	9.916	AV
11		0.450	27.012	17.074	-29.863	56.875	9.938	QP
12		0.450	15.495	5.557	-31.380	46.875	9.938	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2022-09-07
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: hAP ax3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5785MHz	

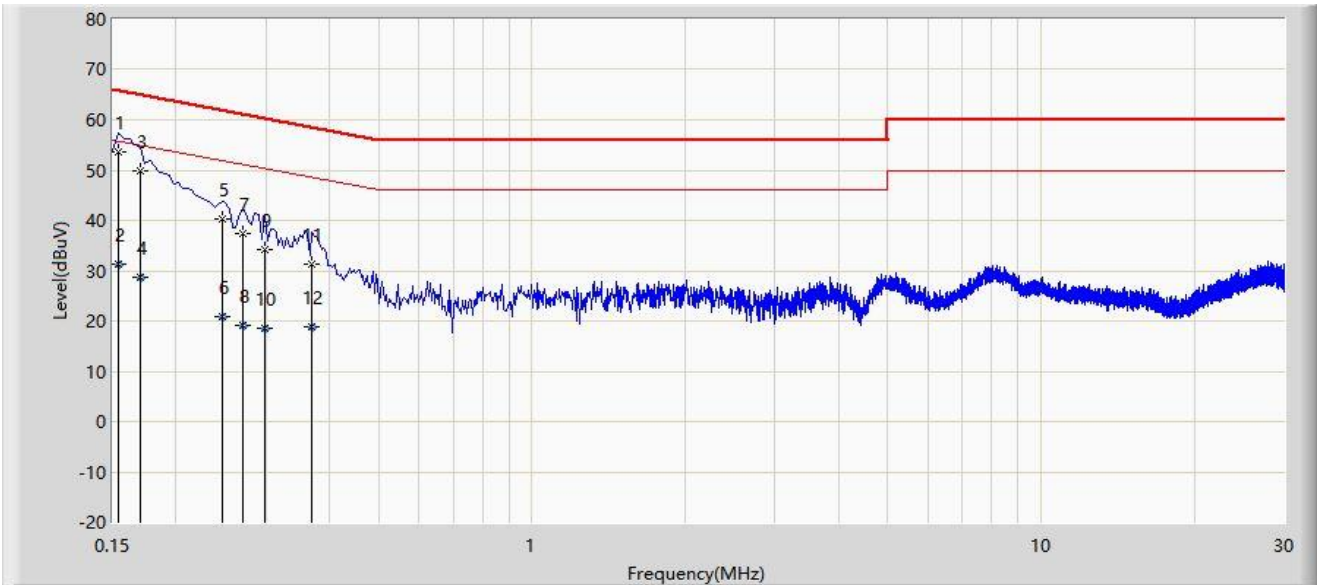

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.154	53.730	43.829	-12.051	65.781	9.901	QP
2		0.154	31.287	21.386	-24.494	55.781	9.901	AV
3		0.170	49.764	39.860	-15.196	64.960	9.904	QP
4		0.170	28.780	18.876	-26.180	54.960	9.904	AV
5		0.246	40.191	30.274	-21.700	61.891	9.918	QP
6		0.246	20.955	11.038	-30.936	51.891	9.918	AV
7		0.270	37.503	27.582	-23.615	61.118	9.921	QP
8		0.270	19.269	9.347	-31.849	51.118	9.921	AV
9		0.298	34.100	24.174	-26.198	60.298	9.926	QP
10		0.298	18.660	8.734	-31.639	50.298	9.926	AV
11		0.370	31.363	21.425	-27.138	58.501	9.938	QP
12		0.370	18.761	8.822	-29.740	48.501	9.938	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2207RSU013-UT” file.

Appendix C – EUT Photograph

Refer to “2207RSU013-UE” file.

_____ The End _____