



## 802.11ax-HE80 26dB &amp; 99% Bandwidth


Channel 42 (5210MHz)

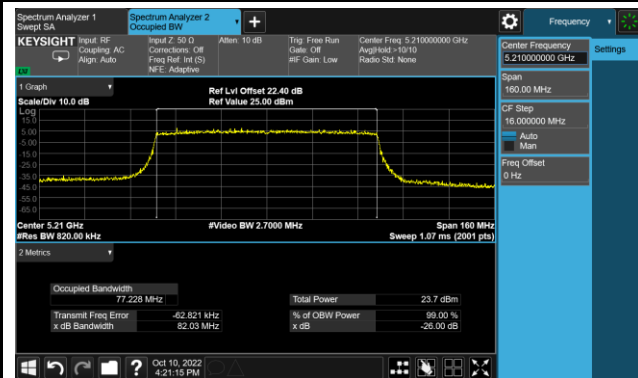


Channel 58 (5290MHz)

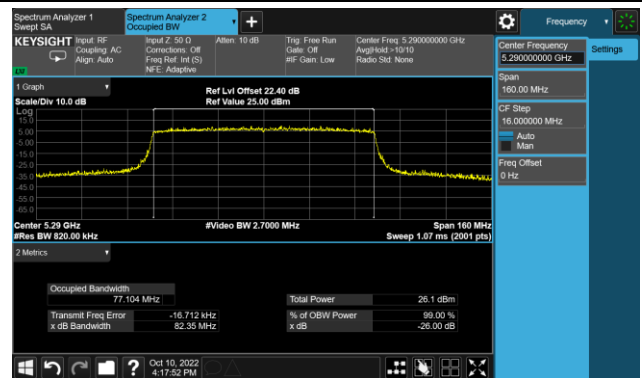


Channel 106 (5530MHz)

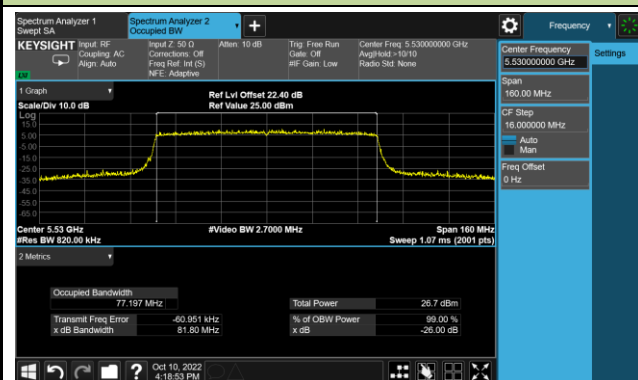


Channel 122 (5610MHz)

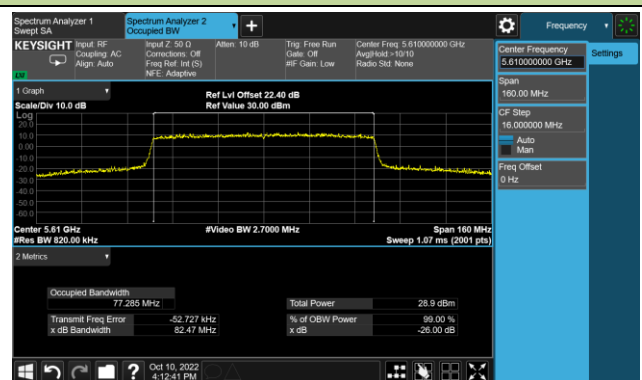

Channel 138 (5690MHz)

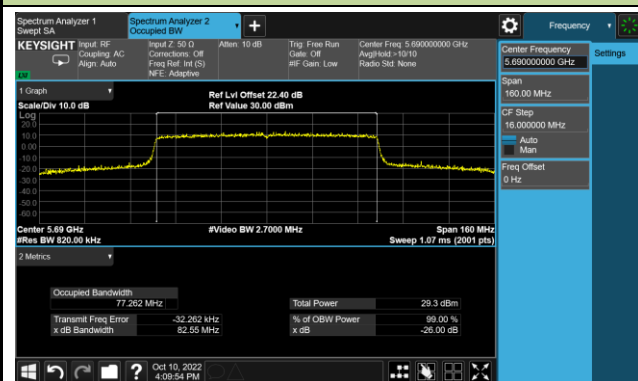

Channel 155 (5775MHz)

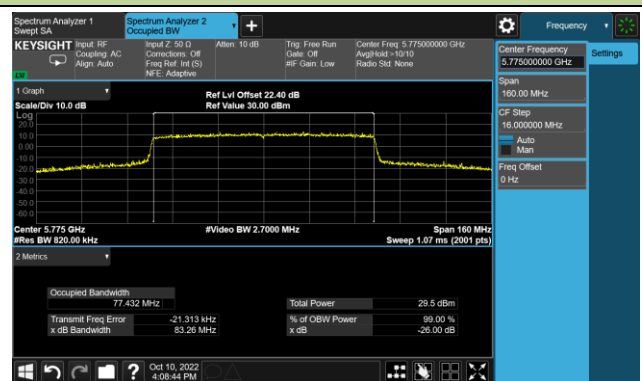


**A.3 6dB Bandwidth Test Result**

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-10-11		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	16.30	≥ 0.5
11a	6Mbps	157	5785	16.29	≥ 0.5
11a	6Mbps	165	5825	15.74	≥ 0.5
11ac-VHT20	MCS0	149	5745	16.92	≥ 0.5
11ac-VHT20	MCS0	157	5785	17.20	≥ 0.5
11ac-VHT20	MCS0	165	5825	17.06	≥ 0.5
11ac-VHT40	MCS0	151	5755	36.35	≥ 0.5
11ac-VHT40	MCS0	159	5795	35.95	≥ 0.5
11ac-VHT80	MCS0	155	5775	75.12	≥ 0.5
11ax-HE20	MCS11	149	5745	19.08	≥ 0.5
11ax-HE20	MCS11	157	5785	19.13	≥ 0.5
11ax-HE20	MCS11	165	5825	19.11	≥ 0.5
11ax-HE40	MCS0	151	5755	37.85	≥ 0.5
11ax-HE40	MCS0	159	5795	37.92	≥ 0.5
11ax-HE80	MCS0	155	5775	75.84	≥ 0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

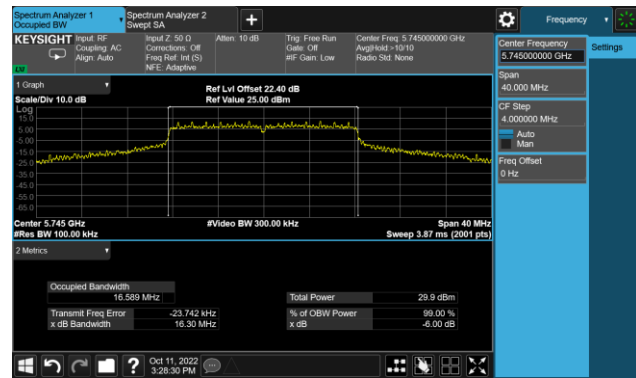

Channel 157 (5785MHz)

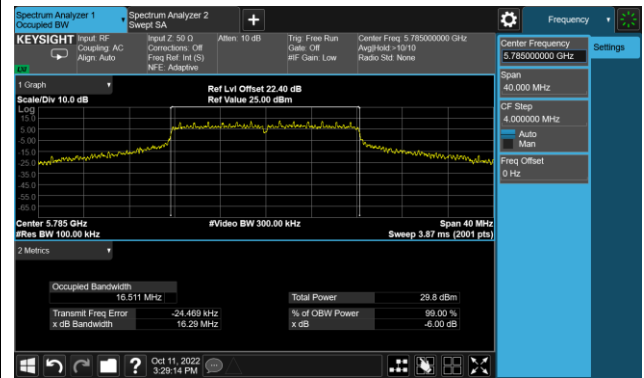


Channel 165 (5825MHz)

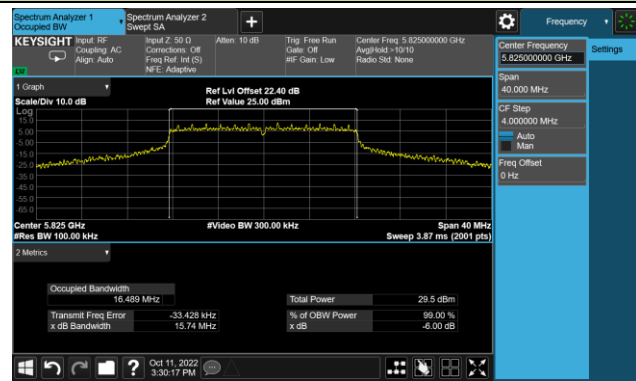


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

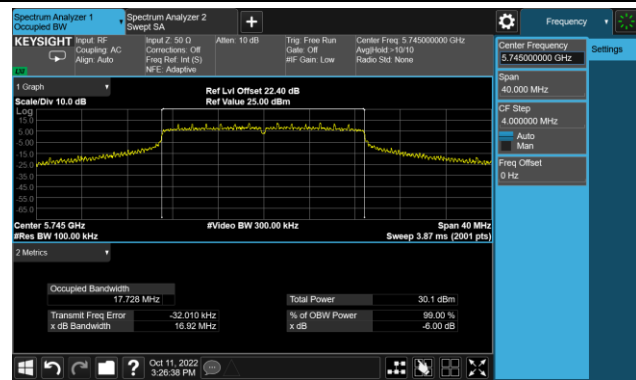

Channel 157 (5785MHz)

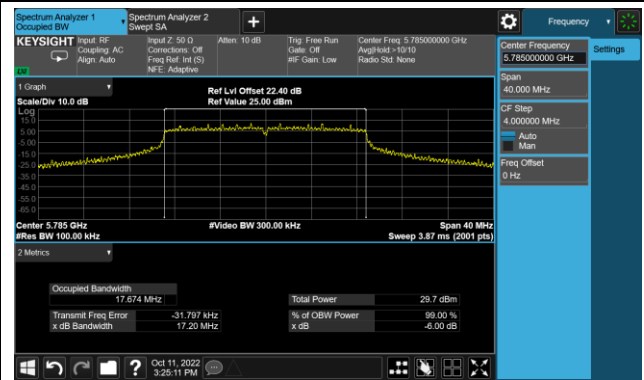


Channel 165 (5825MHz)

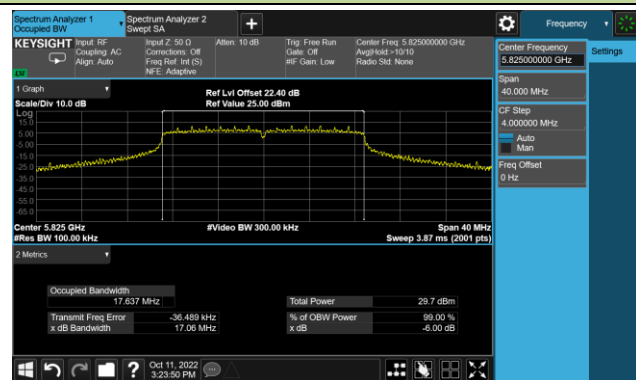



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

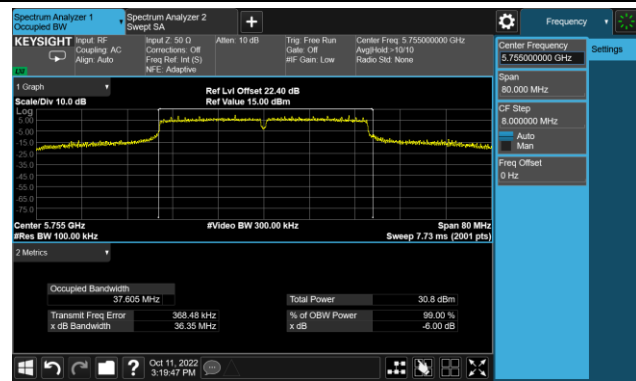


Channel 159 (5795MHz)

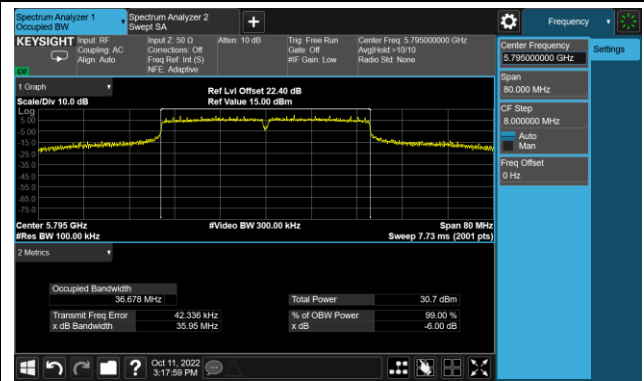

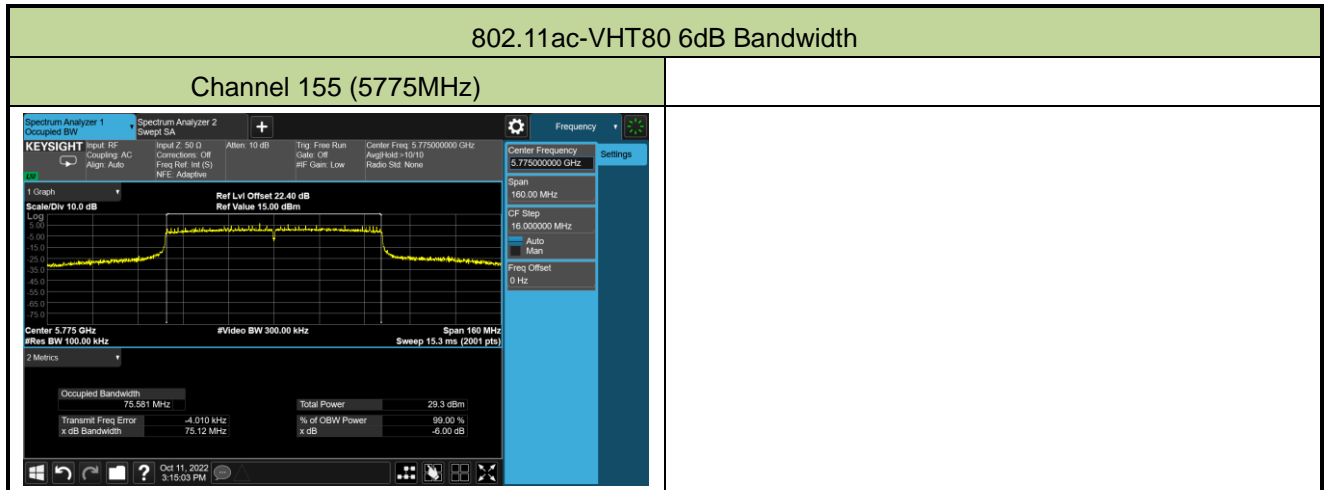


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

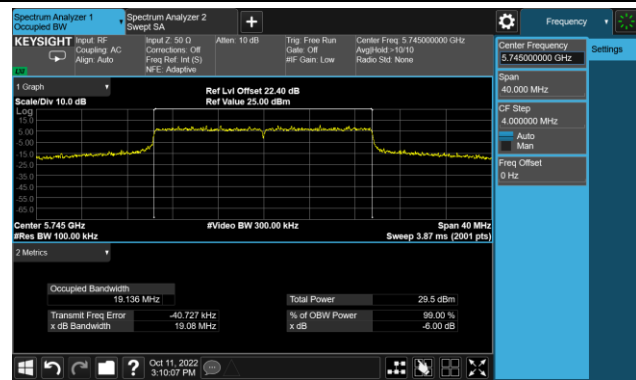

Channel 157 (5785MHz)

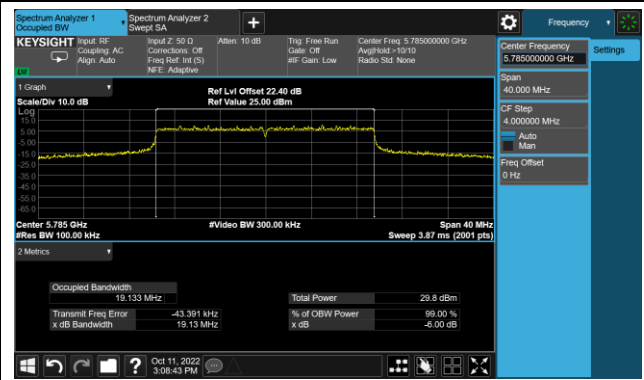


Channel 165 (5825MHz)

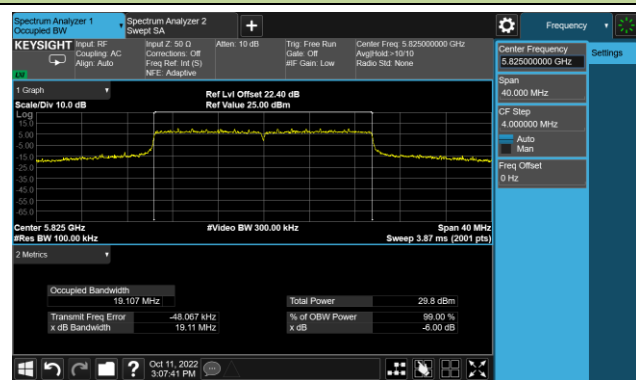



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

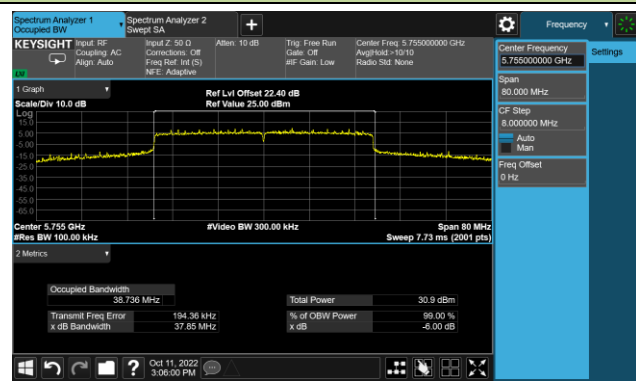

Channel 159 (5795MHz)

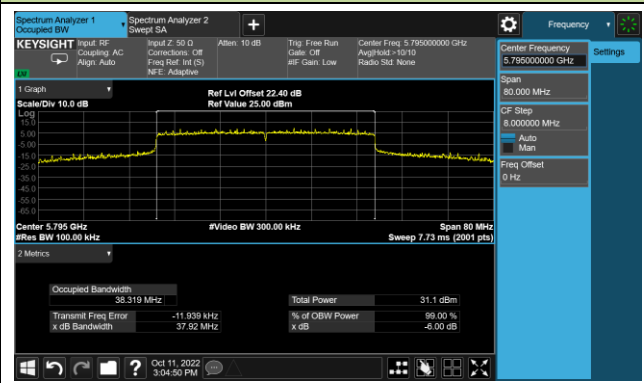

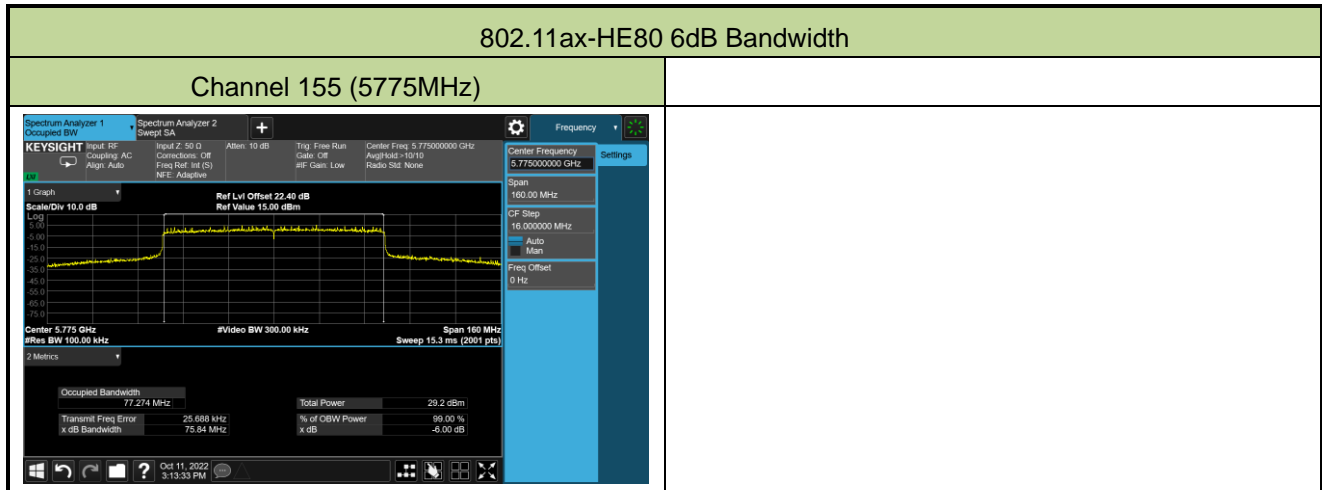

#### A.4 Output Power Test Result

Output power test was verified over all data rates of each mode shown as below table, and then choose the maximum output power (gray marker) for final test of each channel.

Test Mode	Bandwidth	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11a	20	36	5180	6Mbps	20.12
				9Mbps	20.07
				12Mbps	19.90
				18Mbps	19.83
				24Mbps	19.33
				36Mbps	19.15
				48Mbps	19.34
				54Mbps	19.92
802.11ac	20	36	5180	MCS0	20.02
				MCS1	19.21
				MCS2	19.83
				MCS3	19.82
				MCS4	19.99
				MCS5	20.00
				MCS6	19.99
				MCS7	20.02
				MCS8	20.01
				MCS9	20.01
802.11ac	40	38	5190	MCS0	20.56
				MCS1	20.55
				MCS2	20.39
				MCS3	20.38
				MCS4	20.39
				MCS5	20.38
				MCS6	20.39
				MCS7	20.40
				MCS8	20.38
				MCS9	20.37



Test Mode	Bandwidth	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11ac	80	42	5210	MCS0	20.53
				MCS1	20.52
				MCS2	20.48
				MCS3	20.47
				MCS4	20.52
				MCS5	20.48
				MCS6	20.49
				MCS7	20.49
				MCS8	20.51
				MCS9	20.52
802.11ax	20	36	5180	Mcs0	20.02
				Mcs1	20.00
				Mcs2	19.96
				Mcs3	19.93
				Mcs4	20.17
				Mcs5	20.14
				Mcs6	20.17
				Mcs7	20.17
				Mcs8	20.17
				Mcs9	20.16
				Mcs10	20.15
				Mcs11	20.18
802.11ax	40	38	5190	Mcs0	20.49
				Mcs1	20.43
				Mcs2	20.44
				Mcs3	20.43
				Mcs4	20.47
				Mcs5	20.47
				Mcs6	20.48
				Mcs7	20.47
				Mcs8	20.48
				Mcs9	20.48
				Mcs10	20.47
				Mcs11	20.47

Test Mode	Bandwidth	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11ax	80	42	5210	Mcs0	20.45
				Mcs1	20.41
				Mcs2	20.44
				Mcs3	20.43
				Mcs4	20.44
				Mcs5	20.44
				Mcs6	20.43
				Mcs7	20.44
				Mcs8	20.42
				Mcs9	20.44
				Mcs10	20.43
				Mcs11	20.44

Note 1: Above power is only for evaluating the worst data rate.

Note 2: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate (marked in grey).

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-09-30		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11a	6Mbps	36	5180	20.06	19.75	22.92	≤ 30.00
11a	6Mbps	44	5220	21.99	21.79	24.90	≤ 30.00
11a	6Mbps	48	5240	21.68	21.77	24.74	≤ 30.00
11a	6Mbps	52	5260	16.58	16.74	19.67	≤ 23.98
11a	6Mbps	60	5300	16.34	16.96	19.67	≤ 23.98
11a	6Mbps	64	5320	16.66	17.27	19.99	≤ 23.98
11a	6Mbps	100	5500	15.43	14.90	18.18	≤ 23.78
11a	6Mbps	116	5580	15.30	16.09	18.72	≤ 23.78
11a	6Mbps	140	5700	15.10	15.74	18.44	≤ 23.78
11a	6Mbps	144	5720	15.39	15.73	18.57	≤ 22.65
11a	6Mbps	149	5745	21.78	22.24	25.03	≤ 30.00
11a	6Mbps	157	5785	21.88	22.09	25.00	≤ 30.00
11a	6Mbps	165	5825	22.29	21.85	25.09	≤ 30.00
11ac-VHT20	MCS0	36	5180	19.93	19.69	22.82	≤ 30.00
11ac-VHT20	MCS0	44	5220	21.98	21.75	24.88	≤ 30.00
11ac-VHT20	MCS0	48	5240	21.48	21.78	24.64	≤ 30.00
11ac-VHT20	MCS0	52	5260	17.32	17.59	20.47	≤ 23.98
11ac-VHT20	MCS0	60	5300	16.05	16.70	19.40	≤ 23.98
11ac-VHT20	MCS0	64	5320	16.31	16.92	19.64	≤ 23.98
11ac-VHT20	MCS0	100	5500	16.28	16.10	19.20	≤ 23.78
11ac-VHT20	MCS0	116	5580	15.28	16.13	18.74	≤ 23.78
11ac-VHT20	MCS0	140	5700	16.08	16.73	19.43	≤ 23.78
11ac-VHT20	MCS0	144	5720	15.54	15.83	18.70	≤ 22.72
11ac-VHT20	MCS0	149	5745	21.60	22.32	24.99	≤ 30.00
11ac-VHT20	MCS0	157	5785	21.78	22.16	24.98	≤ 30.00
11ac-VHT20	MCS0	165	5825	22.22	21.82	25.03	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11ac-VHT40	MCS0	38	5190	17.46	17.58	20.53	≤ 30.00
11ac-VHT40	MCS0	46	5230	20.95	21.35	24.16	≤ 30.00
11ac-VHT40	MCS0	54	5270	19.67	19.91	22.80	≤ 23.98
11ac-VHT40	MCS0	62	5310	18.52	19.21	21.89	≤ 23.98
11ac-VHT40	MCS0	102	5510	19.51	19.09	22.32	≤ 23.78
11ac-VHT40	MCS0	110	5550	18.58	18.96	21.78	≤ 23.78
11ac-VHT40	MCS0	134	5670	19.49	19.72	22.62	≤ 23.78
11ac-VHT40	MCS0	142	5710	17.60	18.62	21.15	≤ 23.78
11ac-VHT40	MCS0	151	5755	22.03	22.88	25.49	≤ 30.00
11ac-VHT40	MCS0	159	5795	22.36	22.76	25.57	≤ 30.00
11ac-VHT80	MCS0	42	5210	16.01	16.18	19.11	≤ 30.00
11ac-VHT80	MCS0	58	5290	16.96	17.92	20.48	≤ 23.98
11ac-VHT80	MCS0	106	5530	18.22	18.27	21.26	≤ 23.78
11ac-VHT80	MCS0	122	5610	19.18	20.02	22.63	≤ 23.78
11ac-VHT80	MCS0	138	5690	20.03	20.91	23.50	≤ 23.78
11ac-VHT80	MCS0	155	5775	21.04	21.40	24.23	≤ 30.00
11ax-HE20	MCS11	36	5180	19.78	19.80	22.80	≤ 30.00
11ax-HE20	MCS11	44	5220	20.32	20.66	23.50	≤ 30.00
11ax-HE20	MCS11	48	5240	20.18	20.45	23.33	≤ 30.00
11ax-HE20	MCS11	52	5260	17.27	17.43	20.36	≤ 23.98
11ax-HE20	MCS11	60	5300	17.03	17.60	20.33	≤ 23.98
11ax-HE20	MCS11	64	5320	16.20	16.73	19.48	≤ 23.98
11ax-HE20	MCS11	100	5500	16.23	15.93	19.09	≤ 23.78
11ax-HE20	MCS11	116	5580	16.24	17.01	19.65	≤ 23.78
11ax-HE20	MCS11	140	5700	15.86	16.76	19.34	≤ 23.78
11ax-HE20	MCS11	144	5720	16.17	16.91	19.57	≤ 22.88
11ax-HE20	MCS11	149	5745	20.75	21.32	24.05	≤ 30.00
11ax-HE20	MCS11	157	5785	20.90	21.26	24.09	≤ 30.00
11ax-HE20	MCS11	165	5825	21.21	20.97	24.10	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11ax-HE40	MCS0	38	5190	16.82	17.12	19.98	≤ 30.00
11ax-HE40	MCS0	46	5230	21.99	22.30	25.16	≤ 30.00
11ax-HE40	MCS0	54	5270	19.39	19.60	22.51	≤ 23.98
11ax-HE40	MCS0	62	5310	18.12	18.96	21.57	≤ 23.98
11ax-HE40	MCS0	102	5510	18.32	17.92	21.13	≤ 23.78
11ax-HE40	MCS0	110	5550	19.02	19.33	22.19	≤ 23.78
11ax-HE40	MCS0	134	5670	19.21	19.45	22.34	≤ 23.78
11ax-HE40	MCS0	142	5710	18.44	19.19	21.84	≤ 23.78
11ax-HE40	MCS0	151	5755	21.87	22.61	25.27	≤ 30.00
11ax-HE40	MCS0	159	5795	22.01	22.39	25.21	≤ 30.00
11ax-HE80	MCS0	42	5210	15.86	16.05	18.97	≤ 30.00
11ax-HE80	MCS0	58	5290	16.84	17.80	20.36	≤ 23.98
11ax-HE80	MCS0	106	5530	18.10	18.08	21.10	≤ 23.78
11ax-HE80	MCS0	122	5610	18.98	19.93	22.49	≤ 23.78
11ax-HE80	MCS0	138	5690	19.90	20.81	23.39	≤ 23.78
11ax-HE80	MCS0	155	5775	20.93	21.26	24.11	≤ 30.00

Note 1: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ .

Note 2: For NII-2a, the average power limit is not exceeded the lesser of 23.98dBm and  $11 \text{ dBm} + 10 \log B$ .

802.11a/ac-VHT20/ac-VHT40/ac-VHT80/ax-HE20/ax-HE40/ax-HE80:  $11 + 10 \log_{10} B > 23.98 \text{ dBm}$

Note 3: For NII-2c, Average power limit =  $23.98 - (6.20 - 6) = 23.78 \text{ dBm}$

Note 4: For straddle channel 5720MHz, Average Power Limit =  $11 + 10 \cdot \log(5 + 26 \text{ dBc} / 2)$ .

**A.5 Power Spectral Density Test Result**

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-10-01~2022-10-12		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11a	6Mbps	36	5180	7.66	7.30	91.99	10.86	14.54
11a	6Mbps	44	5220	9.66	9.65	91.99	13.03	14.54
11a	6Mbps	48	5240	9.61	9.82	91.99	13.09	14.54
11a	6Mbps	52	5260	4.27	4.55	91.99	7.78	8.64
11a	6Mbps	60	5300	4.19	4.94	91.99	7.95	8.64
11a	6Mbps	64	5320	4.38	5.08	91.99	8.12	8.64
11a	6Mbps	100	5500	3.71	3.25	91.99	6.86	7.79
11a	6Mbps	116	5580	3.36	4.46	91.99	7.32	7.79
11a	6Mbps	140	5700	3.46	4.20	91.99	7.22	7.79
11a	6Mbps	144	5720	3.72	4.17	91.99	7.32	7.79
11ac-VHT20	MCS0	36	5180	7.42	6.74	92.31	10.45	14.54
11ac-VHT20	MCS0	44	5220	9.07	8.88	92.31	12.33	14.54
11ac-VHT20	MCS0	48	5240	8.78	8.89	92.31	12.19	14.54
11ac-VHT20	MCS0	52	5260	4.74	4.87	92.31	8.17	8.64
11ac-VHT20	MCS0	60	5300	3.42	4.13	92.31	7.15	8.64
11ac-VHT20	MCS0	64	5320	3.71	4.30	92.31	7.38	8.64
11ac-VHT20	MCS0	100	5500	3.73	3.53	92.31	6.99	7.79
11ac-VHT20	MCS0	116	5580	3.54	3.75	92.31	7.00	7.79
11ac-VHT20	MCS0	140	5700	3.68	4.32	92.31	7.37	7.79
11ac-VHT20	MCS0	144	5720	3.03	3.47	92.31	6.62	7.79
11ac-VHT40	MCS0	38	5190	2.07	1.72	91.11	5.31	14.54
11ac-VHT40	MCS0	46	5230	5.40	5.64	91.11	8.94	14.54
11ac-VHT40	MCS0	54	5270	4.25	4.56	91.11	7.82	8.64
11ac-VHT40	MCS0	62	5310	3.09	3.62	91.11	6.78	8.64
11ac-VHT40	MCS0	102	5510	4.29	4.15	91.11	7.64	7.79
11ac-VHT40	MCS0	110	5550	3.23	3.57	91.11	6.82	7.79
11ac-VHT40	MCS0	134	5670	3.46	3.48	91.11	6.88	7.79
11ac-VHT40	MCS0	142	5710	2.04	3.31	4.84	6.14	7.79

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11ac-VHT80	MCS0	42	5210	-2.78	-2.77	90.50	0.67	14.54
11ac-VHT80	MCS0	58	5290	-1.73	-0.93	90.50	2.13	8.64
11ac-VHT80	MCS0	106	5530	-0.41	-0.26	90.50	3.11	7.79
11ac-VHT80	MCS0	122	5610	0.72	1.70	90.50	4.68	7.79
11ac-VHT80	MCS0	138	5690	1.85	2.60	90.50	5.68	7.79
11ax-HE20	MCS11	36	5180	6.63	6.66	91.88	10.02	14.54
11ax-HE20	MCS11	44	5220	7.34	7.46	91.88	10.78	14.54
11ax-HE20	MCS11	48	5240	7.01	7.04	91.88	10.40	14.54
11ax-HE20	MCS11	52	5260	4.40	4.57	91.88	7.86	8.64
11ax-HE20	MCS11	60	5300	4.44	4.92	91.88	8.06	8.64
11ax-HE20	MCS11	64	5320	3.51	4.07	91.88	7.18	8.64
11ax-HE20	MCS11	100	5500	3.55	3.23	91.88	6.77	7.79
11ax-HE20	MCS11	116	5580	3.44	4.17	91.88	7.20	7.79
11ax-HE20	MCS11	140	5700	3.25	3.76	91.88	6.89	7.79
11ax-HE20	MCS11	144	5720	3.72	4.27	91.88	7.38	7.79
11ax-HE40	MCS0	38	5190	1.53	1.52	93.80	4.82	14.49
11ax-HE40	MCS0	46	5230	6.25	6.45	93.80	9.64	14.49
11ax-HE40	MCS0	54	5270	3.96	4.25	93.80	7.40	8.64
11ax-HE40	MCS0	62	5310	3.11	3.56	93.80	6.63	8.64
11ax-HE40	MCS0	102	5510	3.13	2.76	93.80	6.24	7.79
11ax-HE40	MCS0	110	5550	3.60	4.04	93.80	7.11	7.79
11ax-HE40	MCS0	134	5670	4.04	4.26	93.80	7.44	7.79
11ax-HE40	MCS0	142	5710	3.22	3.97	93.80	6.90	7.79
11ax-HE80	MCS0	42	5210	-2.76	-2.73	93.56	0.55	14.54
11ax-HE80	MCS0	58	5290	-1.49	-0.63	93.56	2.26	8.64
11ax-HE80	MCS0	106	5530	-0.38	-0.18	93.56	3.02	7.79
11ax-HE80	MCS0	122	5610	0.67	1.55	93.56	4.43	7.79
11ax-HE80	MCS0	138	5690	1.63	2.50	93.56	5.39	7.79

Note: When EUT duty cycle < 98%, the total PSD (dBm/MHz) =  $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$ .

When EUT duty cycle  $\geq$  98%, the total PSD (dBm/MHz) =  $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$ .

Note 2: For NII-1, PSD Limit (dBm/MHz) = 17 - (8.46 - 6) = 14.54 (dBm/MHz).

For NII-2a, PSD Limit (dBm/MHz) = 11 - (8.36 - 6) = 8.64 (dBm/MHz).

For NII-2c, PSD Limit (dBm/MHz) = 11 - (9.21 - 6) = 7.79 (dBm/MHz).

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-10-01~2022-10-12		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)		Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1			
11a	6Mbps	149	5745	7.44	7.81	91.99	11.00	26.99
11a	6Mbps	157	5785	7.30	7.92	91.99	10.99	26.99
11a	6Mbps	165	5825	7.90	7.63	91.99	11.14	26.99
11ac-VHT20	MCS0	149	5745	6.45	7.16	92.31	10.18	26.99
11ac-VHT20	MCS0	157	5785	6.73	7.12	92.31	10.29	26.99
11ac-VHT20	MCS0	165	5825	7.24	6.88	92.31	10.42	26.99
11ac-VHT40	MCS0	151	5755	4.27	5.12	91.11	8.13	26.99
11ac-VHT40	MCS0	159	5795	4.20	4.84	91.11	7.95	26.99
11ac-VHT80	MCS0	155	5775	0.02	0.36	90.50	3.64	26.99
11ax-HE20	MCS0	149	5745	5.12	5.86	91.88	8.88	26.99
11ax-HE20	MCS0	157	5785	5.51	5.95	91.88	9.11	26.99
11ax-HE20	MCS0	165	5825	6.05	5.65	91.88	9.23	26.99
11ax-HE40	MCS0	151	5755	4.05	4.48	93.80	7.55	26.99
11ax-HE40	MCS0	159	5795	4.22	4.59	93.80	7.70	26.99
11ax-HE80	MCS0	155	5775	-0.08	0.36	93.56	3.45	26.99

Note 1:

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) =  $10 \cdot \log \{10^{(\text{Ant } 0 \text{ AVGPSD}/10)} + 10^{(\text{Ant } 1 \text{ AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$ .


When EUT duty cycle  $\geq$  98%, the total PSD (dBm/510kHz) =  $10 \cdot \log \{10^{(\text{Ant } 0 \text{ AVGPSD}/10)} + 10^{(\text{Ant } 1 \text{ AVGPSD}/10)}\}$ .

Note 2: PSD Limit (dBm/500kHz) = 30 - (9.01 - 6) = 26.99dBm/500kHz.




### 802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

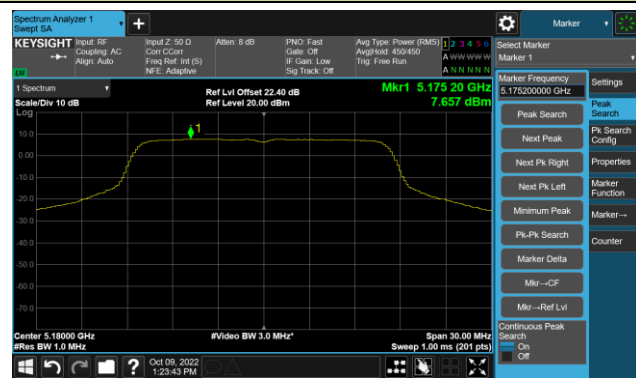


Channel 44 (5220MHz)

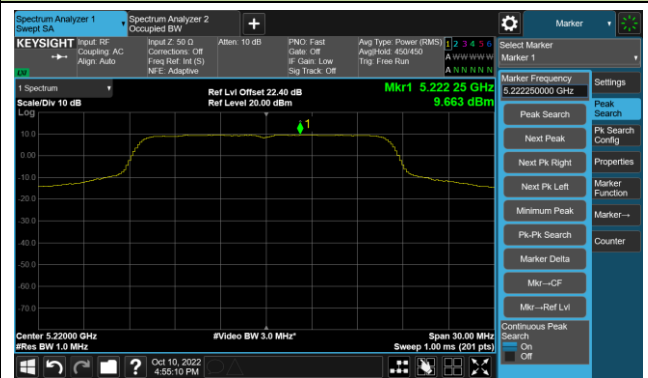


Channel 48 (5240MHz)

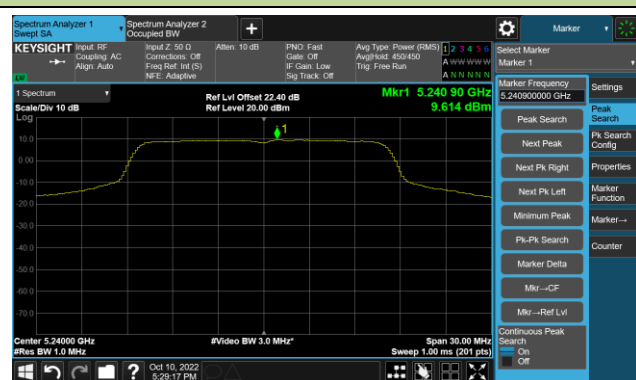

Channel 52 (5260MHz)

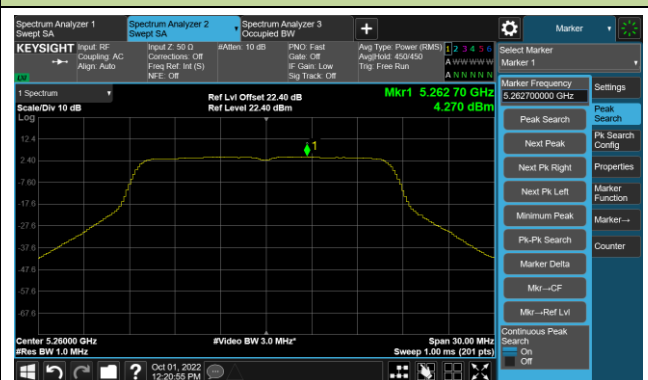


Channel 60 (5300MHz)

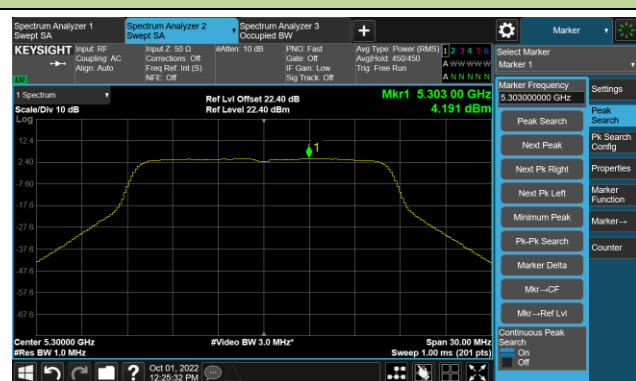


Channel 64 (5320MHz)



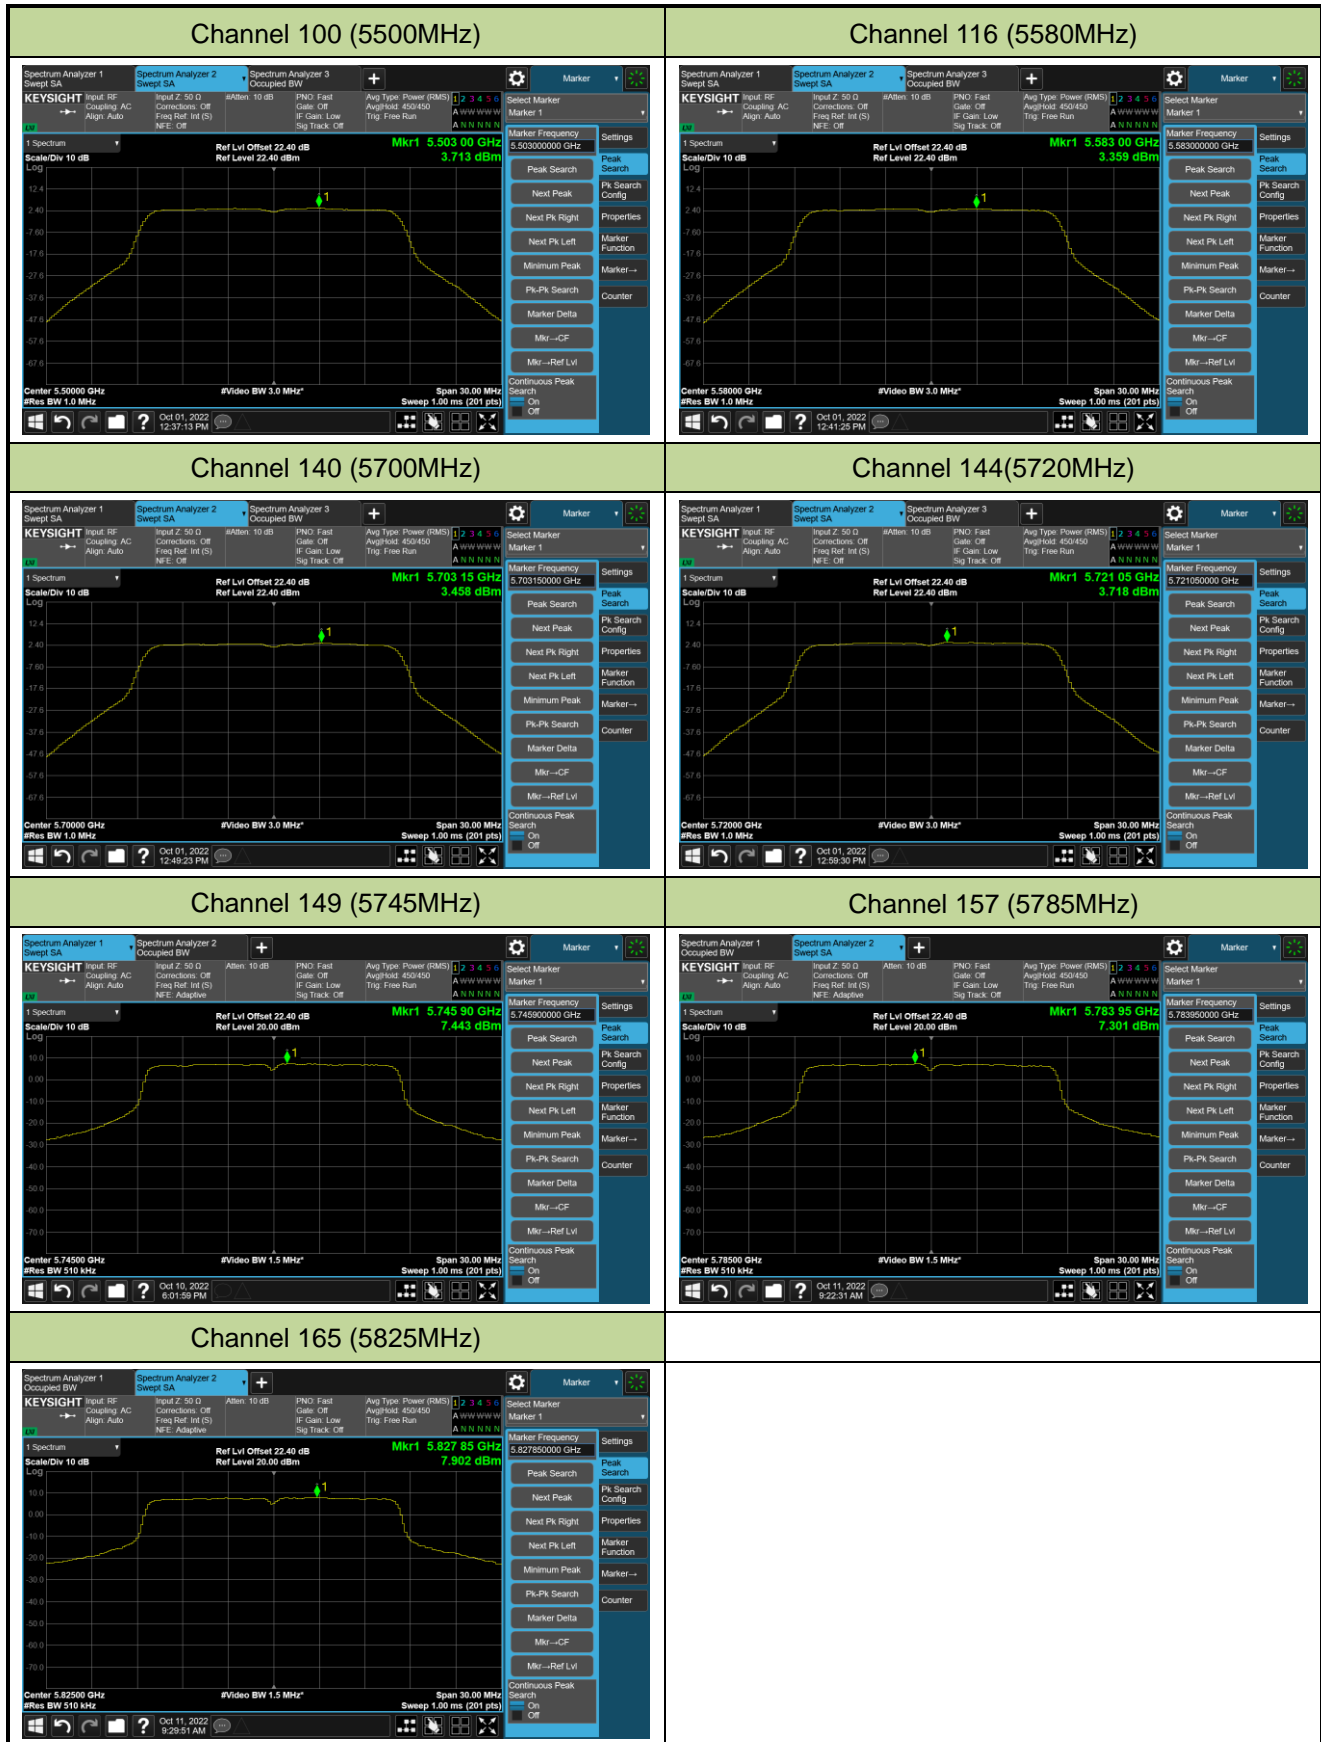


## 802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

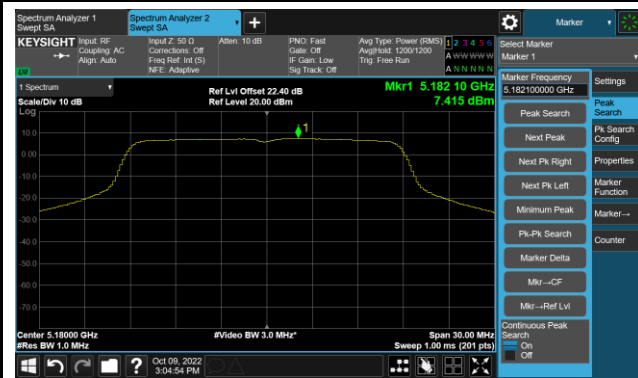


Channel 44 (5220MHz)

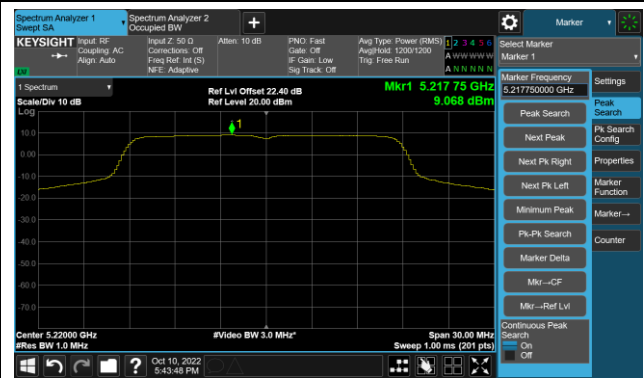


Channel 48 (5240MHz)

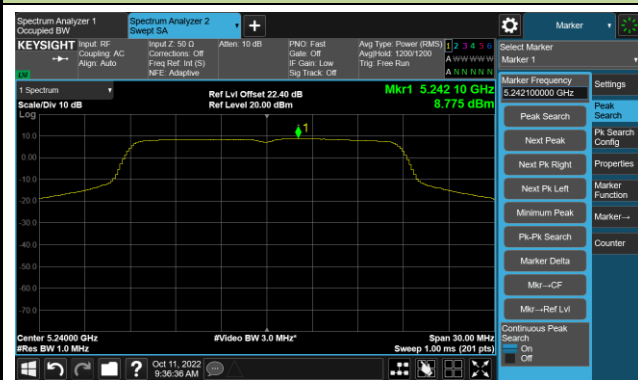

Channel 52 (5260MHz)

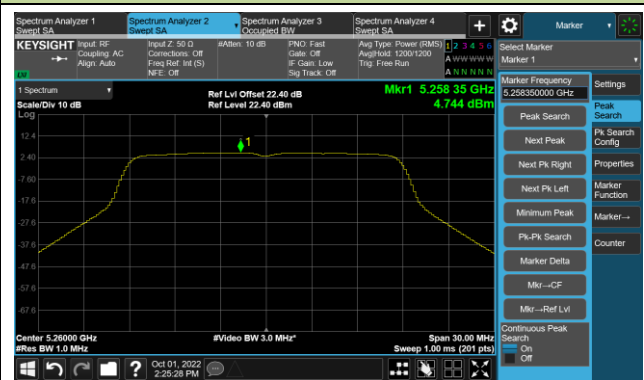

Channel 60 (5300MHz)

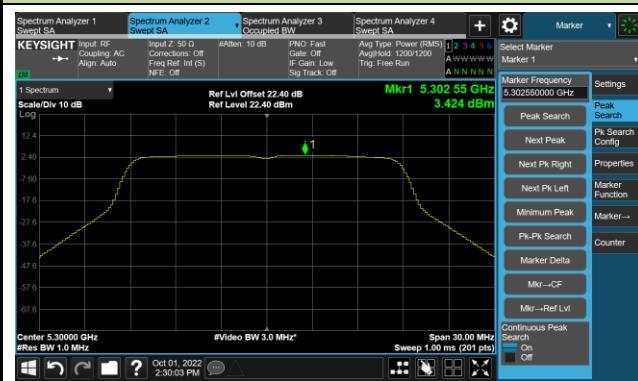


Channel 64 (5320MHz)




## 802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 100 (5500MHz)

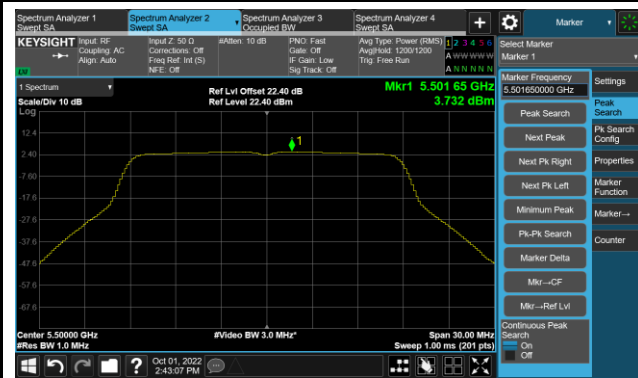


Channel 116 (5580MHz)

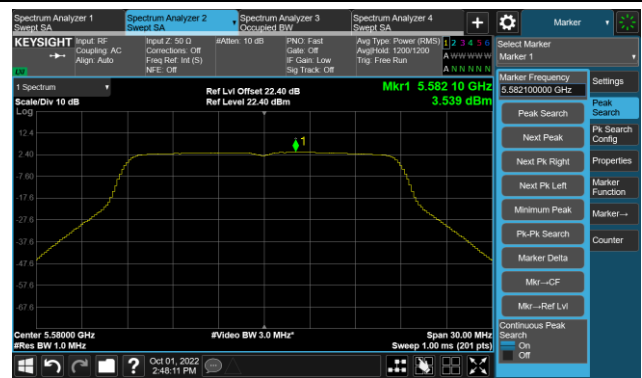


Channel 140 (5700MHz)

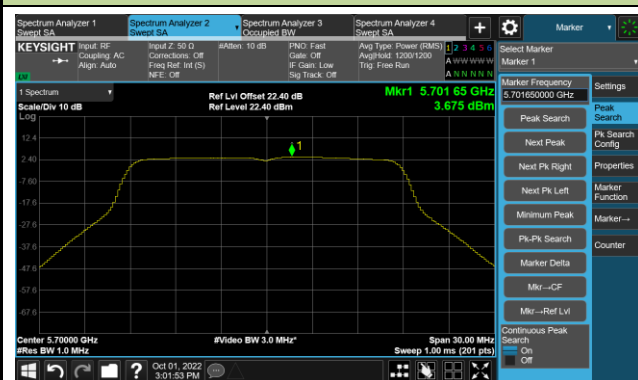

Channel 144(5720MHz)

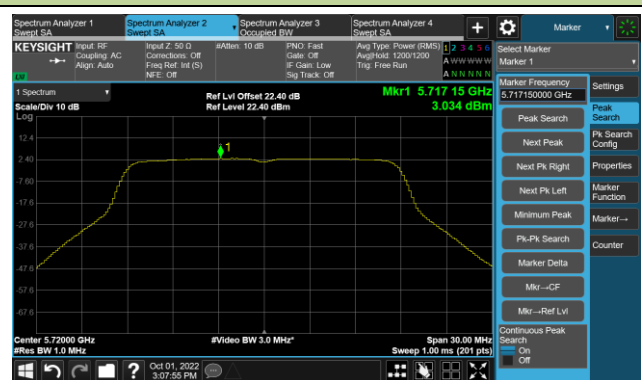


Channel 149 (5745MHz)

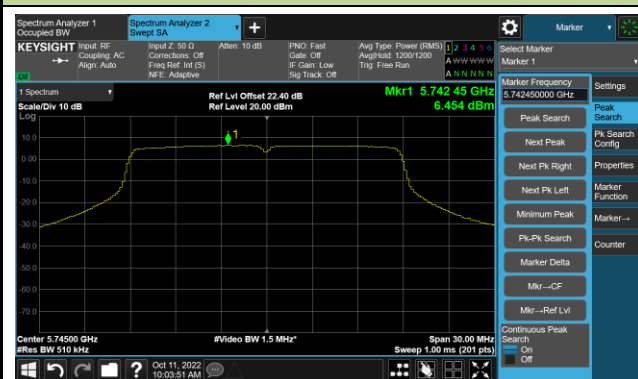

Channel 157 (5785MHz)




Channel 165 (5825MHz)

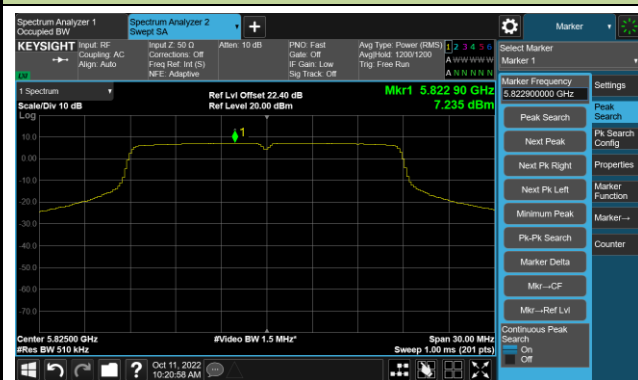


## 802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

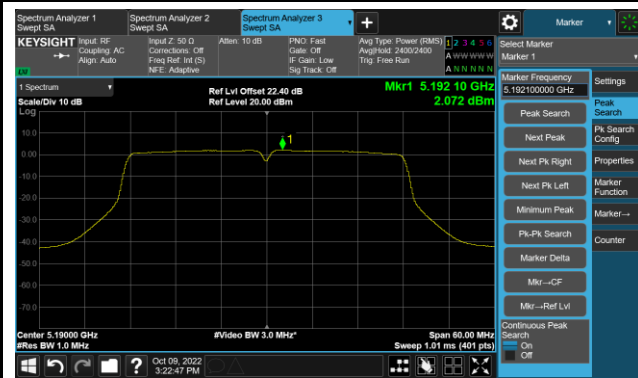


Channel 46 (5230MHz)

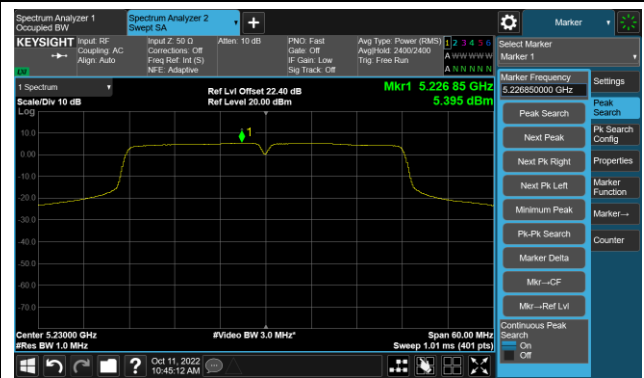


Channel 54 (5270MHz)

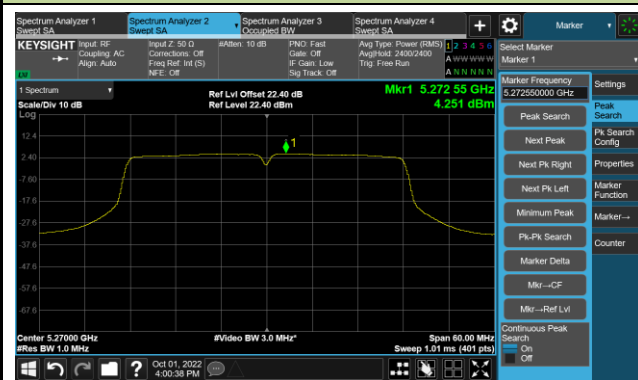


Channel 62 (5310MHz)

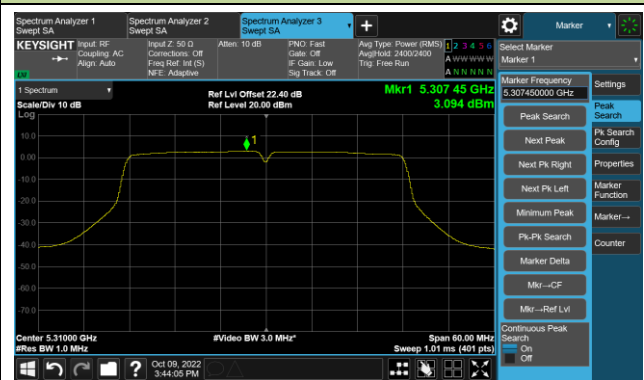

Channel 102 (5510MHz)

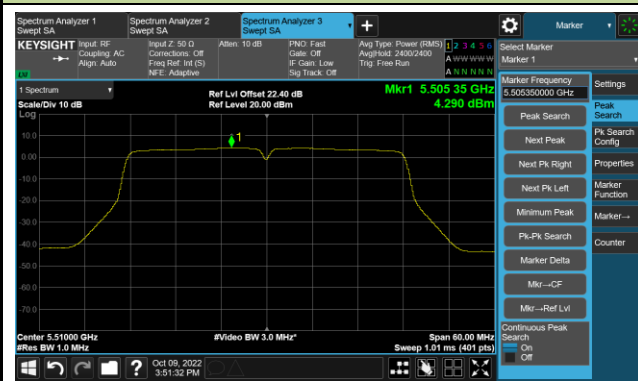


Channel 110 (5550MHz)

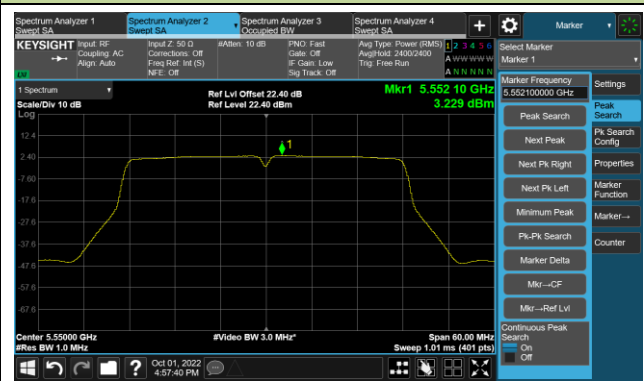


## 802.11ac-VHT40 Power Spectral Density - Ant 0


## Channel 134 (5670MHz)

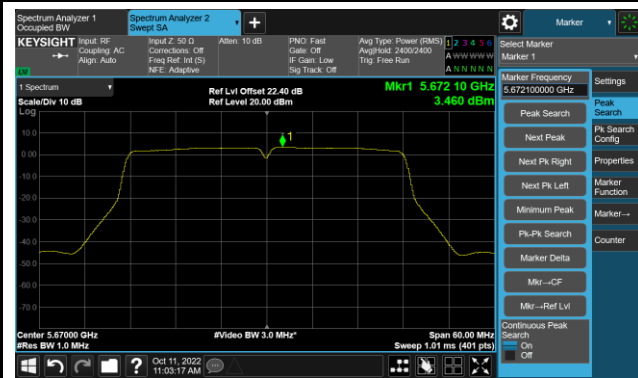


## Channel 142(5710MHz)

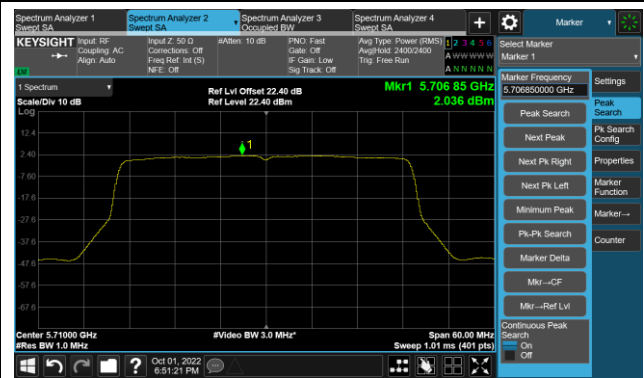

## Channel 151 (5755MHz)

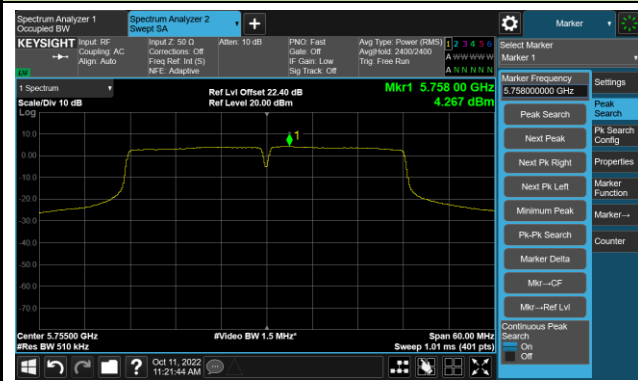


## Channel 159 (5795MHz)

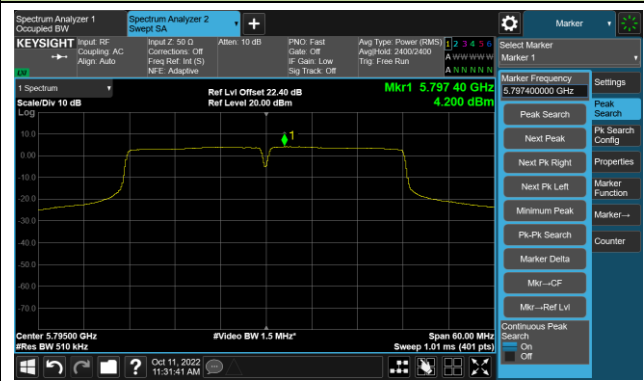


## 802.11ac-VHT80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)

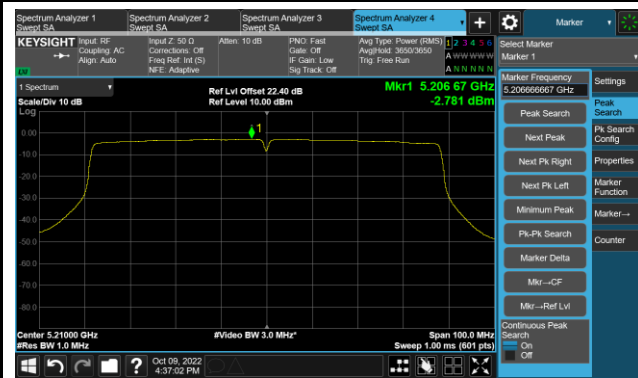

Channel 58 (5290MHz)

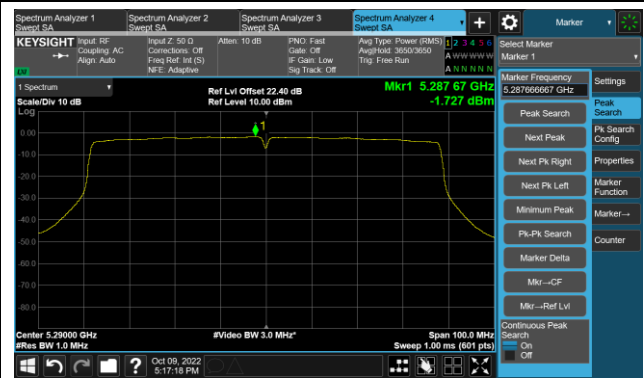


Channel 106 (5530MHz)

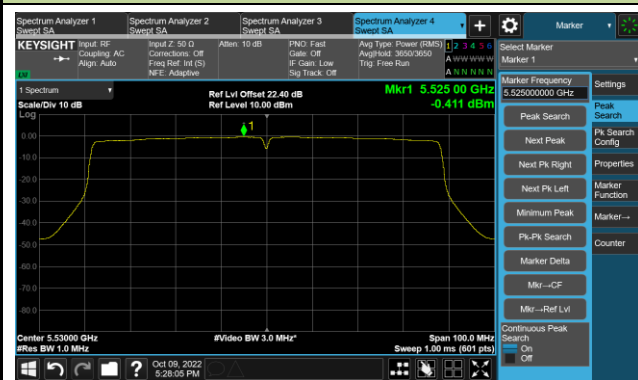

Channel 122 (5610MHz)



Channel 138 (5690MHz)

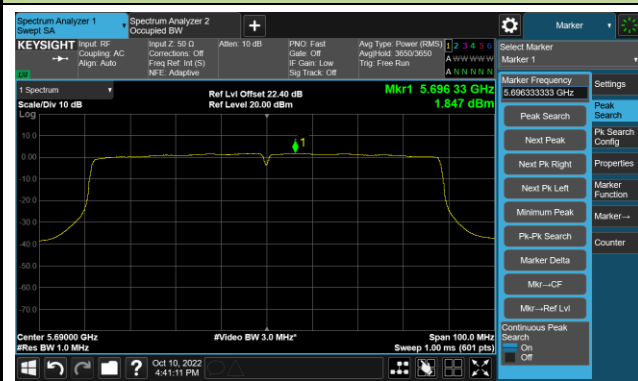

Channel 155 (5775MHz)



## 802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)



Channel 44 (5220MHz)




Channel 48 (5240MHz)

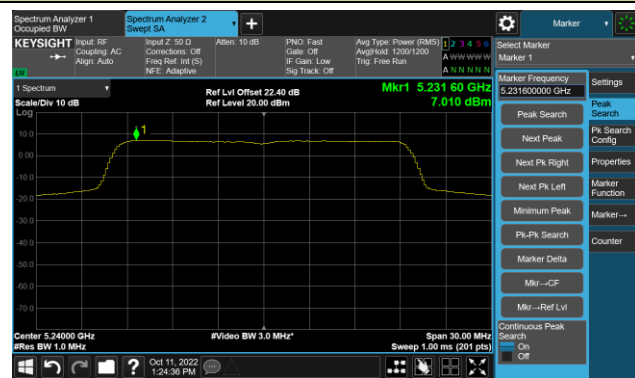

Channel 52 (5260MHz)



Channel 60 (5300MHz)

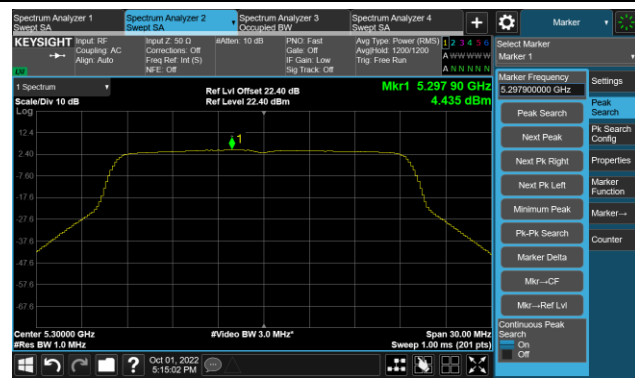


Channel 64 (5320MHz)





## 802.11ax-HE20 Power Spectral Density - Ant 0


Channel 100 (5500MHz)

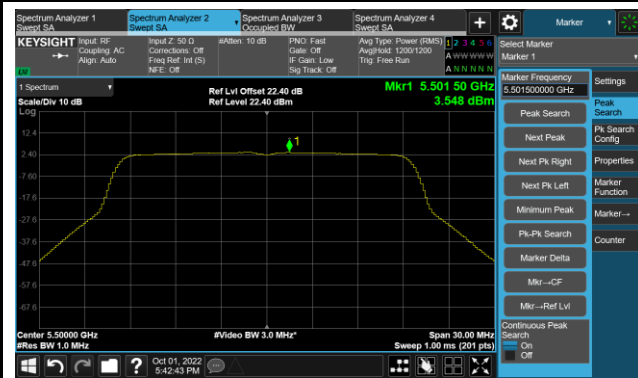

Channel 116 (5580MHz)




Channel 140 (5700MHz)

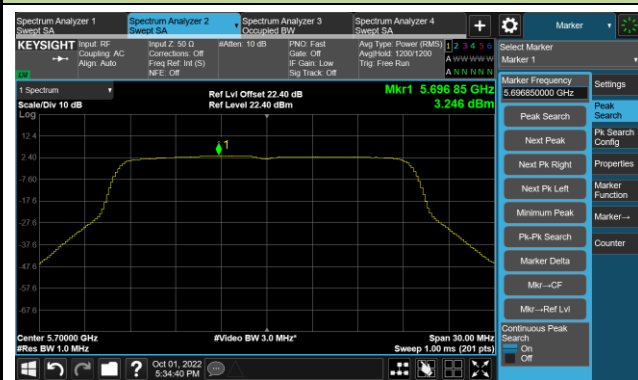


Channel 144(5720MHz)




Channel 149 (5745MHz)

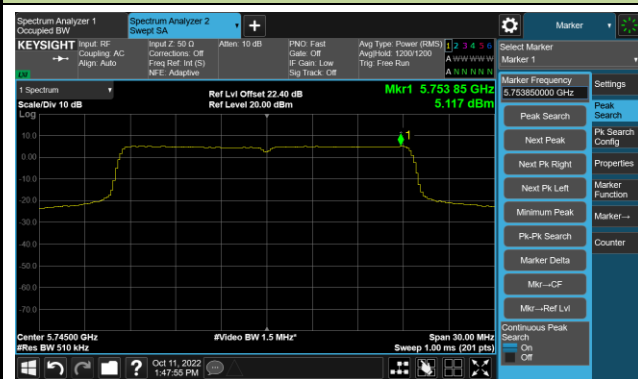

Channel 157 (5785MHz)

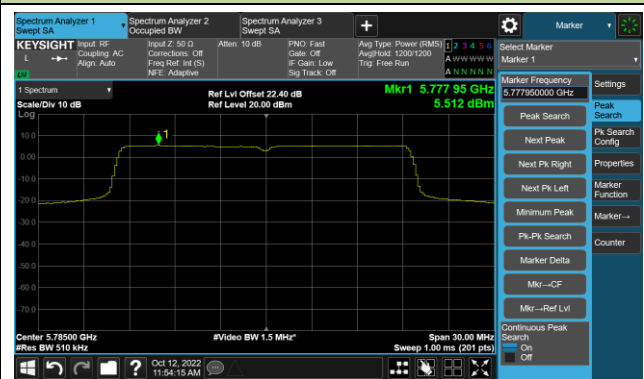


Channel 165 (5825MHz)

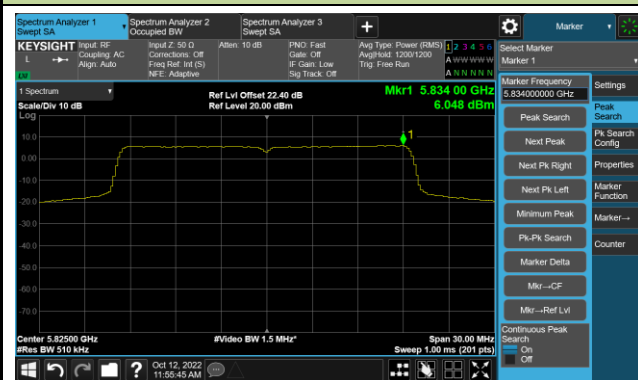


## 802.11ax-HE40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

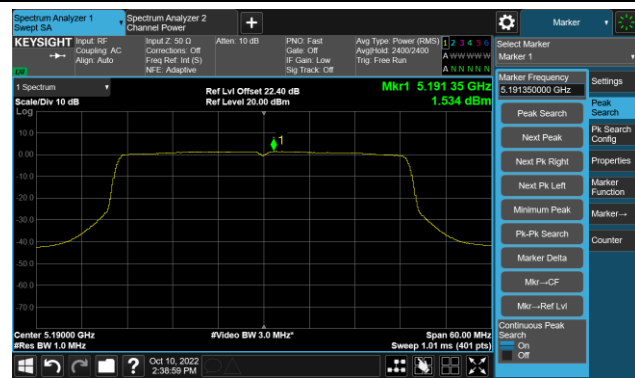


Channel 46 (5230MHz)

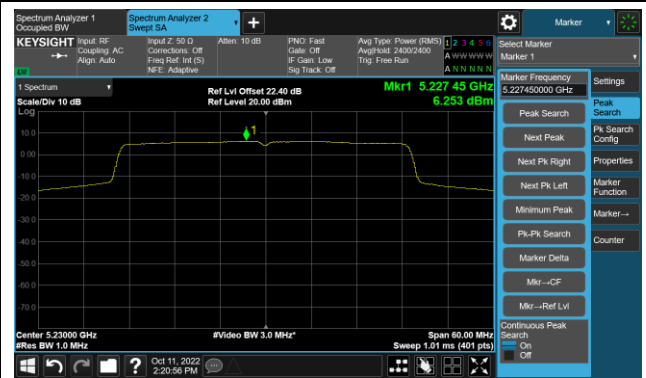


Channel 54 (5270MHz)

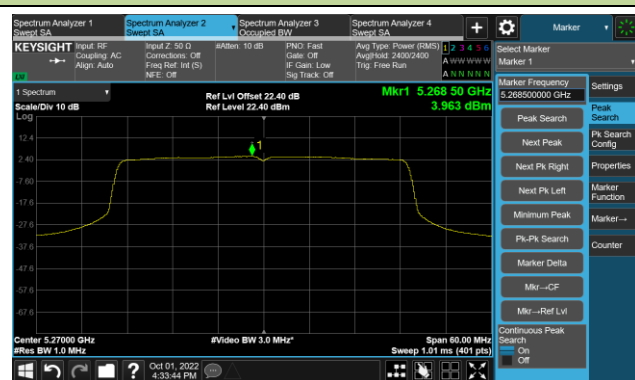

Channel 62 (5310MHz)

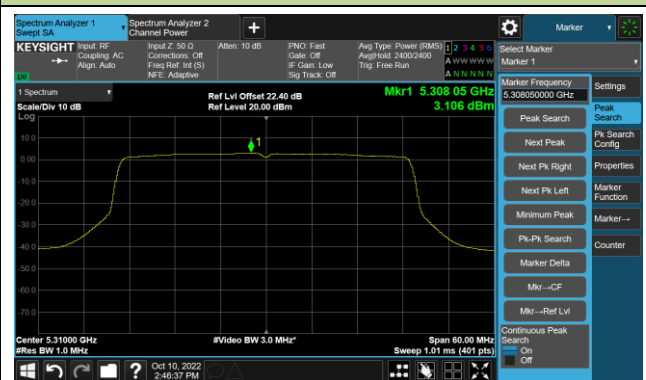

Channel 102 (5510MHz)

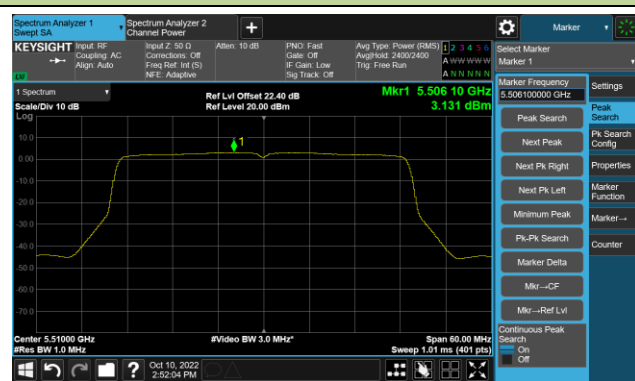


Channel 110 (5550MHz)




## 802.11ax-HE40 Power Spectral Density - Ant 0


Channel 134 (5670MHz)

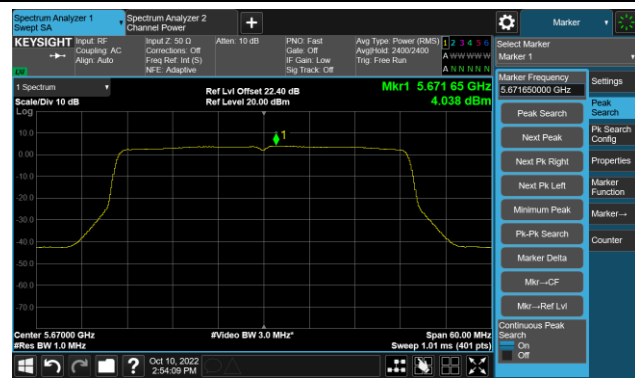

Channel 142(5710MHz)

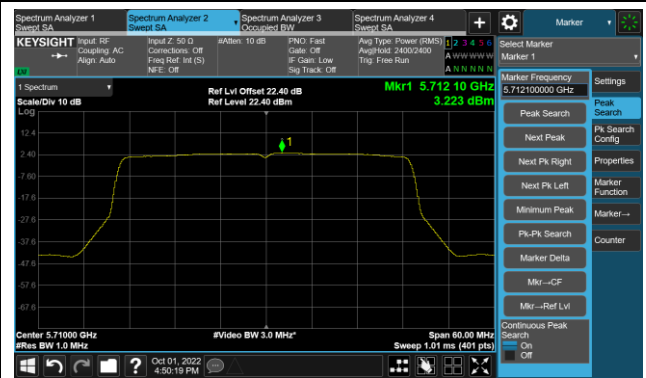

Channel 151 (5755MHz)

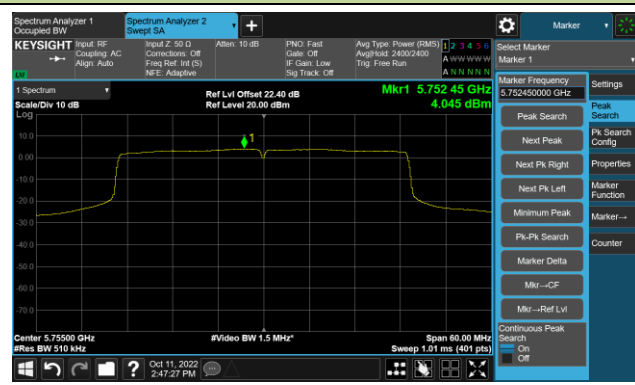

Channel 159 (5795MHz)

