



FCC RADIO TEST REPORT

FCC ID : TVE-240502
Equipment : Network Switch
Brand Name : FORTINET 
Model Name : FortiBranchSASE 20G-WiFixxxxxxxxxxx,
 FORTIBRANCHSASE-20G-WiFixxxxxxxxxxx,
 FBS-20G-WiFixxxxxxxxxxx (where "x" can be used as "A-Z",
 or "0-9", or "-", or blank for software changes or marketing
 purposes only)
Marketing Name : FortiBranchSASE 20G-WiFi
Applicant : Fortinet, Inc.
 909 Kifer Road, Sunnyvale, CA. 94086 USA
Manufacturer : Fortinet, Inc.
 909 Kifer Road, Sunnyvale, CA. 94086 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jul. 10, 2024 and testing was performed from Aug. 29, 2024 to Oct. 16, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	23
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	3.01 dB under the limit at 7440.00 MHz
3.6	15.207	AC Conducted Emission	Pass	11.64 dB under the limit at 0.18 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Ming Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/VHT/ax and Wi-Fi 5GHz 802.11a/n/ac/ax.
Antenna Type WLAN: Omni-directional Antenna Bluetooth-LE: PCB Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	3.57

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH21-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in two config. (Ant. 0° and Ant. 90°), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth-LE TX + WLAN (2.4GHz) Link + Console cable with Notebook + Data Link with USB Flash Drive + LAN Port 3 & 4 Loop Back + LAN Port 2 Link with Notebook + AC Adapter
Remark:	
1. Data Link with USB Flash Drive means data application transferred mode between EUT and USB Flash Drive.	
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	USB Flash Drive	Transcend	Jetflash	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “Tera term 4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

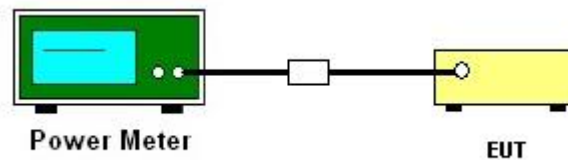

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

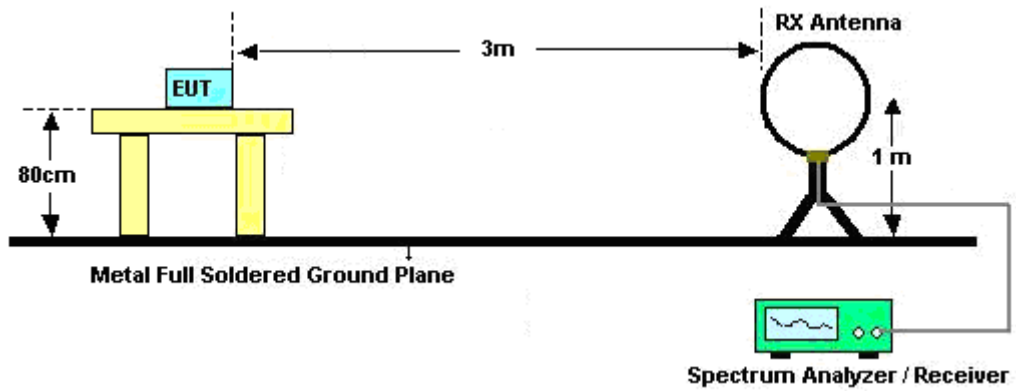


For radiated test from 30MHz to 1GHz

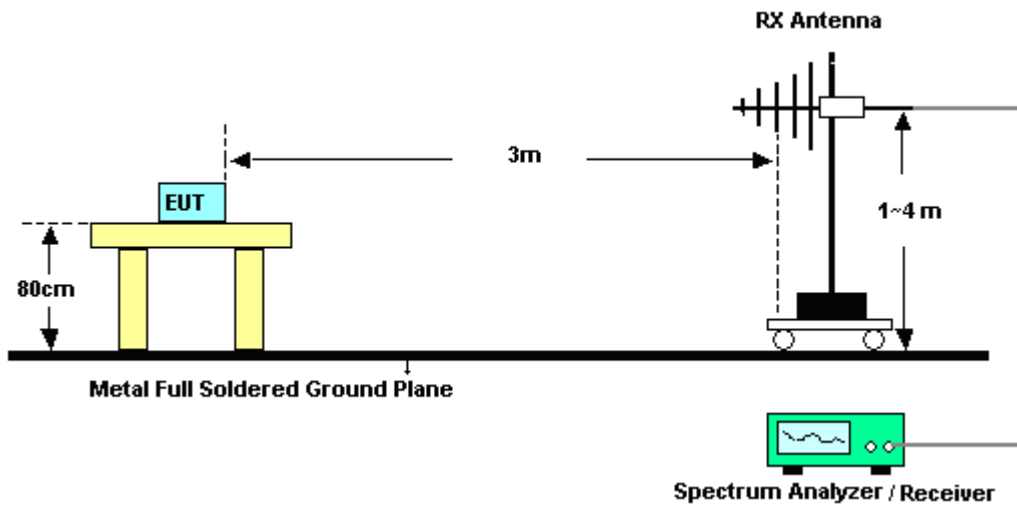

For radiated test from 1GHz to 18GHz

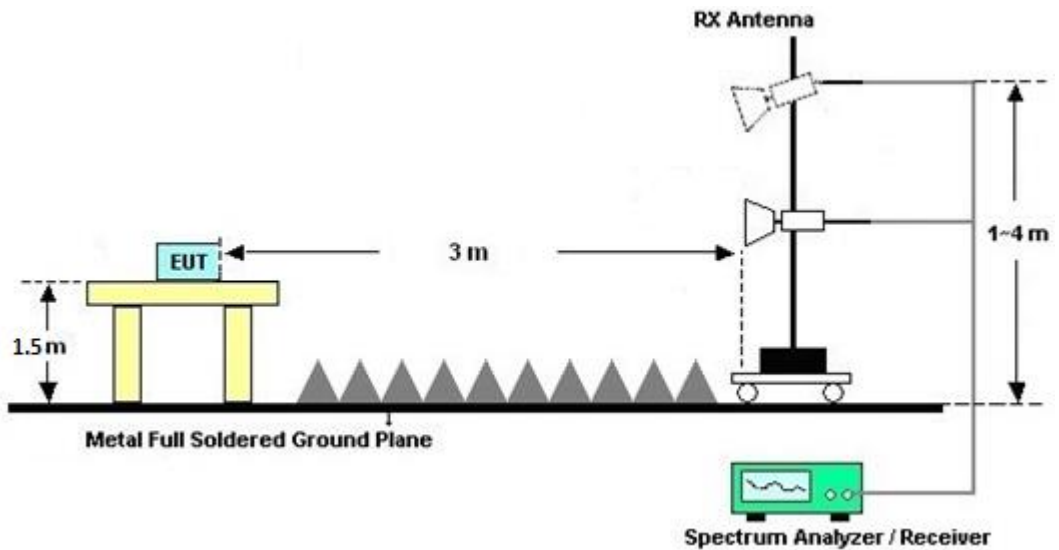

For radiated test above 18GHz

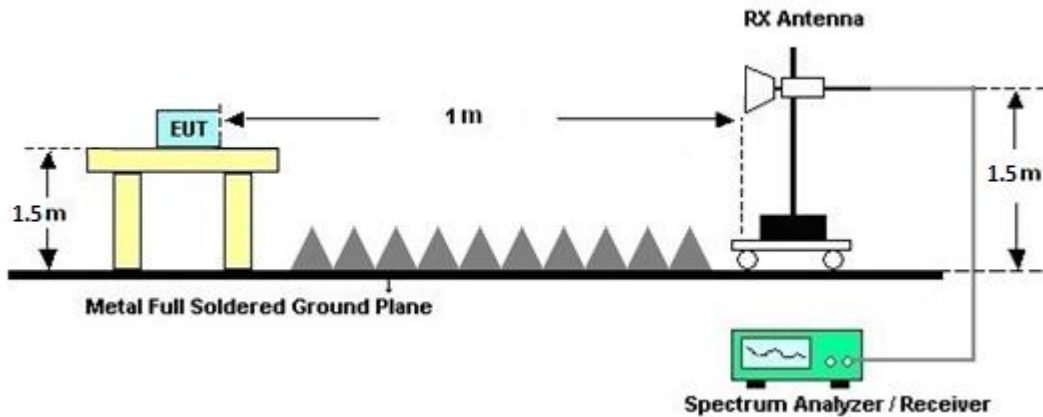

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Sep. 04, 2024~ Oct. 14, 2024	Aug. 28, 2025	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Oct. 15, 2023	Sep. 04, 2024~ Oct. 13, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Jul. 11, 2024	Sep. 04, 2024~ Oct. 14, 2024	Jul. 10, 2025	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Sep. 04, 2024~ Oct. 14, 2024	Jun. 23, 2025	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 14, 2024	Sep. 04, 2024~ Oct. 14, 2024	Jul. 13, 2025	Radiation (03CH21-HY)
Amplifier	E MEC	EM01G18GA	060876	1GHz~18GHz	Sep. 28, 2023	Sep. 04, 2024~ Sep. 26, 2024	Sep. 27, 2024	Radiation (03CH21-HY)
Amplifier	E MEC	EM01G18GA	060876	1GHz~18GHz	Sep. 27, 2024	Sep. 27, 2024~ Oct. 14, 2024	Sep. 26, 2025	Radiation (03CH21-HY)
Preamplifier	E MEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	Sep. 04, 2024~ Oct. 14, 2024	Aug. 22, 2025	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz~44GHz	May 13, 2024	Sep. 04, 2024~ Sep. 05, 2024	May 12, 2025	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 06, 2024	Sep. 06, 2024~ Oct. 14, 2024	Sep. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Sep. 04, 2024~ Oct. 14, 2024	Mar. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,803954/2	30MHz~40GHz	Aug. 12, 2024	Sep. 04, 2024~ Oct. 14, 2024	Aug. 11, 2025	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 30, 2023	Sep. 04, 2024~ Oct. 14, 2024	Oct. 29, 2024	Radiation (03CH21-HY)
Controller	E MEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Sep. 04, 2024~ Oct. 14, 2024	N/A	Radiation (03CH21-HY)
Antenna Mast	E MEC	AM-BS-4500-B	N/A	1~4m	N/A	Sep. 04, 2024~ Oct. 14, 2024	N/A	Radiation (03CH21-HY)
Turn Table	E MEC	TT 2000	N/A	0~360 Degree	N/A	Sep. 04, 2024~ Oct. 14, 2024	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-002349	N/A	N/A	Sep. 04, 2024~ Oct. 14, 2024	N/A	Radiation (03CH21-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Sep. 07, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Sep. 07, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2023	Sep. 07, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Sep. 07, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Sep. 07, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Sep. 07, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2023	Sep. 07, 2024	Sep. 22, 2024	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Aug. 29, 2024~ Oct. 16, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17100015SNO37 (NO:167)	10MHz~6GHz	Dec. 01, 2023	Aug. 29, 2024~ Oct. 16, 2024	Nov. 30, 2024	Conducted (TH05-HY)
Power Divider	Woken	2Way SMA	DCMD38W1E2	N/A	N/A	Aug. 29, 2024~ Oct. 16, 2024	N/A	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Aug. 14, 2024	Aug. 29, 2024~ Oct. 16, 2024	Aug. 13, 2025	Conducted (TH05-HY)
Software1	Sporton	BTWIFI_Final_version:1.0(2024-08-21)	N/A	Conducted Items	N/A	Aug. 29, 2024~ Oct. 16, 2024	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.40 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Wei Shun	Temperature:	21~25	°C
Test Date:	2024/8/29~2024/10/16	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.022	0.671	0.50	Pass
BLE	1Mbps	1	19	2440	1.023	0.669	0.50	Pass
BLE	1Mbps	1	39	2480	1.024	0.667	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	7.19	30.00	3.57	10.76	36.00	Pass
BLE	1Mbps	1	19	2440	6.53	30.00	3.57	10.10	36.00	Pass
BLE	1Mbps	1	39	2480	6.08	30.00	3.57	9.65	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	6.62	-8.98	3.57	8.00	Pass
BLE	1Mbps	1	19	2440	6.14	-9.45	3.57	8.00	Pass
BLE	1Mbps	1	39	2480	5.71	-9.88	3.57	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.051	1.380	0.50	Pass
BLE	2Mbps	1	19	2440	2.051	1.380	0.50	Pass
BLE	2Mbps	1	39	2480	2.052	1.375	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	7.19	30.00	3.57	10.76	36.00	Pass
BLE	2Mbps	1	19	2440	6.74	30.00	3.57	10.31	36.00	Pass
BLE	2Mbps	1	39	2480	6.58	30.00	3.57	10.15	36.00	Pass

TEST RESULTS DATA
Peak Power Density


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	4.48	-15.09	3.57	8.00	Pass
BLE	2Mbps	1	19	2440	4.05	-15.51	3.57	8.00	Pass
BLE	2Mbps	1	39	2480	3.87	-15.65	3.57	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




6dB Bandwidth

<1Mbps>

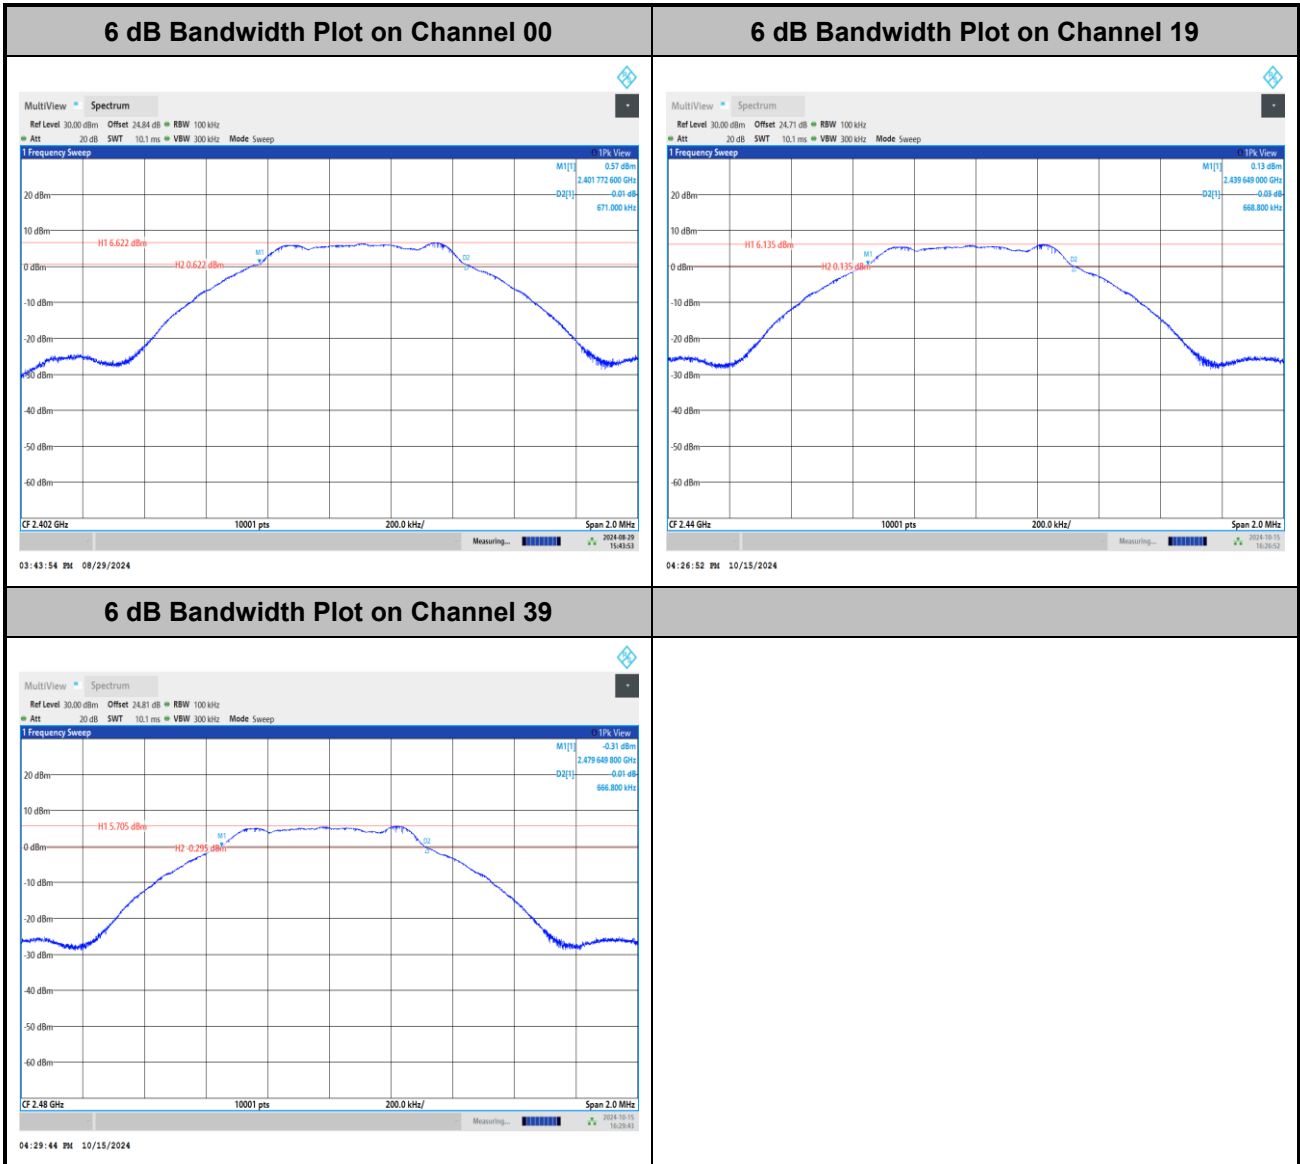



<2Mbps>

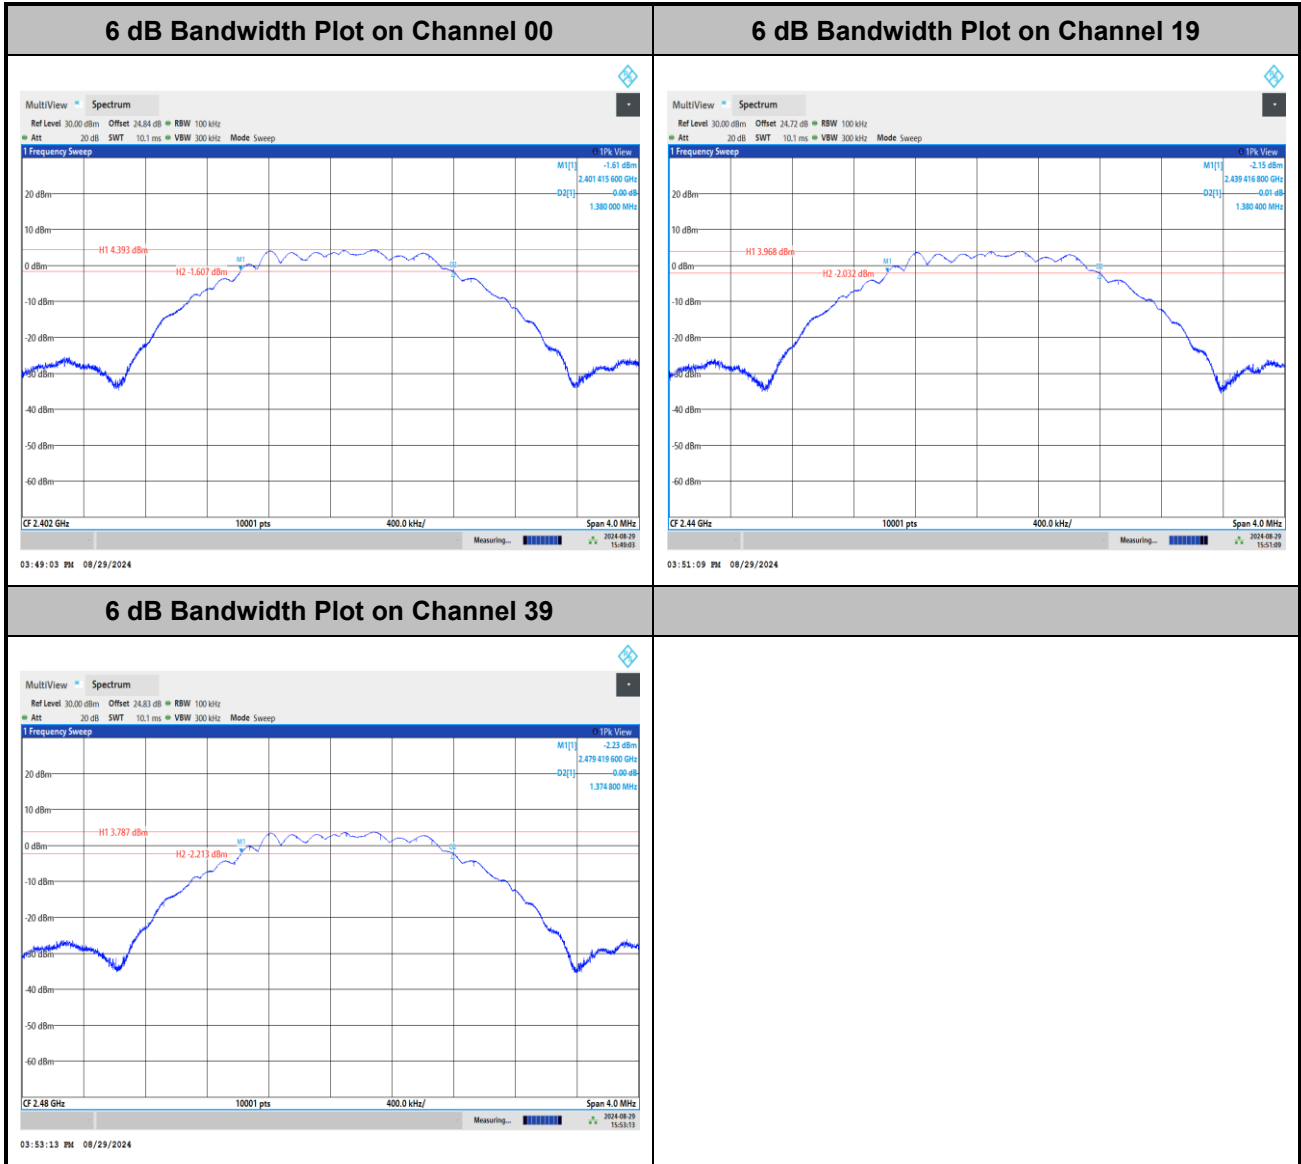





99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

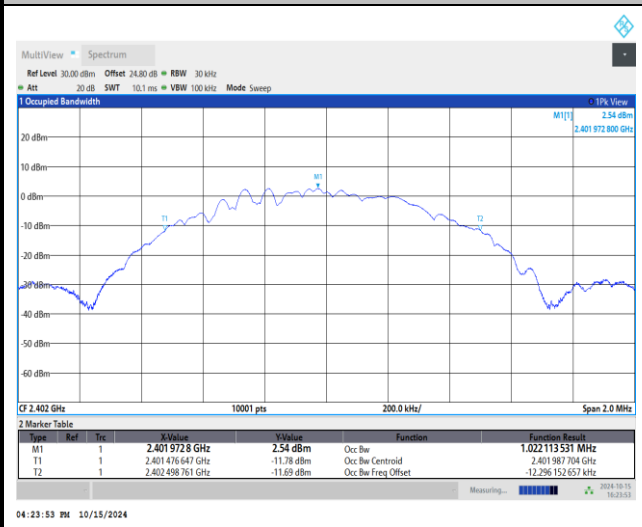

99% Occupied Bandwidth Plot on Channel 19

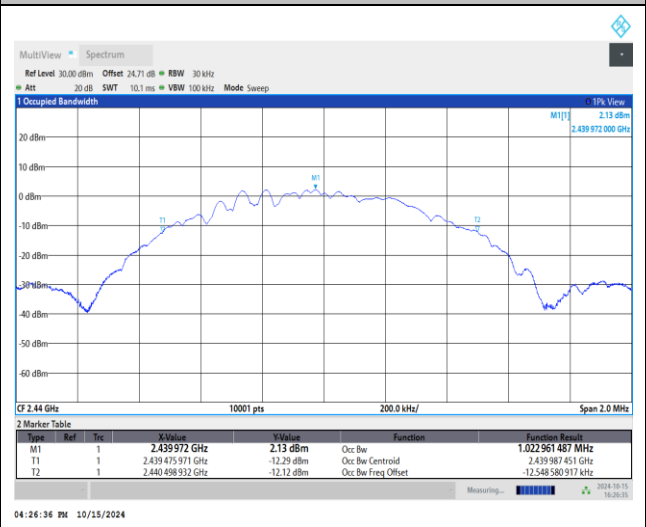


99% Occupied Bandwidth Plot on Channel 39

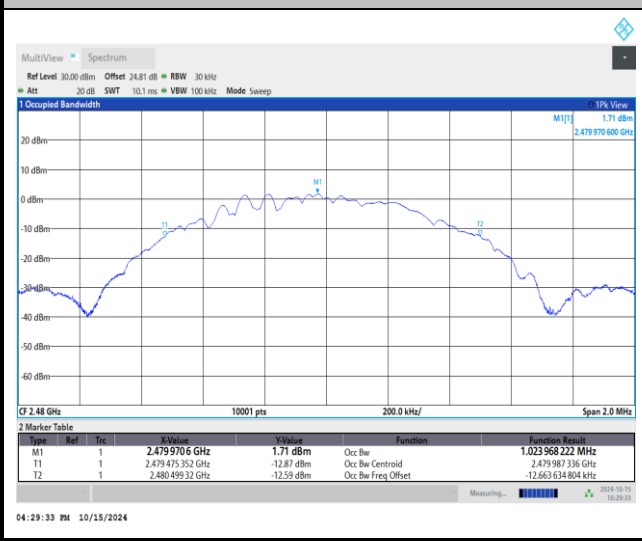




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

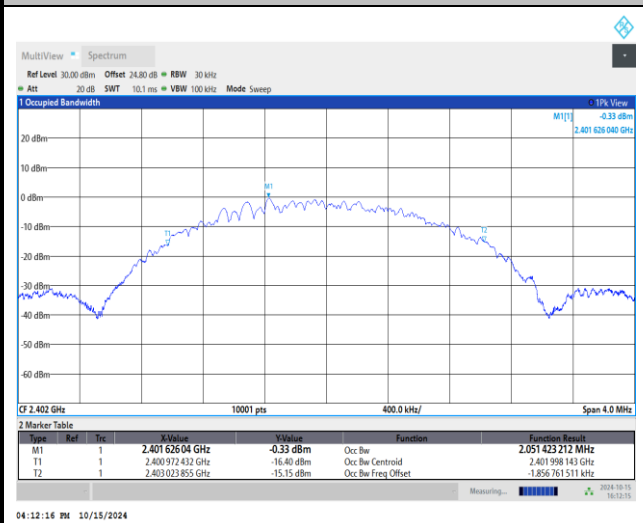

99% Occupied Bandwidth Plot on Channel 19

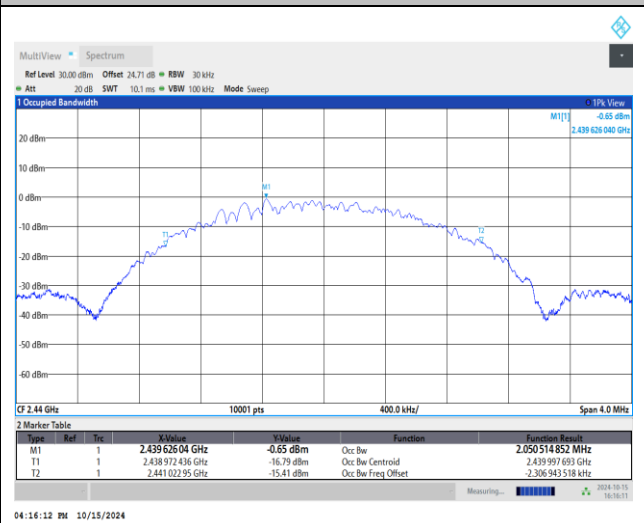


99% Occupied Bandwidth Plot on Channel 39

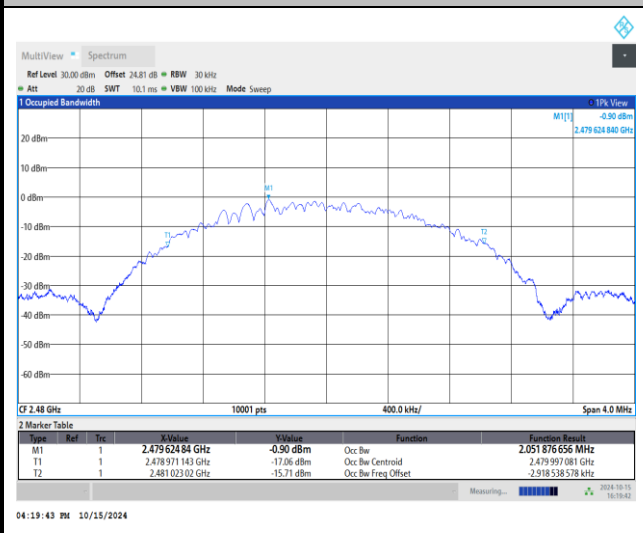




Power Spectral Density (dBm/3kHz)

<1Mbps>

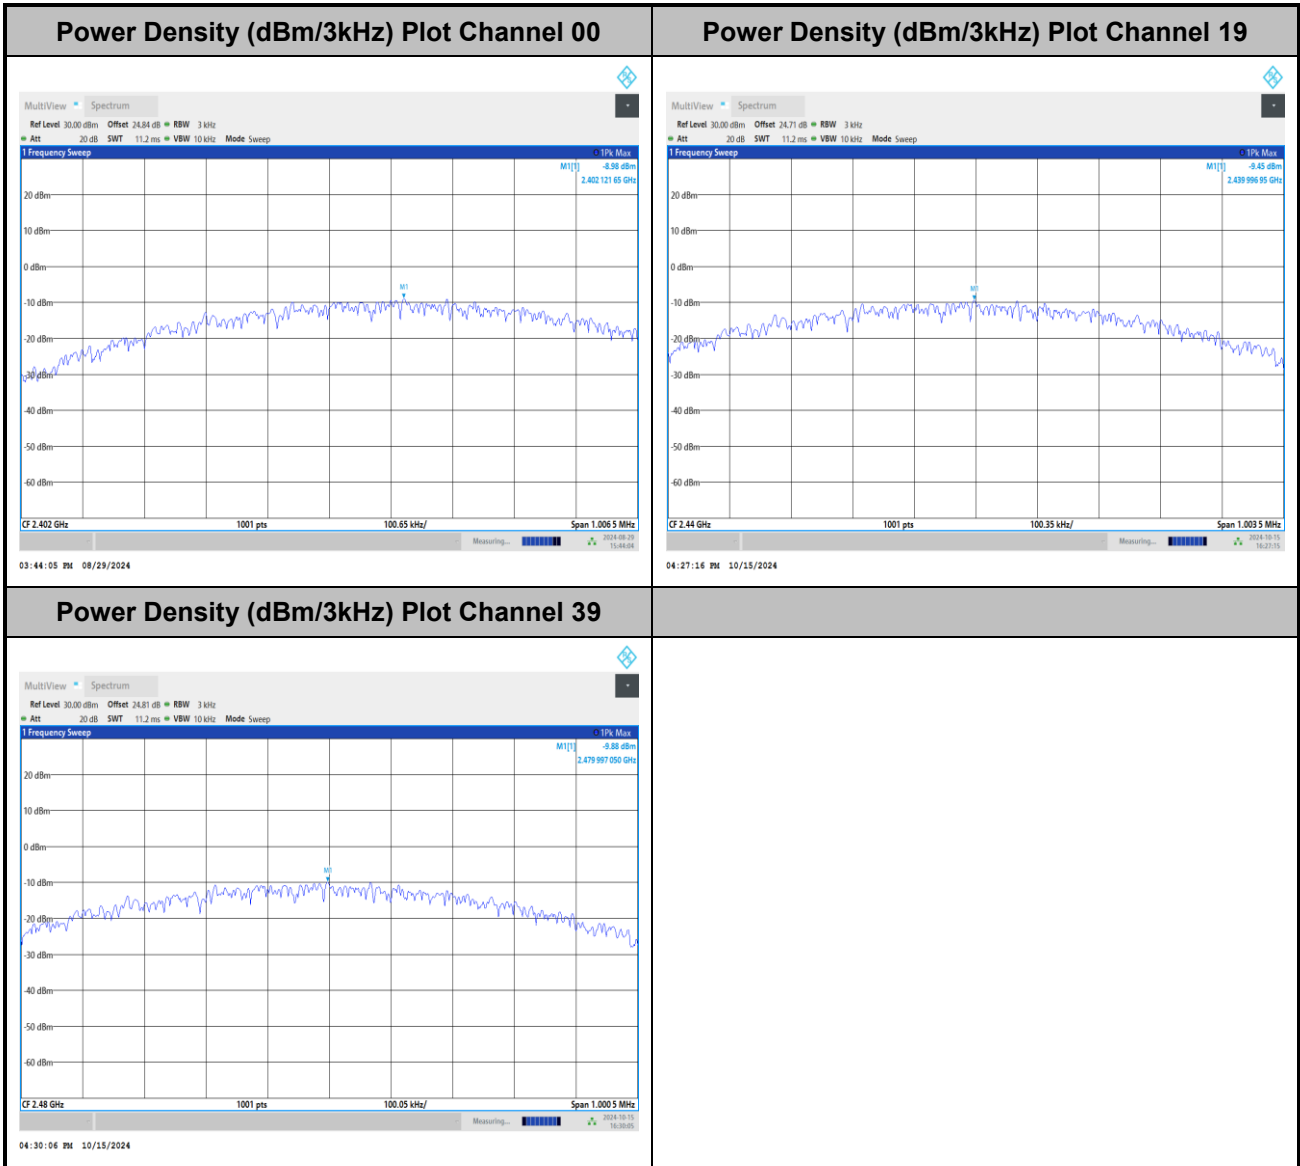




<2Mbps>

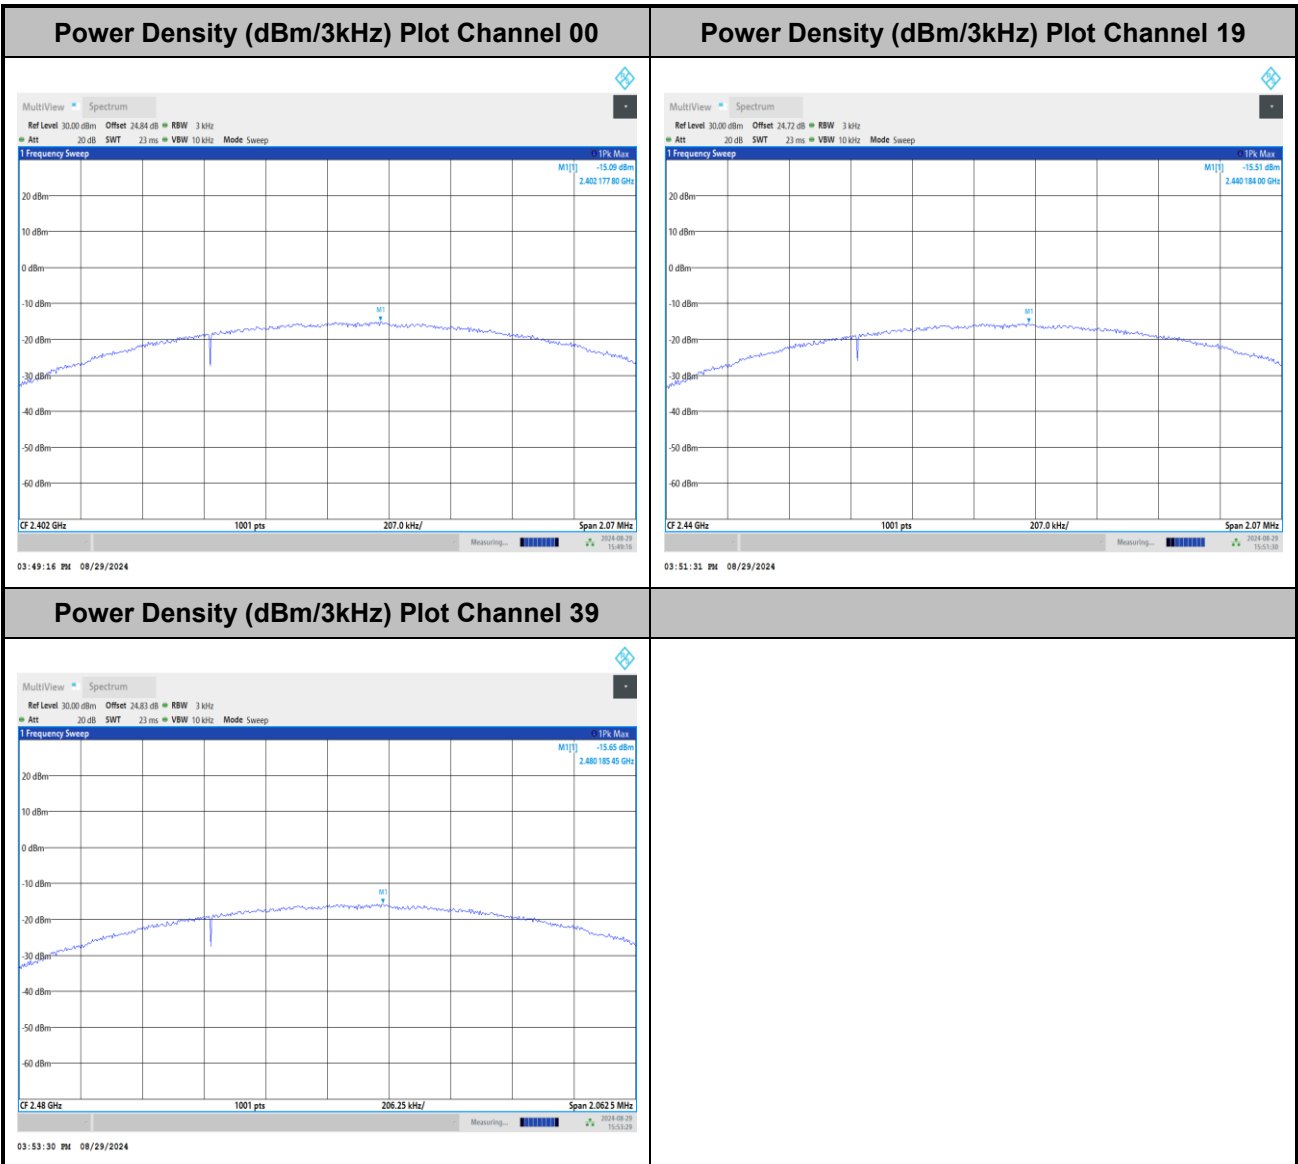



Band Edge and Conducted Spurious Emission


<1Mbps>

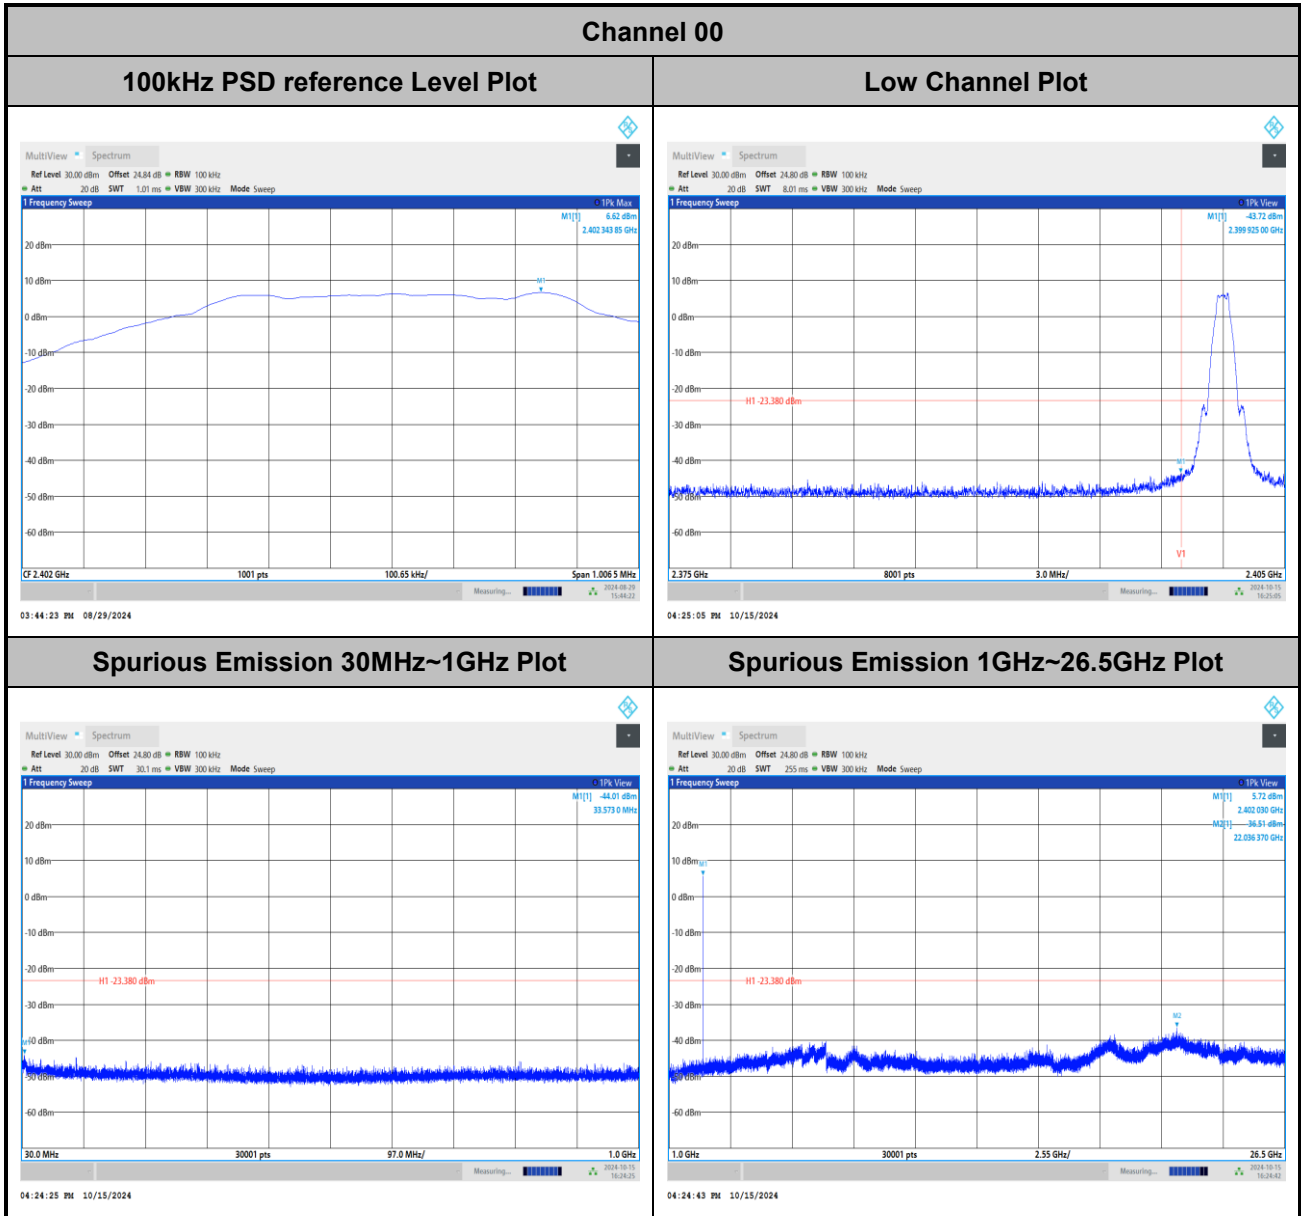




Channel 19

100kHz PSD reference Level Plot

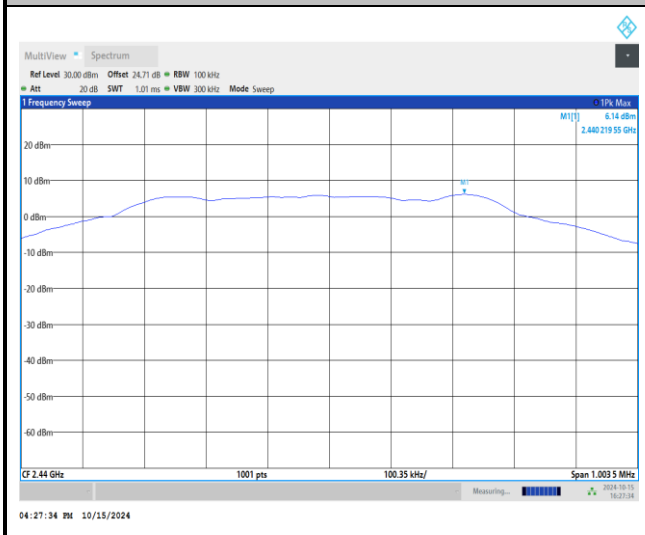


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

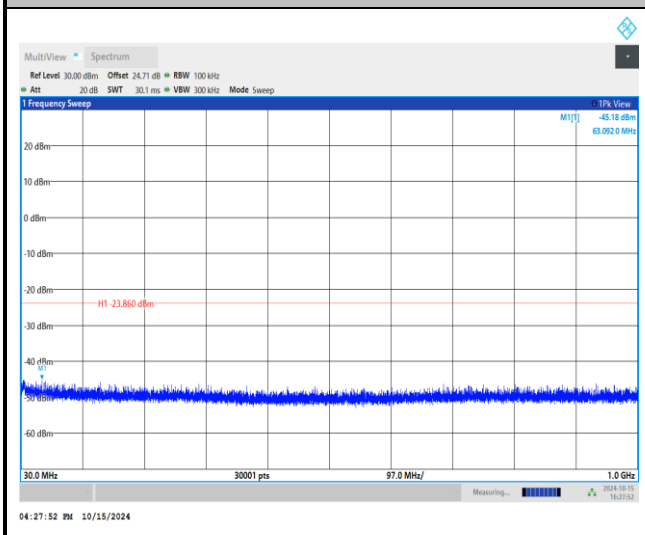


Spurious Emission 1GHz~26.5GHz Plot

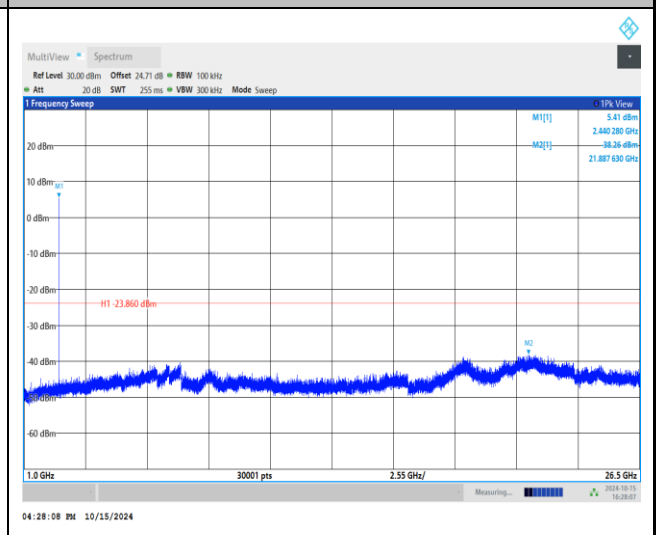




Channel 39


100kHz PSD reference Level Plot

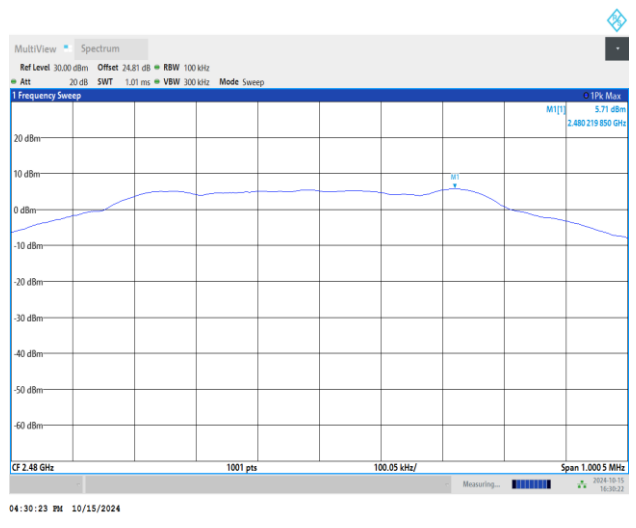


High Channel Plot

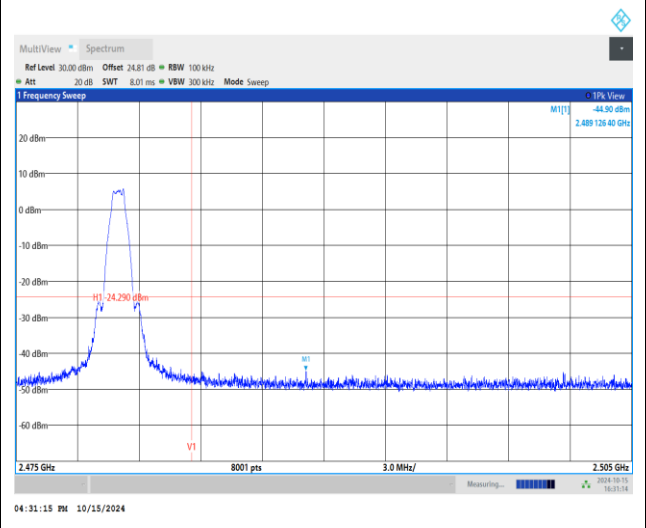

Spurious Emission 30MHz~1GHz Plot

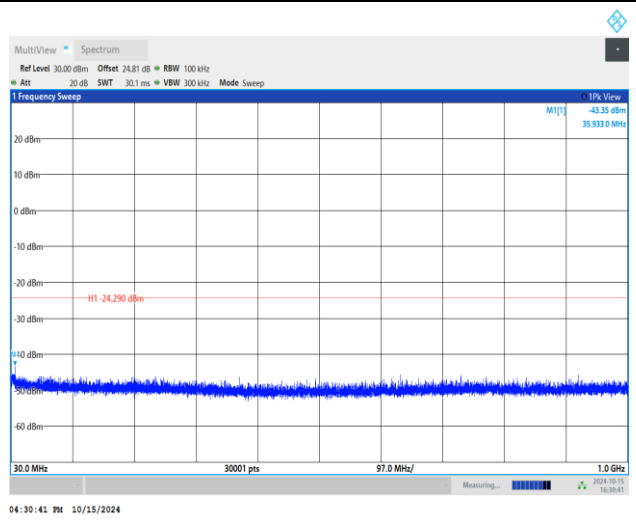


Spurious Emission 1GHz~26.5GHz Plot

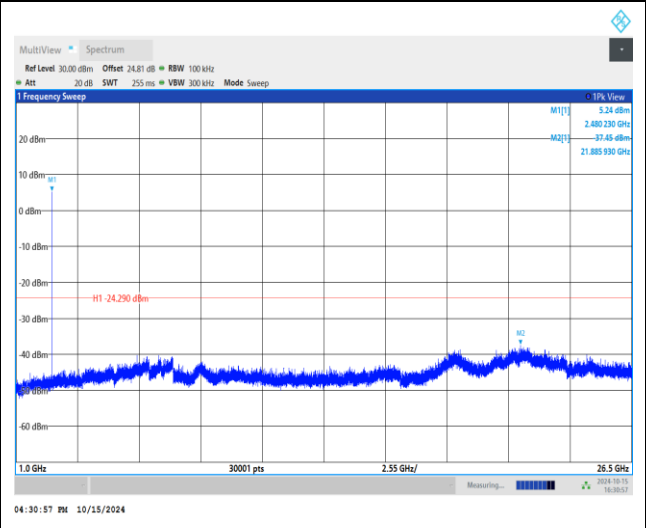




<2Mbps>

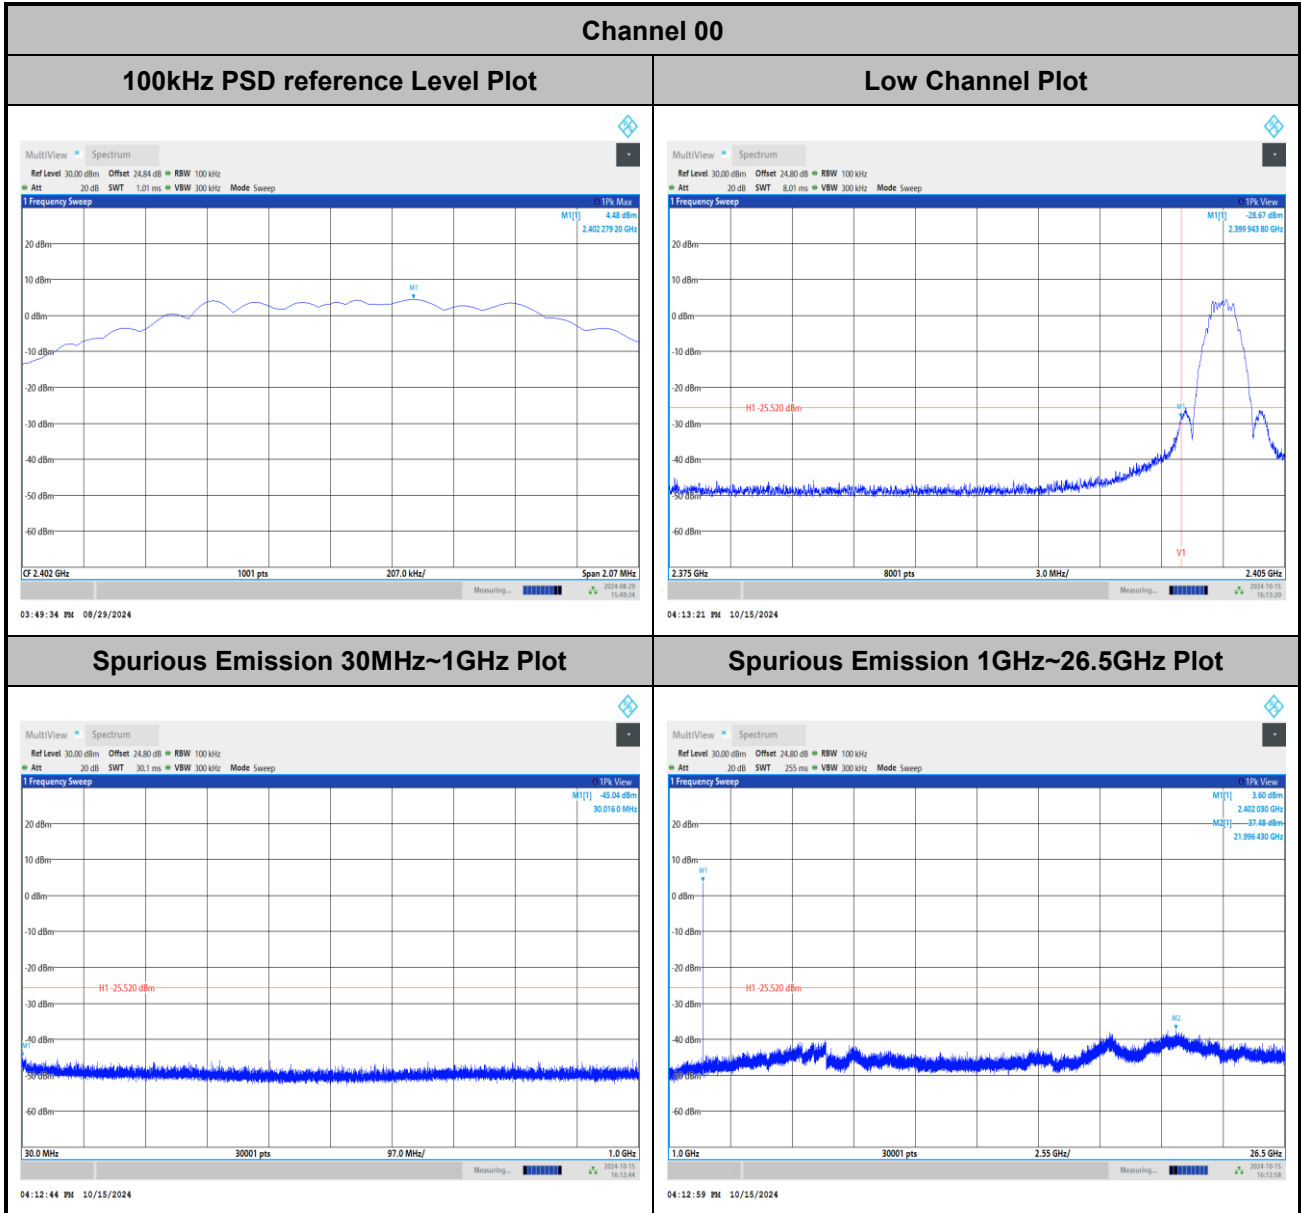




Channel 19

100kHz PSD reference Level Plot

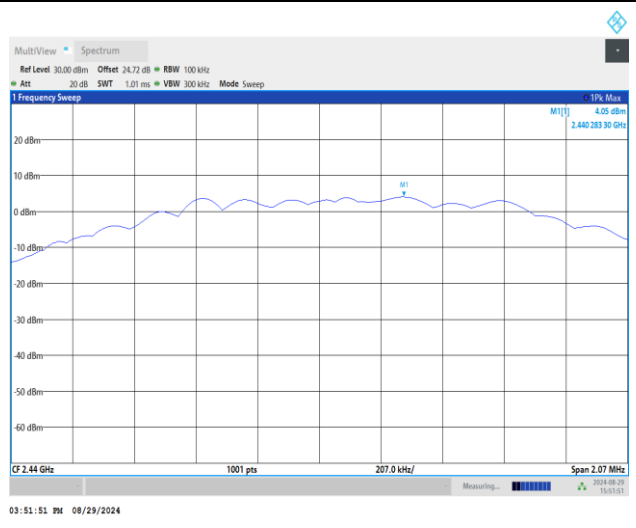


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

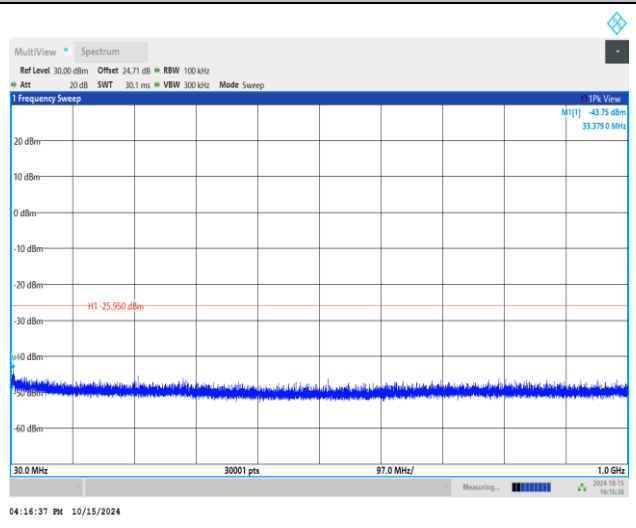


Spurious Emission 1GHz~26.5GHz Plot

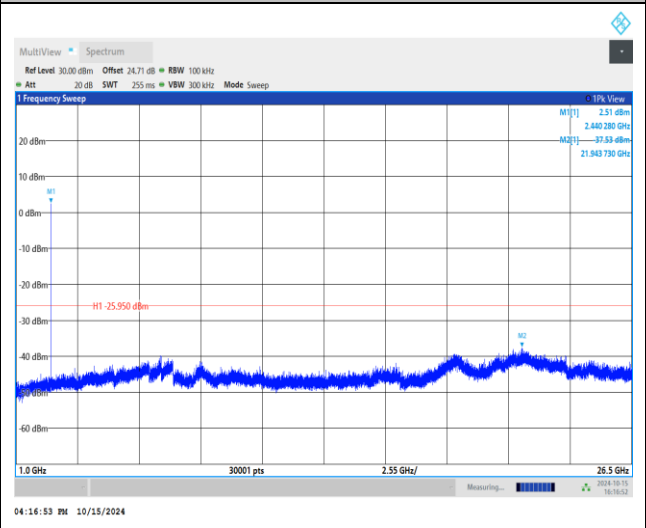




Channel 39


100kHz PSD reference Level Plot

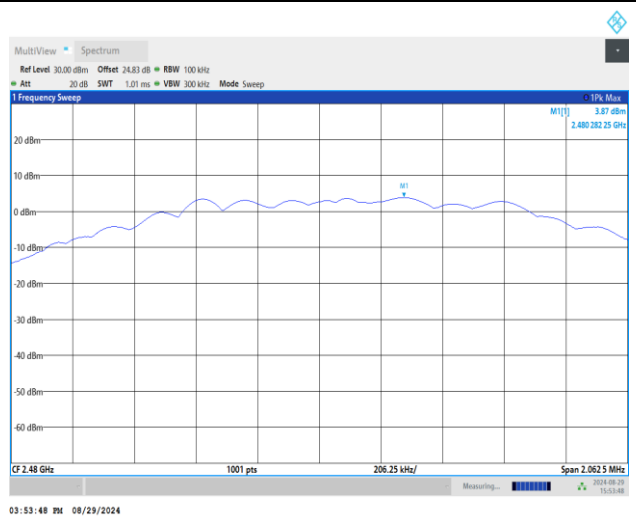


High Channel Plot

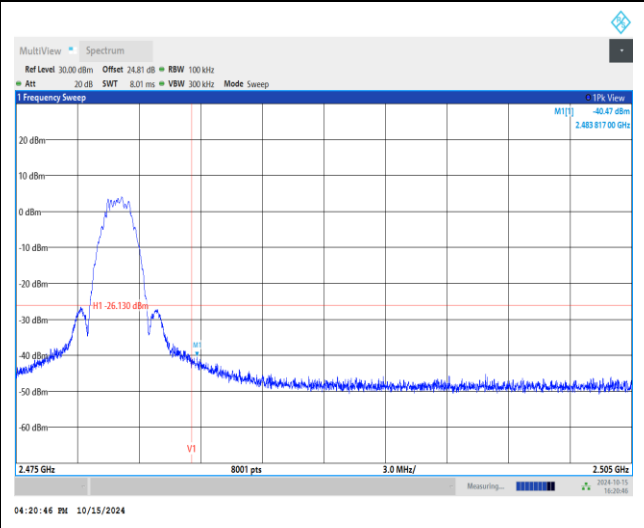

Spurious Emission 30MHz~1GHz Plot

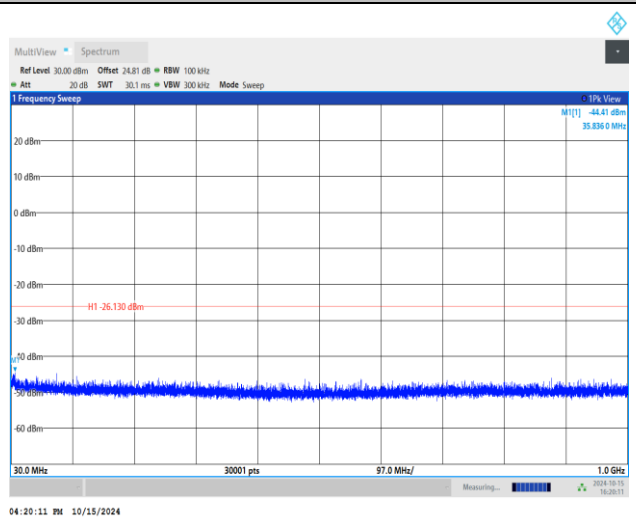

Spurious Emission 1GHz~26.5GHz Plot

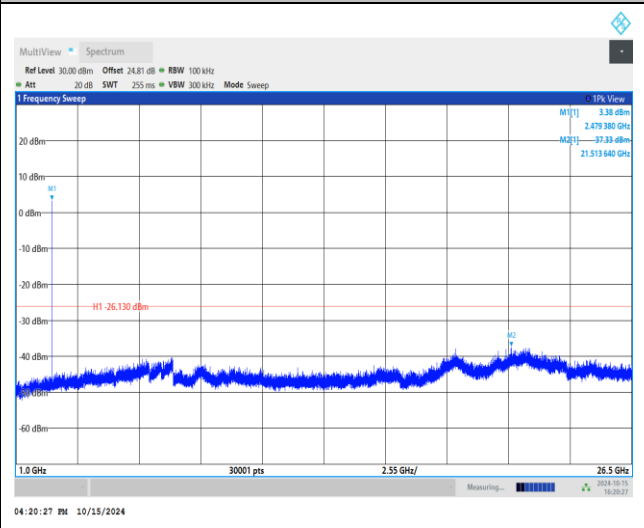




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23.7~26.8°C
		Relative Humidity :	40.2~48.6%

EUT Information

Report NO : 471026
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

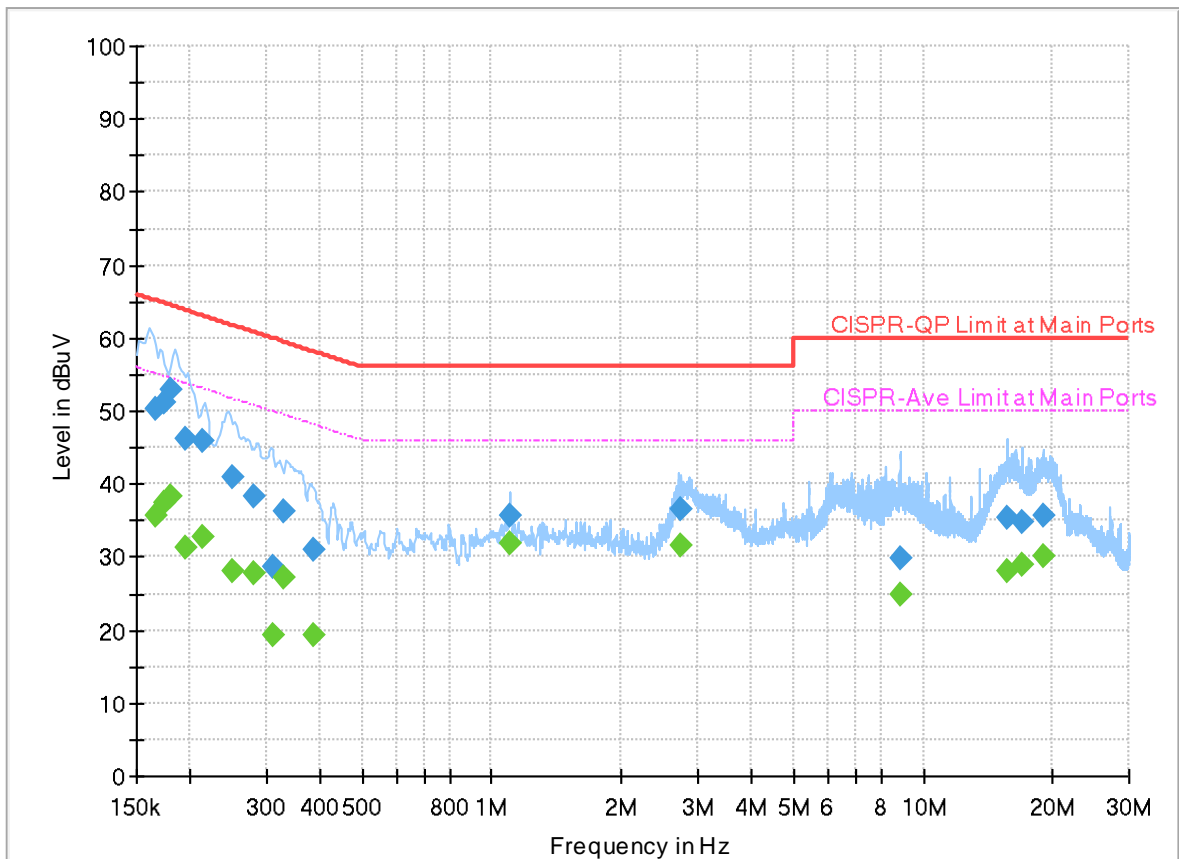

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.165750	50.18	---	65.17	14.99	L1	FLO	19.9
0.165750	---	35.61	55.17	19.56	L1	FLO	19.9
0.174210	51.03	---	64.76	13.73	L1	FLO	19.9
0.174210	---	37.38	54.76	17.38	L1	FLO	19.9
0.180420	52.83	---	64.47	11.64	L1	FLO	19.9
0.180420	---	38.38	54.47	16.09	L1	FLO	19.9
0.195810	46.22	---	63.79	17.57	L1	FLO	19.9
0.195810	---	31.25	53.79	22.54	L1	FLO	19.9
0.213810	45.92	---	63.06	17.14	L1	FLO	19.9
0.213810	---	32.67	53.06	20.39	L1	FLO	19.9
0.251250	40.98	---	61.72	20.74	L1	FLO	19.9
0.251250	---	27.98	51.72	23.74	L1	FLO	19.9
0.280500	38.35	---	60.80	22.45	L1	FLO	19.9
0.280500	---	27.82	50.80	22.98	L1	FLO	19.9
0.312000	28.58	---	59.92	31.34	L1	FLO	19.9
0.312000	---	19.25	49.92	30.67	L1	FLO	19.9
0.328290	36.31	---	59.49	23.18	L1	FLO	19.9
0.328290	---	27.19	49.49	22.30	L1	FLO	19.9
0.384090	31.04	---	58.19	27.15	L1	FLO	19.9

0.384090	---	19.16	48.19	29.03	L1	FLO	19.9
1.102020	35.68	---	56.00	20.32	L1	FLO	19.9
1.102020	---	31.83	46.00	14.17	L1	FLO	19.9
2.749740	36.49	---	56.00	19.51	L1	FLO	20.0
2.749740	---	31.59	46.00	14.41	L1	FLO	20.0
8.839500	29.79	---	60.00	30.21	L1	FLO	20.1
8.839500	---	24.90	50.00	25.10	L1	FLO	20.1
15.621000	35.39	---	60.00	24.61	L1	FLO	20.1
15.621000	---	28.08	50.00	21.92	L1	FLO	20.1
17.010870	34.85	---	60.00	25.15	L1	FLO	20.1
17.010870	---	28.98	50.00	21.02	L1	FLO	20.1
19.029030	35.55	---	60.00	24.45	L1	FLO	20.1
19.029030	---	30.15	50.00	19.85	L1	FLO	20.1

EUT Information

Report NO : 471026
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

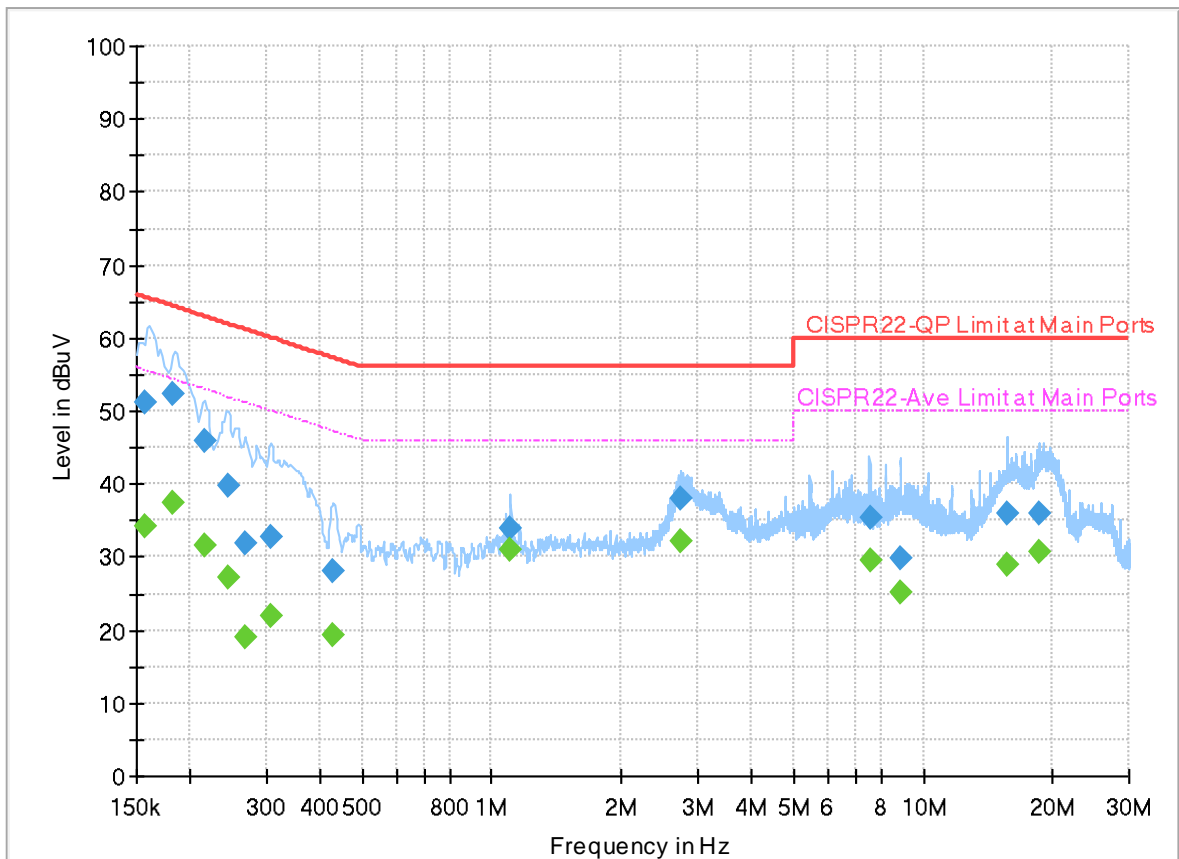

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	34.32	55.63	21.31	N	FLO	19.9
0.156750	51.18	---	65.63	14.45	N	FLO	19.9
0.181500	---	37.56	54.42	16.86	N	FLO	19.9
0.181500	52.30	---	64.42	12.12	N	FLO	19.9
0.216690	---	31.54	52.95	21.41	N	FLO	19.9
0.216690	45.82	---	62.95	17.13	N	FLO	19.9
0.245400	---	27.14	51.91	24.77	N	FLO	19.9
0.245400	39.90	---	61.91	22.01	N	FLO	19.9
0.267810	---	19.10	51.19	32.09	N	FLO	19.9
0.267810	31.75	---	61.19	29.44	N	FLO	19.9
0.308040	---	21.89	50.02	28.13	N	FLO	19.9
0.308040	32.88	---	60.02	27.14	N	FLO	19.9
0.429000	---	19.21	47.27	28.06	N	FLO	19.9
0.429000	27.93	---	57.27	29.34	N	FLO	19.9
1.100130	---	31.06	46.00	14.94	N	FLO	19.9
1.100130	33.86	---	56.00	22.14	N	FLO	19.9
2.733180	---	32.22	46.00	13.78	N	FLO	20.0
2.733180	37.87	---	56.00	18.13	N	FLO	20.0
7.515330	---	29.63	50.00	20.37	N	FLO	20.0

7.515330	35.51	---	60.00	24.49	N	FLO	20.0
8.856060	---	25.20	50.00	24.80	N	FLO	20.1
8.856060	29.83	---	60.00	30.17	N	FLO	20.1
15.702000	---	28.95	50.00	21.05	N	FLO	20.2
15.702000	36.02	---	60.00	23.98	N	FLO	20.2
18.622500	---	30.84	50.00	19.16	N	FLO	20.2
18.622500	36.00	---	60.00	24.00	N	FLO	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jack Cheng, Ray Lung, Sky Chang and White Hou	Temperature :	18~26°C
		Relative Humidity :	50~70%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

<1Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	3	Bluetooth-LE_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	3	Bluetooth-LE_GFSK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	3	Bluetooth-LE_GFSK	39	2480	1Mbps	-	-
Mode 7	2400-2483.5	3	Bluetooth-LE_GFSK	39	2480	1Mbps	-	LF
Mode 8	2400-2483.5	3	Bluetooth-LE_GFSK	39	2480	1Mbps	-	SHF

<2Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	3	Bluetooth-LE_GFSK	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	3	Bluetooth-LE_GFSK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	3	Bluetooth-LE_GFSK	39	2480	2Mbps	-	-



C2. Summary of each worse mode

<1Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE_GFSK	00	2360.23	40.05	54.00	-13.95	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	00	12015.00	50.05	54.00	-3.95	H	Avg.	Pass	-	Harmonic
2	Bluetooth-LE_GFSK	19	2497.60	39.70	54.00	-14.30	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	19	7320.00	50.16	54.00	-3.84	V	Avg.	Pass	-	Harmonic
3	Bluetooth-LE_GFSK	39	2483.52	40.90	54.00	-13.10	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	39	7440.00	50.99	54.00	-3.01	H	Avg.	Pass	-	Harmonic
7	LF	39	716.76	37.04	46.00	-8.96	H	Peak	Pass	-	LF
8	SHF	39	22320.00	42.72	54.00	-11.28	V	Avg.	Pass	-	SHF

<2Mbps>





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth-LE_GFSK	00	2361.52	39.40	54.00	-14.60	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	00	12010.00	47.79	54.00	-6.21	H	Avg.	Pass	-	Harmonic
5	Bluetooth-LE_GFSK	19	2499.76	39.72	54.00	-14.28	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	19	7320.00	50.80	54.00	-3.20	H	Avg.	Pass	-	Harmonic
6	Bluetooth-LE_GFSK	39	2483.52	47.67	54.00	-6.33	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	39	7440.00	50.88	54.00	-3.12	H	Avg.	Pass	-	Harmonic



<1Mbps>

Mode	1																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																									
ANT	3																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2330.79 51.65 74.00 -22.35</td> <td>38.74</td> <td>26.89</td> <td>8.63</td> <td>32.64</td> <td>10.03</td> <td>400</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg		1 2330.79 51.65 74.00 -22.35	38.74	26.89	8.63	32.64	10.03	400	78	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2402.00 84.85</td> <td>-----</td> <td>71.91</td> <td>26.82</td> <td>8.77</td> <td>32.68</td> <td>10.03</td> <td>400</td> <td>78 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg		1 2402.00 84.85	-----	71.91	26.82	8.77	32.68	10.03	400	78 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg																																																																			
1 2330.79 51.65 74.00 -22.35	38.74	26.89	8.63	32.64	10.03	400	78	PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg																																																																			
1 2402.00 84.85	-----	71.91	26.82	8.77	32.68	10.03	400	78 PEAK																																																																		
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2360.23 40.05 54.00 -13.95</td> <td>26.98</td> <td>27.00</td> <td>8.69</td> <td>32.65</td> <td>10.03</td> <td>400</td> <td>78</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg		1 2360.23 40.05 54.00 -13.95	26.98	27.00	8.69	32.65	10.03	400	78	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2402.00 84.27</td> <td>-----</td> <td>71.33</td> <td>26.82</td> <td>8.77</td> <td>32.68</td> <td>10.03</td> <td>400</td> <td>78 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg		1 2402.00 84.27	-----	71.33	26.82	8.77	32.68	10.03	400	78 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg																																																																			
1 2360.23 40.05 54.00 -13.95	26.98	27.00	8.69	32.65	10.03	400	78	AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg																																																																			
1 2402.00 84.27	-----	71.33	26.82	8.77	32.68	10.03	400	78 AVERAGE																																																																		

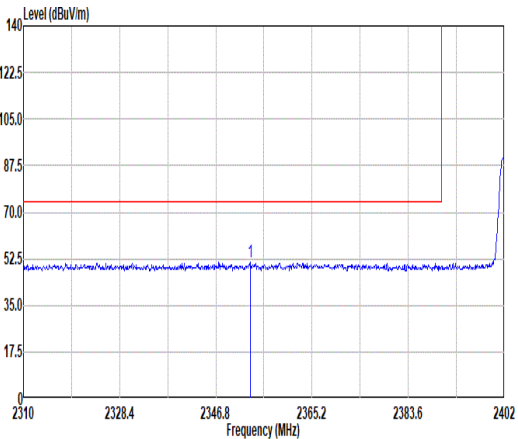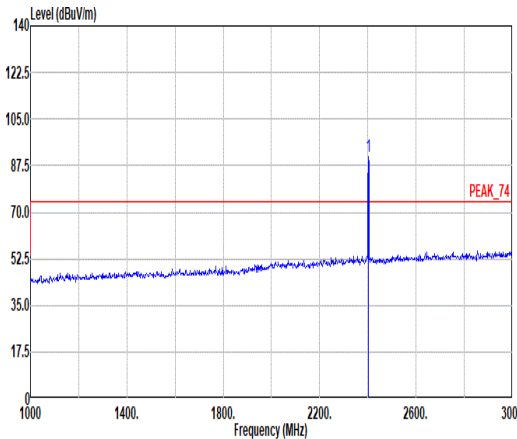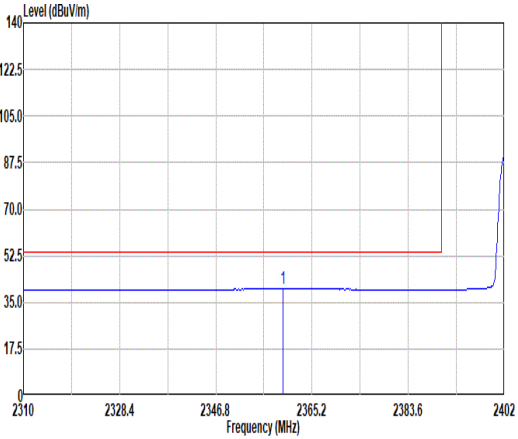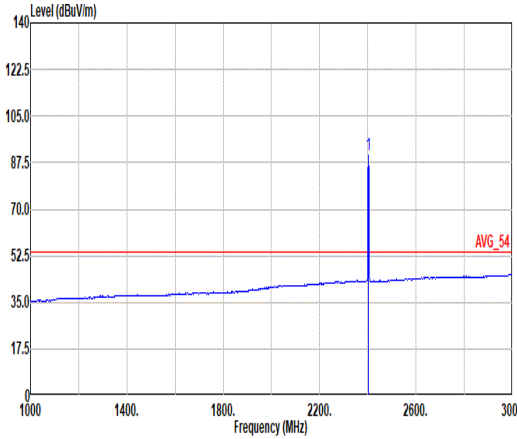

	1																																																																																									
Mode	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																									
ANT	3																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2353.33</td> <td>51.36</td> <td>74.00</td> <td>-22.64</td> <td>38.38</td> <td>26.93</td> <td>8.67</td> <td>32.65</td> <td>10.03</td> <td>183</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2353.33	51.36	74.00	-22.64	38.38	26.93	8.67	32.65	10.03	183	171	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.85</td> <td>-----</td> <td>-----</td> <td>77.91</td> <td>26.82</td> <td>8.77</td> <td>32.68</td> <td>10.03</td> <td>183</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	90.85	-----	-----	77.91	26.82	8.77	32.68	10.03	183	171	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2353.33	51.36	74.00	-22.64	38.38	26.93	8.67	32.65	10.03	183	171	PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2402.00	90.85	-----	-----	77.91	26.82	8.77	32.68	10.03	183	171	PEAK																																																																														
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2359.59</td> <td>40.03</td> <td>54.00</td> <td>-13.97</td> <td>26.96</td> <td>27.00</td> <td>8.69</td> <td>32.65</td> <td>10.03</td> <td>183</td> <td>171</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2359.59	40.03	54.00	-13.97	26.96	27.00	8.69	32.65	10.03	183	171	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.35</td> <td>-----</td> <td>-----</td> <td>77.41</td> <td>26.82</td> <td>8.77</td> <td>32.68</td> <td>10.03</td> <td>183</td> <td>171</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	90.35	-----	-----	77.41	26.82	8.77	32.68	10.03	183	171	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2359.59	40.03	54.00	-13.97	26.96	27.00	8.69	32.65	10.03	183	171	AVERAGE																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2402.00	90.35	-----	-----	77.41	26.82	8.77	32.68	10.03	183	171	AVERAGE																																																																														



Mode	1																																																																																																																																																																																																		
	Harmonic																																																																																																																																																																																																		
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																																																																																																																		
ANT	3																																																																																																																																																																																																		
Pol.	Horizontal	Vertical																																																																																																																																																																																																	
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>44.85</td> <td>74.00</td> <td>-29.15</td> <td>33.43</td> <td>32.21</td> <td>12.66</td> <td>33.98</td> <td>0.53</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7206.00</td> <td>56.99</td> <td>-----</td> <td>-----</td> <td>40.56</td> <td>36.51</td> <td>15.82</td> <td>36.36</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>12015.00</td> <td>56.86</td> <td>74.00</td> <td>-17.14</td> <td>38.93</td> <td>38.63</td> <td>19.97</td> <td>41.34</td> <td>0.67</td> <td>105</td> <td>129</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>12015.00</td> <td>50.05</td> <td>54.00</td> <td>-3.95</td> <td>32.12</td> <td>38.63</td> <td>19.97</td> <td>41.34</td> <td>0.67</td> <td>105</td> <td>129</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>16814.00</td> <td>62.62</td> <td>-----</td> <td>-----</td> <td>44.77</td> <td>40.16</td> <td>23.70</td> <td>46.67</td> <td>0.66</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	44.85	74.00	-29.15	33.43	32.21	12.66	33.98	0.53	--	--	PEAK	2	7206.00	56.99	-----	-----	40.56	36.51	15.82	36.36	0.46	--	--	PEAK	3	12015.00	56.86	74.00	-17.14	38.93	38.63	19.97	41.34	0.67	105	129	PEAK	4	12015.00	50.05	54.00	-3.95	32.12	38.63	19.97	41.34	0.67	105	129	AVERAGE	5	16814.00	62.62	-----	-----	44.77	40.16	23.70	46.67	0.66	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>44.27</td> <td>74.00</td> <td>-29.73</td> <td>32.85</td> <td>32.21</td> <td>12.66</td> <td>33.98</td> <td>0.53</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7206.00</td> <td>56.41</td> <td>-----</td> <td>-----</td> <td>39.98</td> <td>36.51</td> <td>15.82</td> <td>36.36</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>12015.00</td> <td>56.09</td> <td>74.00</td> <td>-17.91</td> <td>38.16</td> <td>38.63</td> <td>19.97</td> <td>41.34</td> <td>0.67</td> <td>100</td> <td>183</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>12015.00</td> <td>48.42</td> <td>54.00</td> <td>-5.58</td> <td>30.49</td> <td>38.63</td> <td>19.97</td> <td>41.34</td> <td>0.67</td> <td>100</td> <td>183</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>16814.00</td> <td>58.29</td> <td>-----</td> <td>-----</td> <td>40.44</td> <td>40.16</td> <td>23.70</td> <td>46.67</td> <td>0.66</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	44.27	74.00	-29.73	32.85	32.21	12.66	33.98	0.53	--	--	PEAK	2	7206.00	56.41	-----	-----	39.98	36.51	15.82	36.36	0.46	--	--	PEAK	3	12015.00	56.09	74.00	-17.91	38.16	38.63	19.97	41.34	0.67	100	183	PEAK	4	12015.00	48.42	54.00	-5.58	30.49	38.63	19.97	41.34	0.67	100	183	AVERAGE	5	16814.00	58.29	-----	-----	40.44	40.16	23.70	46.67	0.66	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																									
1	4804.00	44.85	74.00	-29.15	33.43	32.21	12.66	33.98	0.53	--	--	PEAK																																																																																																																																																																																							
2	7206.00	56.99	-----	-----	40.56	36.51	15.82	36.36	0.46	--	--	PEAK																																																																																																																																																																																							
3	12015.00	56.86	74.00	-17.14	38.93	38.63	19.97	41.34	0.67	105	129	PEAK																																																																																																																																																																																							
4	12015.00	50.05	54.00	-3.95	32.12	38.63	19.97	41.34	0.67	105	129	AVERAGE																																																																																																																																																																																							
5	16814.00	62.62	-----	-----	44.77	40.16	23.70	46.67	0.66	--	--	PEAK																																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																								
1	4804.00	44.27	74.00	-29.73	32.85	32.21	12.66	33.98	0.53	--	--	PEAK																																																																																																																																																																																							
2	7206.00	56.41	-----	-----	39.98	36.51	15.82	36.36	0.46	--	--	PEAK																																																																																																																																																																																							
3	12015.00	56.09	74.00	-17.91	38.16	38.63	19.97	41.34	0.67	100	183	PEAK																																																																																																																																																																																							
4	12015.00	48.42	54.00	-5.58	30.49	38.63	19.97	41.34	0.67	100	183	AVERAGE																																																																																																																																																																																							
5	16814.00	58.29	-----	-----	40.44	40.16	23.70	46.67	0.66	--	--	PEAK																																																																																																																																																																																							



Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz	
ANT	3	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Mode	2																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																	
ANT	3																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2357.32</td> <td>50.57</td> <td>74.00</td> <td>-23.43</td> <td>37.54</td> <td>26.97</td> <td>8.68</td> <td>32.65</td> <td>10.03</td> <td>198</td> <td>173</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2357.32	50.57	74.00	-23.43	37.54	26.97	8.68	32.65	10.03	198	173	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>77.78</td> <td>-----</td> <td>-----</td> <td>64.90</td> <td>26.70</td> <td>8.85</td> <td>32.70</td> <td>10.03</td> <td>198</td> <td>173</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2440.00	77.78	-----	-----	64.90	26.70	8.85	32.70	10.03	198	173	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2357.32	50.57	74.00	-23.43	37.54	26.97	8.68	32.65	10.03	198	173	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2440.00	77.78	-----	-----	64.90	26.70	8.85	32.70	10.03	198	173	PEAK																																																																						
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2361.09</td> <td>39.39</td> <td>54.00</td> <td>-14.61</td> <td>26.33</td> <td>26.99</td> <td>8.69</td> <td>32.65</td> <td>10.03</td> <td>198</td> <td>173</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2361.09	39.39	54.00	-14.61	26.33	26.99	8.69	32.65	10.03	198	173	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>77.12</td> <td>-----</td> <td>-----</td> <td>64.24</td> <td>26.70</td> <td>8.85</td> <td>32.70</td> <td>10.03</td> <td>198</td> <td>173</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2440.00	77.12	-----	-----	64.24	26.70	8.85	32.70	10.03	198	173	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2361.09	39.39	54.00	-14.61	26.33	26.99	8.69	32.65	10.03	198	173	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2440.00	77.12	-----	-----	64.24	26.70	8.85	32.70	10.03	198	173	AVERAGE																																																																						





	2																																							
Mode	Band Edge - R																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																							
ANT	3																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0</p> <p>2440 2452 2464 2476 2488 2500</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2488.66</td> <td>50.70</td> <td>74.00</td> <td>-23.30</td> <td>37.76</td> <td>26.69</td> <td>8.95</td> <td>32.73</td> <td>10.03</td> <td>198 173 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2488.66	50.70	74.00	-23.30	37.76	26.69	8.95	32.73	10.03	198 173 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 2488.66	50.70	74.00	-23.30	37.76	26.69	8.95	32.73	10.03	198 173 PEAK																															
Avg	<p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0</p> <p>2440 2452 2464 2476 2488 2500</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2497.60</td> <td>39.70</td> <td>54.00</td> <td>-14.30</td> <td>26.74</td> <td>26.70</td> <td>8.97</td> <td>32.74</td> <td>10.03</td> <td>198 173 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2497.60	39.70	54.00	-14.30	26.74	26.70	8.97	32.74	10.03	198 173 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 2497.60	39.70	54.00	-14.30	26.74	26.70	8.97	32.74	10.03	198 173 AVERAGE																															



Mode	2																																																																																			
	Band Edge - L																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																			
ANT	3																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2373.05</td> <td>50.80</td> <td>74.00</td> <td>-23.20</td> <td>37.88</td> <td>26.84</td> <td>8.71</td> <td>32.66</td> <td>10.03</td> <td>200</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.05	50.80	74.00	-23.20	37.88	26.84	8.71	32.66	10.03	200	175	PEAK	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>94.84</td> <td>-----</td> <td>-----</td> <td>81.96</td> <td>26.70</td> <td>8.85</td> <td>32.70</td> <td>10.03</td> <td>200</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	94.84	-----	-----	81.96	26.70	8.85	32.70	10.03	200	175	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2373.05	50.80	74.00	-23.20	37.88	26.84	8.71	32.66	10.03	200	175	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2440.00	94.84	-----	-----	81.96	26.70	8.85	32.70	10.03	200	175	PEAK																																																																								
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2359.66</td> <td>39.38</td> <td>54.00</td> <td>-14.62</td> <td>26.31</td> <td>27.00</td> <td>8.69</td> <td>32.65</td> <td>10.03</td> <td>200</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2359.66	39.38	54.00	-14.62	26.31	27.00	8.69	32.65	10.03	200	175	AVERAGE	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>94.39</td> <td>-----</td> <td>-----</td> <td>81.51</td> <td>26.70</td> <td>8.85</td> <td>32.70</td> <td>10.03</td> <td>200</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	94.39	-----	-----	81.51	26.70	8.85	32.70	10.03	200	175	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2359.66	39.38	54.00	-14.62	26.31	27.00	8.69	32.65	10.03	200	175	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2440.00	94.39	-----	-----	81.51	26.70	8.85	32.70	10.03	200	175	AVERAGE																																																																								

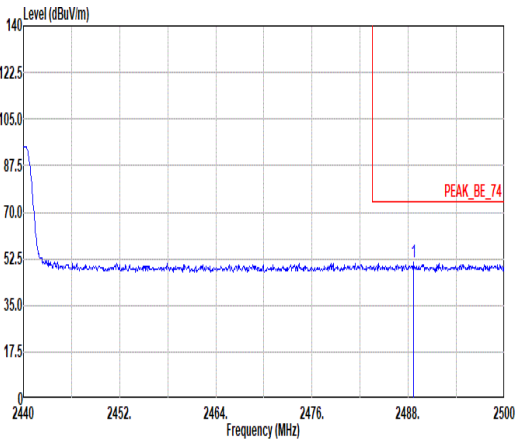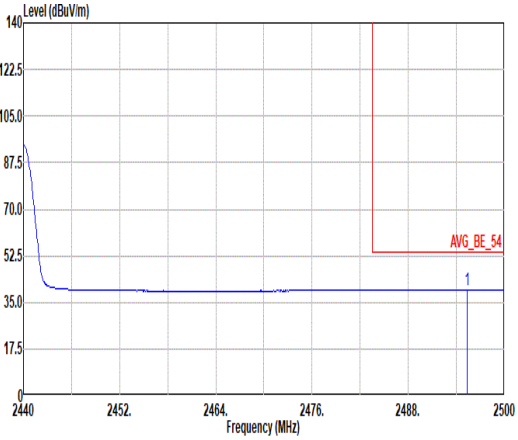

	2																																														
Mode	Band Edge - R																																														
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																														
ANT	3																																														
Pol.	Vertical	Fundamental																																													
Peak	 <p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2488.66</td> <td>51.17</td> <td>74.00</td> <td>-22.83</td> <td>38.23</td> <td>26.69</td> <td>8.95</td> <td>32.73</td> <td>10.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200 175 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2488.66	51.17	74.00	-22.83	38.23	26.69	8.95	32.73	10.03									200 175 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																							
1 2488.66	51.17	74.00	-22.83	38.23	26.69	8.95	32.73	10.03																																							
								200 175 PEAK																																							
Avg	 <p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2495.32</td> <td>39.69</td> <td>54.00</td> <td>-14.31</td> <td>26.73</td> <td>26.70</td> <td>8.97</td> <td>32.74</td> <td>10.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200 175 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2495.32	39.69	54.00	-14.31	26.73	26.70	8.97	32.74	10.03									200 175 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																							
1 2495.32	39.69	54.00	-14.31	26.73	26.70	8.97	32.74	10.03																																							
								200 175 AVERAGE																																							



Mode	2																																																																																																																																																									
	Harmonic																																																																																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																																																																									
ANT	3																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																								
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>45.25</td> <td>74.00</td> <td>-28.75</td> <td>33.64</td> <td>32.36</td> <td>12.74</td> <td>33.97</td> <td>0.48</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>55.60</td> <td>74.00</td> <td>-18.40</td> <td>38.88</td> <td>36.74</td> <td>15.96</td> <td>36.42</td> <td>0.44</td> <td>100</td> <td>250 PEAK</td> </tr> <tr> <td>3</td> <td>7320.00</td> <td>49.11</td> <td>54.00</td> <td>-4.89</td> <td>32.39</td> <td>36.74</td> <td>15.96</td> <td>36.42</td> <td>0.44</td> <td>100</td> <td>250 AVERAGE</td> </tr> <tr> <td>4</td> <td>17080.00</td> <td>55.98</td> <td>-----</td> <td>-----</td> <td>38.04</td> <td>40.14</td> <td>23.89</td> <td>46.82</td> <td>0.73</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	45.25	74.00	-28.75	33.64	32.36	12.74	33.97	0.48	--	PEAK	2	7320.00	55.60	74.00	-18.40	38.88	36.74	15.96	36.42	0.44	100	250 PEAK	3	7320.00	49.11	54.00	-4.89	32.39	36.74	15.96	36.42	0.44	100	250 AVERAGE	4	17080.00	55.98	-----	-----	38.04	40.14	23.89	46.82	0.73	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>46.30</td> <td>74.00</td> <td>-27.70</td> <td>34.69</td> <td>32.36</td> <td>12.74</td> <td>33.97</td> <td>0.48</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>56.02</td> <td>74.00</td> <td>-17.98</td> <td>39.30</td> <td>36.74</td> <td>15.96</td> <td>36.42</td> <td>0.44</td> <td>100</td> <td>195 PEAK</td> </tr> <tr> <td>3</td> <td>7320.00</td> <td>50.16</td> <td>54.00</td> <td>-3.84</td> <td>33.44</td> <td>36.74</td> <td>15.96</td> <td>36.42</td> <td>0.44</td> <td>100</td> <td>195 AVERAGE</td> </tr> <tr> <td>4</td> <td>17080.00</td> <td>60.44</td> <td>-----</td> <td>-----</td> <td>42.50</td> <td>40.14</td> <td>23.89</td> <td>46.82</td> <td>0.73</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	46.30	74.00	-27.70	34.69	32.36	12.74	33.97	0.48	--	PEAK	2	7320.00	56.02	74.00	-17.98	39.30	36.74	15.96	36.42	0.44	100	195 PEAK	3	7320.00	50.16	54.00	-3.84	33.44	36.74	15.96	36.42	0.44	100	195 AVERAGE	4	17080.00	60.44	-----	-----	42.50	40.14	23.89	46.82	0.73	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4880.00	45.25	74.00	-28.75	33.64	32.36	12.74	33.97	0.48	--	PEAK																																																																																																																																															
2	7320.00	55.60	74.00	-18.40	38.88	36.74	15.96	36.42	0.44	100	250 PEAK																																																																																																																																															
3	7320.00	49.11	54.00	-4.89	32.39	36.74	15.96	36.42	0.44	100	250 AVERAGE																																																																																																																																															
4	17080.00	55.98	-----	-----	38.04	40.14	23.89	46.82	0.73	--	PEAK																																																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4880.00	46.30	74.00	-27.70	34.69	32.36	12.74	33.97	0.48	--	PEAK																																																																																																																																															
2	7320.00	56.02	74.00	-17.98	39.30	36.74	15.96	36.42	0.44	100	195 PEAK																																																																																																																																															
3	7320.00	50.16	54.00	-3.84	33.44	36.74	15.96	36.42	0.44	100	195 AVERAGE																																																																																																																																															
4	17080.00	60.44	-----	-----	42.50	40.14	23.89	46.82	0.73	--	PEAK																																																																																																																																															



Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	3	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																			
ANT	3																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2491.18</td> <td>51.11</td> <td>74.00</td> <td>-22.89</td> <td>38.15</td> <td>26.70</td> <td>8.96</td> <td>32.73</td> <td>10.03</td> <td>100</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2491.18	51.11	74.00	-22.89	38.15	26.70	8.96	32.73	10.03	100	135	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>71.23</td> <td>-----</td> <td>-----</td> <td>58.40</td> <td>26.60</td> <td>8.93</td> <td>32.73</td> <td>10.03</td> <td>100</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	71.23	-----	-----	58.40	26.60	8.93	32.73	10.03	100	135	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2491.18	51.11	74.00	-22.89	38.15	26.70	8.96	32.73	10.03	100	135	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	71.23	-----	-----	58.40	26.60	8.93	32.73	10.03	100	135	PEAK																																																																								
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2499.40</td> <td>39.49</td> <td>54.00</td> <td>-14.51</td> <td>26.53</td> <td>26.70</td> <td>8.97</td> <td>32.74</td> <td>10.03</td> <td>100</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.40	39.49	54.00	-14.51	26.53	26.70	8.97	32.74	10.03	100	135	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>70.42</td> <td>-----</td> <td>-----</td> <td>57.59</td> <td>26.60</td> <td>8.93</td> <td>32.73</td> <td>10.03</td> <td>100</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	70.42	-----	-----	57.59	26.60	8.93	32.73	10.03	100	135	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2499.40	39.49	54.00	-14.51	26.53	26.70	8.97	32.74	10.03	100	135	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	70.42	-----	-----	57.59	26.60	8.93	32.73	10.03	100	135	AVERAGE																																																																								



Mode	3																																																																																					
	Band Edge																																																																																					
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																					
ANT	3																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.76</td> <td>51.28</td> <td>74.00</td> <td>-22.72</td> <td>38.40</td> <td>26.64</td> <td>8.94</td> <td>32.73</td> <td>10.03</td> <td>200</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.76	51.28	74.00	-22.72	38.40	26.64	8.94	32.73	10.03	200	180	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>95.63</td> <td>-----</td> <td>-----</td> <td>82.80</td> <td>26.60</td> <td>8.93</td> <td>32.73</td> <td>10.03</td> <td>200</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	95.63	-----	-----	82.80	26.60	8.93	32.73	10.03	200	180	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2483.76	51.28	74.00	-22.72	38.40	26.64	8.94	32.73	10.03	200	180	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2480.00	95.63	-----	-----	82.80	26.60	8.93	32.73	10.03	200	180	PEAK																																																																										
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.52</td> <td>40.90</td> <td>54.00</td> <td>-13.10</td> <td>28.02</td> <td>26.64</td> <td>8.94</td> <td>32.73</td> <td>10.03</td> <td>200</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.52	40.90	54.00	-13.10	28.02	26.64	8.94	32.73	10.03	200	180	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>95.16</td> <td>-----</td> <td>-----</td> <td>82.33</td> <td>26.60</td> <td>8.93</td> <td>32.73</td> <td>10.03</td> <td>200</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	95.16	-----	-----	82.33	26.60	8.93	32.73	10.03	200	180	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2483.52	40.90	54.00	-13.10	28.02	26.64	8.94	32.73	10.03	200	180	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2480.00	95.16	-----	-----	82.33	26.60	8.93	32.73	10.03	200	180	AVERAGE																																																																										



Mode	3																																																																																																																																																									
	Harmonic																																																																																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																																									
ANT	3																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																								
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>45.73</td> <td>74.00</td> <td>-28.27</td> <td>33.73</td> <td>32.72</td> <td>12.82</td> <td>33.97</td> <td>0.43</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>56.29</td> <td>74.00</td> <td>-17.71</td> <td>39.47</td> <td>36.80</td> <td>16.10</td> <td>36.49</td> <td>0.41</td> <td>113</td> <td>150 PEAK</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>50.99</td> <td>54.00</td> <td>-3.01</td> <td>34.17</td> <td>36.80</td> <td>16.10</td> <td>36.49</td> <td>0.41</td> <td>113</td> <td>150 AVERAGE</td> </tr> <tr> <td>4</td> <td>17370.00</td> <td>54.71</td> <td>-----</td> <td>-----</td> <td>37.33</td> <td>39.94</td> <td>24.11</td> <td>47.48</td> <td>0.81</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	45.73	74.00	-28.27	33.73	32.72	12.82	33.97	0.43	--	PEAK	2	7440.00	56.29	74.00	-17.71	39.47	36.80	16.10	36.49	0.41	113	150 PEAK	3	7440.00	50.99	54.00	-3.01	34.17	36.80	16.10	36.49	0.41	113	150 AVERAGE	4	17370.00	54.71	-----	-----	37.33	39.94	24.11	47.48	0.81	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>46.50</td> <td>74.00</td> <td>-27.50</td> <td>34.50</td> <td>32.72</td> <td>12.82</td> <td>33.97</td> <td>0.43</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>55.19</td> <td>74.00</td> <td>-18.81</td> <td>38.37</td> <td>36.80</td> <td>16.10</td> <td>36.49</td> <td>0.41</td> <td>123</td> <td>192 PEAK</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>31.74</td> <td>36.80</td> <td>16.10</td> <td>36.49</td> <td>0.41</td> <td>123</td> <td>192 AVERAGE</td> </tr> <tr> <td>4</td> <td>17360.00</td> <td>57.24</td> <td>-----</td> <td>-----</td> <td>39.85</td> <td>39.92</td> <td>24.11</td> <td>47.45</td> <td>0.81</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	46.50	74.00	-27.50	34.50	32.72	12.82	33.97	0.43	--	PEAK	2	7440.00	55.19	74.00	-18.81	38.37	36.80	16.10	36.49	0.41	123	192 PEAK	3	7440.00	48.56	54.00	-5.44	31.74	36.80	16.10	36.49	0.41	123	192 AVERAGE	4	17360.00	57.24	-----	-----	39.85	39.92	24.11	47.45	0.81	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4960.00	45.73	74.00	-28.27	33.73	32.72	12.82	33.97	0.43	--	PEAK																																																																																																																																															
2	7440.00	56.29	74.00	-17.71	39.47	36.80	16.10	36.49	0.41	113	150 PEAK																																																																																																																																															
3	7440.00	50.99	54.00	-3.01	34.17	36.80	16.10	36.49	0.41	113	150 AVERAGE																																																																																																																																															
4	17370.00	54.71	-----	-----	37.33	39.94	24.11	47.48	0.81	--	PEAK																																																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4960.00	46.50	74.00	-27.50	34.50	32.72	12.82	33.97	0.43	--	PEAK																																																																																																																																															
2	7440.00	55.19	74.00	-18.81	38.37	36.80	16.10	36.49	0.41	123	192 PEAK																																																																																																																																															
3	7440.00	48.56	54.00	-5.44	31.74	36.80	16.10	36.49	0.41	123	192 AVERAGE																																																																																																																																															
4	17360.00	57.24	-----	-----	39.85	39.92	24.11	47.45	0.81	--	PEAK																																																																																																																																															



	3	
Mode	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz	
ANT	3	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Mode	7																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																																																																																																	
ANT	3																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																
QP/ Peak	<p>Site : 03CH21-HY Condition: QP 3m LF_633038001_231015 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>21.88</td><td>40.00</td><td>-18.12</td><td>29.60</td><td>24.03</td><td>0.87</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>117.30</td><td>22.17</td><td>43.50</td><td>-21.33</td><td>35.65</td><td>17.29</td><td>1.85</td><td>32.67</td><td>0.05</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>266.68</td><td>20.35</td><td>46.00</td><td>-25.65</td><td>30.46</td><td>19.60</td><td>2.85</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>419.94</td><td>27.71</td><td>46.00</td><td>-18.29</td><td>34.18</td><td>22.61</td><td>3.60</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>716.76</td><td>37.04</td><td>46.00</td><td>-8.96</td><td>37.93</td><td>27.12</td><td>4.70</td><td>32.85</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>956.35</td><td>33.65</td><td>46.00</td><td>-12.35</td><td>28.17</td><td>31.17</td><td>5.47</td><td>31.35</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.97	21.88	40.00	-18.12	29.60	24.03	0.87	32.65	0.03	--	--	Peak	2	117.30	22.17	43.50	-21.33	35.65	17.29	1.85	32.67	0.05	--	--	Peak	3	266.68	20.35	46.00	-25.65	30.46	19.60	2.85	32.63	0.07	--	--	Peak	4	419.94	27.71	46.00	-18.29	34.18	22.61	3.60	32.78	0.10	--	--	Peak	5	716.76	37.04	46.00	-8.96	37.93	27.12	4.70	32.85	0.14	--	--	Peak	6	956.35	33.65	46.00	-12.35	28.17	31.17	5.47	31.35	0.19	--	--	Peak	<p>Site : 03CH21-HY Condition: QP 3m LF_633038001_231015 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>33.88</td><td>30.07</td><td>40.00</td><td>-9.93</td><td>38.77</td><td>22.99</td><td>0.92</td><td>32.64</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>158.04</td><td>21.51</td><td>43.50</td><td>-21.99</td><td>35.19</td><td>16.73</td><td>2.16</td><td>32.63</td><td>0.06</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>257.95</td><td>21.04</td><td>46.00</td><td>-24.96</td><td>31.21</td><td>19.58</td><td>2.80</td><td>32.63</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>418.97</td><td>29.89</td><td>46.00</td><td>-16.11</td><td>36.39</td><td>22.58</td><td>3.60</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>730.34</td><td>36.96</td><td>46.00</td><td>-9.04</td><td>36.92</td><td>27.95</td><td>4.75</td><td>32.79</td><td>0.13</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>945.68</td><td>34.88</td><td>46.00</td><td>-11.12</td><td>29.88</td><td>30.85</td><td>5.44</td><td>31.46</td><td>0.17</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	33.88	30.07	40.00	-9.93	38.77	22.99	0.92	32.64	0.03	--	--	Peak	2	158.04	21.51	43.50	-21.99	35.19	16.73	2.16	32.63	0.06	--	--	Peak	3	257.95	21.04	46.00	-24.96	31.21	19.58	2.80	32.63	0.08	--	--	Peak	4	418.97	29.89	46.00	-16.11	36.39	22.58	3.60	32.78	0.10	--	--	Peak	5	730.34	36.96	46.00	-9.04	36.92	27.95	4.75	32.79	0.13	--	--	Peak	6	945.68	34.88	46.00	-11.12	29.88	30.85	5.44	31.46	0.17	--	--	Peak
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	30.97	21.88	40.00	-18.12	29.60	24.03	0.87	32.65	0.03	--	--	Peak																																																																																																																																																																																																						
2	117.30	22.17	43.50	-21.33	35.65	17.29	1.85	32.67	0.05	--	--	Peak																																																																																																																																																																																																						
3	266.68	20.35	46.00	-25.65	30.46	19.60	2.85	32.63	0.07	--	--	Peak																																																																																																																																																																																																						
4	419.94	27.71	46.00	-18.29	34.18	22.61	3.60	32.78	0.10	--	--	Peak																																																																																																																																																																																																						
5	716.76	37.04	46.00	-8.96	37.93	27.12	4.70	32.85	0.14	--	--	Peak																																																																																																																																																																																																						
6	956.35	33.65	46.00	-12.35	28.17	31.17	5.47	31.35	0.19	--	--	Peak																																																																																																																																																																																																						
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	33.88	30.07	40.00	-9.93	38.77	22.99	0.92	32.64	0.03	--	--	Peak																																																																																																																																																																																																						
2	158.04	21.51	43.50	-21.99	35.19	16.73	2.16	32.63	0.06	--	--	Peak																																																																																																																																																																																																						
3	257.95	21.04	46.00	-24.96	31.21	19.58	2.80	32.63	0.08	--	--	Peak																																																																																																																																																																																																						
4	418.97	29.89	46.00	-16.11	36.39	22.58	3.60	32.78	0.10	--	--	Peak																																																																																																																																																																																																						
5	730.34	36.96	46.00	-9.04	36.92	27.95	4.75	32.79	0.13	--	--	Peak																																																																																																																																																																																																						
6	945.68	34.88	46.00	-11.12	29.88	30.85	5.44	31.46	0.17	--	--	Peak																																																																																																																																																																																																						



Mode	8																																																																																																													
	SHF																																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																													
ANT	3																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak	<p>Site : Condition: PEAK_74 1m BBHA9170_1223_240622 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>22320.00</td> <td>47.58</td> <td>74.00</td> <td>-26.42</td> <td>51.78</td> <td>38.30</td> <td>27.55</td> <td>60.51</td> <td>-9.54</td> <td>103</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>22320.00</td> <td>40.93</td> <td>54.00</td> <td>-13.07</td> <td>45.13</td> <td>38.30</td> <td>27.55</td> <td>60.51</td> <td>-9.54</td> <td>103</td> <td>199</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	22320.00	47.58	74.00	-26.42	51.78	38.30	27.55	60.51	-9.54	103	199	Peak	2	22320.00	40.93	54.00	-13.07	45.13	38.30	27.55	60.51	-9.54	103	199	Average	<p>Site : Condition: PEAK_74 1m BBHA9170_1223_240622 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>22320.00</td> <td>49.25</td> <td>74.00</td> <td>-24.75</td> <td>53.45</td> <td>38.30</td> <td>27.55</td> <td>60.51</td> <td>-9.54</td> <td>101</td> <td>165</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>22320.00</td> <td>42.72</td> <td>54.00</td> <td>-11.28</td> <td>46.92</td> <td>38.30</td> <td>27.55</td> <td>60.51</td> <td>-9.54</td> <td>101</td> <td>165</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	22320.00	49.25	74.00	-24.75	53.45	38.30	27.55	60.51	-9.54	101	165	Peak	2	22320.00	42.72	54.00	-11.28	46.92	38.30	27.55	60.51	-9.54	101	165	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	22320.00	47.58	74.00	-26.42	51.78	38.30	27.55	60.51	-9.54	103	199	Peak																																																																																																		
2	22320.00	40.93	54.00	-13.07	45.13	38.30	27.55	60.51	-9.54	103	199	Average																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	22320.00	49.25	74.00	-24.75	53.45	38.30	27.55	60.51	-9.54	101	165	Peak																																																																																																		
2	22320.00	42.72	54.00	-11.28	46.92	38.30	27.55	60.51	-9.54	101	165	Average																																																																																																		



<2Mbps>

Mode	4																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																									
ANT	3																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2363.08 50.82 74.00 -23.18</td> <td>37.79</td> <td>26.97</td> <td>8.69</td> <td>32.66</td> <td>10.03</td> <td>100</td> <td>223</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg		1 2363.08 50.82 74.00 -23.18	37.79	26.97	8.69	32.66	10.03	100	223	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2402.00 85.24</td> <td>-----</td> <td>72.30</td> <td>26.82</td> <td>8.77</td> <td>32.68</td> <td>10.03</td> <td>100</td> <td>223 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg		1 2402.00 85.24	-----	72.30	26.82	8.77	32.68	10.03	100	223 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg																																																																			
1 2363.08 50.82 74.00 -23.18	37.79	26.97	8.69	32.66	10.03	100	223	PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg																																																																			
1 2402.00 85.24	-----	72.30	26.82	8.77	32.68	10.03	100	223 PEAK																																																																		
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2360.14 39.40 54.00 -14.60</td> <td>26.33</td> <td>27.00</td> <td>8.69</td> <td>32.65</td> <td>10.03</td> <td>100</td> <td>223</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg		1 2360.14 39.40 54.00 -14.60	26.33	27.00	8.69	32.65	10.03	100	223	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2402.00 83.71</td> <td>-----</td> <td>70.77</td> <td>26.82</td> <td>8.77</td> <td>32.68</td> <td>10.03</td> <td>100</td> <td>223 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg		1 2402.00 83.71	-----	70.77	26.82	8.77	32.68	10.03	100	223 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg																																																																			
1 2360.14 39.40 54.00 -14.60	26.33	27.00	8.69	32.65	10.03	100	223	AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	dB	cm deg																																																																			
1 2402.00 83.71	-----	70.77	26.82	8.77	32.68	10.03	100	223 AVERAGE																																																																		



Mode	4																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																			
ANT	3																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2328.86</td> <td>51.04</td> <td>74.00</td> <td>-22.96</td> <td>38.11</td> <td>26.91</td> <td>8.62</td> <td>32.63</td> <td>10.03</td> <td>200</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2328.86	51.04	74.00	-22.96	38.11	26.91	8.62	32.63	10.03	200	174	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>91.96</td> <td>-----</td> <td>-----</td> <td>79.02</td> <td>26.82</td> <td>8.77</td> <td>32.68</td> <td>10.03</td> <td>200</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.96	-----	-----	79.02	26.82	8.77	32.68	10.03	200	174	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2328.86	51.04	74.00	-22.96	38.11	26.91	8.62	32.63	10.03	200	174	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	91.96	-----	-----	79.02	26.82	8.77	32.68	10.03	200	174	PEAK																																																																								
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2361.52</td> <td>39.40</td> <td>54.00</td> <td>-14.60</td> <td>26.35</td> <td>26.90</td> <td>8.69</td> <td>32.65</td> <td>10.03</td> <td>200</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2361.52	39.40	54.00	-14.60	26.35	26.90	8.69	32.65	10.03	200	174	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.50</td> <td>-----</td> <td>-----</td> <td>77.56</td> <td>26.82</td> <td>8.77</td> <td>32.68</td> <td>10.03</td> <td>200</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	90.50	-----	-----	77.56	26.82	8.77	32.68	10.03	200	174	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2361.52	39.40	54.00	-14.60	26.35	26.90	8.69	32.65	10.03	200	174	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	90.50	-----	-----	77.56	26.82	8.77	32.68	10.03	200	174	AVERAGE																																																																								



Mode	4																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																																																																																																							
ANT	3																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4804.00</td> <td>44.16</td> <td>74.00</td> <td>-29.84</td> <td>32.74</td> <td>32.21</td> <td>12.66</td> <td>33.98</td> <td>0.53</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2 7206.00</td> <td>56.13</td> <td>-----</td> <td>-----</td> <td>39.70</td> <td>36.51</td> <td>15.82</td> <td>36.36</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3 12010.00</td> <td>55.79</td> <td>74.00</td> <td>-18.21</td> <td>37.87</td> <td>38.62</td> <td>19.97</td> <td>41.34</td> <td>0.67</td> <td>106</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>4 12010.00</td> <td>47.79</td> <td>54.00</td> <td>-6.21</td> <td>29.87</td> <td>38.62</td> <td>19.97</td> <td>41.34</td> <td>0.67</td> <td>106</td> <td>164</td> <td>AVERAGE</td> </tr> <tr> <td>5 16814.00</td> <td>61.04</td> <td>-----</td> <td>-----</td> <td>43.19</td> <td>40.16</td> <td>23.70</td> <td>46.67</td> <td>0.66</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4804.00	44.16	74.00	-29.84	32.74	32.21	12.66	33.98	0.53	--	--	PEAK	2 7206.00	56.13	-----	-----	39.70	36.51	15.82	36.36	0.46	--	--	PEAK	3 12010.00	55.79	74.00	-18.21	37.87	38.62	19.97	41.34	0.67	106	164	PEAK	4 12010.00	47.79	54.00	-6.21	29.87	38.62	19.97	41.34	0.67	106	164	AVERAGE	5 16814.00	61.04	-----	-----	43.19	40.16	23.70	46.67	0.66	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4804.00</td> <td>44.29</td> <td>74.00</td> <td>-29.71</td> <td>32.87</td> <td>32.21</td> <td>12.66</td> <td>33.98</td> <td>0.53</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2 7206.00</td> <td>56.88</td> <td>-----</td> <td>-----</td> <td>40.45</td> <td>36.51</td> <td>15.82</td> <td>36.36</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3 12010.00</td> <td>54.80</td> <td>74.00</td> <td>-19.20</td> <td>36.88</td> <td>38.62</td> <td>19.97</td> <td>41.34</td> <td>0.67</td> <td>387</td> <td>169</td> <td>PEAK</td> </tr> <tr> <td>4 12010.00</td> <td>46.88</td> <td>54.00</td> <td>-7.12</td> <td>28.96</td> <td>38.62</td> <td>19.97</td> <td>41.34</td> <td>0.67</td> <td>387</td> <td>169</td> <td>AVERAGE</td> </tr> <tr> <td>5 16814.00</td> <td>58.74</td> <td>-----</td> <td>-----</td> <td>40.89</td> <td>40.16</td> <td>23.70</td> <td>46.67</td> <td>0.66</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4804.00	44.29	74.00	-29.71	32.87	32.21	12.66	33.98	0.53	--	--	PEAK	2 7206.00	56.88	-----	-----	40.45	36.51	15.82	36.36	0.46	--	--	PEAK	3 12010.00	54.80	74.00	-19.20	36.88	38.62	19.97	41.34	0.67	387	169	PEAK	4 12010.00	46.88	54.00	-7.12	28.96	38.62	19.97	41.34	0.67	387	169	AVERAGE	5 16814.00	58.74	-----	-----	40.89	40.16	23.70	46.67	0.66	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																														
1 4804.00	44.16	74.00	-29.84	32.74	32.21	12.66	33.98	0.53	--	--	PEAK																																																																																																																																																																													
2 7206.00	56.13	-----	-----	39.70	36.51	15.82	36.36	0.46	--	--	PEAK																																																																																																																																																																													
3 12010.00	55.79	74.00	-18.21	37.87	38.62	19.97	41.34	0.67	106	164	PEAK																																																																																																																																																																													
4 12010.00	47.79	54.00	-6.21	29.87	38.62	19.97	41.34	0.67	106	164	AVERAGE																																																																																																																																																																													
5 16814.00	61.04	-----	-----	43.19	40.16	23.70	46.67	0.66	--	--	PEAK																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																														
1 4804.00	44.29	74.00	-29.71	32.87	32.21	12.66	33.98	0.53	--	--	PEAK																																																																																																																																																																													
2 7206.00	56.88	-----	-----	40.45	36.51	15.82	36.36	0.46	--	--	PEAK																																																																																																																																																																													
3 12010.00	54.80	74.00	-19.20	36.88	38.62	19.97	41.34	0.67	387	169	PEAK																																																																																																																																																																													
4 12010.00	46.88	54.00	-7.12	28.96	38.62	19.97	41.34	0.67	387	169	AVERAGE																																																																																																																																																																													
5 16814.00	58.74	-----	-----	40.89	40.16	23.70	46.67	0.66	--	--	PEAK																																																																																																																																																																													



Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz	
ANT	3	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>







Mode	5																																																																																			
	Band Edge - L																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																			
ANT	3																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2382.15</td> <td>50.71</td> <td>74.00</td> <td>-23.29</td> <td>37.92</td> <td>26.70</td> <td>8.73</td> <td>32.67</td> <td>10.03</td> <td>274</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.15	50.71	74.00	-23.29	37.92	26.70	8.73	32.67	10.03	274	66	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>86.31</td> <td>-----</td> <td>-----</td> <td>73.43</td> <td>26.70</td> <td>8.85</td> <td>32.70</td> <td>10.03</td> <td>274</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	86.31	-----	-----	73.43	26.70	8.85	32.70	10.03	274	66	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2382.15	50.71	74.00	-23.29	37.92	26.70	8.73	32.67	10.03	274	66	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2440.00	86.31	-----	-----	73.43	26.70	8.85	32.70	10.03	274	66	PEAK																																																																								
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2359.92</td> <td>39.41</td> <td>54.00</td> <td>-14.59</td> <td>26.34</td> <td>27.00</td> <td>8.69</td> <td>32.65</td> <td>10.03</td> <td>274</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2359.92	39.41	54.00	-14.59	26.34	27.00	8.69	32.65	10.03	274	66	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>84.82</td> <td>-----</td> <td>-----</td> <td>71.94</td> <td>26.70</td> <td>8.85</td> <td>32.70</td> <td>10.03</td> <td>274</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	84.82	-----	-----	71.94	26.70	8.85	32.70	10.03	274	66	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2359.92	39.41	54.00	-14.59	26.34	27.00	8.69	32.65	10.03	274	66	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2440.00	84.82	-----	-----	71.94	26.70	8.85	32.70	10.03	274	66	AVERAGE																																																																								





Mode	5																																														
	Band Edge - R																																														
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																														
ANT	3																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2493.28</td> <td>51.25</td> <td>74.00</td> <td>-22.75</td> <td>38.30</td> <td>26.70</td> <td>8.96</td> <td>32.74</td> <td>10.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>274 66 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2493.28	51.25	74.00	-22.75	38.30	26.70	8.96	32.74	10.03									274 66 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2493.28	51.25	74.00	-22.75	38.30	26.70	8.96	32.74	10.03																																							
								274 66 PEAK																																							
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2499.76</td> <td>39.72</td> <td>54.00</td> <td>-14.28</td> <td>26.76</td> <td>26.70</td> <td>8.97</td> <td>32.74</td> <td>10.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>274 66 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2499.76	39.72	54.00	-14.28	26.76	26.70	8.97	32.74	10.03									274 66 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2499.76	39.72	54.00	-14.28	26.76	26.70	8.97	32.74	10.03																																							
								274 66 AVERAGE																																							

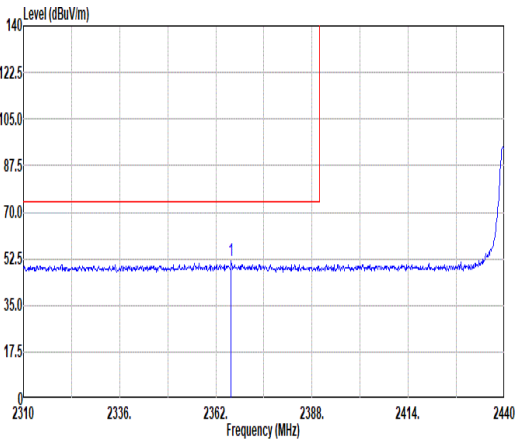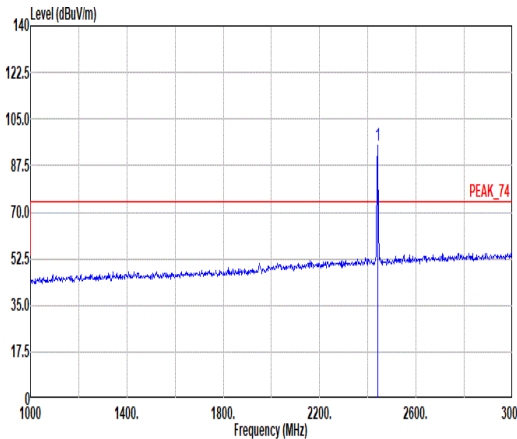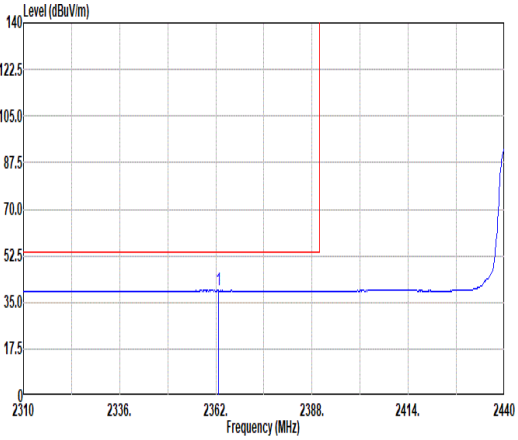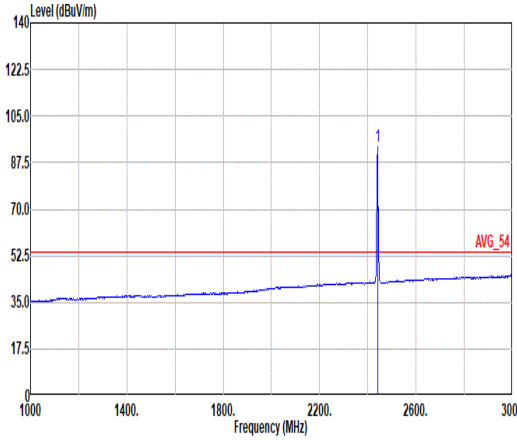

Mode	5																																																																											
	Band Edge - L																																																																											
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																											
ANT	3																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2366.16</td> <td>51.96</td> <td>74.00</td> <td>-22.04</td> <td>38.95</td> <td>26.94</td> <td>8.70</td> <td>32.66</td> <td>10.03</td> <td>229</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2366.16	51.96	74.00	-22.04	38.95	26.94	8.70	32.66	10.03	229	174	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>94.85</td> <td>-----</td> <td>-----</td> <td>81.97</td> <td>26.70</td> <td>8.85</td> <td>32.70</td> <td>10.03</td> <td>229</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2440.00	94.85	-----	-----	81.97	26.70	8.85	32.70	10.03	229	174	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2366.16	51.96	74.00	-22.04	38.95	26.94	8.70	32.66	10.03	229	174	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2440.00	94.85	-----	-----	81.97	26.70	8.85	32.70	10.03	229	174	PEAK																																																																
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2362.65</td> <td>39.40</td> <td>54.00</td> <td>-14.60</td> <td>26.36</td> <td>26.97</td> <td>8.69</td> <td>32.65</td> <td>10.03</td> <td>229</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2362.65	39.40	54.00	-14.60	26.36	26.97	8.69	32.65	10.03	229	174	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>93.40</td> <td>-----</td> <td>-----</td> <td>80.52</td> <td>26.70</td> <td>8.85</td> <td>32.70</td> <td>10.03</td> <td>229</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2440.00	93.40	-----	-----	80.52	26.70	8.85	32.70	10.03	229	174	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2362.65	39.40	54.00	-14.60	26.36	26.97	8.69	32.65	10.03	229	174	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2440.00	93.40	-----	-----	80.52	26.70	8.85	32.70	10.03	229	174	AVERAGE																																																																

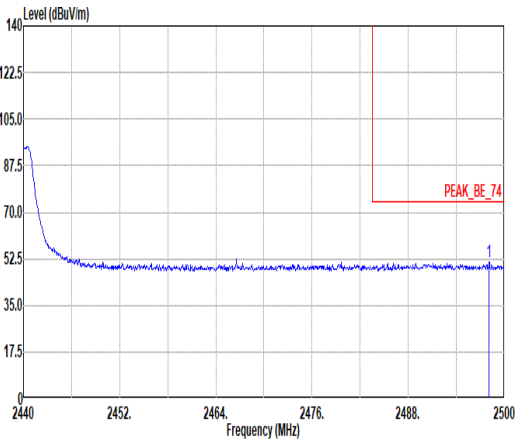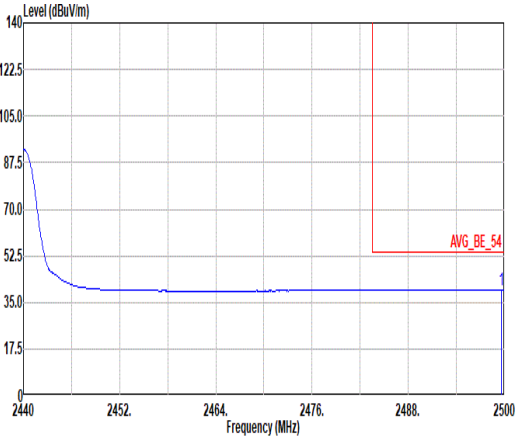

	5																																														
Mode	Band Edge - R																																														
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																														
ANT	3																																														
Pol.	Vertical	Fundamental																																													
Peak	 <p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SNT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2498.08</td> <td>51.22</td> <td>74.00</td> <td>-22.78</td> <td>38.26</td> <td>26.70</td> <td>8.97</td> <td>32.74</td> <td>10.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>229 174 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2498.08	51.22	74.00	-22.78	38.26	26.70	8.97	32.74	10.03									229 174 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																							
1 2498.08	51.22	74.00	-22.78	38.26	26.70	8.97	32.74	10.03																																							
								229 174 PEAK																																							
Avg	 <p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SNT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2499.64</td> <td>39.70</td> <td>54.00</td> <td>-14.30</td> <td>26.74</td> <td>26.70</td> <td>8.97</td> <td>32.74</td> <td>10.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>229 174 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2499.64	39.70	54.00	-14.30	26.74	26.70	8.97	32.74	10.03									229 174 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																							
1 2499.64	39.70	54.00	-14.30	26.74	26.70	8.97	32.74	10.03																																							
								229 174 AVERAGE																																							



Mode	5																																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																																																																																																																																	
ANT	3																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>44.88</td> <td>74.00</td> <td>-29.12</td> <td>33.27</td> <td>32.36</td> <td>12.74</td> <td>33.97</td> <td>0.48</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>57.60</td> <td>74.00</td> <td>-16.40</td> <td>40.88</td> <td>36.74</td> <td>15.96</td> <td>36.42</td> <td>0.44</td> <td>106</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7320.00</td> <td>50.80</td> <td>54.00</td> <td>-3.20</td> <td>34.08</td> <td>36.74</td> <td>15.96</td> <td>36.42</td> <td>0.44</td> <td>106</td> <td>152</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>12200.00</td> <td>54.26</td> <td>74.00</td> <td>-19.74</td> <td>36.12</td> <td>38.70</td> <td>20.11</td> <td>41.32</td> <td>0.65</td> <td>273</td> <td>234</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>12200.00</td> <td>45.80</td> <td>54.00</td> <td>-8.20</td> <td>27.66</td> <td>38.70</td> <td>20.11</td> <td>41.32</td> <td>0.65</td> <td>273</td> <td>234</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>17080.00</td> <td>62.48</td> <td>-----</td> <td>-----</td> <td>44.55</td> <td>40.13</td> <td>23.90</td> <td>46.83</td> <td>0.73</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	44.88	74.00	-29.12	33.27	32.36	12.74	33.97	0.48	--	--	PEAK	2	7320.00	57.60	74.00	-16.40	40.88	36.74	15.96	36.42	0.44	106	152	PEAK	3	7320.00	50.80	54.00	-3.20	34.08	36.74	15.96	36.42	0.44	106	152	AVERAGE	4	12200.00	54.26	74.00	-19.74	36.12	38.70	20.11	41.32	0.65	273	234	PEAK	5	12200.00	45.80	54.00	-8.20	27.66	38.70	20.11	41.32	0.65	273	234	AVERAGE	6	17080.00	62.48	-----	-----	44.55	40.13	23.90	46.83	0.73	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>44.76</td> <td>74.00</td> <td>-29.24</td> <td>33.15</td> <td>32.36</td> <td>12.74</td> <td>33.97</td> <td>0.48</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>55.02</td> <td>74.00</td> <td>-18.98</td> <td>38.30</td> <td>36.74</td> <td>15.96</td> <td>36.42</td> <td>0.44</td> <td>103</td> <td>195</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7320.00</td> <td>48.38</td> <td>54.00</td> <td>-5.62</td> <td>31.66</td> <td>36.74</td> <td>15.96</td> <td>36.42</td> <td>0.44</td> <td>103</td> <td>195</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>12200.00</td> <td>56.55</td> <td>74.00</td> <td>-17.45</td> <td>38.41</td> <td>38.70</td> <td>20.11</td> <td>41.32</td> <td>0.65</td> <td>257</td> <td>162</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>12200.00</td> <td>48.70</td> <td>54.00</td> <td>-5.30</td> <td>30.56</td> <td>38.70</td> <td>20.11</td> <td>41.32</td> <td>0.65</td> <td>257</td> <td>162</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>17080.00</td> <td>63.12</td> <td>-----</td> <td>-----</td> <td>45.19</td> <td>40.13</td> <td>23.90</td> <td>46.83</td> <td>0.73</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	44.76	74.00	-29.24	33.15	32.36	12.74	33.97	0.48	--	--	PEAK	2	7320.00	55.02	74.00	-18.98	38.30	36.74	15.96	36.42	0.44	103	195	PEAK	3	7320.00	48.38	54.00	-5.62	31.66	36.74	15.96	36.42	0.44	103	195	AVERAGE	4	12200.00	56.55	74.00	-17.45	38.41	38.70	20.11	41.32	0.65	257	162	PEAK	5	12200.00	48.70	54.00	-5.30	30.56	38.70	20.11	41.32	0.65	257	162	AVERAGE	6	17080.00	63.12	-----	-----	45.19	40.13	23.90	46.83	0.73	--	--	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	4880.00	44.88	74.00	-29.12	33.27	32.36	12.74	33.97	0.48	--	--	PEAK																																																																																																																																																																																																						
2	7320.00	57.60	74.00	-16.40	40.88	36.74	15.96	36.42	0.44	106	152	PEAK																																																																																																																																																																																																						
3	7320.00	50.80	54.00	-3.20	34.08	36.74	15.96	36.42	0.44	106	152	AVERAGE																																																																																																																																																																																																						
4	12200.00	54.26	74.00	-19.74	36.12	38.70	20.11	41.32	0.65	273	234	PEAK																																																																																																																																																																																																						
5	12200.00	45.80	54.00	-8.20	27.66	38.70	20.11	41.32	0.65	273	234	AVERAGE																																																																																																																																																																																																						
6	17080.00	62.48	-----	-----	44.55	40.13	23.90	46.83	0.73	--	--	PEAK																																																																																																																																																																																																						
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	4880.00	44.76	74.00	-29.24	33.15	32.36	12.74	33.97	0.48	--	--	PEAK																																																																																																																																																																																																						
2	7320.00	55.02	74.00	-18.98	38.30	36.74	15.96	36.42	0.44	103	195	PEAK																																																																																																																																																																																																						
3	7320.00	48.38	54.00	-5.62	31.66	36.74	15.96	36.42	0.44	103	195	AVERAGE																																																																																																																																																																																																						
4	12200.00	56.55	74.00	-17.45	38.41	38.70	20.11	41.32	0.65	257	162	PEAK																																																																																																																																																																																																						
5	12200.00	48.70	54.00	-5.30	30.56	38.70	20.11	41.32	0.65	257	162	AVERAGE																																																																																																																																																																																																						
6	17080.00	63.12	-----	-----	45.19	40.13	23.90	46.83	0.73	--	--	PEAK																																																																																																																																																																																																						



Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	3	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Mode	6																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																			
ANT	3																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.52</td> <td>54.44</td> <td>74.00</td> <td>-19.56</td> <td>41.56</td> <td>26.64</td> <td>8.94</td> <td>32.73</td> <td>10.03</td> <td>387</td> <td>71</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	54.44	74.00	-19.56	41.56	26.64	8.94	32.73	10.03	387	71	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>90.64</td> <td>-----</td> <td>-----</td> <td>77.81</td> <td>26.60</td> <td>8.93</td> <td>32.73</td> <td>10.03</td> <td>387</td> <td>71</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.64	-----	-----	77.81	26.60	8.93	32.73	10.03	387	71	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.52	54.44	74.00	-19.56	41.56	26.64	8.94	32.73	10.03	387	71	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	90.64	-----	-----	77.81	26.60	8.93	32.73	10.03	387	71	PEAK																																																																								
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.52</td> <td>43.70</td> <td>54.00</td> <td>-10.30</td> <td>30.02</td> <td>26.64</td> <td>8.94</td> <td>32.73</td> <td>10.03</td> <td>387</td> <td>71</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	43.70	54.00	-10.30	30.02	26.64	8.94	32.73	10.03	387	71	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>89.22</td> <td>-----</td> <td>-----</td> <td>76.39</td> <td>26.60</td> <td>8.93</td> <td>32.73</td> <td>10.03</td> <td>387</td> <td>71</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	89.22	-----	-----	76.39	26.60	8.93	32.73	10.03	387	71	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.52	43.70	54.00	-10.30	30.02	26.64	8.94	32.73	10.03	387	71	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	89.22	-----	-----	76.39	26.60	8.93	32.73	10.03	387	71	AVERAGE																																																																								



Mode	6																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																			
ANT	3																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>58.20</td> <td>74.00</td> <td>-15.80</td> <td>45.32</td> <td>26.64</td> <td>8.94</td> <td>32.73</td> <td>10.03</td> <td>100</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2483.56	58.20	74.00	-15.80	45.32	26.64	8.94	32.73	10.03	100	192	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>96.18</td> <td>-----</td> <td>-----</td> <td>83.35</td> <td>26.60</td> <td>8.93</td> <td>32.73</td> <td>10.03</td> <td>100</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2480.00	96.18	-----	-----	83.35	26.60	8.93	32.73	10.03	100	192	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																										
1	2483.56	58.20	74.00	-15.80	45.32	26.64	8.94	32.73	10.03	100	192	PEAK																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																										
1	2480.00	96.18	-----	-----	83.35	26.60	8.93	32.73	10.03	100	192	PEAK																																																								
Avg	<p>Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.52</td> <td>47.67</td> <td>54.00</td> <td>-6.33</td> <td>34.79</td> <td>26.64</td> <td>8.94</td> <td>32.73</td> <td>10.03</td> <td>100</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2483.52	47.67	54.00	-6.33	34.79	26.64	8.94	32.73	10.03	100	192	AVERAGE	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>94.75</td> <td>-----</td> <td>-----</td> <td>81.92</td> <td>26.60</td> <td>8.93</td> <td>32.73</td> <td>10.03</td> <td>100</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2480.00	94.75	-----	-----	81.92	26.60	8.93	32.73	10.03	100	192	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																										
1	2483.52	47.67	54.00	-6.33	34.79	26.64	8.94	32.73	10.03	100	192	AVERAGE																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																										
1	2480.00	94.75	-----	-----	81.92	26.60	8.93	32.73	10.03	100	192	AVERAGE																																																								



Mode	6																																																																																																																																																															
	Harmonic																																																																																																																																																															
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																																															
ANT	3																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																														
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>45.30</td> <td>74.00</td> <td>-28.70</td> <td>33.30</td> <td>32.72</td> <td>12.82</td> <td>33.97</td> <td>0.43</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>57.27</td> <td>74.00</td> <td>-16.73</td> <td>40.45</td> <td>36.80</td> <td>16.10</td> <td>36.49</td> <td>0.41</td> <td>109</td> <td>147 PEAK</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>50.88</td> <td>54.00</td> <td>-3.12</td> <td>34.06</td> <td>36.80</td> <td>16.10</td> <td>36.49</td> <td>0.41</td> <td>109</td> <td>147 AVERAGE</td> </tr> <tr> <td>4</td> <td>17370.00</td> <td>56.35</td> <td>-----</td> <td>-----</td> <td>38.97</td> <td>39.94</td> <td>24.11</td> <td>47.48</td> <td>0.81</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	45.30	74.00	-28.70	33.30	32.72	12.82	33.97	0.43	--	PEAK	2	7440.00	57.27	74.00	-16.73	40.45	36.80	16.10	36.49	0.41	109	147 PEAK	3	7440.00	50.88	54.00	-3.12	34.06	36.80	16.10	36.49	0.41	109	147 AVERAGE	4	17370.00	56.35	-----	-----	38.97	39.94	24.11	47.48	0.81	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>45.24</td> <td>74.00</td> <td>-28.76</td> <td>33.24</td> <td>32.72</td> <td>12.82</td> <td>33.97</td> <td>0.43</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>56.67</td> <td>74.00</td> <td>-17.33</td> <td>39.85</td> <td>36.80</td> <td>16.10</td> <td>36.49</td> <td>0.41</td> <td>128</td> <td>176 PEAK</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>49.15</td> <td>54.00</td> <td>-4.85</td> <td>32.33</td> <td>36.80</td> <td>16.10</td> <td>36.49</td> <td>0.41</td> <td>128</td> <td>176 AVERAGE</td> </tr> <tr> <td>4</td> <td>17370.00</td> <td>59.90</td> <td>-----</td> <td>-----</td> <td>42.52</td> <td>39.94</td> <td>24.11</td> <td>47.48</td> <td>0.81</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	45.24	74.00	-28.76	33.24	32.72	12.82	33.97	0.43	--	PEAK	2	7440.00	56.67	74.00	-17.33	39.85	36.80	16.10	36.49	0.41	128	176 PEAK	3	7440.00	49.15	54.00	-4.85	32.33	36.80	16.10	36.49	0.41	128	176 AVERAGE	4	17370.00	59.90	-----	-----	42.52	39.94	24.11	47.48	0.81	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																						
1	4960.00	45.30	74.00	-28.70	33.30	32.72	12.82	33.97	0.43	--	PEAK																																																																																																																																																					
2	7440.00	57.27	74.00	-16.73	40.45	36.80	16.10	36.49	0.41	109	147 PEAK																																																																																																																																																					
3	7440.00	50.88	54.00	-3.12	34.06	36.80	16.10	36.49	0.41	109	147 AVERAGE																																																																																																																																																					
4	17370.00	56.35	-----	-----	38.97	39.94	24.11	47.48	0.81	--	PEAK																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																						
1	4960.00	45.24	74.00	-28.76	33.24	32.72	12.82	33.97	0.43	--	PEAK																																																																																																																																																					
2	7440.00	56.67	74.00	-17.33	39.85	36.80	16.10	36.49	0.41	128	176 PEAK																																																																																																																																																					
3	7440.00	49.15	54.00	-4.85	32.33	36.80	16.10	36.49	0.41	128	176 AVERAGE																																																																																																																																																					
4	17370.00	59.90	-----	-----	42.52	39.94	24.11	47.48	0.81	--	PEAK																																																																																																																																																					




Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz	
ANT	3	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	100.00	-	-	10Hz
Bluetooth - LE for 2Mbps	100.00	-	-	10Hz

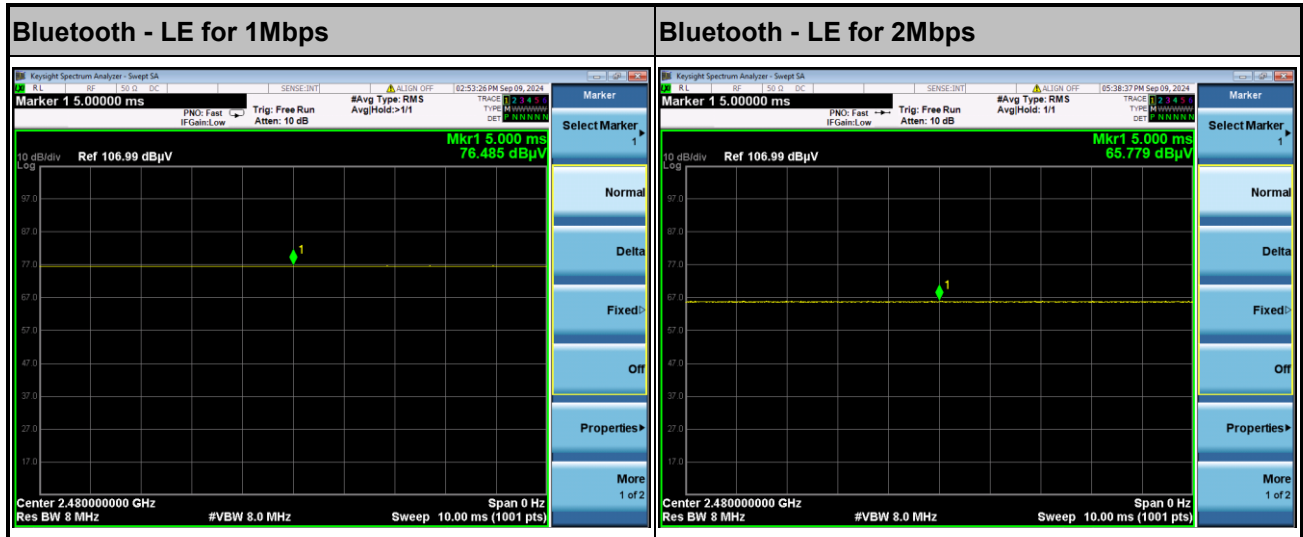


Appendix E. Setup Photographs


<Conducted Emission>

Remote View



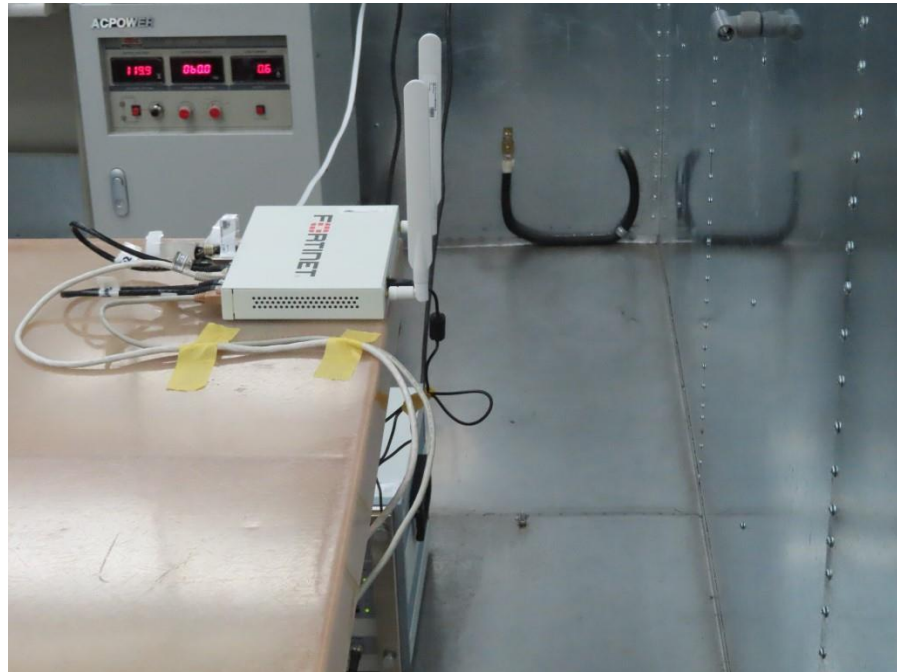


Rear View

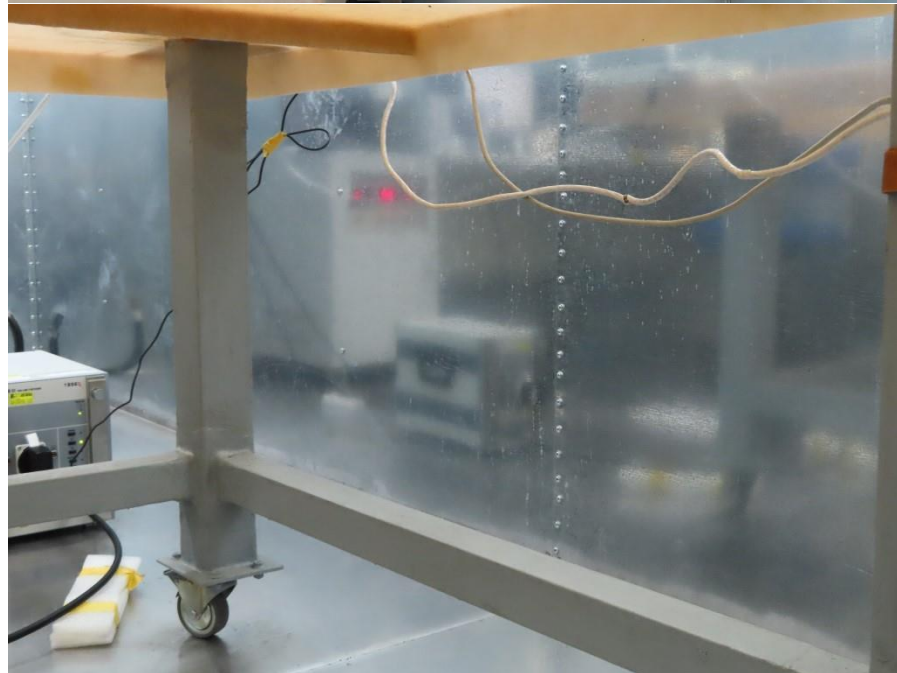


<Radiated Emission>

Ant. 0°


LF

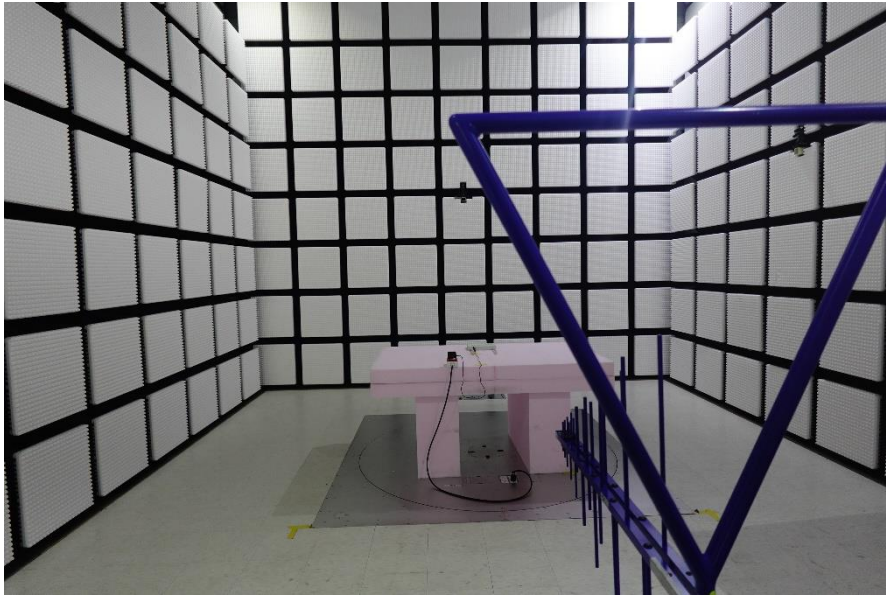

HF

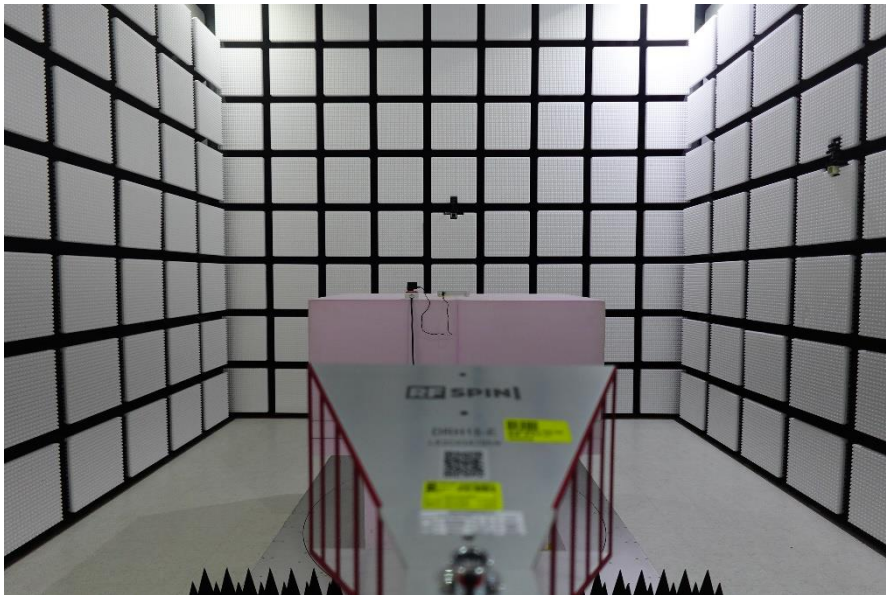

SHF

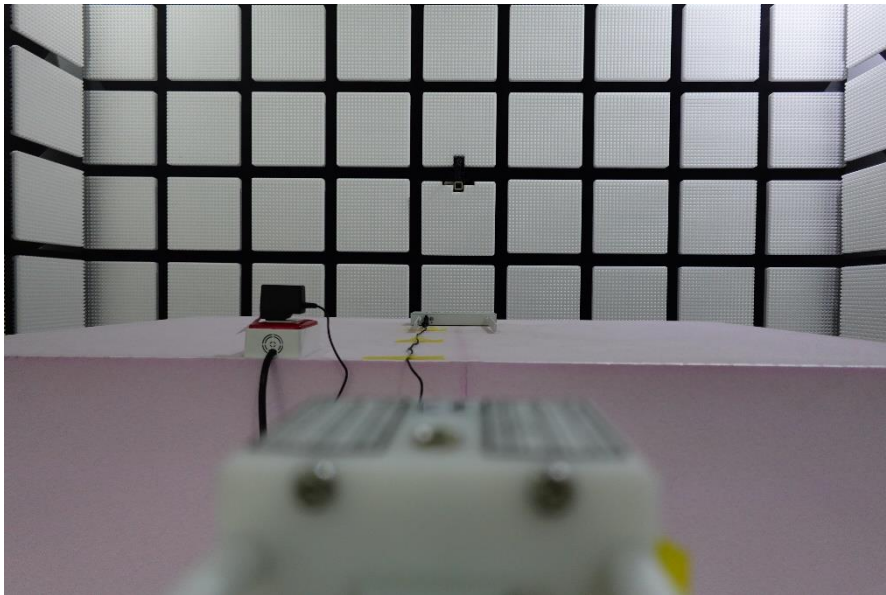

————THE END————