

TEST REPORT

Report No.: BCTC2310332552E

Applicant: JBU GLOBAL LLC

Product Name: WIRELESS MIC

Model/Type Ref.: X9WM

Tested Date: 2023-09-25 to 2023-10-26

Issued Date: 2023-12-18

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A7ZM-X9WM

Product Name: WIRELESS MIC

Trademark: N/A

Model/Type Ref.: X9WM

Prepared For: JBU GLOBAL LLC

Address: 19416 NE 26th AVE,114B, Miami Florida United States 33180

Manufacturer: JBU GLOBAL LLC

Address: 19416 NE 26th AVE,114B, Miami Florida United States 33180

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building SB, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2023-09-25


Sample tested Date: 2023-09-25 to 2023-10-26

Report No.: BCTC2310332552E

Test Standards: FCC Part74H
ANSI C63.10-2013
ANSI/TIA-603-E:2016


Test Results: PASS

Tested by:

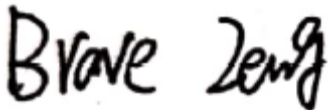

Brave Zeng/ Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table of Content


Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information and Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
5. Test Facility and Test Instrument Used	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. RF OUTPUT POWER	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test Procedure	12
6.4 EUT Operating Conditions	12
6.5 Test Result	13
7. Radiated Emissions	14
7.1 Block Diagram Of Test Setup	14
7.2 Limit	16
7.3 Test Procedure	16
7.4 EUT Operating Conditions	17
7.5 Test Result	18
8. MODULATION CHARACTERISTICS	19
8.1 Block Diagram Of Test Setup	19
8.2 Applicable Standard	19
8.3 Test Procedure	19
8.4 EUT Operating Conditions	19
8.5 Test Result	19
9. OCCUPIED BANDWIDTH	21
9.1 Block Diagram Of Test Setup	21
9.2 Limit	21
9.3 Test Procedure	21
9.4 EUT Operation Conditions	21
9.5 Test Result	21
10. SPURIOUS EMISSION AT ANTENNA TERMINAL	26
10.1 Block Diagram Of Test Setup	26
10.2 Limit	26
10.3 Test Procedure	26
10.4 EUT Operation Conditions	26
10.5 Test Result	27
11. FREQUENCY STABILITY	30
11.1 Block Diagram Of Test Setup	30

11.2	Limit	30
11.3	Test Procedure	30
11.4	EUT Operation Conditions	30
11.5	Test Result.....	31
12.	Antenna Requirement	32
12.1	Limit	32
12.2	Test Result.....	32
13.	EUT Test Setup Photographs.....	33

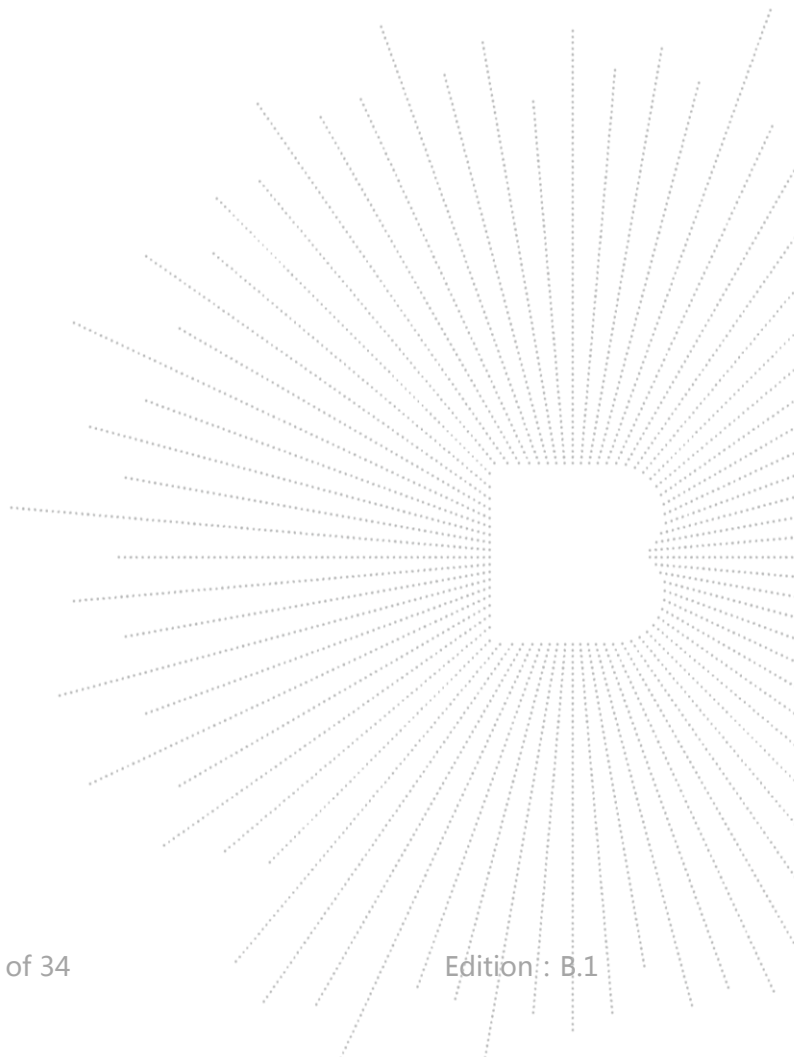

1. Version


Report No.	Issue Date	Description	Approved
BCTC2310332552E	2023-12-18	Original	Valid

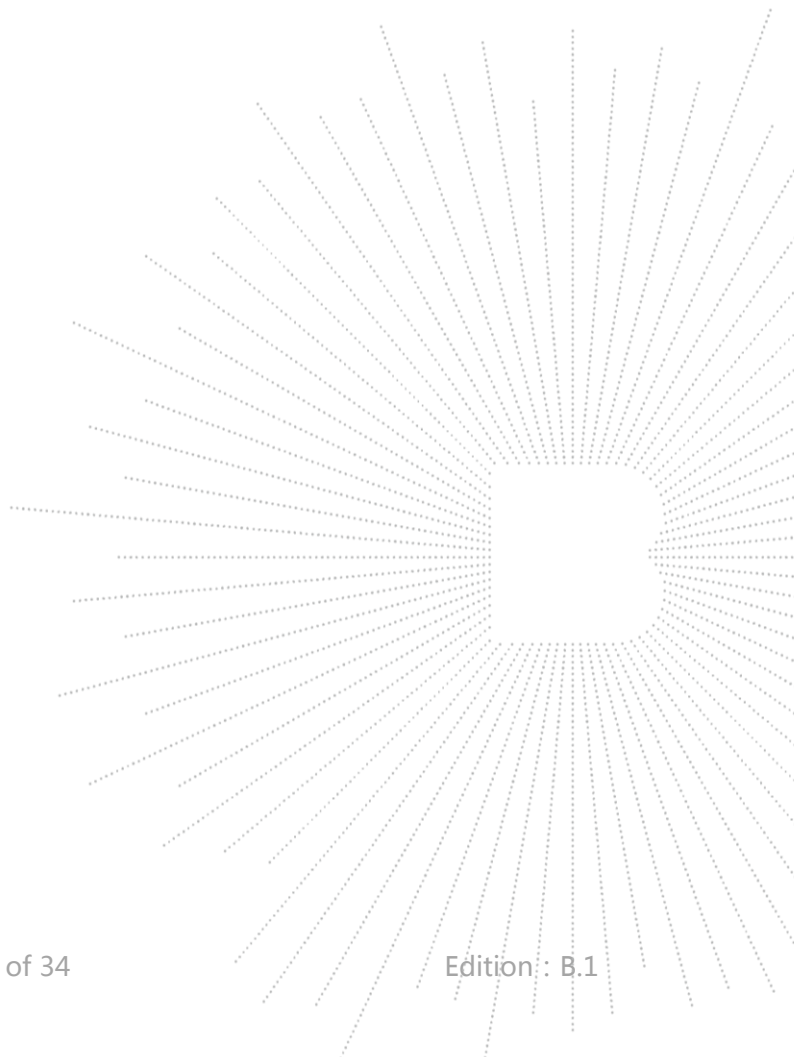

2. Test Summary

The Product has been tested according to the following specifications:


No.	Test Parameter	Clause No	Results
1	Output Power Measurement	§74.861(e)(1)(ii)	PASS
2	Modulation Characteristics	§74.861(e)(3)	PASS
3	Occupied Bandwidth Emission	§74.861(e)(5)	PASS
4	Radiated Spurious Emission	§74.861(e)(6)	PASS
5	Spurious Emission at Antenna Port	§2.1051	PASS
6	Frequency Stability	§74.861(e)(4)	PASS
NOTE1: N/A (Not Applicable)			

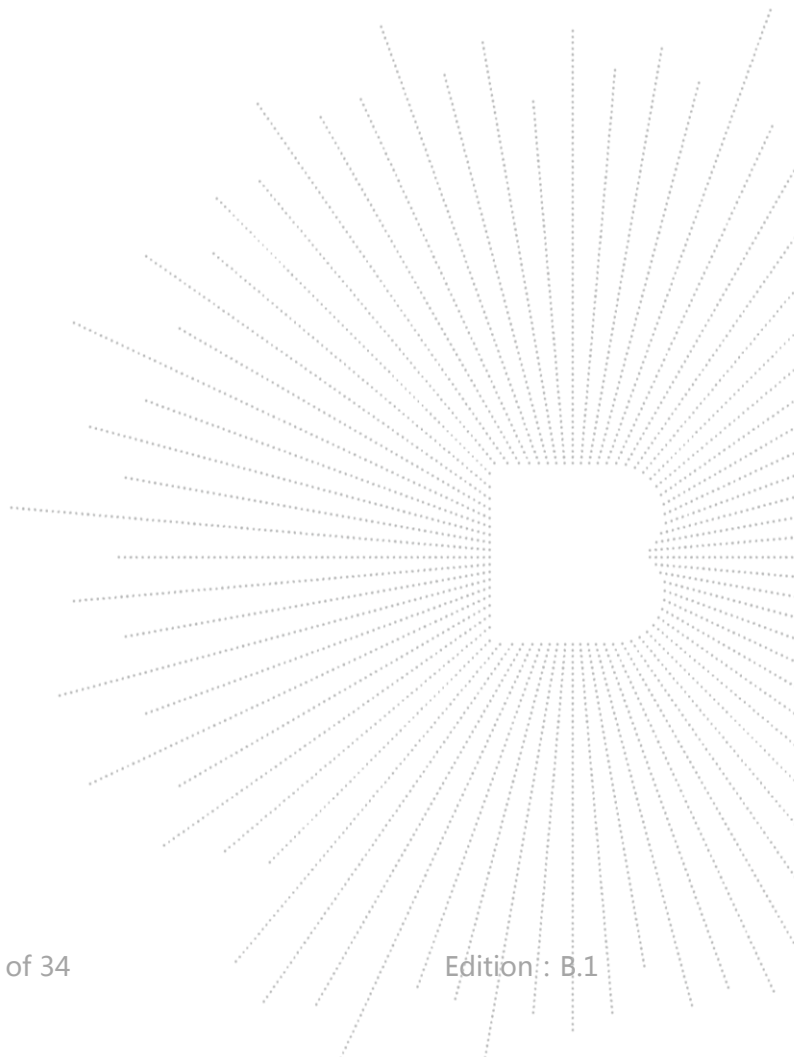

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

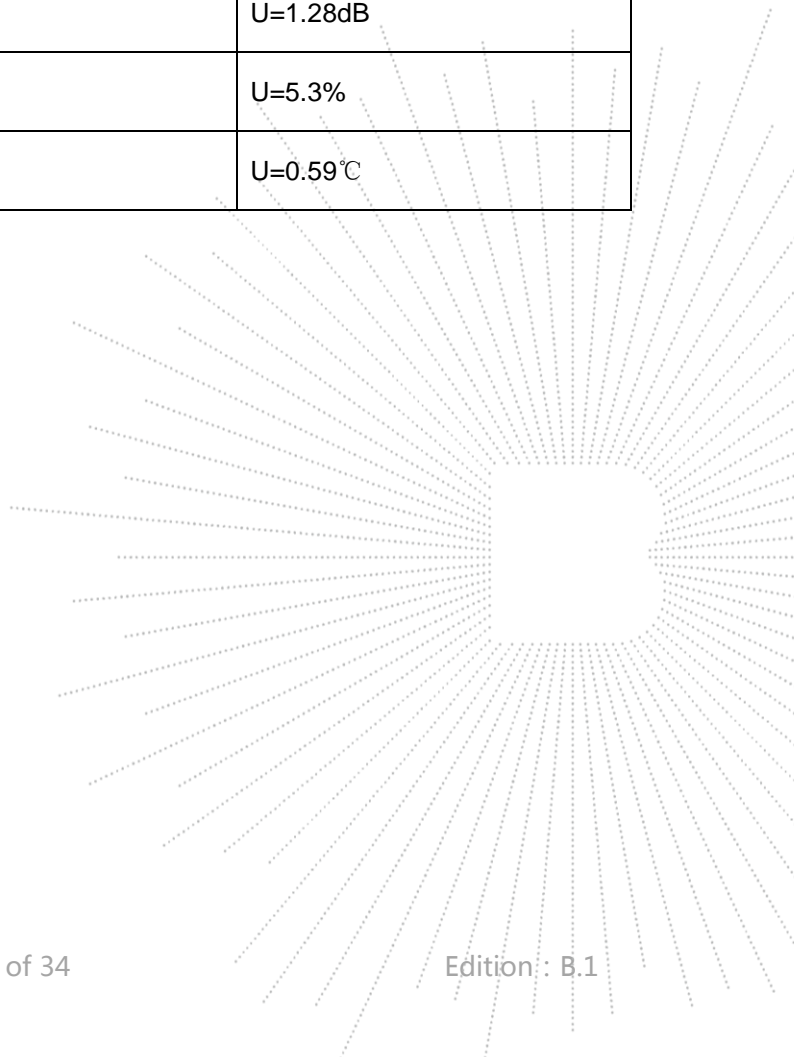


4. Product Information and Test Setup

4.1 Product Information

Model/Type Ref.:	X9WM
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	577.3MHz - 607MHz
Type of Modulation:	FM
Number Of Channel	100 Channel
Antenna installation:	Helical Antenna
Antenna Gain:	-4.21dBi
Ratings:	DC 3.0V

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.
Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	WIRELESS MIC	N/A	X9WM	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Lowest Frequency	Middle Frequency	Highest Frequency
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
577.3	592.0	607

Frequency (MHz)									
577.3	577.6	577.9	578.2	578.5	578.8	579.1	579.4	579.7	580.0
580.3	580.6	580.9	581.2	581.5	581.8	582.1	582.4	582.7	583.0
583.3	583.6	583.9	584.2	584.5	584.8	584.1	585.1	585.7	586.0
586.3	586.6	586.9	587.2	587.5	587.8	588.1	588.4	588.7	589.0
589.3	589.6	589.9	590.2	590.5	590.8	591.1	591.4	591.7	592.0
592.3	592.6	592.9	593.2	593.5	593.8	594.1	594.4	594.7	595.0
595.3	595.6	595.9	596.2	596.5	596.8	597.1	597.4	597.7	598.0
598.3	598.6	598.9	599.2	599.5	599.8	600.1	600.4	600.7	601.0
601.3	601.6	601.9	602.2	602.5	602.8	603.1	603.4	603.7	604.0
604.3	604.6	604.9	605.2	605.5	605.8	606.1	606.4	606.7	607.0

Test Conditions :

	Normal	LTLV	LTHV	HTHV	HTLV
Temperature (°C)	20	-30	-30	50	50
Voltage (V)	3.0	2.6	3.4	2.6	3.4

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Test mode
Mode 1	Transmitting
Mode 2	Transmitting
Mode 3	Transmitting

Note: The measurements are performed at the available channels.

5. Test Facility and Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuha i Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212


ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used


Radiated Emissions Test (966 Chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
Receiver	R&S	ESRP	101154	May 15, 2023	May 14, 2024
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 15, 2023	May 14, 2024
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 15, 2023	May 14, 2024
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 29, 2023	May 28, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 15, 2023	May 14, 2024
Horn Antenn(18GHz -40GHz)	Schwarzbeck	BBHA9170	00822	May 31, 2023	May 30, 2024
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 15, 2023	May 14, 2024
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 31, 2023	May 30, 2024
Power Metter	Keysight	E4419	\	May 15, 2023	May 14, 2024
Power Sensor (AV)	Keysight	E9300A	\	May 15, 2023	May 14, 2024
Signal Analyzer20kH z-26.5GHz	Keysight	N9020A	MY49100060	May 15, 2023	May 14, 2024
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	\	May 15, 2023	May 14, 2024
Cell site test set	Hewlett packard	8921A	\	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 15, 2023	May 14, 2024
Power Sensor (AV)	Keysight	E9300A	\	May 15, 2023	May 14, 2024
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 15, 2023	May 14, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	\	May 15, 2023	May 14, 2024
Cell site test set	Hewlett packard	8921A	\	Nov. 08, 2022	Nov. 07, 2023

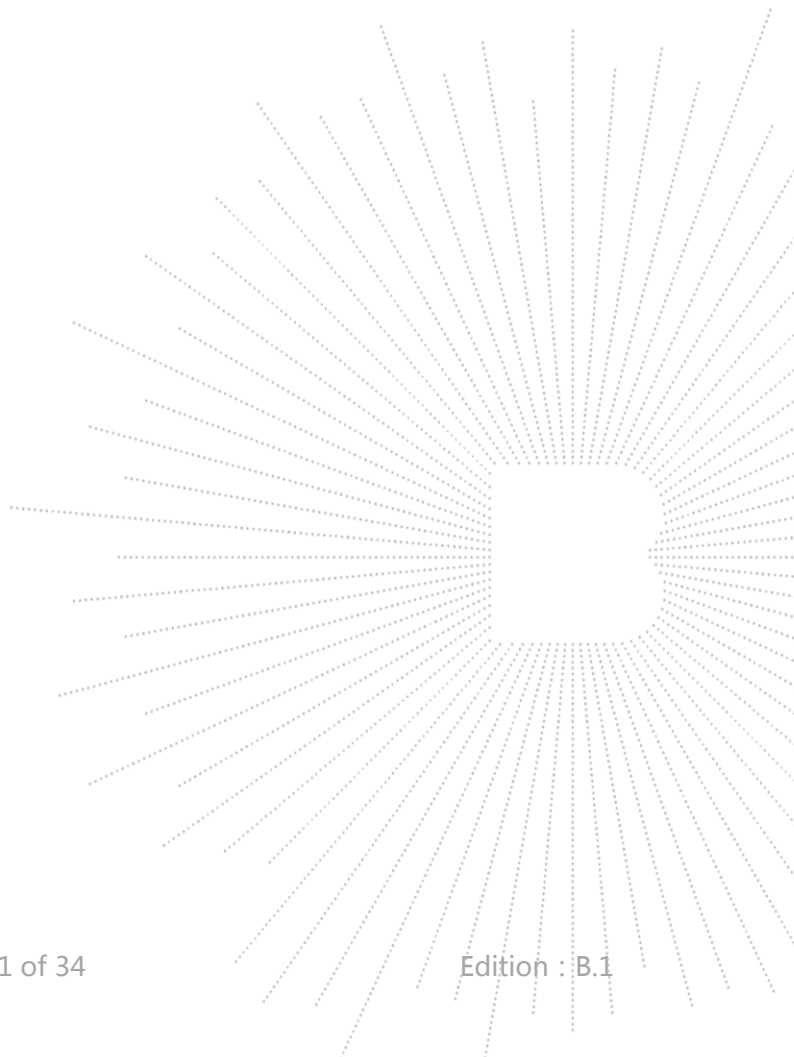

6. RF OUTPUT POWER

6.1 Block Diagram Of Test Setup



6.2 Limit

According to FCC 74.861(e)(1)(ii)

For low power auxiliary station operating in the 470-608, and 614-698 MHz bands, the power of the measured unmodulated carrier power and the output of the transmitter power amplifier (antenna input power) may not exceed 250mW.

6.3 Test Procedure

1. The maximum peak output power was measured with a Spectrum Analyzer connected to the antenna terminal while EUT was operating in unmodulated situation.
2. Power was supplied to the battery input connector a power supply. The power supply was set for +3.0VDC. The Spectrum Analyzer was connected at antenna terminal to measure RF power of the carrier.
3. A Multimeter was connected in series with final RF Stage to measure the current; A Multimeter was used to measure final RF Stage supply voltage. Then the voltage v.s. current of the final RF Stage can be showed.

Measure and record the results in the test report.


6.4 EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result


Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 3.0V	Remark	N/A

Channel	Frequency (MHz)	RF Stage Voltage (Vdc)	Collected Current (mA)	Output Power (dBm)	Limit (dBm)
Low	577.3	3.00	0.35	6.194	24
Middle	592.0	3.00	0.35	6.214	24
High	607.0	3.00	0.35	6.151	24

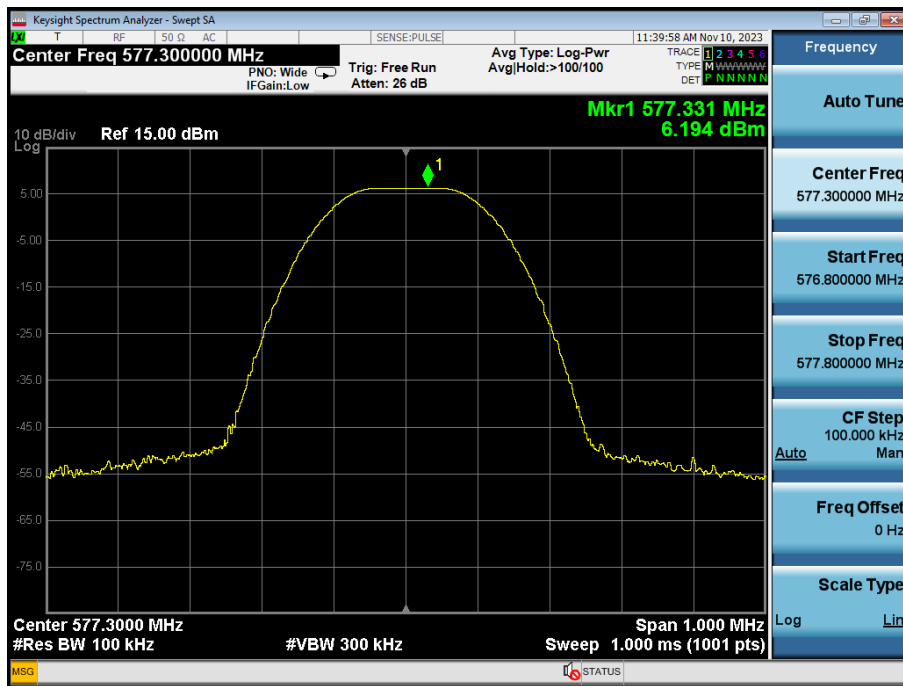Low Channel (577.30MHz)

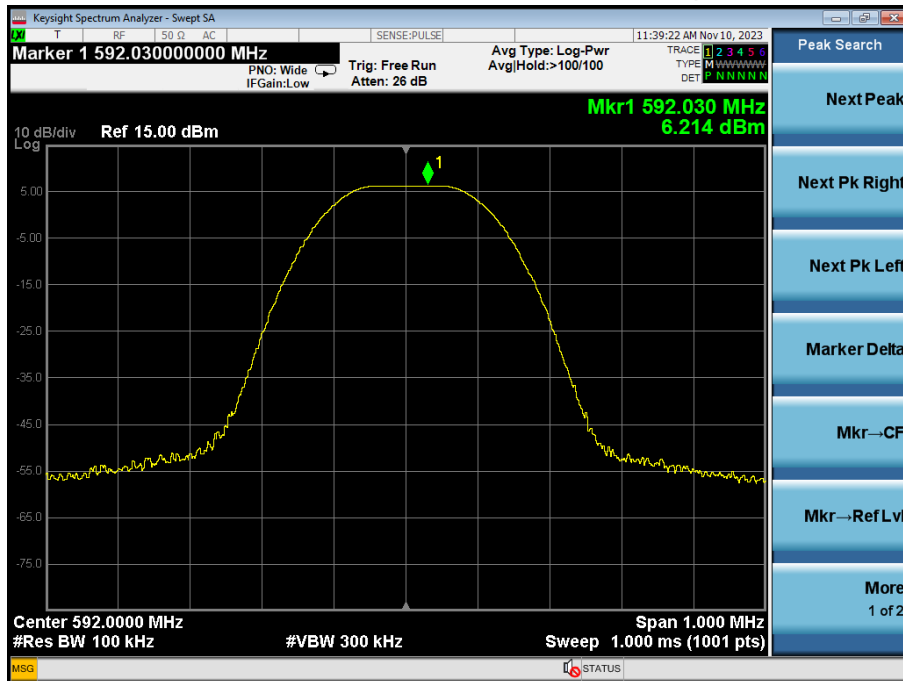Middle Channel (592.00MHz)

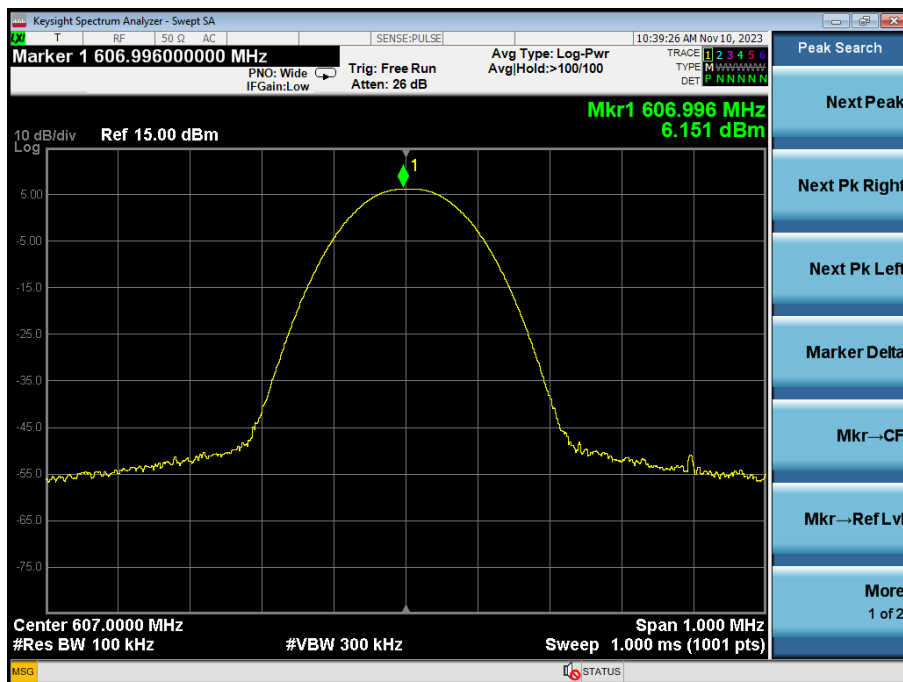


High Channel (607.00MHz)




7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

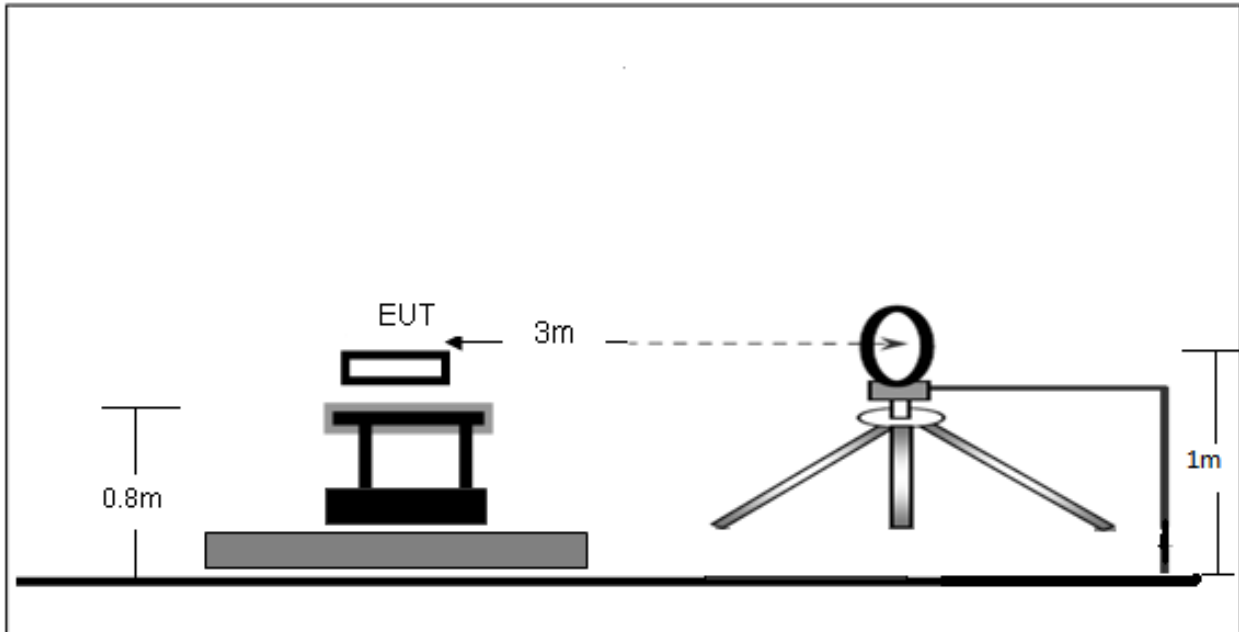

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

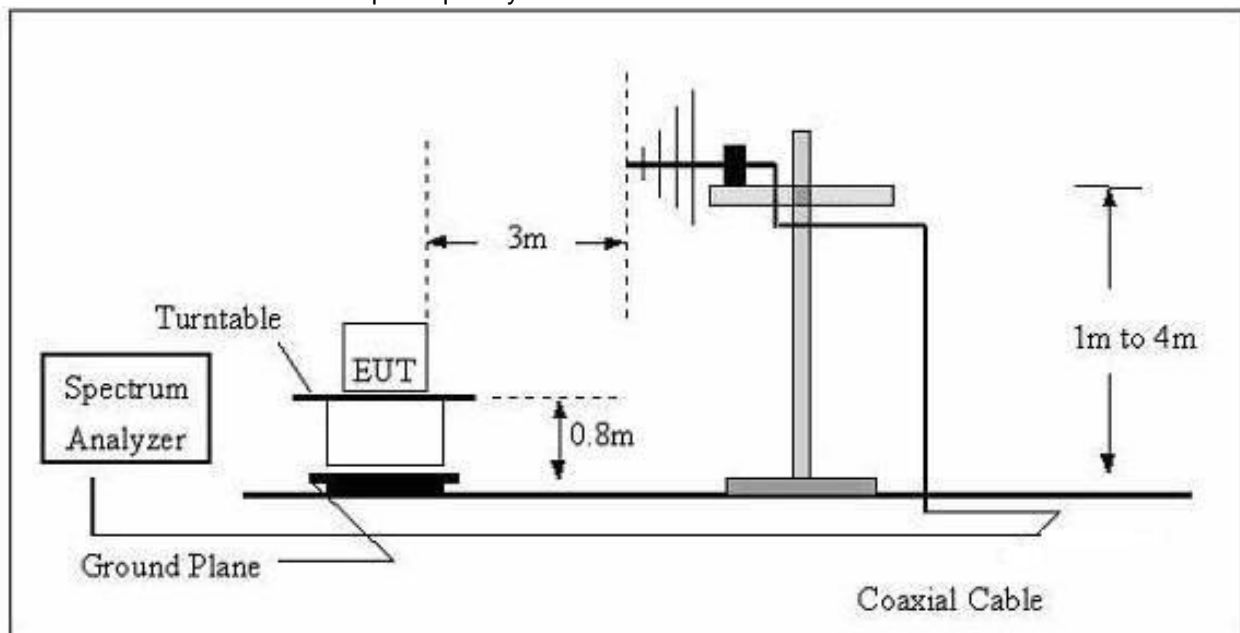

(C) Radiated Emission Test-Up Frequency Above 1GHz

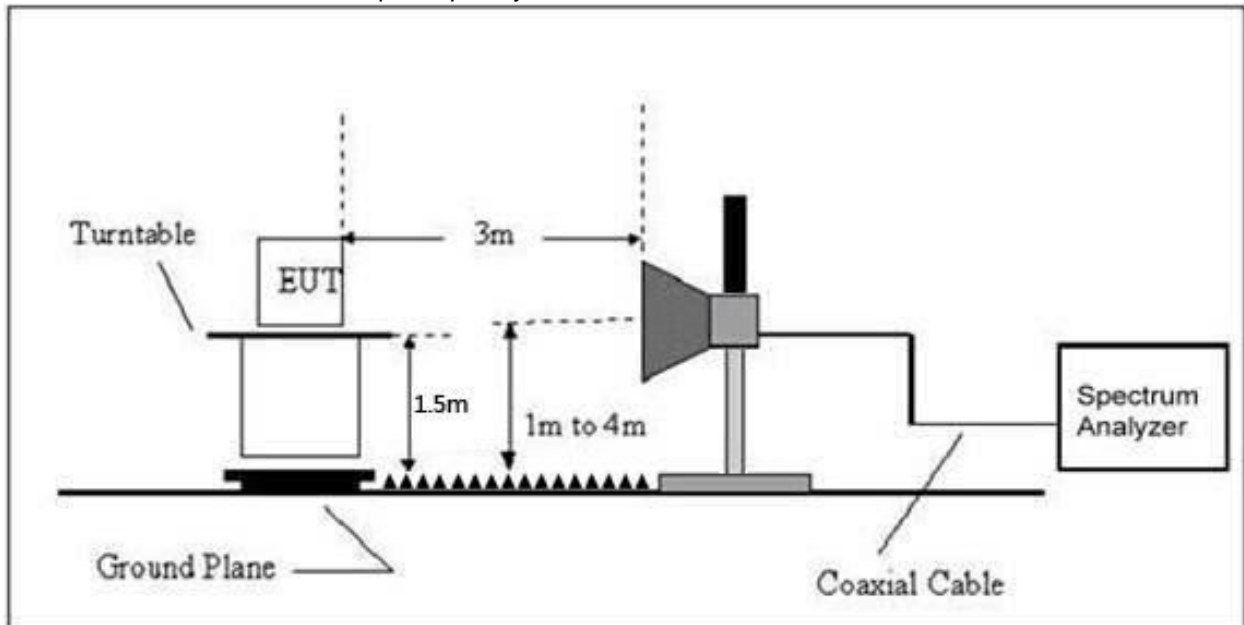

7.2 Limit

According to FCC74.861 (e)(6) and FCC 2.1053

According to FCC 2.1053, measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediated circuit elements under normal condition of installation and operation. Information submitted shall include the relative radiated power of spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from a halfwave dipole antenna.

According to FCC74.861 (e)(6), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- 1 On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- 2 On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- 3 On any frequency removed from the operating frequency by more than 250 percent up to and the authorized bandwidth shall be attenuated below the un-modulated carrier by at least 43 plus 10 Log (output power in watts) dB

7.3 Test Procedure

The setup of EUT is according with per TIA/EIA Standard 603 and ANSI C63.4-2014 measurement procedure.

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.

- 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
- 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as far as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency here emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \text{ Log}_{10}(\text{power in Watts})$


7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result


Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 3.0V	Remark	N/A

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (577.3MHz)						
83.86	-44.35	-30.57	-74.92	-13.00	-61.92	H
1648.40	-18.83	-27.37	-46.20	-13.00	-33.20	H
2472.60	-24.37	-25.18	-49.55	-13.00	-36.55	H
83.86	-43.98	-30.57	-74.55	-13.00	-61.55	V
1648.40	-19.70	-27.37	-47.07	-13.00	-34.07	V
2472.60	-23.76	-25.18	-48.94	-13.00	-35.94	V
Middle Channel (592.0MHz)						
83.86	-41.62	-30.57	-72.19	-13.00	-59.19	H
1673.20	-19.21	-27.32	-46.53	-13.00	-33.53	H
2509.80	-25.03	-25.07	-50.10	-13.00	-37.10	H
83.86	-42.62	-30.57	-73.19	-13.00	-60.19	V
1673.20	-21.18	-27.32	-48.50	-13.00	-35.50	V
2509.80	-26.51	-25.07	-51.58	-13.00	-38.58	V
High Channel (607.0MHz)						
83.86	-43.48	-30.57	-74.05	-13.00	-61.05	H
1697.60	-21.86	-27.27	-49.13	-13.00	-36.13	H
2546.40	-26.66	-24.96	-51.62	-13.00	-38.62	H
83.86	-43.77	-30.57	-74.34	-13.00	-61.34	V
1697.60	-18.89	-27.27	-46.16	-13.00	-33.16	V
2546.40	-23.18	-24.96	-48.14	-13.00	-35.14	V

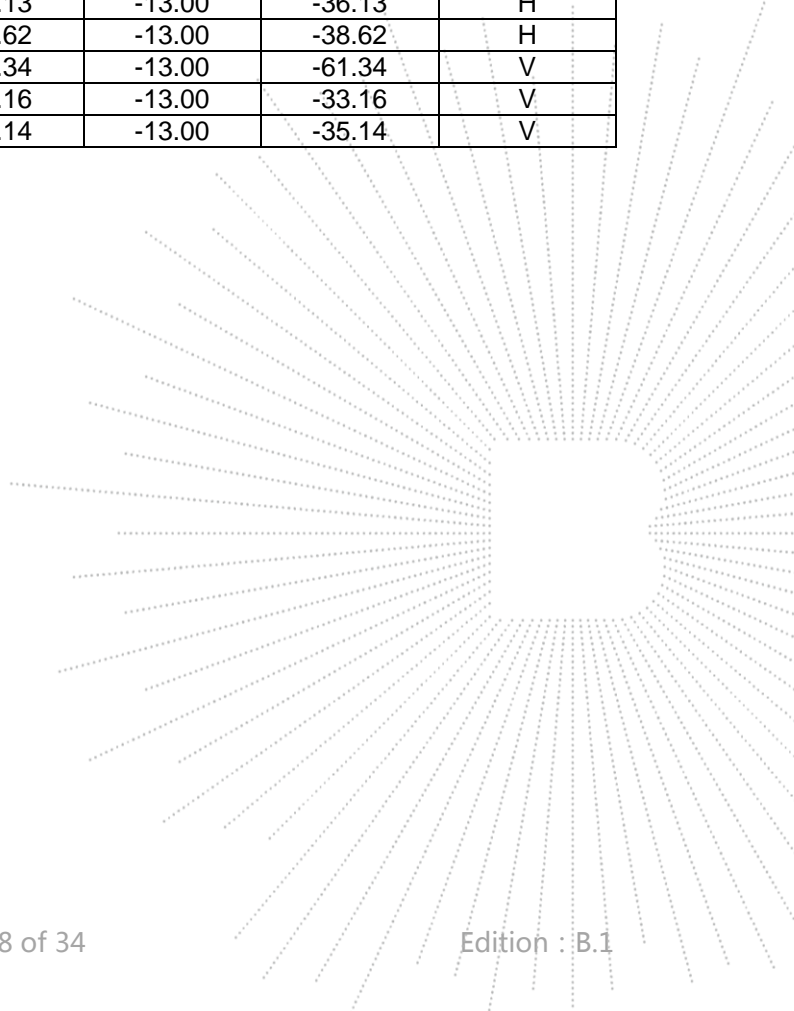

8. MODULATION CHARACTERISTICS

8.1 Block Diagram Of Test Setup



8.2 Applicable Standard

According to FCC Part 74.861(e)(3) and 2.1047 (a)

For Voice Modulated Communication Equipment, the frequency response of the audio modulating circuit over a range of 100Hz to 5000Hz shall be measured. For equipment required to have an audio low-pass filter, the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be measured.

Any form of modulation may be used. A maximum deviation of ± 75 kHz is permitted when frequency modulation is employed.

8.3 Test Procedure

1 Position the EUT as shown in figure 1, adjust the audio input frequency to 100 Hz and the input level from 0V to maximum permitted input voltage with recording each carrier frequency deviation responding to respective input level.

2 Repeat step 1 with changing the input frequency for 100, 300, 1000, 2500 and 3000 Hz in sequence.



8.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.5 Test Result


Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 3.0V	Remark	N/A

Middle Channel (577.3MHz)

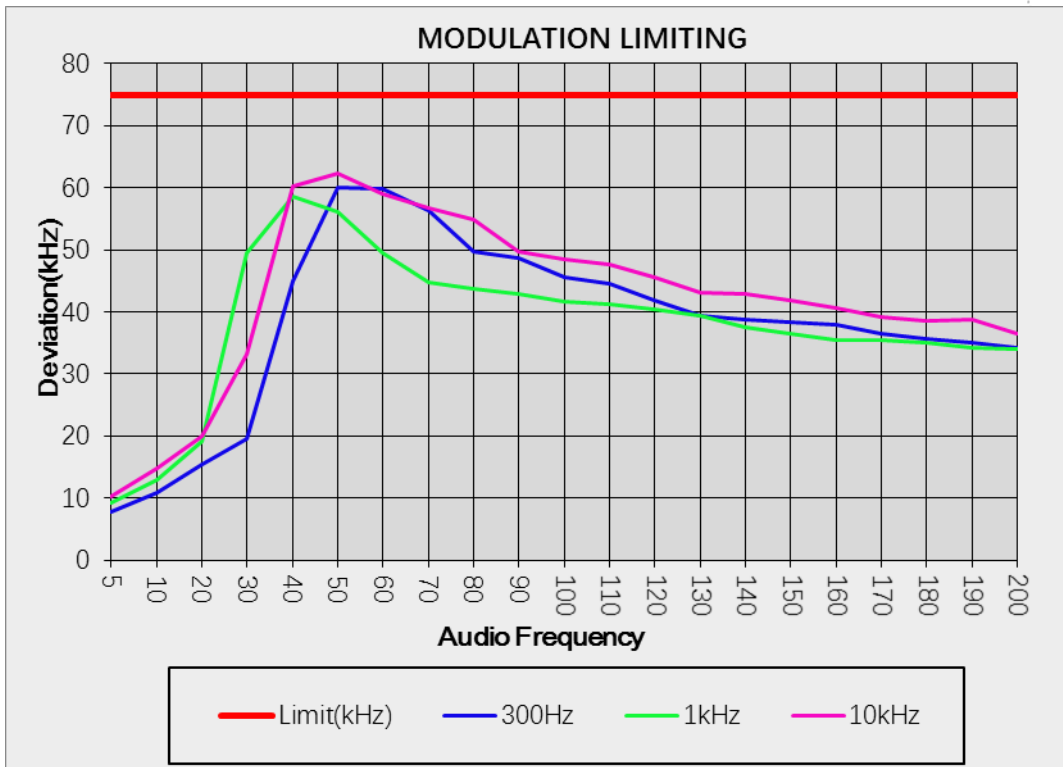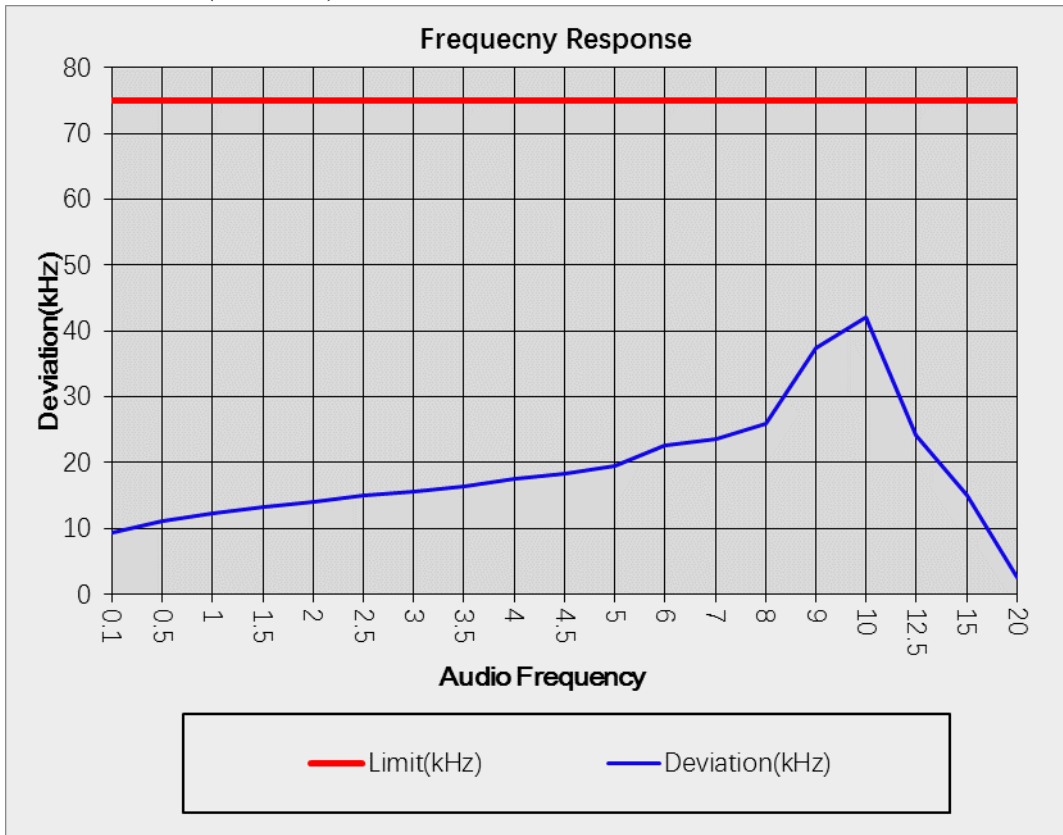

9. OCCUPIED BANDWIDTH

9.1 Block Diagram Of Test Setup



9.2 Limit

According to 74.861(e)(5) and FCC 2.1049 (c) (1)

According to FCC 2.1049 (c) (1), for radiotelephone transmitter, other than single sideband or independent sideband transmitter, when modulated by a 2.5 kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

According to §74.861(e)(5), the operating bandwidth shall not exceed 200 kHz.

According to FCC 74.861(e)(6), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- 1 On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- 2 On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- 3 On any frequency removed from the operating frequency by more than 250 percent up to and the authorized bandwidth shall be attenuated below the un-modulated carrier by at least 43 plus 10 Log (output power in watts) dB.

9.3 Test Procedure

According to TIA-603 for additional Test Set-Up procedures, the occupied bandwidth of emission was measured with a Spectrum Analyzer connected to the antenna terminal while EUT was operating in 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. Then mark the -26dB Bandwidth and record it.


9.4 EUT Operation Conditions



The EUT tested system was configured as the statements of 2.4 unless otherwise a special operating condition is specified in the follows during the testing.



9.5 Test Result



Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 3.0V	Remark	N/A

Test Channel	Frequency (MHz)	-26dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit (kHz)
Low	577.3	141.4	119.64	200
Middle	592.0	141.6	119.85	200
High	607.0	144.7	123.19	200

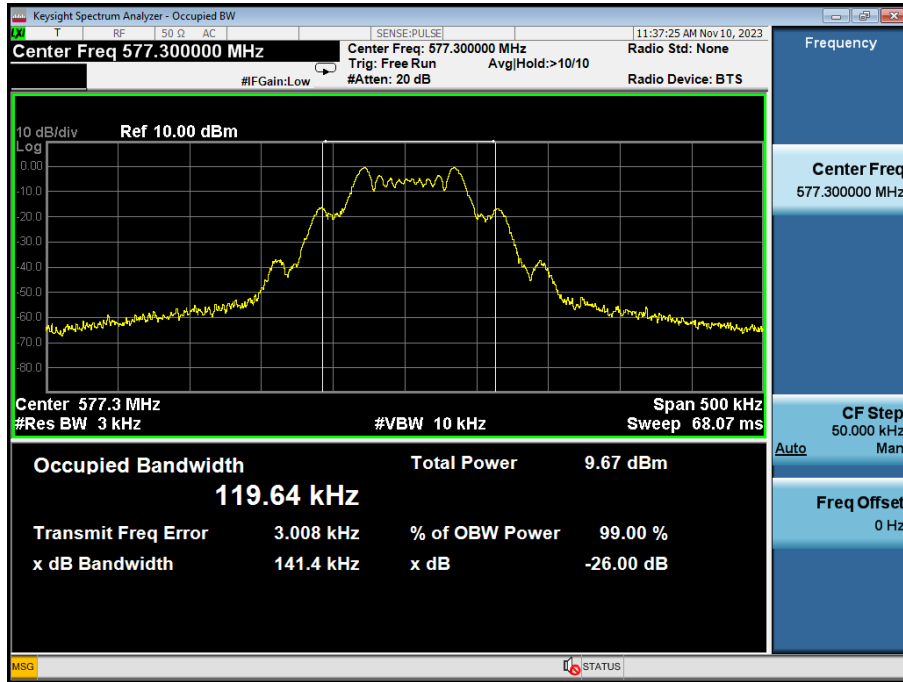Low Channel (577.3MHz)

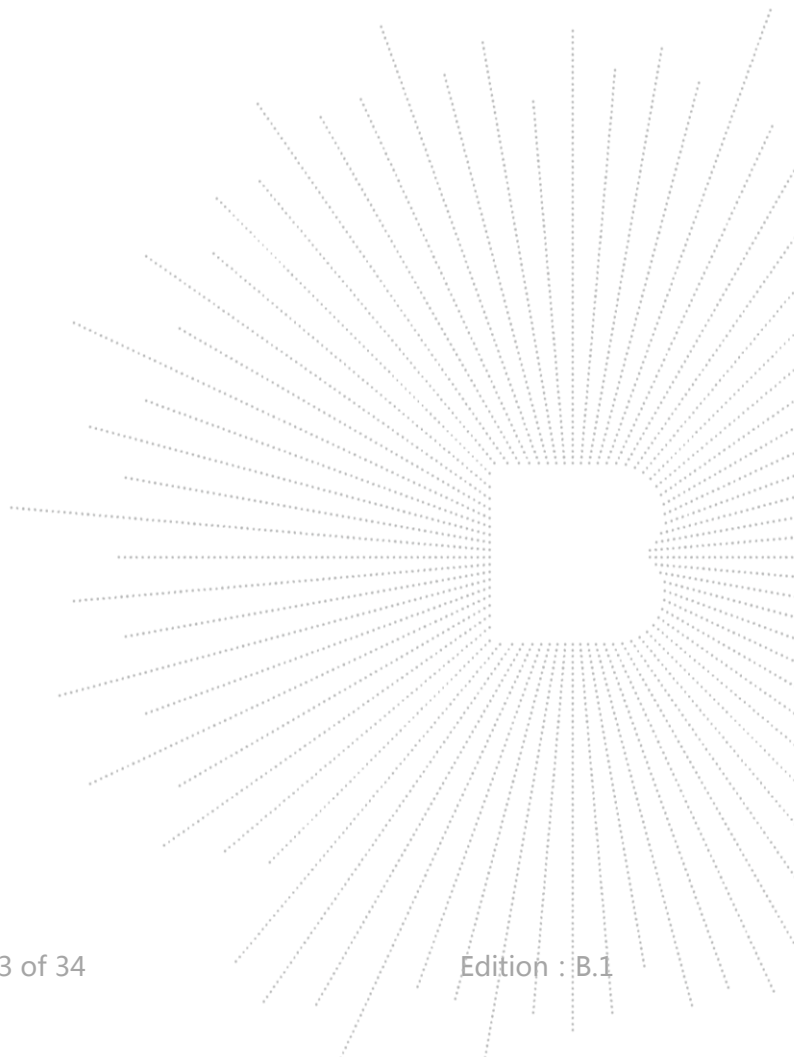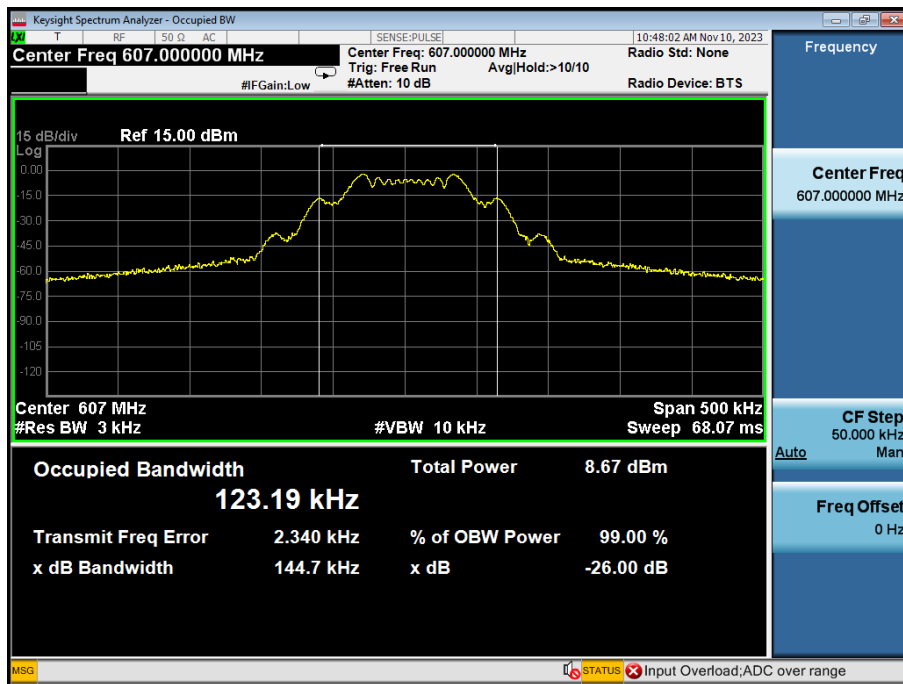Middle Channel (592MHz)

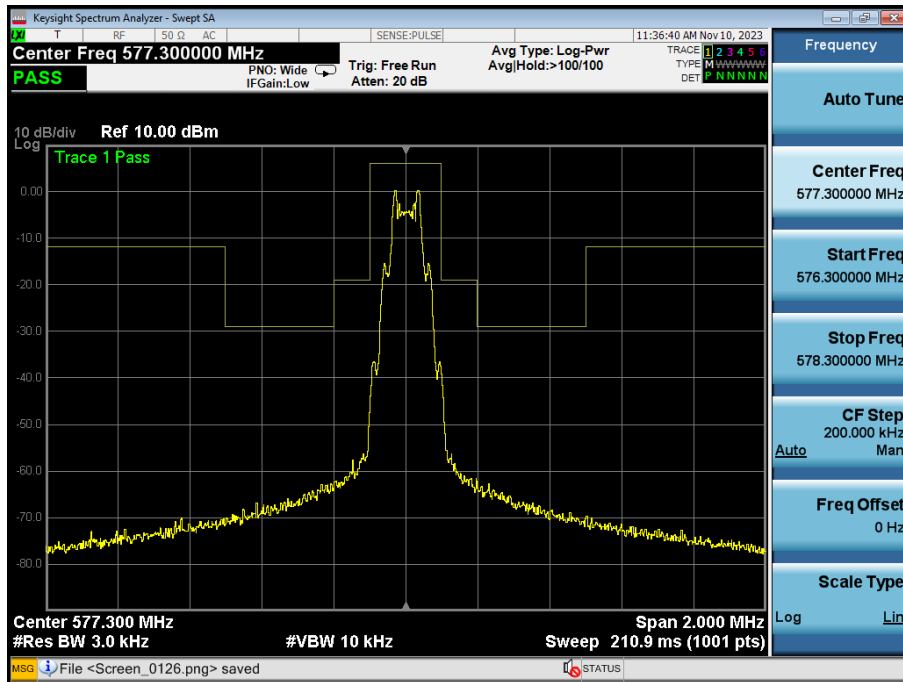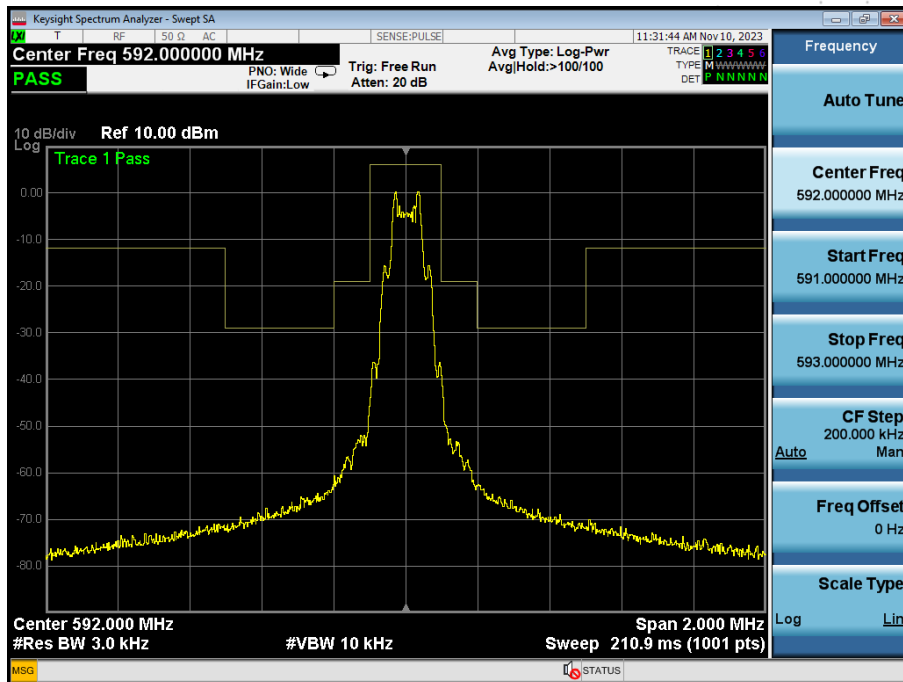

High Channel 3 (607MHz)

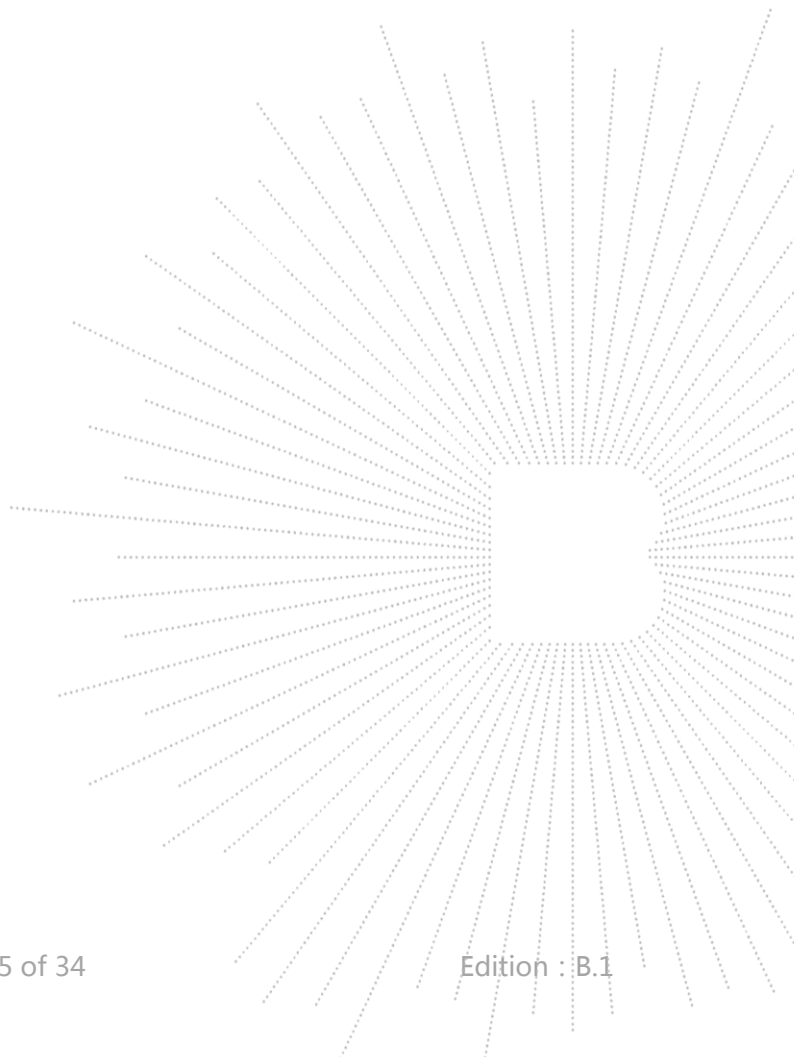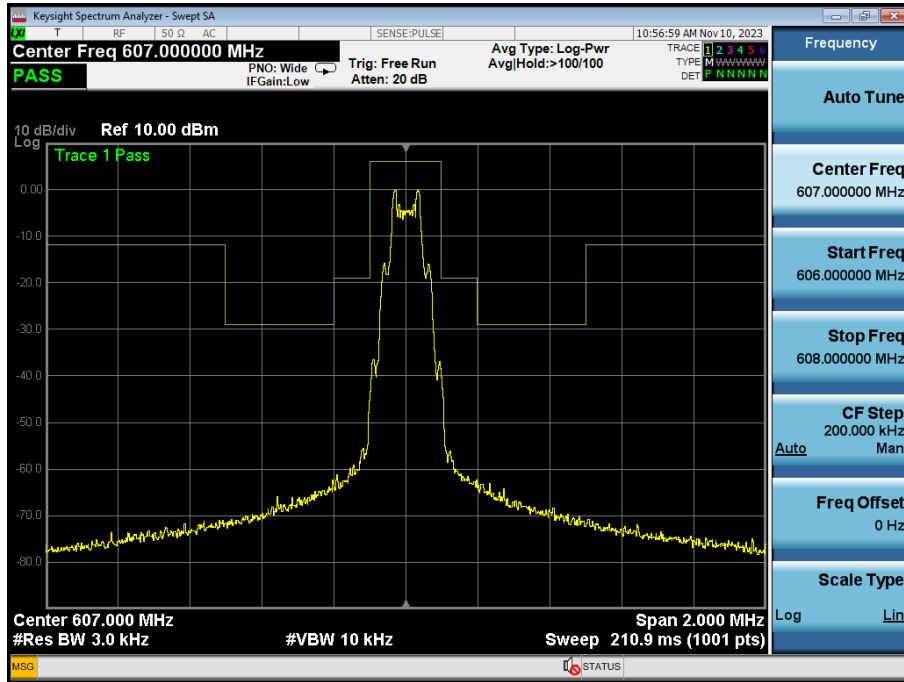
Emission Mask (577.3MHz)

Emission Mask (592.00MHz)

Emission Mask (607MHz)



10. SPURIOUS EMISSION AT ANTENNA TERMINAL

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC74.861 (e)(6)

According to §2.1051, the radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate.

According to FCC74.861 (e)(6), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

On any frequency removed from the operating frequency by more than 250 percent up to and the authorized bandwidth shall be attenuated below the un-modulated carrier by at least 43 plus 10 Log (output power in watts) dB.

10.3 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer
Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to EUT center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conducted level.

Note that the channel found to contain the maximum conducted level can be used to establish the reference level.

Conducted Spurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. (30MHz to 25GHz).

Set RBW = 100 kHz (above 1GHz Set RBW = 1 MHz) Set VBW \geq RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.



10.4 EUT Operation Conditions



The EUT tested system was configured as the statements of 2.4 unless otherwise a special operating condition is specified in the follows during the testing.



10.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 3.0V	Remark	N/A

Low Channel

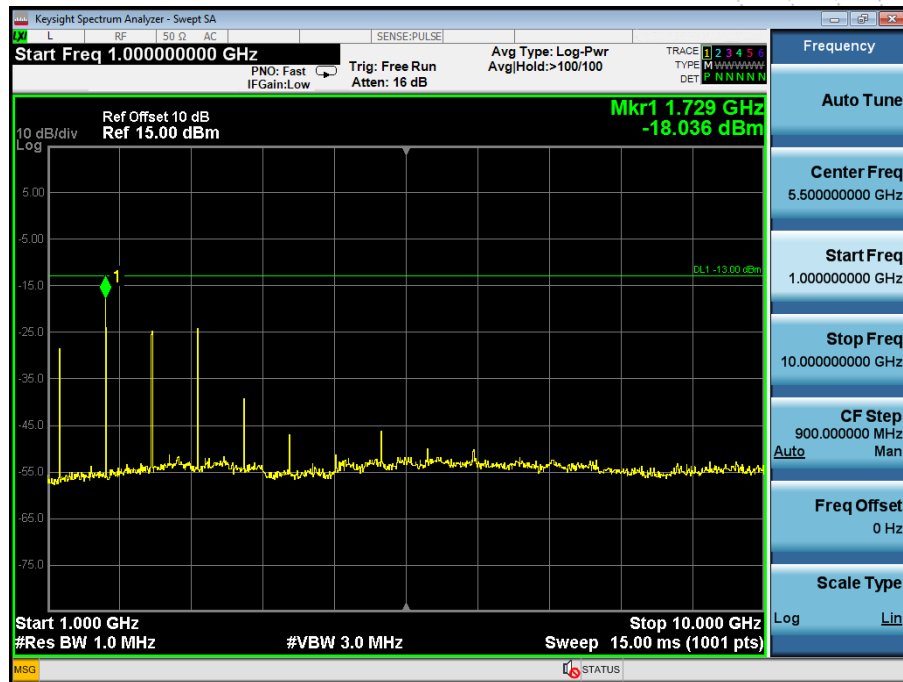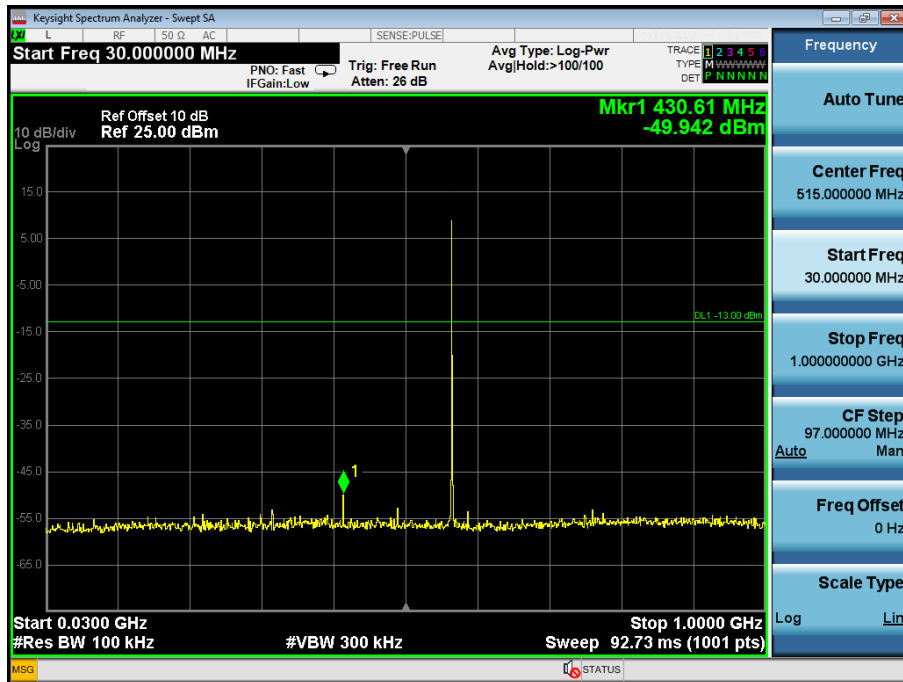


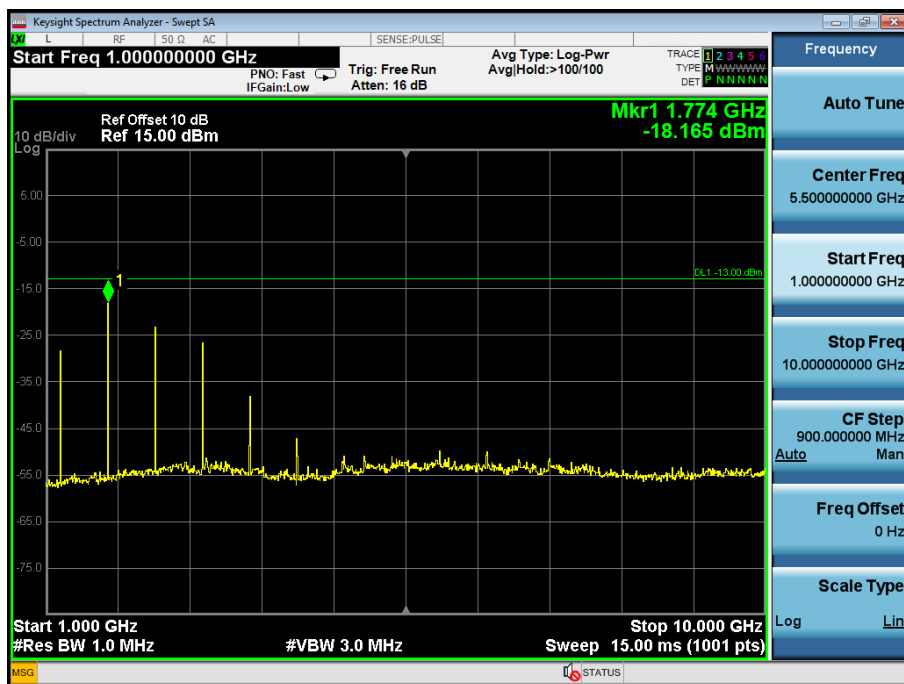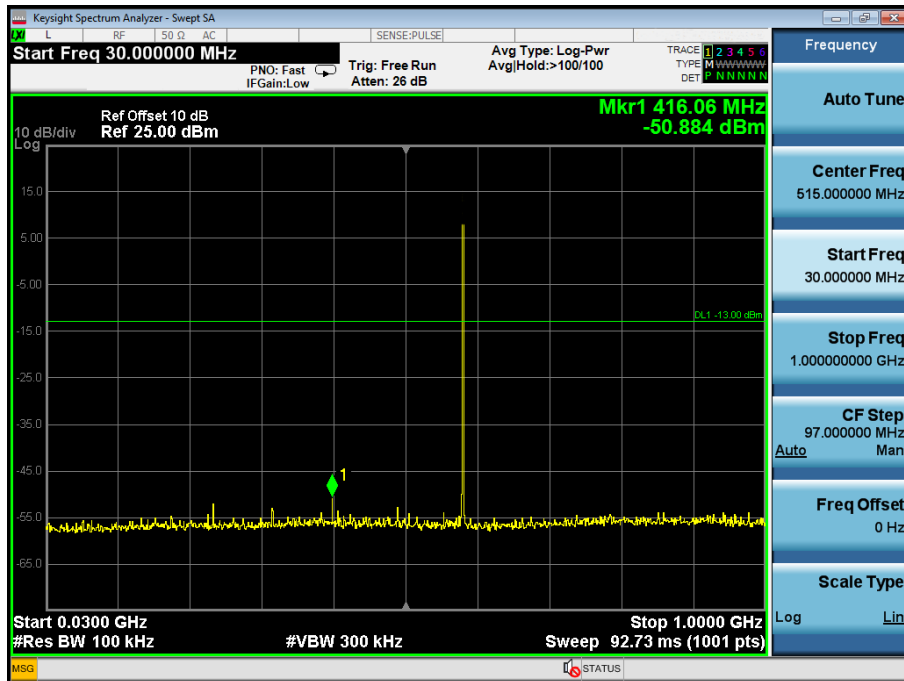

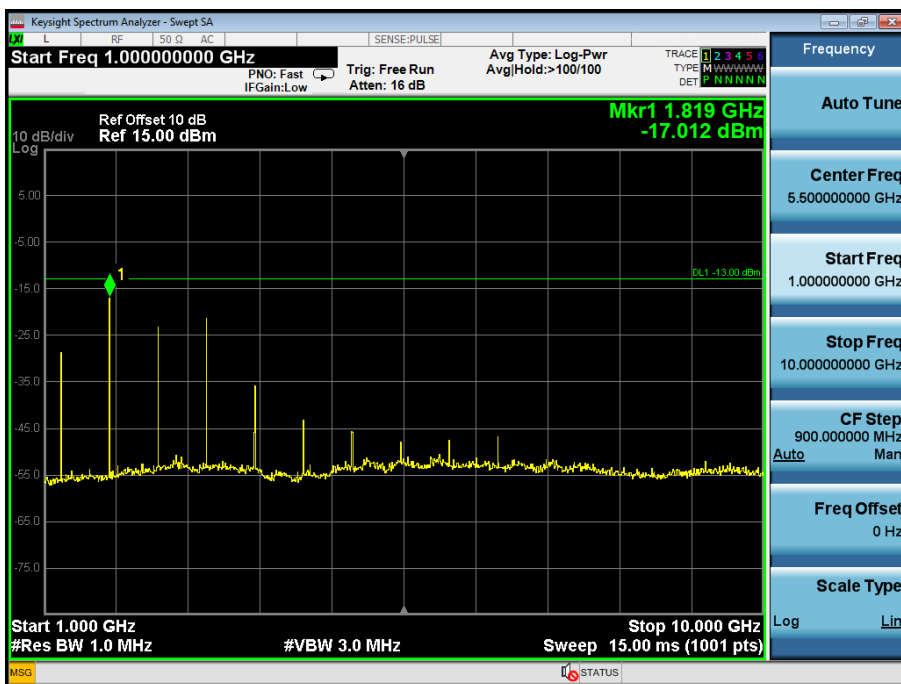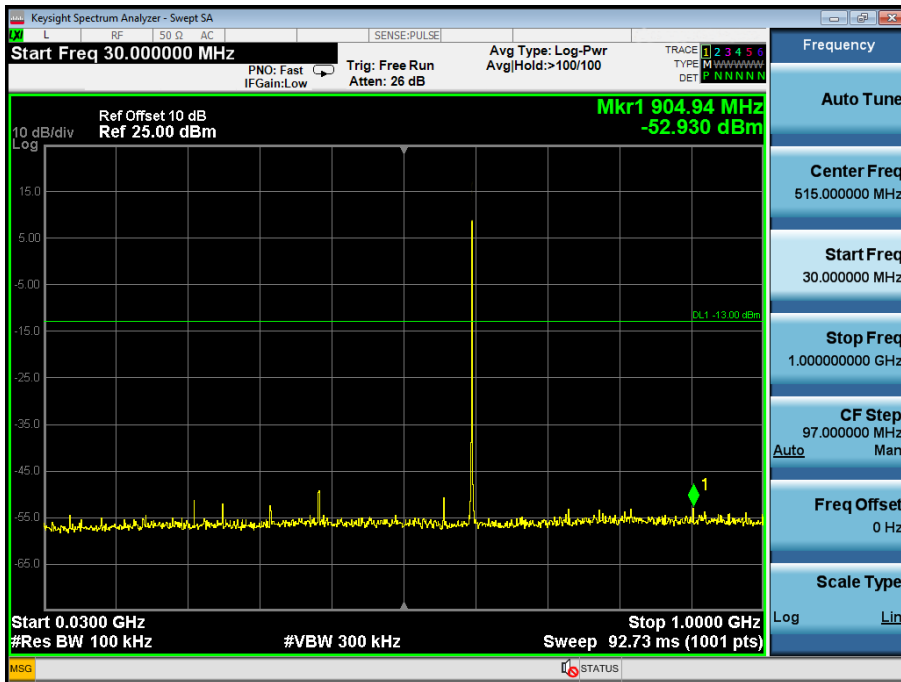

11. FREQUENCY STABILITY

11.1 Block Diagram Of Test Setup



11.2 Limit

According to FCC 74.861

According to FCC 2.1055(a)(1), the frequency stability shall be measure with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$, and according to FCC 2.1055(d)(2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC 74.861, the frequency tolerance of the transmitter shall be 0.005 percent.


11.3 Test Procedure

1 Setup the configuration of the ambient temperature form -30°C to 50°C with sufficient time. And measure the different power of the EUT with an artificial power from highest to end point voltage.

2 Set frequency counter center frequency to the right frequency needs to be measured.


11.4 EUT Operation Conditions

The EUT tested system was configured as the statements of 2.4 unless otherwise a special operating condition is specified in the follows during the testing.

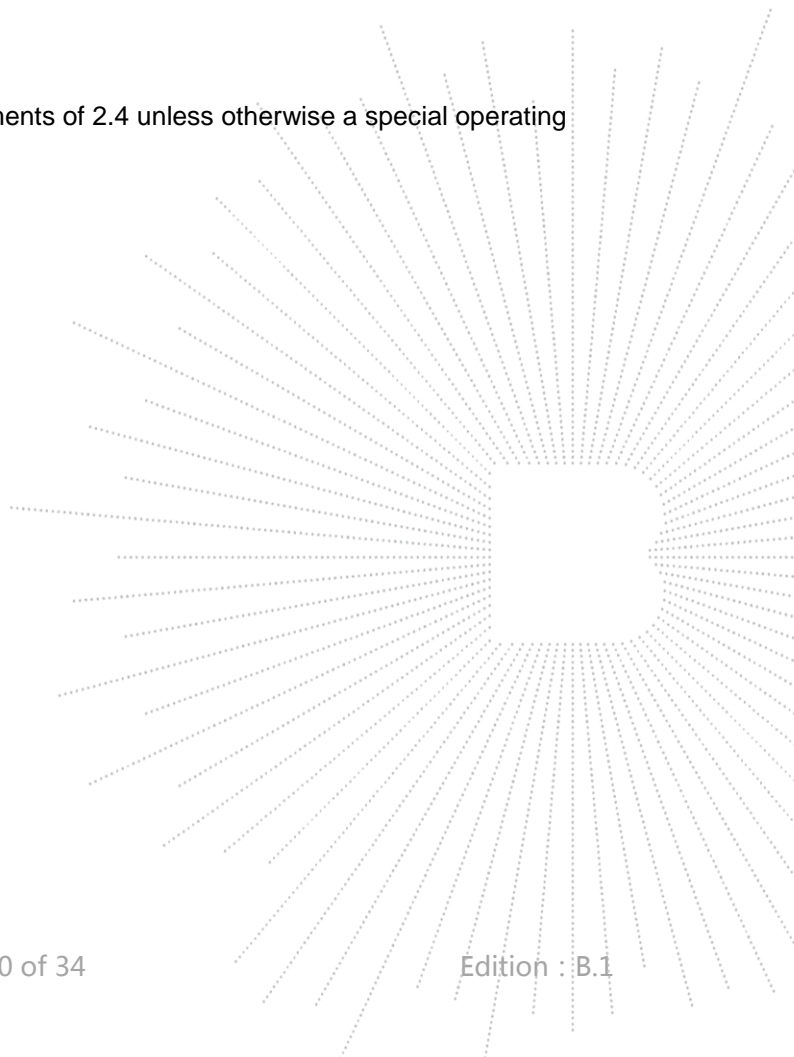

11.5 Test Result

<i>Test conditions</i>		Frequency Error		
		577.3 MHz	592 MHz	607 MHz
T _{min} (-30°C)	V _{min} (2.6V)	577.0036	592.0112	607.0079
	V _{max} (3.4V)	577.0081	592.0065	607.0083
T(-20°C)	V _{nom} (3.0V)	577.0045	592.0094	607.001
T(-10°C)	V _{nom} (3.0V)	577.0057	592.0067	607.0013
T(0°C)	V _{nom} (3.0V)	577.0062	592.0065	607.0063
T(10°C)	V _{nom} (3.0V)	577.0086	592.0073	607.0059
T _{nom} (20°C)	V _{nom} (3.0V)	577.0035	592.0078	607.0061
T(30°C)	V _{nom} (3.0V)	577.0098	592.0096	607.0026
T(40°C)	V _{nom} (3.0V)	577.0098	592.0078	607.0026
T _{max} (50°C)	V _{min} (2.6V)	577.0096	592.0081	607.0057
	V _{max} (3.4V)	577.0073	592.0044	607.0017
Max. frequency error (ppm)		16.98	18.92	13.67
Limit (ppm)		±50ppm		
End Point		DC 3.0V		

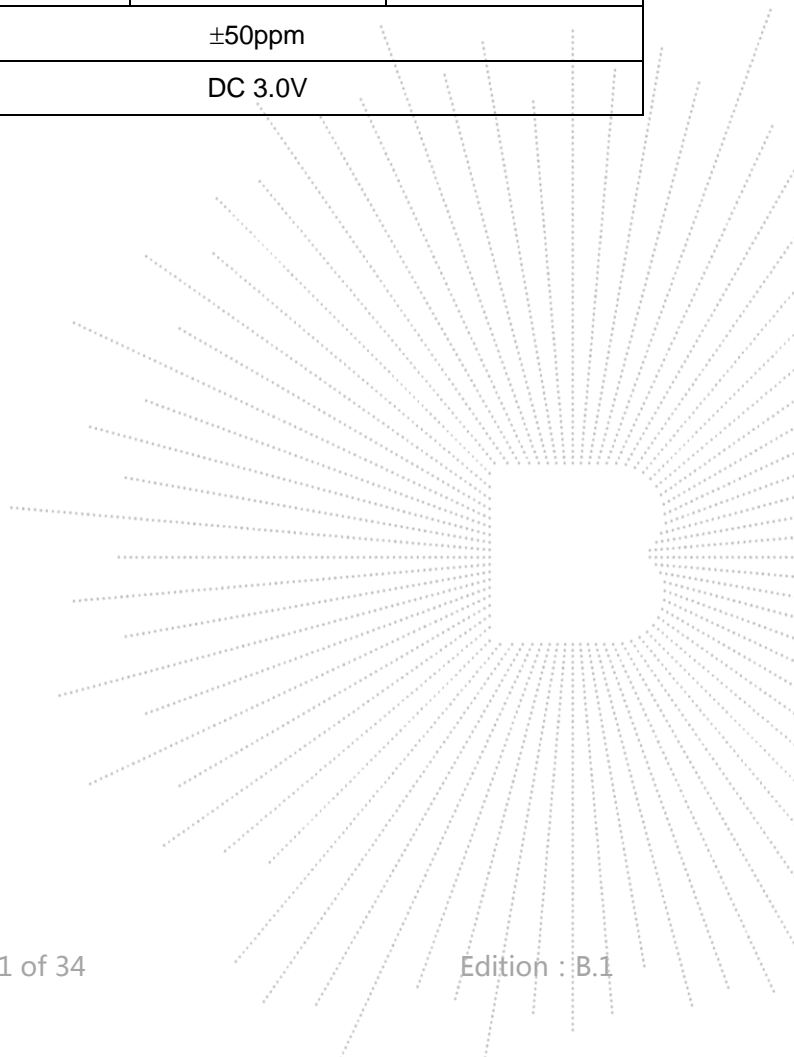


12. Antenna Requirement

12.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2 Test Result

The EUT antenna is Helical Antenna, fulfill the requirement of this section.

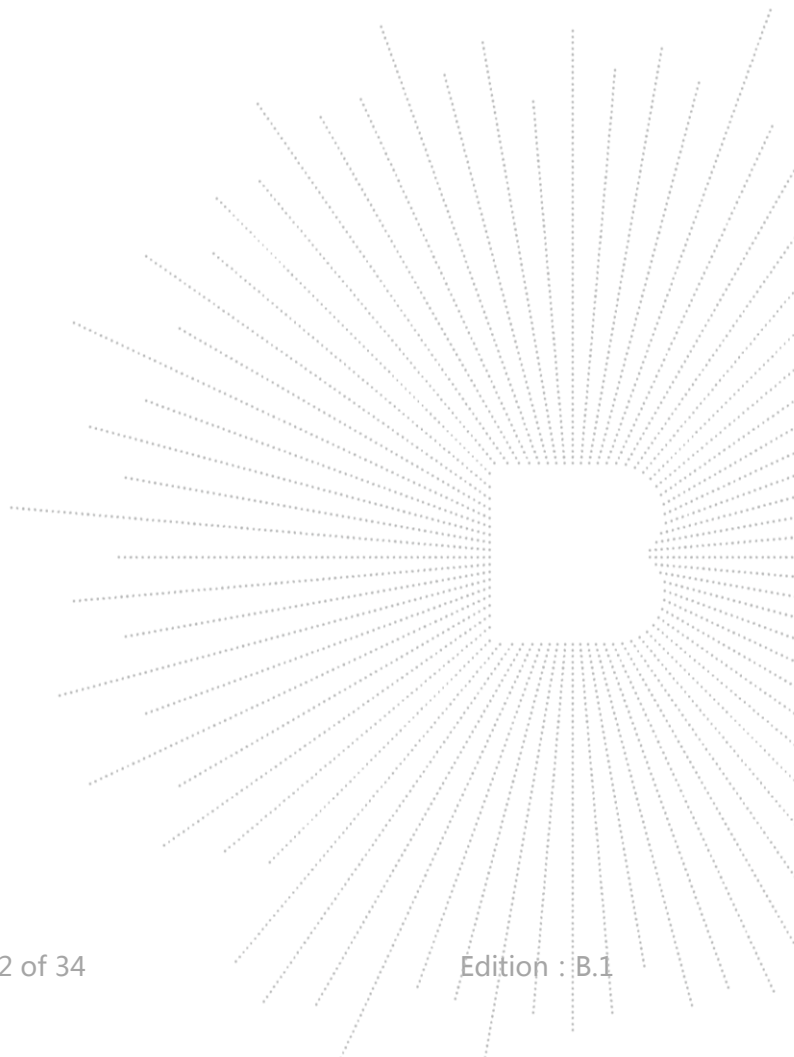

13. EUT Test Setup Photographs

Spurious Emission Test Setup (Below 1GHz)



Spurious Emission Test Setup (Above 1GHz)



STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****

