




# FCC RADIO TEST REPORT

**FCC ID** : TVE-240502  
**Equipment** : Network Switch  
**Brand Name** : FORTINET   
**Model Name** : FortiBranchSASE 20G-WiFixxxxxxxxxxx,  
 FORTIBRANCHSASE-20G-WiFixxxxxxxxxxx,  
 FBS-20G-WiFixxxxxxxxxxx (where "x" can be  
 used as "A-Z", or "0-9", or "-", or blank for  
 software changes or marketing purposes only)  
**Marketing Name** : FortiBranchSASE 20G-WiFi  
**Applicant** : Fortinet, Inc.  
 909 Kifer Road, Sunnyvale, CA. 94086 USA  
**Manufacturer** : Fortinet, Inc.  
 909 Kifer Road, Sunnyvale, CA. 94086 USA  
**Standard** : FCC Part 15 Subpart E §15.407

The product was received on Jul. 10, 2024 and testing was performed from Aug. 28, 2024 to Nov. 14, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

**History of this test report..... 3**

**Summary of Test Result..... 4**

**1 General Description ..... 5**

    1.1 Product Feature of Equipment Under Test..... 5

    1.2 Modification of EUT ..... 7

    1.3 Testing Location ..... 8

    1.4 Applicable Standards..... 8

**2 Test Configuration of Equipment Under Test ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 12

    2.4 Support Unit used in test configuration and system ..... 12

    2.5 EUT Operation Test Setup ..... 12

    2.6 Measurement Results Explanation Example..... 13

**3 Test Result ..... 14**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 15

    3.3 Power Spectral Density Measurement ..... 17

    3.4 Unwanted Emissions Measurement ..... 19

    3.5 AC Conducted Emission Measurement..... 24

    3.6 Antenna Requirements ..... 26

**4 List of Measuring Equipment..... 27**

**5 Measurement Uncertainty ..... 29**

**Appendix A. Conducted Test Results**

**Appendix B. AC Conducted Emission Test Result**

**Appendix C. Radiated Spurious Emission Test Data**

**Appendix D. Duty Cycle Plots**

**Appendix E. Setup Photographs**



### History of this test report

Report No.	Version	Description	Issue Date
FR471026D	01	Initial issue of report	Nov. 04, 2024
FR471026D	02	Revise Marketing Name and Appendix A This report is an updated version, replacing the report issued on Nov. 04, 2024.	Nov. 14, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	3.13 dB under the limit at 5922.72 MHz
3.5	15.207	AC Conducted Emission	Pass	11.88 dB under the limit at 0.18 MHz
3.6	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sheng Kuo**  
**Report Producer: Wilda Wei**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
<b>General Specs</b> Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/VHT/ax and Wi-Fi 5GHz 802.11a/n/ac/ax	
<b>Antenna Type</b> WLAN: Omni-directional Antenna Bluetooth: PCB Antenna	

Antenna information		
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	Ant. 1: 1.64 Ant. 2: 1.64

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



### 1.1.1 Antenna Directional Gain

**<For CDD Mode>**

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

$G_{ANT}$  is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant 1 (dBi)	Ant 2 (dBi)				
Band IV	1.64	1.64	1.64	4.65	0.00	0.00

Calculation example:

If a device has two antenna,  $G_{ANT1} = 1.64\text{dBi}$ ;  $G_{ANT2} = 1.64\text{dBi}$

Directional gain of power measurement =  $\max(1.64, 1.64) + 0 = 1.64$  dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[ 10^{(1.64 \text{ dBi} / 20)} + 10^{(1.64 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= 4.65 \text{ dBi}$$

Power limit reduction = Composite gain – 6dBi, ( min = 0 )

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, ( min = 0 )



<TXBF Modes>

The EUT supports beamforming modes , then

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)e)ii)

Directional gain = GANT + 10 log(NANT/NSS) dBi,

where NSS = the number of independent spatial streams of data and GANT is the antenna gain in dBi

The directional gain “DG” is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 1	Ant 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	1.64	1.64	4.65	4.65	0.00	0.00

Calculation example:

Directional gain is derived from formula which is

$$10 \times \log \left\{ \left[ 10^{(1.64 \text{ dBi} / 20)} + 10^{(1.64 \text{ dBi} / 20)} \right] ^ 2 \right\} / 2$$

$$= 4.65 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, ( min = 0 )

### 1.2 Modification of EUT

No modifications made to the EUT during the testing.



### 1.3 Testing Location

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, CO07-HY, 03CH21-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in two config. (Ant. 0° and Ant. 90°), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

**Note:**

1. The above Frequency and Channel with "\*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80.



## 2.2 Test Mode

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11ac mode is smaller than 802.11n mode, so all other conducted and radiated test is covered by 802.11n mode.

The final test modes include the worst data rates for each modulation shown in the table below.

### MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

### TXBF Mode

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

**Remark:** The conducted power worst case were Non Beamforming, other test items only test worst case and documented.




Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : Bluetooth-LE Link + WLAN (5GHz) Link + Console with Notebook + Data Link with USB Flash Drive + LAN Port 3 & 4 Loop Back + LAN Port 2 Link with Notebook + Adapter
<b>Remark:</b> Data Link with USB Flash Drive means data application transferred mode between EUT and USB Flash Drive.	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

Ch. #		Band IV : 5725-5850 MHz		
		802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

**Remark:** For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

### 2.3 Connection Diagram of Test System

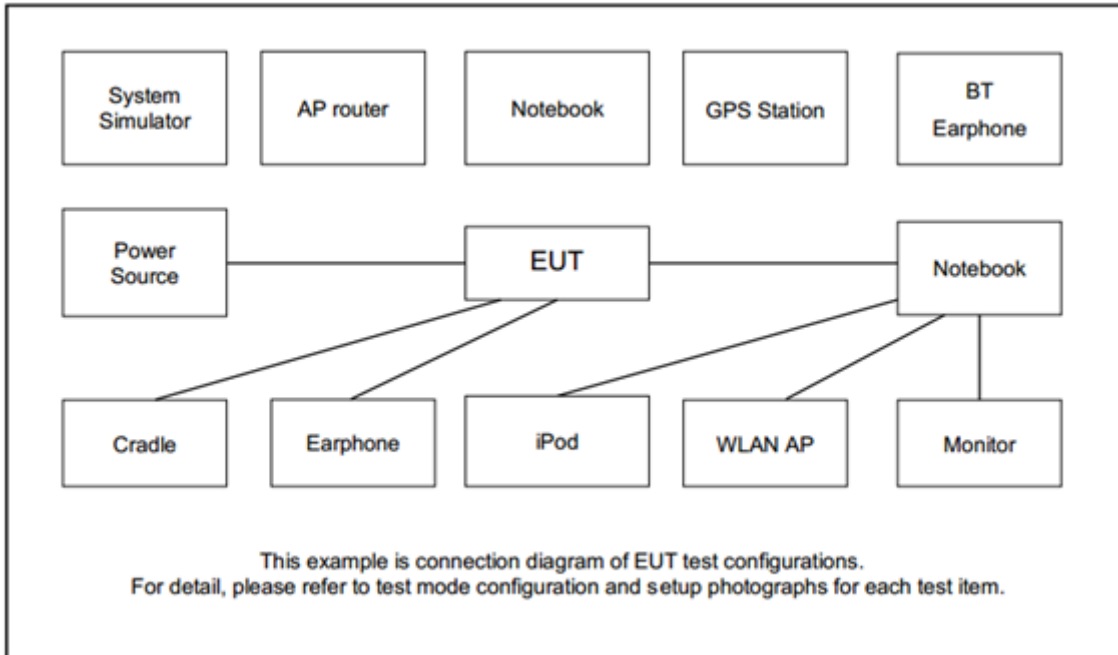

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
2.	USB Flash Drive	Transcend	Jetflash	N/A	N/A	N/A

### 2.5 EUT Operation Test Setup

The RF test items, utility “QRCT 4.0.00206” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

##### 3.1.4 Test Setup

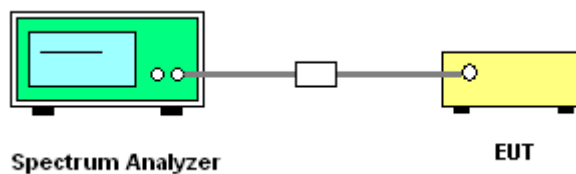

##### 3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

#### <CDD Modes>

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01


#### <TXBF Modes>

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 for TXBF modes.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

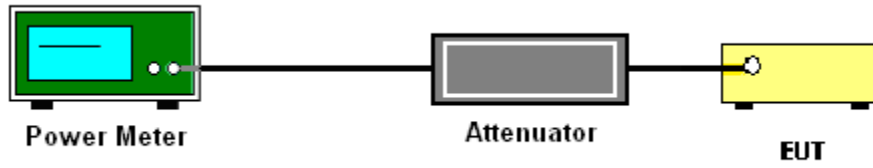

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.





### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

##### <CDD Modes>

##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300kHz.
- Set VBW  $\geq$  1 MHz.
- Add  $10 \log(500 \text{ kHz/RBW})$  to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement
- Number of points in sweep  $\geq 2 \text{ Span} / \text{RBW}$ .
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6 \text{ dB}$  if the duty cycle is 25 percent.

1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add  $10 \log(N_{ANT})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{ANT})$  dB serves to apportion the emission limit among the  $N_{ANT}$  outputs so that each output is permitted to contribute no more than  $1/N_{ANT}^{th}$  of the PSD limit.

### 3.3.4 Test Setup

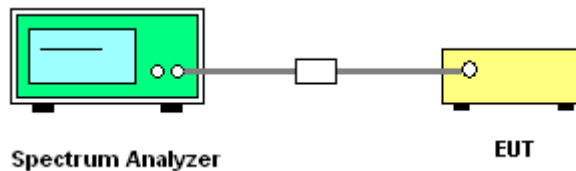

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.



### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading.  
When there is no suspected emission found and the emission level is with at least 6 dB margin


against QP limit line, the position is marked as “-“.

- Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies.


When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.

**3.4.4 Test Setup**


**For radiated emissions below 30MHz**

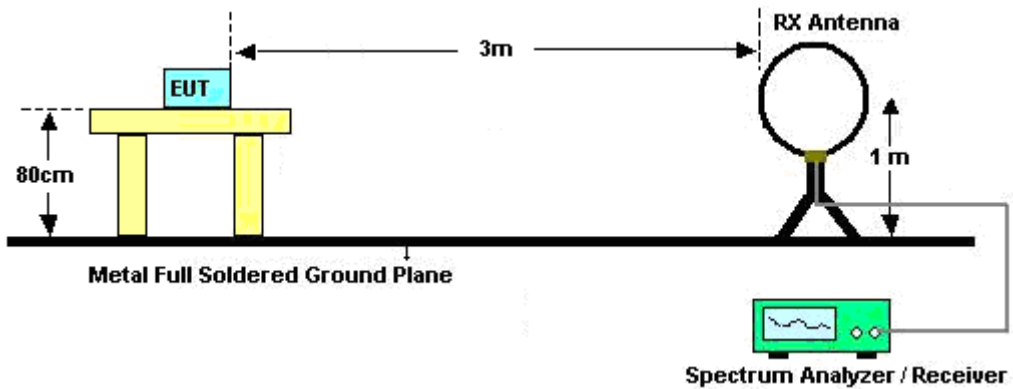


**For radiated emissions from 30MHz to 1GHz**

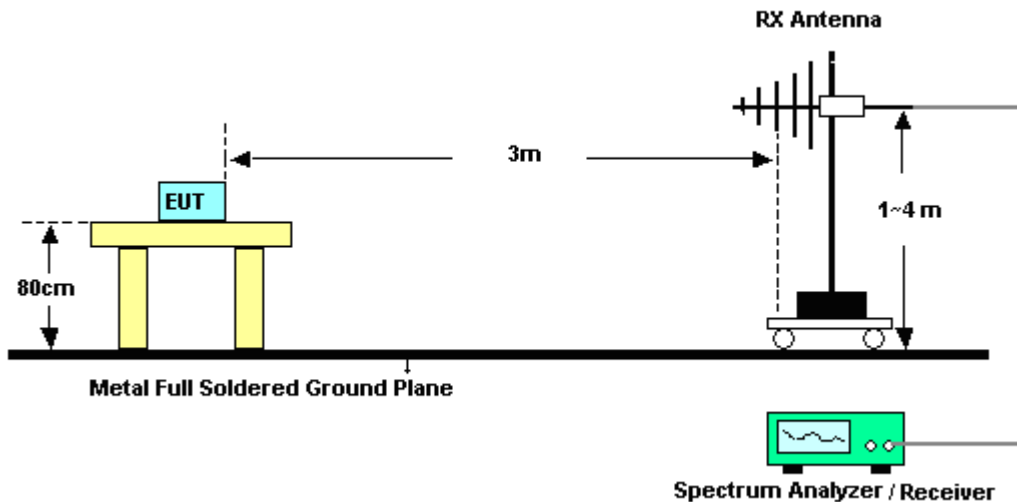

For radiated test from 1GHz to 18GHz

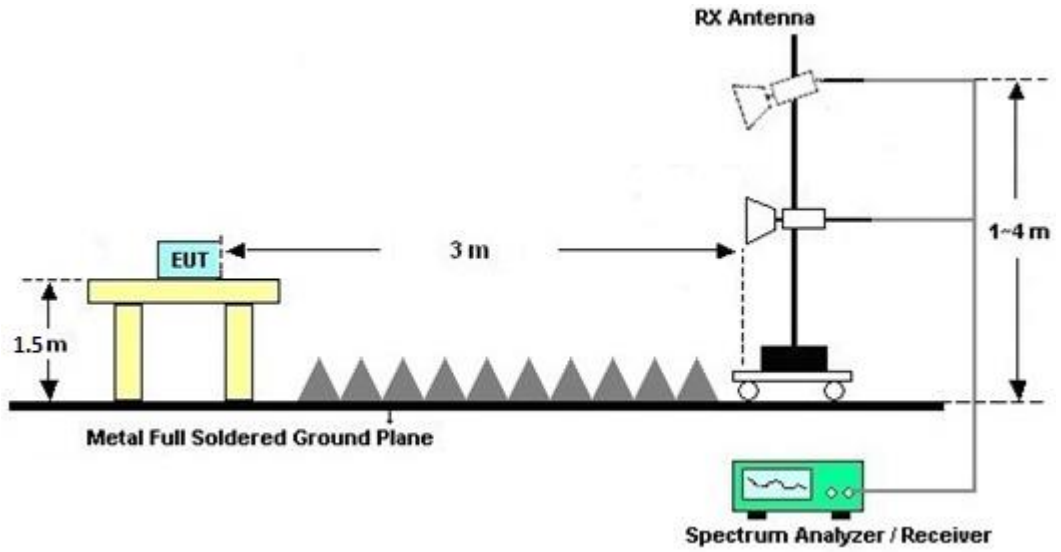

For radiated test above 18GHz

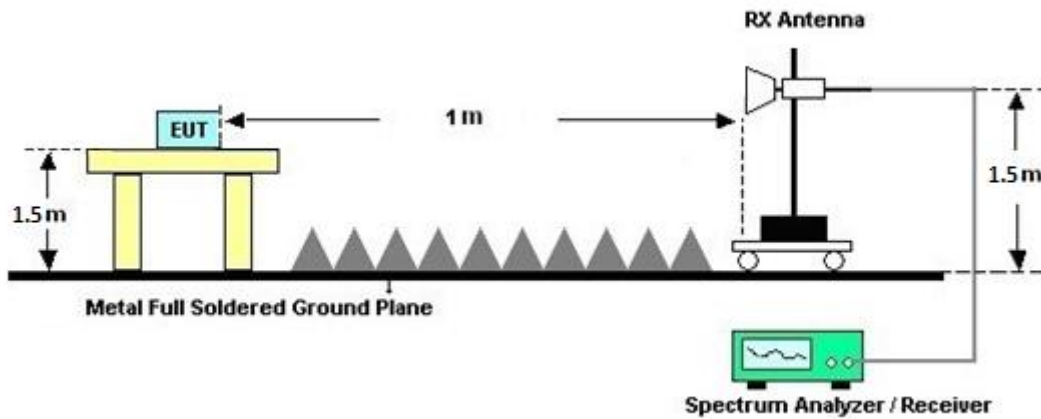



### **3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)**

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### **3.4.6 Test Result of Radiated Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

#### 3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



### 3.5.4 Test Setup

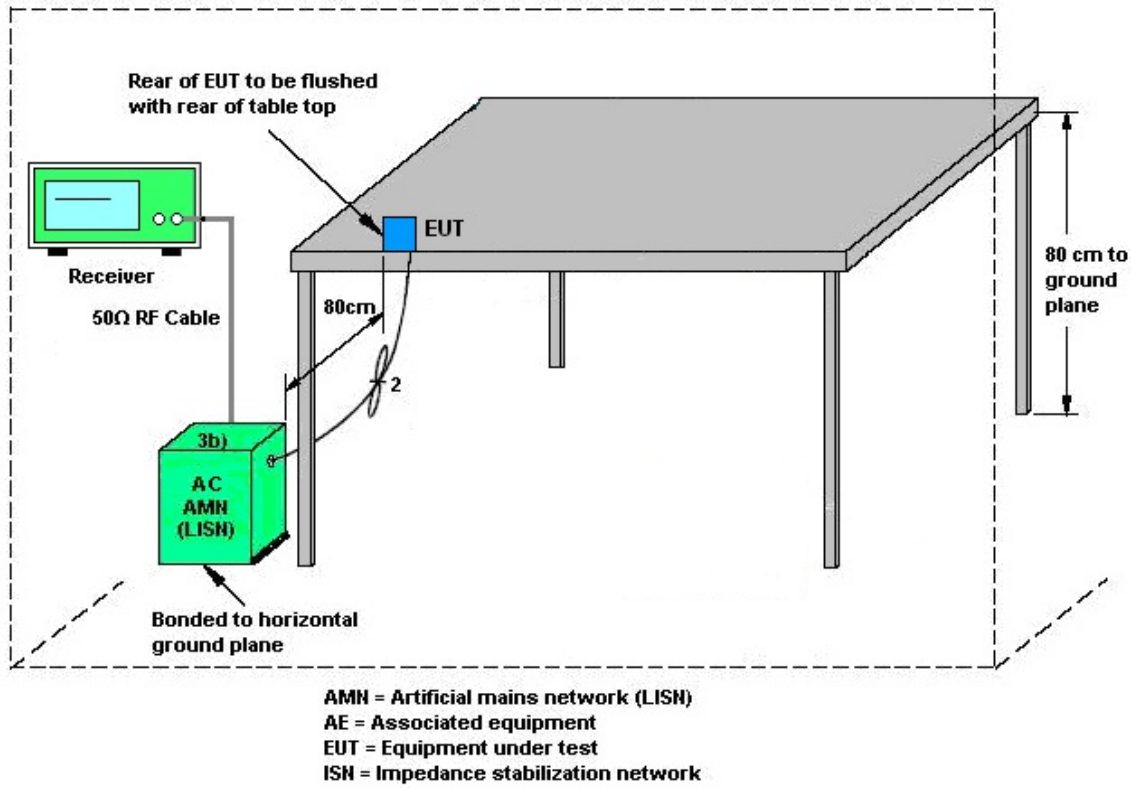

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **3.6.2 Antenna Anti-Replacement Construction**

Antenna permanently attached.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Sep. 04, 2024~ Oct. 14, 2024	Aug. 28, 2025	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Oct. 15, 2023	Sep. 04, 2024~ Oct. 13, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Jul. 11, 2024	Sep. 04, 2024~ Oct. 14, 2024	Jul. 10, 2025	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Sep. 04, 2024~ Oct. 14, 2024	Jun. 23, 2025	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 14, 2024	Sep. 04, 2024~ Oct. 14, 2024	Jul. 13, 2025	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 28, 2023	Sep. 04, 2024~ Sep. 26, 2024	Sep. 27, 2024	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 27, 2024	Sep. 27, 2024~ Oct. 14, 2024	Sep. 26, 2025	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	Sep. 04, 2024~ Oct. 14, 2024	Aug. 22, 2025	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz~44GHz	May 13, 2024	Sep. 04, 2024~ Sep. 05, 2024	May 12, 2025	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 06, 2024	Sep. 06, 2024~ Oct. 14, 2024	Sep. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Sep. 04, 2024~ Oct. 14, 2024	Mar. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2, 803954/2	30MHz~40GHz	Aug. 12, 2024	Sep. 04, 2024~ Oct. 14, 2024	Aug. 11, 2025	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 30, 2023	Sep. 04, 2024~ Oct. 14, 2024	Oct. 29, 2024	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Sep. 04, 2024~ Oct. 14, 2024	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Sep. 04, 2024~ Oct. 14, 2024	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Sep. 04, 2024~ Oct. 14, 2024	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-002349	N/A	N/A	Sep. 04, 2024~ Oct. 14, 2024	N/A	Radiation (03CH21-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Sep. 07, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Sep. 07, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2023	Sep. 07, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Sep. 07, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Sep. 07, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Sep. 07, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Sep. 07, 2024	Sep. 19, 2024	Conduction (CO07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Aug. 28, 2024~ Nov. 05, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Nov. 06, 2024~ Nov. 14, 2024	Oct. 30, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO1 0 (NO:248)	10MHz~6GHz	Jan. 10, 2024	Aug. 28, 2024~ Nov. 14, 2024	Jan. 09, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO3 7 (NO:167)	10MHz~6GHz	Dec. 01, 2023	Aug. 28, 2024~ Nov. 14, 2024	Nov. 30, 2024	Conducted (TH05-HY)
Power Divider	Woken	2Way SMA	DCMD38W1E2	N/A	N/A	Aug. 28, 2024~ Nov. 14, 2024	N/A	Conducted (TH05-HY)
Power Divider	Woken	2Way SMA	DCMD5VW1A2	N/A	N/A	Aug. 28, 2024~ Nov. 14, 2024	N/A	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Aug. 14, 2024	Aug. 28, 2024~ Nov. 14, 2024	Aug. 13, 2025	Conducted (TH05-HY)
Software1	Sporton	BTWIFI_Final_ version:1.0(20 24-08-21)	N/A	Conducted Items	N/A	Aug. 28, 2024~ Nov. 14, 2024	N/A	Conducted (TH05-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.44 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.40 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.60 dB
---	---------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.60 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.50 dB
---	---------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Wei Shun	Temperature:	21~25	°C
Test Date:	2024/08/28~2024/11/14	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

U-NII-3 MIMO												
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	5745	29.51	17.16	42.94	32.49	15.13	15.36	0.5	Pass
11a	6Mbps	2	157	5785	23.68	21.06	39.63	36.44	15.12	16.00	0.5	Pass
11a	6Mbps	2	165	5825	23.32	21.40	38.63	37.48	15.13	16.02	0.5	Pass
HT20	MCS0	2	149	5745	31.30	19.68	46.53	37.31	16.73	16.70	0.5	Pass
HT20	MCS0	2	157	5785	20.29	24.55	37.25	40.95	16.04	17.11	0.5	Pass
HT20	MCS0	2	165	5825	26.83	31.68	42.69	46.53	16.12	17.54	0.5	Pass
HT40	MCS0	2	151	5755	52.62	40.35	91.73	83.71	36.47	35.78	0.5	Pass
HT40	MCS0	2	159	5795	52.91	64.54	88.72	99.52	35.74	36.43	0.5	Pass
VHT80	MCS0	2	155	5775	75.26	75.29	81.44	82.11	72.86	75.31	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	27.03	26.83	29.94	30.00		1.64	Pass	
11a	6Mbps	2	157	5785	27.49	25.35	29.56	30.00		1.64	Pass	
11a	6Mbps	2	165	5825	27.42	25.52	29.58	30.00		1.64	Pass	
HT20	MCS0	2	149	5745	26.67	26.47	29.58	30.00		1.64	Pass	
HT20	MCS0	2	157	5785	27.24	24.64	29.14	30.00		1.64	Pass	
HT20	MCS0	2	165	5825	27.27	25.55	29.50	30.00		1.64	Pass	
HT40	MCS0	2	151	5755	26.92	25.95	29.47	30.00		1.64	Pass	
HT40	MCS0	2	159	5795	27.28	25.32	29.42	30.00		1.64	Pass	
VHT20	MCS0	2	149	5745	26.57	26.37	29.48	30.00		1.64	Pass	
VHT20	MCS0	2	157	5785	27.14	24.54	29.04	30.00		1.64	Pass	
VHT20	MCS0	2	165	5825	27.17	25.45	29.40	30.00		1.64	Pass	
VHT40	MCS0	2	151	5755	26.82	25.85	29.37	30.00		1.64	Pass	
VHT40	MCS0	2	159	5795	27.18	25.22	29.32	30.00		1.64	Pass	
VHT80	MCS0	2	155	5775	22.50	22.30	25.41	30.00		1.64	Pass	



**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-3 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.26	0.26	2.22	13.02	12.51	16.03	30.00	4.65	Pass			
11a	6Mbps	2	157	5785	0.26	0.26	2.22	13.11	10.91	16.12	30.00	4.65	Pass			
11a	6Mbps	2	165	5825	0.26	0.26	2.22	13.29	11.02	16.30	30.00	4.65	Pass			
HT20	MCS0	2	149	5745	0.94	0.97	2.22	11.58	11.40	14.59	30.00	4.65	Pass			
HT20	MCS0	2	157	5785	0.94	0.97	2.22	11.17	11.59	14.60	30.00	4.65	Pass			
HT20	MCS0	2	165	5825	0.94	0.97	2.22	11.12	11.61	14.62	30.00	4.65	Pass			
HT40	MCS0	2	151	5755	0.97	0.94	2.22	8.43	8.52	11.53	30.00	4.65	Pass			
HT40	MCS0	2	159	5795	0.97	0.94	2.22	8.28	8.64	11.65	30.00	4.65	Pass			
VHT80	MCS0	2	155	5775	0.97	0.97	2.22	1.40	1.94	4.95	30.00	4.65	Pass			

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	149	5745	Full	29.38	19.06	48.13	31.36	18.50	17.13	0.5	Pass
HE20	MCS0	2	157	5785	Full	19.70	19.32	36.63	34.55	17.17	17.14	0.5	Pass
HE20	MCS0	2	165	5825	Full	26.43	24.11	44.64	44.41	17.70	18.47	0.5	Pass
HE40	MCS0	2	151	5755	Full	51.96	38.60	91.89	63.71	37.79	37.85	0.5	Pass
HE40	MCS0	2	159	5795	Full	54.45	51.76	94.34	89.71	37.53	37.97	0.5	Pass
HE80	MCS0	2	155	5775	Full	77.21	77.06	83.52	81.82	73.78	75.89	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	149	5745	Full	26.77	26.57	29.68	30.00		1.64		Pass
HE20	MCS0	2	157	5785	Full	27.34	24.74	29.24	30.00		1.64		Pass
HE20	MCS0	2	165	5825	Full	27.37	25.65	29.60	30.00		1.64		Pass
HE40	MCS0	2	151	5755	Full	27.02	26.05	29.57	30.00		1.64		Pass
HE40	MCS0	2	159	5795	Full	27.38	25.42	29.52	30.00		1.64		Pass
HE80	MCS0	2	155	5775	Full	22.60	22.40	25.51	30.00		1.64		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-3 MIMO																	
Mod.	Data Rate	N <sub>Tx</sub>	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	149	5745	Full	0.94	0.94	2.22	12.99	12.32	16.00	30.00	4.65			Pass	
HE20	MCS0	2	157	5785	Full	0.94	0.94	2.22	13.12	10.52	16.13	30.00	4.65			Pass	
HE20	MCS0	2	165	5825	Full	0.94	0.94	2.22	13.44	11.33	16.45	30.00	4.65			Pass	
HE40	MCS0	2	151	5755	Full	0.97	0.94	2.22	9.68	8.67	12.69	30.00	4.65			Pass	
HE40	MCS0	2	159	5795	Full	0.97	0.94	2.22	10.05	8.11	13.06	30.00	4.65			Pass	
HE80	MCS0	2	155	5775	Full	0.97	0.97	2.22	1.04	1.47	4.48	30.00	4.65			Pass	

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

<TXBF Mode>

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HT20	MCS0	2	149	5745	25.40	26.75	29.14	30.00		4.65		Pass
HT20	MCS0	2	157	5785	26.00	26.17	29.10	30.00		4.65		Pass
HT20	MCS0	2	165	5825	25.77	26.31	29.06	30.00		4.65		Pass
HT40	MCS0	2	151	5755	25.27	26.66	29.03	30.00		4.65		Pass
HT40	MCS0	2	159	5795	26.04	26.09	29.08	30.00		4.65		Pass
VHT20	MCS0	2	149	5745	25.30	26.65	29.04	30.00		4.65		Pass
VHT20	MCS0	2	157	5785	25.90	26.07	29.00	30.00		4.65		Pass
VHT20	MCS0	2	165	5825	25.67	26.21	28.96	30.00		4.65		Pass
VHT40	MCS0	2	151	5755	25.17	26.56	28.93	30.00		4.65		Pass
VHT40	MCS0	2	159	5795	25.94	25.99	28.98	30.00		4.65		Pass
VHT80	MCS0	2	155	5775	22.43	22.27	25.36	30.00		4.65		Pass

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	149	5745	Full	25.50	26.85	29.24	30.00		4.65		Pass
HE20	MCS0	2	157	5785	Full	26.10	26.27	29.20	30.00		4.65		Pass
HE20	MCS0	2	165	5825	Full	25.87	26.41	29.16	30.00		4.65		Pass
HE40	MCS0	2	151	5755	Full	25.37	26.76	29.13	30.00		4.65		Pass
HE40	MCS0	2	159	5795	Full	26.14	26.19	29.18	30.00		4.65		Pass
HE80	MCS0	2	155	5775	Full	22.53	22.37	25.46	30.00		4.65		Pass




<CDD Mode>

# Test Result of 6dB and 26dB and 99% Occupied Bandwidth

MIMO <Ant. 1+2>


<802.11a>

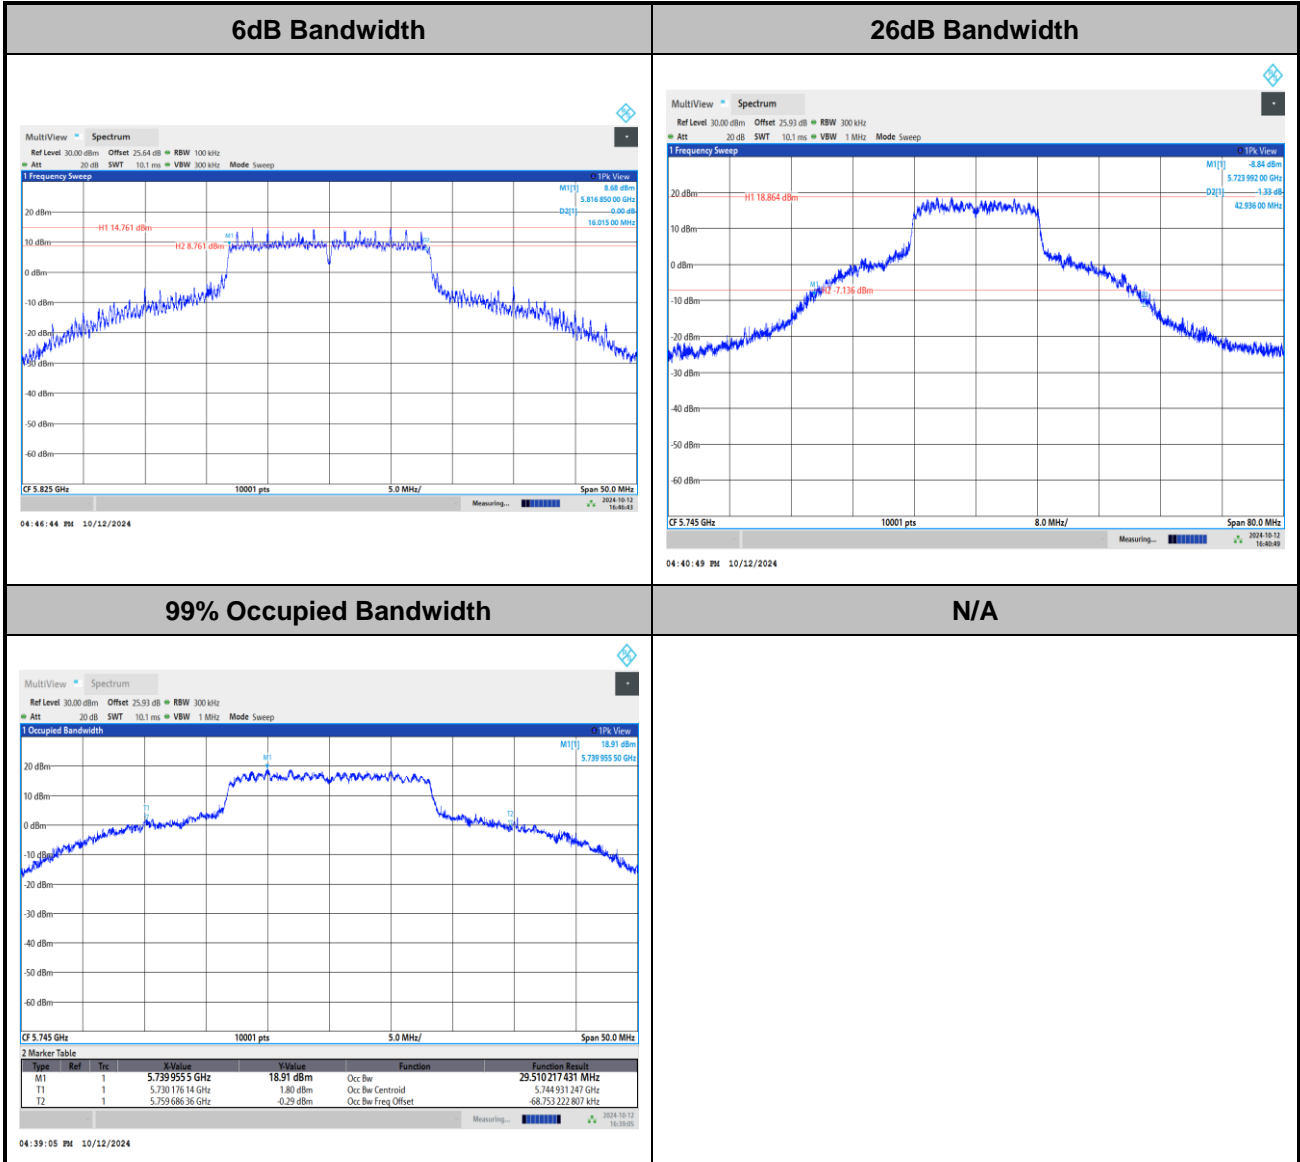




<802.11n HT20>


6dB Bandwidth

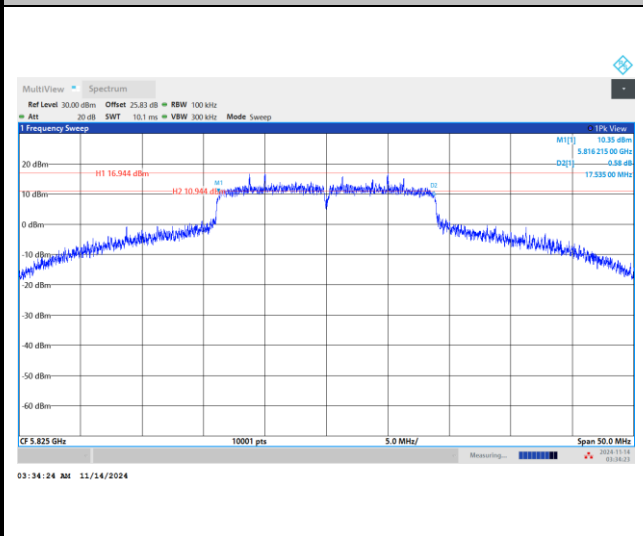

26dB Bandwidth

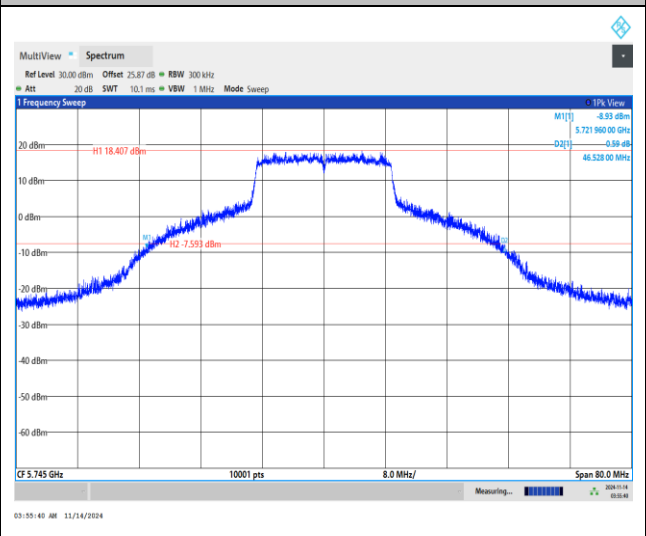

99% Occupied Bandwidth

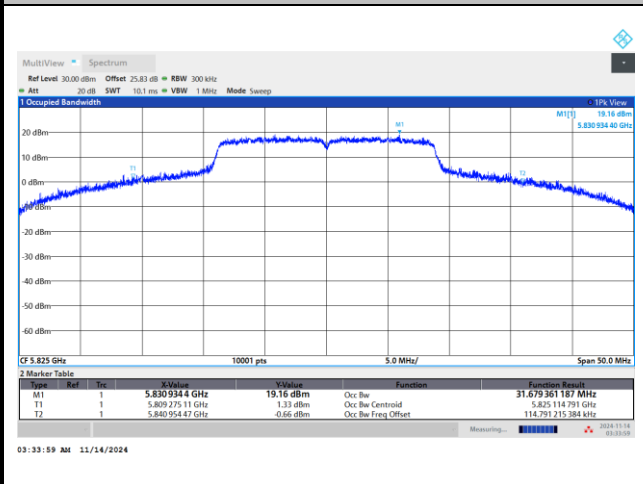


N/A






<802.11n HT40>

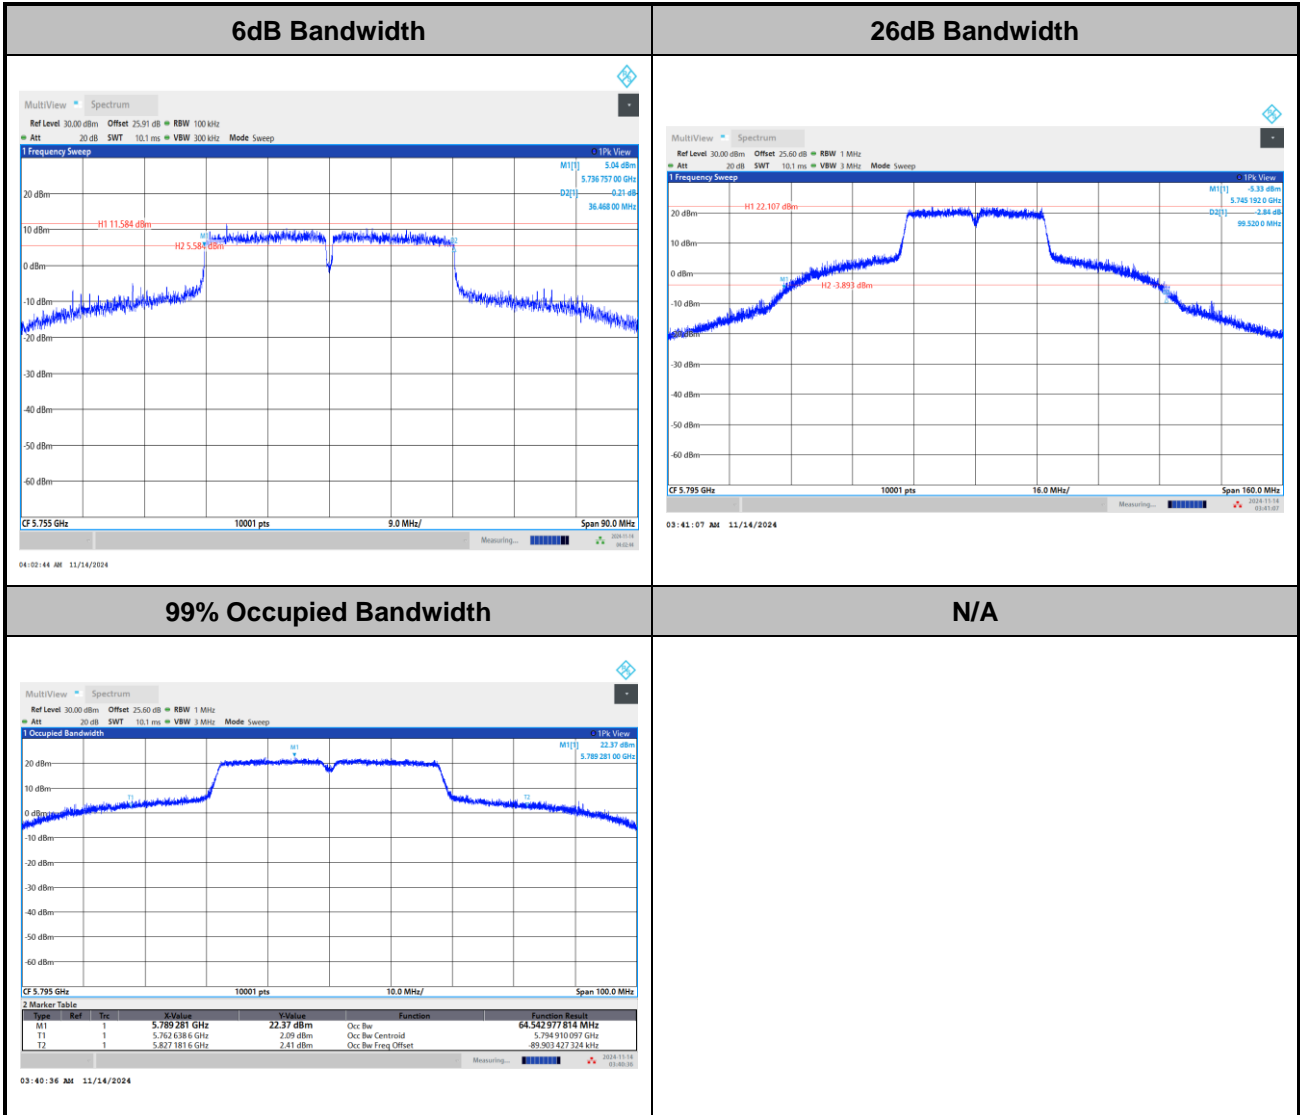




<802.11ac VHT80>


6dB Bandwidth

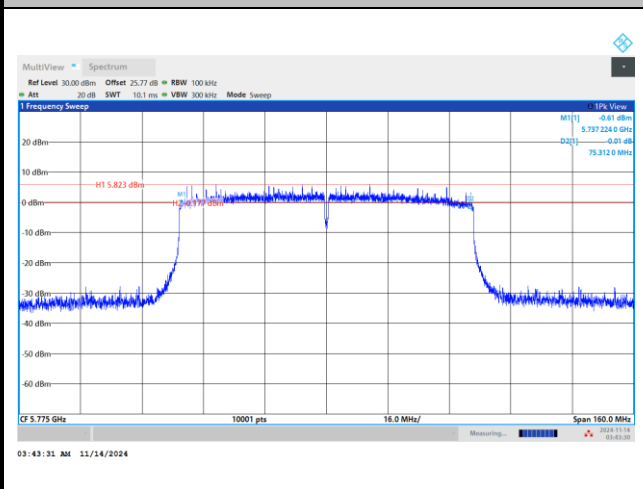

26dB Bandwidth

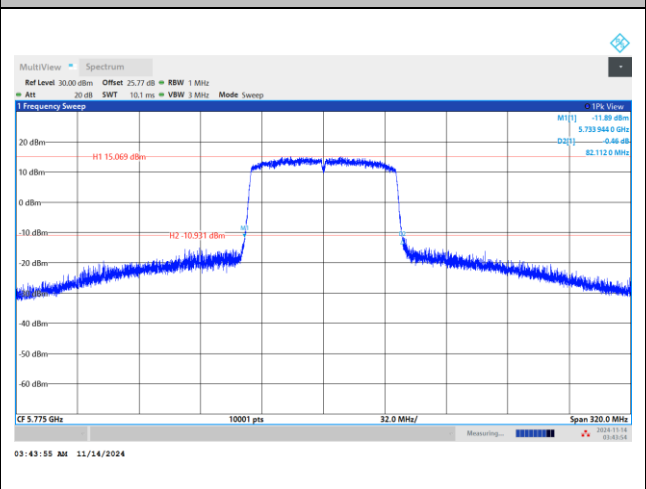


99% Occupied Bandwidth

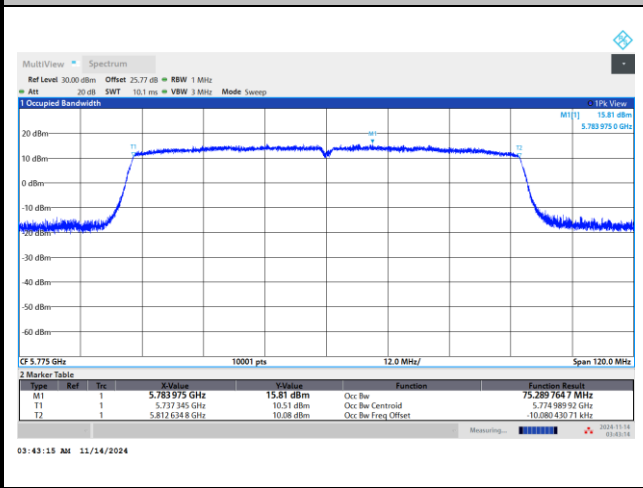

N/A




<802.11ax HE20>

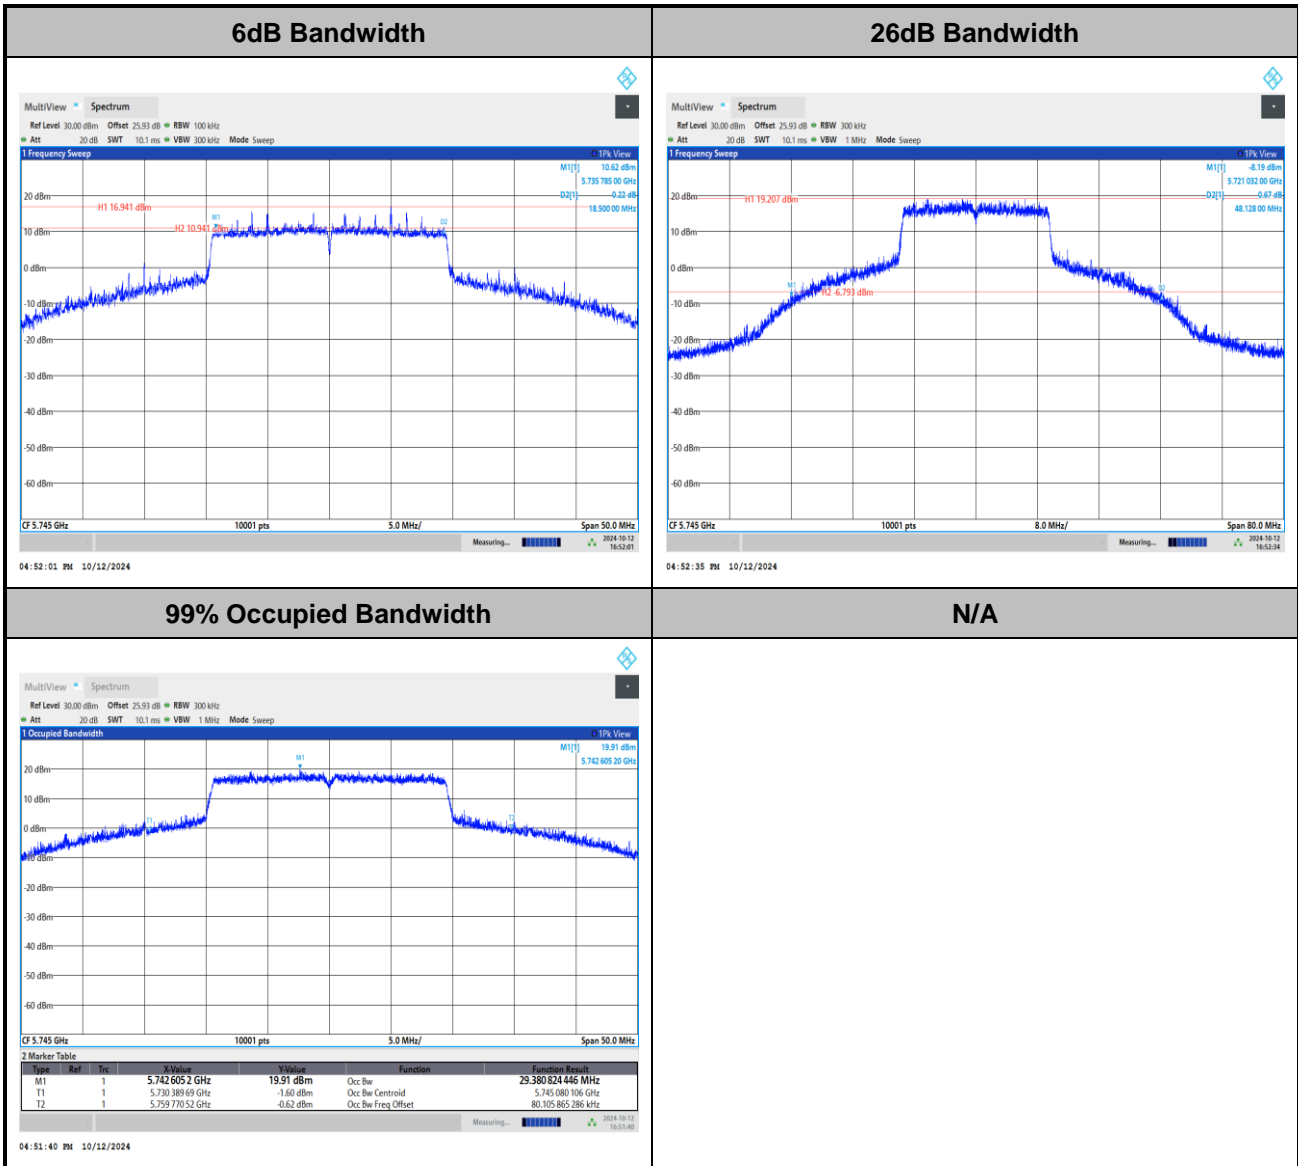




<802.11ax HE40>

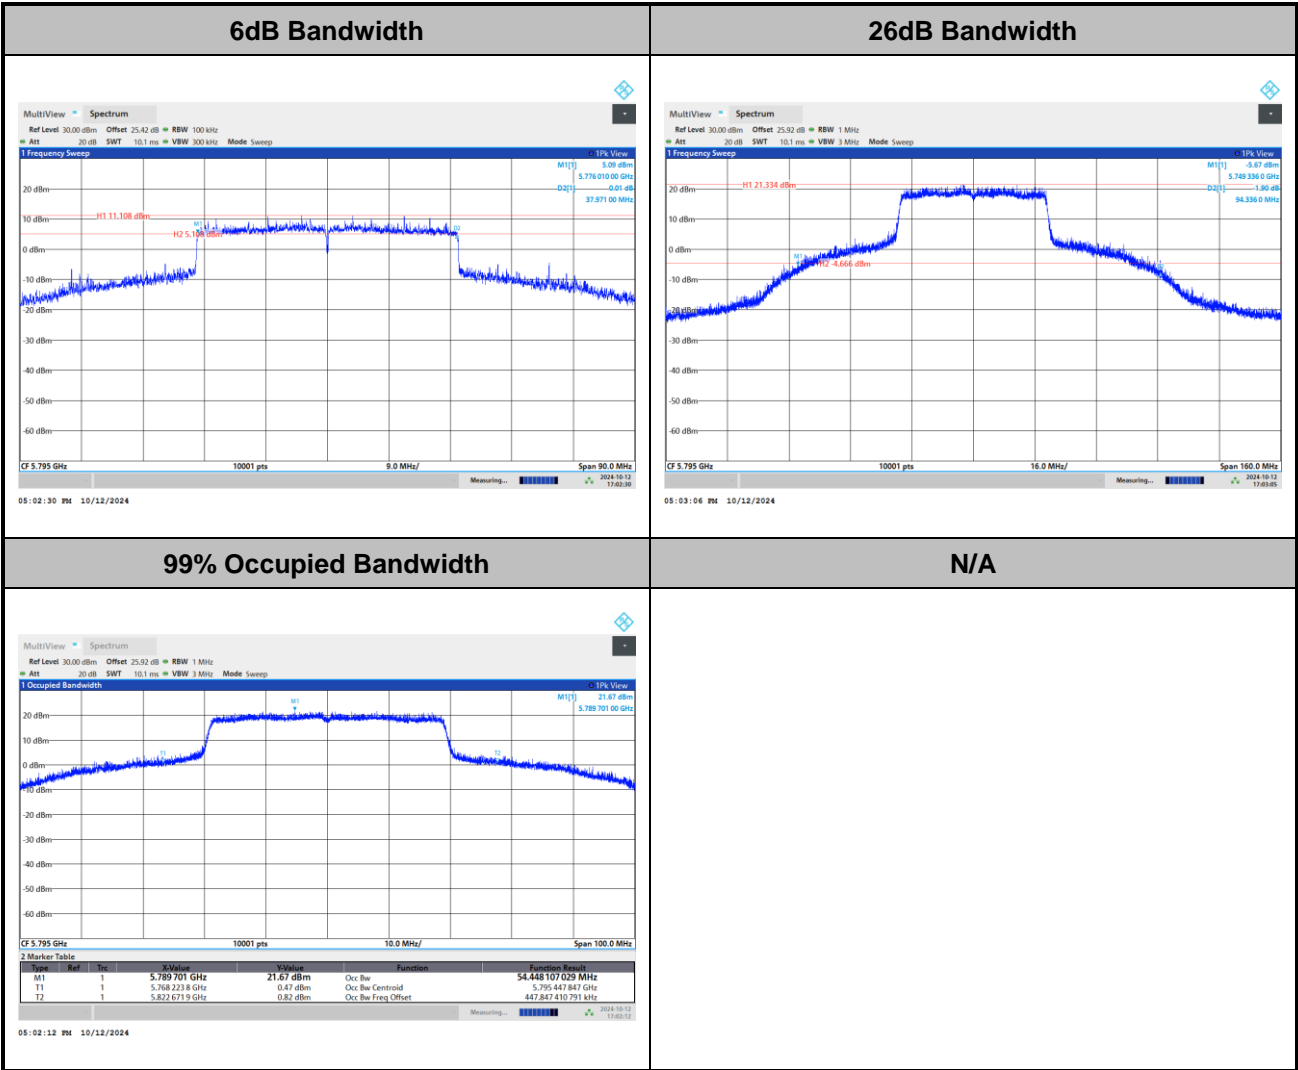




<802.11ax HE80>

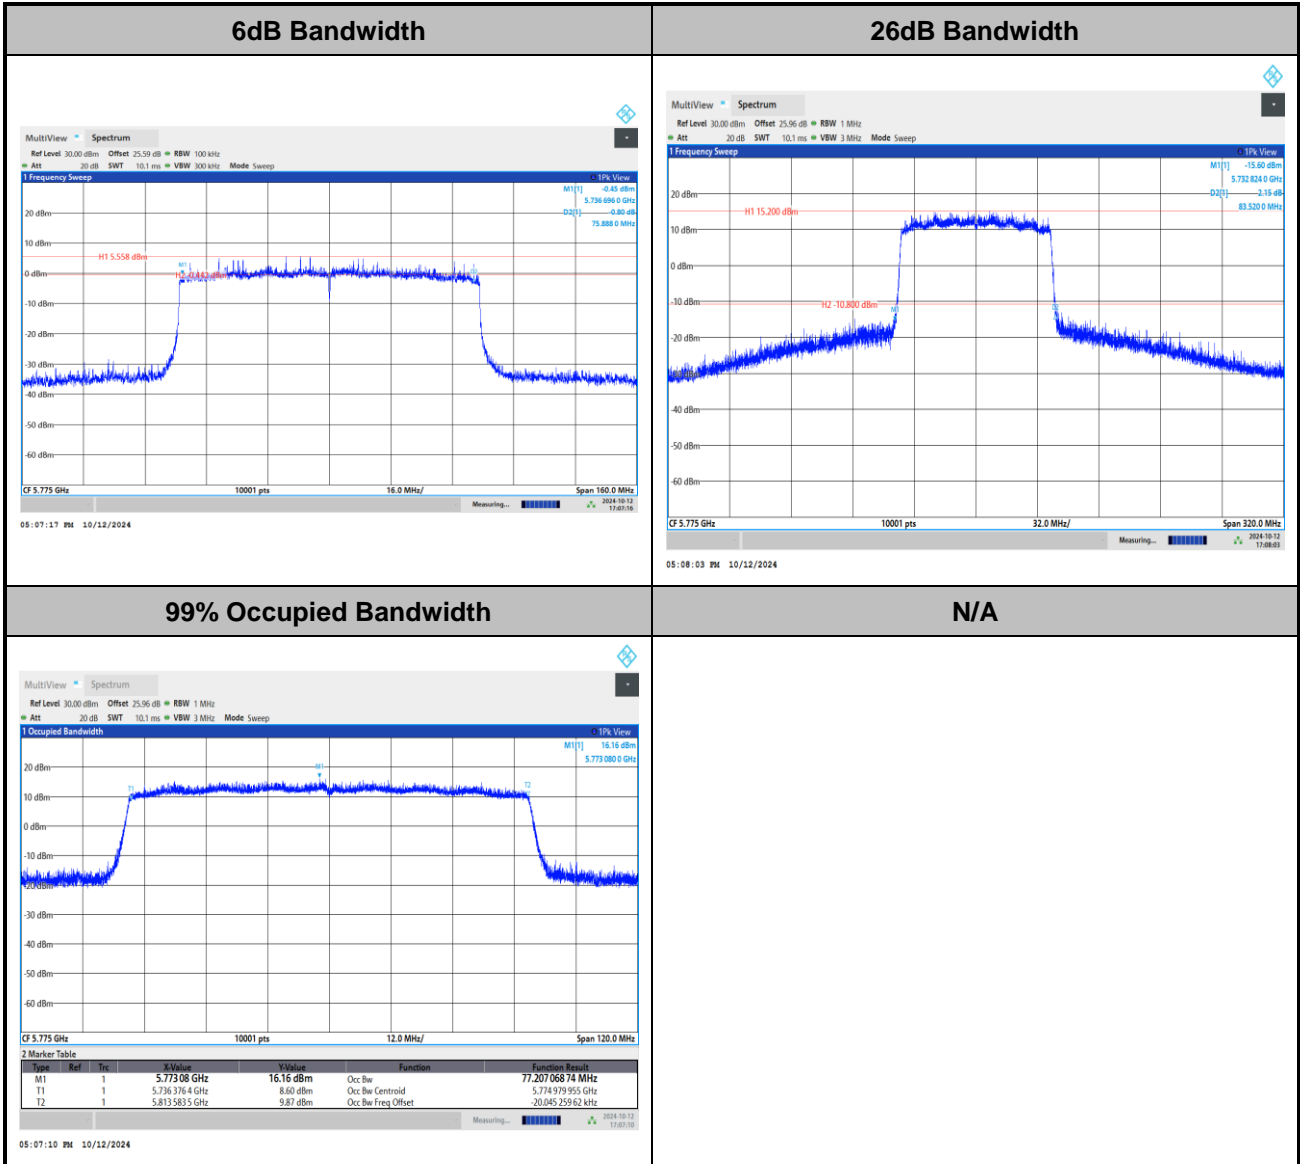




# Test Result of Power Spectral Density

<802.11a>

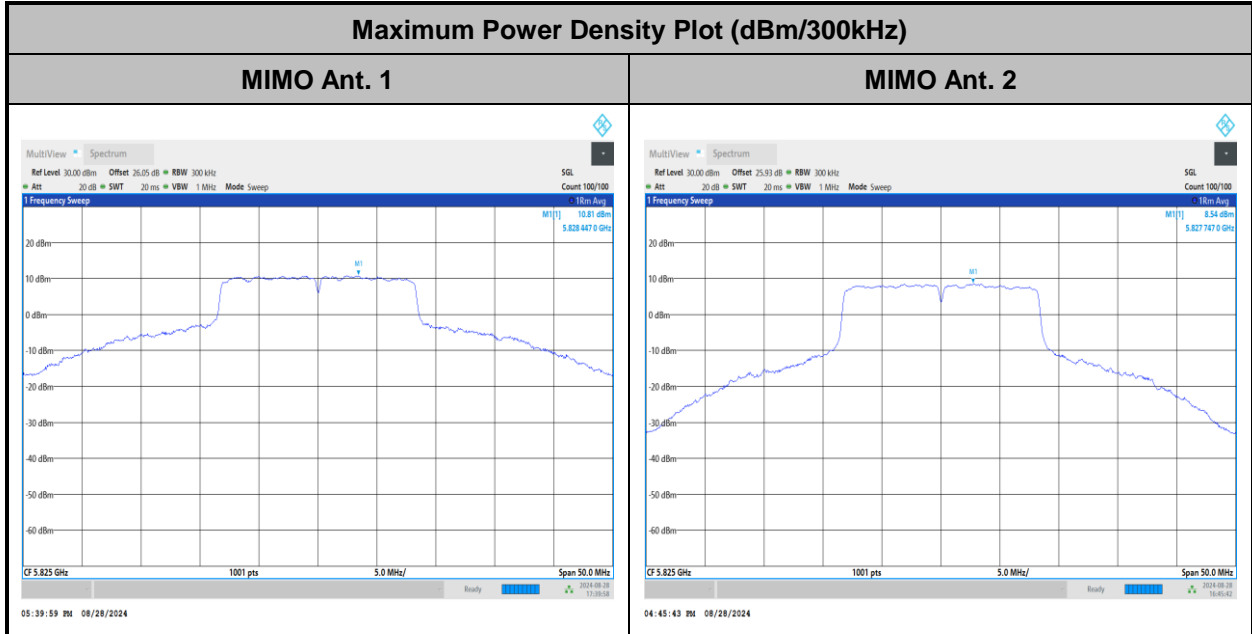


<802.11n HT20>

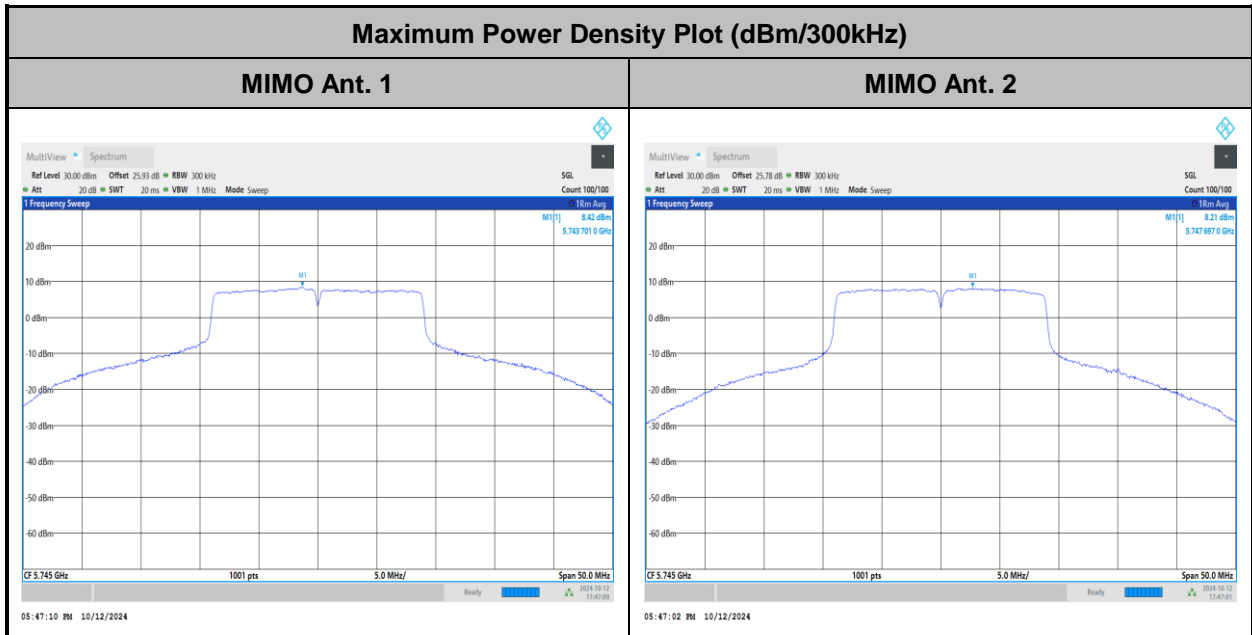




<802.11n HT40>

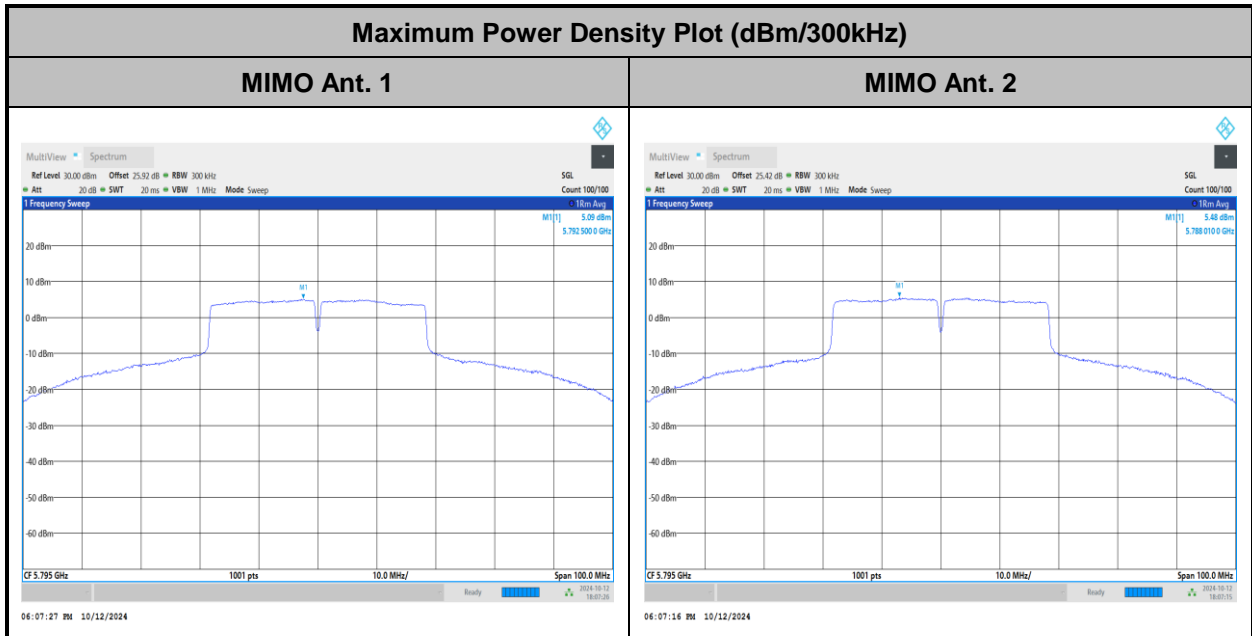


<802.11ac VHT80>

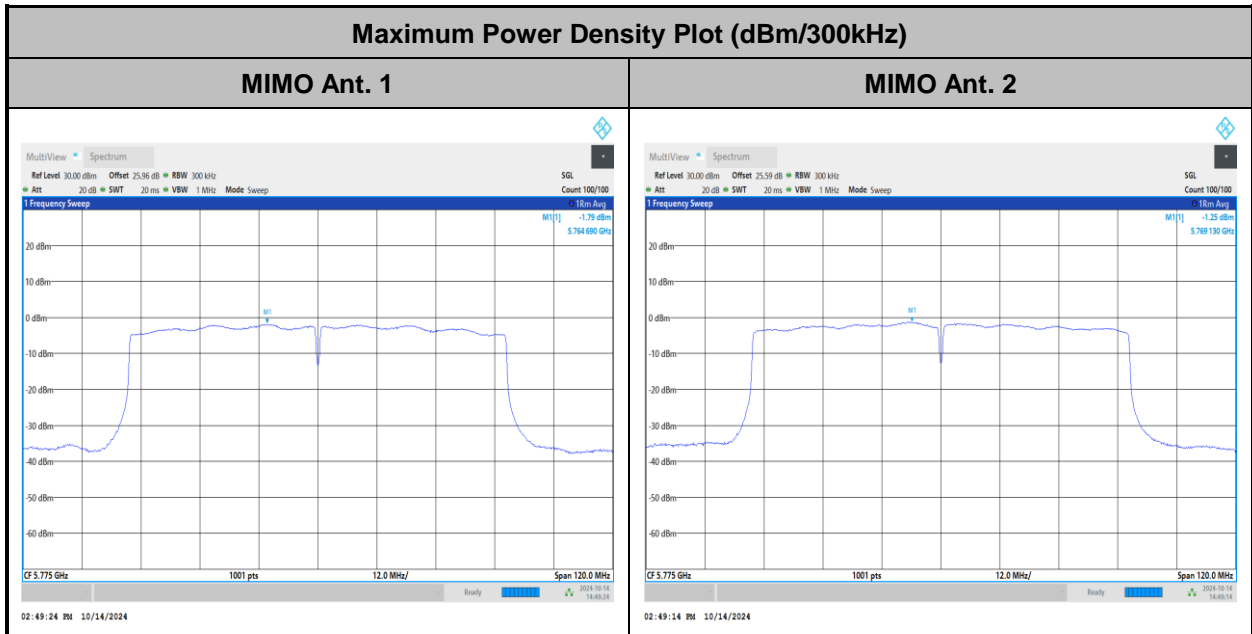




<802.11ax HE20>

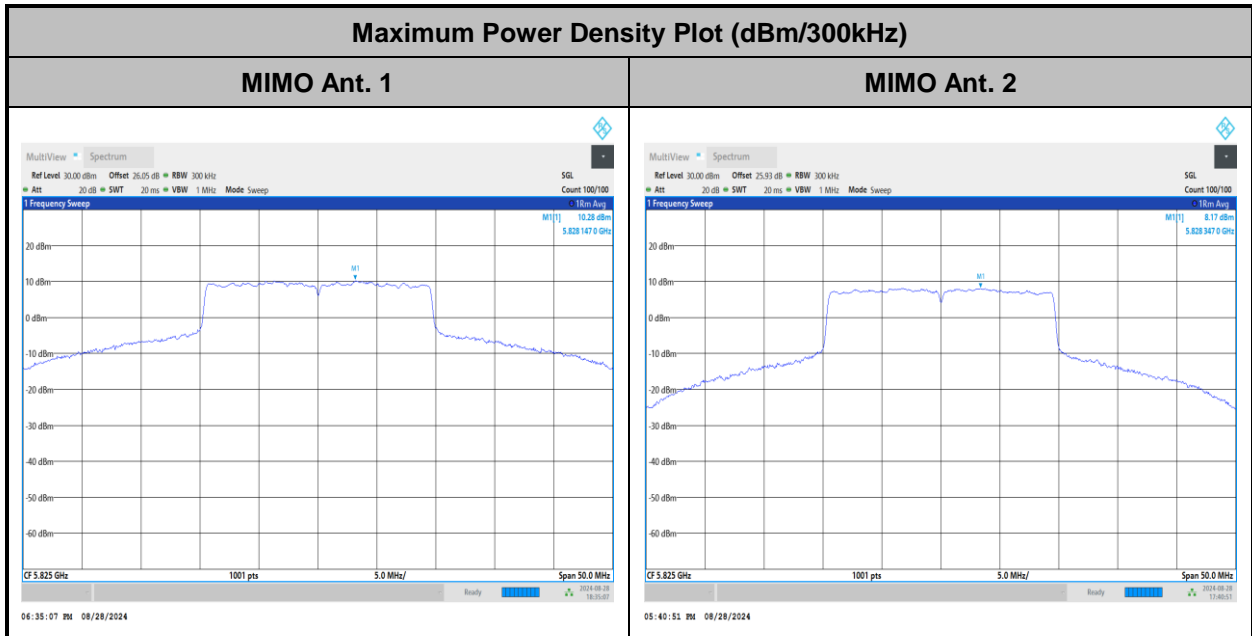


<802.11ax HE40>

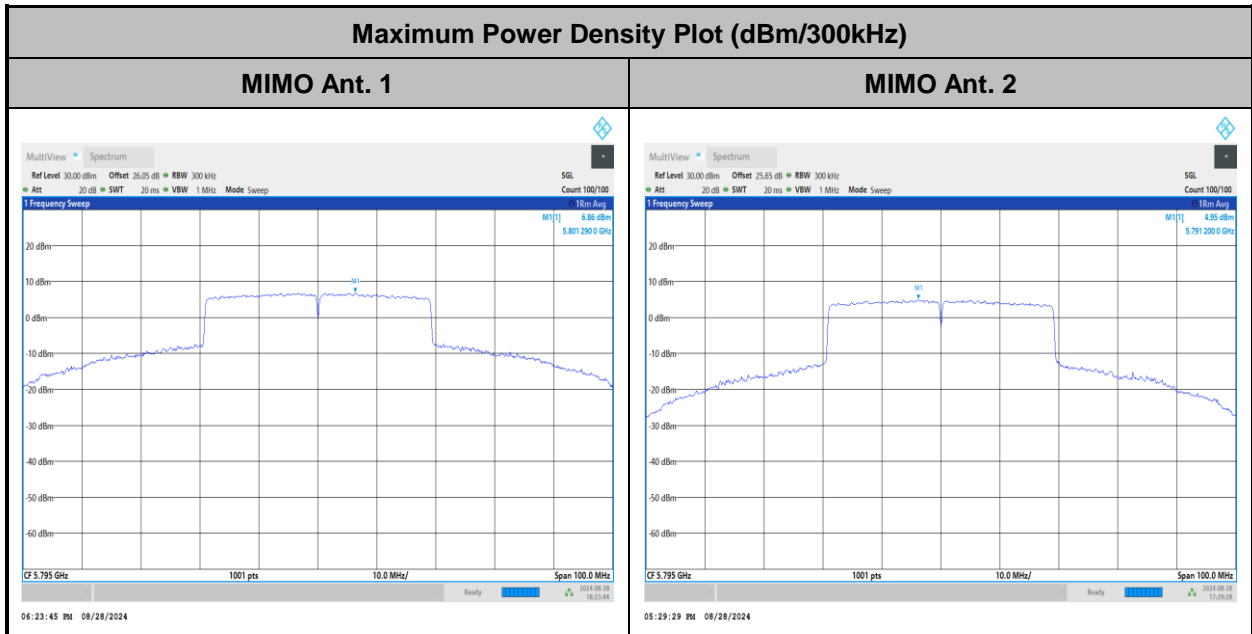





<802.11ax HE80>

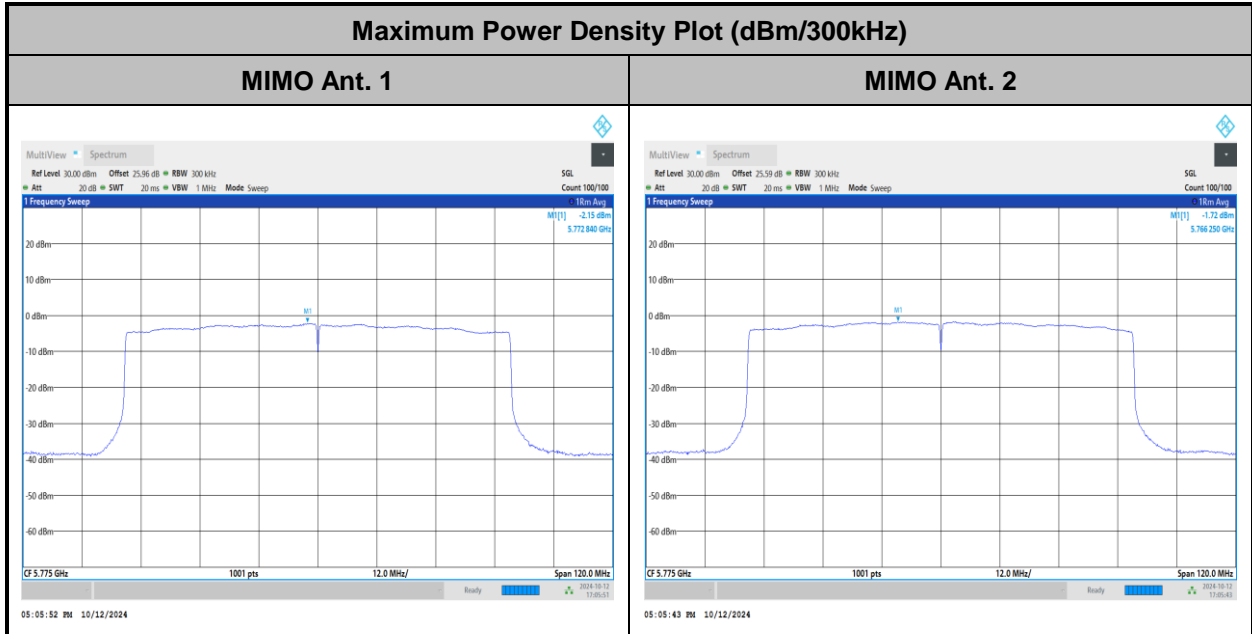




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23.7~26.8°C
		Relative Humidity :	40.2~48.6%

### EUT Information

Report NO : 471026  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

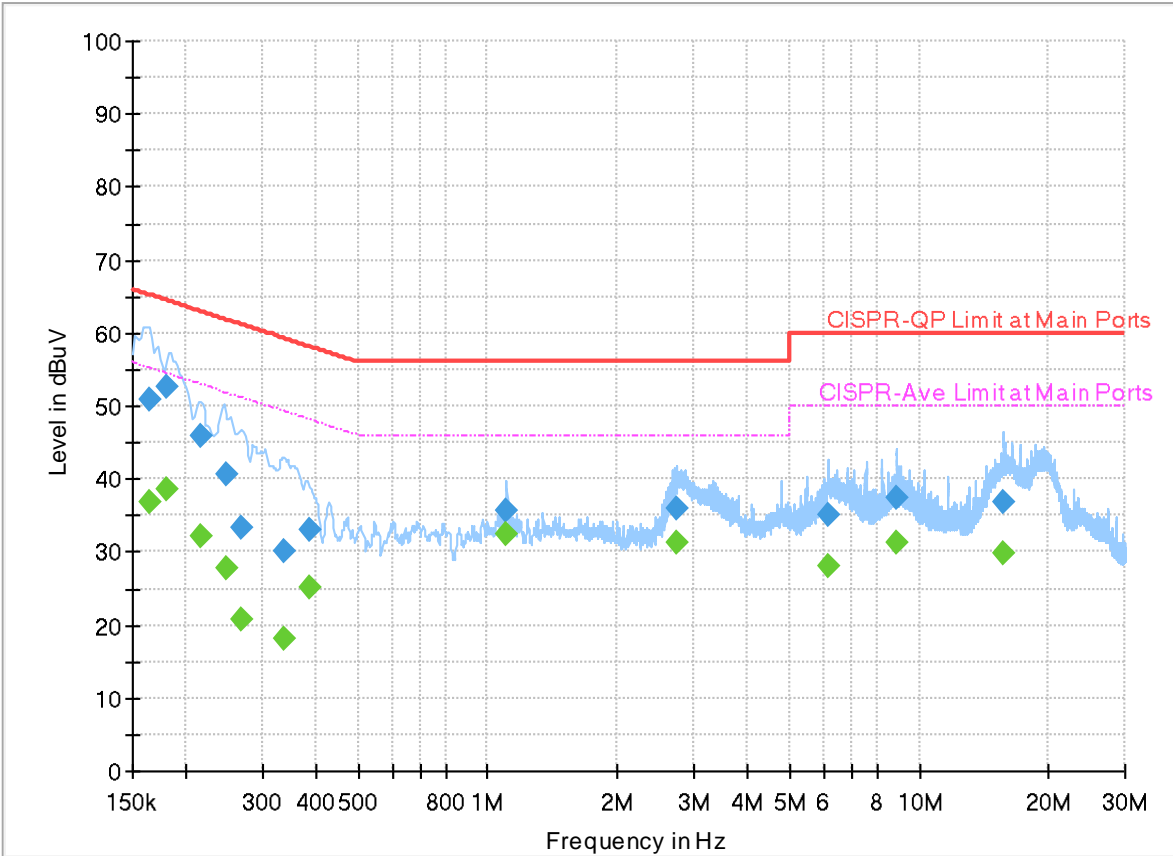

### Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.163500	---	36.85	55.28	18.43	L1	FLO	19.9
0.163500	50.86	---	65.28	14.42	L1	FLO	19.9
0.179250	---	38.49	54.52	16.03	L1	FLO	19.9
0.179250	52.64	---	64.52	11.88	L1	FLO	19.9
0.214800	---	32.19	53.02	20.83	L1	FLO	19.9
0.214800	45.92	---	63.02	17.10	L1	FLO	19.9
0.249000	---	27.90	51.79	23.89	L1	FLO	19.9
0.249000	40.70	---	61.79	21.09	L1	FLO	19.9
0.266910	---	20.82	51.21	30.39	L1	FLO	19.9
0.266910	33.33	---	61.21	27.88	L1	FLO	19.9
0.337110	---	18.19	49.27	31.08	L1	FLO	19.9
0.337110	30.18	---	59.27	29.09	L1	FLO	19.9
0.386250	---	25.17	48.14	22.97	L1	FLO	19.9
0.386250	32.96	---	58.14	25.18	L1	FLO	19.9
1.101570	---	32.51	46.00	13.49	L1	FLO	19.9
1.101570	35.56	---	56.00	20.44	L1	FLO	19.9
2.735880	---	31.27	46.00	14.73	L1	FLO	20.0
2.735880	36.09	---	56.00	19.91	L1	FLO	20.0
6.159750	---	28.18	50.00	21.82	L1	FLO	20.0

6.159750	34.99	---	60.00	25.01	L1	FLO	20.0
8.904300	---	31.15	50.00	18.85	L1	FLO	20.1
8.904300	37.53	---	60.00	22.47	L1	FLO	20.1
15.727020	---	29.74	50.00	20.26	L1	FLO	20.1
15.727020	36.86	---	60.00	23.14	L1	FLO	20.1

### EUT Information

Report NO : 471026  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

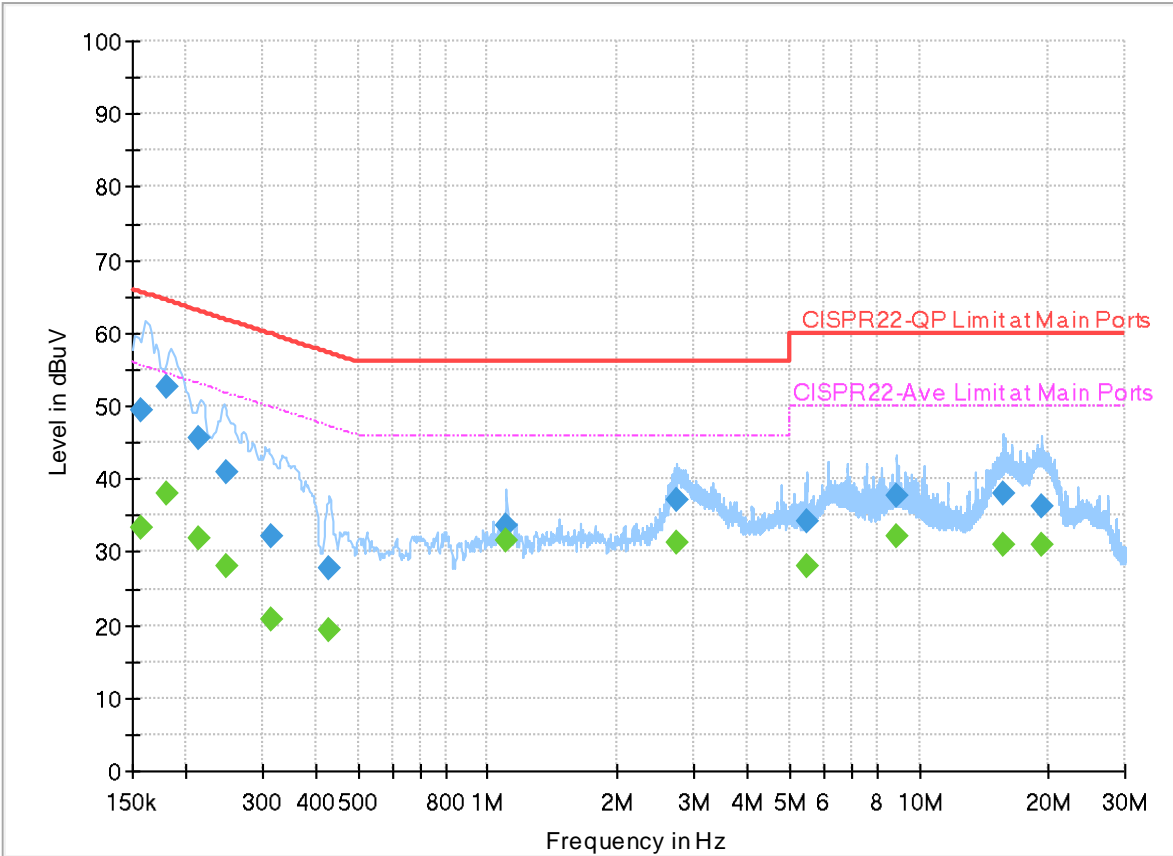

### Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	33.40	55.63	22.23	N	FLO	19.9
0.156750	49.34	---	65.63	16.29	N	FLO	19.9
0.180060	---	37.88	54.48	16.60	N	FLO	19.9
0.180060	52.54	---	64.48	11.94	N	FLO	19.9
0.212460	---	31.97	53.11	21.14	N	FLO	19.9
0.212460	45.58	---	63.11	17.53	N	FLO	19.9
0.248730	---	27.96	51.80	23.84	N	FLO	19.9
0.248730	41.02	---	61.80	20.78	N	FLO	19.9
0.313800	---	20.70	49.87	29.17	N	FLO	19.9
0.313800	32.02	---	59.87	27.85	N	FLO	19.9
0.429360	---	19.42	47.27	27.85	N	FLO	19.9
0.429360	27.92	---	57.27	29.35	N	FLO	19.9
1.101930	---	31.50	46.00	14.50	N	FLO	19.9
1.101930	33.72	---	56.00	22.28	N	FLO	19.9
2.733270	---	31.40	46.00	14.60	N	FLO	20.0
2.733270	37.12	---	56.00	18.88	N	FLO	20.0
5.480250	---	28.11	50.00	21.89	N	FLO	20.0
5.480250	34.22	---	60.00	25.78	N	FLO	20.0
8.911500	---	32.04	50.00	17.96	N	FLO	20.1

8.911500	37.75	---	60.00	22.25	N	FLO	20.1
15.737820	---	31.09	50.00	18.91	N	FLO	20.2
15.737820	37.95	---	60.00	22.05	N	FLO	20.2
19.152870	---	30.99	50.00	19.01	N	FLO	20.2
19.152870	36.17	---	60.00	23.83	N	FLO	20.2



### Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jack Cheng, Ray Lung, Sky Chang and White Hou	Temperature :	18~26°C
		Relative Humidity :	50~70%

#### Note symbol

-L	Low channel location
-R	High channel location

### C1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 59	U-NII-3	5.725-5.85	1+2	802.11a	149	5745	6Mbps	-	-
Mode 60	U-NII-3	5.725-5.85	1+2	802.11a	157	5785	6Mbps	-	-
Mode 61	U-NII-3	5.725-5.85	1+2	802.11a	165	5825	6Mbps	-	-
Mode 62	U-NII-3	5.725-5.85	1+2	802.11n HT20	149	5745	MCS0	-	-
Mode 63	U-NII-3	5.725-5.85	1+2	802.11n HT20	157	5785	MCS0	-	-
Mode 64	U-NII-3	5.725-5.85	1+2	802.11n HT20	165	5825	MCS0	-	-
Mode 65	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	-	-
Mode 66	U-NII-3	5.725-5.85	1+2	802.11ax HE20	157	5785	MCS0	-	-
Mode 67	U-NII-3	5.725-5.85	1+2	802.11ax HE20	165	5825	MCS0	-	-
Mode 68	U-NII-3	5.725-5.85	1+2	802.11n HT40	151	5755	MCS0	-	-
Mode 69	U-NII-3	5.725-5.85	1+2	802.11n HT40	159	5795	MCS0	-	-
Mode 70	U-NII-3	5.725-5.85	1+2	802.11ax HE40	151	5755	MCS0	-	-
Mode 71	U-NII-3	5.725-5.85	1+2	802.11ax HE40	159	5795	MCS0	-	-
Mode 72	U-NII-3	5.725-5.85	1+2	802.11ac VHT80	155	5775	MCS0	-	-
Mode 73	U-NII-3	5.725-5.85	1+2	802.11ax HE80	155	5775	MCS0	-	-
Mode 74	U-NII-3	5.725-5.85	1+2	802.11ax HE40	159	5795	MCS0	-	LF
Mode 75	U-NII-3	5.725-5.85	1+2	802.11ax HE40	159	5795	MCS0	-	SHF






**C2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
59	802.11a	149	5640.60	53.05	68.20	-15.15	V	Peak	Pass	-	Band Edge
	802.11a	149	11490.00	49.55	54.00	-4.45	H	Avg.	Pass	-	Harmonic
60	802.11a	157	5600.19	54.09	68.20	-14.11	V	Peak	Pass	-	Band Edge
	802.11a	157	11570.00	49.03	54.00	-4.97	H	Avg.	Pass	-	Harmonic
61	802.11a	165	5925.75	55.93	68.20	-12.27	V	Peak	Pass	-	Band Edge
	802.11a	165	11650.00	47.77	54.00	-6.23	H	Avg.	Pass	-	Harmonic
62	802.11n HT20	149	5646.11	54.35	68.20	-13.85	V	Peak	Pass	-	Band Edge
	802.11n HT20	149	-	-	-	-	-	-	-	-	Harmonic
63	802.11n HT20	157	-	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	157	11570.00	48.47	54.00	-5.53	H	Avg.	Pass	-	Harmonic
64	802.11n HT20	165	5933.13	56.97	68.20	-11.23	V	Peak	Pass	-	Band Edge
	802.11n HT20	165	-	-	-	-	-	-	-	-	Harmonic
65	802.11ax HE20	149	5640.02	53.43	68.20	-14.77	V	Peak	Pass	-	Band Edge
	802.11ax HE20	149	11490.00	46.02	54.00	-7.98	H	Avg.	Pass	-	Harmonic
66	802.11ax HE20	157	5637.74	54.43	68.20	-13.77	V	Peak	Pass	-	Band Edge
	802.11ax HE20	157	11570.00	46.66	54.00	-7.34	V	Avg.	Pass	-	Harmonic
67	802.11ax HE20	165	5937.38	55.88	68.20	-12.32	V	Peak	Pass	-	Band Edge
	802.11ax HE20	165	11650.00	48.13	54.00	-5.87	V	Avg.	Pass	-	Harmonic
68	802.11n HT40	151	5643.87	63.06	68.20	-5.14	V	Peak	Pass	-	Band Edge
	802.11n HT40	151	11510.00	46.40	54.00	-7.60	H	Avg.	Pass	-	Harmonic
69	802.11n HT40	159	5932.80	63.92	68.20	-4.28	V	Peak	Pass	-	Band Edge
	802.11n HT40	159	11590.00	47.57	54.00	-6.43	H	Avg.	Pass	-	Harmonic
70	802.11ax HE40	151	5650.07	62.75	68.25	-5.50	V	Peak	Pass	-	Band Edge
	802.11ax HE40	151	11510.00	43.99	54.00	-10.01	V	Avg.	Pass	-	Harmonic
71	802.11ax HE40	159	5922.72	66.75	69.88	-3.13	V	Peak	Pass	-	Band Edge
	802.11ax HE40	159	11590.00	42.14	54.00	-11.86	V	Avg.	Pass	-	Harmonic
72	802.11ac VHT80	155	5651.28	64.02	69.15	-5.13	V	Peak	Pass	-	Band Edge
	802.11ac VHT80	155	11550.00	42.47	54.00	-11.53	H	Avg.	Pass	-	Harmonic
73	802.11ax HE80	155	5650.23	62.46	68.37	-5.91	V	Peak	Pass	-	Band Edge
73	802.11ax HE80	155	11550.00	42.52	54.00	-11.48	H	Avg.	Pass	-	Harmonic
	802.11ax HE80	155	11550.00	42.52	54.00	-11.48	H	Avg.	Pass	-	Harmonic
74	LF	159	718.70	39.12	46.00	-6.88	V	Peak	Pass	-	LF
75	SHF	159	38833.91	41.69	54.00	-12.31	H	Avg.	Pass	-	SHF



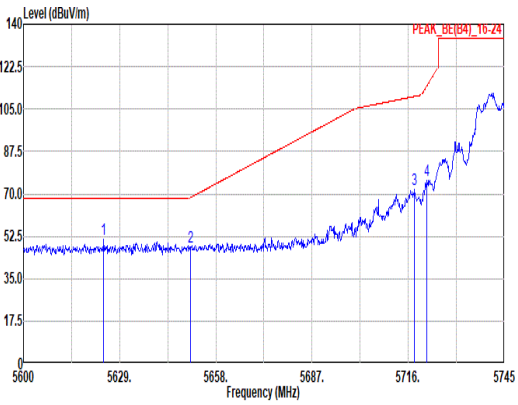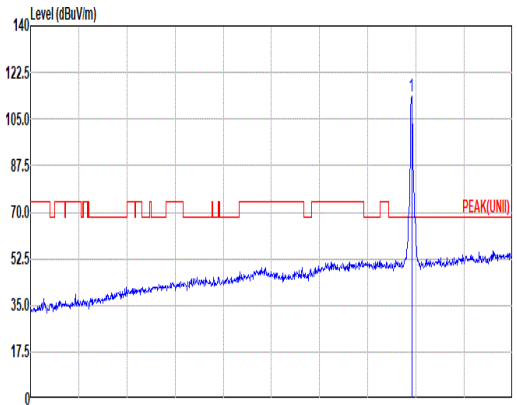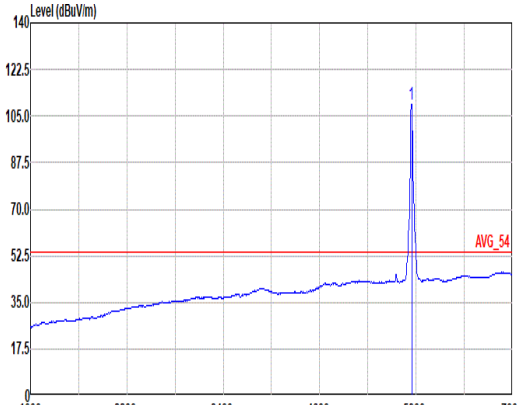

	<b>59</b>																																																																																																																						
<b>Mode</b>	<b>Band Edge</b>																																																																																																																						
	<b>U-NII-3_5.725-5.85_802.11a_CH149_5745MHz</b>																																																																																																																						
<b>ANT</b>	<b>1+2</b>																																																																																																																						
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																																																					
<b>Peak</b>	 <p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5624.22</td> <td>51.16</td> <td>68.20</td> <td>-17.04</td> <td>39.47</td> <td>33.05</td> <td>13.58</td> <td>34.94</td> <td>0.00</td> <td>115</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>48.14</td> <td>68.43</td> <td>-20.29</td> <td>36.29</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>115</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5717.89</td> <td>71.93</td> <td>110.21</td> <td>-38.28</td> <td>59.69</td> <td>33.57</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>115</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.66</td> <td>75.46</td> <td>114.57</td> <td>-39.11</td> <td>63.19</td> <td>33.59</td> <td>13.70</td> <td>35.02</td> <td>0.00</td> <td>115</td> <td>336</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5624.22	51.16	68.20	-17.04	39.47	33.05	13.58	34.94	0.00	115	336	PEAK	2	5650.32	48.14	68.43	-20.29	36.29	33.20	13.61	34.96	0.00	115	336	PEAK	3	5717.89	71.93	110.21	-38.28	59.69	33.57	13.69	35.02	0.00	115	336	PEAK	4	5721.66	75.46	114.57	-39.11	63.19	33.59	13.70	35.02	0.00	115	336	PEAK	 <p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>113.52</td> <td>-----</td> <td>-----</td> <td>101.14</td> <td>33.70</td> <td>13.73</td> <td>35.05</td> <td>0.00</td> <td>115</td> <td>336</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5745.00	113.52	-----	-----	101.14	33.70	13.73	35.05	0.00	115	336	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5624.22	51.16	68.20	-17.04	39.47	33.05	13.58	34.94	0.00	115	336	PEAK																																																																																																											
2	5650.32	48.14	68.43	-20.29	36.29	33.20	13.61	34.96	0.00	115	336	PEAK																																																																																																											
3	5717.89	71.93	110.21	-38.28	59.69	33.57	13.69	35.02	0.00	115	336	PEAK																																																																																																											
4	5721.66	75.46	114.57	-39.11	63.19	33.59	13.70	35.02	0.00	115	336	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5745.00	113.52	-----	-----	101.14	33.70	13.73	35.05	0.00	115	336	PEAK																																																																																																											
<b>Avg</b>	<b>Blank</b>	 <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.43</td> <td>-----</td> <td>-----</td> <td>97.09</td> <td>33.66</td> <td>13.72</td> <td>35.04</td> <td>0.00</td> <td>115</td> <td>336</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5745.00	109.43	-----	-----	97.09	33.66	13.72	35.04	0.00	115	336	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5745.00	109.43	-----	-----	97.09	33.66	13.72	35.04	0.00	115	336	AVERAGE																																																																																																											



	<b>59</b>																																																																																																																						
<b>Mode</b>	<b>Band Edge</b>																																																																																																																						
	<b>U-NII-3_5.725-5.85_802.11a_CH149_5745MHz</b>																																																																																																																						
<b>ANT</b>	<b>1+2</b>																																																																																																																						
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																																																					
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.60</td> <td>53.05</td> <td>68.20</td> <td>-15.15</td> <td>41.26</td> <td>33.14</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.06</td> <td>51.83</td> <td>69.73</td> <td>-17.90</td> <td>39.97</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.63</td> <td>84.49</td> <td>110.70</td> <td>-26.21</td> <td>72.24</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5723.69</td> <td>93.92</td> <td>119.20</td> <td>-25.28</td> <td>81.65</td> <td>33.59</td> <td>13.70</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5640.60	53.05	68.20	-15.15	41.26	33.14	13.60	34.95	0.00	100	302	PEAK	2	5652.06	51.83	69.73	-17.90	39.97	33.21	13.61	34.96	0.00	100	302	PEAK	3	5719.63	84.49	110.70	-26.21	72.24	33.58	13.69	35.02	0.00	100	302	PEAK	4	5723.69	93.92	119.20	-25.28	81.65	33.59	13.70	35.02	0.00	100	302	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>122.29</td> <td>-----</td> <td>-----</td> <td>109.92</td> <td>33.68</td> <td>13.73</td> <td>35.04</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	122.29	-----	-----	109.92	33.68	13.73	35.04	0.00	100	302	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5640.60	53.05	68.20	-15.15	41.26	33.14	13.60	34.95	0.00	100	302	PEAK																																																																																																											
2	5652.06	51.83	69.73	-17.90	39.97	33.21	13.61	34.96	0.00	100	302	PEAK																																																																																																											
3	5719.63	84.49	110.70	-26.21	72.24	33.58	13.69	35.02	0.00	100	302	PEAK																																																																																																											
4	5723.69	93.92	119.20	-25.28	81.65	33.59	13.70	35.02	0.00	100	302	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	122.29	-----	-----	109.92	33.68	13.73	35.04	0.00	100	302	PEAK																																																																																																											
<b>Avg</b>	<b>Blank</b>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>117.30</td> <td>-----</td> <td>-----</td> <td>104.93</td> <td>33.68</td> <td>13.73</td> <td>35.04</td> <td>0.00</td> <td>100</td> <td>302</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	117.30	-----	-----	104.93	33.68	13.73	35.04	0.00	100	302	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	117.30	-----	-----	104.93	33.68	13.73	35.04	0.00	100	302	AVERAGE																																																																																																											



Mode	59																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>55.00</td> <td>74.00</td> <td>-19.00</td> <td>37.17</td> <td>38.50</td> <td>19.50</td> <td>40.61</td> <td>0.44</td> <td>111</td> <td>250</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>49.55</td> <td>54.00</td> <td>-4.45</td> <td>31.72</td> <td>38.50</td> <td>19.50</td> <td>40.61</td> <td>0.44</td> <td>111</td> <td>250</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>57.38</td> <td>68.20</td> <td>-10.82</td> <td>40.21</td> <td>39.87</td> <td>24.01</td> <td>47.17</td> <td>0.46</td> <td>200</td> <td>120</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	55.00	74.00	-19.00	37.17	38.50	19.50	40.61	0.44	111	250	PEAK	2	11490.00	49.55	54.00	-4.45	31.72	38.50	19.50	40.61	0.44	111	250	AVERAGE	3	17235.00	57.38	68.20	-10.82	40.21	39.87	24.01	47.17	0.46	200	120	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>55.83</td> <td>74.00</td> <td>-18.17</td> <td>38.00</td> <td>38.50</td> <td>19.50</td> <td>40.61</td> <td>0.44</td> <td>288</td> <td>202</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>48.88</td> <td>54.00</td> <td>-5.12</td> <td>31.05</td> <td>38.50</td> <td>19.50</td> <td>40.61</td> <td>0.44</td> <td>288</td> <td>202</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>56.39</td> <td>68.20</td> <td>-11.81</td> <td>39.22</td> <td>39.87</td> <td>24.01</td> <td>47.17</td> <td>0.46</td> <td>100</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	55.83	74.00	-18.17	38.00	38.50	19.50	40.61	0.44	288	202	PEAK	2	11490.00	48.88	54.00	-5.12	31.05	38.50	19.50	40.61	0.44	288	202	AVERAGE	3	17235.00	56.39	68.20	-11.81	39.22	39.87	24.01	47.17	0.46	100	169	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11490.00	55.00	74.00	-19.00	37.17	38.50	19.50	40.61	0.44	111	250	PEAK																																																																																																																												
2	11490.00	49.55	54.00	-4.45	31.72	38.50	19.50	40.61	0.44	111	250	AVERAGE																																																																																																																												
3	17235.00	57.38	68.20	-10.82	40.21	39.87	24.01	47.17	0.46	200	120	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11490.00	55.83	74.00	-18.17	38.00	38.50	19.50	40.61	0.44	288	202	PEAK																																																																																																																												
2	11490.00	48.88	54.00	-5.12	31.05	38.50	19.50	40.61	0.44	288	202	AVERAGE																																																																																																																												
3	17235.00	56.39	68.20	-11.81	39.22	39.87	24.01	47.17	0.46	100	169	PEAK																																																																																																																												



Mode	59	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>






Mode	60																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																						
ANT	1+2																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5630.85</td> <td>49.14</td> <td>68.20</td> <td>-19.06</td> <td>37.36</td> <td>33.13</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.14</td> <td>46.96</td> <td>68.30</td> <td>-21.34</td> <td>35.11</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.01</td> <td>48.36</td> <td>105.48</td> <td>-57.12</td> <td>36.19</td> <td>33.50</td> <td>13.67</td> <td>35.00</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.07</td> <td>53.09</td> <td>110.95</td> <td>-57.86</td> <td>40.84</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5630.85	49.14	68.20	-19.06	37.36	33.13	13.60	34.95	0.00	100	328	PEAK	2	5650.14	46.96	68.30	-21.34	35.11	33.20	13.61	34.96	0.00	100	328	PEAK	3	5701.01	48.36	105.48	-57.12	36.19	33.50	13.67	35.00	0.00	100	328	PEAK	4	5720.07	53.09	110.95	-57.86	40.84	33.58	13.69	35.02	0.00	100	328	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>113.75</td> <td>-----</td> <td>-----</td> <td>101.35</td> <td>33.70</td> <td>13.77</td> <td>35.07</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5785.00	113.75	-----	-----	101.35	33.70	13.77	35.07	0.00	100	328	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5630.85	49.14	68.20	-19.06	37.36	33.13	13.60	34.95	0.00	100	328	PEAK																																																																																																											
2	5650.14	46.96	68.30	-21.34	35.11	33.20	13.61	34.96	0.00	100	328	PEAK																																																																																																											
3	5701.01	48.36	105.48	-57.12	36.19	33.50	13.67	35.00	0.00	100	328	PEAK																																																																																																											
4	5720.07	53.09	110.95	-57.86	40.84	33.58	13.69	35.02	0.00	100	328	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5785.00	113.75	-----	-----	101.35	33.70	13.77	35.07	0.00	100	328	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>109.11</td> <td>-----</td> <td>-----</td> <td>96.71</td> <td>33.70</td> <td>13.77</td> <td>35.07</td> <td>0.00</td> <td>100</td> <td>328</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5785.00	109.11	-----	-----	96.71	33.70	13.77	35.07	0.00	100	328	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5785.00	109.11	-----	-----	96.71	33.70	13.77	35.07	0.00	100	328	AVERAGE																																																																																																											



Mode	60																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																												
ANT	1+2																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<p>Site : 03CH21-HY            Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5854.96</td> <td>49.13</td> <td>110.09</td> <td>-61.76</td> <td>36.71</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>2 5874.60</td> <td>50.33</td> <td>105.31</td> <td>-54.98</td> <td>37.90</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>3 5923.93</td> <td>48.79</td> <td>68.99</td> <td>-20.20</td> <td>36.39</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>4 5927.73</td> <td>50.34</td> <td>68.20</td> <td>-17.86</td> <td>37.96</td> <td>33.64</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5854.96	49.13	110.09	-61.76	36.71	33.70	13.86	35.14	0.00	100	328	PEAK	2 5874.60	50.33	105.31	-54.98	37.90	33.70	13.88	35.15	0.00	100	328	PEAK	3 5923.93	48.79	68.99	-20.20	36.39	33.65	13.94	35.19	0.00	100	328	PEAK	4 5927.73	50.34	68.20	-17.86	37.96	33.64	13.94	35.20	0.00	100	328	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																					
1 5854.96	49.13	110.09	-61.76	36.71	33.70	13.86	35.14	0.00	100	328	PEAK																																																																		
2 5874.60	50.33	105.31	-54.98	37.90	33.70	13.88	35.15	0.00	100	328	PEAK																																																																		
3 5923.93	48.79	68.99	-20.20	36.39	33.65	13.94	35.19	0.00	100	328	PEAK																																																																		
4 5927.73	50.34	68.20	-17.86	37.96	33.64	13.94	35.20	0.00	100	328	PEAK																																																																		

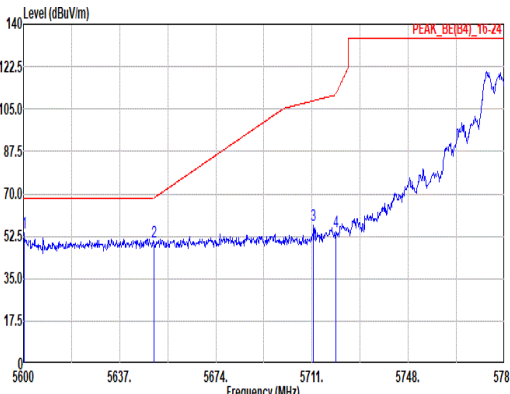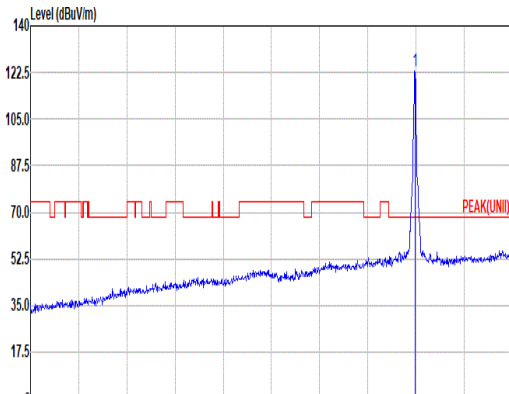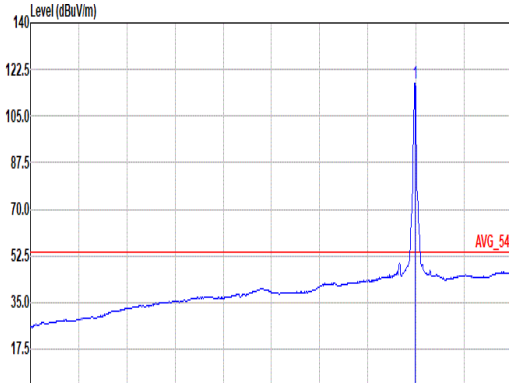

	<b>60</b>																																																																																																																														
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																																														
<b>ANT</b>	<b>U-NII-3_5.725-5.85_802.11a_CH157_5785MHz</b>																																																																																																																														
<b>ANT</b>	<b>1+2</b>																																																																																																																														
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																																																													
<b>Peak</b>	 <p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5600.19</td> <td>54.09</td> <td>68.20</td> <td>-14.11</td> <td>42.56</td> <td>32.90</td> <td>13.55</td> <td>34.92</td> <td>0.00</td> <td>100</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>49.94</td> <td>68.44</td> <td>-18.50</td> <td>38.09</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5711.56</td> <td>57.07</td> <td>108.44</td> <td>-51.37</td> <td>44.85</td> <td>33.55</td> <td>13.68</td> <td>35.01</td> <td>0.00</td> <td>100</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.07</td> <td>54.31</td> <td>110.95</td> <td>-56.64</td> <td>42.06</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>285</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5600.19	54.09	68.20	-14.11	42.56	32.90	13.55	34.92	0.00	100	285	PEAK	2	5650.32	49.94	68.44	-18.50	38.09	33.20	13.61	34.96	0.00	100	285	PEAK	3	5711.56	57.07	108.44	-51.37	44.85	33.55	13.68	35.01	0.00	100	285	PEAK	4	5720.07	54.31	110.95	-56.64	42.06	33.58	13.69	35.02	0.00	100	285	PEAK	 <p>Site : 03CH21-HY Condition: PEAK(U-NII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>123.20</td> <td>-----</td> <td>-----</td> <td>110.80</td> <td>33.70</td> <td>13.77</td> <td>35.07</td> <td>0.00</td> <td>100</td> <td>285</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	123.20	-----	-----	110.80	33.70	13.77	35.07	0.00	100	285	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5600.19	54.09	68.20	-14.11	42.56	32.90	13.55	34.92	0.00	100	285	PEAK																																																																																																																			
2	5650.32	49.94	68.44	-18.50	38.09	33.20	13.61	34.96	0.00	100	285	PEAK																																																																																																																			
3	5711.56	57.07	108.44	-51.37	44.85	33.55	13.68	35.01	0.00	100	285	PEAK																																																																																																																			
4	5720.07	54.31	110.95	-56.64	42.06	33.58	13.69	35.02	0.00	100	285	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5785.00	123.20	-----	-----	110.80	33.70	13.77	35.07	0.00	100	285	PEAK																																																																																																																			
<b>Avg</b>	<b>Blank</b>	 <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>117.07</td> <td>-----</td> <td>-----</td> <td>104.60</td> <td>33.70</td> <td>13.76</td> <td>35.07</td> <td>0.00</td> <td>100</td> <td>285</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	117.07	-----	-----	104.60	33.70	13.76	35.07	0.00	100	285	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5785.00	117.07	-----	-----	104.60	33.70	13.76	35.07	0.00	100	285	AVERAGE																																																																																																																			



Mode	60																																																																
	Band Edge - R																																																																
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																
ANT	1+2																																																																
Pol.	Vertical	Fundamental																																																															
Peak	<p>Site : 03CH21-HY            Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5854.63</td> <td>59.17</td> <td>111.64</td> <td>-52.47</td> <td>46.74</td> <td>33.70</td> <td>13.86</td> <td>35.13</td> <td>0.00 100 285 PEAK</td> </tr> <tr> <td>2 5862.06</td> <td>57.76</td> <td>108.82</td> <td>-51.06</td> <td>45.34</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00 100 285 PEAK</td> </tr> <tr> <td>3 5924.26</td> <td>51.19</td> <td>68.75</td> <td>-17.56</td> <td>38.79</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00 100 285 PEAK</td> </tr> <tr> <td>4 5927.07</td> <td>52.69</td> <td>68.20</td> <td>-15.51</td> <td>40.30</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00 100 285 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5854.63	59.17	111.64	-52.47	46.74	33.70	13.86	35.13	0.00 100 285 PEAK	2 5862.06	57.76	108.82	-51.06	45.34	33.70	13.86	35.14	0.00 100 285 PEAK	3 5924.26	51.19	68.75	-17.56	38.79	33.65	13.94	35.19	0.00 100 285 PEAK	4 5927.07	52.69	68.20	-15.51	40.30	33.65	13.94	35.20	0.00 100 285 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																									
1 5854.63	59.17	111.64	-52.47	46.74	33.70	13.86	35.13	0.00 100 285 PEAK																																																									
2 5862.06	57.76	108.82	-51.06	45.34	33.70	13.86	35.14	0.00 100 285 PEAK																																																									
3 5924.26	51.19	68.75	-17.56	38.79	33.65	13.94	35.19	0.00 100 285 PEAK																																																									
4 5927.07	52.69	68.20	-15.51	40.30	33.65	13.94	35.20	0.00 100 285 PEAK																																																									








Mode	60																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>57.68</td> <td>74.00</td> <td>-16.32</td> <td>39.90</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>104</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>49.03</td> <td>54.00</td> <td>-4.97</td> <td>31.25</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>104</td> <td>153</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>54.75</td> <td>68.20</td> <td>-13.45</td> <td>37.72</td> <td>39.91</td> <td>24.10</td> <td>47.44</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	57.68	74.00	-16.32	39.90	38.50	19.57	40.72	0.43	104	153	PEAK	2	11570.00	49.03	54.00	-4.97	31.25	38.50	19.57	40.72	0.43	104	153	AVERAGE	3	17355.00	54.75	68.20	-13.45	37.72	39.91	24.10	47.44	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>57.34</td> <td>74.00</td> <td>-16.66</td> <td>39.56</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>102</td> <td>144</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>48.70</td> <td>54.00</td> <td>-5.30</td> <td>30.92</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>102</td> <td>144</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>54.83</td> <td>68.20</td> <td>-13.37</td> <td>37.80</td> <td>39.91</td> <td>24.10</td> <td>47.44</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	57.34	74.00	-16.66	39.56	38.50	19.57	40.72	0.43	102	144	PEAK	2	11570.00	48.70	54.00	-5.30	30.92	38.50	19.57	40.72	0.43	102	144	AVERAGE	3	17355.00	54.83	68.20	-13.37	37.80	39.91	24.10	47.44	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11570.00	57.68	74.00	-16.32	39.90	38.50	19.57	40.72	0.43	104	153	PEAK																																																																																																																												
2	11570.00	49.03	54.00	-4.97	31.25	38.50	19.57	40.72	0.43	104	153	AVERAGE																																																																																																																												
3	17355.00	54.75	68.20	-13.45	37.72	39.91	24.10	47.44	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11570.00	57.34	74.00	-16.66	39.56	38.50	19.57	40.72	0.43	102	144	PEAK																																																																																																																												
2	11570.00	48.70	54.00	-5.30	30.92	38.50	19.57	40.72	0.43	102	144	AVERAGE																																																																																																																												
3	17355.00	54.83	68.20	-13.37	37.80	39.91	24.10	47.44	0.46	--	--	PEAK																																																																																																																												



Mode	60	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>

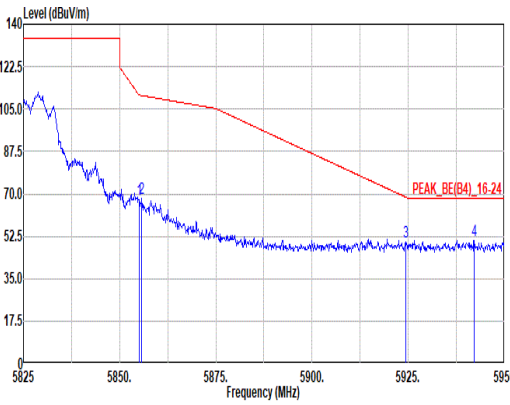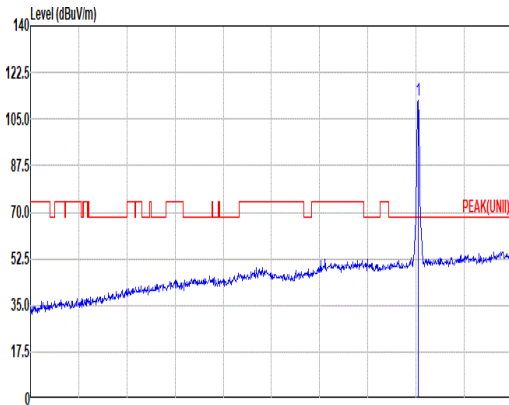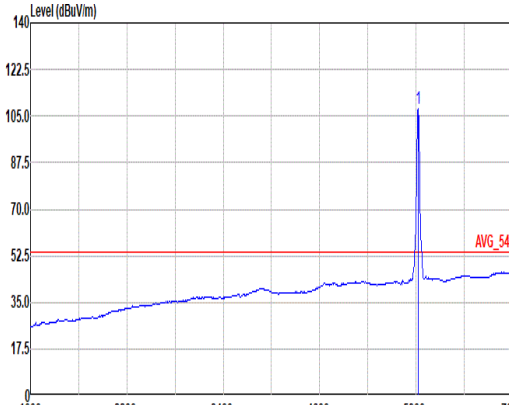

	<b>61</b>																																																																																																																																
<b>Mode</b>	<b>Band Edge</b>																																																																																																																																
	<b>U-NII-3_5.725-5.85_802.11a_CH165_5825MHz</b>																																																																																																																																
<b>ANT</b>	<b>1+2</b>																																																																																																																																
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																																																															
<b>Peak</b>	 <p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>67.87</td> <td>110.00</td> <td>-42.93</td> <td>55.45</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.75</td> <td>68.00</td> <td>110.59</td> <td>-42.59</td> <td>55.58</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.38</td> <td>50.18</td> <td>68.66</td> <td>-18.48</td> <td>37.78</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5942.13</td> <td>50.83</td> <td>68.20</td> <td>-17.37</td> <td>38.46</td> <td>33.62</td> <td>13.96</td> <td>35.21</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	67.87	110.00	-42.93	55.45	33.70	13.86	35.14	0.00	100	302	PEAK	2	5855.75	68.00	110.59	-42.59	55.58	33.70	13.86	35.14	0.00	100	302	PEAK	3	5924.38	50.18	68.66	-18.48	37.78	33.65	13.94	35.19	0.00	100	302	PEAK	4	5942.13	50.83	68.20	-17.37	38.46	33.62	13.96	35.21	0.00	100	302	PEAK	 <p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>112.20</td> <td>-----</td> <td>-----</td> <td>99.78</td> <td>33.70</td> <td>13.83</td> <td>35.11</td> <td>0.00</td> <td>100</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	112.20	-----	-----	99.78	33.70	13.83	35.11	0.00	100	302	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5855.00	67.87	110.00	-42.93	55.45	33.70	13.86	35.14	0.00	100	302	PEAK																																																																																																																					
2	5855.75	68.00	110.59	-42.59	55.58	33.70	13.86	35.14	0.00	100	302	PEAK																																																																																																																					
3	5924.38	50.18	68.66	-18.48	37.78	33.65	13.94	35.19	0.00	100	302	PEAK																																																																																																																					
4	5942.13	50.83	68.20	-17.37	38.46	33.62	13.96	35.21	0.00	100	302	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5825.00	112.20	-----	-----	99.78	33.70	13.83	35.11	0.00	100	302	PEAK																																																																																																																					
<b>Avg</b>	<b>Blank</b>	 <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.62</td> <td>-----</td> <td>-----</td> <td>95.20</td> <td>33.70</td> <td>13.83</td> <td>35.11</td> <td>0.00</td> <td>100</td> <td>302</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	107.62	-----	-----	95.20	33.70	13.83	35.11	0.00	100	302	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5825.00	107.62	-----	-----	95.20	33.70	13.83	35.11	0.00	100	302	AVERAGE																																																																																																																					



	<b>61</b>																																																																																																										
<b>Mode</b>	<b>Band Edge</b>																																																																																																										
	<b>U-NII-3_5.725-5.85_802.11a_CH165_5825MHz</b>																																																																																																										
<b>ANT</b>	<b>1+2</b>																																																																																																										
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																																									
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>80.83</td> <td>110.00</td> <td>-29.97</td> <td>68.41</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>111</td> <td>299</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>80.83</td> <td>110.00</td> <td>-29.97</td> <td>68.41</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>111</td> <td>299</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.63</td> <td>55.82</td> <td>69.95</td> <td>-14.13</td> <td>43.42</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>111</td> <td>299</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.75</td> <td>55.93</td> <td>68.20</td> <td>-12.27</td> <td>43.54</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>111</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5855.00	80.83	110.00	-29.97	68.41	33.70	13.86	35.14	0.00	111	299	PEAK	2	5855.00	80.83	110.00	-29.97	68.41	33.70	13.86	35.14	0.00	111	299	PEAK	3	5922.63	55.82	69.95	-14.13	43.42	33.65	13.94	35.19	0.00	111	299	PEAK	4	5925.75	55.93	68.20	-12.27	43.54	33.65	13.94	35.20	0.00	111	299	PEAK	<p>Site : 03CH21-HY Condition: PEAK(U)11 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>120.42</td> <td>-----</td> <td>-----</td> <td>108.01</td> <td>33.70</td> <td>13.82</td> <td>35.11</td> <td>0.00</td> <td>111</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	120.42	-----	-----	108.01	33.70	13.82	35.11	0.00	111	299	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5855.00	80.83	110.00	-29.97	68.41	33.70	13.86	35.14	0.00	111	299	PEAK																																																																																															
2	5855.00	80.83	110.00	-29.97	68.41	33.70	13.86	35.14	0.00	111	299	PEAK																																																																																															
3	5922.63	55.82	69.95	-14.13	43.42	33.65	13.94	35.19	0.00	111	299	PEAK																																																																																															
4	5925.75	55.93	68.20	-12.27	43.54	33.65	13.94	35.20	0.00	111	299	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	120.42	-----	-----	108.01	33.70	13.82	35.11	0.00	111	299	PEAK																																																																																															
<b>Avg</b>	<b>Blank</b>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>116.96</td> <td>-----</td> <td>-----</td> <td>104.54</td> <td>33.70</td> <td>13.83</td> <td>35.11</td> <td>0.00</td> <td>111</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	116.96	-----	-----	104.54	33.70	13.83	35.11	0.00	111	299	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	116.96	-----	-----	104.54	33.70	13.83	35.11	0.00	111	299	AVERAGE																																																																																															



Mode	61																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>57.78</td> <td>74.00</td> <td>-16.22</td> <td>40.05</td> <td>38.50</td> <td>19.64</td> <td>40.84</td> <td>0.43</td> <td>108</td> <td>157</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>47.77</td> <td>54.00</td> <td>-6.23</td> <td>30.04</td> <td>38.50</td> <td>19.64</td> <td>40.84</td> <td>0.43</td> <td>108</td> <td>157</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>53.50</td> <td>68.20</td> <td>-14.70</td> <td>36.50</td> <td>40.05</td> <td>24.20</td> <td>47.71</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	57.78	74.00	-16.22	40.05	38.50	19.64	40.84	0.43	108	157	PEAK	2	11650.00	47.77	54.00	-6.23	30.04	38.50	19.64	40.84	0.43	108	157	AVERAGE	3	17475.00	53.50	68.20	-14.70	36.50	40.05	24.20	47.71	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>57.55</td> <td>74.00</td> <td>-16.45</td> <td>39.82</td> <td>38.50</td> <td>19.64</td> <td>40.84</td> <td>0.43</td> <td>105</td> <td>148</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>47.25</td> <td>54.00</td> <td>-6.75</td> <td>29.52</td> <td>38.50</td> <td>19.64</td> <td>40.84</td> <td>0.43</td> <td>105</td> <td>148</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>54.48</td> <td>68.20</td> <td>-13.72</td> <td>37.48</td> <td>40.05</td> <td>24.20</td> <td>47.71</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	57.55	74.00	-16.45	39.82	38.50	19.64	40.84	0.43	105	148	PEAK	2	11650.00	47.25	54.00	-6.75	29.52	38.50	19.64	40.84	0.43	105	148	AVERAGE	3	17475.00	54.48	68.20	-13.72	37.48	40.05	24.20	47.71	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11650.00	57.78	74.00	-16.22	40.05	38.50	19.64	40.84	0.43	108	157	PEAK																																																																																																																												
2	11650.00	47.77	54.00	-6.23	30.04	38.50	19.64	40.84	0.43	108	157	AVERAGE																																																																																																																												
3	17475.00	53.50	68.20	-14.70	36.50	40.05	24.20	47.71	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11650.00	57.55	74.00	-16.45	39.82	38.50	19.64	40.84	0.43	105	148	PEAK																																																																																																																												
2	11650.00	47.25	54.00	-6.75	29.52	38.50	19.64	40.84	0.43	105	148	AVERAGE																																																																																																																												
3	17475.00	54.48	68.20	-13.72	37.48	40.05	24.20	47.71	0.46	--	--	PEAK																																																																																																																												



Mode	61	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Mode	62																																																																																																																								
	Band Edge																																																																																																																								
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																								
ANT	1+2																																																																																																																								
Pol.	Horizontal	Fundamental																																																																																																																							
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5605.22</td> <td>50.69</td> <td>68.20</td> <td>-17.51</td> <td>39.12</td> <td>32.93</td> <td>13.56</td> <td>34.92</td> <td>0.00</td> <td>123</td> <td>339</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.19</td> <td>49.36</td> <td>69.08</td> <td>-19.72</td> <td>37.50</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>123</td> <td>339</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5716.00</td> <td>62.66</td> <td>109.68</td> <td>-47.02</td> <td>50.43</td> <td>33.56</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>123</td> <td>339</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5724.85</td> <td>70.69</td> <td>121.85</td> <td>-51.16</td> <td>58.41</td> <td>33.60</td> <td>13.70</td> <td>35.02</td> <td>0.00</td> <td>123</td> <td>339</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5605.22	50.69	68.20	-17.51	39.12	32.93	13.56	34.92	0.00	123	339	PEAK	2	5651.19	49.36	69.08	-19.72	37.50	33.21	13.61	34.96	0.00	123	339	PEAK	3	5716.00	62.66	109.68	-47.02	50.43	33.56	13.69	35.02	0.00	123	339	PEAK	4	5724.85	70.69	121.85	-51.16	58.41	33.60	13.70	35.02	0.00	123	339	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>112.96</td> <td>-----</td> <td>-----</td> <td>100.57</td> <td>33.70</td> <td>13.74</td> <td>35.05</td> <td>0.00</td> <td>123</td> <td>339</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5745.00	112.96	-----	-----	100.57	33.70	13.74	35.05	0.00	123	339	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																	
1	5605.22	50.69	68.20	-17.51	39.12	32.93	13.56	34.92	0.00	123	339	PEAK																																																																																																													
2	5651.19	49.36	69.08	-19.72	37.50	33.21	13.61	34.96	0.00	123	339	PEAK																																																																																																													
3	5716.00	62.66	109.68	-47.02	50.43	33.56	13.69	35.02	0.00	123	339	PEAK																																																																																																													
4	5724.85	70.69	121.85	-51.16	58.41	33.60	13.70	35.02	0.00	123	339	PEAK																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																	
1	5745.00	112.96	-----	-----	100.57	33.70	13.74	35.05	0.00	123	339	PEAK																																																																																																													
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.95</td> <td>-----</td> <td>-----</td> <td>96.56</td> <td>33.70</td> <td>13.74</td> <td>35.05</td> <td>0.00</td> <td>123</td> <td>339</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5745.00	100.95	-----	-----	96.56	33.70	13.74	35.05	0.00	123	339	AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																	
1	5745.00	100.95	-----	-----	96.56	33.70	13.74	35.05	0.00	123	339	AVERAGE																																																																																																													



Mode	62																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																						
ANT	1+2																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.11</td> <td>54.35</td> <td>68.20</td> <td>-13.85</td> <td>42.52</td> <td>33.18</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>105</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.75</td> <td>53.94</td> <td>68.76</td> <td>-14.82</td> <td>42.09</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>105</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.32</td> <td>70.15</td> <td>110.33</td> <td>-40.18</td> <td>57.91</td> <td>33.57</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>105</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5724.41</td> <td>78.92</td> <td>120.86</td> <td>-41.94</td> <td>66.64</td> <td>33.60</td> <td>13.70</td> <td>35.02</td> <td>0.00</td> <td>105</td> <td>287</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5646.11	54.35	68.20	-13.85	42.52	33.18	13.61	34.96	0.00	105	287	PEAK	2	5650.75	53.94	68.76	-14.82	42.09	33.20	13.61	34.96	0.00	105	287	PEAK	3	5718.32	70.15	110.33	-40.18	57.91	33.57	13.69	35.02	0.00	105	287	PEAK	4	5724.41	78.92	120.86	-41.94	66.64	33.60	13.70	35.02	0.00	105	287	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>121.35</td> <td>-----</td> <td>-----</td> <td>108.96</td> <td>33.70</td> <td>13.74</td> <td>35.05</td> <td>0.00</td> <td>105</td> <td>287</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	121.35	-----	-----	108.96	33.70	13.74	35.05	0.00	105	287	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5646.11	54.35	68.20	-13.85	42.52	33.18	13.61	34.96	0.00	105	287	PEAK																																																																																																											
2	5650.75	53.94	68.76	-14.82	42.09	33.20	13.61	34.96	0.00	105	287	PEAK																																																																																																											
3	5718.32	70.15	110.33	-40.18	57.91	33.57	13.69	35.02	0.00	105	287	PEAK																																																																																																											
4	5724.41	78.92	120.86	-41.94	66.64	33.60	13.70	35.02	0.00	105	287	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	121.35	-----	-----	108.96	33.70	13.74	35.05	0.00	105	287	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>116.99</td> <td>-----</td> <td>-----</td> <td>104.60</td> <td>33.70</td> <td>13.74</td> <td>35.05</td> <td>0.00</td> <td>105</td> <td>287</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	116.99	-----	-----	104.60	33.70	13.74	35.05	0.00	105	287	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	116.99	-----	-----	104.60	33.70	13.74	35.05	0.00	105	287	AVERAGE																																																																																																											





Mode	63																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>58.54</td> <td>74.00</td> <td>-15.46</td> <td>40.76</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>114</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>48.47</td> <td>54.00</td> <td>-5.53</td> <td>30.69</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>114</td> <td>153</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>51.91</td> <td>68.20</td> <td>-16.29</td> <td>34.88</td> <td>39.91</td> <td>24.10</td> <td>47.44</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	58.54	74.00	-15.46	40.76	38.50	19.57	40.72	0.43	114	153	PEAK	2	11570.00	48.47	54.00	-5.53	30.69	38.50	19.57	40.72	0.43	114	153	AVERAGE	3	17355.00	51.91	68.20	-16.29	34.88	39.91	24.10	47.44	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>56.93</td> <td>74.00</td> <td>-17.07</td> <td>39.15</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>106</td> <td>142</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>47.80</td> <td>54.00</td> <td>-6.20</td> <td>30.02</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>106</td> <td>142</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>52.19</td> <td>68.20</td> <td>-16.01</td> <td>35.16</td> <td>39.91</td> <td>24.10</td> <td>47.44</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	56.93	74.00	-17.07	39.15	38.50	19.57	40.72	0.43	106	142	PEAK	2	11570.00	47.80	54.00	-6.20	30.02	38.50	19.57	40.72	0.43	106	142	AVERAGE	3	17355.00	52.19	68.20	-16.01	35.16	39.91	24.10	47.44	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11570.00	58.54	74.00	-15.46	40.76	38.50	19.57	40.72	0.43	114	153	PEAK																																																																																																																												
2	11570.00	48.47	54.00	-5.53	30.69	38.50	19.57	40.72	0.43	114	153	AVERAGE																																																																																																																												
3	17355.00	51.91	68.20	-16.29	34.88	39.91	24.10	47.44	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11570.00	56.93	74.00	-17.07	39.15	38.50	19.57	40.72	0.43	106	142	PEAK																																																																																																																												
2	11570.00	47.80	54.00	-6.20	30.02	38.50	19.57	40.72	0.43	106	142	AVERAGE																																																																																																																												
3	17355.00	52.19	68.20	-16.01	35.16	39.91	24.10	47.44	0.46	--	--	PEAK																																																																																																																												



Mode	63	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Mode	64																																																																																																										
	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																										
ANT	1+2																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>74.97</td> <td>111.00</td> <td>-36.11</td> <td>62.55</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.63</td> <td>77.96</td> <td>110.62</td> <td>-32.66</td> <td>65.54</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.88</td> <td>51.21</td> <td>69.03</td> <td>-17.82</td> <td>38.81</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5936.25</td> <td>52.71</td> <td>68.20</td> <td>-15.49</td> <td>40.34</td> <td>33.63</td> <td>13.95</td> <td>35.21</td> <td>0.00</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.88	74.97	111.00	-36.11	62.55	33.70	13.86	35.14	0.00	100	306	PEAK	2	5855.63	77.96	110.62	-32.66	65.54	33.70	13.86	35.14	0.00	100	306	PEAK	3	5923.88	51.21	69.03	-17.82	38.81	33.65	13.94	35.19	0.00	100	306	PEAK	4	5936.25	52.71	68.20	-15.49	40.34	33.63	13.95	35.21	0.00	100	306	PEAK	<p>Site : 03CH21-HY Condition: PEAK(U11) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>112.68</td> <td>-----</td> <td>-----</td> <td>100.26</td> <td>33.70</td> <td>13.83</td> <td>35.11</td> <td>0.00</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	112.68	-----	-----	100.26	33.70	13.83	35.11	0.00	100	306	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5854.88	74.97	111.00	-36.11	62.55	33.70	13.86	35.14	0.00	100	306	PEAK																																																																																															
2	5855.63	77.96	110.62	-32.66	65.54	33.70	13.86	35.14	0.00	100	306	PEAK																																																																																															
3	5923.88	51.21	69.03	-17.82	38.81	33.65	13.94	35.19	0.00	100	306	PEAK																																																																																															
4	5936.25	52.71	68.20	-15.49	40.34	33.63	13.95	35.21	0.00	100	306	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	112.68	-----	-----	100.26	33.70	13.83	35.11	0.00	100	306	PEAK																																																																																															
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.06</td> <td>-----</td> <td>-----</td> <td>95.45</td> <td>33.70</td> <td>13.83</td> <td>35.12</td> <td>0.00</td> <td>100</td> <td>306</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	107.06	-----	-----	95.45	33.70	13.83	35.12	0.00	100	306	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	107.06	-----	-----	95.45	33.70	13.83	35.12	0.00	100	306	AVERAGE																																																																																															



	<b>64</b>																																																																																																										
<b>Mode</b>	<b>Band Edge</b>																																																																																																										
	<b>U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz</b>																																																																																																										
<b>ANT</b>	<b>1+2</b>																																																																																																										
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																																									
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.38</td> <td>94.57</td> <td>119.06</td> <td>-24.49</td> <td>82.15</td> <td>33.70</td> <td>13.85</td> <td>35.13</td> <td>0.00</td> <td>110</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5857.50</td> <td>83.00</td> <td>110.10</td> <td>-27.10</td> <td>70.58</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>110</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.38</td> <td>56.21</td> <td>68.66</td> <td>-12.45</td> <td>43.81</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>110</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5933.13</td> <td>56.97</td> <td>68.20</td> <td>-11.23</td> <td>44.59</td> <td>33.63</td> <td>13.95</td> <td>35.20</td> <td>0.00</td> <td>110</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5851.38	94.57	119.06	-24.49	82.15	33.70	13.85	35.13	0.00	110	0	PEAK	2	5857.50	83.00	110.10	-27.10	70.58	33.70	13.86	35.14	0.00	110	0	PEAK	3	5924.38	56.21	68.66	-12.45	43.81	33.65	13.94	35.19	0.00	110	0	PEAK	4	5933.13	56.97	68.20	-11.23	44.59	33.63	13.95	35.20	0.00	110	0	PEAK	<p>Site : 03CH21-HY Condition: PEAK(U11) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>122.45</td> <td>-----</td> <td>-----</td> <td>110.04</td> <td>33.70</td> <td>13.83</td> <td>35.12</td> <td>0.00</td> <td>110</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5825.00	122.45	-----	-----	110.04	33.70	13.83	35.12	0.00	110	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5851.38	94.57	119.06	-24.49	82.15	33.70	13.85	35.13	0.00	110	0	PEAK																																																																																															
2	5857.50	83.00	110.10	-27.10	70.58	33.70	13.86	35.14	0.00	110	0	PEAK																																																																																															
3	5924.38	56.21	68.66	-12.45	43.81	33.65	13.94	35.19	0.00	110	0	PEAK																																																																																															
4	5933.13	56.97	68.20	-11.23	44.59	33.63	13.95	35.20	0.00	110	0	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5825.00	122.45	-----	-----	110.04	33.70	13.83	35.12	0.00	110	0	PEAK																																																																																															
<b>Avg</b>	<b>Blank</b>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>115.90</td> <td>-----</td> <td>-----</td> <td>103.49</td> <td>33.70</td> <td>13.83</td> <td>35.12</td> <td>0.00</td> <td>110</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5825.00	115.90	-----	-----	103.49	33.70	13.83	35.12	0.00	110	0	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5825.00	115.90	-----	-----	103.49	33.70	13.83	35.12	0.00	110	0	AVERAGE																																																																																															



Mode	65																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHZ																																																																																																																						
ANT	1+2																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5641.04</td> <td>49.82</td> <td>68.20</td> <td>-18.38</td> <td>38.02</td> <td>33.15</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>100</td> <td>300</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.90</td> <td>51.25</td> <td>68.87</td> <td>-17.62</td> <td>39.39</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>300</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5716.58</td> <td>71.72</td> <td>109.84</td> <td>-38.12</td> <td>59.48</td> <td>33.57</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>300</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5724.27</td> <td>80.33</td> <td>120.53</td> <td>-40.20</td> <td>68.05</td> <td>33.60</td> <td>13.70</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5641.04	49.82	68.20	-18.38	38.02	33.15	13.60	34.95	0.00	100	300	PEAK	2	5650.90	51.25	68.87	-17.62	39.39	33.21	13.61	34.96	0.00	100	300	PEAK	3	5716.58	71.72	109.84	-38.12	59.48	33.57	13.69	35.02	0.00	100	300	PEAK	4	5724.27	80.33	120.53	-40.20	68.05	33.60	13.70	35.02	0.00	100	300	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>115.62</td> <td>-----</td> <td>-----</td> <td>103.25</td> <td>33.68</td> <td>13.73</td> <td>35.04</td> <td>0.00</td> <td>100</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	115.62	-----	-----	103.25	33.68	13.73	35.04	0.00	100	300	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5641.04	49.82	68.20	-18.38	38.02	33.15	13.60	34.95	0.00	100	300	PEAK																																																																																																											
2	5650.90	51.25	68.87	-17.62	39.39	33.21	13.61	34.96	0.00	100	300	PEAK																																																																																																											
3	5716.58	71.72	109.84	-38.12	59.48	33.57	13.69	35.02	0.00	100	300	PEAK																																																																																																											
4	5724.27	80.33	120.53	-40.20	68.05	33.60	13.70	35.02	0.00	100	300	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	115.62	-----	-----	103.25	33.68	13.73	35.04	0.00	100	300	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.37</td> <td>-----</td> <td>-----</td> <td>96.00</td> <td>33.68</td> <td>13.73</td> <td>35.04</td> <td>0.00</td> <td>100</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	100.37	-----	-----	96.00	33.68	13.73	35.04	0.00	100	300	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	100.37	-----	-----	96.00	33.68	13.73	35.04	0.00	100	300	AVERAGE																																																																																																											



Mode	65																																																																																																											
	Band Edge																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHZ																																																																																																											
ANT	1+2																																																																																																											
Pol.	Vertical	Fundamental																																																																																																										
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5640.02</td> <td>53.43</td> <td>68.20</td> <td>-14.77</td> <td>41.64</td> <td>33.14</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>108 299 PEAK</td> </tr> <tr> <td>2 5650.90</td> <td>52.41</td> <td>68.87</td> <td>-16.46</td> <td>40.55</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>108 299 PEAK</td> </tr> <tr> <td>3 5718.90</td> <td>82.83</td> <td>110.49</td> <td>-27.66</td> <td>70.58</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>108 299 PEAK</td> </tr> <tr> <td>4 5720.35</td> <td>85.06</td> <td>111.60</td> <td>-26.54</td> <td>72.81</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>108 299 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5640.02	53.43	68.20	-14.77	41.64	33.14	13.60	34.95	0.00	108 299 PEAK	2 5650.90	52.41	68.87	-16.46	40.55	33.21	13.61	34.96	0.00	108 299 PEAK	3 5718.90	82.83	110.49	-27.66	70.58	33.58	13.69	35.02	0.00	108 299 PEAK	4 5720.35	85.06	111.60	-26.54	72.81	33.58	13.69	35.02	0.00	108 299 PEAK	<p>Site : 03CH21-HY Condition: PEAK(U-NII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5745.00</td> <td>122.07</td> <td>-----</td> <td>-----</td> <td>109.70</td> <td>33.68</td> <td>13.73</td> <td>35.04</td> <td>0.00</td> <td>108 299 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5745.00	122.07	-----	-----	109.70	33.68	13.73	35.04	0.00	108 299 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1 5640.02	53.43	68.20	-14.77	41.64	33.14	13.60	34.95	0.00	108 299 PEAK																																																																																																			
2 5650.90	52.41	68.87	-16.46	40.55	33.21	13.61	34.96	0.00	108 299 PEAK																																																																																																			
3 5718.90	82.83	110.49	-27.66	70.58	33.58	13.69	35.02	0.00	108 299 PEAK																																																																																																			
4 5720.35	85.06	111.60	-26.54	72.81	33.58	13.69	35.02	0.00	108 299 PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1 5745.00	122.07	-----	-----	109.70	33.68	13.73	35.04	0.00	108 299 PEAK																																																																																																			
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5745.00</td> <td>116.62</td> <td>-----</td> <td>-----</td> <td>104.25</td> <td>33.68</td> <td>13.73</td> <td>35.04</td> <td>0.00</td> <td>108 299 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5745.00	116.62	-----	-----	104.25	33.68	13.73	35.04	0.00	108 299 AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1 5745.00	116.62	-----	-----	104.25	33.68	13.73	35.04	0.00	108 299 AVERAGE																																																																																																			



Mode	65																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>54.47</td> <td>74.00</td> <td>-19.53</td> <td>37.03</td> <td>38.50</td> <td>19.50</td> <td>41.00</td> <td>0.44</td> <td>101</td> <td>186</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>46.02</td> <td>54.00</td> <td>-7.98</td> <td>28.58</td> <td>38.50</td> <td>19.50</td> <td>41.00</td> <td>0.44</td> <td>101</td> <td>186</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>54.92</td> <td>68.20</td> <td>-13.28</td> <td>37.55</td> <td>39.87</td> <td>24.01</td> <td>46.97</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	54.47	74.00	-19.53	37.03	38.50	19.50	41.00	0.44	101	186	PEAK	2	11490.00	46.02	54.00	-7.98	28.58	38.50	19.50	41.00	0.44	101	186	AVERAGE	3	17235.00	54.92	68.20	-13.28	37.55	39.87	24.01	46.97	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>53.23</td> <td>74.00</td> <td>-20.77</td> <td>35.79</td> <td>38.50</td> <td>19.50</td> <td>41.00</td> <td>0.44</td> <td>153</td> <td>173</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>44.08</td> <td>54.00</td> <td>-9.92</td> <td>26.64</td> <td>38.50</td> <td>19.50</td> <td>41.00</td> <td>0.44</td> <td>153</td> <td>173</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>56.85</td> <td>68.20</td> <td>-11.35</td> <td>39.48</td> <td>39.87</td> <td>24.01</td> <td>46.97</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	53.23	74.00	-20.77	35.79	38.50	19.50	41.00	0.44	153	173	PEAK	2	11490.00	44.08	54.00	-9.92	26.64	38.50	19.50	41.00	0.44	153	173	AVERAGE	3	17235.00	56.85	68.20	-11.35	39.48	39.87	24.01	46.97	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11490.00	54.47	74.00	-19.53	37.03	38.50	19.50	41.00	0.44	101	186	PEAK																																																																																																																												
2	11490.00	46.02	54.00	-7.98	28.58	38.50	19.50	41.00	0.44	101	186	AVERAGE																																																																																																																												
3	17235.00	54.92	68.20	-13.28	37.55	39.87	24.01	46.97	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11490.00	53.23	74.00	-20.77	35.79	38.50	19.50	41.00	0.44	153	173	PEAK																																																																																																																												
2	11490.00	44.08	54.00	-9.92	26.64	38.50	19.50	41.00	0.44	153	173	AVERAGE																																																																																																																												
3	17235.00	56.85	68.20	-11.35	39.48	39.87	24.01	46.97	0.46	--	--	PEAK																																																																																																																												



Mode	65	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>





		<b>66</b>																																																																																																																																	
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																																																		
	<b>U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz</b>																																																																																																																																		
<b>ANT</b>	<b>1+2</b>																																																																																																																																		
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																																																																	
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.52</td> <td>50.32</td> <td>68.20</td> <td>-17.88</td> <td>38.91</td> <td>33.14</td> <td>13.60</td> <td>35.33</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.88</td> <td>49.00</td> <td>68.85</td> <td>-19.85</td> <td>37.51</td> <td>33.21</td> <td>13.61</td> <td>35.33</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.94</td> <td>51.21</td> <td>105.74</td> <td>-54.53</td> <td>39.39</td> <td>33.51</td> <td>13.67</td> <td>35.36</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.44</td> <td>51.77</td> <td>111.79</td> <td>-60.02</td> <td>39.87</td> <td>33.58</td> <td>13.69</td> <td>35.37</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5640.52	50.32	68.20	-17.88	38.91	33.14	13.60	35.33	0.00	100	329	PEAK	2	5650.88	49.00	68.85	-19.85	37.51	33.21	13.61	35.33	0.00	100	329	PEAK	3	5701.94	51.21	105.74	-54.53	39.39	33.51	13.67	35.36	0.00	100	329	PEAK	4	5720.44	51.77	111.79	-60.02	39.87	33.58	13.69	35.37	0.00	100	329	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>115.43</td> <td>-----</td> <td>-----</td> <td>103.36</td> <td>33.70</td> <td>13.78</td> <td>35.41</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	115.43	-----	-----	103.36	33.70	13.78	35.41	0.00	100	329	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	5640.52	50.32	68.20	-17.88	38.91	33.14	13.60	35.33	0.00	100	329	PEAK																																																																																																																							
2	5650.88	49.00	68.85	-19.85	37.51	33.21	13.61	35.33	0.00	100	329	PEAK																																																																																																																							
3	5701.94	51.21	105.74	-54.53	39.39	33.51	13.67	35.36	0.00	100	329	PEAK																																																																																																																							
4	5720.44	51.77	111.79	-60.02	39.87	33.58	13.69	35.37	0.00	100	329	PEAK																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	5785.00	115.43	-----	-----	103.36	33.70	13.78	35.41	0.00	100	329	PEAK																																																																																																																							
<b>Avg</b>	<b>Blank</b>		<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>100.20</td> <td>-----</td> <td>-----</td> <td>96.13</td> <td>33.70</td> <td>13.77</td> <td>35.40</td> <td>0.00</td> <td>100</td> <td>329</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	100.20	-----	-----	96.13	33.70	13.77	35.40	0.00	100	329	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	5785.00	100.20	-----	-----	96.13	33.70	13.77	35.40	0.00	100	329	AVERAGE																																																																																																																							



Mode	66																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz																																																																									
ANT	1+2																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.96</td> <td>52.33</td> <td>110.09</td> <td>-50.56</td> <td>40.21</td> <td>33.70</td> <td>13.06</td> <td>35.44</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.77</td> <td>51.86</td> <td>105.54</td> <td>-53.68</td> <td>39.73</td> <td>33.70</td> <td>13.88</td> <td>35.45</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>50.33</td> <td>69.23</td> <td>-18.90</td> <td>38.22</td> <td>33.65</td> <td>13.94</td> <td>35.48</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5932.18</td> <td>50.56</td> <td>68.20</td> <td>-17.64</td> <td>38.45</td> <td>33.64</td> <td>13.95</td> <td>35.48</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.96	52.33	110.09	-50.56	40.21	33.70	13.06	35.44	0.00	100	329	PEAK	2	5873.77	51.86	105.54	-53.68	39.73	33.70	13.88	35.45	0.00	100	329	PEAK	3	5923.60	50.33	69.23	-18.90	38.22	33.65	13.94	35.48	0.00	100	329	PEAK	4	5932.18	50.56	68.20	-17.64	38.45	33.64	13.95	35.48	0.00	100	329	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.96	52.33	110.09	-50.56	40.21	33.70	13.06	35.44	0.00	100	329	PEAK																																																														
2	5873.77	51.86	105.54	-53.68	39.73	33.70	13.88	35.45	0.00	100	329	PEAK																																																														
3	5923.60	50.33	69.23	-18.90	38.22	33.65	13.94	35.48	0.00	100	329	PEAK																																																														
4	5932.18	50.56	68.20	-17.64	38.45	33.64	13.95	35.48	0.00	100	329	PEAK																																																														



<b>66</b>																																																																			
<b>Mode</b>	<b>Band Edge - L</b>																																																																		
<b>U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz</b>																																																																			
<b>ANT</b>	<b>1+2</b>																																																																		
<b>Pol.</b>	<b>Vertical</b>																																																																		
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5637.74</td> <td>54.43</td> <td>68.20</td> <td>-13.77</td> <td>43.02</td> <td>33.13</td> <td>13.60</td> <td>35.32</td> <td>0.00</td> <td>107</td> <td>223</td> <td>PEAK</td> </tr> <tr> <td>2 5650.69</td> <td>52.95</td> <td>68.71</td> <td>-15.76</td> <td>41.47</td> <td>33.20</td> <td>13.61</td> <td>35.33</td> <td>0.00</td> <td>107</td> <td>223</td> <td>PEAK</td> </tr> <tr> <td>3 5702.49</td> <td>55.68</td> <td>105.90</td> <td>-50.22</td> <td>43.86</td> <td>33.51</td> <td>13.67</td> <td>35.36</td> <td>0.00</td> <td>107</td> <td>223</td> <td>PEAK</td> </tr> <tr> <td>4 5720.62</td> <td>59.95</td> <td>112.21</td> <td>-52.26</td> <td>48.05</td> <td>33.58</td> <td>13.69</td> <td>35.37</td> <td>0.00</td> <td>107</td> <td>223</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	1 5637.74	54.43	68.20	-13.77	43.02	33.13	13.60	35.32	0.00	107	223	PEAK	2 5650.69	52.95	68.71	-15.76	41.47	33.20	13.61	35.33	0.00	107	223	PEAK	3 5702.49	55.68	105.90	-50.22	43.86	33.51	13.67	35.36	0.00	107	223	PEAK	4 5720.62	59.95	112.21	-52.26	48.05	33.58	13.69	35.37	0.00	107	223	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																										
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																											
1 5637.74	54.43	68.20	-13.77	43.02	33.13	13.60	35.32	0.00	107	223	PEAK																																																								
2 5650.69	52.95	68.71	-15.76	41.47	33.20	13.61	35.33	0.00	107	223	PEAK																																																								
3 5702.49	55.68	105.90	-50.22	43.86	33.51	13.67	35.36	0.00	107	223	PEAK																																																								
4 5720.62	59.95	112.21	-52.26	48.05	33.58	13.69	35.37	0.00	107	223	PEAK																																																								
<b>Fundamental</b>																																																																			
<b>Avg</b>	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5785.00</td> <td>121.60</td> <td>-----</td> <td>-----</td> <td>109.53</td> <td>33.70</td> <td>13.78</td> <td>35.41</td> <td>0.00</td> <td>107</td> <td>223</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	1 5785.00	121.60	-----	-----	109.53	33.70	13.78	35.41	0.00	107	223	PEAK																																				
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																										
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																											
1 5785.00	121.60	-----	-----	109.53	33.70	13.78	35.41	0.00	107	223	PEAK																																																								
<b>Blank</b>																																																																			
<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5785.00</td> <td>114.87</td> <td>-----</td> <td>-----</td> <td>102.80</td> <td>33.70</td> <td>13.77</td> <td>35.40</td> <td>0.00</td> <td>107</td> <td>223</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	1 5785.00	114.87	-----	-----	102.80	33.70	13.77	35.40	0.00	107	223	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																											
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																											
1 5785.00	114.87	-----	-----	102.80	33.70	13.77	35.40	0.00	107	223	AVERAGE																																																								



Mode	66																																																																
	Band Edge - R																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz																																																																
ANT	1+2																																																																
Pol.	Vertical	Fundamental																																																															
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5854.80</td> <td>56.39</td> <td>111.27</td> <td>-54.88</td> <td>44.27</td> <td>33.70</td> <td>13.86</td> <td>35.44</td> <td>0.00 107 223 PEAK</td> </tr> <tr> <td>2 5874.76</td> <td>58.47</td> <td>105.27</td> <td>-46.80</td> <td>46.34</td> <td>33.70</td> <td>13.88</td> <td>35.45</td> <td>0.00 107 223 PEAK</td> </tr> <tr> <td>3 5924.43</td> <td>51.55</td> <td>68.62</td> <td>-17.07</td> <td>39.44</td> <td>33.65</td> <td>13.94</td> <td>35.48</td> <td>0.00 107 223 PEAK</td> </tr> <tr> <td>4 5928.06</td> <td>52.97</td> <td>68.20</td> <td>-15.23</td> <td>40.87</td> <td>33.64</td> <td>13.94</td> <td>35.48</td> <td>0.00 107 223 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5854.80	56.39	111.27	-54.88	44.27	33.70	13.86	35.44	0.00 107 223 PEAK	2 5874.76	58.47	105.27	-46.80	46.34	33.70	13.88	35.45	0.00 107 223 PEAK	3 5924.43	51.55	68.62	-17.07	39.44	33.65	13.94	35.48	0.00 107 223 PEAK	4 5928.06	52.97	68.20	-15.23	40.87	33.64	13.94	35.48	0.00 107 223 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																									
1 5854.80	56.39	111.27	-54.88	44.27	33.70	13.86	35.44	0.00 107 223 PEAK																																																									
2 5874.76	58.47	105.27	-46.80	46.34	33.70	13.88	35.45	0.00 107 223 PEAK																																																									
3 5924.43	51.55	68.62	-17.07	39.44	33.65	13.94	35.48	0.00 107 223 PEAK																																																									
4 5928.06	52.97	68.20	-15.23	40.87	33.64	13.94	35.48	0.00 107 223 PEAK																																																									






Mode	66																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>55.36</td> <td>74.00</td> <td>-18.64</td> <td>37.58</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>106</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>46.44</td> <td>54.00</td> <td>-7.56</td> <td>28.66</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>106</td> <td>346</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>55.93</td> <td>68.20</td> <td>-12.27</td> <td>38.90</td> <td>39.91</td> <td>24.10</td> <td>47.44</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	55.36	74.00	-18.64	37.58	38.50	19.57	40.72	0.43	106	346	PEAK	2	11570.00	46.44	54.00	-7.56	28.66	38.50	19.57	40.72	0.43	106	346	AVERAGE	3	17355.00	55.93	68.20	-12.27	38.90	39.91	24.10	47.44	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>56.51</td> <td>74.00</td> <td>-17.49</td> <td>38.73</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>108</td> <td>174</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>46.66</td> <td>54.00</td> <td>-7.34</td> <td>28.88</td> <td>38.50</td> <td>19.57</td> <td>40.72</td> <td>0.43</td> <td>108</td> <td>174</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>55.75</td> <td>68.20</td> <td>-12.45</td> <td>38.72</td> <td>39.91</td> <td>24.10</td> <td>47.44</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	56.51	74.00	-17.49	38.73	38.50	19.57	40.72	0.43	108	174	PEAK	2	11570.00	46.66	54.00	-7.34	28.88	38.50	19.57	40.72	0.43	108	174	AVERAGE	3	17355.00	55.75	68.20	-12.45	38.72	39.91	24.10	47.44	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11570.00	55.36	74.00	-18.64	37.58	38.50	19.57	40.72	0.43	106	346	PEAK																																																																																																																												
2	11570.00	46.44	54.00	-7.56	28.66	38.50	19.57	40.72	0.43	106	346	AVERAGE																																																																																																																												
3	17355.00	55.93	68.20	-12.27	38.90	39.91	24.10	47.44	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11570.00	56.51	74.00	-17.49	38.73	38.50	19.57	40.72	0.43	108	174	PEAK																																																																																																																												
2	11570.00	46.66	54.00	-7.34	28.88	38.50	19.57	40.72	0.43	108	174	AVERAGE																																																																																																																												
3	17355.00	55.75	68.20	-12.45	38.72	39.91	24.10	47.44	0.46	--	--	PEAK																																																																																																																												



Mode	66	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>

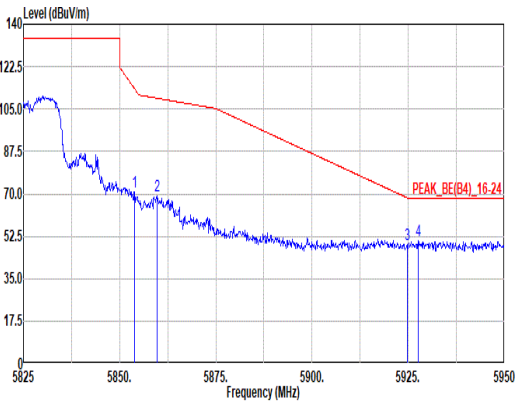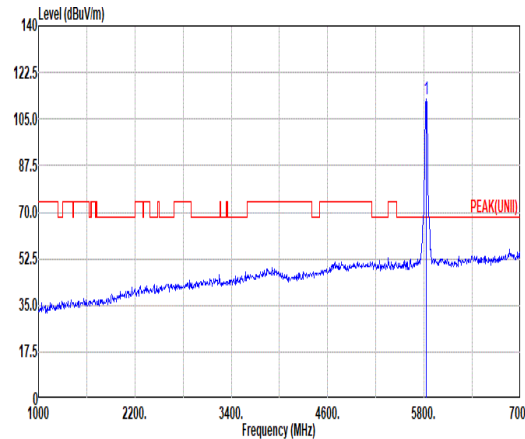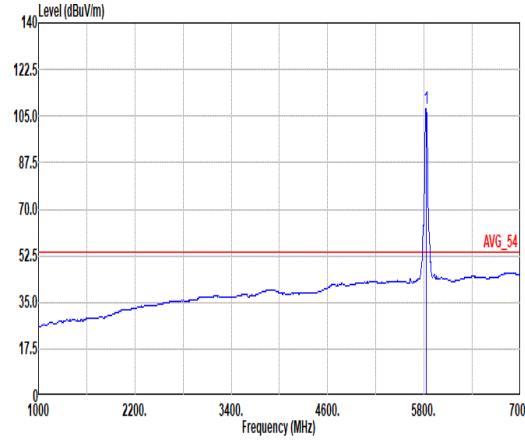

Mode	67																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz																																																																																																																						
ANT	1+2																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	 <p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.80</td> <td>70.53</td> <td>113.36</td> <td>-42.83</td> <td>58.11</td> <td>33.70</td> <td>13.85</td> <td>35.13</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5859.75</td> <td>69.19</td> <td>109.47</td> <td>-40.28</td> <td>56.77</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.75</td> <td>48.91</td> <td>68.38</td> <td>-19.47</td> <td>36.52</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5927.50</td> <td>50.52</td> <td>68.20</td> <td>-17.68</td> <td>38.13</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5853.80	70.53	113.36	-42.83	58.11	33.70	13.85	35.13	0.00	100	328	PEAK	2	5859.75	69.19	109.47	-40.28	56.77	33.70	13.86	35.14	0.00	100	328	PEAK	3	5924.75	48.91	68.38	-19.47	36.52	33.65	13.94	35.20	0.00	100	328	PEAK	4	5927.50	50.52	68.20	-17.68	38.13	33.65	13.94	35.20	0.00	100	328	PEAK	 <p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>112.75</td> <td>-----</td> <td>-----</td> <td>100.34</td> <td>33.70</td> <td>13.82</td> <td>35.11</td> <td>0.00</td> <td>100</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5825.00	112.75	-----	-----	100.34	33.70	13.82	35.11	0.00	100	328	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5853.80	70.53	113.36	-42.83	58.11	33.70	13.85	35.13	0.00	100	328	PEAK																																																																																																											
2	5859.75	69.19	109.47	-40.28	56.77	33.70	13.86	35.14	0.00	100	328	PEAK																																																																																																											
3	5924.75	48.91	68.38	-19.47	36.52	33.65	13.94	35.20	0.00	100	328	PEAK																																																																																																											
4	5927.50	50.52	68.20	-17.68	38.13	33.65	13.94	35.20	0.00	100	328	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5825.00	112.75	-----	-----	100.34	33.70	13.82	35.11	0.00	100	328	PEAK																																																																																																											
Avg	Blank	 <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.90</td> <td>-----</td> <td>-----</td> <td>95.49</td> <td>33.70</td> <td>13.82</td> <td>35.11</td> <td>0.00</td> <td>100</td> <td>328</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5825.00	107.90	-----	-----	95.49	33.70	13.82	35.11	0.00	100	328	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5825.00	107.90	-----	-----	95.49	33.70	13.82	35.11	0.00	100	328	AVERAGE																																																																																																											



		<b>67</b>																																																																																	
<b>Mode</b>	<b>Band Edge</b>																																																																																		
	<b>U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHZ</b>																																																																																		
<b>ANT</b>	<b>1+2</b>																																																																																		
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																	
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.00 80.84 113.00 -32.24</td> <td>68.42</td> <td>33.70</td> <td>13.85</td> <td>35.13</td> <td>0.00</td> <td>128</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 5855.63 78.26 110.62 -32.36</td> <td>65.84</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>128</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3 5922.00 57.37 70.41 -13.04</td> <td>44.96</td> <td>33.66</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>128</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4 5937.38 55.88 68.20 -12.32</td> <td>43.51</td> <td>33.63</td> <td>13.95</td> <td>35.21</td> <td>0.00</td> <td>128</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1 5854.00 80.84 113.00 -32.24	68.42	33.70	13.85	35.13	0.00	128	0	PEAK	2 5855.63 78.26 110.62 -32.36	65.84	33.70	13.86	35.14	0.00	128	0	PEAK	3 5922.00 57.37 70.41 -13.04	44.96	33.66	13.94	35.19	0.00	128	0	PEAK	4 5937.38 55.88 68.20 -12.32	43.51	33.63	13.95	35.21	0.00	128	0	PEAK	<p>Site : 03CH21-HY Condition: PEAK(U-NII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5825.00 121.58</td> <td>109.17</td> <td>33.70</td> <td>13.82</td> <td>35.11</td> <td>0.00</td> <td>128</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1 5825.00 121.58	109.17	33.70	13.82	35.11	0.00	128	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																																											
1 5854.00 80.84 113.00 -32.24	68.42	33.70	13.85	35.13	0.00	128	0	PEAK																																																																											
2 5855.63 78.26 110.62 -32.36	65.84	33.70	13.86	35.14	0.00	128	0	PEAK																																																																											
3 5922.00 57.37 70.41 -13.04	44.96	33.66	13.94	35.19	0.00	128	0	PEAK																																																																											
4 5937.38 55.88 68.20 -12.32	43.51	33.63	13.95	35.21	0.00	128	0	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																																											
1 5825.00 121.58	109.17	33.70	13.82	35.11	0.00	128	0	PEAK																																																																											
<b>Avg</b>	<b>Blank</b>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5825.00 116.28</td> <td>103.87</td> <td>33.70</td> <td>13.83</td> <td>35.12</td> <td>0.00</td> <td>128</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1 5825.00 116.28	103.87	33.70	13.83	35.12	0.00	128	0	AVERAGE																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																																											
1 5825.00 116.28	103.87	33.70	13.83	35.12	0.00	128	0	AVERAGE																																																																											





Mode	67																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>56.36</td> <td>74.00</td> <td>-17.64</td> <td>38.92</td> <td>38.50</td> <td>19.64</td> <td>41.13</td> <td>0.43</td> <td>299</td> <td>131</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>30.19</td> <td>38.50</td> <td>19.64</td> <td>41.13</td> <td>0.43</td> <td>299</td> <td>131</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>56.01</td> <td>68.20</td> <td>-12.19</td> <td>38.40</td> <td>40.05</td> <td>24.20</td> <td>47.10</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	56.36	74.00	-17.64	38.92	38.50	19.64	41.13	0.43	299	131	PEAK	2	11650.00	47.63	54.00	-6.37	30.19	38.50	19.64	41.13	0.43	299	131	AVERAGE	3	17475.00	56.01	68.20	-12.19	38.40	40.05	24.20	47.10	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>56.76</td> <td>74.00</td> <td>-17.24</td> <td>39.32</td> <td>38.50</td> <td>19.64</td> <td>41.13</td> <td>0.43</td> <td>282</td> <td>192</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>48.13</td> <td>54.00</td> <td>-5.87</td> <td>30.69</td> <td>38.50</td> <td>19.64</td> <td>41.13</td> <td>0.43</td> <td>282</td> <td>192</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>56.50</td> <td>68.20</td> <td>-11.70</td> <td>38.89</td> <td>40.05</td> <td>24.20</td> <td>47.10</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	56.76	74.00	-17.24	39.32	38.50	19.64	41.13	0.43	282	192	PEAK	2	11650.00	48.13	54.00	-5.87	30.69	38.50	19.64	41.13	0.43	282	192	AVERAGE	3	17475.00	56.50	68.20	-11.70	38.89	40.05	24.20	47.10	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11650.00	56.36	74.00	-17.64	38.92	38.50	19.64	41.13	0.43	299	131	PEAK																																																																																																																												
2	11650.00	47.63	54.00	-6.37	30.19	38.50	19.64	41.13	0.43	299	131	AVERAGE																																																																																																																												
3	17475.00	56.01	68.20	-12.19	38.40	40.05	24.20	47.10	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11650.00	56.76	74.00	-17.24	39.32	38.50	19.64	41.13	0.43	282	192	PEAK																																																																																																																												
2	11650.00	48.13	54.00	-5.87	30.69	38.50	19.64	41.13	0.43	282	192	AVERAGE																																																																																																																												
3	17475.00	56.50	68.20	-11.70	38.89	40.05	24.20	47.10	0.46	--	--	PEAK																																																																																																																												



Mode	67	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Mode	68																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																						
ANT	1+2																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.35</td> <td>51.49</td> <td>68.20</td> <td>-16.71</td> <td>39.66</td> <td>33.18</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.38</td> <td>51.31</td> <td>68.48</td> <td>-17.17</td> <td>39.46</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.73</td> <td>84.15</td> <td>110.44</td> <td>-26.29</td> <td>71.91</td> <td>33.57</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.44</td> <td>84.70</td> <td>111.79</td> <td>-27.09</td> <td>72.45</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5646.35	51.49	68.20	-16.71	39.66	33.18	13.61	34.96	0.00	100	307	PEAK	2	5650.38	51.31	68.48	-17.17	39.46	33.20	13.61	34.96	0.00	100	307	PEAK	3	5718.73	84.15	110.44	-26.29	71.91	33.57	13.69	35.02	0.00	100	307	PEAK	4	5720.44	84.70	111.79	-27.09	72.45	33.58	13.69	35.02	0.00	100	307	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>110.96</td> <td>-----</td> <td>-----</td> <td>98.57</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	110.96	-----	-----	98.57	33.70	13.75	35.06	0.00	100	307	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5646.35	51.49	68.20	-16.71	39.66	33.18	13.61	34.96	0.00	100	307	PEAK																																																																																																											
2	5650.38	51.31	68.48	-17.17	39.46	33.20	13.61	34.96	0.00	100	307	PEAK																																																																																																											
3	5718.73	84.15	110.44	-26.29	71.91	33.57	13.69	35.02	0.00	100	307	PEAK																																																																																																											
4	5720.44	84.70	111.79	-27.09	72.45	33.58	13.69	35.02	0.00	100	307	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5755.00	110.96	-----	-----	98.57	33.70	13.75	35.06	0.00	100	307	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>106.67</td> <td>-----</td> <td>-----</td> <td>94.29</td> <td>33.70</td> <td>13.73</td> <td>35.05</td> <td>0.00</td> <td>100</td> <td>307</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	106.67	-----	-----	94.29	33.70	13.73	35.05	0.00	100	307	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5755.00	106.67	-----	-----	94.29	33.70	13.73	35.05	0.00	100	307	AVERAGE																																																																																																											



Mode	68																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																															
ANT	1+2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.65</td> <td>59.01</td> <td>111.61</td> <td>-52.60</td> <td>46.58</td> <td>33.70</td> <td>13.86</td> <td>35.13</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5872.78</td> <td>54.85</td> <td>105.82</td> <td>-50.97</td> <td>42.42</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.07</td> <td>50.96</td> <td>68.89</td> <td>-17.93</td> <td>38.56</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5948.05</td> <td>50.65</td> <td>68.20</td> <td>-17.55</td> <td>38.30</td> <td>33.60</td> <td>13.97</td> <td>35.22</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.65	59.01	111.61	-52.60	46.58	33.70	13.86	35.13	0.00	100	307	PEAK	2	5872.78	54.85	105.82	-50.97	42.42	33.70	13.88	35.15	0.00	100	307	PEAK	3	5924.07	50.96	68.89	-17.93	38.56	33.65	13.94	35.19	0.00	100	307	PEAK	4	5948.05	50.65	68.20	-17.55	38.30	33.60	13.97	35.22	0.00	100	307	PEAK	Blank
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5854.65	59.01	111.61	-52.60	46.58	33.70	13.86	35.13	0.00	100	307	PEAK																																																																				
2	5872.78	54.85	105.82	-50.97	42.42	33.70	13.88	35.15	0.00	100	307	PEAK																																																																				
3	5924.07	50.96	68.89	-17.93	38.56	33.65	13.94	35.19	0.00	100	307	PEAK																																																																				
4	5948.05	50.65	68.20	-17.55	38.30	33.60	13.97	35.22	0.00	100	307	PEAK																																																																				



Mode	68																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																					
ANT	1+2																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																				
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5643.87</td> <td>63.06</td> <td>68.20</td> <td>-5.14</td> <td>51.25</td> <td>33.16</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>2 5651.31</td> <td>63.79</td> <td>69.17</td> <td>-5.38</td> <td>51.93</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>3 5719.97</td> <td>94.47</td> <td>110.79</td> <td>-16.32</td> <td>82.22</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>4 5720.13</td> <td>95.21</td> <td>111.09</td> <td>-15.88</td> <td>82.96</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5643.87	63.06	68.20	-5.14	51.25	33.16	13.60	34.95	0.00	100	301	PEAK	2 5651.31	63.79	69.17	-5.38	51.93	33.21	13.61	34.96	0.00	100	301	PEAK	3 5719.97	94.47	110.79	-16.32	82.22	33.58	13.69	35.02	0.00	100	301	PEAK	4 5720.13	95.21	111.09	-15.88	82.96	33.58	13.69	35.02	0.00	100	301	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5755.00</td> <td>121.00</td> <td>-----</td> <td>-----</td> <td>109.42</td> <td>33.70</td> <td>13.73</td> <td>35.05</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5755.00	121.00	-----	-----	109.42	33.70	13.73	35.05	0.00	100	301	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																													
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 5643.87	63.06	68.20	-5.14	51.25	33.16	13.60	34.95	0.00	100	301	PEAK																																																																																																											
2 5651.31	63.79	69.17	-5.38	51.93	33.21	13.61	34.96	0.00	100	301	PEAK																																																																																																											
3 5719.97	94.47	110.79	-16.32	82.22	33.58	13.69	35.02	0.00	100	301	PEAK																																																																																																											
4 5720.13	95.21	111.09	-15.88	82.96	33.58	13.69	35.02	0.00	100	301	PEAK																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																														
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 5755.00	121.00	-----	-----	109.42	33.70	13.73	35.05	0.00	100	301	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5755.00</td> <td>115.30</td> <td>-----</td> <td>-----</td> <td>102.92</td> <td>33.70</td> <td>13.73</td> <td>35.05</td> <td>0.00</td> <td>100</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5755.00	115.30	-----	-----	102.92	33.70	13.73	35.05	0.00	100	301	AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																														
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 5755.00	115.30	-----	-----	102.92	33.70	13.73	35.05	0.00	100	301	AVERAGE																																																																																																											



Mode	68																																																																					
	Band Edge - R																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																					
ANT	1+2																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.26</td> <td>69.64</td> <td>112.50</td> <td>-42.86</td> <td>57.21</td> <td>33.70</td> <td>13.86</td> <td>35.13</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>2 5873.76</td> <td>62.98</td> <td>105.55</td> <td>-42.57</td> <td>50.55</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>3 5924.65</td> <td>53.36</td> <td>68.46</td> <td>-15.10</td> <td>40.97</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>4 5925.24</td> <td>53.95</td> <td>68.20</td> <td>-14.25</td> <td>41.56</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 5854.26	69.64	112.50	-42.86	57.21	33.70	13.86	35.13	0.00	100	301	PEAK	2 5873.76	62.98	105.55	-42.57	50.55	33.70	13.88	35.15	0.00	100	301	PEAK	3 5924.65	53.36	68.46	-15.10	40.97	33.65	13.94	35.20	0.00	100	301	PEAK	4 5925.24	53.95	68.20	-14.25	41.56	33.65	13.94	35.20	0.00	100	301	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1 5854.26	69.64	112.50	-42.86	57.21	33.70	13.86	35.13	0.00	100	301	PEAK																																																											
2 5873.76	62.98	105.55	-42.57	50.55	33.70	13.88	35.15	0.00	100	301	PEAK																																																											
3 5924.65	53.36	68.46	-15.10	40.97	33.65	13.94	35.20	0.00	100	301	PEAK																																																											
4 5925.24	53.95	68.20	-14.25	41.56	33.65	13.94	35.20	0.00	100	301	PEAK																																																											



Mode	68																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																																	
ANT	1+2																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11510.00</td> <td>55.04</td> <td>74.00</td> <td>-18.96</td> <td>37.23</td> <td>38.50</td> <td>19.51</td> <td>40.63</td> <td>0.43</td> <td>115</td> <td>250</td> <td>PEAK</td> </tr> <tr> <td>2 11510.00</td> <td>46.40</td> <td>54.00</td> <td>-7.60</td> <td>28.59</td> <td>38.50</td> <td>19.51</td> <td>40.63</td> <td>0.43</td> <td>115</td> <td>250</td> <td>AVERAGE</td> </tr> <tr> <td>3 17265.00</td> <td>52.26</td> <td>68.20</td> <td>-15.94</td> <td>35.11</td> <td>39.90</td> <td>24.03</td> <td>47.24</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11510.00	55.04	74.00	-18.96	37.23	38.50	19.51	40.63	0.43	115	250	PEAK	2 11510.00	46.40	54.00	-7.60	28.59	38.50	19.51	40.63	0.43	115	250	AVERAGE	3 17265.00	52.26	68.20	-15.94	35.11	39.90	24.03	47.24	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11510.00</td> <td>54.39</td> <td>74.00</td> <td>-19.61</td> <td>36.58</td> <td>38.50</td> <td>19.51</td> <td>40.63</td> <td>0.43</td> <td>117</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2 11510.00</td> <td>45.78</td> <td>54.00</td> <td>-8.22</td> <td>27.97</td> <td>38.50</td> <td>19.51</td> <td>40.63</td> <td>0.43</td> <td>117</td> <td>4</td> <td>AVERAGE</td> </tr> <tr> <td>3 17265.00</td> <td>52.77</td> <td>68.20</td> <td>-15.43</td> <td>35.62</td> <td>39.90</td> <td>24.03</td> <td>47.24</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11510.00	54.39	74.00	-19.61	36.58	38.50	19.51	40.63	0.43	117	4	PEAK	2 11510.00	45.78	54.00	-8.22	27.97	38.50	19.51	40.63	0.43	117	4	AVERAGE	3 17265.00	52.77	68.20	-15.43	35.62	39.90	24.03	47.24	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 11510.00	55.04	74.00	-18.96	37.23	38.50	19.51	40.63	0.43	115	250	PEAK																																																																																																																							
2 11510.00	46.40	54.00	-7.60	28.59	38.50	19.51	40.63	0.43	115	250	AVERAGE																																																																																																																							
3 17265.00	52.26	68.20	-15.94	35.11	39.90	24.03	47.24	0.46	--	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 11510.00	54.39	74.00	-19.61	36.58	38.50	19.51	40.63	0.43	117	4	PEAK																																																																																																																							
2 11510.00	45.78	54.00	-8.22	27.97	38.50	19.51	40.63	0.43	117	4	AVERAGE																																																																																																																							
3 17265.00	52.77	68.20	-15.43	35.62	39.90	24.03	47.24	0.46	--	--	PEAK																																																																																																																							



Mode	68	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>





		<b>69</b>																																																																																																																															
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																																																
	<b>U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz</b>																																																																																																																																
<b>ANT</b>	<b>1+2</b>																																																																																																																																
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																																																															
<b>Peak</b>																																																																																																																																	
	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5643.49</td> <td>52.27</td> <td>68.20</td> <td>-15.93</td> <td>40.46</td> <td>33.16</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.51</td> <td>52.81</td> <td>68.58</td> <td>-15.77</td> <td>40.96</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5710.57</td> <td>65.90</td> <td>108.16</td> <td>-42.26</td> <td>53.69</td> <td>33.54</td> <td>13.68</td> <td>35.01</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.32</td> <td>67.03</td> <td>111.52</td> <td>-44.49</td> <td>54.78</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5643.49	52.27	68.20	-15.93	40.46	33.16	13.60	34.95	0.00	102	330	PEAK	2	5650.51	52.81	68.58	-15.77	40.96	33.20	13.61	34.96	0.00	102	330	PEAK	3	5710.57	65.90	108.16	-42.26	53.69	33.54	13.68	35.01	0.00	102	330	PEAK	4	5720.32	67.03	111.52	-44.49	54.78	33.58	13.69	35.02	0.00	102	330	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>111.82</td> <td>-----</td> <td>-----</td> <td>99.42</td> <td>33.70</td> <td>13.79</td> <td>35.09</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	111.82	-----	-----	99.42	33.70	13.79	35.09	0.00	102	330
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5643.49	52.27	68.20	-15.93	40.46	33.16	13.60	34.95	0.00	102	330	PEAK																																																																																																																					
2	5650.51	52.81	68.58	-15.77	40.96	33.20	13.61	34.96	0.00	102	330	PEAK																																																																																																																					
3	5710.57	65.90	108.16	-42.26	53.69	33.54	13.68	35.01	0.00	102	330	PEAK																																																																																																																					
4	5720.32	67.03	111.52	-44.49	54.78	33.58	13.69	35.02	0.00	102	330	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5795.00	111.82	-----	-----	99.42	33.70	13.79	35.09	0.00	102	330	PEAK																																																																																																																					
<b>Avg</b>	<b>Blank</b>																																																																																																																																
			<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>106.09</td> <td>-----</td> <td>-----</td> <td>94.49</td> <td>33.70</td> <td>13.78</td> <td>35.08</td> <td>0.00</td> <td>102</td> <td>330</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	106.09	-----	-----	94.49	33.70	13.78	35.08	0.00	102	330	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5795.00	106.09	-----	-----	94.49	33.70	13.78	35.08	0.00	102	330	AVERAGE																																																																																																																					



Mode	69																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																															
ANT	1+2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH21-HY            Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.60</td> <td>66.18</td> <td>111.54</td> <td>-45.36</td> <td>53.76</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.73</td> <td>69.14</td> <td>106.12</td> <td>-36.98</td> <td>56.71</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.89</td> <td>55.57</td> <td>68.28</td> <td>-12.71</td> <td>43.18</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.46</td> <td>57.48</td> <td>68.20</td> <td>-10.72</td> <td>45.10</td> <td>33.64</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>102</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.60	66.18	111.54	-45.36	53.76	33.70	13.86	35.14	0.00	102	330	PEAK	2	5871.73	69.14	106.12	-36.98	56.71	33.70	13.88	35.15	0.00	102	330	PEAK	3	5924.89	55.57	68.28	-12.71	43.18	33.65	13.94	35.20	0.00	102	330	PEAK	4	5928.46	57.48	68.20	-10.72	45.10	33.64	13.94	35.20	0.00	102	330	PEAK	Blank
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5854.60	66.18	111.54	-45.36	53.76	33.70	13.86	35.14	0.00	102	330	PEAK																																																																				
2	5871.73	69.14	106.12	-36.98	56.71	33.70	13.88	35.15	0.00	102	330	PEAK																																																																				
3	5924.89	55.57	68.28	-12.71	43.18	33.65	13.94	35.20	0.00	102	330	PEAK																																																																				
4	5928.46	57.48	68.20	-10.72	45.10	33.64	13.94	35.20	0.00	102	330	PEAK																																																																				



Mode	69																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-3_5.725-5.85_802.11n_HT40_CH159_5795MHz																																																																																																										
ANT	1+2																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.75</td> <td>55.23</td> <td>68.20</td> <td>-12.97</td> <td>43.39</td> <td>33.19</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.70</td> <td>54.95</td> <td>68.72</td> <td>-13.77</td> <td>43.10</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5713.10</td> <td>72.27</td> <td>108.87</td> <td>-36.60</td> <td>60.04</td> <td>33.55</td> <td>13.69</td> <td>35.01</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.71</td> <td>72.39</td> <td>112.41</td> <td>-40.02</td> <td>60.14</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5640.75	55.23	68.20	-12.97	43.39	33.19	13.61	34.96	0.00	143	0	PEAK	2	5650.70	54.95	68.72	-13.77	43.10	33.20	13.61	34.96	0.00	143	0	PEAK	3	5713.10	72.27	108.87	-36.60	60.04	33.55	13.69	35.01	0.00	143	0	PEAK	4	5720.71	72.39	112.41	-40.02	60.14	33.58	13.69	35.02	0.00	143	0	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>120.85</td> <td>-----</td> <td>-----</td> <td>108.45</td> <td>33.70</td> <td>13.78</td> <td>35.08</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5795.00	120.85	-----	-----	108.45	33.70	13.78	35.08	0.00	143	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5640.75	55.23	68.20	-12.97	43.39	33.19	13.61	34.96	0.00	143	0	PEAK																																																																																															
2	5650.70	54.95	68.72	-13.77	43.10	33.20	13.61	34.96	0.00	143	0	PEAK																																																																																															
3	5713.10	72.27	108.87	-36.60	60.04	33.55	13.69	35.01	0.00	143	0	PEAK																																																																																															
4	5720.71	72.39	112.41	-40.02	60.14	33.58	13.69	35.02	0.00	143	0	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5795.00	120.85	-----	-----	108.45	33.70	13.78	35.08	0.00	143	0	PEAK																																																																																															
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>115.39</td> <td>-----</td> <td>-----</td> <td>102.99</td> <td>33.70</td> <td>13.78</td> <td>35.08</td> <td>0.00</td> <td>143</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5795.00	115.39	-----	-----	102.99	33.70	13.78	35.08	0.00	143	0	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5795.00	115.39	-----	-----	102.99	33.70	13.78	35.08	0.00	143	0	AVERAGE																																																																																															



Mode	69																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																															
ANT	1+2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH21-HY            Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.68</td> <td>78.17</td> <td>111.54</td> <td>-33.37</td> <td>65.75</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5863.85</td> <td>79.76</td> <td>108.55</td> <td>-28.79</td> <td>67.33</td> <td>33.70</td> <td>13.87</td> <td>35.14</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.88</td> <td>63.83</td> <td>69.77</td> <td>-5.94</td> <td>51.43</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5932.80</td> <td>63.92</td> <td>68.20</td> <td>-4.28</td> <td>51.54</td> <td>33.63</td> <td>13.95</td> <td>35.20</td> <td>0.00</td> <td>143</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.68	78.17	111.54	-33.37	65.75	33.70	13.86	35.14	0.00	143	0	PEAK	2	5863.85	79.76	108.55	-28.79	67.33	33.70	13.87	35.14	0.00	143	0	PEAK	3	5922.88	63.83	69.77	-5.94	51.43	33.65	13.94	35.19	0.00	143	0	PEAK	4	5932.80	63.92	68.20	-4.28	51.54	33.63	13.95	35.20	0.00	143	0	PEAK	Blank
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5854.68	78.17	111.54	-33.37	65.75	33.70	13.86	35.14	0.00	143	0	PEAK																																																																				
2	5863.85	79.76	108.55	-28.79	67.33	33.70	13.87	35.14	0.00	143	0	PEAK																																																																				
3	5922.88	63.83	69.77	-5.94	51.43	33.65	13.94	35.19	0.00	143	0	PEAK																																																																				
4	5932.80	63.92	68.20	-4.28	51.54	33.63	13.95	35.20	0.00	143	0	PEAK																																																																				






Mode	69																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>55.09</td> <td>74.00</td> <td>-18.91</td> <td>37.32</td> <td>38.50</td> <td>19.59</td> <td>40.75</td> <td>0.43</td> <td>118</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>47.57</td> <td>54.00</td> <td>-6.43</td> <td>29.80</td> <td>38.50</td> <td>19.59</td> <td>40.75</td> <td>0.43</td> <td>118</td> <td>153</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17385.00</td> <td>54.03</td> <td>68.20</td> <td>-14.17</td> <td>36.98</td> <td>39.97</td> <td>24.13</td> <td>47.51</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	55.09	74.00	-18.91	37.32	38.50	19.59	40.75	0.43	118	153	PEAK	2	11590.00	47.57	54.00	-6.43	29.80	38.50	19.59	40.75	0.43	118	153	AVERAGE	3	17385.00	54.03	68.20	-14.17	36.98	39.97	24.13	47.51	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>54.54</td> <td>74.00</td> <td>-19.46</td> <td>36.77</td> <td>38.50</td> <td>19.59</td> <td>40.75</td> <td>0.43</td> <td>298</td> <td>174</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>46.78</td> <td>54.00</td> <td>-7.22</td> <td>29.01</td> <td>38.50</td> <td>19.59</td> <td>40.75</td> <td>0.43</td> <td>298</td> <td>174</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17385.00</td> <td>54.44</td> <td>68.20</td> <td>-13.76</td> <td>37.39</td> <td>39.97</td> <td>24.13</td> <td>47.51</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	54.54	74.00	-19.46	36.77	38.50	19.59	40.75	0.43	298	174	PEAK	2	11590.00	46.78	54.00	-7.22	29.01	38.50	19.59	40.75	0.43	298	174	AVERAGE	3	17385.00	54.44	68.20	-13.76	37.39	39.97	24.13	47.51	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11590.00	55.09	74.00	-18.91	37.32	38.50	19.59	40.75	0.43	118	153	PEAK																																																																																																																												
2	11590.00	47.57	54.00	-6.43	29.80	38.50	19.59	40.75	0.43	118	153	AVERAGE																																																																																																																												
3	17385.00	54.03	68.20	-14.17	36.98	39.97	24.13	47.51	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11590.00	54.54	74.00	-19.46	36.77	38.50	19.59	40.75	0.43	298	174	PEAK																																																																																																																												
2	11590.00	46.78	54.00	-7.22	29.01	38.50	19.59	40.75	0.43	298	174	AVERAGE																																																																																																																												
3	17385.00	54.44	68.20	-13.76	37.39	39.97	24.13	47.51	0.46	--	--	PEAK																																																																																																																												



Mode	69	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>

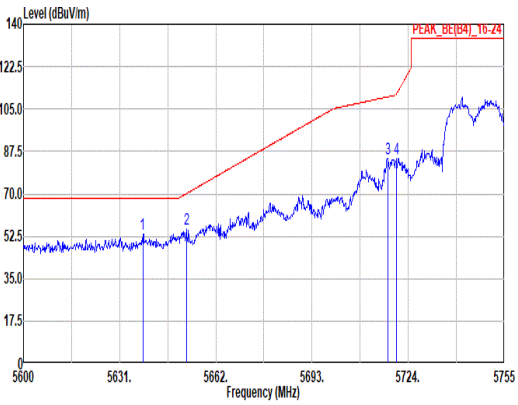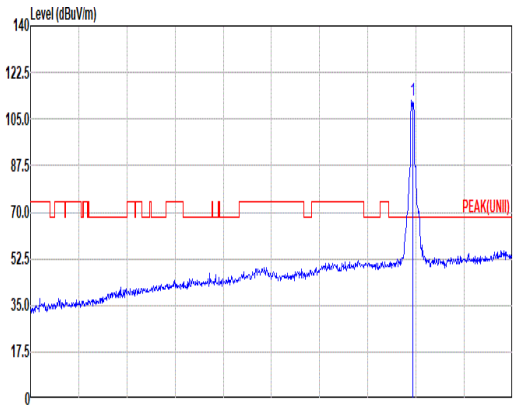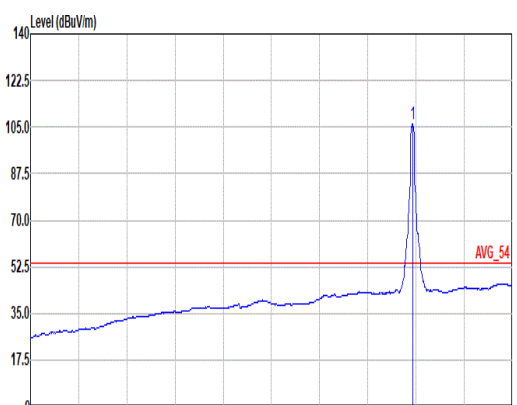

		<b>70</b>																																																																																																																						
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																																							
	<b>U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz</b>																																																																																																																							
<b>ANT</b>	<b>1+2</b>																																																																																																																							
<b>Pol.</b>	<b>Horizontal</b>		<b>Fundamental</b>																																																																																																																					
<b>Peak</b>	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5630.44</td> <td>53.38</td> <td>68.20</td> <td>-14.82</td> <td>41.60</td> <td>33.13</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.55</td> <td>55.70</td> <td>70.09</td> <td>-14.39</td> <td>43.83</td> <td>33.22</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5717.34</td> <td>84.47</td> <td>110.05</td> <td>-25.58</td> <td>72.23</td> <td>33.57</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.13</td> <td>84.38</td> <td>111.09</td> <td>-26.71</td> <td>72.13</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5630.44	53.38	68.20	-14.82	41.60	33.13	13.60	34.95	0.00	100	340	PEAK	2	5652.55	55.70	70.09	-14.39	43.83	33.22	13.61	34.96	0.00	100	340	PEAK	3	5717.34	84.47	110.05	-25.58	72.23	33.57	13.69	35.02	0.00	100	340	PEAK	4	5720.13	84.38	111.09	-26.71	72.13	33.58	13.69	35.02	0.00	100	340	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>111.75</td> <td>-----</td> <td>-----</td> <td>99.41</td> <td>33.66</td> <td>13.72</td> <td>35.04</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	111.75	-----	-----	99.41	33.66	13.72	35.04	0.00	100	340	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5630.44	53.38	68.20	-14.82	41.60	33.13	13.60	34.95	0.00	100	340	PEAK																																																																																																												
2	5652.55	55.70	70.09	-14.39	43.83	33.22	13.61	34.96	0.00	100	340	PEAK																																																																																																												
3	5717.34	84.47	110.05	-25.58	72.23	33.57	13.69	35.02	0.00	100	340	PEAK																																																																																																												
4	5720.13	84.38	111.09	-26.71	72.13	33.58	13.69	35.02	0.00	100	340	PEAK																																																																																																												
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5755.00	111.75	-----	-----	99.41	33.66	13.72	35.04	0.00	100	340	PEAK																																																																																																												
<b>Avg</b>	<b>Blank</b>		 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>106.00</td> <td>-----</td> <td>-----</td> <td>93.69</td> <td>33.70</td> <td>13.74</td> <td>35.05</td> <td>0.00</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	106.00	-----	-----	93.69	33.70	13.74	35.05	0.00	100	340	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5755.00	106.00	-----	-----	93.69	33.70	13.74	35.05	0.00	100	340	AVERAGE																																																																																																												



Mode	70																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz																																																																															
ANT	1+2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.70</td> <td>59.66</td> <td>116.05</td> <td>-56.39</td> <td>47.24</td> <td>33.70</td> <td>13.85</td> <td>35.13</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5872.78</td> <td>55.00</td> <td>105.82</td> <td>-50.82</td> <td>42.57</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.48</td> <td>50.23</td> <td>69.32</td> <td>-19.09</td> <td>37.83</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5944.93</td> <td>50.46</td> <td>68.20</td> <td>-17.74</td> <td>38.10</td> <td>33.61</td> <td>13.96</td> <td>35.21</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5852.70	59.66	116.05	-56.39	47.24	33.70	13.85	35.13	0.00	100	340	PEAK	2	5872.78	55.00	105.82	-50.82	42.57	33.70	13.88	35.15	0.00	100	340	PEAK	3	5923.48	50.23	69.32	-19.09	37.83	33.65	13.94	35.19	0.00	100	340	PEAK	4	5944.93	50.46	68.20	-17.74	38.10	33.61	13.96	35.21	0.00	100	340	PEAK	Blank
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5852.70	59.66	116.05	-56.39	47.24	33.70	13.85	35.13	0.00	100	340	PEAK																																																																				
2	5872.78	55.00	105.82	-50.82	42.57	33.70	13.88	35.15	0.00	100	340	PEAK																																																																				
3	5923.48	50.23	69.32	-19.09	37.83	33.65	13.94	35.19	0.00	100	340	PEAK																																																																				
4	5944.93	50.46	68.20	-17.74	38.10	33.61	13.96	35.21	0.00	100	340	PEAK																																																																				





		<b>70</b>																																																																																																									
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																										
	<b>U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz</b>																																																																																																										
<b>ANT</b>	<b>1+2</b>																																																																																																										
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																																									
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.98</td> <td>61.88</td> <td>68.20</td> <td>-6.32</td> <td>50.04</td> <td>33.19</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.07</td> <td>62.75</td> <td>68.25</td> <td>-5.50</td> <td>50.90</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.04</td> <td>92.47</td> <td>110.53</td> <td>-18.06</td> <td>80.22</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.21</td> <td>94.96</td> <td>113.56</td> <td>-18.60</td> <td>82.70</td> <td>33.58</td> <td>13.70</td> <td>35.02</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5640.98	61.88	68.20	-6.32	50.04	33.19	13.61	34.96	0.00	104	285	PEAK	2	5650.07	62.75	68.25	-5.50	50.90	33.20	13.61	34.96	0.00	104	285	PEAK	3	5719.04	92.47	110.53	-18.06	80.22	33.58	13.69	35.02	0.00	104	285	PEAK	4	5721.21	94.96	113.56	-18.60	82.70	33.58	13.70	35.02	0.00	104	285	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>121.53</td> <td>-----</td> <td>-----</td> <td>109.14</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5755.00	121.53	-----	-----	109.14	33.70	13.75	35.06	0.00	104	285	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5640.98	61.88	68.20	-6.32	50.04	33.19	13.61	34.96	0.00	104	285	PEAK																																																																																															
2	5650.07	62.75	68.25	-5.50	50.90	33.20	13.61	34.96	0.00	104	285	PEAK																																																																																															
3	5719.04	92.47	110.53	-18.06	80.22	33.58	13.69	35.02	0.00	104	285	PEAK																																																																																															
4	5721.21	94.96	113.56	-18.60	82.70	33.58	13.70	35.02	0.00	104	285	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5755.00	121.53	-----	-----	109.14	33.70	13.75	35.06	0.00	104	285	PEAK																																																																																															
<b>Avg</b>	<b>Blank</b>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>114.69</td> <td>-----</td> <td>-----</td> <td>102.30</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>104</td> <td>285</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5755.00	114.69	-----	-----	102.30	33.70	13.75	35.06	0.00	104	285	AVERAGE																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5755.00	114.69	-----	-----	102.30	33.70	13.75	35.06	0.00	104	285	AVERAGE																																																																																															



Mode	70																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz																																																																												
ANT	1+2																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5854.26</td> <td>66.50</td> <td>112.50</td> <td>-46.00</td> <td>54.07</td> <td>33.70</td> <td>13.86</td> <td>35.13</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>2 5861.28</td> <td>67.77</td> <td>109.04</td> <td>-41.27</td> <td>55.35</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>3 5924.46</td> <td>52.42</td> <td>68.60</td> <td>-16.18</td> <td>40.03</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>4 5925.63</td> <td>55.56</td> <td>68.20</td> <td>-12.64</td> <td>43.17</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>104</td> <td>285</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5854.26	66.50	112.50	-46.00	54.07	33.70	13.86	35.13	0.00	104	285	PEAK	2 5861.28	67.77	109.04	-41.27	55.35	33.70	13.86	35.14	0.00	104	285	PEAK	3 5924.46	52.42	68.60	-16.18	40.03	33.65	13.94	35.20	0.00	104	285	PEAK	4 5925.63	55.56	68.20	-12.64	43.17	33.65	13.94	35.20	0.00	104	285	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																					
1 5854.26	66.50	112.50	-46.00	54.07	33.70	13.86	35.13	0.00	104	285	PEAK																																																																		
2 5861.28	67.77	109.04	-41.27	55.35	33.70	13.86	35.14	0.00	104	285	PEAK																																																																		
3 5924.46	52.42	68.60	-16.18	40.03	33.65	13.94	35.20	0.00	104	285	PEAK																																																																		
4 5925.63	55.56	68.20	-12.64	43.17	33.65	13.94	35.20	0.00	104	285	PEAK																																																																		






Mode	70																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>51.88</td> <td>74.00</td> <td>-22.12</td> <td>34.07</td> <td>38.50</td> <td>19.51</td> <td>40.63</td> <td>0.43</td> <td>110</td> <td>59</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>42.14</td> <td>54.00</td> <td>-11.86</td> <td>24.33</td> <td>38.50</td> <td>19.51</td> <td>40.63</td> <td>0.43</td> <td>110</td> <td>59</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17265.00</td> <td>52.17</td> <td>68.20</td> <td>-16.03</td> <td>35.02</td> <td>39.90</td> <td>24.03</td> <td>47.24</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	51.88	74.00	-22.12	34.07	38.50	19.51	40.63	0.43	110	59	PEAK	2	11510.00	42.14	54.00	-11.86	24.33	38.50	19.51	40.63	0.43	110	59	AVERAGE	3	17265.00	52.17	68.20	-16.03	35.02	39.90	24.03	47.24	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>52.94</td> <td>74.00</td> <td>-21.06</td> <td>35.13</td> <td>38.50</td> <td>19.51</td> <td>40.63</td> <td>0.43</td> <td>101</td> <td>174</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>43.99</td> <td>54.00</td> <td>-10.01</td> <td>26.18</td> <td>38.50</td> <td>19.51</td> <td>40.63</td> <td>0.43</td> <td>101</td> <td>174</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17265.00</td> <td>52.89</td> <td>68.20</td> <td>-15.31</td> <td>35.74</td> <td>39.90</td> <td>24.03</td> <td>47.24</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	52.94	74.00	-21.06	35.13	38.50	19.51	40.63	0.43	101	174	PEAK	2	11510.00	43.99	54.00	-10.01	26.18	38.50	19.51	40.63	0.43	101	174	AVERAGE	3	17265.00	52.89	68.20	-15.31	35.74	39.90	24.03	47.24	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11510.00	51.88	74.00	-22.12	34.07	38.50	19.51	40.63	0.43	110	59	PEAK																																																																																																																												
2	11510.00	42.14	54.00	-11.86	24.33	38.50	19.51	40.63	0.43	110	59	AVERAGE																																																																																																																												
3	17265.00	52.17	68.20	-16.03	35.02	39.90	24.03	47.24	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11510.00	52.94	74.00	-21.06	35.13	38.50	19.51	40.63	0.43	101	174	PEAK																																																																																																																												
2	11510.00	43.99	54.00	-10.01	26.18	38.50	19.51	40.63	0.43	101	174	AVERAGE																																																																																																																												
3	17265.00	52.89	68.20	-15.31	35.74	39.90	24.03	47.24	0.46	--	--	PEAK																																																																																																																												



Mode	70	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>

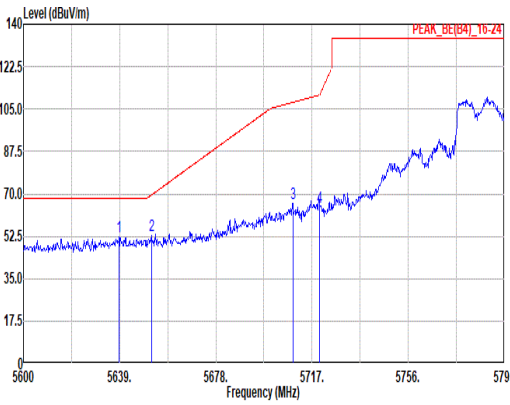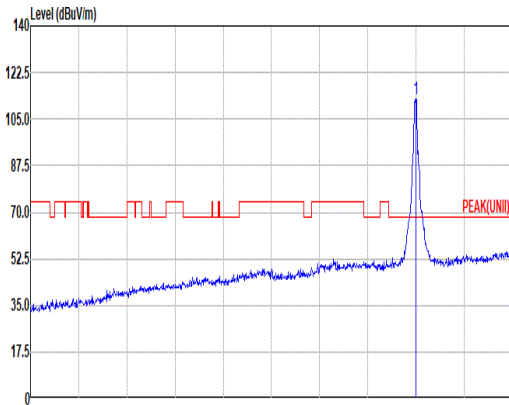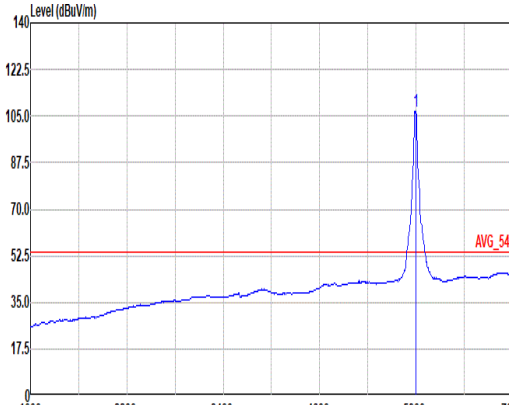

	<b>71</b>																																																																																																																						
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																																						
	<b>U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz</b>																																																																																																																						
<b>ANT</b>	<b>1+2</b>																																																																																																																						
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																																																					
<b>Peak</b>	 <p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5630.81</td> <td>52.28</td> <td>68.20</td> <td>-15.92</td> <td>40.50</td> <td>33.13</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.87</td> <td>52.99</td> <td>69.59</td> <td>-16.60</td> <td>41.13</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5709.20</td> <td>66.21</td> <td>107.78</td> <td>-41.57</td> <td>54.00</td> <td>33.54</td> <td>13.68</td> <td>35.01</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>64.49</td> <td>111.07</td> <td>-46.58</td> <td>52.24</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5630.81	52.28	68.20	-15.92	40.50	33.13	13.60	34.95	0.00	100	333	PEAK	2	5651.87	52.99	69.59	-16.60	41.13	33.21	13.61	34.96	0.00	100	333	PEAK	3	5709.20	66.21	107.78	-41.57	54.00	33.54	13.68	35.01	0.00	100	333	PEAK	4	5720.12	64.49	111.07	-46.58	52.24	33.58	13.69	35.02	0.00	100	333	PEAK	 <p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>112.32</td> <td>-----</td> <td>-----</td> <td>99.92</td> <td>33.70</td> <td>13.78</td> <td>35.08</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5795.00	112.32	-----	-----	99.92	33.70	13.78	35.08	0.00	100	333	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5630.81	52.28	68.20	-15.92	40.50	33.13	13.60	34.95	0.00	100	333	PEAK																																																																																																											
2	5651.87	52.99	69.59	-16.60	41.13	33.21	13.61	34.96	0.00	100	333	PEAK																																																																																																											
3	5709.20	66.21	107.78	-41.57	54.00	33.54	13.68	35.01	0.00	100	333	PEAK																																																																																																											
4	5720.12	64.49	111.07	-46.58	52.24	33.58	13.69	35.02	0.00	100	333	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5795.00	112.32	-----	-----	99.92	33.70	13.78	35.08	0.00	100	333	PEAK																																																																																																											
<b>Avg</b>	<b>Blank</b>	 <p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>106.95</td> <td>-----</td> <td>-----</td> <td>94.55</td> <td>33.70</td> <td>13.79</td> <td>35.09</td> <td>0.00</td> <td>100</td> <td>333</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5795.00	106.95	-----	-----	94.55	33.70	13.79	35.09	0.00	100	333	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5795.00	106.95	-----	-----	94.55	33.70	13.79	35.09	0.00	100	333	AVERAGE																																																																																																											



Mode	71																																																																													
	Band Edge - R																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz																																																																													
ANT	1+2																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.83</td> <td>69.35</td> <td>111.19</td> <td>-41.84</td> <td>56.93</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> <tr> <td>2 5872.81</td> <td>72.16</td> <td>105.81</td> <td>-33.65</td> <td>59.73</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> <tr> <td>3 5924.58</td> <td>56.25</td> <td>68.51</td> <td>-12.26</td> <td>43.86</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> <tr> <td>4 5925.20</td> <td>56.25</td> <td>68.20</td> <td>-11.95</td> <td>43.86</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>333</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.83	69.35	111.19	-41.84	56.93	33.70	13.86	35.14	0.00	100	333	PEAK	2 5872.81	72.16	105.81	-33.65	59.73	33.70	13.88	35.15	0.00	100	333	PEAK	3 5924.58	56.25	68.51	-12.26	43.86	33.65	13.94	35.20	0.00	100	333	PEAK	4 5925.20	56.25	68.20	-11.95	43.86	33.65	13.94	35.20	0.00	100	333	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5854.83	69.35	111.19	-41.84	56.93	33.70	13.86	35.14	0.00	100	333	PEAK																																																																			
2 5872.81	72.16	105.81	-33.65	59.73	33.70	13.88	35.15	0.00	100	333	PEAK																																																																			
3 5924.58	56.25	68.51	-12.26	43.86	33.65	13.94	35.20	0.00	100	333	PEAK																																																																			
4 5925.20	56.25	68.20	-11.95	43.86	33.65	13.94	35.20	0.00	100	333	PEAK																																																																			



<b>71</b>																																																																								
<b>Mode</b>	<b>Band Edge - L</b>																																																																							
<b>U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHZ</b>																																																																								
<b>ANT</b>	<b>1+2</b>																																																																							
<b>Pol.</b>	<b>Vertical</b>																																																																							
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5646.02</td> <td>54.84</td> <td>68.20</td> <td>-13.36</td> <td>43.01</td> <td>33.18</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>130</td> <td>0 PEAK</td> </tr> <tr> <td>2 5651.09</td> <td>55.95</td> <td>69.01</td> <td>-13.06</td> <td>44.09</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>130</td> <td>0 PEAK</td> </tr> <tr> <td>3 5704.33</td> <td>70.52</td> <td>106.41</td> <td>-35.89</td> <td>58.33</td> <td>33.52</td> <td>13.68</td> <td>35.01</td> <td>0.00</td> <td>130</td> <td>0 PEAK</td> </tr> <tr> <td>4 5720.12</td> <td>71.08</td> <td>111.07</td> <td>-39.99</td> <td>58.83</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>130</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5646.02	54.84	68.20	-13.36	43.01	33.18	13.61	34.96	0.00	130	0 PEAK	2 5651.09	55.95	69.01	-13.06	44.09	33.21	13.61	34.96	0.00	130	0 PEAK	3 5704.33	70.52	106.41	-35.89	58.33	33.52	13.68	35.01	0.00	130	0 PEAK	4 5720.12	71.08	111.07	-39.99	58.83	33.58	13.69	35.02	0.00	130	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																
1 5646.02	54.84	68.20	-13.36	43.01	33.18	13.61	34.96	0.00	130	0 PEAK																																																														
2 5651.09	55.95	69.01	-13.06	44.09	33.21	13.61	34.96	0.00	130	0 PEAK																																																														
3 5704.33	70.52	106.41	-35.89	58.33	33.52	13.68	35.01	0.00	130	0 PEAK																																																														
4 5720.12	71.08	111.07	-39.99	58.83	33.58	13.69	35.02	0.00	130	0 PEAK																																																														
<b>Fundamental</b>																																																																								
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK(U-NII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>121.74</td> <td>-----</td> <td>-----</td> <td>109.34</td> <td>33.70</td> <td>13.78</td> <td>35.08</td> <td>0.00</td> <td>130</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5795.00	121.74	-----	-----	109.34	33.70	13.78	35.08	0.00	130	0 PEAK																																	
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																
1 5795.00	121.74	-----	-----	109.34	33.70	13.78	35.08	0.00	130	0 PEAK																																																														
<b>Avg</b>	<b>Blank</b>																																																																							
	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>115.06</td> <td>-----</td> <td>-----</td> <td>102.66</td> <td>33.70</td> <td>13.78</td> <td>35.08</td> <td>0.00</td> <td>130</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5795.00	115.06	-----	-----	102.66	33.70	13.78	35.08	0.00	130	0 AVERAGE																																	
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																
1 5795.00	115.06	-----	-----	102.66	33.70	13.78	35.08	0.00	130	0 AVERAGE																																																														



Mode	71																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz																																																																							
ANT	1+2																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.83</td> <td>79.07</td> <td>111.19</td> <td>-32.12</td> <td>66.65</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>130 0 PEAK</td> </tr> <tr> <td>2 5874.67</td> <td>78.22</td> <td>105.29</td> <td>-27.07</td> <td>65.79</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>130 0 PEAK</td> </tr> <tr> <td>3 5922.72</td> <td>66.75</td> <td>69.88</td> <td>-3.13</td> <td>54.35</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>130 0 PEAK</td> </tr> <tr> <td>4 5925.05</td> <td>62.87</td> <td>68.20</td> <td>-5.33</td> <td>50.48</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>130 0 PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.83	79.07	111.19	-32.12	66.65	33.70	13.86	35.14	0.00	130 0 PEAK	2 5874.67	78.22	105.29	-27.07	65.79	33.70	13.88	35.15	0.00	130 0 PEAK	3 5922.72	66.75	69.88	-3.13	54.35	33.65	13.94	35.19	0.00	130 0 PEAK	4 5925.05	62.87	68.20	-5.33	50.48	33.65	13.94	35.20	0.00	130 0 PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5854.83	79.07	111.19	-32.12	66.65	33.70	13.86	35.14	0.00	130 0 PEAK																																																															
2 5874.67	78.22	105.29	-27.07	65.79	33.70	13.88	35.15	0.00	130 0 PEAK																																																															
3 5922.72	66.75	69.88	-3.13	54.35	33.65	13.94	35.19	0.00	130 0 PEAK																																																															
4 5925.05	62.87	68.20	-5.33	50.48	33.65	13.94	35.20	0.00	130 0 PEAK																																																															





Mode	71																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz																																																																																																																																					
ANT	1+2																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>49.22</td> <td>74.00</td> <td>-24.78</td> <td>31.45</td> <td>38.50</td> <td>19.59</td> <td>40.75</td> <td>0.43</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>42.08</td> <td>54.00</td> <td>-11.92</td> <td>24.31</td> <td>38.50</td> <td>19.59</td> <td>40.75</td> <td>0.43</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17385.00</td> <td>51.72</td> <td>68.20</td> <td>-16.48</td> <td>34.67</td> <td>39.97</td> <td>24.13</td> <td>47.51</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11590.00	49.22	74.00	-24.78	31.45	38.50	19.59	40.75	0.43	--	--	PEAK	2	11590.00	42.08	54.00	-11.92	24.31	38.50	19.59	40.75	0.43	--	--	AVERAGE	3	17385.00	51.72	68.20	-16.48	34.67	39.97	24.13	47.51	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>50.10</td> <td>74.00</td> <td>-23.90</td> <td>32.33</td> <td>38.50</td> <td>19.59</td> <td>40.75</td> <td>0.43</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>42.14</td> <td>54.00</td> <td>-11.86</td> <td>24.37</td> <td>38.50</td> <td>19.59</td> <td>40.75</td> <td>0.43</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17385.00</td> <td>50.71</td> <td>68.20</td> <td>-17.49</td> <td>33.66</td> <td>39.97</td> <td>24.13</td> <td>47.51</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11590.00	50.10	74.00	-23.90	32.33	38.50	19.59	40.75	0.43	--	--	PEAK	2	11590.00	42.14	54.00	-11.86	24.37	38.50	19.59	40.75	0.43	--	--	AVERAGE	3	17385.00	50.71	68.20	-17.49	33.66	39.97	24.13	47.51	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11590.00	49.22	74.00	-24.78	31.45	38.50	19.59	40.75	0.43	--	--	PEAK																																																																																																																										
2	11590.00	42.08	54.00	-11.92	24.31	38.50	19.59	40.75	0.43	--	--	AVERAGE																																																																																																																										
3	17385.00	51.72	68.20	-16.48	34.67	39.97	24.13	47.51	0.46	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11590.00	50.10	74.00	-23.90	32.33	38.50	19.59	40.75	0.43	--	--	PEAK																																																																																																																										
2	11590.00	42.14	54.00	-11.86	24.37	38.50	19.59	40.75	0.43	--	--	AVERAGE																																																																																																																										
3	17385.00	50.71	68.20	-17.49	33.66	39.97	24.13	47.51	0.46	--	--	PEAK																																																																																																																										



	<b>71</b>	
<b>Mode</b>	<b>Harmonic</b>	
	<b>U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz</b>	
<b>ANT</b>	<b>1+2</b>	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>10.6G ~18G Avg</b>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>