




Antenna Test Report

1. RF Fixture Experiment

1.1 Test Setup


1.1.1 VNA Test Setup

VSWR and Return Loss measurements (S_{11}) were performed using an Keysight E5071C Network Analyzer. The isolation between antennas is also tested. The testing was performed with apparatus in free space.

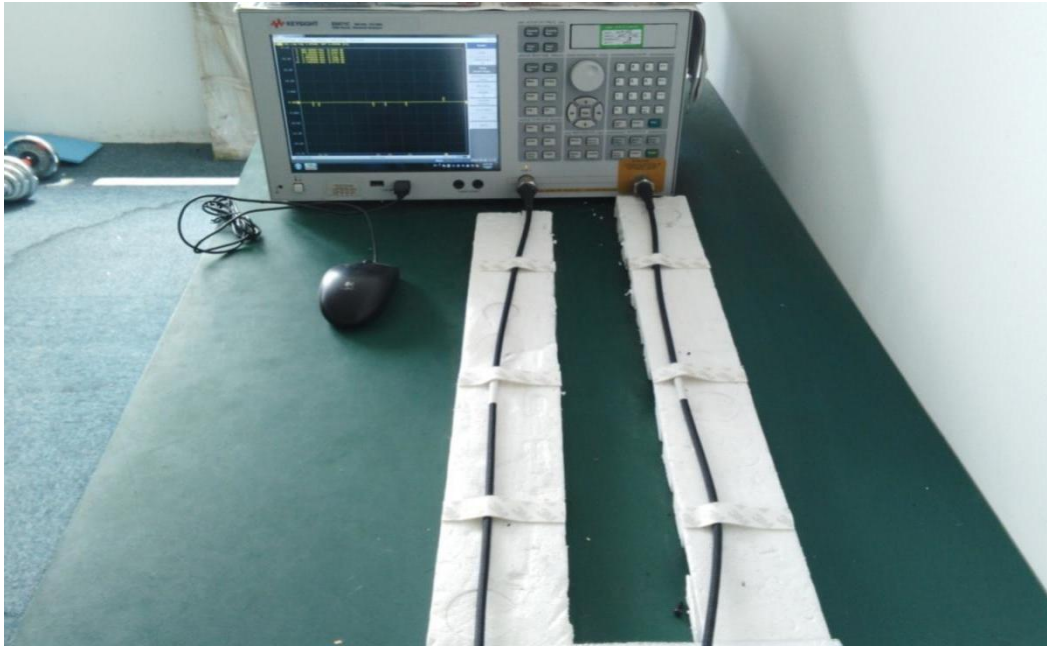



1.1.2 Anechoic Chamber Test Setup

The gain of the antenna was measured in the anechoic chamber. The chamber provides less than -30 dB reflectivity from 400 MHz through 6 GHz. The chamber size is: 7m*4m*3m. The measurement results are calibrated using a leaky wave horn standard. We can measure the antenna gain and efficiency accurately.

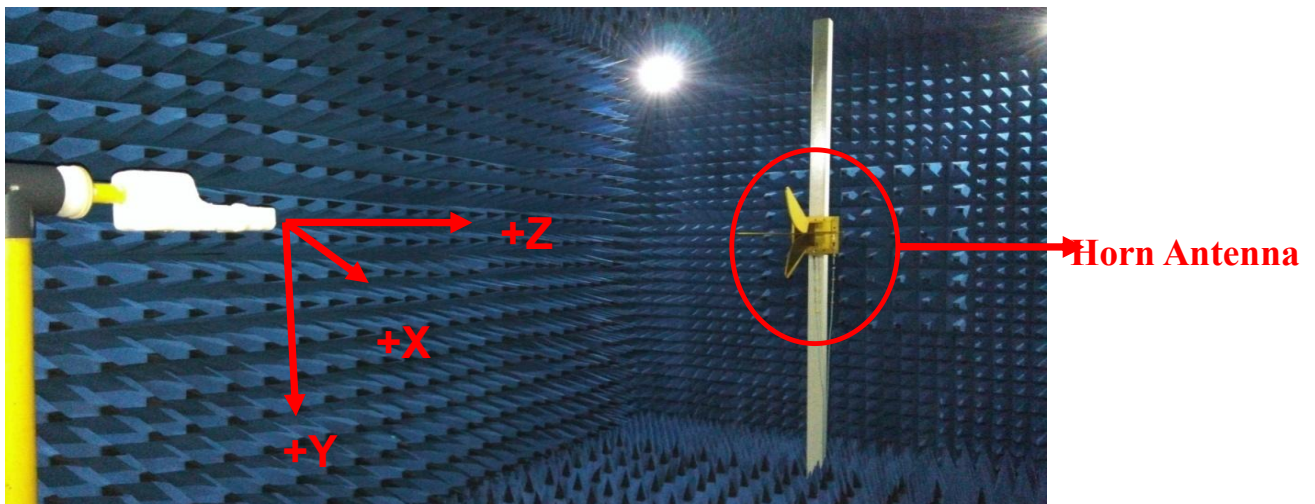

2.Antenna Solution

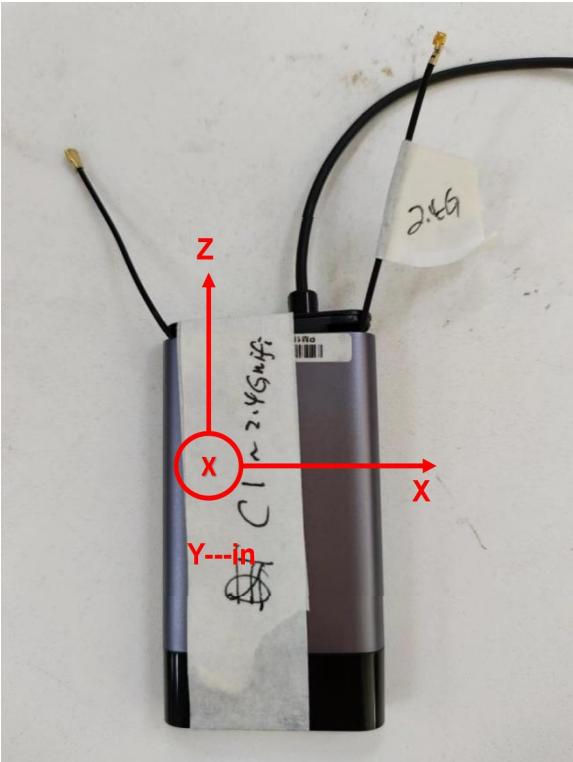

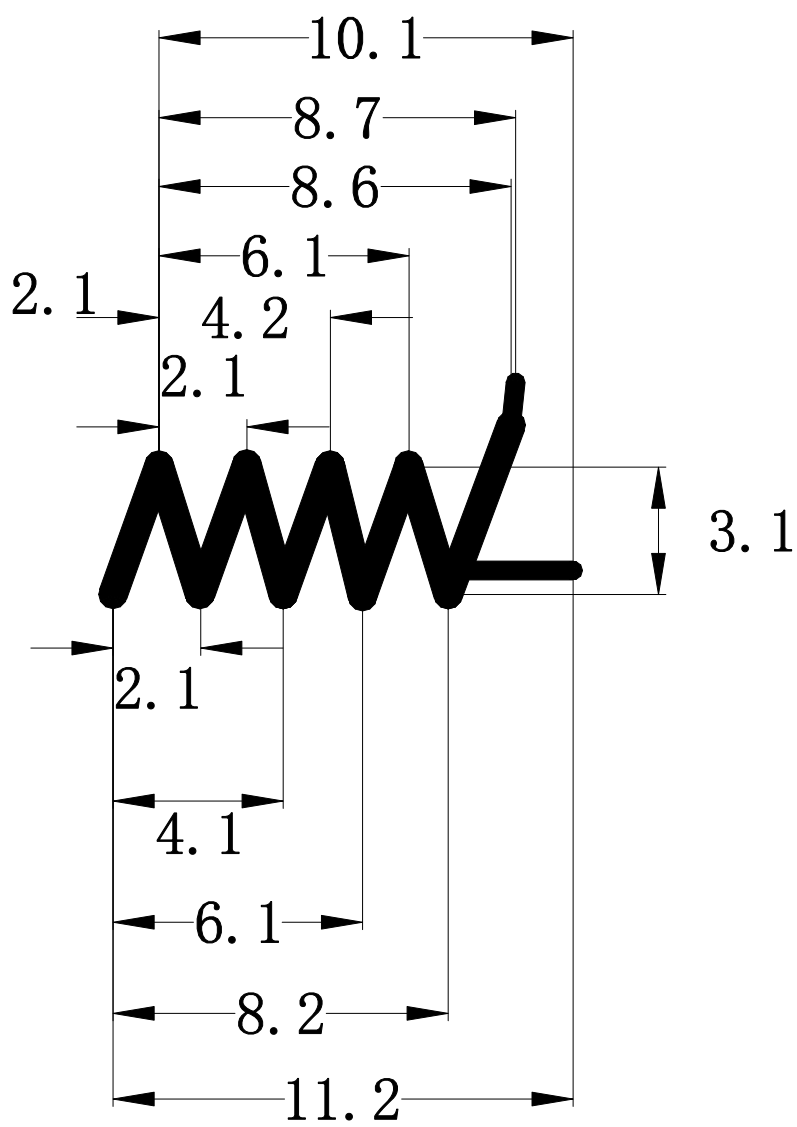

3.Data Preview


S11




Passive Data:

Freq.(MHz)	2400	2450	2500
Gain(dBi)	-2.52	-3.10	-3.75
Eff.%	15.4	14.5	14.1


Radiation patterns:3D (2400MHz /2450MHz/2500MHz)

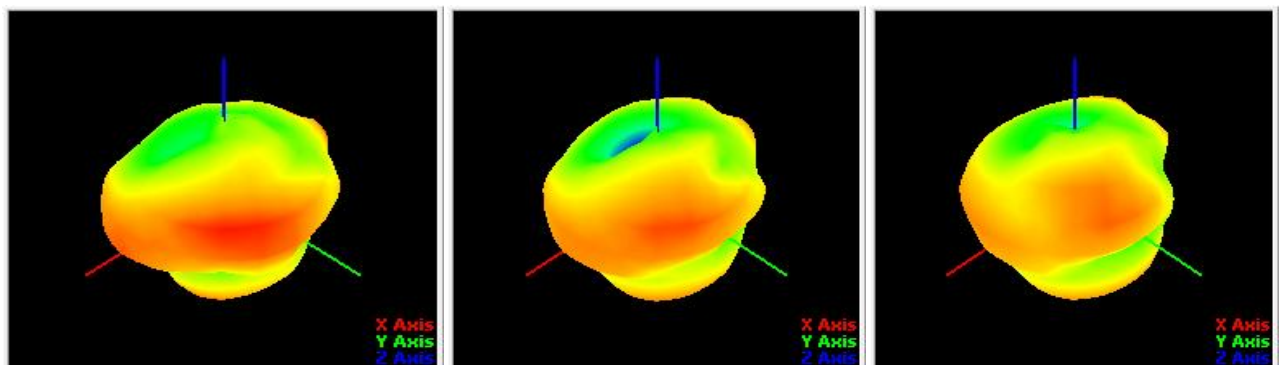

Radiation patterns:2D
2400MHz

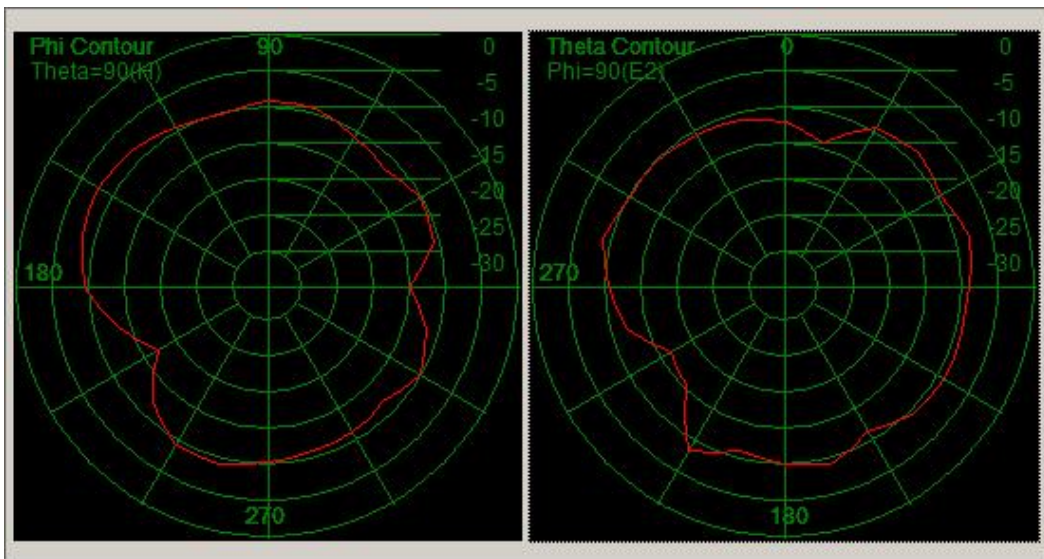

2450MHz

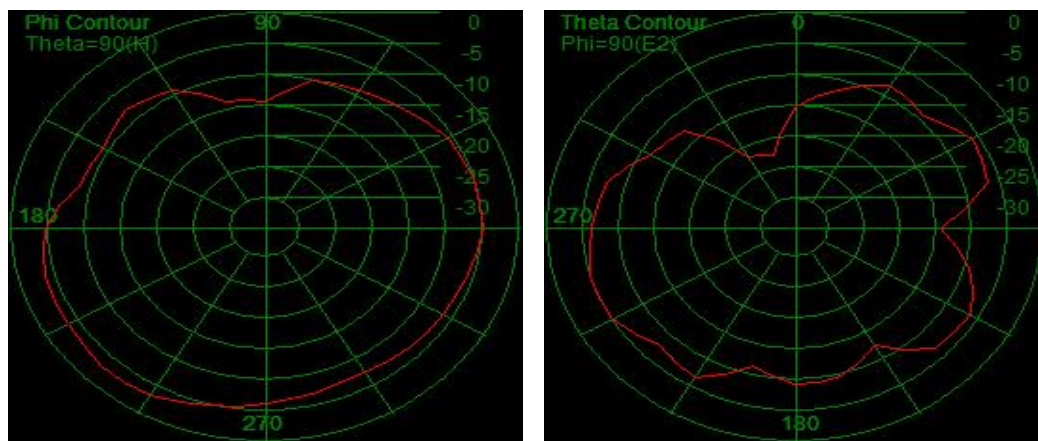

2500MHz

