

Testing Tomorrow's Technology

Application

For

**Title 47 USC Part 2, Subpart J, Paragraph 2.907, 2.1043 Equipment Authorization
of Certification for an Intentional Radiator per Part 15, Subpart C,
Paragraphs 15.207, 15.209 and 15.249**

And

**Innovation, Science, and Economic Development Canada Certification per
RSS-210 Issue 10: License-Exempt Radio Apparatus: Category I Equipment and
RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus**

For

**Aro Technology, Inc
Model: ARO5-001
FCC ID: 2A7ZV-ARO5-001
IC: 28925-ARO5001**

**UST Project: 22-0212
Issue Date: August 15, 2022**

Total Pages in This Report: 32

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: 

Title: Consulting Engineer – President

Date: August 15, 2022



This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

MEASUREMENT TECHNICAL REPORT

Company Name:	Aro Technology, Inc
Address:	2450 E. J. Chapman Drive Knoxville, TN 37996
Model:	ARO5-001
FCC ID:	2A7ZV-ARO5-001
IC ID:	28925-ARO5001
Date:	August 15, 2022

This report concerns (check one): ☒ Original ☐ Class II Permissive Change

Equipment type: 2.4 GHz ISM Radio Transceiver

Technical Information:

Radio Technology:	Bluetooth
Frequency of Operation (MHz):	2404-2480
Output Power (dBm):	+9 dBm (rated)
Type of Modulation:	DPSK
Data/Bit Rate (Mbps):	1 Mbps (max)
Antenna Gain (dBi):	-0.5
Software used to program EUT:	ESP32_RF_TEST
EUT firmware:	V1.3.9
Power setting:	(Max)

Report prepared by:

US Tech

3505 Francis Circle Alpharetta, GA 30004

PH : 770-740-0717 Fax : 770-740-1508

www.ustech-lab.com

Table of Contents

<u>Paragraph Title</u>	<u>Page</u>
1 General Information.....	7
1.1 Purpose of this Report	7
1.2 Characterization of Test Sample.....	7
1.3 Product Description	7
1.4 Configuration of Tested System.....	7
1.5 Test Facility.....	8
2 Tests and Measurements	11
2.1 Test Equipment.....	11
2.2 Modifications to EUT Hardware	12
2.3 Number of Measurements for Intentional Radiators (15.31(m)).....	12
2.4 Frequency Range of Radiated Measurements (Part 15.33).....	12
2.4.1 Intentional Radiator.....	12
2.4.2 Unintentional Radiator	13
2.5 Measurement Detector Function and Bandwidth (CFR 15.35)	13
2.5.1 Detector Function and Associated Bandwidth	13
2.5.2 Corresponding Peak and Average Requirements.....	13
2.5.3 Pulsed Transmitter Averaging.....	13
2.6 Transmitter Duty Cycle (CFR 15.35 (c)).....	14
2.7 EUT Antenna Requirements (CFR 15.203)	14
2.8 Restricted Bands of Operation (CFR 15.205)	14
2.9 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a)(c)) (IC RSS 210, A2.9 (a))	15
2.10 Band Edge Measurements – (CFR 15.249 (d))	18
2.11 Occupied Bandwidth (CFR 2.1049).....	27
2.12 Powerline Emissions (CFR 15.207).....	31
2.13 Intentional Radiator, Radiated Emissions (CFR 15.209)	33
2.14 Measurement Uncertainty	39
2.14.1 Conducted Emissions Measurement Uncertainty	39
2.14.2 Radiated Emissions Measurement Uncertainty	39

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration	10
Figure 2.	Radiated Emissions Setup.....	15
Figure 3.	Radiated Emissions Setup.....	18
Figure 4.	Band Edge Compliance - Low Channel Delta – Peak.....	19
Figure 5.	Band Edge Compliance - Low Channel Delta – Average.....	20
Figure 6.	Band Edge Compliance - High Channel Delta – Peak.....	21
Figure 7.	Band Edge Compliance - High Channel Delta – Average.....	22
Figure 8.	Low Channel Restricted Band - Peak	23
Figure 9.	Low Channel Restricted Band - Average	24
Figure 10.	High Channel Restricted Band - Peak	25
Figure 11.	High Channel Restricted Band - Average	26
Figure 12.	Bench Test Setup	27
Figure 13.	99% Occupied Bandwidth Low Channel	28
Figure 14.	99% Occupied Bandwidth Mid Channel.....	29
Figure 15.	99% Occupied Bandwidth High Channel	30
Figure 16.	Powerline conducted Test Setup	31
Figure 17.	Test Configuration below 30 MHz.....	33
Figure 18.	Test Configuration below 1000 MHz.....	34
Figure 19.	Test Configuration above 1000 MHz.....	34
Figure 20.	Radiated Emissions, Horizontal 30 – 1000 MHz.....	37
Figure 21.	Radiated Emissions, Vertical 30 – 1000 MHz	37

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	9
Table 2.	Test Instruments	11
Table 3.	Number of Test Frequencies for Intentional Radiators.....	12
Table 4.	Allowed Antenna(s).....	14
Table 5.	Average Radiated Fundamental & Harmonic Emissions	16
Table 6.	Peak Radiated Fundamental & Harmonic Emissions.....	17
Table 7.	Occupied Bandwidth	27
Table 8.	Power Line Conducted Emissions Test Data, Part 15.207.....	32
Table 9.	Radiated Emissions, 9 kHz - 30 MHz.....	35
Table 10.	Spurious Radiated Emissions (30 MHz – 1 GHz)	36
Table 11.	Spurious Radiated Emissions (1 GHz – 25 GHz).....	38

List of Attachments

IC Agency Agreement	External Photographs
FCC Agency Agreement	Internal Photographs
Application Forms	Confidential Schematics
Canadian Representative Letter	Confidential Theory of Operation
IC Cover Letter	Confidential Block Diagram
IC RSS to 15.249 Cross Reference	User Manual
Confidentiality Request Letter	Sample Label
Test Configuration Photographs	

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 249.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on August 3, 2022 in good operating condition.

1.3 Product Description

The Equipment under Test (EUT) is the Aro Technology, Inc. Model ARO5-001. The ARO5-001 is a smart box which consumers place their mobile devices into to facilitate mindful phone use, family, and focus time away from devices. A consumer would place their iPhone into the box and close the lid. Using Bluetooth Low Energy, the mobile application connects to the Aro smart box to track usage time. Optionally, the consumer can use the USB-C ports available in the box to charge their iPhone while they are away from them.

The EUT operates either on an AC/DC adaptor operates with an input of 100-240V, 50/60Hz, and 1A max and output of 12V, 3A.

The rated output power for this device is +9.0 dBm

Type of modulation: DPSK

Data Rate: Bluetooth Specification 8.0

Packet Type: Bluetooth Specification 8.0

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4:2014 and ANSI C63.4:2013, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* for FCC subpart A Digital equipment Verification requirements and per *ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for FCC subpart C Intentional Radiators.

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

A list of EUT and Peripherals is found in Table 1. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5301. Additionally this site has also been fully described and submitted to Industry Canada (ISED), and has been approved under file number 9900A-1.

1.6 Related Submittals

The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.207 and 15.209 as a transmitter.
- b) SDoC under 15.101 as a digital device.

The SDoC requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the SDoC authorization report (Parts 15.107 and 15.109) for the EUT is included herein.

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

Table 1. EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID	CABLES P/D
EUT/ Aro Technology, Inc.	ARO5-001	Engineering Sample	Pending: FCC ID: 2A7ZV-ARO5-001 IC: 28925-ARO5001	P
iPhone 7	MN9E2LL/A	F4GT8JJBHG7G	FCC ID: BCG-E3091A	P
iPhone 12 Pro Max	MGCF3LL/A	F2LF9PTE0D3Y	FCC ID: BCG-E3548A	P
iPhone 12 Mini	MG8J3LL/A	F4GDMA8N0GRG	FCC ID: BCG-E3539A	P
iPhone 11	MWGF2LL/A	FK1ZCDYZN10C	FCC ID: BCG-E3309A	P
AC Adaptor Tensility International Corporation	TSAA3601A- 1203000US	16-00217	N/A	p
AC Adaptor Channel Well Technology	2AEC054F	Engineering Sample	N/A	P
Laptop Hewlett-Packard	15-da0012dx	CND8397BJW	FCC ID: TX2-RTL8723DE IC: 6317A-RTL8723DE	P/D
Antenna See antenna details	--	--	--	--

U= Unshielded S= Shielded P= Power D= Data

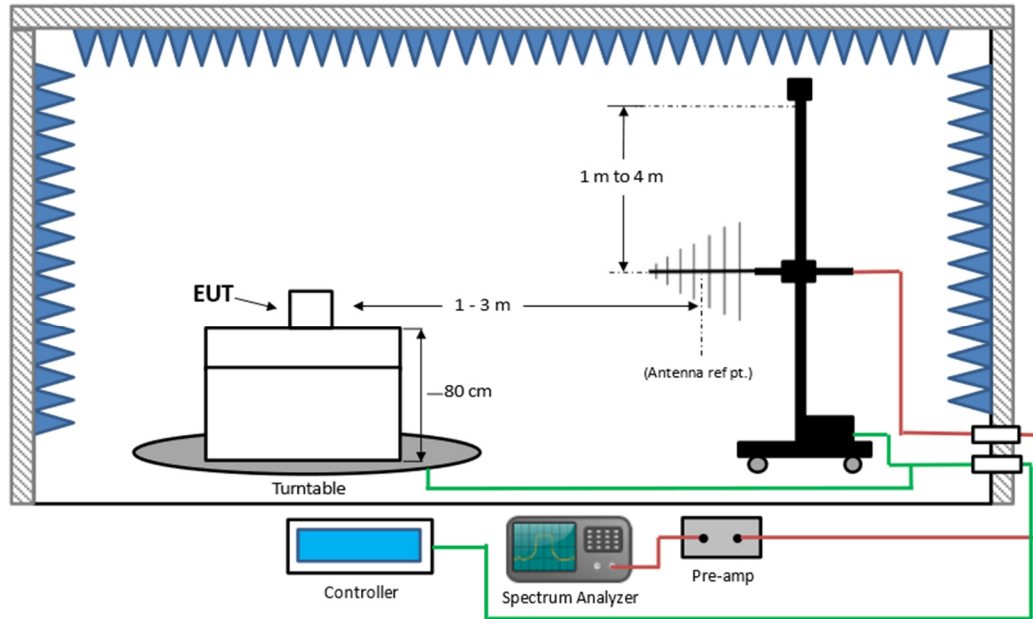


Figure 1. Block Diagram of Test Configuration

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

Table 2. Test Instruments

TEST INSTRUMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DUE DATE
Spectrum Analyzer	Agilent	E4407B	US41442935	9/2/2022 2 yr.
Spectrum Analyzer	Rigol	DSA815	DSA8A18030 0138	1/6/2024 2 yr.
Spectrum Analyzer	Hewlett-Packard	8593E	3205A00124	2/28/2024 2 yr.
RF Preamp 100 kHz To 1.3 GHz	Hewlett-Packard	8447D	1937A02980	6/9/2023
Preamp 1.0 GHz To 26.0 GHz	Hewlett-Packard	8449B	3008A00914	2/11/2023
Loop Antenna	ETS Lindgren	6502	9810-3246	Calibrated before use
Biconical Antenna	EMCO	3110B	9306-1708	8/17/2023 2 yr
Log Periodic Antenna	EMCO	3146	9305-3600	12/13/2023 2 yr
Horn Antenna	EMCO	SAS-571	605	4/28/2024 2 yr
High Pass Filter	Microwave Circuits	H3R020G2	001DC9528	8/1/2023
LISN X 2	Solar Electronics	9247-50-TS- 50-N	955824 and 955825	2/8/2023

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates at 2404 MHz to 2480 MHz, 3 test frequencies were used.

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the parameters outlined following.

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG), the duty cycle factor calculated will be applied.

2.6 Transmitter Duty Cycle (CFR 15.35 (c))

When the radiated emissions limits are expressed in terms of AVERAGE values and pulse operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

In this case the Duty Cycle was calculated. The calculation for the Duty Cycle factor is included in the Theory of Operation exhibit.

2.7 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)


REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
Antenna	Johanson	Chip Antenna	2450AT18A100E	-0.5	solder

2.8 Restricted Bands of Operation (CFR 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious emissions cannot exceed the limits of 15.209. Radiated Harmonics and other Spurious Emissions are examined for this requirement; see paragraph 2.1.

2.9 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a)(c)) (IC RSS 210, A2.9 (a))

Radiated Radio measurements: the EUT was placed into a continuous transmit mode of operation and a preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the product. To obtain the worst case results, the EUT was placed on a table top of a non-conductive table, 80 cm above the ground floor. The EUT was positioned 3 meters away from the receiving antenna during testing (1 meter at frequencies above 6 GHz and if the emissions were less than 6 dB from the noise floor). The EUT was tested in X, Y and Z axes or the position of normal operation to determine the worst case orientation. Radiated measurements below 30 MHz were tested with a RBW = 9 kHz; emissions below 1 GHz were tested with a RBW = 120 kHz and radiated measurements above 1 GHz were measured using a RBW = 1 MHz. VBW was set to three times the RBW value.

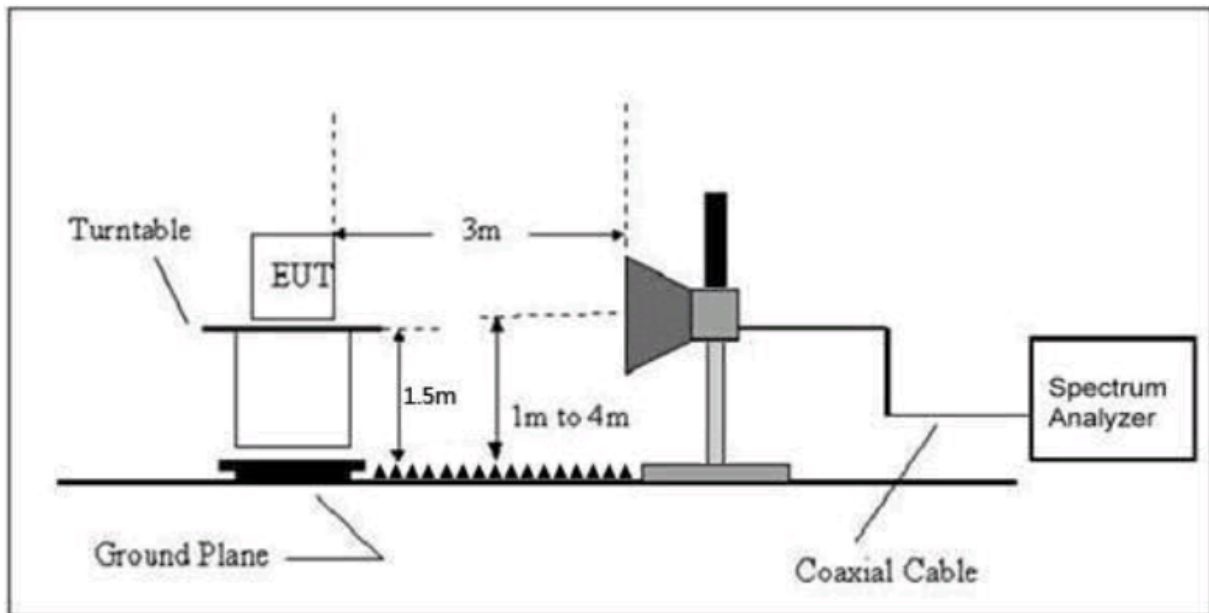

**Figure 2. Radiated Emissions Setup
(Fundamental and Harmonics)**

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

Table 5. Average Radiated Fundamental & Harmonic Emissions


Test: Part 15C, Para 15.249								
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - AVERAGE								
2403.00	43.59	0.00	32.19	75.78	94.0	3.0m./VERT	18.2	AVG
*4806.00	31.76	0.00	1.70	33.49	54.0	3.0m./VERT	20.5	AVG
*7207.00	32.23	-9.50	6.73	29.46	54.0	1.0m./VERT	24.5	AVG
Mid Channel - AVERAGE								
2441.00	48.62	0.00	32.18	80.80	94.0	3.0m./VERT	13.2	AVG
*4888.00	31.28	0.00	1.40	32.68	54.0	3.0m./VERT	21.3	AVG
*7324.00	31.95	-9.50	7.64	30.09	54.0	1.0m./HORZ	23.9	AVG
High Channel- AVERAGE								
2480.00	51.93	0.00	32.36	84.29	94.0	3.0m./VERT	9.7	AVG
*4960.00	31.47	0.00	1.81	33.28	54.0	3.0m./HORZ	20.7	AVG
*7442.00	31.13	-9.50	6.60	28.23	54.0	1.0m./VERT	25.8	AVG

1. (*) Falls within the restricted bands of CFR 15.205.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. Measurement at 1 meters corrected using inverse extrapolation factor of -9.5 dB to correct the value for 3 meter.

Sample Calculation at 2403 MHz:

Magnitude of Measured Frequency	43.59	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	32.19	dB/m
Corrected Result	75.78	dBuV/m

Test Date: August 10, 2022

Tested By
 Signature: 

Name: Gabriel Medina

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

Table 6. Peak Radiated Fundamental & Harmonic Emissions


Test: Part 15C, Para 15.249								
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - PEAK								
2403.00	55.62	0.00	32.19	87.81	114	3.0m./VERT	26.2	PK
*4806.00	51.16	0.00	1.70	52.86	74.0	3.0m./VERT	21.1	PK
*7216.00	51.11	-9.50	6.76	48.37	74.0	1.0m./HORZ	25.6	PK
Mid Channel – PEAK								
2441.00	59.02	0.00	32.18	91.20	114	3.0m./VERT	22.8	PK
*4884.00	50.42	0.00	1.42	51.84	74.0	3.0m./HORZ	22.2	PK
*7321.00	51.67	-9.50	7.61	49.78	74.0	1.0m./VERT	24.2	PK
High Channel– PEAK								
2480.00	62.45	0.00	32.36	94.81	114	3.0m./VERT	19.2	PK
*4960.00	50.41	0.00	1.81	52.22	74.0	3.0m./HORZ	21.8	PK
*7438.00	52.35	-9.50	6.67	48.52	74.0	1.0m./HORZ	25.5	PK

1. (*) Falls within the restricted bands of CFR 15.205.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. Measurement at 1 meters corrected using inverse extrapolation factor of -9.5 dB to correct the value for 3 meter.

Sample Calculation at 2403 MHz:

Magnitude of Measured Frequency	55.62	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	32.19	dB/m
Corrected Result	87.81	dBuV/m


Test Date: August 10, 2022

Tested By
 Signature: 

Name: Gabriel Medina

2.10 Band Edge Measurements – (CFR 15.249 (d))

Band Edge measurements are made following the guidelines in FCC KDB Publication No. 558074 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Radiated measurements are performed to demonstrate compliance with the requirement of 15.249(d) that all emissions outside of the band edges be attenuated by at least 50 dB or 15.209 limits, when compared to its highest in-band value (contained in a 100 kHz band).

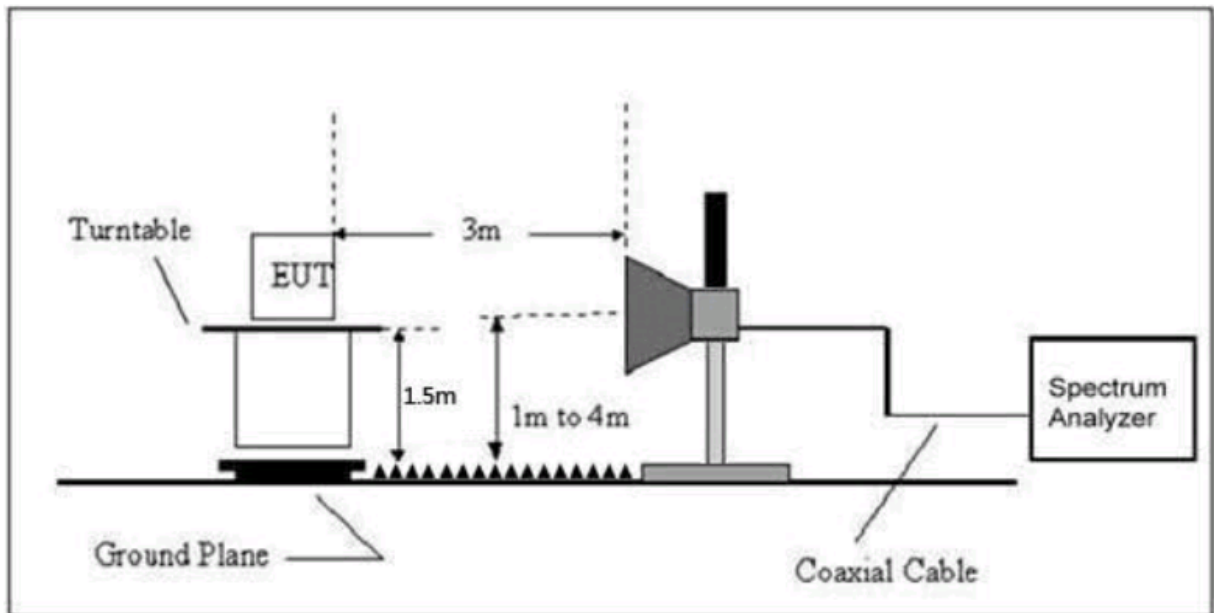

**Figure 3. Radiated Emissions Setup
(Radiated Bandedge & Restricted Band)**

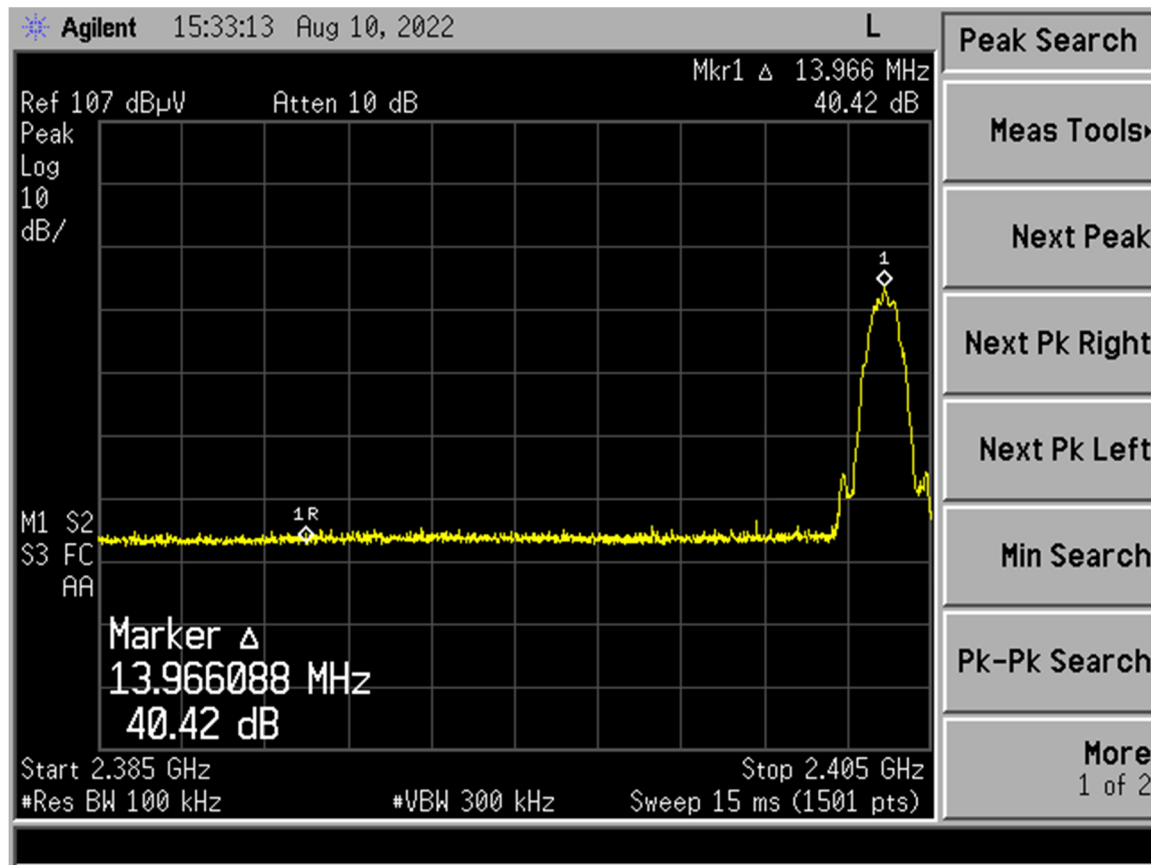


Figure 4. Band Edge Compliance - Low Channel Delta – Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	40.42	dB
Band Edge Limit	20.00	dB
Band Edge Margin	20.42	dB

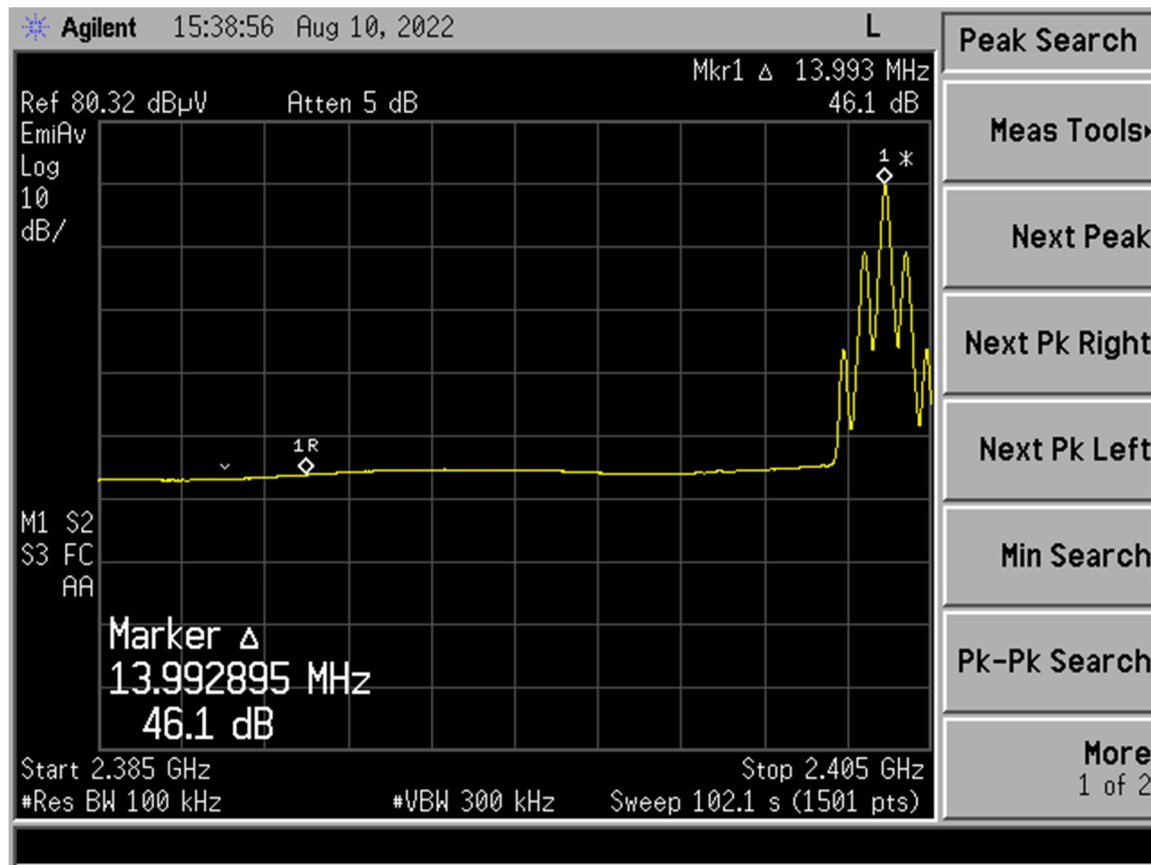


Figure 5. Band Edge Compliance - Low Channel Delta – Average

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	46.10	dB
Band Edge Limit	20.00	dB
Band Edge Margin	26.10	dB

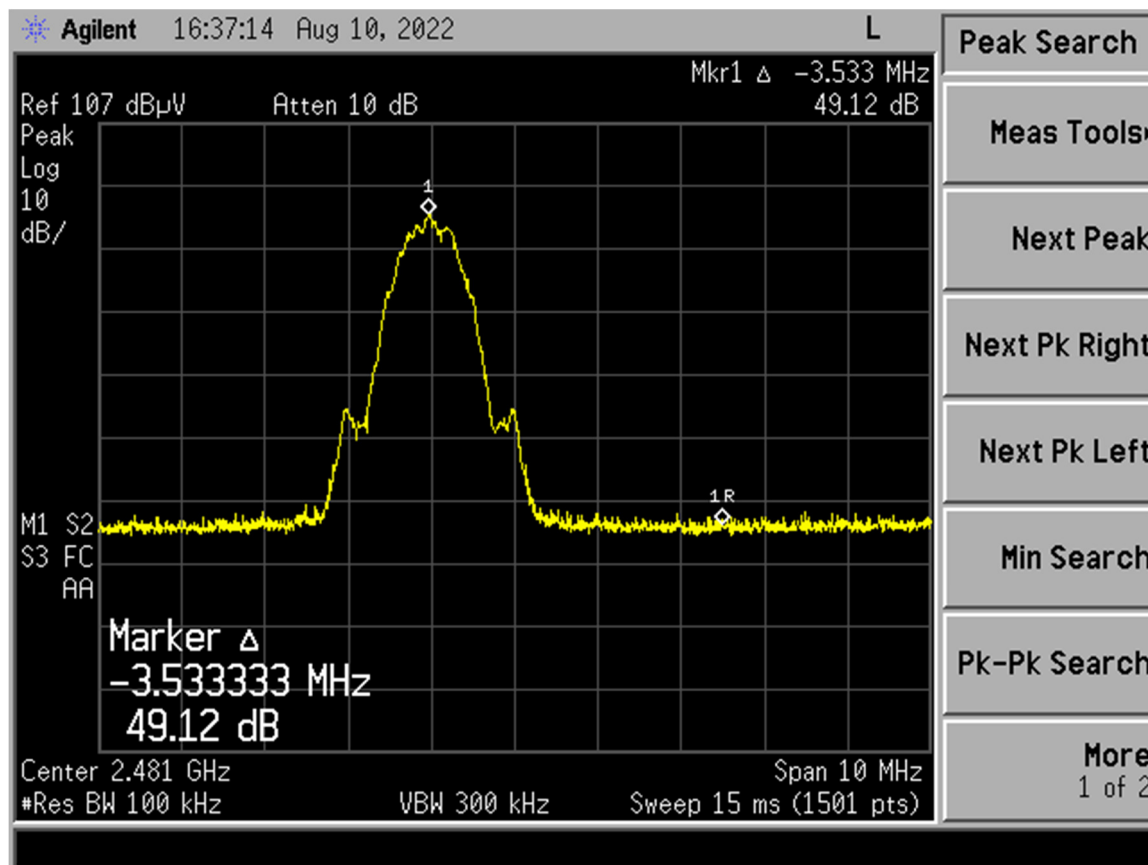


Figure 6. Band Edge Compliance - High Channel Delta – Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	49.12	dB
Band Edge Limit	20.00	dB
Band Edge Margin	29.12	dB

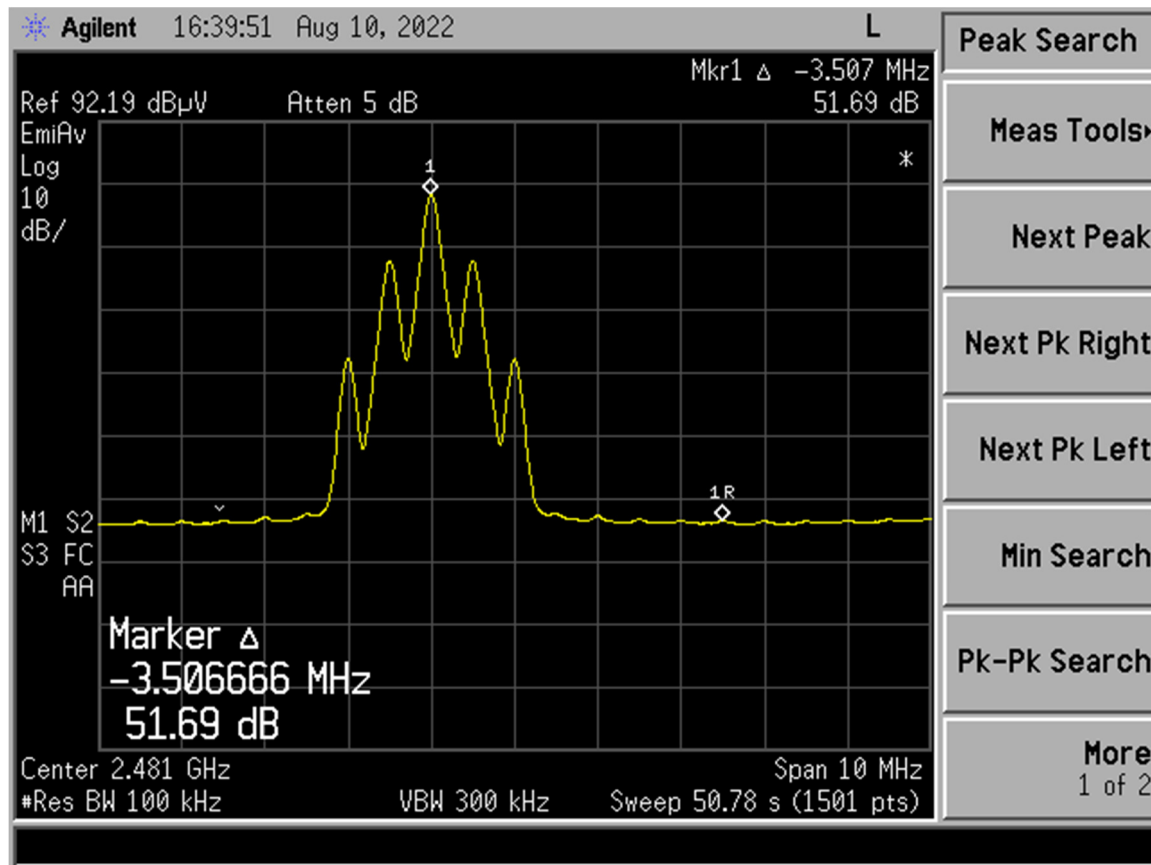


Figure 7. Band Edge Compliance - High Channel Delta – Average

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	51.69	dB
Band Edge Limit	20.00	dB
Band Edge Margin	31.69	dB

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

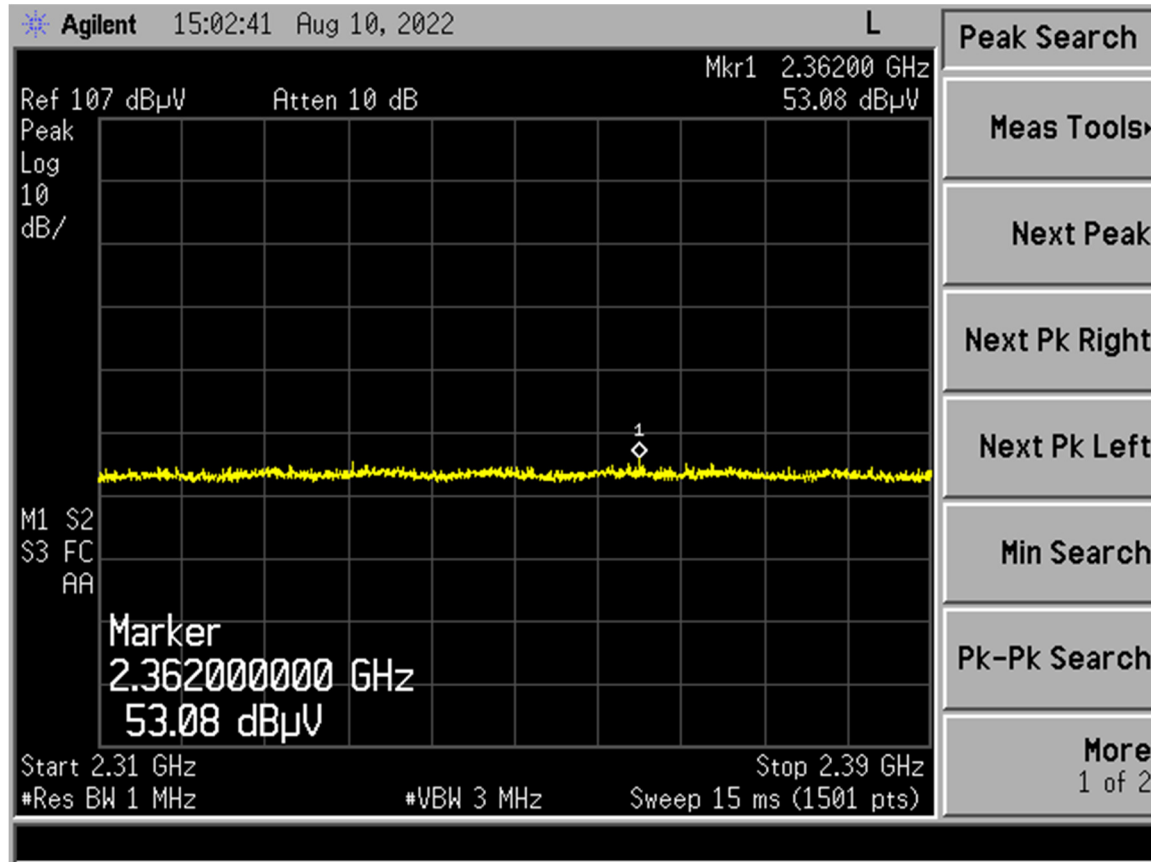


Figure 8. Low Channel Restricted Band - Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2362.00	53.08	-6.57	46.51	74.0	3.0m./VERT	27.5	PK

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

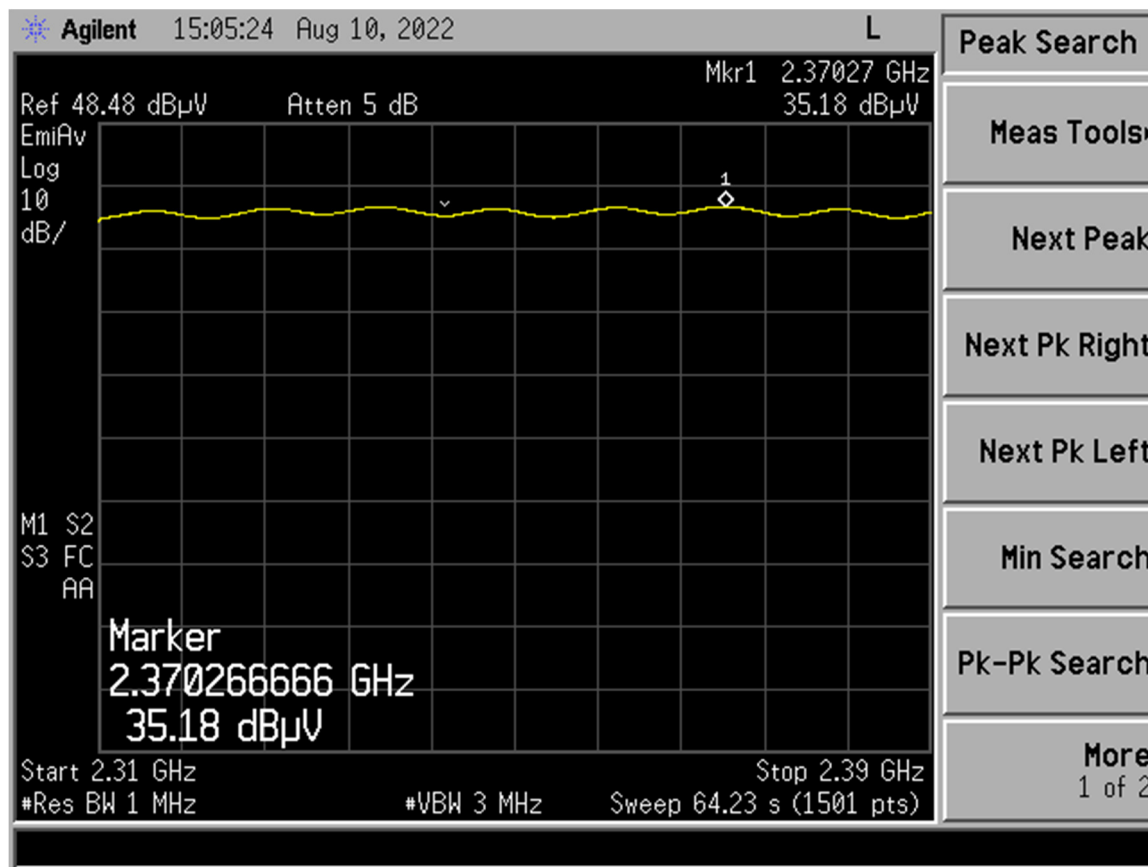


Figure 9. Low Channel Restricted Band - Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2370.26	35.18	-6.57	28.61	54.0	3.0m./VERT	25.4	AVG

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

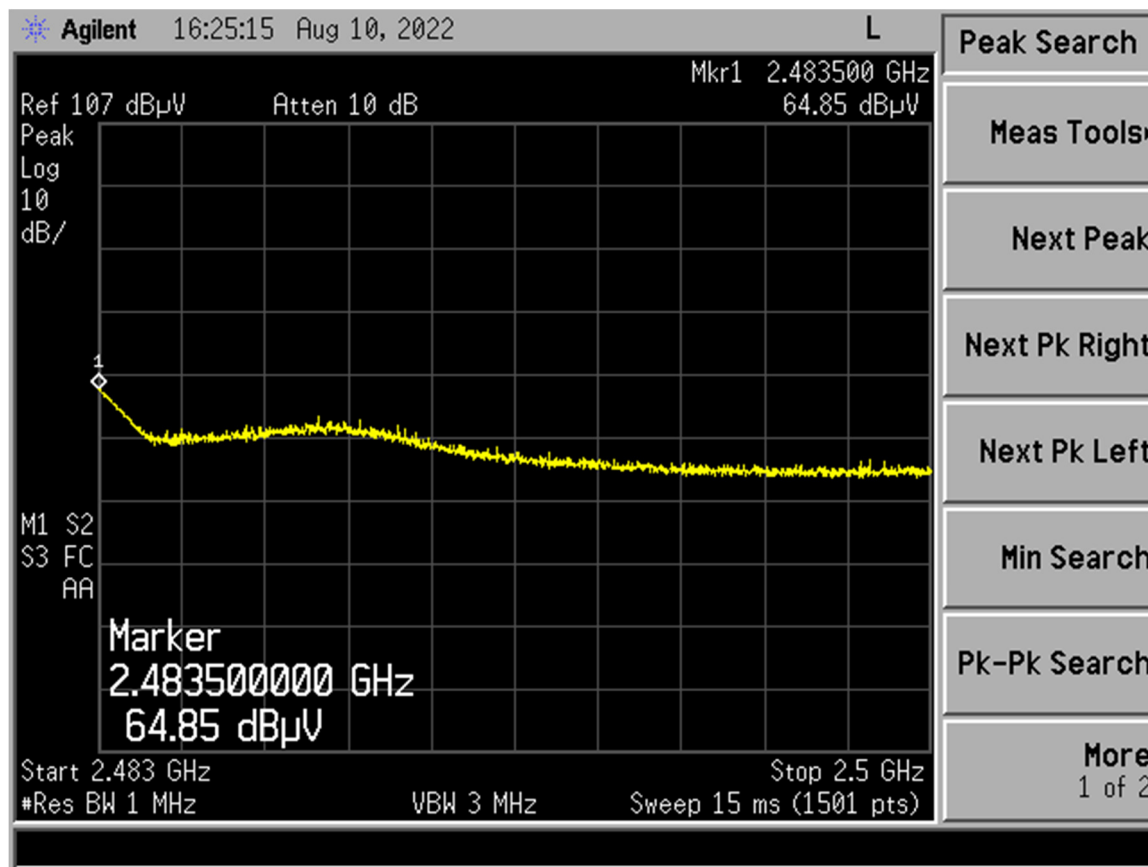


Figure 10. High Channel Restricted Band - Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.5	64.85	-6.14	58.71	74.0	3.0m./VERT	15.3	PK

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

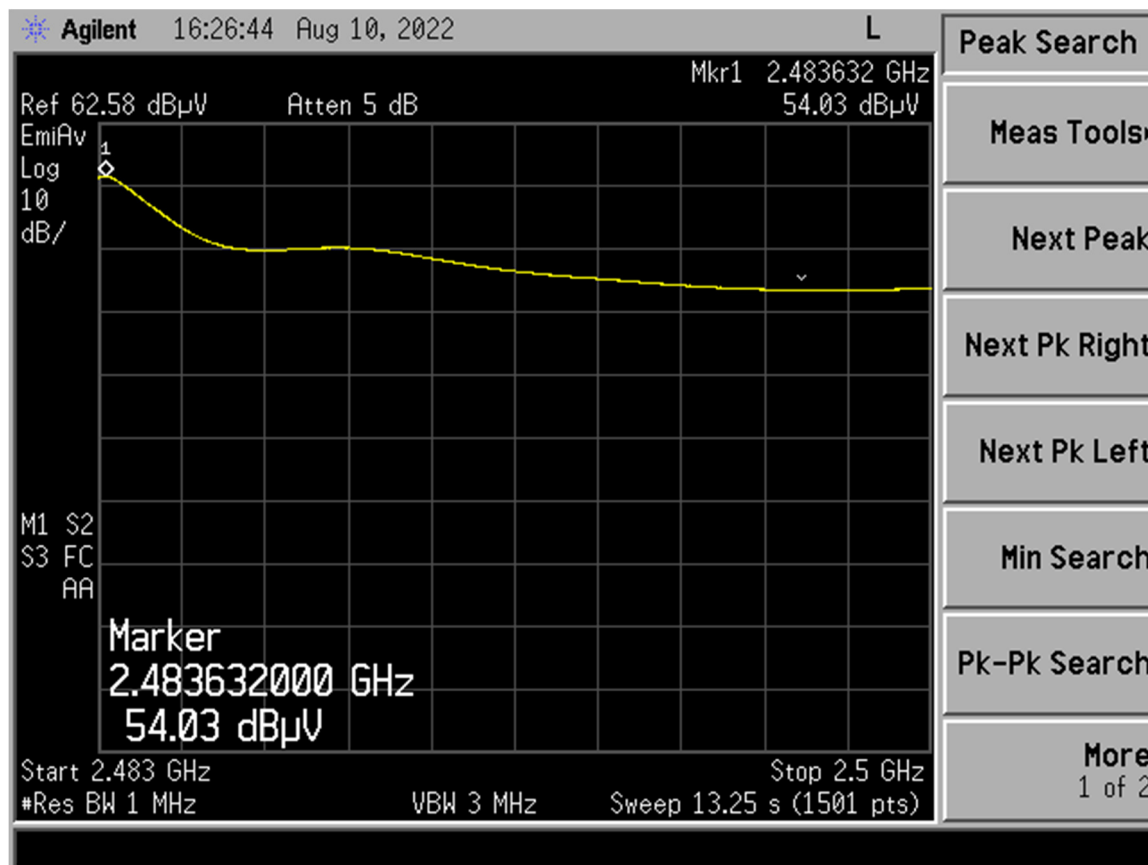


Figure 11. High Channel Restricted Band - Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.63	54.03	-6.14	47.89	54.0	3.0m./VERT	6.1	AVG

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

2.11 Occupied Bandwidth (CFR 2.1049)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.




Figure 12. Bench Test Setup

Table 7. Occupied Bandwidth

Frequency (MHz)	Occupied Bandwidth (MHz)
2402	1.035
2440	1.028
2480	1.028

Test Date: August 12, 2022

Tested By
Signature: 

Name: Gabriel Medina

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

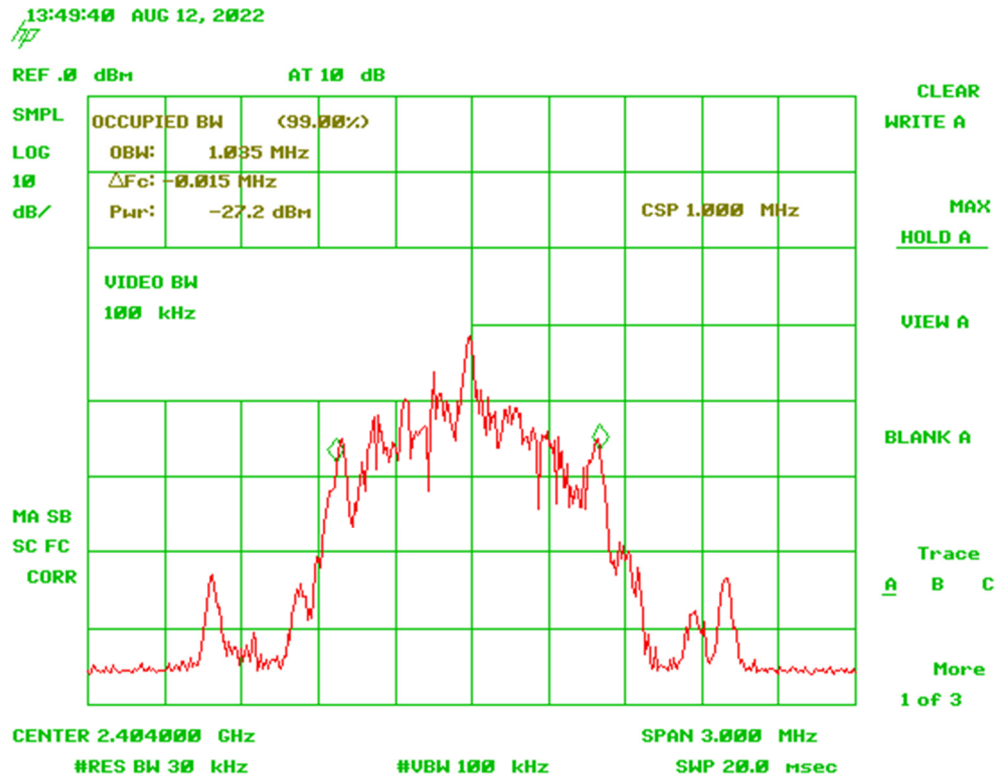


Figure 13. 99% Occupied Bandwidth Low Channel

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

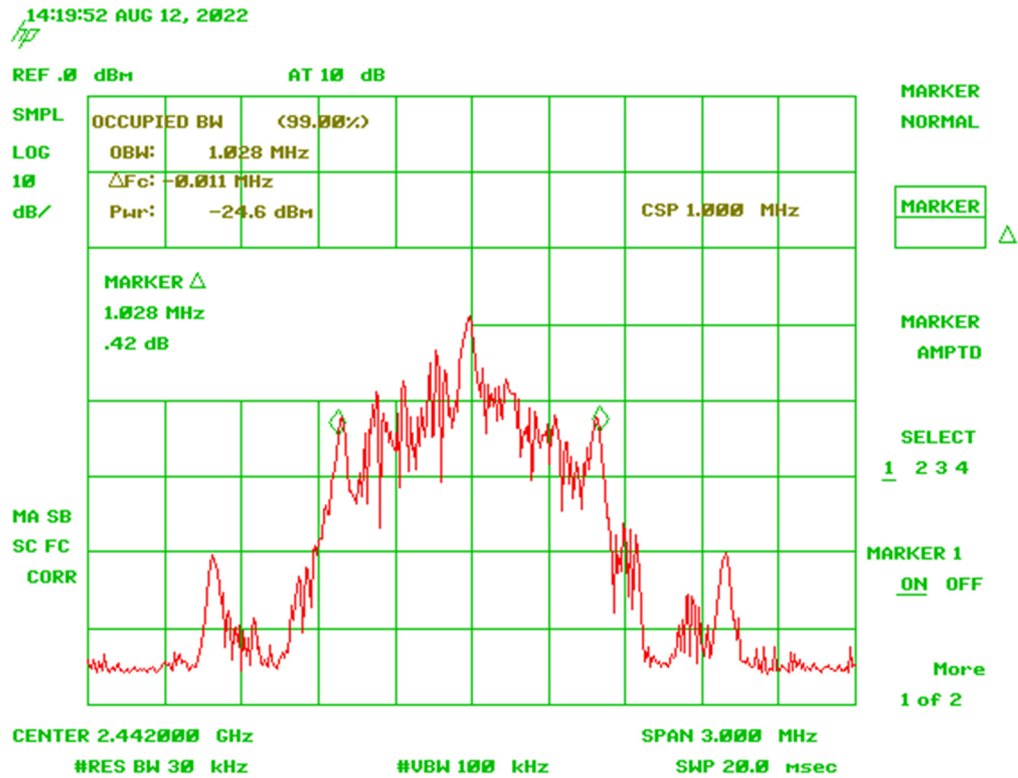


Figure 14. 99% Occupied Bandwidth Mid Channel

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

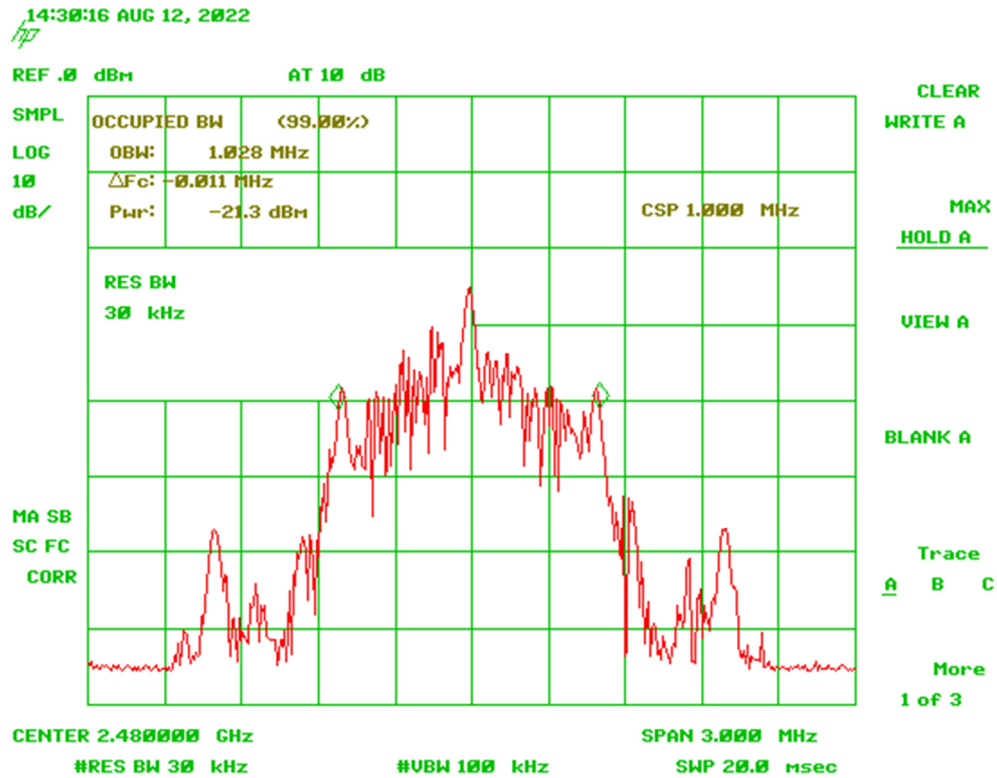


Figure 15. 99% Occupied Bandwidth High Channel

2.12 Powerline Emissions (CFR 15.207)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.207, per ANSI C63.4:2014, Paragraph 7, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmission.

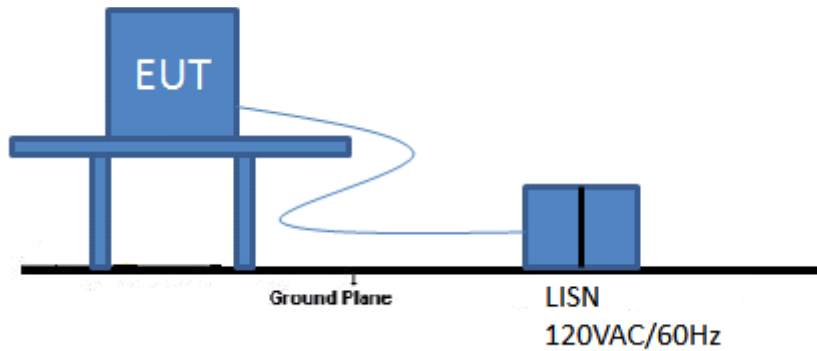


Figure 16. Powerline conducted Test Setup

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001


Table 8. Power Line Conducted Emissions Test Data, Part 15.207

150kHz to 30 MHz with Class B Limits						
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Results (dBuV)	AVG Limits (dBuV)	Margin (dB)	Detector PK, QP, or AVG
Phase @ 120 Vac / 60Hz						
0.1500	58.35	0.08	58.43	66.0*	7.6	PK
0.1500	38.32	0.08	38.40	56.0	17.6	AVG
2.4430	51.07	0.07	51.14	56.0*	4.9	PK
2.4430	24.38	0.07	24.45	46.0	21.6	AVG
10.2080	44.71	0.55	45.26	50.0	4.7	PK
Neutral @ 120 Vac / 60Hz						
0.1523	57.90	0.13	58.03	65.9*	7.8	PK
0.1523	38.75	0.13	38.88	55.9	17.0	AVG
0.5975	41.81	0.51	42.32	56.0*	13.7	PK
0.5975	30.29	0.51	30.80	46.0	15.2	AVG
9.7500	40.83	0.61	41.44	50.0	8.6	PK

Sample Calculation at 0.1500 MHz:

Magnitude of Measured Frequency	58.35	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	0.08	dB/m
Corrected Result	58.43	dBuV/m

Test Date: August 5-8, 2022

Tested By
 Signature: 

Name: Gabriel Medina

2.13 Intentional Radiator, Radiated Emissions (CFR 15.209)

Radiated emissions disturbance Measurements were performed with an instrument having both peak and quasi-peak detectors over the frequency range of 9 KHz to 12.5 GHz. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emissions in the range of 9 KHz to 25 GHz are more than 20 dB below the limit.

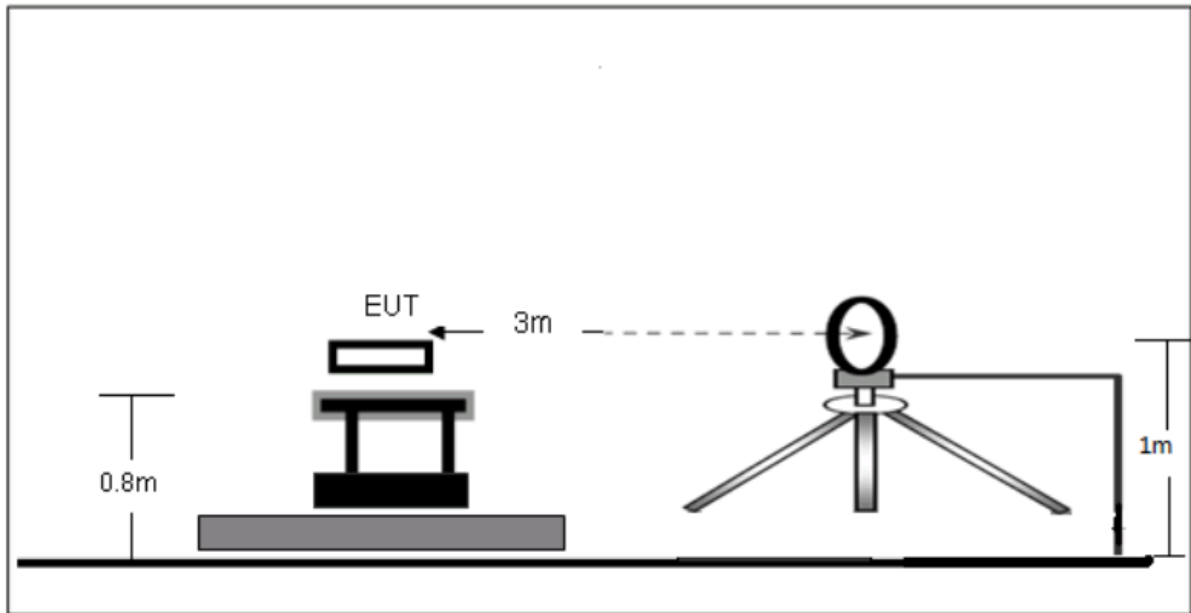


Figure 17. Test Configuration below 30 MHz

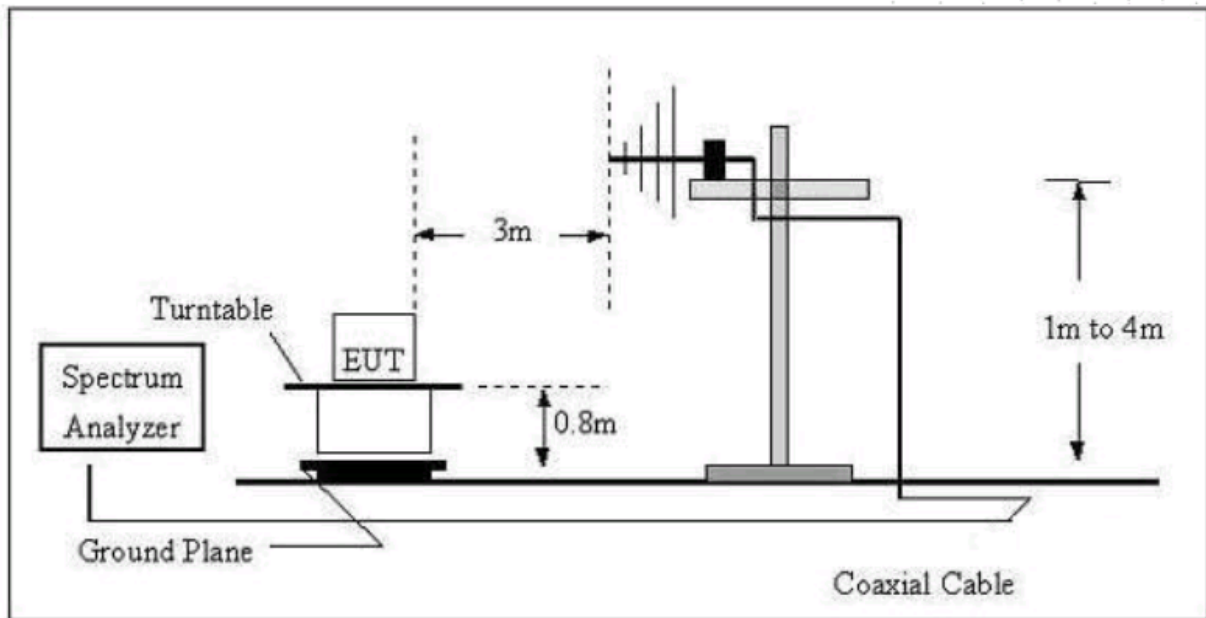


Figure 18. Test Configuration below 1000 MHz

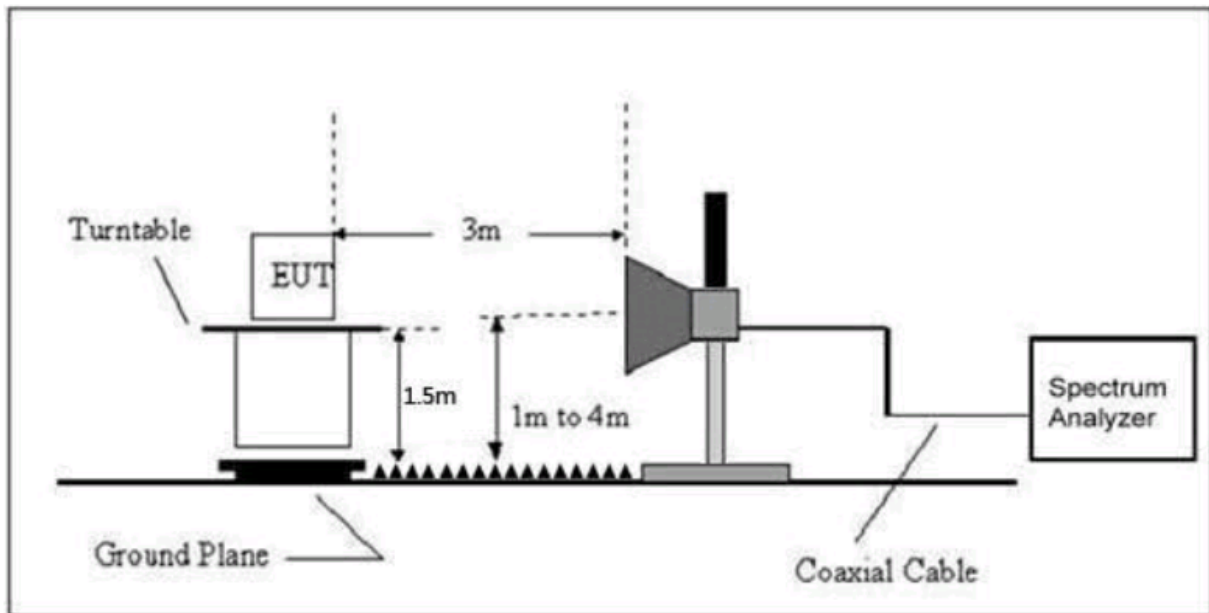


Figure 19. Test Configuration above 1000 MHz

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

Table 9. Radiated Emissions, 9 kHz - 30 MHz


9 kHz to 30 MHz, 15.209 limits							
Frequency (MHz)	Test Data (dBuV)	AF+CA- AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
All emissions were more than 20 dB below the applicable limit.							

Sample Calculations: N/A

Test Date: August 11, 2022

Tested By

Signature:



Name: Gabriel Medina

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Customer:
 Model:

FCC Part 15.209/249
 2A7ZV-ARO5-001
 28925-ARO5001
 22-0212
 August 15, 2022
 Aro Technology, Inc
 ARO5-001

Table 10. Spurious Radiated Emissions (30 MHz – 1 GHz)

Test: FCC Part 15 2.09 Limits							
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
85.38	45.42	-18.15	27.27	40.0	3m./HORZ	12.7	PK
195.36	40.96	-11.25	29.71	43.5	3m./HORZ	13.8	PK
220.58	44.79	-14.54	30.25	46.0	3m./HORZ	15.8	PK
671.66	41.57	-4.87	36.70	46.0	3m./HORZ	9.3	PK
857.56	41.23	-2.93	38.30	46.0	3m./HORZ	7.7	PK
82.68	50.13	-18.51	31.62	40.0	3m./VERT	8.4	PK
190.03	41.34	-11.19	30.15	43.5	3m./VERT	13.4	PK
351.98	41.71	-11.75	29.96	46.0	3m./VERT	16.0	PK
623.90	41.89	-6.91	34.98	46.0	3m./VERT	11.0	PK
871.28	42.25	-4.53	37.72	46.0	3m./VERT	8.3	PK


Sample Calculation at 85.38 MHz:

Magnitude of Measured Frequency	45.42 dBuV
+Antenna Factor + Cable Loss - Amplifier Gain	-18.15 dB/m
Corrected Result	27.27 dBuV/m

Test Date: August 11, 2022

Tested By

Signature:



Name: Gabriel Medina

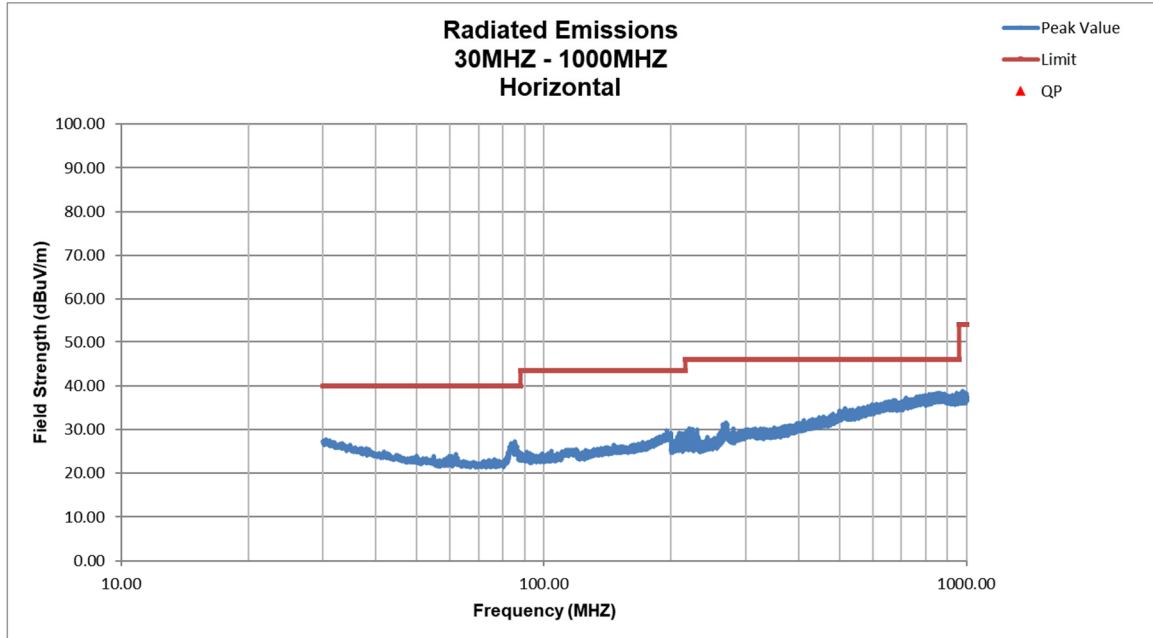


Figure 20. Radiated Emissions, Horizontal 30 – 1000 MHz

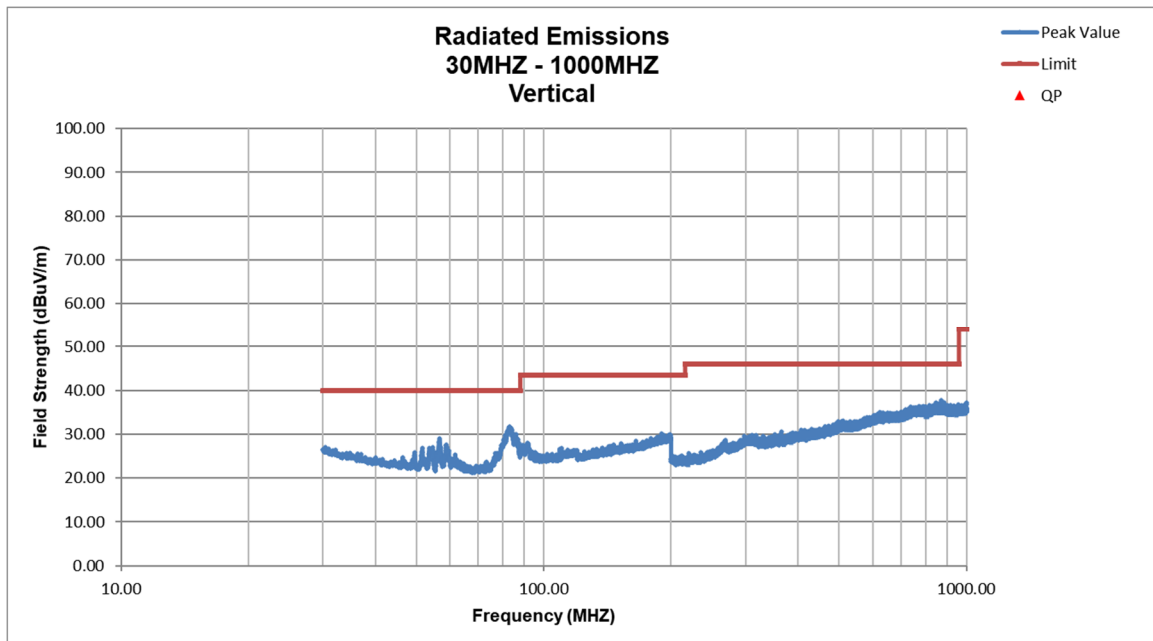


Figure 21. Radiated Emissions, Vertical 30 – 1000 MHz

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

Table 11. Spurious Radiated Emissions (1 GHz – 25 GHz)


Test: FCC Part 15.209							
Frequency (MHz)	Test Data (dBuV)	AF+CA- AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
All emissions were more than 20 dB below the applicable limit.							

Sample Calculation: N/A

Test Date: August 11, 2022

Tested By

Signature:



Name: Gabriel Medina

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Customer:
Model:

FCC Part 15.209/249
2A7ZV-ARO5-001
28925-ARO5001
22-0212
August 15, 2022
Aro Technology, Inc
ARO5-001

2.14 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2: 2011. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.14.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.85 dB.

2.14.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.40 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.19 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.08 dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty. Therefore, the EUT unconditionally meets this requirement.

END REPORT