


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5136.60	52.0 PK	74.0	-22.0	1.30 V	32	50.8	1.2
2	5136.60	40.3 AV	54.0	-13.7	1.30 V	32	39.1	1.2
3	*5200.00	121.9 PK			1.30 V	32	121.0	0.9
4	*5200.00	112.5 AV			1.30 V	32	111.6	0.9
5	5423.20	50.2 PK	74.0	-23.8	1.30 V	32	49.3	0.9
6	5423.20	38.1 AV	54.0	-15.9	1.30 V	32	37.2	0.9
7	#10400.00	65.7 PK	68.2	-2.5	2.21 V	43	54.3	11.4
8	15600.00	56.1 PK	74.0	-17.9	3.35 V	141	45.4	10.7
9	15600.00	42.5 AV	54.0	-11.5	3.35 V	141	31.8	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

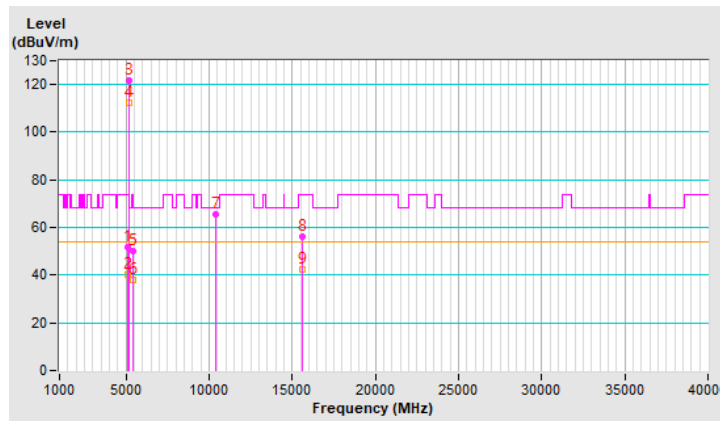


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.2 PK			2.46 H	240	117.3	0.9
2	*5240.00	108.9 AV			2.46 H	240	108.0	0.9
3	5350.00	51.1 PK	74.0	-22.9	2.46 H	240	50.1	1.0
4	5350.00	36.1 AV	54.0	-17.9	2.46 H	240	35.1	1.0
5	#10480.00	61.2 PK	68.2	-7.0	2.60 H	216	49.8	11.4
6	15720.00	53.4 PK	74.0	-20.6	2.37 H	234	42.8	10.6
7	15720.00	40.1 AV	54.0	-13.9	2.37 H	234	29.5	10.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

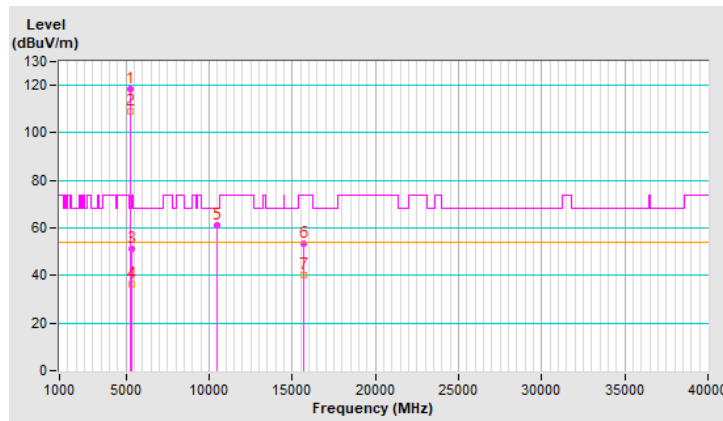


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.2 PK			1.05 V	13	119.3	0.9
2	*5240.00	111.0 AV			1.05 V	13	110.1	0.9
3	5350.00	50.4 PK	74.0	-23.6	1.05 V	13	49.4	1.0
4	5350.00	39.6 AV	54.0	-14.4	1.05 V	13	38.6	1.0
5	#10480.00	64.5 PK	68.2	-3.7	2.29 V	0	53.1	11.4
6	15720.00	54.1 PK	74.0	-19.9	3.58 V	150	43.5	10.6
7	15720.00	41.0 AV	54.0	-13.0	3.58 V	150	30.4	10.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

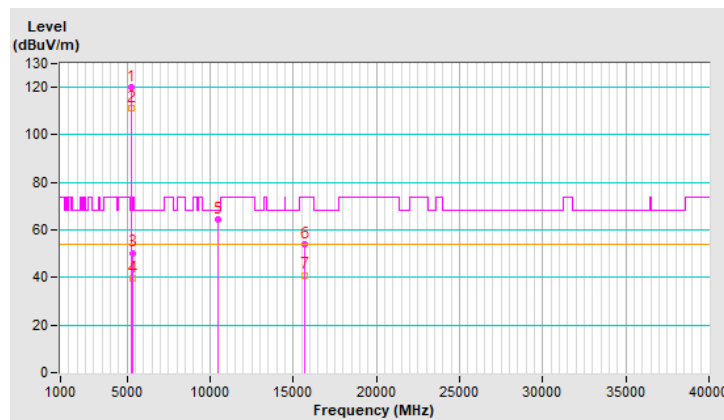


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	49.9 PK	74.0	-24.1	2.27 H	219	48.8	1.1
2	5150.00	34.9 AV	54.0	-19.1	2.27 H	219	33.8	1.1
3	*5260.00	118.1 PK			2.27 H	219	117.3	0.8
4	*5260.00	108.5 AV			2.27 H	219	107.7	0.8
5	5355.20	49.2 PK	74.0	-24.8	2.27 H	219	48.2	1.0
6	5355.20	39.4 AV	54.0	-14.6	2.27 H	219	38.4	1.0
7	#10520.00	61.5 PK	68.2	-6.7	2.48 H	235	50.1	11.4
8	15780.00	53.1 PK	74.0	-20.9	2.52 H	265	42.6	10.5
9	15780.00	39.3 AV	54.0	-14.7	2.52 H	265	28.8	10.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

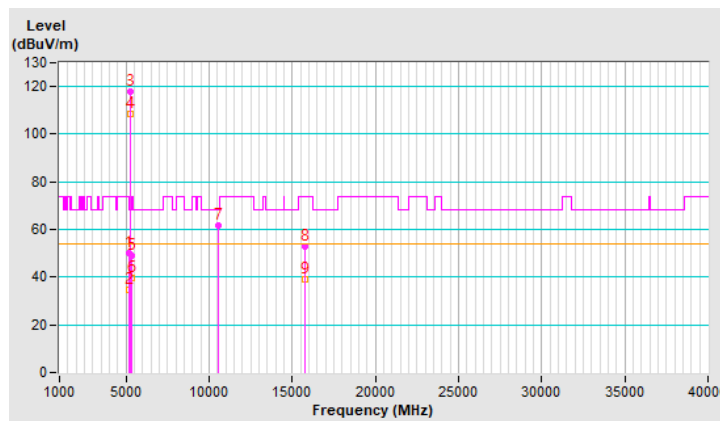


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5134.20	51.6 PK	74.0	-22.4	1.13 V	14	50.4	1.2
2	5134.20	40.3 AV	54.0	-13.7	1.13 V	14	39.1	1.2
3	*5260.00	121.0 PK			1.13 V	14	120.2	0.8
4	*5260.00	111.4 AV			1.13 V	14	110.6	0.8
5	#5324.00	49.7 PK	68.2	-18.5	1.13 V	14	48.8	0.9
6	#10520.00	62.8 PK	68.2	-5.4	2.42 V	42	51.4	11.4
7	15780.00	52.9 PK	74.0	-21.1	3.58 V	149	42.4	10.5
8	15780.00	39.1 AV	54.0	-14.9	3.58 V	149	28.6	10.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

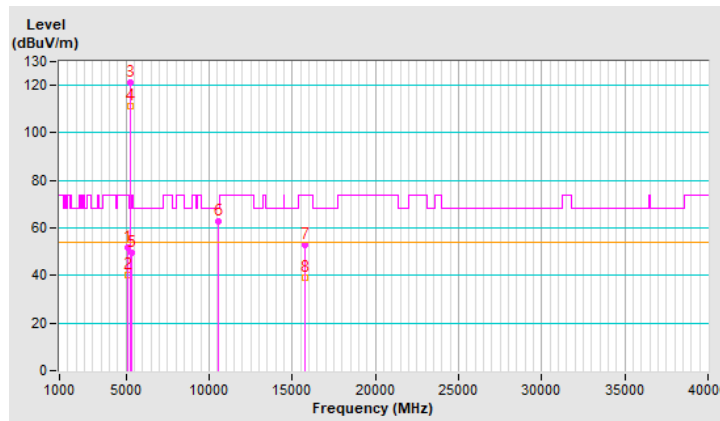


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.60	57.0 PK	74.0	-17.0	2.45 H	218	55.8	1.2
2	5138.60	40.6 AV	54.0	-13.4	2.45 H	218	39.4	1.2
3	*5300.00	118.6 PK			2.45 H	218	117.8	0.8
4	*5300.00	109.4 AV			2.45 H	218	108.6	0.8
5	5380.60	52.7 PK	74.0	-21.3	2.45 H	218	51.8	0.9
6	5380.60	45.3 AV	54.0	-8.7	2.45 H	218	44.4	0.9
7	10600.00	61.3 PK	74.0	-12.7	2.51 H	212	50.0	11.3
8	10600.00	43.5 AV	54.0	-10.5	2.51 H	212	32.2	11.3
9	15900.00	52.5 PK	74.0	-21.5	2.34 H	226	42.2	10.3
10	15900.00	33.7 AV	54.0	-20.3	2.34 H	226	23.4	10.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

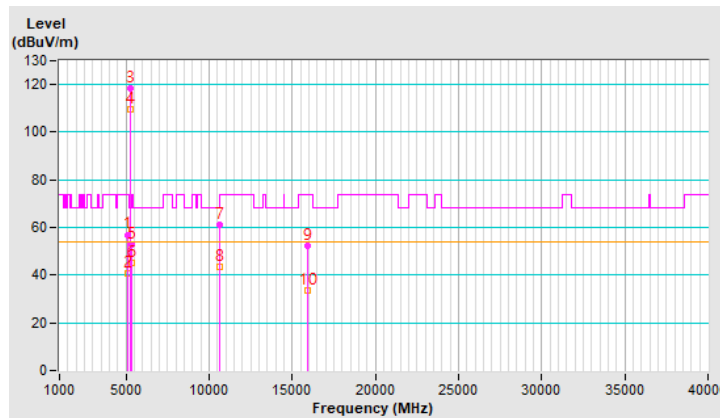


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5123.00	50.7 PK	74.0	-23.3	1.27 V	25	49.6	1.1
2	5123.00	39.4 AV	54.0	-14.6	1.27 V	25	38.3	1.1
3	*5300.00	120.9 PK			1.27 V	25	120.1	0.8
4	*5300.00	111.4 AV			1.27 V	25	110.6	0.8
5	5404.40	52.8 PK	74.0	-21.2	1.27 V	25	51.9	0.9
6	5404.40	45.7 AV	54.0	-8.3	1.27 V	25	44.8	0.9
7	10600.00	64.0 PK	74.0	-10.0	2.18 V	36	52.7	11.3
8	10600.00	45.5 AV	54.0	-8.5	2.18 V	36	34.2	11.3
9	15900.00	53.0 PK	74.0	-21.0	3.85 V	188	42.7	10.3
10	15900.00	34.9 AV	54.0	-19.1	3.85 V	188	24.6	10.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

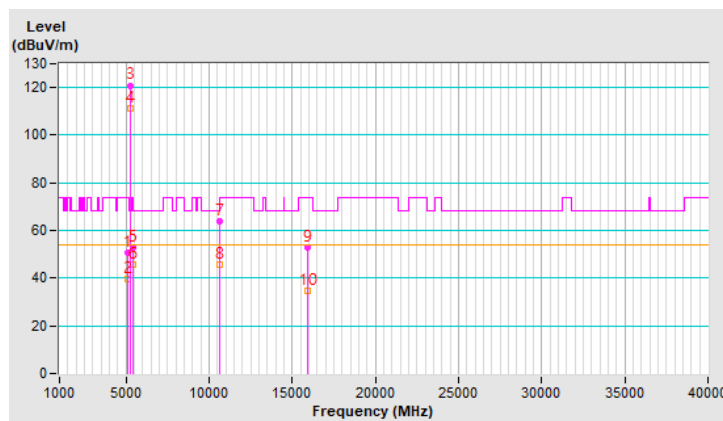


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.1 PK			2.47 H	183	117.2	0.9
2	*5320.00	108.6 AV			2.47 H	183	107.7	0.9
3	5350.00	63.4 PK	74.0	-10.6	2.47 H	183	62.4	1.0
4	5350.00	51.4 AV	54.0	-2.6	2.47 H	183	50.4	1.0
5	10640.00	58.8 PK	74.0	-15.2	2.61 H	167	47.5	11.3
6	10640.00	45.7 AV	54.0	-8.3	2.61 H	167	34.4	11.3
7	15960.00	50.1 PK	74.0	-23.9	2.77 H	143	39.4	10.7
8	15960.00	34.3 AV	54.0	-19.7	2.77 H	143	23.6	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

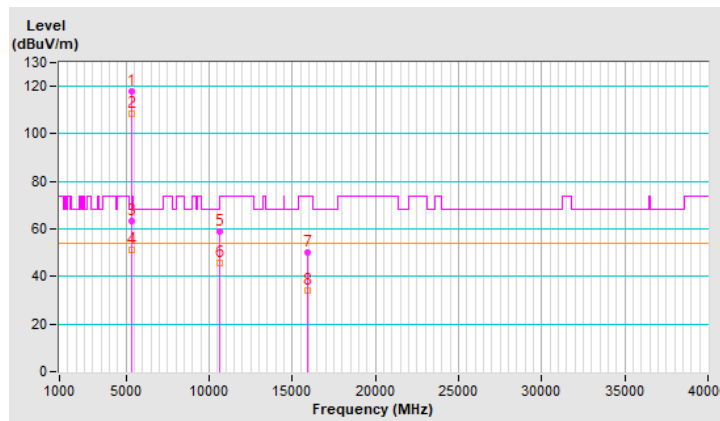




<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.7 PK			1.38 V	155	118.8	0.9
2	*5320.00	110.6 AV			1.38 V	155	109.7	0.9
3	5350.00	64.7 PK	74.0	-9.3	1.38 V	155	63.7	1.0
4	5350.00	52.0 AV	54.0	-2.0	1.38 V	155	51.0	1.0
5	10640.00	62.5 PK	74.0	-11.5	2.18 V	211	51.2	11.3
6	10640.00	50.8 AV	54.0	-3.2	2.18 V	211	39.5	11.3
7	15960.00	55.0 PK	74.0	-19.0	1.02 V	223	44.3	10.7
8	15960.00	38.2 AV	54.0	-15.8	1.02 V	223	27.5	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

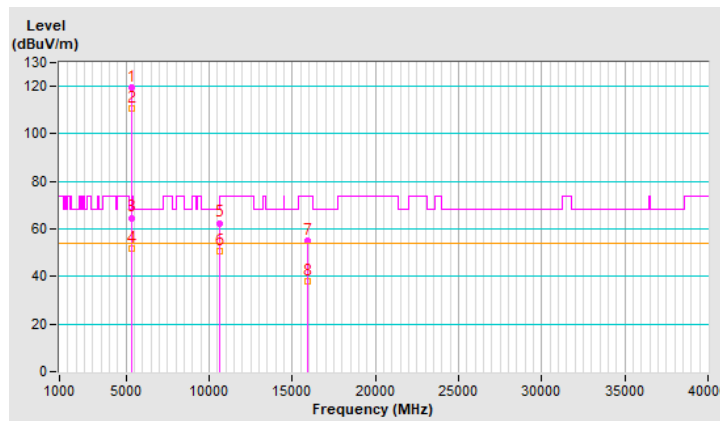


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.8 PK	74.0	-15.2	2.31 H	212	57.8	1.0
2	5460.00	41.7 AV	54.0	-12.3	2.31 H	212	40.7	1.0
3	#5470.00	63.4 PK	68.2	-4.8	2.31 H	212	62.4	1.0
4	*5500.00	117.3 PK			2.31 H	212	116.3	1.0
5	*5500.00	107.1 AV			2.31 H	212	106.1	1.0
6	11000.00	57.7 PK	74.0	-16.3	2.42 H	188	45.8	11.9
7	11000.00	44.5 AV	54.0	-9.5	2.42 H	188	32.6	11.9
8	#16500.00	51.5 PK	68.2	-16.7	2.50 H	158	38.6	12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

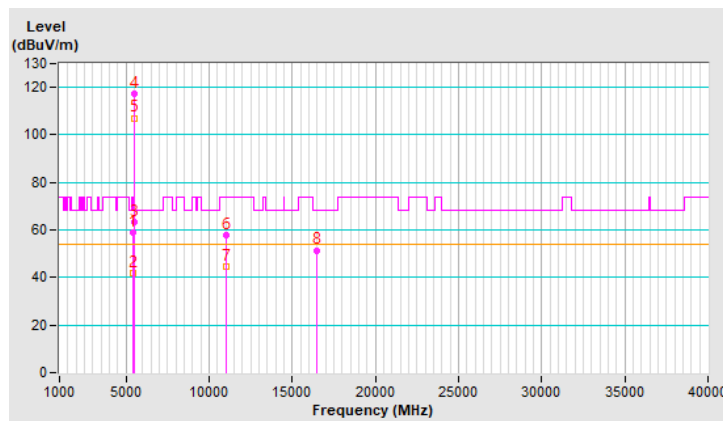


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.5 PK	74.0	-12.5	1.48 V	191	60.5	1.0
2	5460.00	44.8 AV	54.0	-9.2	1.48 V	191	43.8	1.0
3	#5470.00	66.0 PK	68.2	-2.2	1.48 V	191	65.0	1.0
4	*5500.00	120.3 PK			1.48 V	191	119.3	1.0
5	*5500.00	109.9 AV			1.48 V	191	108.9	1.0
6	11000.00	62.5 PK	74.0	-11.5	1.46 V	161	50.6	11.9
7	11000.00	49.0 AV	54.0	-5.0	1.46 V	161	37.1	11.9
8	#16500.00	53.5 PK	68.2	-14.7	1.10 V	232	40.6	12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

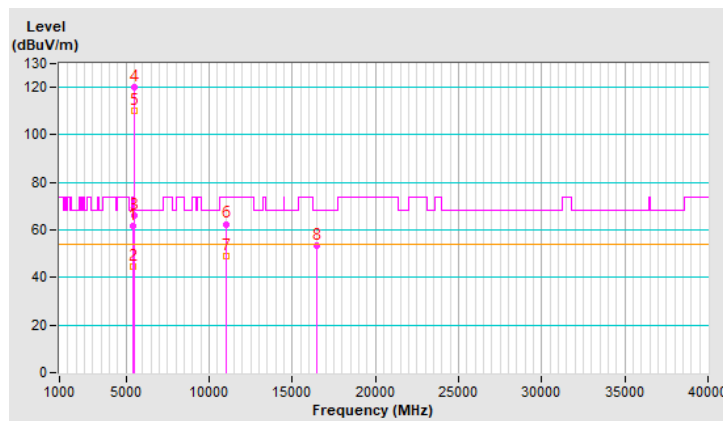


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5437.80	52.8 PK	74.0	-21.2	2.40 H	207	51.8	1.0
2	5437.80	36.2 AV	54.0	-17.8	2.40 H	207	35.2	1.0
3	#5468.70	52.0 PK	68.2	-16.2	2.40 H	207	51.0	1.0
4	*5580.00	118.0 PK			2.40 H	207	116.9	1.1
5	*5580.00	109.5 AV			2.40 H	207	108.4	1.1
6	11160.00	58.7 PK	74.0	-15.3	2.44 H	110	47.3	11.4
7	11160.00	46.0 AV	54.0	-8.0	2.44 H	110	34.6	11.4
8	#16740.00	50.3 PK	68.2	-17.9	2.48 H	168	36.4	13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

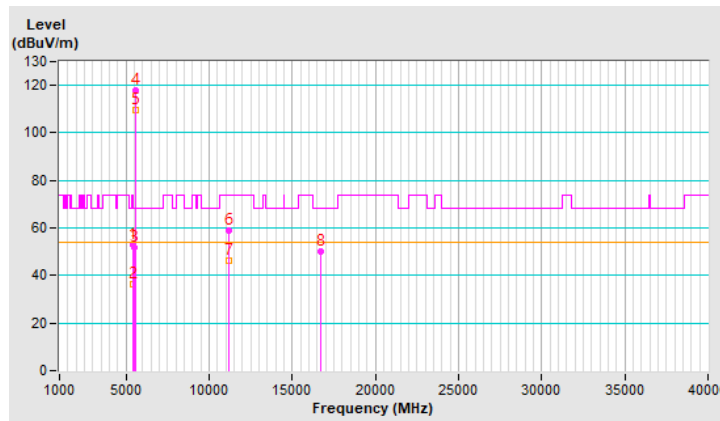


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5445.00	52.4 PK	74.0	-21.6	1.11 V	327	51.4	1.0
2	5445.00	39.6 AV	54.0	-14.4	1.11 V	327	38.6	1.0
3	#5466.60	51.8 PK	68.2	-16.4	1.11 V	327	50.8	1.0
4	*5580.00	122.1 PK			1.11 V	327	121.0	1.1
5	*5580.00	112.8 AV			1.11 V	327	111.7	1.1
6	11160.00	62.3 PK	74.0	-11.7	1.93 V	128	50.9	11.4
7	11160.00	52.1 AV	54.0	-1.9	1.93 V	128	40.7	11.4
8	#16740.00	55.6 PK	68.2	-12.6	3.47 V	225	41.7	13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

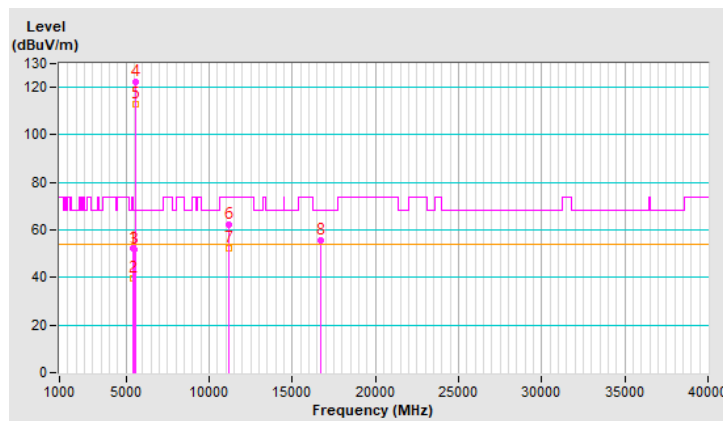


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.9 PK			2.40 H	228	117.5	1.4
2	*5700.00	110.7 AV			2.40 H	228	109.3	1.4
3	#5725.00	55.5 PK	68.2	-12.7	2.40 H	228	54.0	1.5
4	11400.00	59.1 PK	74.0	-14.9	2.34 H	132	47.2	11.9
5	11400.00	46.4 AV	54.0	-7.6	2.34 H	132	34.5	11.9
6	#17100.00	51.5 PK	68.2	-16.7	2.44 H	147	36.6	14.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

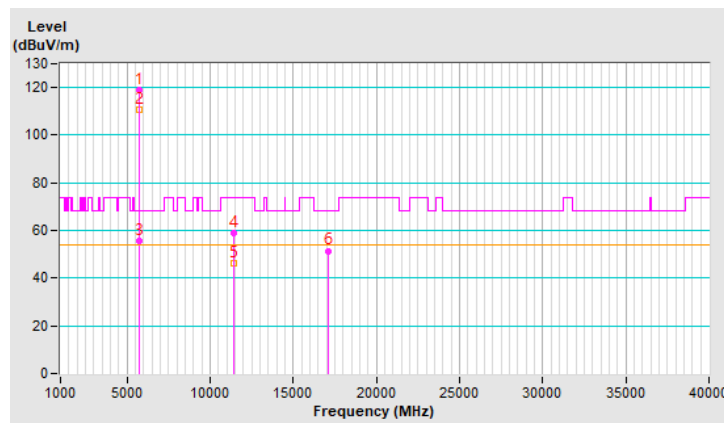


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	122.8 PK			1.04 V	340	121.4	1.4
2	*5700.00	113.5 AV			1.04 V	340	112.1	1.4
3	#5725.00	53.5 PK	68.2	-14.7	1.04 V	340	52.0	1.5
4	11400.00	62.7 PK	74.0	-11.3	1.85 V	360	50.8	11.9
5	11400.00	48.3 AV	54.0	-5.7	1.85 V	360	36.4	11.9
6	#17100.00	53.7 PK	68.2	-14.5	3.26 V	248	38.8	14.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

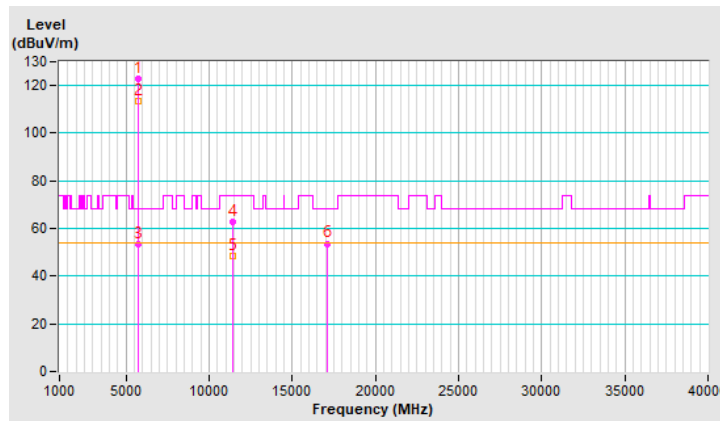


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.4 PK	74.0	-22.6	2.24 H	227	50.4	1.0
2	5460.00	36.4 AV	54.0	-17.6	2.24 H	227	35.4	1.0
3	#5470.00	49.2 PK	68.2	-19.0	2.24 H	227	48.2	1.0
4	*5720.00	117.2 PK			2.24 H	227	115.7	1.5
5	*5720.00	109.1 AV			2.24 H	227	107.6	1.5
6	#5850.00	47.0 PK	68.2	-21.2	2.24 H	227	45.2	1.8
7	11440.00	59.2 PK	74.0	-14.8	2.38 H	145	47.3	11.9
8	11440.00	45.8 AV	54.0	-8.2	2.38 H	145	33.9	11.9
9	#17160.00	51.3 PK	68.2	-16.9	2.66 H	147	36.3	15.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

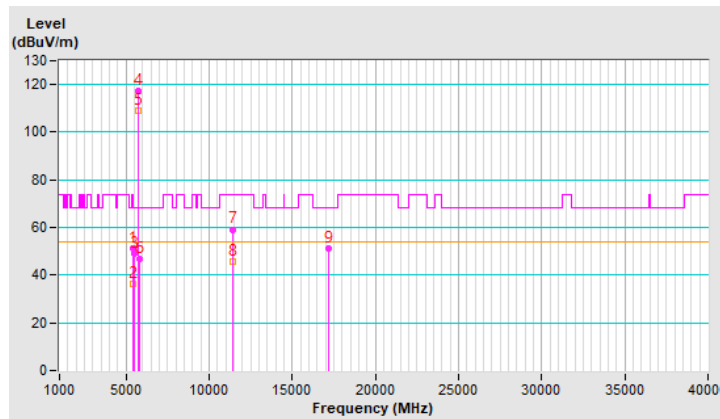




<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.6 PK	74.0	-23.4	1.13 V	31	49.6	1.0
2	5460.00	39.7 AV	54.0	-14.3	1.13 V	31	38.7	1.0
3	#5470.00	49.7 PK	68.2	-18.5	1.13 V	31	48.7	1.0
4	*5720.00	120.9 PK			1.13 V	31	119.4	1.5
5	*5720.00	112.3 AV			1.13 V	31	110.8	1.5
6	#5850.00	48.0 PK	68.2	-20.2	1.13 V	31	46.2	1.8
7	11440.00	64.7 PK	74.0	-9.3	1.97 V	359	52.8	11.9
8	11440.00	50.5 AV	54.0	-3.5	1.97 V	359	38.6	11.9
9	#17160.00	53.0 PK	68.2	-15.2	3.13 V	276	38.0	15.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

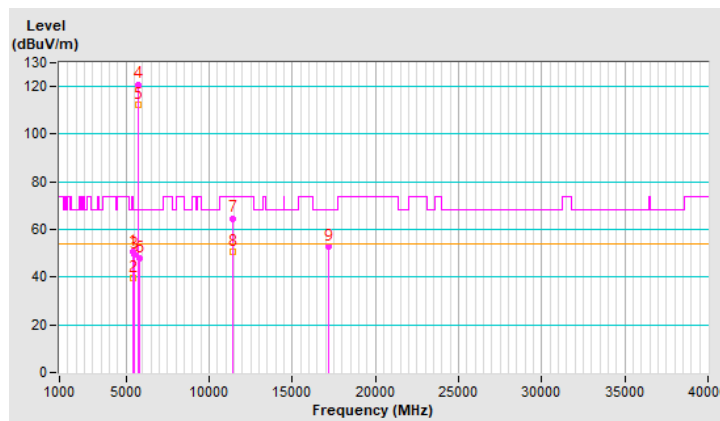


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5581.79	52.0 PK	68.2	-16.2	2.39 H	220	50.9	1.1
2	*5745.00	115.5 PK			2.39 H	220	114.0	1.5
3	*5745.00	106.3 AV			2.39 H	220	104.8	1.5
4	#5939.39	50.6 PK	68.2	-17.6	2.39 H	220	48.6	2.0
5	11490.00	51.8 PK	74.0	-22.2	2.56 H	159	39.9	11.9
6	11490.00	48.6 AV	54.0	-5.4	2.56 H	159	36.7	11.9
7	#17235.00	44.6 PK	68.2	-23.6	2.22 H	169	29.4	15.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

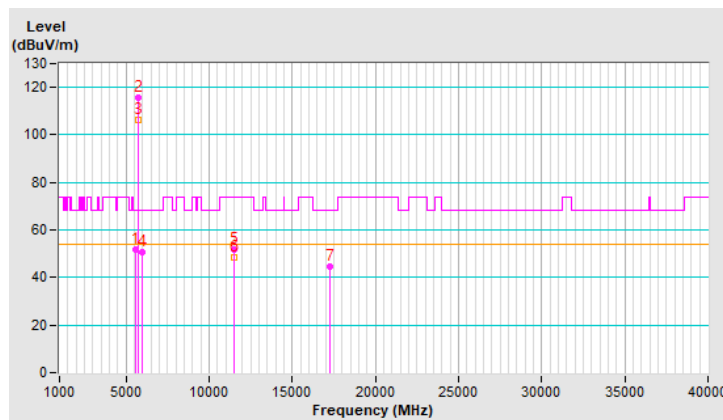


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5607.15	49.9 PK	68.2	-18.3	1.48 V	164	48.7	1.2
2	*5745.00	117.5 PK			1.48 V	164	116.0	1.5
3	*5745.00	107.1 AV			1.48 V	164	105.6	1.5
4	#5974.56	51.0 PK	68.2	-17.2	1.48 V	164	48.9	2.1
5	11490.00	65.0 PK	74.0	-9.0	2.22 V	166	53.1	11.9
6	11490.00	51.0 AV	54.0	-3.0	2.22 V	166	39.1	11.9
7	#17235.00	48.4 PK	68.2	-19.8	1.05 V	227	33.2	15.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

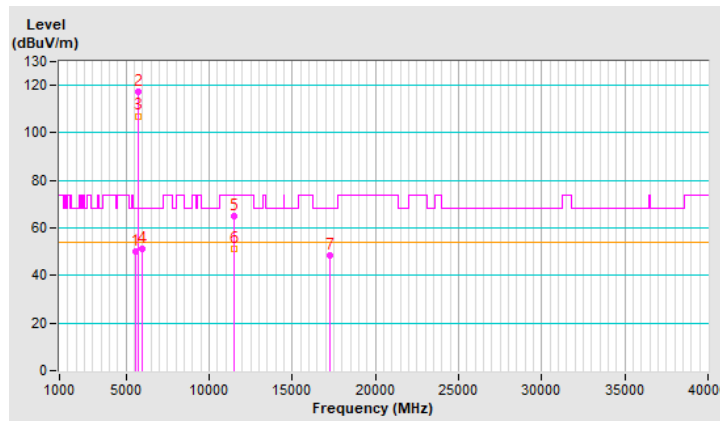


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5577.11	51.3 PK	68.2	-16.9	2.44 H	242	50.2	1.1
2	*5785.00	115.8 PK			2.44 H	242	114.2	1.6
3	*5785.00	105.7 AV			2.44 H	242	104.1	1.6
4	#5979.48	49.7 PK	68.2	-18.5	2.44 H	242	47.6	2.1
5	11570.00	58.7 PK	74.0	-15.3	2.47 H	165	46.8	11.9
6	11570.00	46.2 AV	54.0	-7.8	2.47 H	165	34.3	11.9
7	#17355.00	42.0 PK	68.2	-26.2	2.14 H	177	25.9	16.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

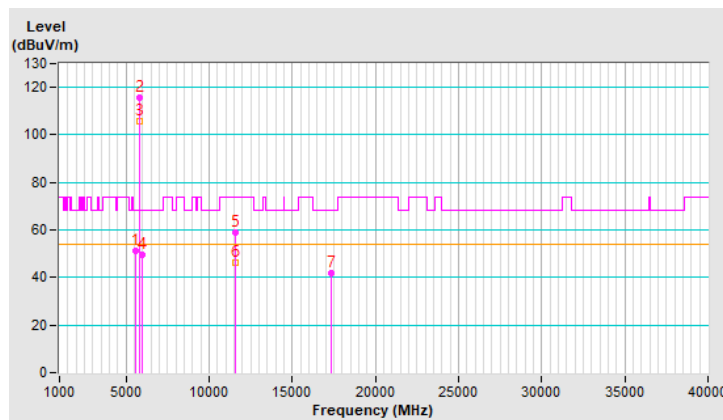


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.62	51.1 PK	68.2	-17.1	1.35 V	205	49.9	1.2
2	*5785.00	118.9 PK			1.35 V	205	117.3	1.6
3	*5785.00	107.7 AV			1.35 V	205	106.1	1.6
4	#5954.74	49.5 PK	68.2	-18.7	1.35 V	205	47.4	2.1
5	11570.00	63.2 PK	74.0	-10.8	2.00 V	220	51.3	11.9
6	11570.00	49.8 AV	54.0	-4.2	2.00 V	220	37.9	11.9
7	#17355.00	48.2 PK	68.2	-20.0	1.05 V	248	32.1	16.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

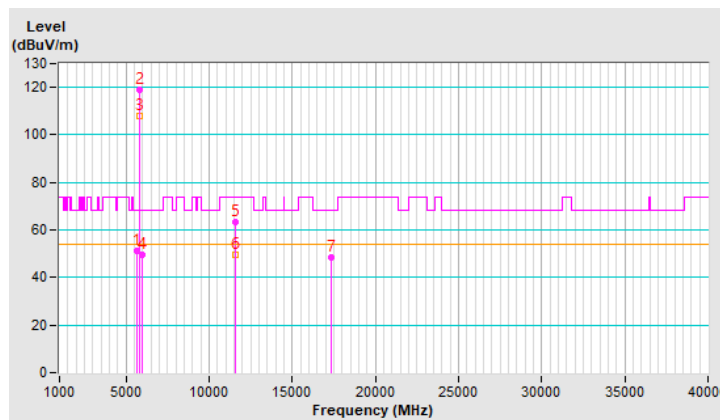


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5566.13	49.9 PK	68.2	-18.3	2.41 H	224	48.8	1.1
2	*5825.00	117.6 PK			2.41 H	224	115.8	1.8
3	*5825.00	107.8 AV			2.41 H	224	106.0	1.8
4	#5981.37	50.9 PK	68.2	-17.3	2.41 H	224	48.8	2.1
5	11650.00	57.2 PK	74.0	-16.8	2.39 H	158	45.5	11.7
6	11650.00	45.1 AV	54.0	-8.9	2.39 H	158	33.4	11.7
7	#17475.00	42.8 PK	68.2	-25.4	2.16 H	166	25.5	17.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

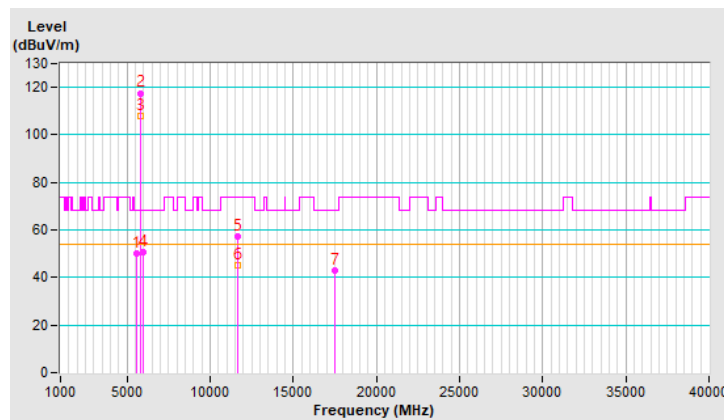


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU26)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5571.30	49.5 PK	68.2	-18.7	1.61 V	184	48.4	1.1
2	*5825.00	117.4 PK			1.61 V	184	115.6	1.8
3	*5825.00	107.7 AV			1.61 V	184	105.9	1.8
4	#5947.87	51.4 PK	68.2	-16.8	1.61 V	184	49.3	2.1
5	11650.00	62.6 PK	74.0	-11.4	2.02 V	177	50.9	11.7
6	11650.00	49.9 AV	54.0	-4.1	2.02 V	177	38.2	11.7
7	#17475.00	46.6 PK	68.2	-21.6	1.00 V	235	29.3	17.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

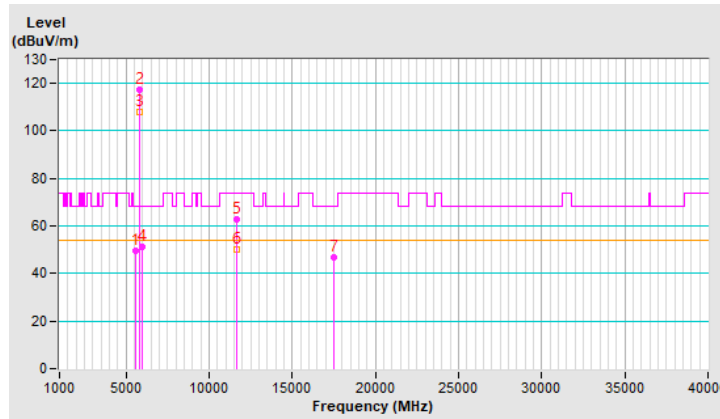


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	71.6 PK	74.0	-2.4	2.33 H	176	70.5	1.1
2	5150.00	45.5 AV	54.0	-8.5	2.33 H	176	44.4	1.1
3	*5180.00	116.6 PK			2.33 H	176	115.6	1.0
4	*5180.00	106.6 AV			2.33 H	176	105.6	1.0
5	#10360.00	54.5 PK	68.2	-13.7	2.13 H	165	43.3	11.2
6	15540.00	47.0 PK	74.0	-27.0	2.17 H	148	36.1	10.9
7	15540.00	31.4 AV	54.0	-22.6	2.17 H	148	20.5	10.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

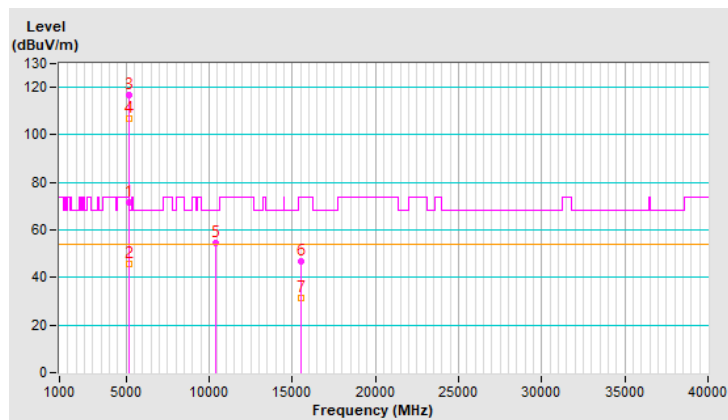




<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.2 PK	74.0	-1.8	1.07 V	172	71.1	1.1
2	5150.00	48.7 AV	54.0	-5.3	1.07 V	172	47.6	1.1
3	*5180.00	118.6 PK			1.07 V	172	117.6	1.0
4	*5180.00	109.1 AV			1.07 V	172	108.1	1.0
5	#10360.00	59.7 PK	68.2	-8.5	2.46 V	170	48.5	11.2
6	15540.00	52.2 PK	74.0	-21.8	1.00 V	207	41.3	10.9
7	15540.00	35.4 AV	54.0	-18.6	1.00 V	207	24.5	10.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

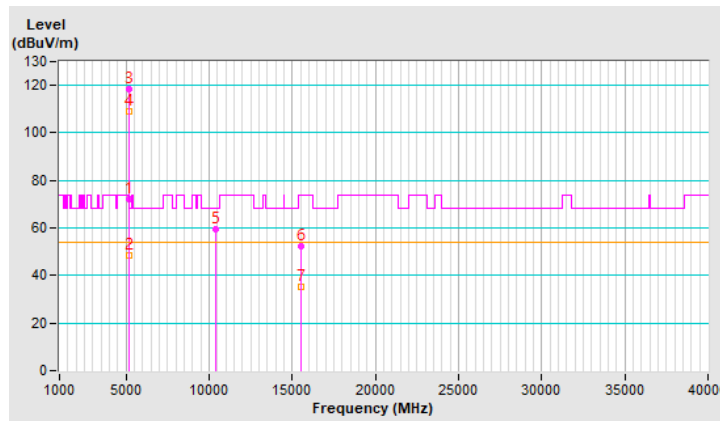


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5142.70	63.6 PK	74.0	-10.4	2.25 H	224	62.4	1.2
2	5142.70	41.3 AV	54.0	-12.7	2.25 H	224	40.1	1.2
3	*5200.00	117.9 PK			2.25 H	224	117.0	0.9
4	*5200.00	105.1 AV			2.25 H	224	104.2	0.9
5	5397.50	50.7 PK	74.0	-23.3	2.25 H	224	49.8	0.9
6	5397.50	40.3 AV	54.0	-13.7	2.25 H	224	39.4	0.9
7	#10400.00	54.4 PK	68.2	-13.8	2.11 H	179	43.0	11.4
8	15600.00	47.1 PK	74.0	-26.9	2.20 H	209	36.4	10.7
9	15600.00	31.2 AV	54.0	-22.8	2.20 H	209	20.5	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

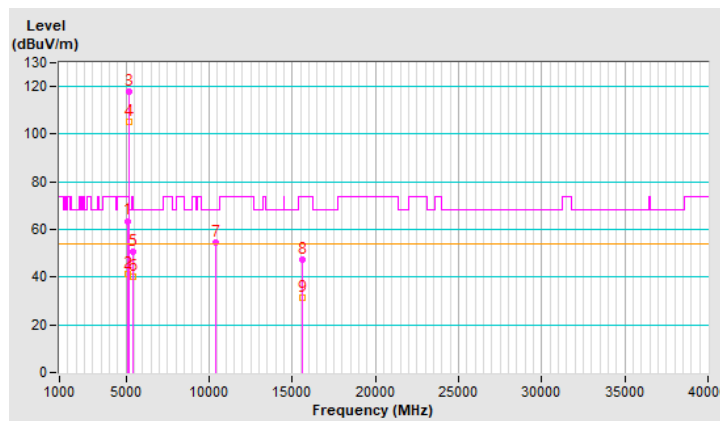


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5155.50	65.6 PK	68.2	-2.6	1.26 V	358	64.5	1.1
2	#5155.50	44.0 AV	54.0	-10.0	1.26 V	358	42.9	1.1
3	*5200.00	121.6 PK			1.26 V	358	120.7	0.9
4	*5200.00	108.5 AV			1.26 V	358	107.6	0.9
5	5410.80	52.5 PK	74.0	-21.5	1.26 V	358	51.6	0.9
6	5410.80	41.0 AV	54.0	-13.0	1.26 V	358	40.1	0.9
7	#10400.00	61.2 PK	68.2	-7.0	2.32 V	327	49.8	11.4
8	15600.00	50.4 PK	74.0	-23.6	3.79 V	190	39.7	10.7
9	15600.00	37.1 AV	54.0	-16.9	3.79 V	190	26.4	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

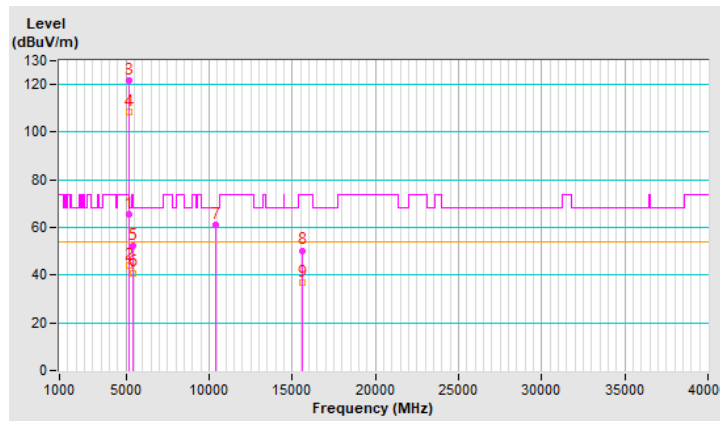


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.0 PK			2.46 H	195	117.1	0.9
2	*5240.00	105.6 AV			2.46 H	195	104.7	0.9
3	5350.00	64.2 PK	74.0	-9.8	2.46 H	195	63.2	1.0
4	5350.00	41.7 AV	54.0	-12.3	2.46 H	195	40.7	1.0
5	#10480.00	52.6 PK	68.2	-15.6	2.09 H	126	41.2	11.4
6	15720.00	46.7 PK	74.0	-27.3	2.17 H	159	36.1	10.6
7	15720.00	30.9 AV	54.0	-23.1	2.17 H	159	20.3	10.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

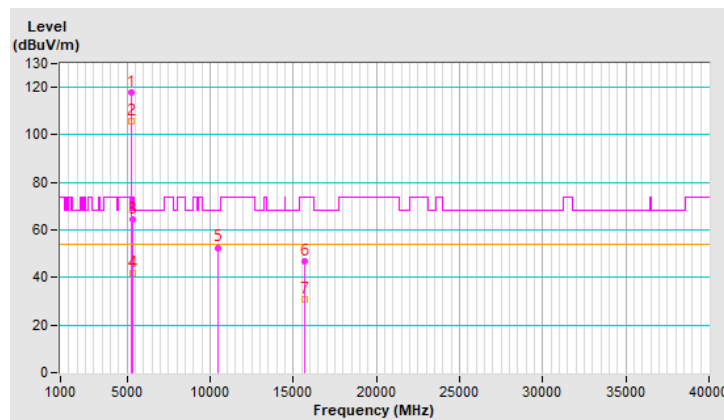


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.3 PK			1.30 V	335	119.4	0.9
2	*5240.00	107.9 AV			1.30 V	335	107.0	0.9
3	5350.00	65.0 PK	74.0	-9.0	1.30 V	335	64.0	1.0
4	5350.00	44.2 AV	54.0	-9.8	1.30 V	335	43.2	1.0
5	#10480.00	60.5 PK	68.2	-7.7	2.20 V	314	49.1	11.4
6	15720.00	51.5 PK	74.0	-22.5	3.84 V	130	40.9	10.6
7	15720.00	38.1 AV	54.0	-15.9	3.84 V	130	27.5	10.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

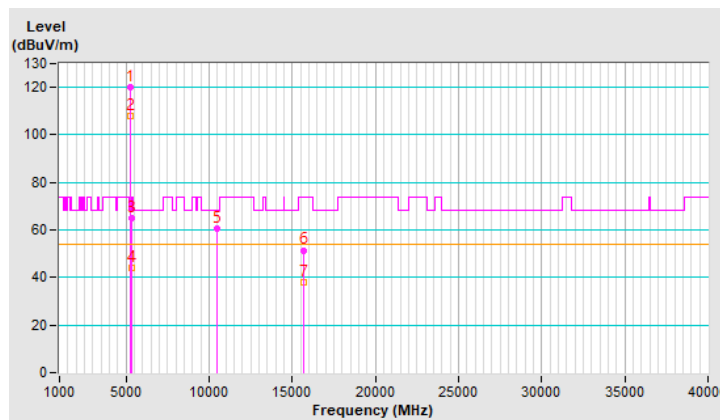


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.0 PK	74.0	-9.0	2.43 H	235	63.9	1.1
2	5150.00	43.4 AV	54.0	-10.6	2.43 H	235	42.3	1.1
3	*5260.00	118.0 PK			2.43 H	235	117.2	0.8
4	*5260.00	105.7 AV			2.43 H	235	104.9	0.8
5	#10520.00	55.4 PK	68.2	-12.8	2.23 H	160	44.0	11.4
6	15780.00	47.2 PK	74.0	-26.8	2.08 H	164	36.7	10.5
7	15780.00	31.2 AV	54.0	-22.8	2.08 H	164	20.7	10.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

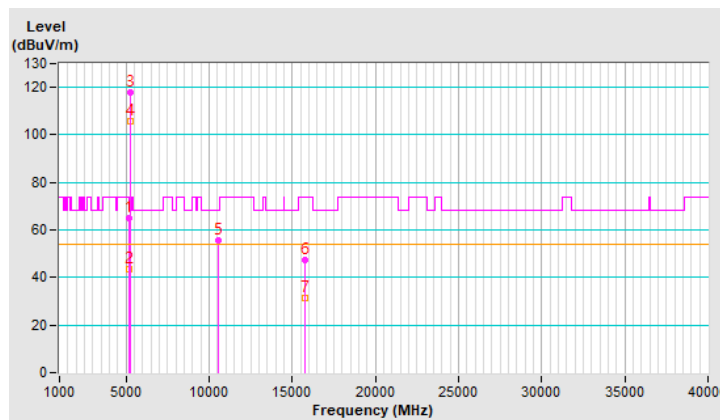


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.4 PK	74.0	-7.6	1.16 V	360	65.3	1.1
2	5150.00	45.0 AV	54.0	-9.0	1.16 V	360	43.9	1.1
3	*5260.00	120.7 PK			1.16 V	360	119.9	0.8
4	*5260.00	108.3 AV			1.16 V	360	107.5	0.8
5	#10520.00	61.9 PK	68.2	-6.3	2.31 V	338	50.5	11.4
6	15780.00	50.7 PK	74.0	-23.3	3.93 V	236	40.2	10.5
7	15780.00	37.3 AV	54.0	-16.7	3.93 V	236	26.8	10.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

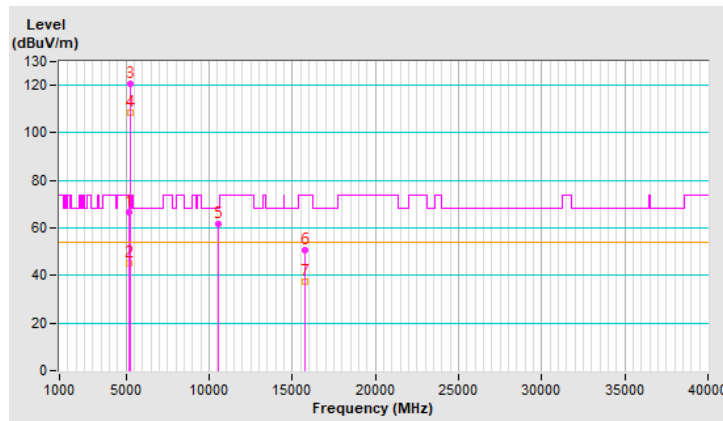


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5142.10	50.6 PK	74.0	-23.4	2.51 H	210	49.4	1.2
2	5142.10	39.4 AV	54.0	-14.6	2.51 H	210	38.2	1.2
3	*5300.00	115.5 PK			2.51 H	210	114.7	0.8
4	*5300.00	106.7 AV			2.51 H	210	105.9	0.8
5	5383.00	52.1 PK	74.0	-21.9	2.51 H	210	51.2	0.9
6	5383.00	42.4 AV	54.0	-11.6	2.51 H	210	41.5	0.9
7	10600.00	53.6 PK	74.0	-20.4	2.10 H	160	42.3	11.3
8	10600.00	43.7 AV	54.0	-10.3	2.10 H	160	32.4	11.3
9	15900.00	48.5 PK	74.0	-25.5	2.18 H	158	38.2	10.3
10	15900.00	32.6 AV	54.0	-21.4	2.18 H	158	22.3	10.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

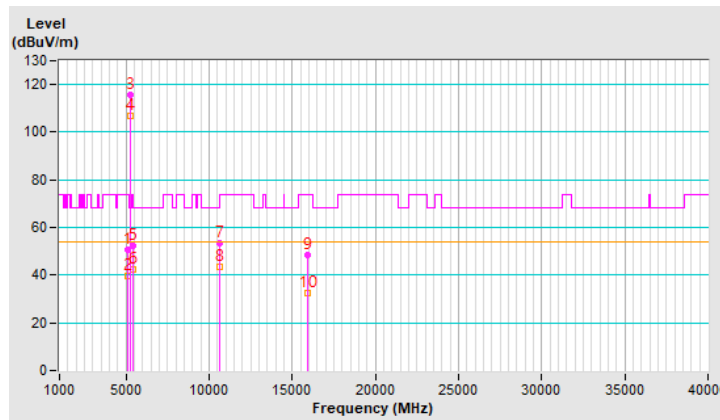




<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5152.30	52.9 PK	68.2	-15.3	1.02 V	347	51.8	1.1
2	#5152.30	42.3 AV	54.0	-11.7	1.02 V	347	41.2	1.1
3	*5300.00	117.7 PK			1.02 V	347	116.9	0.8
4	*5300.00	108.5 AV			1.02 V	347	107.7	0.8
5	5389.90	51.8 PK	74.0	-22.2	1.02 V	347	50.9	0.9
6	5389.90	42.2 AV	54.0	-11.8	1.02 V	347	41.3	0.9
7	10600.00	63.4 PK	74.0	-10.6	1.34 V	66	52.1	11.3
8	10600.00	51.3 AV	54.0	-2.7	1.34 V	66	40.0	11.3
9	15900.00	54.8 PK	74.0	-19.2	3.70 V	176	44.5	10.3
10	15900.00	41.2 AV	54.0	-12.8	3.70 V	176	30.9	10.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

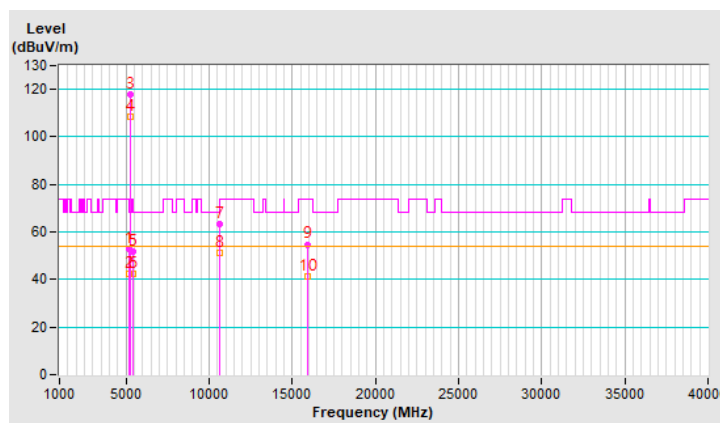


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.5 PK			2.28 H	260	114.6	0.9
2	*5320.00	106.1 AV			2.28 H	260	105.2	0.9
3	5350.00	70.0 PK	74.0	-4.0	2.28 H	260	69.0	1.0
4	5350.00	47.0 AV	54.0	-7.0	2.28 H	260	46.0	1.0
5	10640.00	56.8 PK	74.0	-17.2	2.30 H	154	45.5	11.3
6	10640.00	42.5 AV	54.0	-11.5	2.30 H	154	31.2	11.3
7	15960.00	46.9 PK	74.0	-27.1	2.32 H	124	36.2	10.7
8	15960.00	31.3 AV	54.0	-22.7	2.32 H	124	20.6	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

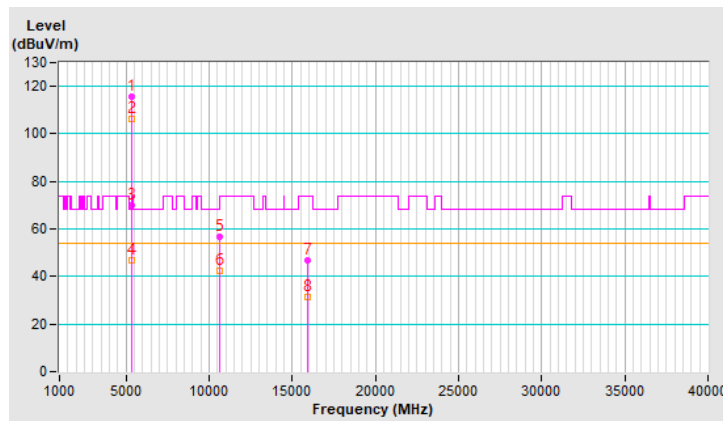


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.4 PK			1.14 V	173	114.5	0.9
2	*5320.00	107.5 AV			1.14 V	173	106.6	0.9
3	5350.00	73.3 PK	74.0	-0.7	1.14 V	173	72.3	1.0
4	5350.00	50.6 AV	54.0	-3.4	1.14 V	173	49.6	1.0
5	10640.00	58.9 PK	74.0	-15.1	1.93 V	175	47.6	11.3
6	10640.00	45.1 AV	54.0	-8.9	1.93 V	175	33.8	11.3
7	15960.00	50.2 PK	74.0	-23.8	1.00 V	180	39.5	10.7
8	15960.00	34.8 AV	54.0	-19.2	1.00 V	180	24.1	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

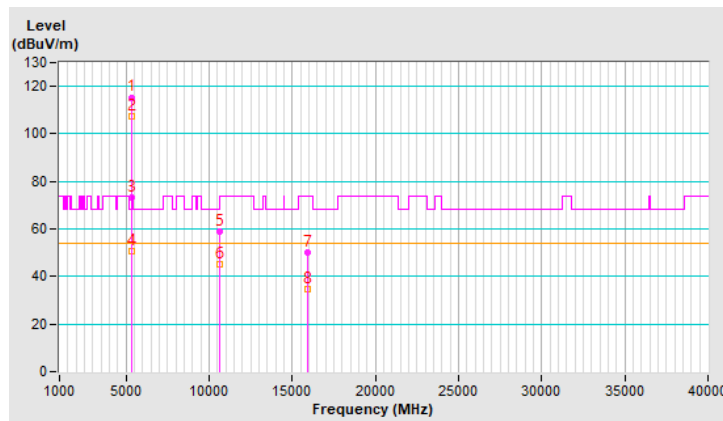


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.7 PK	74.0	-18.3	2.26 H	215	54.7	1.0
2	5460.00	40.1 AV	54.0	-13.9	2.26 H	215	39.1	1.0
3	#5470.00	64.2 PK	68.2	-4.0	2.26 H	215	63.2	1.0
4	*5500.00	113.3 PK			2.26 H	215	112.3	1.0
5	*5500.00	103.8 AV			2.26 H	215	102.8	1.0
6	11000.00	55.1 PK	74.0	-18.9	2.30 H	129	43.2	11.9
7	11000.00	42.3 AV	54.0	-11.7	2.30 H	129	30.4	11.9
8	#16500.00	47.2 PK	68.2	-21.0	2.15 H	176	34.3	12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

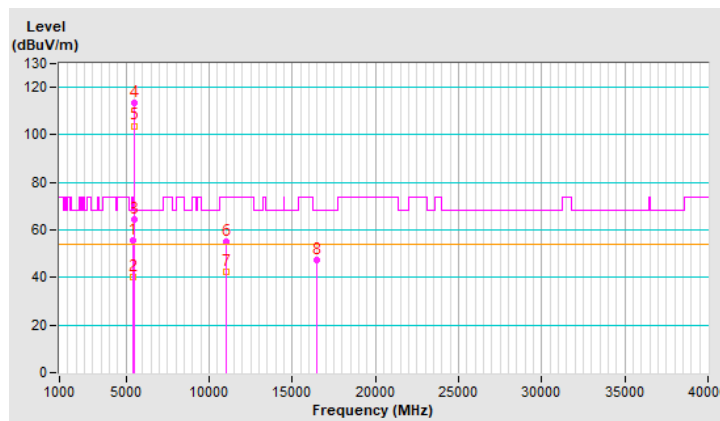


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.1 PK	74.0	-15.9	1.22 V	159	57.1	1.0
2	5460.00	42.3 AV	54.0	-11.7	1.22 V	159	41.3	1.0
3	#5470.00	66.2 PK	68.2	-2.0	1.22 V	159	65.2	1.0
4	*5500.00	116.1 PK			1.22 V	159	115.1	1.0
5	*5500.00	106.7 AV			1.22 V	159	105.7	1.0
6	11000.00	59.3 PK	74.0	-14.7	1.95 V	162	47.4	11.9
7	11000.00	45.9 AV	54.0	-8.1	1.95 V	162	34.0	11.9
8	#16500.00	51.3 PK	68.2	-16.9	1.08 V	193	38.4	12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

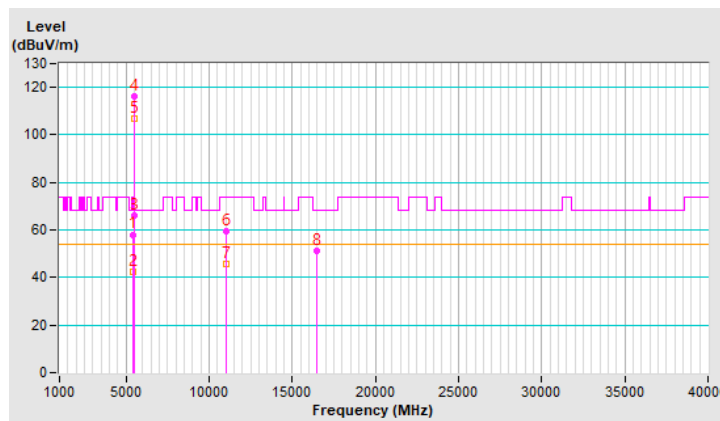


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5456.60	51.1 PK	74.0	-22.9	2.33 H	247	50.1	1.0
2	5456.60	38.7 AV	54.0	-15.3	2.33 H	247	37.7	1.0
3	#5466.70	49.6 PK	68.2	-18.6	2.33 H	247	48.6	1.0
4	*5580.00	116.9 PK			2.33 H	247	115.8	1.1
5	*5580.00	106.4 AV			2.33 H	247	105.3	1.1
6	11160.00	54.7 PK	74.0	-19.3	2.20 H	146	43.3	11.4
7	11160.00	44.1 AV	54.0	-9.9	2.20 H	146	32.7	11.4
8	#16740.00	47.5 PK	68.2	-20.7	2.14 H	134	33.6	13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

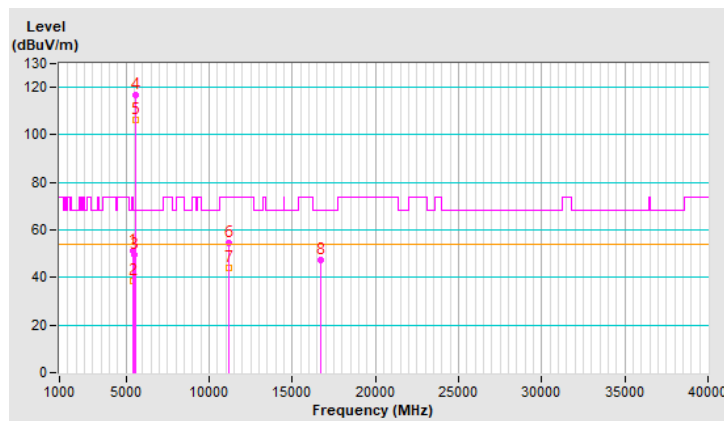


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5448.90	52.8 PK	74.0	-21.2	1.14 V	356	51.8	1.0
2	5448.90	40.5 AV	54.0	-13.5	1.14 V	356	39.5	1.0
3	#5480.10	49.9 PK	68.2	-18.3	1.14 V	356	48.9	1.0
4	*5580.00	122.1 PK			1.14 V	356	121.0	1.1
5	*5580.00	111.5 AV			1.14 V	356	110.4	1.1
6	11160.00	60.2 PK	74.0	-13.8	2.42 V	360	48.8	11.4
7	11160.00	48.6 AV	54.0	-5.4	2.42 V	360	37.2	11.4
8	#16740.00	53.9 PK	68.2	-14.3	3.16 V	174	40.0	13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

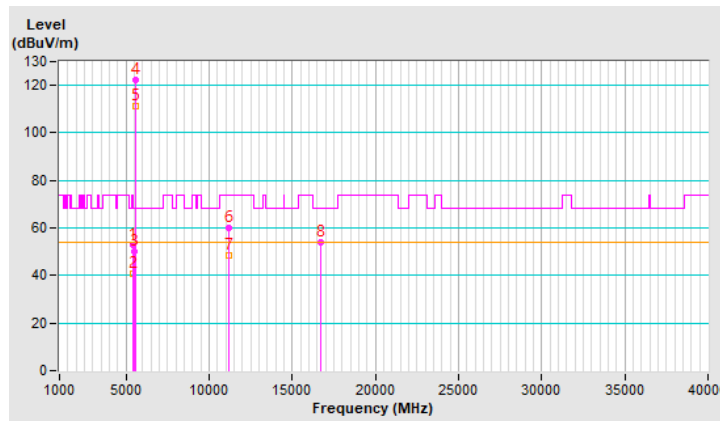


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.1 PK			2.35 H	224	111.7	1.4
2	*5700.00	104.7 AV			2.35 H	224	103.3	1.4
3	#5725.00	62.4 PK	68.2	-5.8	2.35 H	224	60.9	1.5
4	11400.00	53.6 PK	74.0	-20.4	2.15 H	141	41.7	11.9
5	11400.00	43.2 AV	54.0	-10.8	2.15 H	141	31.3	11.9
6	#17100.00	47.9 PK	68.2	-20.3	2.07 H	123	33.0	14.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

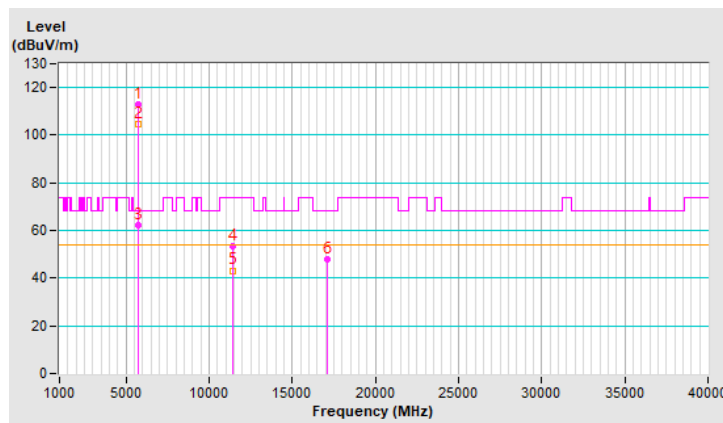




<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	117.4 PK			1.06 V	360	116.0	1.4
2	*5700.00	108.9 AV			1.06 V	360	107.5	1.4
3	#5725.00	65.8 PK	68.2	-2.4	1.06 V	360	64.3	1.5
4	11400.00	64.8 PK	74.0	-9.2	2.00 V	360	52.9	11.9
5	11400.00	51.0 AV	54.0	-3.0	2.00 V	360	39.1	11.9
6	#17100.00	51.8 PK	68.2	-16.4	3.19 V	190	36.9	14.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

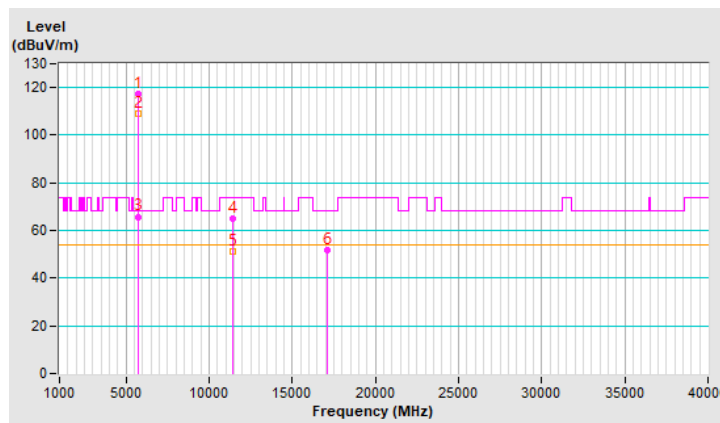


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.4 PK	74.0	-22.6	2.29 H	233	50.4	1.0
2	5460.00	38.1 AV	54.0	-15.9	2.29 H	233	37.1	1.0
3	#5470.00	50.5 PK	68.2	-17.7	2.29 H	233	49.5	1.0
4	*5720.00	115.9 PK			2.29 H	233	114.4	1.5
5	*5720.00	106.3 AV			2.29 H	233	104.8	1.5
6	#5850.00	51.7 PK	68.2	-16.5	2.29 H	233	49.9	1.8
7	11440.00	54.2 PK	74.0	-19.8	2.17 H	133	42.3	11.9
8	11440.00	43.9 AV	54.0	-10.1	2.17 H	133	32.0	11.9
9	#17160.00	46.9 PK	68.2	-21.3	2.20 H	152	31.9	15.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

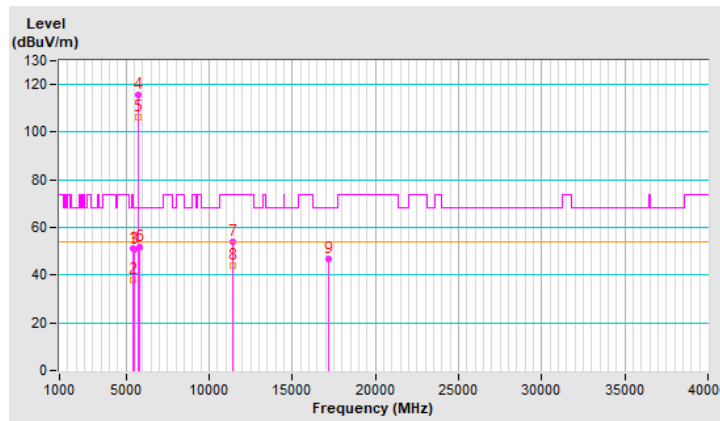


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.0 PK	74.0	-24.0	1.02 V	357	49.0	1.0
2	5460.00	38.5 AV	54.0	-15.5	1.02 V	357	37.5	1.0
3	#5470.00	49.1 PK	68.2	-19.1	1.02 V	357	48.1	1.0
4	*5720.00	118.0 PK			1.02 V	357	116.5	1.5
5	*5720.00	108.3 AV			1.02 V	357	106.8	1.5
6	#5850.00	51.1 PK	68.2	-17.1	1.02 V	357	49.3	1.8
7	11440.00	64.4 PK	74.0	-9.6	1.95 V	360	52.5	11.9
8	11440.00	50.8 AV	54.0	-3.2	1.95 V	360	38.9	11.9
9	#17160.00	52.4 PK	68.2	-15.8	3.35 V	202	37.4	15.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

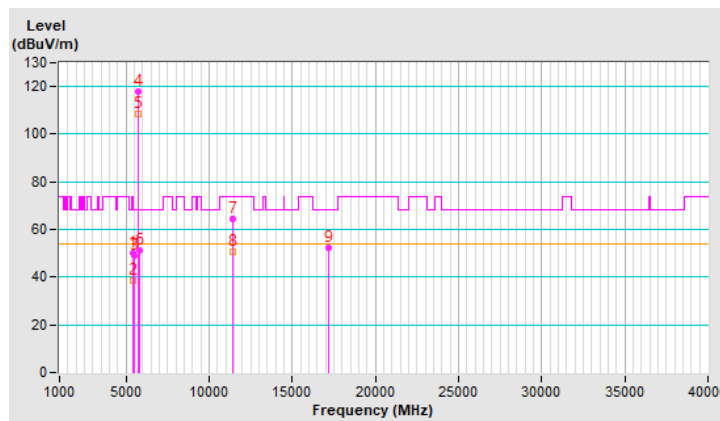


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.27	51.8 PK	68.2	-16.4	2.11 H	225	50.6	1.2
2	*5745.00	114.9 PK			2.11 H	225	113.4	1.5
3	*5745.00	104.6 AV			2.11 H	225	103.1	1.5
4	#6000.69	50.2 PK	68.2	-18.0	2.11 H	225	48.1	2.1
5	11490.00	57.6 PK	74.0	-16.4	2.15 H	162	45.7	11.9
6	11490.00	47.8 AV	54.0	-6.2	2.15 H	162	35.9	11.9
7	#17235.00	45.4 PK	68.2	-22.8	2.23 H	114	30.2	15.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

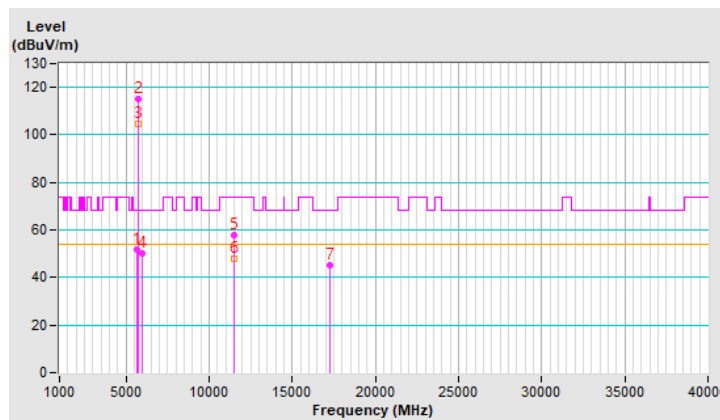


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.21	51.2 PK	68.2	-17.0	1.18 V	193	50.0	1.2
2	*5745.00	117.7 PK			1.18 V	193	116.2	1.5
3	*5745.00	107.9 AV			1.18 V	193	106.4	1.5
4	#5944.76	49.8 PK	68.2	-18.4	1.18 V	193	47.7	2.1
5	11490.00	61.4 PK	74.0	-12.6	1.20 V	214	49.5	11.9
6	11490.00	51.1 AV	54.0	-2.9	1.20 V	214	39.2	11.9
7	#17235.00	50.9 PK	68.2	-17.3	3.69 V	211	35.7	15.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

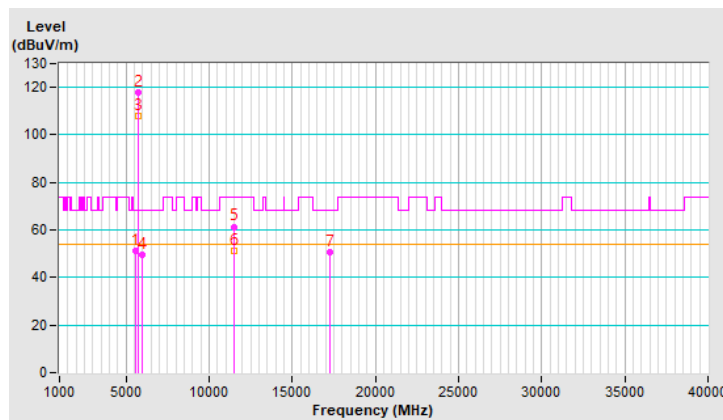


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5604.38	50.9 PK	68.2	-17.3	2.20 H	264	49.7	1.2
2	*5785.00	116.0 PK			2.20 H	264	114.4	1.6
3	*5785.00	106.7 AV			2.20 H	264	105.1	1.6
4	#5976.78	51.2 PK	68.2	-17.0	2.20 H	264	49.1	2.1
5	11570.00	56.9 PK	74.0	-17.1	2.40 H	182	45.0	11.9
6	11570.00	45.9 AV	54.0	-8.1	2.40 H	182	34.0	11.9
7	#17355.00	46.9 PK	68.2	-21.3	2.20 H	146	30.8	16.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

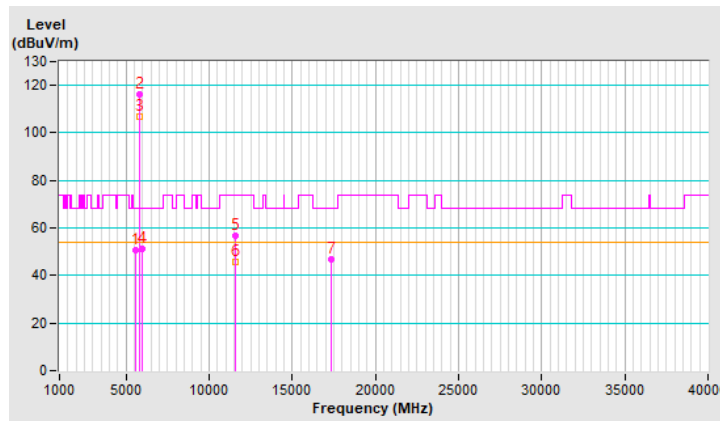


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5623.46	49.8 PK	68.2	-18.4	1.12 V	162	48.6	1.2
2	*5785.00	117.5 PK			1.12 V	162	115.9	1.6
3	*5785.00	107.7 AV			1.12 V	162	106.1	1.6
4	#5981.70	53.9 PK	68.2	-14.3	1.12 V	162	51.8	2.1
5	11570.00	61.6 PK	74.0	-12.4	1.08 V	214	49.7	11.9
6	11570.00	51.1 AV	54.0	-2.9	1.08 V	214	39.2	11.9
7	#17355.00	49.8 PK	68.2	-18.4	3.74 V	30	33.7	16.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

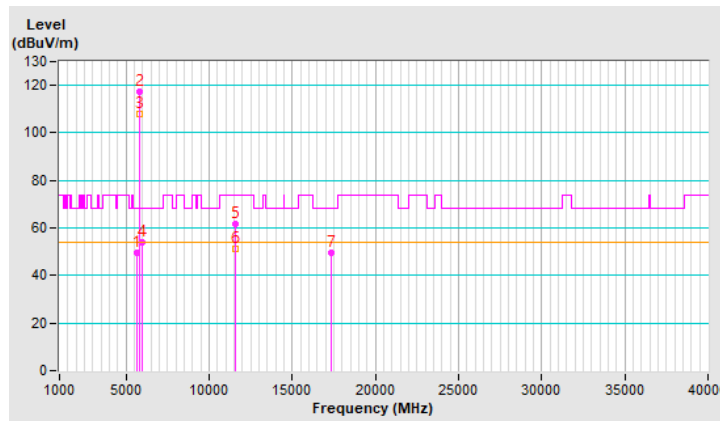


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5633.85	51.1 PK	68.2	-17.1	2.24 H	282	49.9	1.2
2	*5825.00	115.9 PK			2.24 H	282	114.1	1.8
3	*5825.00	106.5 AV			2.24 H	282	104.7	1.8
4	#6003.01	52.1 PK	68.2	-16.1	2.24 H	282	50.0	2.1
5	11650.00	57.6 PK	74.0	-16.4	2.27 H	168	45.9	11.7
6	11650.00	46.8 AV	54.0	-7.2	2.27 H	168	35.1	11.7
7	#17475.00	46.4 PK	68.2	-21.8	2.17 H	125	29.1	17.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

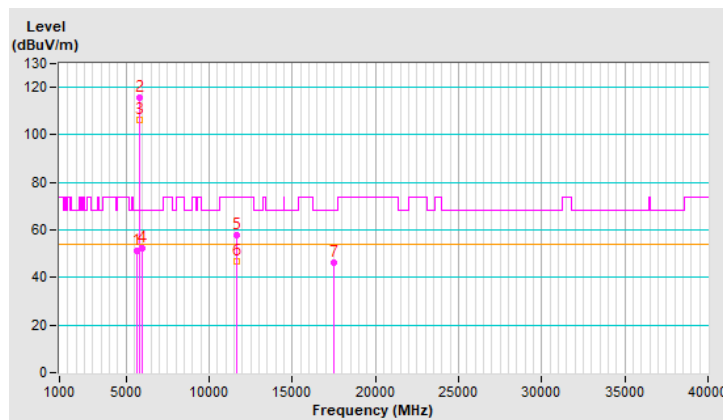




<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU52)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.50	50.2 PK	68.2	-18.0	1.17 V	229	49.0	1.2
2	*5825.00	118.2 PK			1.17 V	229	116.4	1.8
3	*5825.00	108.2 AV			1.17 V	229	106.4	1.8
4	#5974.22	52.6 PK	68.2	-15.6	1.17 V	229	50.5	2.1
5	11650.00	61.8 PK	74.0	-12.2	1.04 V	194	50.1	11.7
6	11650.00	51.8 AV	54.0	-2.2	1.04 V	194	40.1	11.7
7	#17475.00	48.9 PK	68.2	-19.3	3.41 V	194	31.6	17.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

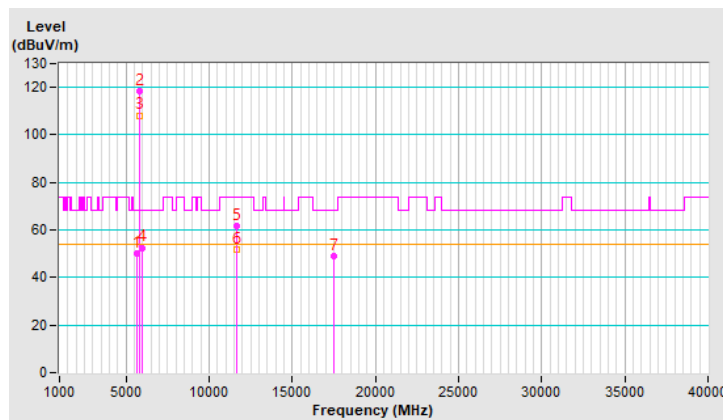


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	29°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.7 PK	74.0	-3.3	1.25 H	268	68.7	2.0
2	5150.00	47.5 AV	54.0	-6.5	1.25 H	268	45.5	2.0
3	*5180.00	113.5 PK			1.25 H	268	111.6	1.9
4	*5180.00	104.8 AV			1.25 H	268	102.9	1.9
5	#10360.00	51.2 PK	68.2	-17.0	2.10 H	141	39.6	11.6
6	15540.00	41.4 PK	74.0	-32.6	2.16 H	135	29.6	11.8
7	15540.00	30.8 AV	54.0	-23.2	2.16 H	135	19.0	11.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

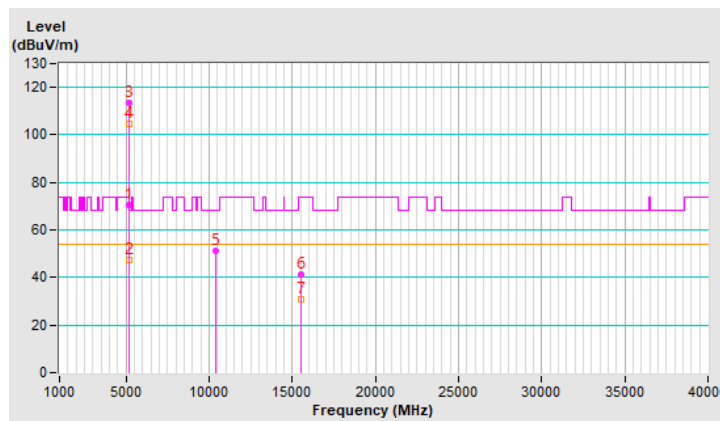


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	29°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.6 PK	74.0	-1.4	1.21 V	189	70.6	2.0
2	5150.00	49.4 AV	54.0	-4.6	1.21 V	189	47.4	2.0
3	*5180.00	114.8 PK			1.21 V	189	112.9	1.9
4	*5180.00	105.3 AV			1.21 V	189	103.4	1.9
5	#10360.00	56.6 PK	68.2	-11.6	1.10 V	211	45.0	11.6
6	15540.00	45.4 PK	74.0	-28.6	1.02 V	249	33.6	11.8
7	15540.00	35.1 AV	54.0	-18.9	1.02 V	249	23.3	11.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

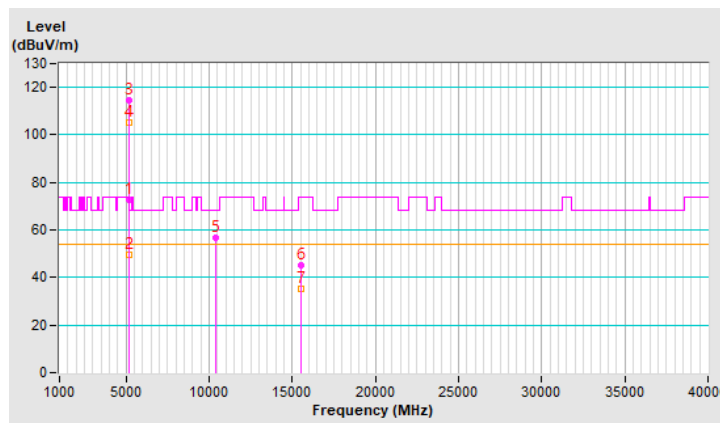


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	29°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.20	68.9 PK	74.0	-5.1	1.30 H	283	66.8	2.1
2	5145.20	45.8 AV	54.0	-8.2	1.30 H	283	43.7	2.1
3	*5200.00	116.5 PK			1.30 H	283	114.7	1.8
4	*5200.00	105.7 AV			1.30 H	283	103.9	1.8
5	5366.50	49.8 PK	74.0	-24.2	1.30 H	283	48.1	1.7
6	5366.50	39.1 AV	54.0	-14.9	1.30 H	283	37.4	1.7
7	#10400.00	57.4 PK	68.2	-10.8	2.05 H	145	45.6	11.8
8	15600.00	47.1 PK	74.0	-26.9	2.06 H	176	35.4	11.7
9	15600.00	35.7 AV	54.0	-18.3	2.06 H	176	24.0	11.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

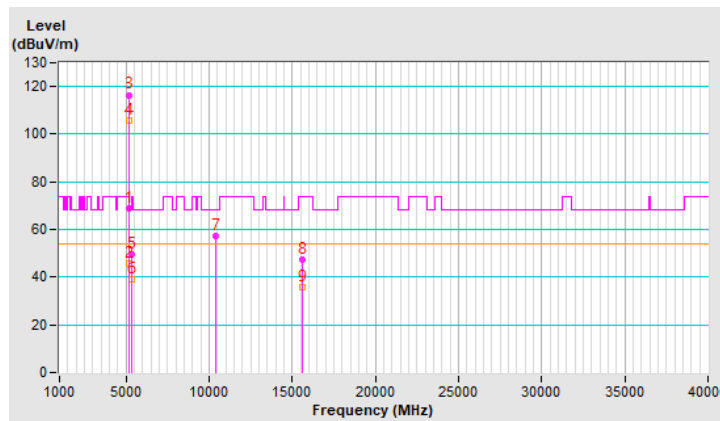


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.20	72.2 PK	74.0	-1.8	1.37 V	351	71.0	1.2
2	5145.20	49.0 AV	54.0	-5.0	1.37 V	351	47.8	1.2
3	*5200.00	118.2 PK			1.37 V	351	117.3	0.9
4	*5200.00	107.3 AV			1.37 V	351	106.4	0.9
5	5366.50	51.0 PK	74.0	-23.0	1.37 V	351	50.0	1.0
6	5366.50	39.8 AV	54.0	-14.2	1.37 V	351	38.8	1.0
7	#10400.00	59.5 PK	68.2	-8.7	2.15 V	24	48.1	11.4
8	15600.00	50.8 PK	74.0	-23.2	2.97 V	34	40.1	10.7
9	15600.00	39.3 AV	54.0	-14.7	2.97 V	34	28.6	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

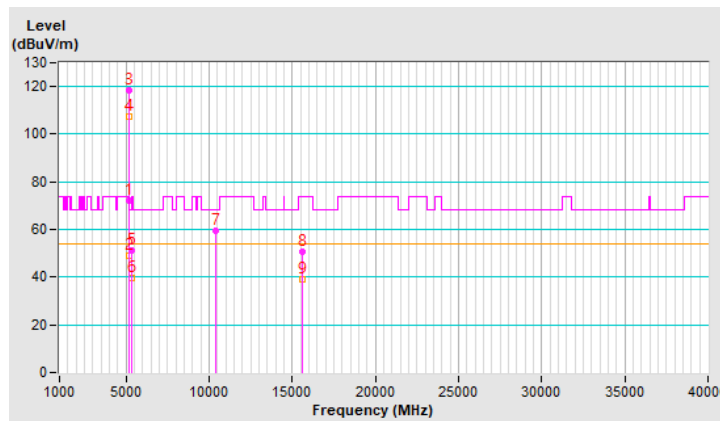


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	29°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	113.6 PK			1.12 H	242	111.9	1.7
2	*5240.00	104.7 AV			1.12 H	242	103.0	1.7
3	5350.00	52.1 PK	74.0	-21.9	1.12 H	242	50.4	1.7
4	5350.00	37.4 AV	54.0	-16.6	1.12 H	242	35.7	1.7
5	#10480.00	56.9 PK	68.2	-11.3	2.25 H	133	45.1	11.8
6	15720.00	47.8 PK	74.0	-26.2	2.24 H	160	36.2	11.6
7	15720.00	35.6 AV	54.0	-18.4	2.24 H	160	24.0	11.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

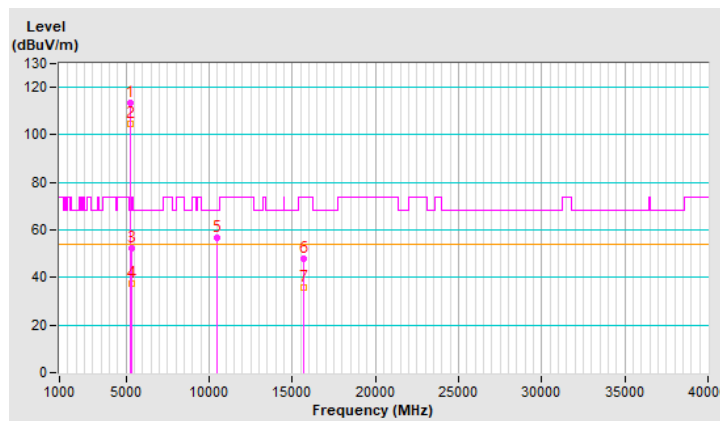


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	29°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.9 PK			1.50 V	351	116.2	1.7
2	*5240.00	108.0 AV			1.50 V	351	106.3	1.7
3	5350.00	53.7 PK	74.0	-20.3	1.50 V	351	52.0	1.7
4	5350.00	39.6 AV	54.0	-14.4	1.50 V	351	37.9	1.7
5	#10480.00	61.0 PK	68.2	-7.2	2.23 V	11	49.2	11.8
6	15720.00	51.9 PK	74.0	-22.1	3.01 V	212	40.3	11.6
7	15720.00	40.1 AV	54.0	-13.9	3.01 V	212	28.5	11.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

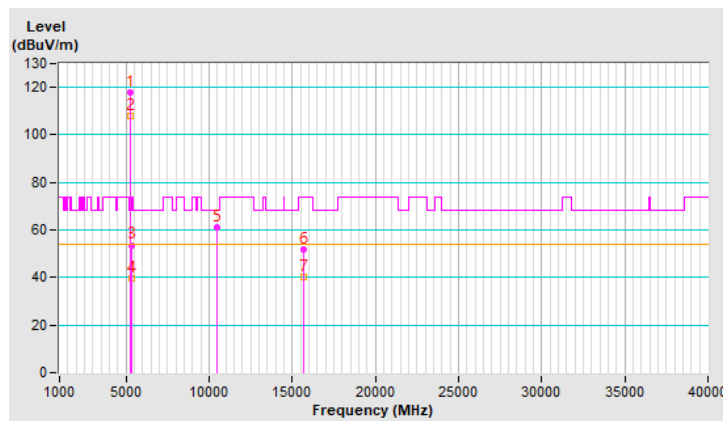


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	29°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.2 PK	74.0	-23.8	1.16 H	243	48.2	2.0
2	5150.00	39.1 AV	54.0	-14.9	1.16 H	243	37.1	2.0
3	*5260.00	114.9 PK			1.16 H	243	113.4	1.5
4	*5260.00	105.1 AV			1.16 H	243	103.6	1.5
5	#10520.00	55.9 PK	68.2	-12.3	2.10 H	141	44.2	11.7
6	15780.00	45.0 PK	74.0	-29.0	2.39 H	122	33.7	11.3
7	15780.00	33.6 AV	54.0	-20.4	2.39 H	122	22.3	11.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

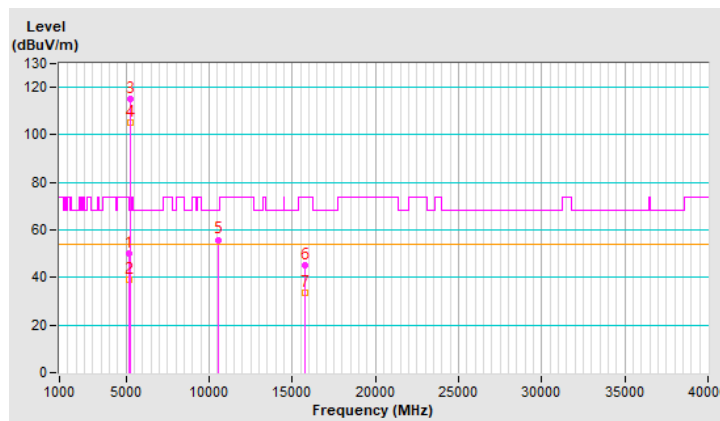




<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	29°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.7 PK	74.0	-23.3	1.61 V	336	48.7	2.0
2	5150.00	39.6 AV	54.0	-14.4	1.61 V	336	37.6	2.0
3	*5260.00	117.1 PK			1.61 V	336	115.6	1.5
4	*5260.00	107.1 AV			1.61 V	336	105.6	1.5
5	#10520.00	61.4 PK	68.2	-6.8	2.19 V	54	49.7	11.7
6	15780.00	50.8 PK	74.0	-23.2	2.88 V	45	39.5	11.3
7	15780.00	38.9 AV	54.0	-15.1	2.88 V	45	27.6	11.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

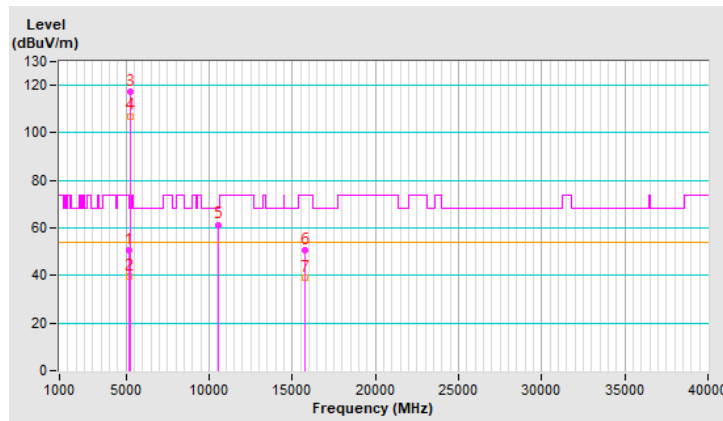


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.50	49.9 PK	74.0	-24.1	1.14 H	239	48.7	1.2
2	5135.50	38.2 AV	54.0	-15.8	1.14 H	239	37.0	1.2
3	*5300.00	112.8 PK			1.14 H	239	112.0	0.8
4	*5300.00	105.1 AV			1.14 H	239	104.3	0.8
5	5352.90	66.2 PK	74.0	-7.8	1.14 H	239	65.2	1.0
6	5352.90	42.7 AV	54.0	-11.3	1.14 H	239	41.7	1.0
7	10600.00	55.4 PK	74.0	-18.6	2.09 H	124	44.1	11.3
8	10600.00	48.4 AV	54.0	-5.6	2.09 H	124	37.1	11.3
9	15900.00	54.9 PK	74.0	-19.1	2.24 H	148	44.6	10.3
10	15900.00	42.9 AV	54.0	-11.1	2.24 H	148	32.6	10.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

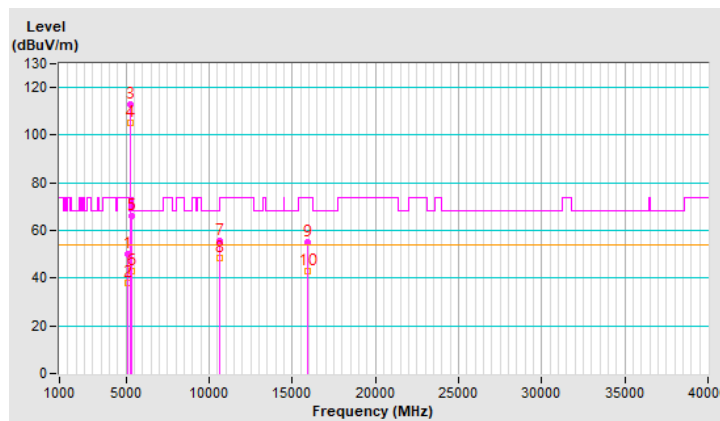


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5132.10	51.4 PK	74.0	-22.6	1.52 V	360	50.2	1.2
2	5132.10	39.8 AV	54.0	-14.2	1.52 V	360	38.6	1.2
3	*5300.00	114.9 PK			1.52 V	360	114.1	0.8
4	*5300.00	106.8 AV			1.52 V	360	106.0	0.8
5	5354.20	66.2 PK	74.0	-7.8	1.52 V	360	65.2	1.0
6	5354.20	42.4 AV	54.0	-11.6	1.52 V	360	41.4	1.0
7	10600.00	59.8 PK	74.0	-14.2	2.38 V	1	48.5	11.3
8	10600.00	49.4 AV	54.0	-4.6	2.38 V	1	38.1	11.3
9	15900.00	58.6 PK	74.0	-15.4	3.37 V	347	48.3	10.3
10	15900.00	46.9 AV	54.0	-7.1	3.37 V	347	36.6	10.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

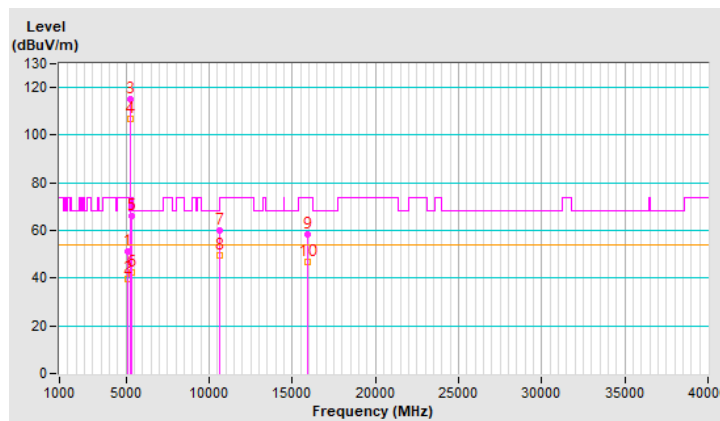


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	29°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.4 PK			1.22 H	214	113.8	1.6
2	*5320.00	105.5 AV			1.22 H	214	103.9	1.6
3	5350.00	69.6 PK	74.0	-4.4	1.22 H	214	67.9	1.7
4	5350.00	46.8 AV	54.0	-7.2	1.22 H	214	45.1	1.7
5	10640.00	53.3 PK	74.0	-20.7	2.31 H	172	41.6	11.7
6	10640.00	41.5 AV	54.0	-12.5	2.31 H	172	29.8	11.7
7	15960.00	43.2 PK	74.0	-30.8	2.34 H	138	31.9	11.3
8	15960.00	33.3 AV	54.0	-20.7	2.34 H	138	22.0	11.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

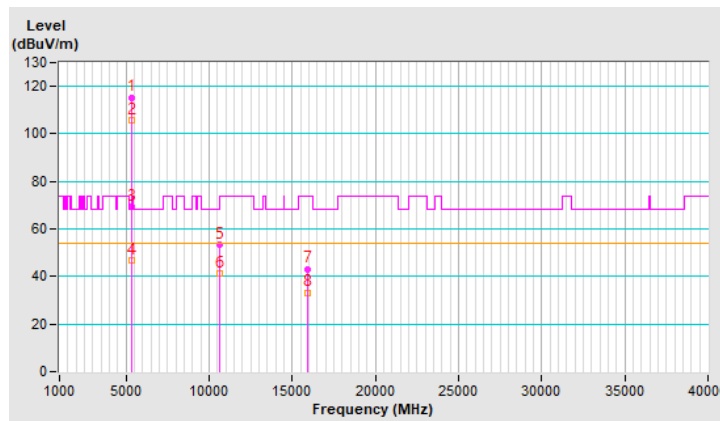


<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.7 PK			1.10 V	183	116.8	0.9
2	*5320.00	106.9 AV			1.10 V	183	106.0	0.9
3	5350.00	70.9 PK	74.0	-3.1	1.10 V	183	69.9	1.0
4	5350.00	50.6 AV	54.0	-3.4	1.10 V	183	49.6	1.0
5	10640.00	56.1 PK	74.0	-17.9	1.02 V	279	44.8	11.3
6	10640.00	44.7 AV	54.0	-9.3	1.02 V	279	33.4	11.3
7	15960.00	47.5 PK	74.0	-26.5	1.20 V	283	36.8	10.7
8	15960.00	37.9 AV	54.0	-16.1	1.20 V	283	27.2	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

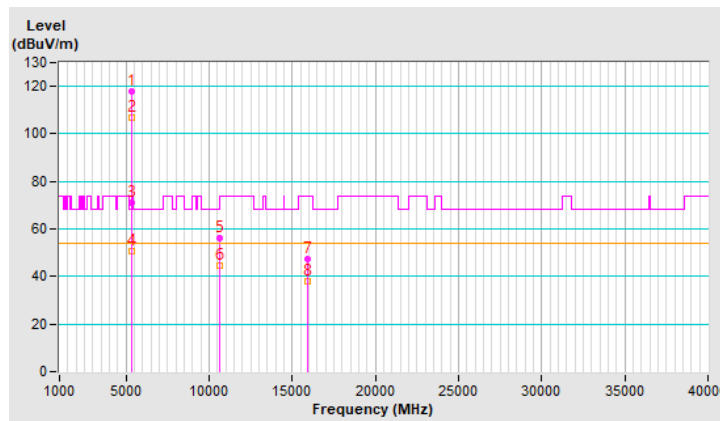

<b>RF Mode</b>	20 MHz Preamble 802.11ax (RU106)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.2 PK	74.0	-13.8	1.12 H	295	59.2	1.0
2	5460.00	40.5 AV	54.0	-13.5	1.12 H	295	39.5	1.0
3	#5470.00	64.2 PK	68.2	-4.0	1.12 H	295	63.2	1.0
4	*5500.00	115.6 PK			1.12 H	295	114.6	1.0
5	*5500.00	105.0 AV			1.12 H	295	104.0	1.0
6	11000.00	51.7 PK	74.0	-22.3	2.20 H	171	39.8	11.9
7	11000.00	41.3 AV	54.0	-12.7	2.20 H	171	29.4	11.9
8	#16500.00	43.8 PK	68.2	-24.4	2.21 H	183	30.9	12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

