

**PARTIAL TEST REPORT**  
No.: 17-1-0172601T21a-C3

According to:  
**FCC Regulations**  
Part 22, Part 24, Part 27

**ISED-Regulations**  
RSS-132 Issue 3, RSS-133 Issue 6,  
RSS-139 Issue 3, RSS-Gen Issue 4  
RSS-130 Issue 1

for

**Robert Bosch Tool Corporation**

**GPS 25-4**

With integrated SARA-R410M LTE Cat-M1 Module

**FCC ID: TXTGPS25-4**

**ISED: 909H-GPS254**

Laboratory Accreditation



accredited according to DIN EN ISO/IEC 17025

**CETECOM GmbH**

Laboratory Radio Communications & Electromagnetic Compatibility  
Im Teelbruch 116 • 45219 Essen • Germany  
Registered in Essen, Germany, Reg. No.: HRB Essen 8984  
Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964  
E-mail: info@cetecom.com • Internet: www.cetecom.com

## Table of contents

<b>1. SUMMARY OF TEST RESULTS</b> .....	<b>4</b>
1.1. TX mode, Test overview of FCC and Canada IC/ISED (RSS) Standards.....	4
1.2. Attestation:.....	5
<b>2. ADMINISTRATIVE DATA</b> .....	<b>6</b>
2.1. Identification of the testing laboratory.....	6
2.2. Test location .....	6
2.2.1. Test laboratory “CTC” .....	6
2.3. Organizational items.....	6
2.4. Applicant’s details .....	6
2.5. Customer’s details .....	6
2.6. Manufacturer’s details .....	6
<b>3. EQUIPMENT UNDER TEST (EUT)</b> .....	<b>7</b>
3.1. SUMMARY OF RESULTS AND TECHNICAL DATA OF MAIN EUT DECLARED BY APPLICANT.....	7
3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....	9
3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....	9
3.4. EUT set-ups .....	9
3.5. EUT operating modes .....	10
<b>4. DESCRIPTION OF TEST SYSTEM SET-UP’S</b> .....	<b>11</b>
4.1. Test system set-up for conducted measurements on antenna port .....	11
4.2. Test system set-up for radiated magnetic field measurements below 30 MHz.....	12
4.3. Test system set-up for radiated spurious emission measurements.....	13
<b>5. MEASUREMENTS</b> .....	<b>14</b>
5.1. RF-Parameter - RF Peak power output conducted and PAPR.....	14
5.1.1. <i>Test location and equipments</i> (for reference numbers please see chapter ‘List of test equipment’).....	14
5.1.2. <i>Requirements and limits</i> .....	14
5.1.3. <i>Test condition and test set-up</i> .....	14
5.1.4. <i>Power results</i> .....	15
5.1.5. <i>PAPR results</i> .....	17
5.2. General Limit - Radiated field strength emissions below 30 MHz.....	18
5.2.1. <i>Test location and equipment</i> .....	18
5.2.2. <i>Requirements</i> .....	18
5.2.3. <i>Test condition and test set-up</i> .....	18
5.2.4. <i>Measurement Results</i> .....	18
5.2.5. <i>Correction factors due to reduced meas. distance (f&lt; 30 MHz)</i> .....	19
5.3. RF-Parameter - Radiated out of Band RF emissions and Band Edge.....	20
5.3.1. <i>Test location and equipments</i> (for reference numbers please see chapter ‘List of test equipment’).....	20
5.3.2. <i>Requirements and limits</i> .....	20
5.3.3. <i>Test condition and test set-up</i> .....	20
5.3.4. <i>Results</i> .....	22
5.4. Measurement uncertainties .....	27
<b>6. ABBREVIATIONS USED IN THIS REPORT</b> .....	<b>28</b>
<b>7. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES</b> .....	<b>28</b>
<b>8. INSTRUMENTS AND ANCILLARY</b> .....	<b>29</b>
8.1. Test software and firmware of equipment .....	29
8.1.1. <i>Single instruments and test systems</i> .....	30
8.1.2. <i>Legend</i> .....	34
<b>9. VERSIONS OF TEST REPORTS (CHANGE HISTORY)</b> .....	<b>34</b>

<b>Table of annex</b>	<b>Total pages</b>
<b>Annex 1: Test result diagrams</b> (separate document) CETECOM_TR17-1-0172601T21a-C3-A1	35
<b>Annex 2: Internal photographs of EUT</b> (separate document) CETECOM_TR17-1-0172601T21a-C3-A2	5
<b>Annex 3: External photographs of EUT</b> (separate document) CETECOM_TR17-1-0172601T21a-C3-A3	4
<b>Annex 4: Test set-up photographs</b> (separate document) CETECOM_TR17-1-0172601T21a-C3-A4	3

The listed attachments are an integral part of this report.

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests. Also we refer on special conditions which the applicant should fulfil according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies and use an already approved cellular module with FCC-ID: **TXTGPS25-4** and ISED: **909H-GPS25-4**. This test report shows results for LTE technology only. Other implemented wireless technologies were not considered within this test report.

Following tests have been performed to show compliance with applicable FCC Part 2, Part 22, Subpart H, Part 24, Subpart E (Broadband PCS) and FCC Part 27, Subpart C, of the FCC CFR Title 47 Rules, Edition 4<sup>th</sup> November 2016 and Canada RSS-132 Issue 3, RSS-133 Issue 6 and RSS-Gen Issue 4 standards.

### 1.1. TX mode, Test overview of FCC and Canada IC/ISED (RSS) Standards

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1	AC-Power Lines Emissions Conducted (0,15 - 30 MHz)	AC-Power lines (conducted)	§ 15.207	RSS-Gen, Issue 4: Chapter 8.8	§15.207 limits  ISED: Table 3, Chapter 8.8	1	1+2+3 +4	Passed
2	General field strength emissions (9 kHz - 30 MHz)	Cabinet + inter-connecting cables (radiated)	§ 15.209(a)	RSS-Gen, Issue 4: Chapter 8.9, Table 5+6	2400/F(kHz) $\mu$ V/m 24000/F(kHz) $\mu$ V/m  30 $\mu$ V/m	1	1+2+3 +4	passed
7	RF-Power (ERP/EIRP)		§ 2.1046 §22.913(a)(2)	RSS-132, Issue 3: Chapter 5.4 SRSP-503: 5.1.3	< 7 Watt (ERP)	1	1+2+3 +4	Calculated passed
			§ 24.232(c)	RSS-133, Issue 6 Chapter 4.1/6.4 SRSP-510: 5.1.2	< 2 Watt (EIRP)			
			§ 27.50 (d)(4)	RSS-139: Issue 3 Chapter 6.5 SRSP-513: 5.1.2	< 1 Watt (EIRP)			
			§ 27.50(c)(10)	RSS-130, Issue 1, Chapter 4.4	< 3 Watt (ERP)			
8	Spurious emissions		§ 2.1053(a) § 2.1057	RSS-Gen., Issue 4	43+10log(P) dBc	1	1+2+3 +4	passed
9	Band-Edge compliance		§ 22.917(a)(b)	RSS-132: Chapter 5.5(i)(ii)				
		§ 24.238(a)(b)	RSS-133: Chapter 6.5.1(i)(ii)					
		§ 27.53(h)(1)(3)(i)(ii)(iii)	RSS-139: Issue 3 Chapter 6.6 (i) (ii)					
		§ 27.53(g)	RSS-130: Issue 1 Chapter 4.6.1		1	1+2+3 +4	passed	

30	RF Power	Antenna terminal (conducted)	§2.1046	--	N/A	1	1+2+3+4	passed	
34	26dB Emission bandwidth		§2.1049(h)	RSS-Gen, Issue 4, Chapter 6.6	26dBc Emissions BW 99% Power				Not performed see initial modules's certification
35	99% Occupied bandwidth								
36	Spurious emissions		§2.1051 §2.1057	RSS-132, Issue 3: 5.5(i)(ii) RSS-133, Issue 6: 6.5.1(i)(ii)	43+10log(P) dBc	--	--		Not performed see initial modules's certification
37	Band-Edge compliance		§22.917(a)(b) §24.238(a)(b)	RSS-139, Issue 3 Chapt. 6.6 (i) (ii)					
			§27.53	RSS-130, Issue 1 Chapt. 4.6.1 Chapt. 4.6.2					
38	Frequency stability	§22.355, table C-1 §24.235 §2.1055(a)(2) §27.54	RSS-132, Issue 3: Chapter 5.3 RSS-133, Issue 6: Chapter 6.3 RSS-130, Issue 1: Chapter 4.3 RSS-139, Issue 3, Chapter 6.4	< ±2.5ppm or ±0.1ppm				Not performed see initial modules's certification	

Remark:

- for conducted tests see original report no.SD72128174-0517A and SD72128174-0517B for FCC-ID: XPY2AGQN4NNN  
<https://apps.fcc.gov/eas/GetApplicationAttachment.html?id=3764932>

## 1.2. Attestation:

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

The current version of the Test Report CETECOM\_TR17\_1\_0172601T21a-C3 replaces the Test Report CETECOM\_TR17\_1\_0172601T21a\_C2 dated 2019-04-29. The replaced test report is herewith invalid.

.....  
Dipl.-Ing. Niels Jeß  
Responsible for test section

.....  
Dipl.-Ing. N. Perez  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Volker Wittmann
Deputy for testing laboratory:	Dipl.-Ing. Niels Jeß

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

### 2.3. Organizational items

Project leader:	B.Sc. Al-Amin Hossain
Responsible for test report:	Dipl.-Ing. Ninovic Perez
Receipt of EUT:	2018-05-18
Date(s) of test:	2018-06-21 to 2018-07-06
Date of report:	2019-06-06
-----	
Version of template:	13.02 ]

### 2.4. Applicant's details

Applicant's name:	Robert Bosch Tool Corporation
Address:	1800 W, Central Road Mount Prospect  IL, 60056 USA
Contact person:	Mr. Gerard Pasciak

### 2.5. Customer's details

Customer's name:	Rosenberger Hochfrequenztechnik GmbH & Co.KG
Address:	Hauptstr.1 83413, Fridolfing Germany
Contact person:	Mr. Matthias Rappl

### 2.6. Manufacturer's details

Manufacturer's name:	Robert Bosch Power Tools GmbH
Address:	70538, Stuttgart Germany
Contact person:	Mr. Thomas Moser

### 3. Equipment under test (EUT)

#### 3.1. SUMMARY OF RESULTS AND TECHNICAL DATA OF MAIN EUT DECLARED BY APPLICANT

TX-frequency range (E-UTRA operating bands)	<input checked="" type="checkbox"/> LTE Band 2: 1850 - 1910 MHz (Uplink), 1930-1990 MHz (Downlink) <input checked="" type="checkbox"/> LTE Band 4: 1710 - 1755 MHz (Uplink), 2110 - 2155 MHz (Downlink) <input checked="" type="checkbox"/> LTE Band 5: 824 - 849 MHz (Uplink), 869-894 MHz (Downlink) <input checked="" type="checkbox"/> LTE Band 12: 699 - 716 MHz (Uplink), 729 - 746 MHz (Downlink)		
Type of modulation	QPSK, 16-QAM		
Data rates	Cat3, Downlink: max. 100Mbps, Uplink: max. 50Mbps		
Number of channels – Table 5.4.4-1 accord. 3GPP TS36.521-1  (See Note in 3GPP-Standard about channels not to be used depending on channel bandwidths)	<input checked="" type="checkbox"/> LTE Band 2: UARFCN range 18600 - 19199 <input checked="" type="checkbox"/> LTE Band 4: UARFCN range 19950 - 20399 <input checked="" type="checkbox"/> LTE Band 5: UARFCN range 20400 - 20649 <input checked="" type="checkbox"/> LTE Band 12: UARFCN range 23010 - 23179		
Emission designator(s)	Nominal Channel bandwidth	QPSK Modulation:	16-QAM Modulation
	1.4 MHz	See initial certification of the module: <a href="https://apps.fcc.gov/eas/GetApplicationAttachment.html?id=3764932">https://apps.fcc.gov/eas/GetApplicationAttachment.html?id=3764932</a>	
Antenna Type	<input checked="" type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input type="checkbox"/> External, separate RF-connector		
Antenna Gain Tx <sup>*1)</sup>	<input checked="" type="checkbox"/> Values: Band-12# 699-716MHz Band: (-5.6) dBi Band-5# 824-849MHz Band: (-6.5) dBi Band-4# 1710-1755MHz Band: 0.5 dBi Bnad-2# 1850-1909MHz Band: 0.8 dBi		
<b>QPSK-Modulation</b>			
<b>MAX Average Output Power:</b>			
Conducted	LTE-Mode 2	22.79 dBm (AV)	
	LTE-Mode 4	23.41 dBm (AV)	
	LTE-Mode 5	23.60 dBm (AV)	
	LTE-Mode 12	23.69 dBm (AV)	
<b>EIRP</b>	conducted output power + antenna gain - pathloss		
	LTE-Mode 2	23.79 dBm + 0.8 dBi – 0,7dB = 22.89 dBm	
	LTE-Mode 4	23.41 dBm + 0.5 dBi – 0,7dB = 23.51 dBm	
	LTE-Mode 5	23.60 dBm + (-6.5) dBi – 0,7dB = 16.40 dBm	
	LTE-Mode 12	23.69 dBm + (-5.6) dBi – 0,7dB = 17.39 dBm	
<b>ERP</b>	EIRP – 2.15dBi		
	LTE-Mode 2	22.89 dBm – 2.15 dBi = 20.74 dBm	
	LTE-Mode 4	23.51 dBm – 2.15 dBi = 21.36 dBm	
	LTE-Mode 5	16.40 dBm – 2.15 dBi = 14.25 dBm	
	LTE-Mode 12	17.39 dBm – 2.15 dBi = 15.24 dBm	
Installed option	<input type="checkbox"/> GSM 900 and GSM 1800 Bands (not usable in USA) <input type="checkbox"/> W-CDMA Band II, IV, V (not tested within this test report) <input checked="" type="checkbox"/> GPS (not tested within this test report)		
Power supply	<input checked="" type="checkbox"/> over AC/DC adapter: 120V/60 Hz		
Special EMI components	--		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC/ISED label attached	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no	

<b>16-QAM-Modulation</b>			
<b>MAX Average Output Power:</b>			
Conducted	LTE-Mode 2	22.82 dBm (AV)	
	LTE-Mode 4	23.29 dBm (AV)	
	LTE-Mode 5	23.60 dBm (AV)	
	LTE-Mode 12	23.70 dBm (AV)	
<b>EIRP</b>			
	LTE-Mode 2	conducted output power + antenna gain - pathloss 23.82 dBm + 0.8 dBi - 0,7dB = 22.92 dBm	
	LTE-Mode 4	23.29 dBm + 0,5 dBi - 0,7dB = 23.39 dBm	
	LTE-Mode 5	23.60 dBm + (-6.5) dBi - 0,7dB = 16.40 dBm	
	LTE-Mode 12	23.70 dBm + (-5.6) dBi - 0,7dB = 17.40 dBm	
<b>ERP</b>			
	LTE-Mode 2	EIRP - 2.15dBi 22.92 dBm - 2.15 dBi = 20.77 dBm	
	LTE-Mode 4	23.39 dBm - 2.15 dBi = 21.24 dBm	
	LTE-Mode 5	16.40 dBm - 2.15 dBi = 14.25 dBm	
	LTE-Mode 12	17.40 dBm - 2.15 dBi = 15.25 dBm	
Installed option		<input type="checkbox"/> GSM 900 and GSM 1800 Bands (not usable in USA) <input type="checkbox"/> W-CDMA Band II, IV, V (not tested within this test report) <input checked="" type="checkbox"/> GPS (not tested within this test report)	
Power supply		<input checked="" type="checkbox"/> over AC/DC adapter: 120V/60 Hz	
Special EMI components		--	
EUT sample type		<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production
			<input type="checkbox"/> Engineering
FCC/ISED label attached		<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no

Remark: \*1) MPE Information Requirements



### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A S03	GPS25-4	Retrofit Tracker US	IMEI-No: 352753090098 185	PCB-R2802 #200	Doberman- Retrofit-US- 1.0.0

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	EUT Battery	ABI-L18650-1S1P	ABI 170815000528	--	--

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
set. 1	EUT A + AE 1	--

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
op. 1	LTE-Band 2 eMTC Auto Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link. NS_01 Network signaling value was used, no A-MPR was used therefore for this band.
op. 2	LTE-Band 4 eMTC Auto Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link. NS_01 Network signaling value was used, no A-MPR was used therefore for this band.
op. 3	LTE-Band 5 eMTC Auto Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link. NS_01 Network signaling value was used, no A-MPR was used therefore for this band.
op. 4	LTE-Band 12 eMTC Auto Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK and/or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link. NS_01 Network signaling value was used, no A-MPR was used therefore for this band.

\*) EUT operating mode no. is used to simplify the test report.


## 4. Description of test system set-up's

### 4.1. Test system set-up for conducted measurements on antenna port

#### Cellular Conducted RF-Setup 2 (Cel-2 Set-up)

**Tests Specification:** Conducted Carrier power, Frequency Error

**Schematic:** Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5)

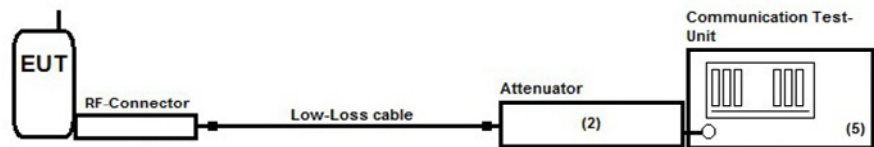

**Testing method:** ANSI C63.10:2013, KDB 971168 D01 v02r02

Used Equipment	Passive Elements	Test Equipment	Remark:
	<input checked="" type="checkbox"/> 10 dB Attenuator (#613)	<input checked="" type="checkbox"/> CMW500	See List of equipment under each test case and chapter 8. for calibration info
	<input checked="" type="checkbox"/> Low loss RF-cables	<input checked="" type="checkbox"/> DC-Power Supply	

**Measurement uncertainty** See chapter Measurement Uncertainties (Cel-2)


## 4.2. Test system set-up for radiated magnetic field measurements below 30 MHz

**Specification:** ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1 , ANSI C63.10-2013 chapter 6.4 (§6.4.4.2)

**General Description:** Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commission.

**Schematic:**

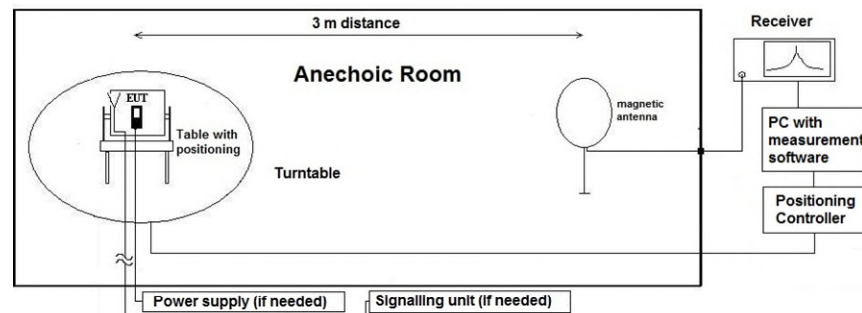

**Testing method:**

### Exploratory, preliminary measurement

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C<sub>L</sub> = Cable loss

D<sub>F</sub> = Distance correction factor

E<sub>C</sub> = Electrical field – corrected value

E<sub>R</sub> = Receiver reading

G<sub>A</sub> = Gain of pre-amplifier (if used)

L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**Distance correction:**

Reference for applied correction (extrapolating) factors due to reduced measurement distance:


ANSI C63.10:2013, §6.4.4.2 - Equations (2) + (3) + (4)

### 4.3. Test system set-up for radiated spurious emission measurements

**Specification:** ANSI C63.4-2014 chapter 8.3, ANSI C63.10-2013 chapter 6.6.3.3 & 6.6.4, ANSI C63.26-2015, Chapter 4.6.3.3

**General Description:** Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

**Schematic:**

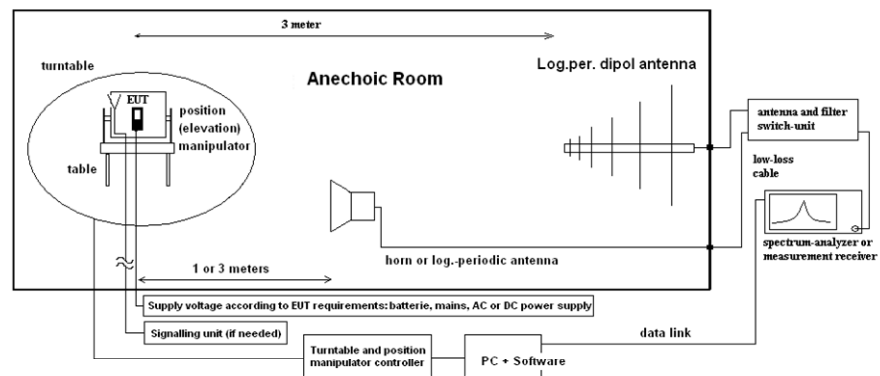

**Testing method:**

**Exploratory, preliminary measurements**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and its characteristics) was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$E_{CE(I)RP} = E_C - 95.2 \text{ dB}$$

$$M = L_T - E_{CE(I)RP}$$

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$M$  = Margin

$L_T$  = Limit

$AF$  = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor (if used)

$G_A$  = Gain of pre-amplifier (if used)

$E_{CE(I)RP}$  = Electrical field corrected for E(I)RP

All units are dB-units, positive margin means value is below limit.

## 5. Measurements

### 5.1. RF-Parameter - RF Peak power output conducted and PAPR

#### 5.1.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2				
test site	<input checked="" type="checkbox"/> 347 Radio.lab. 1	<input type="checkbox"/> Radio.lab. 2				
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 489 ESU 40	<input type="checkbox"/> 264 FSEK	<input type="checkbox"/> 620 ESU 26		
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU	<input checked="" type="checkbox"/> 757 CMW		
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 378 RadiSense	
DC power	<input type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 611 E3632A
otherwise	<input type="checkbox"/> 331 HC 4055	<input type="checkbox"/> 248 6 dB Att.	<input type="checkbox"/> 529 Power div.	<input type="checkbox"/> - cable OTA20		<input type="checkbox"/> 530 10 dB Att.
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input checked="" type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000			

#### 5.1.2. Requirements and limits

<b>FCC</b>	§2.1046, §27.50
<b>ISED</b>	RSS-132: 5.4 + SRSP 503:5.1.3 for FDD Band 5 RSS-133: 4.1/6.4 + SRSP-510:5.1.2 for FDD Band 2 RSS-139, Issue 3: 6.5 RSS-130, Issue 1 + SRSP-518
<b>Limit</b>	Maximum Power Output of the mobile phone should be determined while measured conducted. Limit LTE Band 5: 7 Watt ERP (38.4 dBm) Limit LTE Band 2: 2 Watt EIRP (33.0 dBm) Limit LTE Band 4: 1 Watt EIRP (30.0 dBm) Limit LTE Band 7: 2 Watt EIRP (33.0 dBm) FCC: Limit LTE Band 12/13/17: 3 Watt ERP (34.7dBm)
<b>FCC Limit</b>	FCC: Limit LTE Band 12/13/17: 3 Watt ERP (34.7dBm)
<b>ISED Limit</b>	ISED Limit LTE Band 12: 5 Watt EIRP (37dBm) ISED Limit LTE Band 13: 5 Watt EIRP (37dBm) ISED-Limit LTE Band 17: 5 Watt EIRP (37dBm)

#### 5.1.3. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter "Test system set-up for conducted measurements on antenna port"	
Measurement method	<p>The measurements were performed with the integrated power measurement function of the „radio communication tester CMW500 from Rohde&amp;Schwarz company. In this way spectrum-analyzers instrument limitations can be avoided or minimized. Instead, CMW manufacturers declared measurement error can be considered for this measurement.</p> <p>The attenuation (insertion loss) at the RF Inputs/Outputs of CMW were set according the path loss of the test set-up, determined in a step before starting the measurements. A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector)</p> <p>Peak and Average Values have been recorded for each channel and band. The Peak-to -Average-Ratio is determined by comparing the total peak power to total average power for each measurement.</p>	
Mobile phone settings	<p>A call was established with a suitable communication test unit (CMW500). UE is set TX mode, highest transmit power conditions (RMC-mode), power saving techniques have been disabled (MPR-techniques)</p> <p>Tests have been performed in different EUT bandwidth settings and various settings for allocated RBs.</p> <p>The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band within the designated range within the allowed channel bandwidths. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.</p>	

**5.1.4. Power results**

**5.1.4.1. LTE Band 2**

LTE Band 2				
Signal-BW	QPSK		16-QAM	
	Peak	RMS	Peak	RMS
1.4	27.53	22.79	27.52	22.82

LTE Band 2				
Signal-BW	QPSK		QAM	
	EIRP (dBm)	ERP (dBm)	EIRP (dBm)	ERP (dBm)
1.4	22.89	20.74	22.92	20.77

**5.1.4.2. LTE Band 4**

LTE Band 4				
Signal-BW	QPSK		16-QAM	
	Peak	RMS	Peak	RMS
1.4	28.24	23.41	28.08	23.29

LTE Band 4				
Signal-BW	QPSK		QAM	
	EIRP (dBm)	ERP (dBm)	EIRP (dBm)	ERP (dBm)
1.4	23.51	21.36	23.39	21.24

**5.1.4.3. LTE Band 5**

LTE Band 5				
Signal-BW	QPSK		16-QAM	
	Peak	RMS	Peak	RMS
1.4	28.38	23.60	28.25	23.55

LTE Band 5				
Signal-BW	QPSK		QAM	
	EIRP (dBm)	ERP (dBm)	EIRP (dBm)	ERP (dBm)
1.4	16.40	14.25	16.35	14.20

**5.1.4.4. LTE Band 12**

LTE Band 12				
Signal-BW	QPSK		16-QAM	
	Peak	RMS	Peak	RMS
1.4	28.51	23.69	28.47	23.7

LTE Band 12				
Signal-BW	QPSK		QAM	
	EIRP (dBm)	ERP (dBm)	EIRP (dBm)	ERP (dBm)
1.4	17.39	15.24	17.4	15.25

Remark: pls. see annex 1 for full power results of LTE bands -2, 4, 5, 12



### 5.1.5. PAPR results

#### 5.1.5.1. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter "Test system set-up for conducted measurements on antenna port"	
Measurement method	<p>The measurements were performed with the integrated power measurement function of the „radio communication tester CMW500 from Rohde&amp;Schwarz company.</p> <p>The attenuation (insertion loss) at the RF Inputs/Outputs of CMW were set according the path loss of the test set-up, determined in a step before starting the measurements. A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector)</p> <p>The CCDF function of the measurement equipment as described in the operating manual was used (default settings). Further details can be found in KDB 971168 D01 v02r02 chapter 5.7.1.</p>	
Mobile phone settings	<p>A call was established with a suitable communication test unit (CMW500).          UE is set TX mode, highest transmit power conditions (RMC-mode), power saving techniques have been disabled (MPR-techniques)</p> <p>Tests have been performed in different EUT bandwidth settings and various settings for allocated RBs.</p>	

#### 5.1.5.2. PAPR-results

According KDB 5.7.1 two method are allowed.

- Chapter 5.7.2 for determining worst-case configuration (Signal bandwidth, modulation, RB allocation)
- Chapter 5.7.1 CCDF-Method (0.1% probability)

LTE Band 2		
Signal-Bandwidth / [MHz]	Max. PAPR level with 0.1% probability / [dB]	
	QPSK Modulation	16-QAM Modulation
1.4	5.30	5.48

Remark: pls. see annex 1(17-1-0172601T21a-C3-A1) for graphical plots

LTE Band 4		
Signal-Bandwidth / [MHz]	Max. PAPR level with 0.1% probability / [dB]	
	QPSK Modulation	16-QAM Modulation
1.4	4.88	5.48

Remark: pls. see annex 1 for graphical plots

LTE Band 5		
Signal-Bandwidth / [MHz]	Max. PAPR level with 0.1% probability / [dB]	
	QPSK Modulation	16-QAM Modulation
1.4	4.88	5.20

Remark: pls. see annex 1(17-1-0172601T21a-C3-A1) for graphical plots

LTE Band 12		
Signal-Bandwidth / [MHz]	Max. PAPR level with 0.1% probability / [dB]	
	QPSK Modulation	16-QAM Modulation
1.4	5.06	6.05

Remark: pls. see annex 1 for graphical plots

#### 5.1.5.3. Conclusion

- Peak conducted output power - pass
- PAPR <13dB - pass

## 5.2. General Limit - Radiated field strength emissions below 30 MHz

### 5.2.1. Test location and equipment

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2		<input type="checkbox"/> Please see Chapter. 2.2.3		
test site	<input checked="" type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.	<input type="checkbox"/>	<input type="checkbox"/>	
receiver	<input checked="" type="checkbox"/> 250 ESVS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK	<input type="checkbox"/>	<input type="checkbox"/>	
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170	<input type="checkbox"/> 289 CBL 6141	<input checked="" type="checkbox"/> 030 HFH-Z2	<input type="checkbox"/> 477 GPS
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 371 CBT32	<input type="checkbox"/> 547 CMU	<input checked="" type="checkbox"/> 757 CMW		
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 378 RadiSense	
DC power	<input type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 498 NGPE 40
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input checked="" type="checkbox"/> 060 120 V/ 60 Hz via PAS 5000			

### 5.2.2. Requirements

<b>FCC</b>	Part 15, Subpart C, §15.205 & §15.209			
<b>IC</b>	RSS-Gen: Issue 4: §8.9 Table 5			
<b>ANSI</b>	C63.10-2013			
Frequency [MHz]	Field strength limit		Distance [m]	Remarks
	[µV/m]	[dBµV/m]		
0.009 – 0.490	2400/f (kHz)	67.6 – 20Log(f) (kHz)	300	Correction factor used due to measurement distance of 3 m
0.490 – 1.705	24000/f (kHz)	87.6 – 20Log(f) (kHz)	30	Correction factor used due to measurement distance of 3 m
1.705 – 30	30	29.5	30	Correction factor used due to measurement distance of 3 m

### 5.2.3. Test condition and test set-up

Signal link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top		
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%
EMI-Receiver or Analyzer Settings	Scan data	<input checked="" type="checkbox"/> 9 – 150 kHz RBW/VBW = 200 Hz Scan step = 80 Hz <input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz Scan step = 4 kHz <input type="checkbox"/> other:	
	Scan-Mode Detector Mode: Sweep-Time	<input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3dB Spectrum analyser Mode Peak (pre-measurement) and Quasi-PK/Average (final if applicable) Repetitive-Scan, max-hold Coupled – calibrated display if continuous signal otherwise adapted to EUT's individual transmission duty-cycle	
General measurement procedures	Please see chapter "Test system set-up radiated magnetic field measurements below 30 MHz"		

### 5.2.4. Measurement Results

The results are presented below in summary form only. For more information please see the diagrams included in annex 1. (17-1-0172601T21a-C3-A1)

Table of measurement results:

Diagram No.	Carrier Channel		Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
	Range	No.					PK	AV	QP	
2.01	Mid	19193	9 kHz-30 MHz	1	1	EUT laying and standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.02	Mid	20175	9 kHz-30 MHz	1	2	EUT laying and standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.03	Mid	20525	9 kHz-30 MHz	1	3	EUT laying and standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.04	Mid	23017	9 kHz-30 MHz	1	4	EUT laying and standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark 1: For further information see Annex A1(17-1-0172601T21a-C3-A1)

### 5.2.5. Correction factors due to reduced meas. distance (f< 30 MHz)

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

Frequency -Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (d <sub>meas</sub> < D <sub>near-field</sub> )	2 <sup>te</sup> Condition (Limit distance bigger d <sub>near-field</sub> )	Distance Correction accord. Formula
kHz	9,00E+03	33333,33	5305,17	300	fulfilled	not fulfilled	-80,00
	1,00E+04	30000,00	4774,65		fulfilled	not fulfilled	-80,00
	2,00E+04	15000,00	2387,33		fulfilled	not fulfilled	-80,00
	3,00E+04	10000,00	1591,55		fulfilled	not fulfilled	-80,00
	4,00E+04	7500,00	1193,66		fulfilled	not fulfilled	-80,00
	5,00E+04	6000,00	954,93		fulfilled	not fulfilled	-80,00
	6,00E+04	5000,00	795,78		fulfilled	not fulfilled	-80,00
	7,00E+04	4285,71	682,09		fulfilled	not fulfilled	-80,00
	8,00E+04	3750,00	596,83		fulfilled	not fulfilled	-80,00
	9,00E+04	3333,33	530,52		fulfilled	not fulfilled	-80,00
	1,00E+05	3000,00	477,47		fulfilled	not fulfilled	-80,00
	1,25E+05	2400,00	381,97		fulfilled	not fulfilled	-80,00
	2,00E+05	1500,00	238,73		fulfilled	fulfilled	-78,02
	3,00E+05	1000,00	159,16		fulfilled	fulfilled	-74,49
	4,00E+05	750,00	119,37		fulfilled	fulfilled	-72,00
	4,90E+05	612,24	97,44		fulfilled	fulfilled	-70,23
	5,00E+05	600,00	95,49		fulfilled	not fulfilled	-40,00
	6,00E+05	500,00	79,58		fulfilled	not fulfilled	-40,00
7,00E+05	428,57	68,21	fulfilled	not fulfilled	-40,00		
8,00E+05	375,00	59,68	fulfilled	not fulfilled	-40,00		
9,00E+05	333,33	53,05	fulfilled	not fulfilled	-40,00		
MHz	1,00	300,00	47,75	30	fulfilled	not fulfilled	-40,00
	1,59	188,50	30,00		fulfilled	not fulfilled	-40,00
	2,00	150,00	23,87		fulfilled	fulfilled	-38,02
	3,00	100,00	15,92		fulfilled	fulfilled	-34,49
	4,00	75,00	11,94		fulfilled	fulfilled	-32,00
	5,00	60,00	9,55		fulfilled	fulfilled	-30,06
	6,00	50,00	7,96		fulfilled	fulfilled	-28,47
	7,00	42,86	6,82		fulfilled	fulfilled	-27,13
	8,00	37,50	5,97		fulfilled	fulfilled	-25,97
	9,00	33,33	5,31		fulfilled	fulfilled	-24,95
	10,00	30,00	4,77		fulfilled	fulfilled	-24,04
	10,60	28,30	4,50		fulfilled	fulfilled	-23,53
	11,00	27,27	4,34		fulfilled	fulfilled	-23,21
	12,00	25,00	3,98		fulfilled	fulfilled	-22,45
	13,66	22,12	3,52		fulfilled	fulfilled	-21,39
	15,00	20,00	3,18		fulfilled	fulfilled	-20,51
	15,92	18,85	3,00		fulfilled	fulfilled	-20,00
	17,00	17,65	2,81		not fulfilled	fulfilled	-20,00
	18,00	16,67	2,65		not fulfilled	fulfilled	-20,00
	20,00	15,00	2,39		not fulfilled	fulfilled	-20,00
21,00	14,29	2,27	not fulfilled	fulfilled	-20,00		
23,00	13,04	2,08	not fulfilled	fulfilled	-20,00		
25,00	12,00	1,91	not fulfilled	fulfilled	-20,00		
27,00	11,11	1,77	not fulfilled	fulfilled	-20,00		
29,00	10,34	1,65	not fulfilled	fulfilled	-20,00		
30,00	10,00	1,59	not fulfilled	fulfilled	-20,00		

### 5.3. RF-Parameter - Radiated out of Band RF emissions and Band Edge

#### 5.3.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 443 FAR
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK
antenna	<input checked="" type="checkbox"/> 608 HL 562	<input checked="" type="checkbox"/> 549 HL 025	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 017 CMD 65	<input type="checkbox"/> 323 CMD 55	<input type="checkbox"/> 340 CMD 55
power supply	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 546 CMU	<input type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 611 E3632A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
line voltage	<input type="checkbox"/> 529 6dB divider	<input type="checkbox"/> 530 6dB Att.	<input type="checkbox"/> 110 USB LWL
	<input type="checkbox"/> 230 V 50 Hz via public mains	<input checked="" type="checkbox"/> 060 120 V/ 60 Hz via PAS 5000	<input type="checkbox"/> 482 Filter Matrix
			<input type="checkbox"/> 431 Near field
			<input type="checkbox"/> 494 AG6632A
			<input type="checkbox"/> 498 NGPE 40
			<input type="checkbox"/> 289 CBL 6141
			<input type="checkbox"/> 030 HFH-Z2
			<input type="checkbox"/> 477 GPS

#### 5.3.2. Requirements and limits

<b>FCC</b>	General: §2.1053(a) , §2.1057(a) <input checked="" type="checkbox"/> LTE Band 5: Part 22: §22.917(a)(b) <input checked="" type="checkbox"/> LTE Band 2: Part 24: §24.238(a)(b) <input checked="" type="checkbox"/> LTE Band 4: Part 27: §27.53(h) <input checked="" type="checkbox"/> LTE Band 12: Part 27: §27.53(g) <input type="checkbox"/> LTE Band 13: Part 27: §27.53(c) , §27.53(f) <input type="checkbox"/> LTE Band 17: Part 27: §27.53(g)
<b>ISED</b>	<input checked="" type="checkbox"/> FDD Band 5: RSS-132, Issue 3: 5.5(i)(ii) <input checked="" type="checkbox"/> FDD Band 2: RSS-133, Issue 6: 6.5.1(i)(ii) <input checked="" type="checkbox"/> FDD Band 4: RSS-139, Issue 3: 6.6 (i)(ii) <input checked="" type="checkbox"/> FDD Band 12: RSS-130, Issue 1: 4.6.1 <input type="checkbox"/> FDD Band 13: RSS-130, Issue 1: 4.6.2(a)(i)(ii) + 4.6.2(b) <input type="checkbox"/> FDD Band 17: RSS-130, Issue 1: 4.6.1
<b>Limit</b>	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“ -> Resulting limits for all power levels of the Mobile Phone: -13dBm

#### 5.3.3. Test condition and test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/>
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top	<input type="checkbox"/> floor standing	
Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%	
Test system set-up	Please see chapter “Test system set-up for radiated spurious emission measurements up to 20 GHz”		
Spectrum Analyzer Settings	<b>Parameter:</b> Scan Mode RBW VBW Sweep time Sweep mode Detector	Spectrum analyser mode 1 MHz 10 MHz Coupled (Auto) repetitive Peak	
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the Band-Edge where a AVERAGE detector applied when results are critical (low margin or limit exceed). Tests have been performed in various settings for the device regarding allocated resource blocks and channels in order to find worst-case configuration. Due to very big amount of possible combinations only certain combinations have been tested.		
Mobile phone settings	A call was established on highest power transmit conditions in RMC mode. MPR was deactivated.  The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band within the designated range within the allowed channel bandwidths. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.		

**Spectrum-Analyzer settings for LTE band 2**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	20000	1	10	60	10	MaxH-PK
Sweep 2a (Band-Edge)	1849	1850	0.03	0.3	30	35	MaxH-PK
Sweep 2b (Band-Edge)	1849	1850	0.03	0.3	30	35	MaxH-AV
Sweep 3a (Band-Edge)	1910	1911	0.03	0.3	30	35	MaxH-PK
Sweep 3b (Band-Edge)	1910	1911	0.03	0.3	30	35	MaxH-AV

**Spectrum-analyzer settings for FDD Band 4**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	18000	1	10	160	10	MaxH-PK
Sweep 2a (Band-Edge)	1709	1710	0.03	0.3	30	35	MaxH-PK
Sweep 2b (Band-Edge)	1709	1710	0.03	0.3	30	35	MaxH-AV
Sweep 3a (Band-Edge)	1755	1756	0.03	0.3	30	35	MaxH-PK
Sweep 3b (Band-Edge)	1755	1756	0.03	0.3	30	35	MaxH-AV

**Spectrum-analyzer settings for LTE Band 5**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	9000	1	10	160	10	MaxH-PK
Sweep 2a (Band-Edge)	823	824	0.02	0.2	30	35	MaxH-PK
Sweep 2b (Band-Edge)	823	824	0.02	0.2	30	35	MaxH-AV
Sweep 3a (Band-Edge)	850	851	0.02	0.2	30	35	MaxH-PK
Sweep 3b (Band-Edge)	850	851	0.02	0.2	30	35	MaxH-AV

### Spectrum-analyzer settings for LTE Band 12

	Start freq. MHz	Stop freq. MHz	R-BW kHz	V-BW kHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	100	300	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	100	300	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	9000	100	300	160	10	MaxH-PK
Sweep 2a (Band-Edge)	697	698	50	300	30	35	MaxH-PK, Signal-BW=5MHz
Sweep 2b (Band-Edge)	697	698	100	300	30	35	MaxH-PK, Signal-BW=10MHz
Sweep 3a (Band-Edge)	716	717	500	300	30	35	MaxH-PK, Signal-BW=5MHz
Sweep 3b (Band-Edge)	716	717	100	300	30	35	MaxH-PK, Signal-BW=10MHz

#### 5.3.4. Results

The results are presented below in summary form only. For more information please see the diagrams enclosed in annex 1. (17-1-0172601T21a-C3-A1)

**5.3.4.1. LTE Band 2: Op. Mode 1, Set-up 1**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.01	1RB high	18900	30 MHz to 18 GHz	1	Carrier visible on diagram. Not relevant for results External antenna used 16 QAM modulation	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
No Diagram in Annex	1RB high	18900	18 to 19.5 GHz	1	No Emission Found during premeasurements	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: Used channel bandwidth of 1,4MHz mid channel\_19193 was chosen as worst-case as determined within power measurement

**5.3.4.1.1. Band-Edge Low: 1849-1850 MHz**

Diagram No.	Channel no.	Op.Mode	Number of RBs	Modulation scheme	Detector		Verdict
					PK	RMS	
9.01	18607	1	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.02	18607	1	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.03	18607	1	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.04	18607	1	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed

Remark:

**5.3.4.1.2. Band-Edge High: 1910-1911MHz**

Diagram No.	Channel no.	Op.Mode	Number of RBs	Modulation scheme	Detector		Verdict
					PK	RMS	
9.5	19193	1	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.6	19193	1	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.7	19193	1	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.8	19193	1	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Passed

Remark:

**5.3.4.2. LTE Band 4: Op. Mode 2, Set-up 2**

Dia-gram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.02	1RB low	19957	30 MHz to 18 GHz	2	Carrier visible on diagram. Not relevant for results QPSK modulation External antenna used	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: Used channel bandwidth of 1,4MHz channel\_19957 found as worst-case as determined within power measurements

**5.3.4.2.1. Band-Edge Low: 1709-1710 MHz**

Diagram No.	Channel no.	Op.Mode	Number of RBs	Modulation scheme	Detector		Verdict
					PK	RMS	
9.09	19957	2	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.10	19957	2	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.11	19957	2	<input checked="" type="checkbox"/> full: 15	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.12	19957	2	<input checked="" type="checkbox"/> full: 15	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed

Remark:.

**5.3.4.2.2. Band-Edge High: 1755-1756MHz**

Diagram No.	Channel no.	Op.Mode	Number of RBs	Modulation scheme	Detector		Verdict
					PK	RMS	
9.13	20393	2	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.14	20393	2	<input checked="" type="checkbox"/> 1R low	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.15	20393	2	<input checked="" type="checkbox"/> 1R high	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.16	20393	2	<input checked="" type="checkbox"/> 1R high	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Passed

Remark:.



**5.3.4.3. LTE Band 5: Op. Mode 3, Set-up 1**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.03	1 RB High	20407	30 MHz to 9 GHz	3	Carrier visible on diagram. Not relevant for results QPSK modulation External antenna used	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: Used channel bandwidth of 1,4MHz (channel\_20407) found as worst-case as determined within power measurements

**5.3.4.3.1. Band-Edge Low: 823-824MHz**

Diagram No.	Channel no.	Op.Mode	Number of RBs	Modulation scheme	Detector		Verdict
					PK	RMS	
9.17	20407	3	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.18	20407	3	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.19	20407	3	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.20	20407	3	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed

Remark:

**5.3.4.3.2. Band-Edge High: 849-850MHz**

Diagram No.	Channel no.	Op.Mode	Number of RBs	Modulation scheme	Detector		Verdict
					PK	RMS	
9.21	20643	3	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.22	20643	3	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.23	20643	3	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Passed
9.24	20643	3	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Passed

Remark:

### 5.3.4.4. LTE Band 12: Op. Mode 4 Set-up 1

#### Radiated spurious emission measurements:

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.04	1RBLow	23173	30 MHz to 9 GHz	4	Carrier visible on diagram. Not relevant for results 16 QAM Modulation External antenna used	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: Used channel bandwidth of 1,4MHz channel\_23017 was chosen as worst-case as determined within power measurements

#### Band-Edge Low: 697-698MHz

Diagram No.	Channel no.	Op.Mode	Number of RBs	Modulation scheme	Detector		Verdict
					PK	RMS	
9.25	23017	4	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.26	23017	4	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.27	23017	4	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.28	23017	4	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed

Remark:.

#### Band-Edge High: 716-717MHz

Diagram No.	Channel no.	Op.Mode	Number of RBs	Modulation scheme	Detector		Verdict
					PK	RMS	
9.29	23173	4	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.30	23173	4	<input checked="" type="checkbox"/> 1RB low	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.31	23173	4	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> QPSK modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed
9.32	23173	4	<input checked="" type="checkbox"/> 1RB high	<input checked="" type="checkbox"/> 16-QAM modulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	passed

Remark:

### 5.4. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%						Remarks
Conducted emissions (U <sub>CISPR</sub> )	CISPR 16-2-1	9 kHz - 150 kHz	4.0 dB						-
		150 kHz - 30 MHz	3.6 dB						
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz	4.2 dB						E-Field
		1 GHz - 18 GHz	5.1 dB						
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-						-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB						Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--	-
		12.75 - 26.5GHz	N/A	0.82	--	N/A	N/A	--	
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable
		2.8 GHz - 12.75GHz	1.48	N/A	1.51	N/A	1.43	--	
		12.75 GHz - 18GHz	1.81	N/A	1.83	N/A	1.77	--	
		18 GHz - 26.5GHz	1.83	N/A	1.85	N/A	1.79	--	
Power density	-	1 – 2.8GHz	1.40 dB						--
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			1.0 dB						Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			See above: 0.70 dB						Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm						-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB						Magnetic field E-field Substitution
		30 MHz - 1 GHz	4.2 dB						
		1 GHz - 20 GHz	3.17 dB						

**Table: measurement uncertainties, valid for conducted/radiated measurements**

## 6. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

## 7. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkkS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	(MRA US-EU 0003)	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurment.	FCC, Federal Communications Commission Laboratory Division, USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	ISED, Industry Canada Certification and Engineering Bureau
487 550 348 348	R- 4452 G- 20013 C- 20009 T- 20006	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurment.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room

## 8. Instruments and Ancillary

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

### 8.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
140	Signal Generator	SMHU	831314/006	Firm.= 3.21
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	Power Meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	Spuri 7.2.5 or EMC 32 Ver. 9.15.00
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw..f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw..f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2
607	Signal Generator	SMR 20	832033/011	V1.25
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20
670	Univ. Radio Communication Tester	CMU 200	106833	µP1 =V8.50, Firmware = V.20
689	Vector Signal Generator	SMU200	100970	02.20.360.142
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)

### 8.1.1. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	16.05.2019
250	EMI Test Receiver	ESVS-30	829007/001	Rohde & Schwarz			
23	EMI Test Receiver	ESVS-30	829007/001	Rohde & Schwarz			
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	16.05.2019
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	16.05.2019
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	15.05.2019
011	Insertion Unit (EMS-radiated)	URV5-Z2	864169/004	Rohde & Schwarz	24 M	-	
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Rohde & Schwarz	24 M	-	15.05.2019
013	Power Meter (EMS cond.)	NRVD	839111/003	Rohde & Schwarz	24 M	-	15.05.2019
014	Insertion Unit (EMS cond.)	URV5-Z2	838519/029	Rohde & Schwarz	24 M	-	15.05.2019
015	Insertion Unit (EMS cond.)	URV5-Z4	838570/024	Rohde & Schwarz	24 M	-	15.05.2019
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	30.05.2019
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Rohde & Schwarz	pre-m	3	
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.07.2017
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.04.2018
022	Audio Measurement Amplifier	2636C	1537643	Brüel & Kjaer	24 M	-	31.03.2016
030	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	30.04.2018
031	Absorbing Clamp	MDS-21	863325/015	Rohde & Schwarz	36 M	-	30.04.2018
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	15.05.2019
049	Current Clamp (injection)	F-120-2	48	FCC	24 M	-	30.05.2020
050	3-ph Coupling Decoupling Netw. (Burst)	CDN 300	176	Schaffner	36 M	-	30.05.2021
051	VHF-Current Probe 20-300 MHz	ESV-Z1	872421	Rohde & Schwarz	36 M	-	30.05.2021
052	Notch Filter DECT	WRCB 1887,82/1889,55SS	12	Wainwright Industries	pre-m	2	
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
058	capacitive clamp (Burst)	IP 4	99	Haefely	36 M	-	30.05.2021
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
065	attenuator, (6 dB) 50 Ohm, 250W	AT 50-6-250	521057	BNOS Electronics	12 M	1b	30.09.2015
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	30.06.2017
067	coupling decoupling-network	CDN 801-M2/M3	272	Lüthi	36 M	-	15.05.2020
068	coupling decoupling-network	CDN 801-M5	95226	Lüthi	36 M	-	17.05.2020
069	EM - clamp	EM101	9535159	Lüthi	36 M	-	30.05.2019
072	coupling decoupling-network	CDN 801-M2/M3	276	Lüthi	36 M	-	17.05.2020
083	AC - power supply, 0-10 A	EAC/MT 27010	910502096	EURO TEST	pre-m	2	
084	AC - power supply, 0-5 A	ELABO-8-34214	-	ELABO	pre-m	2	
085	AC - power supply, 0-10 A	R250	-	Schunterm.&Benningh.	pre-m	2	
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
090	Helmholtz coil: 2x10 coils in series	Helmholtz coil: 2x10 coils in	-	RWTÜV	24 M	4	31.03.2016
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
094	artificial head (No.1)	4905	1566990	Brüel & Kjaer	pre-m	2	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	30.05.2021
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.05.2021
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	30.05.2019
121	notch filter GSM 1900	WRCB 1879,5/1880,5EE	15	Wainwright GmbH	12 M	1d	30.06.2017
122	notch filter GSM 1800	WRCB 1747/1748	12	Wainwright GmbH	12 M	1c	30.06.2017
131	RF-Current Probe	F-52	19	FCC	36 M	-	17.05.2020
133	horn antenna 18 GHz (Meas 1)	3115	9012-3629	EMCO	36 M	1c	10.03.2020
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO	36 M	-	10.03.2020
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	30.04.2018
142	attenuator (6 dB) 2 W, 8 GHz	DGL N	-	Radiall	12 M	1b	30.09.2015
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
254	high pass GSM1800/1900/DECT	5HC 2600/12750-1.5KK	23042	Trilithic	12 M	1c	30.06.2017
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	30.05.2020
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	30.05.2019
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	30.05.2019
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	30.05.2020
266	Peak Power Sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	30.05.2020
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
268	AC/DC power supply	EA 3050-A	9823636	Elektro Automatik	pre-m	-	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
284	coupling decoupling network	CDN 801-M1	1661	Lüthi	36 M	-	17.05.2020
285	coupling decoupling network	CDN 801-S1	1642	Lüthi	36 M	-	17.05.2020
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	30.06.2017
290	notch filter GSM 900	WRCA 901.9/903,1SS	3RR	Wainwright GmbH	12 M	1c	30.06.2017
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	30.06.2017
295	Racal Digital Radio Test Set	6103	1572	Racal	pre-m	3	
296	audio measurement amplifier	2636C (Reserve)	R=316568/004 B=1537541	Brüel & Kjaer	pre-m	2	
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
299	audio microphone	134	-	Brüel & Kjaer	pre-m	2	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	17.05.2019
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	14.03.2020
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	20.03.2020
304	fix dipole antenna 1,6 GHz	EMCO 3125-307	9907-1001	ETS	pre-m	-	
305	fix dipole antenna 1,8-2,0 GHz	EMCO 3125-306	9907-1001	ETS	pre-m	-	
306	fix dipole antenna 2,45 GHz	EMCO 3125-308	9907-1001	ETS	pre-m	-	
307	fix dipole antenna 3 GHz	EMCO 3125-309	9907-1001	ETS	pre-m	-	
317	1000 Hz calibrator 94 dB SPL	4230 94dB	1542286	Brüel & Kjaer	12 M	-	
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Rohde & Schwarz	pre-m	3	
335	CTC-EMS-Conducted	System EMS Conducted	-	Rohde & Schwarz	12 M	5	30.09.2015
337	System CTC OATS NSA	System EMI OATS NSA	-	HD GmbH	24 M	5	12.04.2019
340	Digital Radiocommunication Tester	CMD 55	849709/037	Rohde & Schwarz	pre-m	3	
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	30.05.2020
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	17.05.2019
344	adaptor 150/50 Ohm	150/50	-	Krohne	36 M	-	17.05.2020
345	adaptor 150/50 Ohm	150/50	-	Krohne	36 M	-	17.05.2020
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
349	car battery 12 V	car battery 12 V	without	-	-	3	
350	car battery 12 V	car battery 12 V	without	-	-	3	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	24.05.2019
363	Kalibrieradapter HF-uns.	CR 100 A	without	Lüthi	24 M	-	30.05.2020
364	Kalibrieradapter HF-uns.	CR 100 A	128	Lüthi	24 M	-	30.05.2020
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	EM-Test	12 M	-	30.05.2019
368	ROD-Antenna	HFH 2-Z1	879283/31	Rohde & Schwarz	60 M	-	17.07.2019
371	Bluetooth Tester	CBT32	100153	R&S	36 M	-	30.05.2019
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	12 M	-	17.05.2019
374	Power Amplifier 0,8-3 GHz	60SIG3	306528	Amplifier Research	12 M	1a	20.03.2018
375	Directional Coupler	DC7144M1	306498	Amplifier Research	12 M	1a	20.03.2018
376	Horn Antenna 6 GHz	BBHA9120 E	BBHA 9120 E 179	Schwarzbeck	36 M	-	28.02.2020
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	30.05.2019
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	DARE B.V.	24 M	-	25.05.2016
386	Coupling Decoupling Network	CDN USB/p	19397	Schaffner	36 M	-	17.05.2020
387	Coupling Decoupling Network	CDN L-801 M2	2051	Lüthi	36 M	-	18.05.2020
388	Coupling Decoupling Network	CDN L-801 T2	1929	Lüthi	36 M	-	18.05.2020
389	Digital Multimeter	Keithley 2000	0583926	Keithley	pre-m	-	
390	Industry Acoustic System	MO 2000 Set	2127100123	Sennheiser	pre-m	2	
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	18.05.2018
394	Power Amplifier 80-1000 MHz	BLWA 0810-250/200	045610	Bonn-Elektronik	-	1a	20.03.2018
399	Sound Calibrator	Sound Calibrator 4231	2665101	Brüel & Kjaer	12 M	-	30.05.2019
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	06.03.2019
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	-	10.03.2020
440	CDN for Datacable	CDN-UTP	CDN-UTP 029	EMC Partner AG, CH	36 M	-	30.05.2019
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR) Cable	-	CETECOM	12 M	5	05.06.2017
442	CTC-SAR-EMS	System EMS field (SAR)	-	ETS-Lindgren / CETECOM	12 M	5	20.03.2018
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	ETS-Lindgren / CETECOM	12 M	5	30.09.2017
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	ETS Lindgren/CETECOM	12 M	5	30.09.2014
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-	5	Wainwright Instruments GmbH	12 M	1c	30.06.2017
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	
450	6dB attenuator N/N	6806.17B 6dB	-	Huber & Suhner	12 M	-	20.05.2019
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
455	Oscilloscope	HP 54602B	US 350 336 45	Hawlett Packard	-	4	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	30.05.2019
462	AF-Generator	MX-2020	-	Conrad	-	4	
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	30.05.2020
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	36 M	-	30.05.2019
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	36 M	-	30.04.2021
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	16.05.2019
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	30.07.2017
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	31.03.2019
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	18.05.2018
491	ESD Simulator dito	ESD dito	dito307022	EM-Test	12 M	-	30.05.2019
498	Power Supply	NGPE 40/40	402	Rohde & Schwarz	pre-m	2	
500	Industry Acoustic System	MO 2000 Set	100048	Sennheiser	pre-m	2	
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwrght	12 M	1c	30.06.2017
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	18.05.2019
524	Voltage Drop Simulator	VDS 200	0196-16	EM Test	24 M	-	16.05.2019
525	CDN coupling network	CNA 200	1196-01	EM Test	24 M	-	16.05.2019
526	Burst Generator	EFT 200 A	0496-06	EM Test	24 M	-	16.05.2019
527	Micro Pulse Generator	MPG 200 B	0496-05	EM Test	24 M	-	16.05.2019
528	Load Dump Simulator	LD 200B	0496-06	EM Test	24 M	-	16.05.2019
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
533	Impedance Stabilization Network	ISN T200A	25706	Teseq	36 M	-	18.05.2020
534	Impedance Stabilization Network	ISN T400A	24881	Teseq	36 M	-	18.05.2020
535	Impedance Stabilization Network	ISN T800	26321	Teseq	36 M	-	18.05.2020
536	Impedance Stabilization Network	ISN ST08	25867	Teseq	36 M	-	18.05.2020
541	Impedance Stabilization Network	ISN T8-Cat6	26373	Teseq Berlin	36 M	-	18.05.2020
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	30.03.2018
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	05.07.2018
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	31.07.2018
550	System CTC S-VSWR Verification SAR-EMI	System EMI Field SAR S-VSWR	-	ETS Lindgren/CETECOM	24 M	-	30.03.2019
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	08.08.2019
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2019
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	
592	CDN-HDMI	CDN-HDMI	A3029004	Frankonia / Dr.Hubert	36 M	-	18.05.2020
595	Analog Adder	TS8910	-	Rohde & Schwarz	pre-m	2	
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	pre-m	-	
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	17.05.2019
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
607	Signal Generator	SMR 20	832033/011	Rohde & Schwarz	36 M	-	18.05.2020
609	Sleeve Dipole Antenna	3126-700	00123808	ETS-Lindgren	36/12 M	-	01.08.2017
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
615	Analog Adder	TS8920	-	Rohde & Schwarz	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	30.05.2020
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	30.05.2019
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.43	G. Luft GmbH	24 M	-	30.03.2019
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	Kogilink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichert	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichert	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	24 M	-	24.05.2019
644	Amplifier	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
645	Power Amplifier	CBA 230M-080	T44236	TESEQ	-	1g	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	30.05.2020
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	
672	Digitalmultimeter	Keithley 2700	1182075	Keithley	pre-m	-	
673	Diditalmultimeter	Keithley 2700	1181408	Keithley	pre-m	-	
674	Digitalmultimeter	Keithley 2700	1182090	Keithley	pre-m	-	



Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
675	Digitalmultimeter	Keithley 2700	1162865	Keithley	pre-m	-	
676	Digitalmultimeter	Keithley 2700	1182092	Keithley	24 M	-	16.05.2019
677	Digitalmultimeter	Keithley 2700	1182089	Keithley	pre-m	-	
678	Power Meter	NRP	101638	Rohde&Schwarz	pre-m	-	
679	Power Supply	High Speed Power Supply	0783417	Keithley	pre-m	-	
680	Power Sensor	NRP-Z21	100622	Rohde & Schwarz	pre-m	-	
682	Vector Signal Generator	SMU 200A	101319	Rohde & Schwarz	pre-m	-	
683	Spectrum Analyzer	FSU 26	200571	Rohde & Schwarz	12 M	-	30.05.2019
684	Widerstand 100 Ohm	SL 403-403	72973	Teseq	pre-m	-	
685	Widerstand 100 OHM	SL 403-403	72974	Teseq	pre-m	-	
686	Field Analyzer	EHP-200A	160WX30702	Narda Safety Test Solutions	24 M	-	29.03.2019
687	Signal Generator	SMF 100A	102073	Rohde&Schwarz	12 M	-	30.05.2019
689	Vector Signal Generator	SMU200	100970	Rohde&Schwarz	24 M	-	30.06.2020
690	Spectrum Analyzer	FSU	100302/026	Rohde&Schwarz	24 M	-	16.05.2019
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	36 M	-	29.05.2020
695	ReRadiating GPS-System	AS-47	G1406003500001	Automotive Cons. Fink	-	3	
698	Sound Calibrator	Sound Calibrator 4231	2035208	Briuel & Kjaer	12 M	-	30.05.2019
699	Audio Analyzer	UPL16	833494/005	Rohde & Schwarz	12 M	-	30.05.2019
700	Audio Analyzer	UPL 16	830695/0016	Rohde&Schwarz	24 M	-	30.05.2020
701	CMW500 wide. Radio Comm.	CMW500	158150	Rohde & Schwarz	12 M	-	
705	NRV-Z1	Power Sensor	893350/020	Rohde & Schwarz	12 M	-	30.05.2019
706	NRV-Z1	Power Sensor	830961/001	Rohde & Schwarz	12 M	-	30.05.2019
707	RadiCentre	CTR-1004B	10I00037SN038-1	D.A.R.E!! Instruments	24 M	-	
708	Laser powered Electrical Field Strength Probe	RadiSense 6	10I00037SN038	D.A.R.E!! Instruments BV	24 M	-	31.03.2019
710	RF Power Amplifier	BLMA 2560-100	1610879	Bonn Elektronik	12 M	-	20.03.2018
711	Harmonic Mixer 90 GHz - 140GHz	RPG FS-Z140	101004	RPG	24 M	-	22.02.2019
712	Harmonic Mixer 75 GHz - 110GHz	FS-Z110	101468	Rohde & Schwarz	24 M	-	22.02.2019
713	Harmonic Mixer, 50 GHz - 75GHz	FS-Z75	101022	Rohde & Schwarz	24 M	-	22.05.2019
714	Signal Analyzer 67GHz	FSW67	104023	Rohde & Schwarz	24 M	-	28.02.2020
715	Harmonic Mixer, 140 GHz - 220GHz	FS-Z220	101009	RPG Radiometer Physics	24 M	-	03.08.2019
716	Harmonic Mixer 220 GHz to 325 GHZ	FS-Z325	101005	RPG Radiometer Physics	24 M	-	13.02.2019
717	Signal Generator	SMP02	830682/005	Rohde&Schwarz	36 M	-	
718	Robot	Dasy 5 / TX90	F11/5GM9A1/A/01	Stäubli	pre-m	-	
747	Spectrum Analyzer	FSU 26	200152	Rohde & Schwarz	12 M	-	30.05.2019
751	Digital Optical System	optoCAN-FD Transceiver	17-010416	mk-messtechnik GmbH	-	-	
752	Digital Optical System	optoCAN-FD Transceiver	17-010083	mk-messtechnik GmbH	-	-	
753	Digital Optical System	optoCAN-FD Transceiver	17-010084	mk-messtechnik GmbH	-	-	
754	Digital Optical System	optoCAN-FD Transceiver	17-010415	mk-messtechnik GmbH	-	-	
755	Digital Optical System	optoLAN-100-MAX	17-010795	mk-messtechnik GmbH	-	-	
757	WIDEBAND RADIO COMMUNICATION	CMW500	163673	Rohde&Schwarz	12 M	-	
758	Signal Generator	SMU 200A	100754	Rohde & Schwarz	24 M	-	11.10.2019
780	Spectrum Analyzer	FSH3	101726	Rohde & Schwarz	12 M	-	
781	Power Supply	PS 2042-10 B	2815450369	Elektro-Automatik GmbH	-	-	
782	Power Supply	PS 2042-10 B	2815450348	lektro-Automatik GmbH & Co.KG	-	-	
783	Spectrum Analyzer	FSU 26	100414	Rohde & Schwarz	12 M	-	30.05.2019
784	Power Supply	NGSM 32/10	00196	Rohde & Schwarz	12 M	-	
785	RSP	RF Step Attenuator	860712/012	Rohde & Schwarz	12 M	-	

### 8.1.2. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No. 443)
	1d	System CTC-SAR-EMI (Ref.-No. 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No. 420)
	1 g	System CTC-FAR-EMS (Ref.-No. 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

## 9. Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2018-08-21
C1	Manufacturer and ISED changed	2018-11-05
C2	Applicant and Coversheet Logo changed	2019-04-29
C3	Antenna Gain for Band2/4/5/12 changed; ERP/EIRP results added (see ch. 5.1.4); PAPR results updated	2019-06-06

End Of Test Report