

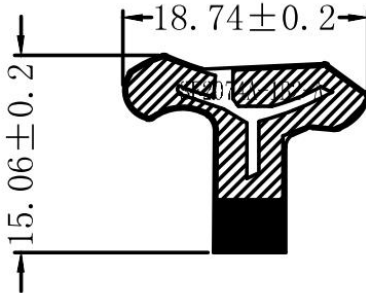


<b>Manufacturer</b>	Shenzhen Suo Ward Communication Technology Co., Ltd.
<b>Product</b>	SF2074A-1B2-A
<b>Specification</b>	
<b>Frequency Range</b>	2400-2500 MHz
<b>V.S.W.R</b>	$\leq 2.0$
<b>Impedance</b>	50 $\Omega$
<b>Gain</b>	$\geq -4.5$
<b>Azimuth</b>	Omni-directional
<b>Polarization</b>	Linear
<b>Azimuth Beam width</b>	Omni-directional
<b>Dimension (mm)</b>	
 <p>The image shows a technical drawing of a component, likely a connector or antenna part, with two dimensions indicated: a width of <math>18.74 \pm 0.2</math> mm and a height of <math>15.06 \pm 0.2</math> mm. The component has a complex, multi-faceted top surface and a narrower base.</p>	
<b>Performance</b>	


2400.000MHz




2400.000MHz H




2400.000MHz E1




2400.000MHz E2




2450.000MHz




2450.000MHz H




2450.000MHz E1




2450.000MHz E2




2500.000MHz



2500.000MHz H



2500.000MHz E1



2500.000MHz E2

