

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: IC 3463A-1
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
DAT-P-176/94-D1



Independent ETSI
compliance test house



Accredited Bluetooth[®] Test Facility (BQTF)

Test report no.: 2-4556-01-05/07

LANCOM XAP-40-2

Hirschmann BAT54-Rail

FCC ID: U4Y-SE112

IC: 7049A-SE112

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,
Inc. and any use of such marks by Cetecom ICT is under license*

Table of contents

| | | |
|-----------|---|-----------|
| 1. | ADMINISTRATIVE DATA | 3 |
| 1.1. | ADMINISTRATIVE DATA OF THE TEST FACILITY | 3 |
| 1.1.1 | Identification of the testing laboratory | 3 |
| 1.1.2 | Organizational items..... | 3 |
| 1.1.3 | Applicant´s details | 4 |
| 1.2. | ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER | 4 |
| 1.3. | DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT) | 5 |
| 1.3.1 | EUT: Type, S/N etc. | 5 |
| 1.3.2 | If RF component testing only, description of additional used HW/SW | 5 |
| 1.3.3 | Additional EUT information | 5 |
| 1.3.4 | Additional EUT information For IC Canada (appendix 2)..... | 6 |
| 1.3.5 | EUT operating modes | 7 |
| 1.3.5 | Extreme conditions testing values..... | 7 |
| 2. | TEST STANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES | 8 |
| 3. | RF MEASUREMENT TESTING | 9 |
| 3.1. | DESCRIPTION OF TEST SET-UP | 9 |
| 3.1.1 | Radiated measurements | 9 |
| 3.1.2 | Conducted measurements | 9 |
| 3.1.3 | AC-conducted measurements..... | 9 |
| 3.2. | REFERENCED DOCUMENTS | 10 |
| 3.3. | ADDITIONAL COMMENTS | 10 |
| 3.4. | ANTENNA GAIN | 10 |
| 3.5. | PEAK POWER SPECTRAL DENSITY (OFDM) §15.247(E) | 11 |
| 3.6. | SPECTRUM BANDWIDTH OF A OFDM SYSTEM / 6 dB BANDWITH §15.247(A2) | 14 |
| 3.7. | MAXIMUM OUTPUT POWER (CONDUCTED) (OFDM) §15.247 (B) (3)..... | 20 |
| 3.8. | MAX. PEAK OUTPUT POWER (RADIATED) §15.247 (B) (3) | 24 |
| 3.9. | BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (D) | 25 |
| 3.10. | BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS (DSSS) §15.205..... | 27 |
| 3.11. | SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) §15.247 (D)..... | 28 |
| 3.12. | SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) §15.209 | 38 |
| 3.13. | SPURIOUS EMISSIONS - RADIATED RECEIVER §15.109 / 209 | 48 |
| 3.14. | SPURIOUS EMISSIONS - RADIATED < 30 MHZ §15.109..... | 54 |
| 3.15. | CONDUCTED EMISSIONS < 30 MHZ §15.107/207 | 55 |
| 3.16. | USED TESTEQUIPMENT | 56 |
| 3.16. | USED TESTEQUIPMENT | 56 |
| 4. | PHOTOGRAPHS | 60 |

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory

| | |
|-------------------------------------|---|
| Company name: | Cetecom ICT Services GmbH |
| Address: | Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany |
| Laboratory accreditation: | DAR-Registration No. DAT-P-176/94-D1 Bluetooth Qualification Test Facility (BQTF) |
| Responsible for testing laboratory: | Harro Ames, Michael Berg Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de |

..... /

Responsible for testing laboratory
(Harro Ames, Michael Berg)

1.1.2 Organizational items

| | |
|---|--------------------------|
| Reference No.: | 2-4556-01-05/07 |
| Order No.: | |
| Responsible for test report and project leader: | Harro Ames, Michael Berg |
| Receipt of EUT: | 2007-03-22 |
| Date(s) of test: | 2007-03-25 to 2007-04-19 |
| Date of report: | 2007-04-27 |
| Number of report pages: | 70 |
| Number of diagram pages (annex): | |
| ----- | |
| Version of template: | 1.6 |

..... /

Responsible for test report
(Harro Ames, Michael Berg)

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

| | |
|-------------------|---|
| Applicant's name: | LANCOM Systems GmbH |
| Address: | Adenauerstr. 20/B2 D-52146 Würselen Germany |
| Contact person: | Mr. Andre Krautschick Tel: +49 (0)2405 49936-443 Fax: +49(0)2405 49936-99 email: Andre.Krautschick@lancom.de |

1.2 Administrative data of manufacturer / member

| | |
|----------------------|---------------|
| Manufacturer's name: | - applicant - |
| Address: | |

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

| Product name | Product ID | Description | S/N serial number | HW hardware status | SW software status |
|------------------------|--------------------|--------------------|--------------------------|-----------------------------|--------------------|
| XAP-40-2 BAT54-Rail | | Dual WLAN AP | - | - | - |
| Frequency Band [MHz] | Type of Modulation | Number of channels | Antenna | Power Supply | Temperature Range |
| ISM 5725 - 5850 | OFDM | 5 | 2*2 external antennas | External AC power supply | -20°C - +55°C |

1.3.2 If RF component testing only, description of additional used HW/SW

| | Product name | Product ID | Description | S/N serial number | HW hardware status | SW software status |
|---|--------------|------------|-------------|-------------------|--------------------|--------------------|
| 1 | | | | | | |
| 2 | | | | | | |

1.3.3 Additional EUT information

The sample is a dual access point for dualband use. (2.4 and 5 GHz).

Inside the AP are two identical RF parts, both are able to work on 2.4 and 5 GHz.

In this report we test the AP with one board and the dedicated rod antennas at 5725 to 5850 MHz.

Other antennas and frequency ranges are tested in separate reports.

There are two different type of housing on the market, one is called XAP-40-2, the second is called Hirschmann BAT54-Rail.

The only difference is in the front panel, RF-part and software are identical. There are no differences in RF behaviour.

1.3.4 Additional EUT information For IC Canada (appendix 2)

| | |
|---|--|
| Company Number: | 7049A |
| Model Name: | LANCOM XAP-40-2 Hirschmann BAT54-Rail |
| Manufacturer (complete Adress): | LANCOM Systems GmbH Adenauerstr. 20/B2 D-52146 Würselen Germany |
| Tested to Radio Standards Specification (RSS) No.: | RSS-210 Issue 6 |
| Open Area Test Site Industry Canada Number: | IC 3463A-1 |
| Frequency Range (or fixed frequency) [MHz]: | 5745 - 5825 MHz |
| RF: Power [W] (max): | Rad. EIRP: 182 mW Conducted : 95.5 mW |
| Antenna Type: | rod antenna |
| Occupied Bandwidth (99% BW) [MHz]: | 18.27 |
| Type of Modulation: | OFDM |
| Emission Designator (TRC-43): | 18M3G7D |
| Transmitter Spurious (worst case) [μ V/m in 3m]: | No peaks found |
| Receiver Spurious (worst case) [μ V/m in 3m]: | No peaks found |

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all the applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date: 2007-04-27

Testengineer: Harro Ames

1.3.5 EUT operating modes

| EUT operating mode no.*) | Description of operating modes | Additional information |
|--------------------------|--------------------------------|--|
| Op. 0 | Normal mode | Normal temperature and power source conditions |
| Op. 1 | | low temperature, low power source conditions |
| Op. 3 | | low temperature, high power source conditions |
| Op. 4 | | high temperature, low power source conditions |
| Op. 5 | | high temperature, high power source conditions |

*) EUT operating mode no. is used to simplify the test report.

1.3.5 Extreme conditions testing values

| Description | Shortcut | Unit | Value |
|--------------------------------|-------------------|--------|------------|
| Nominal Temperature / humidity | T _{nom} | °C / % | 22°C / 33% |
| Low Temperature | T _{low} | °C | -20°C |
| High Temperature | T _{high} | °C | 55°C |
| Nominal Power Source | V _{nom} | V | 115V AC |
| Low Power Source | V _{low} | V | 100V AC |
| High Power Source | V _{high} | V | 130V AC |

Type of powersource: External AC power supply with 12V DC output

2 Test standard & summary list of all performed test cases

| TC identifier | Description | verdict | date | Remark |
|---------------|--------------------------------------|---------|------------|--------|
| RF-Testing | FCC Part 15 §15.247 - CANADA RSS-210 | pass | 2007-03-28 | |

| Test Specification Clause | Test Case | Pass | Fail | Not applicable | Not performed |
|---------------------------|---|------|------|----------------|---------------|
| None | Antenna Gain | Yes | | | |
| §15.247 (e) | Peak power spectral density | Yes | | | |
| §15.247(a2) | Spectrum Bandwidth of a DSSS /OFDMSystem 6dB/20dB BW | Yes | | | |
| § 15.247 (b) (3) | Maximum output power (conducted) | Yes | | | |
| § 15.247 (b) (3) | Max. peak output power (radiated) | Yes | | | |
| §15.247 d) | Band-edge compliance of conducted emissions | Yes | | | |
| §15.205 | Band-edge compliance of radiated emissions | Yes | | | |
| §15.247 (d) | Spurious Emission - conducted (Transmitter) | Yes | | | |
| § 15.209 | Spurious Emission -radiated (Transmitter) | Yes | | | |
| § 15.247 (d) | Spurious Emissions-radiated (Receiver) | Yes | | | |
| § 15.209 | Spurious Emissions-radiated <30 MHz | Yes | | | |
| § 15.107/207 | Conducted Emissions <30 MHz | Yes | | | |

3 RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.


30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn with lownoise preamp

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal paths are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

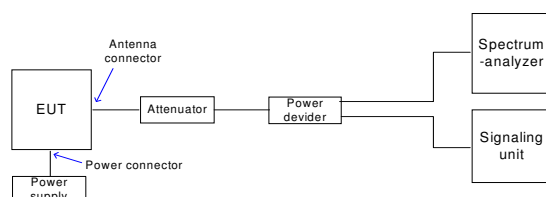

3.1.3 AC-conducted measurements

We used the dedicated power supply delivered by the customer.

3.2 Referenced Documents

none

3.3 Additional comments

none

3.4 Antenna gain


The antenna gain is calculated by subtracting the conducted from the radiated power.

For the dedicated rod antenna, we calculated ~ 2.6 dBi at 5800 MHz. (See also clause 3.8)


3.5 Peak Power Spectral density (OFDM)

§15.247(e)


Plot 1:

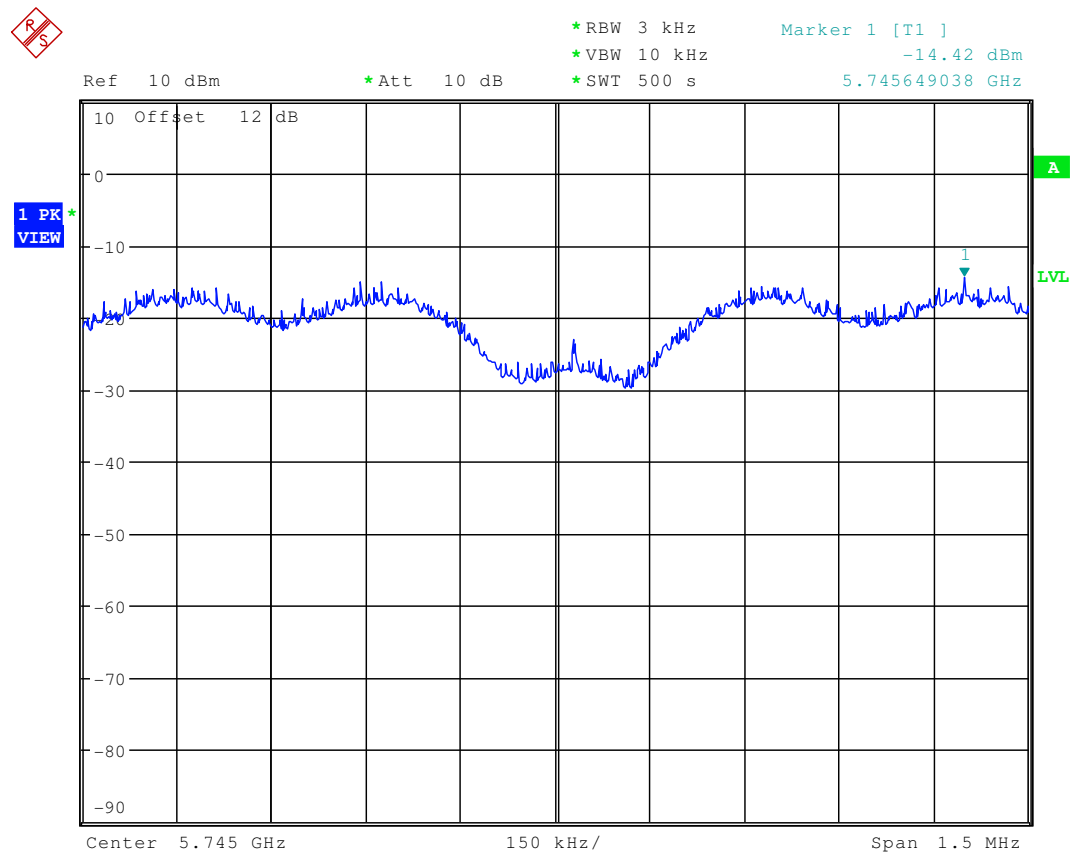

Plot 2:

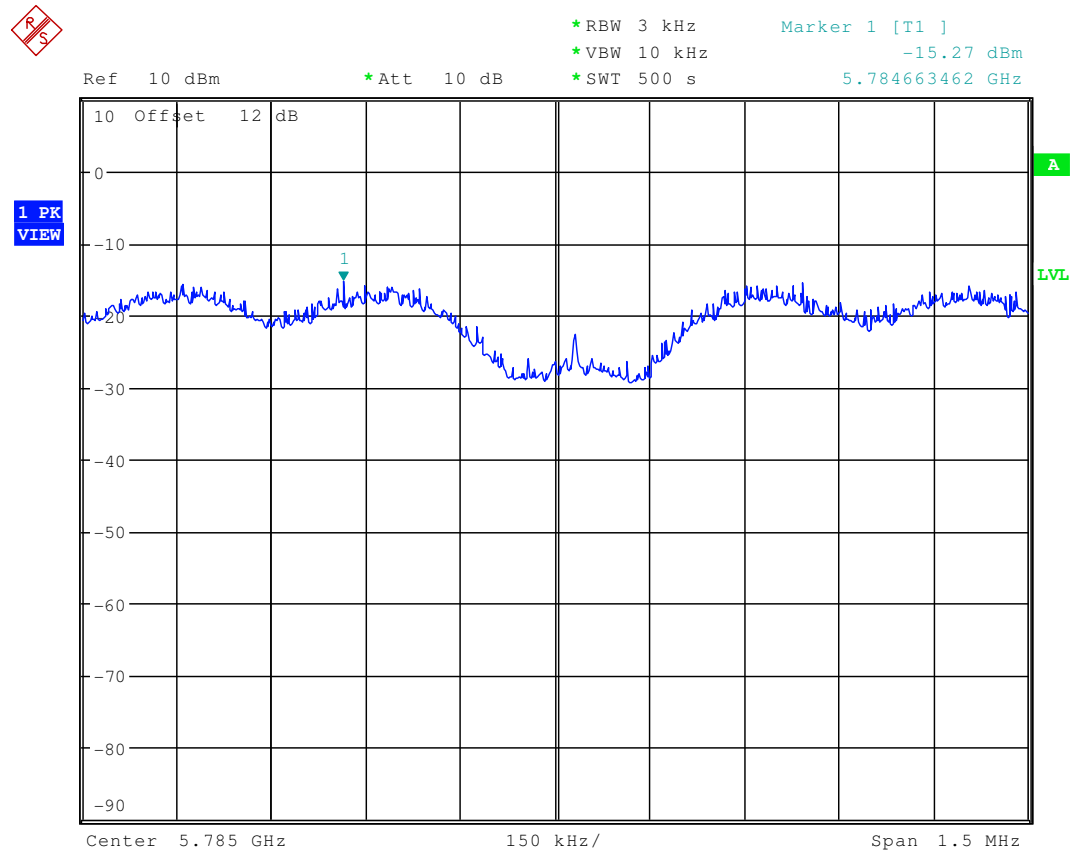

Plot 3:

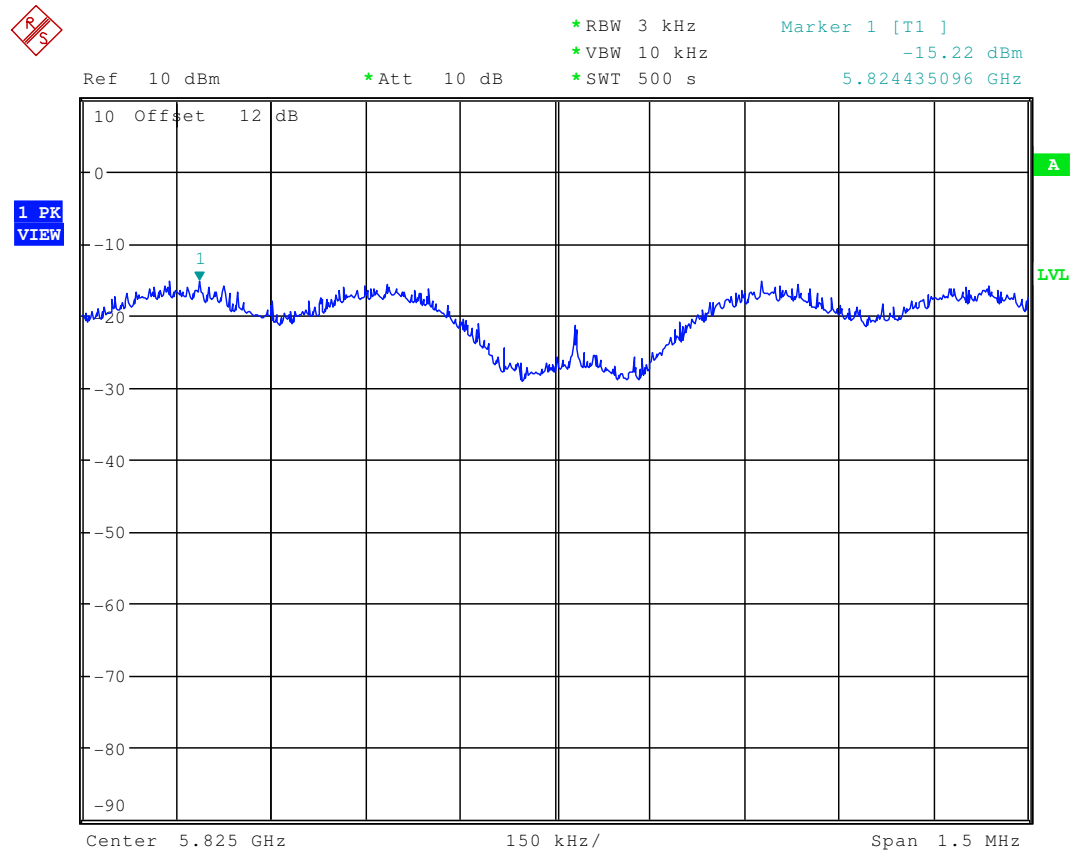


Results: Plot 1: Power density : = - 14.4 dBm / 3 KHz
 Plot 2: Power density : = - 15.3 dBm / 3 KHz
 Plot 3: Power density : = - 15.2 dBm / 3 KHz

Limits :

| | |
|-----------------------------------|---|
| Under normal test conditions only | For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission |
|-----------------------------------|---|

3.6 Spectrum Bandwidth of a OFDM System / 6 dB Bandwith §15.247(a2)

Plot 1 :

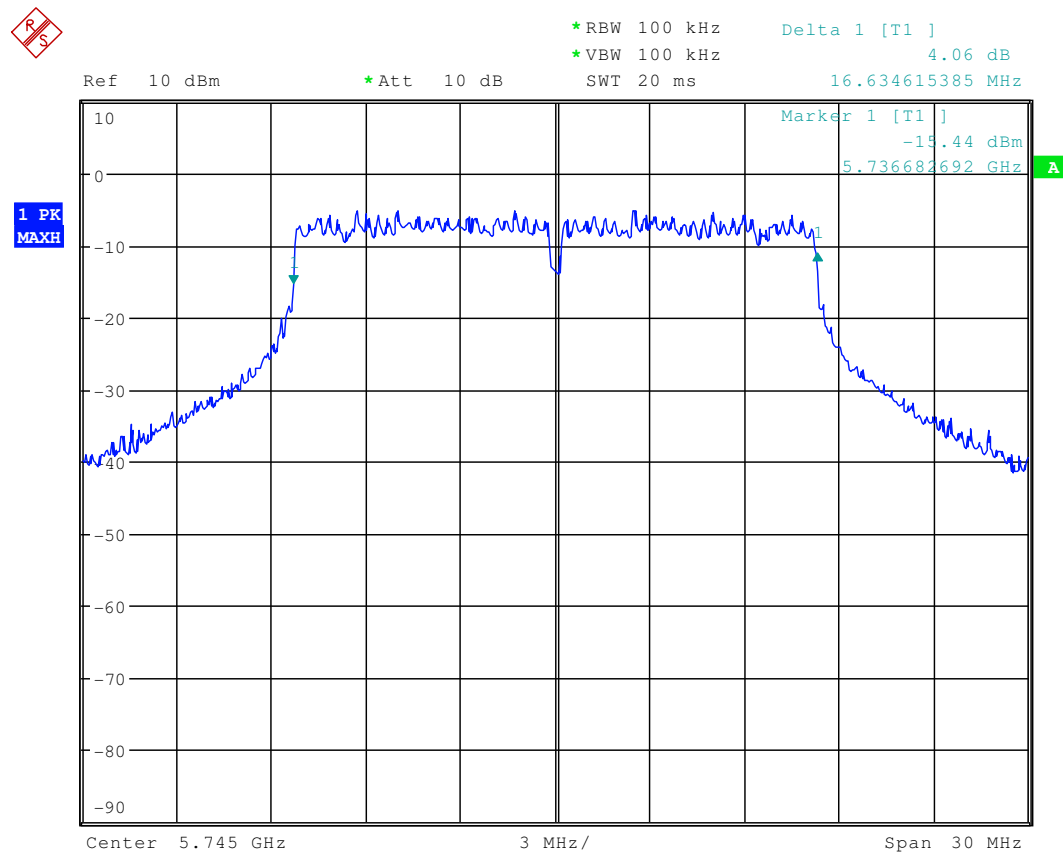

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 15 of 70

Plot 2:

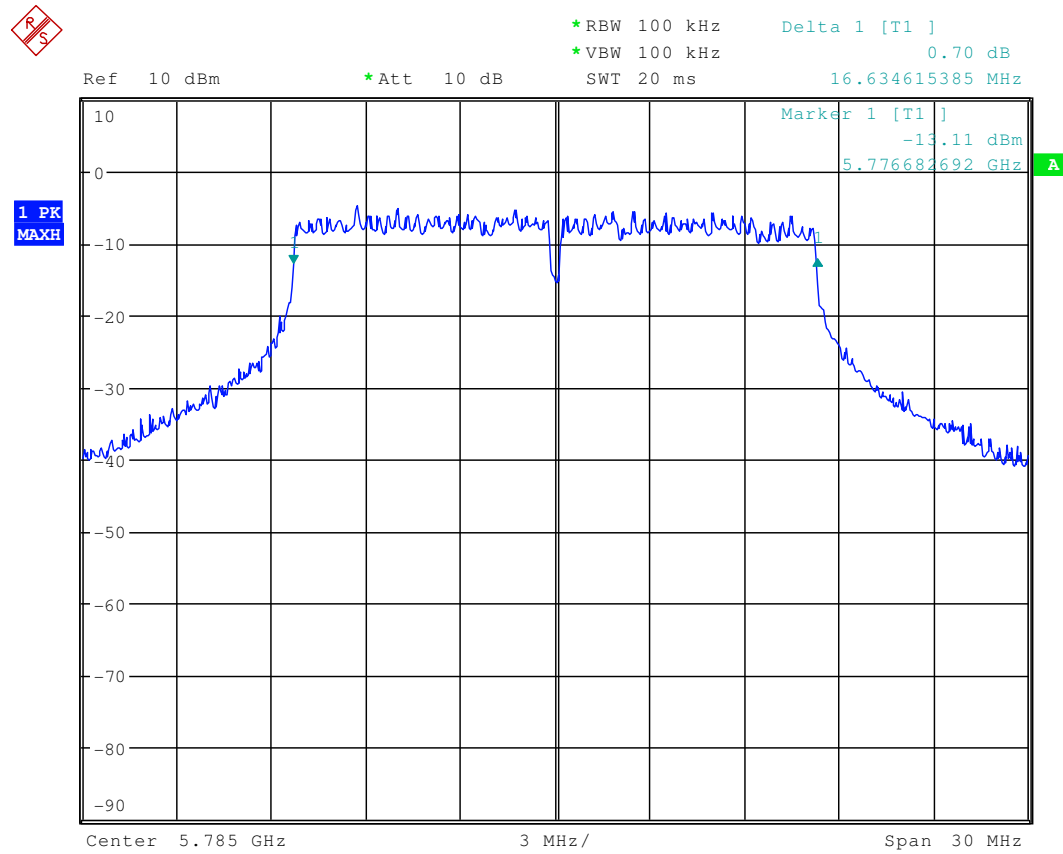

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 16 of 70

Plot 3:

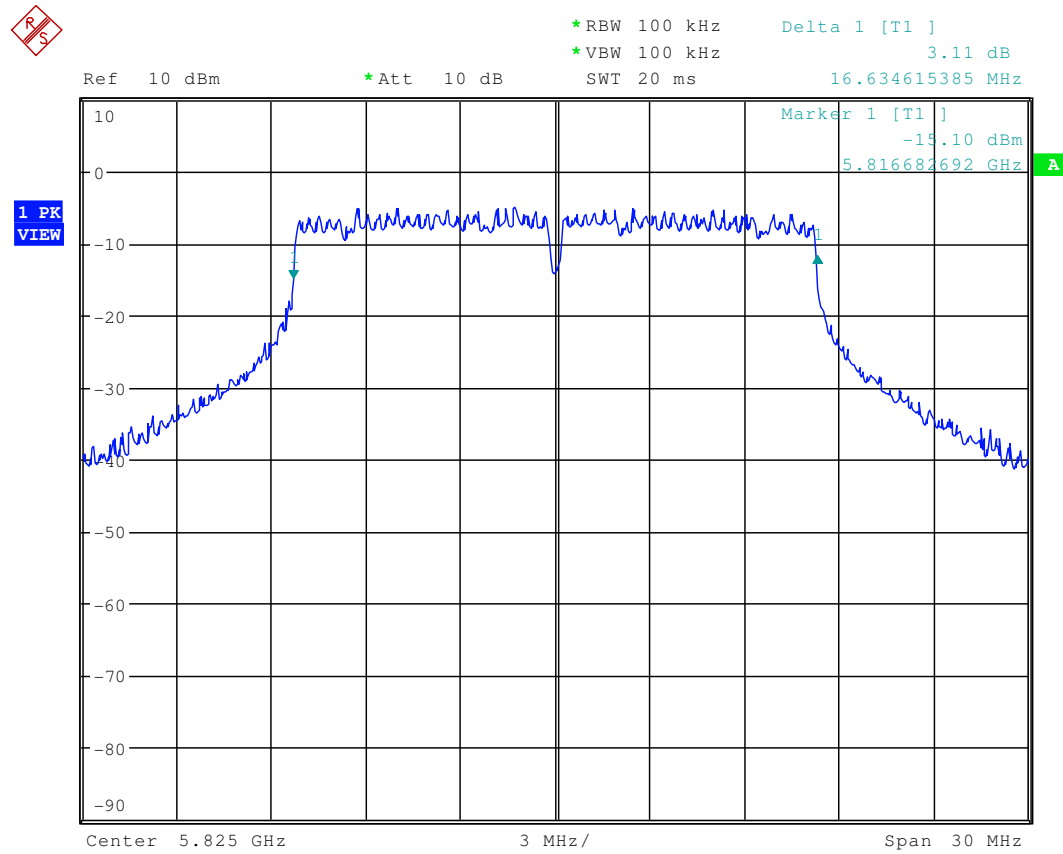

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07


Date: 2007-04-27

Page 17 of 70


Plot 4: -20 dB BW

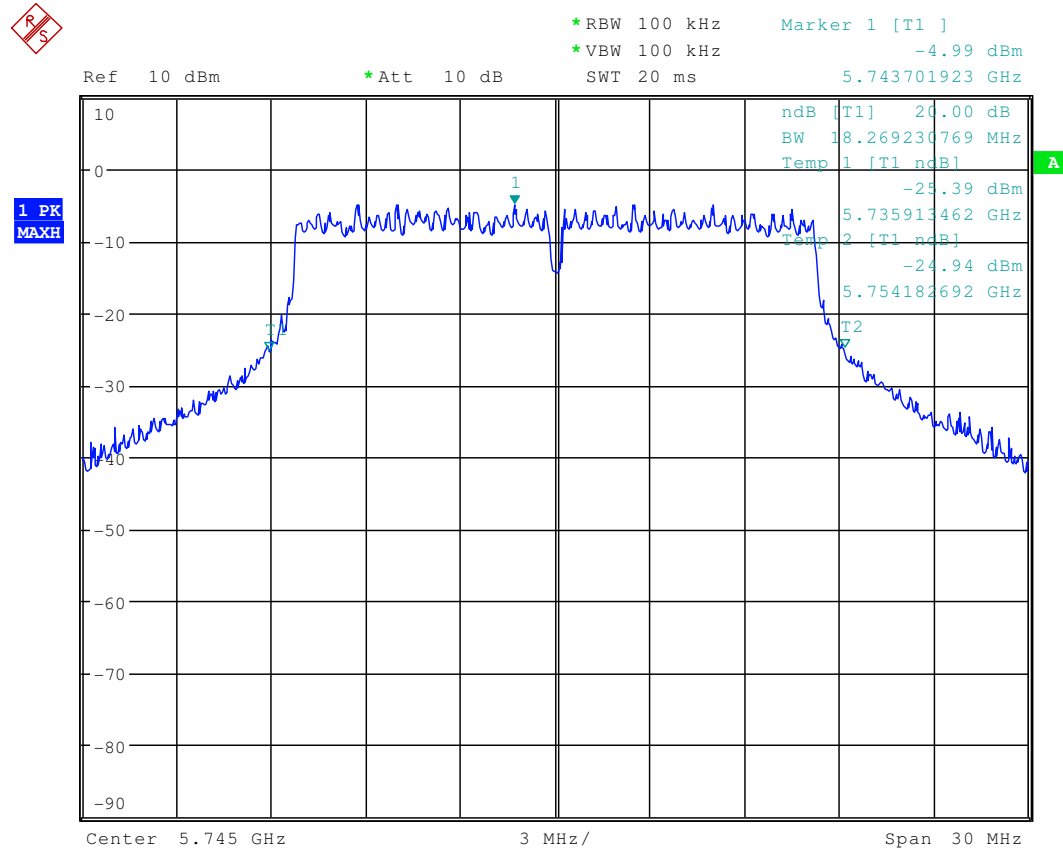

Plot 5:

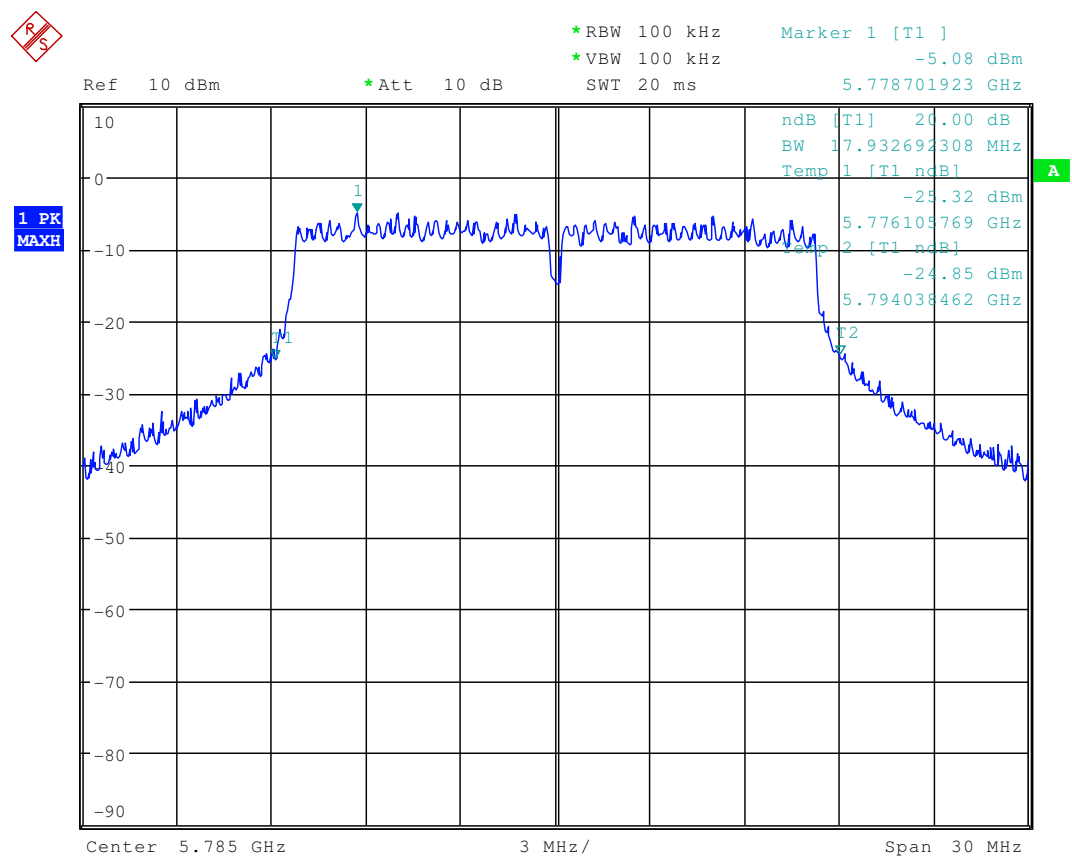

Plot 6:

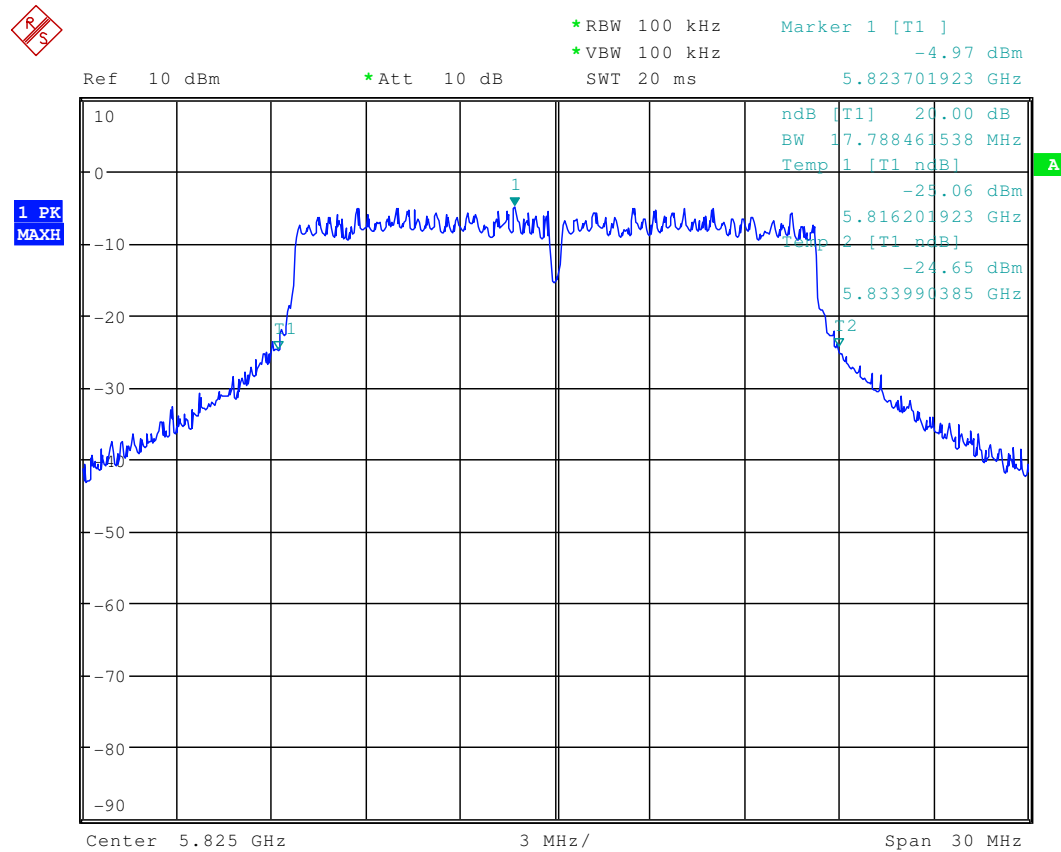

Results:

| Test conditions | | BANDWIDTH [MHz] | | |
|-------------------------|-------|-----------------|-------|-------|
| | | 5745 | 5785 | 5825 |
| Frequency [MHz] | | | | |
| | 6 dB | 16.63 | 16.63 | 16.63 |
| | 20 dB | 18.27 | 17.93 | 17.79 |
| Measurement uncertainty | | ±1kHz | | |

RBW: 100 kHz / VBW 100 kHz


Limits :

| | |
|-----------------------------------|-----------|
| Under normal test conditions only | > 500 KHz |
|-----------------------------------|-----------|

3.7 Maximum output power (conducted) (OFDM)

§15.247 (b) (3)

Plot 1:

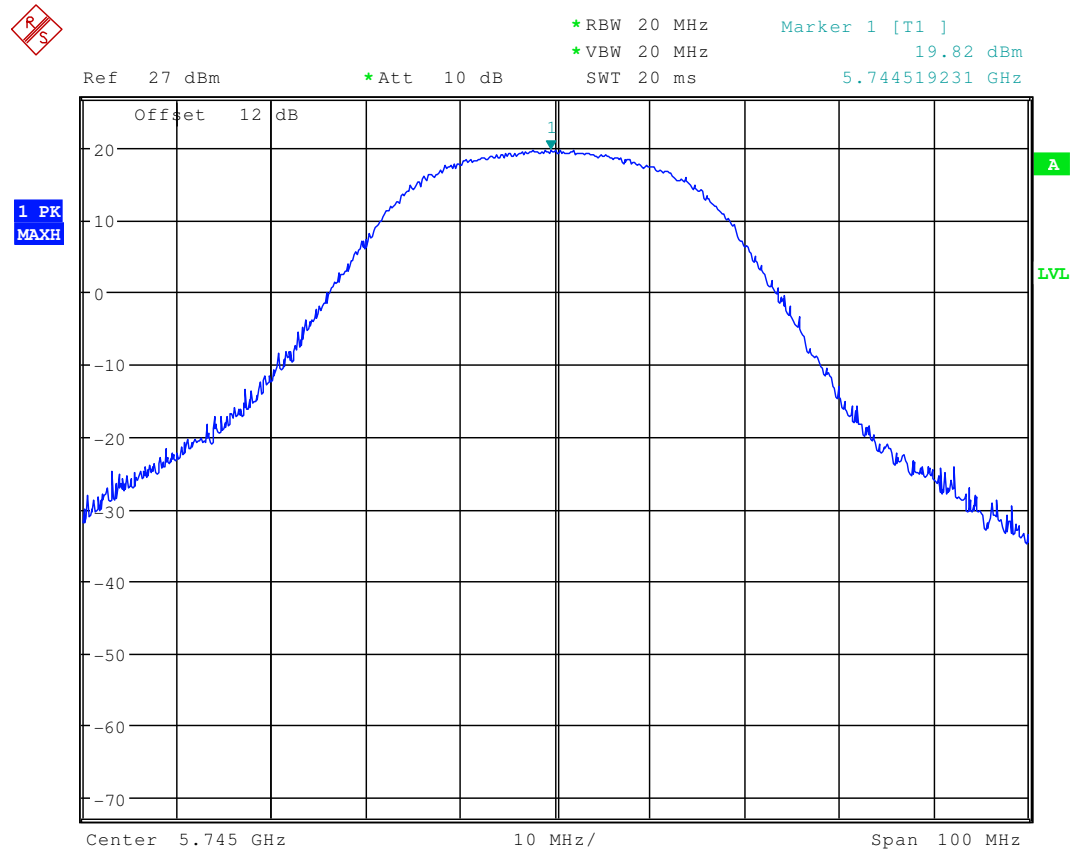

RBW / VBW : 20 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27


Page 21 of 70

Plot 2:

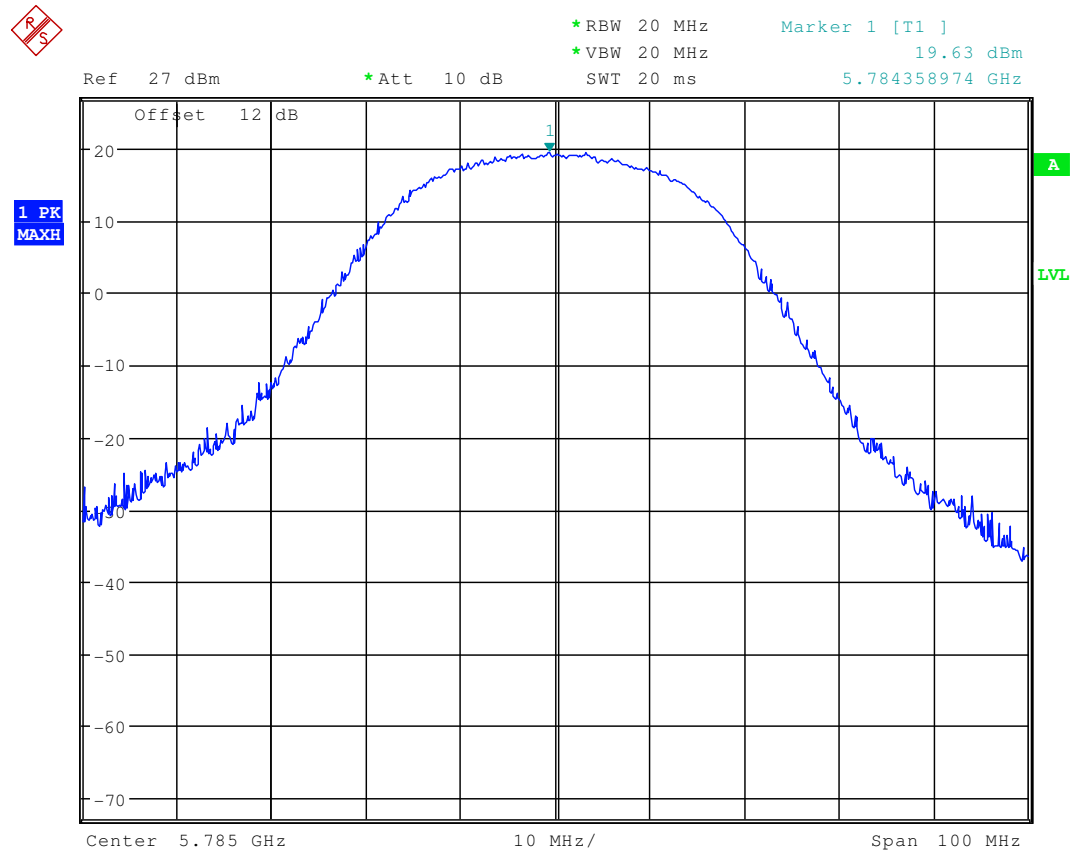

RBW / VBW : 20 MHz

Plot 3:

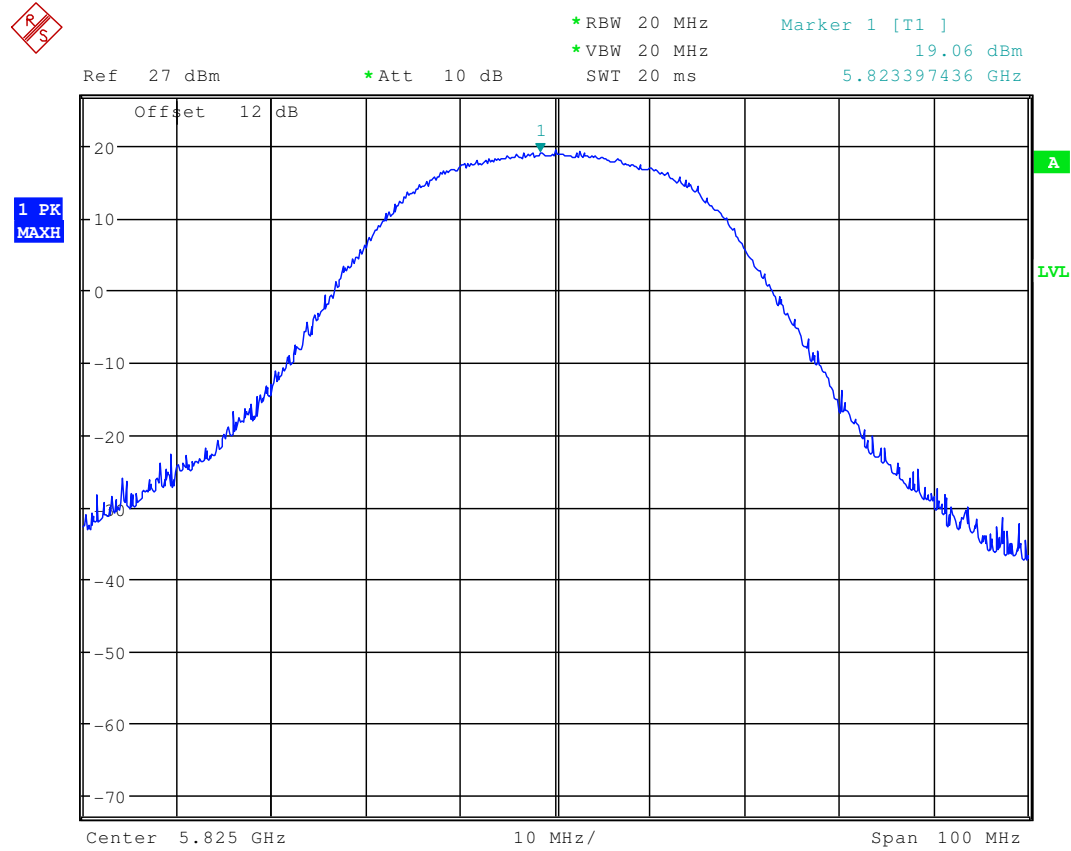

RBW / VBW : 20 MHz

| Test conditions | | Max. peak output power [dBm] | | | |
|-------------------------|------------------|------------------------------|------|------|------|
| Frequency [MHz] | | 5745 | 5785 | 5825 | |
| T _{nom} | V _{nom} | PK | 19.8 | 19.6 | 19.1 |
| Measurement uncertainty | | ±3dB | | | |

| | |
|--|------------------------|
| Under normal test conditions only, for frequency range 2400-2483.5 MHz | Max. 1.0 Watt / 30 dBm |
|--|------------------------|

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)
P = power input to the antenna (in appropriate units e.g. mW)
G = power gain of the antenna in the direction of interest relative to the isotropic radiator
R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = EIRP/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 22.6 dBm = 182 mW

calculated at distance of 20 cm:

power density = $182 / 4\pi 20^2 = 0.036 \text{ mW/ cm}^2$

Limit:

| |
|---|
| 1mW/ cm ² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1. |
|---|

3.8 Max. peak output power (radiated) §15.247 (b) (3)

Results:

| Test conditions | | Max. peak output power EIRP [dBm] | | |
|-------------------------|-----------|-----------------------------------|-----------|-----------|
| Frequency [MHz] | | 5745 | 5785 | 5825 |
| T_{nom} | V_{nom} | 19.8 cond | 19.6 cond | 19.1 cond |
| OFDM | | 22.1 rad | 22.6 rad | 21.9 rad |
| Gain | | 2.3 | 3.0 | 2.8 |
| Measurement uncertainty | | ±3dB | | |


RBW / VBW : 20 MHz

Limits:

| | |
|--|------------------------|
| Under normal test conditions only, for frequency range 2400-2483.5 MHz | Max. 1.0 Watt / 30 dBm |
|--|------------------------|

3.9 Band-edge compliance of conducted emissions §15.247 (d)


Plot 1, lowest channel

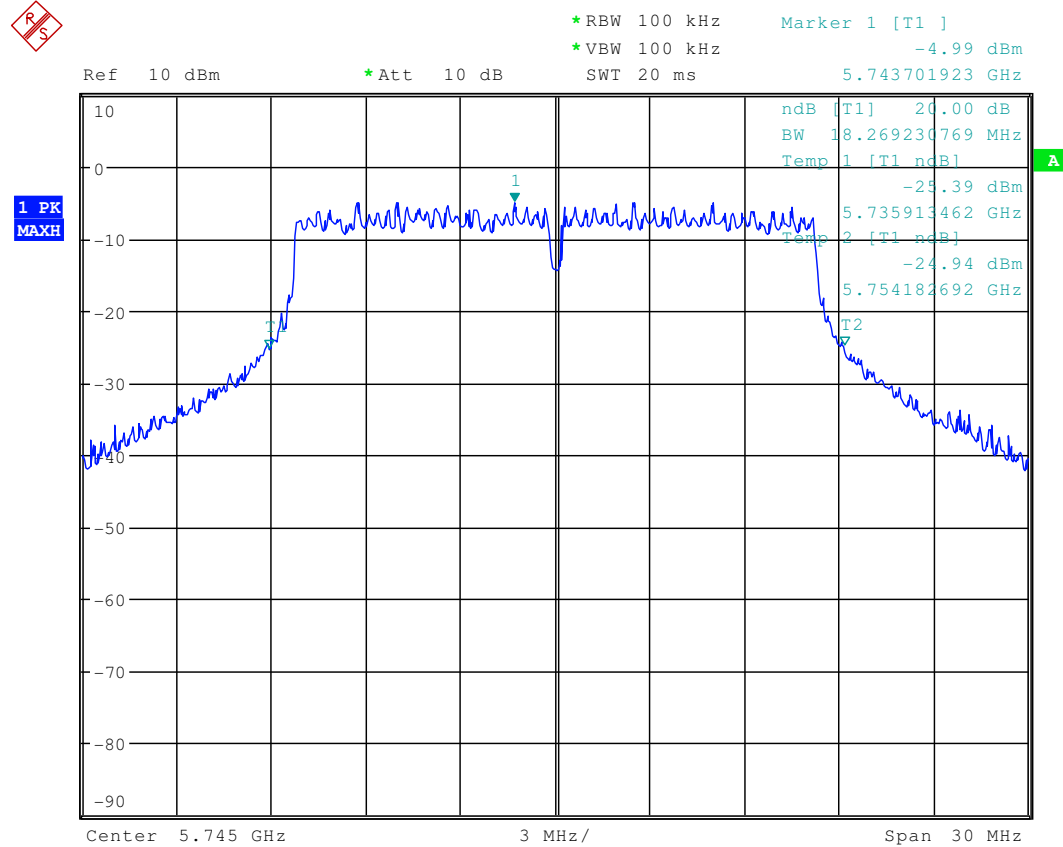

Date: 22.MAR.2007 13:30:15

The -20 dBc point is at 5736 MHz

Plot 2, highest channel

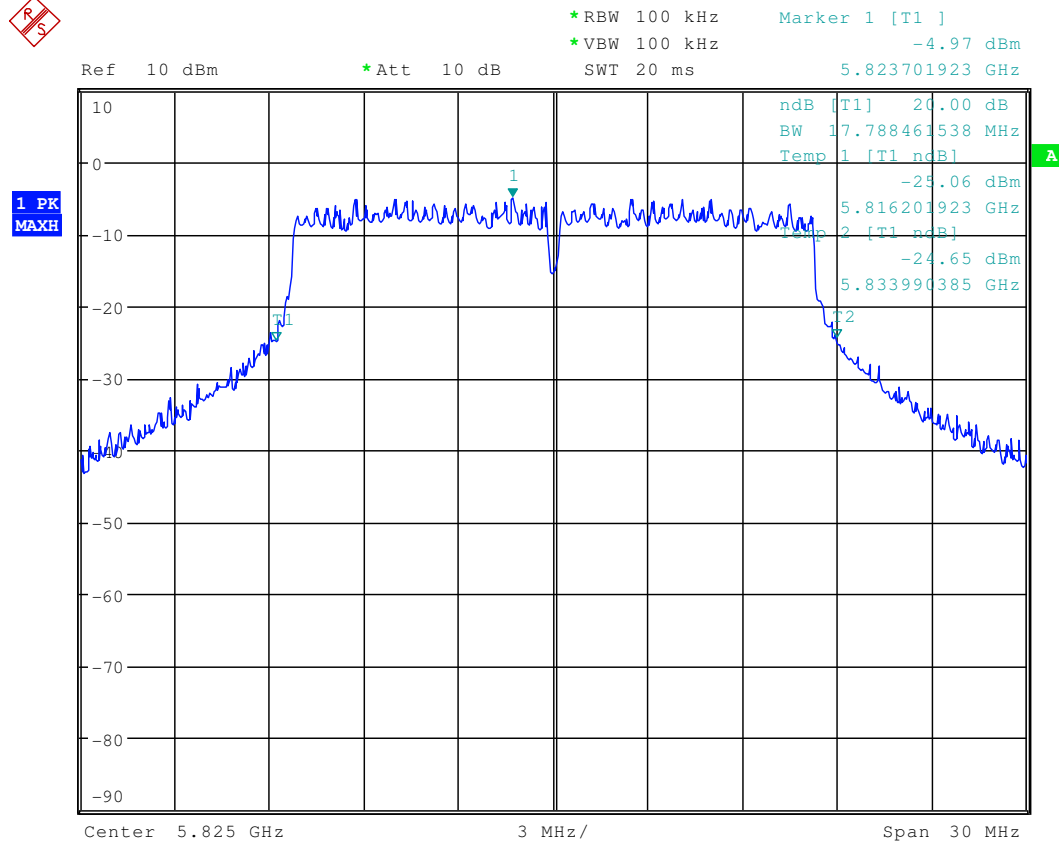

Date: 22.MAR.2007 13:32:07

The -20 dBc point is at 5834 MHz

Limits:

| | |
|--|---|
| <p>Under normal test conditions only</p> | <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).</p> |
|--|---|


3.10 Band-edge compliance of radiated emissions (DSSS)

§15.205

There are no restricted bands directly besides the tested frequency range


for the -20 dB points see next plots

5745 MHz

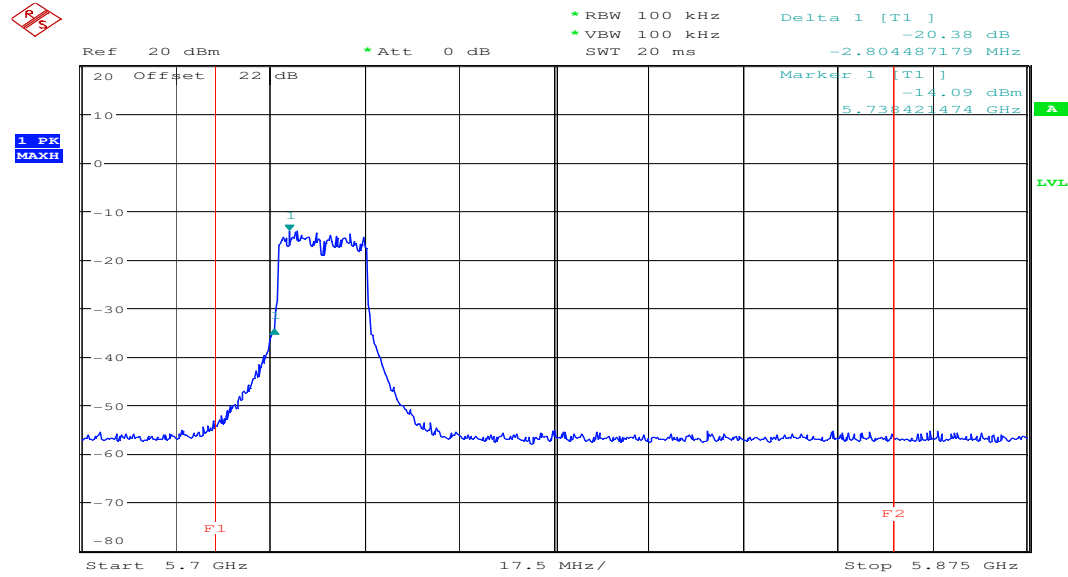

Date: 29.MAR.2007 07:46:56

5825 MHz

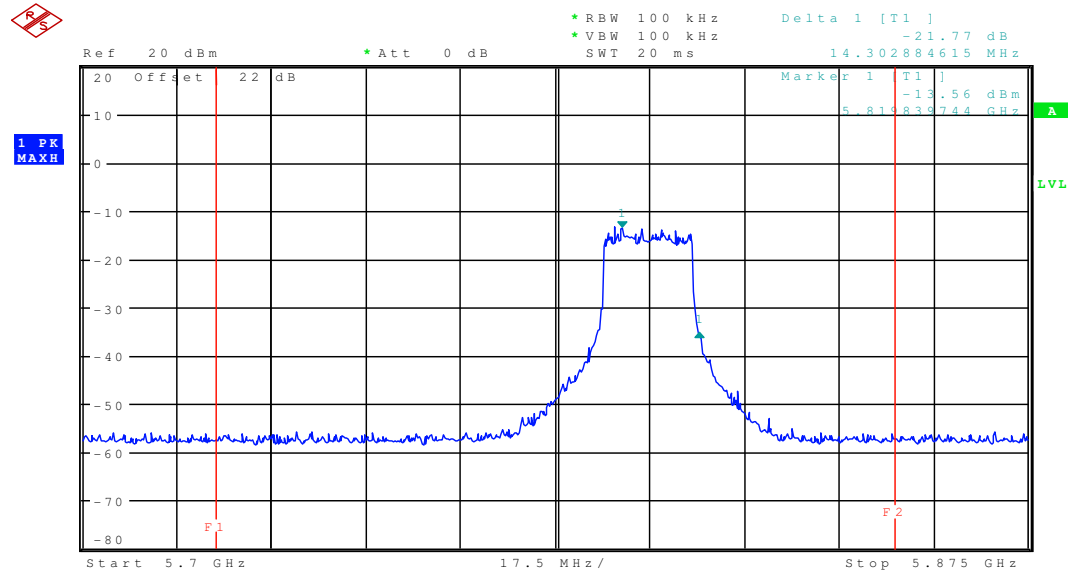

3.11 Spurious Emissions - conducted (Transmitter)

§15.247 (d)

Result & Limits

| Emission Limitations | | | | | |
|-------------------------|---------------------------|-----------------------------------|--|--|---------------------|
| f [MHz] | Modulation (DSSS/OFDM) | amplitude of emission [dBm] | limit max. allowed emmission power | actual attenuation below frequency of operation [dB] | results |
| 5745 | | 23.1 | 30 dBm | - | Operating frequency |
| 11490 | OFDM | -51.2 | -20 dBc | > 20 dB | pass |
| | | | | | |
| | | | | | |
| 5785 | | 23.7 | 30 dBm | | Operating frequency |
| 11570 | OFDM | -46.9 | -20 dBc | > 20 dB | pass |
| | | | | | |
| | | | | | |
| 5825 | | 23.3 | 30 dBm | | Operating frequency |
| 11650 | OFDM | -44.9 | -20 dBc | > 20 dB | pass |
| | | | | | |
| | | | | | |
| Measurement uncertainty | | ± 3dB | | | |

RBW : 100 kHz VBW: 100 kHz

| | |
|-----------------------------------|--|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
|-----------------------------------|--|

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 29 of 70

5745 MHz

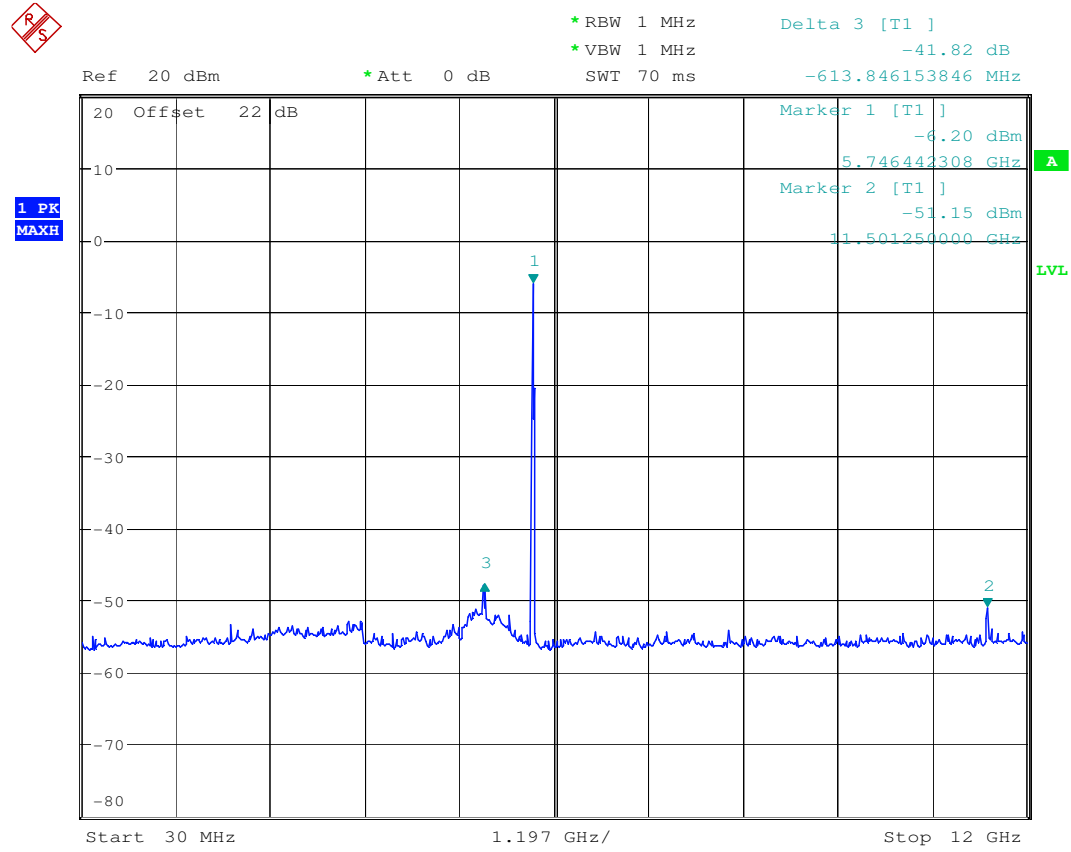

Date: 29.MAR.2007 07:28:28

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 30 of 70

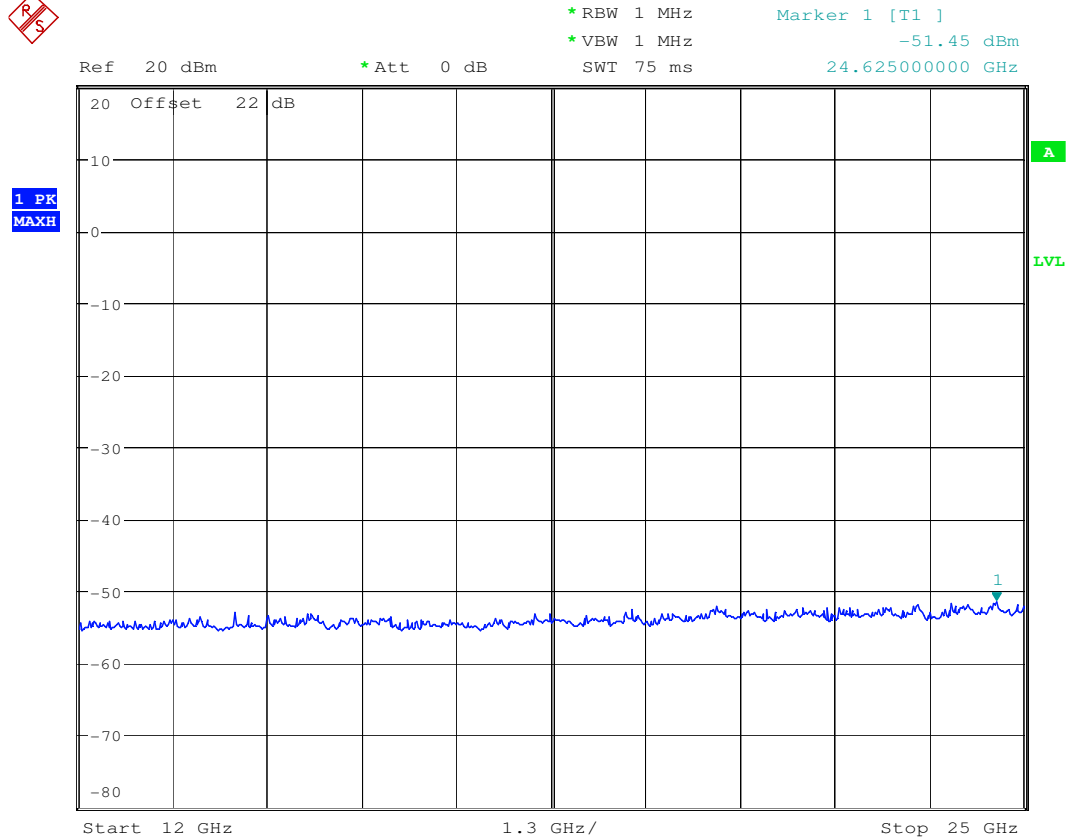

Date: 29.MAR.2007 07:31:58

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07


Date: 2007-04-27

Page 31 of 70

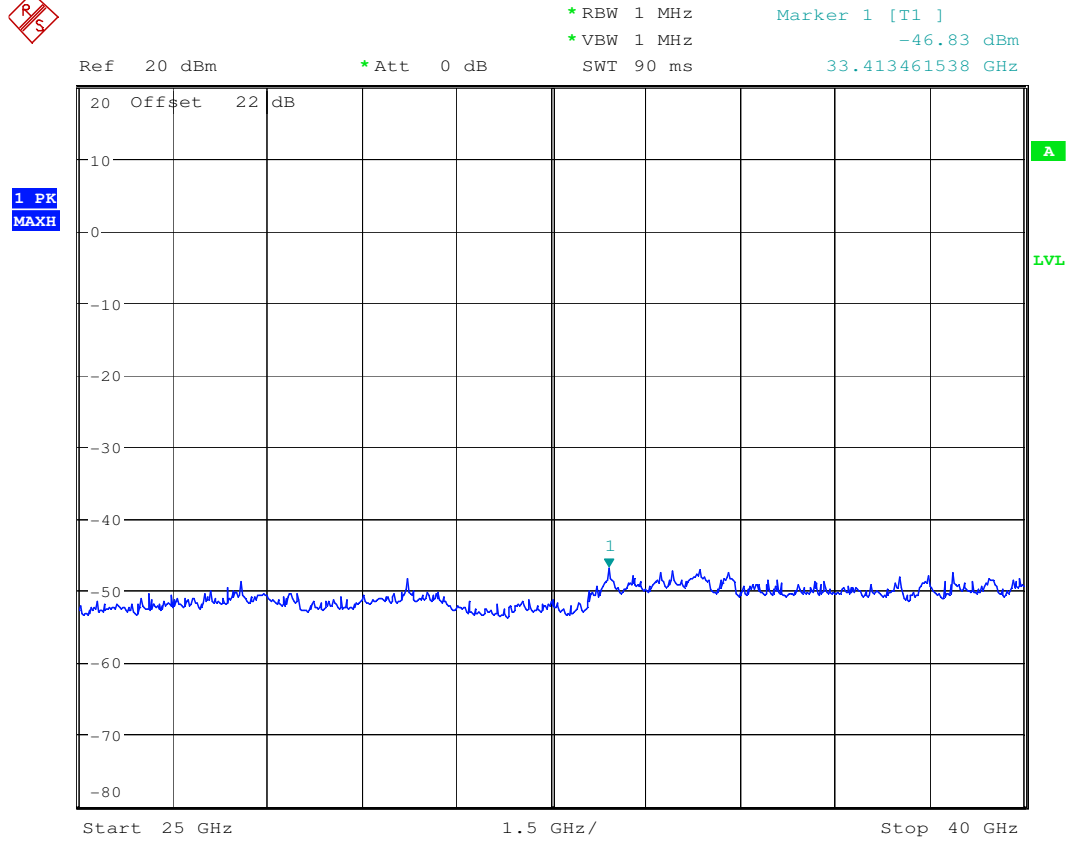

Date: 29.MAR.2007 07:32:37

5785 MHz

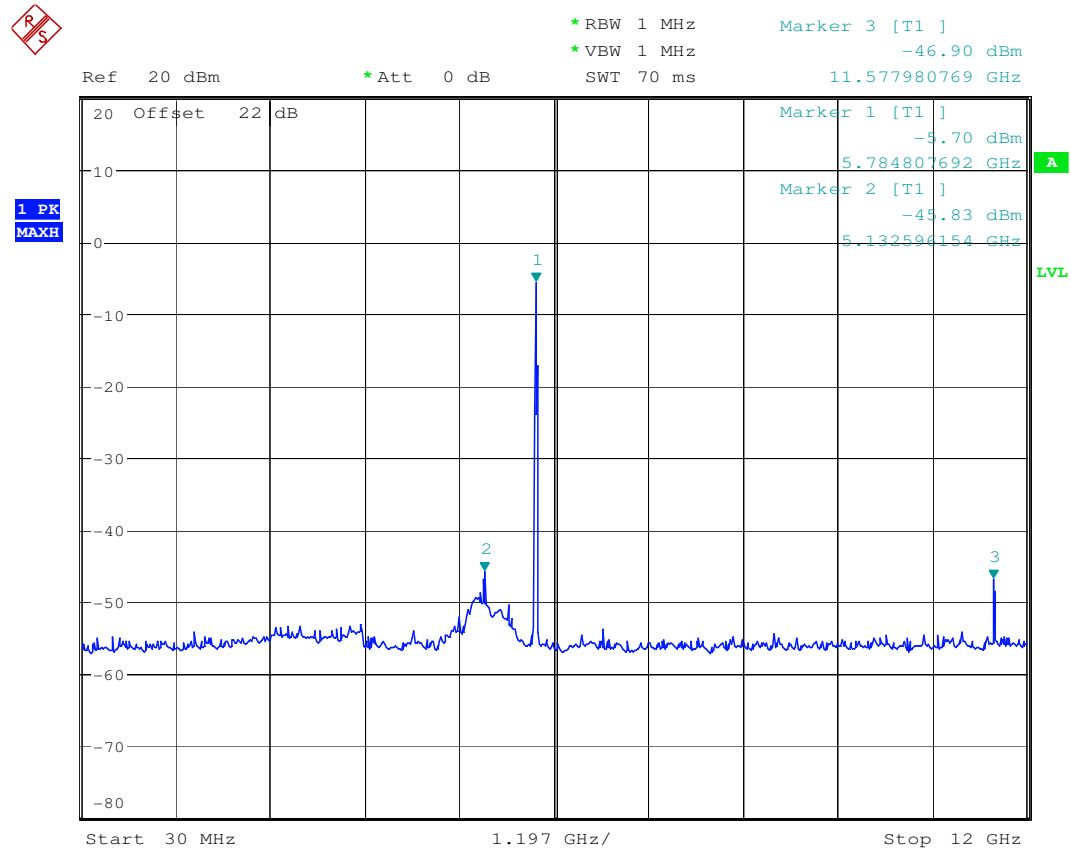


Date: 29.MAR.2007 07:40:54



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -51.45 dBm
SWT 75 ms 24.687500000 GHz

Ref 20 dBm

*Att 0 dB

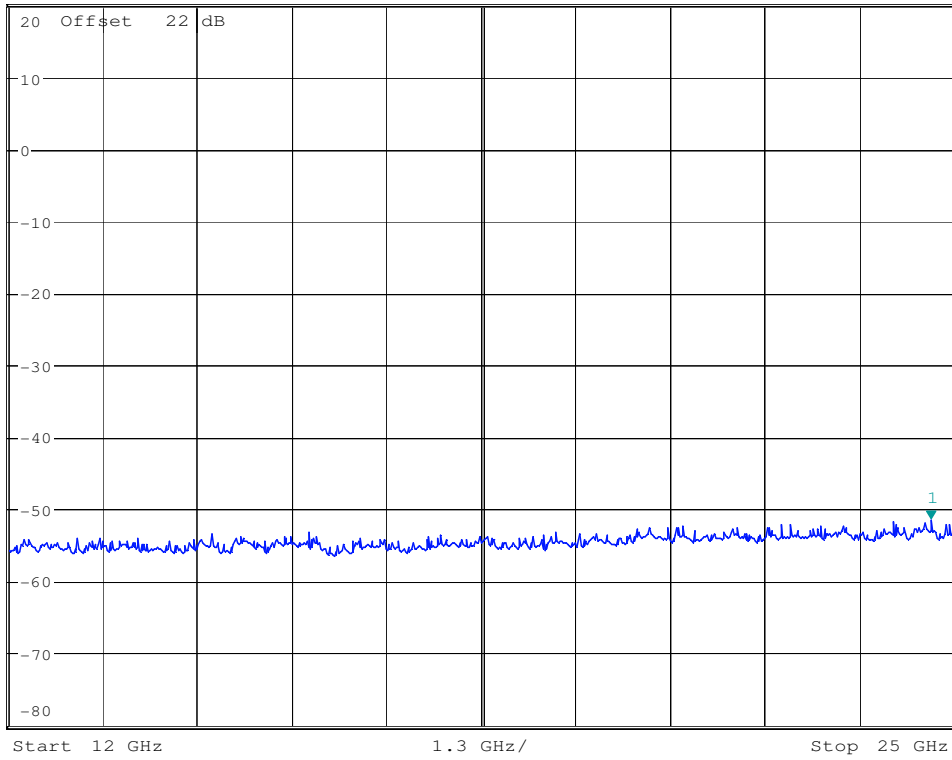

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 34 of 70



1 PK
MAXH

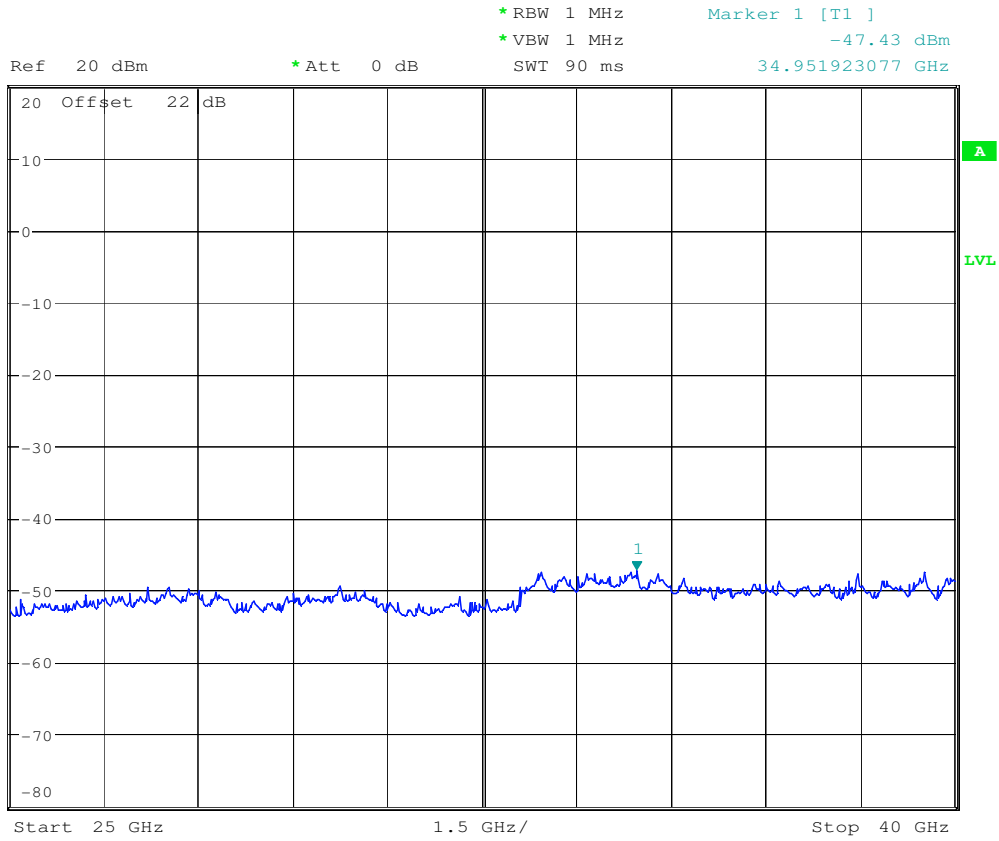

Date: 29.MAR.2007 07:33:28

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 35 of 70

5825 MHz

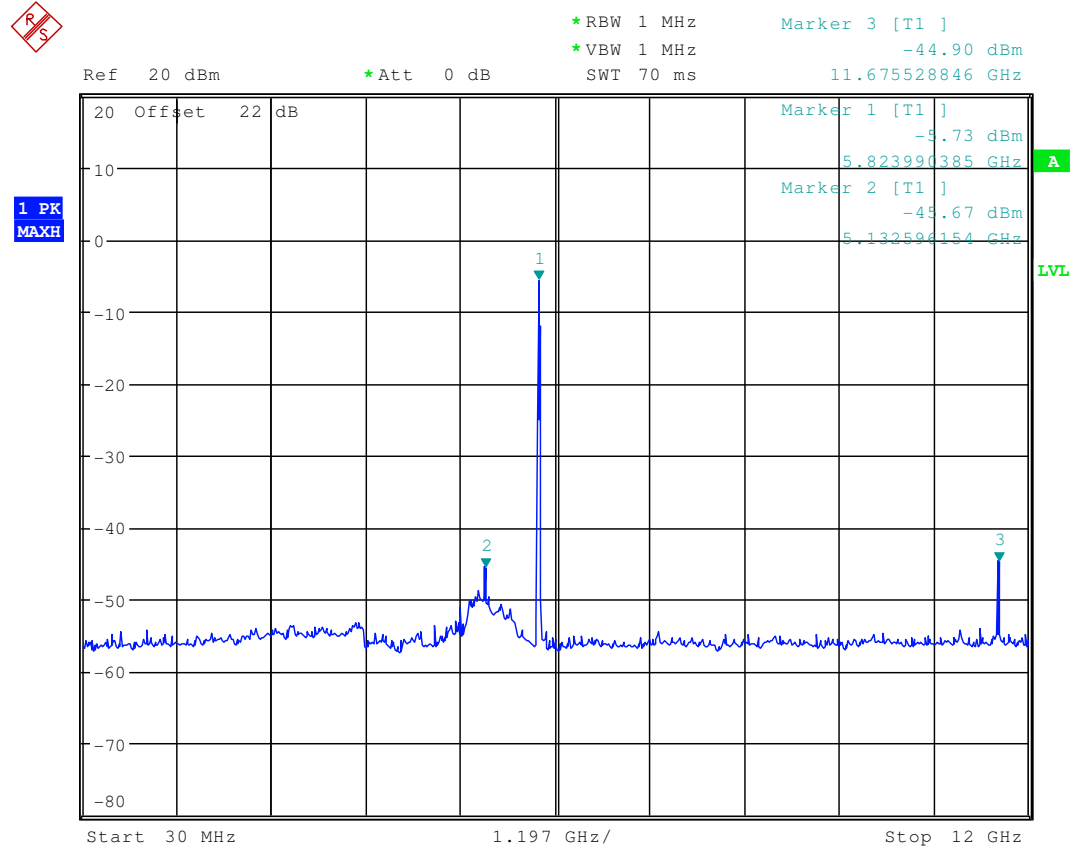

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27


Page 36 of 70



1 PK
MAXH

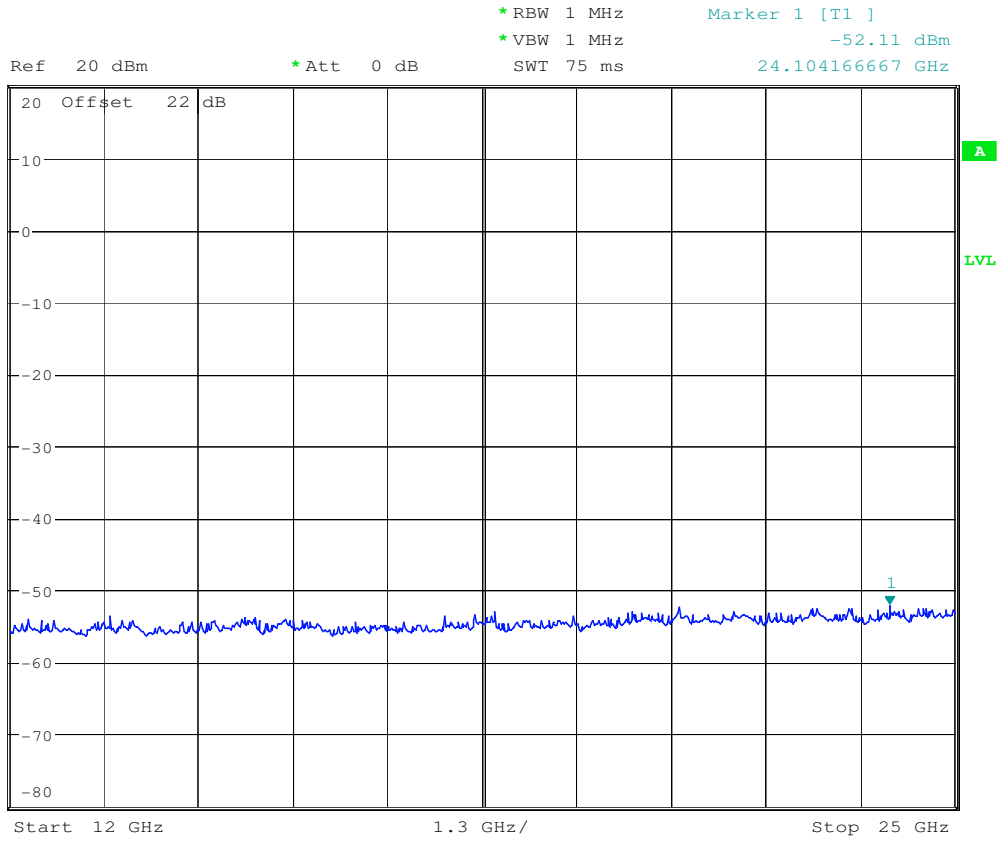

Date: 29.MAR.2007 07:35:08

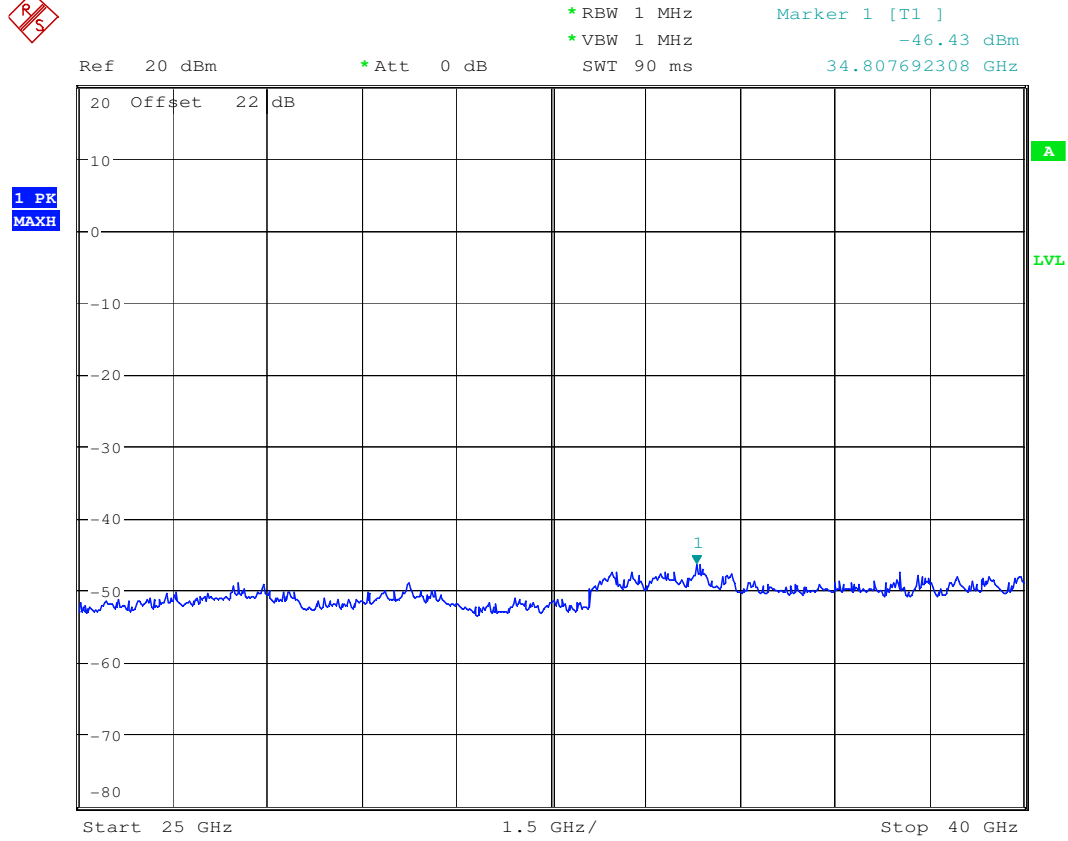


Date: 29.MAR.2007 07:34:35

3.12 Spurious Emissions - radiated (Transmitter)

§15.209

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

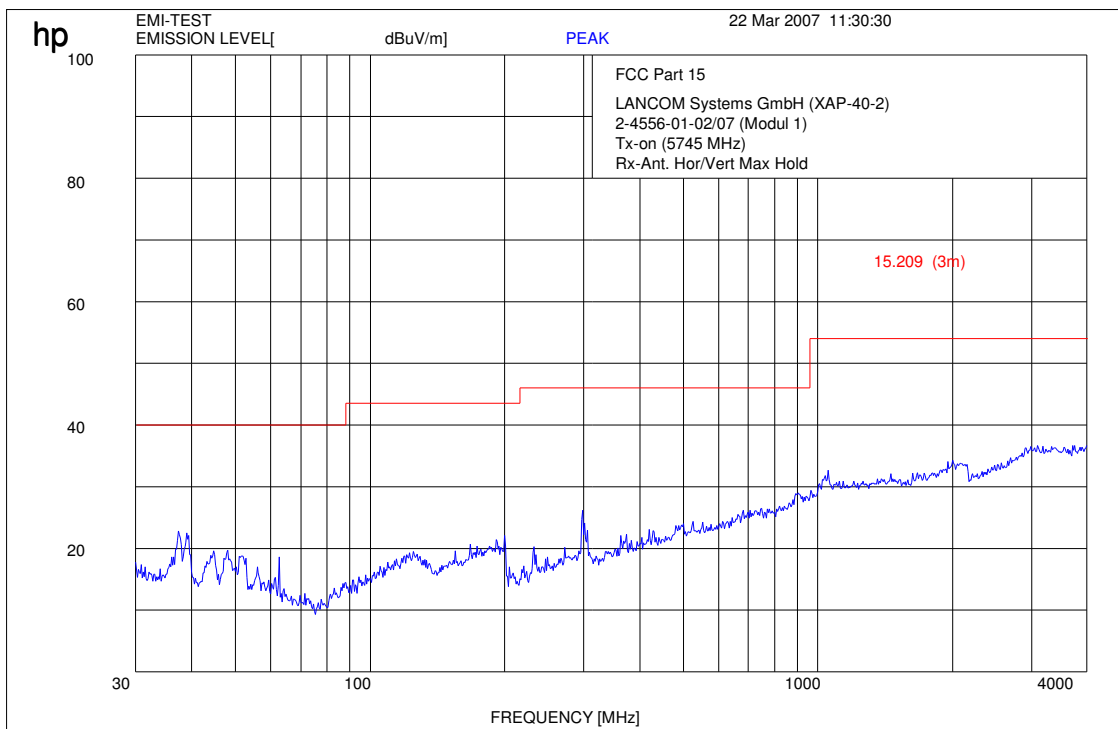

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27


Page 39 of 70

Plot 2: 4- 12 GHz (lowest channel)

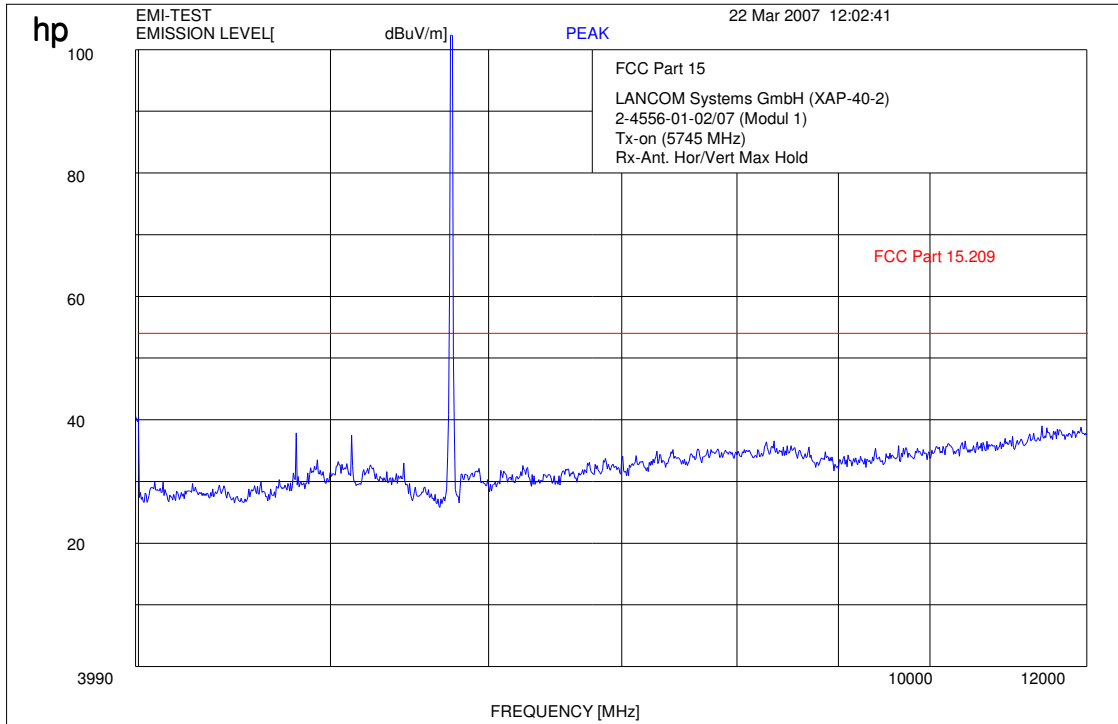


Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

There were no peaks found.

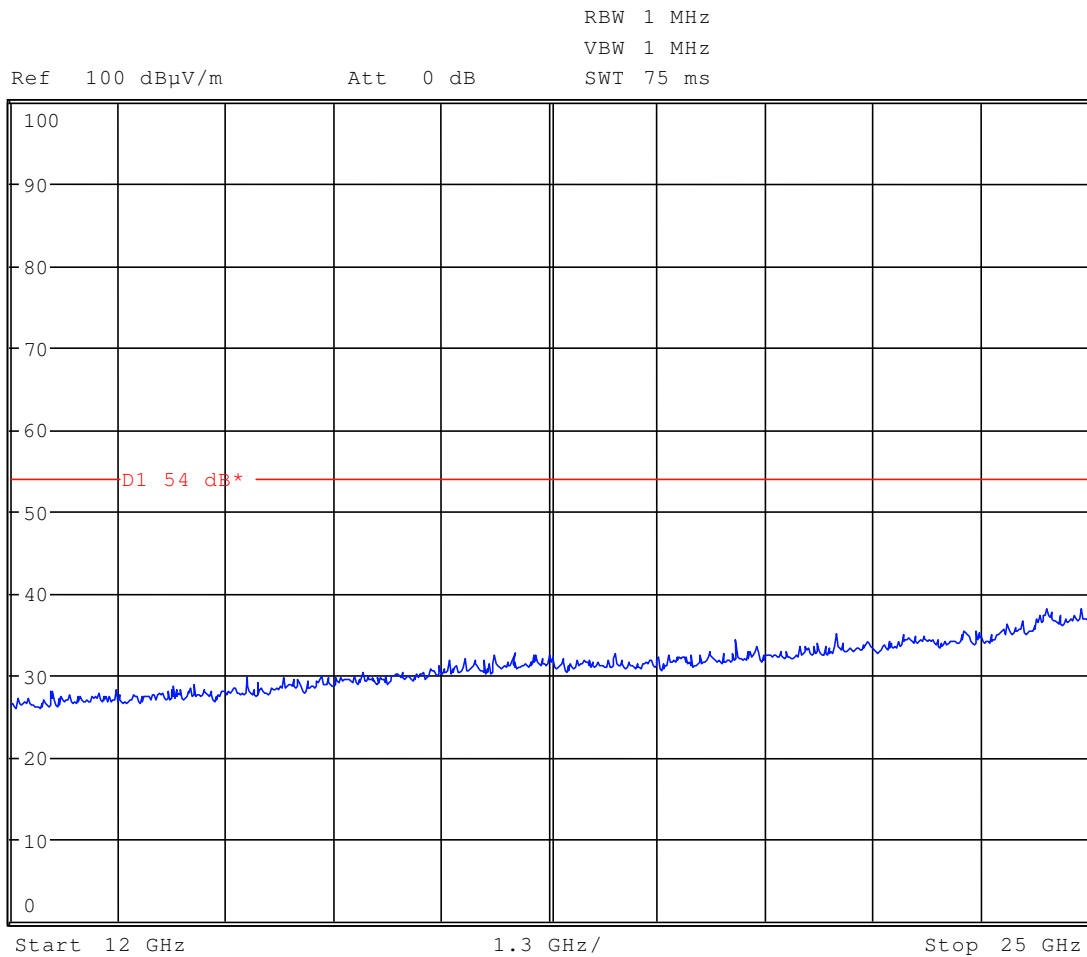

25 - 33 GHz horizontal / vertical (valid for all three channels)

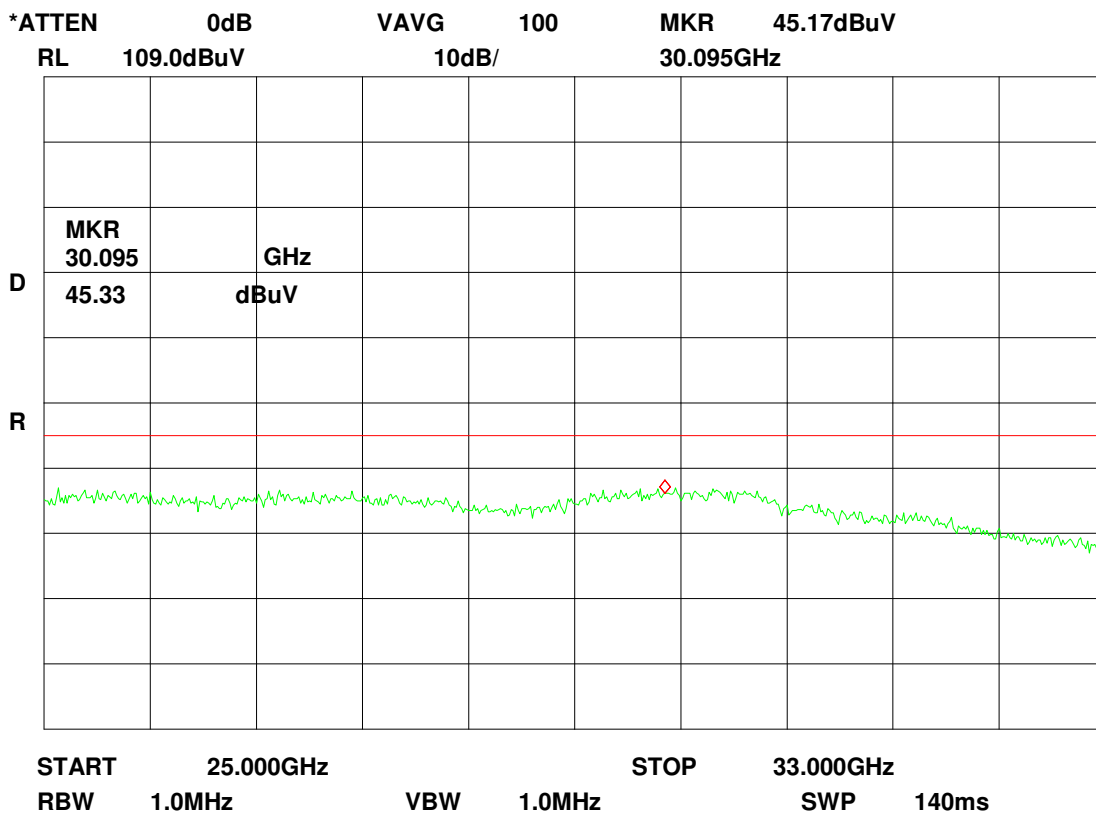

Calculation: Field strength = analyzer reading + cable loss - amplifier gain + antenna factor

$$e \text{ [dB}(\mu\text{V/m)}] = u \text{ [dB}(\mu\text{V)}] + a \text{ [dB]} - g \text{ [dB]} + k \text{ [dB(1/m)]}$$

see page 9-11

The offset (cable loss - amplifier gain + antenna factor) is calculated in the analyzer reading.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 42 of 70


33 – 50 GHz horizontal / vertical (valid for all three channels)

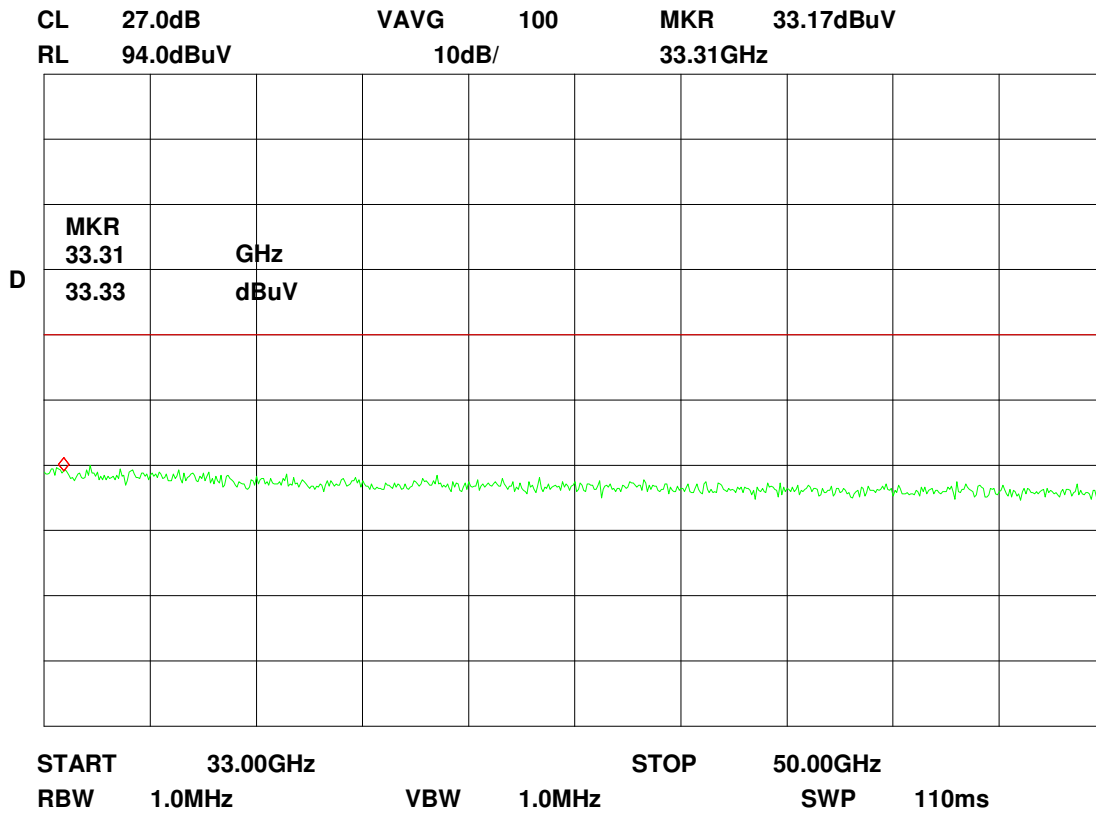

Calculation: Field strength = analyser reading + antenna factor - distance correction
 $e \text{ [dB}(\mu\text{V/m)}] = u \text{ [dB}(\mu\text{V)}] + k \text{ [dB(1/m)}] - d \text{ [dB]}$
 see page 9-11

The offset (antenna factor - distance correction) is considered in the analyzer reading.

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

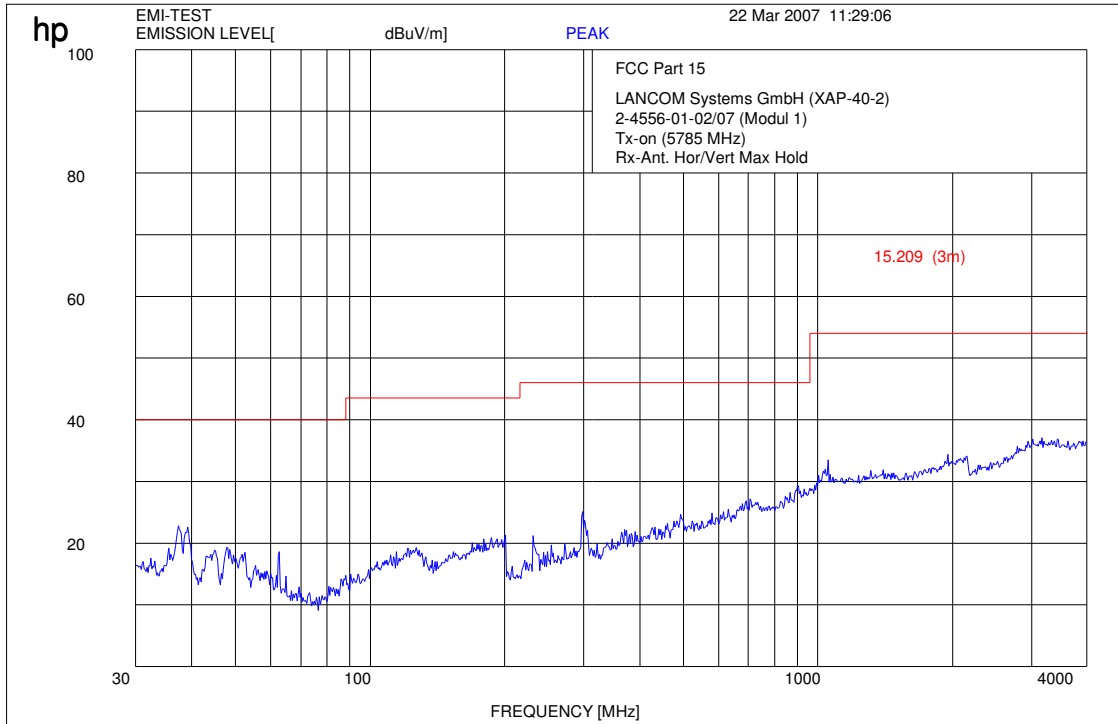

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 44 of 70

Plot 5: 4- 12 GHz (middle channel)

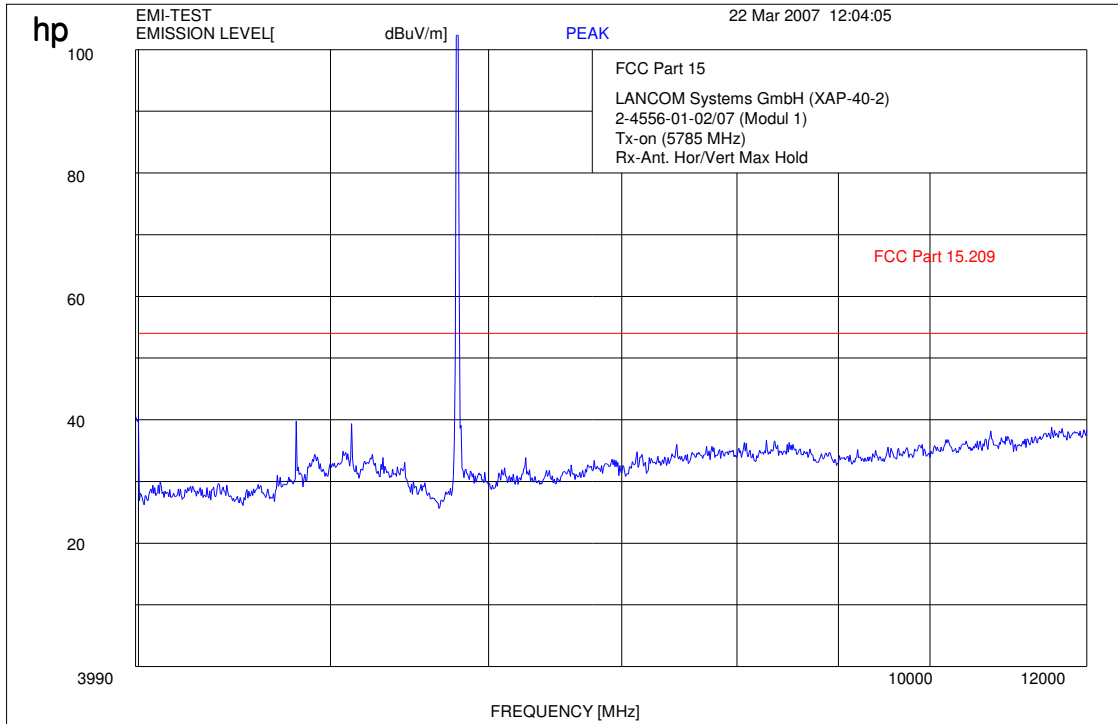

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 45 of 70

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

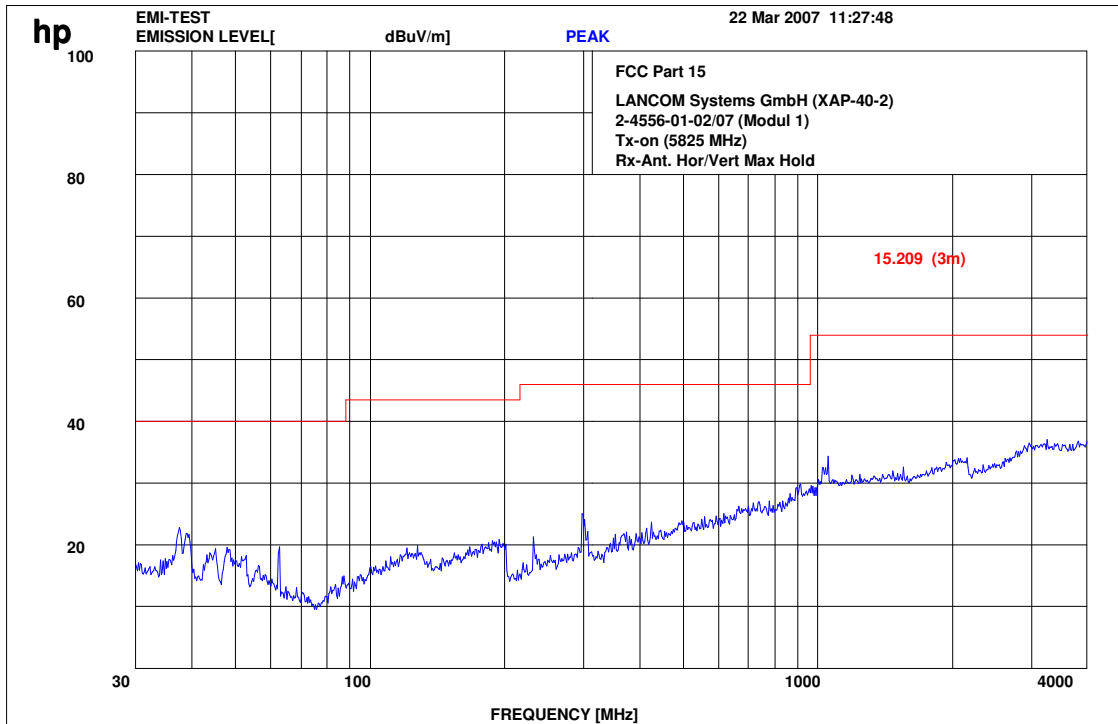

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 46 of 70

Plot 7: 4- 12 GHz (highest channel)

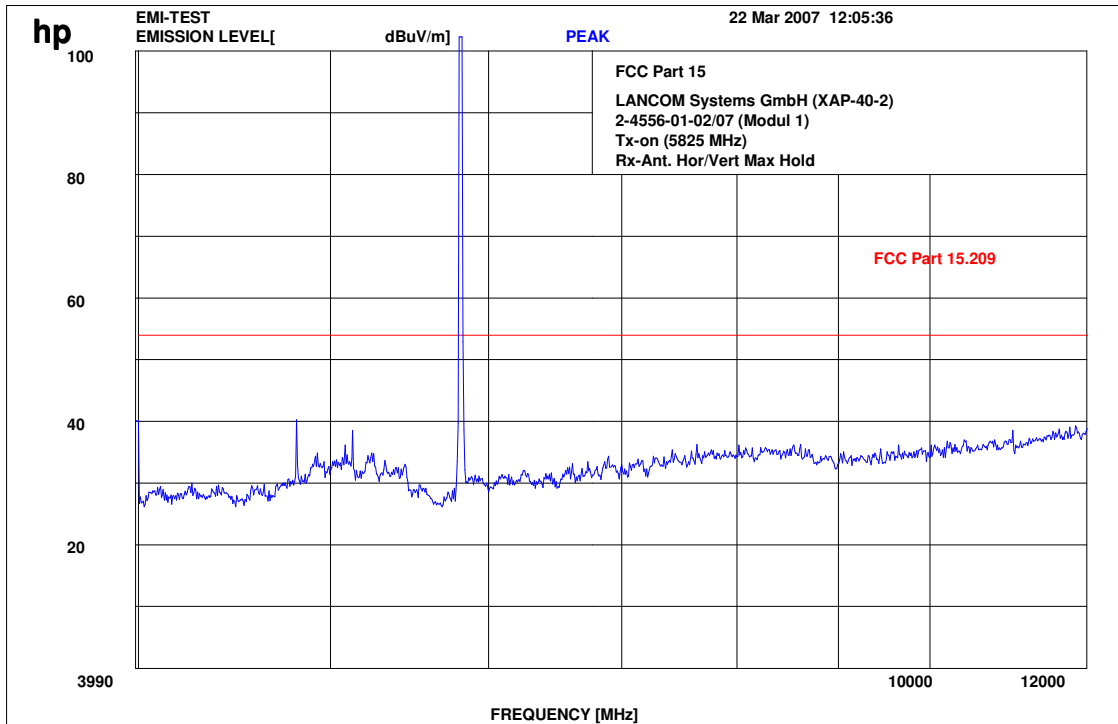

Results: (black line on the plots)

| SPURIOUS EMISSIONS LEVEL §15.209 | | | | | | | | |
|---|----------|----------------|----------|----------|----------------|----------|----------|----------------|
| 5745 MHz | | | 5785 MHz | | | 5805 MHz | | |
| F [MHz] | Detector | Level [dBμV/m] | F [MHz] | Detector | Level [dBμV/m] | F [MHz] | Detector | Level [dBμV/m] |
| No peaks found < 15 dB below limit line | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| Measurement uncertainty | | | ±3 dB | | | | | |

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (d)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Limits: § 15.209

| Frequency [MHz] | Field strength [μV/m] | Measurement distance (m) |
|-----------------|-----------------------|--------------------------|
| 30 - 88 | 100 (40 dBμV/m) | 3 |
| 88 - 216 | 150 (43.5 dBμV/m) | 3 |
| 216 - 960 | 200 (46 dBμV/m) | 3 |
| above 960 | 500 (54 dBμV/m) | 3 |

3.13 Spurious Emissions - radiated Receiver

§15.109 / 209

Plot 1: 0.03 - 4 GHz vertical / horizontal (receiver)

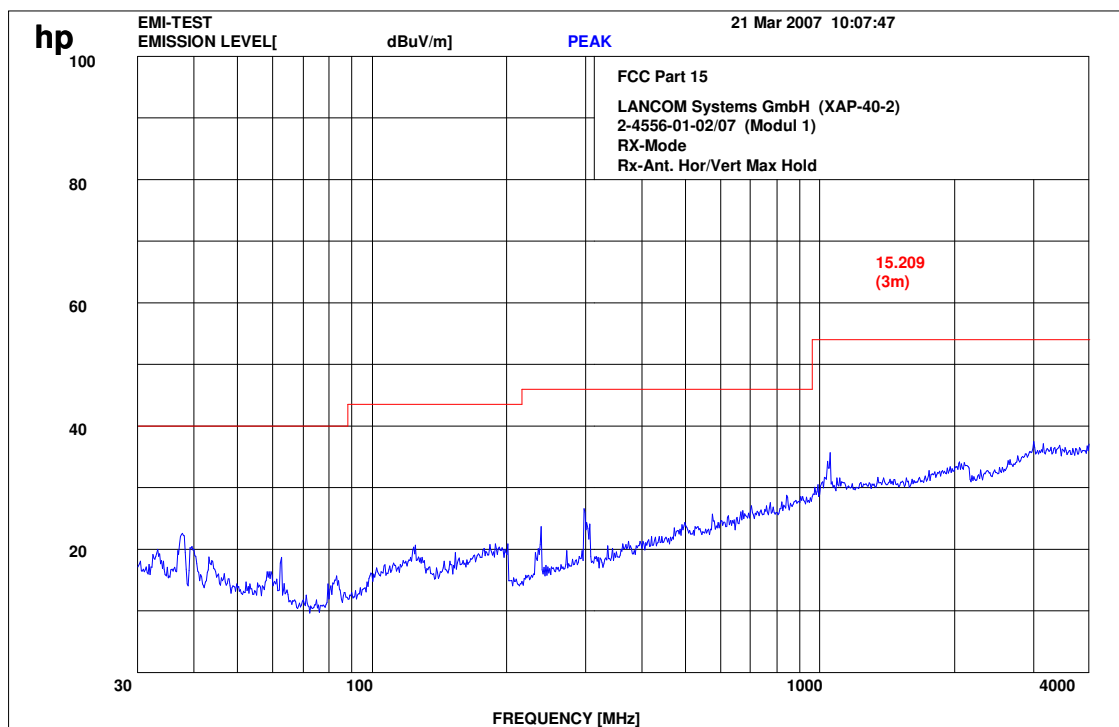

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 49 of 70

Plot 2: 4- 12 GHz (receiver)

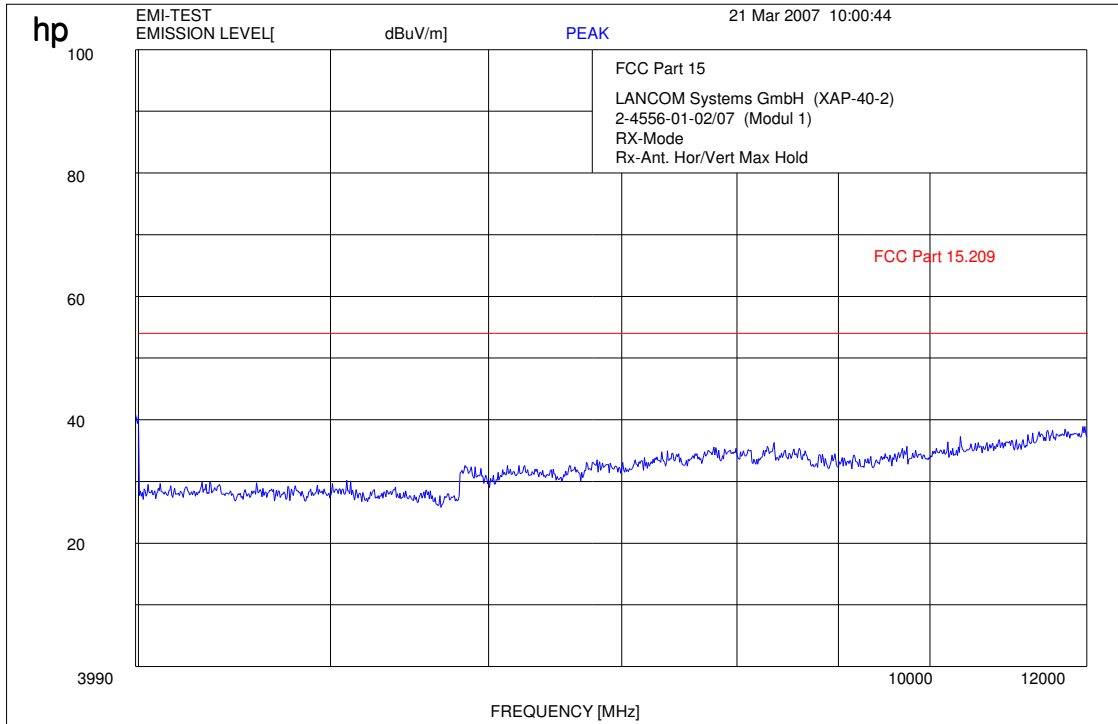

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 50 of 70

Plot 3: 12- 25 GHz (receiver)

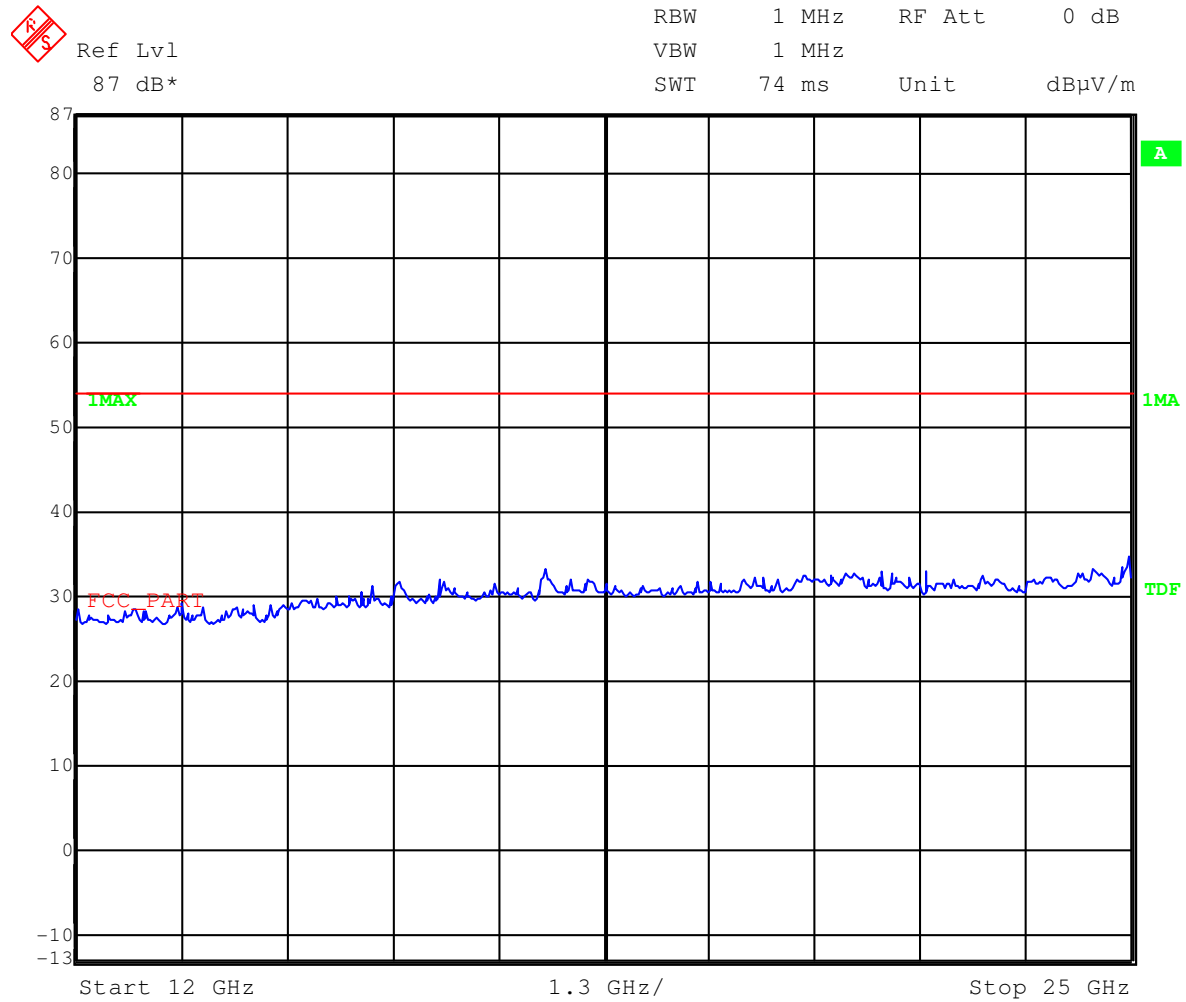

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 51 of 70

25 - 33 GHz (receiver)

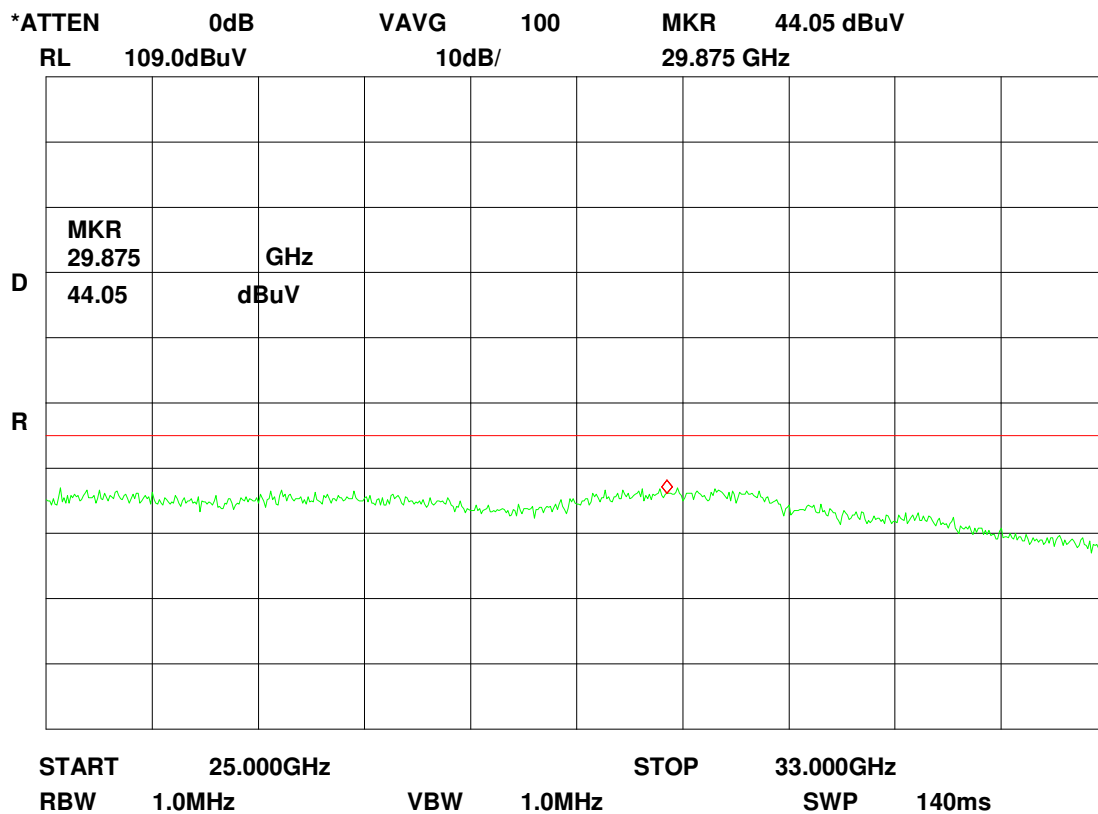

Calculation: Field strength = analyzer reading + cable loss - amplifier gain + antenna factor

$$e \text{ [dB}(\mu\text{V/m)}] = u \text{ [dB}(\mu\text{V)}] + a \text{ [dB]} - g \text{ [dB]} + k \text{ [dB(1/m)]}$$

see page 9-11

The offset (cable loss - amplifier gain + antenna factor) is calculated in the analyzer reading.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 52 of 70

33 – 50 GHz (receiver)

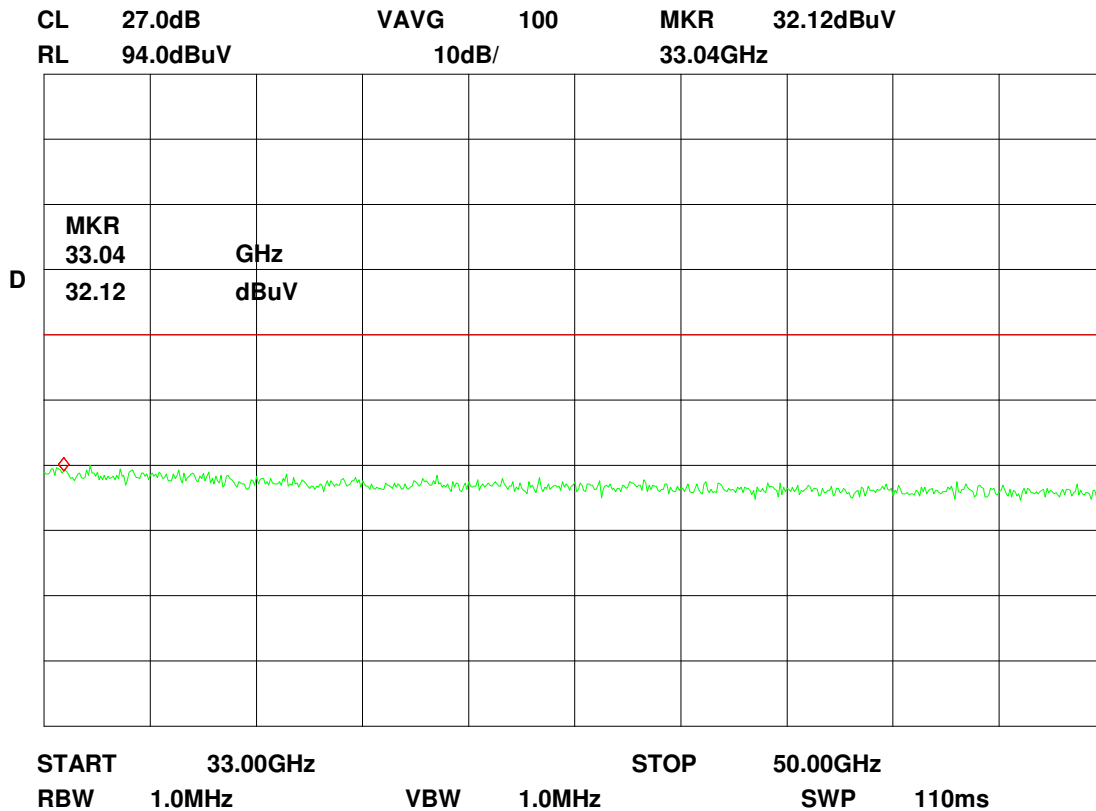

Calculation: Field strength = analyser reading + antenna factor - distance correction
 $e \text{ [dB}(\mu\text{V/m)}] = u \text{ [dB}(\mu\text{V)}] + k \text{ [dB(1/m)}] - d \text{ [dB]}$
 see page 9-11

The offset (antenna factor - distance correction) is considered in the analyzer reading.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 53 of 70

Results:

| Spurious Emissions level [$\mu\text{V/m}$] | | | | | | | | |
|--|----------|---------------------------|--------|----------|---------------------------|--------|----------|---------------------------|
| CH 1 / 2 / 3 | | | | | | | | |
| f[MHz] | Detector | Level [$\mu\text{V/m}$] | f[MHz] | Detector | Level [$\mu\text{V/m}$] | f[MHz] | Detector | Level [$\mu\text{V/m}$] |
| No peaks found < 20 dB below limit line | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| Measurement uncertainty | | | ±3 dB | | | | | |

f < 1 GHz : RBW/VBW: 100 kHz
see above plots

f ≥ 1GHz : RBW/VBW: 1 MHz

Measurement distance see table


Limits : § 15.109 / 209

| Frequency (MHz) | Field strength ($\mu\text{V/m}$) | Measurement distance (m) |
|-----------------|------------------------------------|--------------------------|
| 30 - 88 | 100 (40 dB $\mu\text{V/m}$) | 3 |
| 88 - 216 | 150 (43.5 dB $\mu\text{V/m}$) | 3 |
| 216 - 960 | 200 (46 dB $\mu\text{V/m}$) | 3 |
| above 960 | 500 (54 dB $\mu\text{V/m}$) | 3 |

3.14 Spurious Emissions - radiated < 30 MHz

§15.109

Transmit mode, valid for all three channels

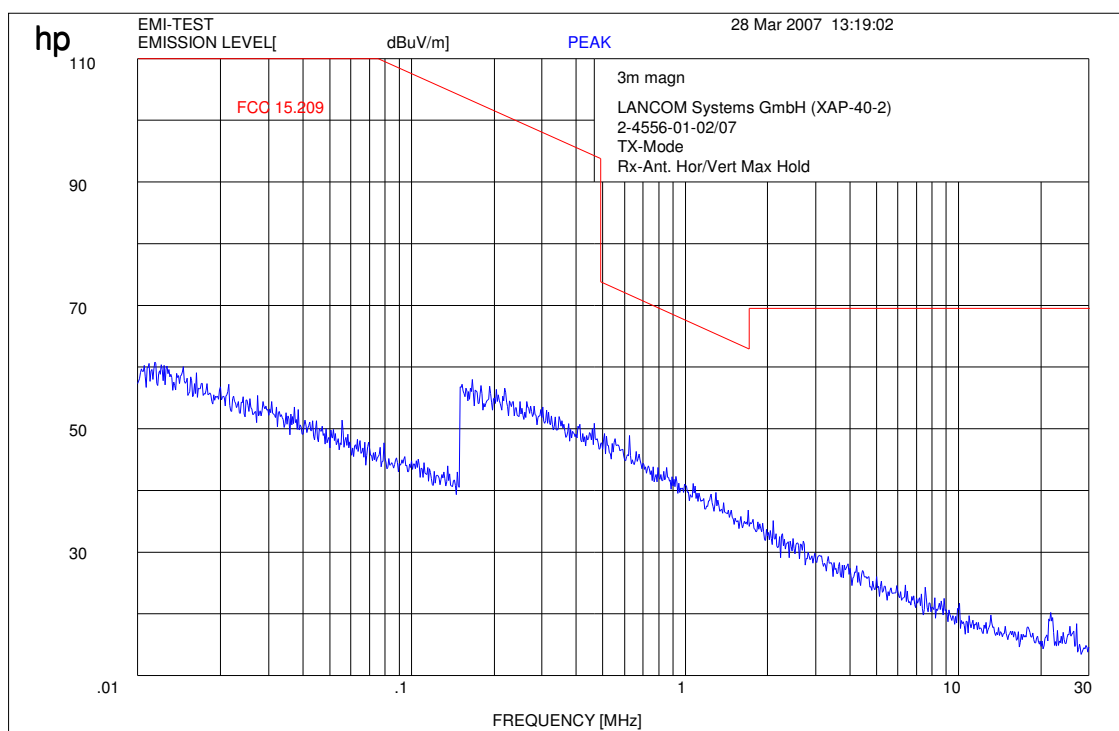

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Limits:

| Frequency (MHz) | Field strength ($\mu\text{V/m}$) | Measurement distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 / 29.5 dB $\mu\text{V/m}$ | 30 |
| 30 - 88 | 100 / 40 dB $\mu\text{V/m}$ | 3 |
| 88 - 216 | 150 / 43.5 dB $\mu\text{V/m}$ | 3 |
| 216 - 960 | 200 / 46 dB $\mu\text{V/m}$ | 3 |
| above 960 | 54 dB $\mu\text{V/m}$ | 3 |


3.15 Conducted Emissions < 30 MHz

§15.107/207

(measured with the 110V AC power supplied by the customer)

Transmit mode, valid for all three channels

Plot 1: CISPR 22

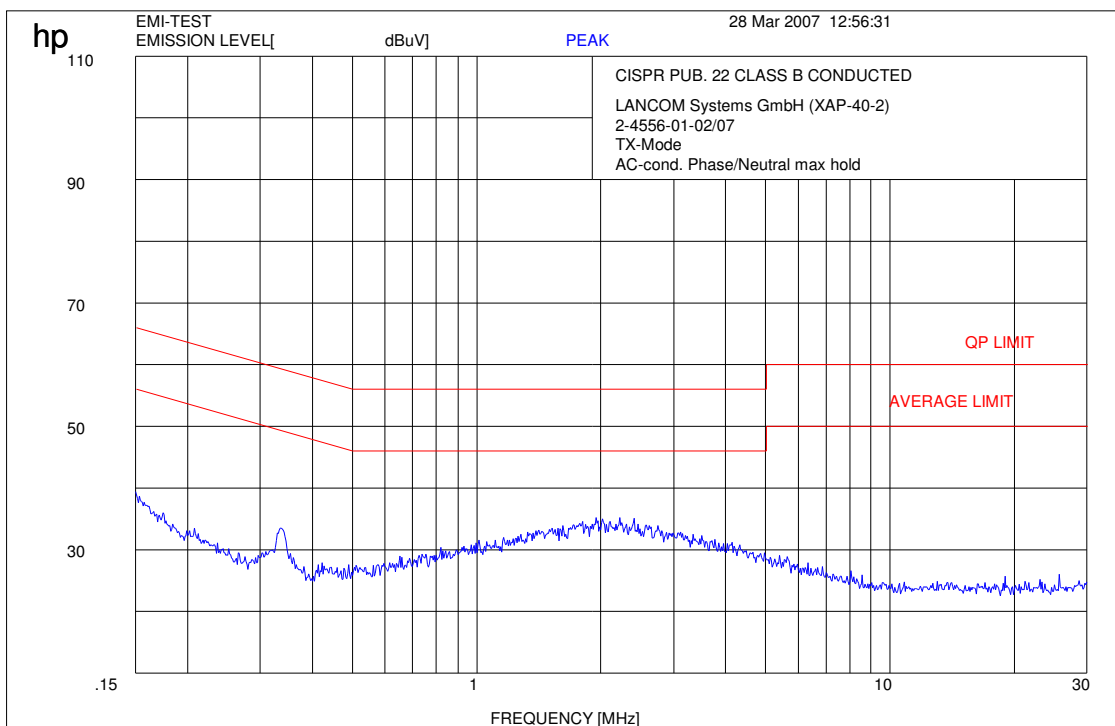

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

Limits :

| | |
|-----------------------------------|--|
| Under normal test conditions only | 0.15 to 0.5 MHz, 66-56 dB μ V QP, 56-46 dB μ V AV 0.5 to 5.0 MHz, 56 dB μ V QP, 46 dB μ V AV 5.0 to 30 MHz, 60 dB μ V QP, 50 dB μ V AV |
|-----------------------------------|--|

3.16 Used Testequipment

Anechoic chamber C:

| Device | Manufacturer | Type | S/N Number | Inv. No. Cetecom |
|---------------------------|--------------|-----------|------------|------------------|
| Spektrum Analyser | HP | 8566B | 2747A05306 | 300001000 |
| Spektrum Analyser Display | HP | 85662A | 2816A16541 | 300002297 |
| Quasi-Peak-Adapter | HP | 85650A | 2811A01131 | 300000999 |
| Power Dupply | HP | 6032A | 2818A03450 | 300001040 |
| Power Attenuator | Byrd | 8325 | 1530 | 300001595 |
| Biconical Antenna | EMCO | 3104 | 3758 | 300001602 |
| Log. Period. Antenna | EMCO | 3146 | 2130 | 300001603 |
| Double Ridged Antenna | EMCO | HP 3115P | 3088 | 300001032 |
| Active Loop Antenna | EMCO | 6502 | 2210 | 300001015 |
| Antenna VDE/FCC | | HP11965B | | 300002298 |
| SRM-Drive | HP | 9144A | 2823e46556 | 300001044 |
| Software | HP | EMI | | 300000983 |
| Busisolator | Kontron | | | 300001056 |
| Absorberhalle | MWB | | 87400/02 | 300000996 |
| Salzsäule | Kontron | | | 300001055 |
| Antenna | R&S | HMO20 | 832211/003 | 300002243 |
| Indukt.Tast Antenna | R&S | HFH 2 Z4 | 881468/026 | 300001464 |
| System-Rack | HP I.V. | 85900 | * | 300000222 |
| Spectrum Analyzer | HP | 8566B | 2747A05275 | 300000219 |
| Quasi-Peak-Adapter | HP | 85650A | 2811A01135 | 300000216 |
| RF-Preselector | HP | 85685A | 2837A00779 | 300000218 |
| Rahmen Antenne | R&S | HFH2-Z2 | 891847-35 | 300001169 |
| Leitungsteiler | HP | 11850C | | 300000997 |
| Breitband-Hornantenne EMI | HP | 35155P | | 300002300 |
| PC | HP | Vectra VL | | 300001688 |
| VHF Meßantenne | Schwarzbeck | VHA 9103 | | 300001778 |
| Spectrum Analyzer Display | HP | 85662A | 2816A16497 | 300001690 |
| VHF Meßantenna | Schwarzbeck | VHA 9103 | | 300001780 |
| Biconical Antenna | EMCO | 3104 C | 9909-4868 | 300002590 |

SRD Laboratory:

| Device | 300001207 | Type | S/N Number | Inv. No. Cetecom |
|---------------------------------|-----------|----------------|------------|------------------|
| Spectrum Analyzer | 300001208 | 494AP | B010241 | 300000863 |
| Spectrum Analyzer | HP | 71210A (70000) | 2731A02347 | 300000321 |
| Spectrum Analyzer Display | HP | 70206A | 2840A01553 | 300002017 |
| Reference Frequency | HP | 70310A | 2736A00707 | 300002018 |
| Local Oscillator | HP | 70900A | 2842A02221 | 300002019 |
| ZF-Modul 10Hz-300 kHz | HP | 70902A | 2840A02145 | 300002020 |
| ZF-Modul 100 kHz-3 MHz | HP | 70903A | 2835A01069 | 300002021 |
| HF-Teil für 71210A 100Hz- 22GHz | HP | 70908A | | 300002022 |
| Spectrum Analyzer 2 | HP | 85660B | 3138A07614 | |
| Spectrum Analyzer Display 2 | HP | 85662A | 3144A20627 | |

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 57 of 70

| | | | | |
|--------------------------------|-----------------|-----------|------------|-----------|
| Signal Generator DC-600 KHz | HP | 8904A | 2822A01213 | 300001157 |
| Signal Generator DC-600 KHz | HP | 8904A | 2822A01214 | 300001158 |
| Powersupply | HP | 6038A | 3122A11097 | 300001204 |
| Netznachbildung | R&S | ESH3-Z5 | 828576/020 | 300001210 |
| Amplituden Controller | R&S | SMDU-Z2 | 871829/051 | 300002309 |
| Trenntrafo | Erfi | 913501 | | 300001205 |
| Trenntrafo | Grundig | RT5A | 9242 | 300001627 |
| Relais Matrix | HP | 3488A | 2719A15013 | 300001156 |
| Multimeter | Siemens | Multizet | | 300001102 |
| Peak Power Calibrator | HP | 8900B | | 300001084 |
| Schallgeber | Schomandl | SG 1 | 10159 | 300001209 |
| Schallgeber | Schomandl | SG 2 | 10176 | 300002473 |
| Filter | FSY Microwave | | | 300001206 |
| Attenuatorer | Pro Nova | | | 300002476 |
| Klimaschrank | Heraeus Voetsch | VUK04/500 | | 300001012 |
| Spectrum Analyzer 3 | HP | 8566A | 1925A00257 | 300001098 |
| Spectrum Analyzer Display 3 | HP | 85662 | 1925A00860 | 300002306 |
| Oszilloscope | Tektronix | 2432 | 110261 | 300001165 |
| Radiocom. Analyzer | R&S | CMTA 54 | 894043/010 | 300001175 |
| Powersupply | HP | 6038A | 2848A07027 | 300001174 |
| Signal Generator 0.01-1280 MHz | HP | 8662A | 2224A01012 | 300001110 |
| Signal Generator (Funktionen) | R&S | AFGU | 862490/032 | 300001201 |
| Trenntrafo | Erfi | MPL | 91350 | 300001155 |
| Relais Matrix | R&S | PSU | 893285/020 | 300001173 |
| Power Meter | HP | 436A | 2101A12378 | 300001136 |
| Powersensor | HP | 8484A | 2237A10156 | 300001140 |
| Powersensor | HP | 8482A | 2237A06016 | 300001139 |
| Relais Matrix | R&S | PSU | 282628/004 | 300001214 |
| Powersupply | Zentro | | 2007 | 300001109 |
| Oszilloscope | Tektronix | 7633 | | 300001111 |
| Klimaschrank | Heraeus Voetsch | VUK04/500 | 32926 | 300001500 |
| Quasi-Peak Adapter | HP | 85650A | 2811A01204 | 300002308 |
| Radiocom. Analyzer | R&S | CMTA 84 | 894199/012 | 300001176 |
| Oszilloscope | HP | 54510A | 3022A02062 | 300001202 |
| Funkmeßplatz | Schomandl | FD1000 | 34982 | 300001115 |
| Signal Generator | R&S | SMPC | 882416/019 | 300001162 |
| Frequency counter | HP | 5340A | 2116A08138 | 300001104 |
| Power Meter | HP | 436A | 2031U01461 | 300001105 |
| Powersensor | HP | 8482A | | 300001106 |
| Powersensor | HP | 8484A | | 300001107 |
| Powersensor | HP | 8485A | | 300001108 |
| Powersupply | HP | 6038A | 2752A04866 | 300001161 |
| Reflectionsmeter | R&S | NAP | 879191 | 300001132 |
| Signal Generator NF | R&S | SPN | 880139/068 | 300001142 |
| Trenntrafo | Erfi | MPL | 91350 | 300001151 |
| Attenuator | JFW | 30 db | 1350h/104 | 300001703 |
| Attenuator | JFW | 10 db | 1350h/103 | 300001704 |
| Attenuator | JFW | 20 db | 1350h/106 | 300001705 |
| Attenuator | JFW | 20 db | 1350h/105 | 300001766 |
| Filter | Spinner | 153755 | | 300001791 |

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 58 of 70

| | | | | |
|--------------------------------|-----------------|-----------|------------|-----------|
| Powersensor | HP | 8484A | 2237A10494 | 300001666 |
| Powersupply | HP | 6038A | 3122A11097 | 300001204 |
| Netznachbildung | R&S | ESH3-Z5 | 828576/020 | 300001210 |
| Amplituden Controller | R&S | SMDU-Z2 | 871829/051 | 300002309 |
| Trenntrafo | Erfi | 913501 | | 300001205 |
| Trenntrafo | Grundig | RT5A | 9242 | 300001627 |
| Relais Matrix | HP | 3488A | 2719A15013 | 300001156 |
| Multimeter | Siemens | Multizet | | 300001102 |
| Peak Power Calibrator | HP | 8900B | | 300001084 |
| Schallgeber | Schomandl | SG 1 | 10159 | 300001209 |
| Schallgeber | Schomandl | SG 2 | 10176 | 300002473 |
| Filter | FSY Microwave | | | 300001206 |
| Attenuatorer | Pro Nova | | | 300002476 |
| Klimaschrank | Heraeus Voetsch | VUK04/500 | | 300001012 |
| Spectrum Analyzer 3 | HP | 8566A | 1925A00257 | 300001098 |
| Spectrum Analyzer Display 3 | HP | 85662 | 1925A00860 | 300002306 |
| Oszilloscope | Tektronix | 2432 | 110261 | 300001165 |
| Radiocom. Analyzer | R&S | CMTA 54 | 894043/010 | 300001175 |
| Powersupply | HP | 6038A | 2848A07027 | 300001174 |
| Signal Generator 0.01-1280 MHz | HP | 8662A | 2224A01012 | 300001110 |
| Signal Generator (Funkions) | R&S | AFGU | 862490/032 | 300001201 |
| Trenntrafo | Erfi | MPL | 91350 | 300001155 |
| Relais Matrix | R&S | PSU | 893285/020 | 300001173 |
| Power Meter | HP | 436A | 2101A12378 | 300001136 |
| Powersensor | HP | 8484A | 2237A10156 | 300001140 |
| Powersensor | HP | 8482A | 2237A06016 | 300001139 |
| Relais Matrix | R&S | PSU | 282628/004 | 300001214 |
| Powersupply | Zentro | | 2007 | 300001109 |
| Oszilloscope | Tektronix | 7633 | | 300001111 |
| Klimaschrank | Heraeus Voetsch | VUK04/500 | 32926 | 300001500 |
| Quasi-Peak Adapter | HP | 85650A | 2811A01204 | 300002308 |
| Radiocom. Analyzer | R&S | CMTA 84 | 894199/012 | 300001176 |
| Oszilloscope | HP | 54510A | 3022A02062 | 300001202 |
| Funkmeßplatz | Schomandl | FD1000 | 34982 | 300001115 |
| Signal Generator | R&S | SMPC | 882416/019 | 300001162 |
| Frequency counter | HP | 5340A | 2116A08138 | 300001104 |
| Power Meter | HP | 436A | 2031U01461 | 300001105 |
| Powersensor | HP | 8482A | | 300001106 |
| Powersensor | HP | 8484A | | 300001107 |
| Powersensor | HP | 8485A | | 300001108 |
| Powersupply | HP | 6038A | 2752A04866 | 300001161 |
| Reflectionsmeter | R&S | NAP | 879191 | 300001132 |
| Signal Generator NF | R&S | SPN | 880139/068 | 300001142 |
| Trenntrafo | Erfi | MPL | 91350 | 300001151 |
| Attenuator | JFW | 30 db | 1350h/104 | 300001703 |
| Attenuator | JFW | 10 db | 1350h/103 | 300001704 |
| Attenuator | JFW | 20 db | 1350h/106 | 300001705 |
| Attenuator | JFW | 20 db | 1350h/105 | 300001766 |
| Filter | Spinner | 153755 | | 300001791 |
| Powersensor | HP | 8484A | 2237A10494 | 300001666 |

| | | | | |
|-------------------------------|--------------------|--------------------------|------------|-----------|
| Powersensor | HP | 8485A | 2238A00849 | 300001668 |
| Bandfilter | Telonic | TTF7255EE | 20293-11 | 300001300 |
| Bandfilter | Telonic | TTF12555EE | 20292-6 | 300001302 |
| Bandfilter | Telonic | TTF25055EE | 20291-8 | 300001304 |
| Bandfilter | Telonic | TTF50055EE | 20290-7 | 300001305 |
| Bandfilter | Telonic | TTF100055EE | 20289-7 | 300001307 |
| Bandfilter | Telonic | TTA300055EESN | 20370-2 | 300001312 |
| Bandstop | Telonic | TTR3753EE1 | 30013-1 | 300001314 |
| Bandstop | Telonic | TTR723EE | 20417-2 | 300001316 |
| Bandstop | Telonic | TTR95-3EE | 20372-4 | 300001318 |
| Bandstop | Telonic | TTR1903EE | 30036-4 | 300001320 |
| Bandstop | Telonic | TTR3753EE | 20369-5 | 300001321 |
| Bandstop | Telonic | TTR750-3EE1 | 90177-1 | 300002387 |
| Highpass | Pro Nova | HDP120-6GG | ohne | 300001348 |
| Highpass | Pro Nova | HMC500-6AA | HJ67-01? | 300001350 |
| Highpass | Narda | NHP 9000 | 0004 | 300001362 |
| Highpass | Narda | HDP16-6GH | JV70-01 | 300001364 |
| Highpass | RSD | HDP50-6GH, HDP200-6GG | | 300001371 |
| Highpass | RSD | 2099-02-01 | | 300000370 |
| Signal Generator 0.1-2060 MHz | HP | 8657A | 2838U00736 | 300001009 |
| Radio Code Analyzer | Schlumberger | SL4922 | | 300001038 |
| Signal Analyzer | B&K | 2033 | | 300001047 |
| Frequency counter | HP | 5386A | 2704A01243 | 300000998 |
| Laufzeitelement | WR-Elektronik | | | 300001036 |
| Powersupply Stromversorgung | Systron | M5P 40/15A | 828233 | 300001291 |
| Powersupply | Heiden | 1108-32 | 1701 | 300001392 |
| Powersupply | Heiden | 1108-32 | 1802 | 300001383 |
| Powersupply | Heiden | 1108-32 | 003202 | 300001187 |
| Powersupply | Zentro | LA 2x30/5GB1 | 2011 | 300001276 |
| Powersupply | Zentro | LA 2x30/5GB2 | 2012 | 300001275 |
| Powersupply | Zentro | LA 30/5GA | 2041,2042 | 300001287 |
| Trenntrafo | Grundig | RT5A | 8781 | 300001277 |
| Trenntrafo | Grundig | RT5A | 9242 | 300001263 |
| Multimeter | Goerz Elektro | Unigor 6e P | 911 355 | 300001625 |
| Multimeter | Goerz Elektro | Unigor 6e P | 911 391 | 300001281 |
| Climatic Box | Heraeus Voetsch | VUK04/500 | 32679 | 300000299 |
| Powersensor + Att. | HP | 8482B | 2703A02586 | 300001492 |
| Attenuator 30 dB | HP | 8498A | 1801A02445 | 300001475 |
| Signal Generator NF | HP | | 2822A01203 | 300001004 |
| Attenuator | Spinner | BN 534171 D | 51881 | 300001516 |
| Attenuator coaxial | Bird | 8325 | 2429 | 300001513 |
| Impulsbegrenzer | R&S | ESH 3 Z2 | | 300001460 |
| 4Port Box | R&S | 4Port Box | 860457/005 | 300001472 |
| Signal Generator 0.1-4200 MHz | HP | 8665A | 2833A0011 | 300002299 |
| Spektrumanalyzer | R&S | FSU50 | 200012 | 300003443 |
| Swissphone Freifeld-Messbox | Swissphone Schweiz | | | 300002302 |
| Trenntrafo regelbar | Grundig | RT5H | 9242 | 300001628 |
| Signal Generator | HP | 8111A | 2215G00867 | 300001117 |

4 Photographs

Test site:



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 61 of 70

Test site:



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 62 of 70

AC-conducted:

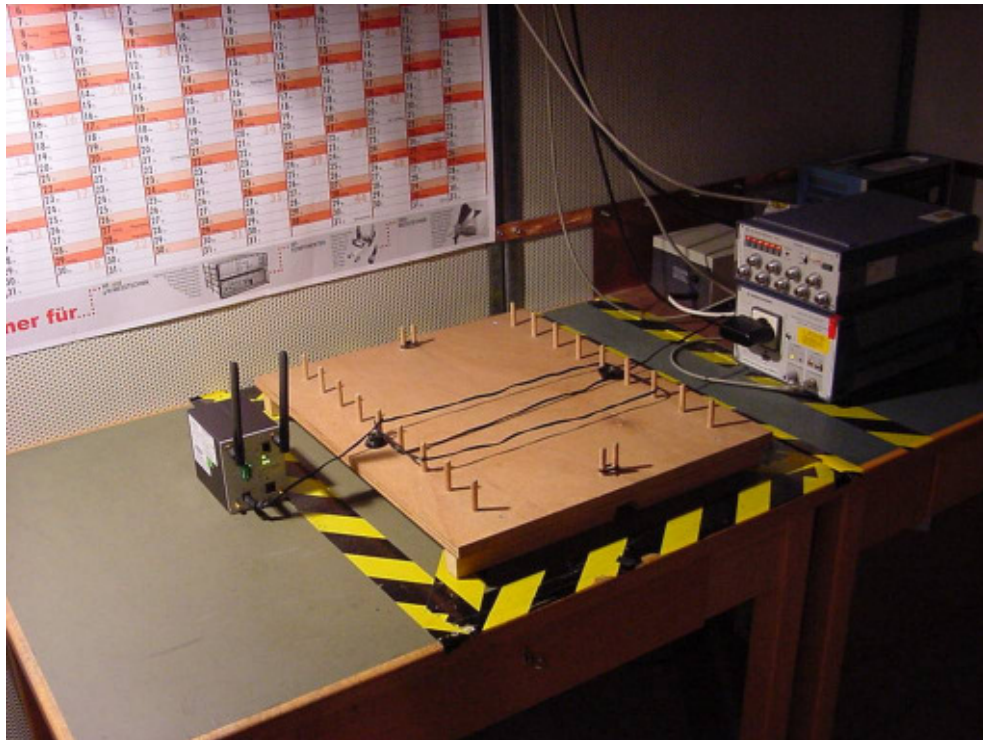

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 63 of 70

Test sample: XAP-40-2, front site

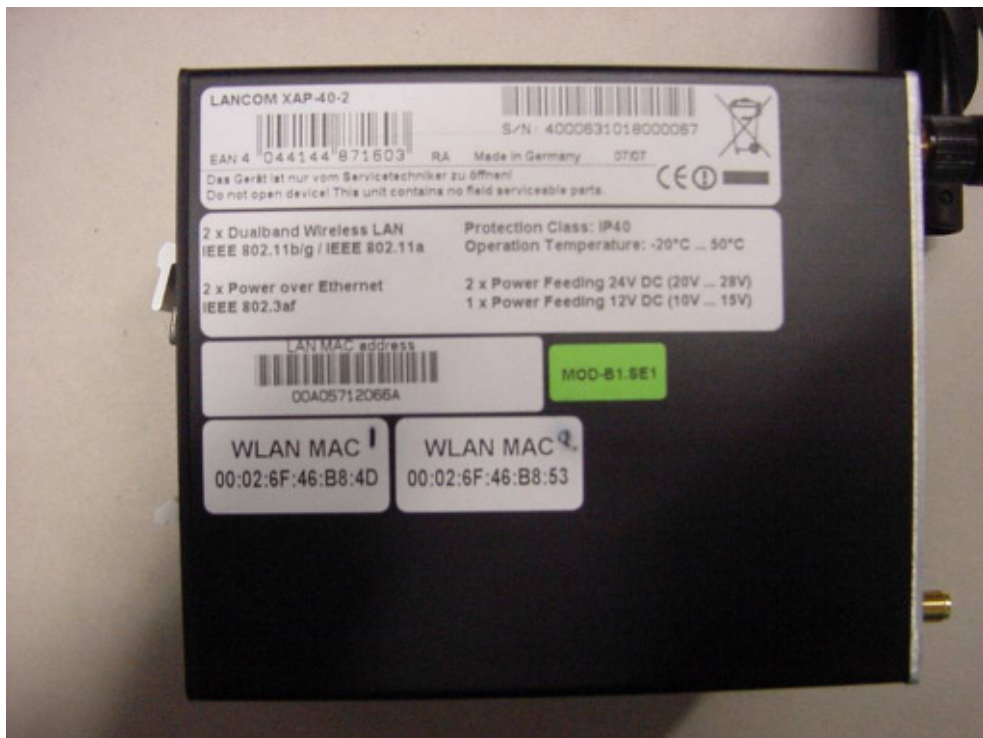

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany





Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 64 of 70

Test sample: BAT54-Rail, front site

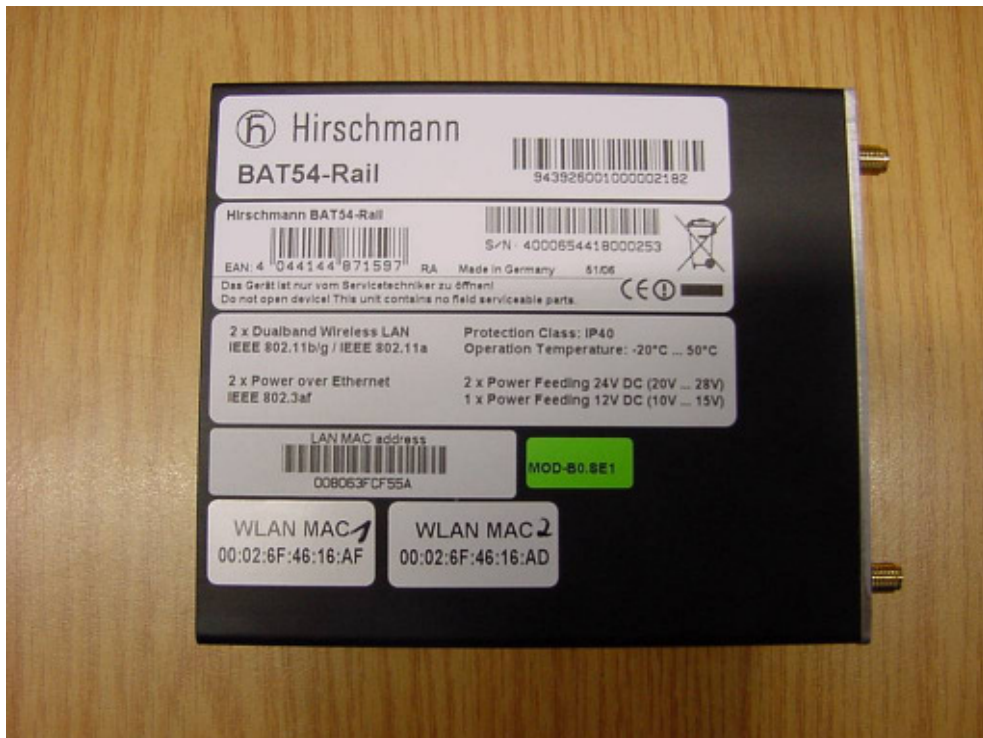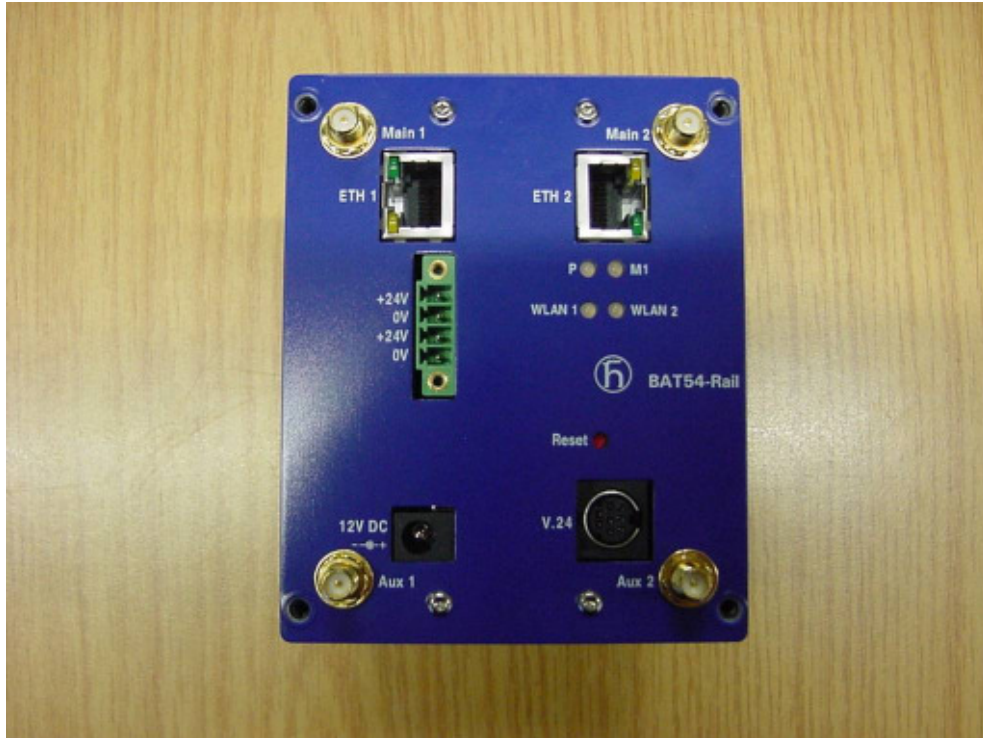

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 65 of 70

Back site

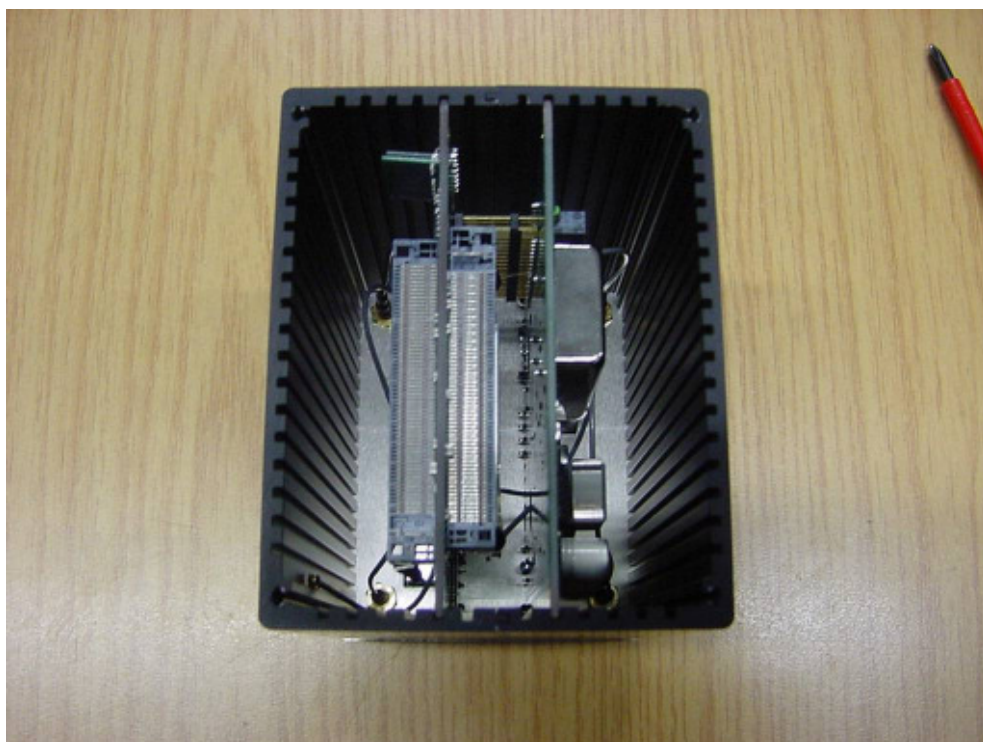

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 66 of 70

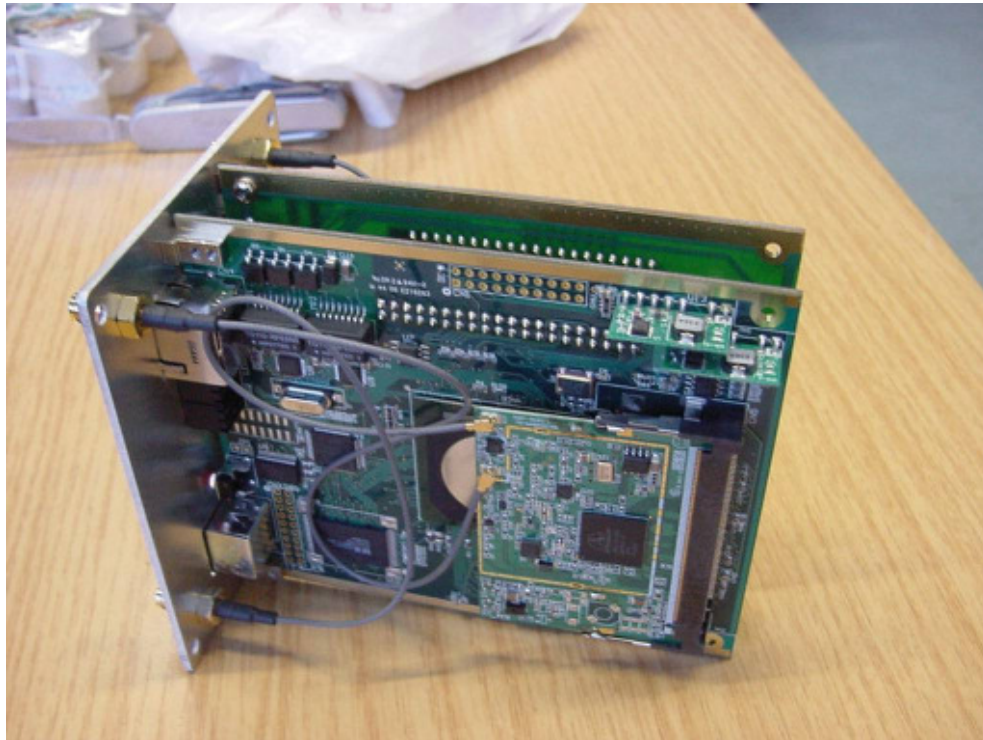

SRD-Testreport



CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 67 of 70

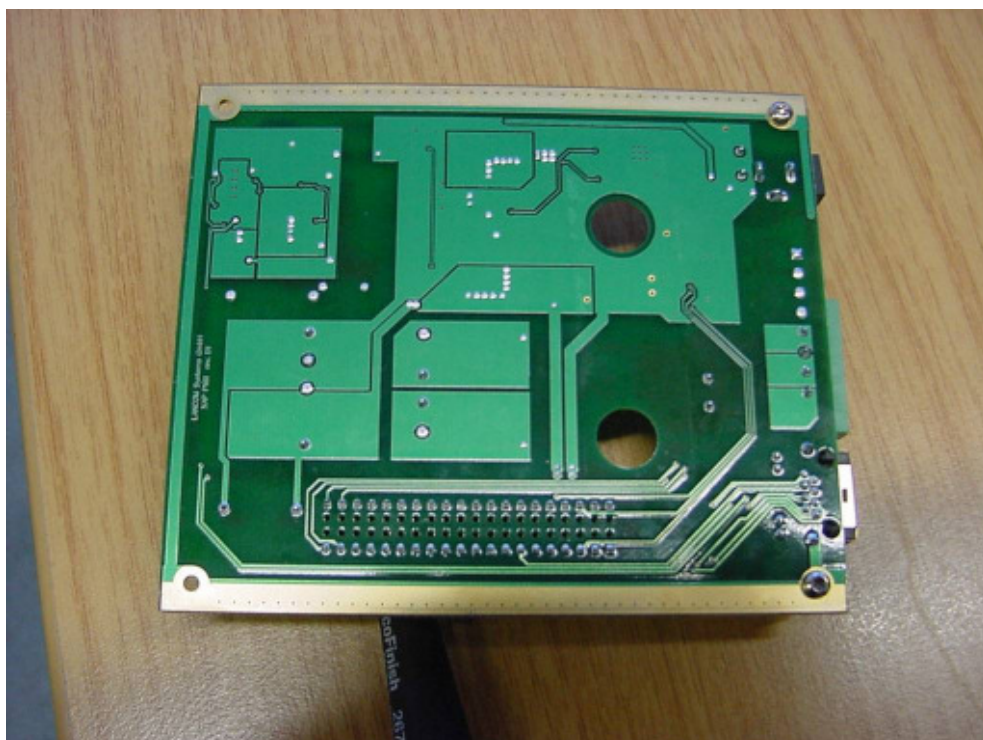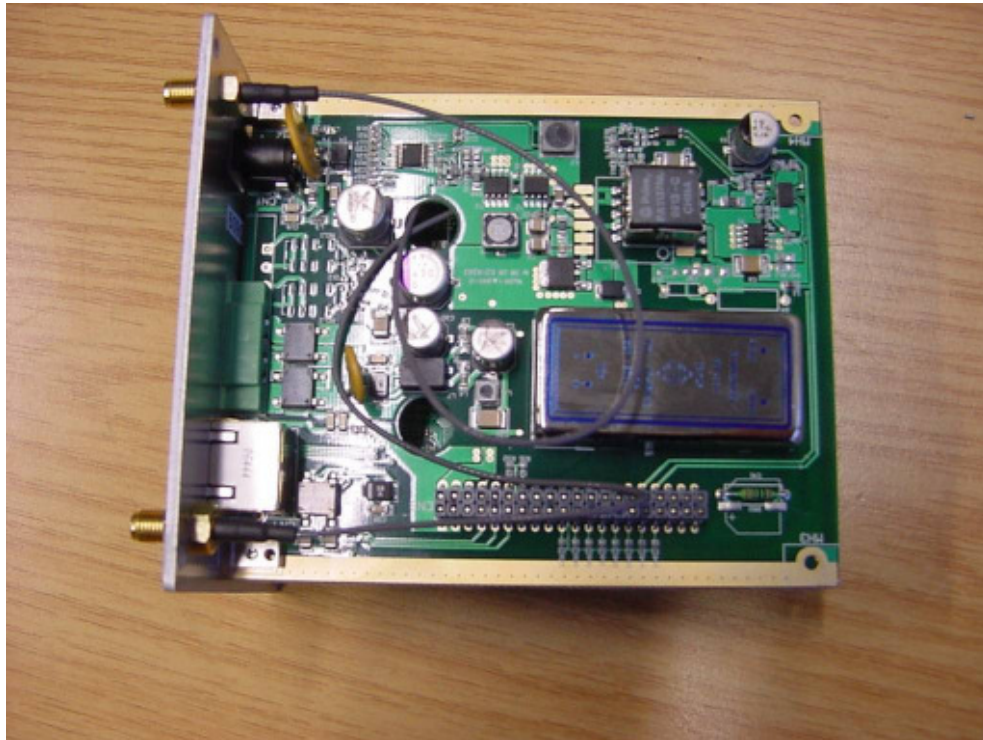

SRD-Testreport



CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 68 of 70

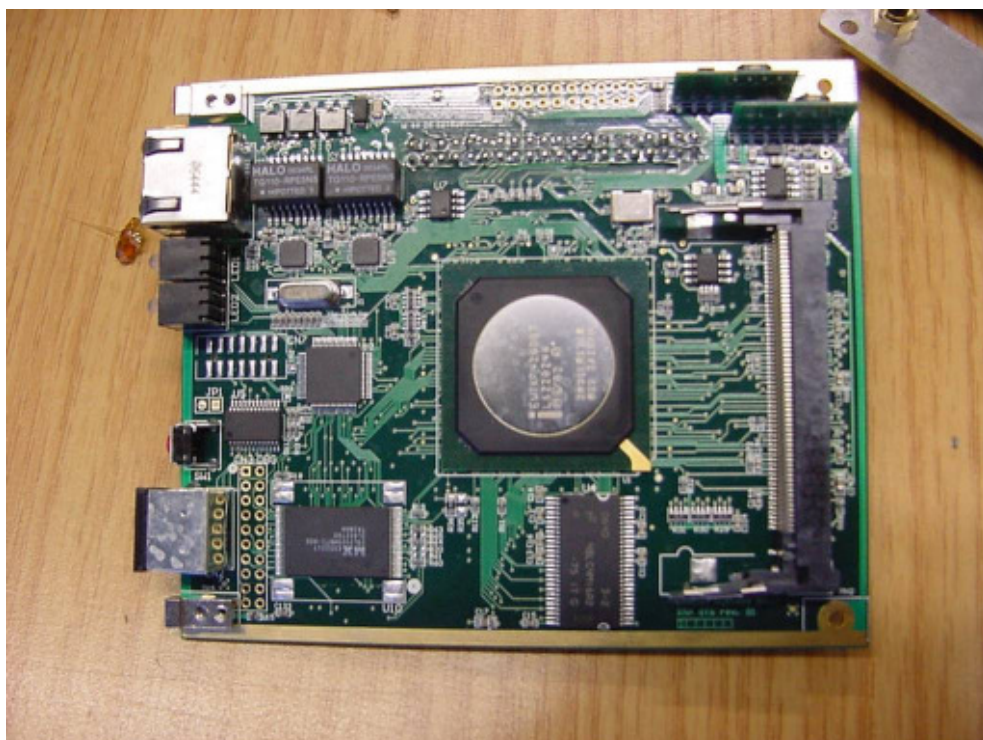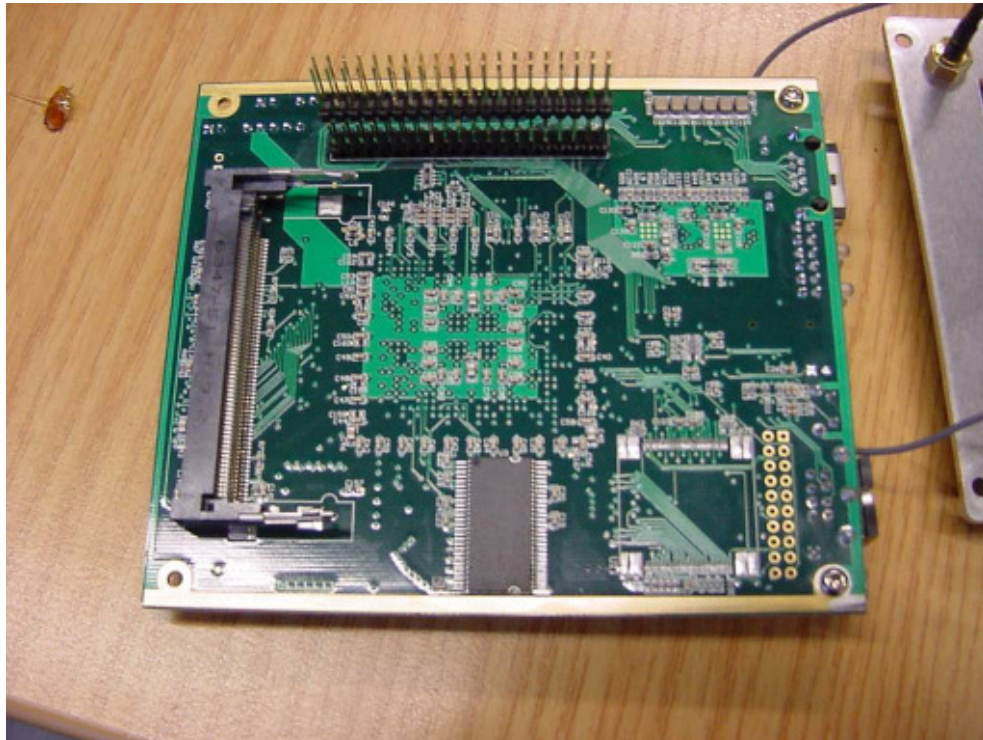

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 69 of 70



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4556-01-05/07

Date: 2007-04-27

Page 70 of 70

