

Appendix A
RF Test Data for 2.4G WIFI (Conducted Measurement)
Product Name: Pet Vision Live Full HD
Trade Mark: EYENIMAL
Test Model: NGHOMCAM012


Environmental Conditions

Temperature:	23.3 ° C
Relative Humidity:	53.3%
ATM Pressure:	100.0 kPa
Test Engineer:	David Luo
Supervised by:	Li Huan


A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
11B	2437	Ant1	100	PASS
11G	2437	Ant1	100	PASS
11N20SISO	2437	Ant1	100	PASS
11N40SISO	2437	Ant1	100	PASS


Duty Cycle_11B_2437_Ant1

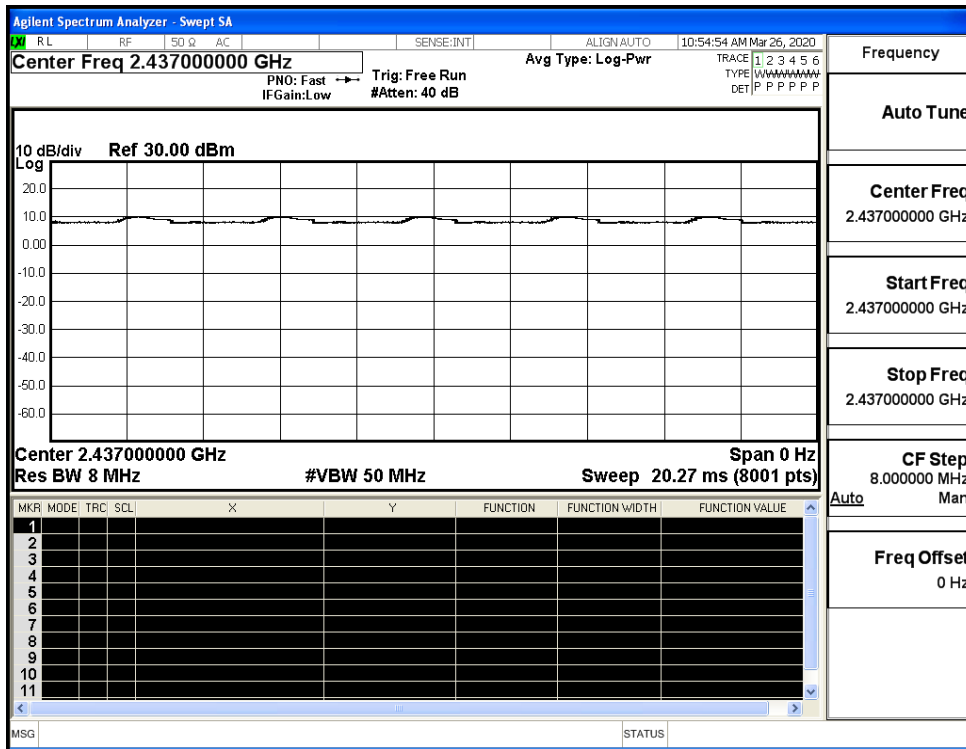


Duty Cycle_11G_2437_Ant1

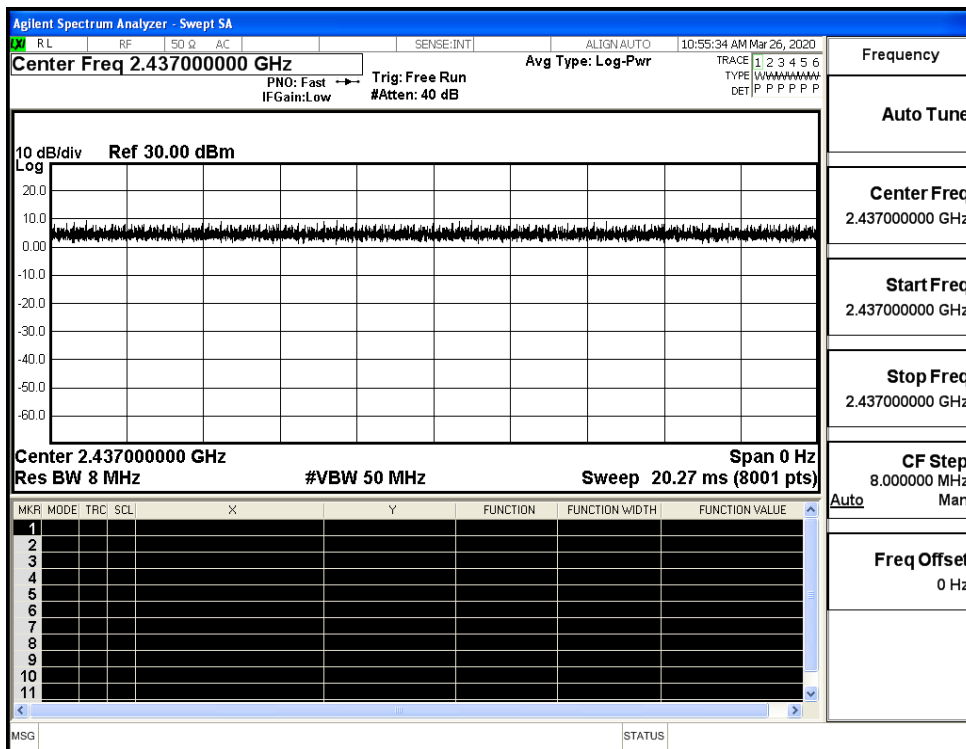

Duty Cycle_11N20SISO_2437_Ant1

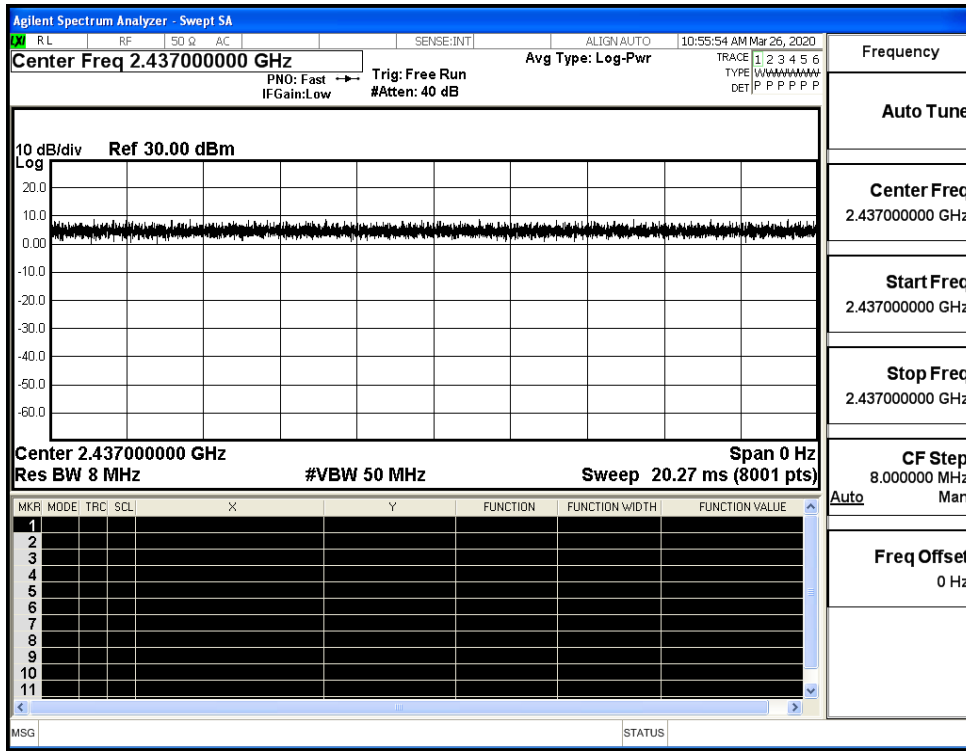

Duty Cycle_11N40SISO_2437_Ant1

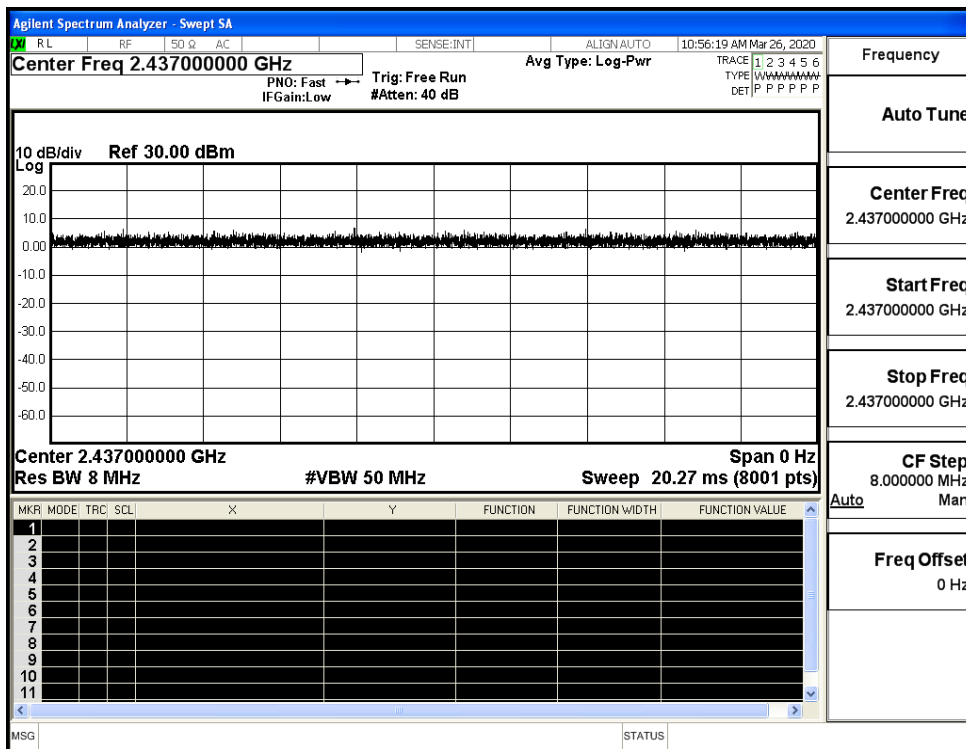


A.2 Maximum Conducted Output Power


Mode	Channel	Meas.Level [dBm]	Limit [dBm]	Verdict
11B	LCH	16.91	30	PASS
	MCH	16.50	30	PASS
	HCH	16.03	30	PASS
11G	LCH	20.13	30	PASS
	MCH	20.05	30	PASS
	HCH	19.42	30	PASS
11N20SISO	LCH	18.05	30	PASS
	MCH	19.42	30	PASS
	HCH	17.85	30	PASS
11N40SISO	LCH	18.14	30	PASS
	MCH	19.96	30	PASS
	HCH	17.73	30	PASS

A.3 Maximum Power Spectral Density


Mode	Channel	Meas.Level [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
11B	LCH	-9.717	8	PASS
	MCH	-10.004	8	PASS
	HCH	-10.935	8	PASS
11G	LCH	-13.371	8	PASS
	MCH	-12.988	8	PASS
	HCH	-14.670	8	PASS
11N20SISO	LCH	-16.497	8	PASS
	MCH	-14.471	8	PASS
	HCH	-15.818	8	PASS
11N40SISO	LCH	-19.284	8	PASS
	MCH	-17.208	8	PASS
	HCH	-18.966	8	PASS

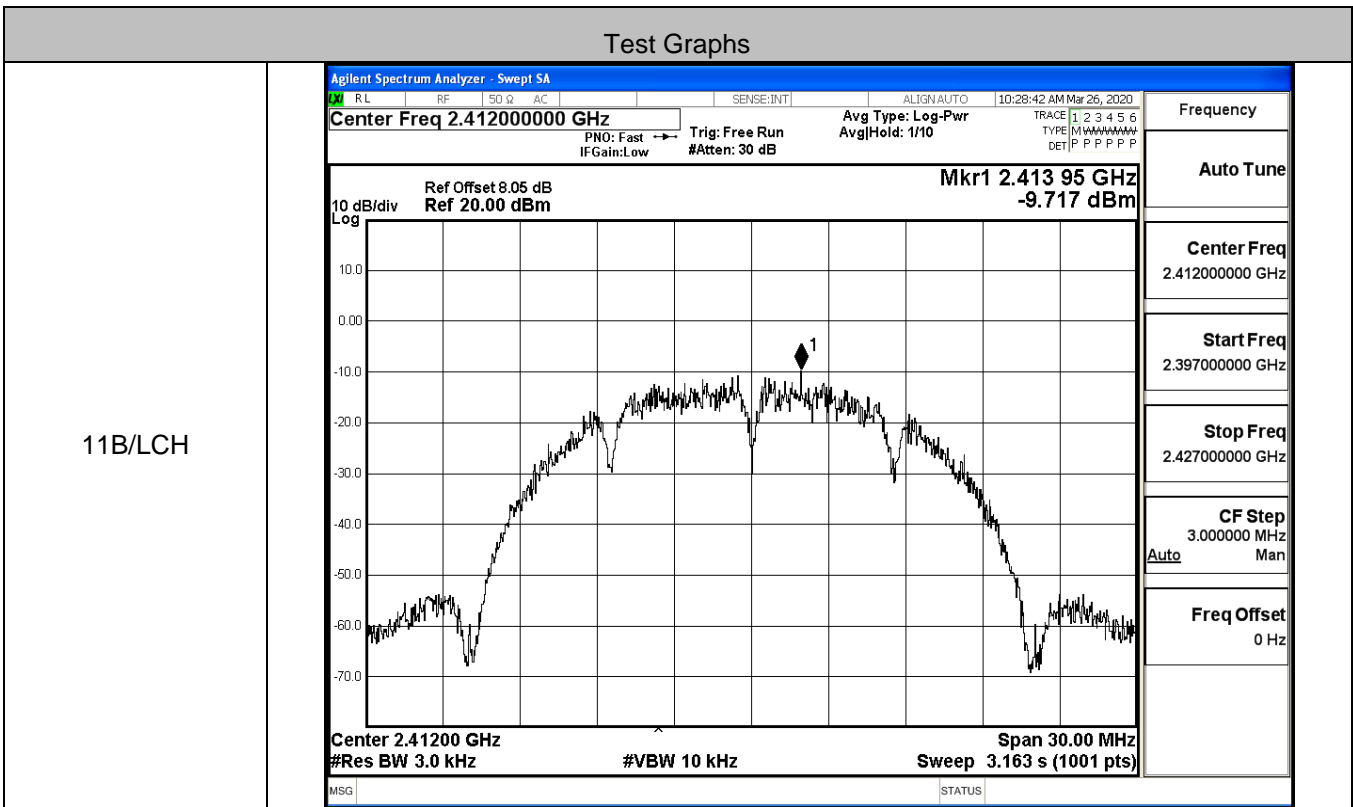


11B/MCH

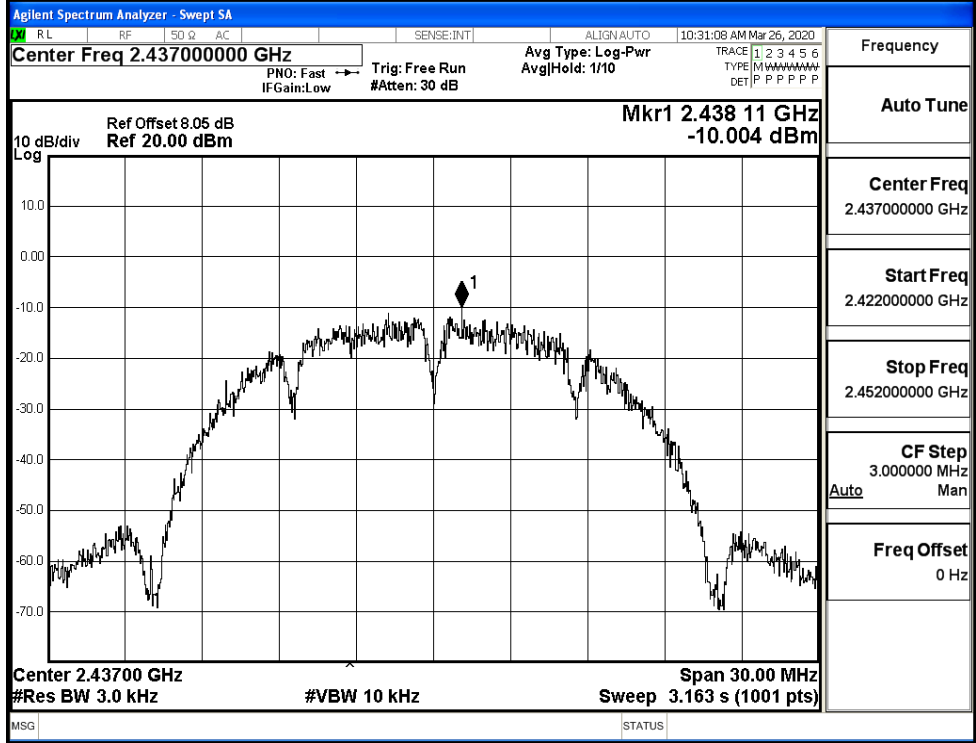


11B/HCH

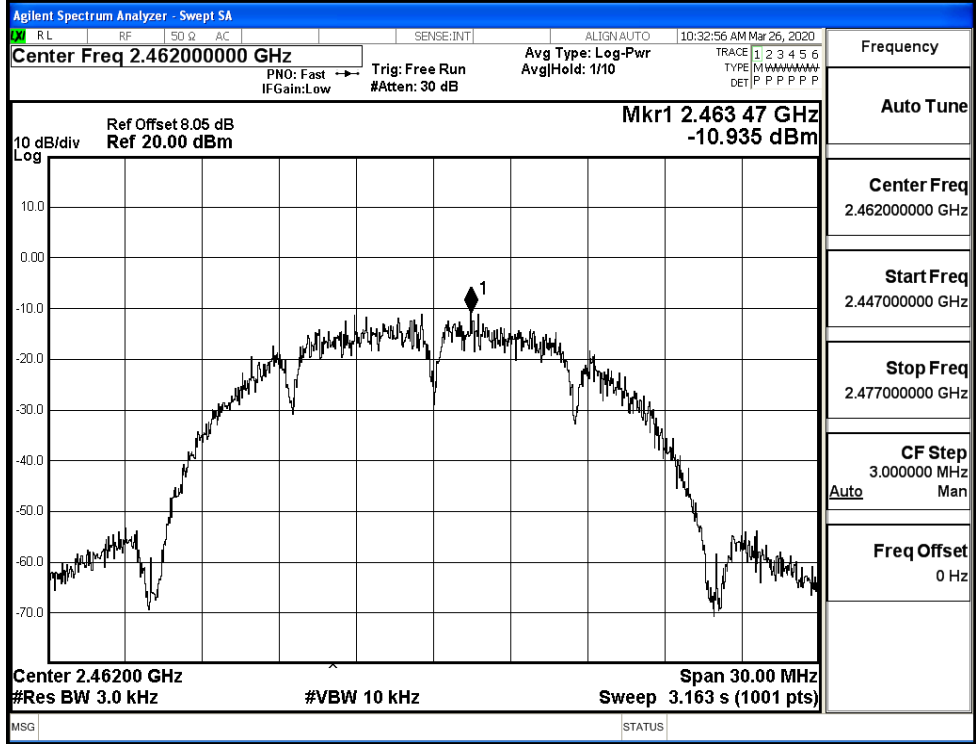


11G/LCH

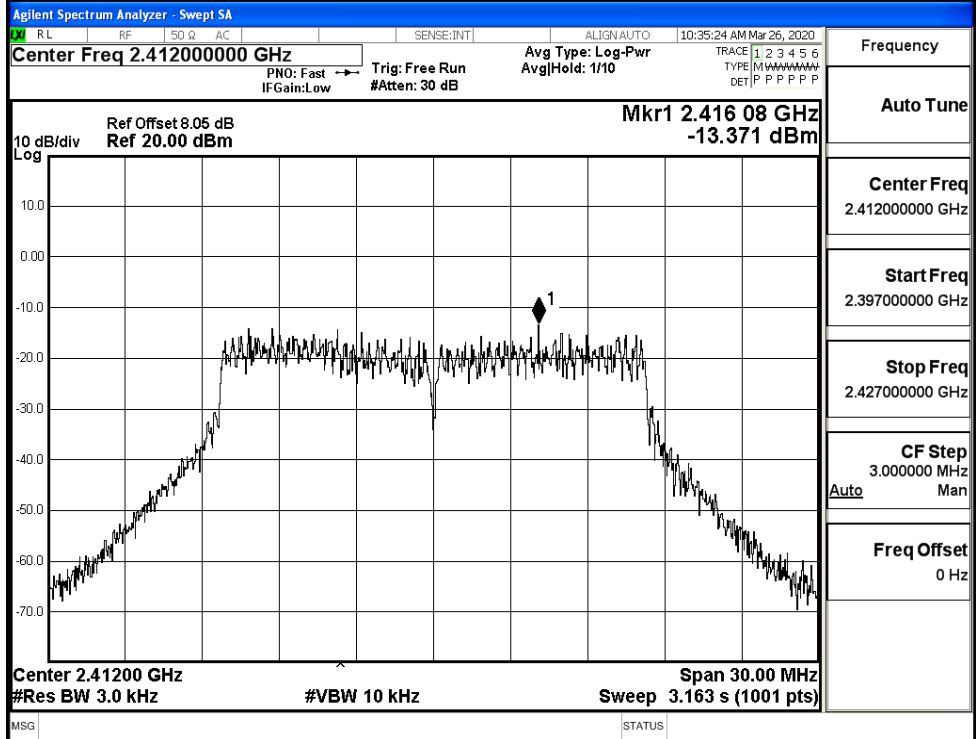


11G/MCH

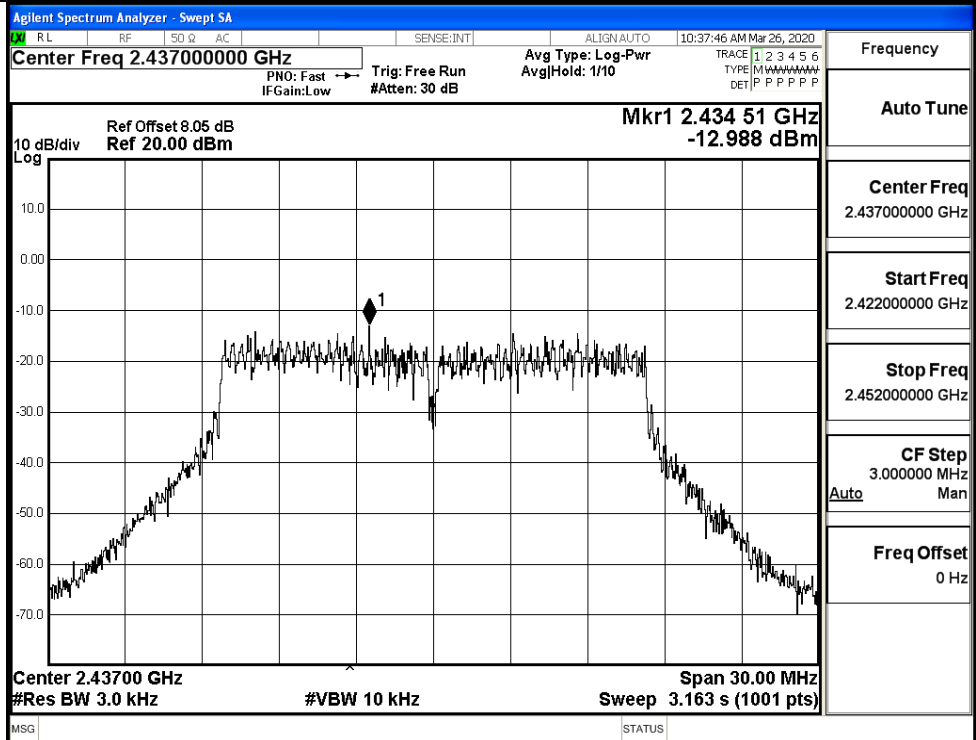


11G/HCH

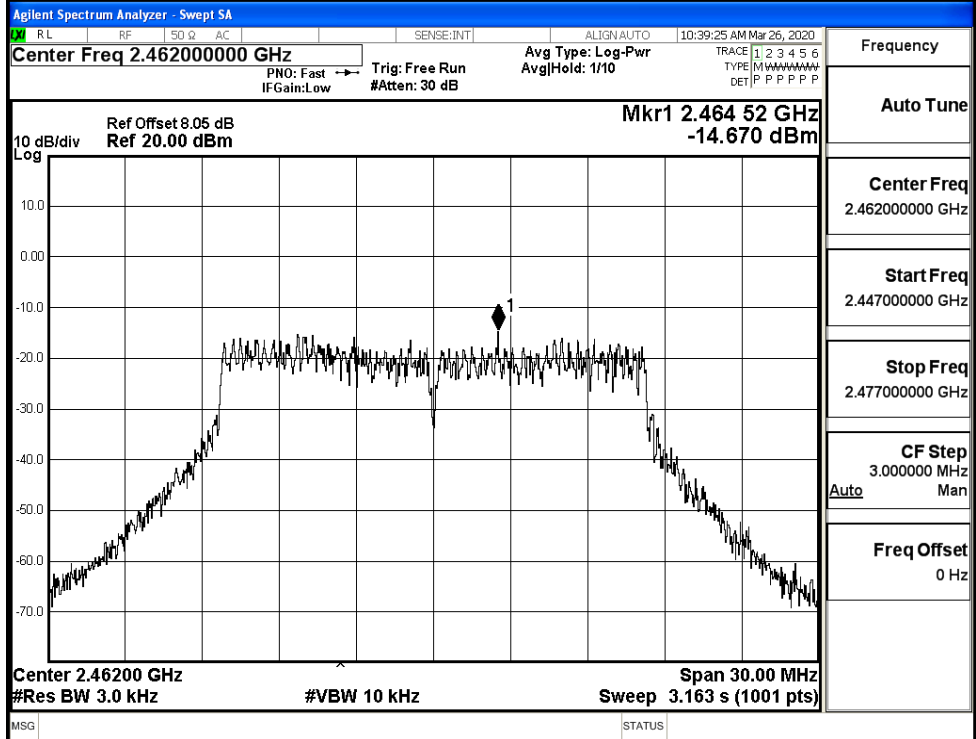


11N20SISO/LCH

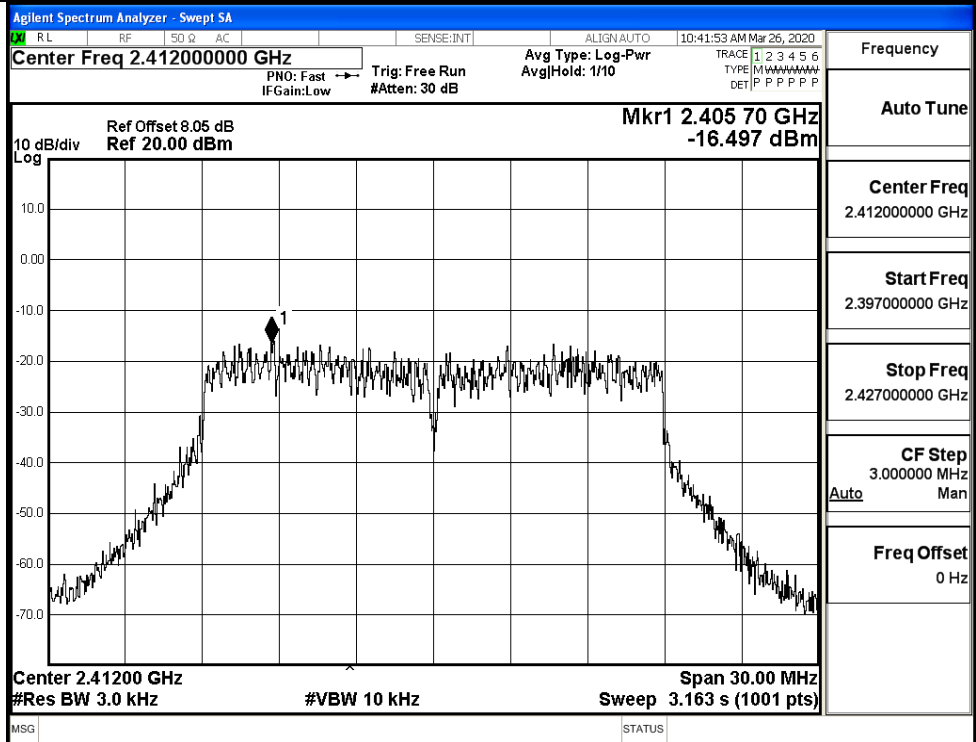


11N20SISO/MCH

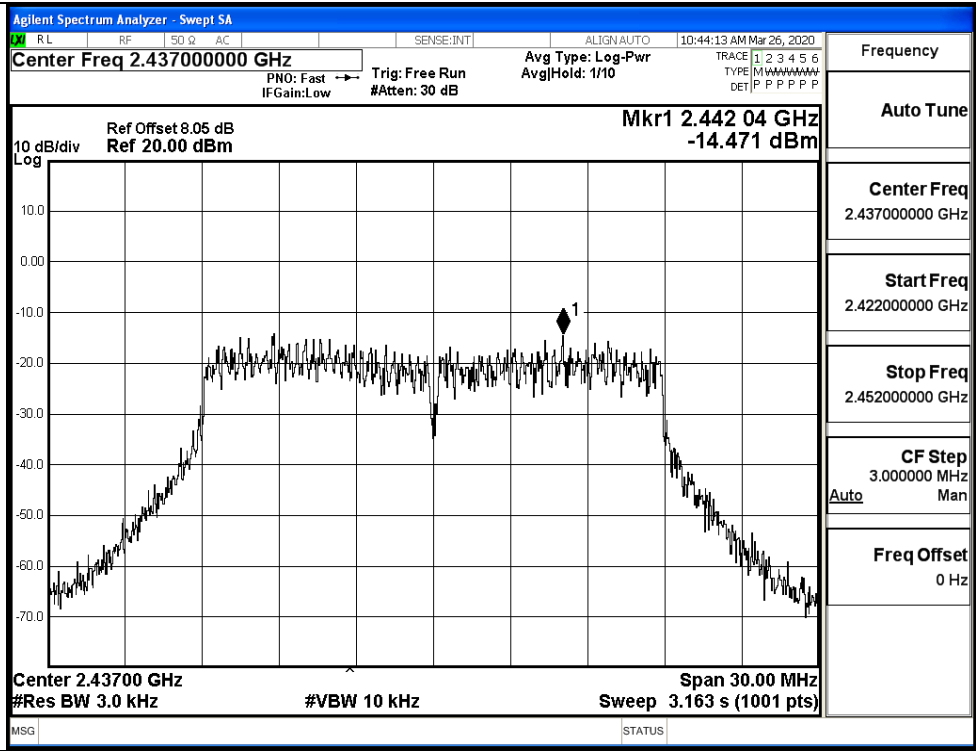

11N20SISO/HCH

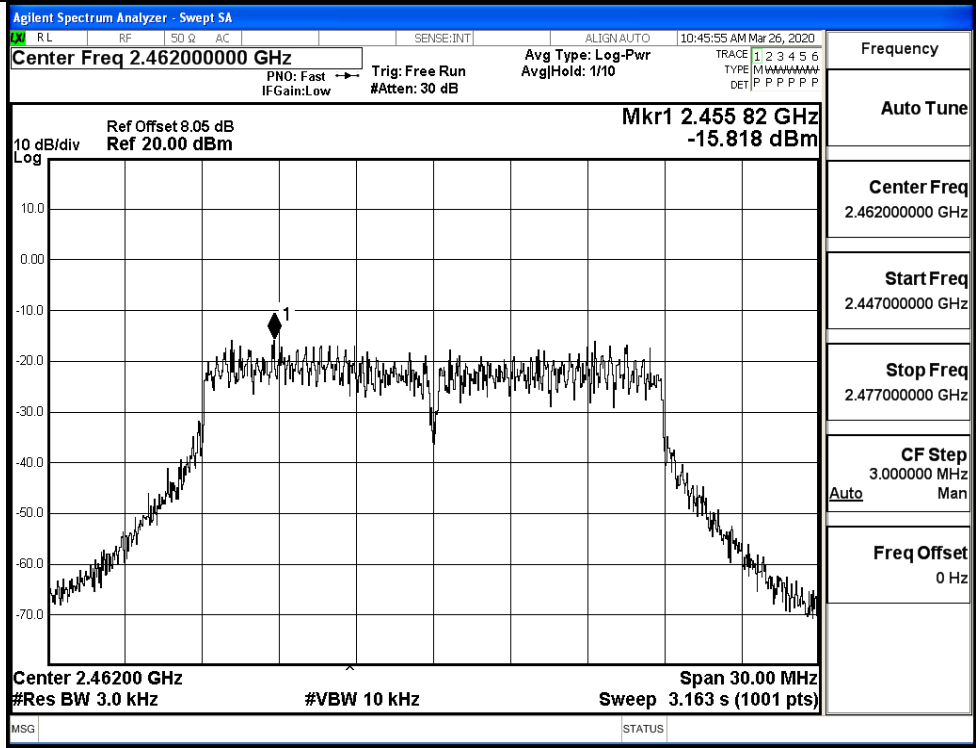


11N40SISO/LCH

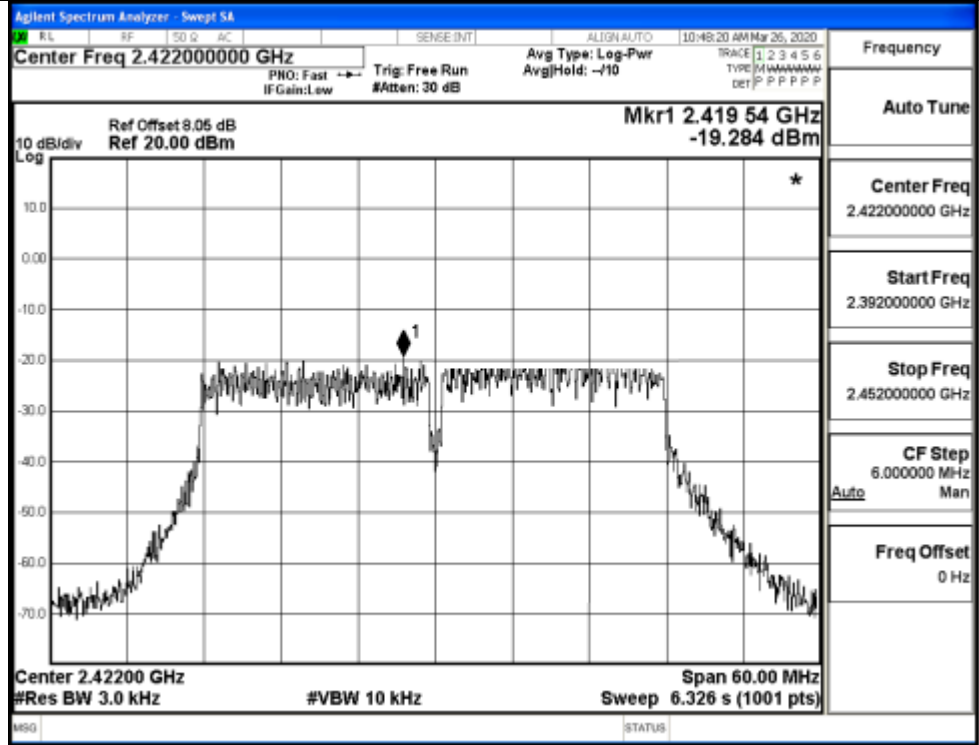


Frequency	2.422000000 GHz
Auto Tune	
Center Freq	2.422000000 GHz
Start Freq	2.392000000 GHz
Stop Freq	2.452000000 GHz
CF Step	6.000000 MHz
Auto	Man
Freq Offset	0 Hz

11N40SISO/MCH

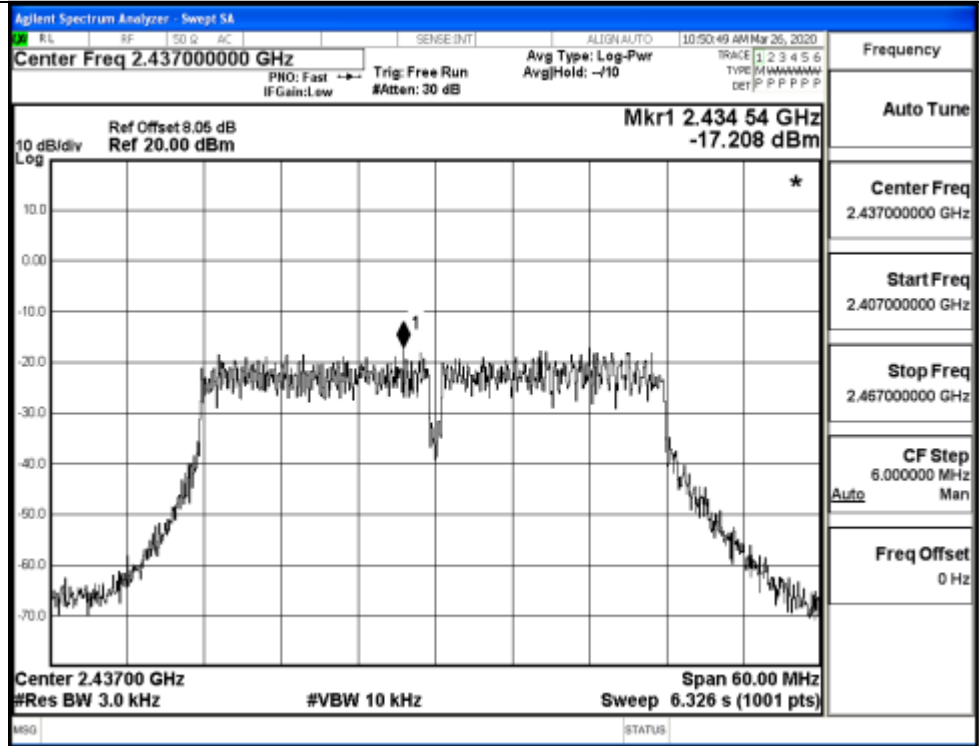


Frequency	2.437000000 GHz
Auto Tune	
Center Freq	2.437000000 GHz
Start Freq	2.407000000 GHz
Stop Freq	2.467000000 GHz
CF Step	6.000000 MHz
Auto	Man
Freq Offset	0 Hz

11N40SISO/HCH

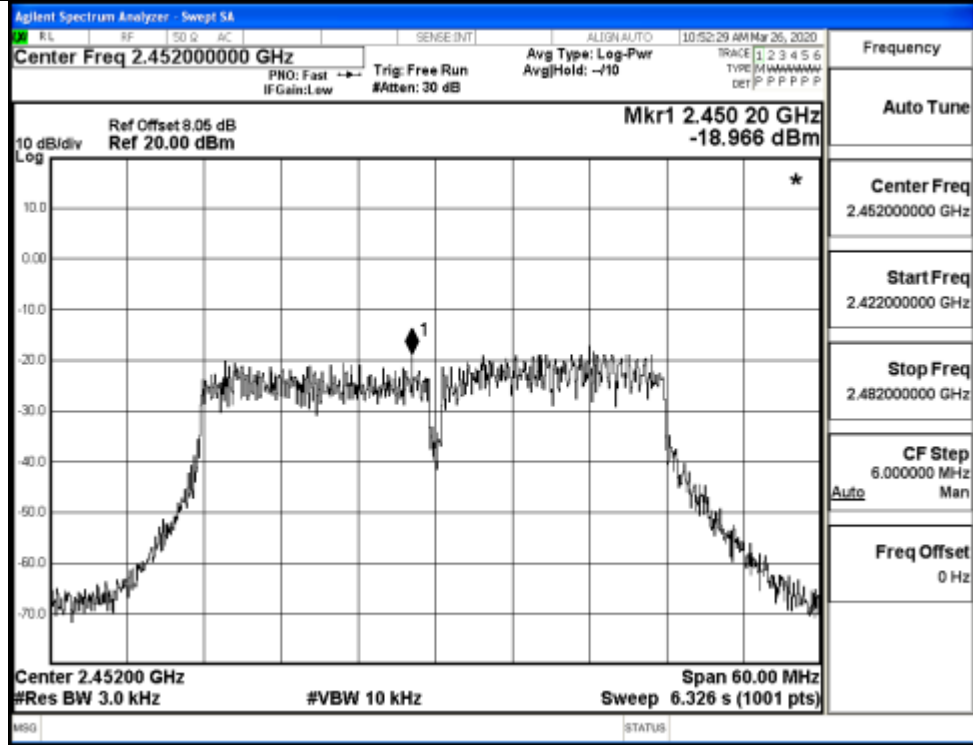


A.4 6dB Bandwidth


Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	LCH	10.10	≥0.5	PASS
	MCH	10.11	≥0.5	PASS
	HCH	10.12	≥0.5	PASS
11G	LCH	16.38	≥0.5	PASS
	MCH	16.38	≥0.5	PASS
	HCH	16.37	≥0.5	PASS
11N20SISO	LCH	17.31	≥0.5	PASS
	MCH	17.34	≥0.5	PASS
	HCH	17.29	≥0.5	PASS
11N40SISO	LCH	36.07	≥0.5	PASS
	MCH	35.87	≥0.5	PASS
	HCH	35.67	≥0.5	PASS

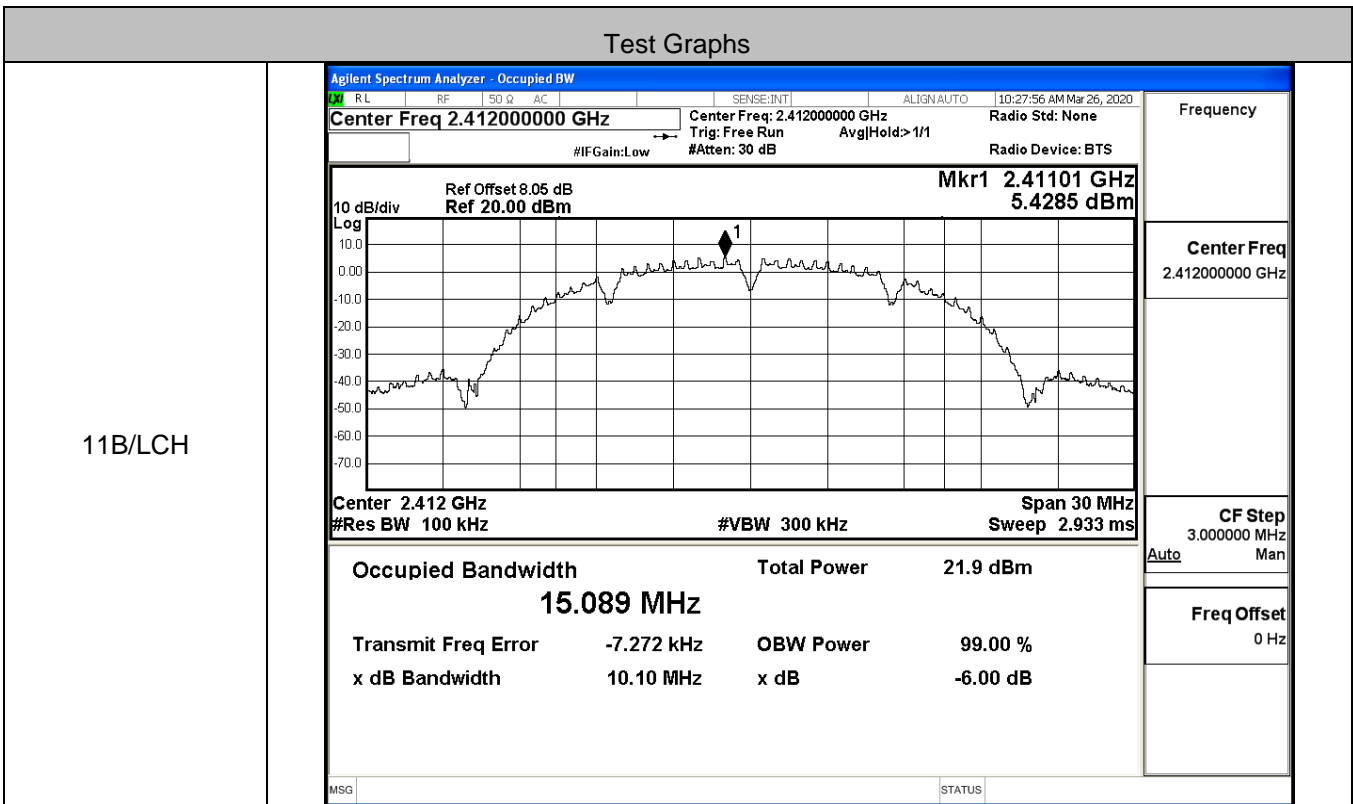


11B/MCH

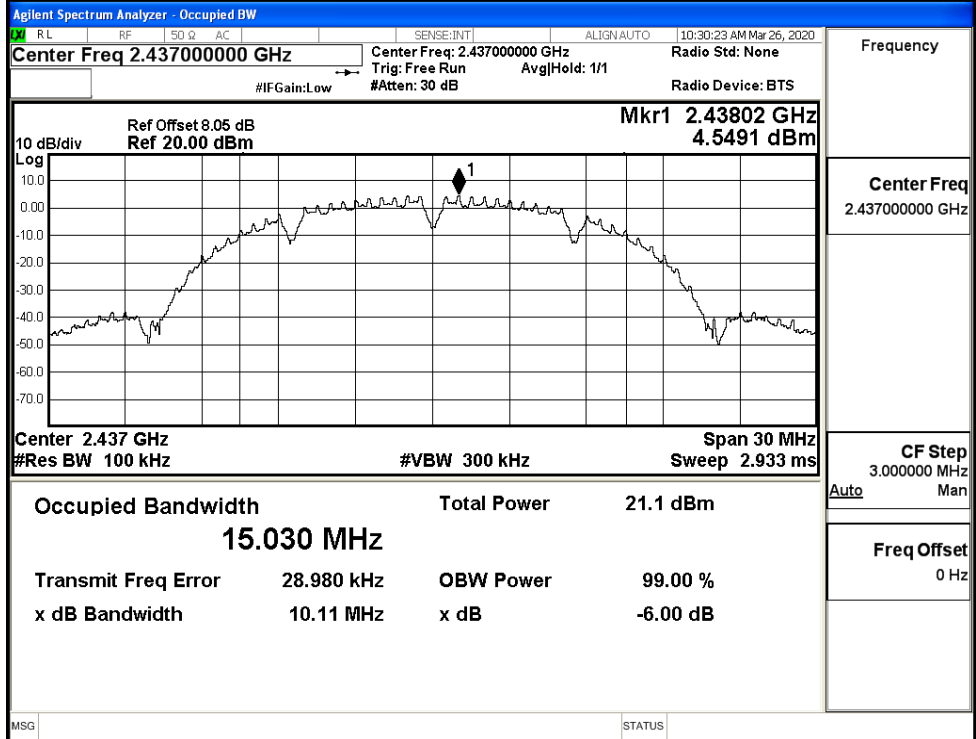

11B/HCH

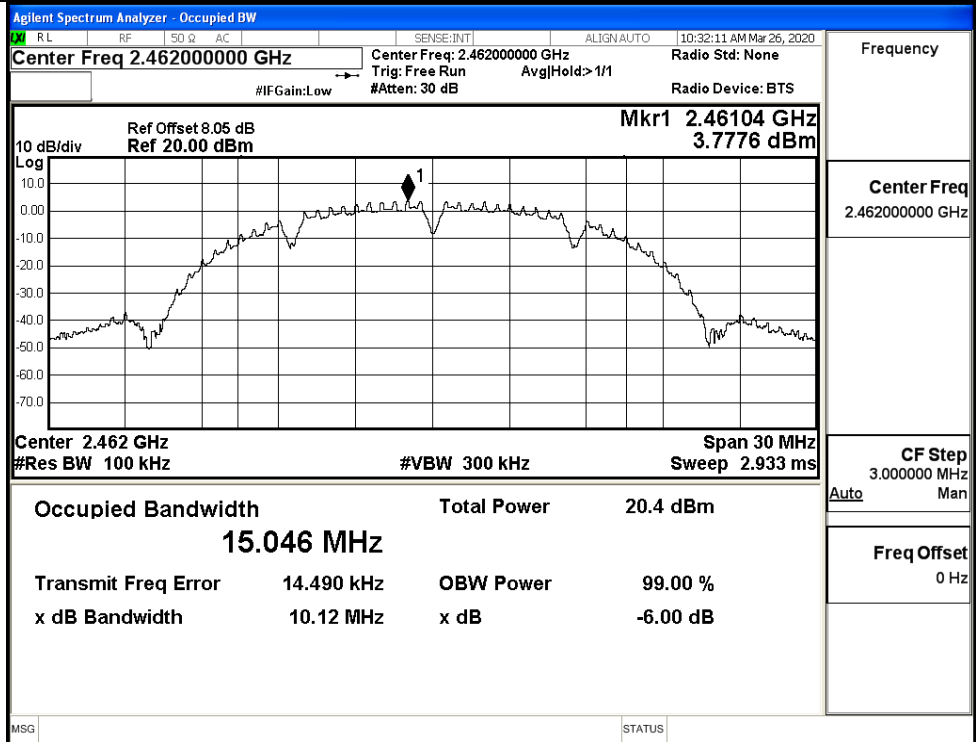


11G/LCH

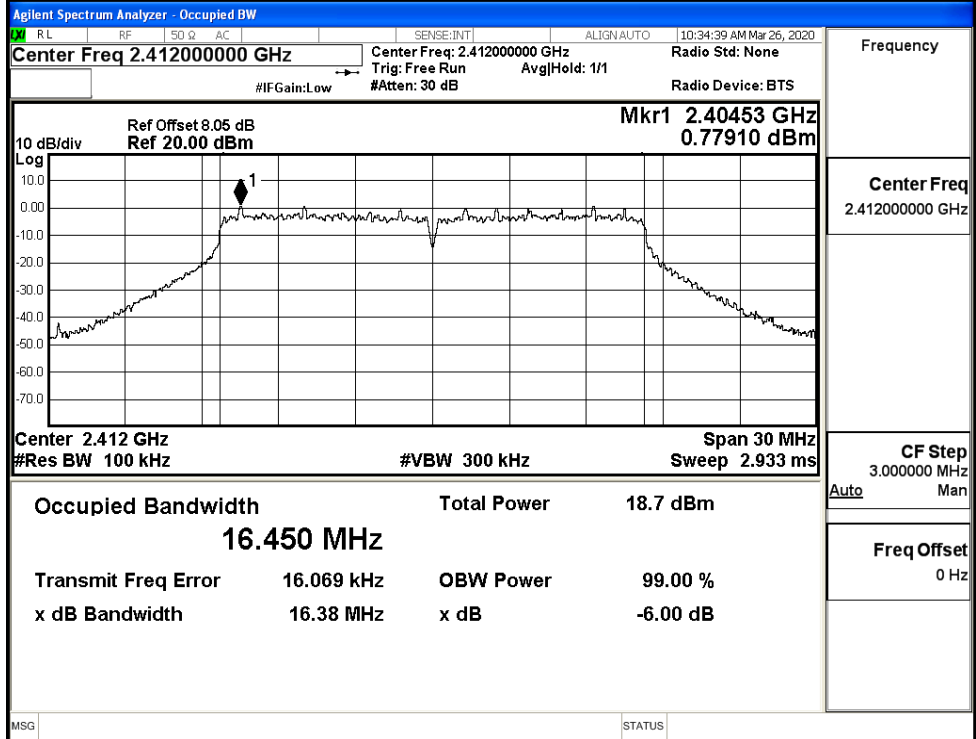


Frequency	2.41200000 GHz
Center Freq	2.41200000 GHz
CF Step	3.000000 MHz
Auto	Man
Freq Offset	0 Hz

11G/MCH

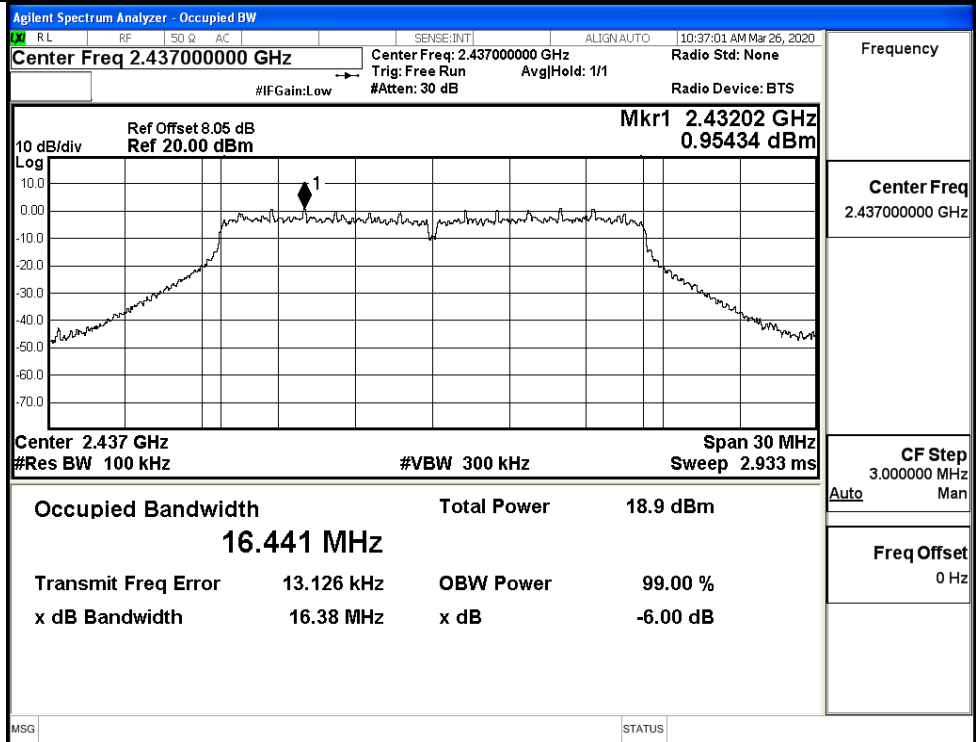


Frequency	2.43700000 GHz
Center Freq	2.43700000 GHz
CF Step	3.000000 MHz
Auto	Man
Freq Offset	0 Hz


11G/HCH

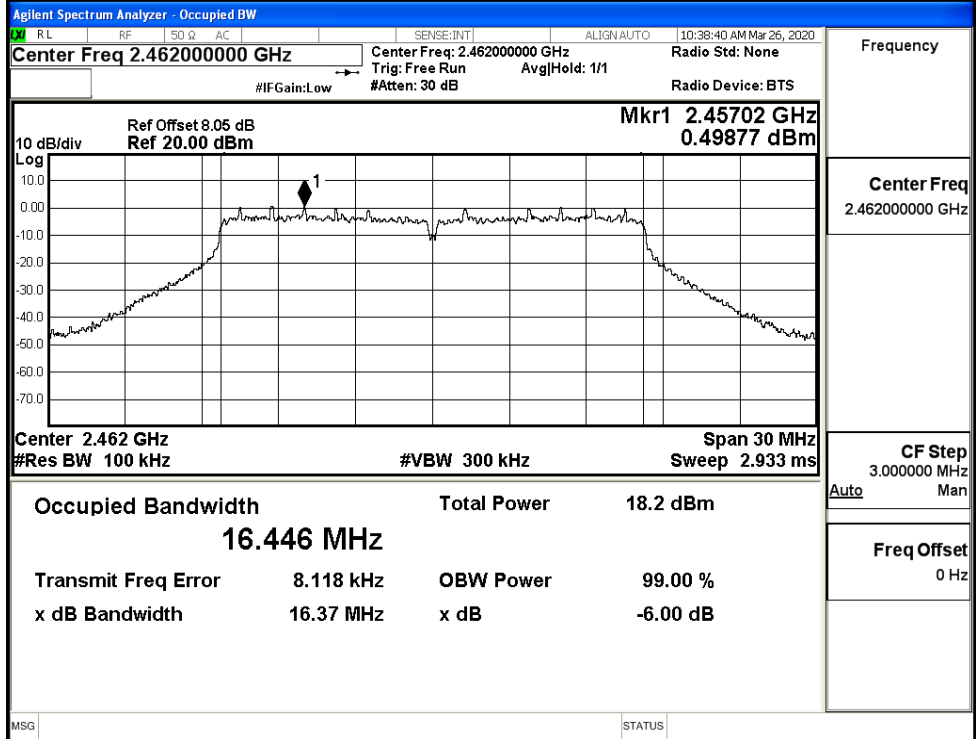


11N20SISO/LCH


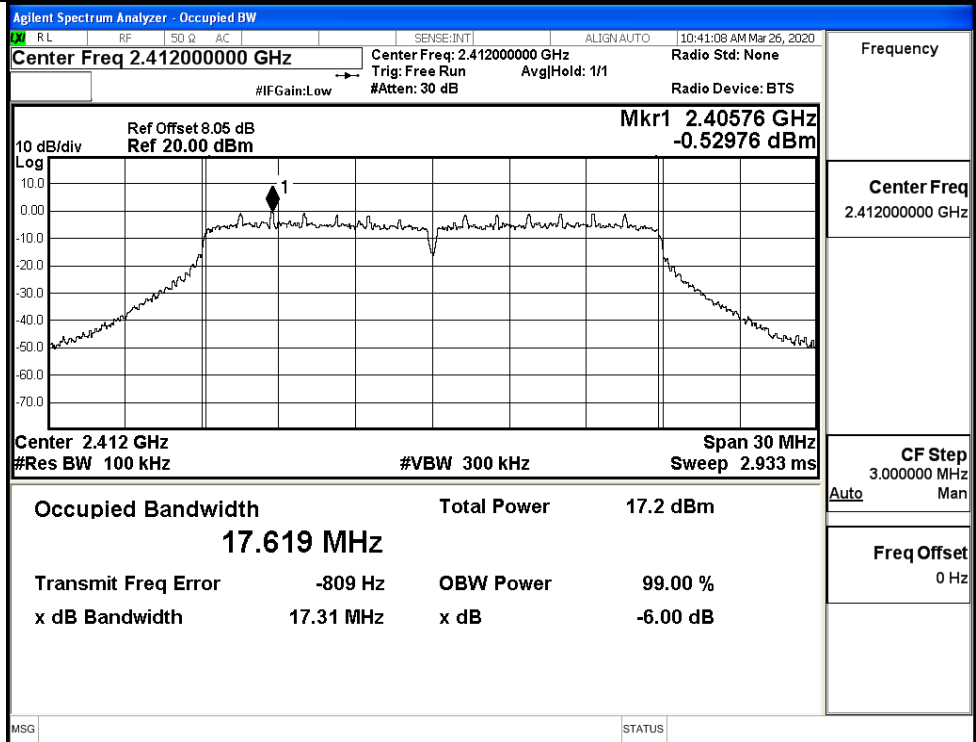


11N20SISO/MCH

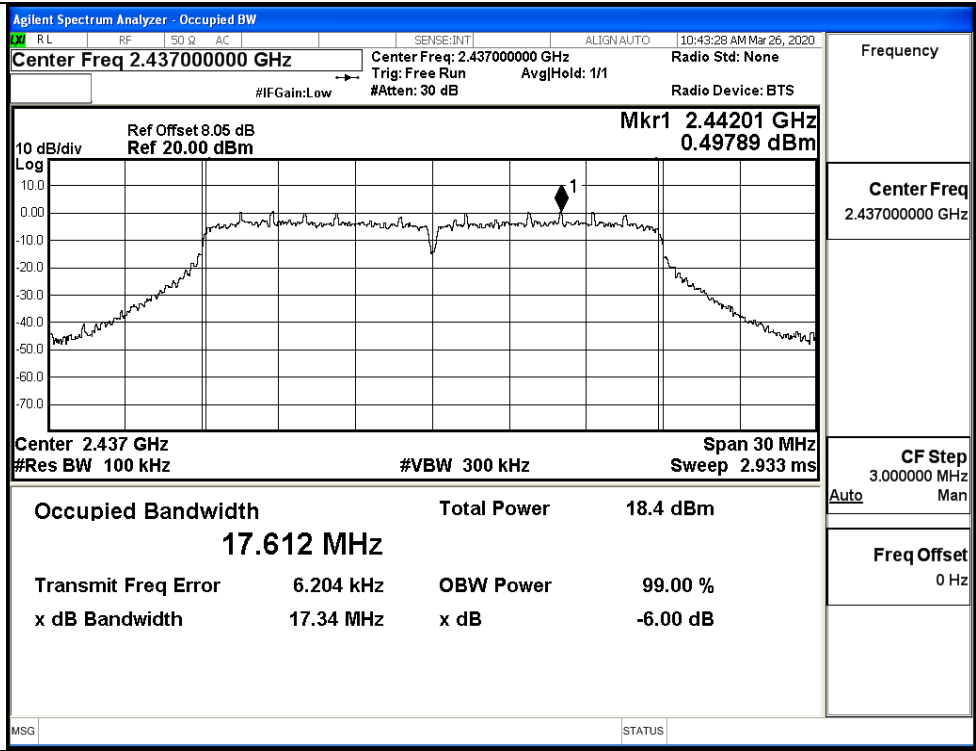


11N20SISO/HCH

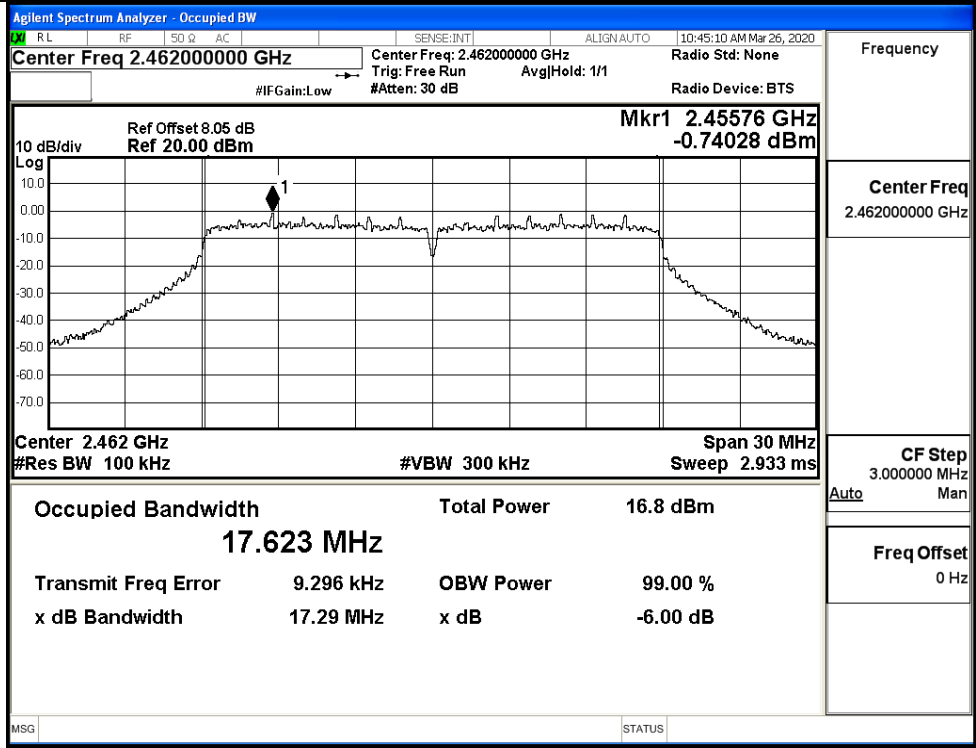
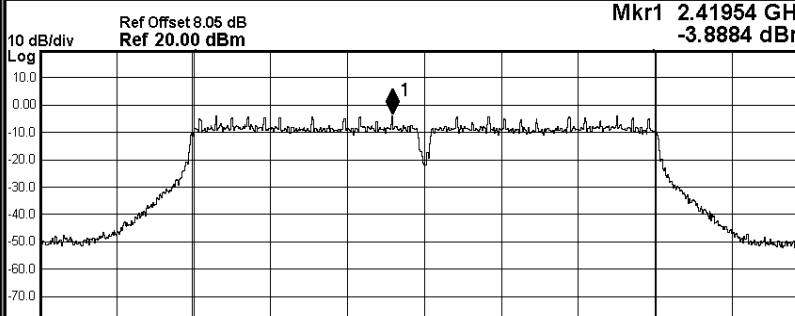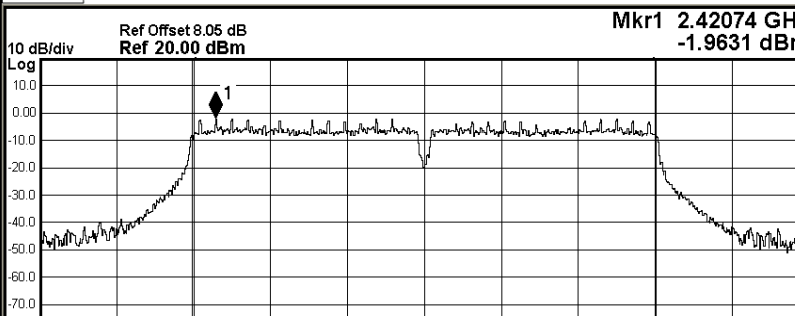
<p>11N40SISO/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>RL RF 50 Ω AC SENSE:INT ALIGN AUTO 10:47:35 AM Mar 26, 2020</p> <p>Center Freq 2.42200000 GHz Center Freq: 2.42200000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p>  <p>Center 2.422 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.095 MHz Total Power 17.1 dBm</p> <p>Transmit Freq Error 3.372 kHz OBW Power 99.00 % x dB Bandwidth 36.07 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>	<p>Frequency</p> <p>Center Freq 2.42200000 GHz</p> <p>CF Step 6.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	<p>11N40SISO/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>RL RF 50 Ω AC SENSE:INT ALIGN AUTO 10:50:05 AM Mar 26, 2020</p> <p>Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p>  <p>Center 2.437 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.079 MHz Total Power 19.0 dBm</p> <p>Transmit Freq Error -8.896 kHz OBW Power 99.00 % x dB Bandwidth 35.87 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>

11N40SISO/HCH

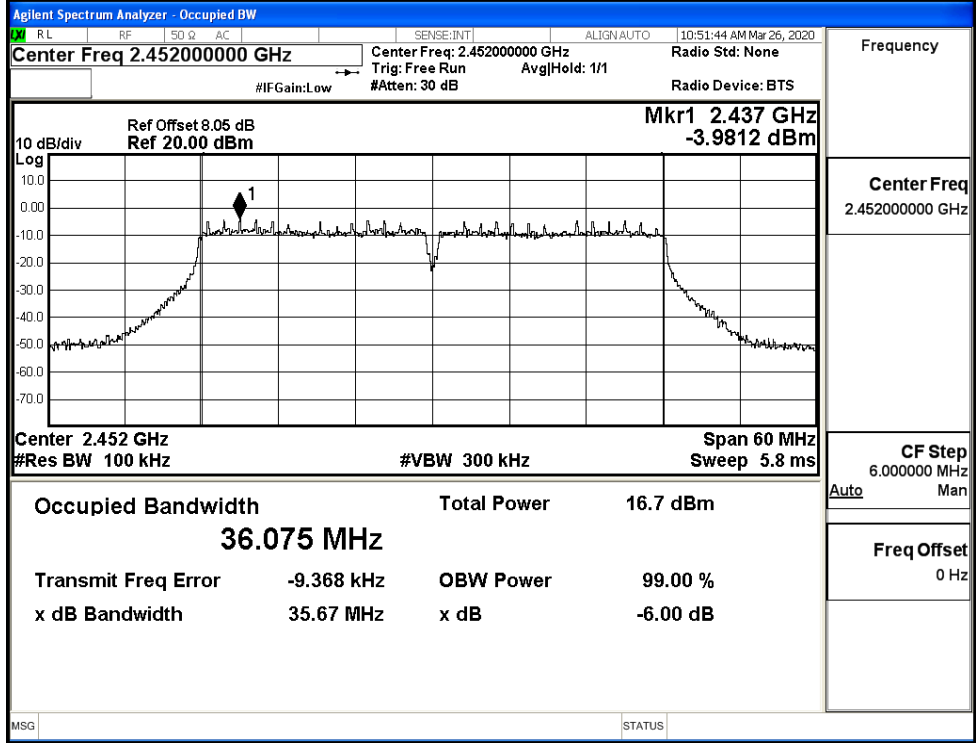


A.5 Occupied Bandwidth

Mode	Channel	Occupied Bandwidth [MHz]	Limit [MHz]	Verdict
11B	LCH	15.097	≥0.5	PASS
	MCH	15.080	≥0.5	PASS
	HCH	15.082	≥0.5	PASS
11G	LCH	16.786	≥0.5	PASS
	MCH	16.825	≥0.5	PASS
	HCH	16.814	≥0.5	PASS
11N20SISO	LCH	17.834	≥0.5	PASS
	MCH	17.804	≥0.5	PASS
	HCH	17.819	≥0.5	PASS
11N40SISO	LCH	36.329	≥0.5	PASS
	MCH	36.358	≥0.5	PASS
	HCH	36.254	≥0.5	PASS

Test Graphs


11B/LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run #IFGain: Low</p>		<p>Frequency</p> <p>Center Freq 2.41200000 GHz</p>
	<p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz</p> <p>Span 40 MHz Sweep 1.067 ms</p> <p>#VBW 1 MHz</p>		<p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>Occupied Bandwidth 15.097 MHz</p> <p>Total Power 18.0 dBm</p> <p>Transmit Freq Error 12.972 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.24 MHz</p> <p>x dB -6.00 dB</p>			

11B/MCH

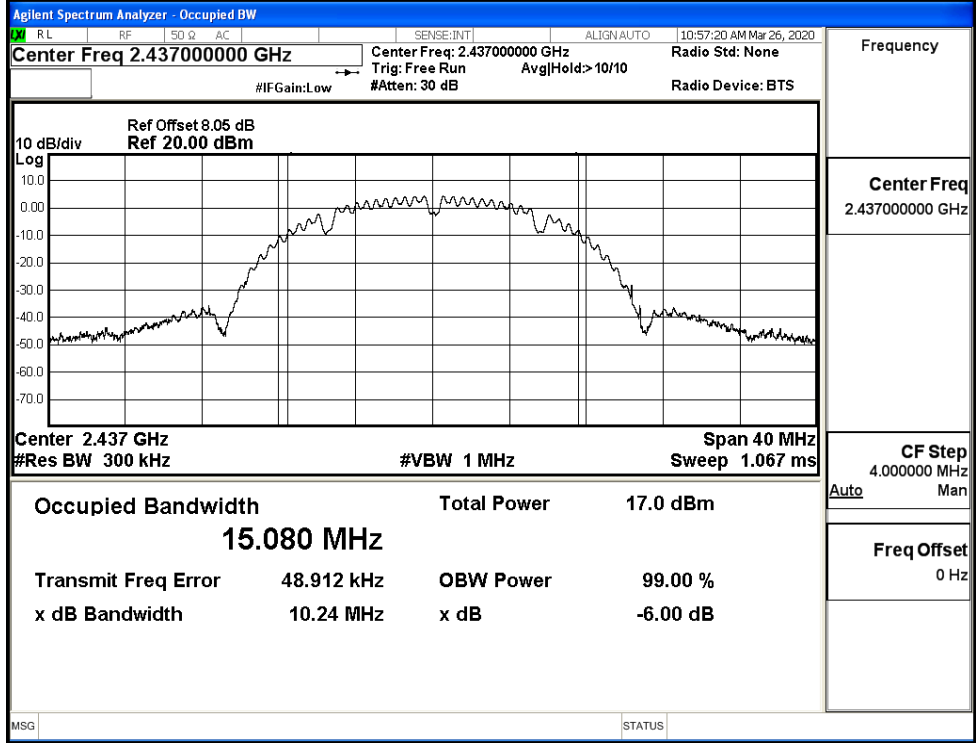


Frequency	2.43700000 GHz
Center Freq	2.43700000 GHz
CF Step	4.000000 MHz
Auto	Man
Freq Offset	0 Hz

11B/HCH

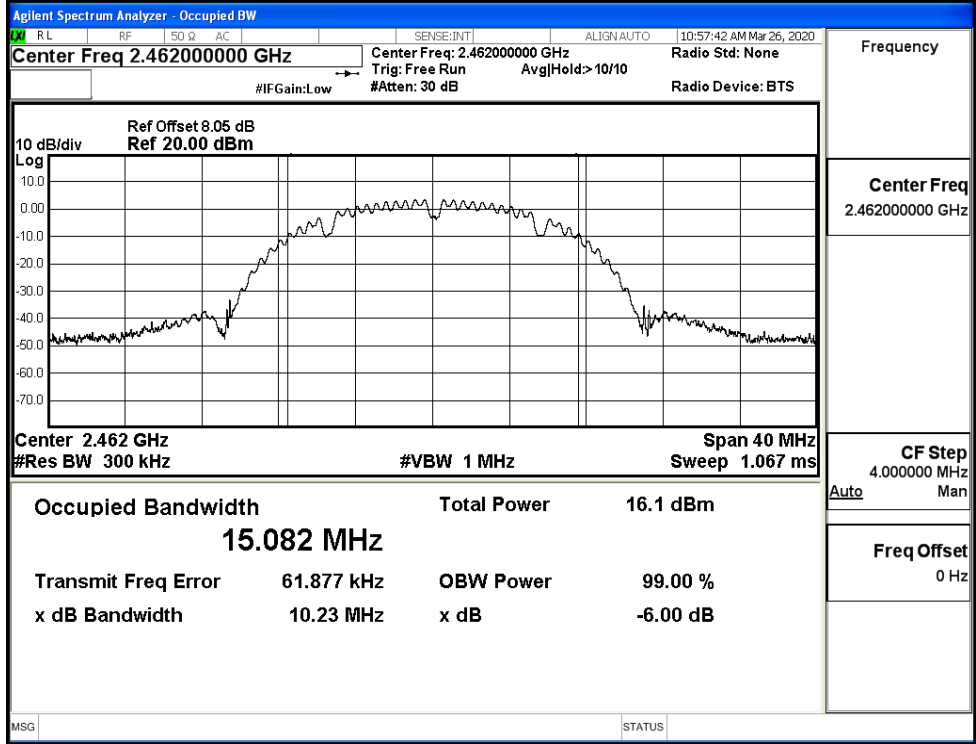


Frequency	2.46200000 GHz
Center Freq	2.46200000 GHz
CF Step	4.000000 MHz
Auto	Man
Freq Offset	0 Hz


11G/LCH

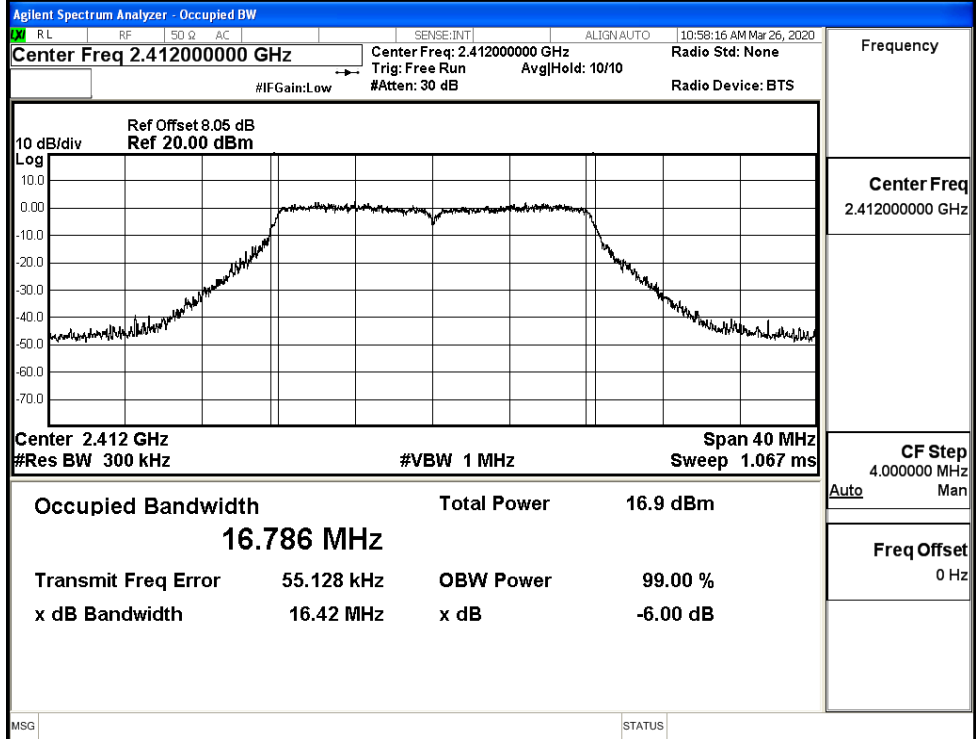

11G/MCH

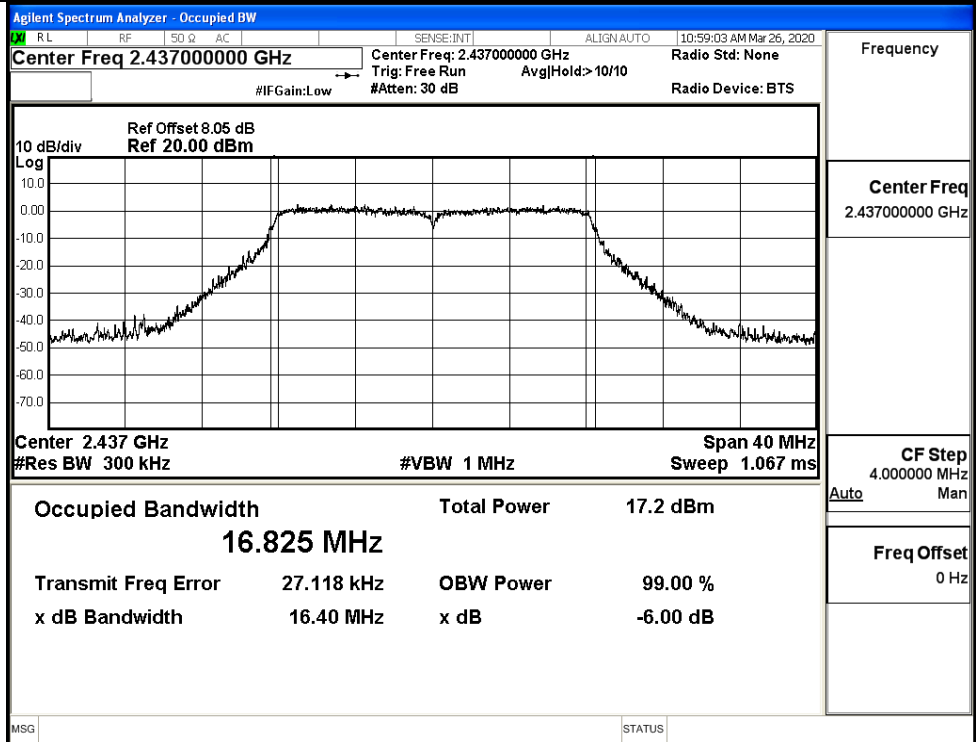


11G/HCH

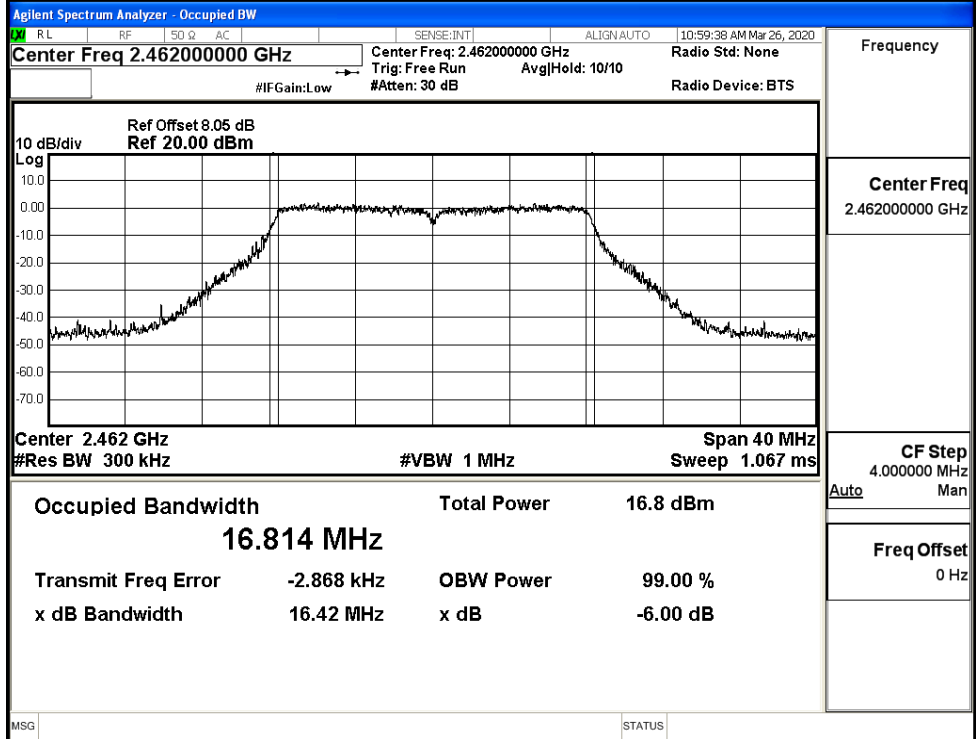


Frequency	Center Freq 2.46200000 GHz
CF Step	4.000000 MHz Auto Man
Freq Offset	0 Hz

11N20SISO/LCH

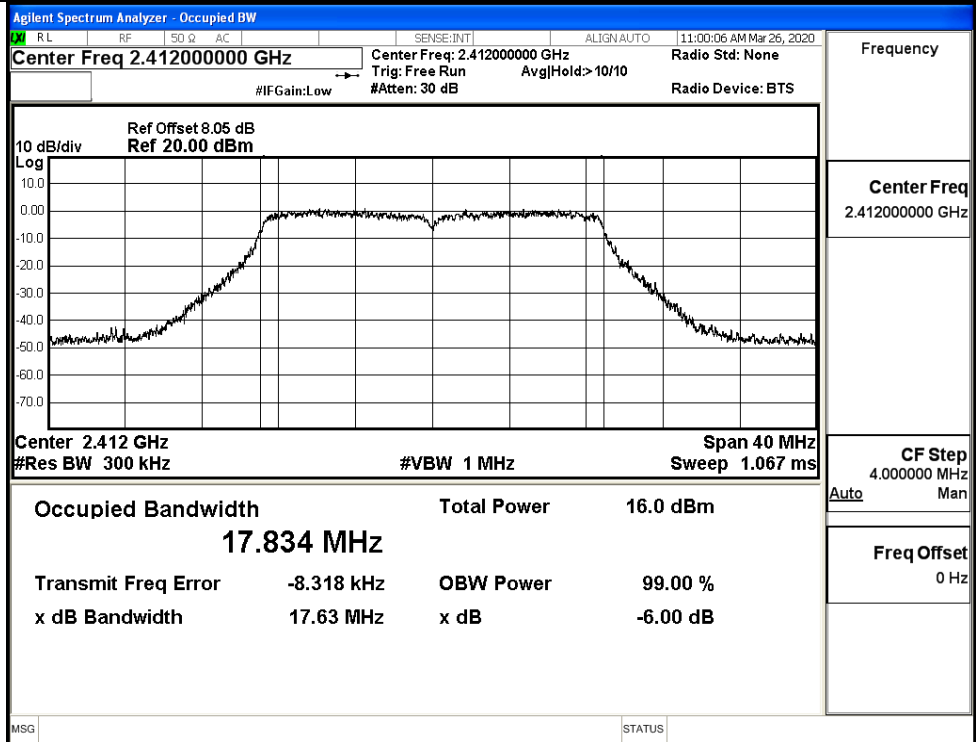


Frequency	Center Freq 2.41200000 GHz
CF Step	4.000000 MHz Auto Man
Freq Offset	0 Hz


11N20SISO/MCH

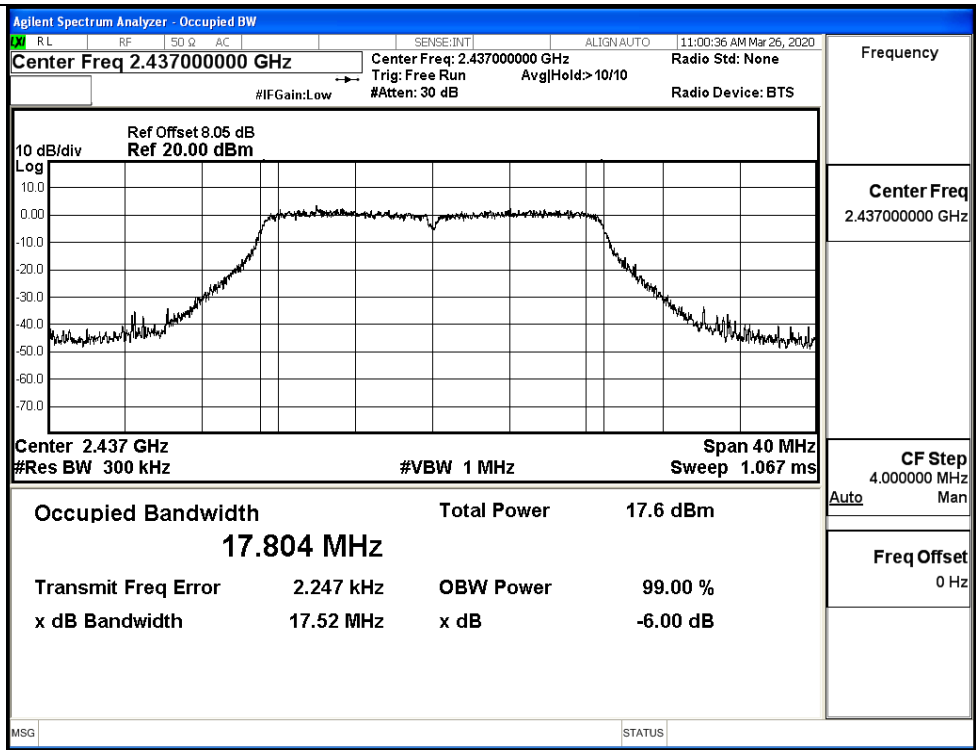


11N20SISO/HCH

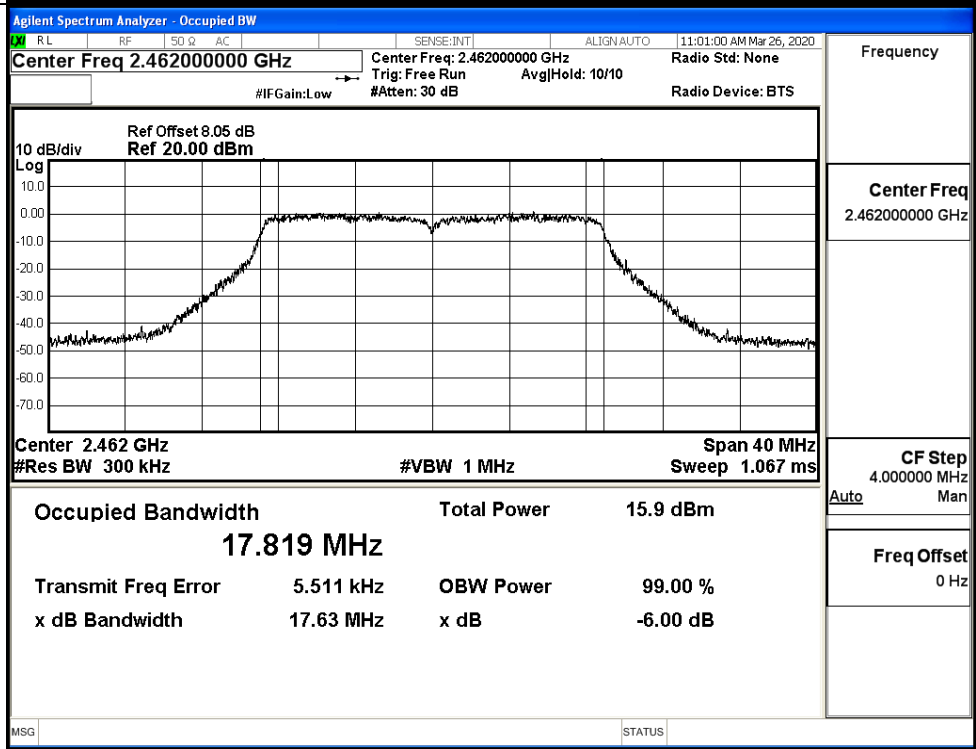


11N40SISO/LCH

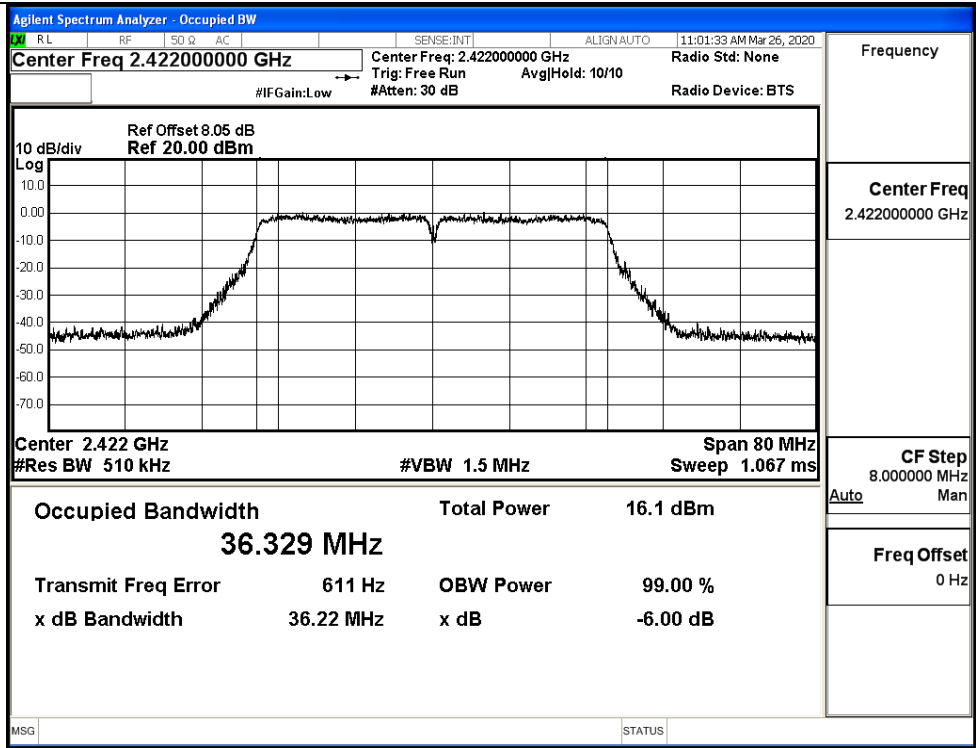

11N40SISO/MCH

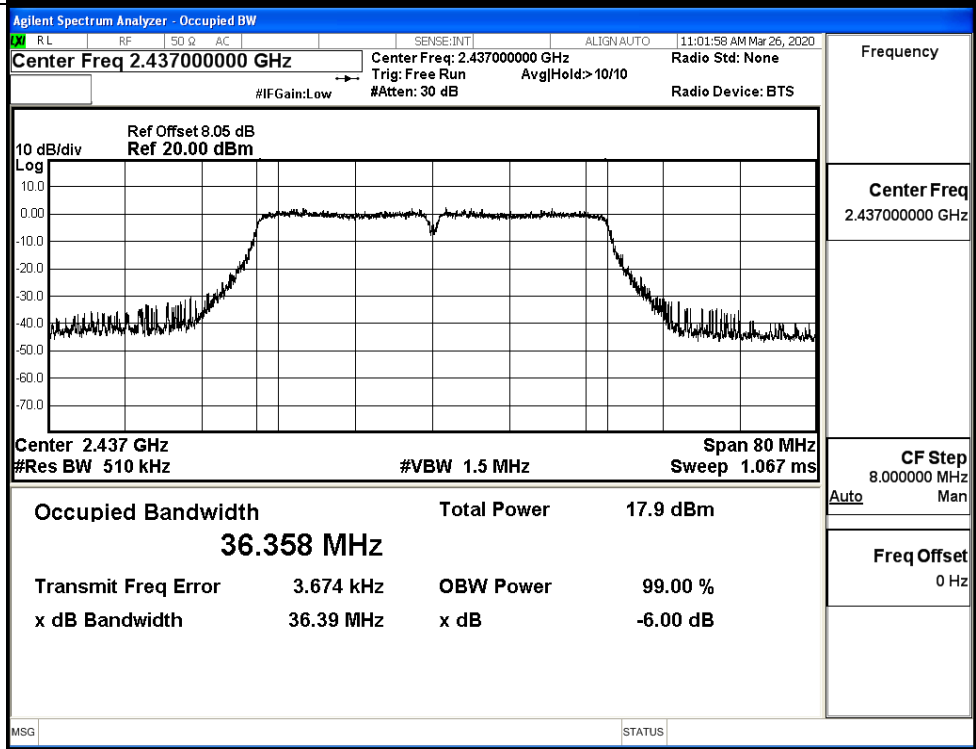

11N40SISO/HCH

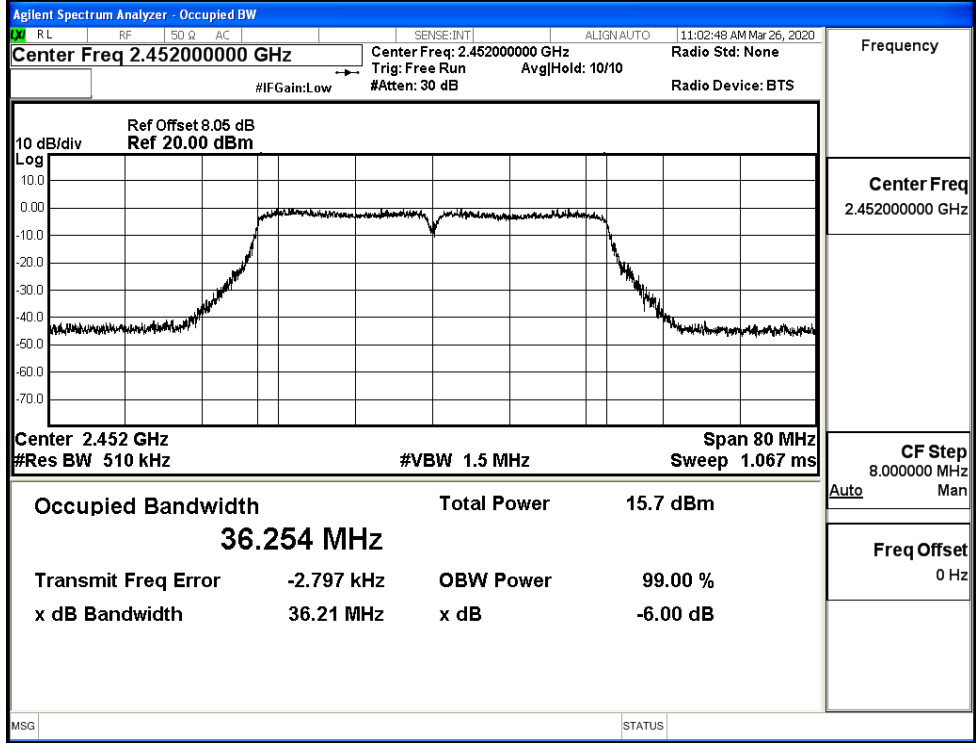


A.6 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
11B	LCH	4.398	-37.983	-15.602	PASS
	MCH	4.134	-38.587	-15.866	PASS
	HCH	3.739	-37.961	-16.261	PASS
11G	LCH	1.34	-38.051	-18.660	PASS
	MCH	0.966	-37.011	-19.034	PASS
	HCH	0.354	-36.724	-19.646	PASS
11N20 SISO	LCH	-0.822	-36.890	-20.822	PASS
	MCH	0.491	-38.063	-19.509	PASS
	HCH	-0.899	-38.057	-20.899	PASS
11N40 SISO	LCH	-3.775	-37.545	-23.775	PASS
	MCH	-2.255	-37.403	-22.255	PASS
	HCH	-4.038	-37.582	-24.038	PASS

11B_LCH_Graphs

Pref/11B/LCH

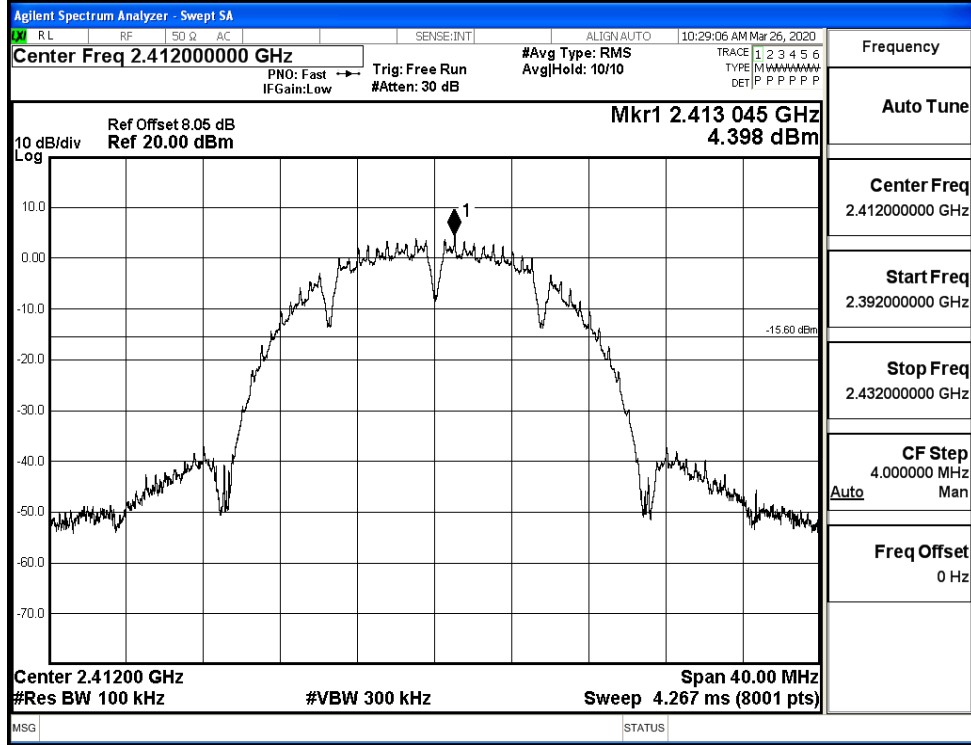


Puw/11B/LCH

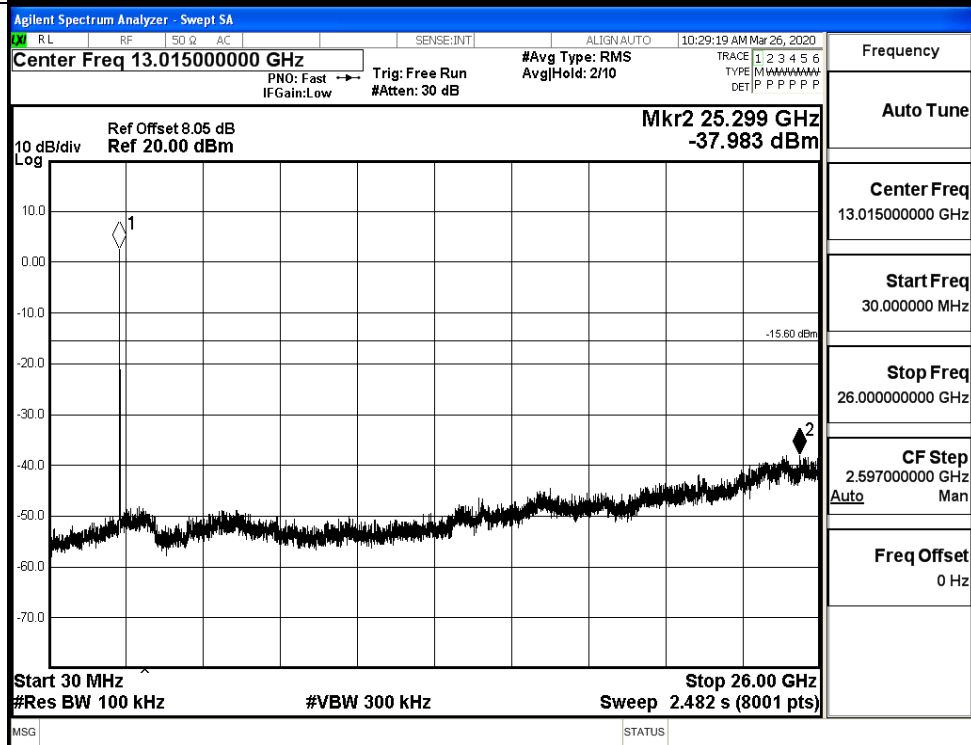


11B_MCH_Graphs

Pref/11B/MCH

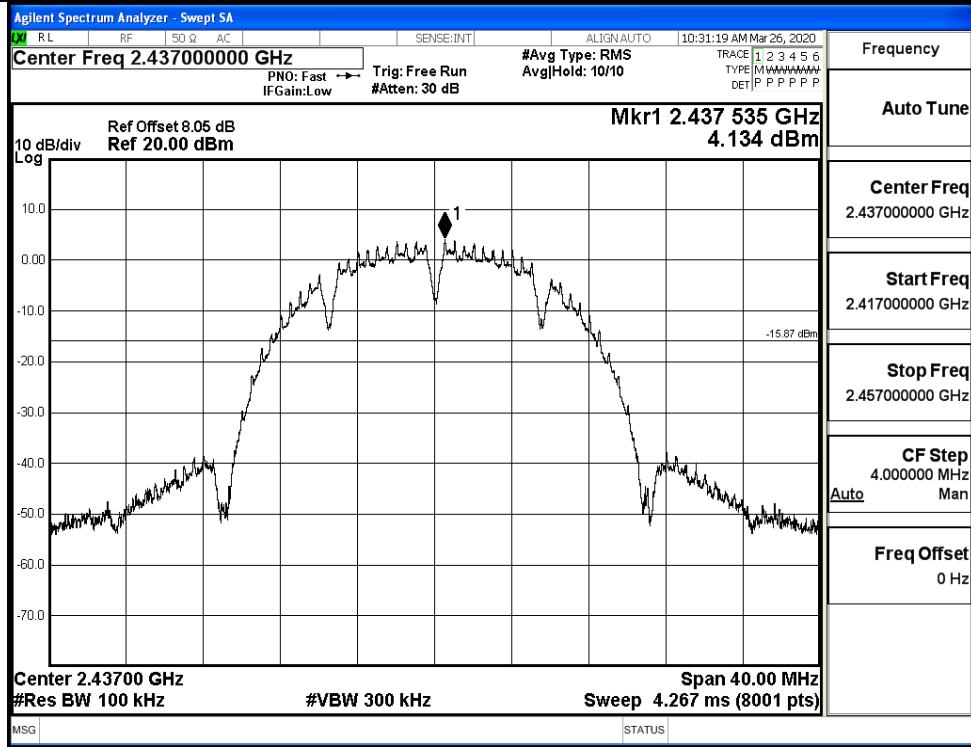


Puw/11B/MCH

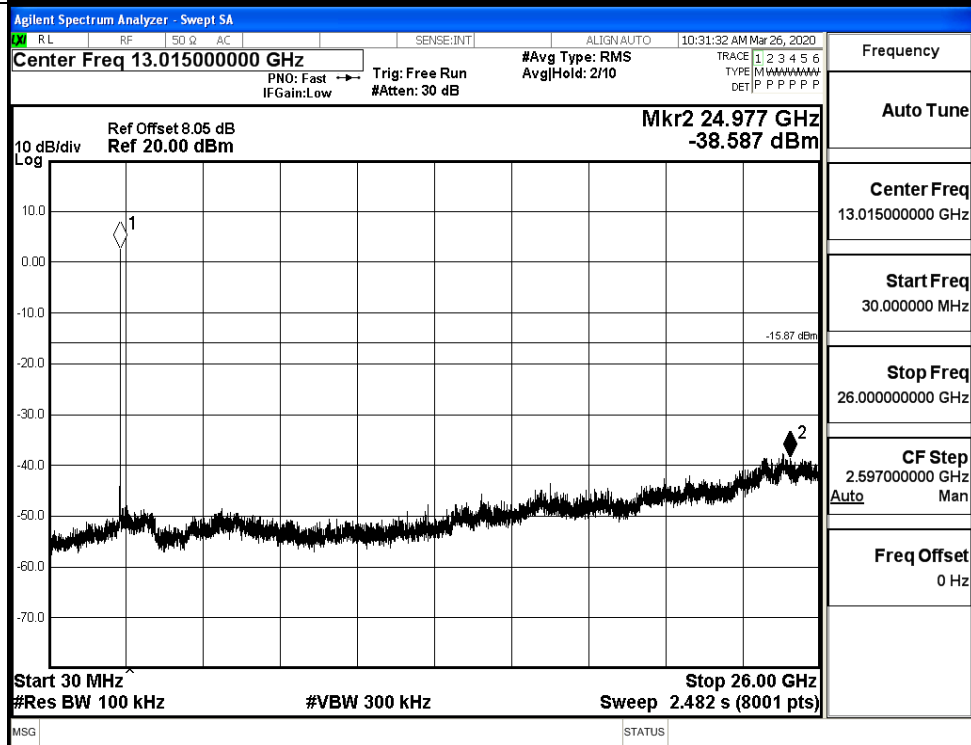


11B_HCH_Graphs

Pref/11B/HCH

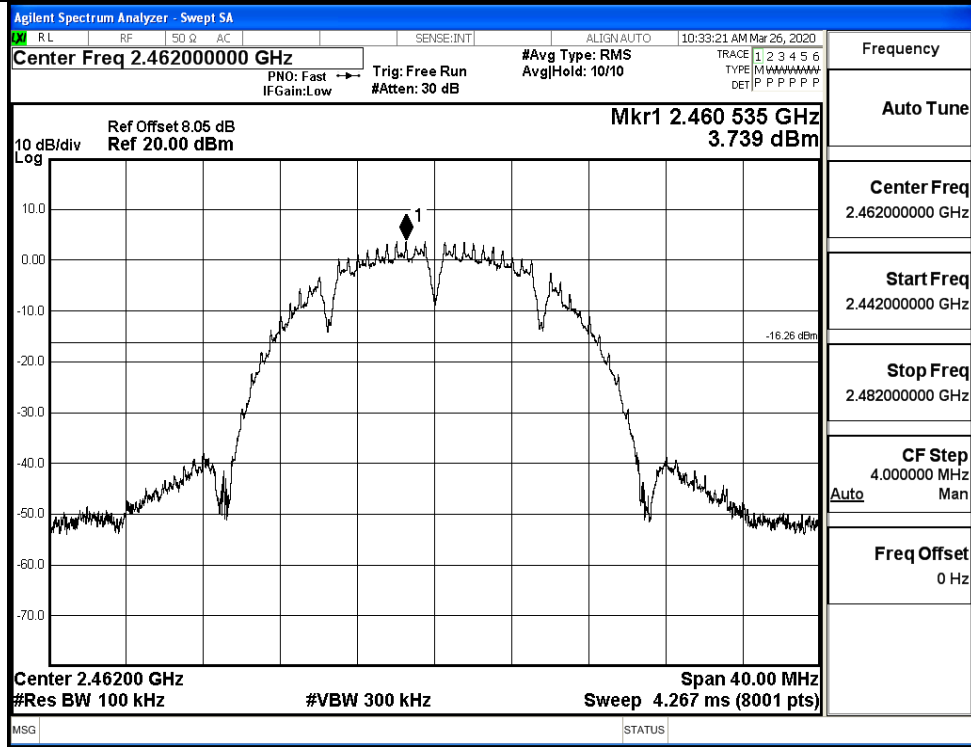


Puw/11B/HCH

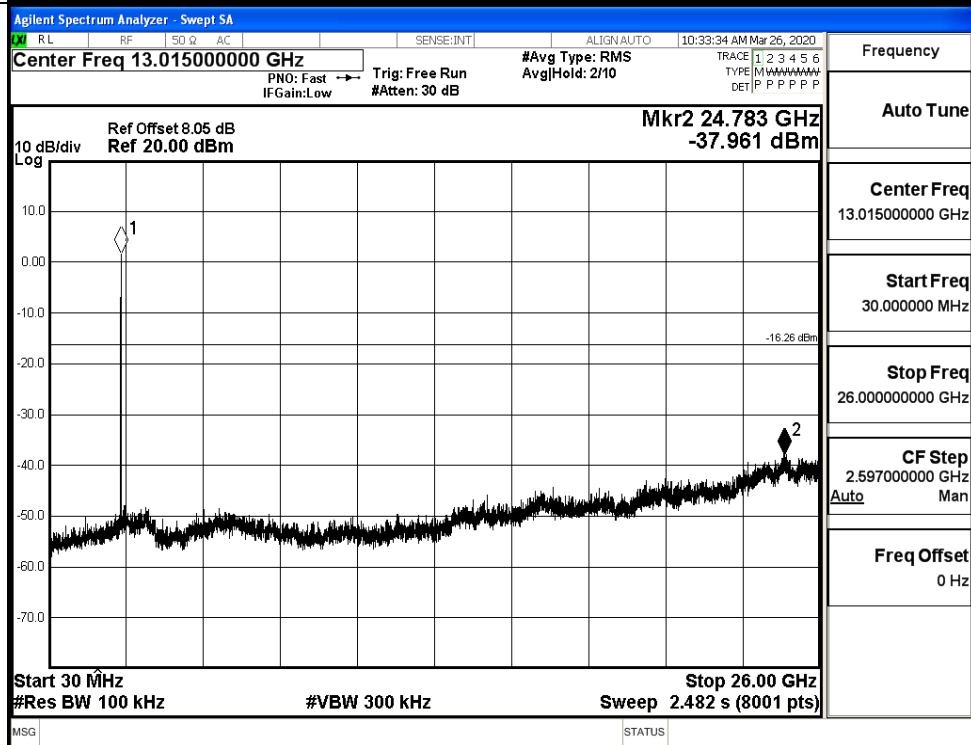


11G_LCH_Graphs

Pref/11G/LCH

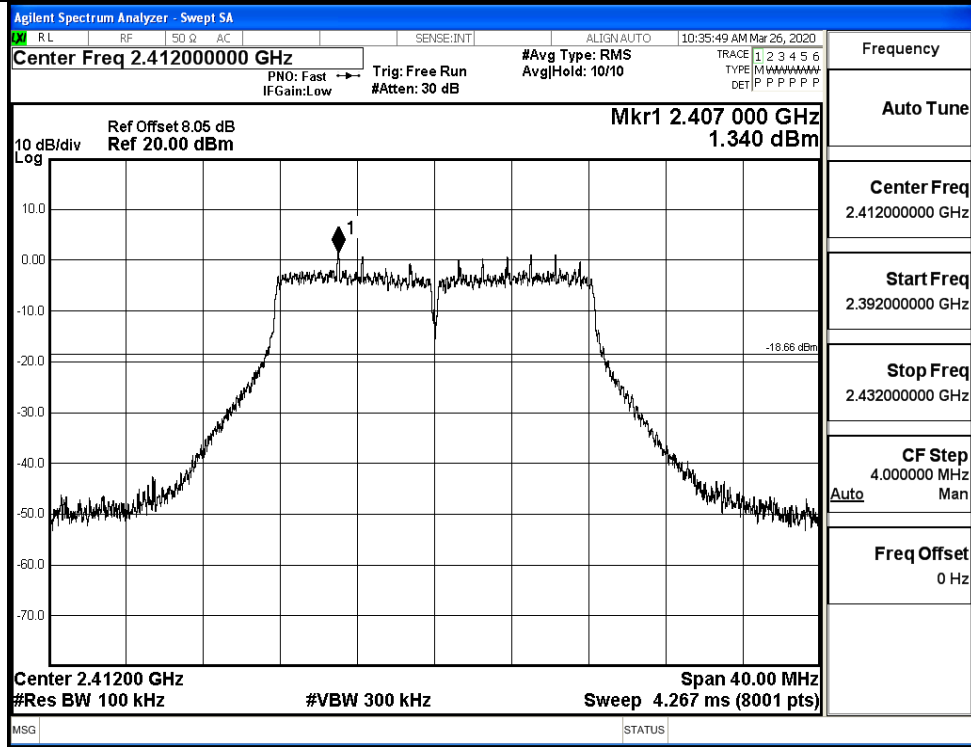


Puw/11G/LCH

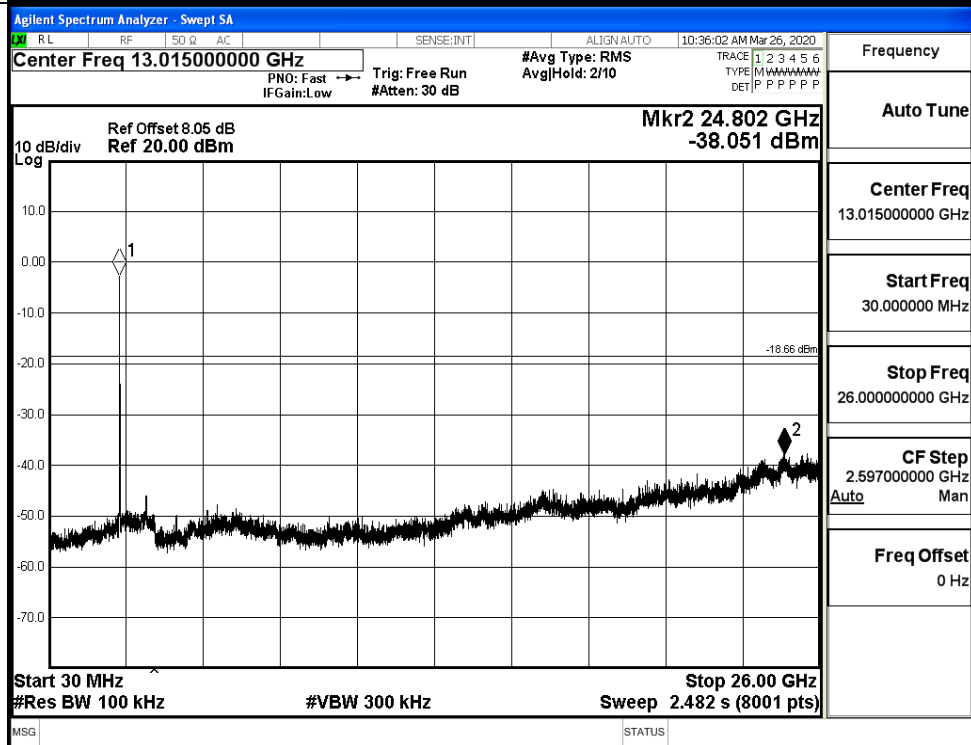


11G_MCH_Graphs

Pref/11G/MCH

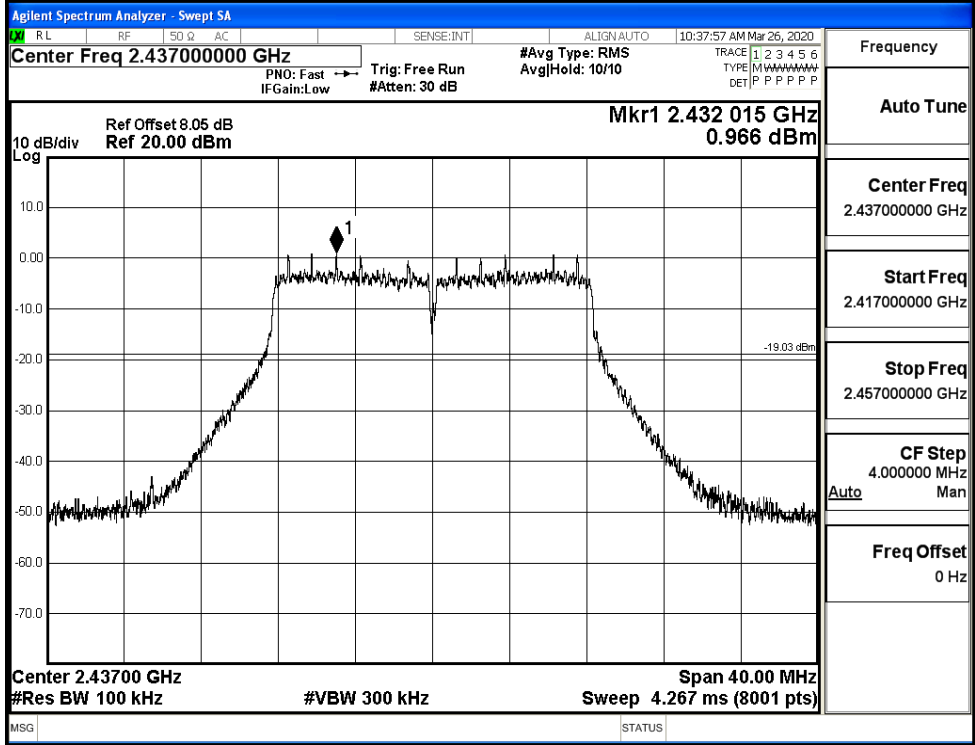


Puw/11G/MCH

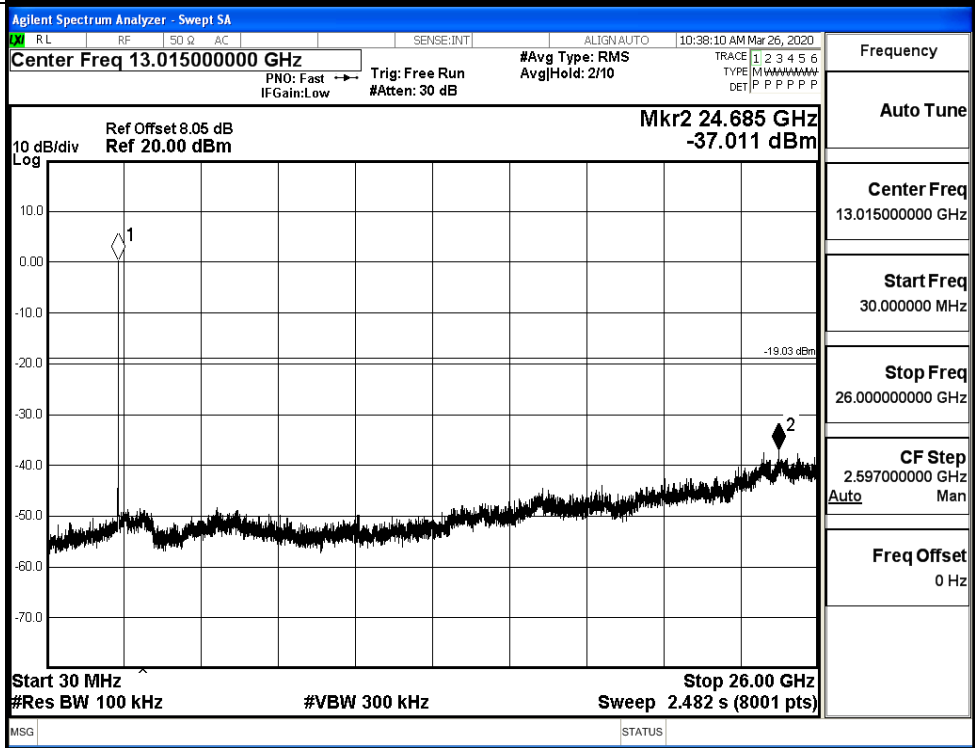


11G_HCH_Graphs

Pref/11G/HCH

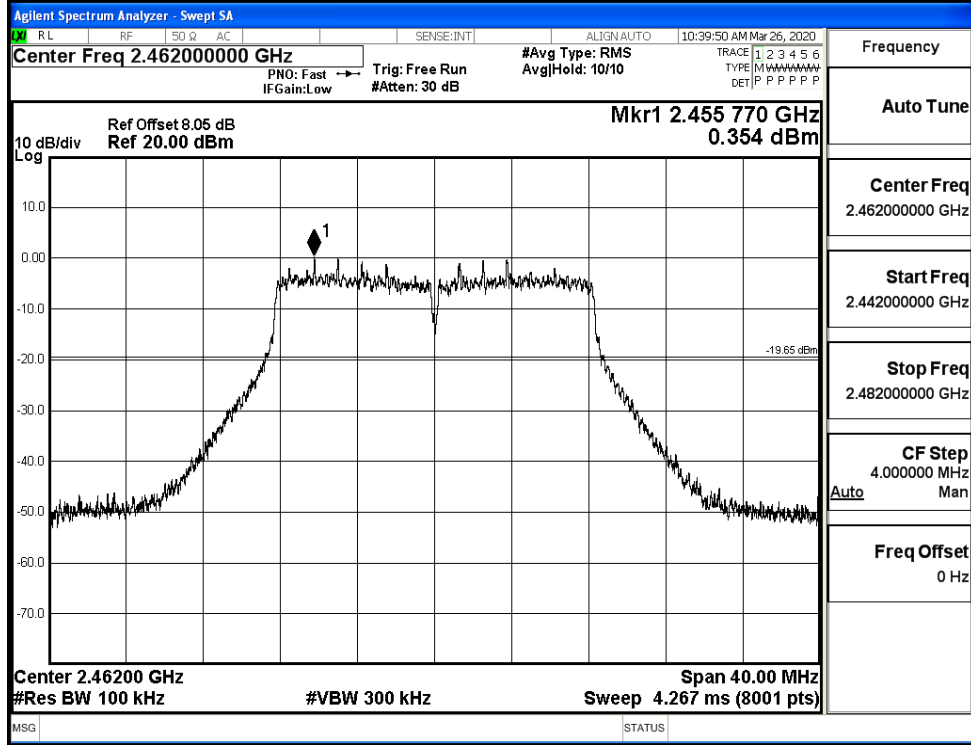


Puw/11G/HCH

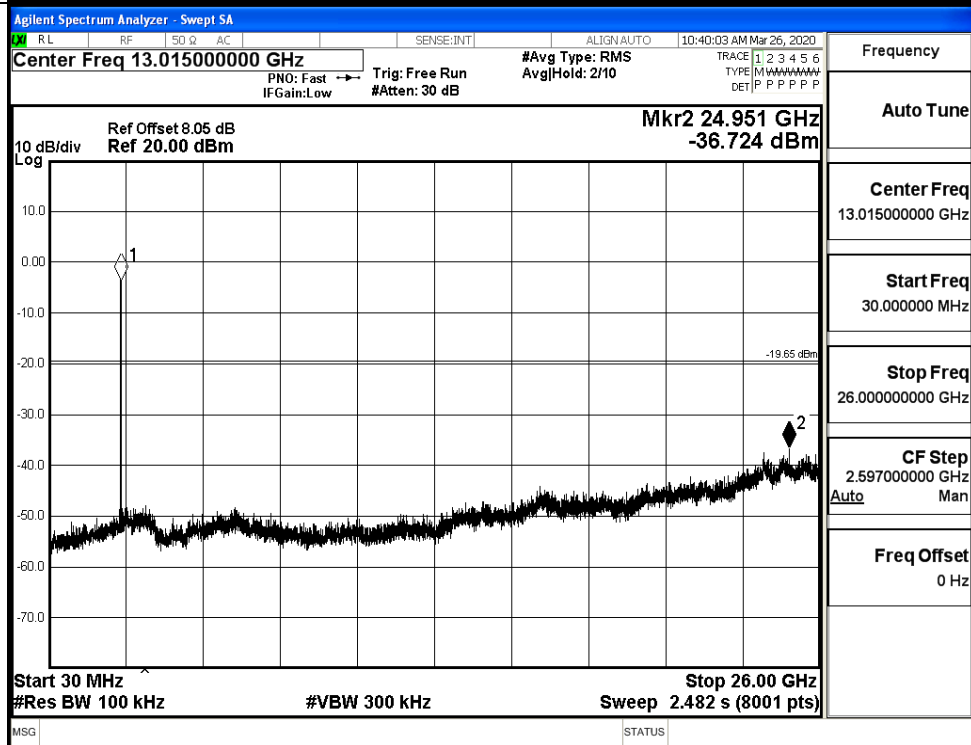


11N20SISO_LCH_Graphs

Pref/11N20SIS
O/LCH

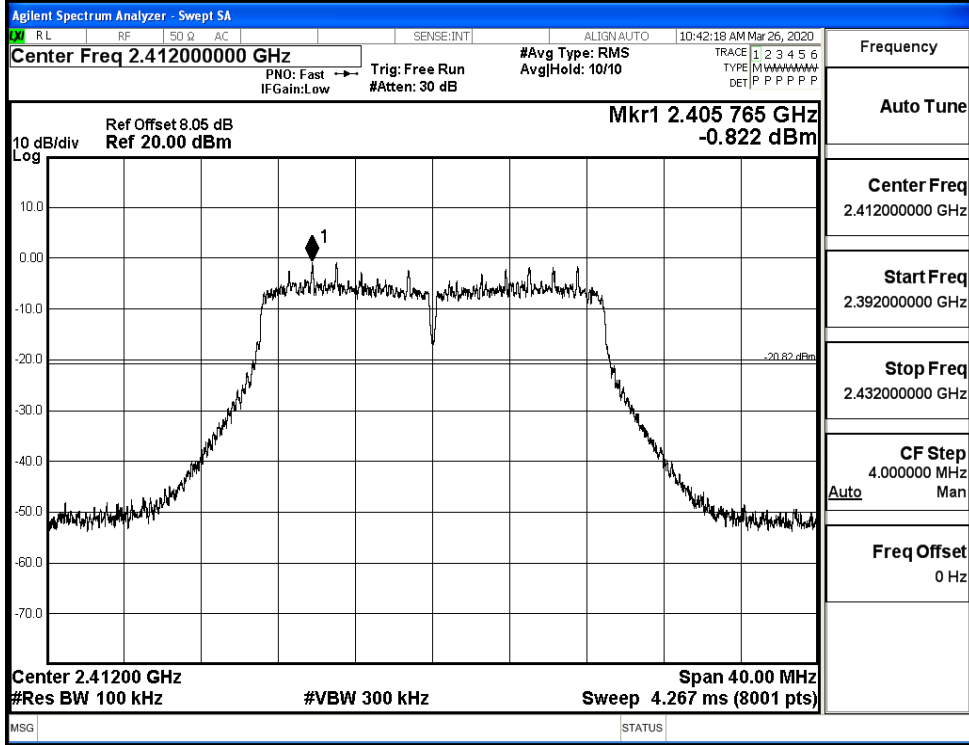


Puw/11N20
SISO/LCH

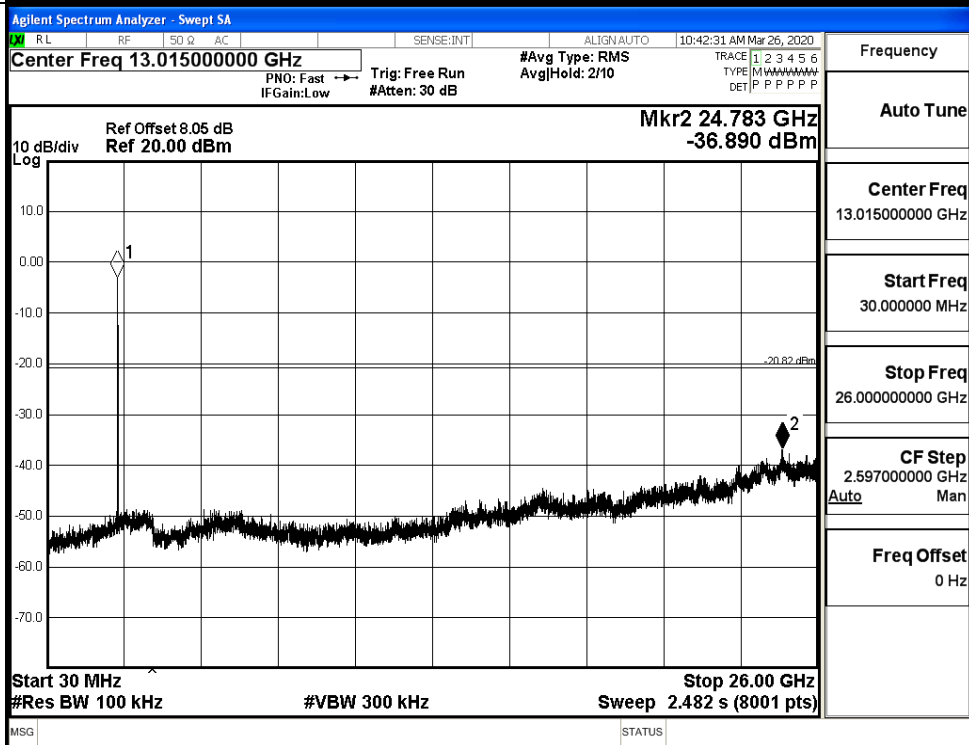


11N20SISO_MCH_Graphs

Pref/11N20
SISO/MCH

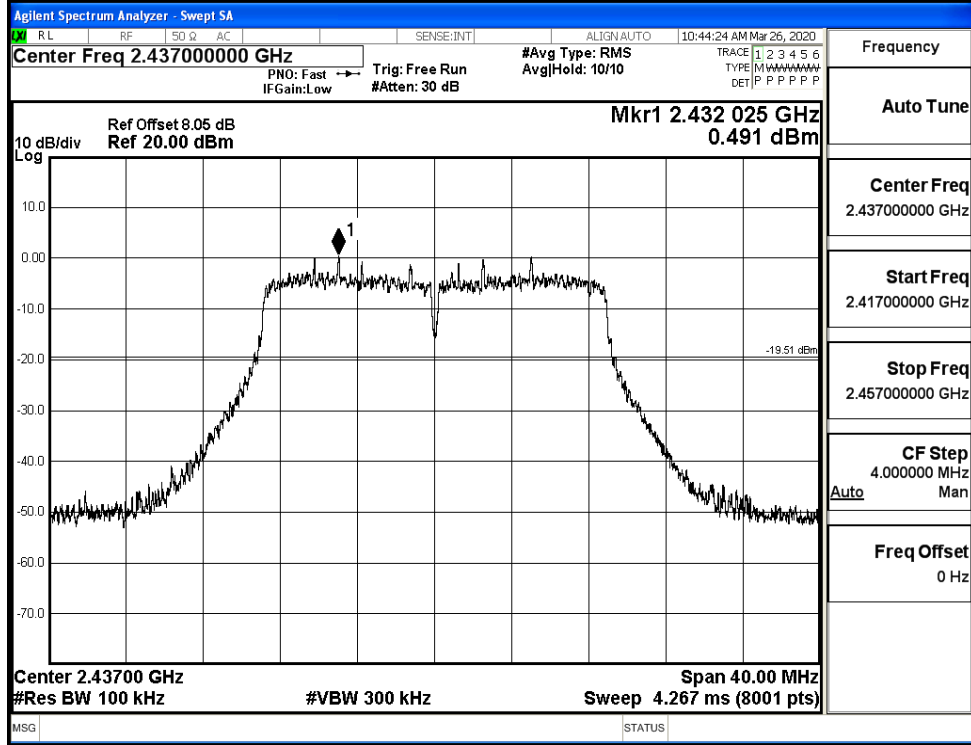


Puw/11N20
SISO/MCH

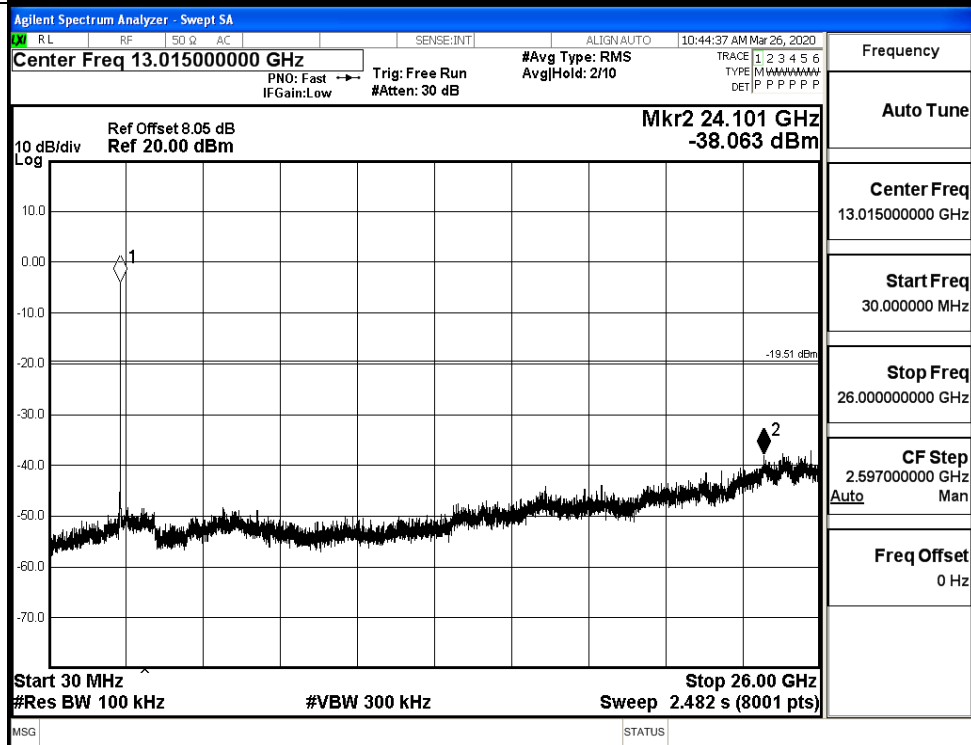


11N20SISO_HCH_Graphs

Pref/11N20
SISO/HCH

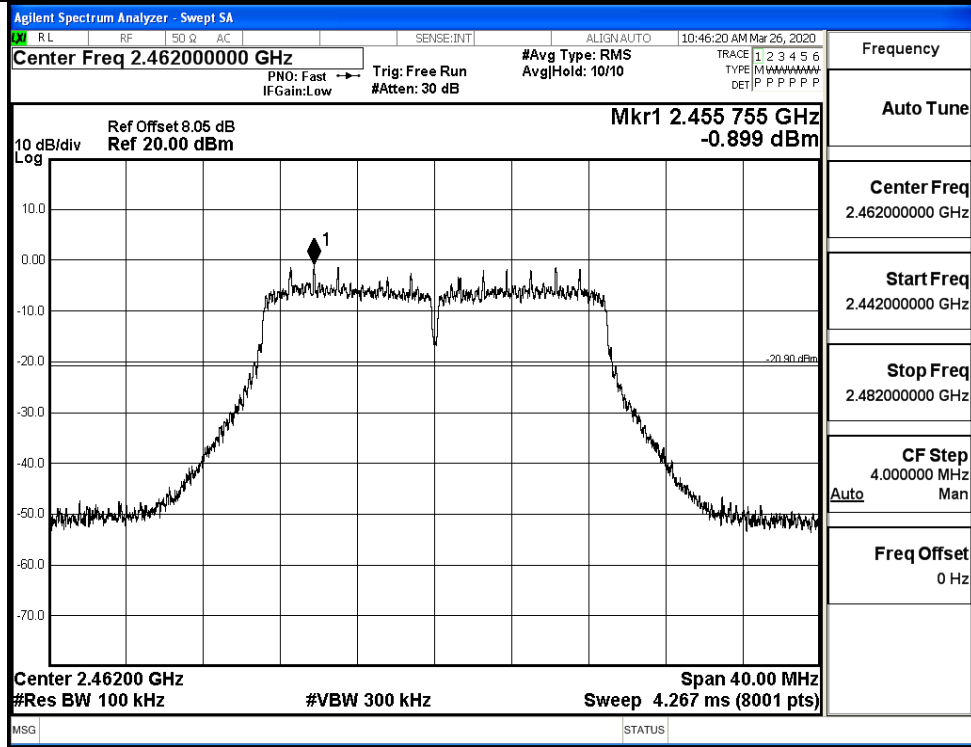


Puw/11N20
SISO/HCH

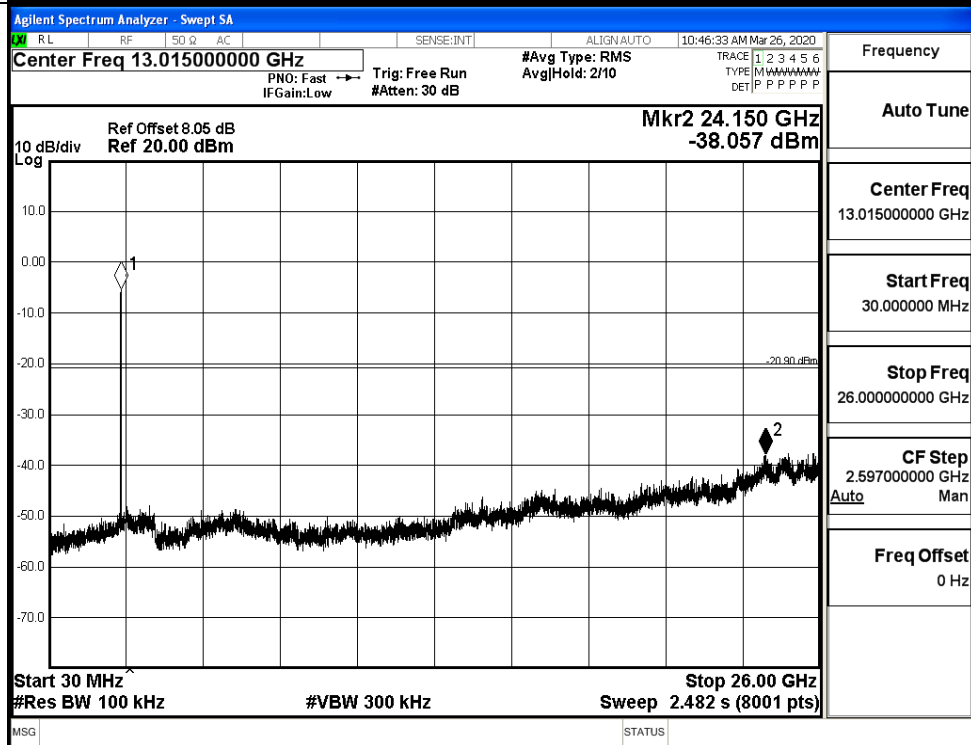


11N40SISO_LCH_Graphs

Pref/11N40
SISO/LCH

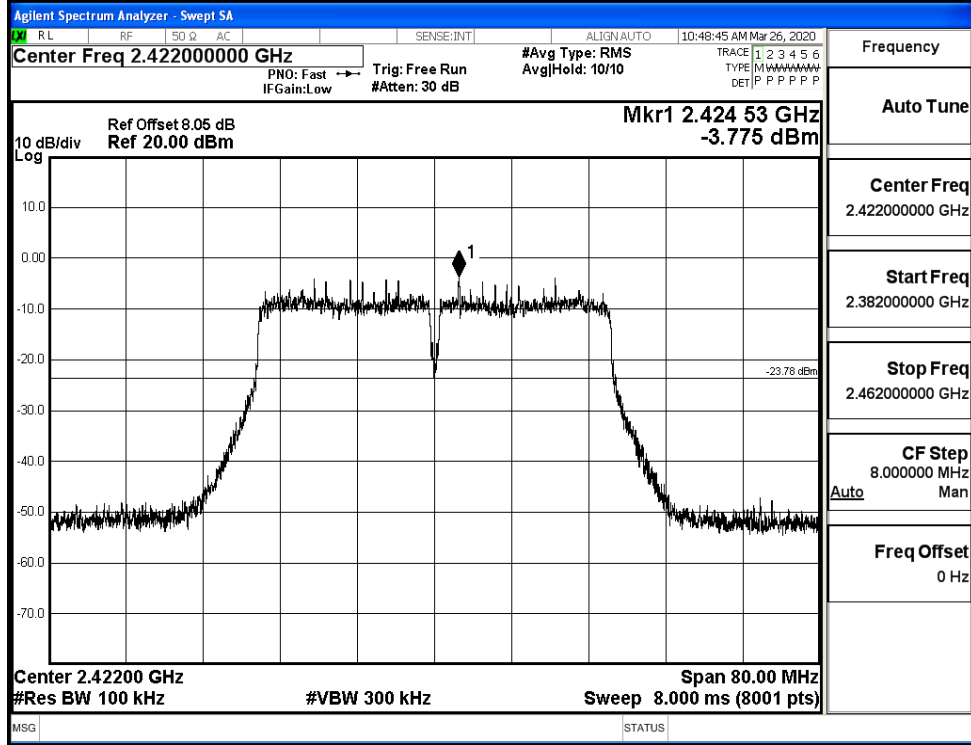


Puw/11N40
SISO/LCH

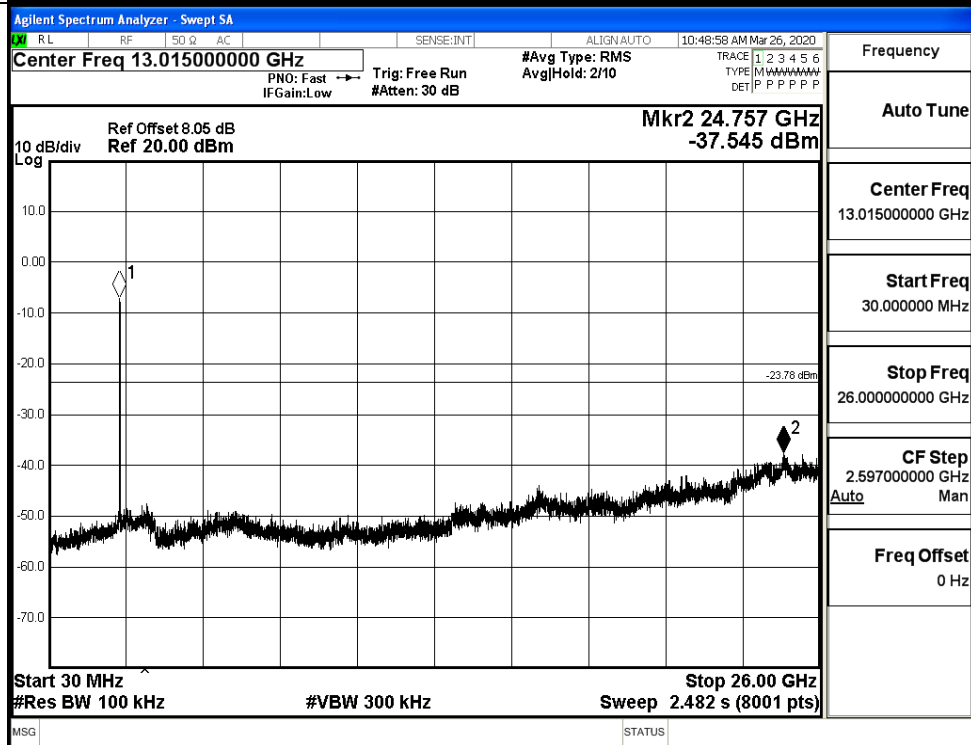


11N40SISO_MCH_Graphs

Pref/11N40
SISO/MCH

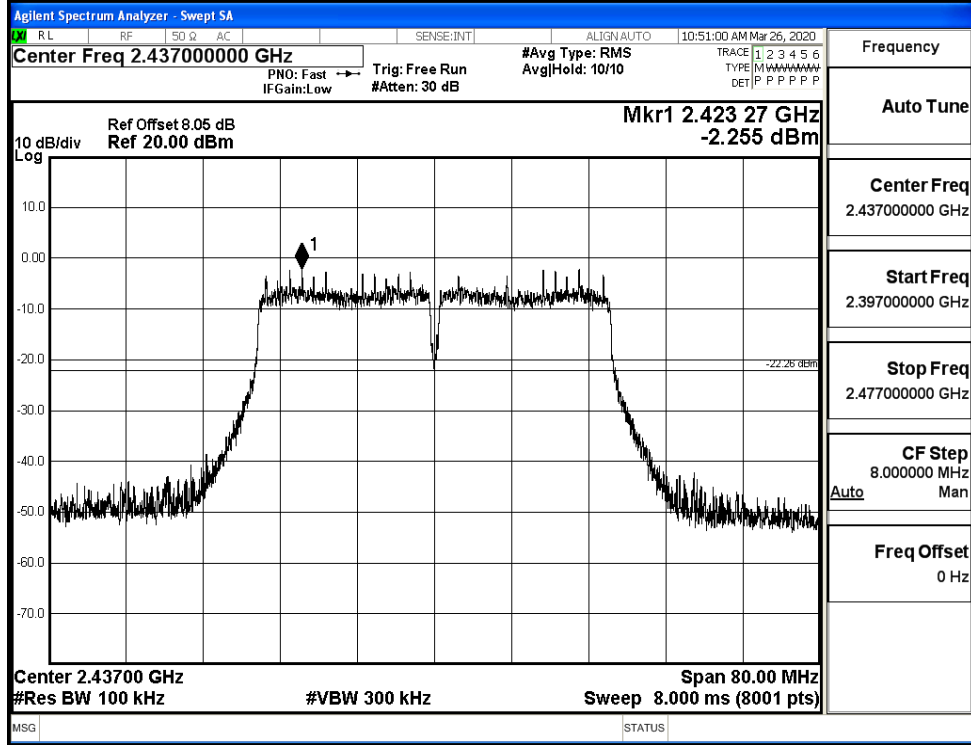


Puw/11N40
SISO/MCH

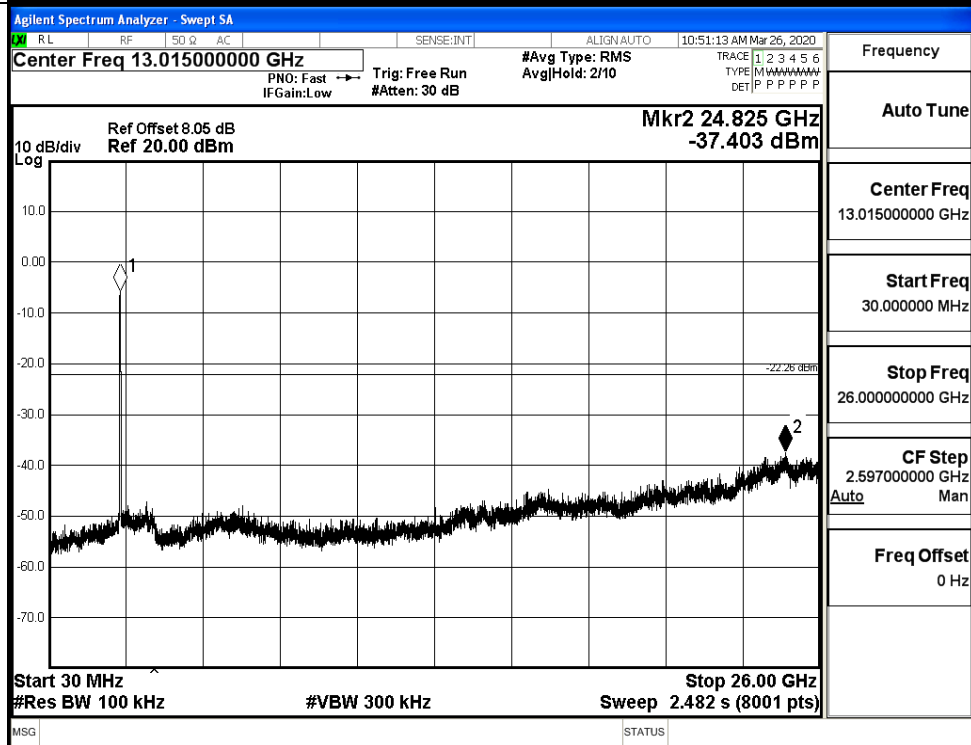


11N40SISO_HCH_Graphs

Pref/11N40
SISO/HCH

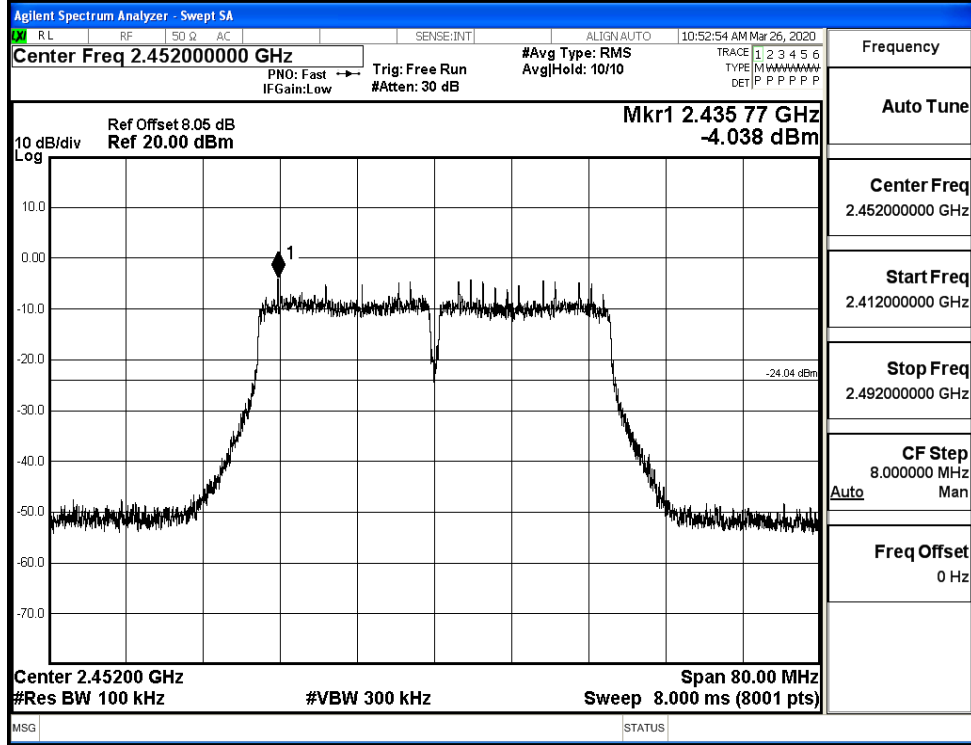


Puw/11N40
SISO/HCH

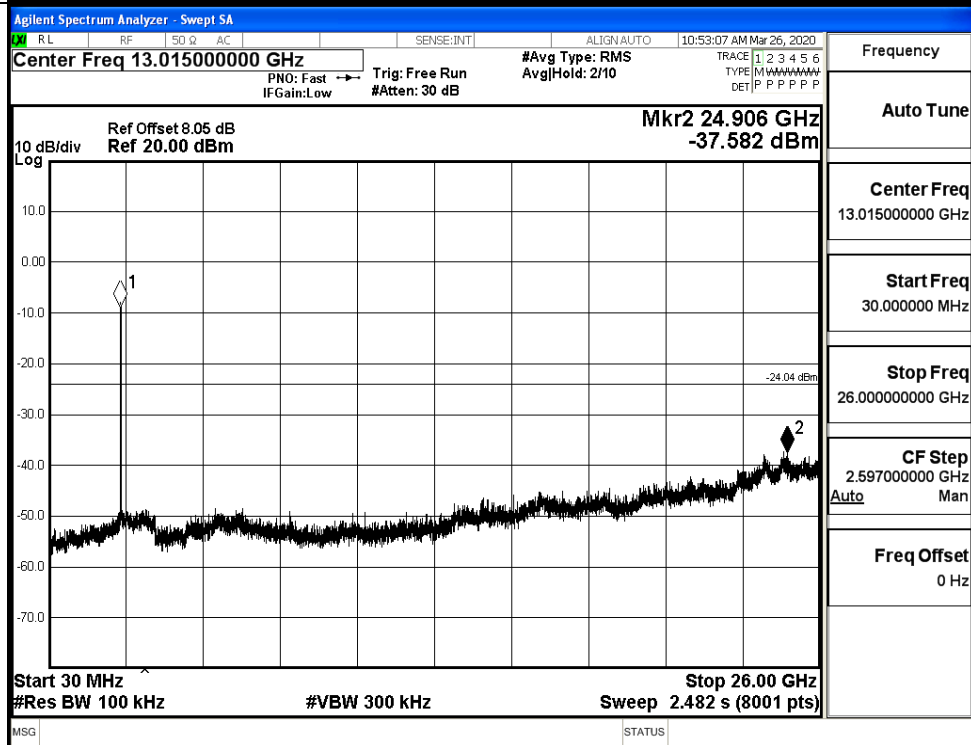


A.7 Band-edge for RF Conducted Emissions


Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	4.407	-49.537	-15.59	PASS
	HCH	4.116	-49.082	-15.88	PASS
11G	LCH	0.922	-48.423	-19.08	PASS
	HCH	0.441	-48.450	-19.56	PASS
11N20SISO	LCH	-1.395	-48.783	-21.4	PASS
	HCH	-0.807	-49.133	-20.81	PASS
11N40SISO	LCH	-3.749	-47.045	-23.75	PASS
	HCH	-3.830	-48.497	-23.83	PASS

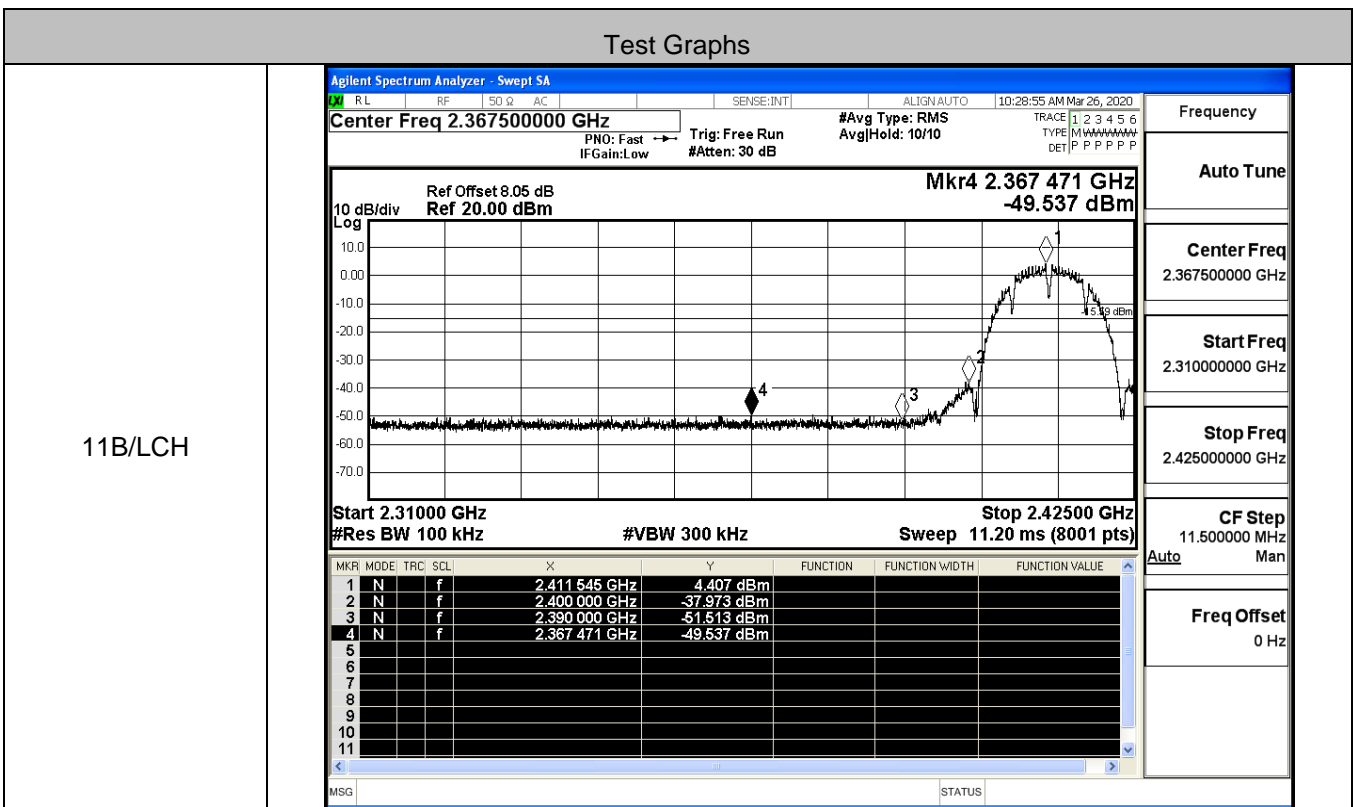


11B/HCH

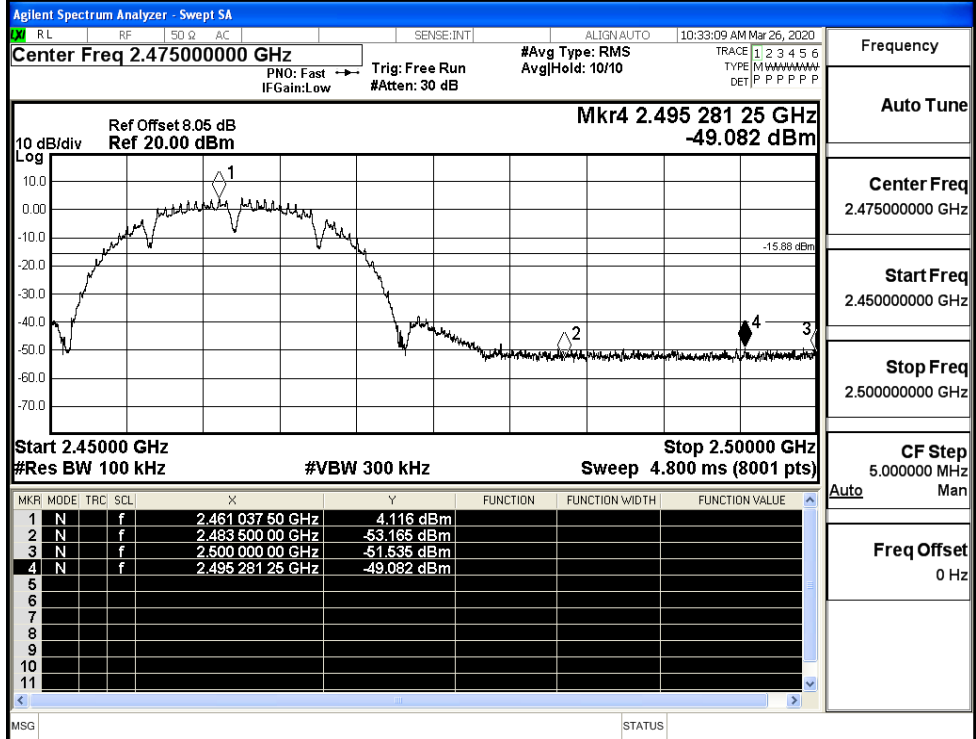

11G/LCH

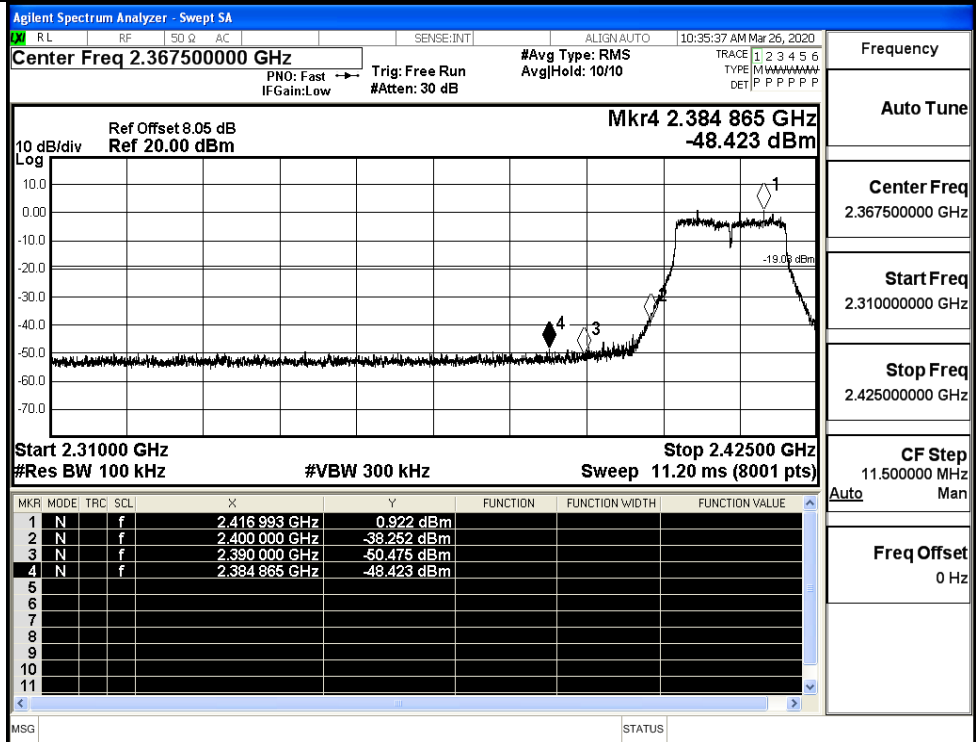


11G/HCH

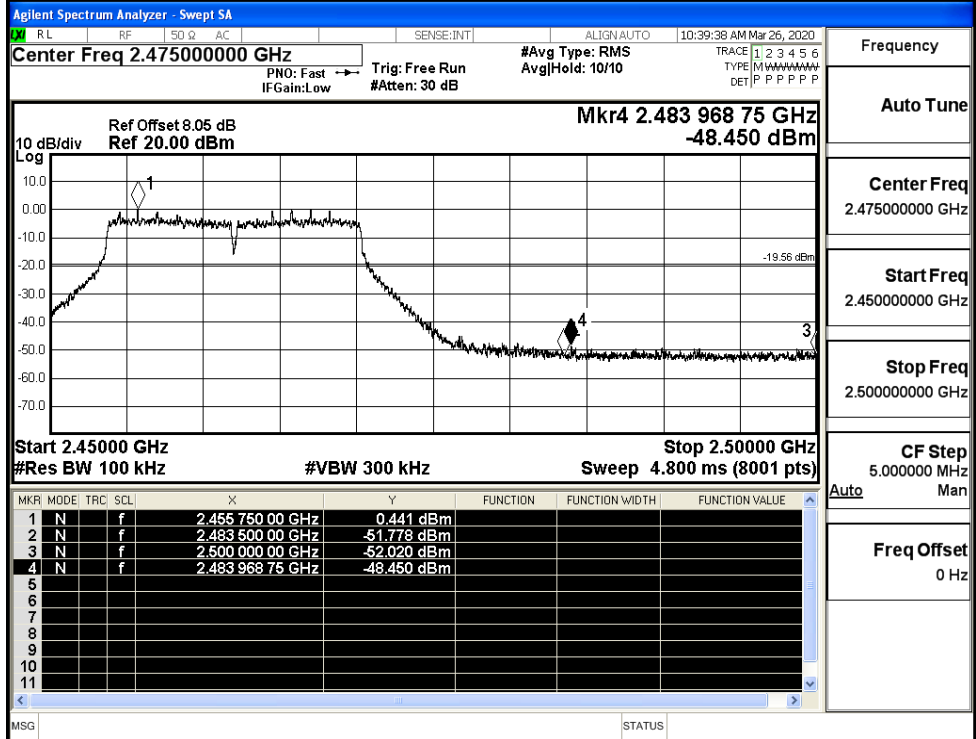


Frequency	2.47500000 GHz
Auto Tune	
Center Freq	2.47500000 GHz
Start Freq	2.45000000 GHz
Stop Freq	2.50000000 GHz
CF Step	5.000000 MHz
Freq Offset	0 Hz

11N20SISO/LCH

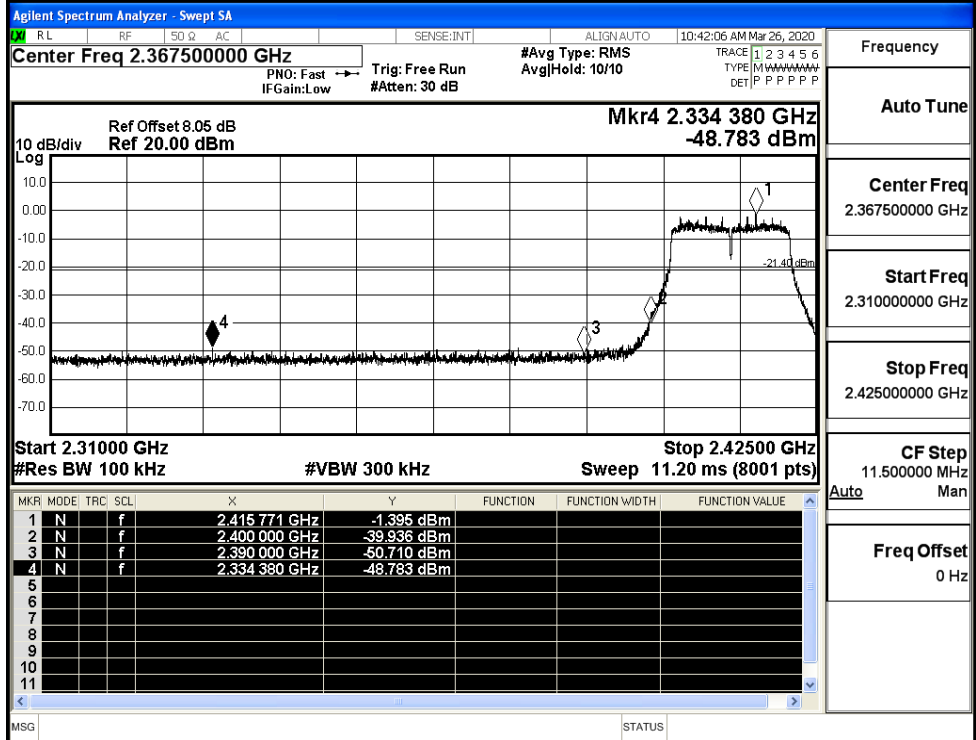


Frequency	2.36750000 GHz
Auto Tune	
Center Freq	2.36750000 GHz
Start Freq	2.31000000 GHz
Stop Freq	2.42500000 GHz
CF Step	11.500000 MHz
Freq Offset	0 Hz

11N20SISO/HCH

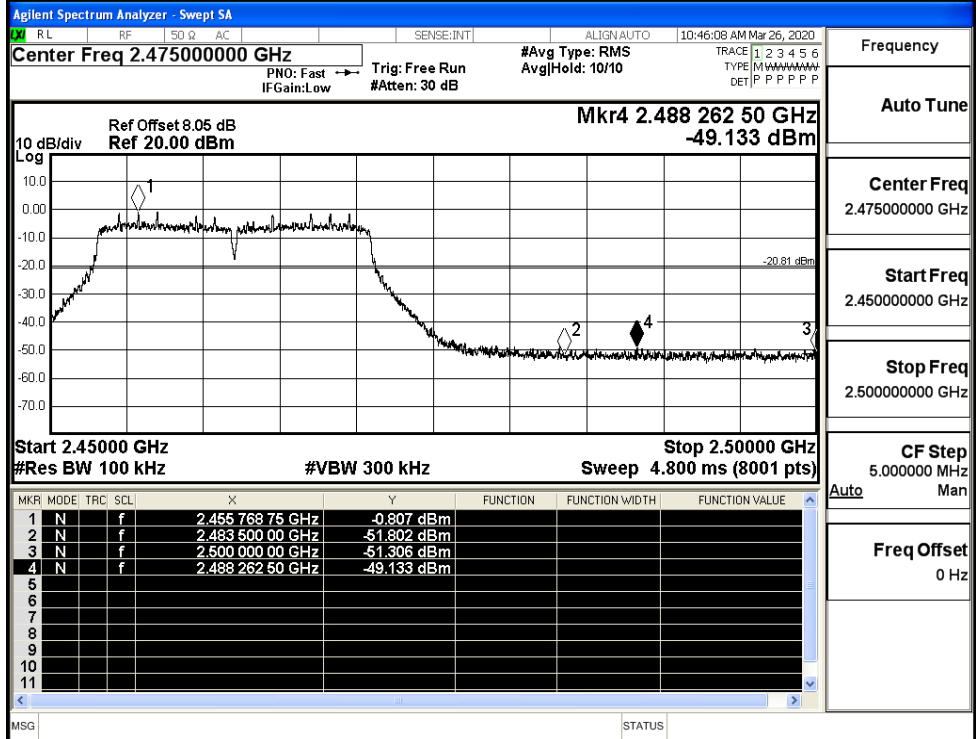


Frequency	2.47500000 GHz
Auto Tune	
Center Freq	2.47500000 GHz
Start Freq	2.45000000 GHz
Stop Freq	2.50000000 GHz
CF Step	5.000000 MHz
Freq Offset	0 Hz

11N40SISO/LCH

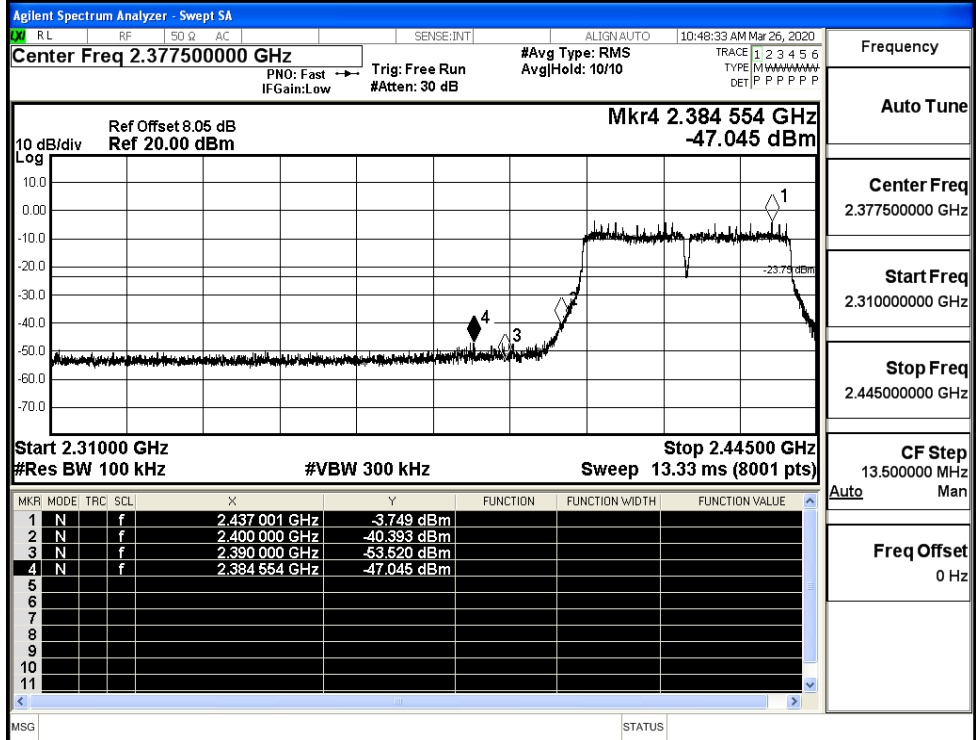

Frequency	2.37750000 GHz
Auto Tune	
Center Freq	2.37750000 GHz
Start Freq	2.31000000 GHz
Stop Freq	2.44500000 GHz
CF Step	13.500000 MHz
Freq Offset	0 Hz

11N40SISO/HCH

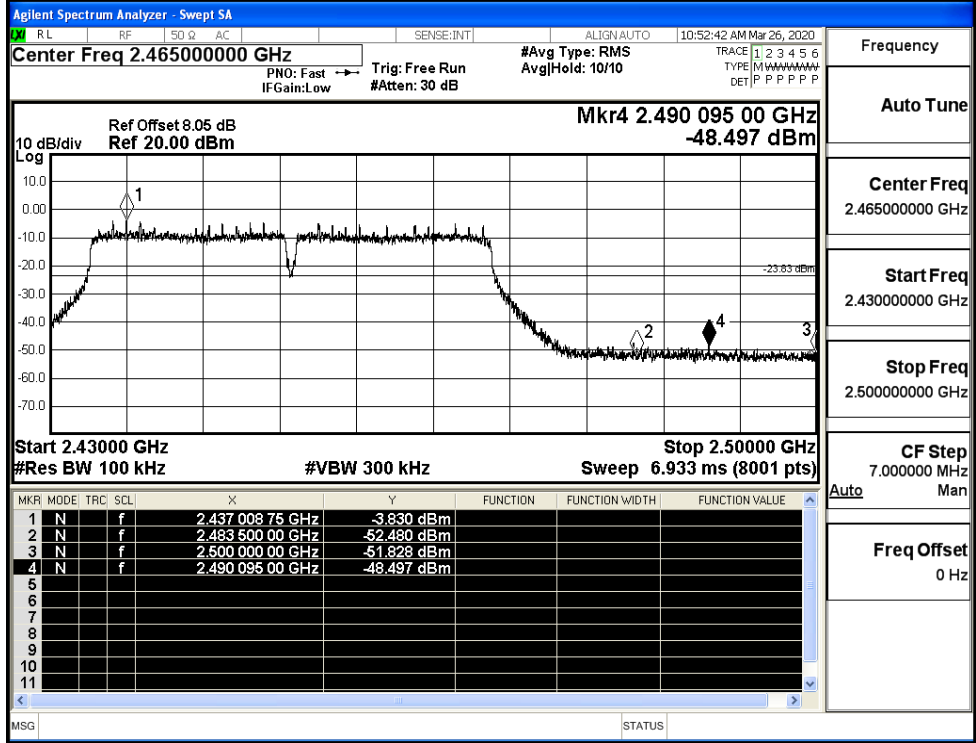


A.8 Restrict-band band-edge measurements


Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
11B	2412	Ant1	2310.0	-41.51	3	0	56.72	PEAK	74	PASS
	2412	Ant1	2310.0	-53.58	3	0	44.65	AV	54	PASS
	2412	Ant1	2390.0	-42.73	3	0	55.50	PEAK	74	PASS
	2412	Ant1	2390.0	-52.72	3	0	45.51	AV	54	PASS
	2462	Ant1	2483.5	-42.38	3	0	55.85	PEAK	74	PASS
	2462	Ant1	2483.5	-52.61	3	0	45.62	AV	54	PASS
	2462	Ant1	2500.0	-40.76	3	0	57.47	PEAK	74	PASS
	2462	Ant1	2500.0	-52.59	3	0	45.64	AV	54	PASS
11G	2412	Ant1	2310.0	-42.73	3	0	55.50	PEAK	74	PASS
	2412	Ant1	2310.0	-53.56	3	0	44.67	AV	54	PASS
	2412	Ant1	2390.0	-35.73	3	0	62.50	PEAK	74	PASS
	2412	Ant1	2390.0	-49.25	3	0	48.98	AV	54	PASS
	2462	Ant1	2483.5	-28.05	3	0	70.18	PEAK	74	PASS
	2462	Ant1	2483.5	-47.33	3	0	50.90	AV	54	PASS
	2462	Ant1	2500.0	-42.7	3	0	55.53	PEAK	74	PASS
	2462	Ant1	2500.0	-52.61	3	0	45.62	AV	54	PASS
11N20 SISO	2412	Ant1	2310.0	-42.51	3	0	55.72	PEAK	74	PASS
	2412	Ant1	2310.0	-53.51	3	0	44.72	AV	54	PASS
	2412	Ant1	2390.0	-40.71	3	0	57.52	PEAK	74	PASS
	2412	Ant1	2390.0	-52.51	3	0	45.72	AV	54	PASS
	2462	Ant1	2483.5	-35.81	3	0	62.42	PEAK	74	PASS
	2462	Ant1	2483.5	-49.3	3	0	48.93	AV	54	PASS
	2462	Ant1	2500.0	-41.09	3	0	57.14	PEAK	74	PASS
	2462	Ant1	2500.0	-52.55	3	0	45.68	AV	54	PASS
11N40 SISO	2422	Ant1	2310.0	-42.99	3	0	55.24	PEAK	74	PASS
	2422	Ant1	2310.0	-53.55	3	0	44.68	AV	54	PASS
	2422	Ant1	2390.0	-32.65	3	0	65.58	PEAK	74	PASS
	2422	Ant1	2390.0	-49.47	3	0	48.76	AV	54	PASS

	2452	Ant1	2483.5	-29.38	3	0	68.85	PEAK	74	PASS
	2452	Ant1	2483.5	-49.98	3	0	48.25	AV	54	PASS
	2452	Ant1	2500.0	-41.91	3	0	56.32	PEAK	74	PASS
	2452	Ant1	2500.0	-52.56	3	0	45.67	AV	54	PASS


Restrict-band band-edge measurements_11B_2412_Ant1_PEAK

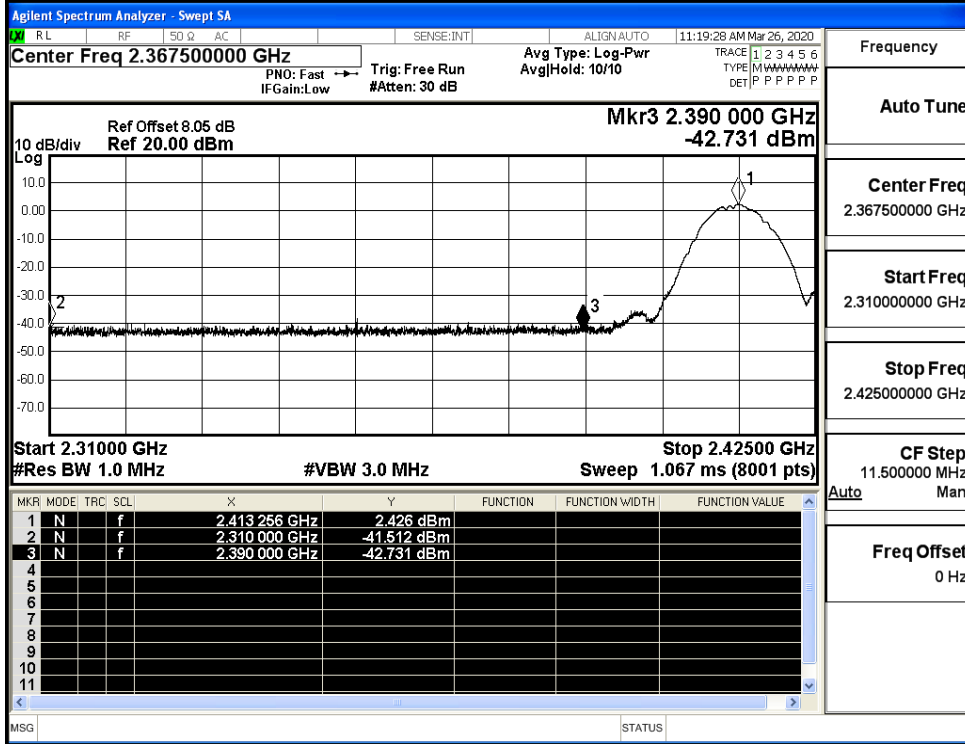


Restrict-band band-edge measurements_11B_2412_Ant1_AV

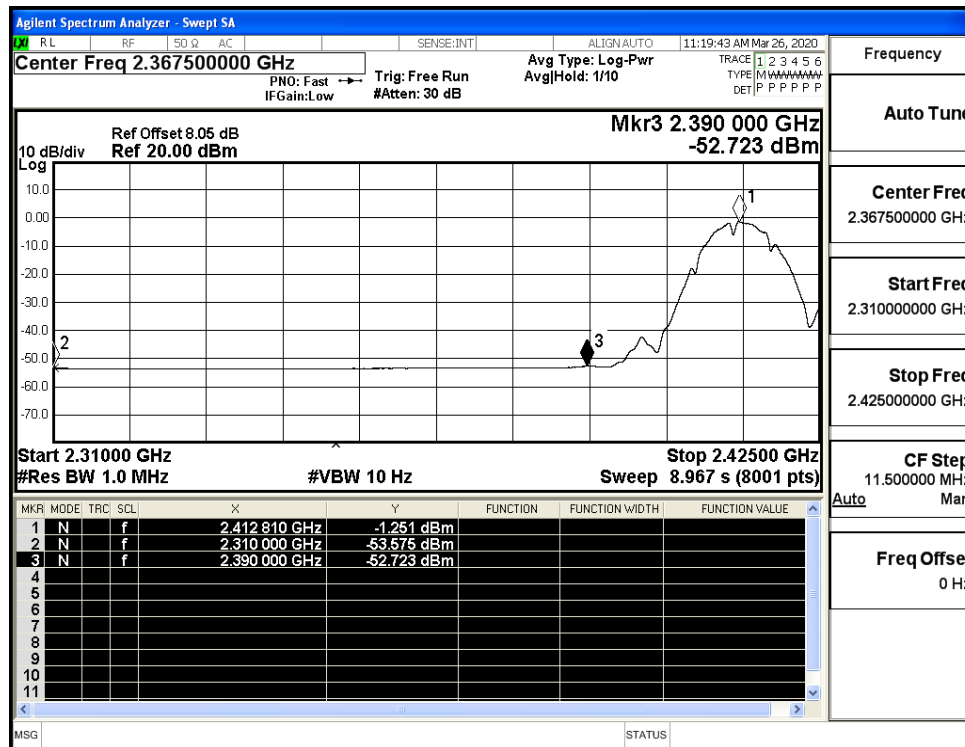


Restrict-band band-edge measurements_11B_2462_Ant1_PEAK

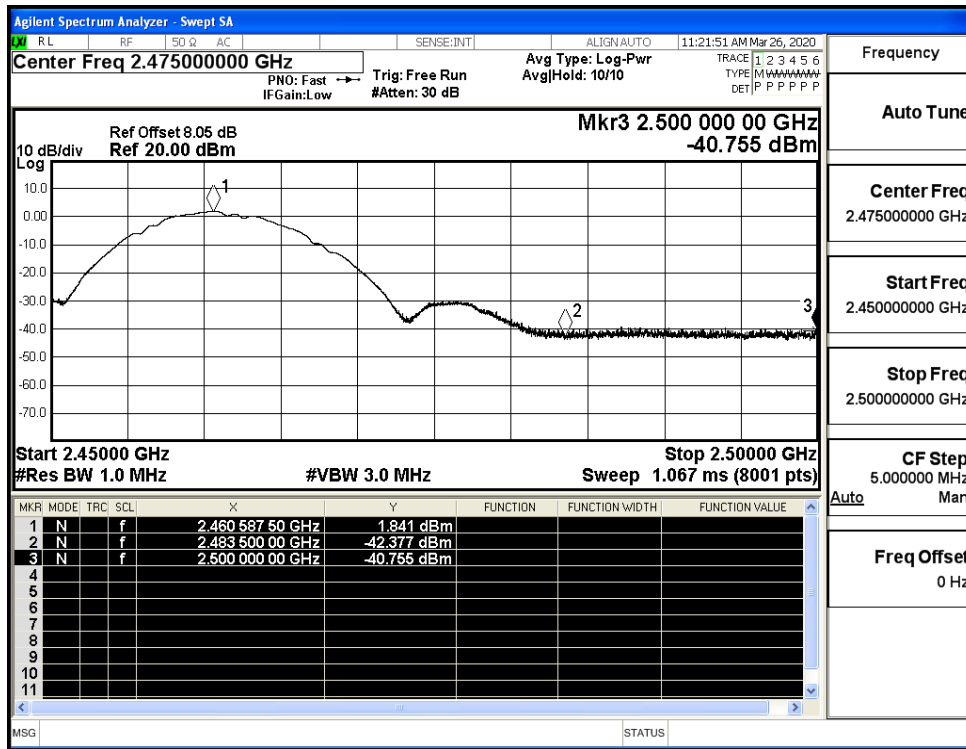


Restrict-band band-edge measurements_11B_2462_Ant1_AV

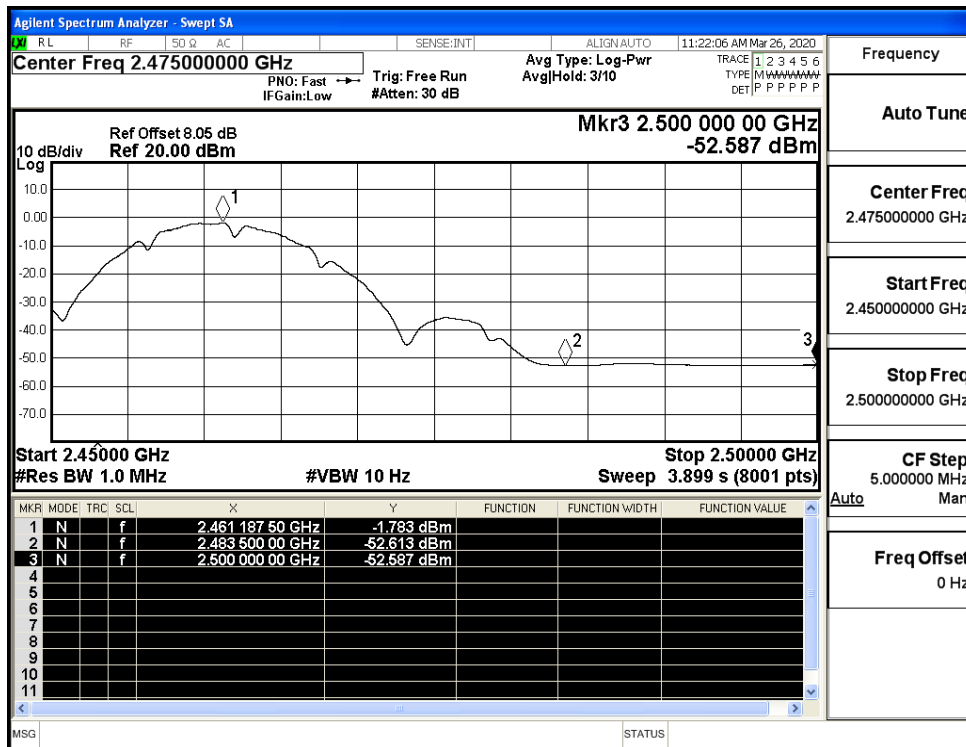


Restrict-band band-edge measurements_11G_2412_Ant1_PEAK

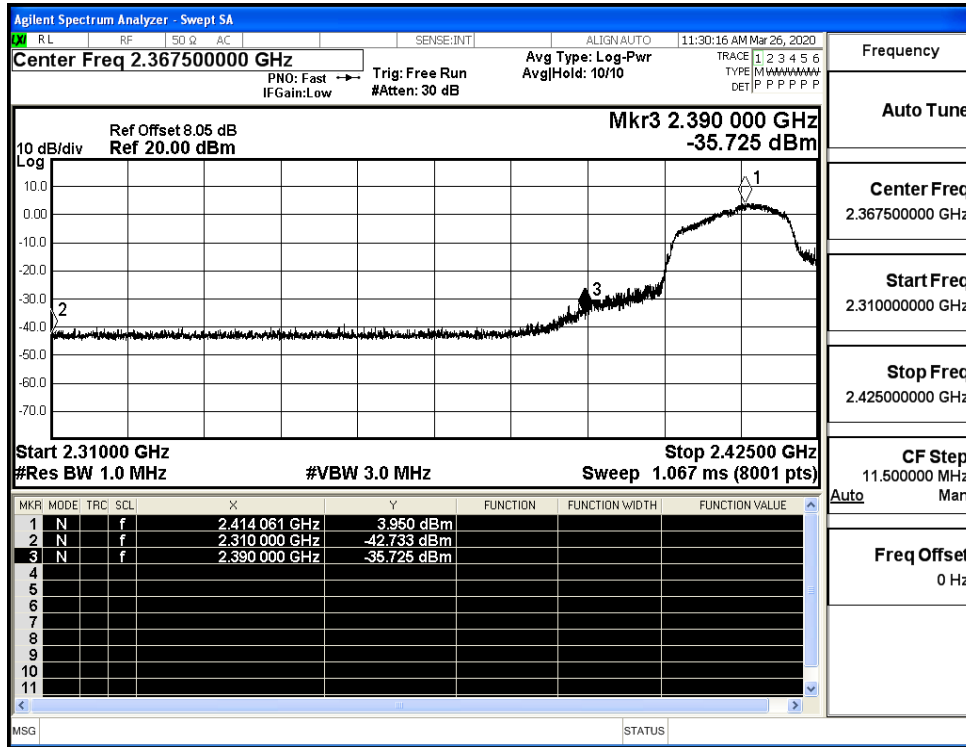


Restrict-band band-edge measurements_11G_2412_Ant1_AV

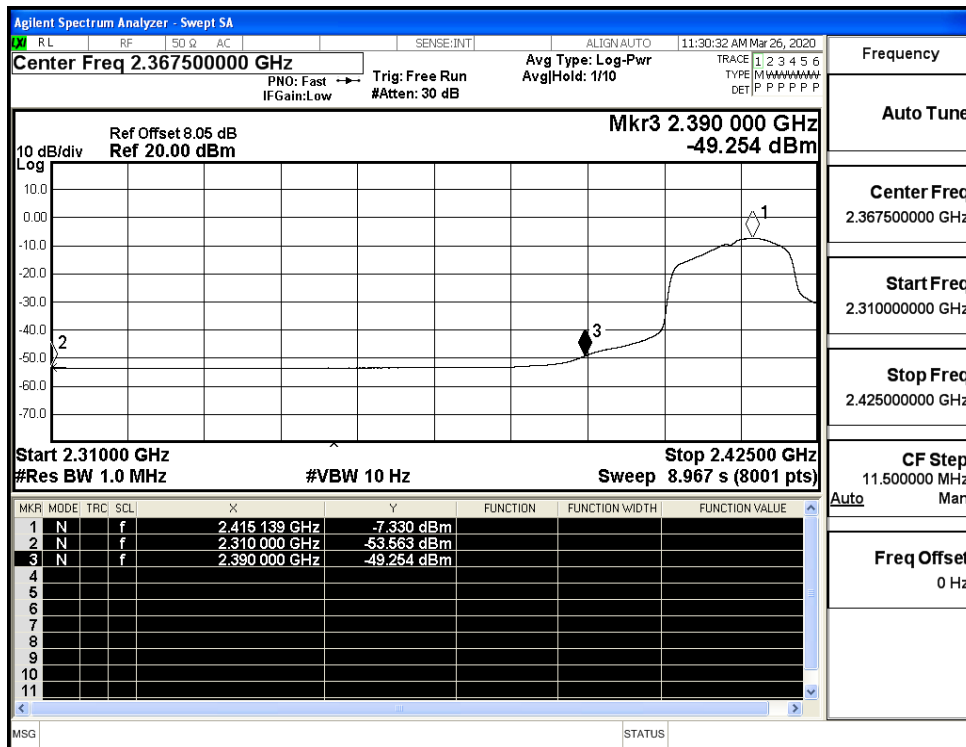


Restrict-band band-edge measurements_11G_2462_Ant1_PEAK

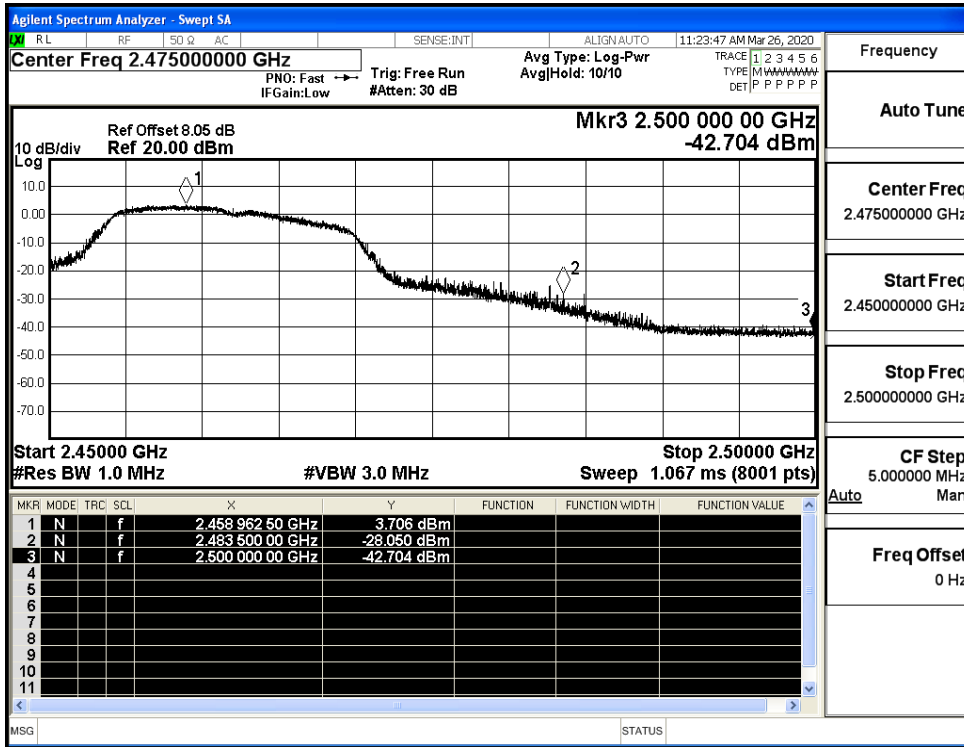


Restrict-band band-edge measurements_11G_2462_Ant1_AV

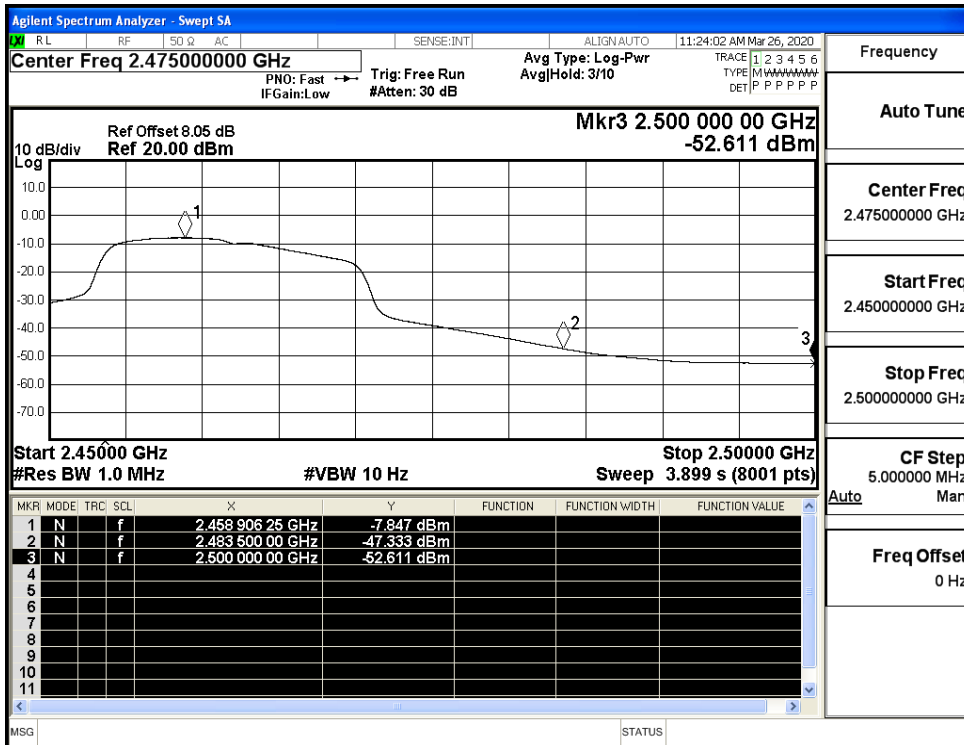


Restrict-band band-edge measurements_11N20SISO_2412_Ant1_PEAK

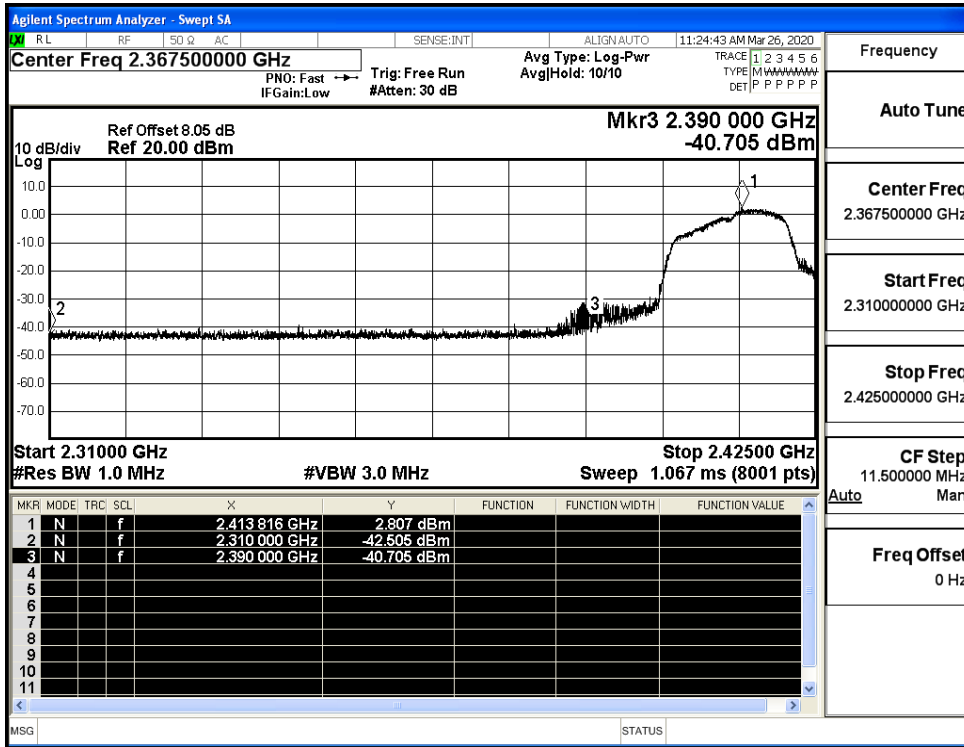


Restrict-band band-edge measurements_11N20SISO_2412_Ant1_AV

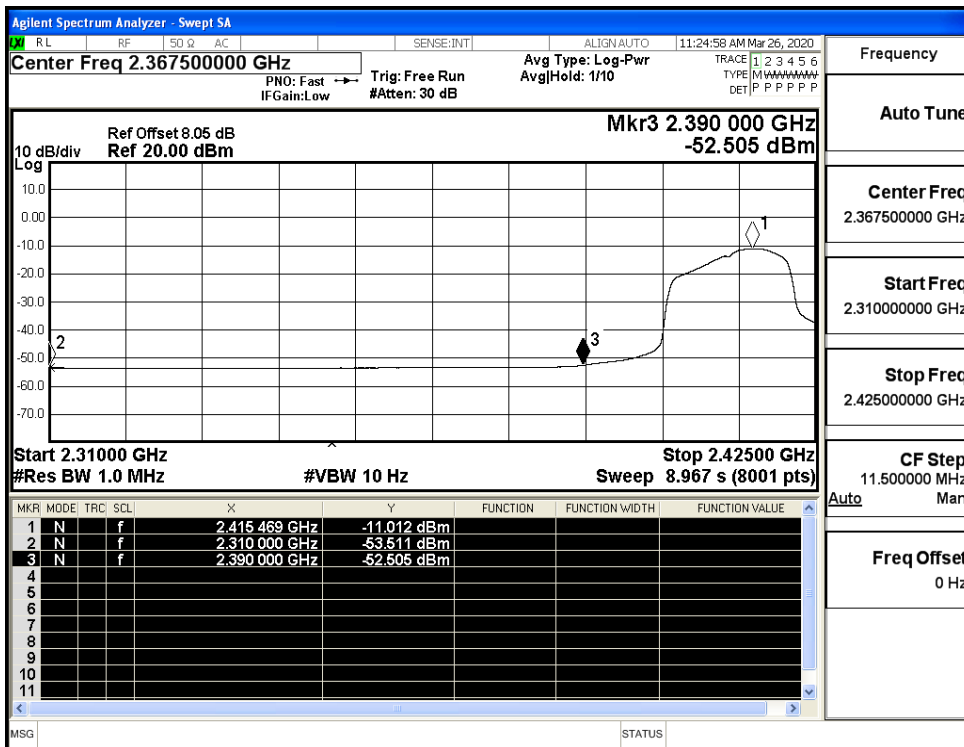


Restrict-band band-edge measurements_11N20SISO_2462_Ant1_PEAK

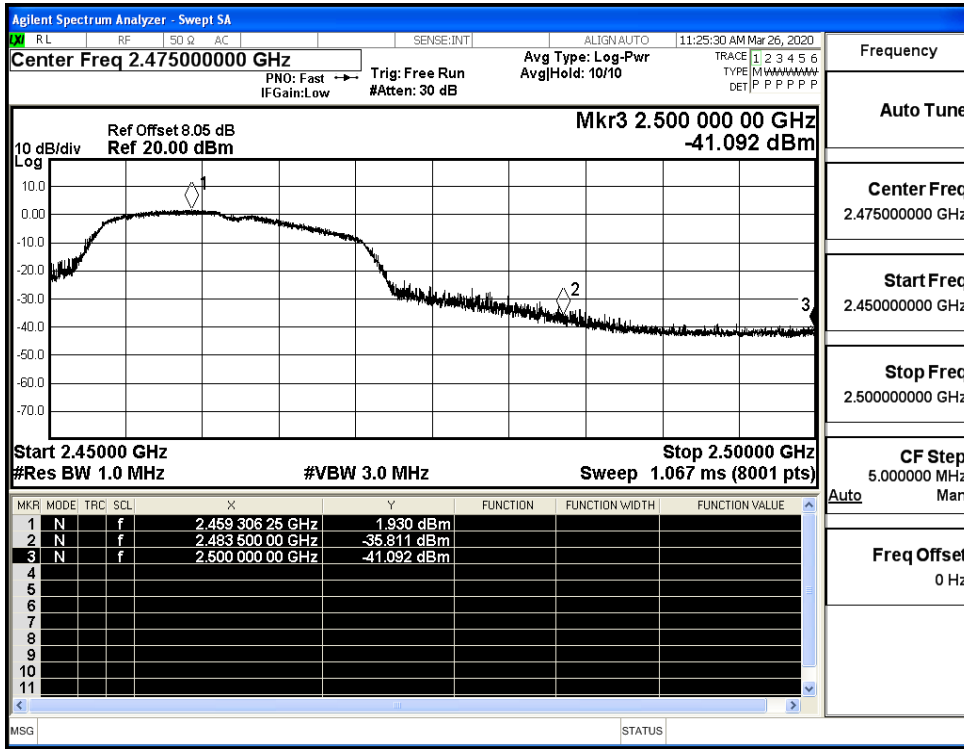


Restrict-band band-edge measurements_11N20SISO_2462_Ant1_AV

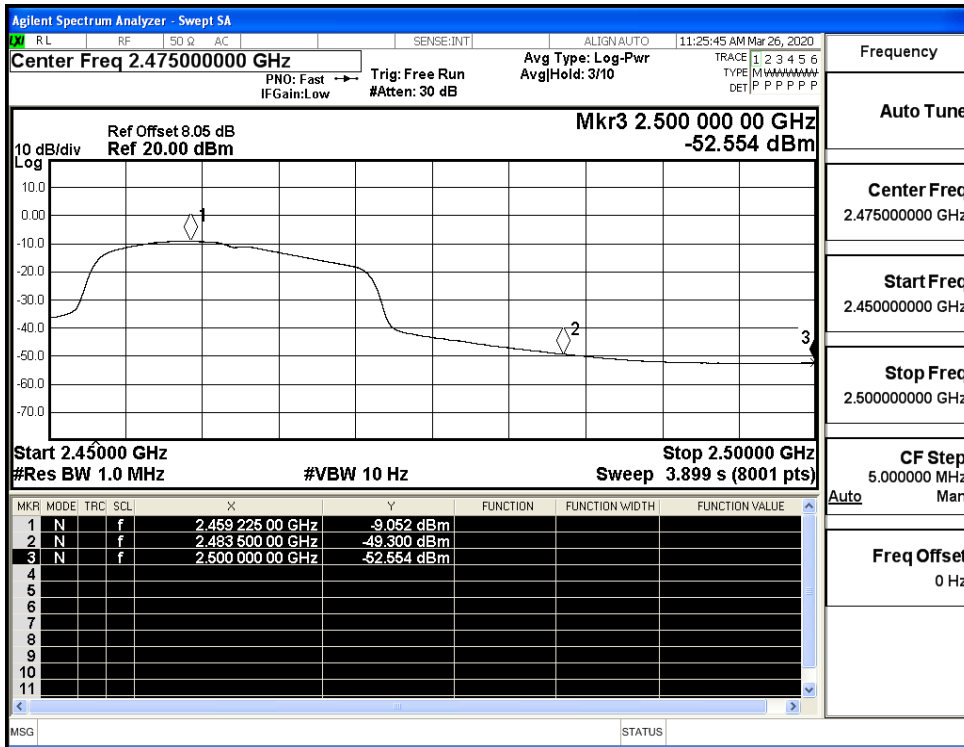


Restrict-band band-edge measurements_11N40SISO_2422_Ant1_PEAK

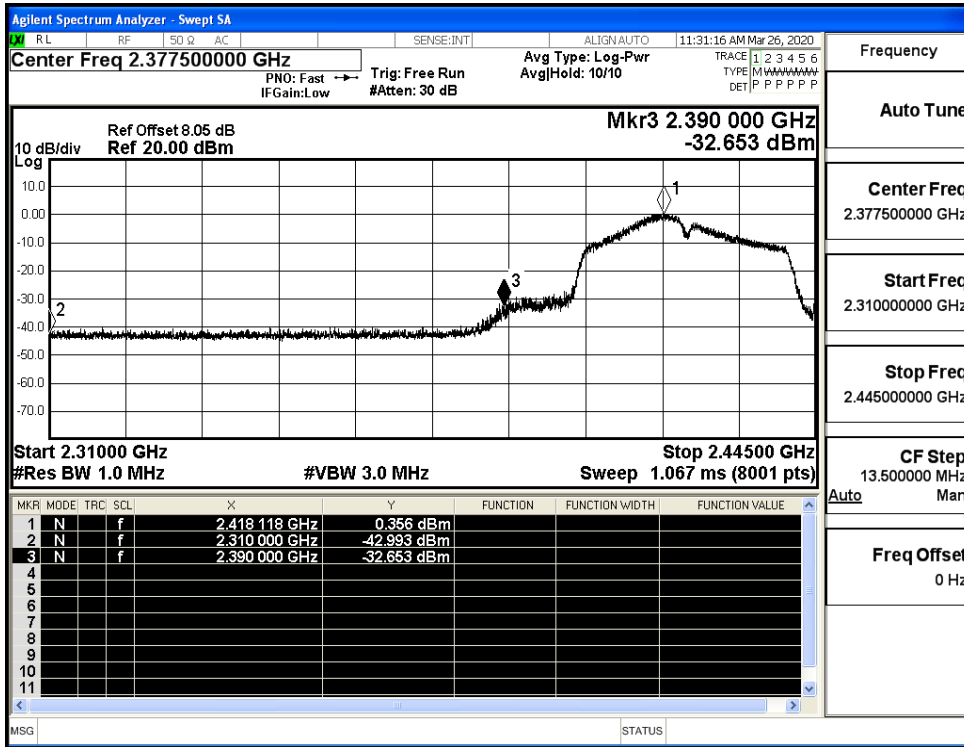

Restrict-band band-edge measurements_11N40SISO_2422_Ant1_AV

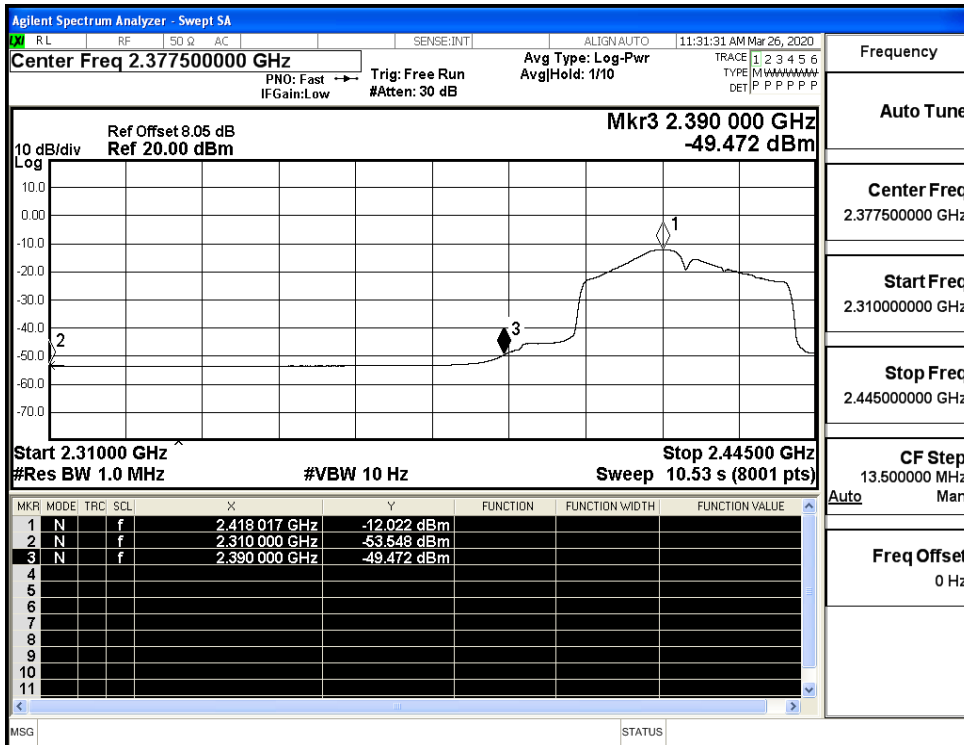

Restrict-band band-edge measurements_11N40SISO_2452_Ant1_PEAK

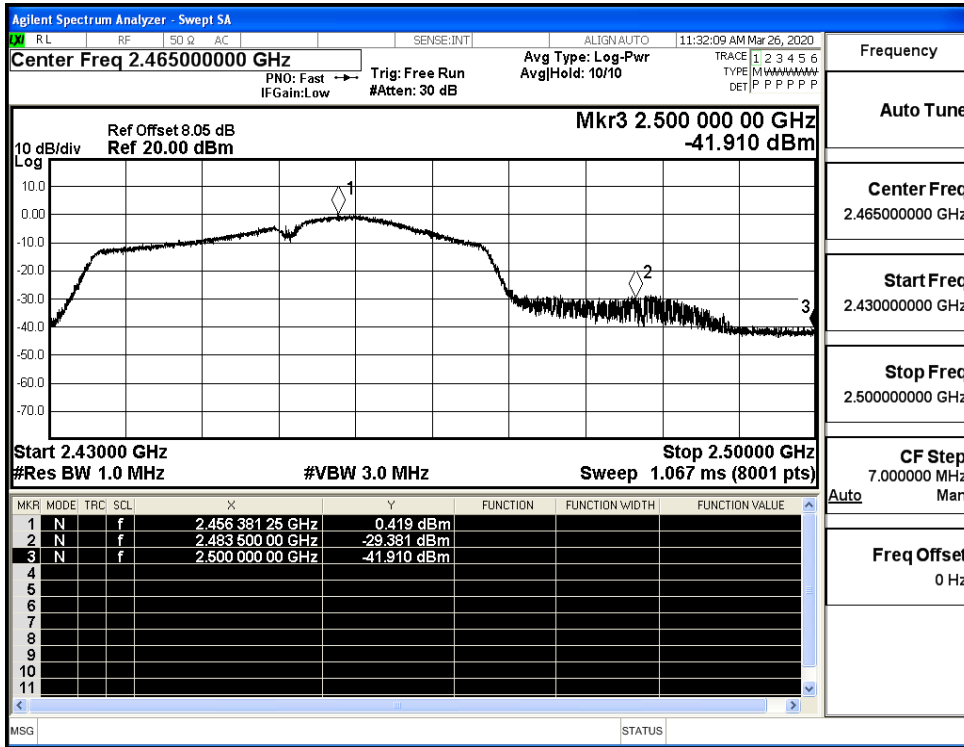

Restrict-band band-edge measurements_11N40SISO_2452_Ant1_AV

