


Site :HC-CB04
Condition :3m ,Horizontal
Mode :11ax20_TX_2462MHz
Test By :Cyril

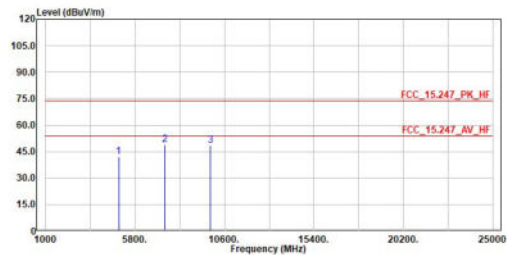


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	42.02	74.00	-31.98	56.29	-14.27	Peak
2	7386.000	49.11	74.00	-24.89	55.36	-6.25	Peak
3	9848.000	48.66	74.00	-25.34	51.06	-2.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11ax20_TX_2462MHz
Test By :Cyril

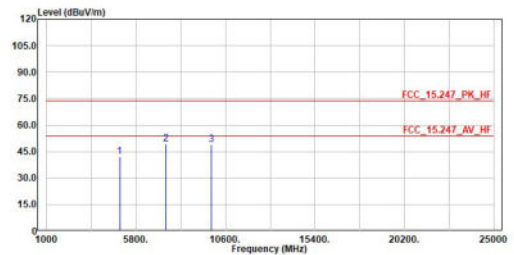


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	41.99	74.00	-32.01	56.26	-14.27	Peak
2	7386.000	49.14	74.00	-24.86	55.39	-6.25	Peak
3	9848.000	48.69	74.00	-25.31	51.09	-2.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11ax40_TX_2422MHz
Test By :Cyril

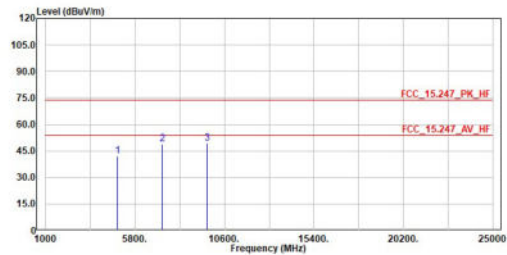


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	41.96	74.00	-32.04	56.59	-14.63	Peak
2	7266.000	48.73	74.00	-25.27	55.39	-6.66	Peak
3	9688.000	49.15	74.00	-24.85	51.94	-2.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11ax40_TX_2422MHz
Test By :Cyril

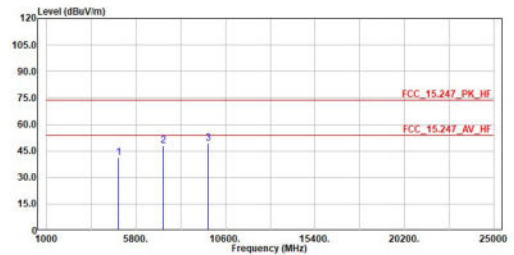


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	41.31	74.00	-32.69	55.94	-14.63	Peak
2	7266.000	47.92	74.00	-26.08	54.58	-6.66	Peak
3	9688.000	49.41	74.00	-24.59	52.20	-2.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11ax40_TX_2437MHz
Test By :Cyril

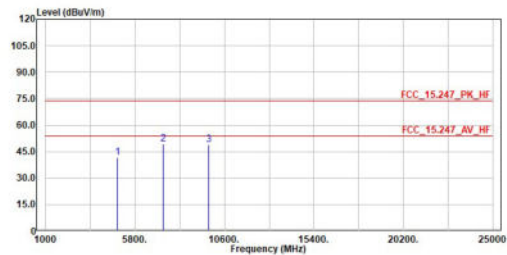


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	41.79	74.00	-32.21	56.28	-14.49	Peak
2	7311.000	49.15	74.00	-24.85	55.66	-6.51	Peak
3	9748.000	48.70	74.00	-25.30	51.32	-2.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11ax40_TX_2437MHz
Test By :Cyril

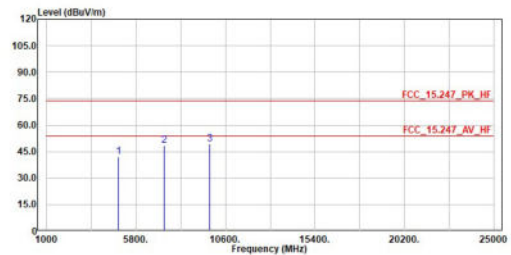


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	42.24	74.00	-31.76	56.73	-14.49	Peak
2	7311.000	48.63	74.00	-25.37	55.14	-6.51	Peak
3	9748.000	49.35	74.00	-24.65	51.97	-2.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11ax40_TX_2452MHz
Test By :Cyril

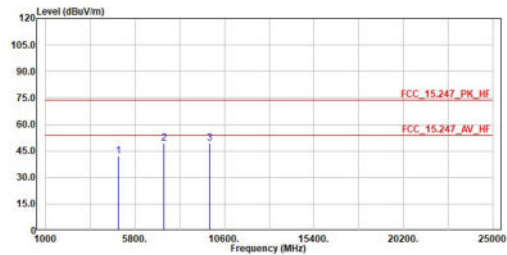


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	42.25	74.00	-31.75	56.61	-14.36	Peak
2	7356.000	49.14	74.00	-24.86	55.50	-6.36	Peak
3	9808.000	49.42	74.00	-24.58	51.91	-2.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11ax40_TX_2452MHz
Test By :Cyril

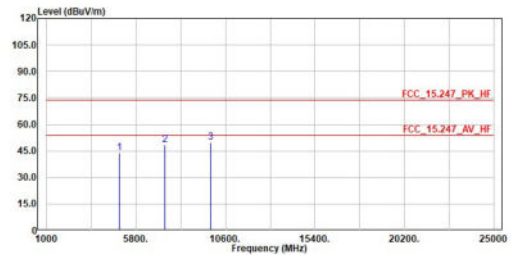


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	43.89	74.00	-30.11	58.25	-14.36	Peak
2	7356.000	48.46	74.00	-25.54	54.82	-6.36	Peak
3	9808.000	49.68	74.00	-24.32	52.17	-2.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

5. Antenna Port Conducted Emission

5.1. Test Setup

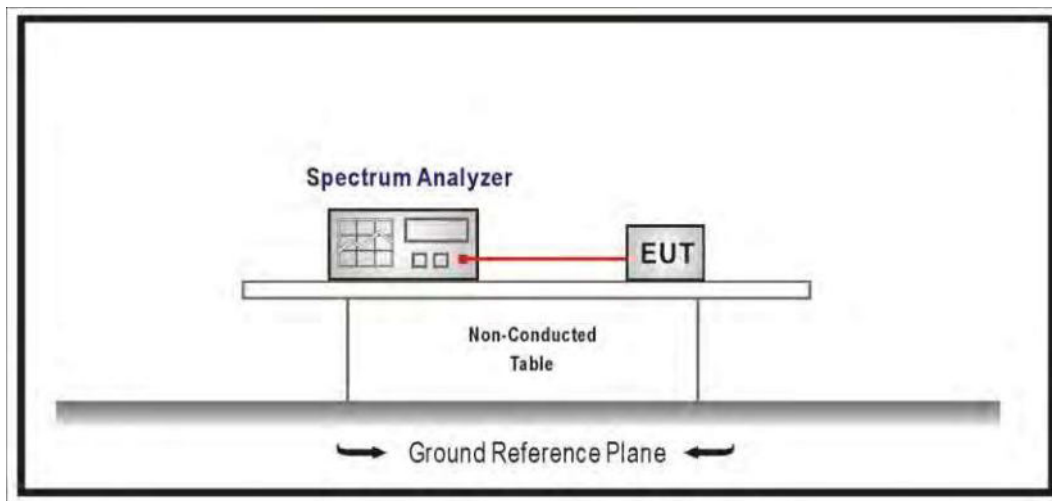

5.2. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limit. If the transmitter complies with the conducted power limit based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limit specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

5.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074 D01 V05r02 for compliance to FCC 47CFR 15.247 requirements.


Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Specification


According to FCC Part 15 Subpart C Paragraph 15.247.

5.5. Test Result of Antenna Port Conducted Emission


802.11b / 2412 MHz / Ant. 0

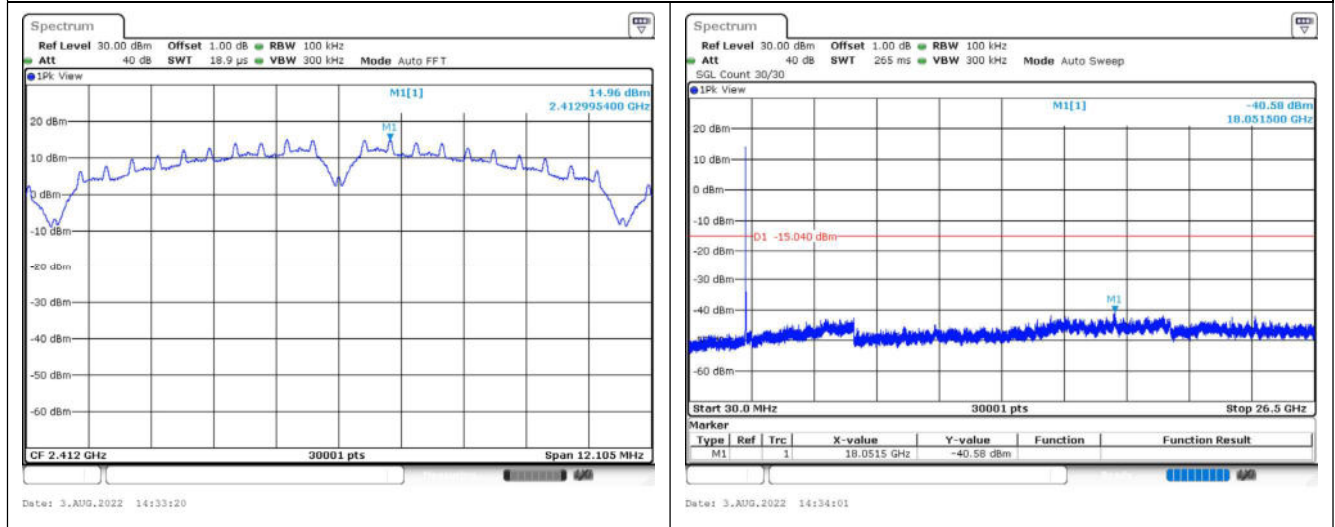


802.11b / 2437 MHz / Ant. 0

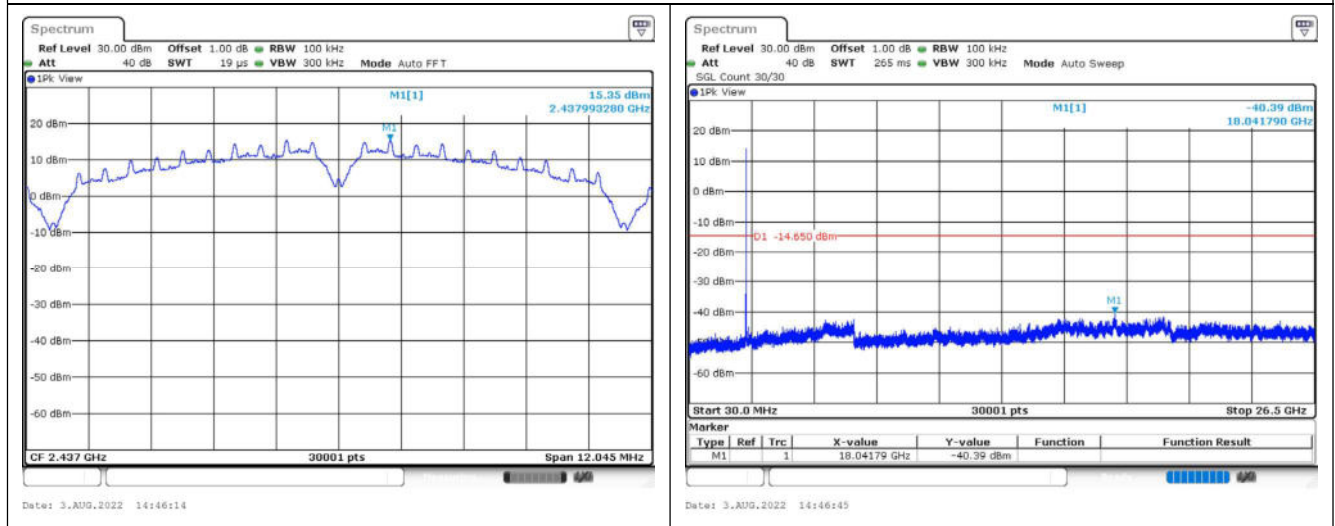


802.11b / 2462 MHz / Ant. 0

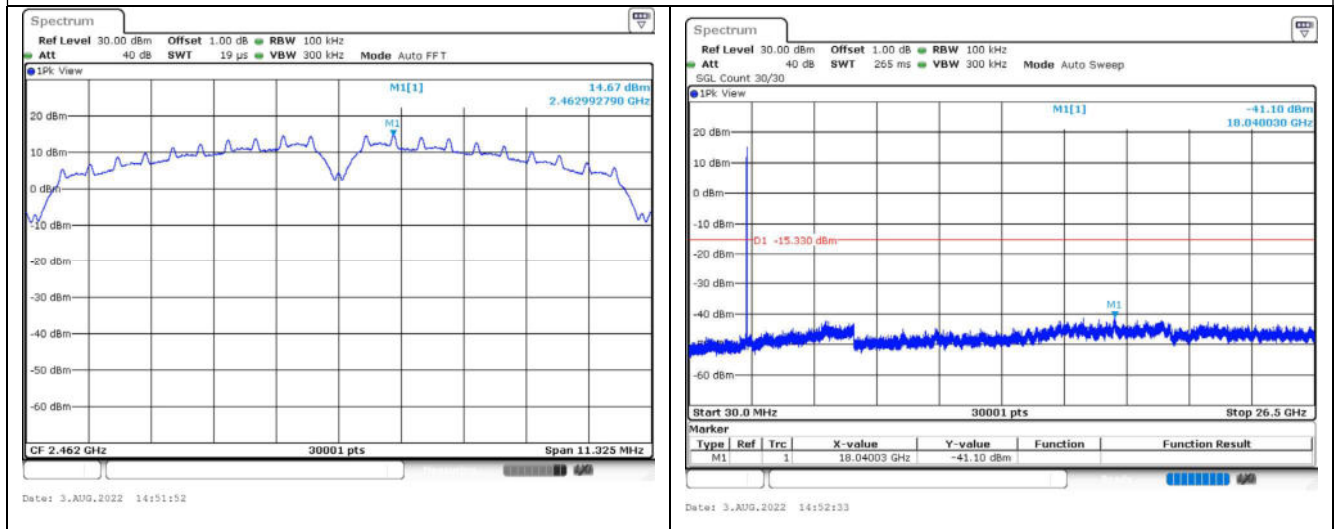


802.11g / 2412 MHz / Ant. 0






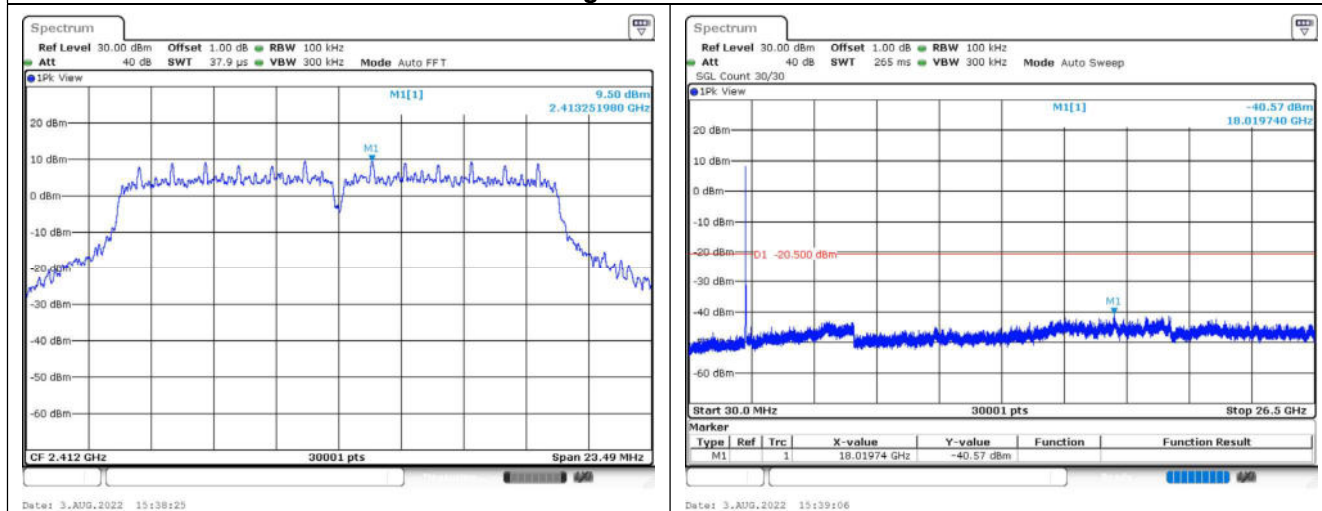








802.11g / 2437 MHz / Ant. 0

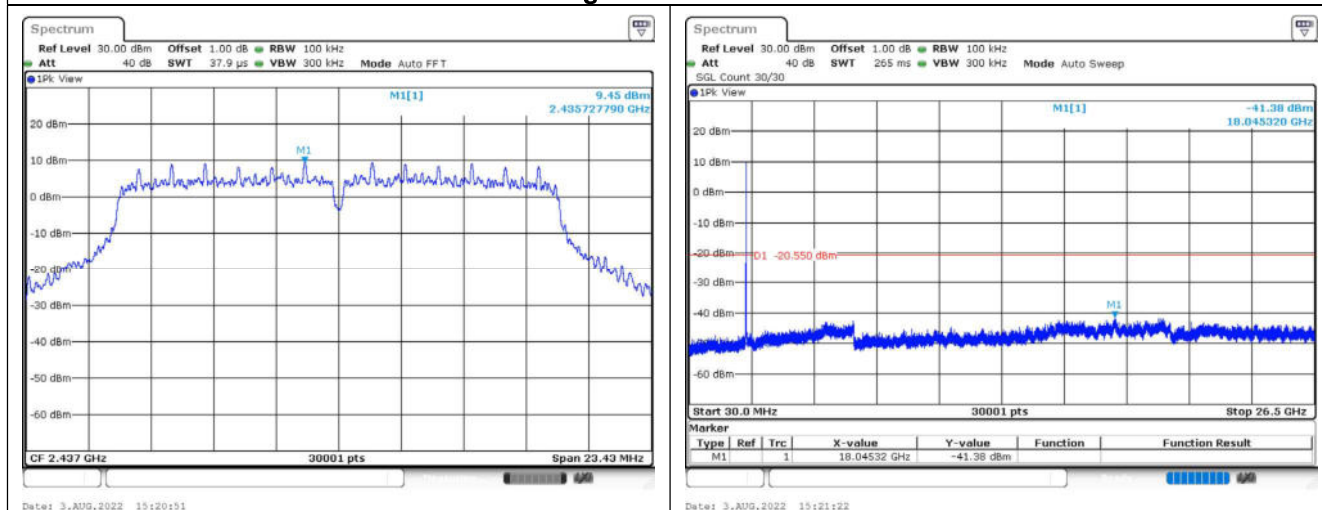



802.11g / 2462 MHz / Ant. 0

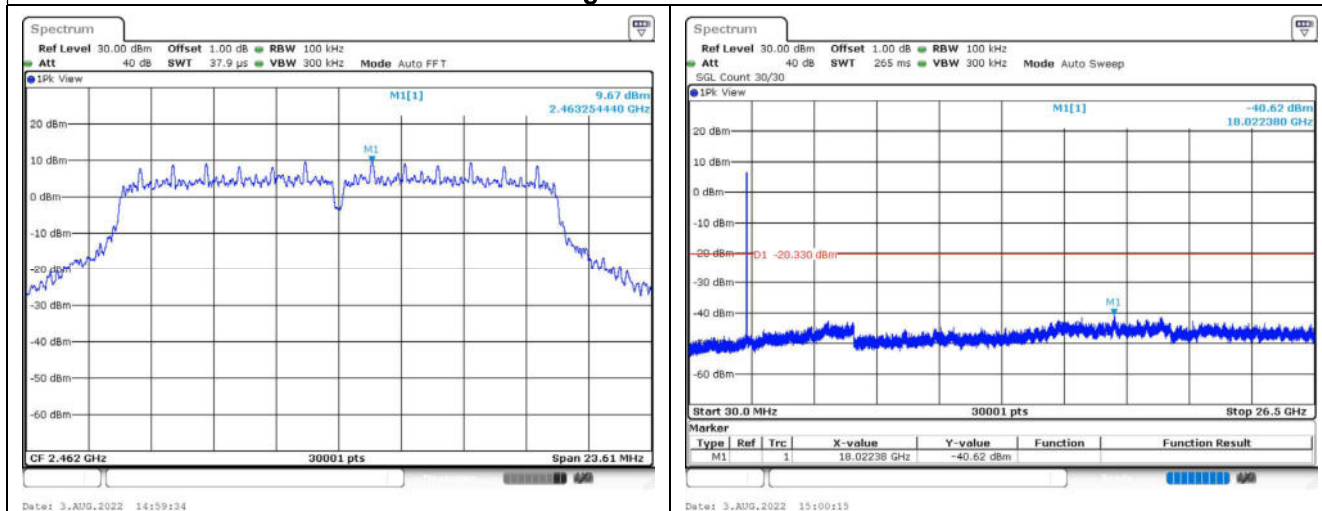

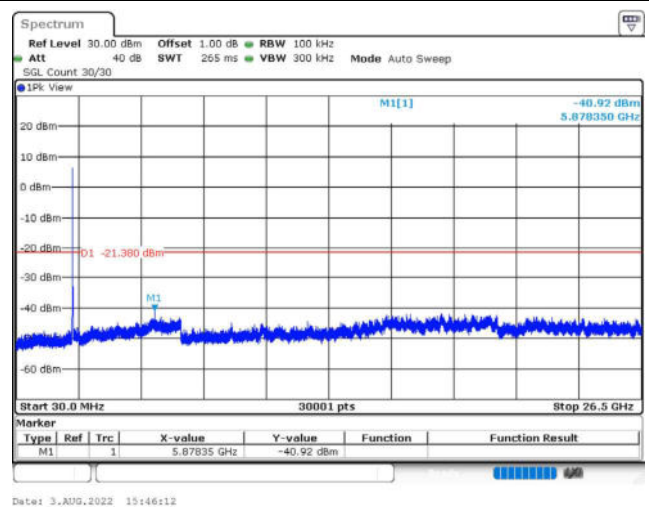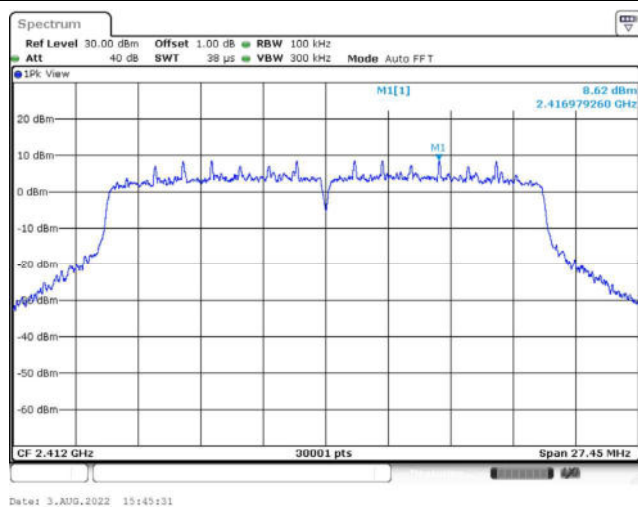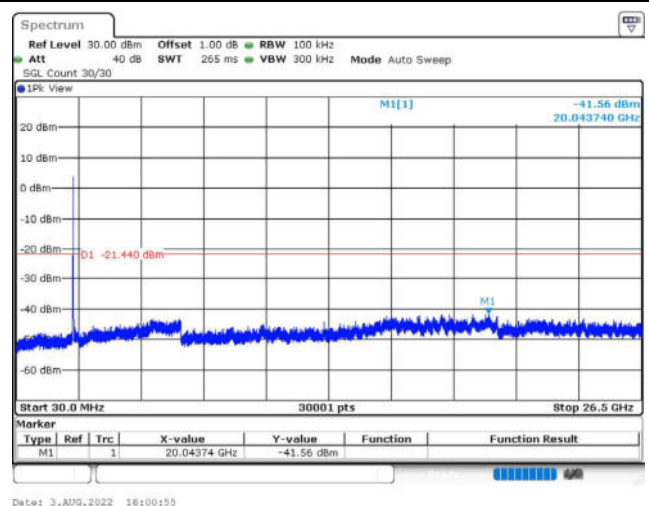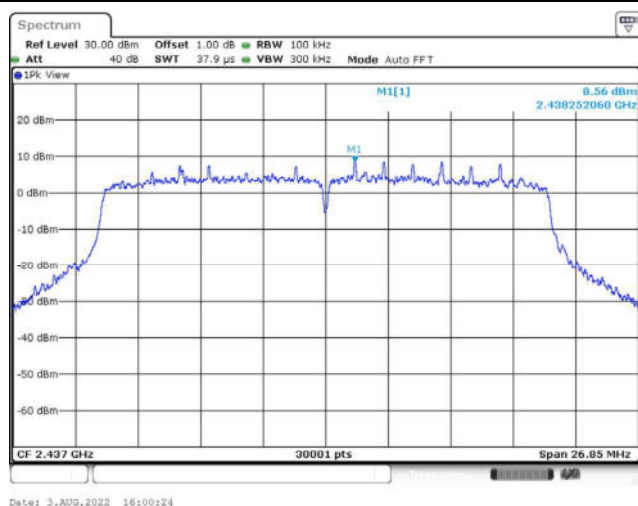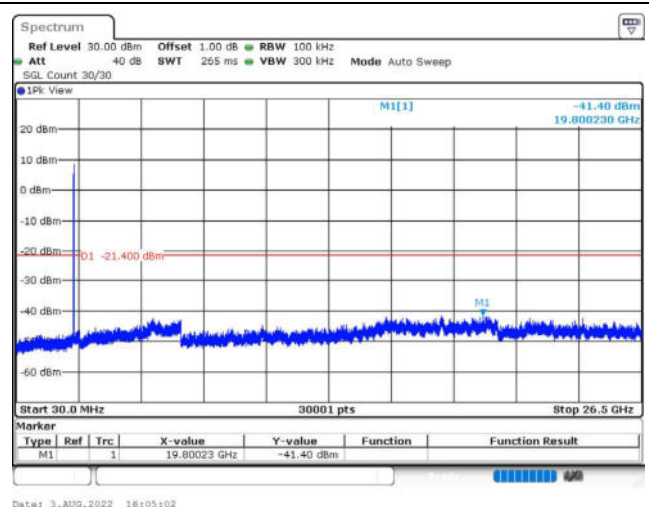
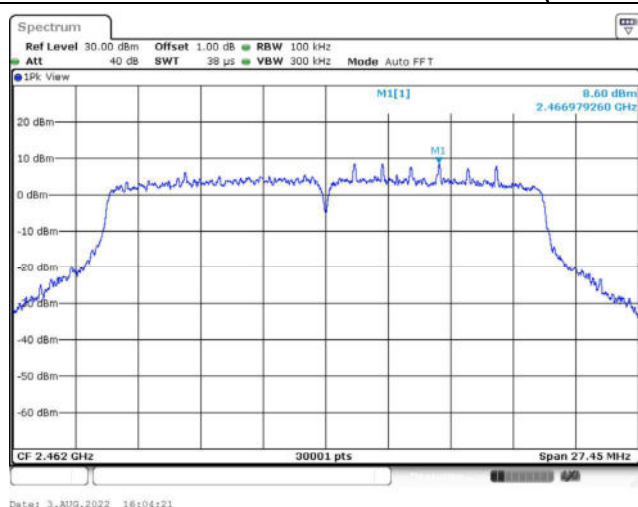
802.11ax (20 MHz) / 2412 MHz / Ant. 0**802.11ax (20 MHz) / 2437 MHz / Ant. 0****802.11ax (20 MHz) / 2462 MHz / Ant. 0**

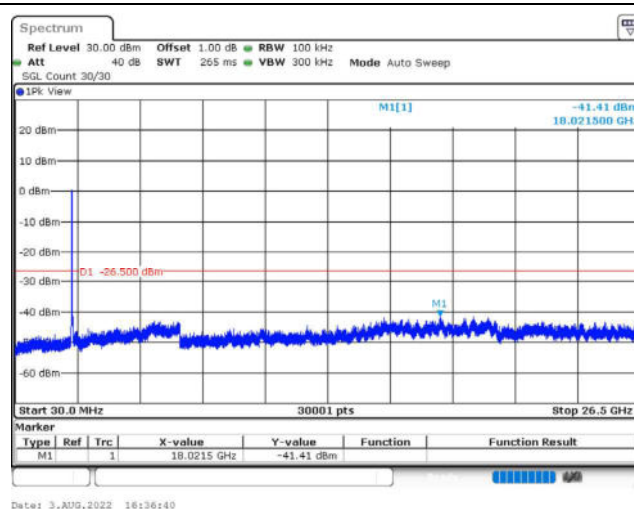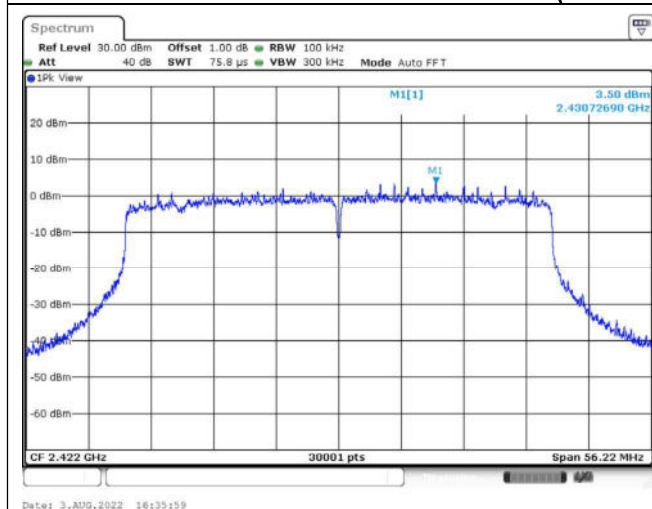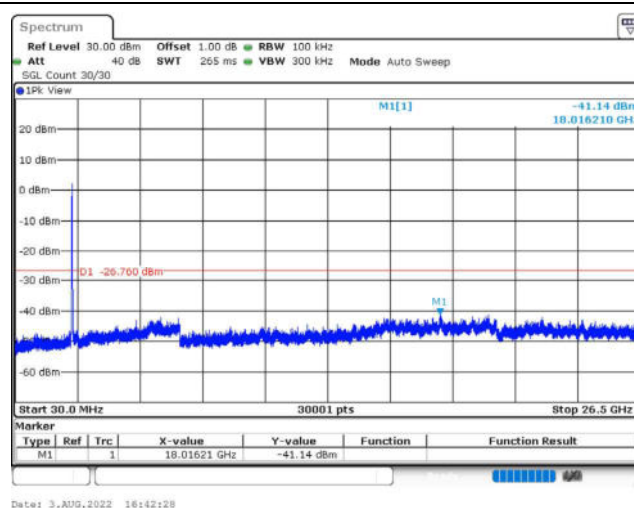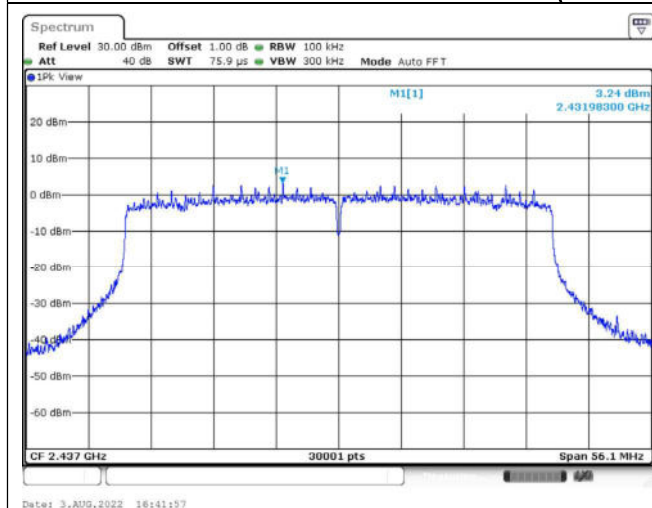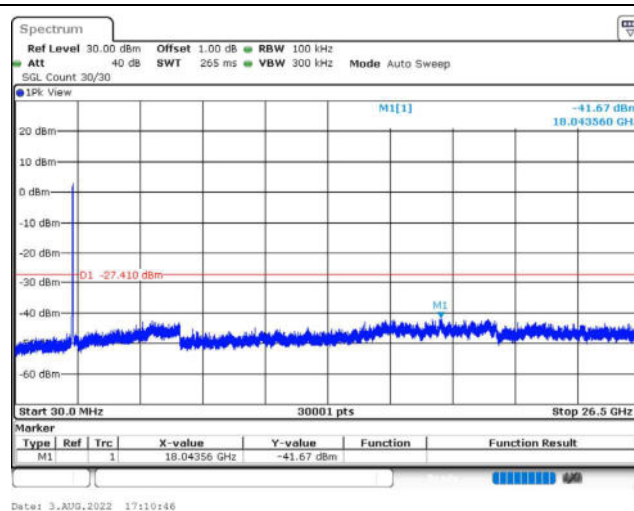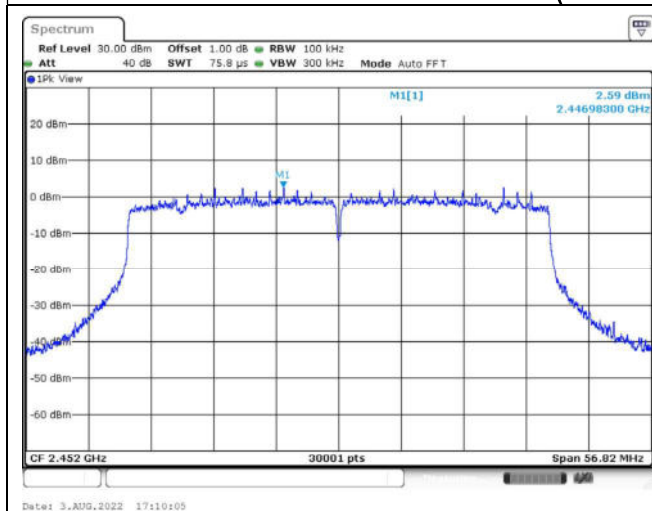802.11ax (40 MHz) / 2422 MHz / Ant. 0**802.11ax (40 MHz) / 2437 MHz / Ant. 0****802.11ax (40 MHz) / 2452 MHz / Ant. 0**



802.11b / 2412 MHz / Ant. 1

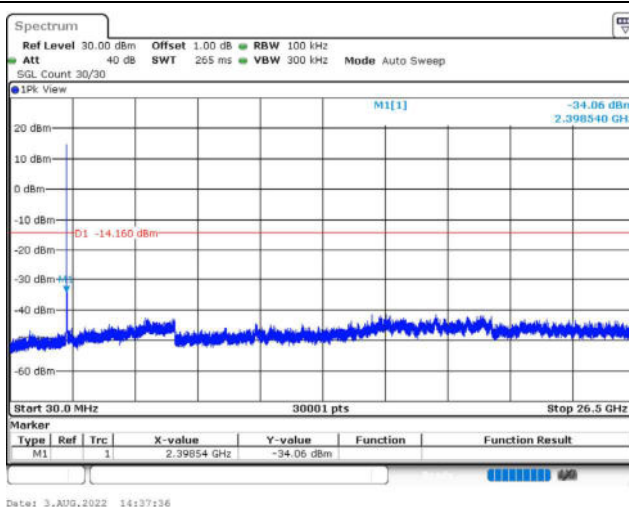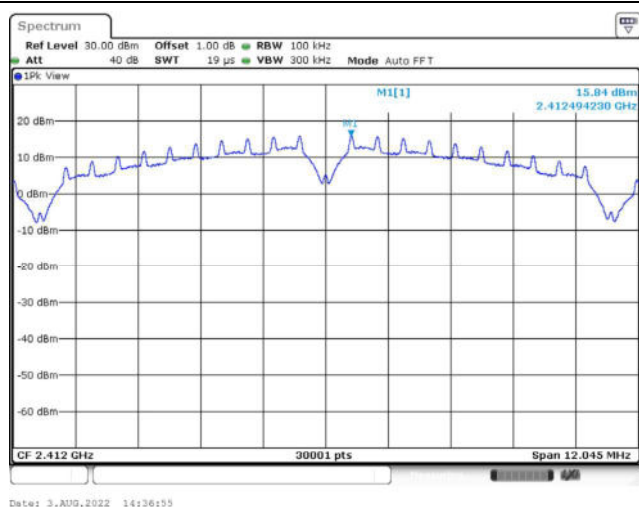


802.11b / 2437 MHz / Ant. 1

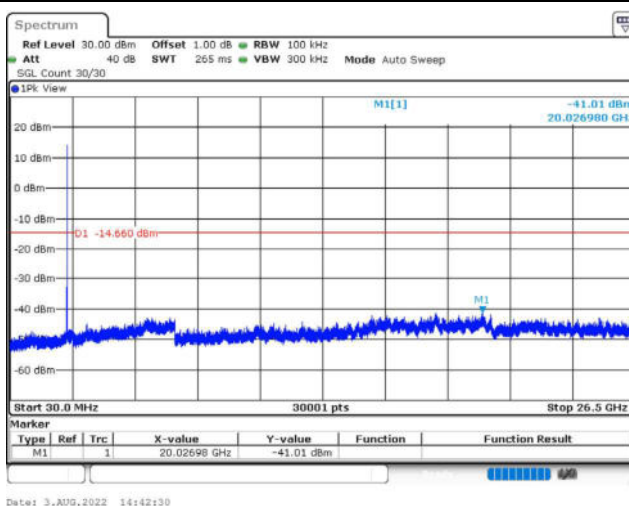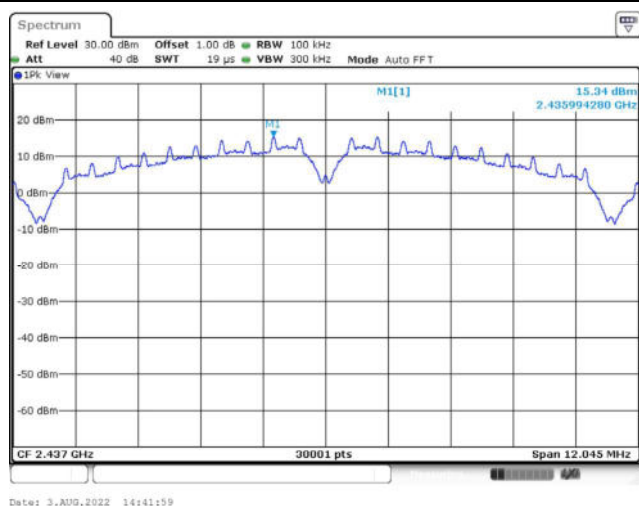


802.11b / 2462 MHz / Ant. 1

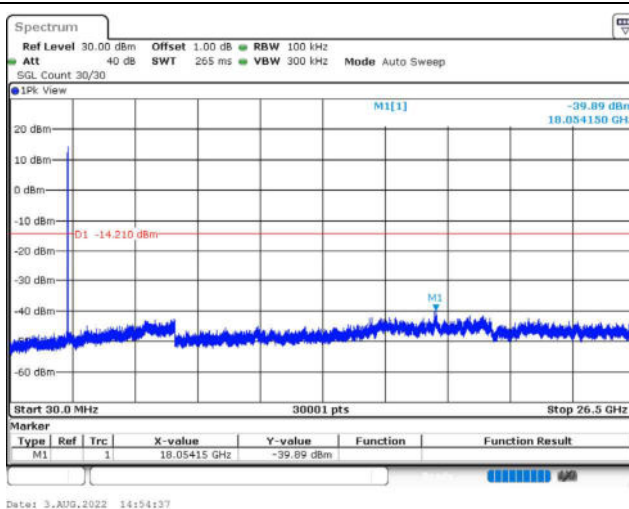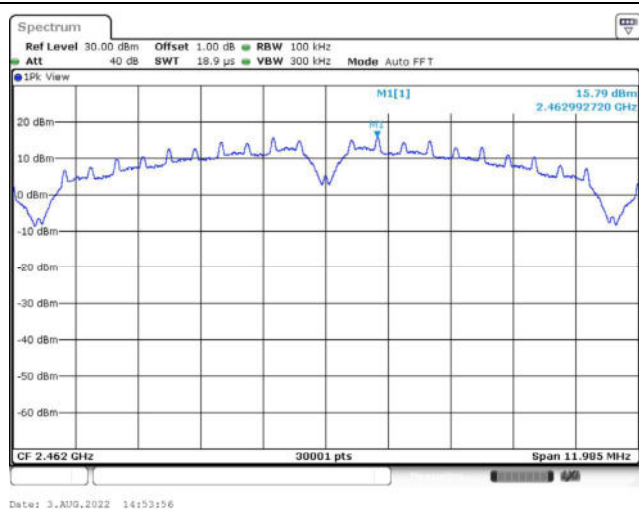


802.11g / 2412 MHz / Ant. 1



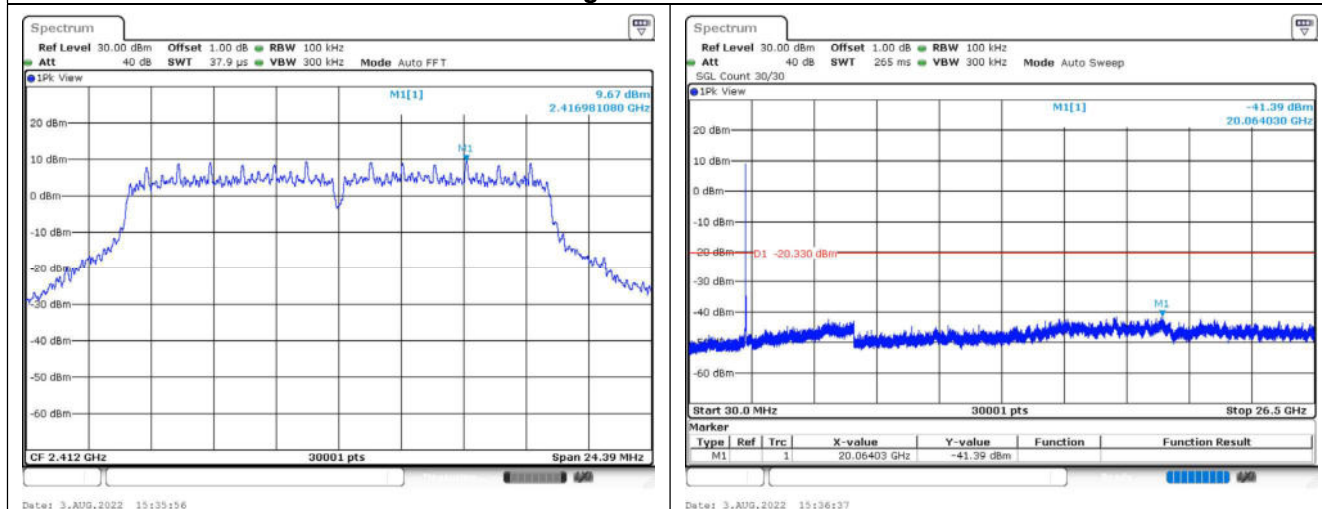








802.11g / 2437 MHz / Ant. 1






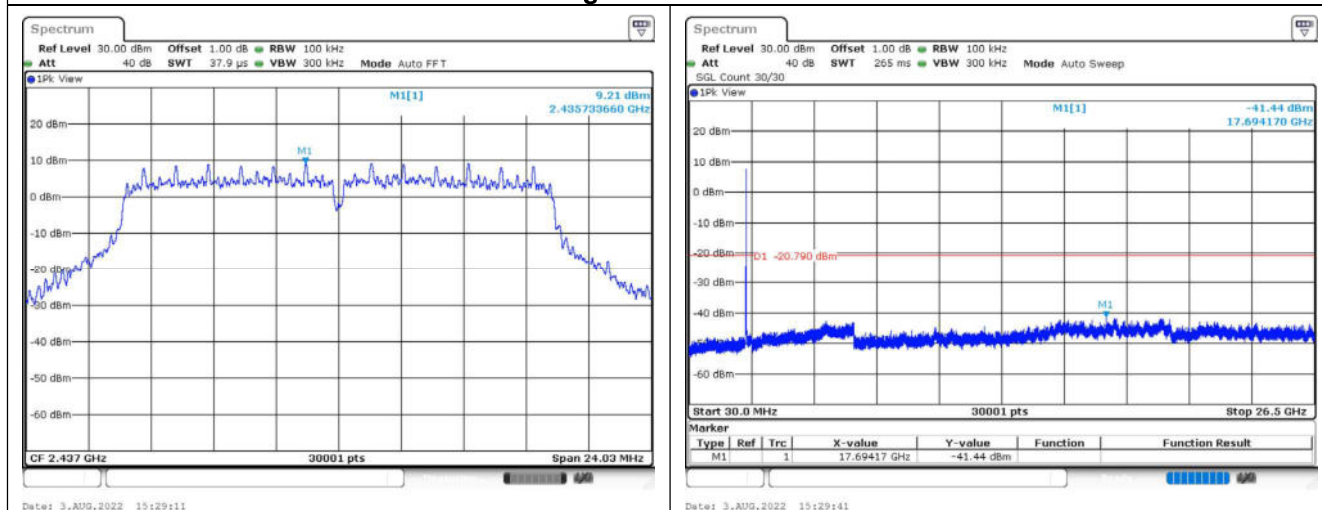



802.11g / 2462 MHz / Ant. 1




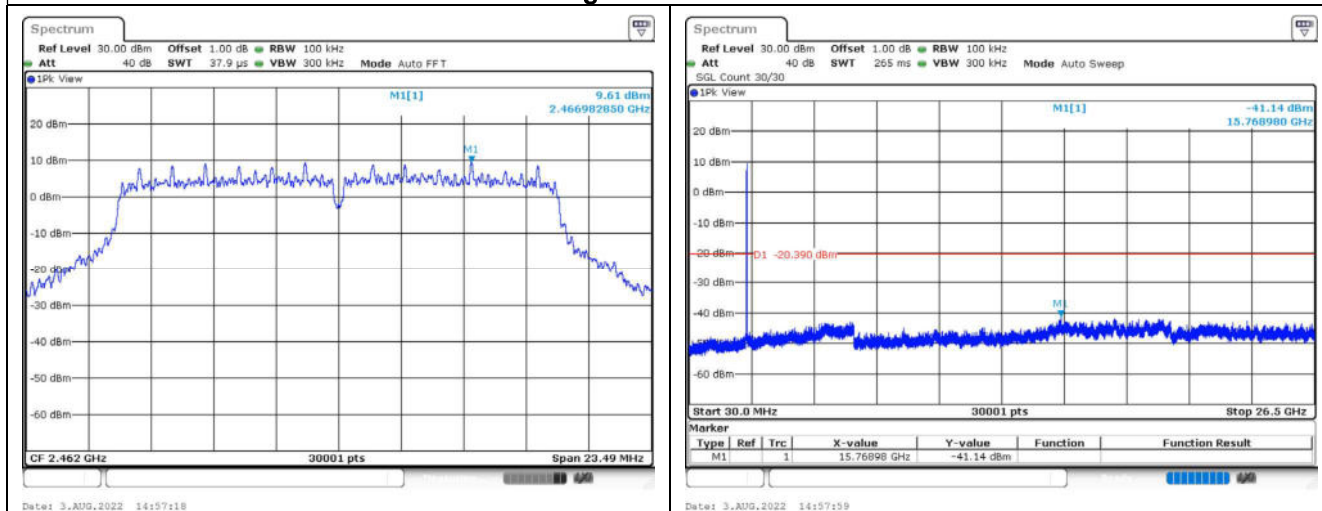


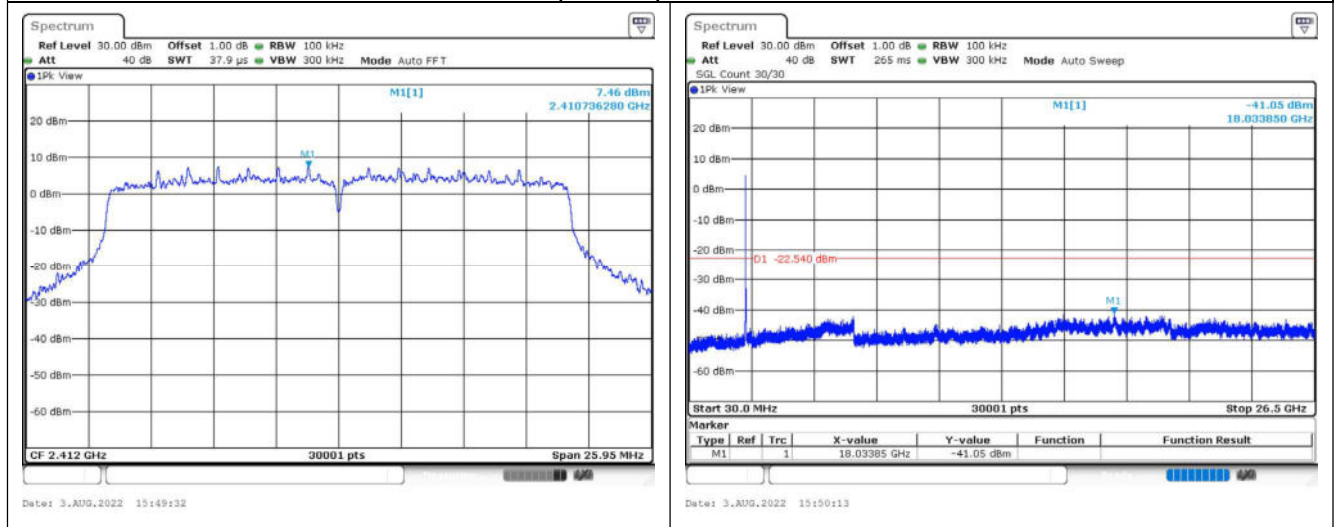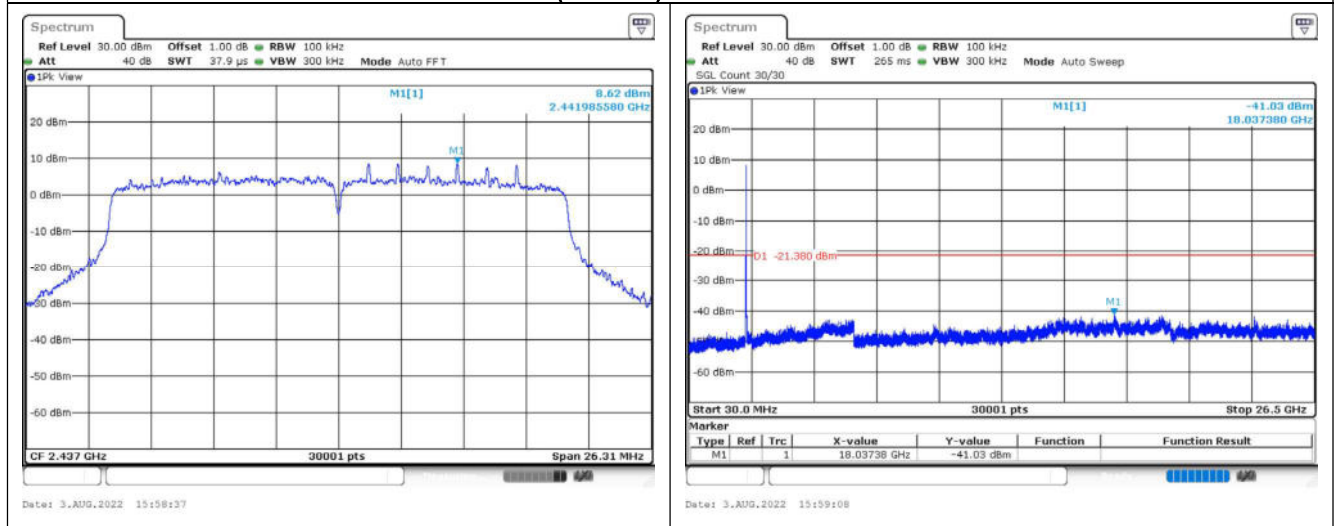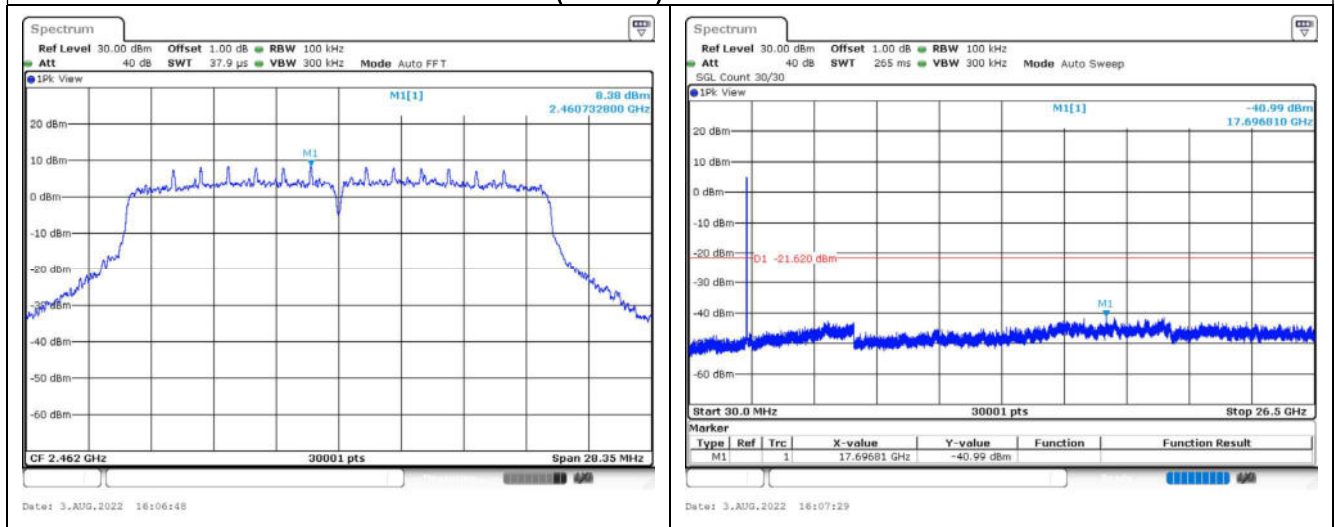802.11ax (20 MHz) / 2412 MHz / Ant. 1**802.11ax (20 MHz) / 2437 MHz / Ant. 1****802.11ax (20 MHz) / 2462 MHz / Ant. 1**

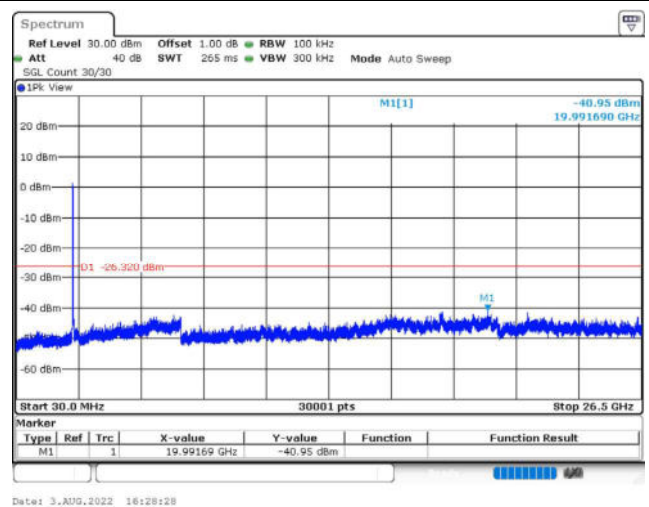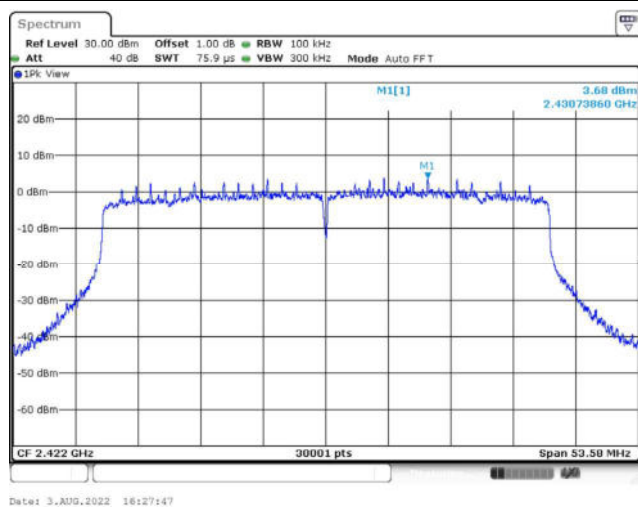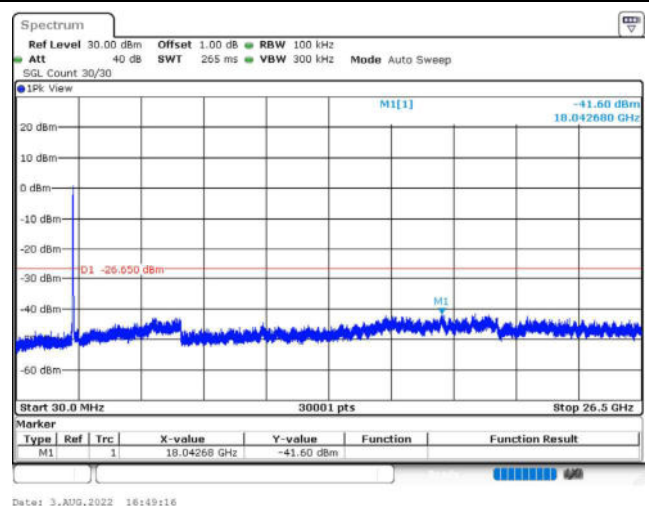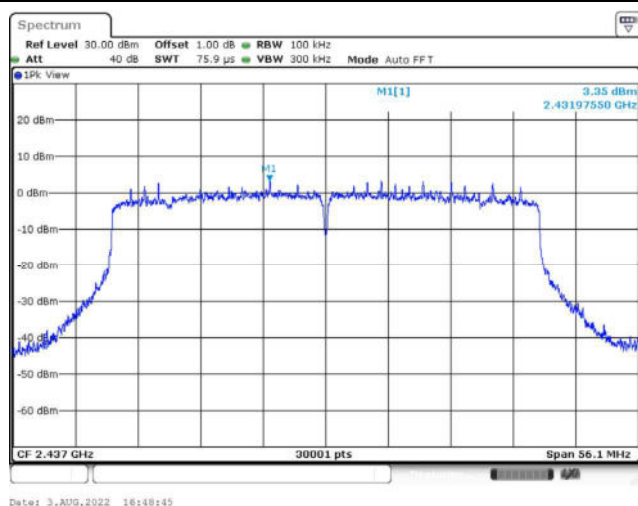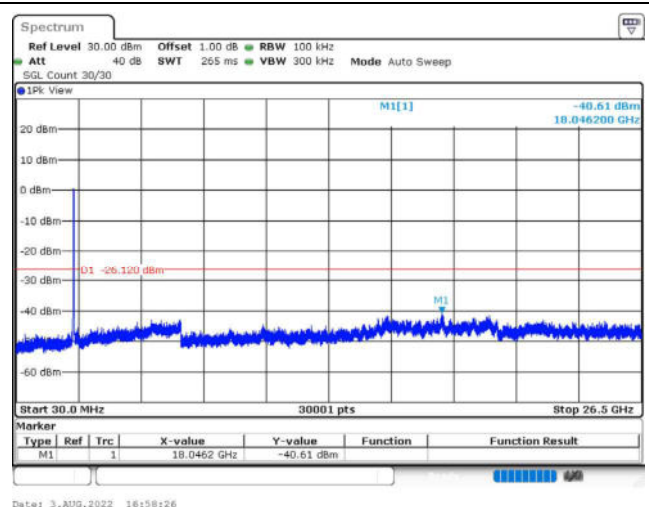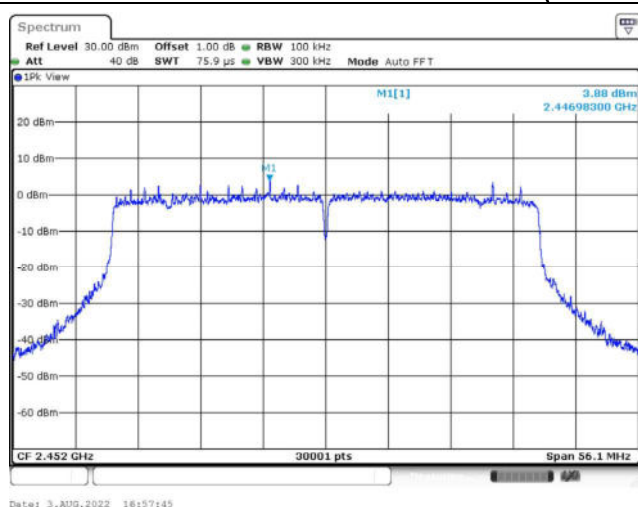802.11ax (40 MHz) / 2422 MHz / Ant. 1**802.11ax (40 MHz) / 2437 MHz / Ant. 1****802.11ax (40 MHz) / 2452 MHz / Ant. 1**

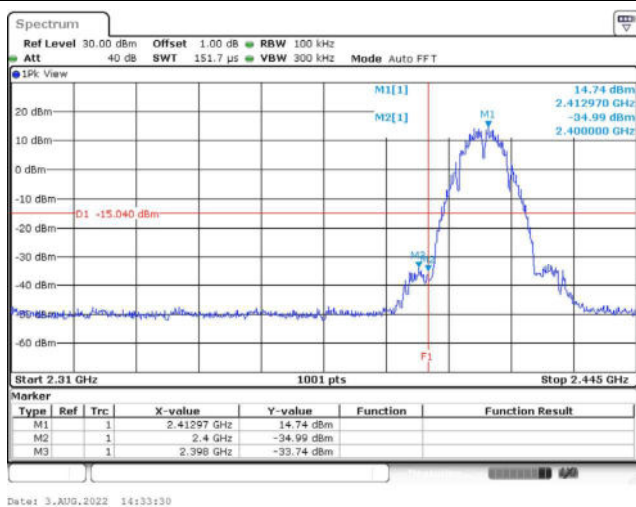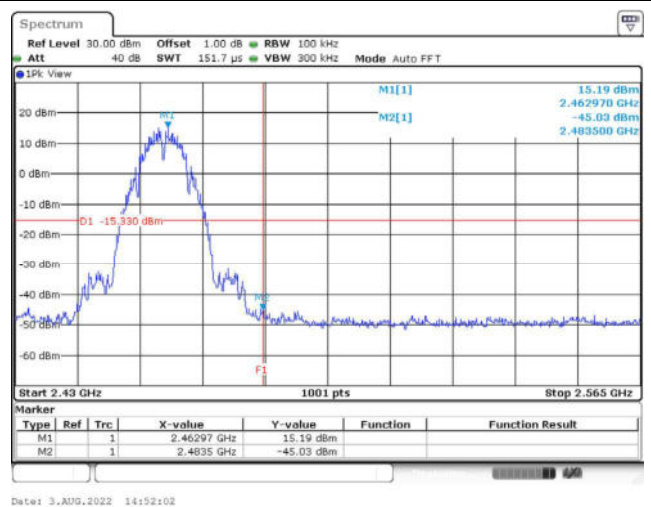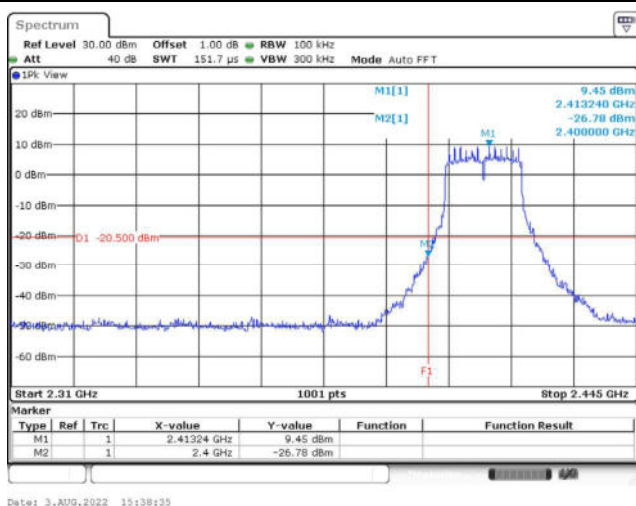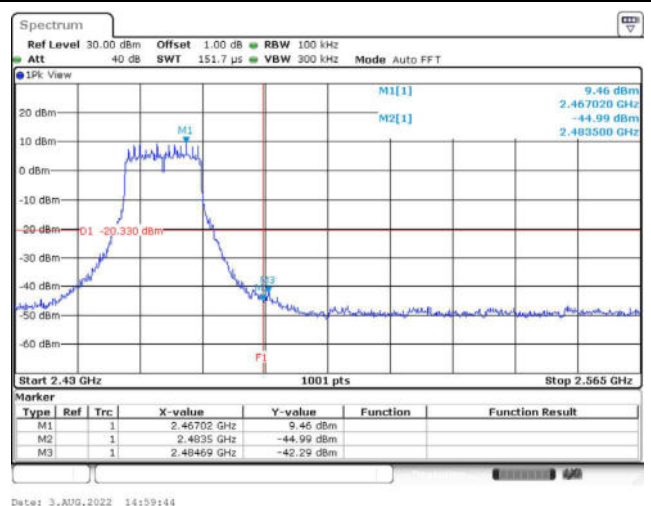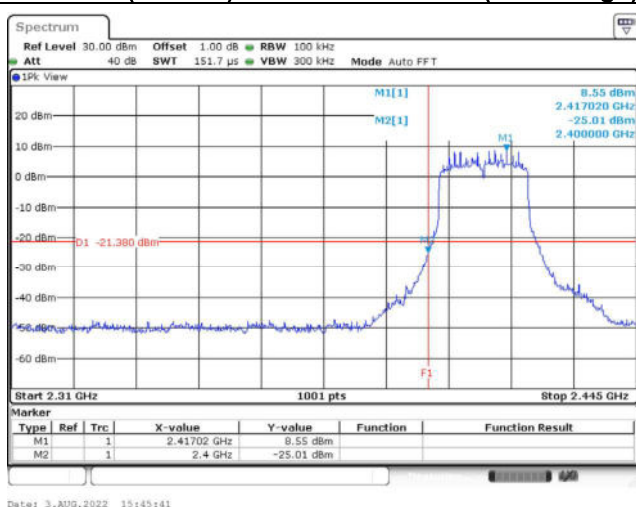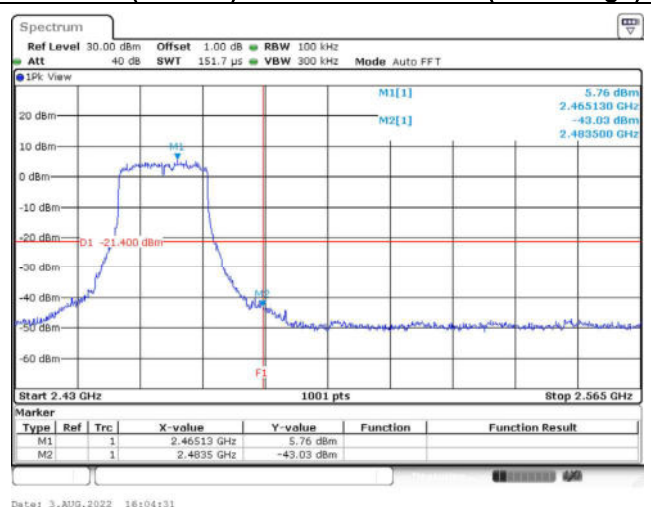
802.11b / 2412 MHz / Ant. 0 (Band Edge)**802.11b / 2462 MHz / Ant. 0 (Band Edge)****802.11g / 2412 MHz / Ant. 0 (Band Edge)****802.11g / 2462 MHz / Ant. 0 (Band Edge)****802.11ax (20 MHz) / 2412 MHz / Ant. 0 (Band Edge)****802.11ax (20 MHz) / 2462 MHz / Ant. 0 (Band Edge)**

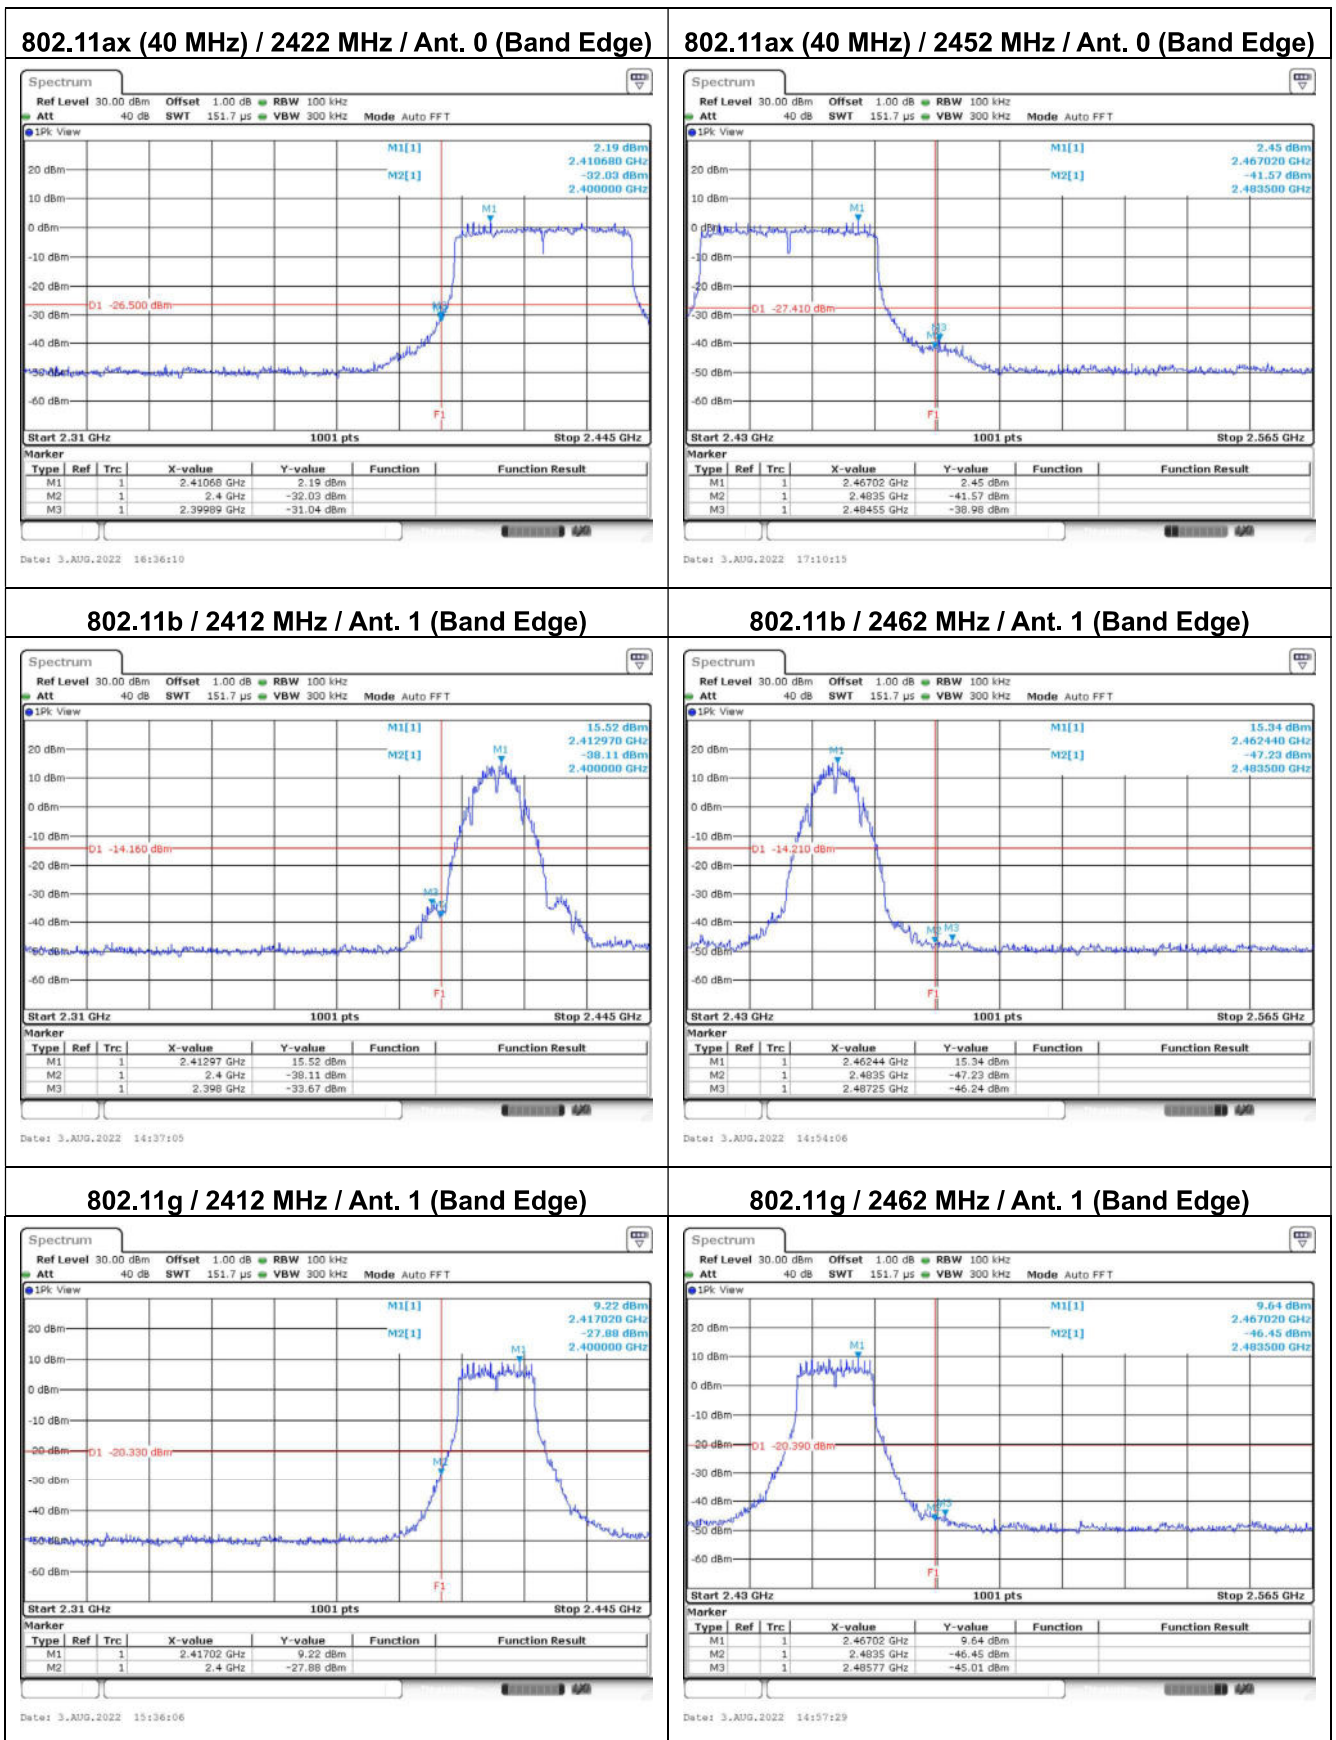

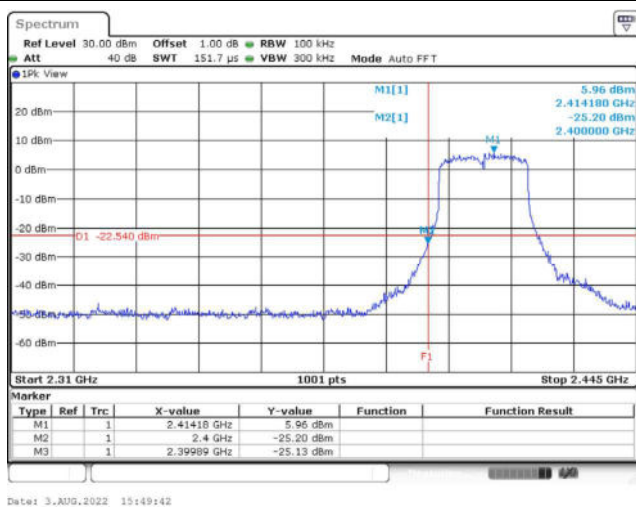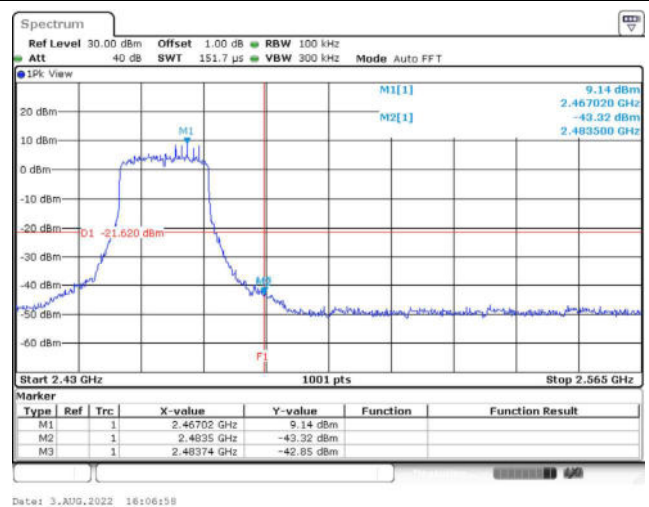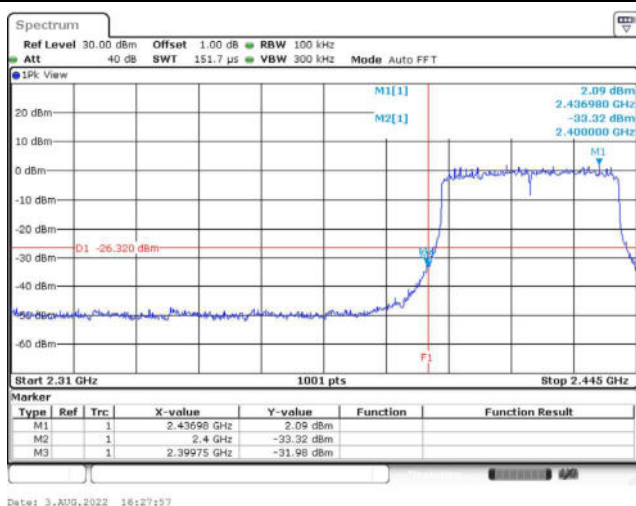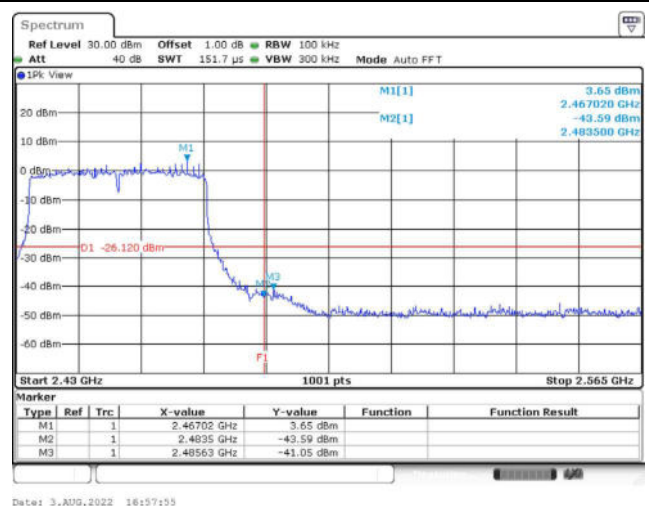802.11ax (20 MHz) / 2412 MHz / Ant. 1 (Band Edge)**802.11ax (20 MHz) / 2462 MHz / Ant. 1 (Band Edge)****802.11ax (40 MHz) / 2422 MHz / Ant. 1 (Band Edge)****802.11ax (40 MHz) / 2452 MHz / Ant. 1 (Band Edge)**

6. Radiated Emission Band Edge

6.1. Test Setup

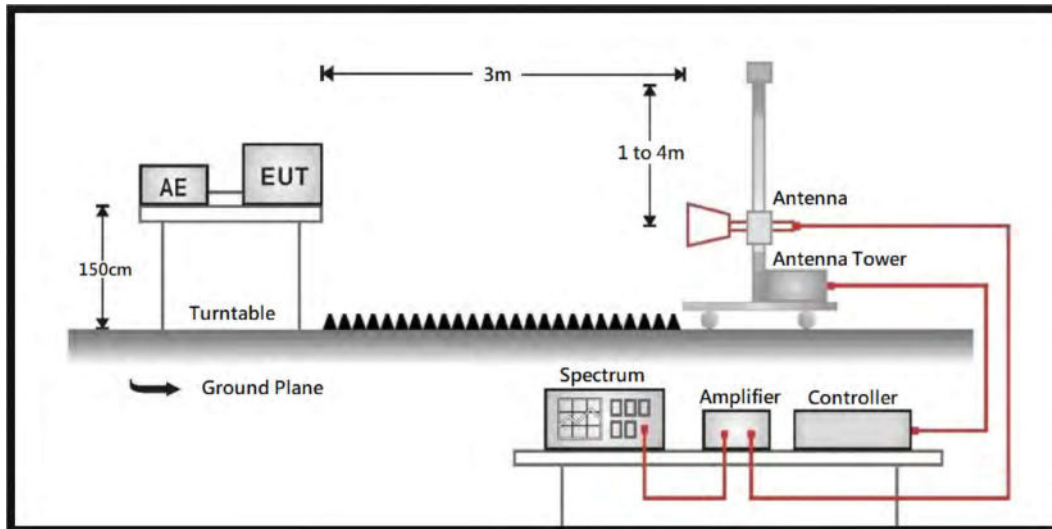

6.2. Test Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30 dB below the level of the fundamental or to the general radiated emission limit in paragraph 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

6.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to the FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

6.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247.

6.5. Test Result of Radiated Emission Band Edge

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11b_TX_2412MHz
Test By :Cyril

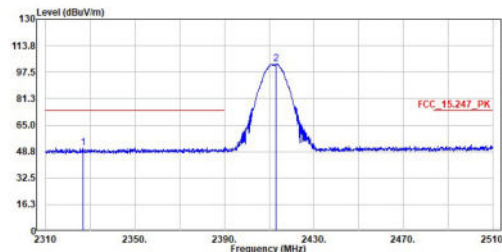


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2326.900	51.13	74.00	-22.87	38.96	12.17	Peak
2	2413.200	102.69	-----	-----	90.01	12.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11b_TX_2412MHz
Test By :Cyril

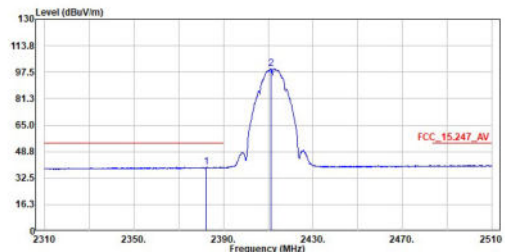


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2382.900	39.14	54.00	-14.86	26.64	12.50	Average
2	2411.200	99.80	-----	-----	87.13	12.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11b_TX_2412MHz
Test By :Cyril

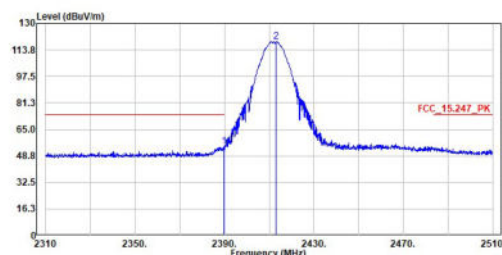


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	54.44	74.00	-19.56	41.90	12.54	Peak
2	2413.200	118.95	-----	-----	106.27	12.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11b_TX_2412MHz
Test By :Cyril

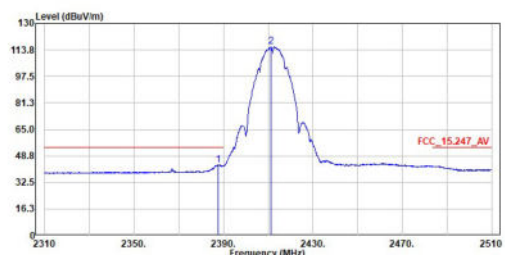


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.800	43.31	54.00	-10.69	30.78	12.53	Average
2	2411.200	115.67	-----	-----	103.00	12.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11b_TX_2437MHz
Test By :Cyril

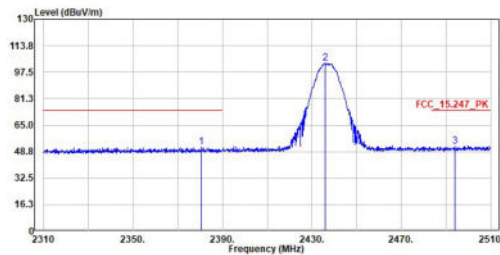


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2380.400	51.71	74.00	-22.29	39.23	12.48	Peak
2	2435.900	103.03	-----	-----	90.21	12.82	Peak
3	2494.100	52.05	74.00	-21.95	38.89	13.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11b_TX_2437MHz
Test By :Cyril

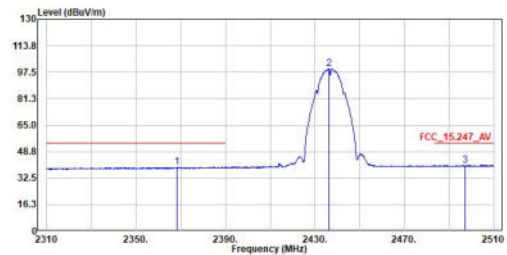


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2368.300	39.26	54.00	-14.74	26.85	12.41	Average
2	2436.300	99.78	-----	-----	86.95	12.83	Average
3	2497.100	40.33	54.00	-13.67	27.15	13.18	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11b_TX_2437MHz
Test By :Cyril

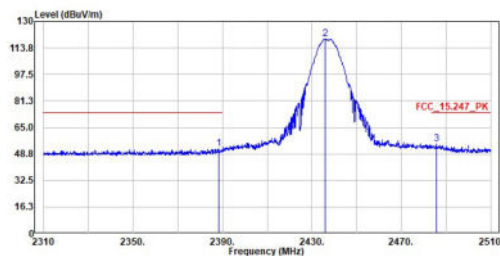


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.200	51.76	74.00	-22.24	39.23	12.53	Peak
2	2435.900	119.27	-----	-----	106.45	12.82	Peak
3	2485.700	54.74	74.00	-19.26	41.63	13.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11b_TX_2437MHz
Test By :Cyril

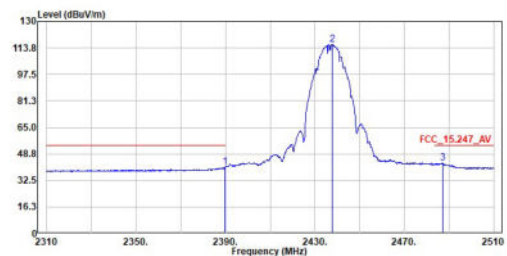


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	40.74	54.00	-13.26	28.20	12.54	Average
2	2437.700	115.87	-----	-----	103.04	12.83	Average
3	2487.100	43.10	54.00	-10.90	29.97	13.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11b_TX_2462MHz
Test By :Cyril

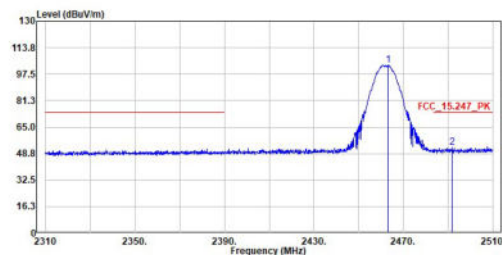


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.200	102.93	-----	89.95	12.98	13.16	Peak
2	2491.800	52.27	74.00	-21.73	39.11		Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11b_TX_2462MHz
Test By :Cyril

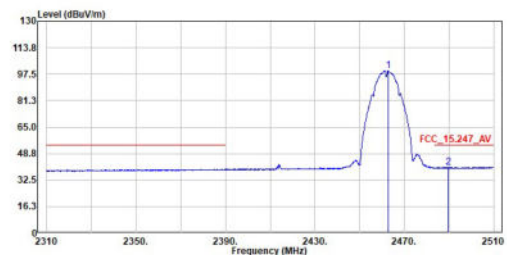


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.700	99.63	-----	86.65	12.98		Average
2	2489.800	40.36	54.00	-13.64	27.22	13.14	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11b_TX_2462MHz
Test By :Cyril

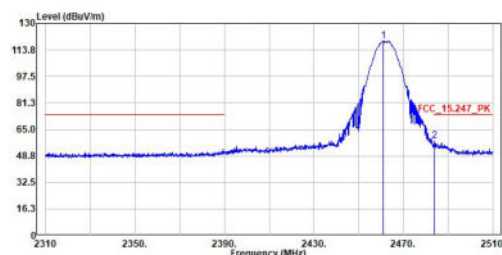


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.900	119.22	-----	106.26	12.96	13.10	Peak
2	2483.900	57.74	74.00	-16.26	44.64		Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11b_TX_2462MHz
Test By :Cyril

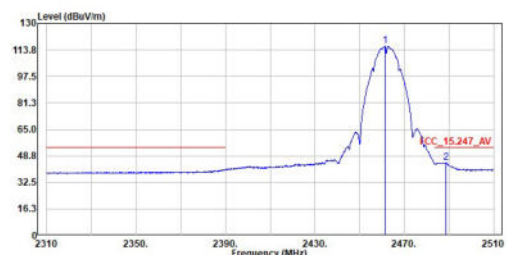


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.300	116.18	-----	103.21	12.97		Average
2	2488.600	44.55	54.00	-9.45	31.41	13.14	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11g_TX_2412MHz
Test By :Cyril

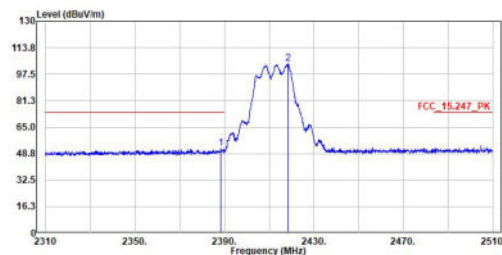


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.500	52.03	74.00	-21.97	39.49	12.54	Peak
2	2418.300	103.00	-----	-----	91.09	12.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11g_TX_2412MHz
Test By :Cyril

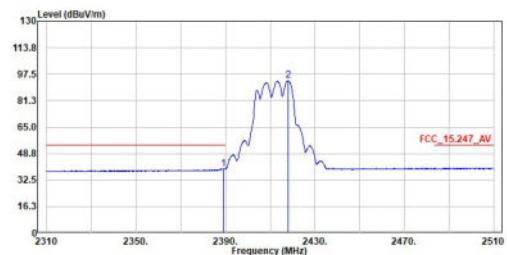


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.100	39.47	54.00	-14.53	26.93	12.54	Average
2	2418.100	93.48	-----	-----	80.78	12.70	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11g_TX_2412MHz
Test By :Cyril

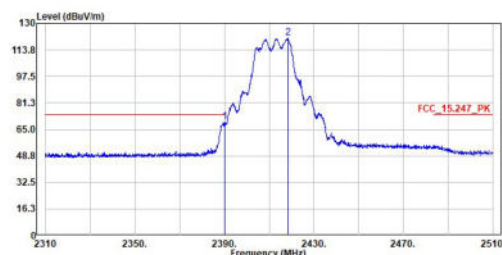


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	69.79	74.00	-4.21	57.25	12.54	Peak
2	2418.300	121.02	-----	-----	108.31	12.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11g_TX_2412MHz
Test By :Cyril

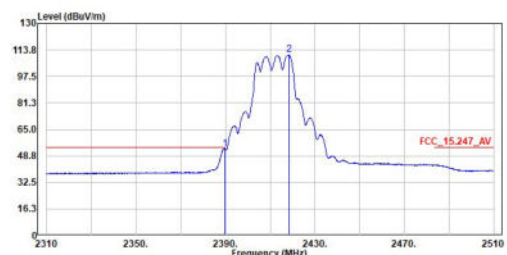


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	52.99	54.00	-1.01	40.45	12.54	Average
2	2418.400	110.62	-----	-----	97.90	12.72	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11g_TX_2437MHz
Test By :Cyril

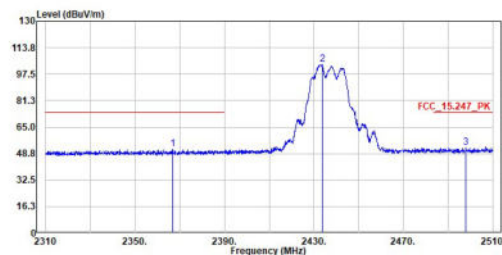


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2366.700	51.33	74.00	-22.67	38.92	12.41	Peak
2	2433.700	103.32	-----	-----	90.52	12.80	Peak
3	2497.900	52.53	74.00	-21.47	39.34	13.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11g_TX_2437MHz
Test By :Cyril

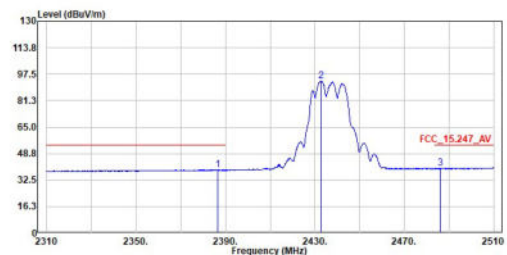


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2386.400	38.79	54.00	-15.21	26.26	12.53	Average
2	2432.700	93.18	-----	-----	80.38	12.80	Average
3	2486.200	39.90	54.00	-14.10	26.78	13.12	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11g_TX_2437MHz
Test By :Cyril

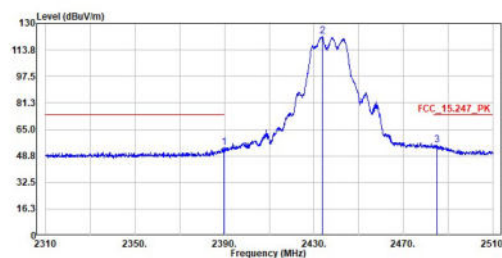


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	53.74	74.00	-20.26	41.20	12.54	Peak
2	2433.700	121.96	-----	-----	109.16	12.80	Peak
3	2484.900	55.51	74.00	-18.49	42.41	13.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11g_TX_2437MHz
Test By :Cyril

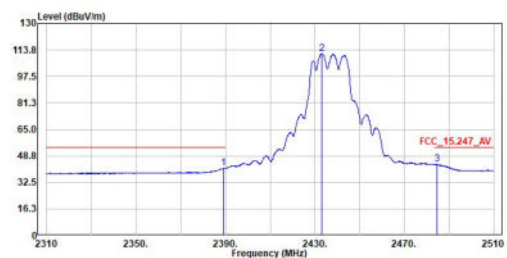


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.200	41.25	54.00	-12.75	28.71	12.54	Average
2	2433.100	111.41	-----	-----	98.61	12.80	Average
3	2484.500	43.64	54.00	-10.36	30.54	13.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11g_TX_2462MHz
Test By :Cyril

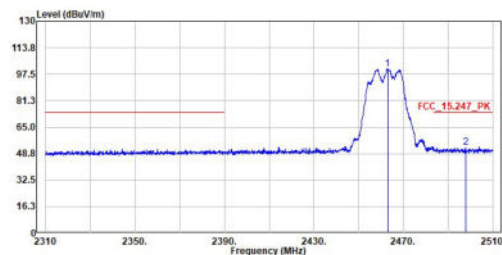


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.000	100.68	-----	87.78	12.98	Peak	
2	2497.800	52.28	74.00	-21.72	39.09	13.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11g_TX_2462MHz
Test By :Cyril

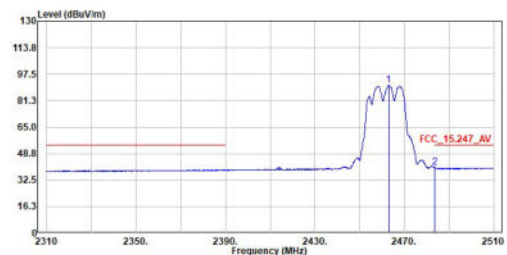


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.000	90.94	-----	77.96	12.98	Average	
2	2483.600	40.22	54.00	-13.78	27.12	13.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11g_TX_2462MHz
Test By :Cyril

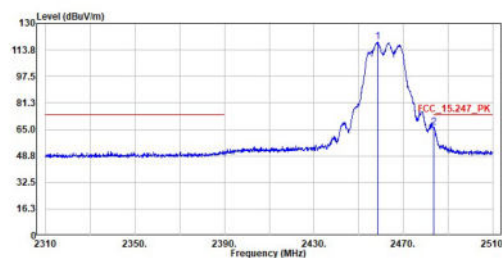


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2458.000	118.67	-----	105.71	12.96	Peak	
2	2483.600	66.29	74.00	-7.71	53.19	13.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11g_TX_2462MHz
Test By :Cyril

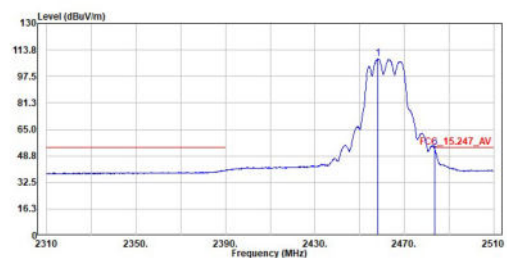


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2458.000	108.18	-----	95.24	12.94	Average	
2	2483.600	52.74	54.00	-1.26	39.64	13.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11ax20_TX_2412MHz
Test By :Cyril

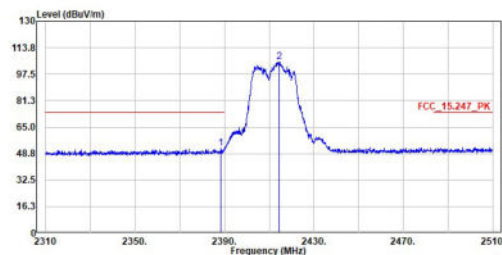


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.500	51.97	74.00	-22.03	39.43	12.54	Peak
2	2414.500	105.22	-----	-----	92.53	12.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11ax20_TX_2412MHz
Test By :Cyril

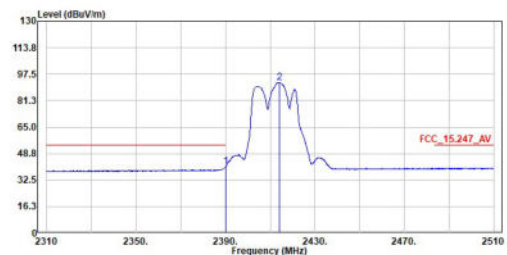


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	40.49	54.00	-13.51	27.95	12.54	Average
2	2414.000	92.41	-----	-----	79.72	12.69	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11ax20_TX_2412MHz
Test By :Cyril

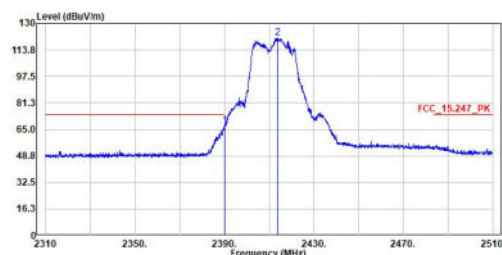


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	67.27	74.00	-6.73	54.73	12.54	Peak
2	2413.900	121.38	-----	-----	108.69	12.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11ax20_TX_2412MHz
Test By :Cyril

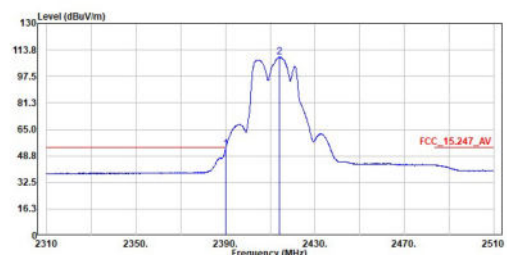


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	52.80	54.00	-1.20	40.26	12.54	Average
2	2414.200	109.39	-----	-----	96.70	12.69	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11ax20_TX_2437MHz
Test By :Cyril

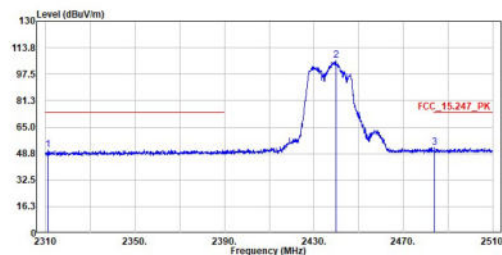


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2311.100	51.08	74.00	-22.92	39.01	12.07	Peak
2	2439.900	105.91	-----	-----	93.07	12.84	Peak
3	2484.000	52.32	74.00	-21.68	39.22	13.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :11ax20_TX_2437MHz
Test By :Cyril

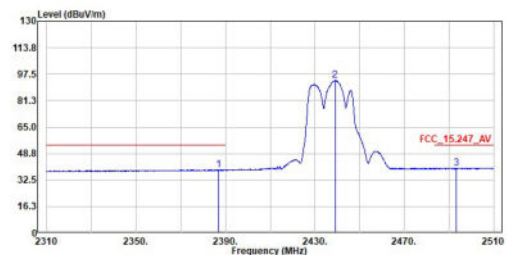


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.000	38.91	54.00	-15.09	26.38	12.53	Average
2	2439.000	93.73	-----	-----	80.89	12.84	Average
3	2493.400	39.83	54.00	-14.17	26.67	13.16	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11ax20_TX_2437MHz
Test By :Cyril

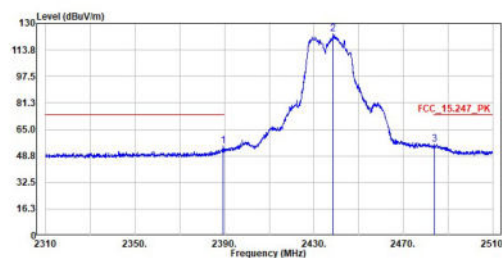


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.500	55.05	74.00	-18.95	42.51	12.54	Peak
2	2438.500	123.42	-----	-----	110.58	12.84	Peak
3	2483.800	56.04	74.00	-17.96	42.94	13.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :11ax20_TX_2437MHz
Test By :Cyril

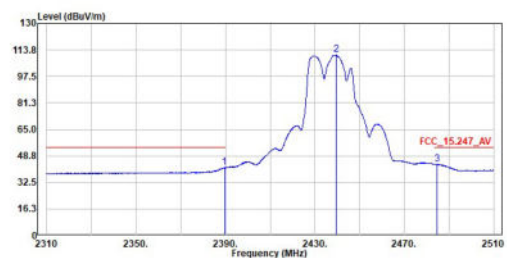

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.600	41.66	54.00	-12.34	29.12	12.54	Average
2	2439.400	110.64	-----	-----	97.80	12.84	Average
3	2484.800	43.83	54.00	-10.17	30.73	13.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.