



Appendix A

RF Test Data for 2.4G WIFI (Conducted Measurement)

Product Name: Farm monitoring Camera FMC- IP1.1 US

Test Model: 2150024802

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	<i>Kay Hu</i> Kay Hu
Supervised by:	<i>Li Huan</i> Li Huan





A.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.127	0.5	Pass
NVNT	b	2437	Ant1	9.168	0.5	Pass
NVNT	b	2462	Ant1	9.562	0.5	Pass
NVNT	g	2412	Ant1	15.682	0.5	Pass
NVNT	g	2437	Ant1	15.85	0.5	Pass
NVNT	g	2462	Ant1	14.416	0.5	Pass
NVNT	n20	2412	Ant1	16.856	0.5	Pass
NVNT	n20	2437	Ant1	17.055	0.5	Pass
NVNT	n20	2462	Ant1	14.728	0.5	Pass
NVNT	n40	2422	Ant1	36.039	0.5	Pass
NVNT	n40	2437	Ant1	36.354	0.5	Pass
NVNT	n40	2452	Ant1	35.78	0.5	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1




-6dB Bandwidth NVNT b 2437MHz Ant1

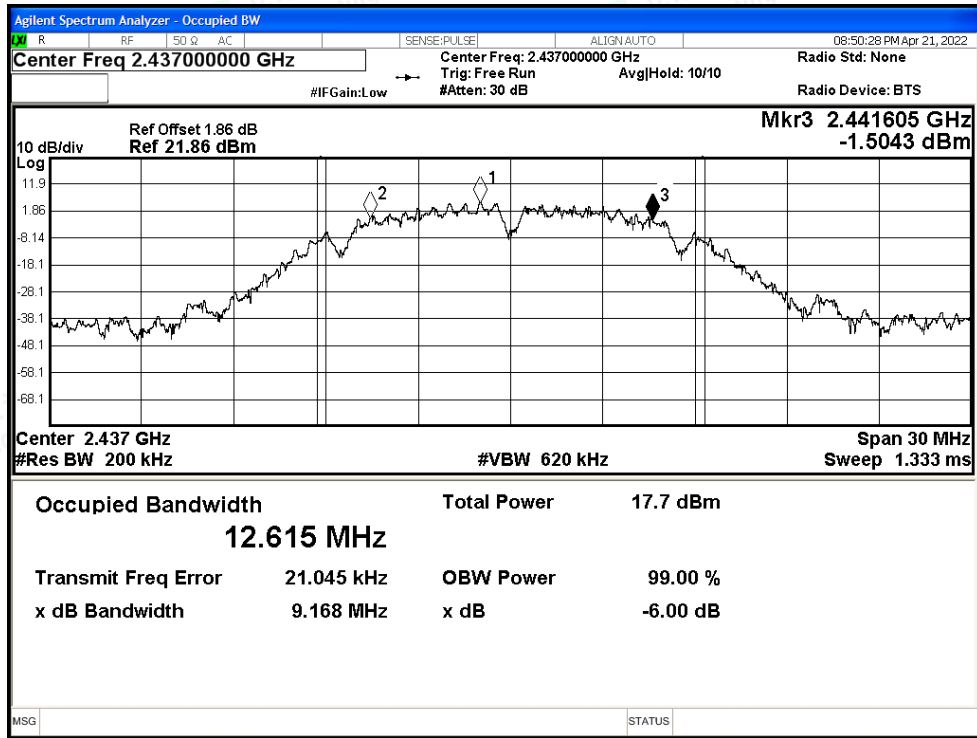




-6dB Bandwidth NVNT b 2462MHz Ant1

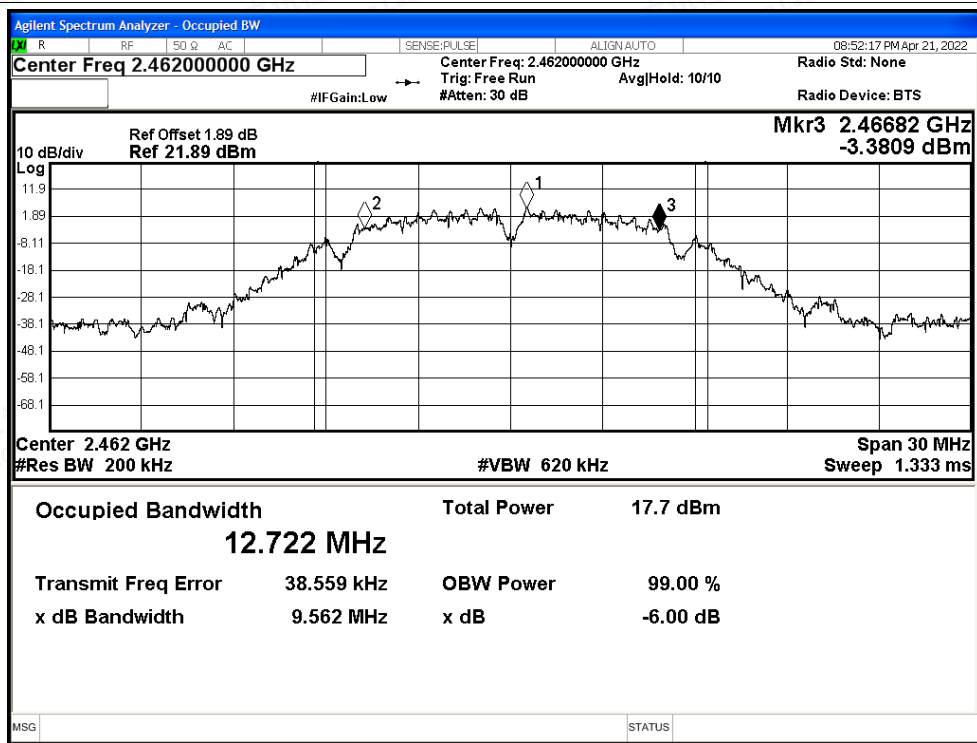


-6dB Bandwidth NVNT g 2412MHz Ant1

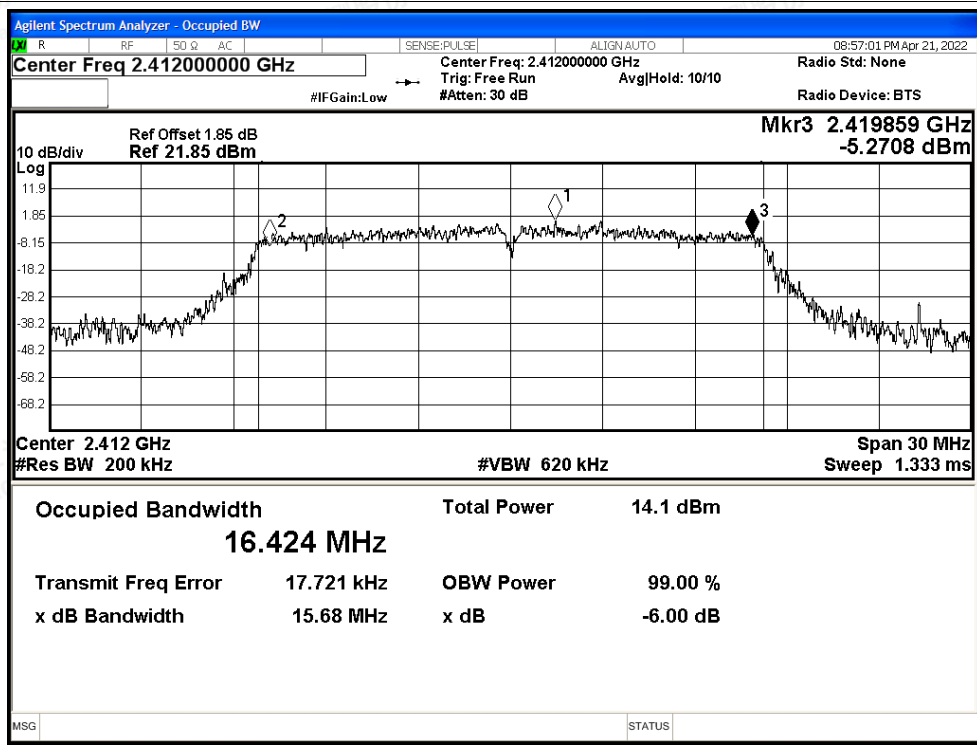




-6dB Bandwidth NVNT g 2437MHz Ant1

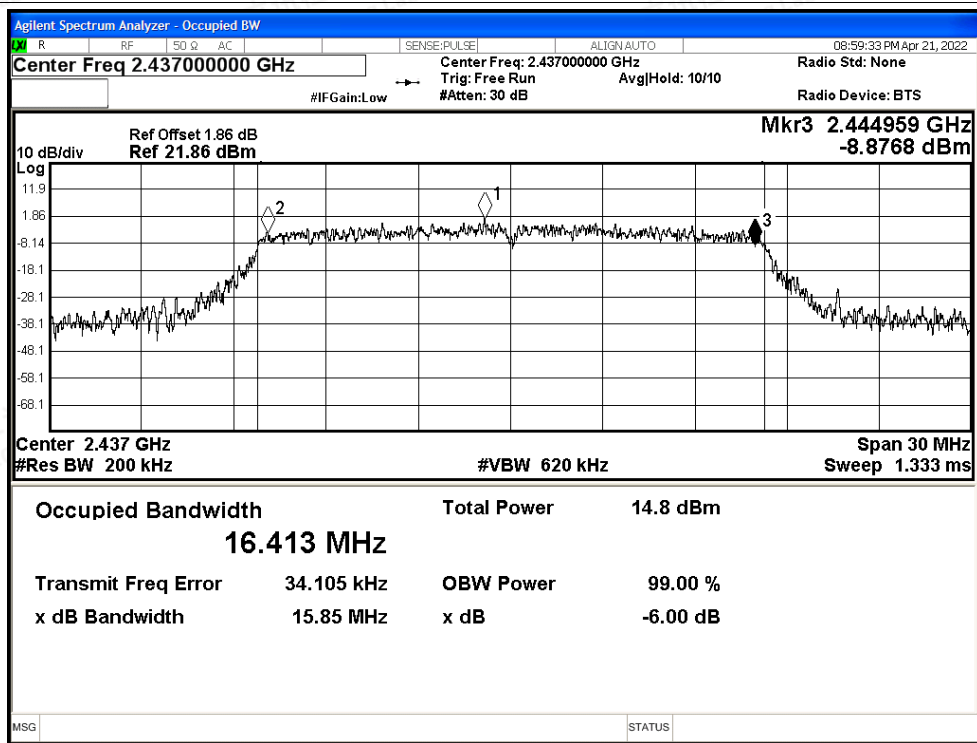


-6dB Bandwidth NVNT g 2462MHz Ant1

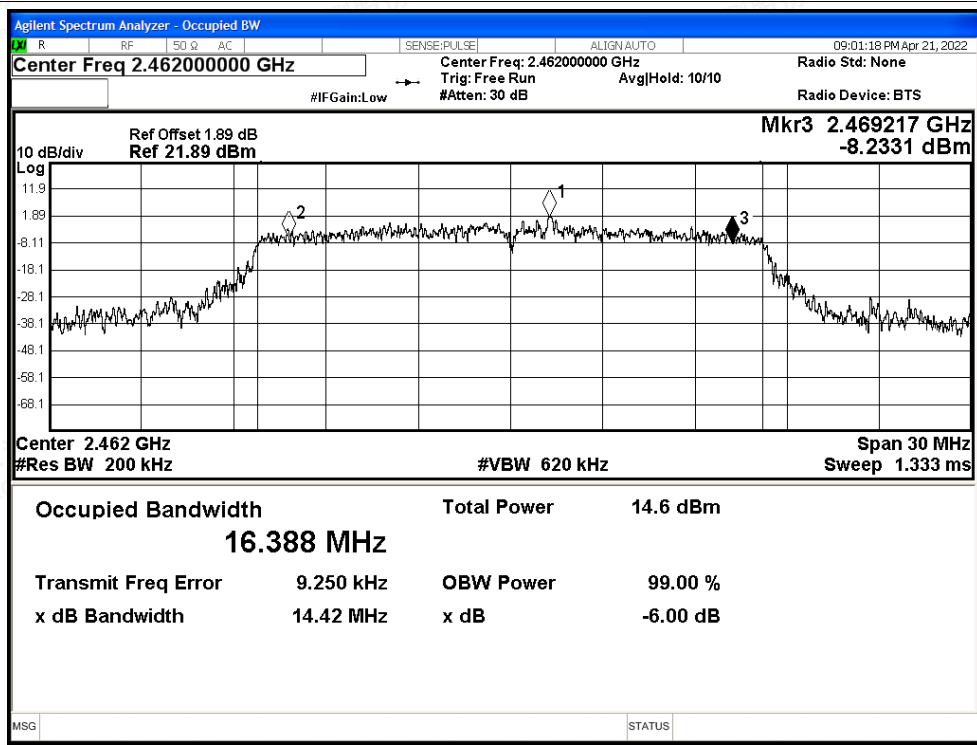




-6dB Bandwidth NVNT n20 2412MHz Ant1

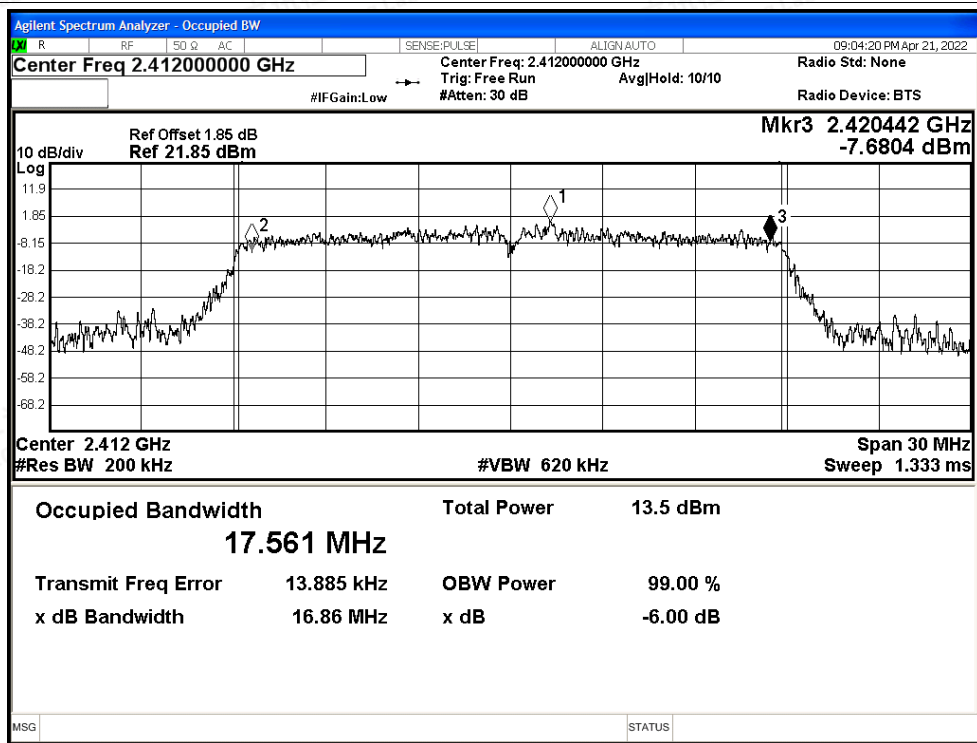


-6dB Bandwidth NVNT n20 2437MHz Ant1

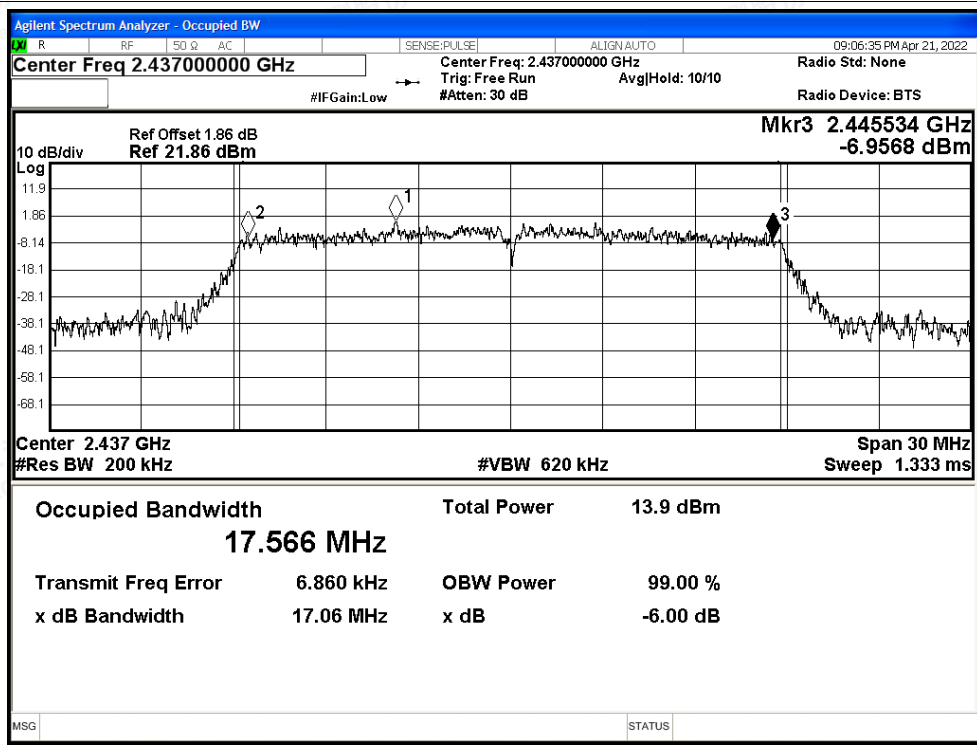




-6dB Bandwidth NVNT n20 2462MHz Ant1

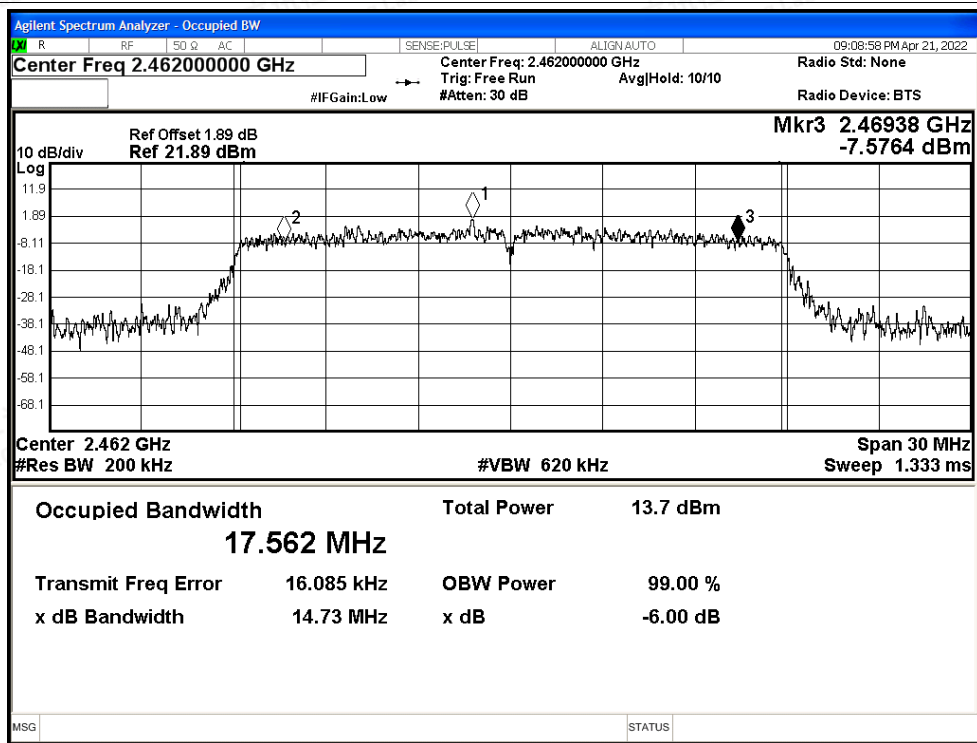


-6dB Bandwidth NVNT n40 2422MHz Ant1

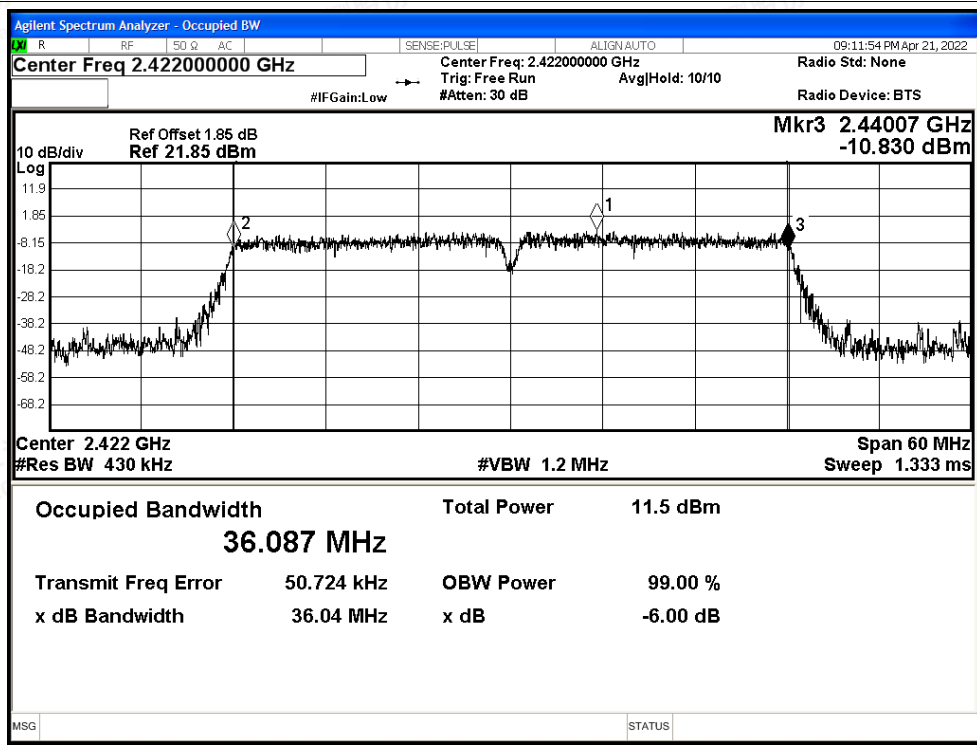




-6dB Bandwidth NVNT n40 2437MHz Ant1

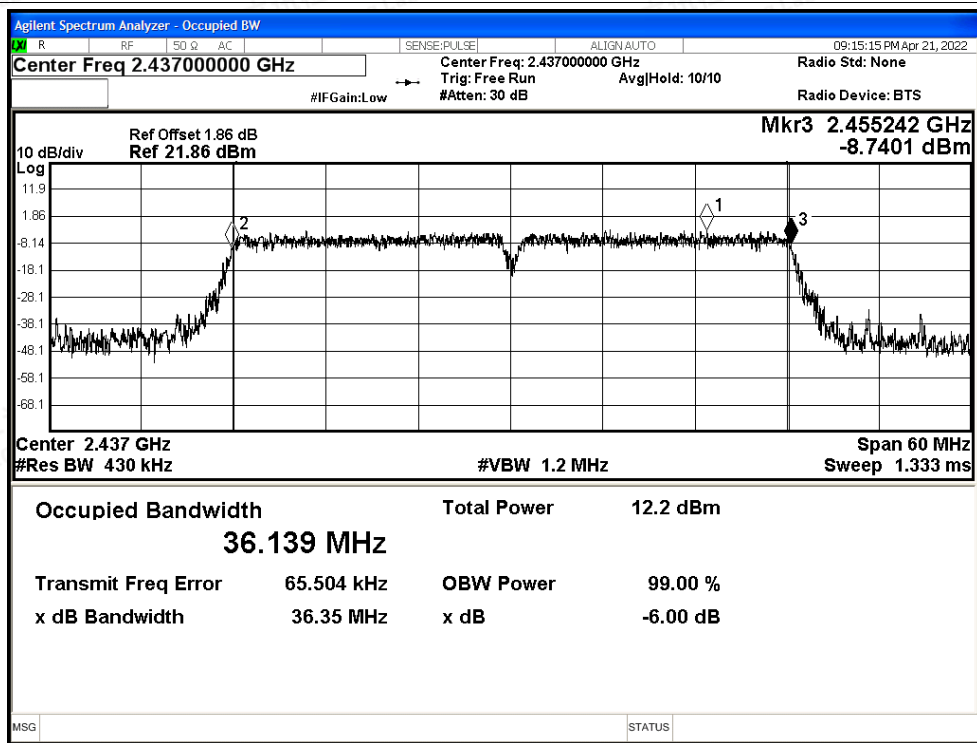

-6dB Bandwidth NVNT n40 2452MHz Ant1

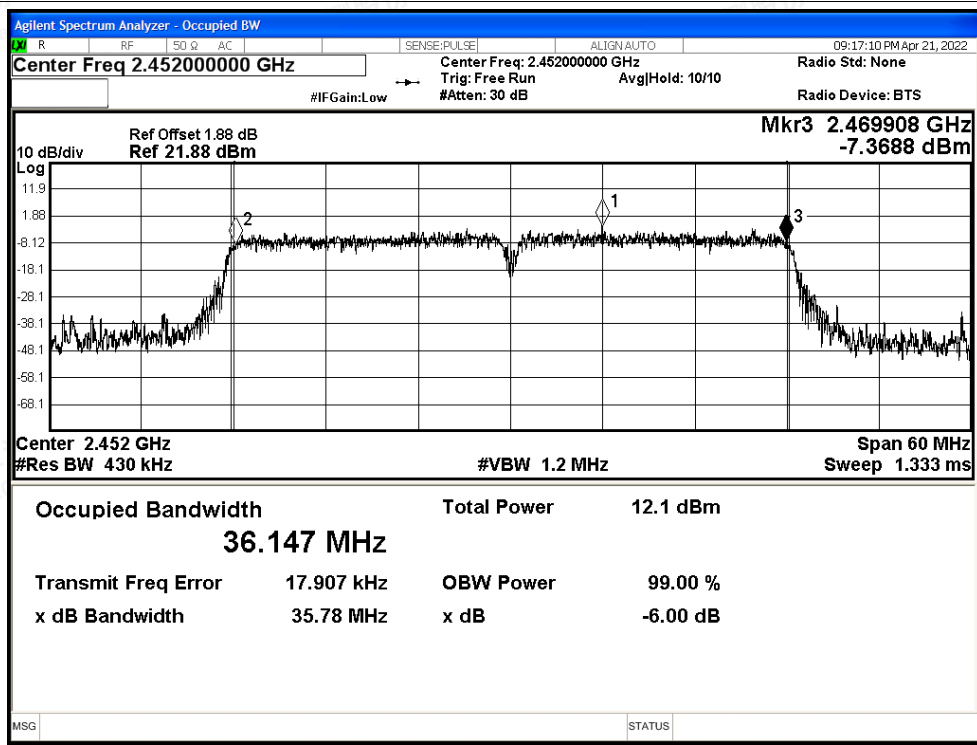



A.2 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.482
NVNT	b	2437	Ant1	12.597
NVNT	b	2462	Ant1	12.697
NVNT	g	2412	Ant1	16.395
NVNT	g	2437	Ant1	16.418
NVNT	g	2462	Ant1	16.461
NVNT	n20	2412	Ant1	17.541
NVNT	n20	2437	Ant1	17.572
NVNT	n20	2462	Ant1	17.58
NVNT	n40	2422	Ant1	36.066
NVNT	n40	2437	Ant1	36.056
NVNT	n40	2452	Ant1	36.143






Test Graphs

OBW NVNT b 2412MHz Ant1

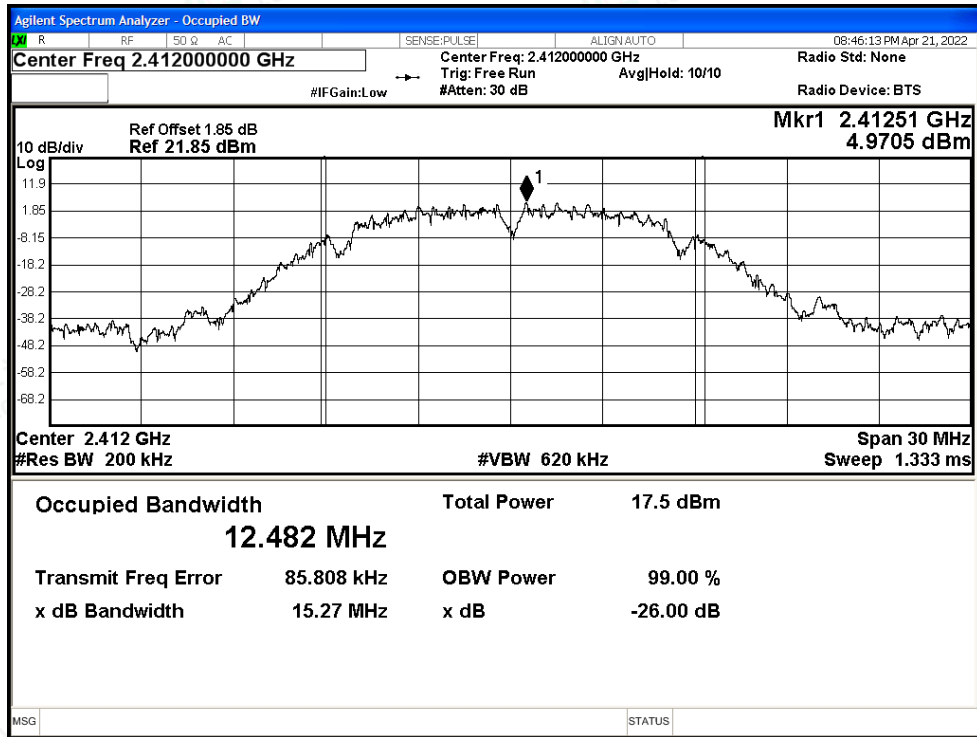


OBW NVNT b 2437MHz Ant1

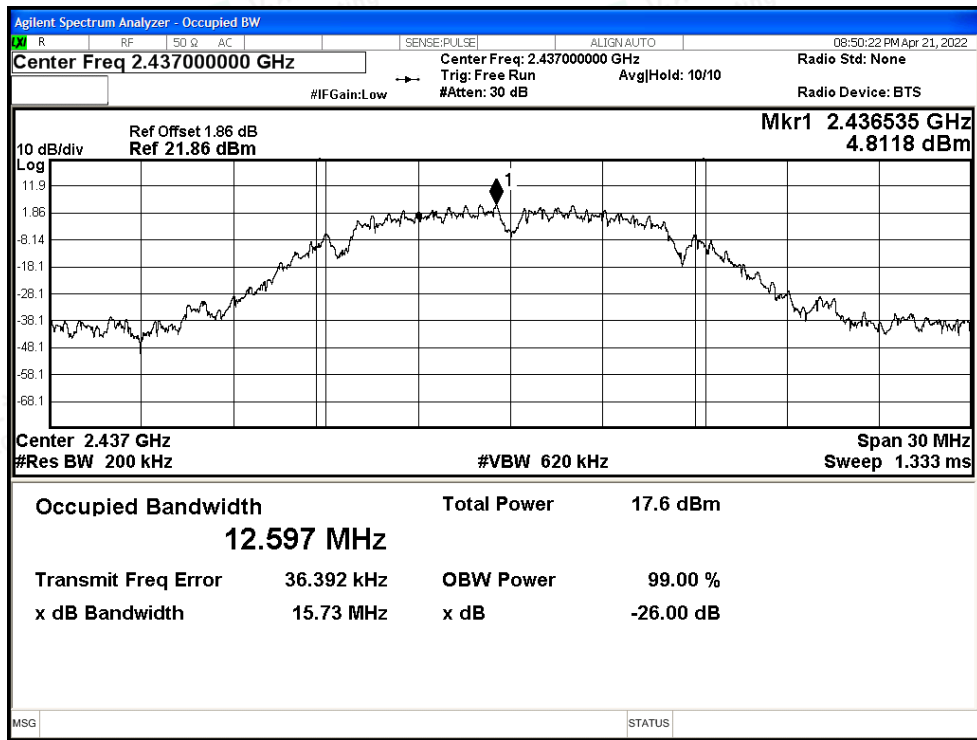




OBW NVNT b 2462MHz Ant1

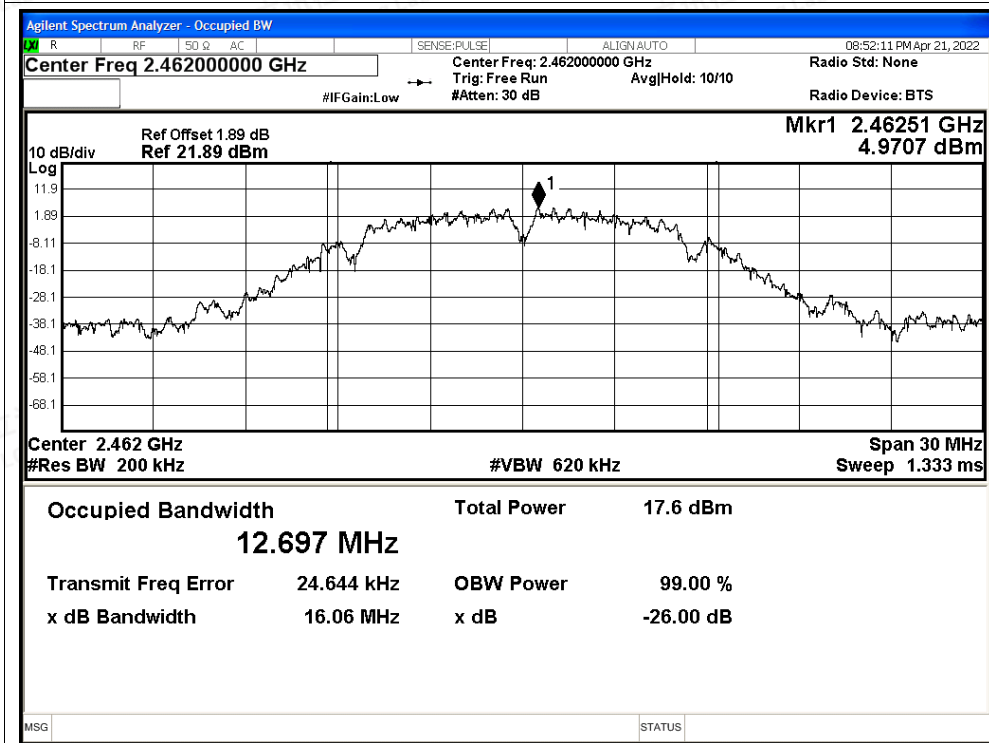


OBW NVNT g 2412MHz Ant1

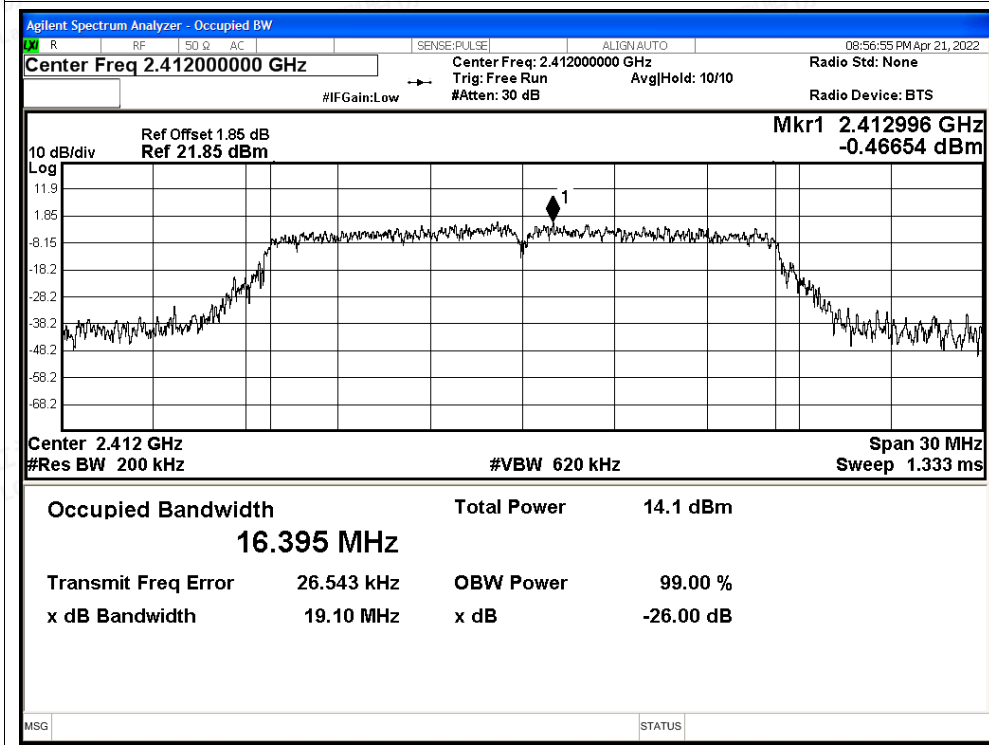






OBW NVNT g 2437MHz Ant1

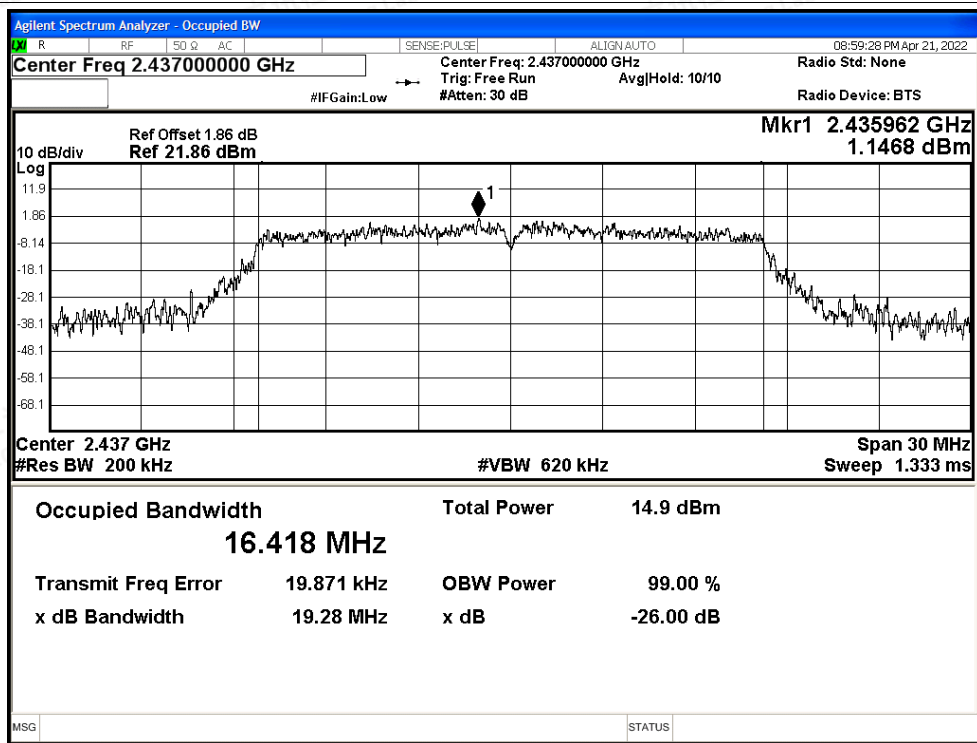


OBW NVNT g 2462MHz Ant1

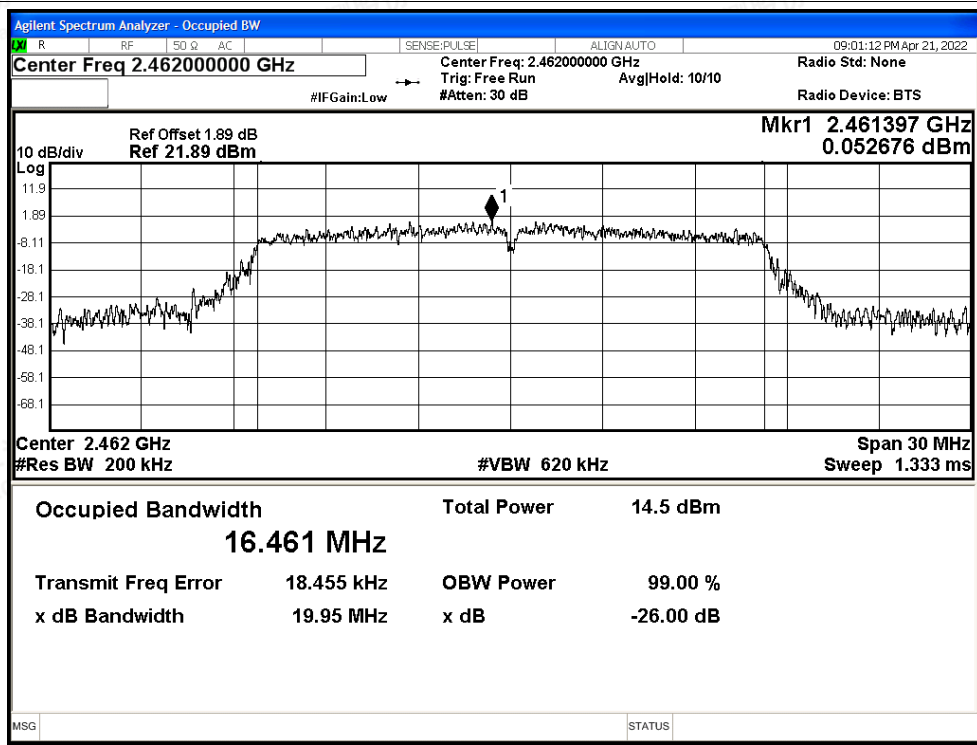

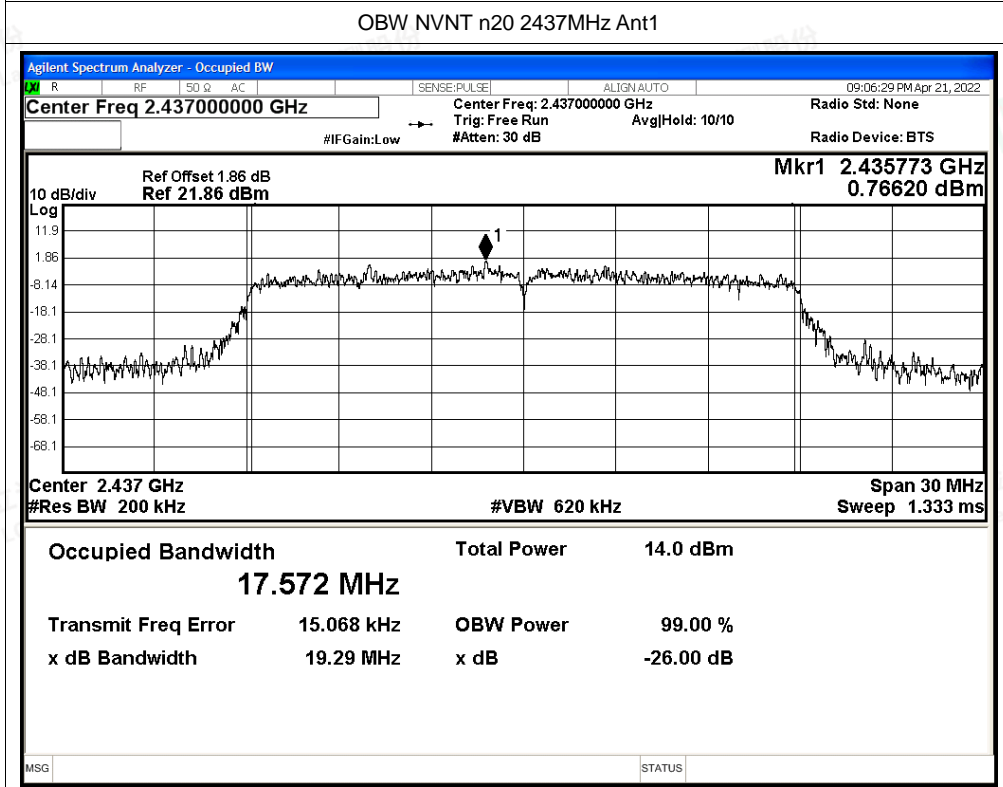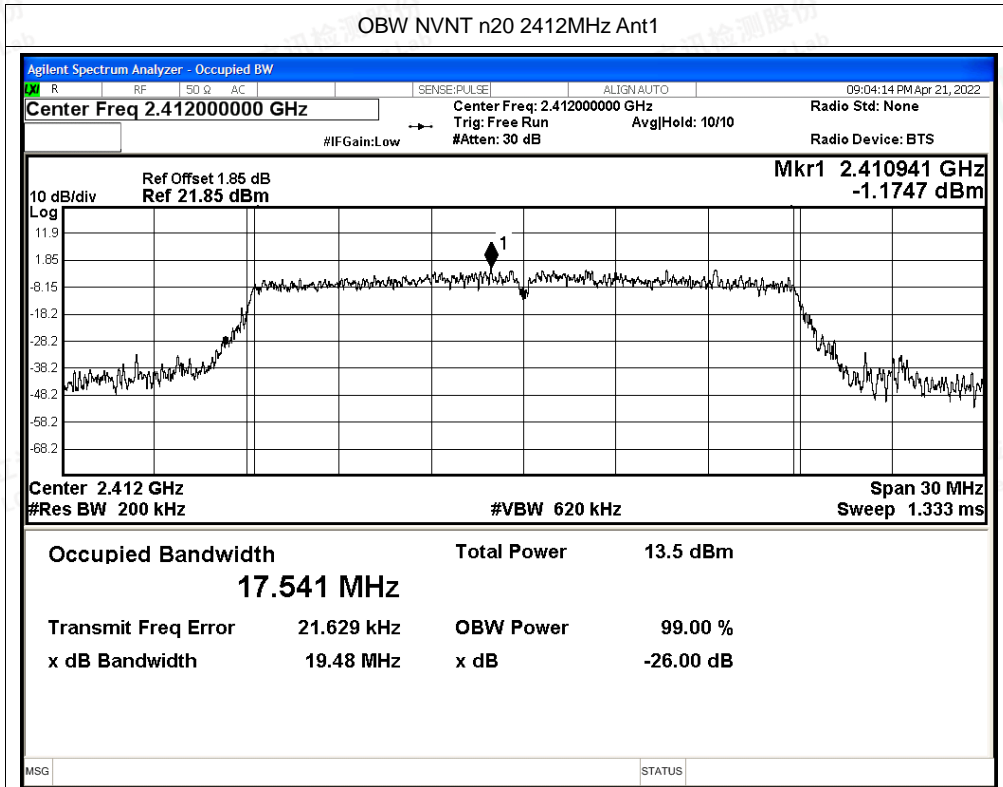






OBW NVNT n20 2462MHz Ant1

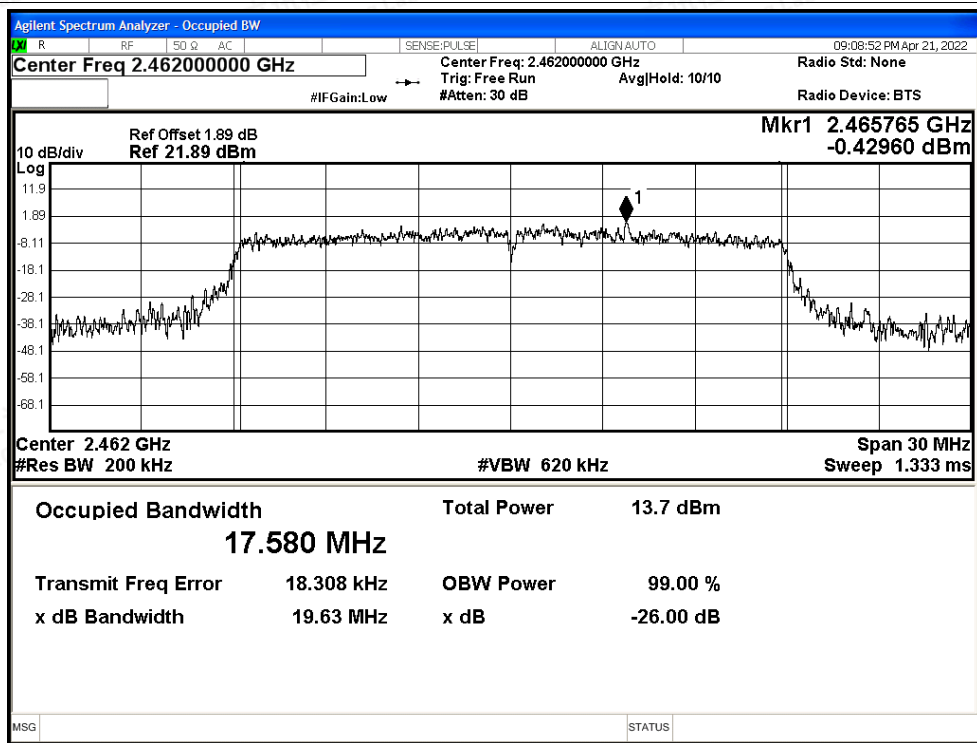

OBW NVNT n40 2422MHz Ant1

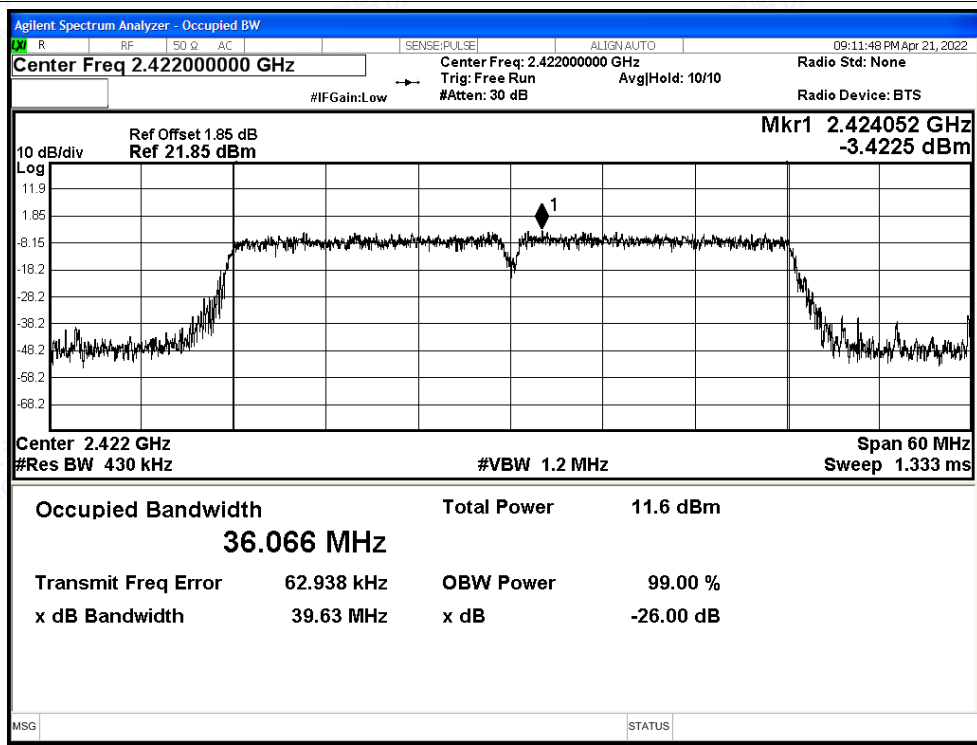

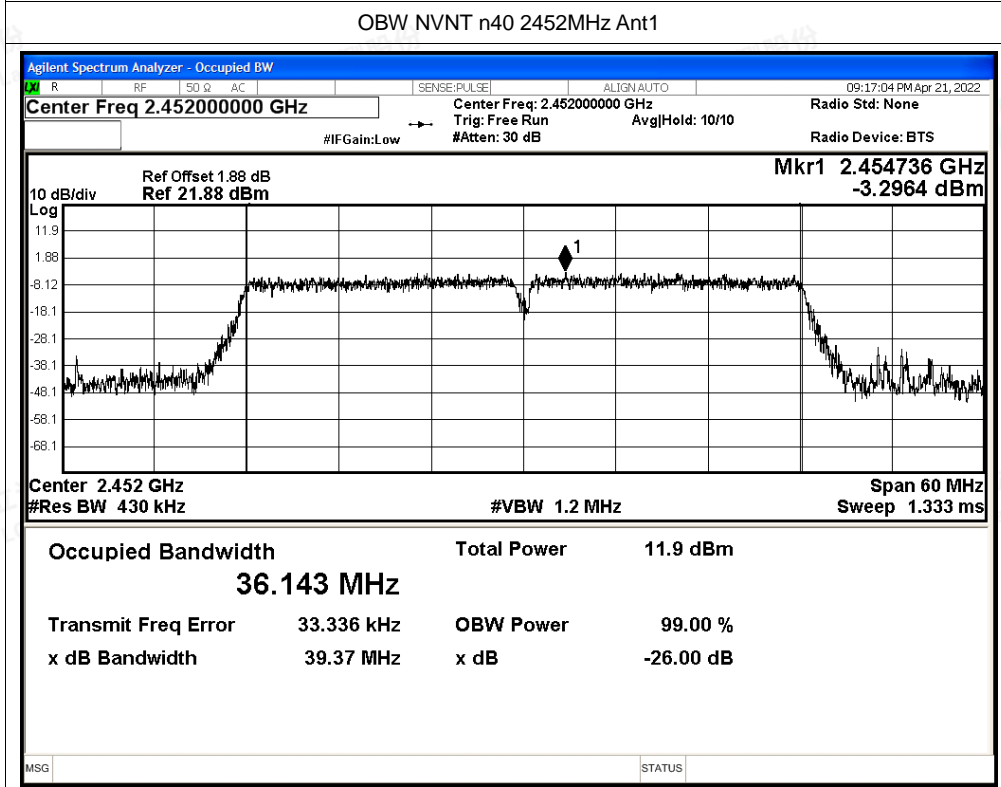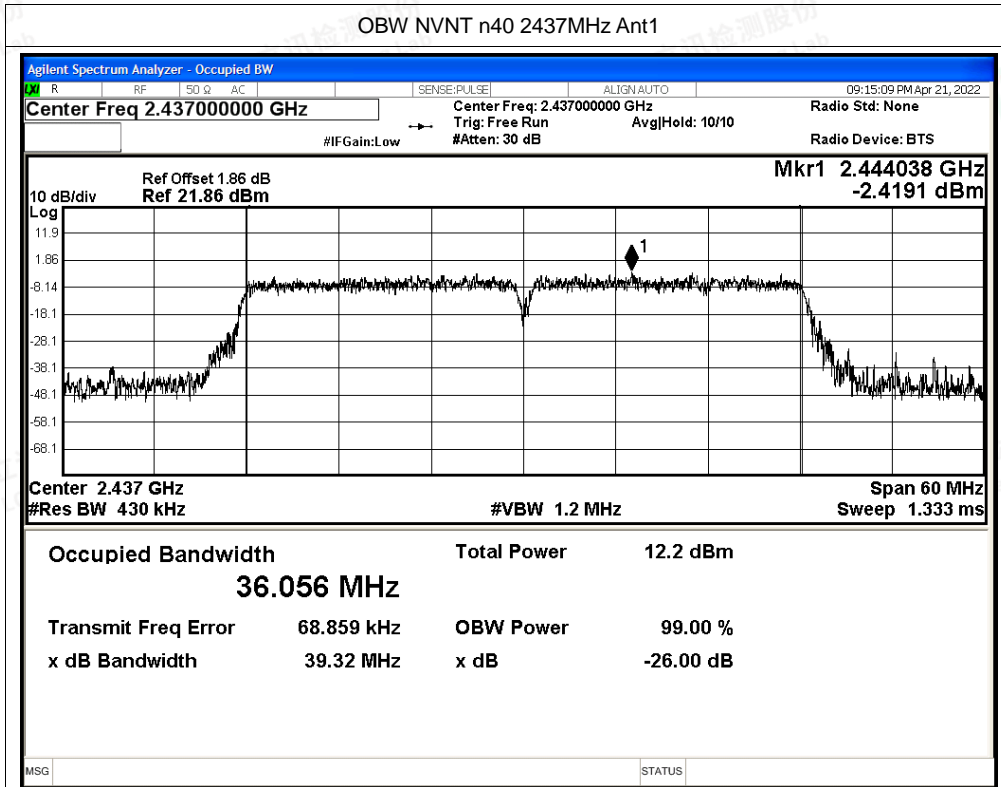



A.3 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	14.84	30	Pass
NVNT	b	2437	Ant1	14.89	30	Pass
NVNT	b	2462	Ant1	14.84	30	Pass
NVNT	g	2412	Ant1	13.18	30	Pass
NVNT	g	2437	Ant1	13.91	30	Pass
NVNT	g	2462	Ant1	13.75	30	Pass
NVNT	n20	2412	Ant1	12.15	30	Pass
NVNT	n20	2437	Ant1	12.83	30	Pass
NVNT	n20	2462	Ant1	14.47	30	Pass
NVNT	n40	2422	Ant1	10.48	30	Pass
NVNT	n40	2437	Ant1	11.27	30	Pass
NVNT	n40	2452	Ant1	11.07	30	Pass





A.4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-9.49	8	Pass
NVNT	b	2437	Ant1	-8.93	8	Pass
NVNT	b	2462	Ant1	-10.11	8	Pass
NVNT	g	2412	Ant1	-13.81	8	Pass
NVNT	g	2437	Ant1	-14.02	8	Pass
NVNT	g	2462	Ant1	-13.09	8	Pass
NVNT	n20	2412	Ant1	-14.01	8	Pass
NVNT	n20	2437	Ant1	-14.4	8	Pass
NVNT	n20	2462	Ant1	-15.2	8	Pass
NVNT	n40	2422	Ant1	-20.87	8	Pass
NVNT	n40	2437	Ant1	-20.68	8	Pass
NVNT	n40	2452	Ant1	-19.54	8	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity






Test Graphs

PSD NVNT b 2412MHz Ant1

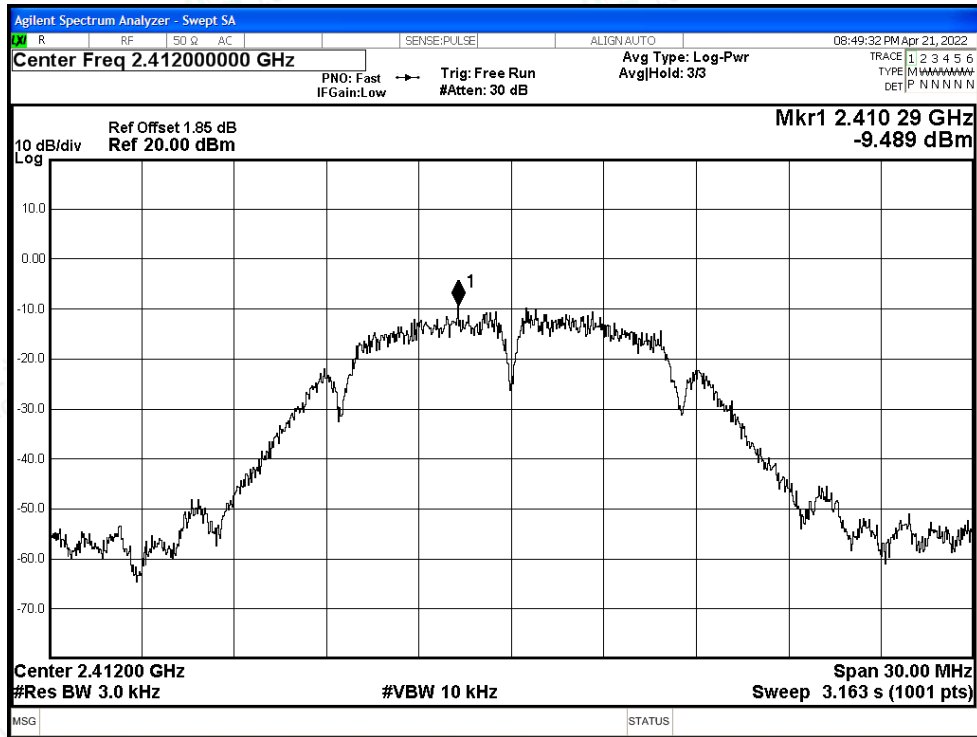


PSD NVNT b 2437MHz Ant1

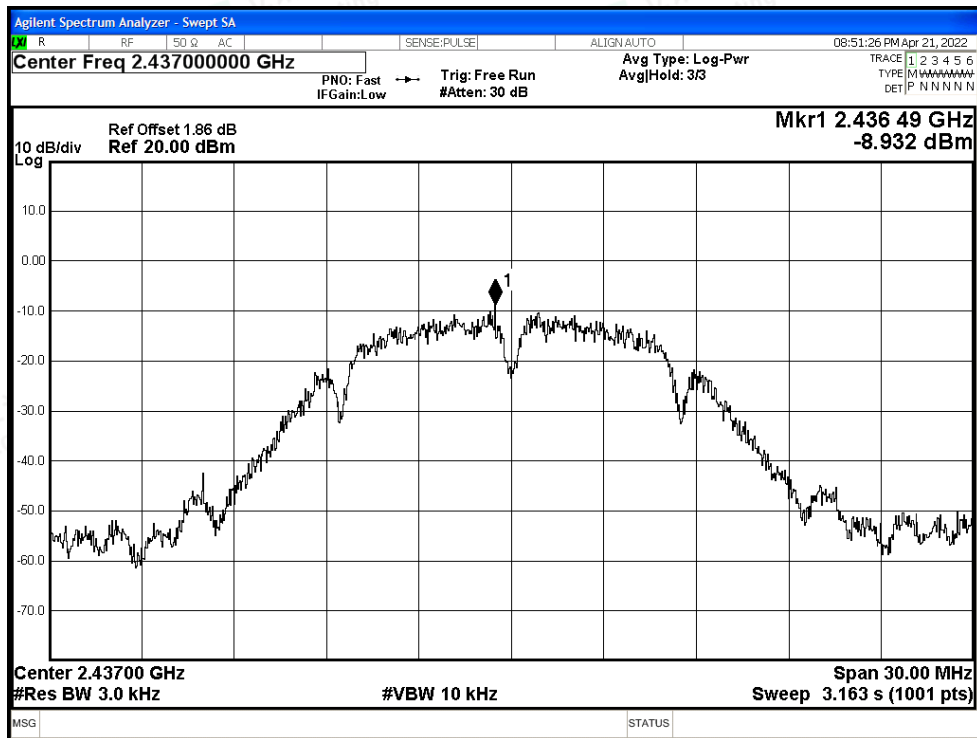

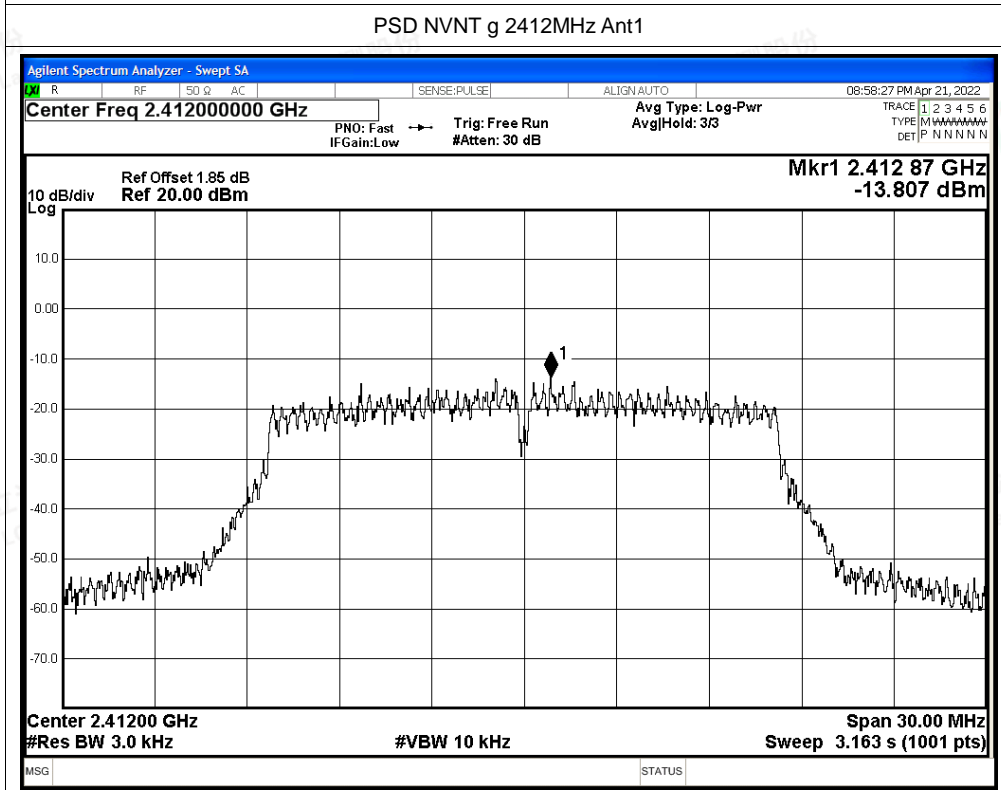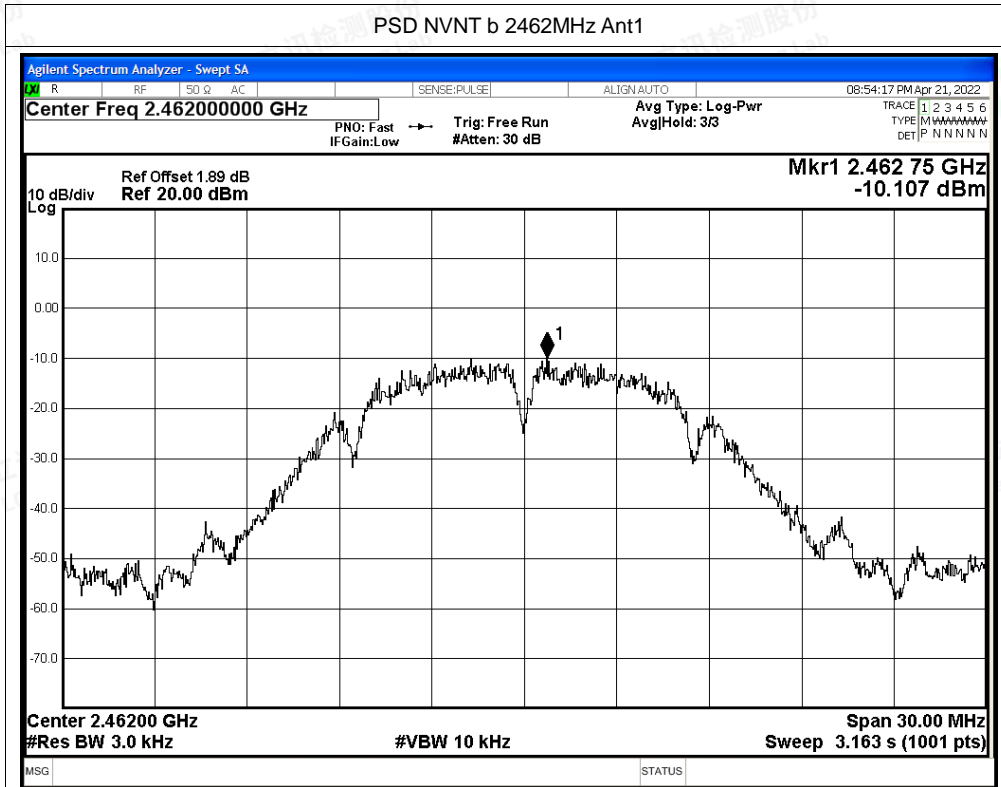








PSD NVNT g 2437MHz Ant1


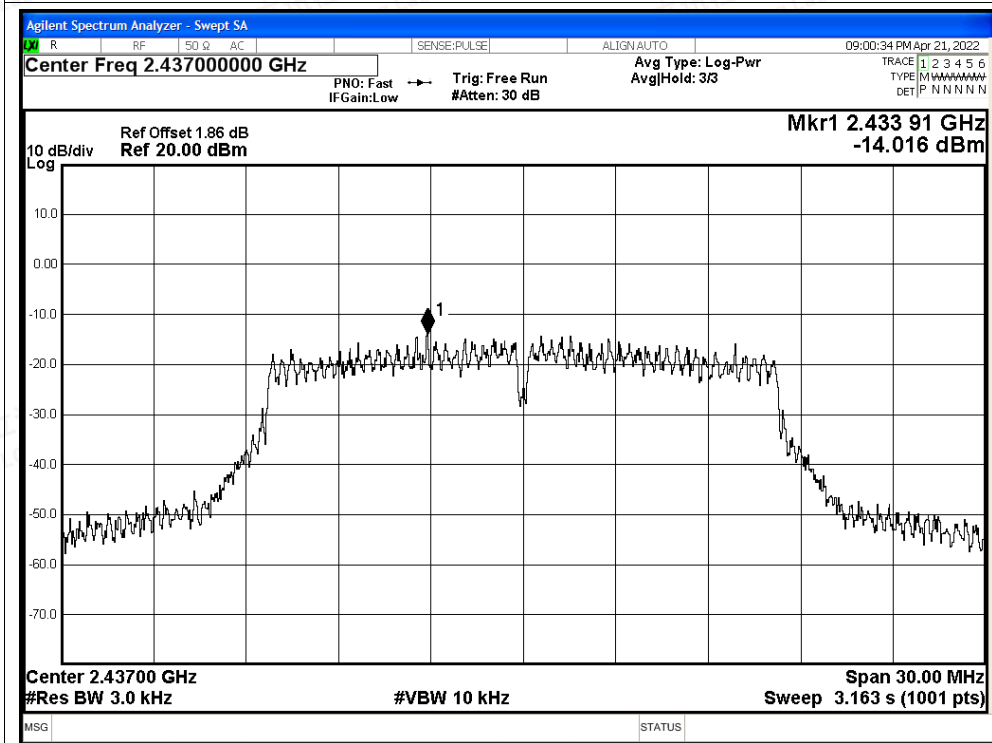


PSD NVNT g 2462MHz Ant1

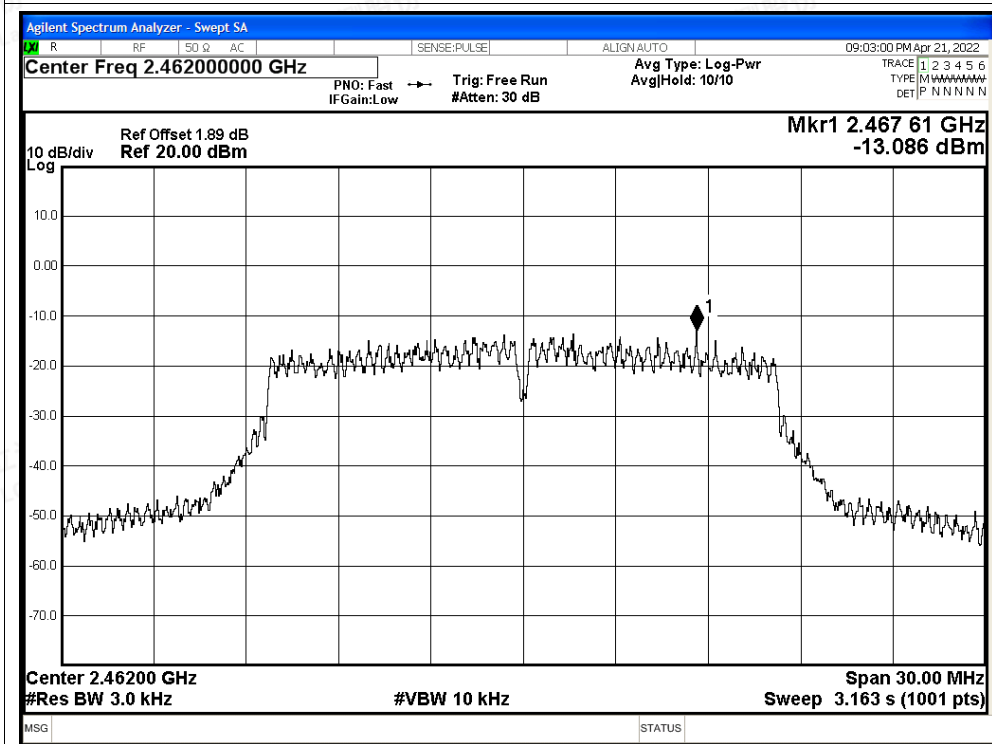

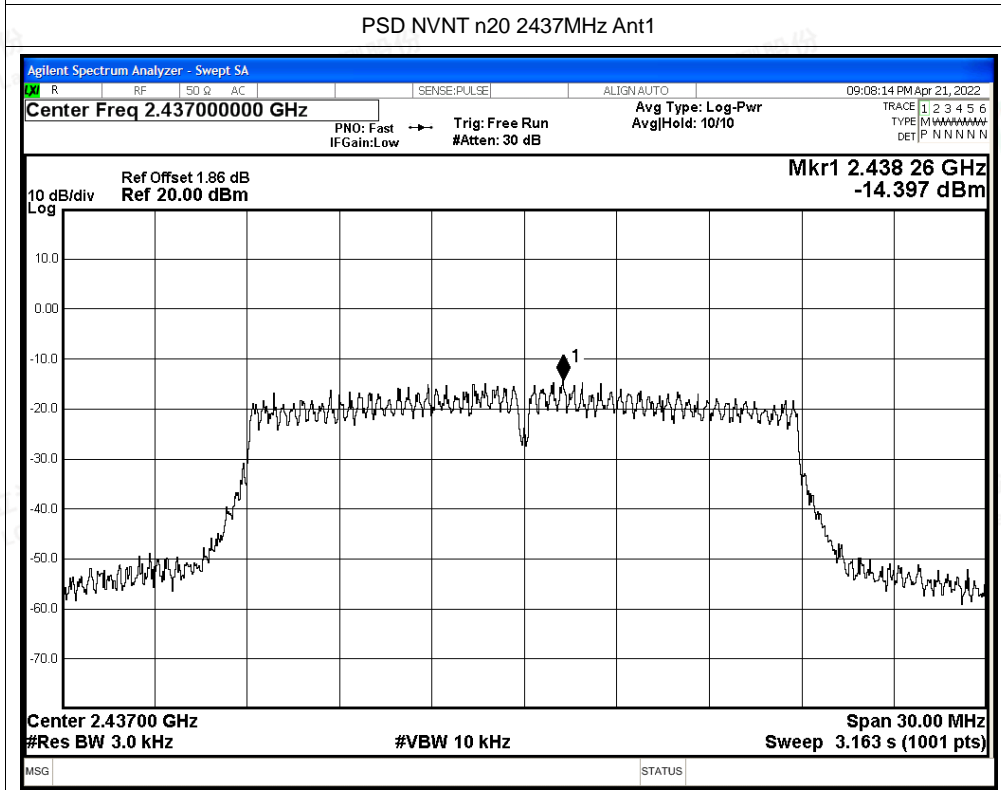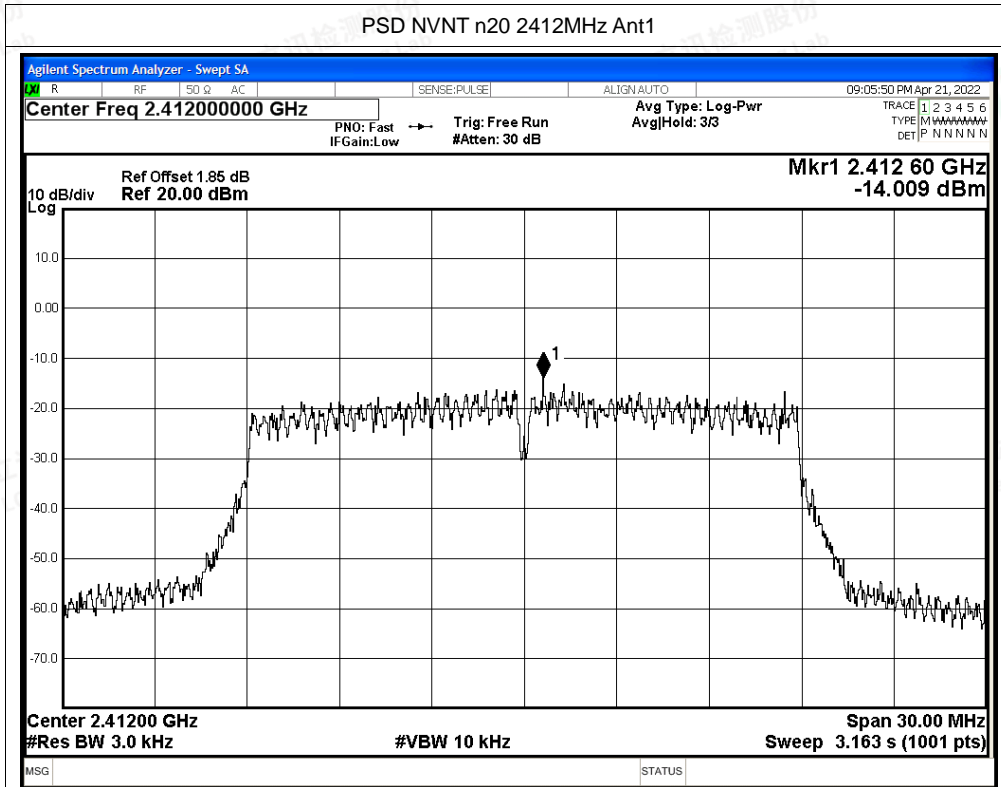

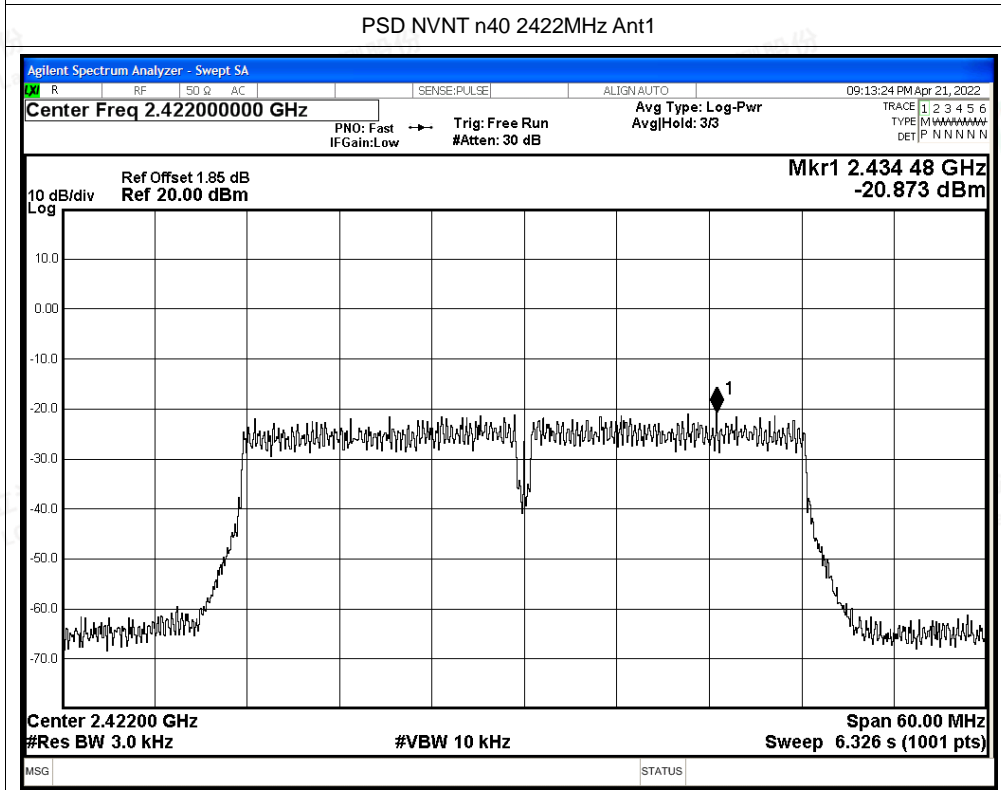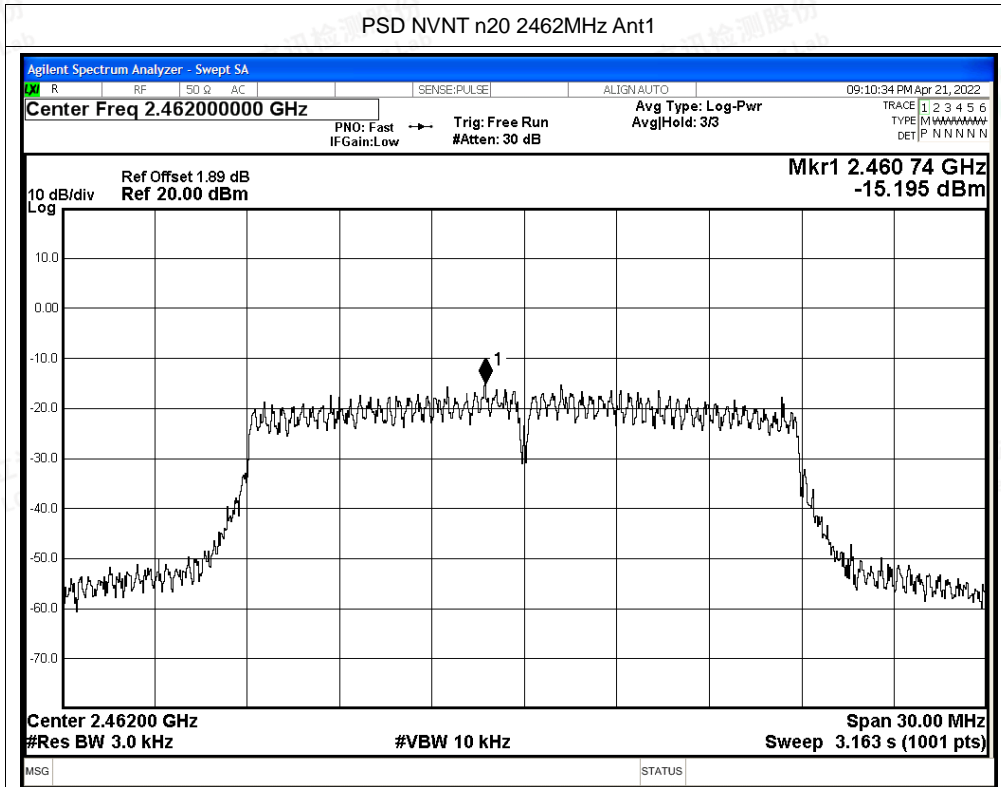

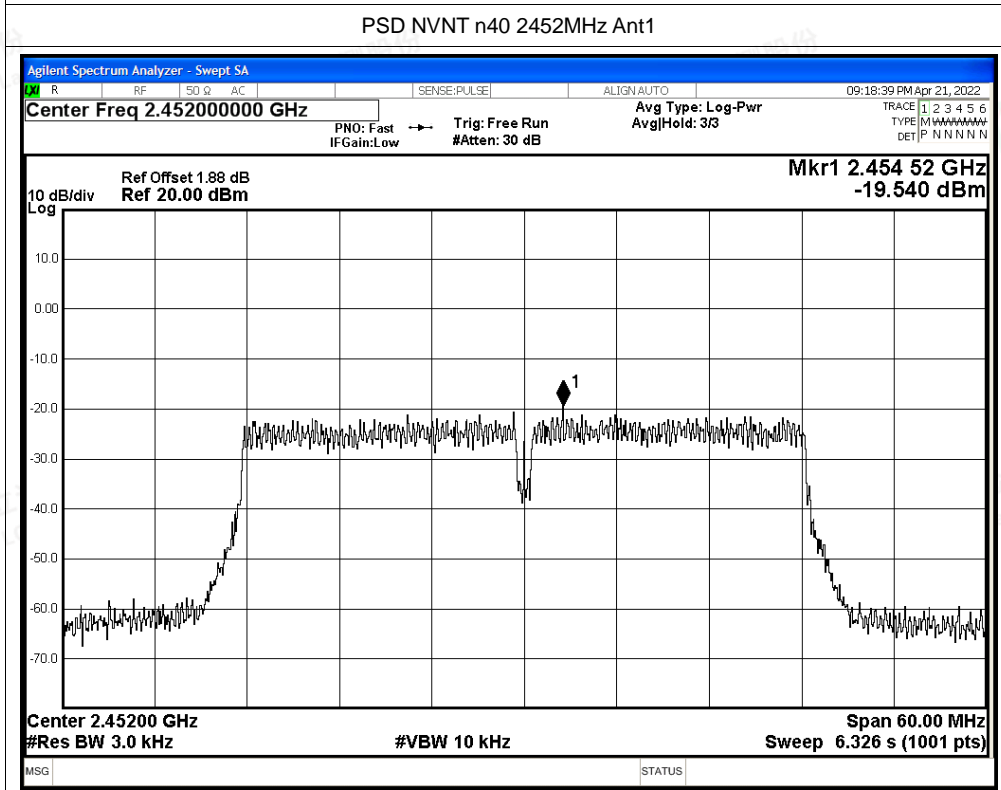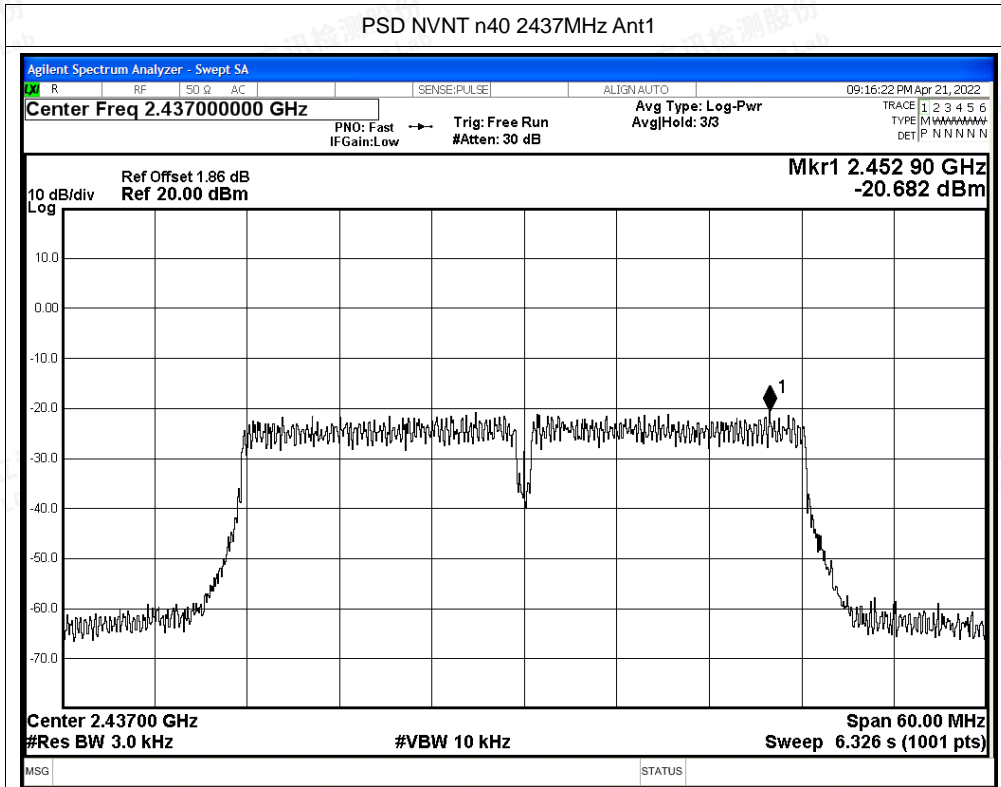



A.5 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-44.88	-20	Pass
NVNT	b	2462	Ant1	-60.26	-20	Pass
NVNT	g	2412	Ant1	-38.92	-20	Pass
NVNT	g	2462	Ant1	-46.3	-20	Pass
NVNT	n20	2412	Ant1	-38.04	-20	Pass
NVNT	n20	2462	Ant1	-45.72	-20	Pass
NVNT	n40	2422	Ant1	-38.02	-20	Pass
NVNT	n40	2452	Ant1	-35.05	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref

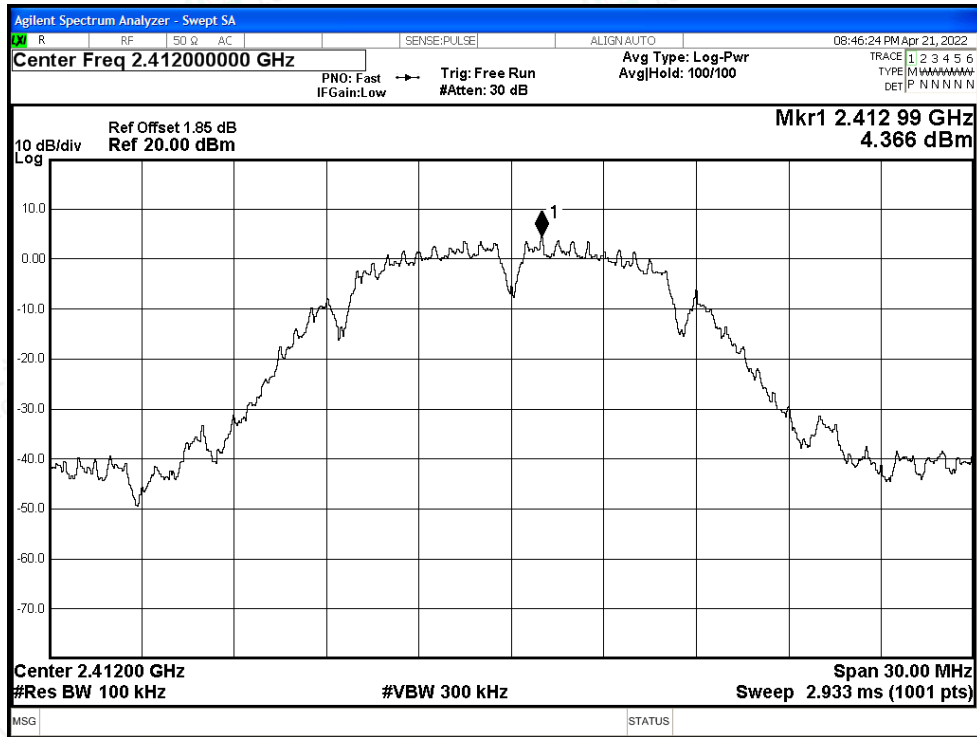


Band Edge NVNT b 2412MHz Ant1 Emission

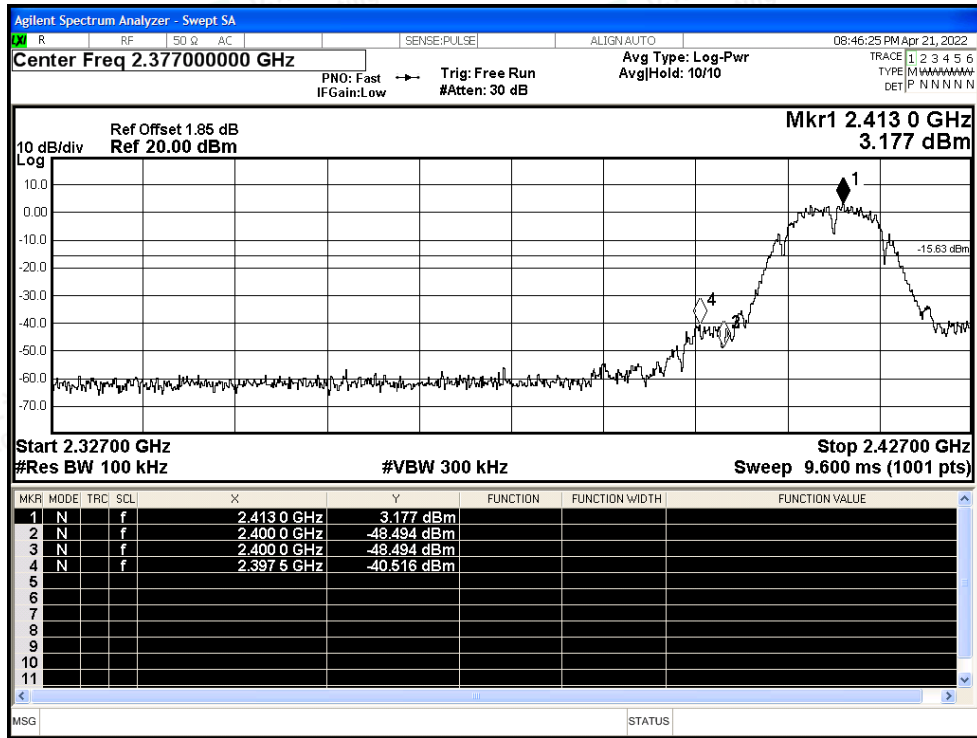




Band Edge NVNT b 2462MHz Ant1 Ref

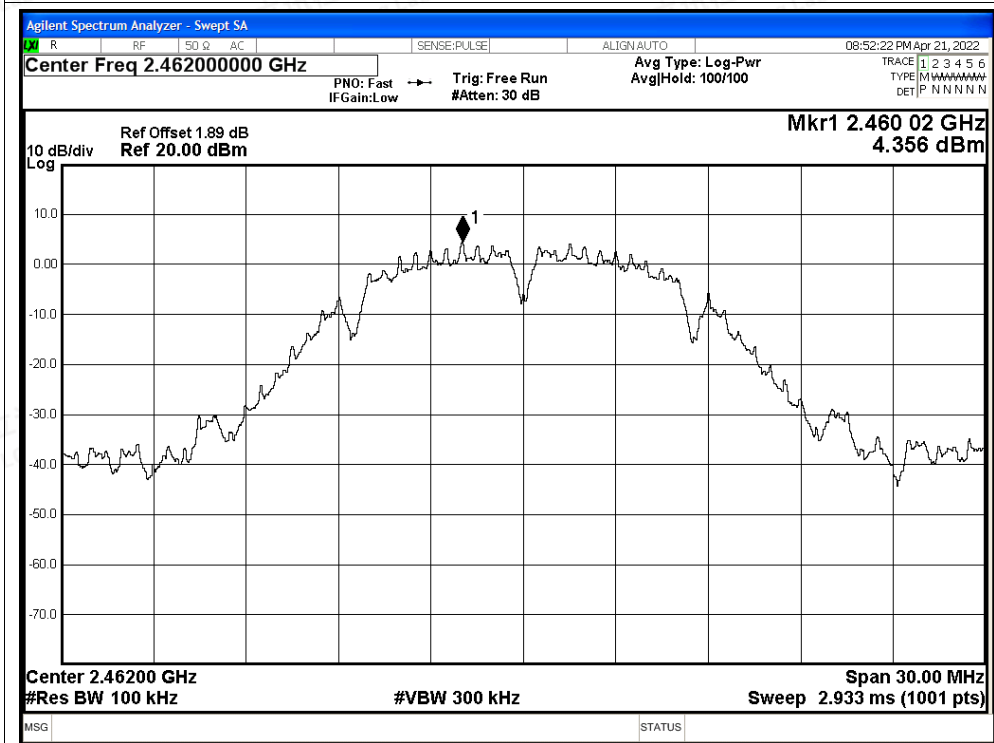


Band Edge NVNT b 2462MHz Ant1 Emission

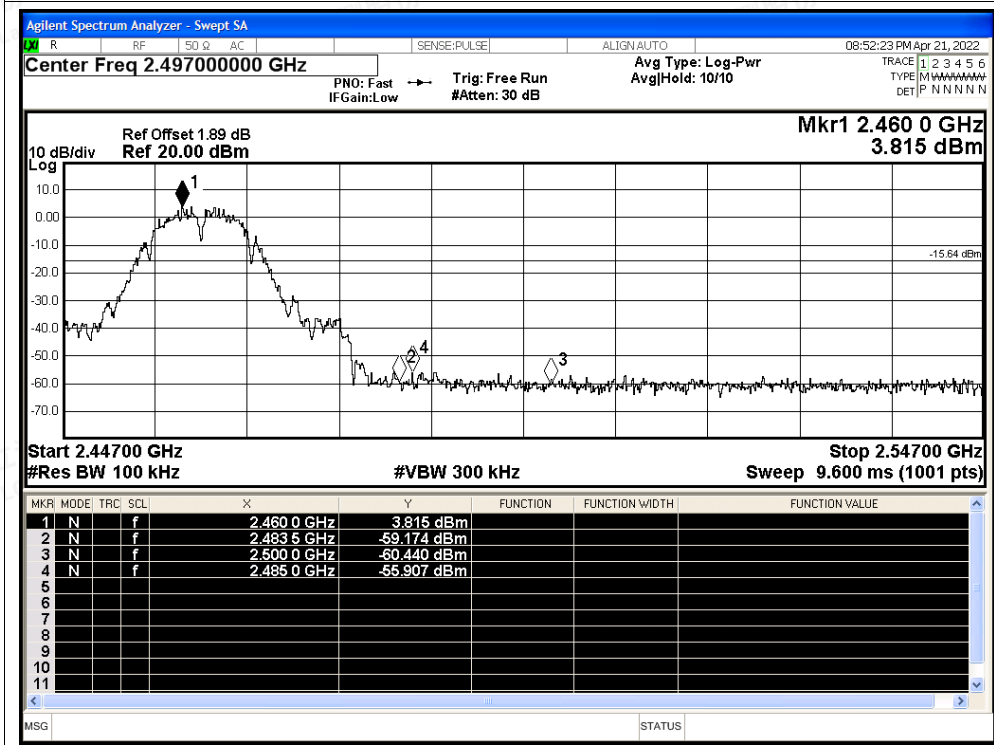




Band Edge NVNT g 2412MHz Ant1 Ref

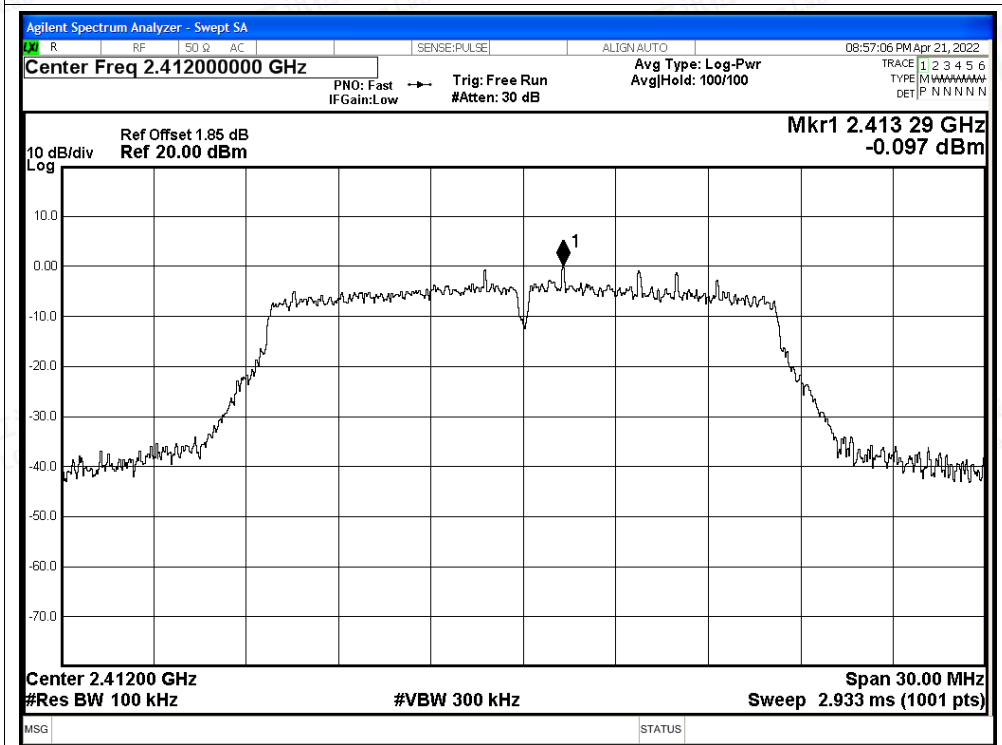


Band Edge NVNT g 2412MHz Ant1 Emission

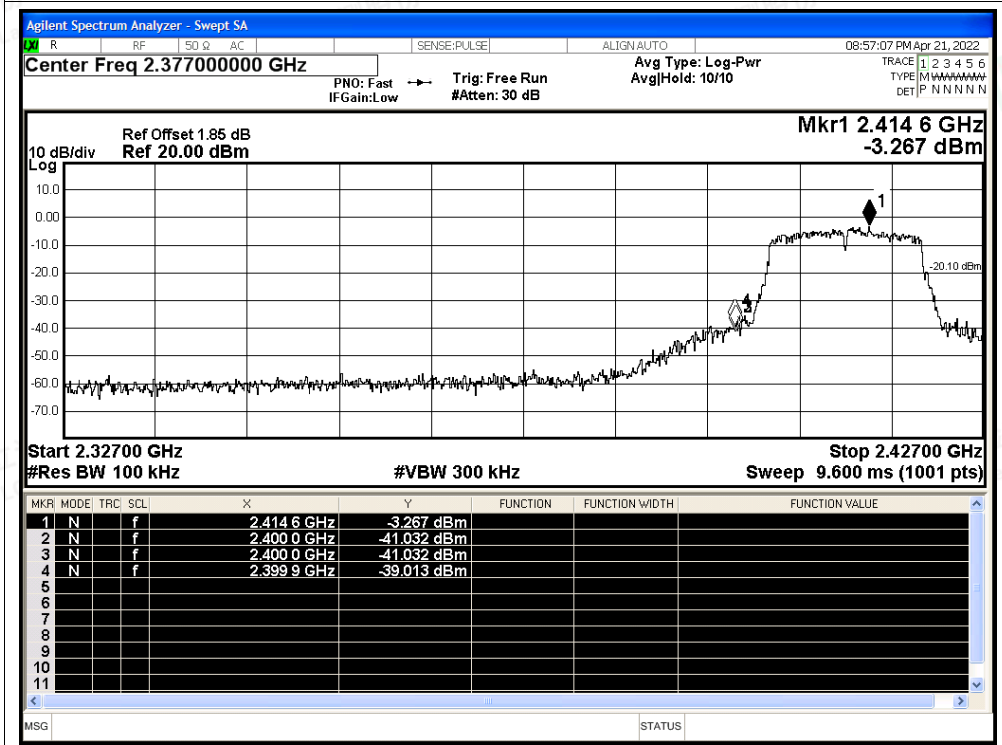








Band Edge NVNT g 2462MHz Ant1 Ref


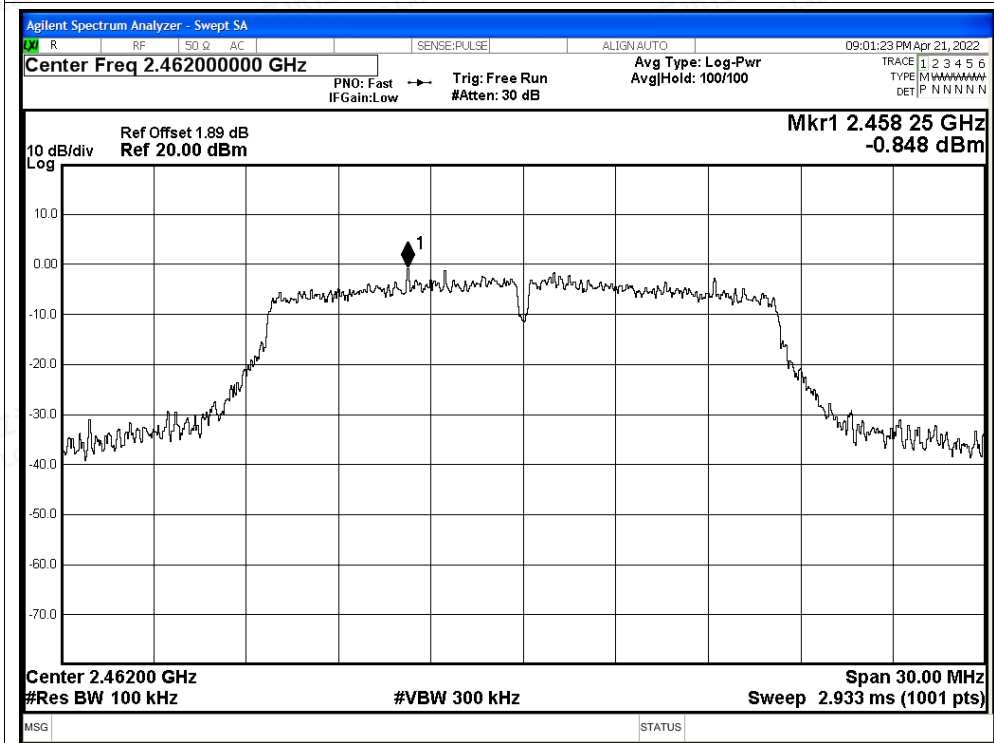




Band Edge NVNT g 2462MHz Ant1 Emission

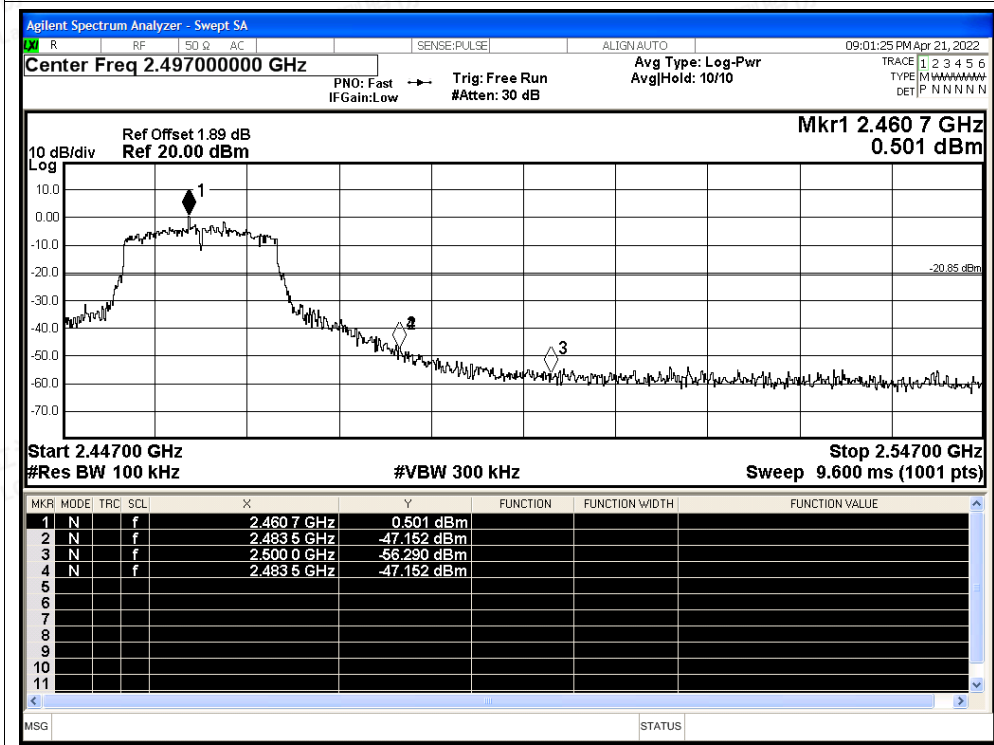

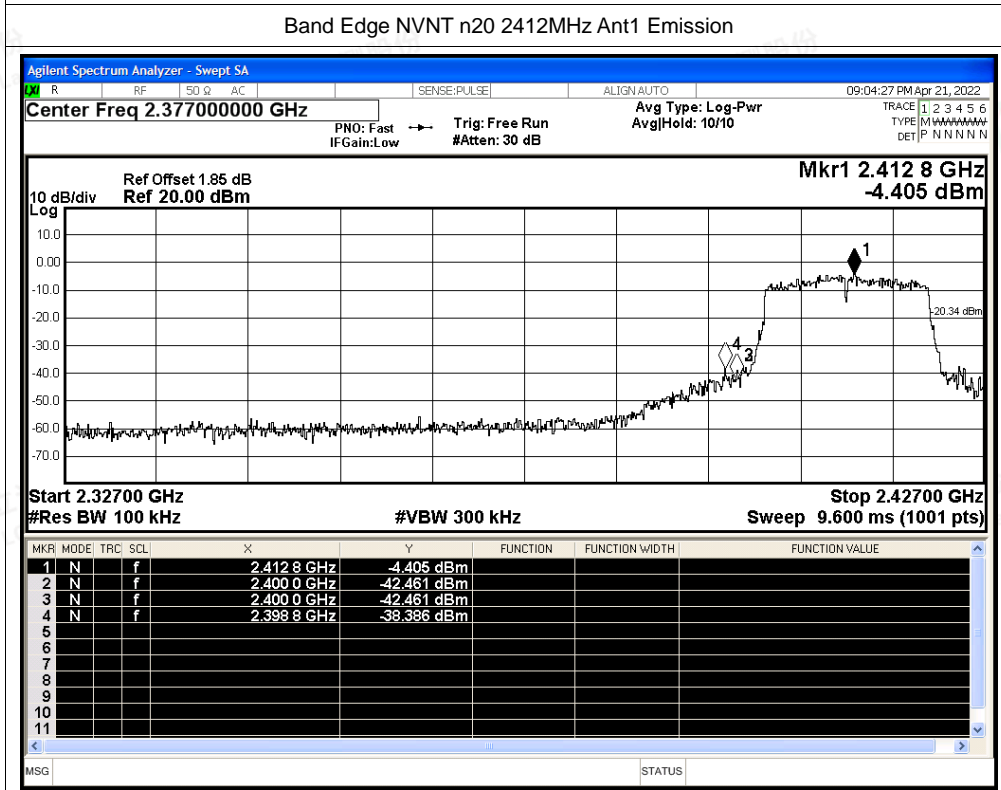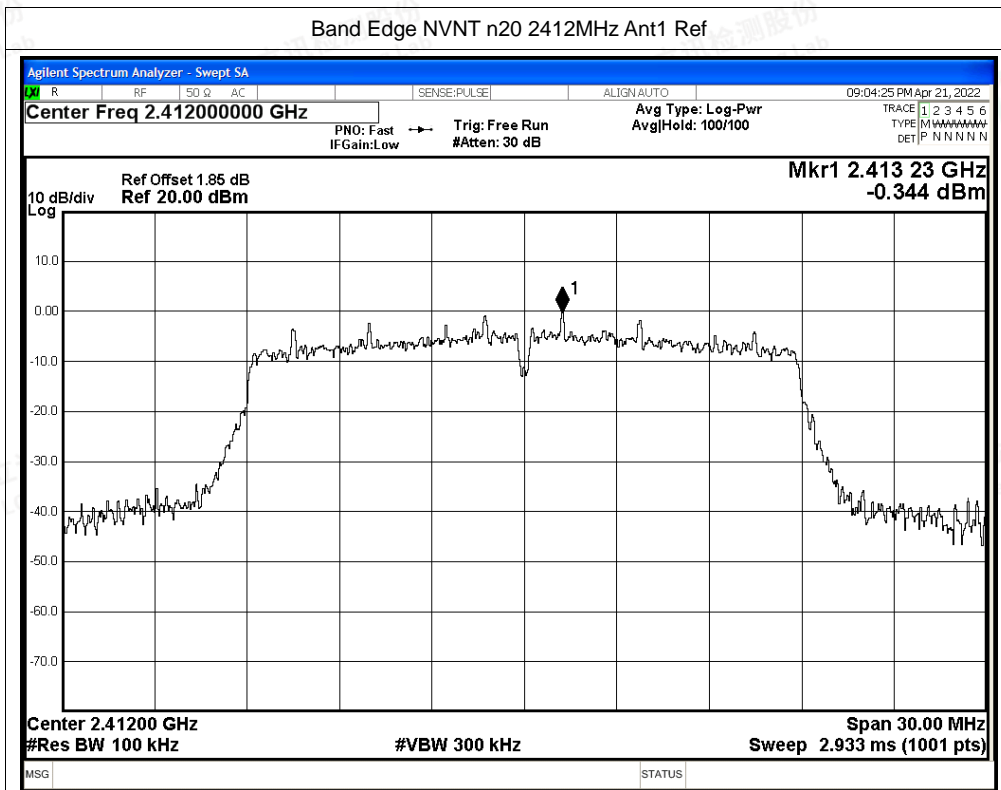

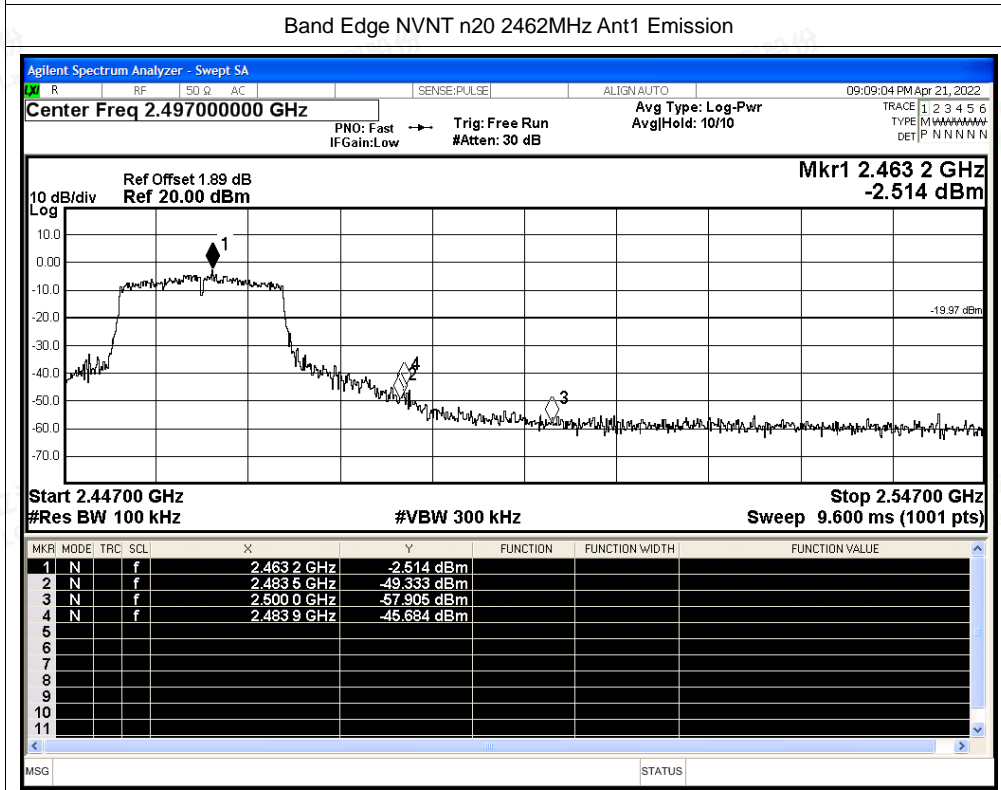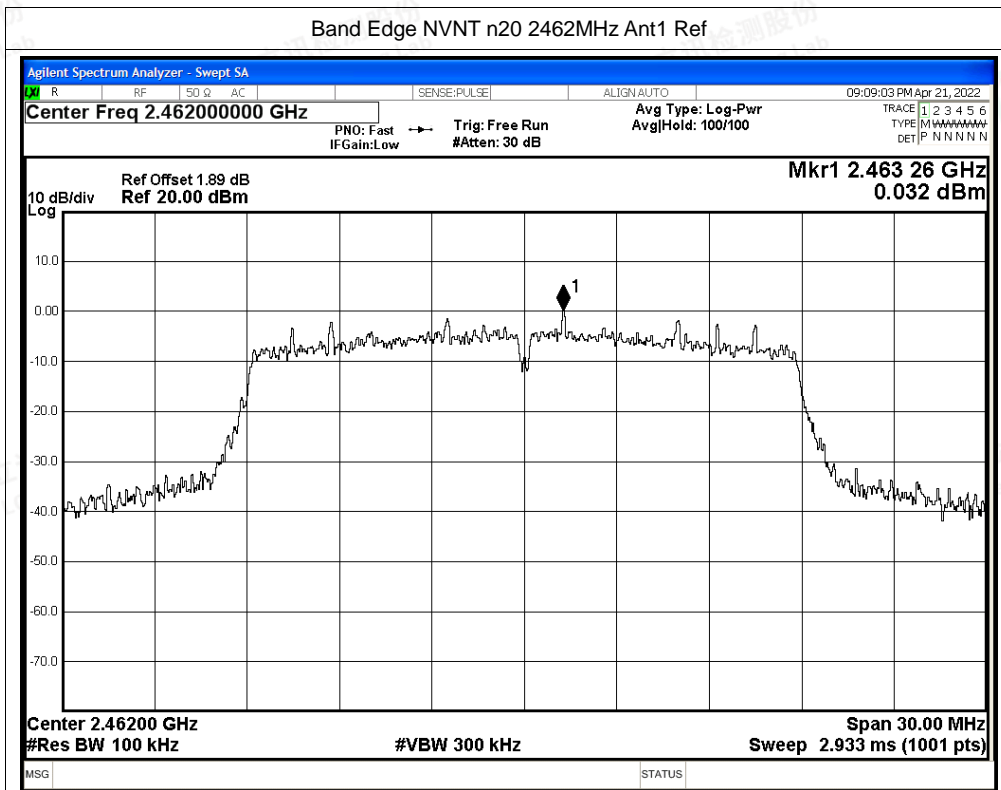

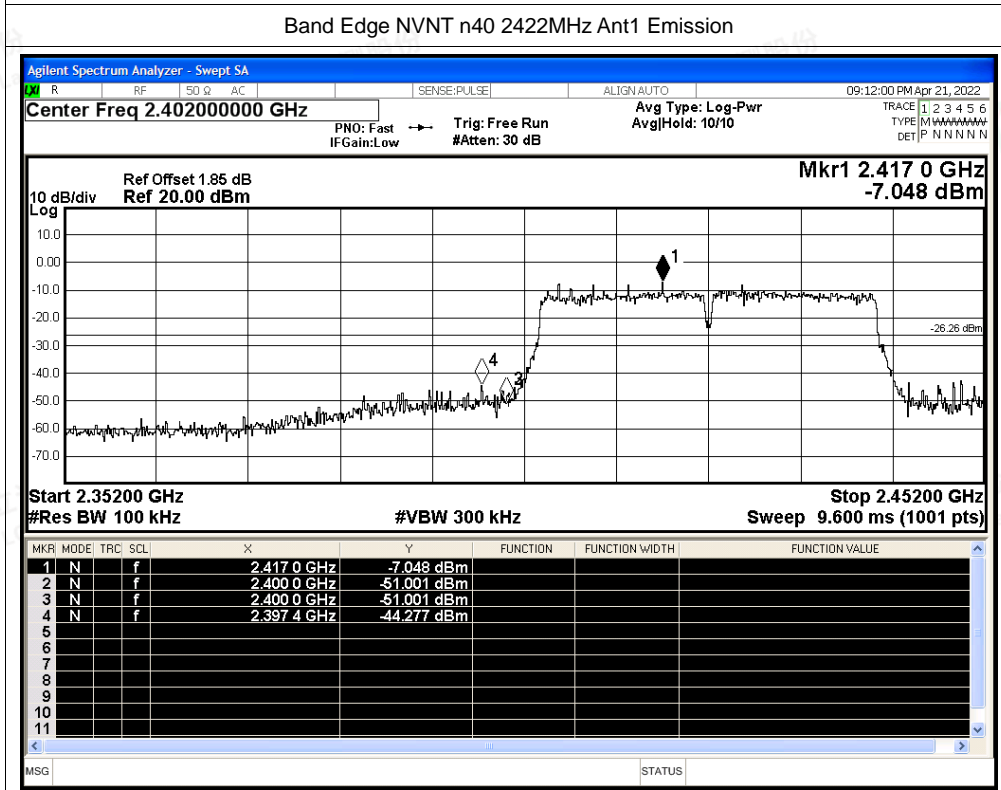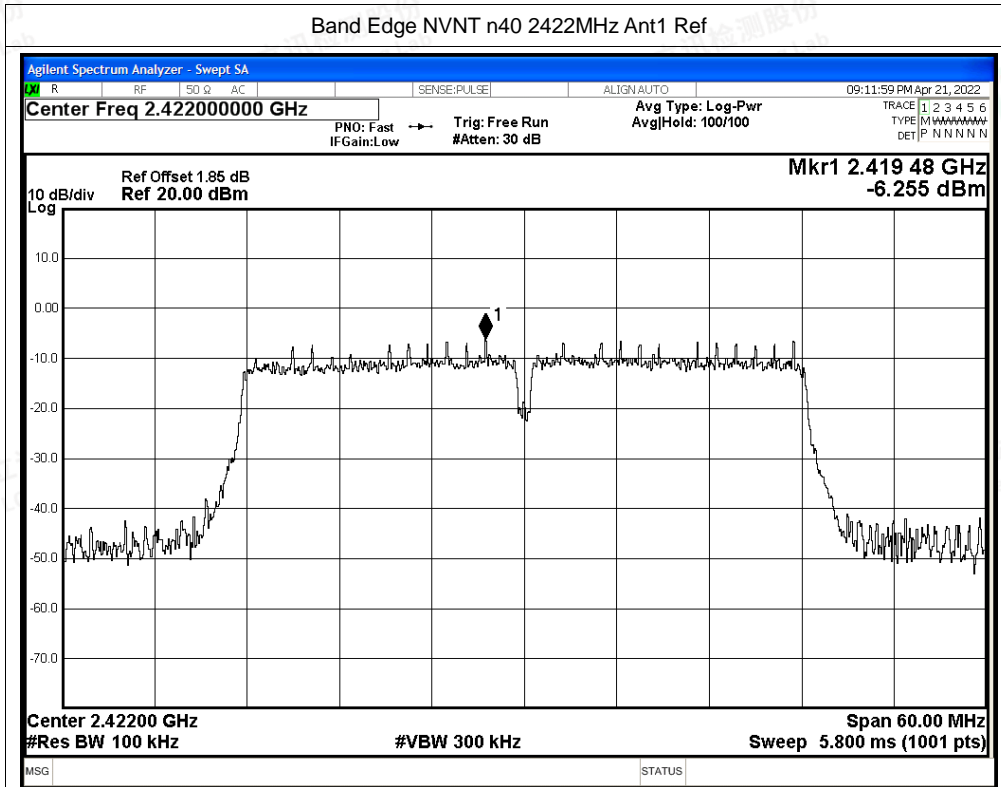

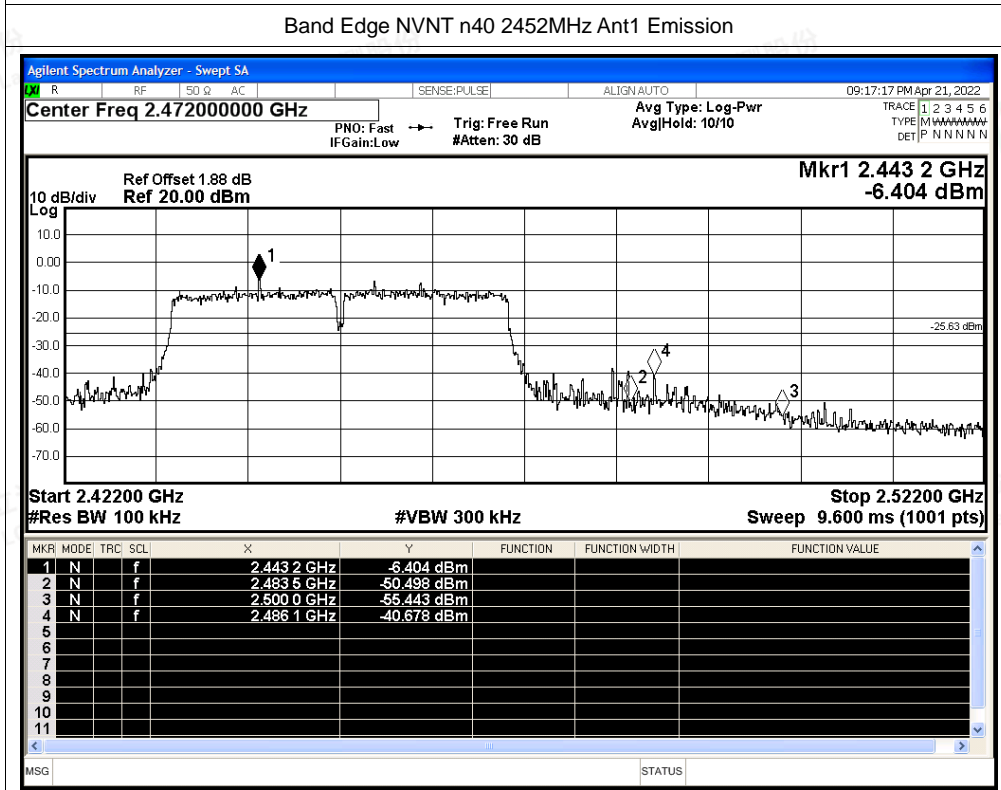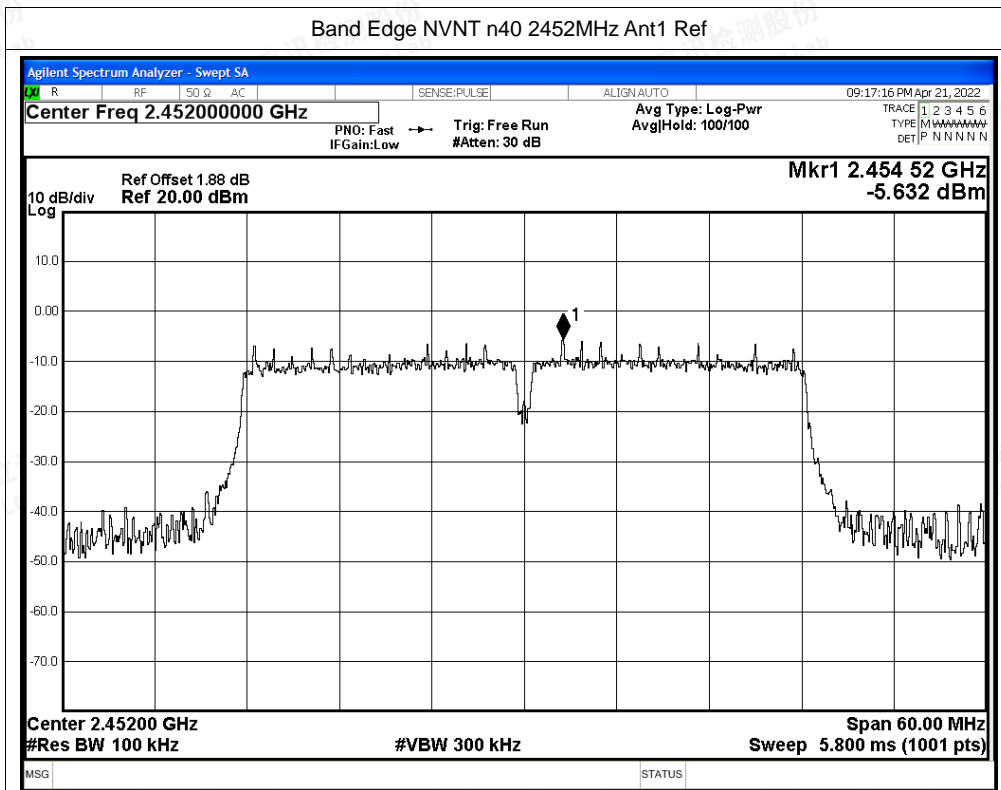



A.6 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-50.08	-20	Pass
NVNT	b	2437	Ant1	-49.69	-20	Pass
NVNT	b	2462	Ant1	-50.02	-20	Pass
NVNT	g	2412	Ant1	-44.79	-20	Pass
NVNT	g	2437	Ant1	-46.59	-20	Pass
NVNT	g	2462	Ant1	-45.41	-20	Pass
NVNT	n20	2412	Ant1	-45.74	-20	Pass
NVNT	n20	2437	Ant1	-45.51	-20	Pass
NVNT	n20	2462	Ant1	-44.93	-20	Pass
NVNT	n40	2422	Ant1	-39.52	-20	Pass
NVNT	n40	2437	Ant1	-39.91	-20	Pass
NVNT	n40	2452	Ant1	-40.32	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref

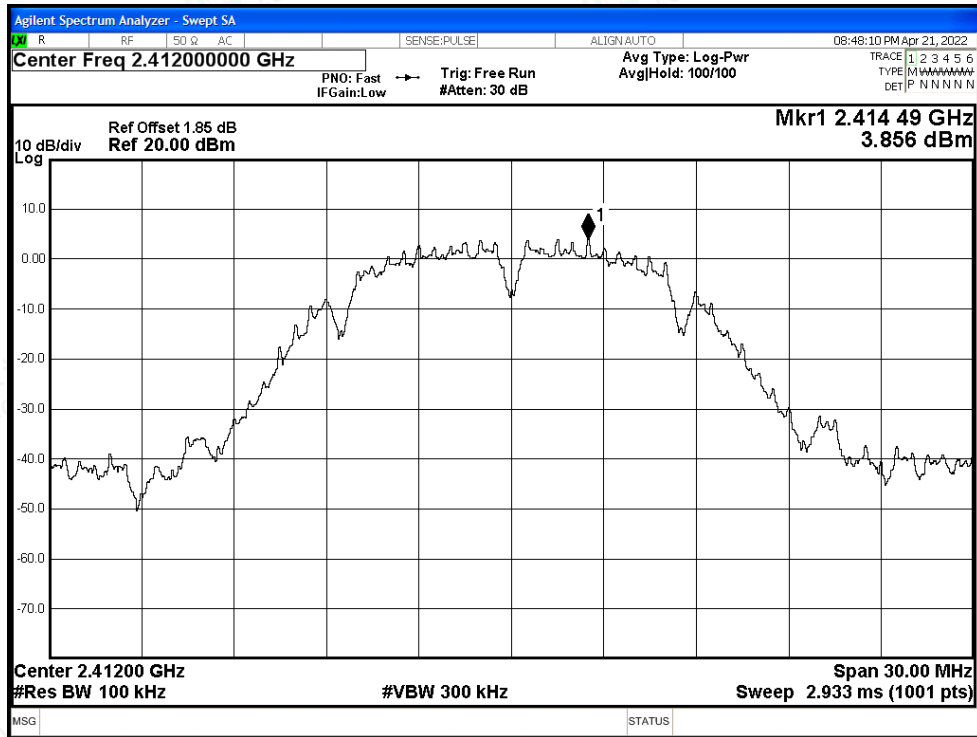


Tx. Spurious NVNT b 2412MHz Ant1 Emission

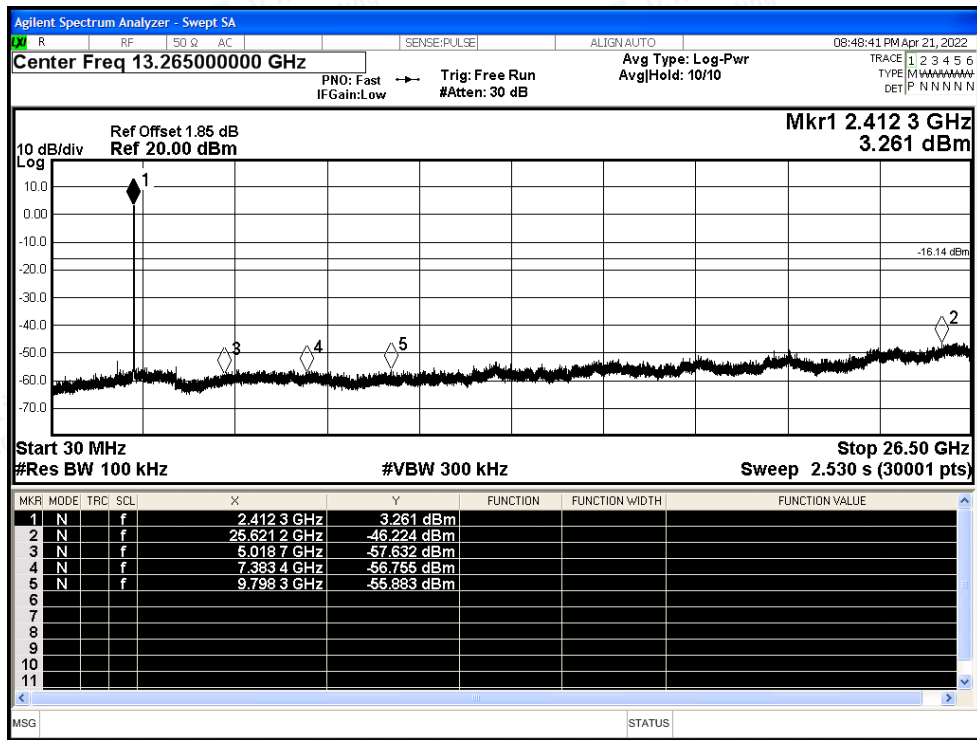




Tx. Spurious NVNT b 2437MHz Ant1 Ref

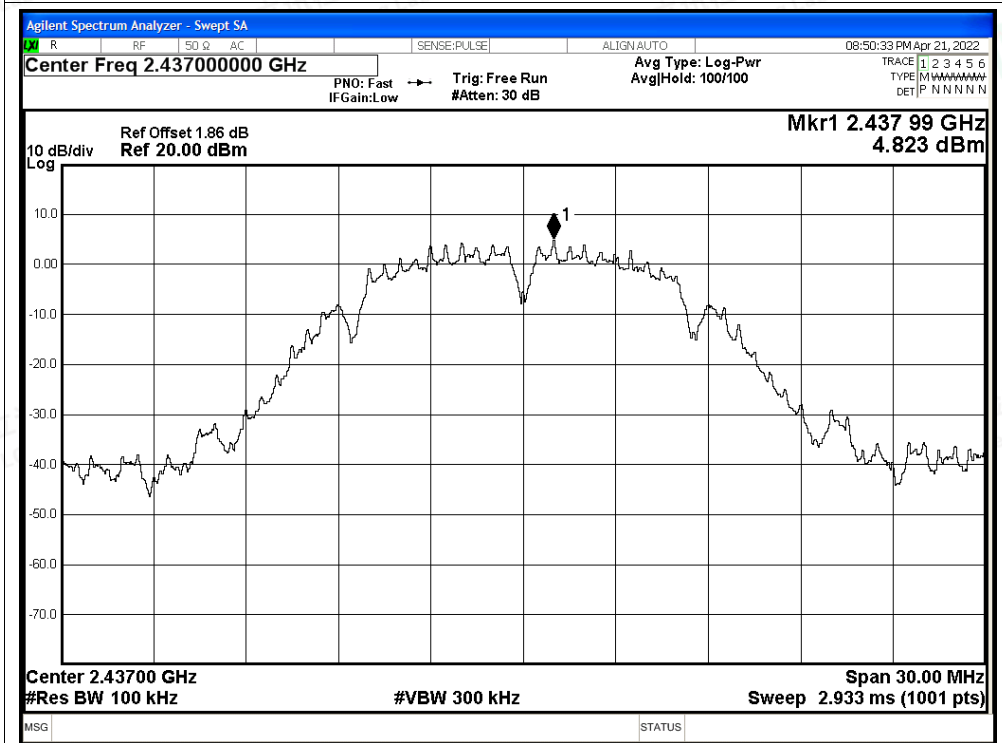


Tx. Spurious NVNT b 2437MHz Ant1 Emission

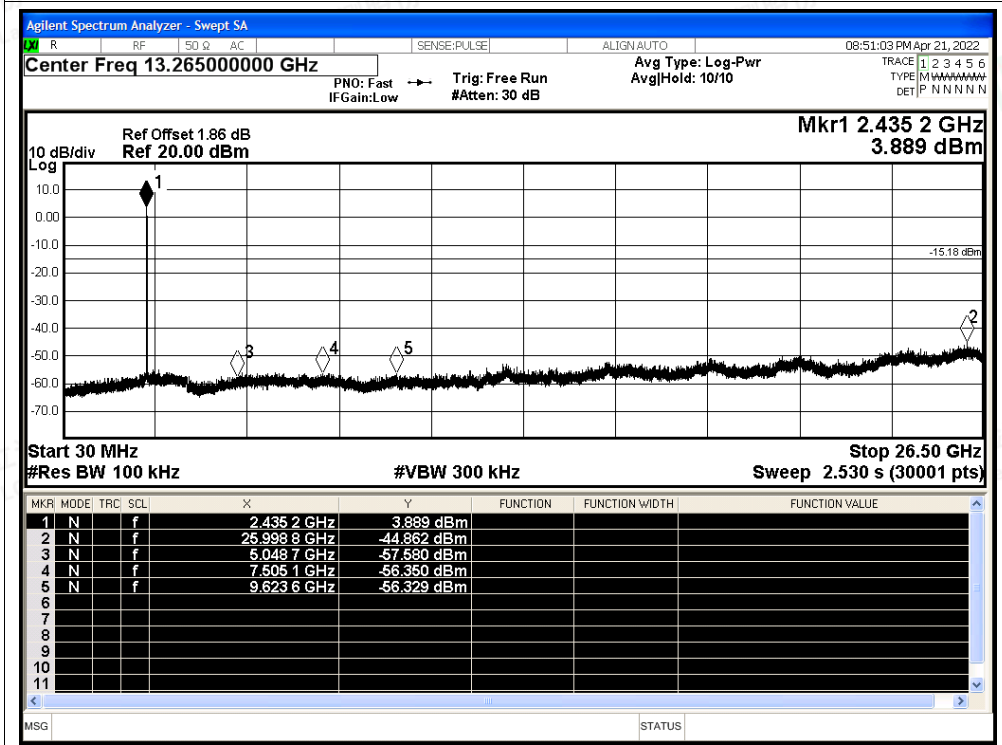




Tx. Spurious NVNT b 2462MHz Ant1 Ref

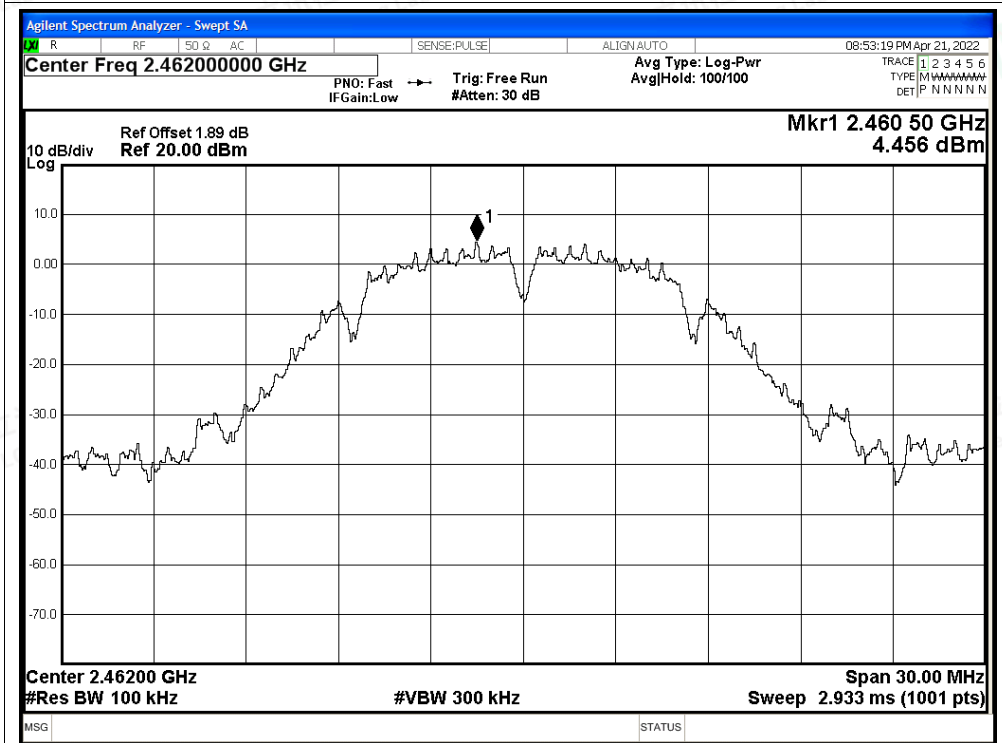


Tx. Spurious NVNT b 2462MHz Ant1 Emission

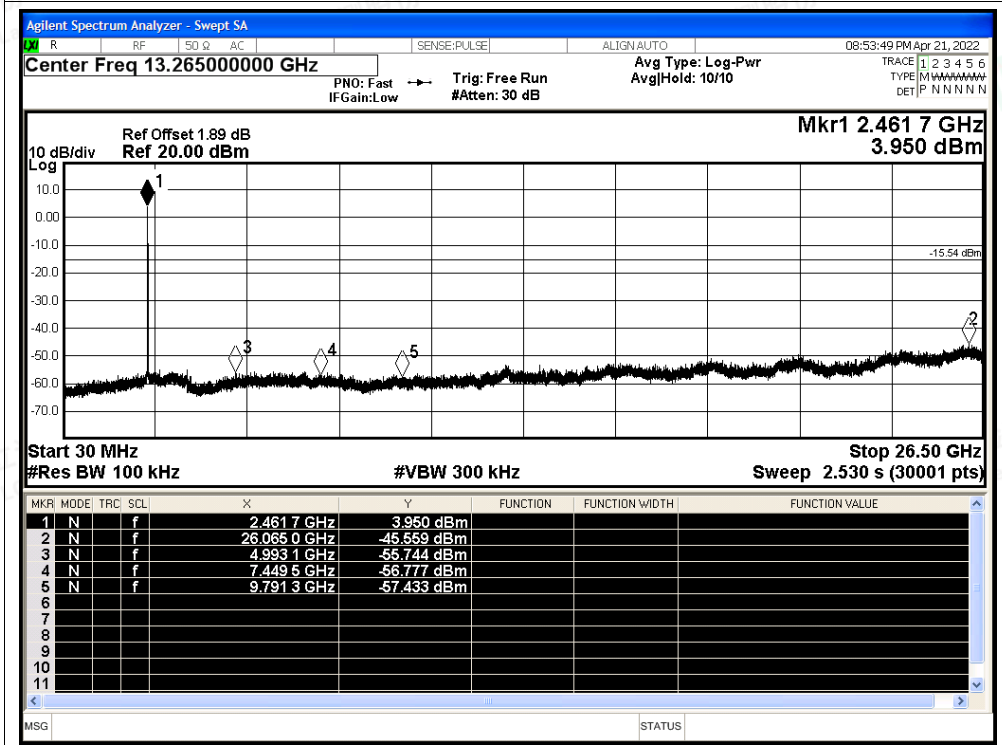




Tx. Spurious NVNT g 2412MHz Ant1 Ref

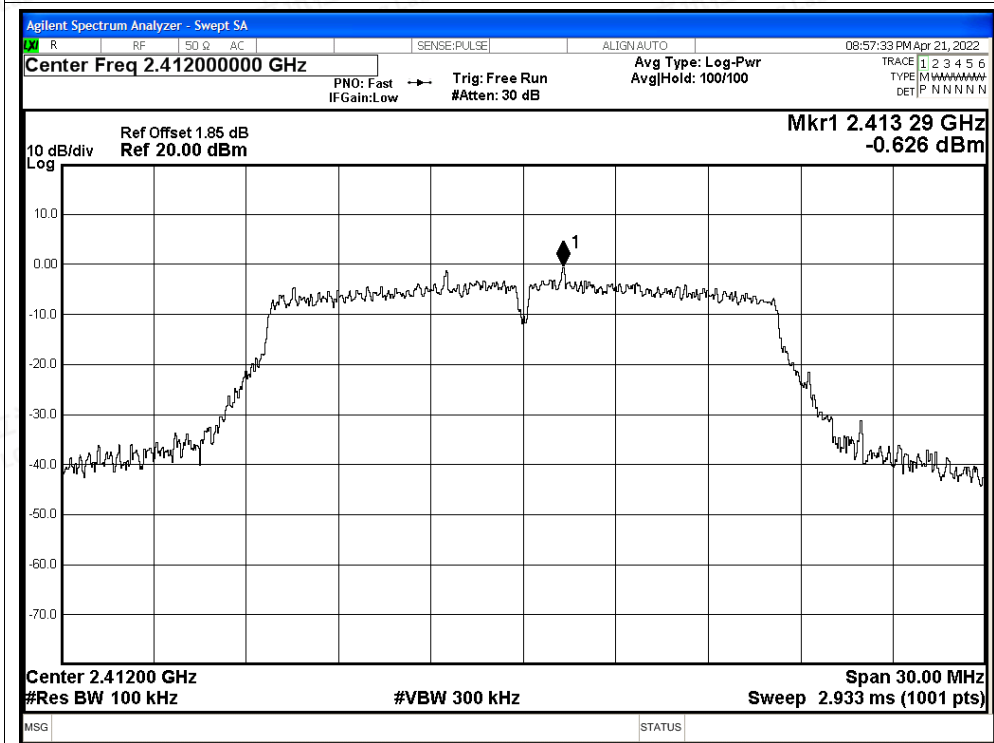


Tx. Spurious NVNT g 2412MHz Ant1 Emission

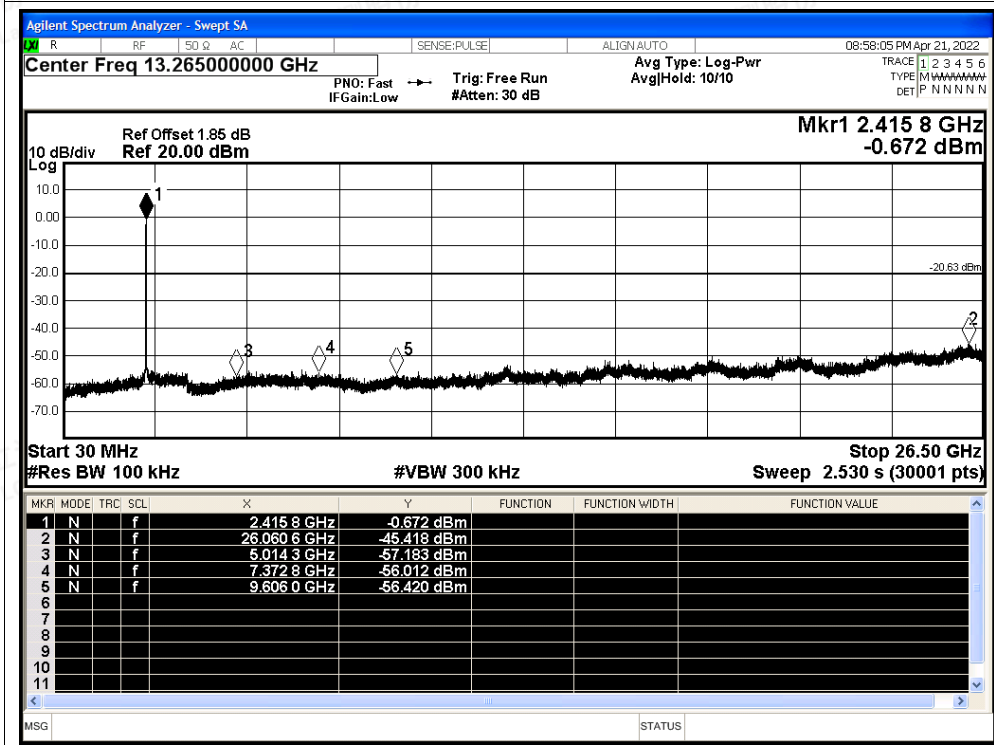




Tx. Spurious NVNT g 2437MHz Ant1 Ref

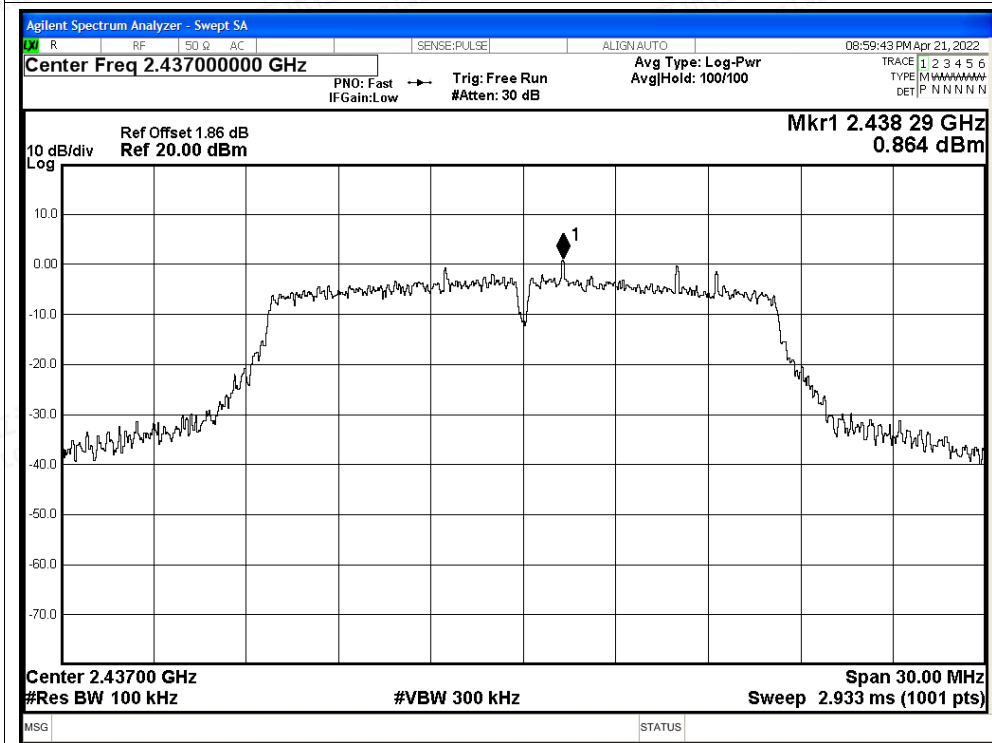


Tx. Spurious NVNT g 2437MHz Ant1 Emission

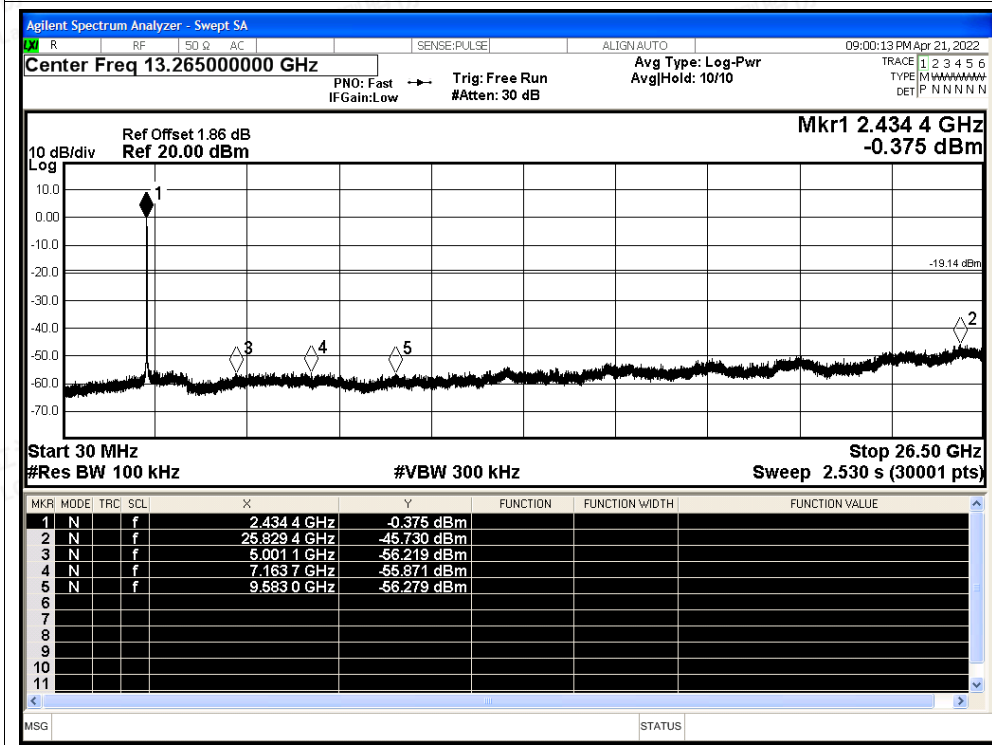




Tx. Spurious NVNT g 2462MHz Ant1 Ref

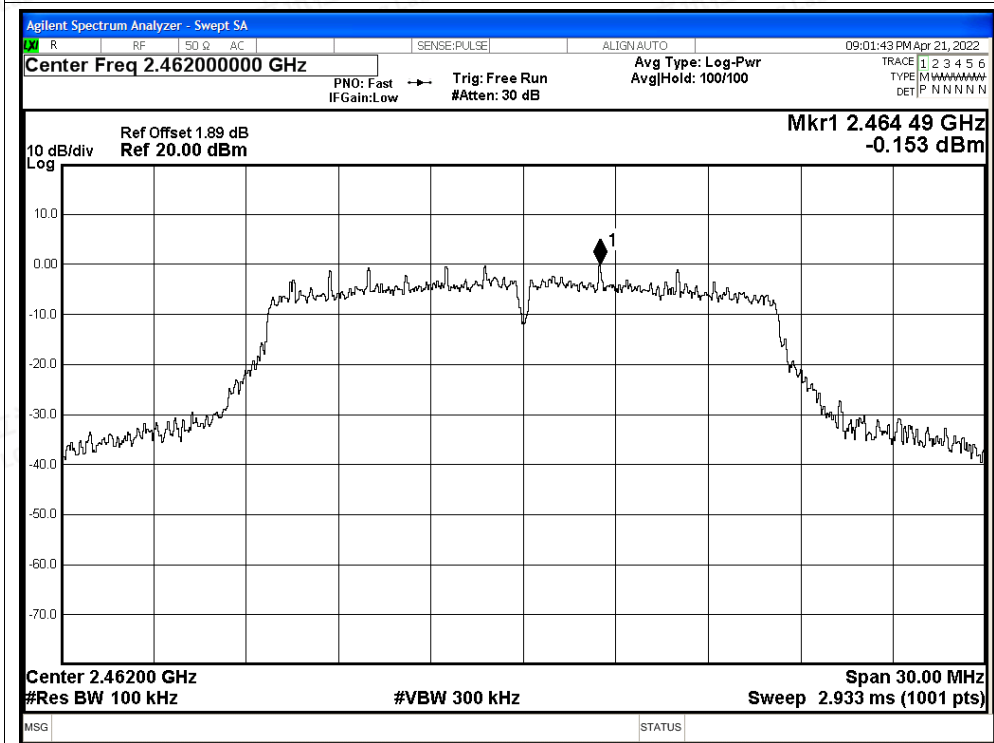


Tx. Spurious NVNT g 2462MHz Ant1 Emission

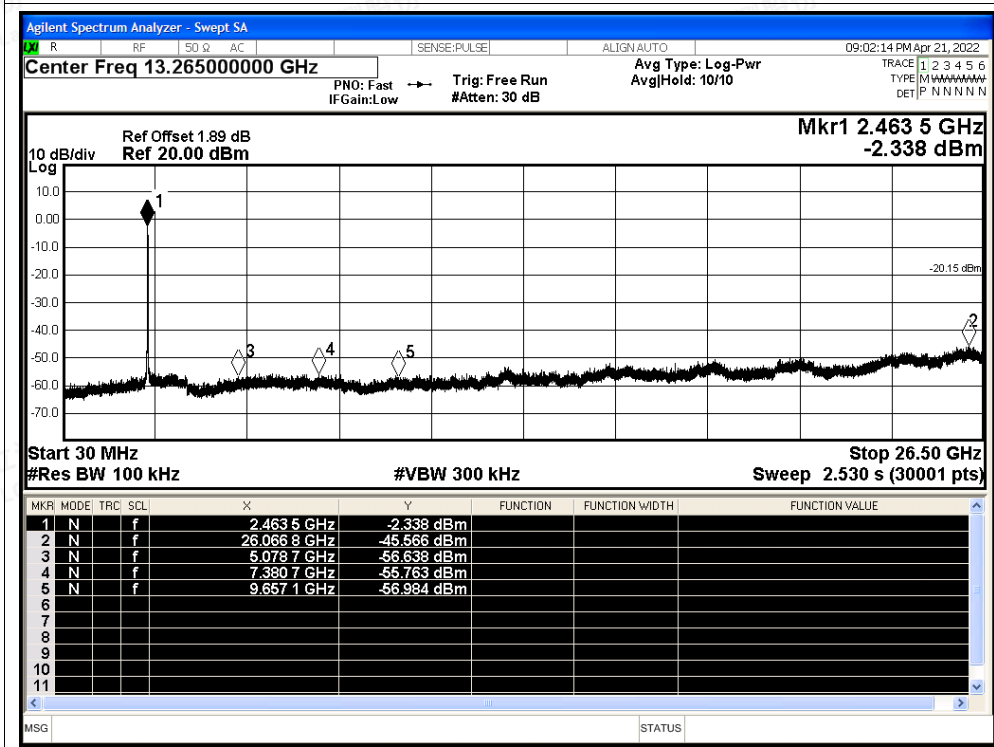




Tx. Spurious NVNT n20 2412MHz Ant1 Ref

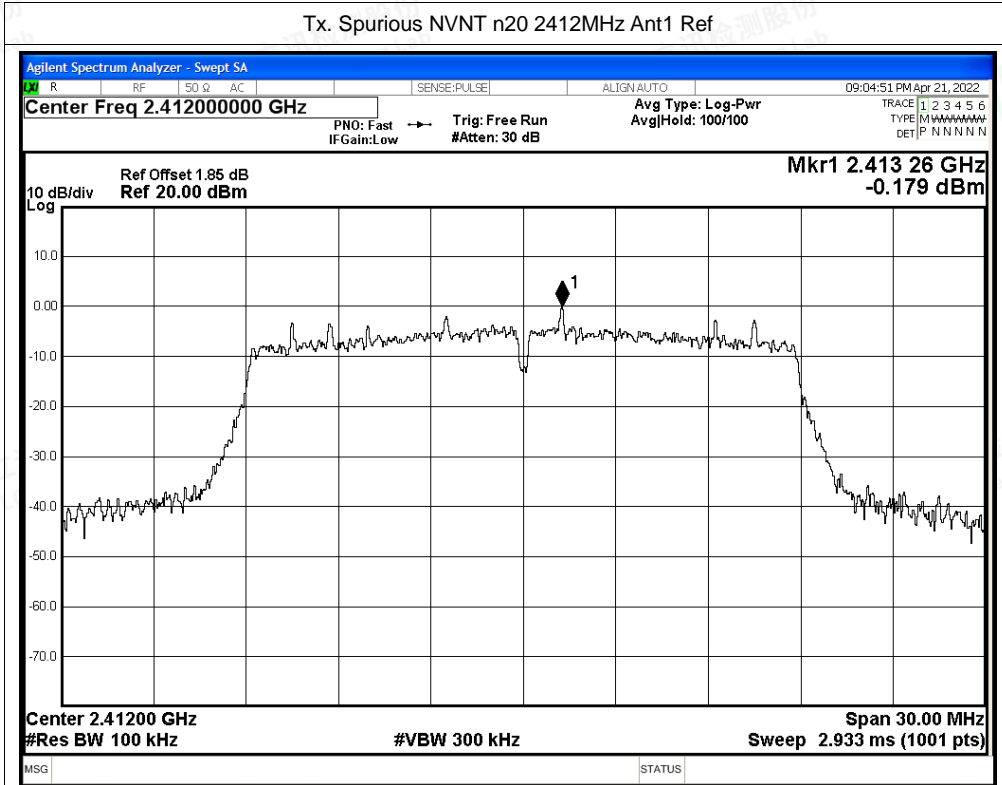


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

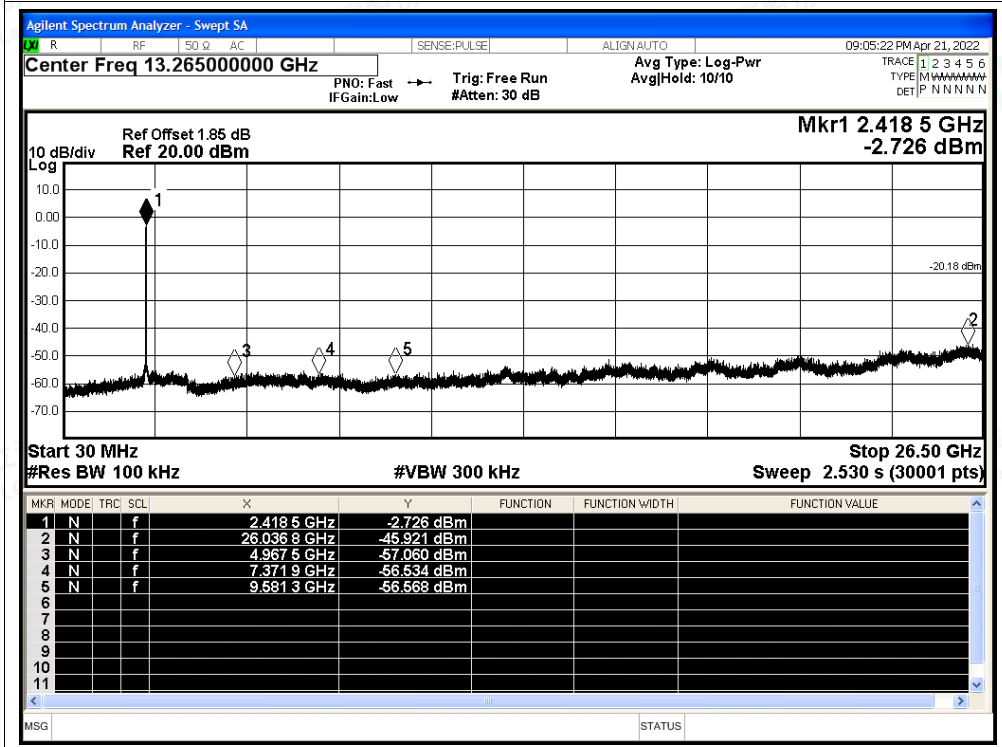




Tx. Spurious NVNT n20 2437MHz Ant1 Ref

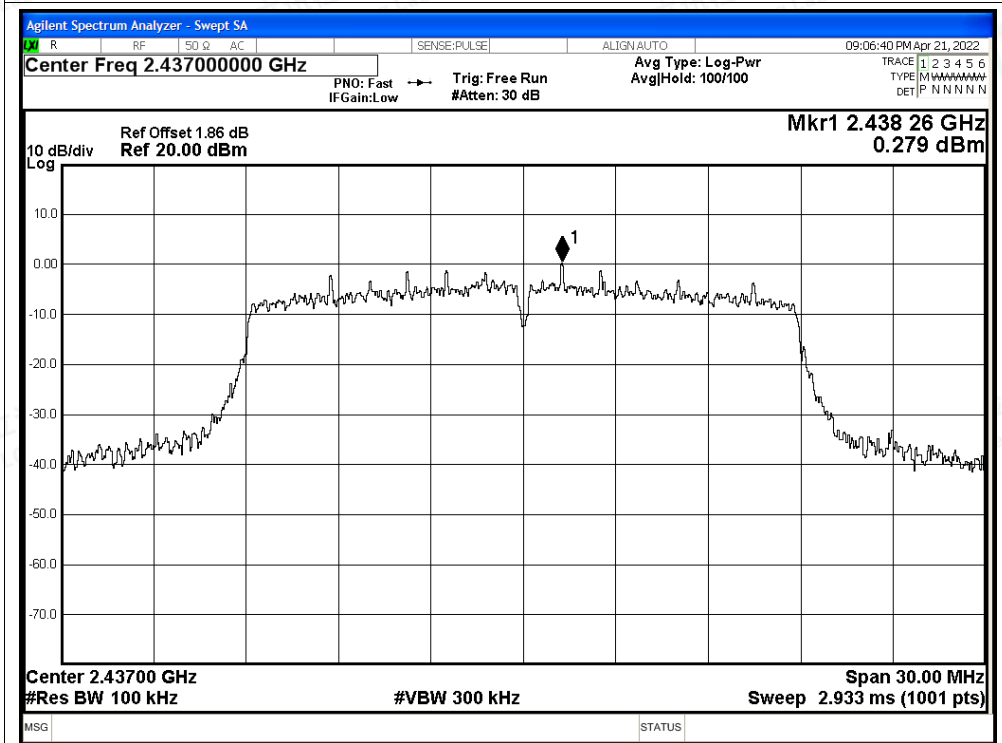


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

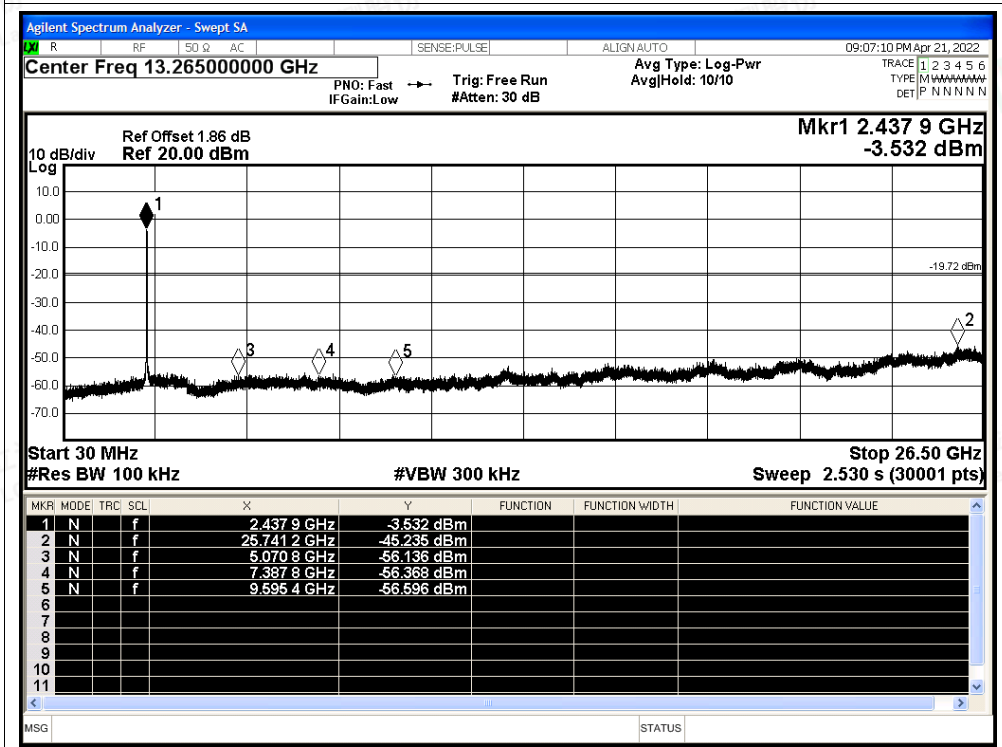




Tx. Spurious NVNT n20 2462MHz Ant1 Ref

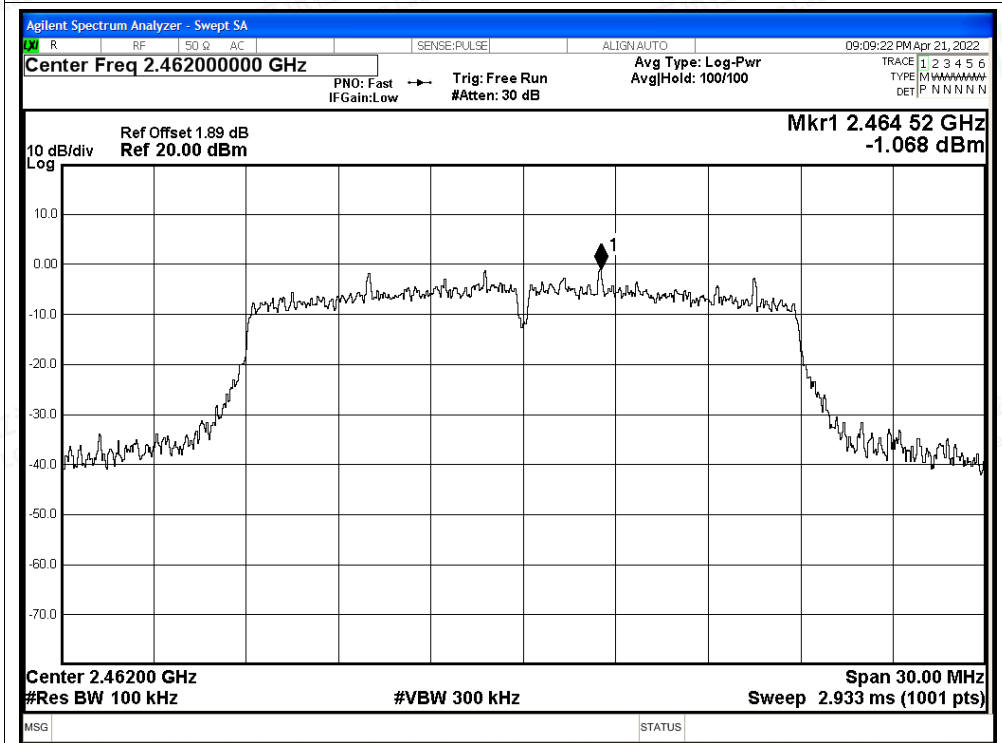


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

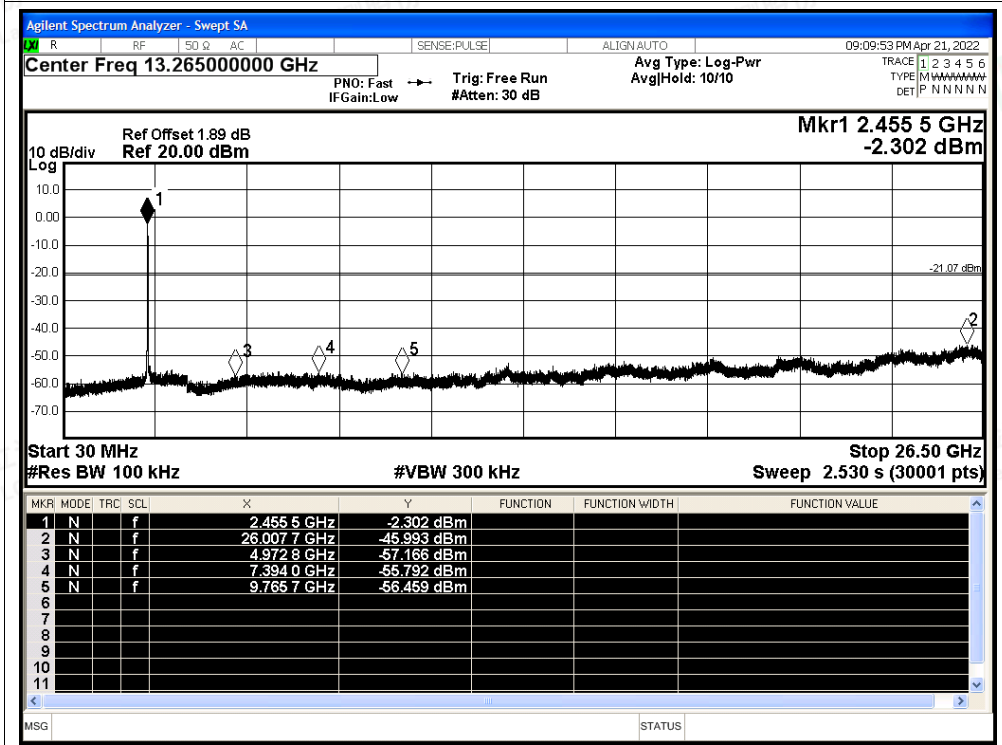




Tx. Spurious NVNT n40 2422MHz Ant1 Ref

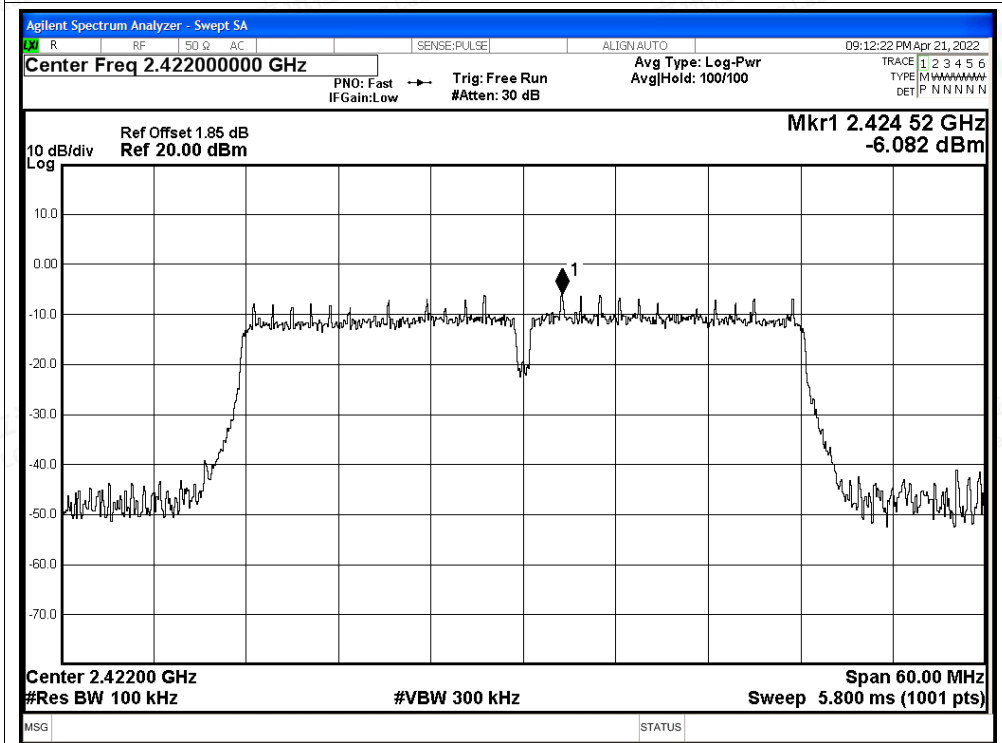


Tx. Spurious NVNT n40 2422MHz Ant1 Emission

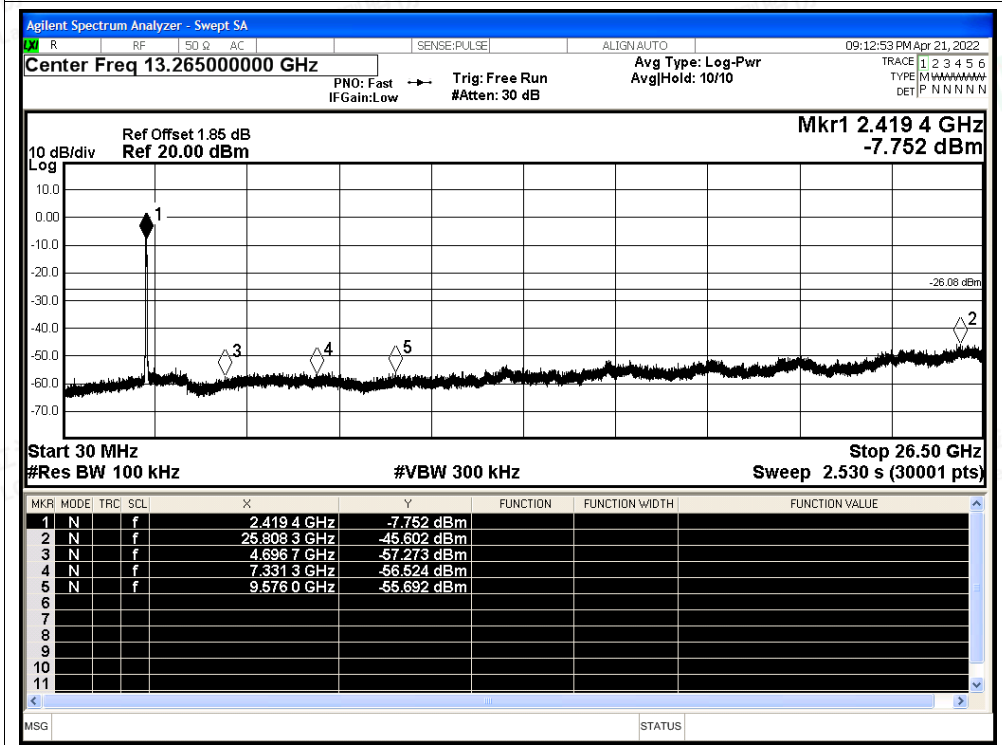




Tx. Spurious NVNT n40 2437MHz Ant1 Ref

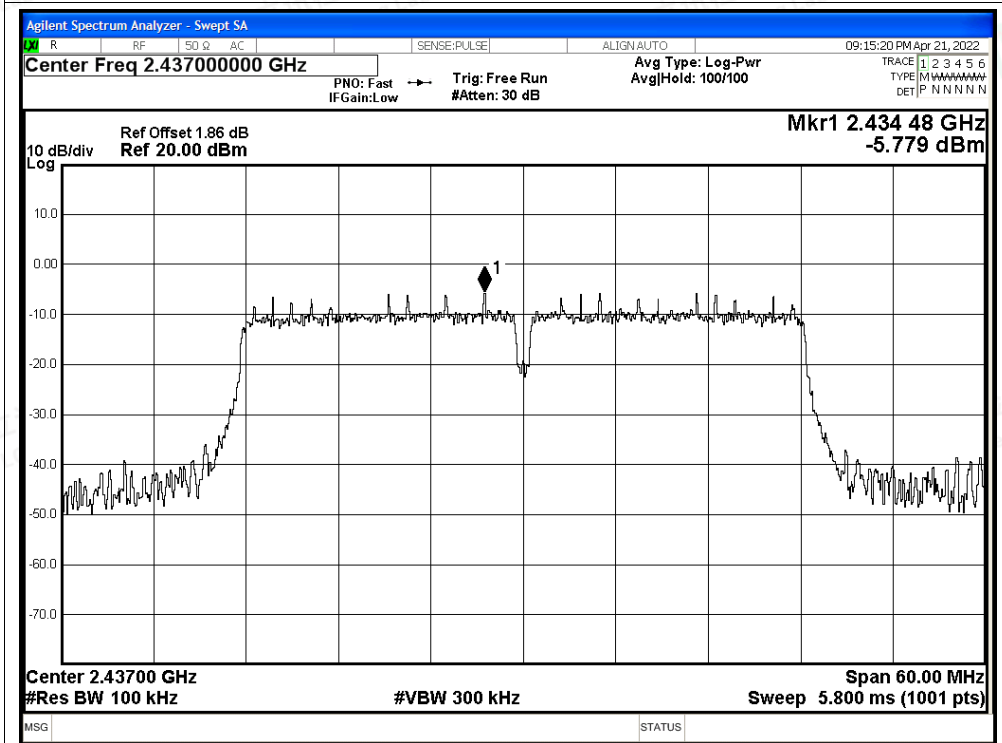


Tx. Spurious NVNT n40 2437MHz Ant1 Emission

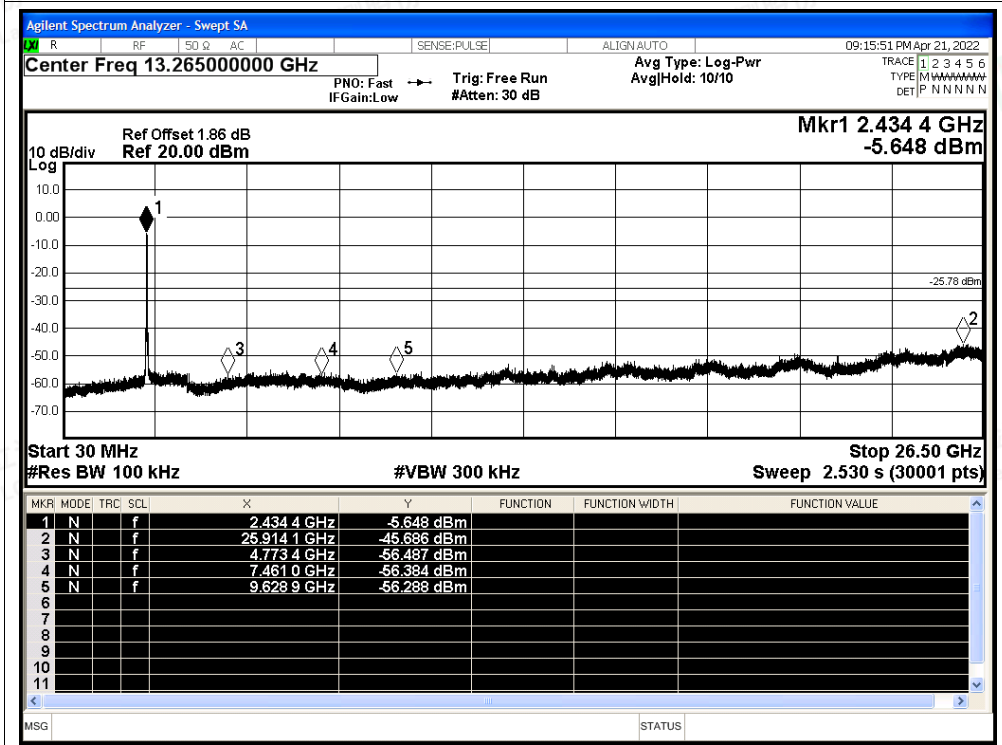




Tx. Spurious NVNT n40 2452MHz Ant1 Ref

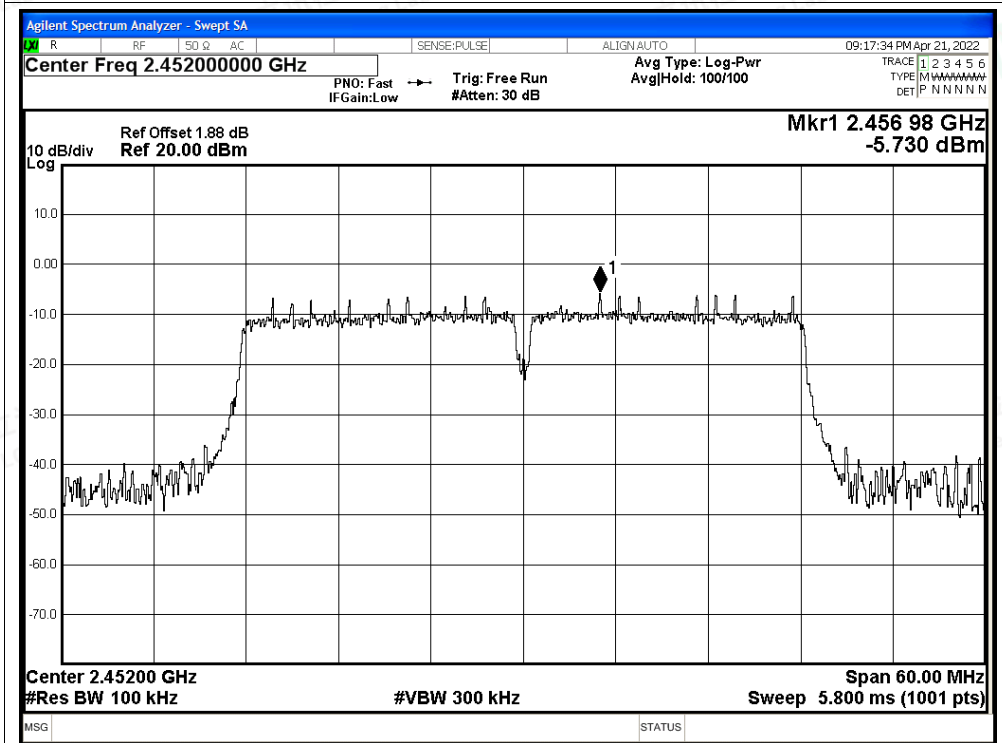

Tx. Spurious NVNT n40 2452MHz Ant1 Emission

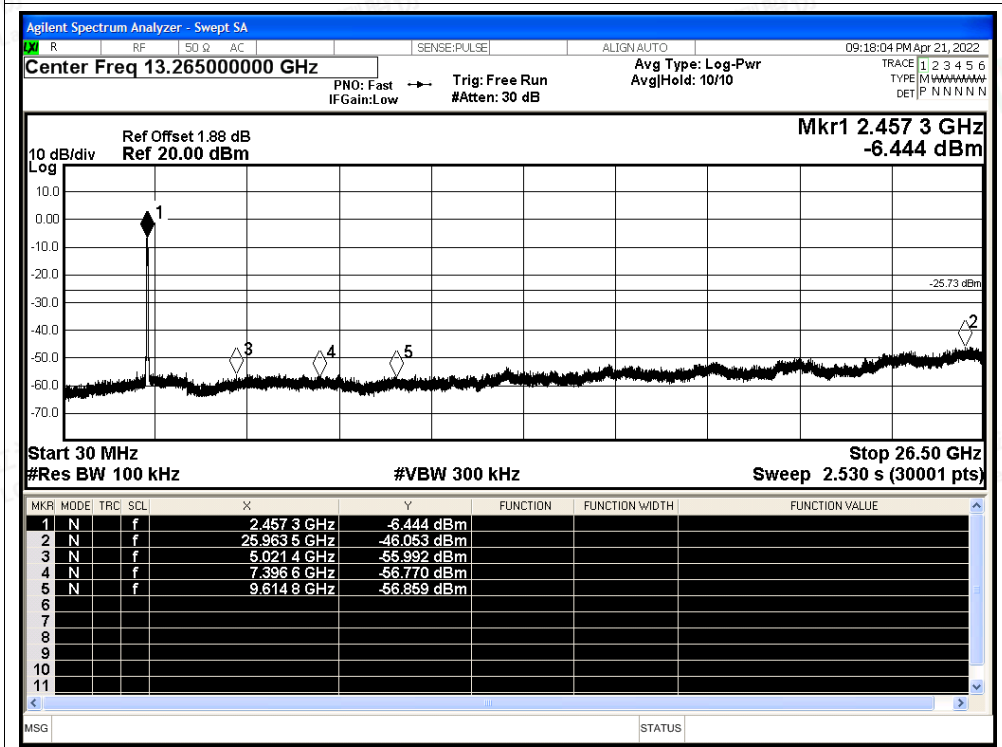



A.7 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.67	0	0.01
NVNT	b	2437	Ant1	99.67	0	0.01
NVNT	b	2462	Ant1	99.67	0	0.01
NVNT	g	2412	Ant1	97.62	0.1	0.72
NVNT	g	2437	Ant1	97.62	0.1	0.72
NVNT	g	2462	Ant1	97.62	0.1	0.72
NVNT	n20	2412	Ant1	97.46	0.11	0.77
NVNT	n20	2437	Ant1	97.46	0.11	0.77
NVNT	n20	2462	Ant1	97.31	0.12	0.77
NVNT	n40	2422	Ant1	95.32	0.21	1.53
NVNT	n40	2437	Ant1	95.31	0.21	1.54
NVNT	n40	2452	Ant1	95.32	0.21	1.53






Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

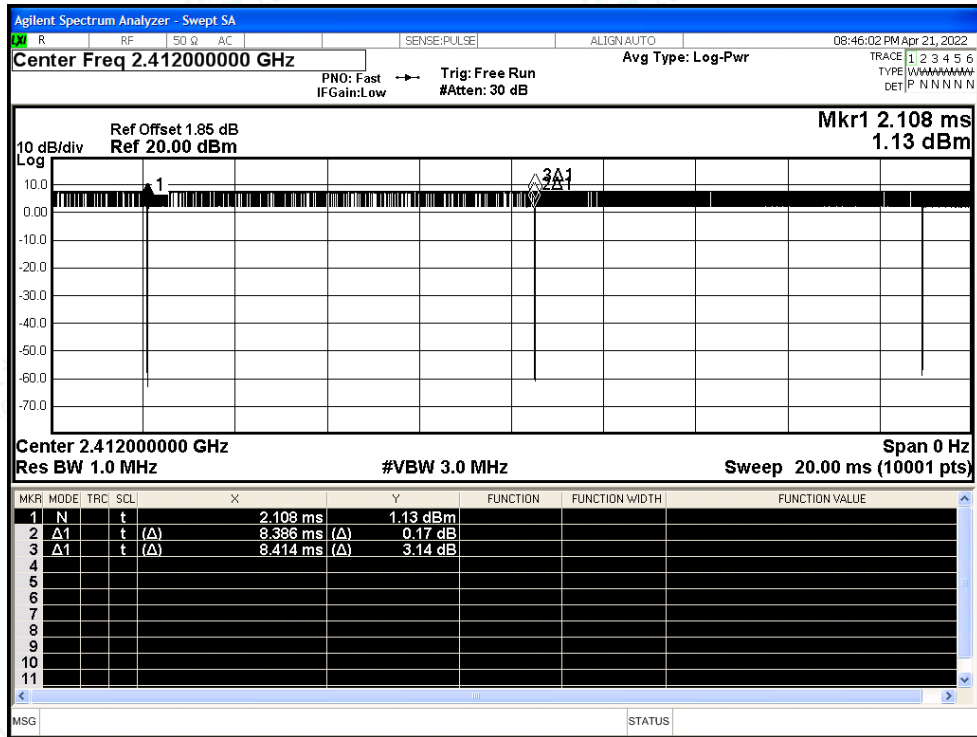


Duty Cycle NVNT b 2437MHz Ant1

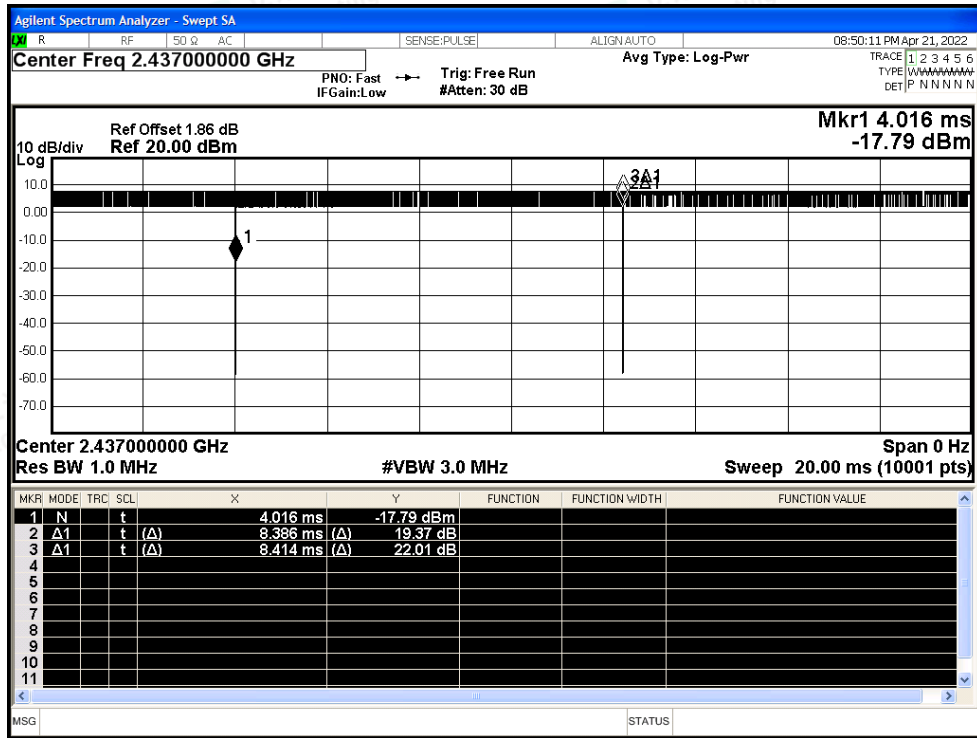






Duty Cycle NVNT b 2462MHz Ant1

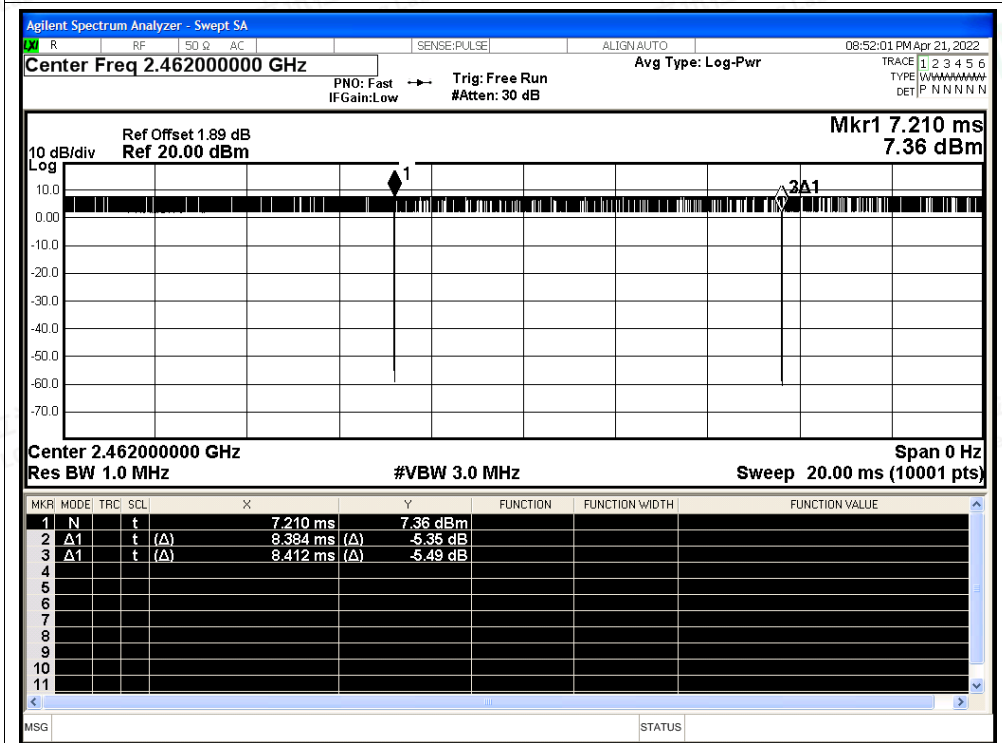


Duty Cycle NVNT g 2412MHz Ant1

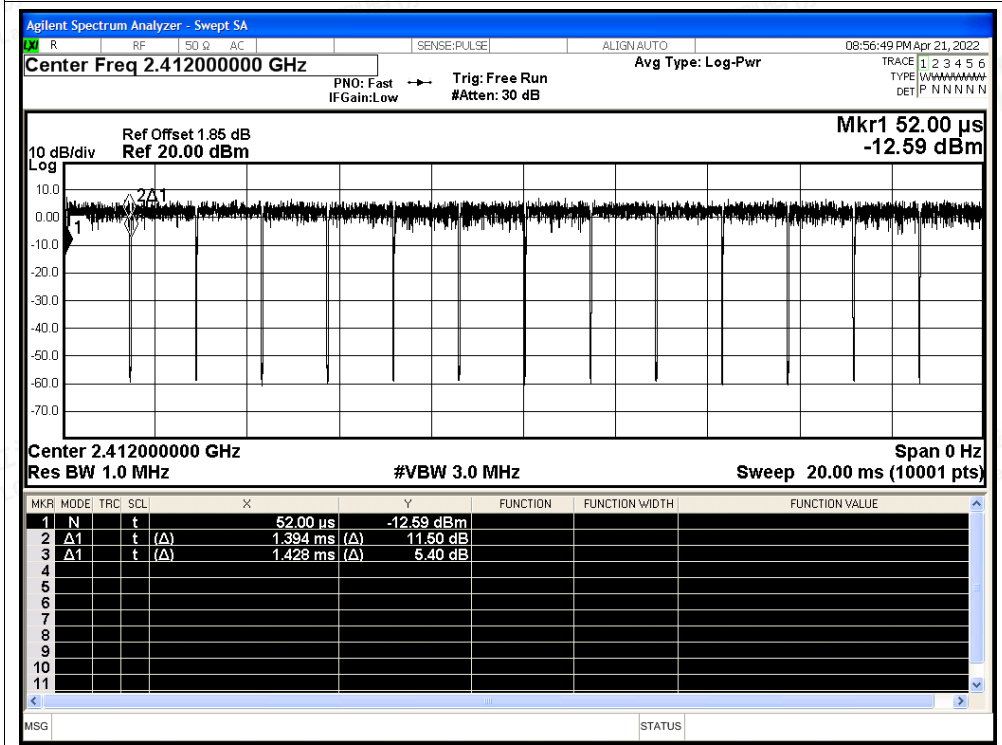

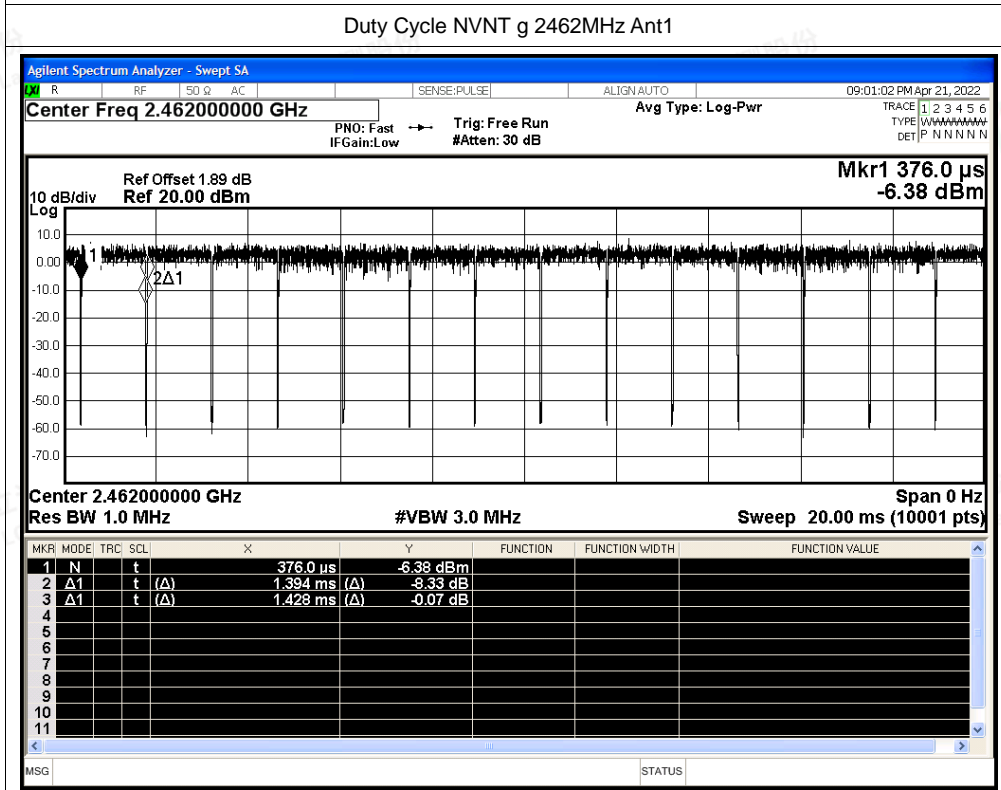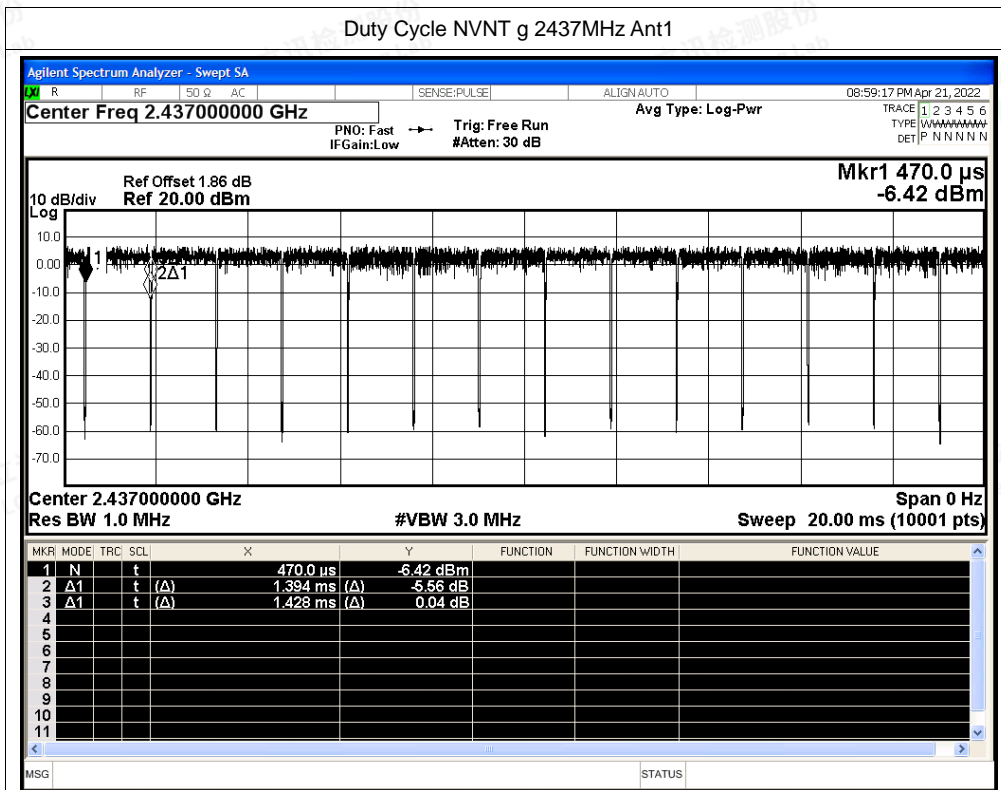




Duty Cycle NVNT n20 2412MHz Ant1

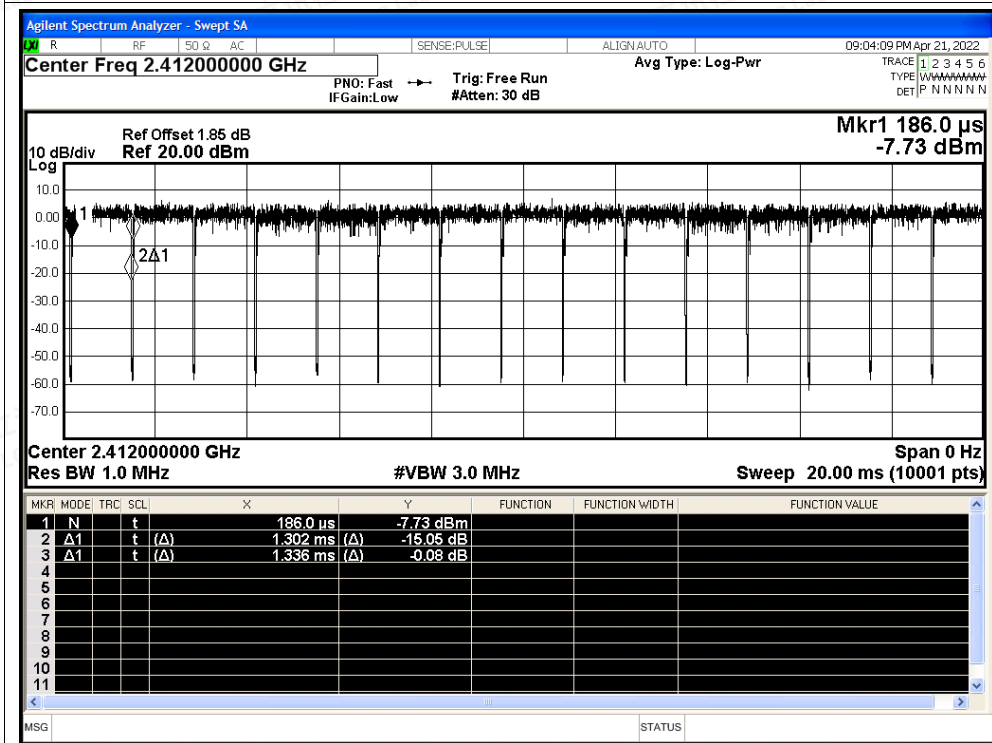


Duty Cycle NVNT n20 2437MHz Ant1

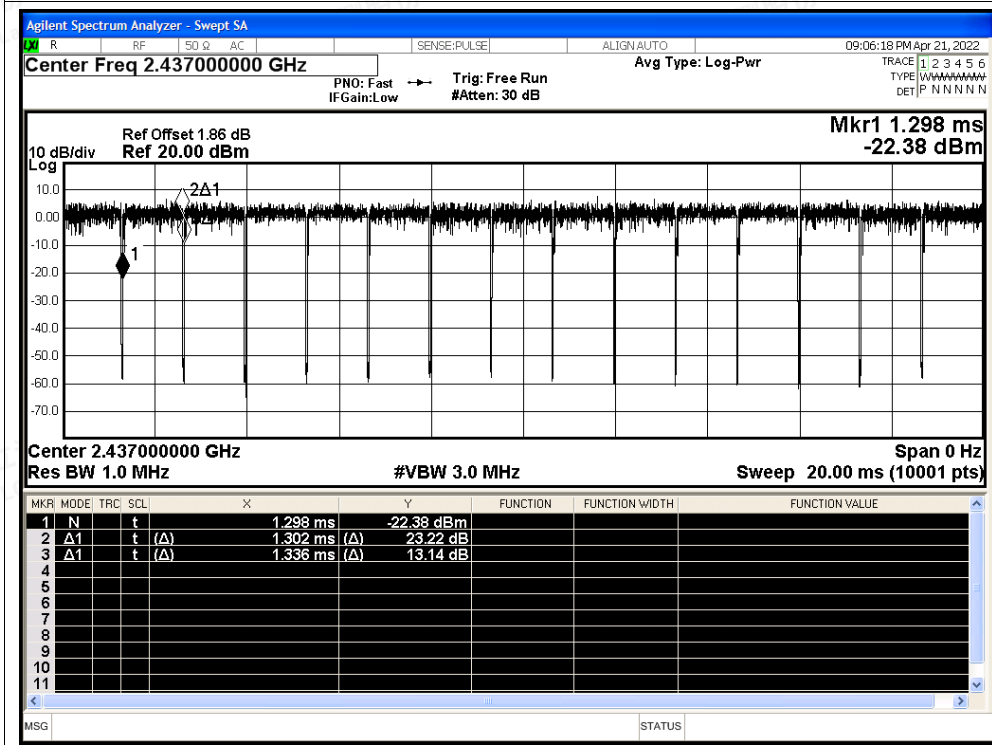




Duty Cycle NVNT n20 2462MHz Ant1

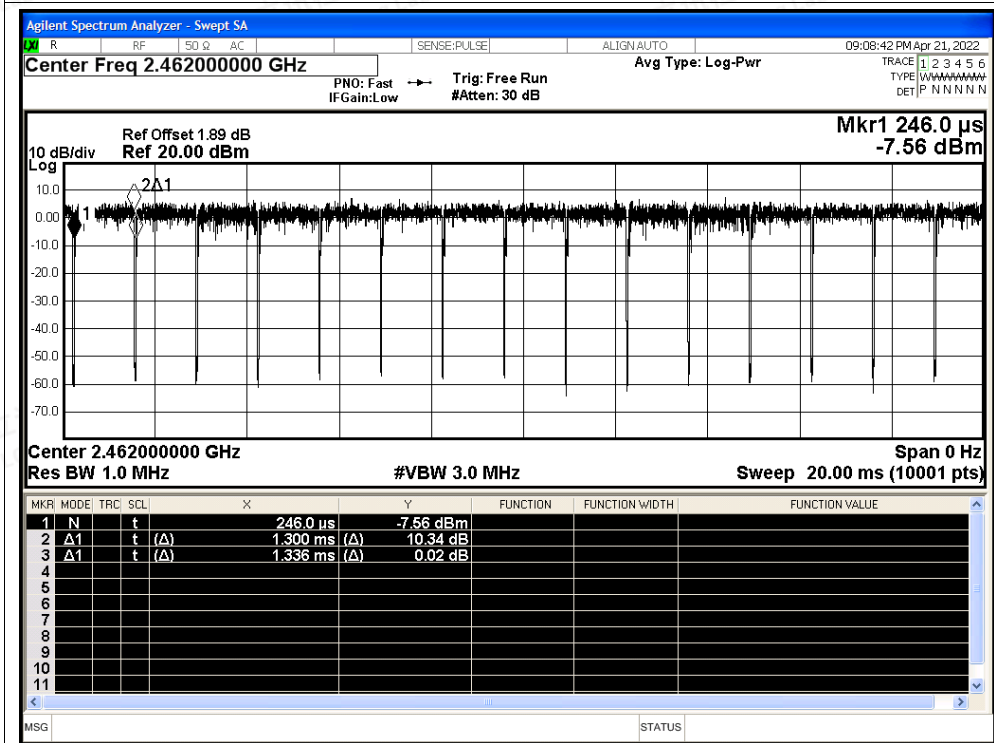


Duty Cycle NVNT n40 2422MHz Ant1

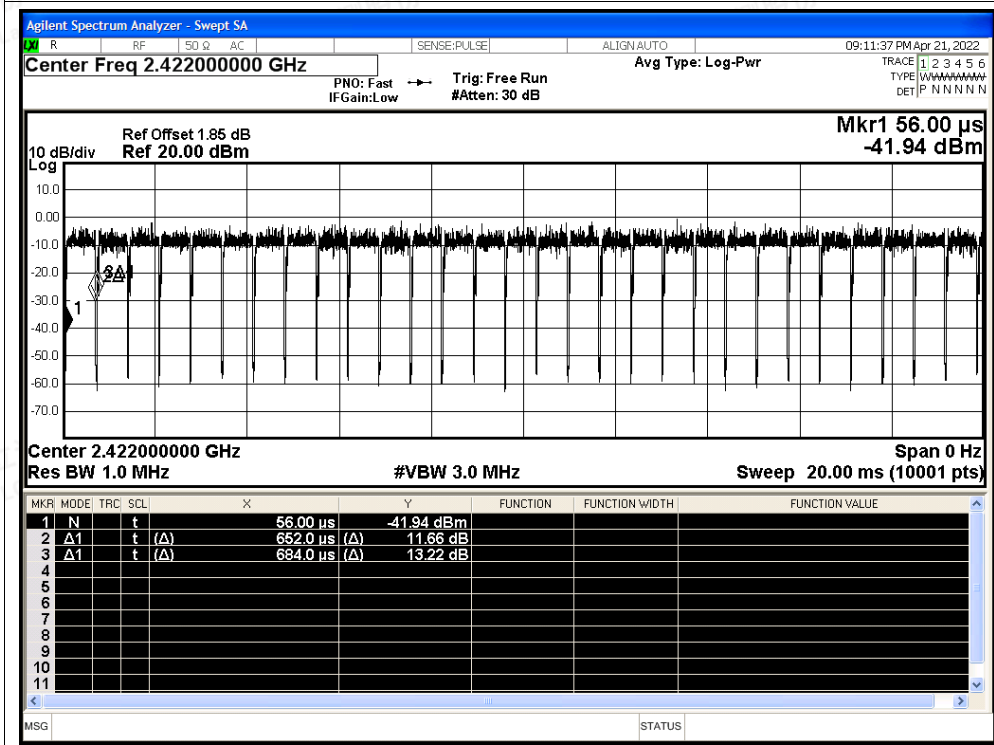




Duty Cycle NVNT n40 2437MHz Ant1

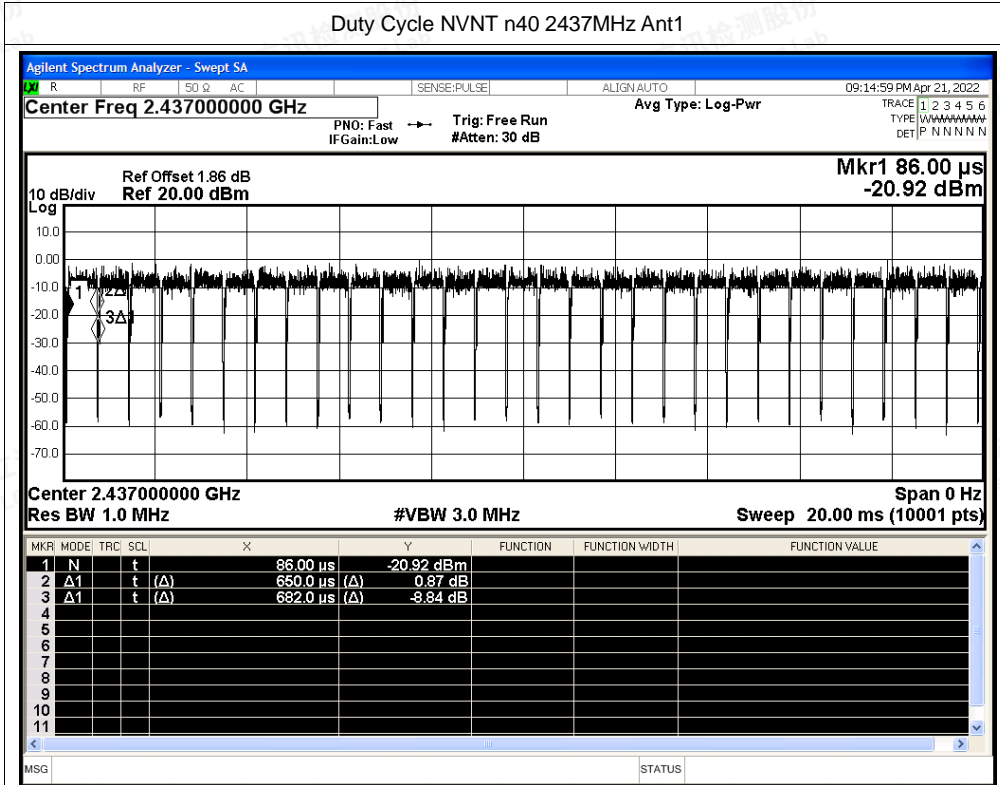

Duty Cycle NVNT n40 2452MHz Ant1

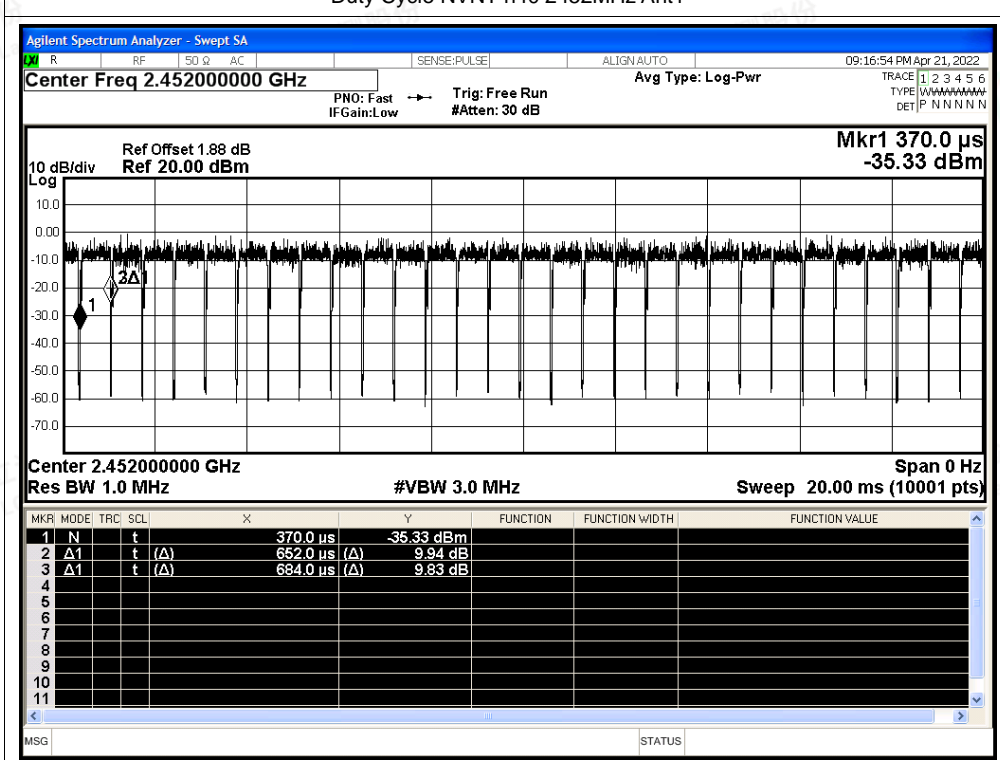



A.8 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	b	2412	Ant1	2310	-49.77	3.72	49.18	Peak	74	Pass
NVNT	b	2412	Ant1	2310	-60.72	3.72	38.23	Average	54	Pass
NVNT	b	2412	Ant1	2388.741	-45.53	3.72	53.42	Peak	74	Pass
NVNT	b	2412	Ant1	2387.103	-55.23	3.72	43.72	Average	54	Pass
NVNT	b	2412	Ant1	2390	-46.41	3.72	52.54	Peak	74	Pass
NVNT	b	2412	Ant1	2390	-55.12	3.72	43.83	Average	54	Pass
NVNT	b	2462	Ant1	2483.5	-46.2	3.72	52.75	Peak	74	Pass
NVNT	b	2462	Ant1	2483.5	-56.92	3.72	42.03	Average	54	Pass
NVNT	b	2462	Ant1	2487.386	-45.09	3.72	53.86	Peak	74	Pass
NVNT	b	2462	Ant1	2486.114	-55.84	3.72	43.11	Average	54	Pass
NVNT	b	2462	Ant1	2500	-49.07	3.72	49.88	Peak	74	Pass
NVNT	b	2462	Ant1	2500	-59.04	3.72	39.91	Average	54	Pass
NVNT	g	2412	Ant1	2310	-51.55	3.72	47.40	Peak	74	Pass
NVNT	g	2412	Ant1	2310	-60	3.72	38.95	Average	54	Pass
NVNT	g	2412	Ant1	2389.209	-40.11	3.72	58.84	Peak	74	Pass
NVNT	g	2412	Ant1	2389.911	-52.83	3.72	46.12	Average	54	Pass
NVNT	g	2412	Ant1	2390	-39.65	3.72	59.30	Peak	74	Pass
NVNT	g	2412	Ant1	2390	-52.68	3.72	46.27	Average	54	Pass
NVNT	g	2462	Ant1	2483.5	-32.32	3.72	66.63	Peak	74	Pass
NVNT	g	2462	Ant1	2483.5	-47.89	3.72	51.06	Average	54	Pass
NVNT	g	2462	Ant1	2483.517	-32.32	3.72	66.63	Peak	74	Pass
NVNT	g	2462	Ant1	2483.517	-47.89	3.72	51.06	Average	54	Pass
NVNT	g	2462	Ant1	2500	-47.27	3.72	51.68	Peak	74	Pass
NVNT	g	2462	Ant1	2500	-55.42	3.72	43.53	Average	54	Pass
NVNT	n20	2412	Ant1	2310	-49.77	3.72	49.18	Peak	74	Pass
NVNT	n20	2412	Ant1	2310	-59.89	3.72	39.06	Average	54	Pass
NVNT	n20	2412	Ant1	2389.911	-33.5	3.72	65.45	Peak	74	Pass
NVNT	n20	2412	Ant1	2389.911	-52.19	3.72	46.76	Average	54	Pass
NVNT	n20	2412	Ant1	2390	-42.51	3.72	56.44	Peak	74	Pass
NVNT	n20	2412	Ant1	2390	-51.98	3.72	46.97	Average	54	Pass
NVNT	n20	2462	Ant1	2483.5	-34.43	3.72	64.52	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.5	-49.01	3.72	49.94	Average	54	Pass
NVNT	n20	2462	Ant1	2484.047	-28.82	3.72	70.13	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.57	-48.85	3.72	50.10	Average	54	Pass
NVNT	n20	2462	Ant1	2500	-46.43	3.72	52.52	Peak	74	Pass
NVNT	n20	2462	Ant1	2500	-55.68	3.72	43.27	Average	54	Pass
NVNT	n40	2422	Ant1	2310	-51.65	3.72	47.30	Peak	74	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



NVNT	n40	2422	Ant1	2310	-59.59	3.72	39.36	Average	54	Pass
NVNT	n40	2422	Ant1	2389.52	-29.86	3.72	69.09	Peak	74	Pass
NVNT	n40	2422	Ant1	2389.946	-49.79	3.72	49.16	Average	54	Pass
NVNT	n40	2422	Ant1	2390	-37.5	3.72	61.45	Peak	74	Pass
NVNT	n40	2422	Ant1	2390	-49.71	3.72	49.24	Average	54	Pass
NVNT	n40	2452	Ant1	2483.5	-40.36	3.72	58.59	Peak	74	Pass
NVNT	n40	2452	Ant1	2483.5	-49.09	3.72	49.86	Average	54	Pass
NVNT	n40	2452	Ant1	2485.648	-26.32	3.72	72.63	Peak	74	Pass
NVNT	n40	2452	Ant1	2485.258	-48.79	3.72	50.16	Average	54	Pass
NVNT	n40	2452	Ant1	2500	-39.03	3.72	59.92	Peak	74	Pass
NVNT	n40	2452	Ant1	2500	-53.73	3.72	45.22	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT b 2412MHz Ant1 Peak

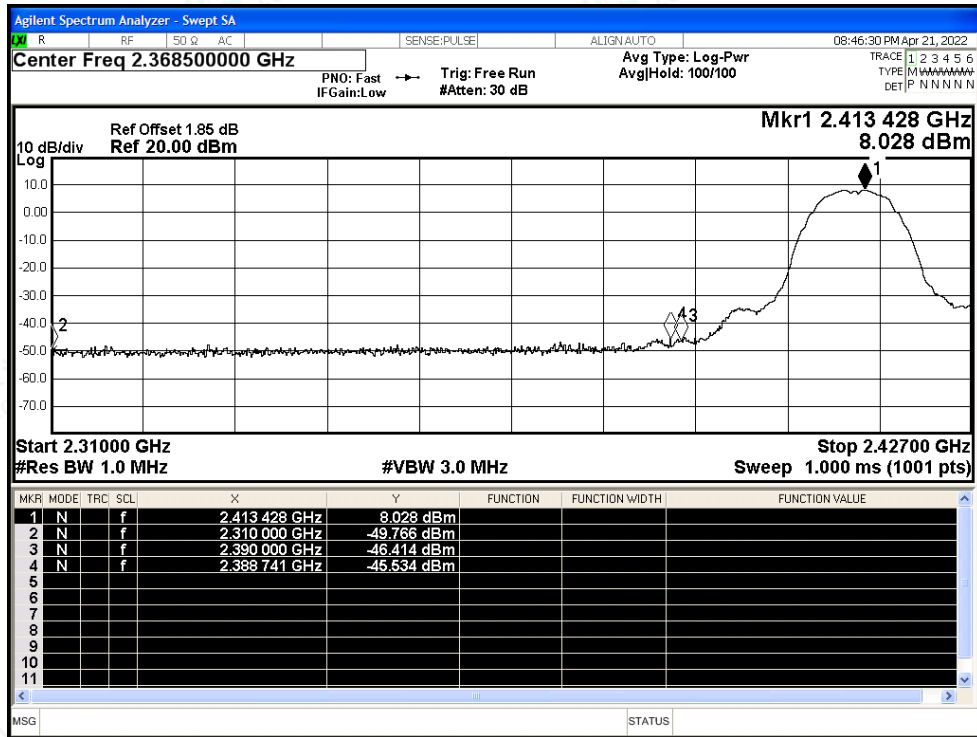


Restrict Band NVNT b 2412MHz Ant1 Average

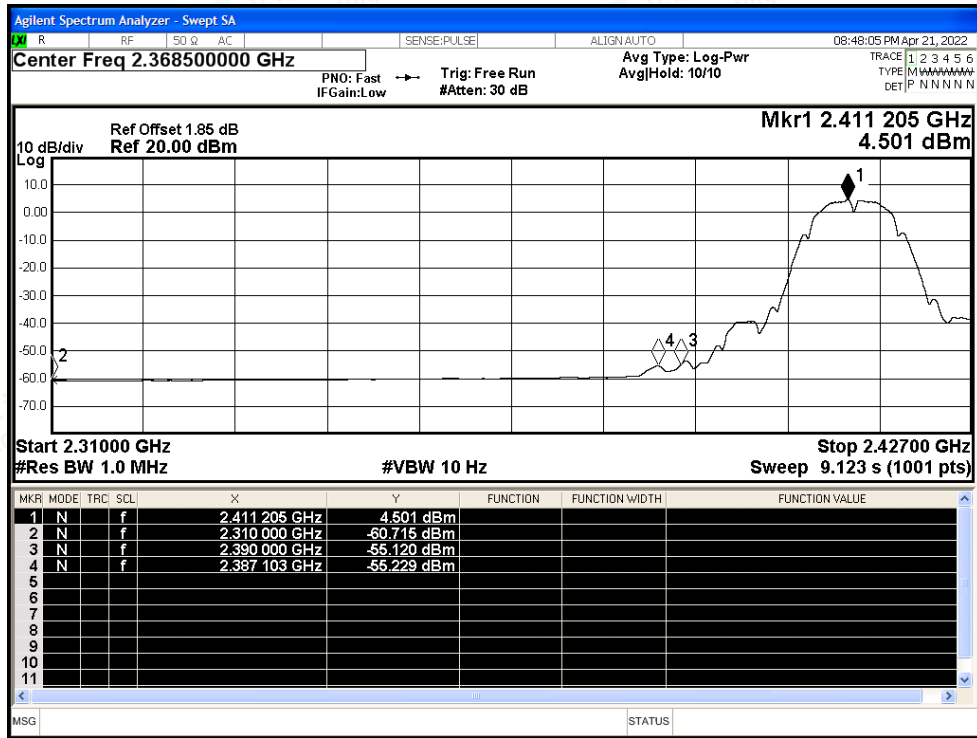




Restrict Band NVNT b 2462MHz Ant1 Peak

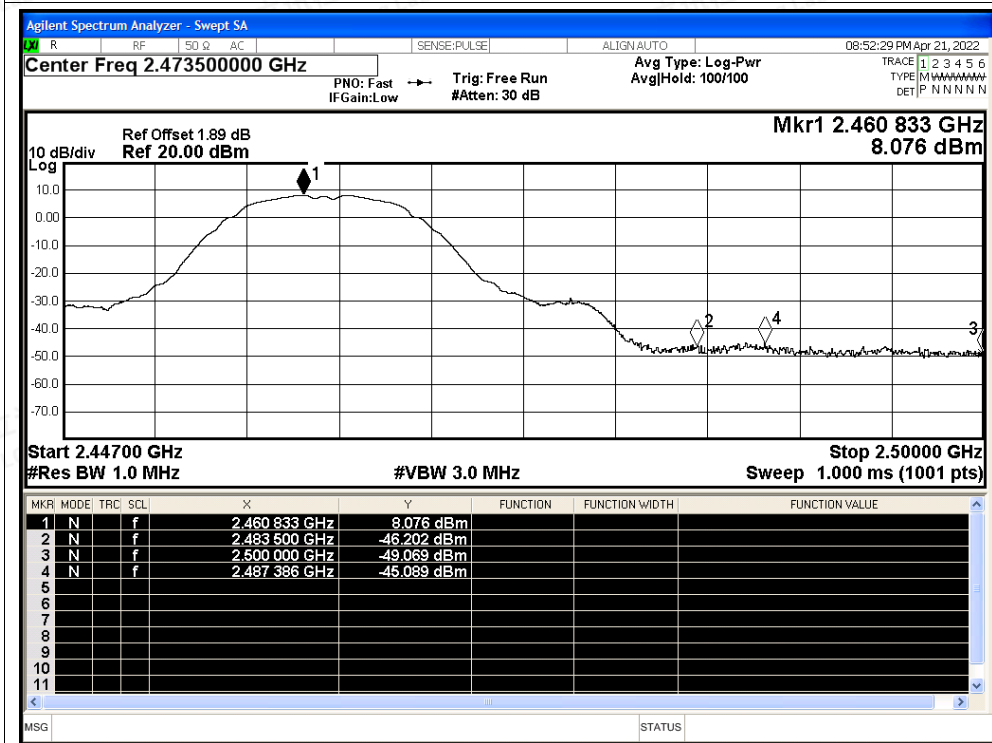


Restrict Band NVNT b 2462MHz Ant1 Average

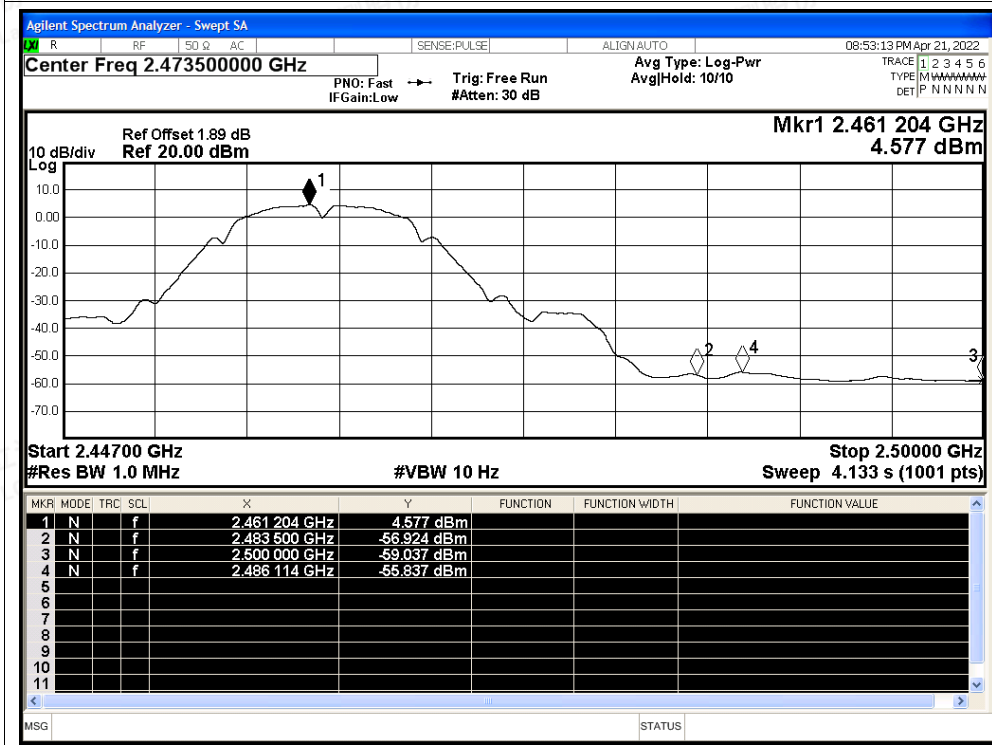




Restrict Band NVNT g 2412MHz Ant1 Peak

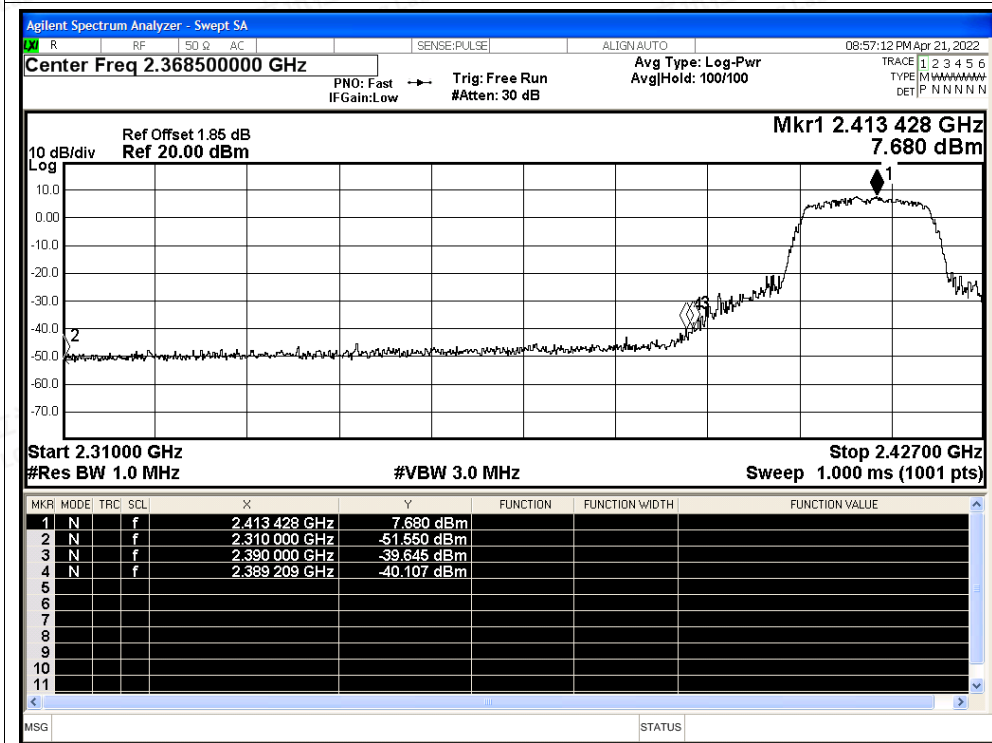


Restrict Band NVNT g 2412MHz Ant1 Average

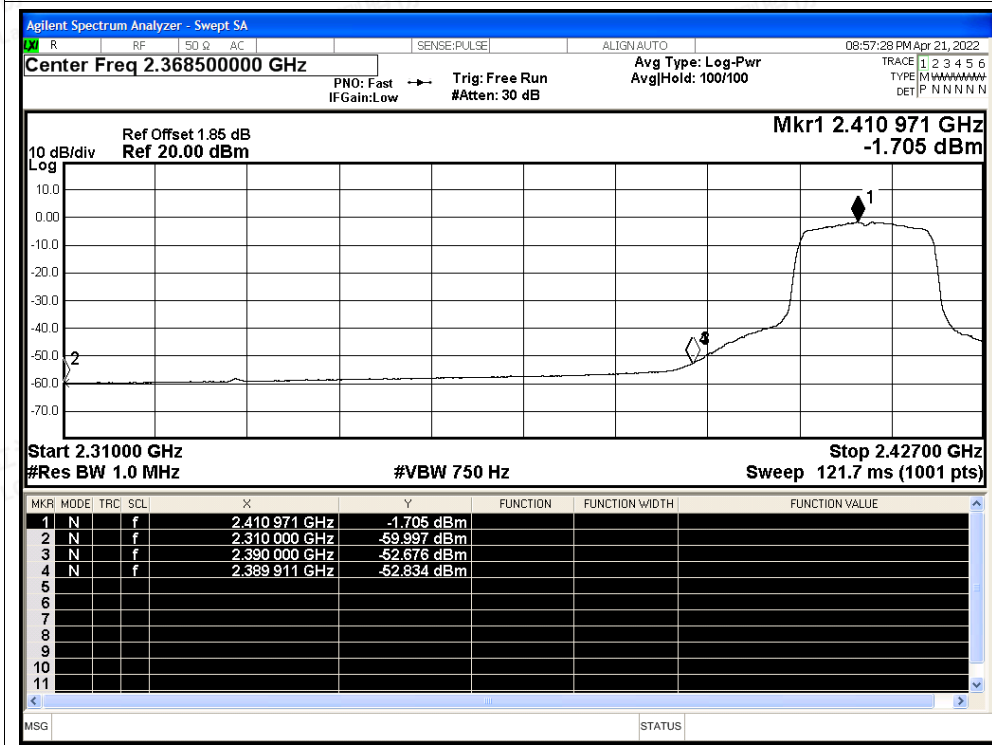




Restrict Band NVNT g 2462MHz Ant1 Peak

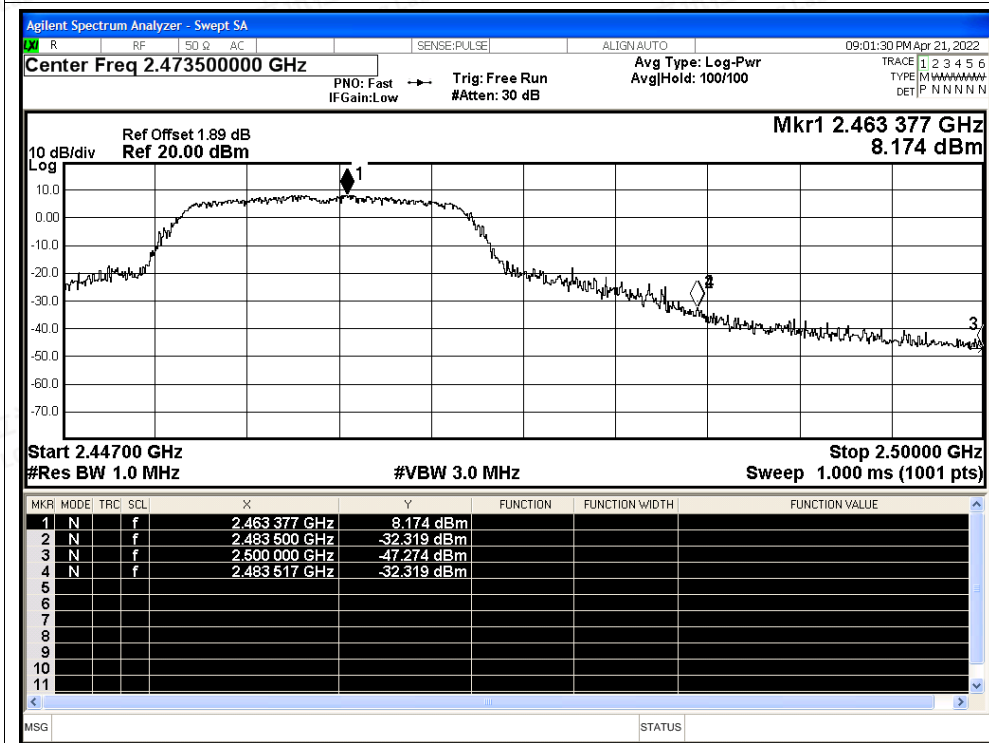


Restrict Band NVNT g 2462MHz Ant1 Average

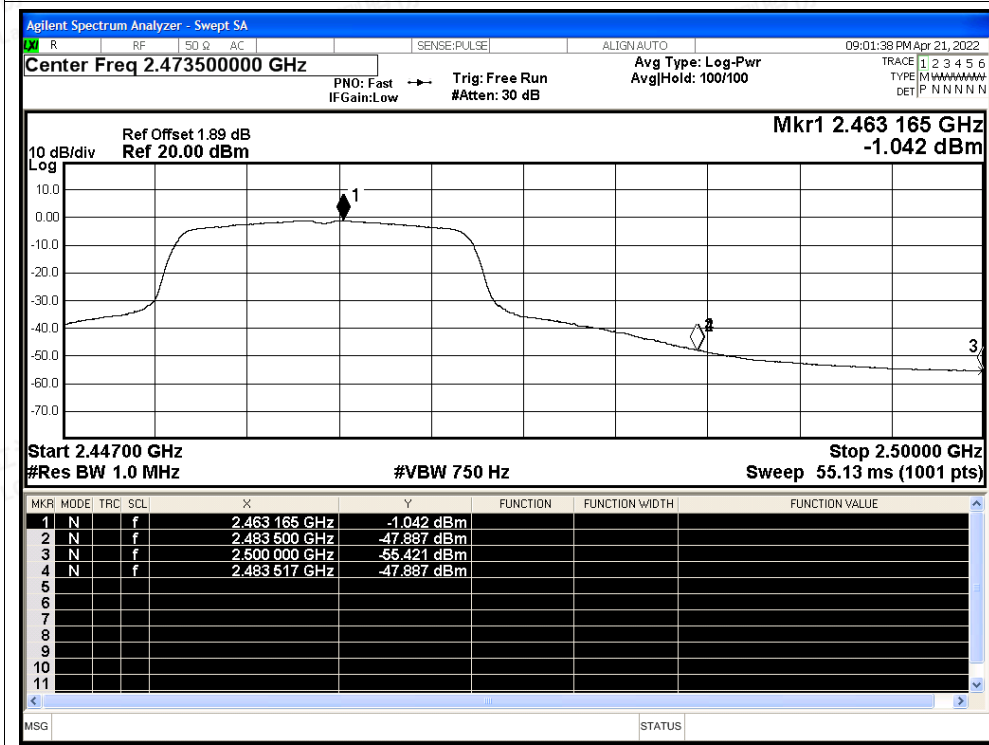




Restrict Band NVNT n20 2412MHz Ant1 Peak

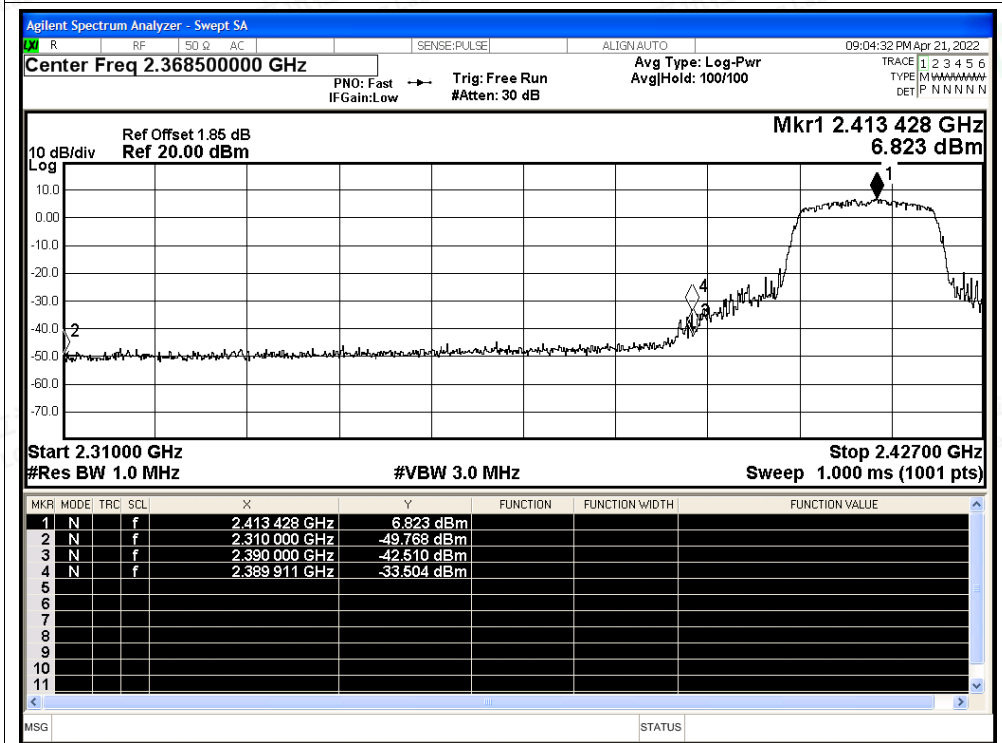


Restrict Band NVNT n20 2412MHz Ant1 Average

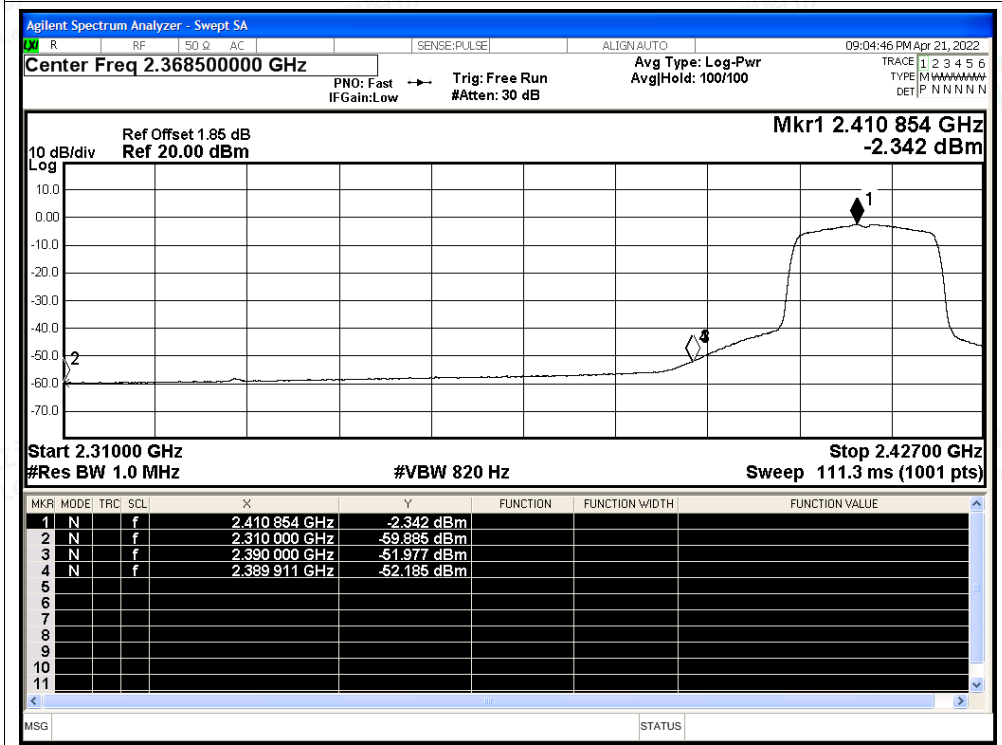




Restrict Band NVNT n20 2462MHz Ant1 Peak

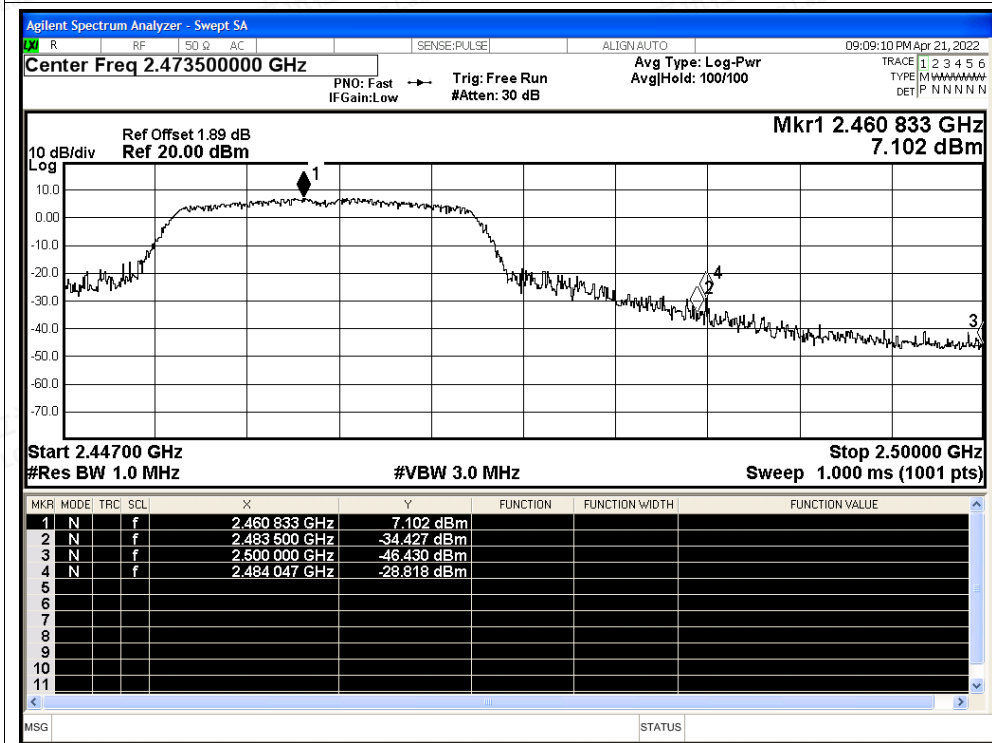


Restrict Band NVNT n20 2462MHz Ant1 Average

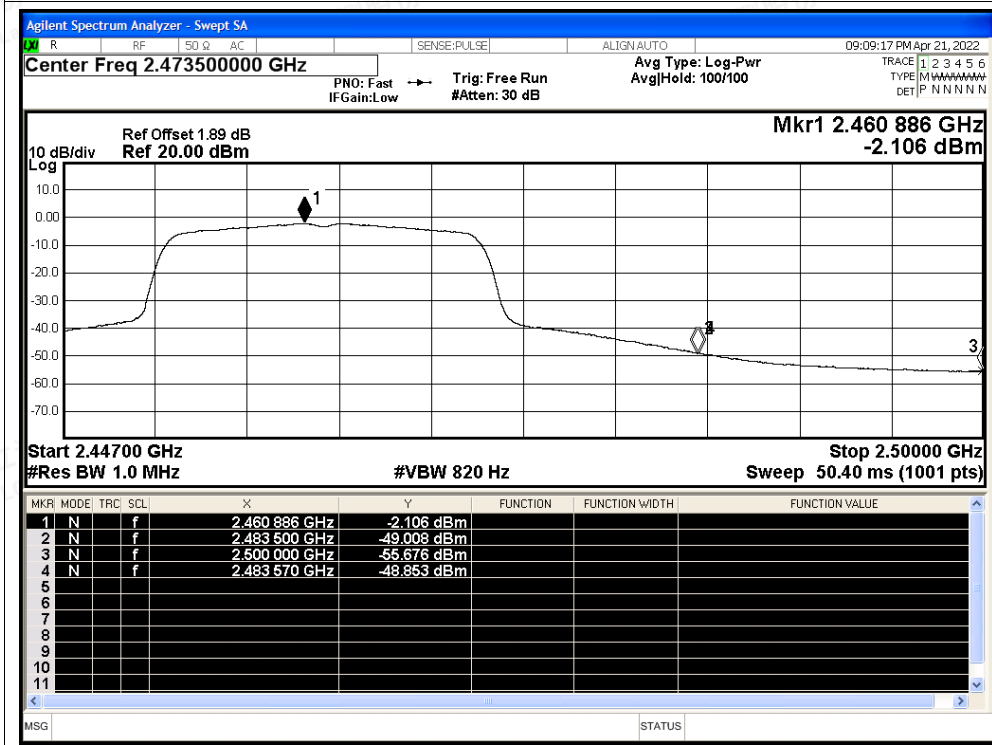




Restrict Band NVNT n40 2422MHz Ant1 Peak

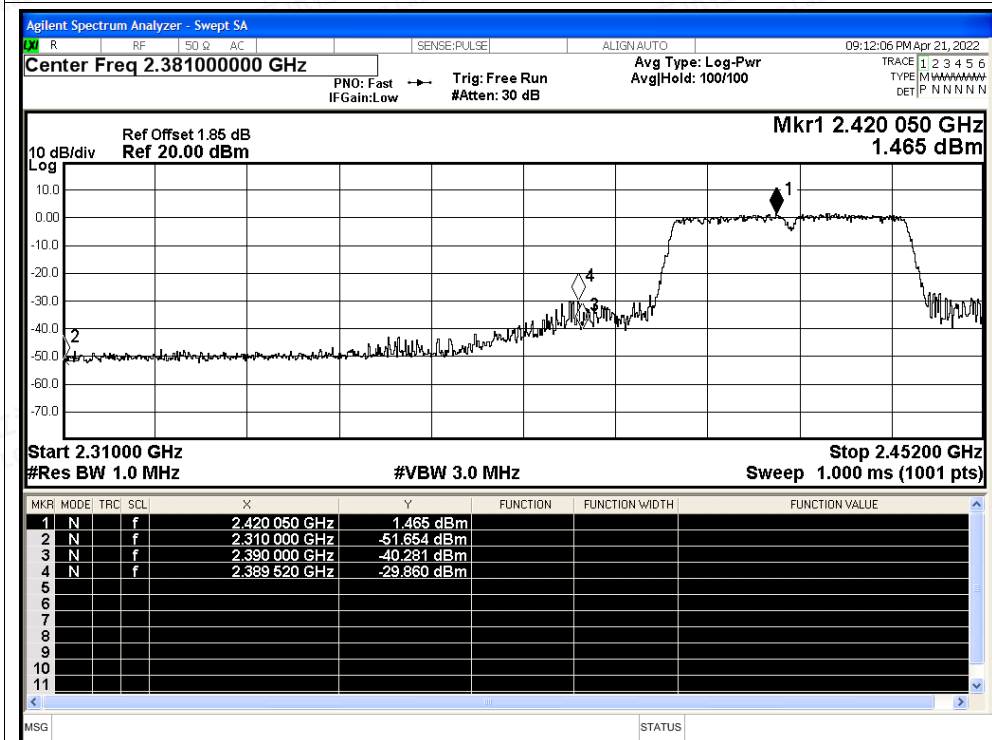


Restrict Band NVNT n40 2422MHz Ant1 Average

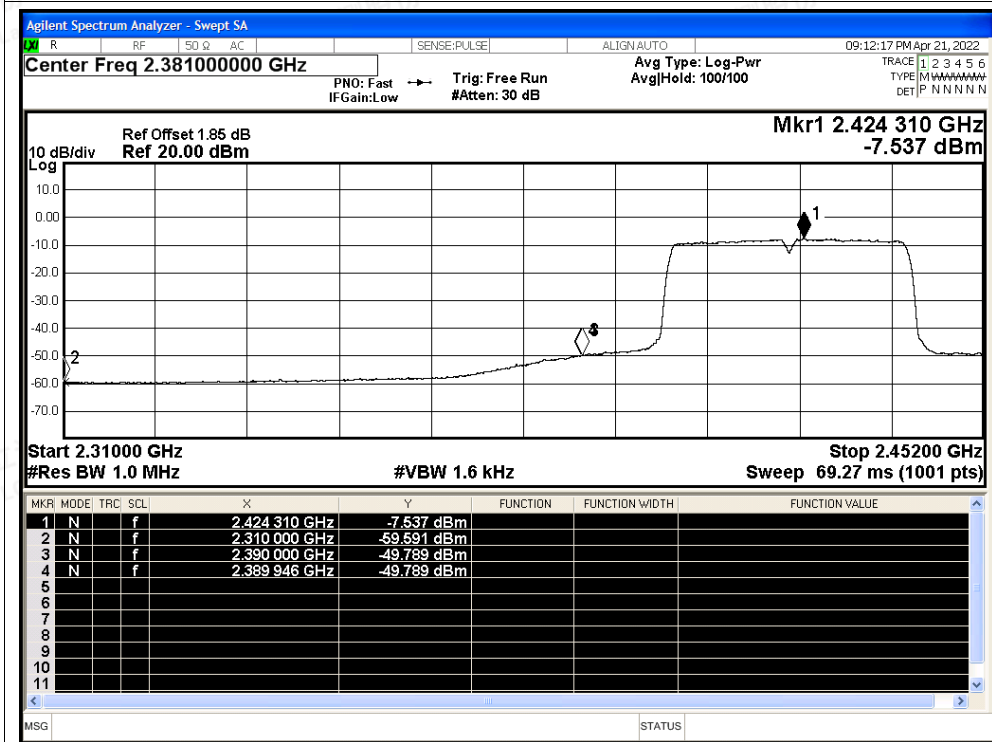



Restrict Band NVNT n40 2452MHz Ant1 Peak

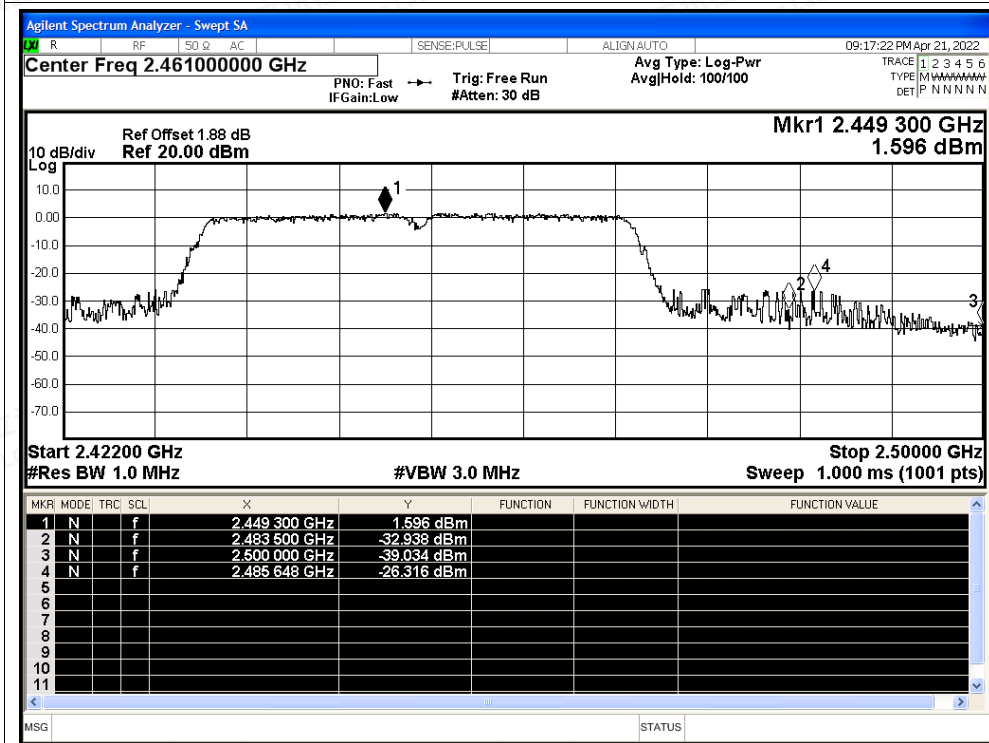

Restrict Band NVNT n40 2452MHz Ant1 Average

