

File name: J85216C1.RES  
Date: 28. Nov 06 10:14




Scan Settings (2 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	AUTO LN	OFF
1M	30M	10k	9k	QP+AV	20ms	AUTO LN	OFF

Transducer No.	Start	Stop	Name
12	150k	30M	CECF

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 30dB

Mode: EUT (PC Connection)

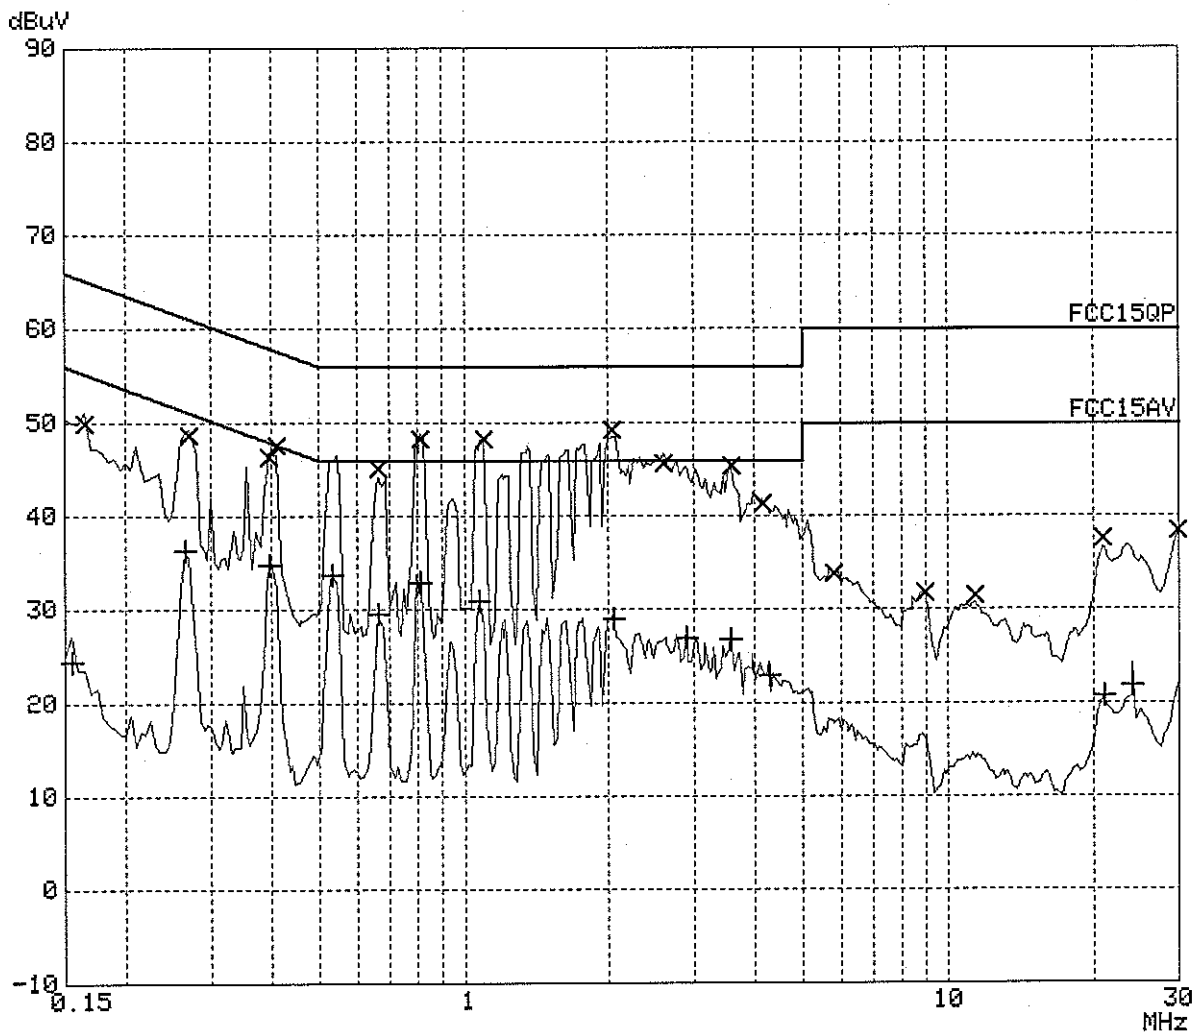

File name: J85216C1.RES  
Date: 28. Nov 06 10:14

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.16500	49.9	-15.2	N	gnd
0.27000	48.6	-12.5	N	gnd
0.39500	46.4	-11.5	N	gnd
0.41000	47.6	-10.0	N	gnd
0.66000	45.0	-10.9	L1	gnd
0.81000	48.3	-7.7	L1	gnd
1.10000	48.3	-7.6	L1	gnd
2.03000	49.2	-6.7	L1	gnd
2.60000	45.7	-10.2	N	gnd
3.59000	45.3	-10.6	L1	gnd
4.14000	41.4	-14.5	N	gnd
5.79000	33.9	-26.0	N	gnd
8.95000	31.9	-28.1	N	gnd
11.33000	31.5	-28.4	N	gnd
20.83000	37.6	-22.3	N	gnd
29.98000	38.4	-21.5	N	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.15500	24.4	-31.2	L1	gnd
0.26500	36.4	-14.9	N	gnd
0.39500	34.9	-13.0	L1	gnd
0.53000	33.7	-12.2	L1	gnd
0.66000	29.6	-16.3	L1	gnd
0.81000	33.0	-12.9	L1	gnd
1.07000	31.0	-14.9	L1	gnd
2.04000	29.0	-16.9	N	gnd
2.89000	27.0	-19.0	N	gnd
3.56000	26.8	-19.1	N	gnd
4.27000	23.0	-22.9	N	gnd
21.03000	20.8	-29.1	N	gnd
24.03000	21.8	-28.1	L1	gnd

\* limit exceeded

File name: J85216C2.RES  
Date: 28. Nov 06 11:53


Scan Settings (2 Ranges)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp		
150k	1M	5k	9k	QP+AV	20ms	AUTO	LN	OFF	
1M	30M	10k	9k	QP+AV	20ms	AUTO	LN	OFF	

Transducer No.	Start	Stop	Name
12	150k	30M	CECF

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 30dB

Mode: EUT (stand alone)

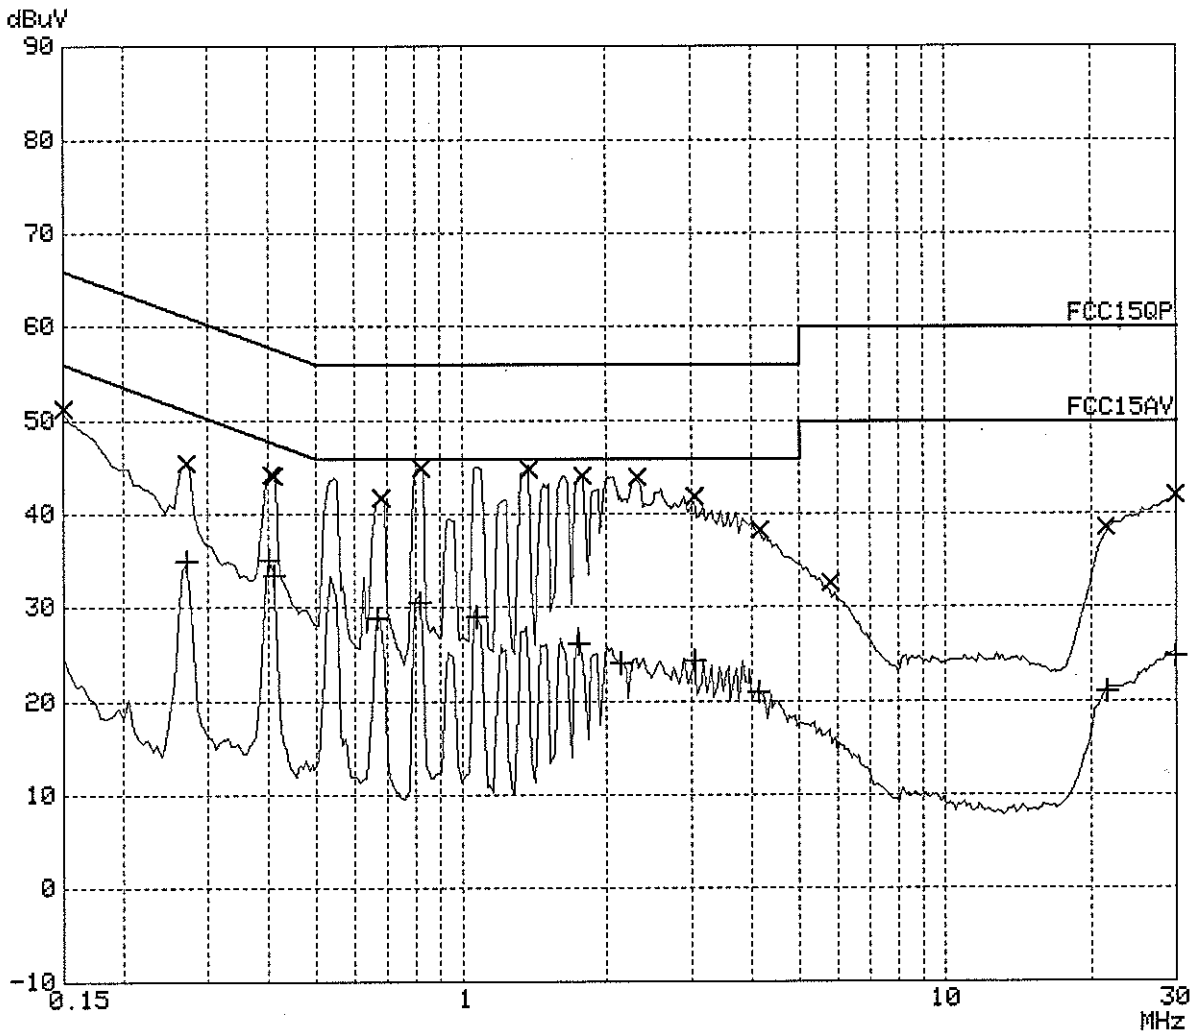

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.15000	51.3	-14.6	N	gnd
0.27000	45.6	-15.5	N	gnd
0.40500	44.3	-13.5	N	gnd
0.41000	44.1	-13.5	L1	gnd
0.68000	41.7	-14.2	N	gnd
0.82000	45.0	-10.9	L1	gnd
1.38000	44.8	-11.1	L1	gnd
1.78000	44.2	-11.8	N	gnd
2.31000	44.0	-11.9	N	gnd
3.04000	41.8	-14.1	N	gnd
4.14000	38.3	-17.6	N	gnd
5.80000	32.7	-27.2	N	gnd
21.44000	38.6	-21.3	N	gnd
29.89000	42.0	-17.9	N	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.27000	35.0	-16.1	L1	gnd
0.40000	35.0	-12.7	L1	gnd
0.41000	33.4	-14.2	L1	gnd
0.66500	28.9	-17.0	L1	gnd
0.81500	30.6	-15.3	L1	gnd
1.07000	29.0	-16.9	N	gnd
1.75000	26.2	-19.7	N	gnd
2.14000	24.1	-21.8	N	gnd
3.04000	24.3	-21.6	N	gnd
4.12000	21.0	-25.0	N	gnd
21.48000	21.0	-28.9	N	gnd
29.91000	24.7	-25.2	N	gnd

\* limit exceeded