# FCC Test Report

Report No.: AGC00053170301FE03

FCC ID	:	UHBSX-820
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Bluetooth Earphones
BRAND NAME	:	Suicen
MODEL NAME	:	SX-820
CLIENT	:	Shenzhen Shuaixian Electronic Equipment Co., Ltd.
DATE OF ISSUE	:	Mar.14, 2017
STANDARD(S) TEST PROCEDURE(S)	:	FCC Part 15 Subpart C Section 15.249
<b>REPORT VERSION</b>	:	V1.0



# CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar.14, 2017	Valid	Original Report

# **Report Revise Record**

# TABLE OF CONTENTS

1 VERIFICATION OF CONFORMITY	4
2 GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3 MEASUREMENT UNCERTAINTY	6
4 DESCRIPTION OF TEST MODES	6
5 SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6 TEST FACILITY	9
7 TEST METHOD	9
8 TEST EQUIPMENT LIST	9
9 RADIATED EMISSION	11
9.1TEST LIMIT	11
9.2. MEASUREMENT PROCEDURE	12
9.3. TEST SETUP	14
9.4. TEST RESULT	16
10 BAND EDGE EMISSION	32
10.1. MEASUREMENT PROCEDURE	32
10.2 TEST SETUP	32
10.3 RADIATED TEST RESULT	33
11 20DB BANDWIDTH	37
11.1. MEASUREMENT PROCEDURE	37
11.2. TEST SET-UP	37
11.3. LIMITS AND MEASUREMENT RESULTS	37
12 FCC LINE CONDUCTED EMISSION TEST	44
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	44
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	44
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	45
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	45
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	45
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	46
APPENDIX B: PHOTOGRAPHS OF EUT	48

Applicant	Shenzhen Shuaixian Electronic Equipment Co., Ltd.
Address	No.10 Lane 3, Longxing Rd., Dakang Long Village, Henggang Town, Longgang Dist., Shenzhen, China
Manufacturer	Shenzhen Shuaixian Electronic Equipment Co., Ltd.
Address	No.10 Lane 3, Longxing Rd., Dakang Long Village, Henggang Town, Longgang Dist., Shenzhen, China
Product Designation	Bluetooth Earphones
Brand Name	Suicen
Test Model	SX-820
Date of test	Mar.02, 2017 to Mar.10, 2017
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

# **1. VERIFICATION OF CONFORMITY**

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Zhang **Tested By** Henry Zhang(Zhang Zhuorui) Mar.10, 2017 Formers en **Reviewed By** Forrest Lei(Lei Yonggang) Mar.14, 2017 Silya 2hory Approved By Solger Zhang(Zhang Hongyi) Mar.14, 2017 Authorized Officer

# 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
RF Output Power	1.35dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V 4.1
Modulation	GFSK ,π /4-DQPSK, 8DPSK
Number of channels	79 for BR/EDR
Hardware Version	SX-802002-8635
Software Version	v1.0
Antenna Designation	Ceramic Antenna
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery
Note: 1. The USB port only be u	sed for charging and can't be used to transfer data with PC.

2. The EUT didn't support BLE.

3. The BT function of EUT didn't work when charging.

# 2.2. TABLE OF CARRIER FREQUENCYS

**BR/EDR** channel List

Frequency Band	Channel Number	Frequency
	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
2400~2483.5MHz	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

# **3. MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions, radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

# 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link
NI (	

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. The EUT used fully-charged battery when tested.

Test Mode FAUSE RADIO STATUS RADIO STATUS RADIO STATUS FUL TXSTART TXDATA TXDATA2 TXDATA2 TXDATA3 TXDATA4 RXSTART2 RXDATA1 TXDATA1 TXDATA4 RXSTART2 RXDATA1 TSTATUS Save to file Browse for file Display: © Standard C Bit Error Vlogfile.txt Denning USB SFI (602250). Transport active. L0 Freq. (MHz) 2402 Power (Ext, Int) 255 50 Execute Close Cl	PAUSE RADIO STATUS RADIO STATUS FULL TXSTART TXDATA1 TXDATA2 TXDATA3 TXDATA3 TXDATA4 RXSTART1 RXSTART2 RXDATA1 Cold Reset Warm Reset Test Results Save to file Browse for file Display : • Standard • Bit Error	Test Mode       Test Arguments       Close         RADIO STATUS FULL       LD Freq. (MHz)       2402         TXSTART       LD Freq. (MHz)       2402         TXSTART       Power (Ext, Int)       255       50         TXDATAA       TXDATAA       Cold Reset         TXDATAA       Warm Reset       Cold Reset         TXDATAA       Warm Reset       Warm Reset         Test Results       Save to file       Browse for file       Display : • Standard       Bit Error         . \logfile.txt       .       .       .       .       .         pening USB SPI (602250).       rangort active.       .       .       .         al. (Markware LD 0x332) firmware version 8648.       .       .       .	Test Mode  FAUSE RADIO STATUS RADIA TXDATA2 TXDATA2 TXDATA2 TXDATA3 TXDATA3 TXDATA4 RXSTART1 RXSTART2 RXDATA1  Test Results  Save to file Browse for file Display: © Standard C Bit Error  Vlogfile.txt  Denning USB SFI (602250). ransport active. Id. (Hardware ID 0x332) firmware version 8648.	Test Mode FAUSE RADIO STATUS RADIO STATUS RADIO STATUS RADIO STATUS FUL INSTART IXDATA			Software Sett	ing		
PAUSE       Close         RADIO STATUS       Full         RADIO STATUS FULL       Power (Ext, Int)         TXSTART       Cold Reset         TXDATA3       Cold Reset         RXSTART1       Warm Reset         Test Results       Warm Reset         Save to file       Browse for file       Display : © Standard         Penning USB SFI (602250).       France         rransport active.       202         Jal (Mardware ID 0x332) firmware version 8648.	PAUSE       Close         RADIO STATUS       Full         RADIO STATUS FULL       Power (Ext, Int)         TXSTART       Cold Reset         TXDATA3       Cold Reset         RXSTART1       Warm Reset         Test Results       Warm Reset         Save to file       Browse for file       Display : (• Standard         Vlogfile.txt	FAUSE       Image: Close         RADIO STATUS       Full         RADIO STATUS FULL       Power (Ext, Int)         TXSTART       Power (Ext, Int)         TXDATA1       Cold Reset         TXDATA3       Cold Reset         RXSTART1       Warm Reset         Test Results       Image: Save to file         Prowse for file       Display : Standard         Pening USB SPI (602250).       Fandard         ransport active.       al (Mardware ID 0x332) firmware version 8648.	PAUSE       Close         RADIO STATUS       Full         RADIO STATUS FULL       Power (Ext, Int)         TXSTART       Cold Reset         TXDATA3       Cold Reset         RXSTART1       Warm Reset         Test Results       Warm Reset         Save to file       Browse for file       Display : (• Standard         Vlogfile.txt	PAUSE       Close         RADIO STATUS       Full         RADIO STATUS FULL       Power (Ext, Int)         TXSTART       Cold Reset         TXDATA3       Cold Reset         RXSTART1       Warm Reset         Test Results       Warm Reset         Save to file       Browse for file       Display : © Standard         Penning USB SFI (602250).       France         rransport active.       202         Jal (Mardware ID 0x332) firmware version 8648.	BlueTest3					
RADIO STATUS         RADIO STATUS FULL         TXSTART         TXSTART         TXDATAI         Cold Reset         RXSTART1         RXSTART2         RXDATAI         Warm Reset         Test Results         Save to file       Browse for file         Display : (* Standard         OB t Error         .'logfile.txt	RADIO STATUS         RADIO STATUS FULL         TXSTART         TXSTART         TXDATAA         TXDATA2         TXDATA3         TXDATA4         RXTD         RXTD         Cold Reset         Warm Reset         Test Results         Save to file       Browse for file         Display : • Standard         Opening USB SPI (602250).         Transport active.         All (Mardware ID Dx332) firmware version 8648.	ANDIO STATUS         RADIO STATUS         RADIO STATUS         RADIO STATUS         Fower (Ext, Int)         255         50         Execute         TXDATA1         TXDATA1         TXDATA2         TXDATA3         TXDATA3         TXDATA4         Cold Reset         Warm Reset         Test Results         Save to file       Browse for file         Display : (* Standard         . Mogfile. txt	RADIO STATUS         RADIO STATUS FULL         TXSTART         TXSTART         TXDATAI         Warm Reset         Cold Reset         Warm Reset         Test Results         Save to file       Browse for file         Display :       Standard         . \logfile.txt         Dpening USB SPI (602250).         rransport active.         al. (Mardware ID 0x332) firmware version 8648.	RADIO STATUS         RADIO STATUS FULL         TXSTART         TXSTART         TXDATAI         TXDATA2         TXDATA3         TXDATA4         RXTP         RXSTART1         RXSTART2         RXDATA1         TSTART2         RXDATA3         TXDATA4         Cold Reset         Warm Reset         Test Results         Save to file         Browse for file         Display : (* Standard         Vlogfile.txt			est Arguments			[] ose
TXDATAI         TXDATA2         TXDATA2         TXDATA2         TXDATA2         TXDATA2         TXDATA3         TXDATA4         Cold Reset         RXSTART1         RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display : Standard         Image: Save to file         Browse for file         Display : Standard         Image: Save to file         Browse for file         Display : Standard         Image: Save to file         Browse for file         Display : Standard         Standard         Standard         Standard         Transport active.         Save to Bux By (602250).         Standard active.	TXDATA1 TXDATA2 TXDATA3 TXDATA4 RXSTART1 RXSTART2 RXDATA1 Test Results Save to file Browse for file Display : Standard O Bit Error . \logfile. txt Dpening USB SFI (602250). Fransport active. dal Offardware ID 0x332) firmware version 8648.	TXDATA1         TXDATA2         TXDATA3         TXDATA4         Cold Reset         RXSTART1         RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display : Standard         Save to file         Browse for file         Display : Standard         Standard         Optiming USB SPI (602250).         ransport active.         al. (Mardware ID 0x332). firmware version 8648.	TXIATAI         TXIATAI         TXIATAI         TXIATAZ         RXSTART1         RXSTART2         RXINATAI         Warn Reset         Test Results         Save to file         Browse for file         Display :         Standard         Opening USB SPI (602250).         Transport active.         Ial (Mardware ID 0x332) firmware version 8648.	TXDATAI         TXDATA2         TXDATA3         TXDATA4         EXECUTE         RXSTART1         RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display : Standard         Save to file         Browse for file         Display : Standard         Standard         Dyening USB SFI (602250).         Gransport active.         all Offardware ID 0x332) firmware version 8648.	RADIO STATUS		LO Freq. (MHz)	2402		
TXDATA3       Cold Reset         RXSTART1       Cold Reset         RXSTART2       Warm Reset         Test Results       Warm Reset         Save to file       Browse for file       Display : Standard         Jopening USB SPI (602250).       Standard       Bit Error         Transport active.       Idad (fardware ID 0x332) firmware version 8648.       Image: Standard 10x332)	TXDATA3       Cold Reset         RXSTART1       Cold Reset         RXSTART2       Warm Reset         Test Results       Warm Reset         Save to file       Browse for file       Display : Standard         Jopening USB SPI (602250).       Standard       Bit Error         Transport active.       Idad (fardware ID 0x332) firmware version 8648.       Image: Standard 10x332)	TXDATA3 TXDATA4 Cold Reset Cold Reset Warm Reset Warm Reset Test Results Save to file Browse for file Display : © Standard © Bit Error .\logfile.txt pening USB SPI (602250). ransport active. al (Mardware ID 0x332) firmware version 8648.	TXDATA3       Cold Reset         RXSTART1       Cold Reset         RXSTART2       Warm Reset         Test Results       Warm Reset         Save to file       Browse for file       Display : Standard         Jopening USB SPI (602250).       Standard       Bit Error         Transport active.       Idad (fardware ID 0x332) firmware version 8648.       Image: Standard 10x332)	TXDATA3       Cold Reset         RXSTART1       Cold Reset         RXSTART2       Warm Reset         Test Results       Warm Reset         Save to file       Browse for file       Display : Standard         Jopening USB SPI (602250).       Standard       Bit Error         Transport active.       Idad (fardware ID 0x332) firmware version 8648.       Image: Standard 10x332)			Power (Ext, Int)	255	50	
RXSTART1         RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display : Standard         Bit Error         . Vlogfile. txt	RXSTART1         RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display : Standard         Bit Error         . Vlogfile. txt	RXSTART1         RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display : Standard         Bit Error         .\logfile.txt	RXSTART1         RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display : Standard         Bit Error         . Vlogfile. txt	RXSTART1         RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display : Standard         Bit Error         . Vlogfile. txt	TXDATA3					Cold Report
Warm Reset         Test Results         Save to file         Browse for file         Display : • Standard         Opening USB SFI (602250).         ransport active.         Ial (Mardware ID 0x332) firmware version 8648.	Warm Reset         Test Results         Save to file         Browse for file         Display : • Standard         Opening USB SFI (602250).         ransport active.         Ial (Mardware ID 0x332) firmware version 8648.	Warm Reset	Warm Reset         Test Results         Save to file         Browse for file         Display : • Standard         Opening USB SFI (602250).         ransport active.         Ial (Mardware ID 0x332) firmware version 8648.	Warm Reset         Test Results         Save to file         Browse for file         Display : • Standard         Opening USB SFI (602250).         ransport active.         Ial (Mardware ID 0x332) firmware version 8648.						
Save to file Browse for file Display : • Standard • Bit Error .\logfile.txt Dpening USB SPI (602250). Gransport active. lal (Mardware ID 0x332) firmware version 8648.	Save to file Browse for file Display : • Standard • Bit Error .\logfile.txt Dpening USB SPI (602250). Gransport active. lal (Mardware ID 0x332) firmware version 8648.	Save to file Browse for file Display : © Standard O Bit Error .\logfile.txt pening USB SPI (602250). ransport active. al (Mardware ID 0x332) firmware version 8648.	Save to file Browse for file Display : • Standard • Bit Error . \logfile.txt Dpening USB SFI (602250). Transport active. lal (Mardware ID 0x332) firmware version 8648.	Save to file Browse for file Display : • Standard • Bit Error .\logfile.txt Dpening USB SFI (602250). Gransport active. lal (Mardware ID 0x332) firmware version 8648.	RXDATA1					Warm Reset
. \logfile.txt Dening USB SPI (602250). Gransport active. Hal (Mardware ID 0x332) firmware version 8648.	. \logfile.txt Dening USB SPI (602250). Gransport active. Hal (Mardware ID 0x332) firmware version 8648.	. \logfile. txt pening USB SPI (602250). ransport active. al (Mardware ID 0x332) firmware version 8648.	. \logfile.txt Dening USB SPI (602250). Transport active. lal (Mardware ID 0x332) firmware version 8648.	. \logfile.txt Dening USB SPI (602250). Gransport active. Hal (Mardware ID 0x332) firmware version 8648.			1			
pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	🗌 Save to file	Browse for fi	ile Disp	olay: 🕡	Standard	🔘 Bit Error
pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	pening USB SPI (602250). ransport active. al (Hardware ID 0x332) firmware version 8648.	. \logfile. txt					
					adio Test TXDATA1 succ	, parameters. oo	04 0962 1132 0000 (	0000 0000		
					Radio Test TXDATA1 succ	, parameters. oo	04 0962 1132 0000 (	0000 0000		
					Radio Test TXDATA1 succ	, parameters. oo	04 0962 1132 0000 (	0000 0000		
					Andio Test TXDATA1 succ	, parameters. co	04 0962 1132 0000 (			
					adio Test TXDATA1 succ	, parameters. co				

# 5. SYSTEM TEST CONFIGURATION

**5.1. CONFIGURATION OF EUT SYSTEM** 

Configure 1: (Normal hopping)

EUT

# Configure 2: (Control continuous TX)



## 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth Earphones	Suicen	SX-820	EUT
2	Battery	ST	501235	Accessory
3	PC	Sony	E1412AYCW	A.E
4	PC Adapter	Sony	AC-L100	A.E
5	Control box	CSR	USB_SPI_TOOLS	A.E

# 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	Bandwidth	Compliant

Note: N/A means it's not applicable to this item.

# 6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

# 7.TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

# 8. TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

	Radiated Emission Test Site											
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration							
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017							
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017							
Signal Amplifier	ignal Amplifier SCHWARZBECK BBV 9475 9745-00				July 3, 2017							
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017							
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017							
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A							
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017							
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017							
Radiation Cable 1	Radiation Cable 1 MXT RS1 R00		R005	June 6, 2016	June 5, 2017							
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017							

	Radiated Emission Test Site											
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration							
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017							
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017							
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017							
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017							
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017							
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017							
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A							
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2016	June 5, 2017							
Radiation Cable 1	МХТ	RS1	R005	June 6, 2016	June 5, 2017							
Radiation Cable 2	МХТ	RS1	R006	June 6, 2016	June 5, 2017							

## FOR RADIATED EMISSION TEST (1GHz ABOVE)

# 9. RADIATED EMISSION

## 9.1TEST LIMIT

# Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics			
	(millivolts/meter)	(microvolts/meter)			
900-928MHz	50	500			
2400-2483.5MHz	50	500			
5725-5875MHz	50	500			
24.0-24.25GHz	250	2500			

#### Standard FCC 15.209

Frequency	Distance	Field Strengths Limit				
(MHz)	Meters	μ V/m	dB(µV)/m			
0.009 ~ 0.490	300	2400/F(kHz)				
0.490 ~ 1.705	30	24000/F(kHz)				
1.705 ~ 30	30	30				
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3	Other:74.0 dB(µV)/m (Peał	κ) 54.0 dB(μV)/m (Average)			
Remark: (1) Emission le	evel dBµ V = 20 log Emission	n level µ V/m				
(2) The smalle	r limit shall apply at the cross	s point between two frequen	cy bands.			
(3) Distance is	the distance in meters betw	een the measuring instrume	nt, antenna and the closest			

point of any part of the device or system.

## 9.2. MEASUREMENT PROCEDURE


- The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average				
Receiver Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				


The following table is the setting of spectrum analyzer and receiver.


#### 9.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

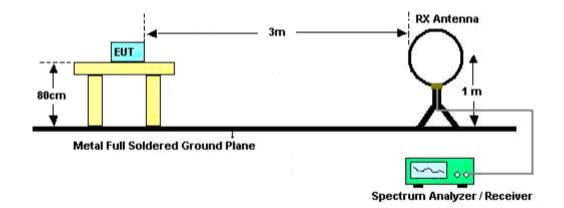

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

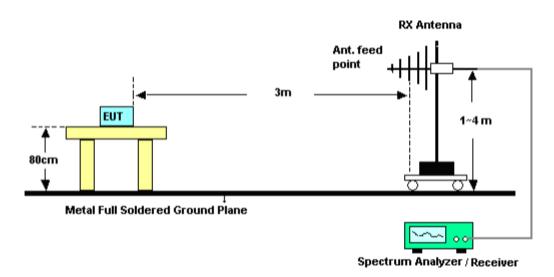

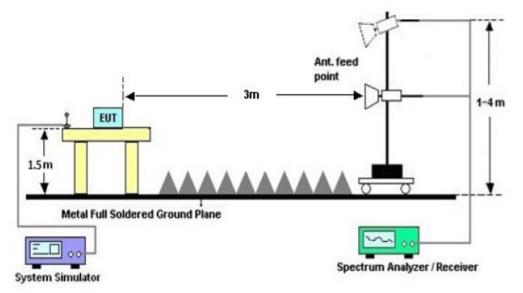

RADIATED EMISSION TEST SETUP ABOVE 1000MHz


# 9.4. TEST RESULT (Worst modulation:GFSK) FOR BR/EDR

## **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

# RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

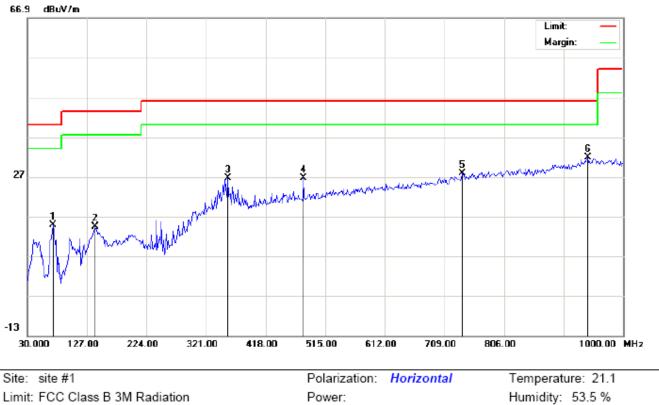


EUT:Bluetooth Earphones M/N: SX-820 Mode: Low Channel TX Note:

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∨	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		72.0333	6.47	8.28	14.75	40.00	-25.25	peak			
2		139.9333	-0.76	15.17	14.41	43.50	-29.09	peak			
3		356.5667	7.77	18.78	26.55	46.00	-19.45	peak			
4		479.4333	5.64	20.91	26.55	46.00	-19.45	peak			
5		738.1000	1.58	26.29	27.87	46.00	-18.13	peak			
6	*	941.8000	1.94	29.77	31.71	46.00	-14.29	peak			

**RESULT: PASS** 

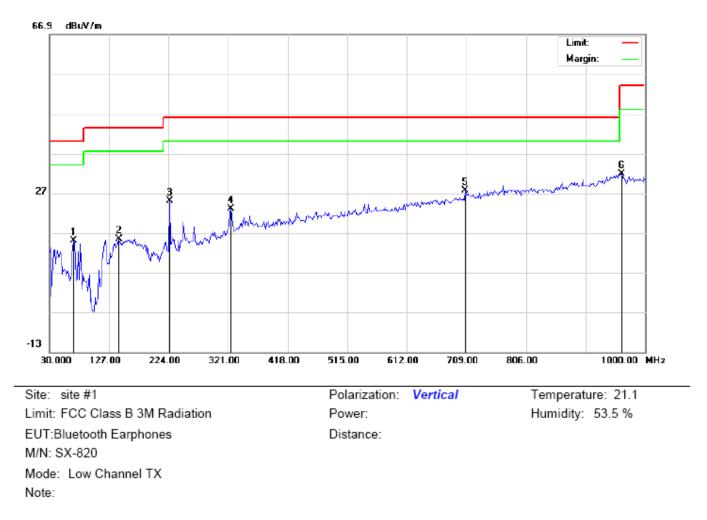


# RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∨	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		68.8000	10.21	4.73	14.94	40.00	-25.06	peak			
2		143.1667	0.21	15.22	15.43	43.50	-28.07	peak			
3		225.6167	13.50	11.51	25.01	46.00	-20.99	peak			
4		325.8500	5.89	17.13	23.02	46.00	-22.98	peak			
5	*	707.3832	2.22	25.40	27.62	46.00	-18.38	peak			
6		961.2000	1.98	29.89	31.87	54.00	-22.13	peak			

# **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

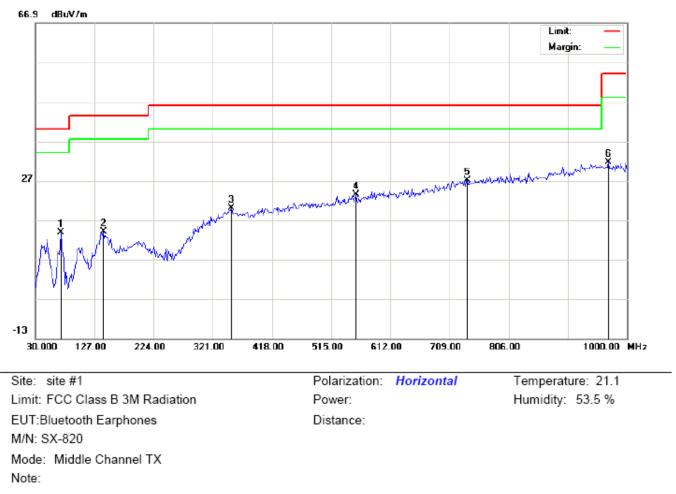

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1		72.0333	5.48	8.28	13.76	40.00	-26.24	peak			
2		141.5500	-0.79	14.82	14.03	43.50	-29.47	peak			
3		351.7167	1.27	18.75	20.02	46.00	-25.98	peak			
4		555.4167	0.81	22.62	23.43	46.00	-22.57	peak			
5	*	738.1000	0.81	26.29	27.10	46.00	-18.90	peak			
6		969.2833	1.71	29.81	31.52	54.00	-22.48	peak			

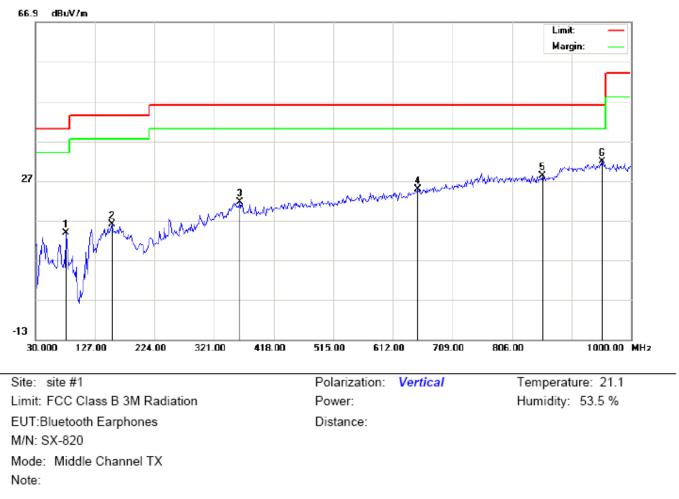


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∨	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		80.1167	12.03	1.84	13.87	40.00	-26.13	peak			
2		154.4832	0.62	15.29	15.91	43.50	-27.59	peak			
3		363.0333	2.72	18.83	21.55	46.00	-24.45	peak			
4		652.4167	0.85	23.91	24.76	46.00	-21.24	peak			
5		856.1167	0.81	27.47	28.28	46.00	-17.72	peak			
6	*	953.1167	1.74	29.97	31.71	46.00	-14.29	peak			

# **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

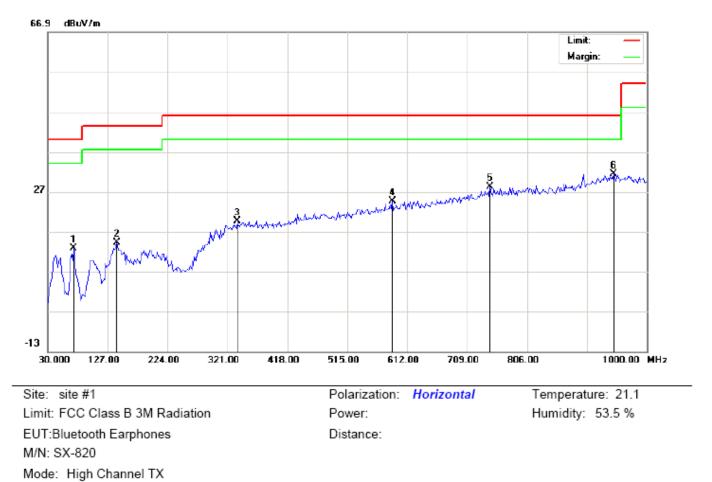


#### RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

Antenna Table Reading Factor Measurement Limit Over Freq. Mk Height Degree No. Detector Comment MHz dBu∨ dB/m dBuV/m dBu∀/m dB degree cm 1 72.0333 4.43 8.28 12.71 40.00 -27.29 peak 2 141.5500 -0.52 14.82 14.30 43.50 -29.20 peak 3 19.57 337.1666 1.68 17.89 46.00 -26.43 peak 4 587.7500 23.42 24.57 -21.43 1.15 46.00 peak 5 746.1833 26.52 1.64 28.16 46.00 -17.84 peak 6 946.6500 1.49 29.91 31.40 46.00 -14.60 \* peak

#### **RESULT: PASS**

Note:

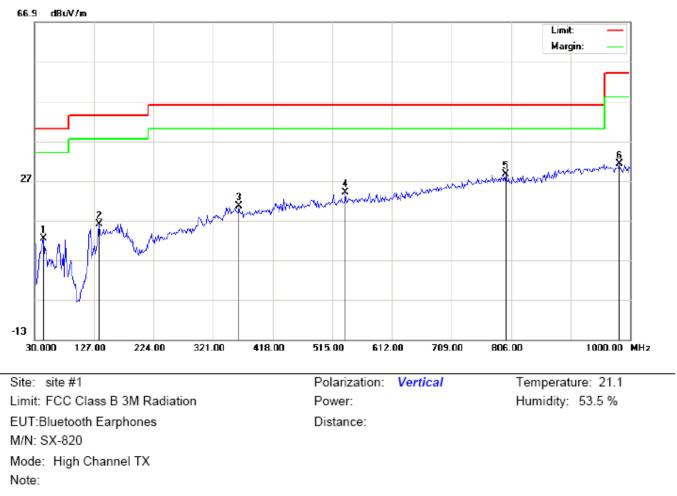

RADIATED EMISSION TEST- (	30MHz-1GHz	)-HIGH CHANNEL -VERTICAL
---------------------------	------------	--------------------------

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∨	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		44.5500	3.74	8.60	12.34	40.00	-27.66	peak			
2		135.0833	2.95	13.15	16.10	43.50	-27.40	peak			
3		363.0333	1.82	18.83	20.65	46.00	-25.35	peak			
4		536.0167	1.91	22.10	24.01	46.00	-21.99	peak			
5	*	797.9167	1.32	27.29	28.61	46.00	-17.39	peak			
6		982.2167	1.43	29.69	31.12	54.00	-22.88	peak			

# **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

#### **RADIATED EMISSION ABOVE 1GHz**

#### (Worst modulation: GFSK)

#### FOR BR/EDR

#### RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

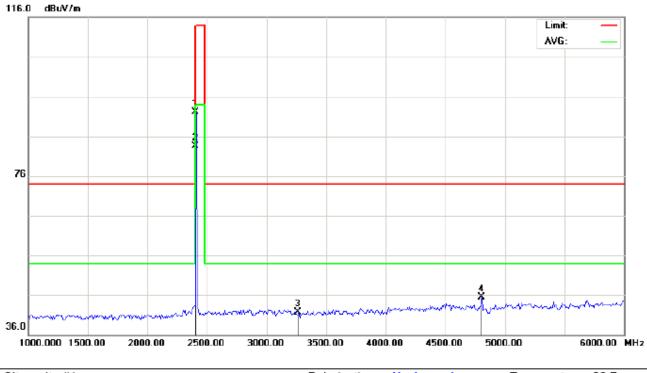


Site: site #1 Limit: FCC Class B 3M Radiation above 1GHz(PK)-EUT:Bluetooth Earphones M/N: SX-820 Mode: Low Channel TX Note:

Polarization: *Horizontal* Power: Temperature: 22.7 Humidity: 53.6 %


Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	•	MHz	dBu∨	dB/m	dBu∀/m	dBuV/m	dB		cm	cm degree	
1		2402.000	81.69	10.32	92.01	114.00	-21.99	peak			
2	*	2402.000	73.23	10.32	83.55	94.00	-10.45	AVG	100	20	
3		3265.000	29.79	11.89	41.68	74.00	-32.32	peak			
4		4804.000	37.74	7.69	45.43	74.00	-28.57	peak			

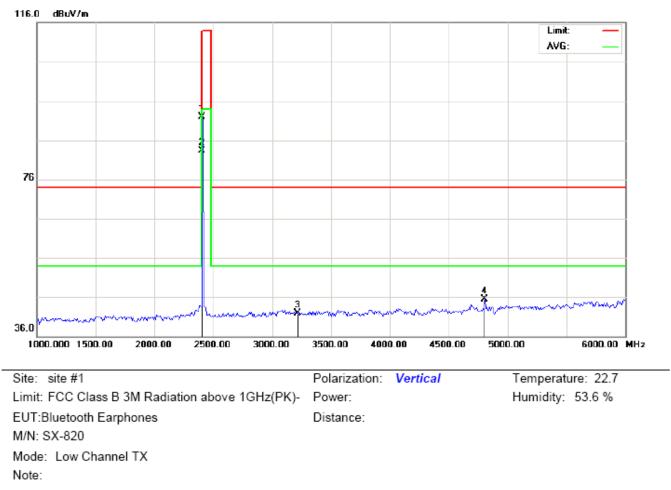

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∨/m	dB		cm	degree	
1		2402.000	81.57	10.32	91.89	114.00	-22.11	peak			
2	*	2402.000	72.99	10.32	83.31	94.00	-10.69	AVG	100	84	
3		3217.000	30.09	11.84	41.93	74.00	-32.07	peak			
4		4804.000	37.88	7.69	45.57	74.00	-28.43	peak			

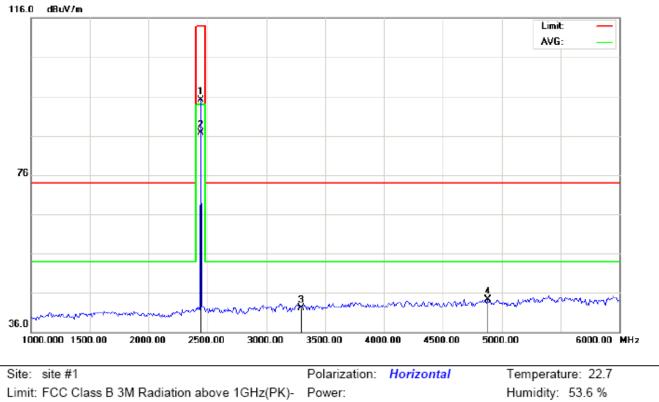


RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

M/N: SX-820 Mode: Middle Channel TX Note:

EUT:Bluetooth Earphones


	-			•	
<b>–</b>	-				
υ	15	51	an	ce:	

Antenna Table Reading Factor Measurement Limit Over Freq. Mk No. Detector Height Degree Comment dBu∨ dB/m dBu∀/m dBuV/m dB MHz cm degree 95.19 1 2441.000 84.83 10.36 114.00 -18.81 peak \* 2 AVG 22 2441.000 76.38 10.36 86.74 94.00 -7.26 100 11.92 3 3296.000 42.03 74.00 30.11 -31.97 peak 4 4882.000 36.38 7.89 44.27 74.00 -29.73 peak

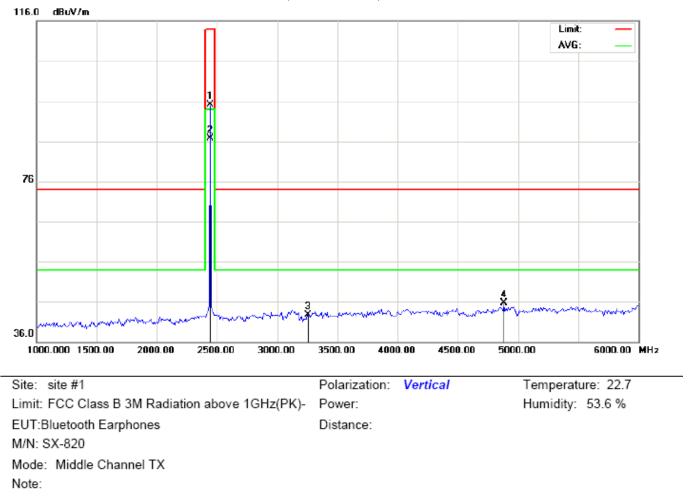

#### RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∨/m	dB		cm	degree	
1		2441.000	84.77	10.36	95.13	114.00	-18.87	peak			
2	*	2441.000	76.32	10.36	86.68	94.00	-7.32	AVG	100	85	
3		3258.000	30.89	11.88	42.77	74.00	-31.23	peak			
4		4882.000	37.81	7.89	45.70	74.00	-28.30	peak			

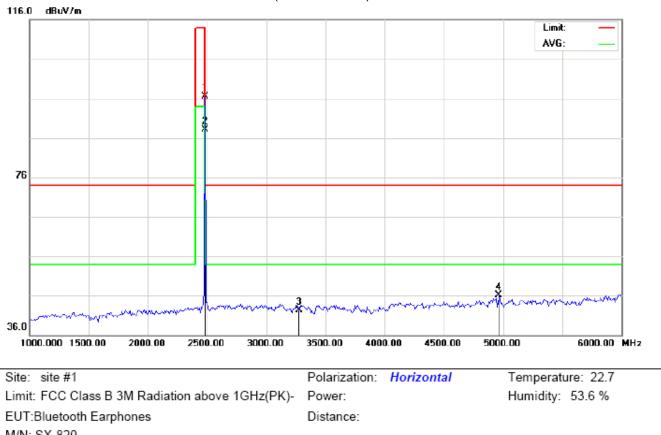


RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

M/N: SX-820 Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	86.14	10.41	96.55	114.00	-17.45	peak			
2	*	2480.000	77.68	10.41	88.09	94.00	-5.91	AVG	100	21	
3		3279.000	30.47	11.90	42.37	74.00	-31.63	peak			
4		4960.000	38.01	8.09	46.10	74.00	-27.90	peak			

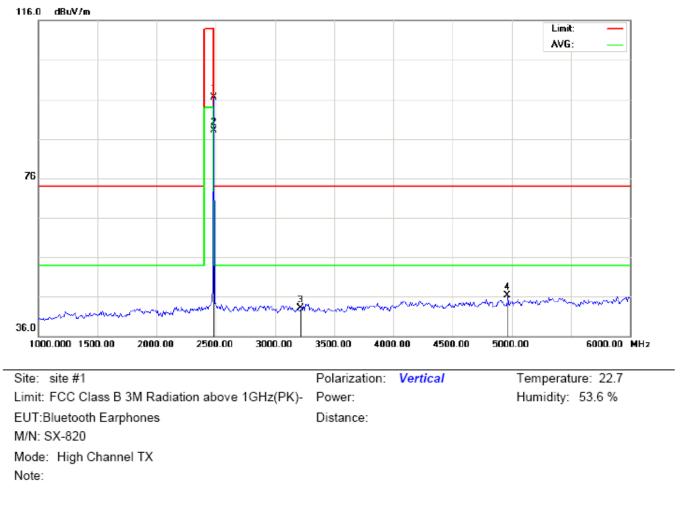

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	•	MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		2480.000	86.07	10.41	96.48	114.00	-17.52	peak			
2	*	2480.000	77.60	10.41	88.01	94.00	-5.99	AVG	100	87	
3		3219.000	31.21	11.85	43.06	74.00	-30.94	peak			
4		4960.000	38.16	8.09	46.25	74.00	-27.75	peak			

# **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

# Field strength of the fundamental signal

# 1Mbps Result:

## Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.69	10.32	92.01	114	-21.99	Horizontal
2402	81.57	10.32	91.89	114	-22.11	Vertical
2441	84.83	10.36	95.19	114	-18.81	Horizontal
2441	84.77	10.36	95.13	114	-18.87	Vertical
2480	86.14	10.41	96.55	114	-17.45	Horizontal
2480	86.07	10.41	96.48	114	-17.52	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.23	10.32	83.55	94	-10.45	Horizontal
2402	72.99	10.32	83.31	94	-10.69	Vertical
2441	76.38	10.36	86.74	94	-7.26	Horizontal
2441	76.32	10.36	86.68	94	-7.32	Vertical
2480	77.68	10.41	88.09	94	-5.91	Horizontal
2480	77.60	10.41	88.01	94	-5.99	Vertical

# 2Mbps Result:

## Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.65	10.32	91.97	114	-22.03	Horizontal
2402	81.49	10.32	91.81	114	-22.19	Vertical
2441	84.68	10.36	95.04	114	-18.96	Horizontal
2441	84.65	10.36	95.01	114	-18.99	Vertical
2480	86.06	10.41	96.47	114	-17.53	Horizontal
2480	86.01	10.41	96.42	114	-17.58	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.09	10.32	83.41	94	-10.59	Horizontal
2402	72.92	10.32	83.24	94	-10.76	Vertical
2441	76.26	10.36	86.62	94	-7.38	Horizontal
2441	76.23	10.36	86.59	94	-7.41	Vertical
2480	77.60	10.41	88.01	94	-5.99	Horizontal
2480	77.54	10.41	87.95	94	-6.05	Vertical

# 3Mbps Result:

## Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.61	10.32	91.93	114	-22.07	Horizontal
2402	81.44	10.32	91.76	114	-22.24	Vertical
2441	84.56	10.36	94.92	114	-19.08	Horizontal
2441	84.61	10.36	94.97	114	-19.03	Vertical
2480	85.98	10.41	96.39	114	-17.61	Horizontal
2480	85.94	10.41	96.35	114	-17.65	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.06	10.32	83.38	94	-10.62	Horizontal
2402	72.89	10.32	83.21	94	-10.79	Vertical
2441	76.20	10.36	86.56	94	-7.44	Horizontal
2441	76.17	10.36	86.53	94	-7.47	Vertical
2480	77.55	10.41	87.96	94	-6.04	Horizontal
2480	77.50	10.41	87.91	94	-6.09	Vertical

# **10. BAND EDGE EMISSION**


## **10.1. MEASUREMENT PROCEDURE**

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setup 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

## **10.2 TEST SETUP**

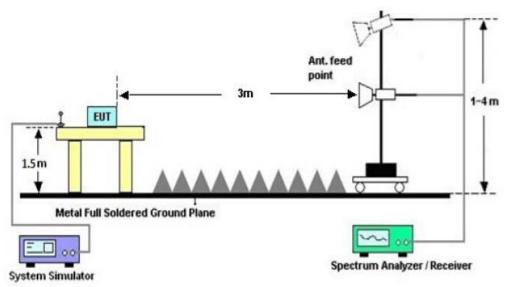


# RADIATED EMISSION TEST SETUP

#### **10.3 RADIATED TEST RESULT**


## (Worst modulation: GFSK)

#### FOR BR/EDR

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

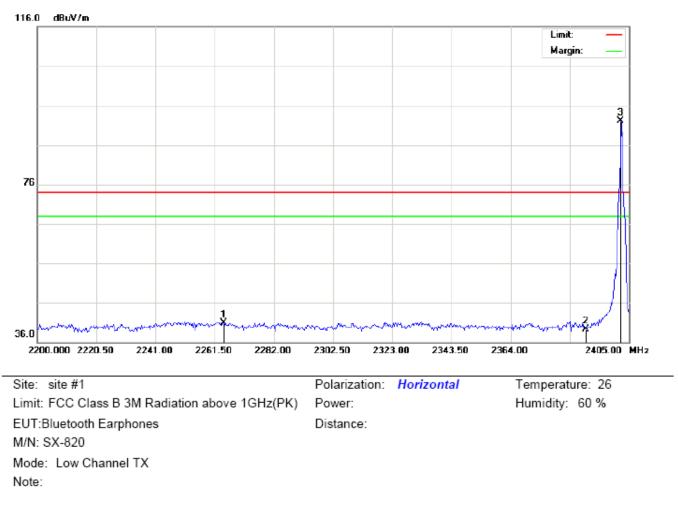

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1		2264.575	30.75	10.17	40.92	74.00	-33.08	peak			
2		2390.000	28.98	10.31	39.29	74.00	-34.71	peak			
3	*	2402.000	81.71	10.32	92.03	74.00	18.03	peak			

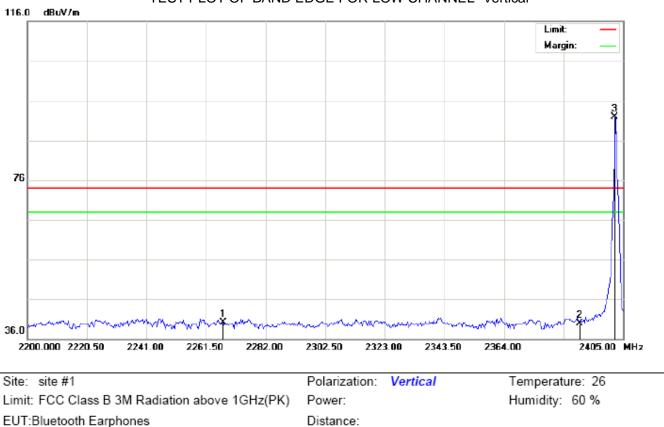


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

M/N: SX-820 Mode: Low Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2267.308	29.86	10.17	40.03	74.00	-33.97	peak			
2		2390.000	29.67	10.31	39.98	74.00	-34.02	peak			
3	*	2402.000	81.65	10.32	91.97	74.00	17.97	peak			

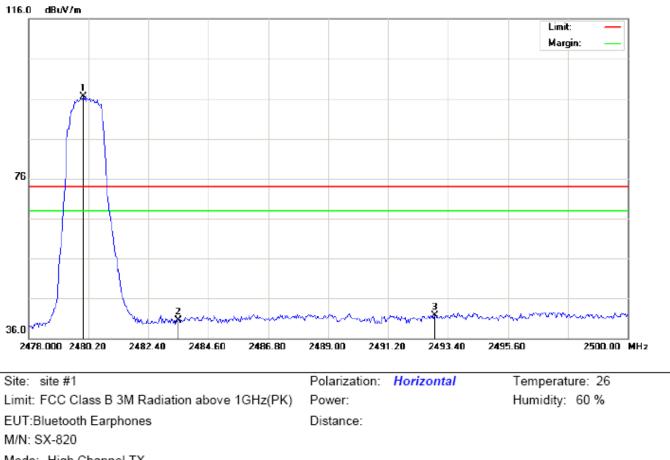

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

Mode: High Channel TX Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∨/m	dB		cm	degree	
1	*	2480.000	86.11	10.41	96.52	74.00	22.52	peak			
2		2483.500	30.19	10.41	40.60	74.00	-33.40	peak			
3		2492.923	31.33	10.42	41.75	74.00	-32.25	peak			

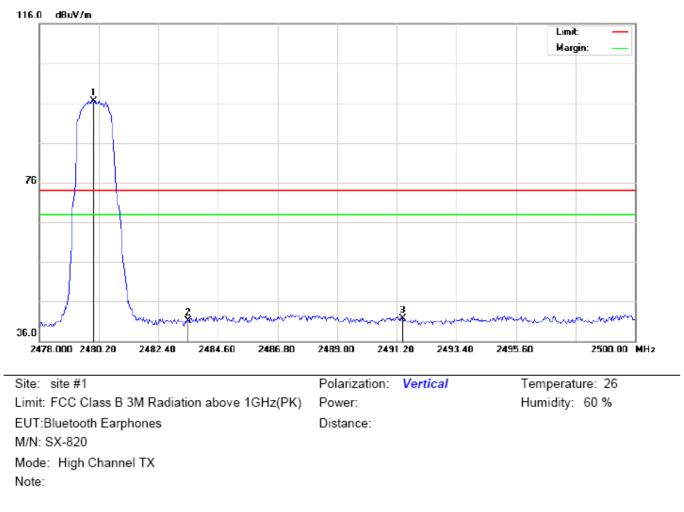

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∨	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1	*	2480.000	86.06	10.41	96.47	74.00	22.47	peak			
2		2483.500	30.76	10.41	41.17	74.00	-32.83	peak			
3		2491.420	31.26	10.42	41.68	74.00	-32.32	peak			

## **RESULT: PASS**

**Note**: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

# 11. 20DB BANDWIDTH

### **11.1. MEASUREMENT PROCEDURE**

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel
- RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

## 11.2. TEST SET-UP

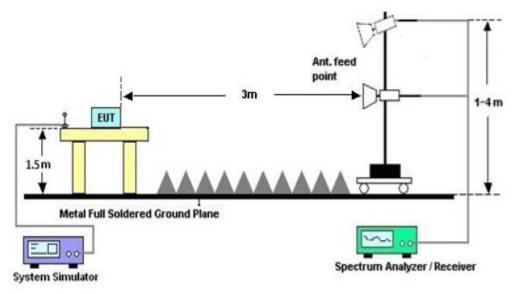

#### **11.3. LIMITS AND MEASUREMENT RESULTS**


#### FOR BR/EDR


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
	Measurement Result			
Applicable Limits	Test Data (MHz)			Decult
		99%OBW (MHz)	-20dB BW(MHz)	Result
N/A	Low Channel	0.927	1.097	PASS
	Middle Channel	0.916	1.081	PASS
	High Channel	0.920	1.072	PASS



#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

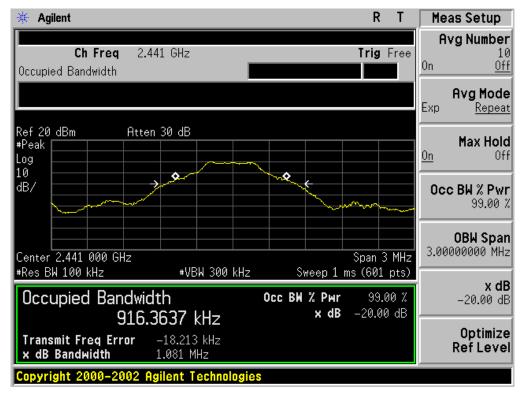


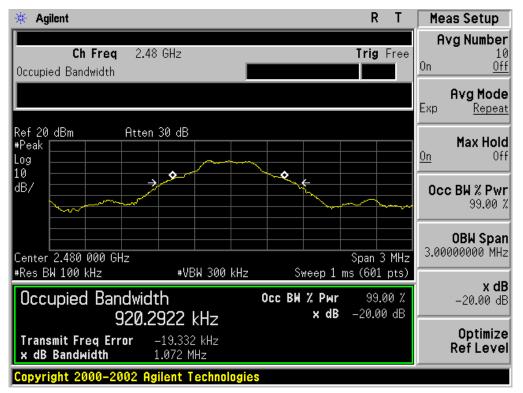


## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
	Measurement Result			
Applicable Limits	Test Data (MHz)			Decult
		99%OBW (MHz)	-20dB BW(MHz)	Result
N/A	Low Channel	1.210	1.353	PASS
	Middle Channel	1.221	1.364	PASS
	High Channel	1.228	1.373	PASS


#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

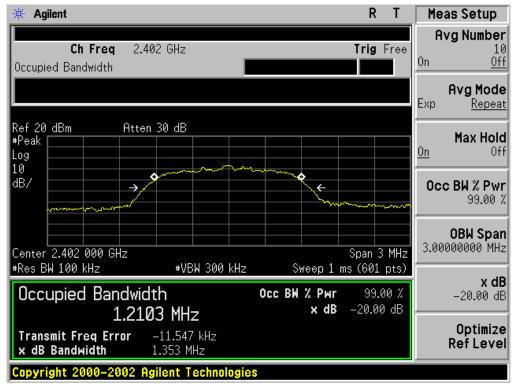

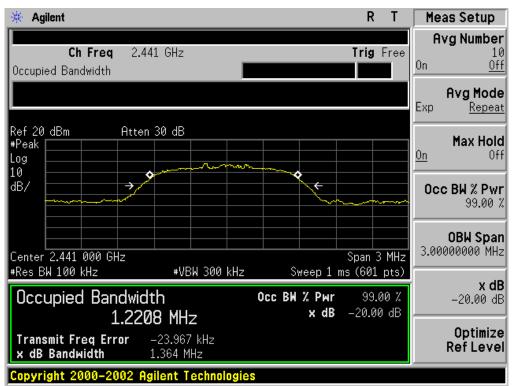


# TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL


### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

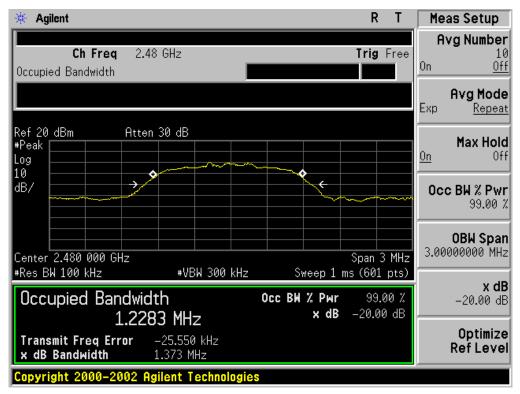

BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
	Measurement Result			
Applicable Limits	Test Data (MHz)			Decult
		99%OBW (MHz)	-20dB BW(MHz)	Result
N/A	Low Channel	1.223	1.365	PASS
	Middle Channel	1.207	1.354	PASS
	High Channel	1.230	1.367	PASS


#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

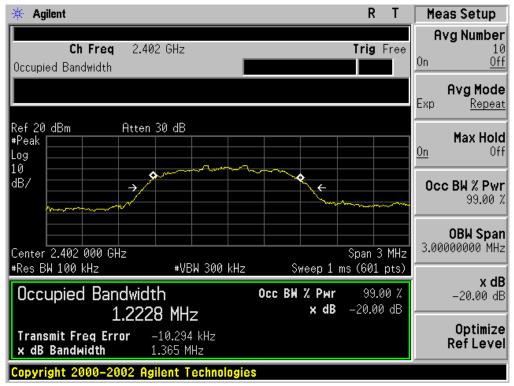

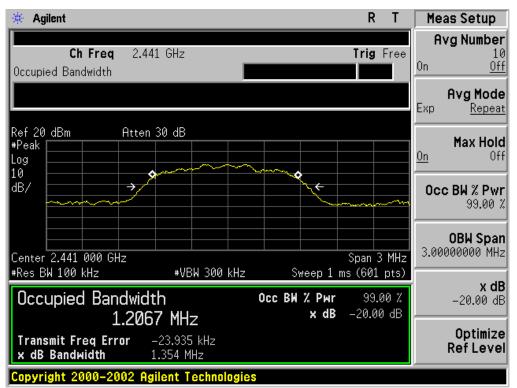

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

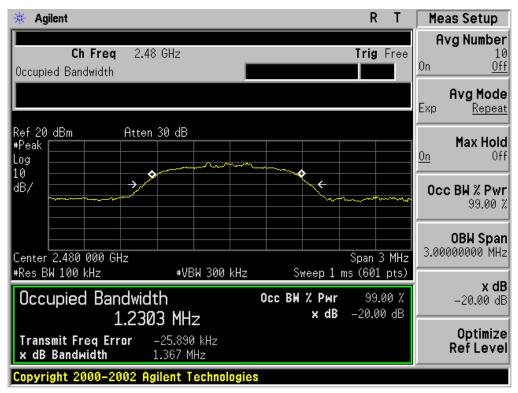

# **12. FCC LINE CONDUCTED EMISSION TEST**

# 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Frequency	Maximum RF Line Voltage		
	Q.P.( dBuV)	Average( dBuV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

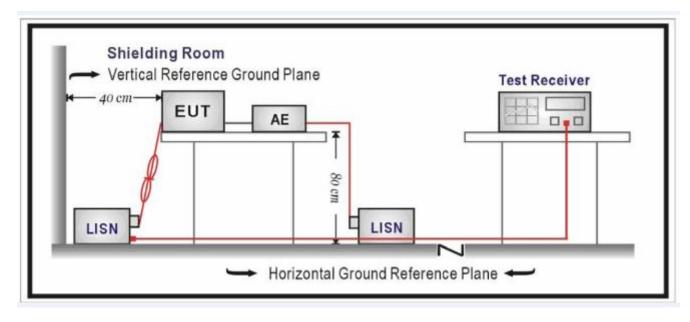

## 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


#### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


#### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

#### N/A


Note: The BT function of EUT didn't work when charging.

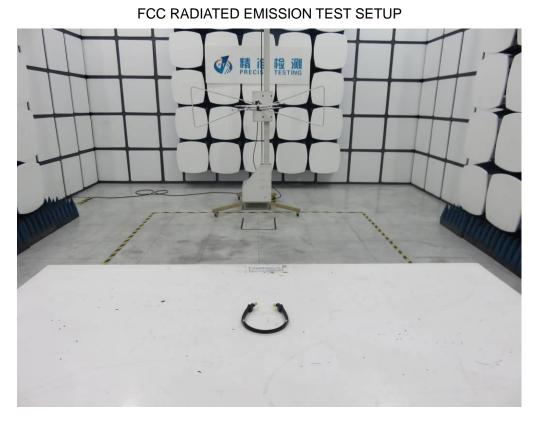

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

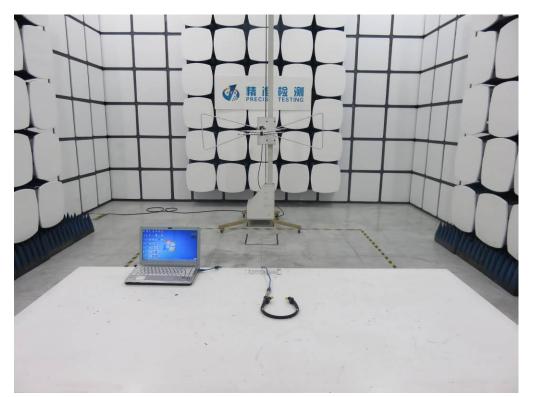

Report No.: AGC00053170301FE03 Page 47 of 53

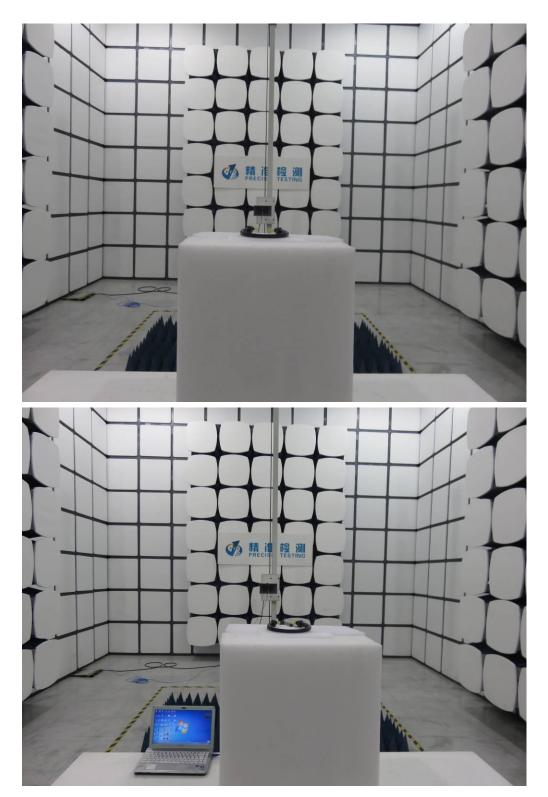

#### 10 20 30 40

# APPENDIX B: PHOTOGRAPHS OF EUT

WHOLE VIEW OF EUT

TOP VIEW OF EUT





BOTTOM VIEW OF EUT

FRONT VIEW OF EUT



#### Report No.: AGC00053170301FE03 Page 50 of 53



BACK VIEW OF EUT

LEFT VIEW OF EUT






**RIGHT VIEW OF EUT** 


VIEW OF EUT (PORT)



OPEN VIEW OF EUT

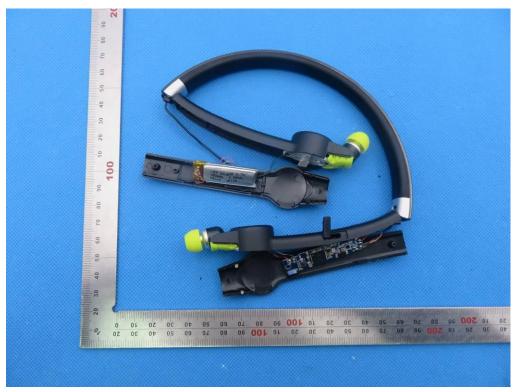

**INTERNAL VIEW OF EUT-1** 

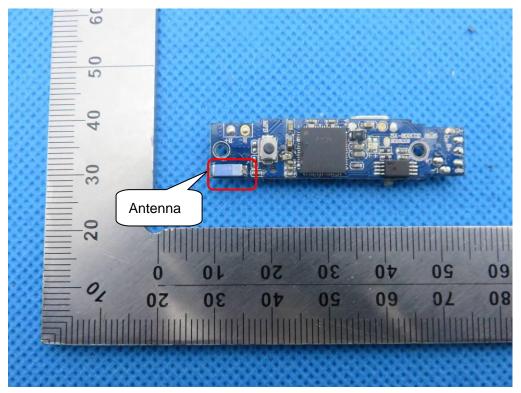

0.9 

**INTERNAL VIEW OF EUT-2** 

INTERNAL VIEW OF EUT-3



----END OF REPORT----