



Spectrum plot value of power


802.11ax (80 MHz) / Ant. 1 / 5690 MHz (U-NII-2C)

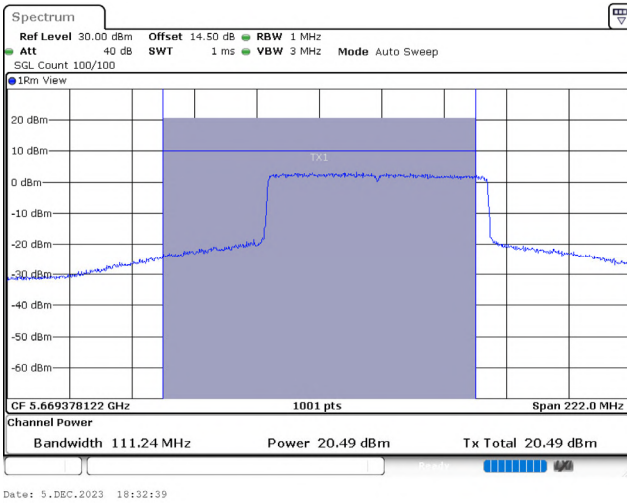


802.11ax (80 MHz) / Ant. 1 / 5690 MHz (U-NII-3)

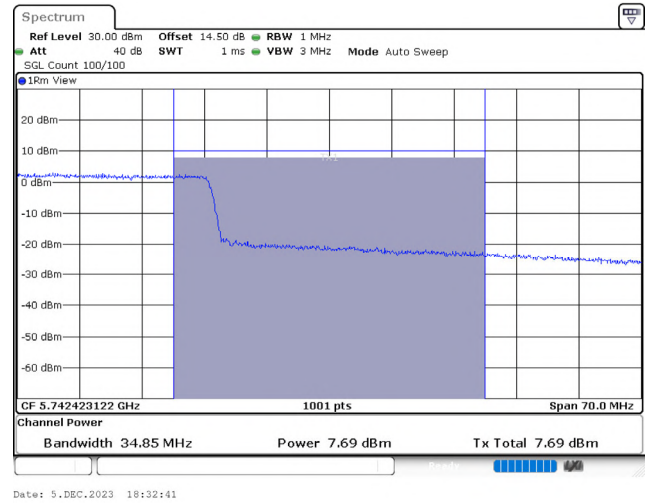

802.11ax (80 MHz) / Ant. 2 / 5690 MHz (U-NII-2C)

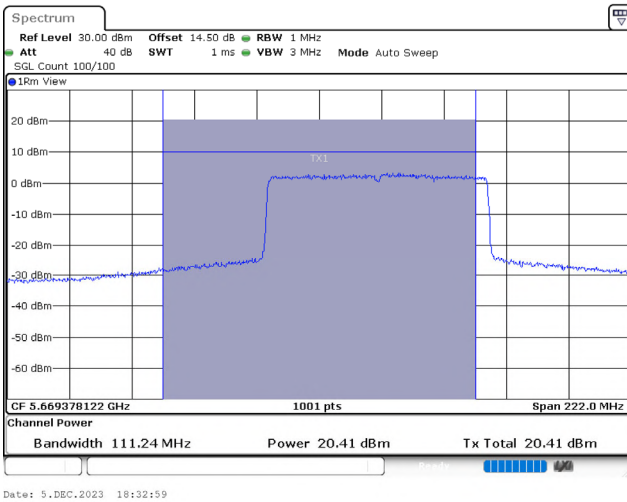


802.11ax (80 MHz) / Ant. 2 / 5690 MHz (U-NII-3)

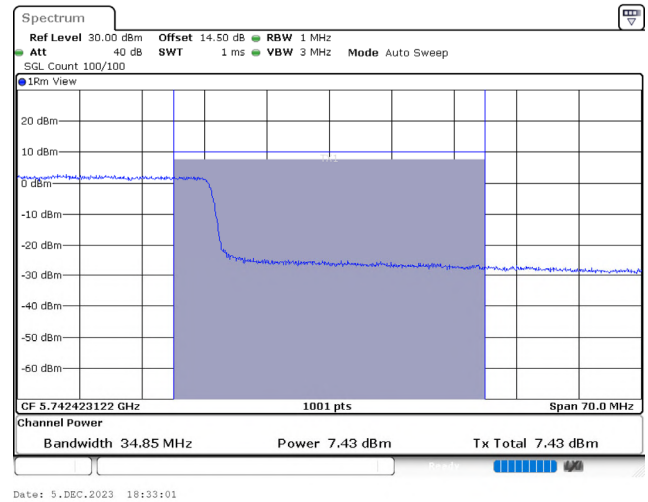


Spectrum plot value of power


802.11ax (160 MHz) / Ant. 1 / 5250 MHz (U-NII-1)

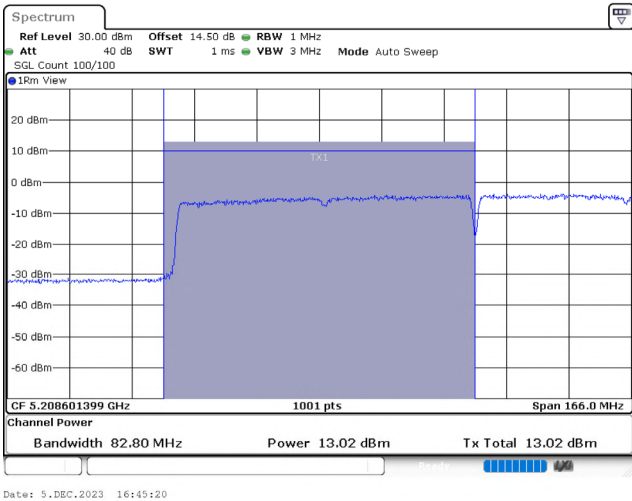


802.11ax (160 MHz) / Ant. 1 / 5250 MHz (U-NII-2A)

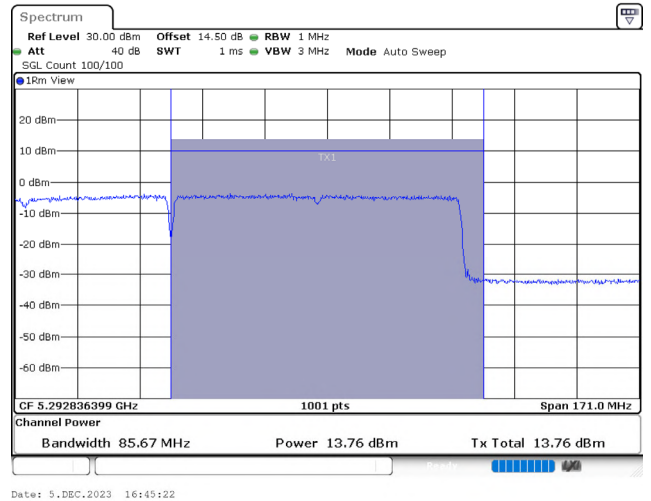

802.11ax (160 MHz) / Ant. 2 / 5250 MHz (U-NII-1)

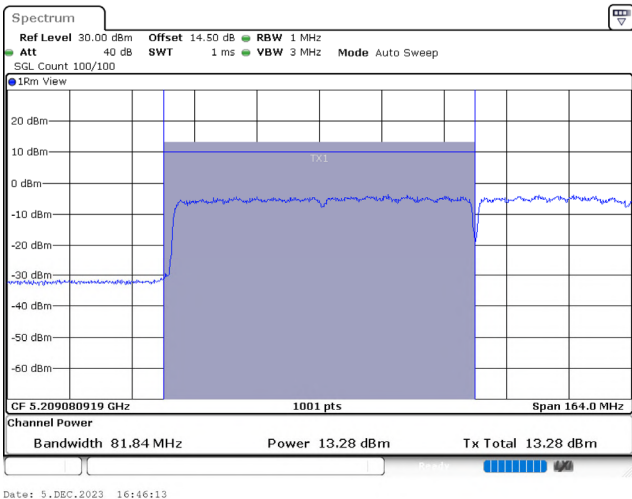

802.11ax (160 MHz) / Ant. 2 / 5250 MHz (U-NII-2A)

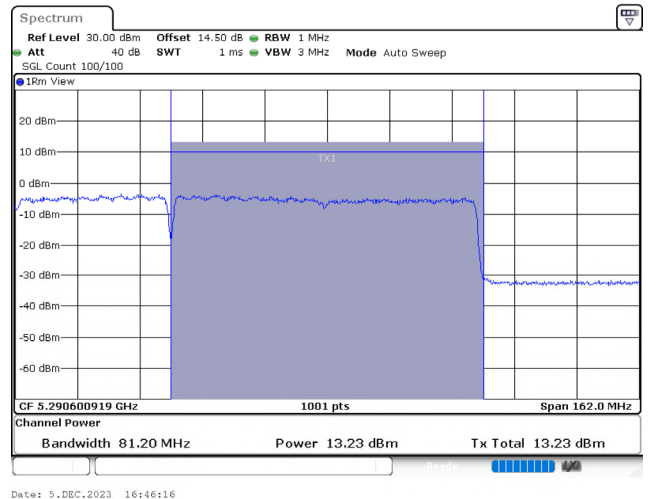

Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)		Limit (dBm/MHz)
		Ant. 1 + Ant. 2	Total	
802.11a	5180	12.650	12.682	17.00
	5220	12.520	12.552	17.00
	5240	12.590	12.622	17.00
	5260	10.370	10.402	11.00
	5300	10.790	10.822	11.00
	5320	10.450	10.482	11.00
	5500	10.410	10.442	11.00
	5580	10.610	10.642	11.00
	5700	10.020	10.052	11.00
	5720 (U-NII-2C)	10.560	10.592	11.00
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Limit (dBm/500kHz)
		Ant. 1 + Ant. 2	Total	
802.11a	5720 (U-NII-3)	7.670	7.702	30.00
	5745	13.350	13.382	30.00
	5785	12.970	13.002	30.00
	5825	13.190	13.222	30.00

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)		Limit (dBm/MHz)
		Ant. 1 + Ant. 2	Total	
802.11ax (20 MHz)	5180	12.700	12.825	17.00
	5220	12.650	12.775	17.00
	5240	12.660	12.785	17.00
	5260	10.640	10.765	11.00
	5300	10.870	10.995	11.00
	5320	10.580	10.705	11.00
	5500	10.210	10.335	11.00
	5580	10.670	10.795	11.00
	5700	7.640	7.765	11.00
	5720 (U-NII-2C)	10.450	10.575	11.00
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Limit (dBm/500kHz)
		Ant. 1 + Ant. 2	Total	
802.11ax (20 MHz)	5720 (U-NII-3)	7.550	7.675	30.00
	5745	12.710	12.835	30.00
	5785	12.490	12.615	30.00
	5825	12.500	12.625	30.00

Note: Total power spectral density = power spectral density + duty factor, and the duty factor refer to section 2.3.

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)		Limit (dBm/MHz)
		Ant. 1 + Ant. 2	Total	
802.11ax (40 MHz)	5190	7.710	7.951	17.00
	5230	9.710	9.951	17.00
	5270	7.440	7.681	11.00
	5310	4.930	5.171	11.00
	5510	6.690	6.931	11.00
	5550	8.200	8.441	11.00
	5670	8.150	8.391	11.00
	5710 (U-NII-2C)	8.410	8.651	11.00
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Limit (dBm/500kHz)
		Ant. 1 + Ant. 2	Total	
802.11ax (40 MHz)	5710 (U-NII-3)	6.110	6.351	30.00
	5755	6.220	6.461	30.00
	5795	6.100	6.341	30.00


Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)		Limit (dBm/MHz)
		Ant. 1 + Ant. 2	Total	
802.11ax (80 MHz)	5210	2.570	3.087	17.00
	5290	2.170	2.687	11.00
	5530	2.290	2.807	11.00
	5610	4.690	5.207	11.00
	5690 (U-NII-2C)	5.370	5.887	11.00
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Limit (dBm/500kHz)
		Ant. 1 + Ant. 2	Total	
802.11ax (80 MHz)	5690 (U-NII-3)	2.380	2.897	30.00
	5775	1.320	1.837	30.00

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)		Limit (dBm/MHz)
		Ant. 1 + Ant. 2	Total	
802.11ax (160 MHz)	5250 (U-NII-1)	-1.080	-0.129	17.00
	5250 (U-NII-2A)	-1.080	-0.129	11.00
	5570	-1.170	-0.219	11.00

Note: Total power spectral density = power spectral density + duty factor, and the duty factor refer to section 2.3.


Spectrum plot of worst value

802.11a / Ant. 1 + Ant. 2 / 5220 MHz (U-NII-1)

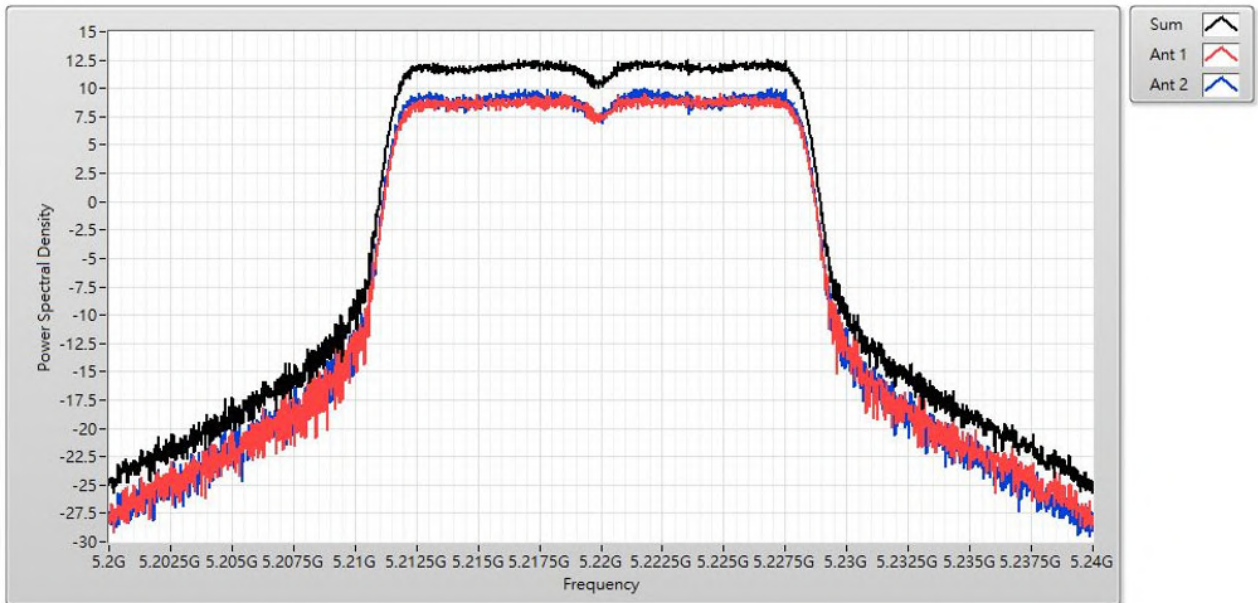

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
12.52	9.62	10.00


802.11a / Ant. 1 + Ant. 2 / 5300 MHz (U-NII-2A)

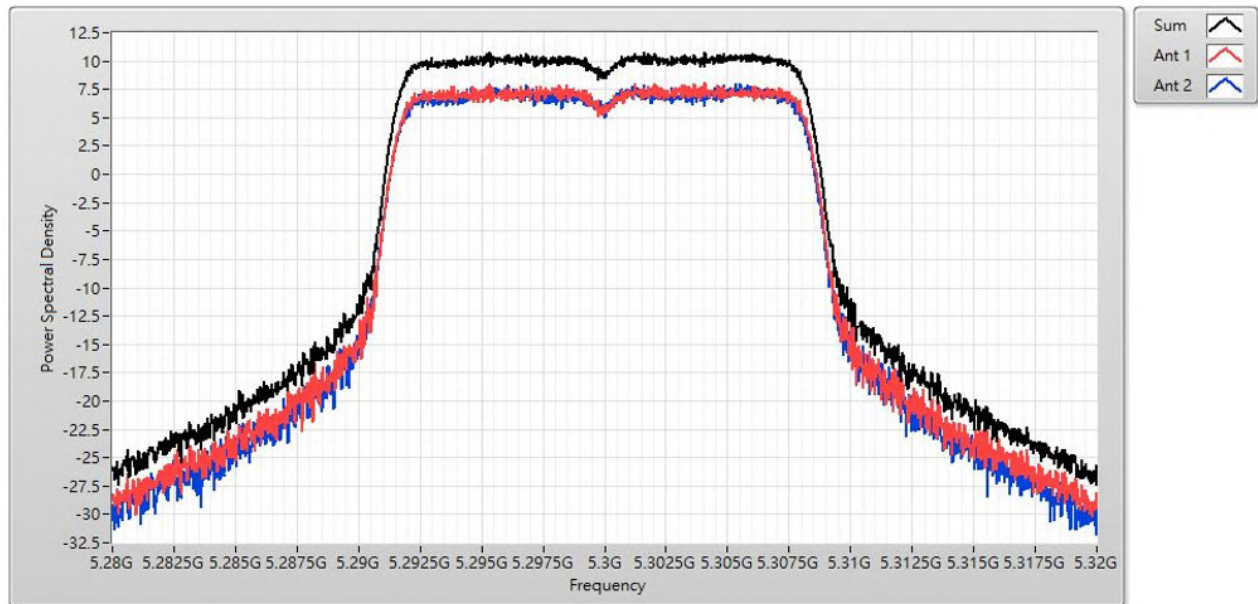

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
10.79	8.09	8.02


Spectrum plot of worst value

802.11a / Ant. 1 + Ant. 2 / 5580 MHz (U-NII-2C)

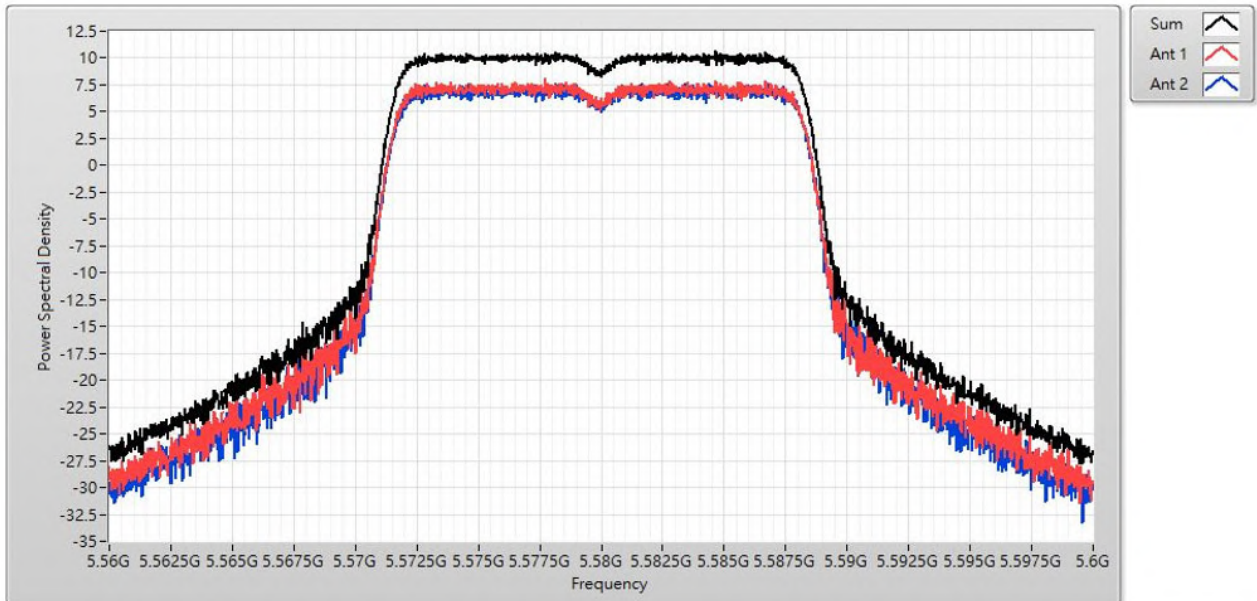

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
10.61	8.08	7.65


802.11a / Ant. 1 + Ant. 2 / 5745 MHz (U-NII-3)

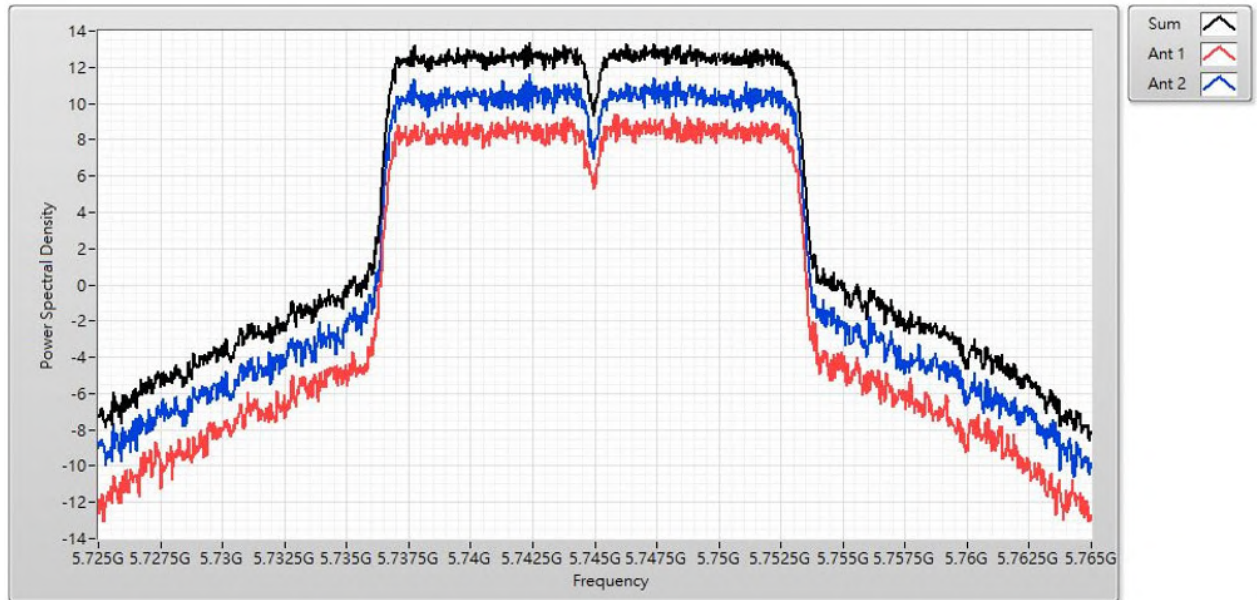

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
13.35	9.50	11.62


Spectrum plot of worst value

802.11ax (20 MHz) / Ant. 1 + Ant. 2 / 5180 MHz (U-NII-1)

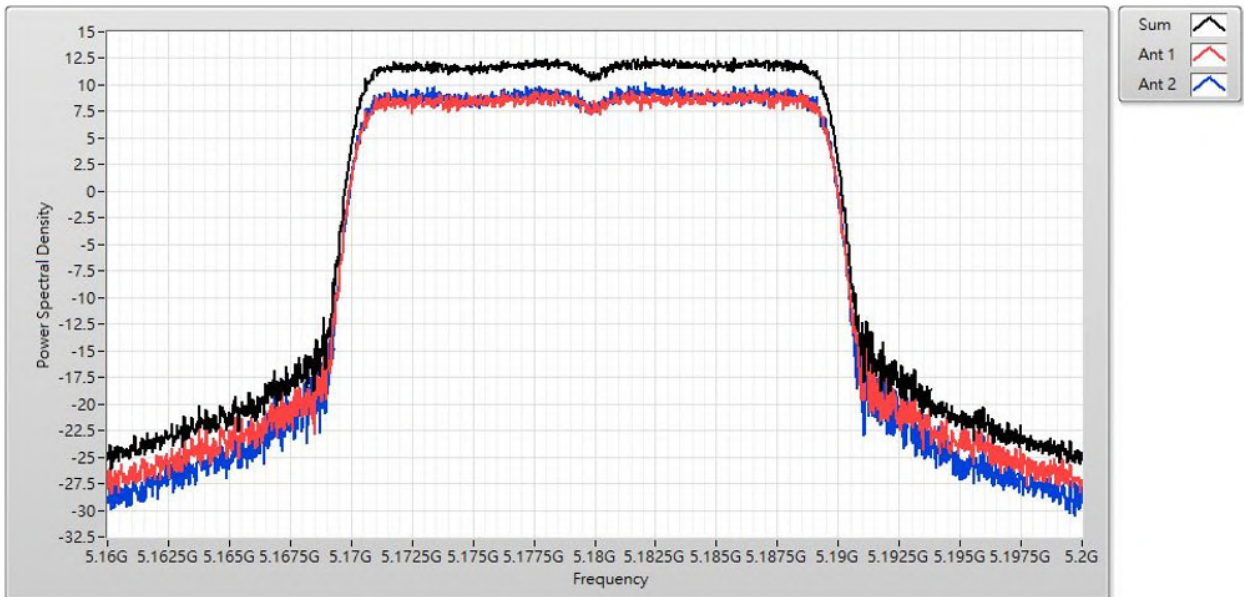

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
12.70	9.67	10.25


802.11ax (20 MHz) / Ant. 1 + Ant. 2 / 5300 MHz (U-NII-2A)

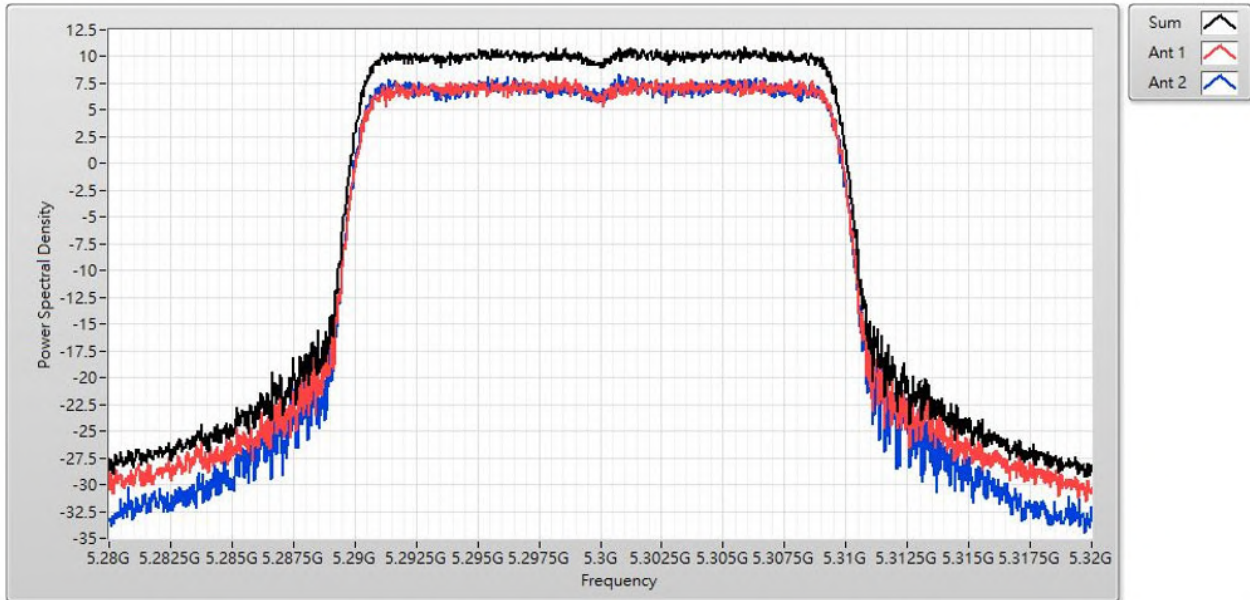

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
10.87	8.09	8.31


Spectrum plot of worst value

802.11ax (20 MHz) / Ant. 1 + Ant. 2 / 5580 MHz (U-NII-2C)

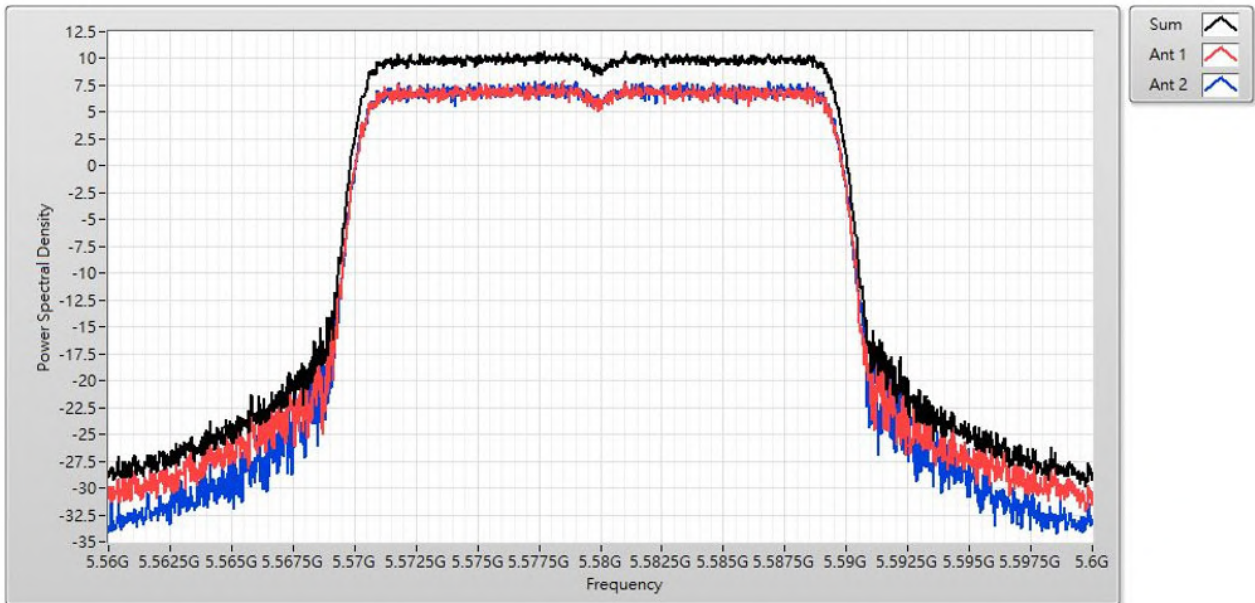

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
10.67	7.89	7.92


802.11ax (20 MHz) / Ant. 1 + Ant. 2 / 5745 MHz (U-NII-3)

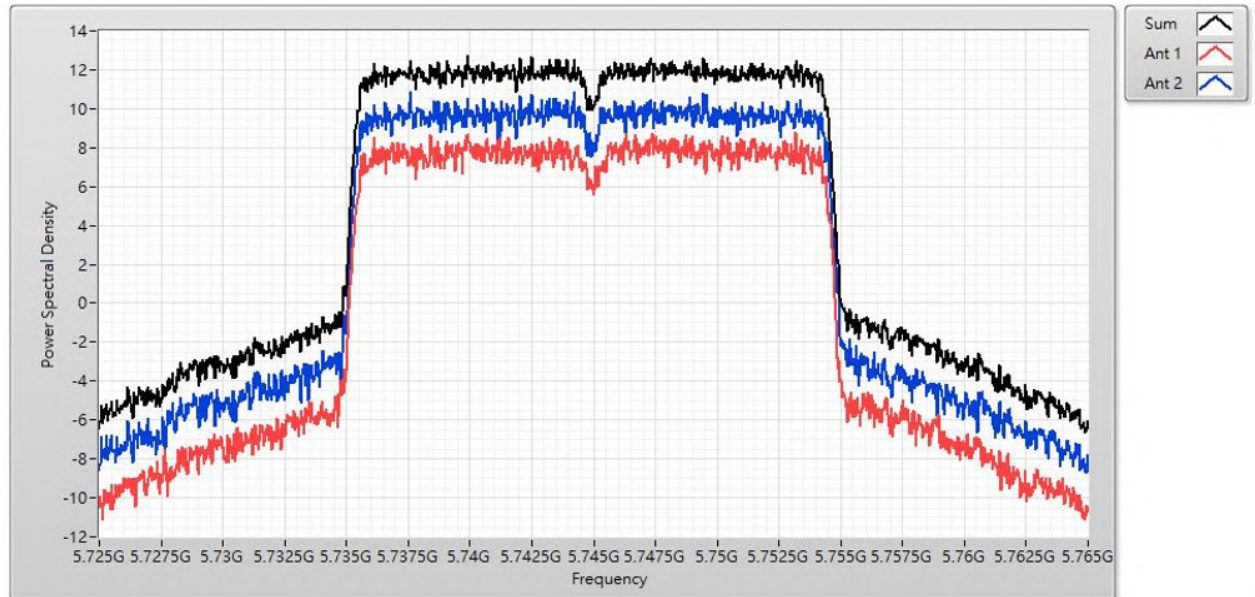

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
12.71	8.79	10.87

Spectrum plot of worst value

802.11ax (40 MHz) / Ant. 1 + Ant. 2 / 5230 MHz (U-NII-1)

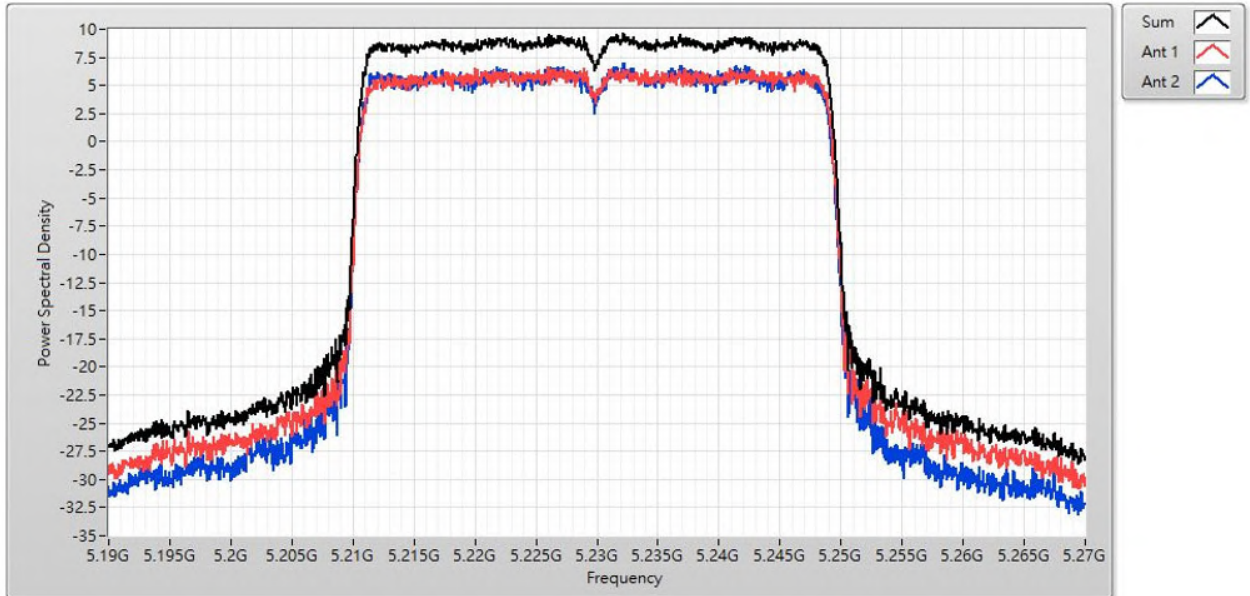

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
9.71	6.70	6.96


802.11ax (40 MHz) / Ant. 1 + Ant. 2 / 5270 MHz (U-NII-2A)



Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
7.44	4.79	4.64


Spectrum plot of worst value

802.11ax (40 MHz) / Ant. 1 + Ant. 2 / 5710 MHz (U-NII-2C)

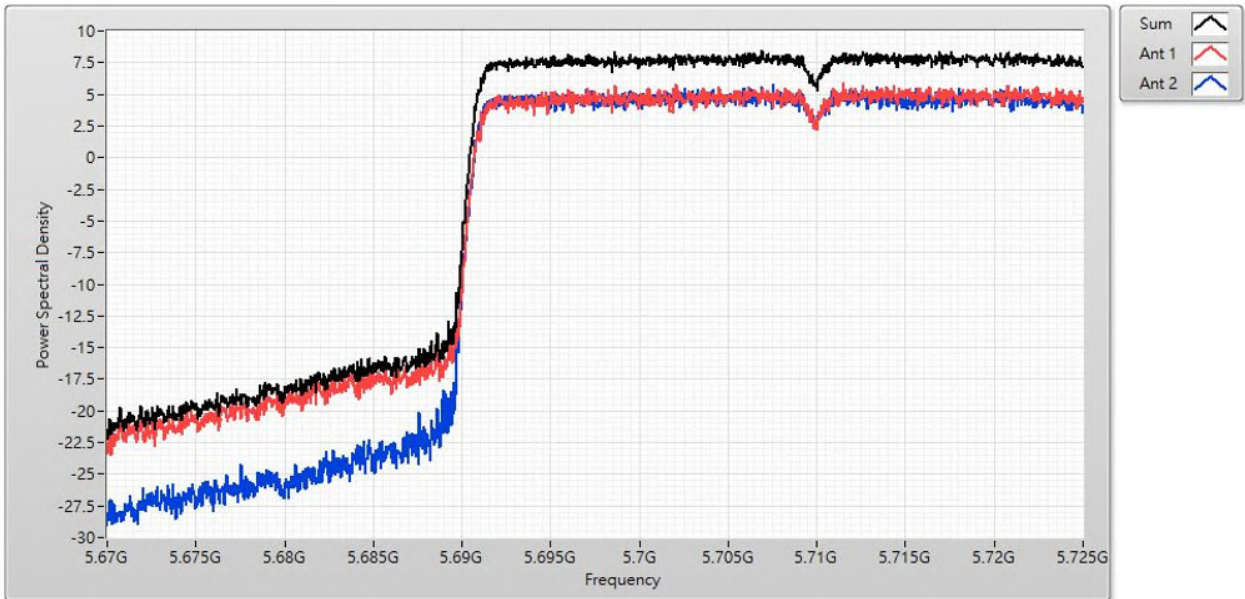

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
8.41	5.86	5.78


802.11ax (40 MHz) / Ant. 1 + Ant. 2 / 5755 MHz (U-NII-3)

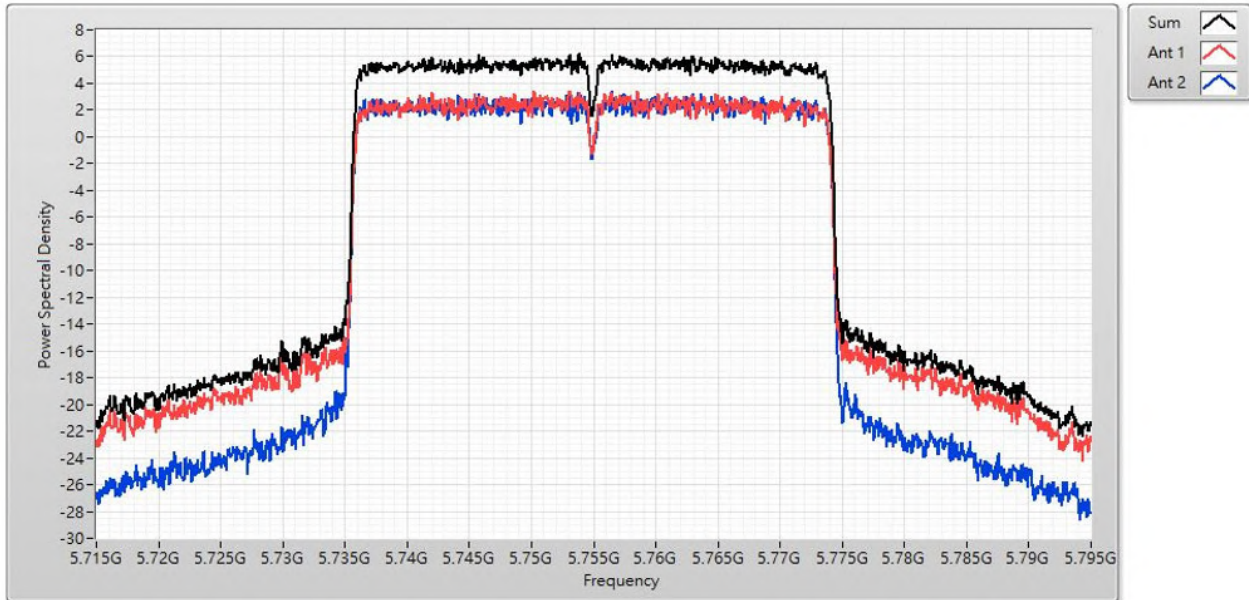

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
6.22	3.46	3.41


Spectrum plot of worst value

802.11ax (80 MHz) / Ant. 1 + Ant. 2 / 5210 MHz (U-NII-1)

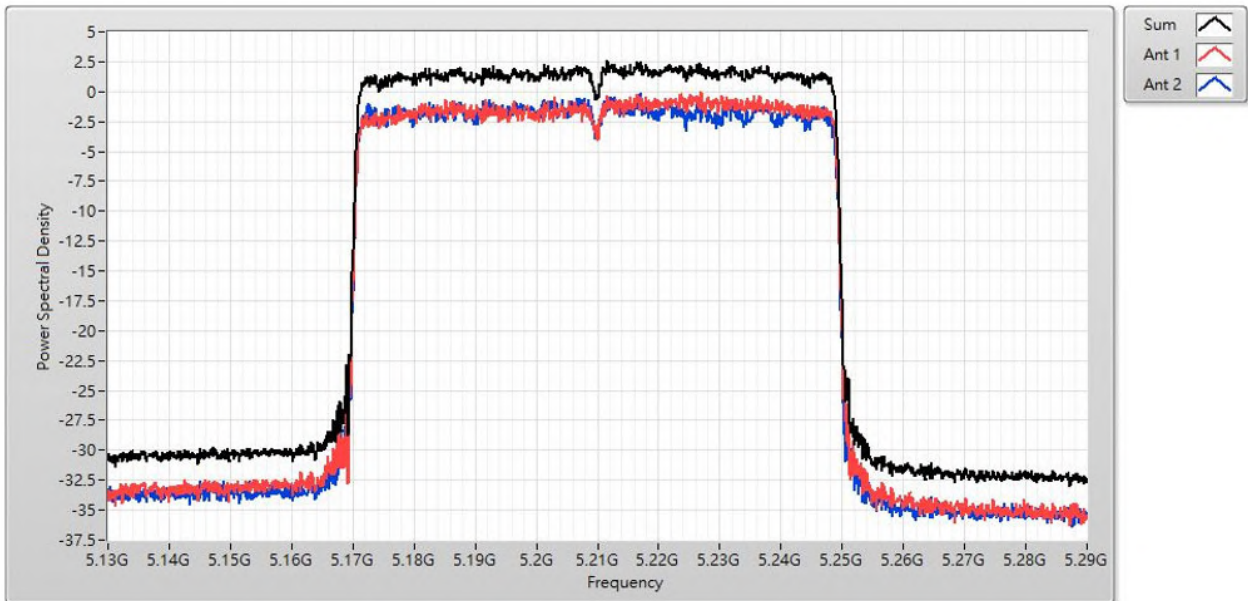

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
2.57	-0.05	-0.17


802.11ax (80 MHz) / Ant. 1 + Ant. 2 / 5290 MHz (U-NII-2A)

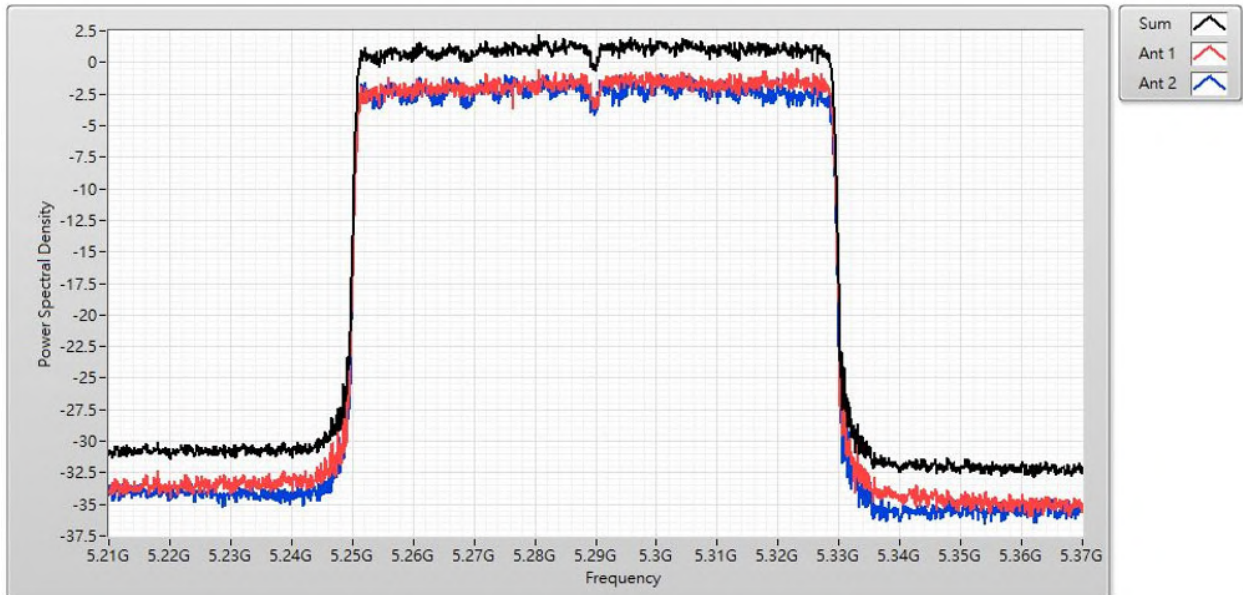

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
2.17	-0.46	-0.94


Spectrum plot of worst value

802.11ax (80 MHz) / Ant. 1 + Ant. 2 / 5690 MHz (U-NII-2C)

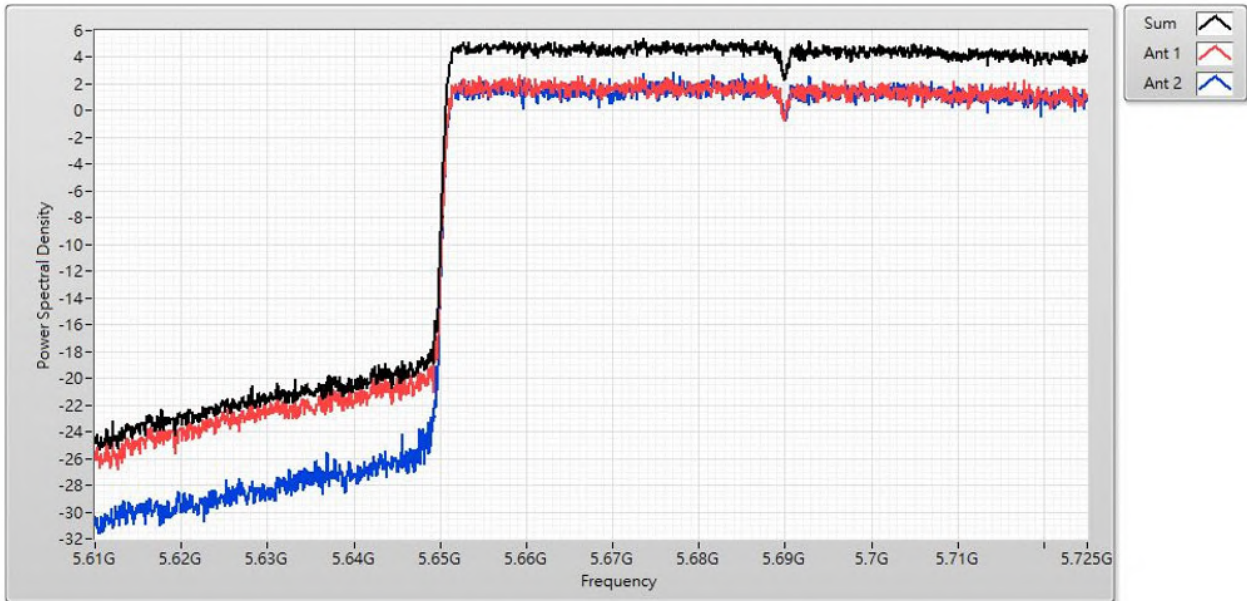

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
5.37	2.67	2.84


802.11ax (80 MHz) / Ant. 1 + Ant. 2 / 5690 MHz (U-NII-3)

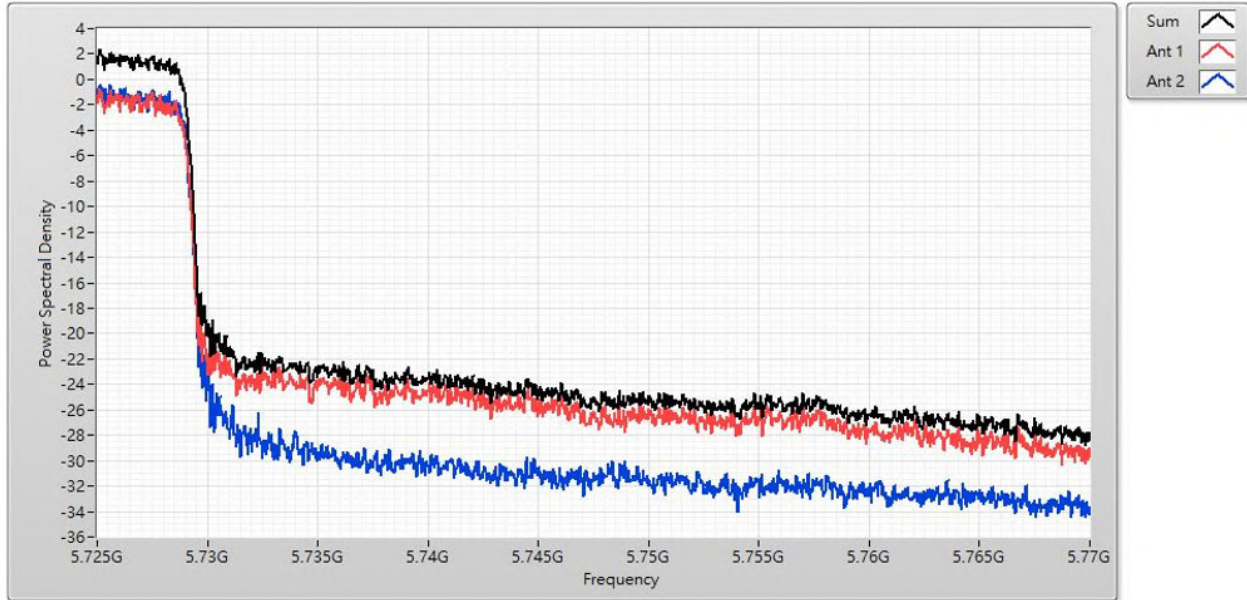

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
2.38	-0.73	-0.39


Spectrum plot of worst value

802.11ax (160 MHz) / Ant. 1 + Ant. 2 / 5250 MHz (U-NII-1 and U-NII-2A)

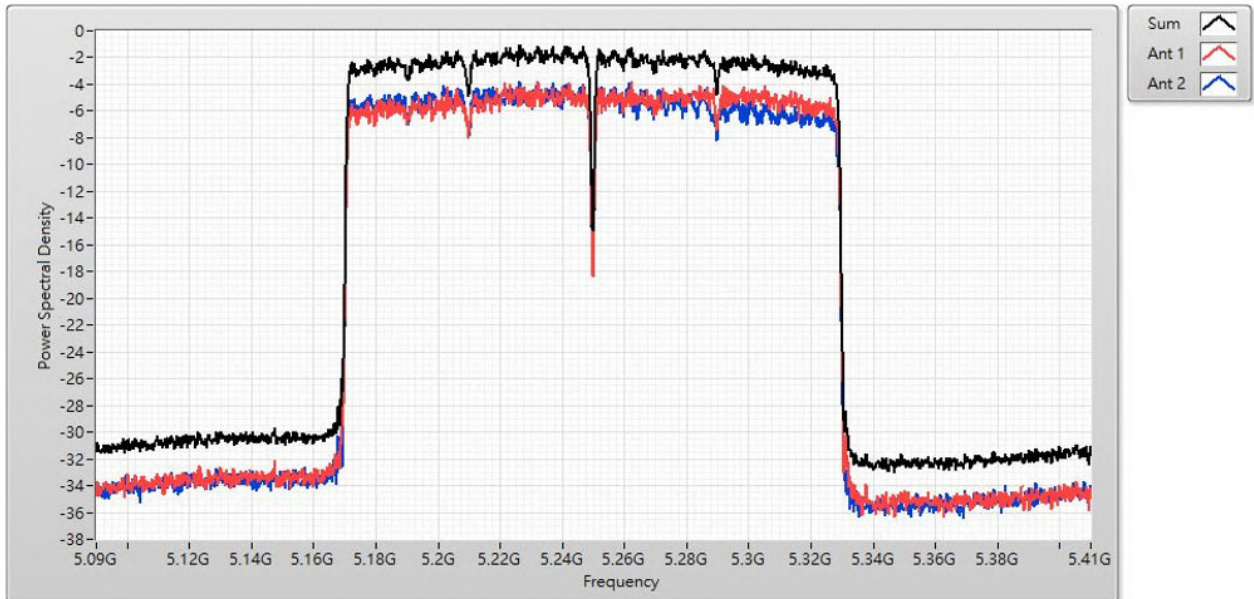

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
-1.08	-3.82	-3.84

802.11ax (160 MHz) / Ant. 1 + Ant. 2 / 5570 MHz (U-NII-2C)

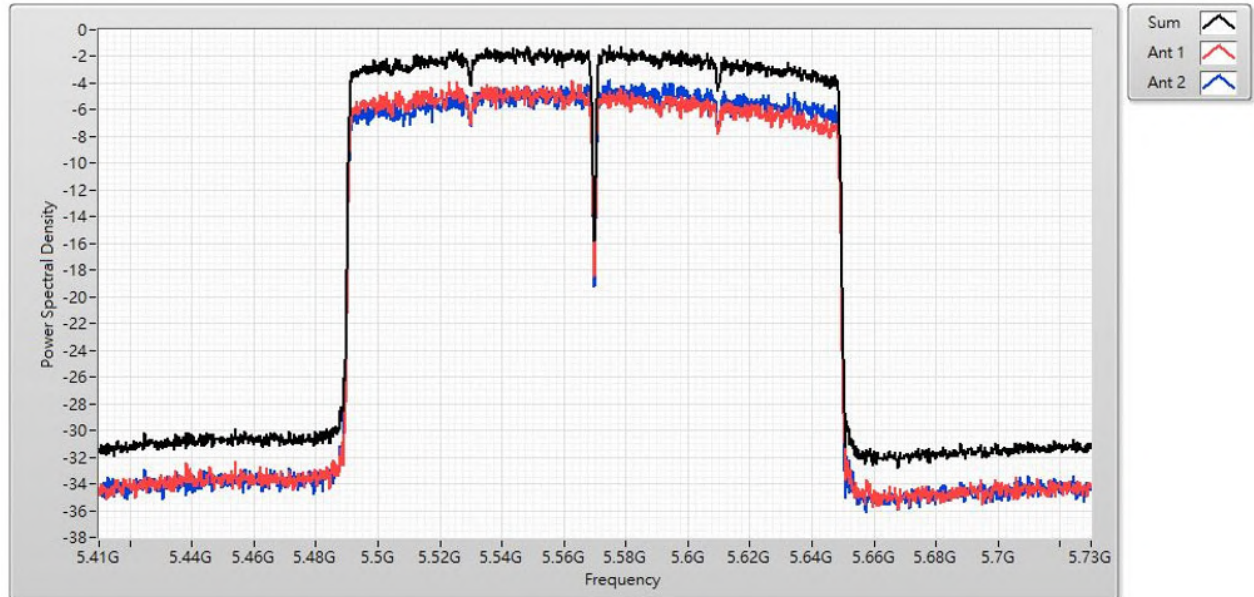

Sum (dBm/RBW)	Ant. 1 (dBm/RBW)	Ant. 2 (dBm/RBW)
-1.17	-3.84	-3.77

Appendix E. Test Result of Transmitter Radiated Spurious Emission


30 MHz ~ 1 GHz

Mode 2: EUT + Adapter 2



Above 1 GHz


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5180MHz
 Test by :Cyril

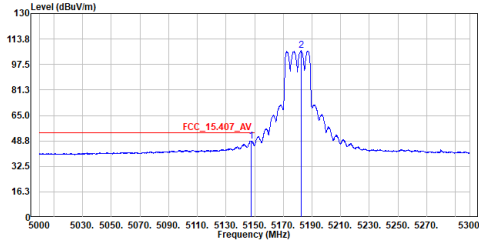

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.750	48.81	54.00	-5.19	27.43	21.38	Average
2	5182.400	106.22	-----	-----	84.83	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5180MHz
 Test by :Cyril

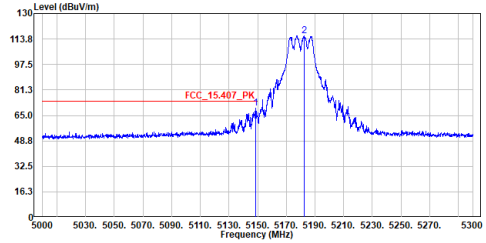

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.500	69.53	74.00	-4.47	48.15	21.38	Peak
2	5182.250	115.87	-----	-----	94.48	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5180MHz
 Test by :Cyril

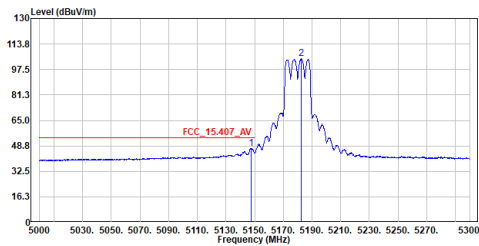

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.750	47.15	54.00	-6.85	25.77	21.38	Average
2	5182.400	104.29	-----	-----	82.90	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5180MHz
 Test by :Cyril

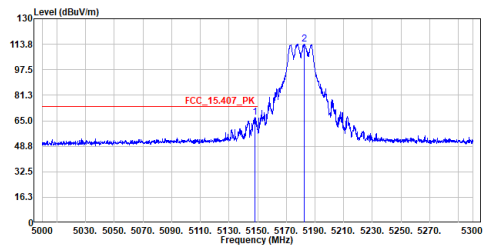

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.050	67.23	74.00	-6.77	45.85	21.38	Peak
2	5182.400	113.95	-----	-----	92.56	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5180MHz
 Test by :Cyril

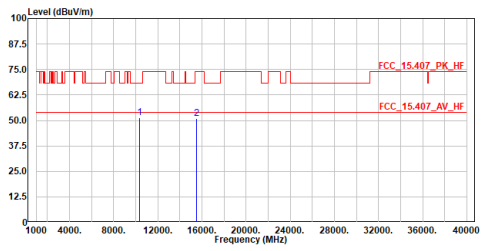


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10360.000	51.40	68.20	-16.80	59.37	-7.97	Peak
2	15540.000	51.00	74.00	-23.00	54.22	-3.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5180MHz
 Test by :Cyril

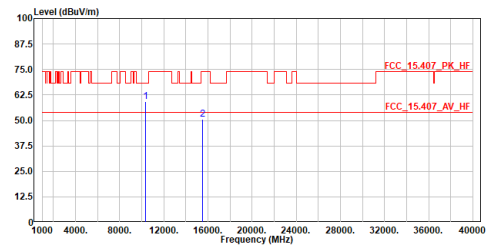


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10360.000	59.39	68.20	-8.81	67.36	-7.97	Peak
2	15540.000	50.61	74.00	-23.39	53.83	-3.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5220MHz
 Test by :Cyril

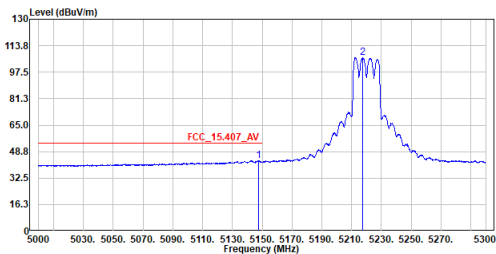


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.750	43.25	54.00	-10.75	21.87	21.38	Average
2	5217.350	106.37	-----	-----	84.98	21.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5220MHz
 Test by :Cyril

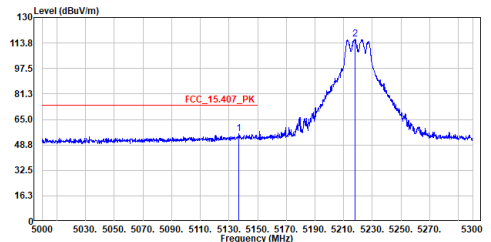


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5136.800	55.74	74.00	-18.26	34.36	21.38	Peak
2	5218.100	116.16	-----	-----	94.77	21.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5220MHz
 Test by :Cyril

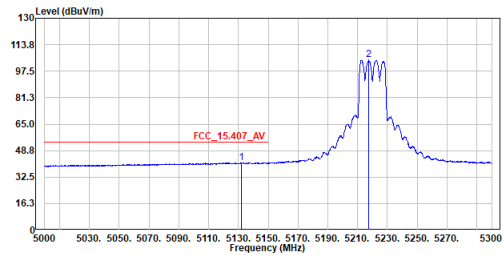

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5132.000	41.40	54.00	-12.60	20.02	21.38	Average
2	5217.500	104.26	-----	-----	82.87	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5220MHz
 Test by :Cyril

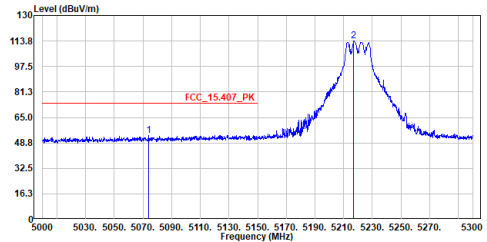

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5073.950	53.60	74.00	-20.40	32.23	21.37	Peak
2	5217.050	113.91	-----	-----	92.52	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5220MHz
 Test by :Cyril

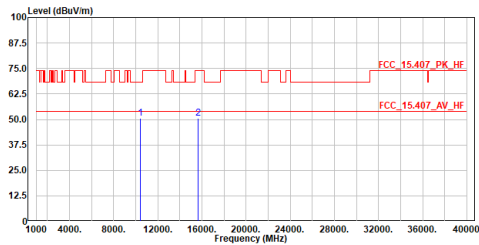

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10440.000	50.74	68.20	-17.46	58.57	-7.83	Peak
2	15660.000	50.51	74.00	-23.49	53.70	-3.19	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5220MHz
 Test by :Cyril

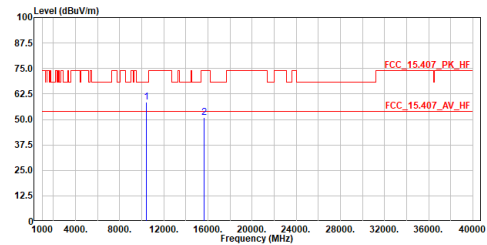

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10440.000	58.43	68.20	-9.77	66.26	-7.83	Peak
2	15660.000	50.81	74.00	-23.19	54.00	-3.19	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5240MHz
 Test by :Cyril

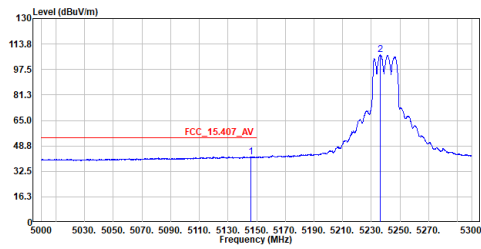


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5145.950	41.81	54.00	-12.19	20.43	21.38	Average
2	5236.400	106.72	-----	-----	85.32	21.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5240MHz
 Test by :Cyril

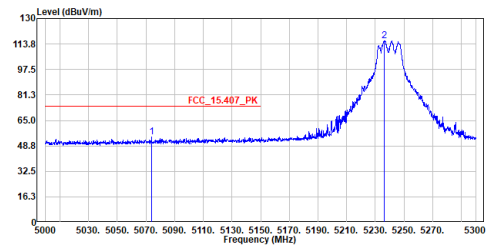


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5073.950	54.35	74.00	-19.65	32.98	21.37	Peak
2	5236.250	115.74	-----	-----	94.34	21.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5240MHz
 Test by :Cyril

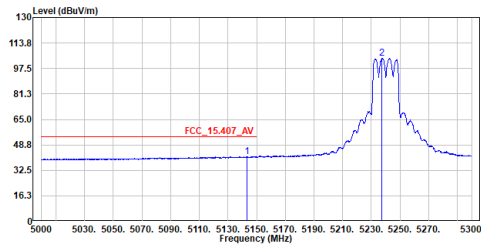


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5143.400	41.24	54.00	-12.76	19.86	21.38	Average
2	5237.300	104.03	-----	-----	82.63	21.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5240MHz
 Test by :Cyril

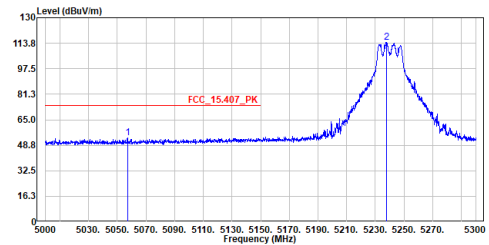


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5057.150	53.66	74.00	-20.34	32.29	21.37	Peak
2	5238.050	114.30	-----	-----	92.91	21.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5240MHz
 Test by :Cyril

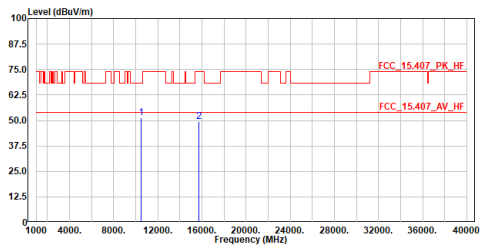

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10480.000	51.43	68.20	-16.77	59.19	-7.76	Peak
2	15720.000	49.61	74.00	-24.39	52.77	-3.16	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5240MHz
 Test by :Cyril

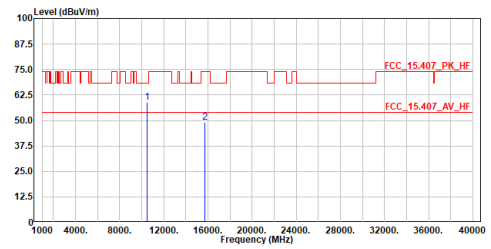

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10480.000	58.98	68.20	-9.22	66.74	-7.76	Peak
2	15720.000	49.18	74.00	-24.82	52.34	-3.16	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5260MHz
 Test by :Cyril

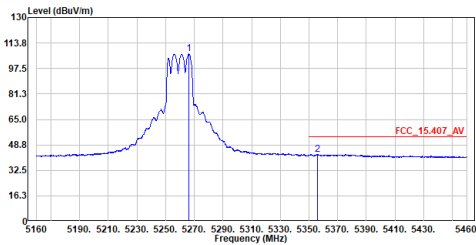

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5266.200	106.79	-----	-----	85.39	21.40	Average
2	5356.050	42.76	54.00	-11.24	21.34	21.42	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5260MHz
 Test by :Cyril

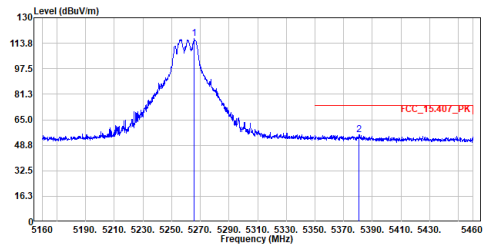

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5265.900	116.65	-----	-----	95.25	21.40	Peak
2	5380.500	55.37	74.00	-18.63	33.94	21.43	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5260MHz
 Test by :Cyril

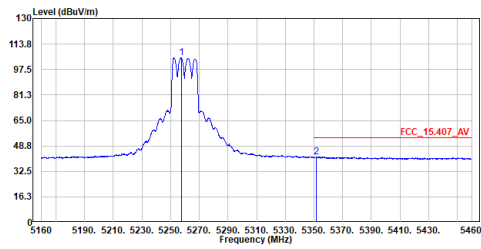


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5257.500	104.84	-----	-----	83.43	21.41	Average
2	5351.850	41.68	54.00	-12.32	20.26	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5260MHz
 Test by :Cyril

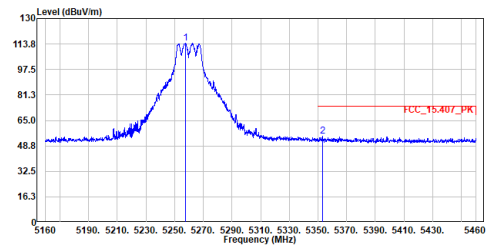


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5257.650	114.44	-----	-----	93.03	21.41	Peak
2	5353.050	54.77	74.00	-19.23	33.35	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5260MHz
 Test by :Cyril

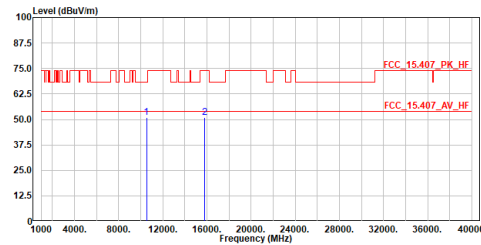


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10520.000	51.07	68.20	-17.13	58.78	-7.71	Peak
2	15780.000	50.84	74.00	-23.16	53.99	-3.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5260MHz
 Test by :Cyril

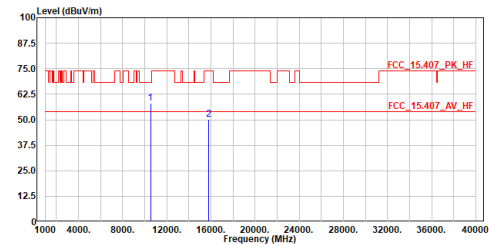


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10520.000	58.13	68.20	-10.07	65.84	-7.71	Peak
2	15780.000	50.35	74.00	-23.65	53.50	-3.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5300MHz
 Test by :Cyril

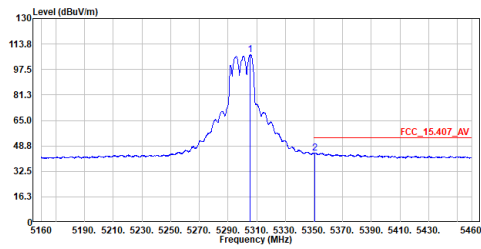


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5305.500	106.97	-----	-----	85.56	21.41	Average
2	5350.800	44.17	54.00	-9.83	22.75	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5300MHz
 Test by :Cyril

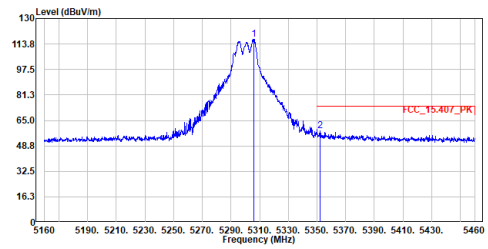


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5305.800	116.81	-----	-----	95.39	21.42	Peak
2	5352.150	58.15	74.00	-15.85	36.73	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5300MHz
 Test by :Cyril

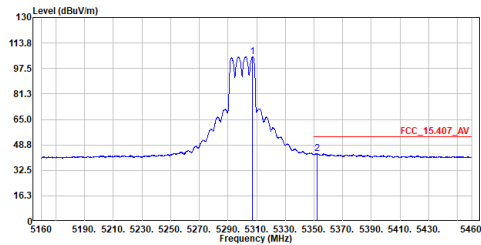


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5307.150	105.01	-----	-----	83.59	21.42	Average
2	5352.300	43.31	54.00	-10.69	21.89	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5300MHz
 Test by :Cyril

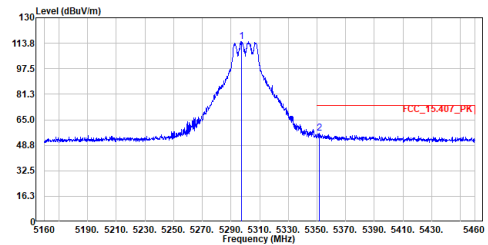


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5297.550	114.74	-----	-----	93.33	21.41	Peak
2	5351.550	56.47	74.00	-17.53	35.05	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5300MHz
 Test by :Cyril

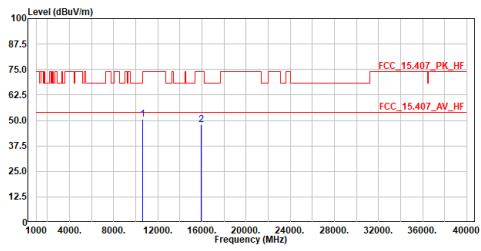


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10600.000	50.60	74.00	-23.40	58.22	-7.62	Peak
2	15900.000	48.01	74.00	-25.99	51.12	-3.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5300MHz
 Test by :Cyril

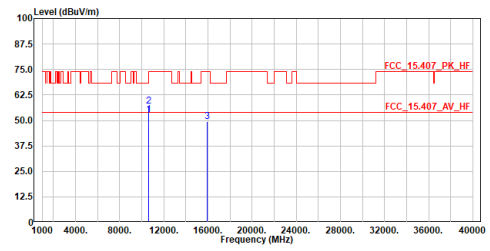


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10600.000	52.82	54.00	-1.18	60.44	-7.62	Average
2	10600.000	57.01	74.00	-16.99	64.63	-7.62	Peak
3	15900.000	49.26	74.00	-24.74	52.37	-3.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5320MHz
 Test by :Cyril

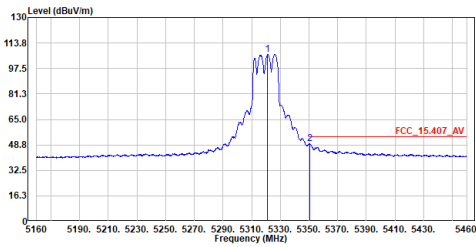


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5321.250	106.45	-----	-----	85.04	21.41	Average
2	5350.650	49.54	54.00	-4.46	28.12	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5320MHz
 Test by :Cyril

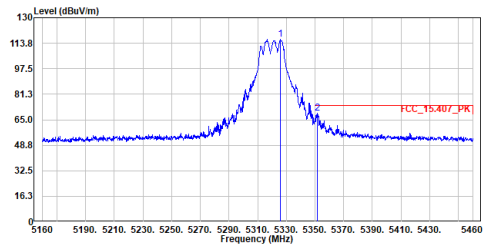


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5325.900	116.40	-----	-----	94.98	21.42	Peak
2	5351.850	69.08	74.00	-4.92	47.66	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5320MHz
 Test by :Cyril

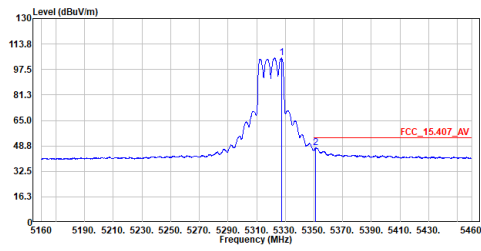


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5327.250	104.80	-----	-----	83.38	21.42	Average
2	5351.250	47.53	54.00	-6.47	26.11	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5320MHz
 Test by :Cyril

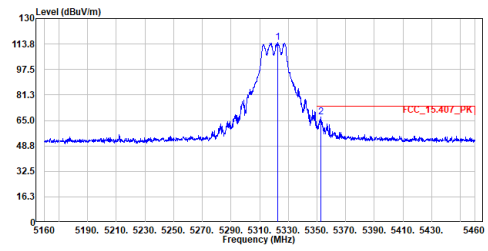


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5322.600	114.93	-----	-----	93.52	21.41	Peak
2	5352.600	67.05	74.00	-6.95	45.63	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5320MHz
 Test by :Cyril

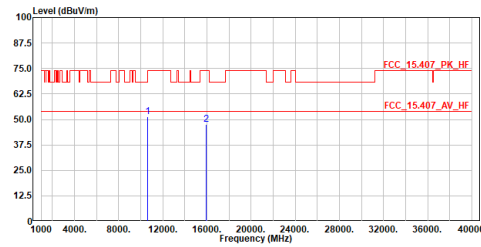


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10640.000	51.39	74.00	-22.61	58.95	-7.56	Peak
2	15960.000	47.56	74.00	-26.44	50.65	-3.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5320MHz
 Test by :Cyril

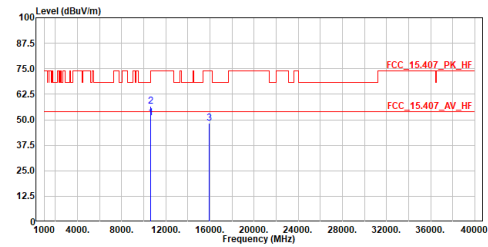


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10640.000	50.99	54.00	-3.01	58.55	-7.56	Average
2	10640.000	56.62	74.00	-17.38	64.18	-7.56	Peak
3	15960.000	48.12	74.00	-25.88	51.21	-3.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5500MHz
 Test by :Cyril

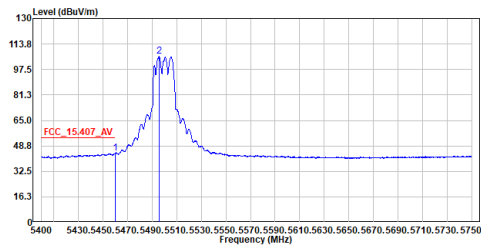


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.850	43.92	54.00	-10.08	22.48	21.44	Average
2	5495.550	105.92	-----	-----	84.48	21.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5500MHz
 Test by :Cyril

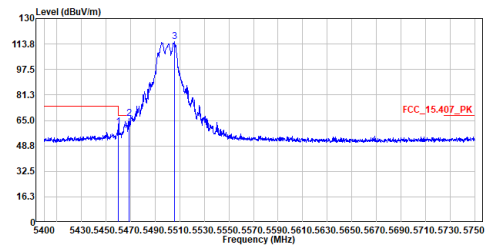


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.850	60.77	74.00	-13.23	39.33	21.44	Peak
2	5468.775	66.26	68.20	-1.94	44.83	21.43	Peak
3	5505.700	115.13	-----	-----	93.68	21.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5500MHz
 Test by :Cyril

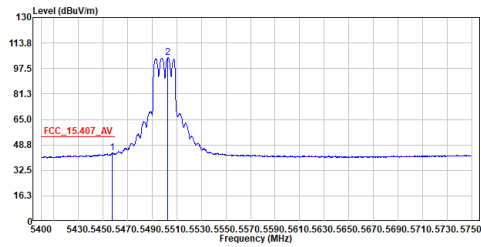


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5457.750	43.54	54.00	-10.46	22.10	21.44	Average
2	5502.725	104.30	-----	-----	82.85	21.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5500MHz
 Test by :Cyril

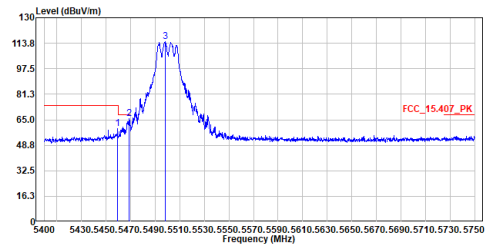


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.500	59.35	74.00	-14.65	37.91	21.44	Peak
2	5468.600	65.72	68.20	-2.48	44.29	21.43	Peak
3	5498.000	114.69	-----	-----	93.25	21.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5500MHz
 Test by :Cyril

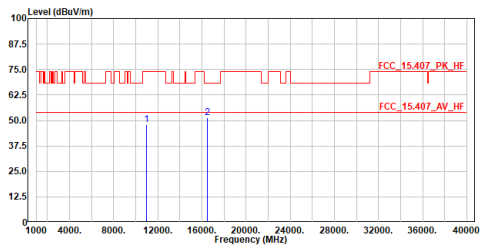

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11000.000	47.85	74.00	-26.15	55.01	-7.16	Peak
2	16500.000	51.38	68.20	-16.82	54.72	-3.34	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5500MHz
 Test by :Cyril

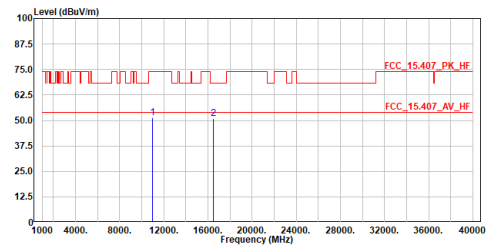

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11000.000	51.48	74.00	-22.52	58.64	-7.16	Peak
2	16500.000	51.02	68.20	-17.18	54.36	-3.34	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5580MHz
 Test by :Cyril

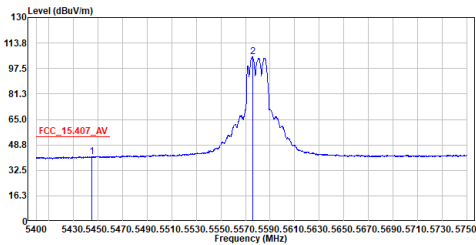

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5445.150	41.39	54.00	-12.61	19.96	21.43	Average
2	5575.700	105.02	-----	-----	83.30	21.72	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5580MHz
 Test by :Cyril

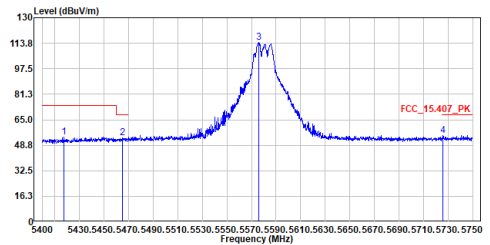

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5417.675	54.03	74.00	-19.97	32.60	21.43	Peak
2	5465.100	53.69	68.20	-14.51	32.26	21.43	Peak
3	5575.700	114.16	-----	-----	92.44	21.72	Peak
4	5725.675	54.90	68.20	-13.30	32.63	22.27	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5580MHz
 Test by :Cyril

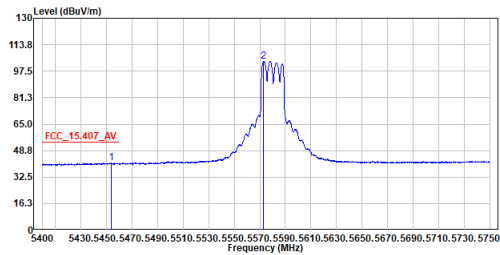

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5453.900	41.05	54.00	-12.95	19.61	21.44	Average
2	5573.075	103.69	-----	-----	81.98	21.71	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5580MHz
 Test by :Cyril

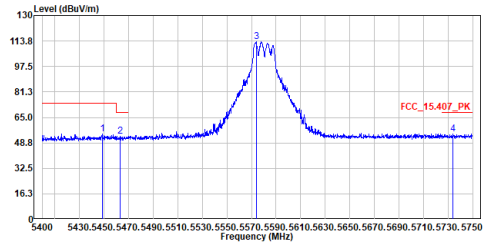

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5448.475	54.54	74.00	-19.46	33.11	21.43	Peak
2	5463.000	53.12	68.20	-15.08	31.69	21.43	Peak
3	5573.775	113.39	-----	-----	91.68	21.71	Peak
4	5733.900	54.59	68.20	-13.61	32.30	22.29	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5580MHz
 Test by :Cyril

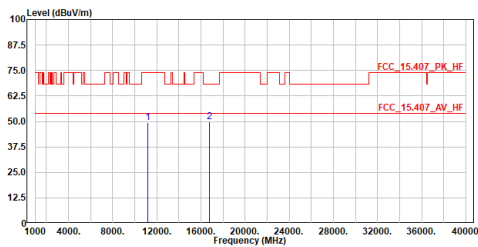

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11160.000	49.25	74.00	-24.75	56.09	-6.84	Peak
2	16740.000	49.64	68.20	-18.56	53.13	-3.49	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5580MHz
 Test by :Cyril

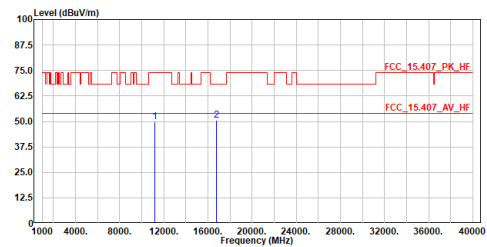

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11160.000	49.78	74.00	-24.22	56.62	-6.84	Peak
2	16740.000	50.57	68.20	-17.63	54.06	-3.49	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5700MHz
 Test by :Cyril

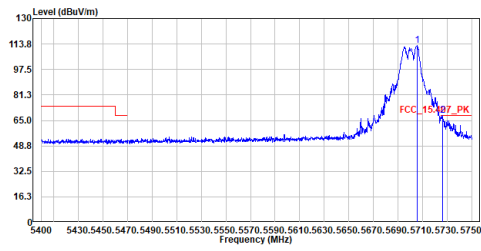


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5705.725	112.66	-----	-----	90.47	22.19	Peak
2	5726.550	68.01	68.20	-0.19	45.74	22.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5700MHz
 Test by :Cyril

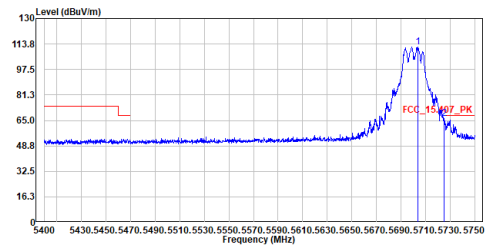


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5703.975	111.99	-----	-----	89.80	22.19	Peak
2	5725.150	66.22	68.20	-1.98	43.96	22.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5700MHz
 Test by :Cyril

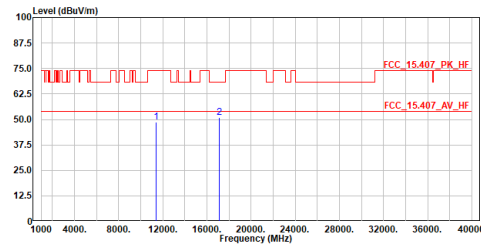


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11400.000	48.66	74.00	-25.34	55.03	-6.37	Peak
2	17100.000	51.02	68.20	-17.18	54.53	-3.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5700MHz
 Test by :Cyril

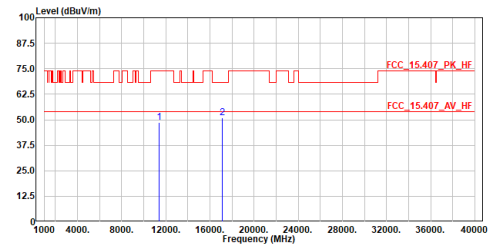


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11400.000	48.68	74.00	-25.32	55.05	-6.37	Peak
2	17100.000	51.07	68.20	-17.13	54.58	-3.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5720MHz
 Test by :Cyril

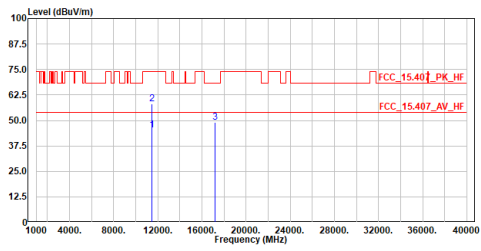

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11440.000	45.15	54.00	-8.85	51.43	-6.28	Average
2	11440.000	58.16	74.00	-15.84	64.44	-6.28	Peak
3	17160.000	48.93	68.20	-19.27	52.35	-3.42	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5720MHz
 Test by :Cyril

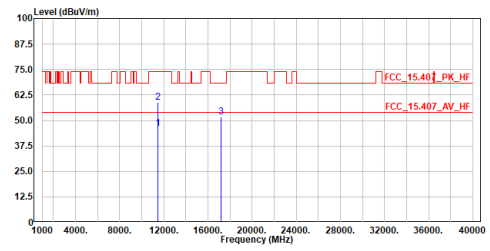

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11440.000	46.06	54.00	-7.94	52.34	-6.28	Average
2	11440.000	58.99	74.00	-15.01	65.27	-6.28	Peak
3	17160.000	51.54	68.20	-16.66	54.96	-3.42	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5745MHz
 Test by :Cyril

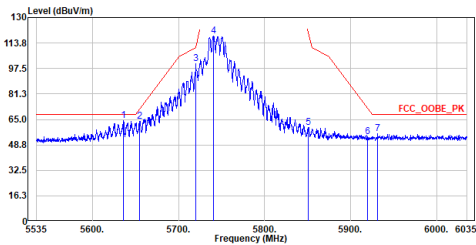

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5636.250	64.30	68.20	-3.90	42.37	21.93	Peak
2	5654.750	63.67	71.72	-8.05	41.66	22.01	Peak
3	5720.000	100.64	110.80	-10.16	78.40	22.24	Peak
4	5740.750	118.47	-----	-----	96.15	22.32	Peak
5	5851.000	59.81	119.92	-60.11	37.09	22.72	Peak
6	5920.000	53.89	71.91	-18.02	30.93	22.96	Peak
7	5931.250	55.82	68.20	-12.38	32.81	23.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5745MHz
 Test by :Cyril

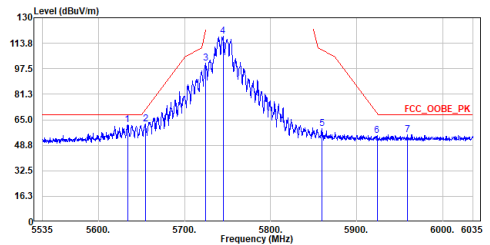

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5633.750	61.65	68.20	-6.55	39.73	21.92	Peak
2	5654.500	62.24	71.54	-9.30	40.23	22.01	Peak
3	5724.250	101.13	120.49	-19.36	78.88	22.25	Peak
4	5744.750	118.10	-----	-----	95.77	22.33	Peak
5	5859.750	59.28	109.47	-50.19	36.54	22.74	Peak
6	5923.750	54.83	69.13	-14.30	31.85	22.98	Peak
7	5959.250	55.64	68.20	-12.56	32.53	23.11	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5745MHz
 Test by :Cyril

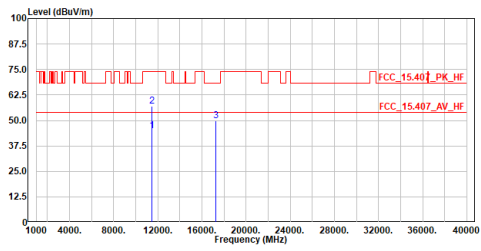

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11490.000	44.87	54.00	-9.13	51.05	-6.18	Average
2	11490.000	56.92	74.00	-17.08	63.10	-6.18	Peak
3	17235.000	49.94	68.20	-18.26	53.26	-3.32	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5745MHz
 Test by :Cyril

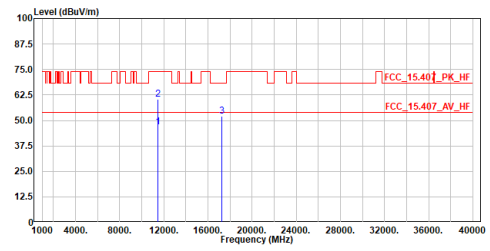

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11490.000	46.64	54.00	-7.36	52.82	-6.18	Average
2	11490.000	60.36	74.00	-13.64	66.54	-6.18	Peak
3	17235.000	51.98	68.20	-16.22	55.30	-3.32	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5785MHz
 Test by :Cyril

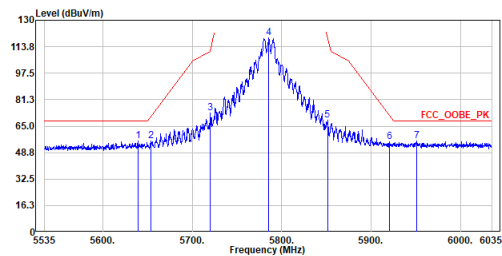

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5639.250	55.93	68.20	-12.27	33.98	21.95	Peak
2	5653.500	55.81	70.80	-14.99	33.80	22.01	Peak
3	5720.500	73.24	111.94	-38.70	50.99	22.25	Peak
4	5785.750	119.19	-----	-----	96.71	22.48	Peak
5	5851.250	68.55	119.35	-50.80	45.83	22.72	Peak
6	5920.750	55.59	71.35	-15.76	32.61	22.98	Peak
7	5951.000	55.68	68.20	-12.52	32.60	23.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5785MHz
 Test by :Cyril

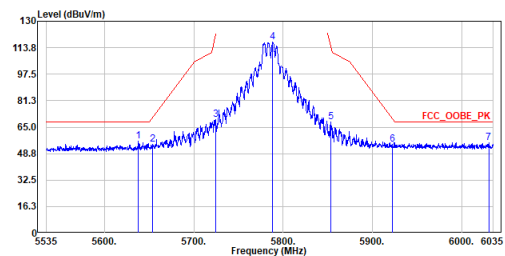

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5638.000	56.57	68.20	-11.63	34.63	21.94	Peak
2	5654.000	54.63	71.17	-16.54	32.62	22.01	Peak
3	5724.750	69.49	121.63	-52.14	47.24	22.25	Peak
4	5788.250	117.10	-----	-----	94.61	22.49	Peak
5	5853.750	68.37	113.65	-45.28	45.64	22.73	Peak
6	5922.000	54.39	70.43	-16.04	31.41	22.98	Peak
7	6030.250	55.53	68.20	-12.67	32.12	23.41	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5785MHz
 Test by :Cyril

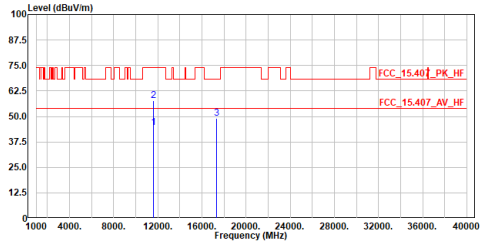

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11570.000	44.40	54.00	-9.60	50.53	-6.13	Average
2	11570.000	57.91	74.00	-16.09	64.04	-6.13	Peak
3	17355.000	49.22	68.20	-18.98	52.38	-3.16	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5785MHz
 Test by :Cyril

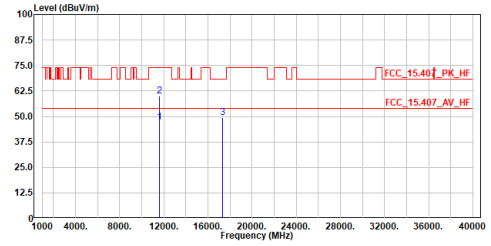

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11570.000	47.20	54.00	-6.80	53.33	-6.13	Average
2	11570.000	59.90	74.00	-14.10	66.03	-6.13	Peak
3	17355.000	49.25	68.20	-18.95	52.41	-3.16	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5825MHz
 Test by :Cyril

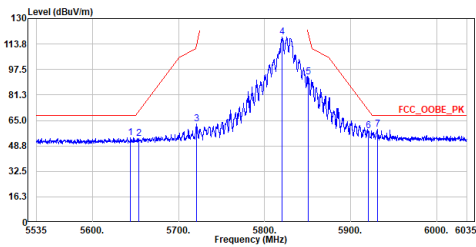

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5644.000	54.03	68.20	-14.17	32.06	21.97	Peak
2	5654.000	53.62	71.17	-17.55	31.61	22.01	Peak
3	5720.750	63.00	112.51	-49.51	40.75	22.25	Peak
4	5820.250	118.31	-----	-----	95.71	22.60	Peak
5	5851.000	92.94	119.92	-26.98	70.22	22.72	Peak
6	5920.500	58.27	71.54	-13.27	35.30	22.97	Peak
7	5931.250	59.25	68.20	-8.95	36.24	23.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5825MHz
 Test by :Cyril

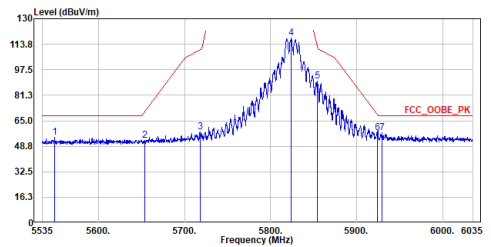

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5549.250	54.31	68.20	-13.89	32.69	21.62	Peak
2	5653.500	52.47	70.80	-18.33	30.46	22.01	Peak
3	5718.250	58.08	110.31	-52.23	35.84	22.24	Peak
4	5824.250	117.72	-----	-----	95.10	22.62	Peak
5	5854.250	90.04	112.51	-22.47	67.31	22.73	Peak
6	5924.000	57.32	68.95	-11.63	34.34	22.98	Peak
7	5929.500	57.18	68.20	-11.02	34.18	23.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5825MHz
 Test by :Cyril

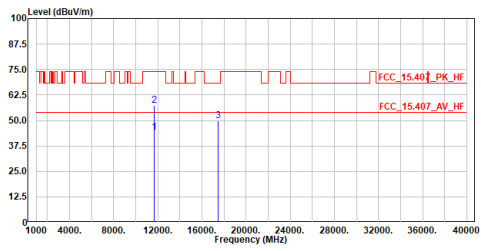

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11650.000	44.31	54.00	-9.69	50.37	-6.06	Average
2	11650.000	57.28	74.00	-16.72	63.34	-6.06	Peak
3	17475.000	49.97	68.20	-18.23	52.96	-2.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5825MHz
 Test by :Cyril

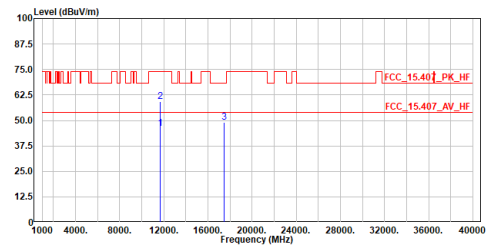

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11650.000	46.07	54.00	-7.93	52.13	-6.06	Average
2	11650.000	59.39	74.00	-14.61	65.45	-6.06	Peak
3	17475.000	49.17	68.20	-19.03	52.16	-2.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5180MHz
 Test by :Cyril

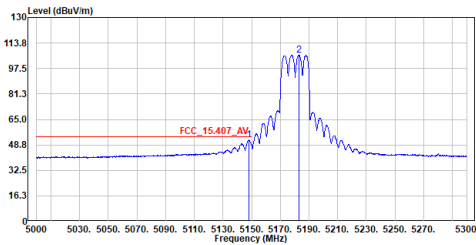

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.200	51.82	54.00	-2.18	30.44	21.38	Average
2	5183.000	106.20	-----	-----	84.81	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5180MHz
 Test by :Cyril

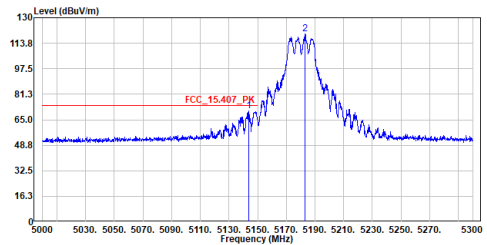

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5143.850	70.44	74.00	-3.56	49.06	21.38	Peak
2	5183.000	119.55	-----	-----	98.16	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5180MHz
 Test by :Cyril

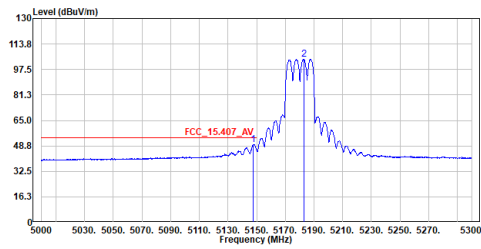

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.600	49.63	54.00	-4.37	28.25	21.38	Average
2	5183.000	104.03	-----	-----	82.64	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5180MHz
 Test by :Cyril

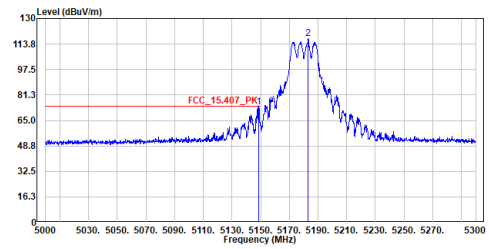

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.500	73.48	74.00	-0.52	52.10	21.38	Peak
2	5183.150	117.15	-----	-----	95.76	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5180MHz
 Test by :Cyril

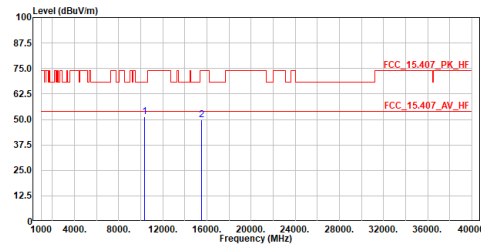

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10360.000	51.32	68.20	-16.88	59.29	-7.97	Peak
2	15540.000	49.84	74.00	-24.16	53.06	-3.22	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5180MHz
 Test by :Cyril

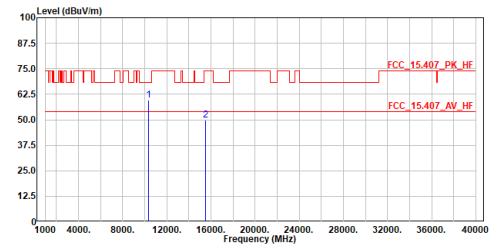

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10360.000	59.52	68.20	-8.68	67.49	-7.97	Peak
2	15540.000	49.77	74.00	-24.23	52.99	-3.22	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5220MHz
 Test by :Cyril

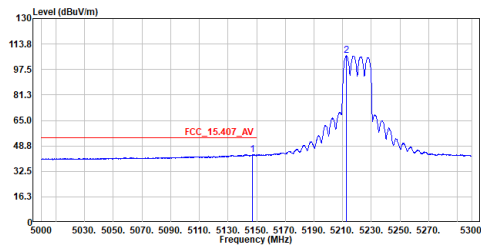

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.150	43.19	54.00	-10.81	21.81	21.38	Average
2	5212.700	106.24	-----	-----	84.86	21.38	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5220MHz
 Test by :Cyril

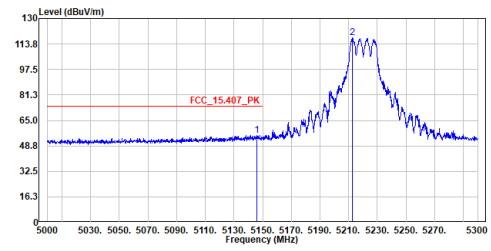

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5145.950	55.60	74.00	-18.40	34.22	21.38	Peak
2	5212.400	117.63	-----	-----	96.24	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5220MHz
 Test by :Cyril

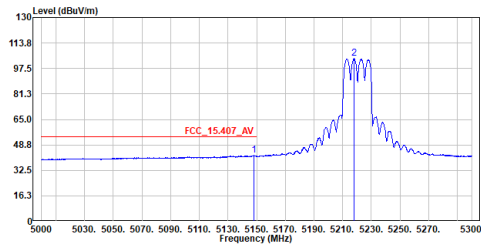

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.350	42.13	54.00	-11.87	20.75	21.38	Average
2	5217.950	103.77	-----	-----	82.38	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5220MHz
 Test by :Cyril

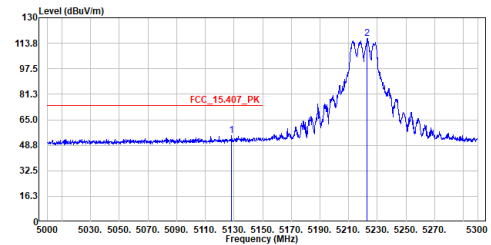

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5128.400	54.70	74.00	-19.30	33.32	21.38	Peak
2	5222.900	116.83	-----	-----	95.44	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5220MHz
 Test by :Cyril

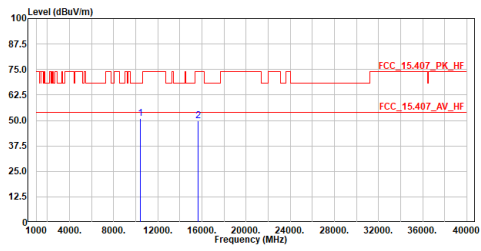


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10440.000	50.82	68.20	-17.38	58.65	-7.83	Peak
2	15660.000	49.74	74.00	-24.26	52.93	-3.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5220MHz
 Test by :Cyril

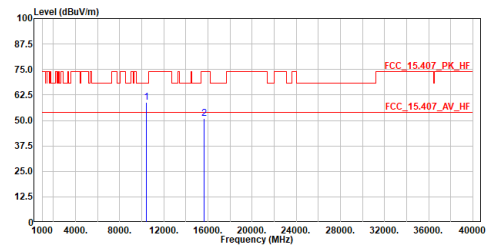


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10440.000	58.92	68.20	-9.28	66.75	-7.83	Peak
2	15660.000	51.11	74.00	-22.89	54.30	-3.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5240MHz
 Test by :Cyril

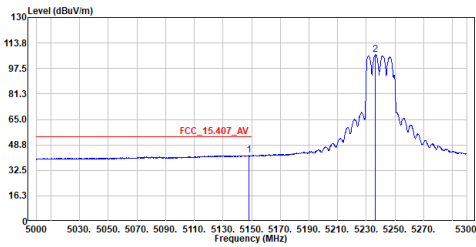


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.050	42.02	54.00	-11.98	20.64	21.38	Average
2	5236.100	106.35	-----	-----	84.95	21.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5240MHz
 Test by :Cyril

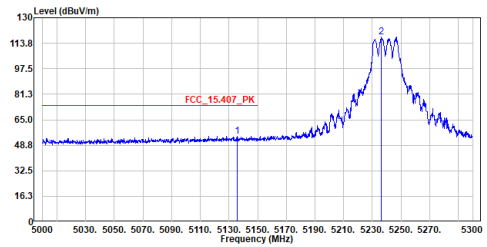


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5135.750	54.61	74.00	-19.39	33.23	21.38	Peak
2	5236.100	117.98	-----	-----	96.58	21.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5240MHz
 Test by :Cyril

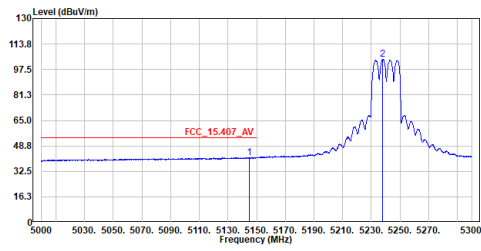


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5144.750	41.32	54.00	-12.68	19.94	21.38	Average
2	5238.050	104.06	-----	-----	82.67	21.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5240MHz
 Test by :Cyril

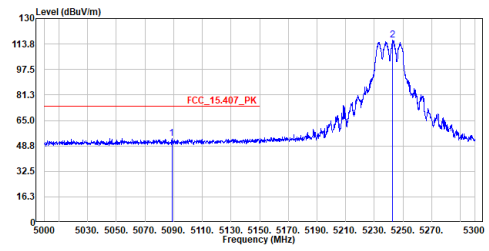


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5088.800	53.56	74.00	-20.44	32.19	21.37	Peak
2	5242.700	116.15	-----	-----	94.76	21.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5240MHz
 Test by :Cyril

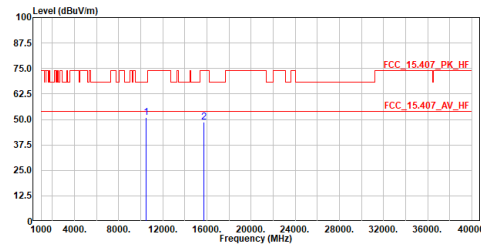


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10480.000	51.10	68.20	-17.10	58.86	-7.76	Peak
2	15720.000	48.74	74.00	-25.26	51.90	-3.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5240MHz
 Test by :Cyril

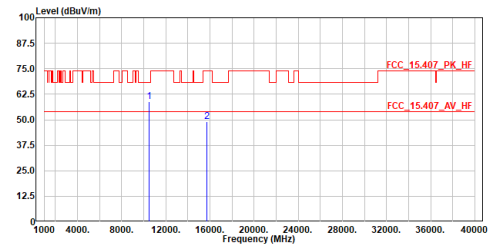


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10480.000	58.95	68.20	-9.25	66.71	-7.76	Peak
2	15720.000	49.22	74.00	-24.78	52.38	-3.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5260MHz
 Test by :Cyril

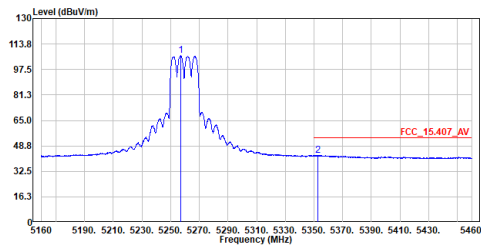

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5257.050	106.34	-----	-----	84.93	21.41	Average
2	5352.900	42.72	54.00	-11.28	21.30	21.42	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5260MHz
 Test by :Cyril

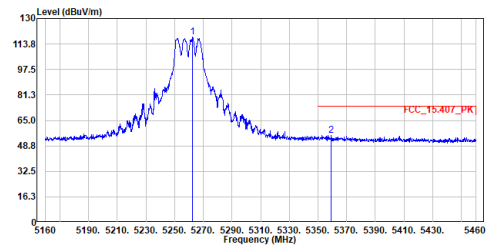

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5262.600	118.09	-----	-----	96.69	21.40	Peak
2	5359.350	55.61	74.00	-18.39	34.19	21.42	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5260MHz
 Test by :Cyril

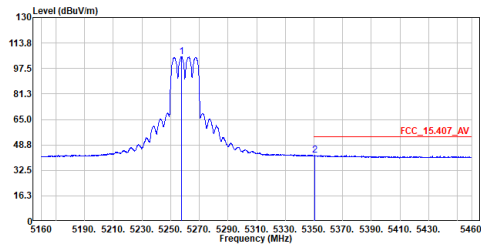

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5257.500	104.90	-----	-----	83.49	21.41	Average
2	5350.500	42.13	54.00	-11.87	20.71	21.42	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5260MHz
 Test by :Cyril

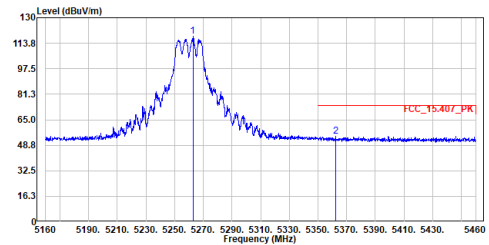

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5262.750	118.12	-----	-----	96.72	21.40	Peak
2	5362.200	54.29	74.00	-19.71	32.86	21.43	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5260MHz
 Test by :Cyril

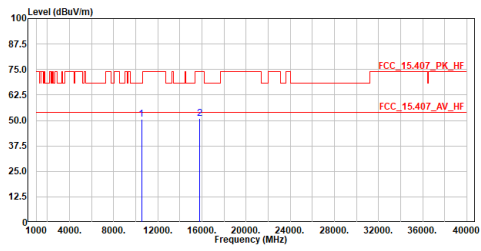


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10520.000	50.59	68.20	-17.61	58.30	-7.71	Peak
2	15780.000	50.76	74.00	-23.24	53.91	-3.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5260MHz
 Test by :Cyril

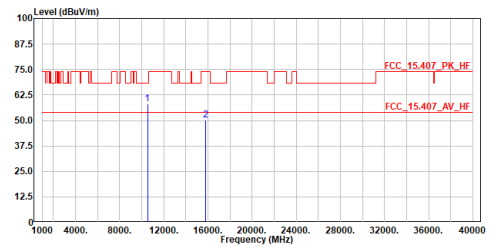


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10520.000	58.06	68.20	-10.14	65.77	-7.71	Peak
2	15780.000	50.01	74.00	-23.99	53.16	-3.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5300MHz
 Test by :Cyril

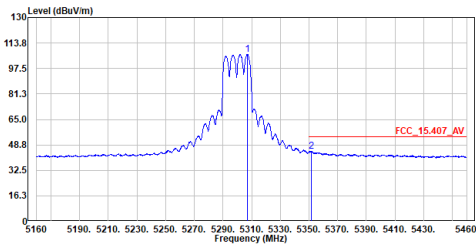


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5307.000	106.58	-----	-----	85.16	21.42	Average
2	5351.700	44.59	54.00	-9.41	23.17	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5300MHz
 Test by :Cyril

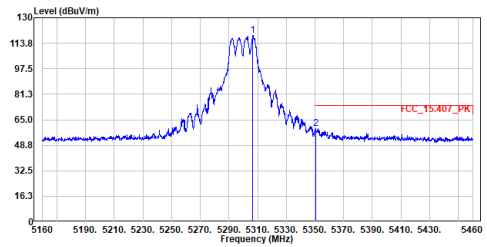


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5306.400	118.64	-----	-----	97.22	21.42	Peak
2	5350.350	59.15	74.00	-14.85	37.73	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5300MHz
 Test by :Cyril

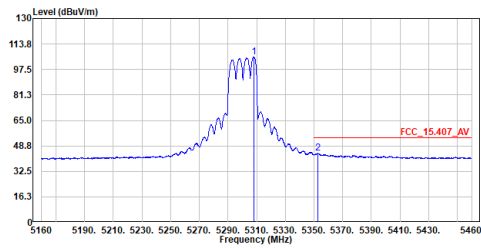


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5308.050	105.41	-----	-----	83.99	21.42	Average
2	5352.900	44.04	54.00	-9.96	22.62	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5300MHz
 Test by :Cyril

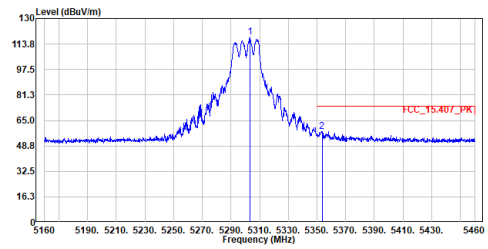


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5303.100	118.13	-----	-----	96.72	21.41	Peak
2	5353.500	58.09	74.00	-15.91	36.67	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5300MHz
 Test by :Cyril

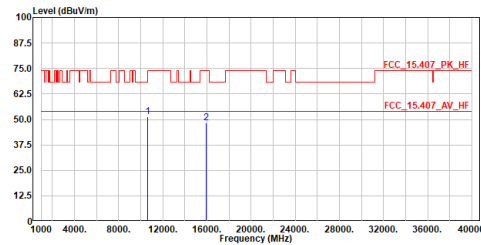


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10660.000	51.14	74.00	-22.86	58.76	-7.62	Peak
2	15900.000	48.12	74.00	-25.88	51.23	-3.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5300MHz
 Test by :Cyril

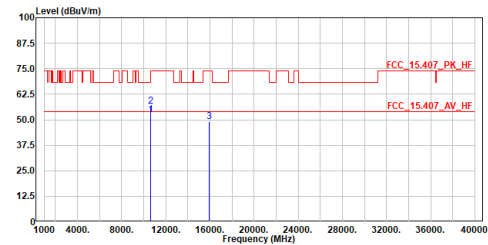


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10660.000	52.56	54.00	-1.44	60.18	-7.62	Average
2	10660.000	56.74	74.00	-17.26	64.36	-7.62	Peak
3	15900.000	49.17	74.00	-24.83	52.28	-3.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5320MHz
 Test by :Cyril

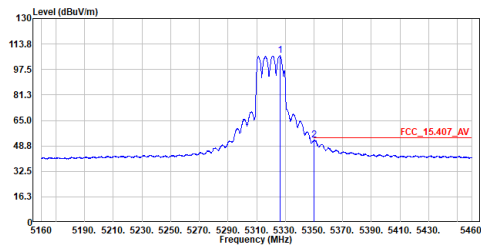


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5326.350	106.25	-----	-----	84.83	21.42	Average
2	5350.200	52.70	54.00	-1.30	31.28	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5320MHz
 Test by :Cyril

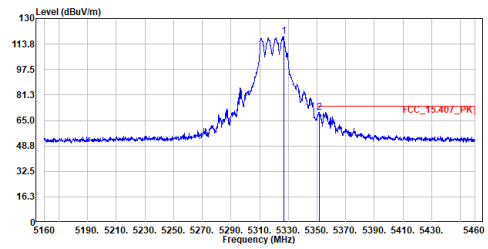


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5326.800	118.85	-----	-----	97.43	21.42	Peak
2	5351.700	70.23	74.00	-3.77	48.81	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5320MHz
 Test by :Cyril

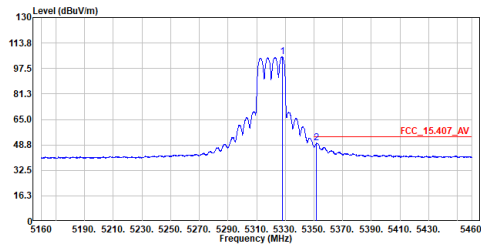


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5327.850	104.79	-----	-----	83.37	21.42	Average
2	5351.850	49.84	54.00	-4.16	28.42	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5320MHz
 Test by :Cyril

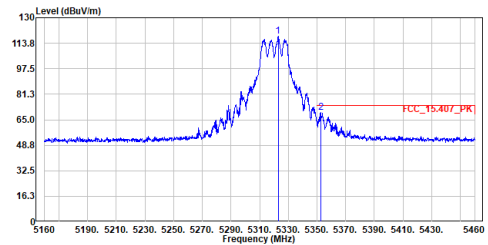


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5322.900	118.07	-----	-----	96.66	21.41	Peak
2	5352.450	69.42	74.00	-4.58	48.00	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5320MHz
 Test by :Cyril

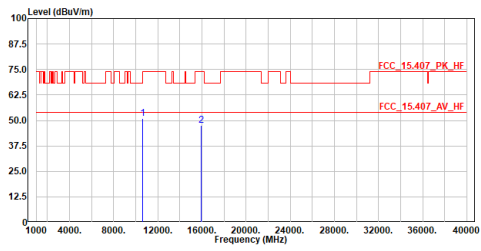


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10640.000	50.87	74.00	-23.13	58.43	-7.56	Peak
2	15960.000	47.70	74.00	-26.30	50.79	-3.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5320MHz
 Test by :Cyril

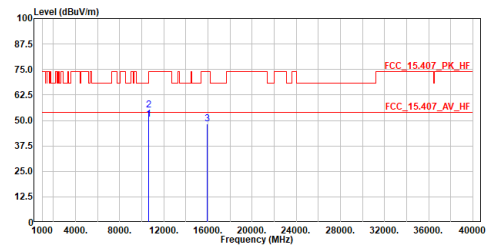


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10640.000	50.43	54.00	-3.57	57.99	-7.56	Average
2	10640.000	55.17	74.00	-18.83	62.73	-7.56	Peak
3	15960.000	48.17	74.00	-25.83	51.26	-3.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5500MHz
 Test by :Cyril

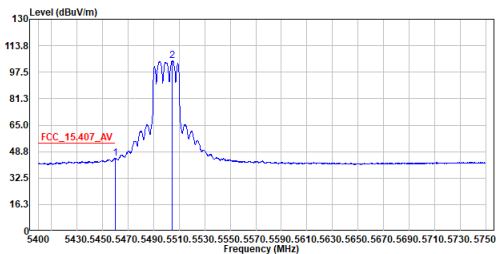


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.850	44.62	54.00	-9.38	23.18	21.44	Average
2	5504.825	104.60	-----	-----	83.15	21.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5500MHz
 Test by :Cyril

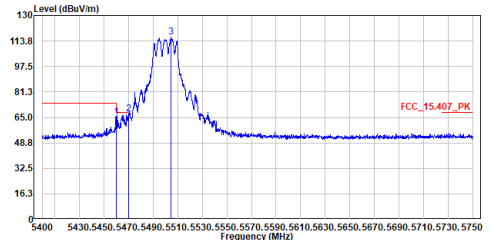


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.850	65.40	74.00	-8.60	43.96	21.44	Peak
2	5469.825	67.21	68.20	-0.99	45.78	21.43	Peak
3	5504.650	116.48	-----	-----	95.03	21.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5500MHz
 Test by :Cyril

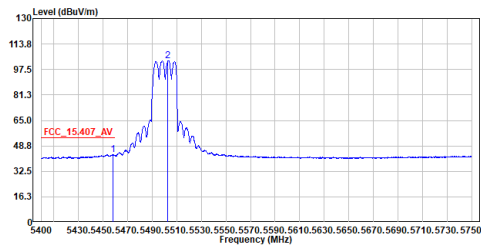


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5457.925	43.39	54.00	-10.61	21.95	21.44	Average
2	5502.900	103.13	-----	-----	81.68	21.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5500MHz
 Test by :Cyril

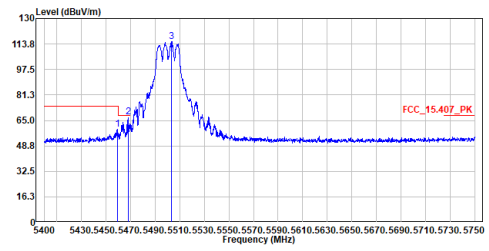


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.675	59.24	74.00	-14.76	37.80	21.44	Peak
2	5468.425	67.13	68.20	-1.07	45.70	21.43	Peak
3	5503.425	115.44	-----	-----	93.99	21.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5500MHz
 Test by :Cyril

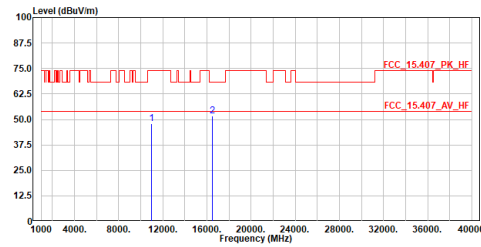


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11000.000	47.76	74.00	-26.24	54.92	-7.16	Peak
2	16500.000	51.63	68.20	-16.57	54.97	-3.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5500MHz
 Test by :Cyril

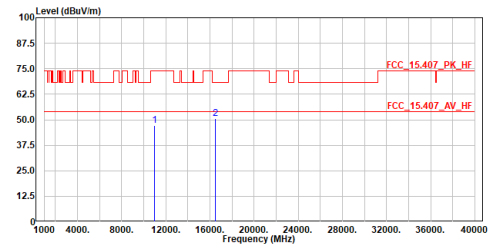


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11000.000	47.13	74.00	-26.87	54.29	-7.16	Peak
2	16500.000	50.75	68.20	-17.45	54.09	-3.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5580MHz
 Test by :Cyril

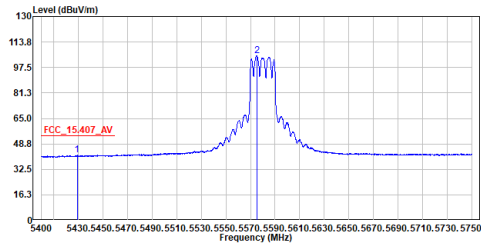

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5429.050	41.61	54.00	-12.39	20.18	21.43	Average
2	5575.175	105.00	-----	-----	83.28	21.72	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5580MHz
 Test by :Cyril

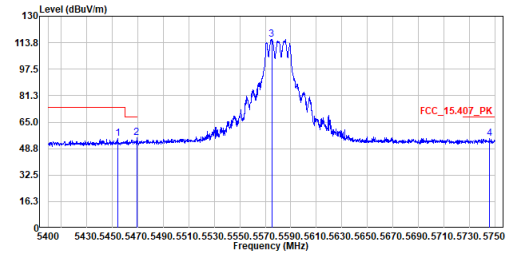

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5454.250	54.73	74.00	-19.27	33.29	21.44	Peak
2	5469.125	55.20	68.20	-13.00	33.77	21.43	Peak
3	5575.000	116.00	-----	-----	94.28	21.72	Peak
4	5745.625	55.12	68.20	-13.08	32.79	22.33	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5580MHz
 Test by :Cyril

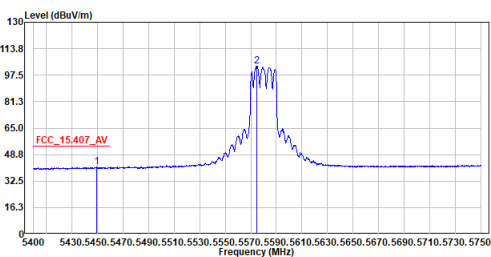

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5449.350	41.03	54.00	-12.97	19.60	21.43	Average
2	5574.825	103.13	-----	-----	81.42	21.71	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5580MHz
 Test by :Cyril

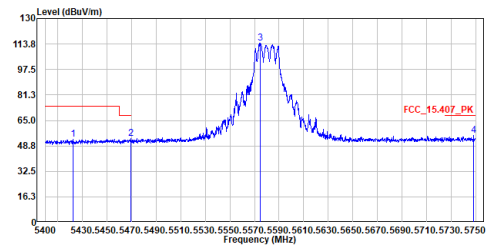

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5422.225	53.16	74.00	-20.84	31.73	21.43	Peak
2	5469.475	53.49	68.20	-14.71	32.06	21.43	Peak
3	5574.475	114.30	-----	-----	92.59	21.71	Peak
4	5748.250	55.30	68.20	-12.90	32.96	22.34	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5580MHz
 Test by :Cyril

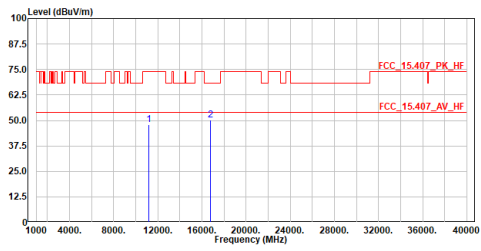


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11160.000	47.80	74.00	-26.20	54.64	-6.84	Peak
2	16740.000	50.05	68.20	-18.15	53.54	-3.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5580MHz
 Test by :Cyril

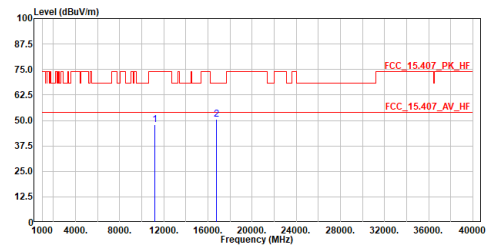


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11160.000	47.80	74.00	-26.20	54.64	-6.84	Peak
2	16740.000	50.58	68.20	-17.62	54.07	-3.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5700MHz
 Test by :Cyril

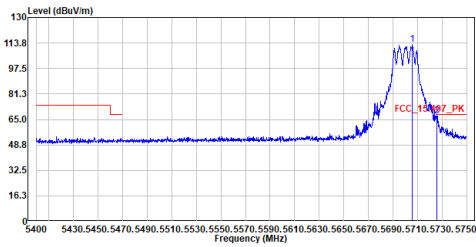


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5705.900	113.03	-----	-----	90.84	22.19	Peak
2	5725.675	67.34	68.20	-0.86	45.07	22.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5700MHz
 Test by :Cyril

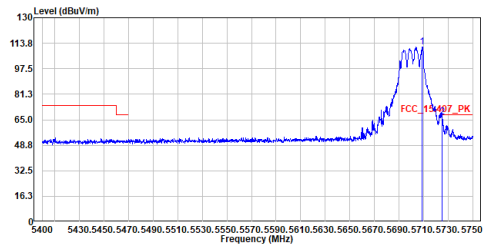


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5709.050	111.42	-----	-----	89.22	22.20	Peak
2	5725.325	66.62	68.20	-1.58	44.36	22.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5700MHz
 Test by :Cyril

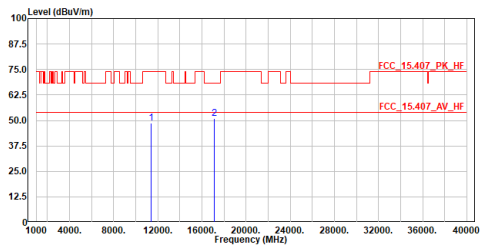


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11400.000	48.75	74.00	-25.25	55.12	-6.37	Peak
2	17100.000	51.10	68.20	-17.10	54.61	-3.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5700MHz
 Test by :Cyril

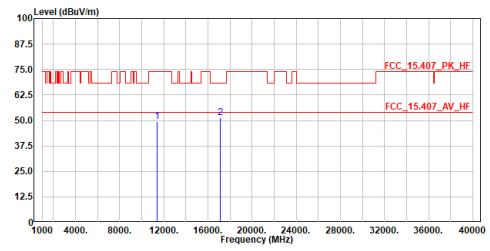


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11400.000	49.47	74.00	-24.53	55.84	-6.37	Peak
2	17100.000	51.26	68.20	-16.94	54.77	-3.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5720MHz
 Test by :Cyril

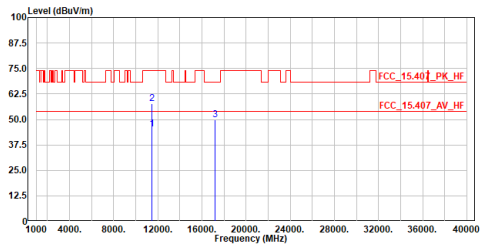


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11440.000	45.20	54.00	-8.80	51.48	-6.28	Average
2	11440.000	57.78	74.00	-16.22	64.06	-6.28	Peak
3	17160.000	49.88	68.20	-18.32	53.30	-3.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5720MHz
 Test by :Cyril

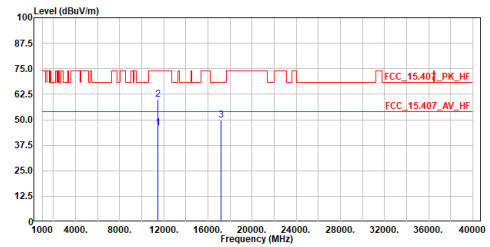


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11440.000	46.05	54.00	-7.95	52.33	-6.28	Average
2	11440.000	59.84	74.00	-14.16	66.12	-6.28	Peak
3	17160.000	49.70	68.20	-18.50	53.12	-3.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5745MHz
 Test by :Cyril

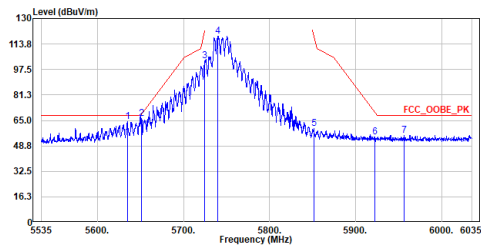

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5634.750	64.32	68.20	-3.88	42.39	21.93	Peak
2	5651.500	66.34	69.32	-2.98	44.36	21.98	Peak
3	5724.500	102.79	121.06	-18.27	80.54	22.25	Peak
4	5740.000	118.92	-----	-----	96.60	22.32	Peak
5	5851.500	59.64	118.78	-59.14	36.92	22.72	Peak
6	5922.000	54.66	70.43	-15.77	31.68	22.98	Peak
7	5956.250	55.60	68.20	-12.60	32.51	23.09	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5745MHz
 Test by :Cyril

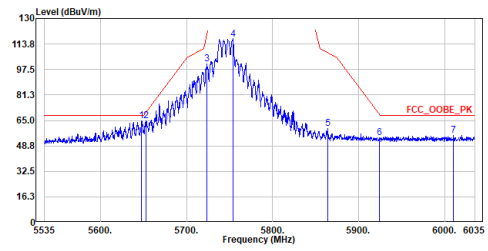

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5647.750	64.55	68.20	-3.65	42.57	21.98	Peak
2	5652.750	64.73	70.24	-5.51	42.73	22.00	Peak
3	5724.000	101.15	119.92	-18.77	78.90	22.25	Peak
4	5754.000	117.00	-----	-----	94.63	22.37	Peak
5	5864.000	59.84	108.28	-48.44	37.07	22.77	Peak
6	5924.000	54.01	68.95	-14.94	31.03	22.98	Peak
7	6010.250	55.60	68.20	-12.60	32.28	23.32	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5745MHz
 Test by :Cyril

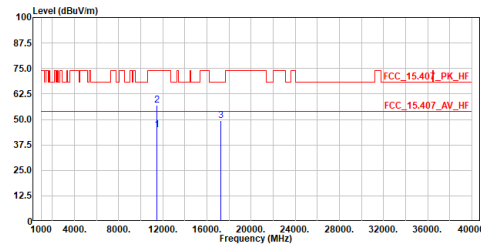

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11490.000	44.96	54.00	-9.04	51.14	-6.18	Average
2	11490.000	56.93	74.00	-17.07	63.11	-6.18	Peak
3	17235.000	49.56	68.20	-18.64	52.88	-3.32	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5745MHz
 Test by :Cyril

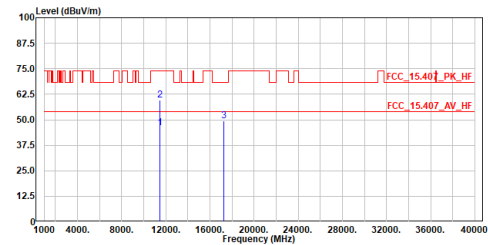

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11490.000	45.95	54.00	-8.05	52.13	-6.18	Average
2	11490.000	59.75	74.00	-14.25	65.93	-6.18	Peak
3	17235.000	49.61	68.20	-18.59	52.93	-3.32	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5785MHz
 Test by :Cyril

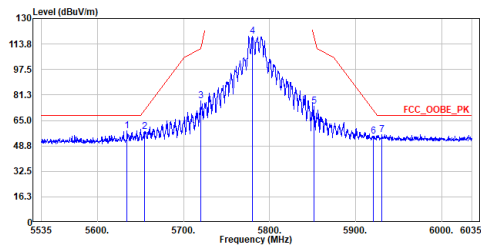


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5634.250	58.46	68.20	-9.74	36.53	21.93	Peak
2	5654.750	58.07	71.72	-13.65	36.06	22.01	Peak
3	5720.250	77.67	111.37	-33.70	55.43	22.24	Peak
4	5780.500	118.95	-----	-----	96.49	22.46	Peak
5	5851.500	74.17	118.78	-44.61	51.45	22.72	Peak
6	5920.750	55.09	71.35	-16.26	32.11	22.98	Peak
7	5930.500	56.10	68.20	-12.10	33.09	23.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5785MHz
 Test by :Cyril

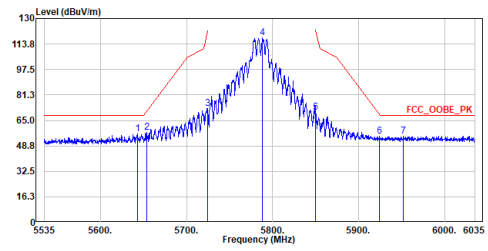


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5643.000	56.43	68.20	-11.77	34.47	21.96	Peak
2	5653.500	57.17	70.80	-13.63	35.16	22.01	Peak
3	5724.250	72.81	120.49	-47.68	50.56	22.25	Peak
4	5788.250	117.56	-----	-----	95.07	22.49	Peak
5	5850.250	70.05	121.63	-51.58	47.33	22.72	Peak
6	5924.000	54.80	68.95	-14.15	31.82	22.98	Peak
7	5951.750	55.04	68.20	-13.16	31.96	23.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5785MHz
 Test by :Cyril

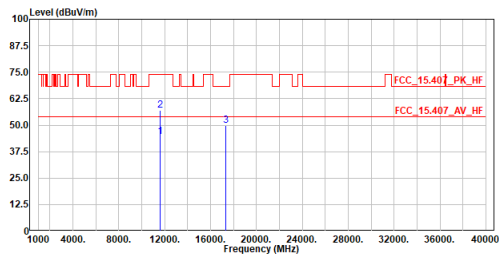


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11570.000	44.49	54.00	-9.51	50.62	-6.13	Average
2	11570.000	56.88	74.00	-17.12	63.01	-6.13	Peak
3	17355.000	49.96	68.20	-18.24	53.12	-3.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5785MHz
 Test by :Cyril

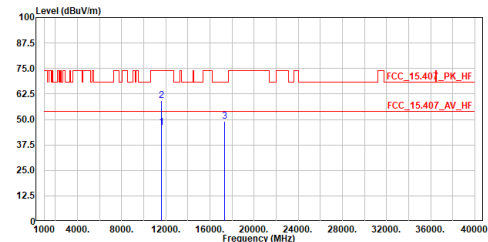


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11570.000	46.21	54.00	-7.79	52.34	-6.13	Average
2	11570.000	59.07	74.00	-14.93	65.20	-6.13	Peak
3	17355.000	49.22	68.20	-18.98	52.38	-3.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5825MHz
 Test by :Cyril

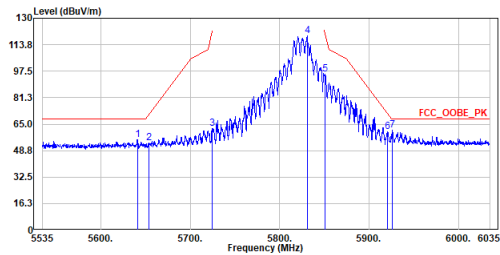

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5641.000	55.46	68.20	-12.74	33.50	21.96	Peak
2	5654.250	53.45	71.35	-17.90	31.44	22.01	Peak
3	5724.500	62.35	121.06	-58.71	40.10	22.25	Peak
4	5830.750	119.45	-----	-----	96.80	22.65	Peak
5	5850.750	95.67	120.49	-24.82	72.95	22.72	Peak
6	5920.250	60.21	71.72	-11.51	37.25	22.96	Peak
7	5926.000	61.18	68.20	-7.02	38.19	22.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5825MHz
 Test by :Cyril

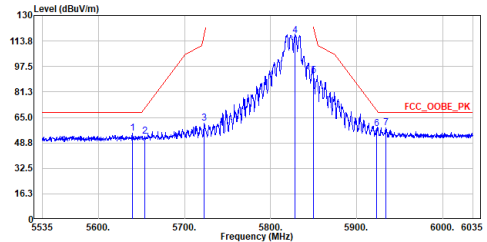

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5639.500	54.82	68.20	-13.38	32.87	21.95	Peak
2	5654.000	53.11	71.17	-18.06	31.10	22.01	Peak
3	5723.000	61.32	117.64	-56.32	39.07	22.25	Peak
4	5828.000	117.31	-----	-----	94.68	22.63	Peak
5	5850.000	91.94	122.20	-30.26	69.22	22.72	Peak
6	5923.000	57.75	69.69	-11.94	34.77	22.98	Peak
7	5934.250	58.21	68.20	-9.99	35.18	23.03	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5825MHz
 Test by :Cyril

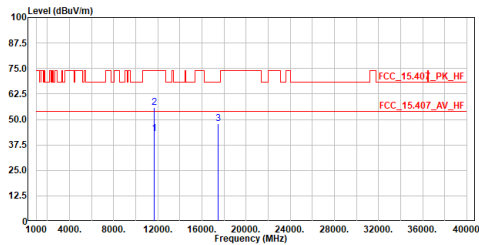

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11650.000	43.09	54.00	-10.91	49.15	-6.06	Average
2	11650.000	56.03	74.00	-17.97	62.09	-6.06	Peak
3	17475.000	47.93	68.20	-20.27	50.92	-2.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5825MHz
 Test by :Cyril

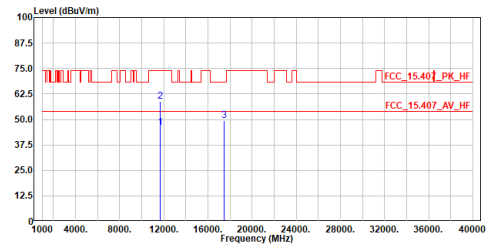

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11650.000	45.85	54.00	-8.15	51.91	-6.06	Average
2	11650.000	58.92	74.00	-15.08	64.98	-6.06	Peak
3	17475.000	49.43	68.20	-18.77	52.42	-2.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5190MHz
 Test by :Cyril

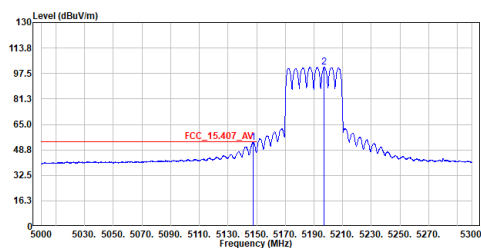

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.750	53.62	54.00	-0.38	32.24	21.38	Average
2	5197.100	101.42	-----	-----	80.03	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5190MHz
 Test by :Cyril

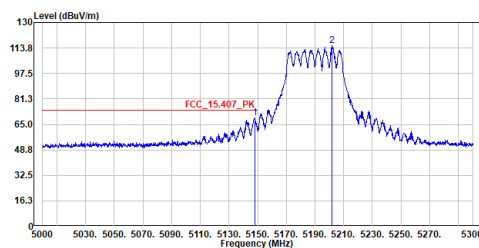

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.200	68.94	74.00	-5.06	47.56	21.38	Peak
2	5202.050	115.09	-----	-----	93.70	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5190MHz
 Test by :Cyril

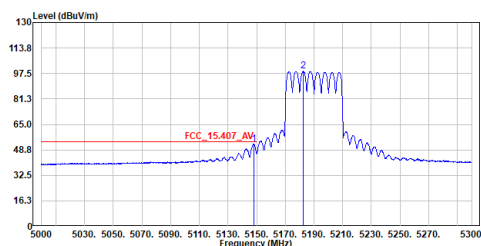

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.200	52.35	54.00	-1.65	30.97	21.38	Average
2	5182.250	98.89	-----	-----	77.50	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5190MHz
 Test by :Cyril

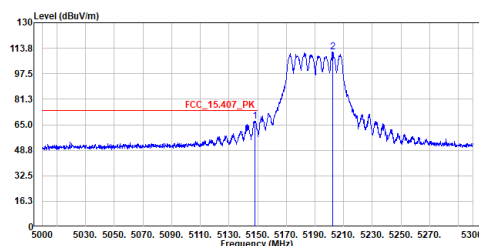

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.900	67.39	74.00	-6.61	46.01	21.38	Peak
2	5202.500	111.58	-----	-----	90.19	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5190MHz
 Test by :Cyril

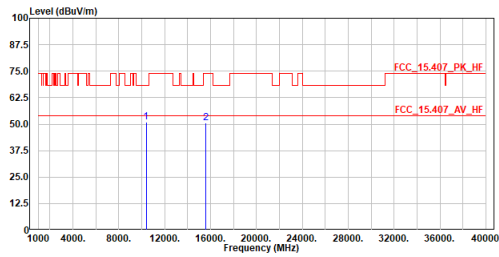

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10380.000	51.09	68.20	-17.11	59.01	-7.92	Peak
2	15570.000	50.64	74.00	-23.36	53.85	-3.21	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5190MHz
 Test by :Cyril

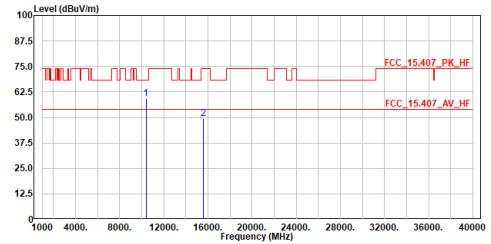

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10380.000	59.38	68.20	-8.82	67.30	-7.92	Peak
2	15570.000	49.57	74.00	-24.43	52.78	-3.21	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5230MHz
 Test by :Cyril

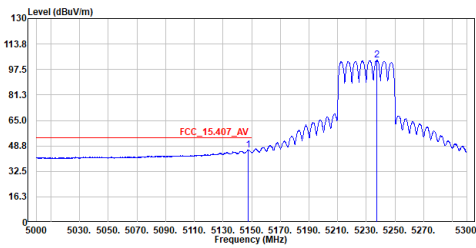

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.600	46.28	54.00	-7.72	24.90	21.38	Average
2	5237.300	103.60	-----	-----	82.20	21.40	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5230MHz
 Test by :Cyril

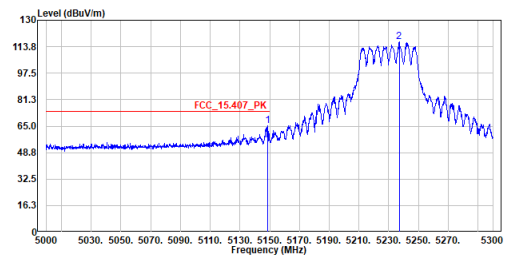

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.500	65.24	74.00	-8.76	43.86	21.38	Peak
2	5237.000	116.67	-----	-----	95.27	21.40	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5230MHz
 Test by :Cyril

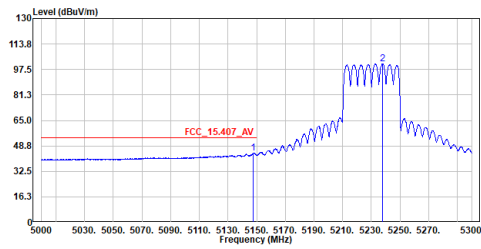

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.750	44.21	54.00	-9.79	22.83	21.38	Average
2	5237.900	101.18	-----	-----	79.79	21.39	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5230MHz
 Test by :Cyril

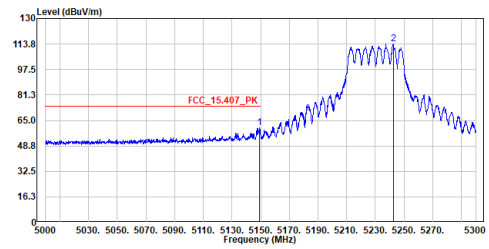

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5149.100	60.42	74.00	-13.58	39.04	21.38	Peak
2	5242.550	113.87	-----	-----	92.48	21.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5230MHz
 Test by :Cyril

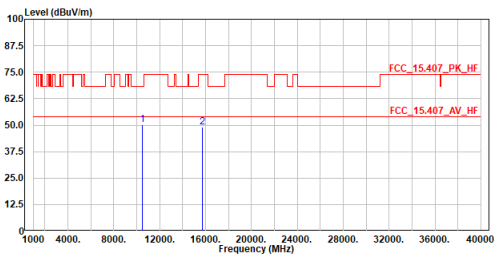

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10460.000	50.36	68.20	-17.84	58.16	-7.80	Peak
2	15690.000	49.22	74.00	-24.78	52.39	-3.17	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5230MHz
 Test by :Cyril

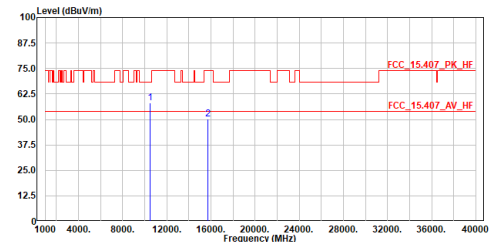

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10460.000	58.17	68.20	-10.03	65.97	-7.80	Peak
2	15690.000	50.08	74.00	-23.92	53.25	-3.17	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5270MHz
 Test by :Cyril

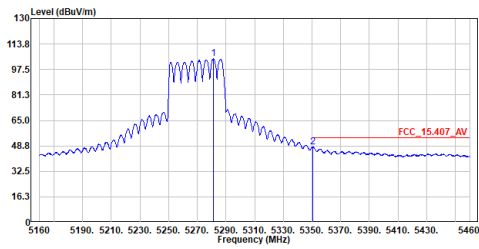

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5281.200	104.39	-----	-----	82.98	21.41	Average
2	5350.500	48.16	54.00	-5.84	26.74	21.42	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5270MHz
 Test by :Cyril

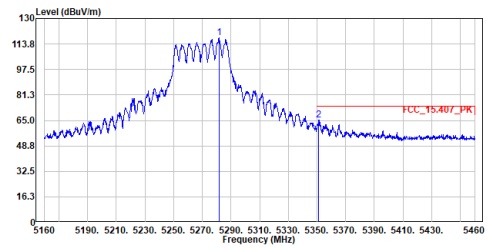

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5281.800	117.53	-----	-----	96.12	21.41	Peak
2	5351.250	65.09	74.00	-8.91	43.67	21.42	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5270MHz
 Test by :Cyril

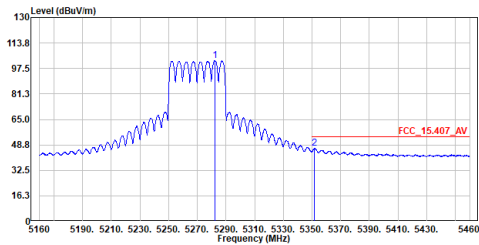

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5282.400	102.46	-----	-----	81.05	21.41	Average
2	5351.850	46.61	54.00	-7.39	25.19	21.42	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5270MHz
 Test by :Cyril

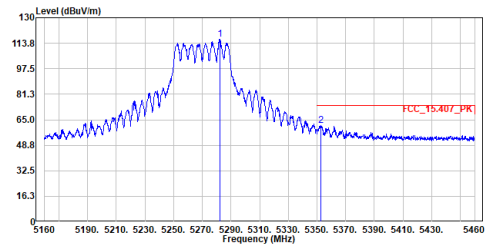

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5282.100	116.12	-----	-----	94.71	21.41	Peak
2	5352.450	61.16	74.00	-12.84	39.74	21.42	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5270MHz
 Test by :Cyril

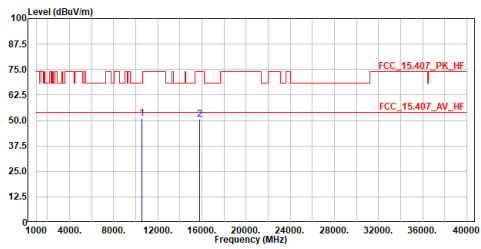


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10540.000	51.13	68.20	-17.07	58.81	-7.68	Peak
2	15810.000	50.64	74.00	-23.36	53.78	-3.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5270MHz
 Test by :Cyril

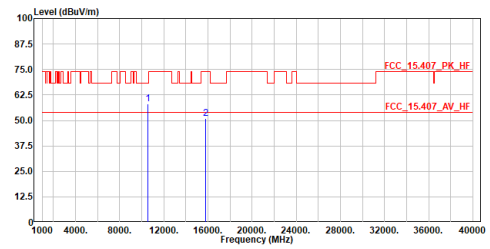


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10540.000	57.94	68.20	-10.26	65.62	-7.68	Peak
2	15810.000	50.99	74.00	-23.01	54.13	-3.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5310MHz
 Test by :Cyril

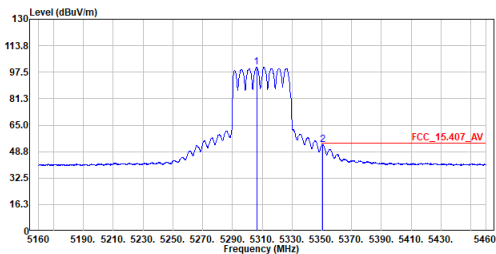


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5306.250	100.56	-----	-----	79.14	21.42	Average
2	5350.800	53.13	54.00	-0.87	31.71	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5310MHz
 Test by :Cyril

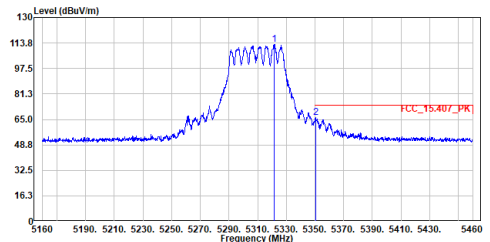


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5321.700	112.87	-----	-----	91.46	21.41	Peak
2	5350.350	66.28	74.00	-7.72	44.86	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5310MHz
 Test by :Cyril

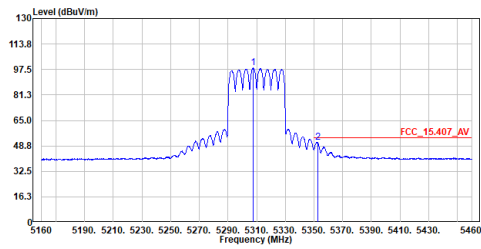


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5307.600	98.49	-----	-----	77.07	21.42	Average
2	5352.450	51.00	54.00	-3.00	29.58	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5310MHz
 Test by :Cyril

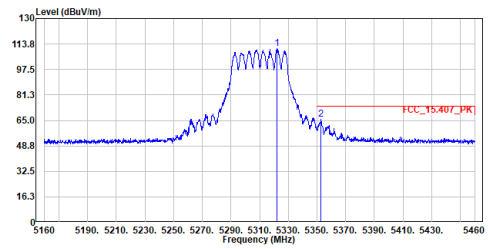


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5322.150	110.77	-----	-----	89.36	21.41	Peak
2	5352.600	65.57	74.00	-8.43	44.15	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5310MHz
 Test by :Cyril

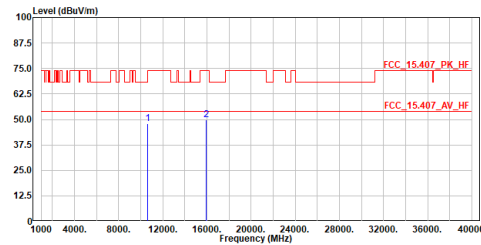


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10620.000	47.97	74.00	-26.03	55.57	-7.60	Peak
2	15930.000	49.83	74.00	-24.17	52.94	-3.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5310MHz
 Test by :Cyril

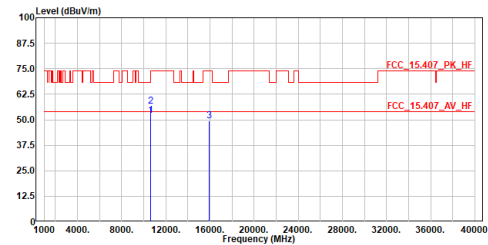


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10620.000	52.19	54.00	-1.81	59.79	-7.60	Average
2	10620.000	56.65	74.00	-17.35	64.25	-7.60	Peak
3	15930.000	49.47	74.00	-24.53	52.58	-3.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5510MHz
 Test by :Cyril

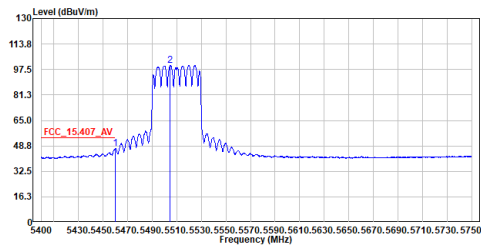


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.850	46.97	54.00	-7.03	25.53	21.44	Average
2	5504.825	100.23	-----	-----	78.78	21.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5510MHz
 Test by :Cyril

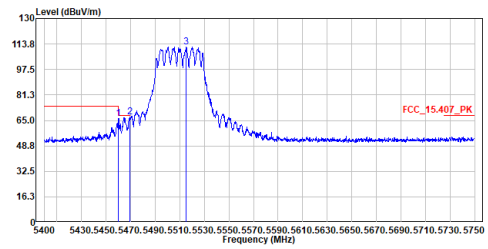


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.850	66.06	74.00	-7.94	44.62	21.44	Peak
2	5469.650	67.24	68.20	-0.96	45.81	21.43	Peak
3	5515.150	111.93	-----	-----	90.44	21.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5510MHz
 Test by :Cyril

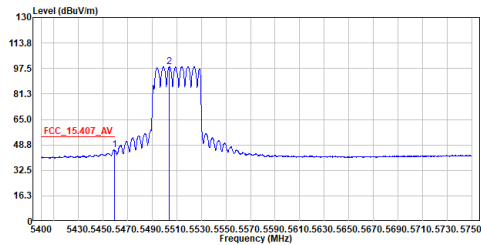


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.150	45.59	54.00	-8.41	24.15	21.44	Average
2	5503.950	98.83	-----	-----	77.38	21.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5510MHz
 Test by :Cyril

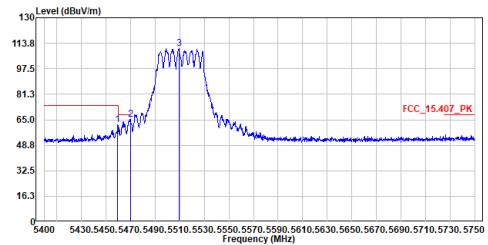


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.500	62.00	74.00	-12.00	40.56	21.44	Peak
2	5469.825	65.33	68.20	-2.87	43.90	21.43	Peak
3	5509.375	110.14	-----	-----	88.66	21.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5510MHz
 Test by :Cyril

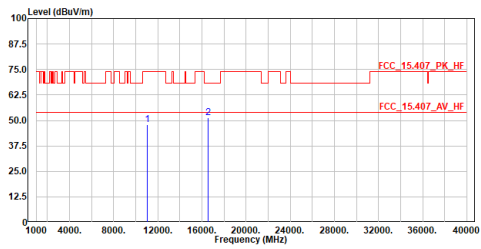

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11020.000	47.76	74.00	-26.24	54.88	-7.12	Peak
2	16530.000	51.22	68.20	-16.98	54.58	-3.36	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5510MHz
 Test by :Cyril

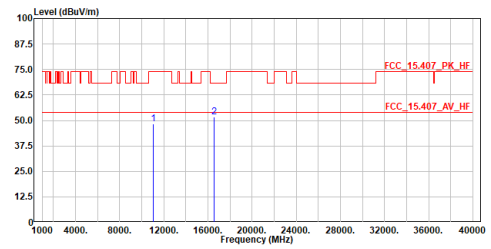

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11020.000	48.24	74.00	-25.76	55.36	-7.12	Peak
2	16530.000	51.52	68.20	-16.68	54.88	-3.36	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5550MHz
 Test by :Cyril

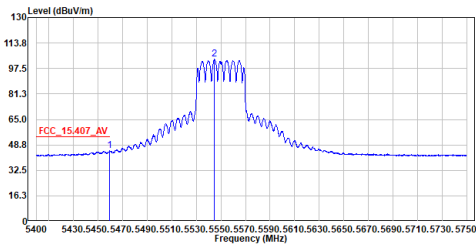

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.500	45.27	54.00	-8.73	23.83	21.44	Average
2	5544.550	103.28	-----	-----	81.67	21.61	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5550MHz
 Test by :Cyril

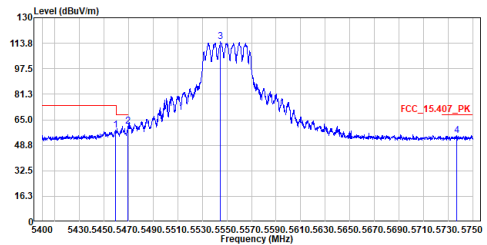

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.675	58.61	74.00	-15.39	37.17	21.44	Peak
2	5469.650	60.98	68.20	-7.22	39.55	21.43	Peak
3	5544.725	114.81	-----	-----	93.20	21.61	Peak
4	5736.700	54.86	68.20	-13.34	32.56	22.30	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5550MHz
 Test by :Cyril

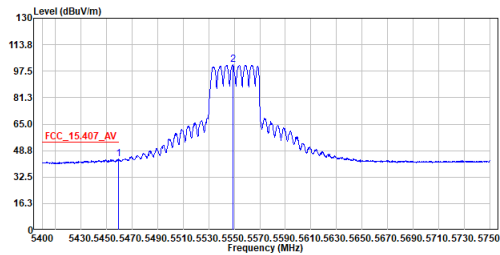

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.325	43.66	54.00	-10.34	22.22	21.44	Average
2	5548.925	101.42	-----	-----	79.80	21.62	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5550MHz
 Test by :Cyril

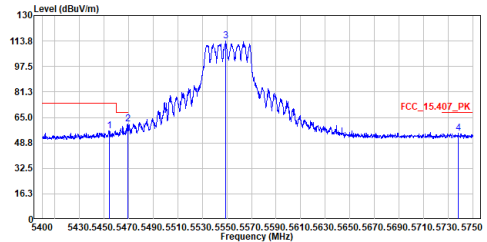

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5454.250	56.61	74.00	-17.39	35.17	21.44	Peak
2	5469.650	60.97	68.20	-7.23	39.54	21.43	Peak
3	5549.100	114.05	-----	-----	92.43	21.62	Peak
4	5738.450	54.81	68.20	-13.39	32.50	22.31	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5550MHz
 Test by :Cyril

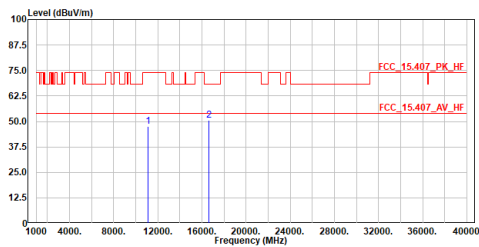

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11100.000	47.63	74.00	-26.37	54.59	-6.96	Peak
2	16650.000	50.39	68.20	-17.81	53.82	-3.43	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5550MHz
 Test by :Cyril

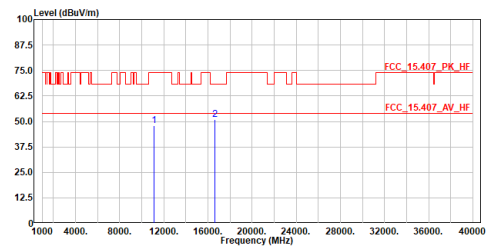

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11100.000	47.97	74.00	-26.03	54.93	-6.96	Peak
2	16650.000	51.02	68.20	-17.18	54.45	-3.43	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5670MHz
 Test by :Cyril

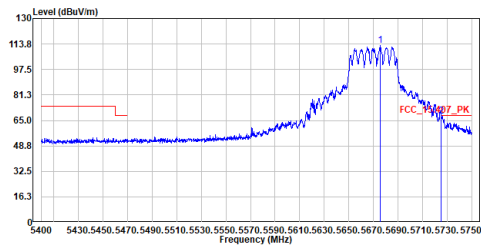


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5675.450	112.74	-----	-----	90.66	22.08	Peak
2	5725.150	67.60	68.20	-0.60	45.34	22.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5670MHz
 Test by :Cyril

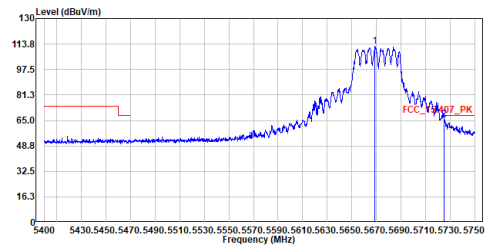


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5668.800	112.10	-----	-----	90.05	22.05	Peak
2	5725.325	65.97	68.20	-2.23	43.71	22.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5670MHz
 Test by :Cyril

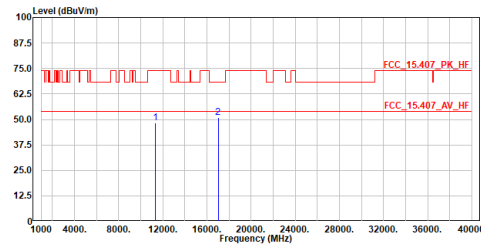


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11340.000	48.31	74.00	-25.69	54.79	-6.48	Peak
2	17010.000	51.05	68.20	-17.15	54.69	-3.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5670MHz
 Test by :Cyril

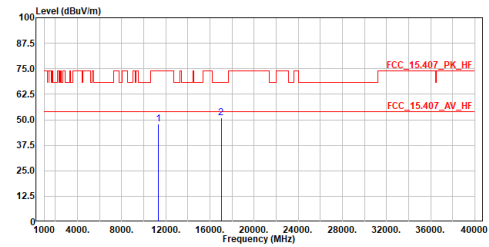


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11340.000	48.10	74.00	-25.90	54.58	-6.48	Peak
2	17010.000	51.09	68.20	-17.11	54.73	-3.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5710MHz
 Test by :Cyril

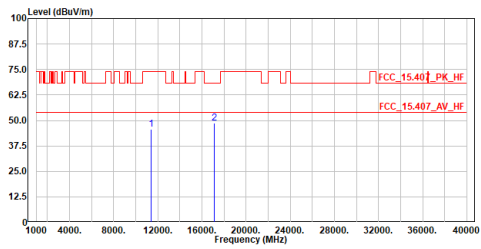

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11420.000	45.69	74.00	-28.31	52.01	-6.32	Peak
2	17130.000	48.71	68.20	-19.49	52.18	-3.47	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5710MHz
 Test by :Cyril

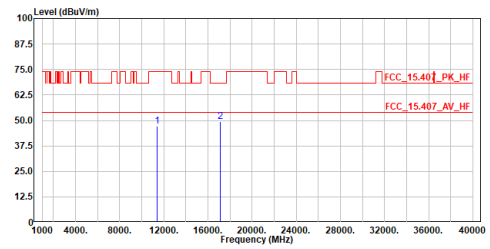

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11420.000	47.24	74.00	-26.76	53.56	-6.32	Peak
2	17130.000	49.28	68.20	-18.92	52.75	-3.47	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5755MHz
 Test by :Cyril

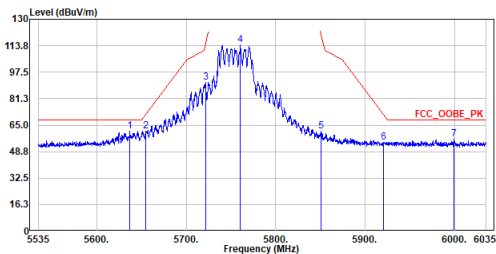

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5637.000	61.31	68.20	-6.89	39.38	21.93	Peak
2	5654.750	61.40	71.72	-10.32	39.39	22.01	Peak
3	5721.750	91.18	114.79	-23.61	68.93	22.25	Peak
4	5760.500	114.34	-----	-----	91.96	22.38	Peak
5	5851.000	61.32	119.92	-58.60	38.60	22.72	Peak
6	5921.000	54.41	71.17	-16.76	31.43	22.98	Peak
7	5999.500	56.60	68.20	-11.60	33.34	23.26	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5755MHz
 Test by :Cyril

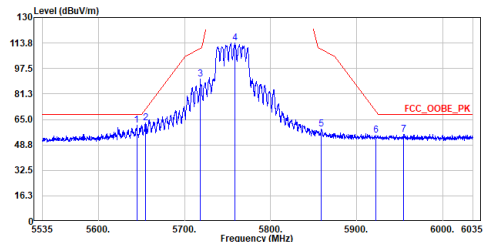

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5644.500	61.19	68.20	-7.01	39.22	21.97	Peak
2	5654.750	62.59	71.72	-9.13	40.58	22.01	Peak
3	5718.500	90.71	110.38	-19.67	68.47	22.24	Peak
4	5758.750	113.96	-----	-----	91.58	22.38	Peak
5	5859.250	58.67	109.61	-50.94	35.93	22.74	Peak
6	5922.750	54.95	69.87	-14.92	31.97	22.98	Peak
7	5955.000	55.55	68.20	-12.65	32.46	23.09	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5755MHz
 Test by :Cyril

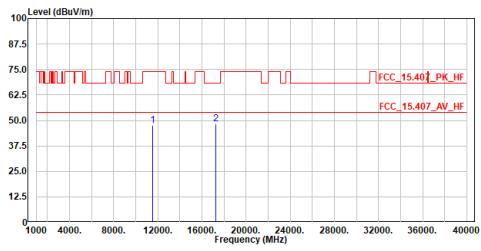


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11510.000	47.51	74.00	-26.49	53.67	-6.16	Peak
2	17265.000	48.16	68.20	-20.04	51.44	-3.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5755MHz
 Test by :Cyril

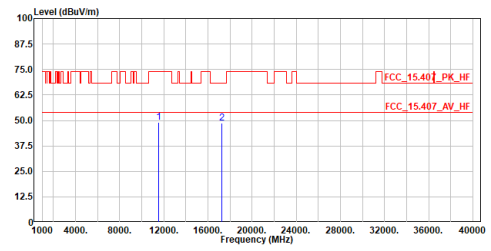


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11510.000	48.96	74.00	-25.04	55.12	-6.16	Peak
2	17265.000	48.63	68.20	-19.57	51.91	-3.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5795MHz
 Test by :Cyril

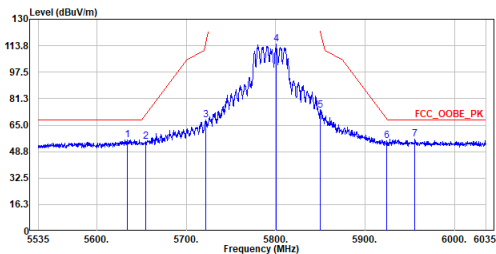


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5634.250	56.16	68.20	-12.04	34.23	21.93	Peak
2	5654.500	54.71	71.54	-16.83	32.70	22.01	Peak
3	5722.000	68.28	115.36	-47.08	46.03	22.25	Peak
4	5800.750	114.63	-----	-----	92.09	22.54	Peak
5	5850.000	74.25	122.20	-47.95	51.53	22.72	Peak
6	5924.000	55.26	68.95	-13.69	32.28	22.98	Peak
7	5955.750	56.28	68.20	-11.92	33.19	23.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5795MHz
 Test by :Cyril

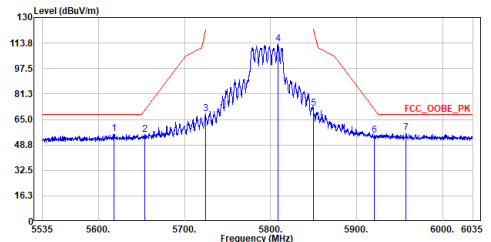


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5617.750	55.68	68.20	-12.52	33.81	21.87	Peak
2	5654.250	55.44	71.35	-15.91	33.43	22.01	Peak
3	5724.250	68.49	120.49	-52.00	46.24	22.25	Peak
4	5809.000	113.54	-----	-----	90.98	22.56	Peak
5	5850.000	71.95	122.20	-50.25	49.23	22.72	Peak
6	5920.250	55.11	71.72	-16.61	32.15	22.96	Peak
7	5957.500	56.55	68.20	-11.65	33.44	23.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_5795MHz
 Test by :Cyril

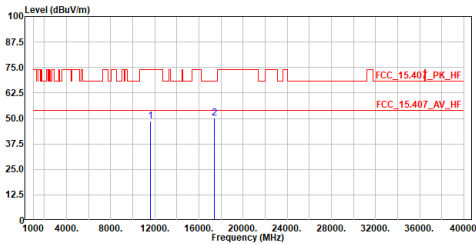

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	48.56	74.00	-25.44	54.67	-6.11	Peak
2	17385.000	50.03	68.20	-18.17	53.14	-3.11	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_5795MHz
 Test by :Cyril

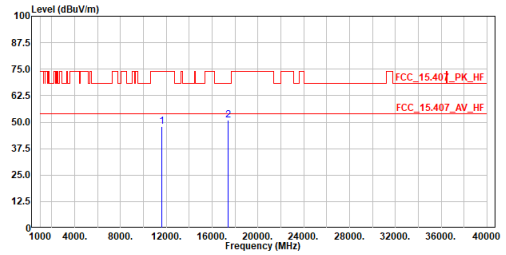

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	47.79	74.00	-26.21	53.90	-6.11	Peak
2	17385.000	50.99	68.20	-17.21	54.10	-3.11	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5210MHz
 Test by :Cyril

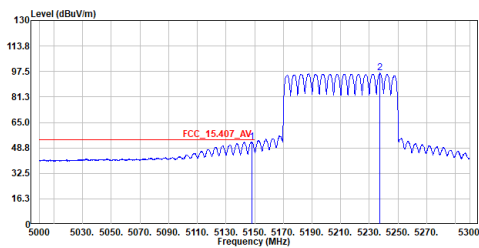

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.900	52.68	54.00	-1.32	31.30	21.38	Average
2	5237.450	96.40	-----	-----	75.00	21.40	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5210MHz
 Test by :Cyril

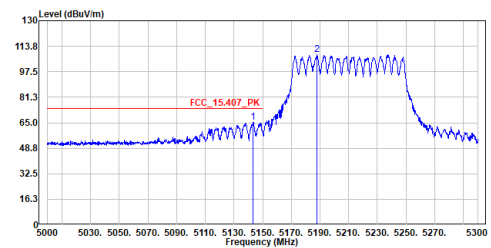

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5143.550	65.16	74.00	-8.84	43.78	21.38	Peak
2	5188.100	108.53	-----	-----	87.15	21.38	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5210MHz
 Test by :Cyril

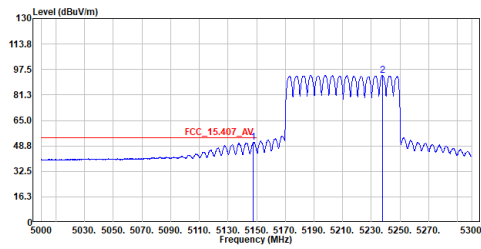


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.750	51.12	54.00	-2.88	29.74	21.38	Average
2	5237.600	93.88	-----	-----	72.49	21.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5210MHz
 Test by :Cyril

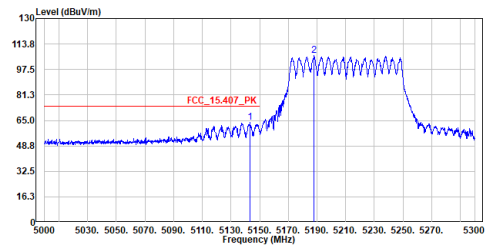


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5143.400	63.76	74.00	-10.24	42.38	21.38	Peak
2	5188.100	106.21	-----	-----	84.83	21.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5210MHz
 Test by :Cyril

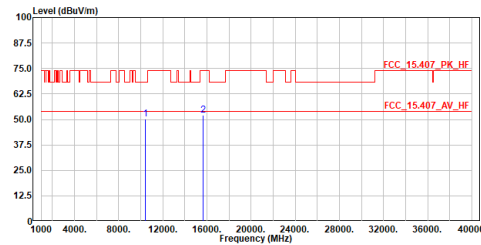


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10420.000	50.30	68.20	-17.90	58.17	-7.87	Peak
2	15630.000	51.89	74.00	-22.11	55.09	-3.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5210MHz
 Test by :Cyril

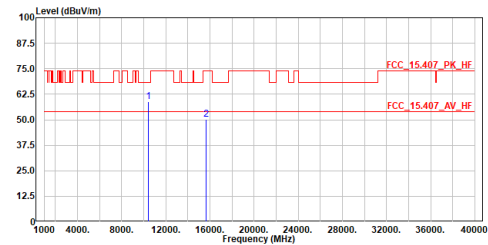


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10420.000	58.99	68.20	-9.21	66.86	-7.87	Peak
2	15630.000	50.31	74.00	-23.69	53.51	-3.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5290MHz
 Test by :Cyril

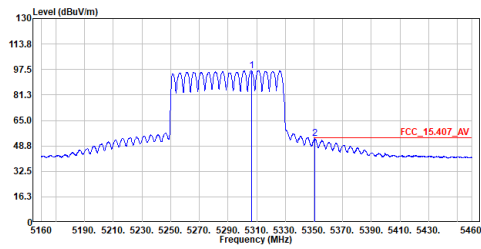


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5306.400	96.80	-----	-----	75.38	21.42	Average
2	5350.500	53.34	54.00	-0.66	31.92	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5290MHz
 Test by :Cyril

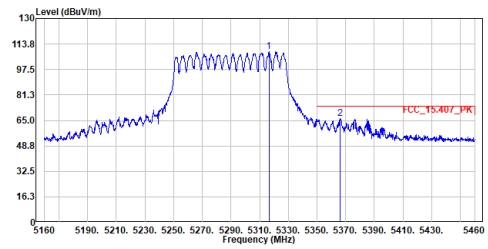


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5316.450	108.91	-----	-----	87.50	21.41	Peak
2	5366.250	66.12	74.00	-7.88	44.70	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5290MHz
 Test by :Cyril

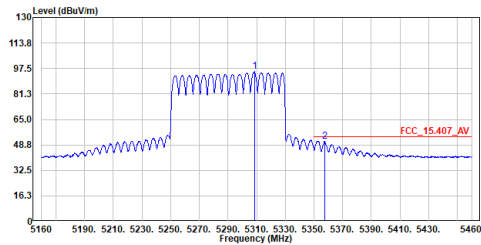


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5308.500	95.44	-----	-----	74.02	21.42	Average
2	5357.400	51.19	54.00	-2.81	29.77	21.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5290MHz
 Test by :Cyril

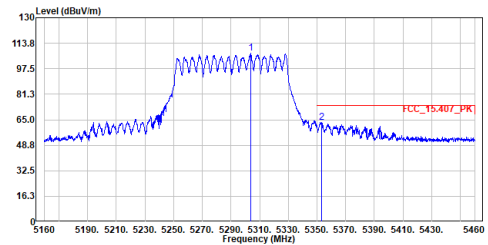


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5303.700	107.44	-----	-----	86.03	21.41	Peak
2	5353.200	63.39	74.00	-10.61	41.97	21.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5290MHz
 Test by :Cyril

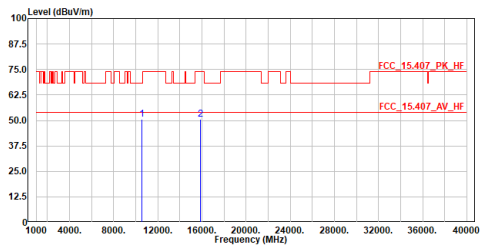


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10580.000	50.57	68.20	-17.63	58.21	-7.64	Peak
2	15870.000	50.72	74.00	-23.28	53.84	-3.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5290MHz
 Test by :Cyril

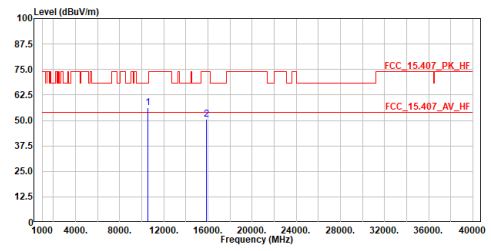


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10580.000	56.37	68.20	-11.83	64.01	-7.64	Peak
2	15870.000	50.65	74.00	-23.35	53.77	-3.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5530MHz
 Test by :Cyril

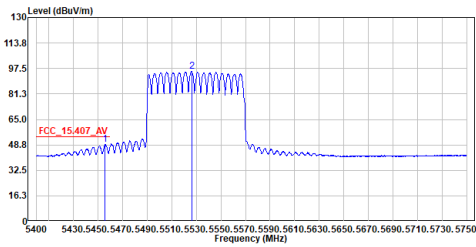


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5455.825	48.85	54.00	-5.15	27.41	21.44	Average
2	5526.350	95.74	-----	-----	74.20	21.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5530MHz
 Test by :Cyril

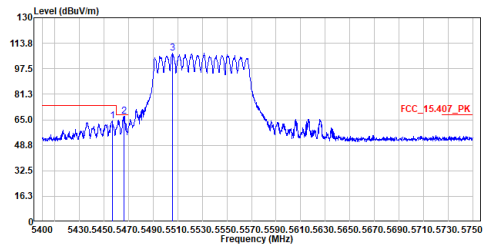


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5456.700	64.44	74.00	-9.56	43.00	21.44	Peak
2	5466.500	67.34	68.20	-0.86	45.91	21.43	Peak
3	5505.525	107.39	-----	-----	85.94	21.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5530MHz
 Test by :Cyril

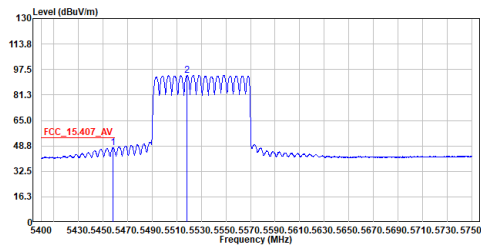


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.275	47.58	54.00	-6.42	26.14	21.44	Average
2	5518.300	93.82	-----	-----	72.31	21.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5530MHz
 Test by :Cyril

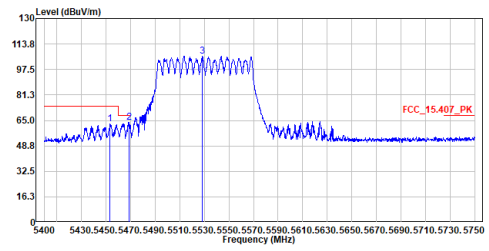


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5453.375	63.01	74.00	-10.99	41.58	21.43	Peak
2	5468.600	63.69	68.20	-4.51	42.26	21.43	Peak
3	5528.625	106.20	-----	-----	84.66	21.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5530MHz
 Test by :Cyril

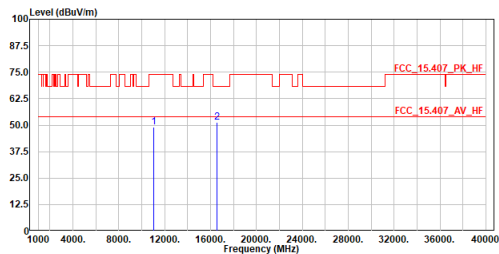


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11060.000	48.95	74.00	-25.05	56.00	-7.05	Peak
2	16590.000	51.25	68.20	-16.95	54.64	-3.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5530MHz
 Test by :Cyril

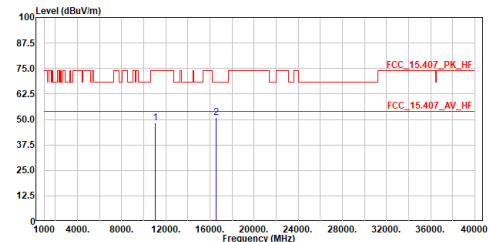


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11060.000	48.20	74.00	-25.80	55.25	-7.05	Peak
2	16590.000	50.94	68.20	-17.26	54.33	-3.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5610MHz
 Test by :Cyril

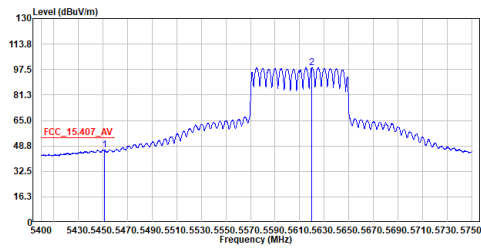

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5451.275	46.34	54.00	-7.66	24.91	21.43	Average
2	5619.975	98.65	-----	-----	76.78	21.87	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax80_TX_5610MHz
 Test by :Cyril

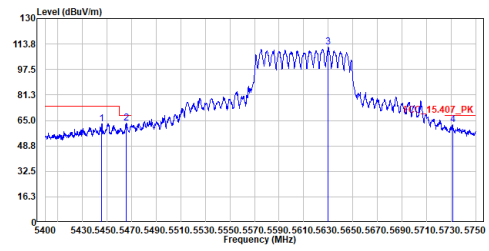

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5445.850	62.87	74.00	-11.13	41.44	21.43	Peak
2	5465.625	63.09	68.20	-5.11	41.66	21.43	Peak
3	5630.125	111.76	-----	-----	89.84	21.92	Peak
4	5731.625	62.11	68.20	-6.09	39.83	22.28	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5610MHz
 Test by :Cyril

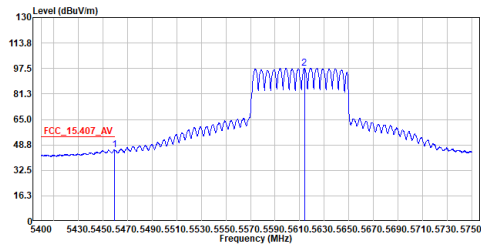

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.500	45.59	54.00	-8.41	24.15	21.44	Average
2	5613.850	97.71	-----	-----	75.86	21.85	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax80_TX_5610MHz
 Test by :Cyril

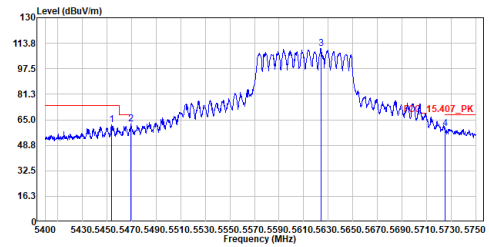

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5454.075	61.61	74.00	-12.39	40.17	21.44	Peak
2	5469.300	62.25	68.20	-5.95	40.82	21.43	Peak
3	5624.000	110.40	-----	-----	88.51	21.89	Peak
4	5725.150	59.29	68.20	-8.91	37.03	22.26	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.