

XS4 Original+ and XS4 One S

E2131

W41M, and W81M

Antennas

Version	Date	Changes	Author
1.0	20/12/2022	First edition	M.U.

Table of contents


1	W61M	3
	RFID Antenna	3
	Bluetooth LE Antenna	4
Annex I	6

1 W61M

XS4 Original+ and XS4 One S E2131		W61M
		MIFARE (1) + Bluetooth LE SoC (2)
Antennas	Number of antennas	2
	Manufacturer	1- SALTO Systems, S.L. 2- N/A
	Model number	1- W41M 2- N/A
	Type	1- Integral, PCB 2- Integral, Chip
	Gain	1- N/A 2- 0.5 dBi
	Frequency of Operation	1- 13.553 - 13.567 MHz 2- 2400 - 2483.5 MHz
Channels	Number of channels	1- N/A 2- 40
	Spacing	1- N/A 2- 2 MHz
	Bandwith	1- N/A 2- 2 MHz
Type of Modulation		1- ASK 100%, OOK (subcarrier fc/16) & ASK 10% - 30%, OOK (subcarrier fc/32) 2- GFSK
Declared Nominal Output Power (Max.)		1- 22 dBm 2- 6 dBm
ITU Emission Designator		1- K1D 2- F1D
Equipment Configuration for frequency Stability: Data Rate		1- 106 Kbit/s, 26.48 Kbit/s 2- 1 Mbit/s
Equipment Configuration for Field Strenght Measurement: Data Rate		1- 106 Kbit/s, 26.48 Kbit/s 2- 1 Mbit/s


RFID Antenna

The RFID antenna was designed by Salto Systems, S.L. at Arkotz 9, Pol. Lanbarren 20180 Oiartzun (Gipuzkoa), Spain. The antenna model is W41M and it is located on the control circuit, 227236. The dimensions of the circuit and the antenna are shown in the following pictures.

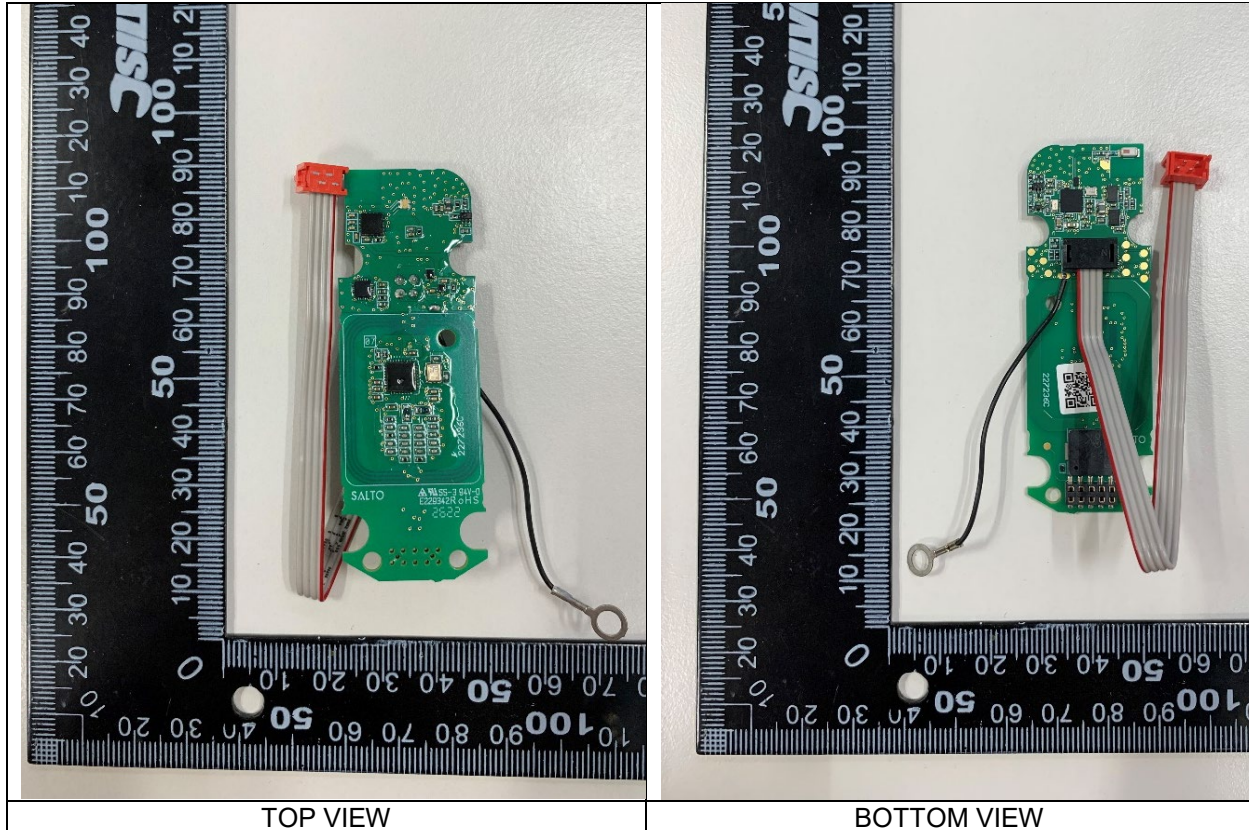

Bluetooth LE Antenna

The Bluetooth LE antenna is the 2450AT18B100 model form Johanson Technology. The antenna is located on the bottom side of the control circuit, 227236. The following image shows the location of the antenna on the control circuit.

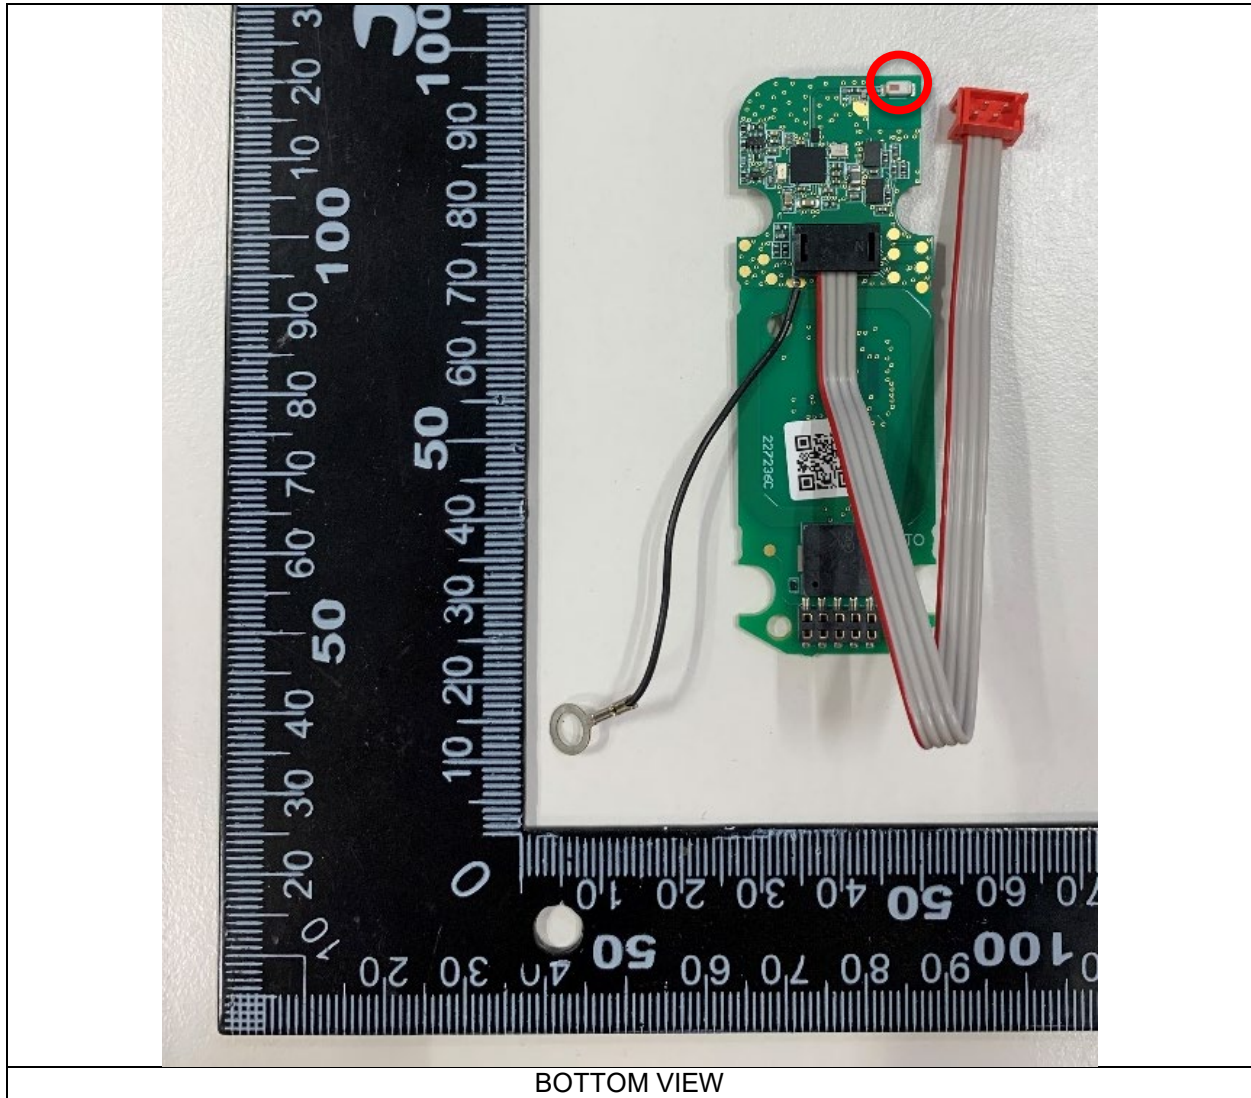

The remaining technical information of the antenna is described in the data sheet attached in Annex I.

Annex I

"High Frequency Ceramic Solutions"

2450 MHz Antenna **P/N 2450AT18B100**
 Detail Specification: 08/10/09 Page 1 of 3


General Specifications

Part Number	2450AT18B100	Input Power	3W max.
Frequency Range	2400 - 2500 Mhz	Impedance	50 Ω
Peak Gain	0.5 dBi typ. (XZ-V)	Operating Temperature	-40 to +85°C
Average Gain	-0.5 dBi typ. (XZ-V)	Reel Quantity	3,000
Return Loss	9.5 dB min.		

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2450AT18B100S
		T & R	Suffix = E	Eg. 2450AT18B100E
Termination Style		100% Tin	Suffix = None	Eg. 2450AT18B100(E or S)
		Tin / Lead	Please consult Factory	


Terminal Configuration

No.	Function
1	Feeding Point
2	NC




Mechanical Dimensions

	In	mm
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 ± 0.008	1.60 ± 0.20
T	0.051 +.004/-0.008	1.30 +0.1/-0.2
a	0.020 ± 0.012	0.50 ± 0.30

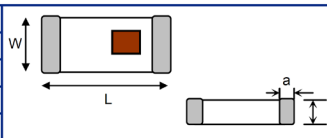

Mounting Considerations

Mount these devices with brown mark facing up. Units: mm
 Line width should be designed to provide 50 Ω impedance matching characteristics.

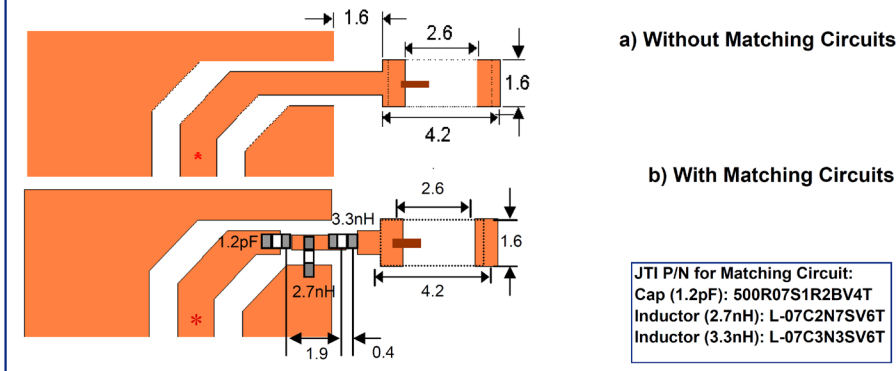

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
 2009 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


2450 MHz Antenna

P/N 2450AT18B100

Detail Specification: 08/10/09

Page 2 of 3

Typical Electrical Characteristics (T=25°C)

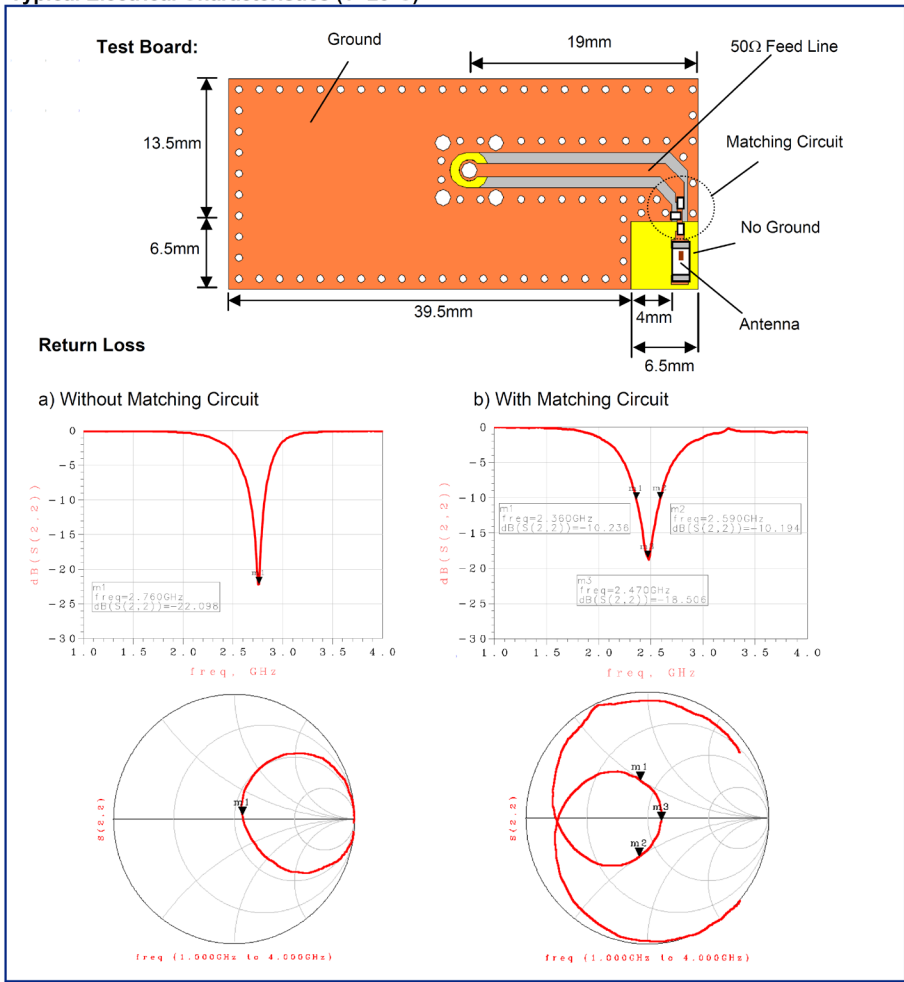

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
2009 Johanson Technology, Inc. All Rights Reserved


"High Frequency Ceramic Solutions"

2450 MHz Antenna

P/N 2450AT18B100

Detail Specification: 08/10/09

Page 3 of 3

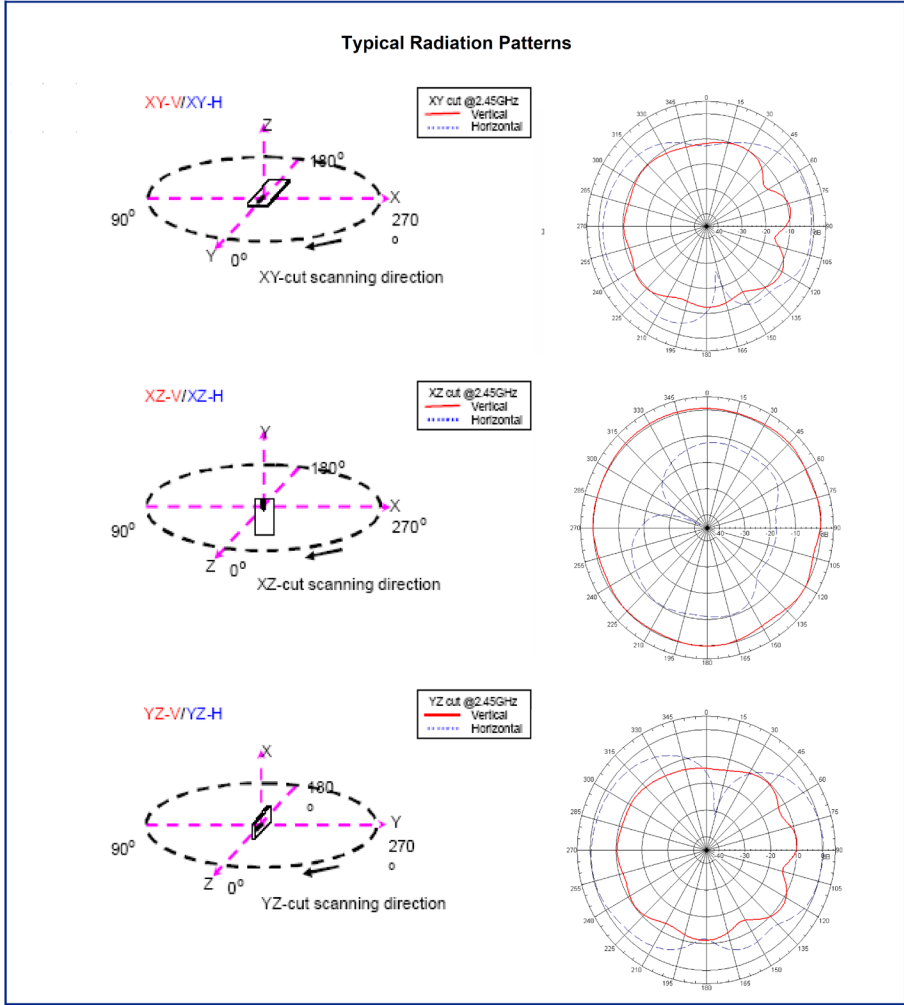

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved