



| Application Information |                               |
|-------------------------|-------------------------------|
| O4Version               | 5.244.350                     |
| TotalTime               | 3m 43s 875ms                  |
| AdditionalInfor         | NULL                          |
| Manufacturer            | HongKong Genuine Co., limited |




| Passive Test For 2.4g |             |               |               |            |             |             |             |              |              |
|-----------------------|-------------|---------------|---------------|------------|-------------|-------------|-------------|--------------|--------------|
| Freq<br>(MHz)         | Effi<br>(%) | Gain<br>(dBi) | Gain<br>(dBd) | UHS<br>(%) | DHIS<br>(%) | Max<br>(dB) | Min<br>(dB) | AttH<br>(dB) | AttV<br>(dB) |
| 2400                  | 7.2         | -1.46         | -3.61         | 6.765      | 0.432       | -1.46       | -40.7       | 43           | 43           |
| 2410                  | 7.98        | -1.11         | -3.26         | 7.55       | 0.435       | -1.11       | -38.5       | 43.06        | 43.09        |
| 2420                  | 8.26        | -1            | -3.15         | 7.843      | 0.416       | -1          | -36.7       | 43.19        | 43.25        |
| 2430                  | 8.04        | -1.11         | -3.26         | 7.635      | 0.401       | -1.11       | -36.5       | 43.18        | 43.2         |
| 2440                  | 8.66        | -0.78         | -2.93         | 8.241      | 0.421       | -0.78       | -35.3       | 43.26        | 43.26        |
| 2450                  | 9.17        | -0.51         | -2.66         | 8.729      | 0.444       | -0.51       | -35.8       | 43.34        | 43.32        |
| 2460                  | 7.25        | -1.59         | -3.74         | 6.919      | 0.33        | -1.59       | -38.2       | 43.06        | 43.12        |
| 2470                  | 7           | -1.64         | -3.79         | 6.642      | 0.355       | -1.64       | -34.5       | 43.03        | 43.1         |
| 2480                  | 8.14        | -0.94         | -3.09         | 7.694      | 0.442       | -0.94       | -33.2       | 43.28        | 43.33        |
| 2490                  | 8.69        | -0.57         | -2.72         | 8.224      | 0.468       | -0.57       | -34.4       | 43.34        | 43.38        |
| 2500                  | 7.98        | -0.79         | -2.94         | 7.546      | 0.439       | -0.79       | -36.2       | 43.41        | 43.47        |

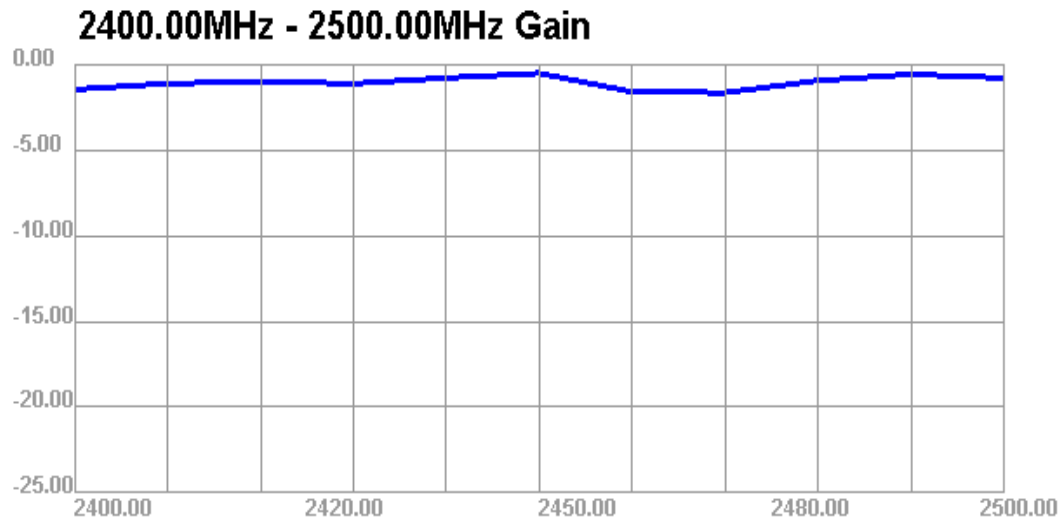


### 2400.00MHz - 2500.00MHz Efficiency

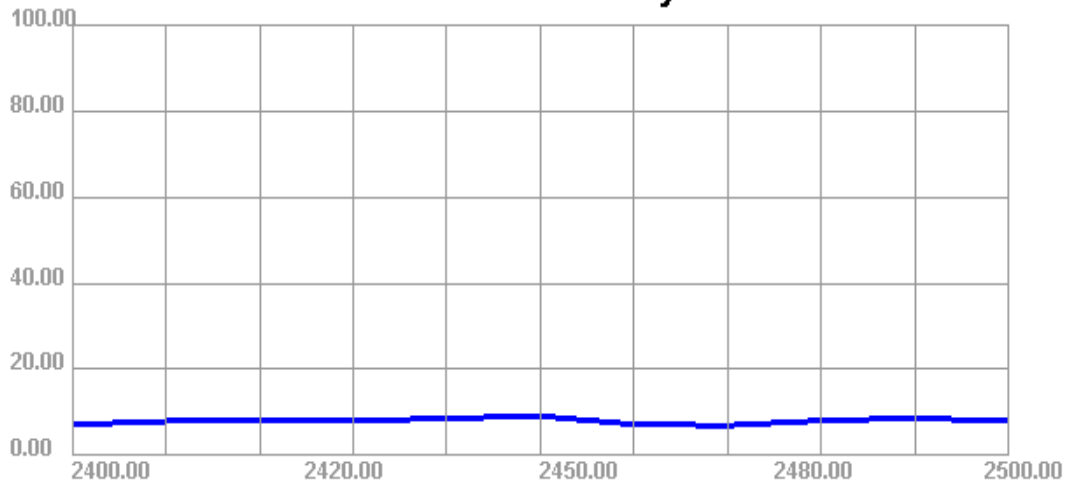


### 2400.000MHz H

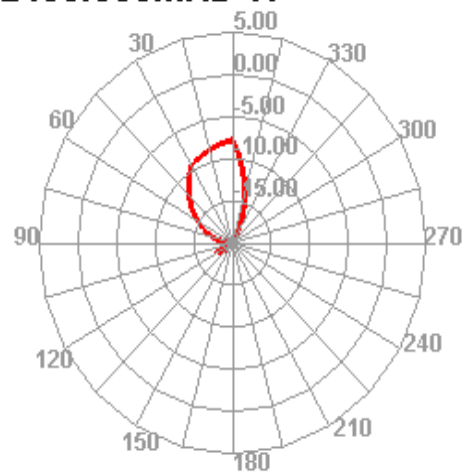


### 2400.000MHz E1

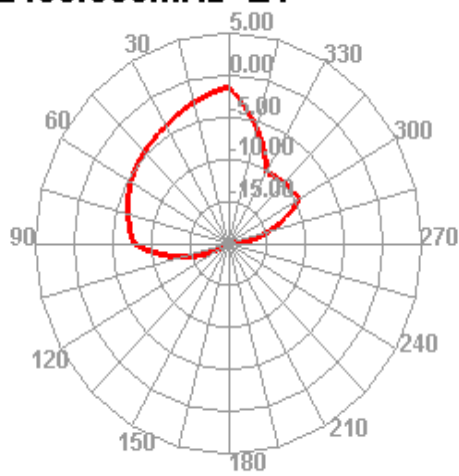


### 2400.000MHz E2

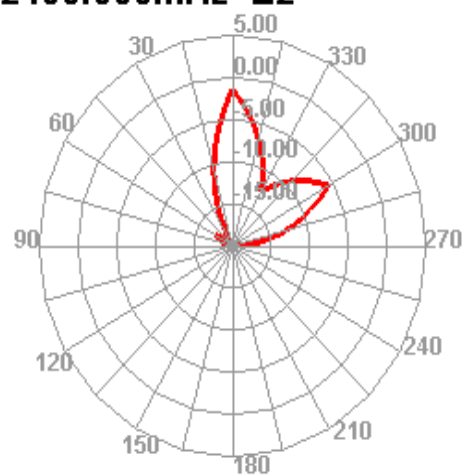


**2450.000MHz H**

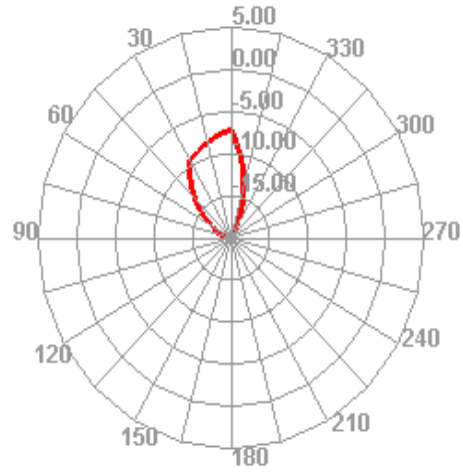


**2450.000MHz E1**

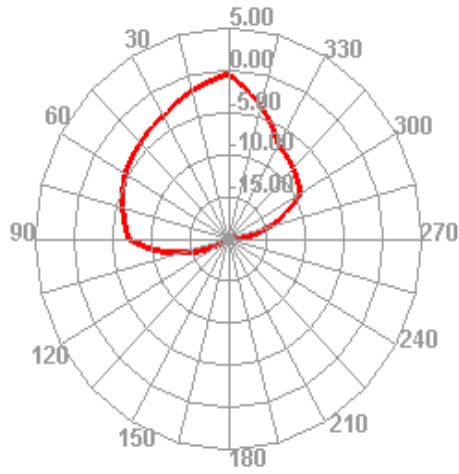


**2450.000MHz E2**

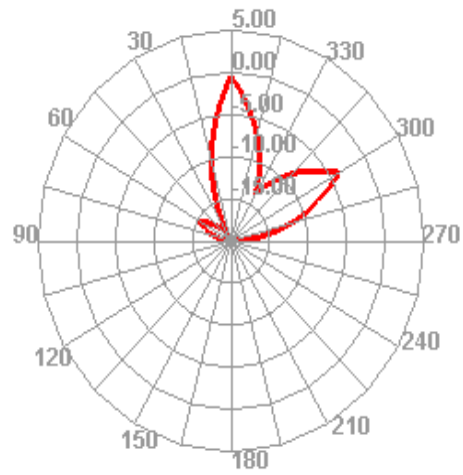

**2500.000MHz H**

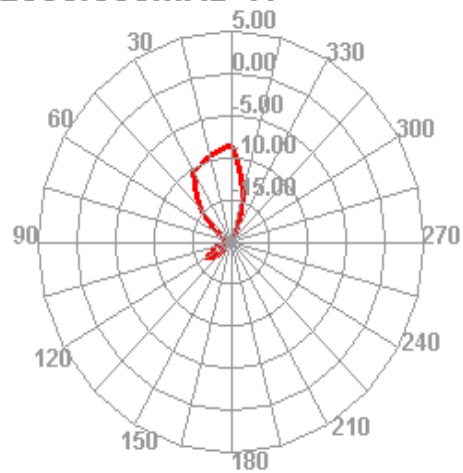

**2500.000MHz E1**

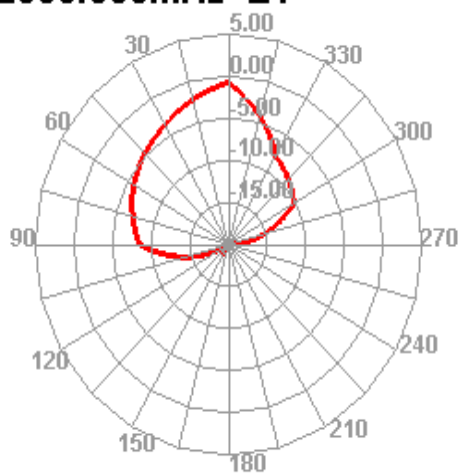

**2500.000MHz E2**

