

TEST REPORT

APPLICANT	:	Winners'Sun Plastic & Electronic (Shenzhen) Co., Ltd.
PRODUCT NAME	:	Keen Sword
MODEL NAME	:	WS-23002, LJ-8858
BRAND NAME	:	N/A
FCC ID	:	UR9WS-23002
STANDARD(S)	:	47 CFR Part 15 Subpart C
RECEIPT DATE	:	2023-07-04
TEST DATE	:	2023-07-06 to 2023-07-10
ISSUE DATE	:	2023-07-21

Su xiaoxian Edited by: Su Xiaoxian (Rapporteur) Approved by: Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





DIRECTORY

1. S	Summary of Test Result ······· 4
1.1.	Testing Applied Standards 5
1.2.	Test Equipment List ······ 6
1.3.	Measurement Uncertainty
1.4.	Testing Laboratory 8
2. 0	Seneral Description ·······9
2.1.	Information of Applicant and Manufacturer9
2.2.	Information of EUT······10
2.3.	Channel List of EUT ·······11
2.4.	Test Configuration of EUT12
2.5.	Test Conditions12
2.6.	Test Setup Layout Diagram ······12
3. T	est Results ······15
3.1.	Antenna Requirement ······15
3.2.	Duty Cycle of Test Signal16
3.3.	Maximum Peak Conducted Output Power ······17
3.4.	Maximum Average Conducted Output Power ······18
3.5.	6 dB Bandwidth ······19
3.6.	Conducted Spurious Emissions and Band Edge20
3.7.	Power Spectral Density21
3.8.	Conducted Emission22
3.9.	Restricted Frequency Bands23
3.10	Radiated Emission······24
Anno	ex A Test Data and Result ······26





Change History				
Version Date		Reason for change		
1.0	2023-07-21	First edition		



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Jul. 06, 2023	Zhong Yanshan	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Jul. 06, 2023	Zhong Yanshan	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Jul. 06, 2023	Zhong Yanshan	PASS	No deviation
5	15.247(a)	Bandwidth	Jul. 06, 2023	Zhong Yanshan	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jul. 06, 2023	Zhong Yanshan	PASS	No deviation
7	15.247(e)	Power Spectral Density	Jul. 06, 2023	Zhong Yanshan	PASS	No deviation
8	15.207	Conducted Emission	N/A	N/A	N/A _{Note1}	N/A
9	15.247(d)	Restricted Frequency Bands	Jul. 05, 2023	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Jul. 06, 2023	Gao Jianrou	PASS	No deviation

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

Page 4 of 55



"Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525



1.2.4 Radiated Test Equipments

Equipment	Serial No.	Tuno	Manufacturer	Cal. Date	Due Date
Name	Serial No.	Туре	Manufacturer	Cal. Dale	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.26	2024.06.27
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.26	2024.06.27
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2022.07.23	2023.07.22
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm	226174
Registration Number	220174



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Winners'Sun Plastic & Electronic (Shenzhen) Co., Ltd.	
	Detai Industrial Park, 496 Huarong Road, Langkou Community,	
Applicant Address	Dalang Sub-district, Longhua District, Shenzhen, Guangdong,	
	China	
Manufacturer	Winners'Sun Plastic & Electronic (Shenzhen) Co., Ltd.	
Detai Industrial Park, 496 Huarong Road, Langkou Com		
Manufacturer Address	Dalang Sub-district, Longhua District, Shenzhen, Guangdong,	
	China	



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





2.2. Information of EUT

Product Name:	Keen Sword		
Sample No.:	1#		
Hardware Version:	MV-LJ01-V1		
Software Version:	5316_ble_sample	e_v1	
Equipment Type:	Bluetooth LE		
Bluetooth Version:	4.2		
Modulation Type:	GFSK		
Data Rate:	1Mbps		
Operating Frequency Range:	2402MHz-2480MHz		
Antenna Type:	PCB Antenna		
Antenna Gain:	-6.31dBi		
	Battery		
	Brand Name:	DOYEN	
	Model No.:	DY401020	
Accessory Information:	Serial No.:	N/A	
Accessory mormation.	Capacity:	50mAh	
	Rated Voltage:	3.7V	
	Charge Limit:	4.2V	
	Manufacturer:	Shenzhen Chaorong Battery Tech Co., Ltd.	

Note 1: According to the certificate holder, they declare that for model number: WS-23002, LJ-8858 have the same hardware and software, only different in model name, the others are the same, all RF parameters remain the same.The main measuring model is WS-23002, only the results for WS-23002 were recorded in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1.Conducted Measurement



2.6.2.Conducted Emission Measurement

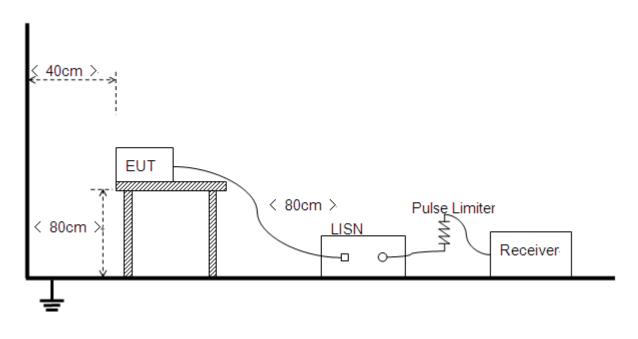




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

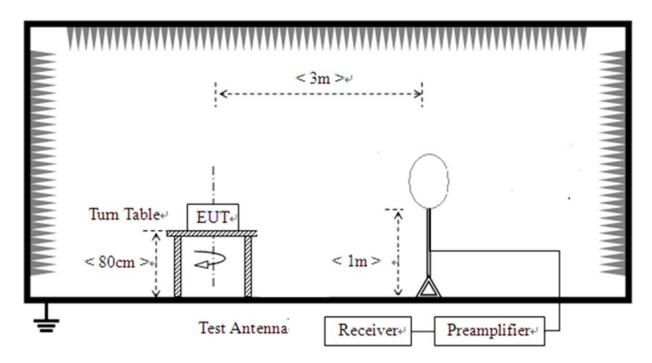

2) For radiated emissions from 30MHz to1GHz

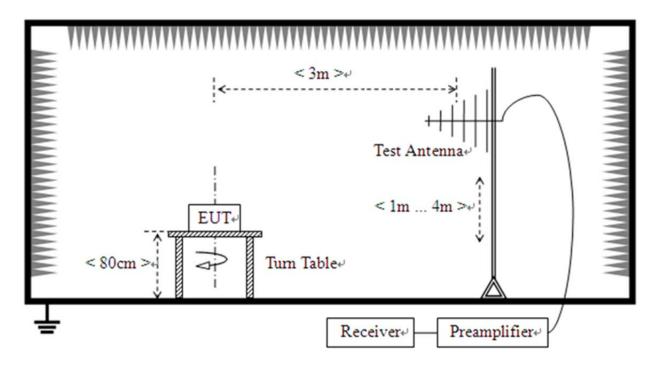




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

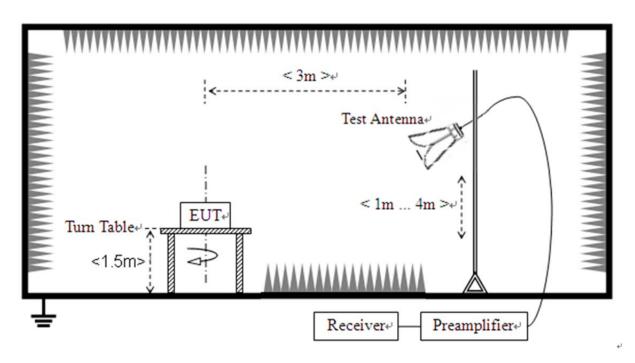



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



3.1. Antenna Requirement

3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2.Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



3.2. Duty Cycle of Test Signal

3.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

3.2.2.Test Result

Refer to Annex A.1 in this report.





3.3. Maximum Peak Conducted Output Power

3.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2.Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4.Test Result

Refer to Annex A.2 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



3.4. Maximum Average Conducted Output Power

3.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4.Test Result


Refer to Annex A.3 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \geq 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result


Refer to Annex A.4 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





3.6. Conducted Spurious Emissions and Band Edge

3.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2.Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4.Test Result

Refer to Annex A.5 and A.6 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



3.7. Power Spectral Density

3.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2.Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize

i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4.Test Result

Refer to Annex A.7 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555





3.8. Conducted Emission

3.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/ 50Ω line impedance stabilization network (LISN).

Frequency Pango (MHz)	Conducted Limit (dBµV)				
Frequency Range (MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4.Test Result

Refer to Annex A.8 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



3.9. Restricted Frequency Bands

3.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1GHz

VBW = 3 MHz Sweep = auto Detector function = peak/average Trace = max hold Allow the trace to stabilize

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.8 in this report.





3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525



3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result

Refer to Annex A.9 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn



Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	100	0	0
NVNT	BLE 1M	2440	Ant1	100	0	0
NVNT	BLE 1M	2480	Ant1	100	0	0




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



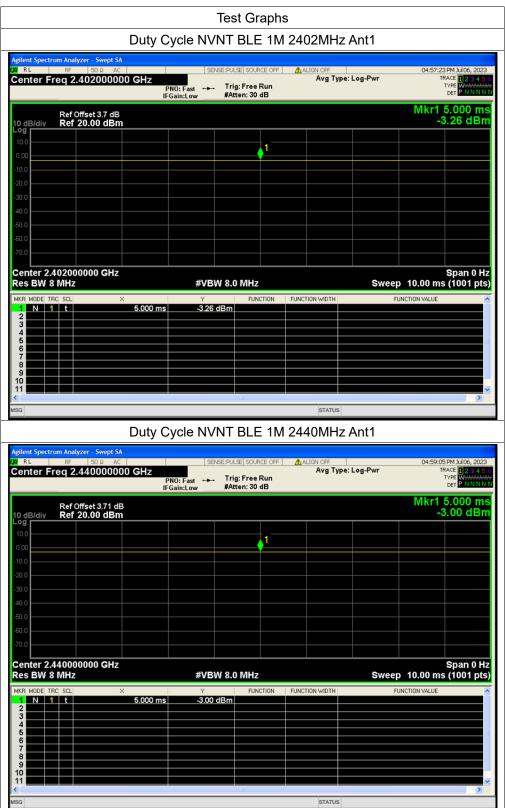

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



	Duty Cycle	NVNT BLE	1M 2480MH	Iz Ant1	
Agilent Spectrum Analyzer - Sw XIRL RF 50 Q Center Freq 2.48000	AC		Avg T un	ype: Log-Pwr	05:00:50 PM Jul 06, 2023 TRACE 2 3 4 5 6 TYPE V DET P NNNN
Ref Offset 3. 10 dB/div Ref 20.00					Mkr1 5.000 ms -2.71 dBm
10.0			1		
-10.0					
20.0					
40.0					
60.0					
Center 2.480000000 (Res BW 8 MHz		#VBW 8.0 MHz		Sweep	Span 0 Hz 10.00 ms (1001 pts
MKR MODE TRC SCL	× 5.000 ms	Y FUNCT	ION FUNCTION WIDTH	FUN	ICTION VALUE
2 3 4 4					
5 6 7 8					
9 10 11					
< ISG			STATU	IS	>



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (mW)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-3.29	0	-3.29	0.47	30	Pass
NVNT	BLE 1M	2440	Ant1	-3.01	0	-3.01	0.5	30	Pass
NVNT	BLE 1M	2480	Ant1	-2.74	0	-2.74	0.53	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



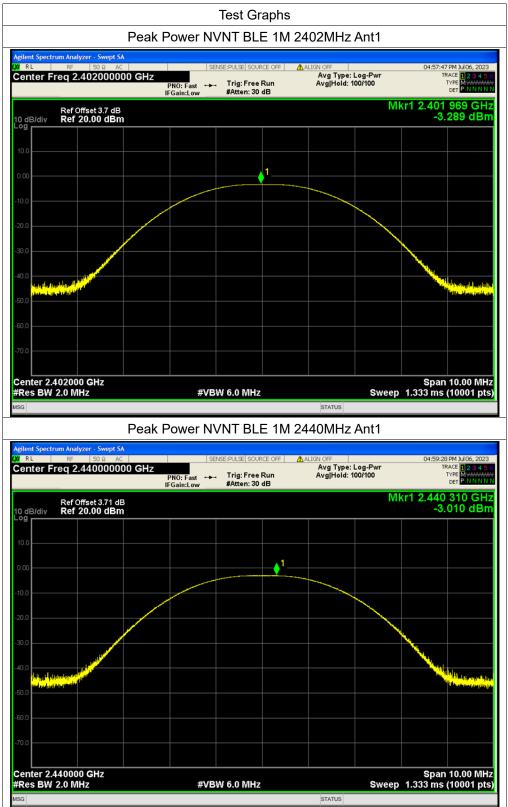


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



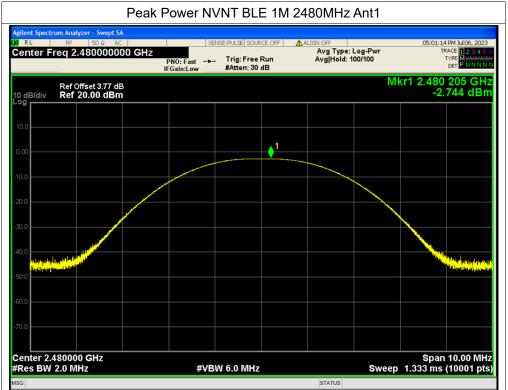



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (mW)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-3.69	0	-3.69	0.43	30	Pass
NVNT	BLE 1M	2440	Ant1	-3.28	0	-3.28	0.47	30	Pass
NVNT	BLE 1M	2480	Ant1	-3.05	0	-3.05	0.5	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




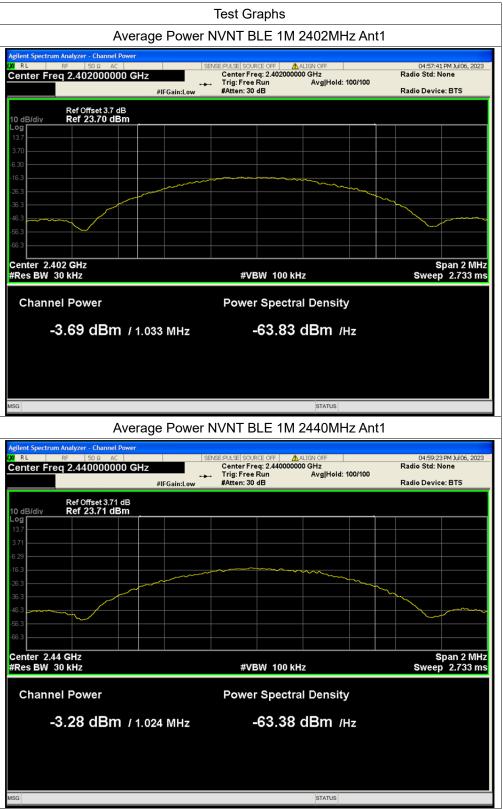



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



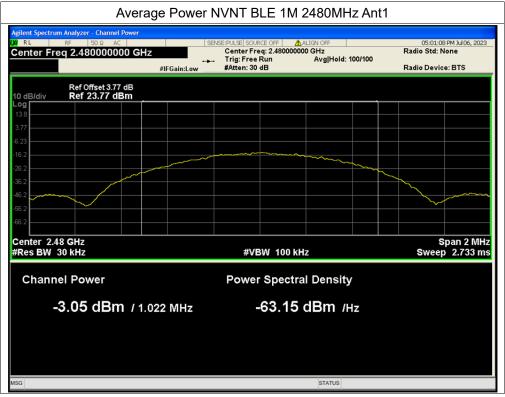



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.4. 6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.667	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.679	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.707	0.5	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



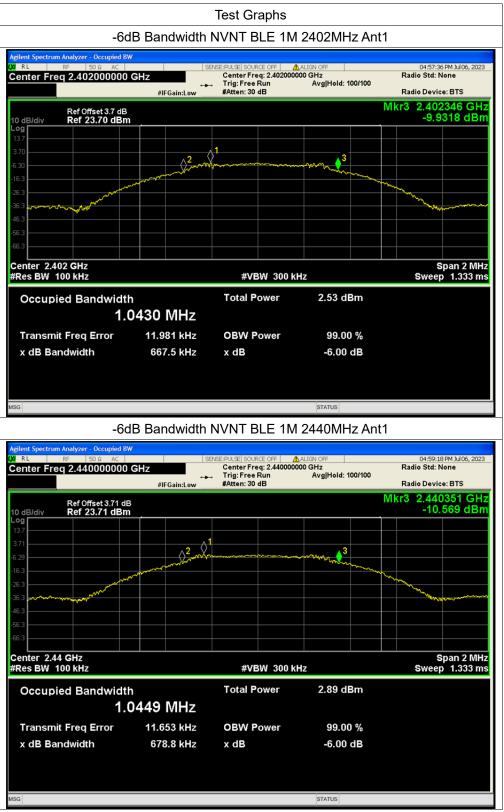



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn Http://www.morlab.cn

Fax: 86-755-36698525







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-29.81	-20	Pass
NVNT	BLE 1M	2440	Ant1	-32.87	-20	Pass
NVNT	BLE 1M	2480	Ant1	-33.63	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




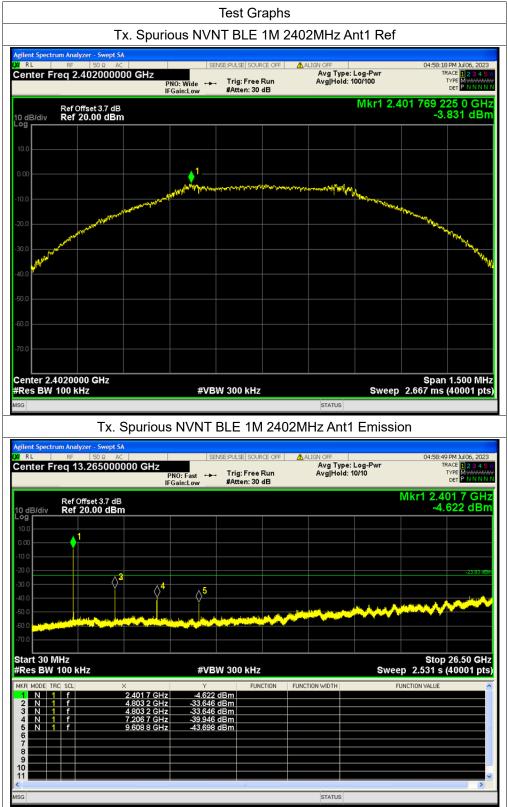

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




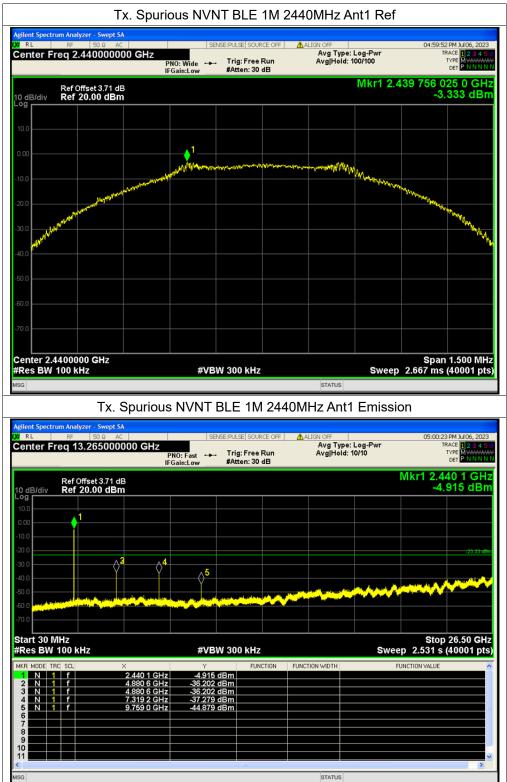



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



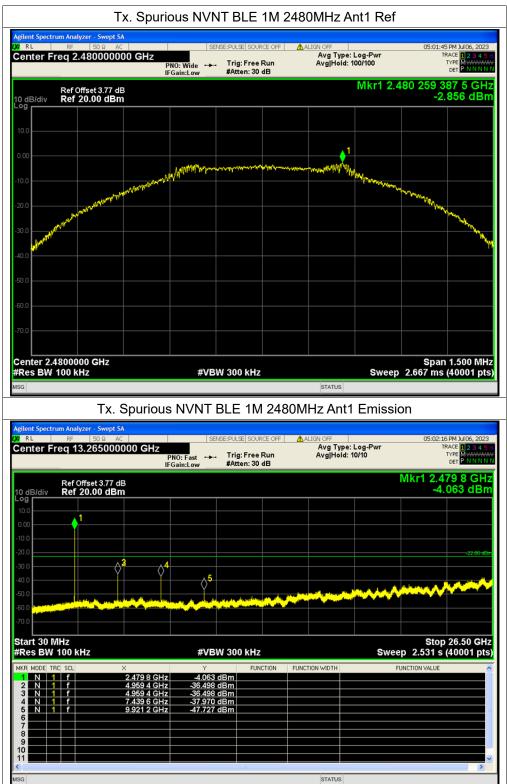



MORLAB



A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-48.54	-20	Pass
NVNT	BLE 1M	2480	Ant1	-47.05	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



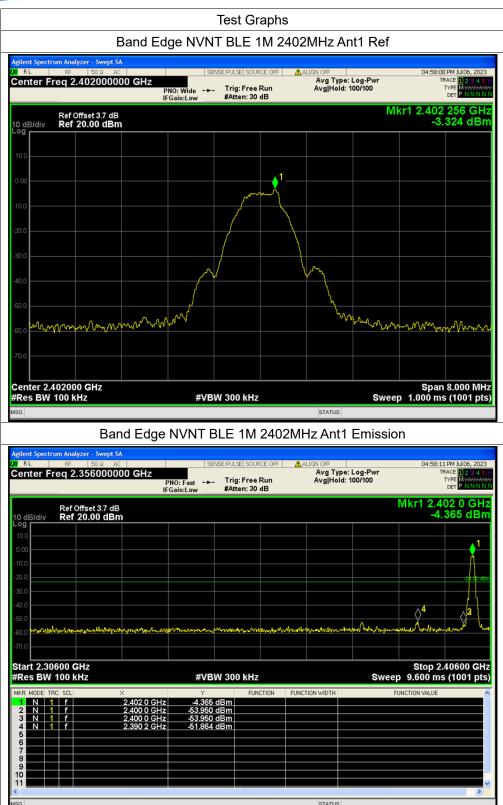


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

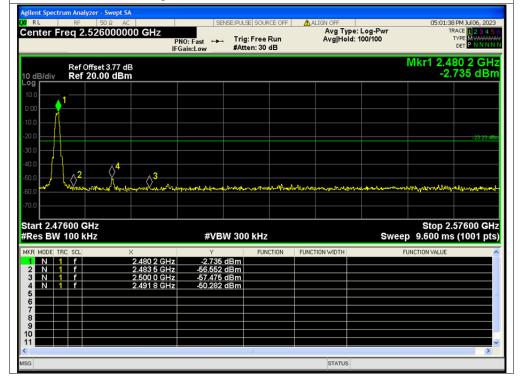

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-12.96	0	-12.96	8	Pass
NVNT	BLE 1M	2440	Ant1	-12.55	0	-12.55	8	Pass
NVNT	BLE 1M	2480	Ant1	-12.87	0	-12.87	8	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



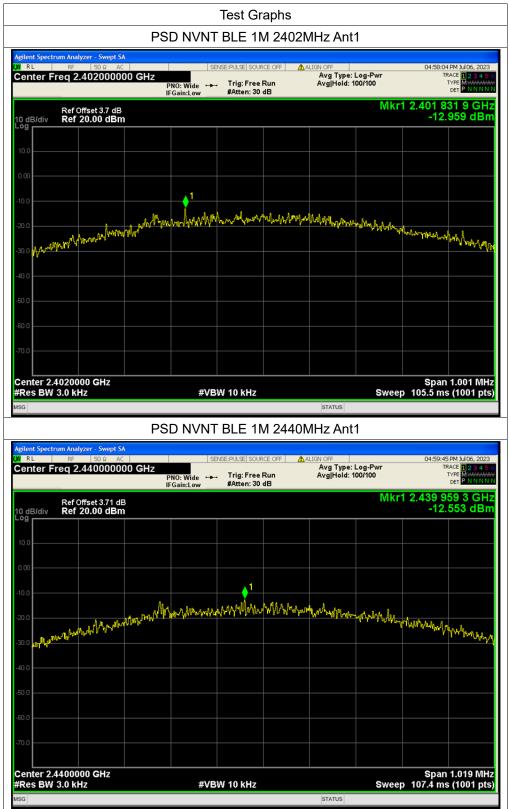



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



			D NVNT	BLE 1N	1 24801	/IHz Ant	1		
RL	rum Analyzer - Swept S. RF 50 Ω AC req 2.4800000	00 GHz	SE NO: Wide Gain:Low	NSE:PULSE SOUR . Trig: Free F #Atten: 30 d	Run	LIGN OFF Avg Type: Avg Hold: 1			1 PM Jul 06, 2023 RACE 1 2 3 4 5 TYPE MWWWW DET P N N N N
0 dB/div og	Ref Offset 3.77 di Ref 20.00 dBn						Mkr	1 2.480 1 -12	02 9 GH2 .868 dBm
10.0									
0.00									
10.0						1			
20.0		M. March	nlyn ylyn	man	when	hundylang	hour parter	talat	
مريم ار 0.0	when the strates all and							a growing the station of	- who way
10.0									
50.0									
60.0									
/0.0									
	4800000 GHz		#\/D					Span	1.061 MHz
Res BW	3.0 KHZ		#VB	W 10 kHz		STATUS	Swee	5 111.9 m	s (1001 pts



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.8. Conducted Emission

This test case does not apply this kind of EUT.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channel	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	verdict
0	2386.42	PK	22.86	6.74	27.20	56.80	74	PASS
0	2375.19	AV	11.46	6.74	27.20	45.40	54	PASS
39	2489.53	PK	22.16	6.74	27.20	56.10	74	PASS
39	2483.87	AV	12.82	6.74	27.20	46.76	54	PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



Marker Select Marker	M Jul 05, 2023 E 1 2 3 4 5 6 E M W N N N E P P N N N N	TRAC TYF	ALIGN OFF pe: Voltage Id:>100/100	Avg			GHz PNO: Fast IFGain:Low	Ω DC 000000 G	Analyzer - S RESEL 50 864240 EAMP	RF P	RL
1	24 GHz 5 dBµV		Mkr1					dBμV	ef 82.99	iv R) dB/di
Normal											og 13.0 13.0 13.0
Delta		1 2 ²		~~~~~~				alog		unda starota	13.0 13.0 13.0 23.0
Fixed⊳											13.0 2.99 7.01
Off	0400 GHz 1001 pts)	.000 ms (Sweep 1	FUNCTION	z	V 3.0 MHz Y		х	PR) 1 №	.30000 V (CIS	es BW
Properties►	E					22.855 dE 22.524 dE	424 GHz 000 GHz	2.386 4 2.390 0			1 N 2 N 3 4 5 6
More 1 of 2											7 8 9 0 1
			STATUS								G

(PEAK, Channel 0)

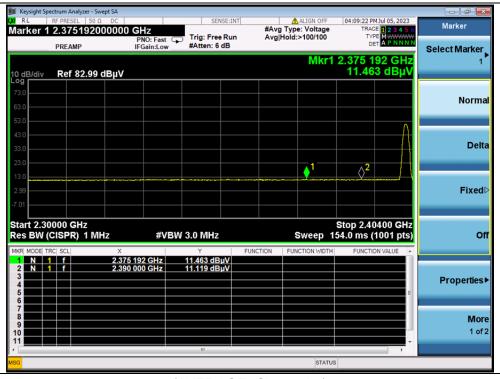

(AVERAGE, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



	04:42:17 PMJul 05, 2023 TRACE 1 2 3 4 5 6 TYPE MWWWWW	ALIGN OFF vg Type: Voltage vg Hold:>100/100		SENSE:		DC 0000 GHz	Analyzer - Swej SEL 50 Ω 3952800	RF PR	LXI RL
Select Marker	2.489 528 GHz 22.163 dBµV	Mkr2		Atten: 6 dB	Low	IFGain:	^{амр} f 82.99 d	PRE	10 dB/
Normal									Log 73.0 63.0
Delta	Notingh your couperture of	and the start of t	2		Swalling .	1 ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			53.0 - 43.0 - 33.0 - 23.0 -
Fixed⊳									13.0 - 2.99 - -7.01 -
off	Stop 2.50000 GHz .000 ms (1001 pts)	Sweep 1	FUNCTI	MHz	#VBW 3	X	'R) 1 MH	2.47800 SW (CISP	Res E
Properties►	E			929 dBµV 163 dBµV		2.483 500 GH 2.489 528 GH			1 2 3 4 5 6
More 1 of 2									7 8 9 10 11
	· · · · · · · · · · · · · · · · · · ·	STATU							MSG

(PEAK, Channel 39)

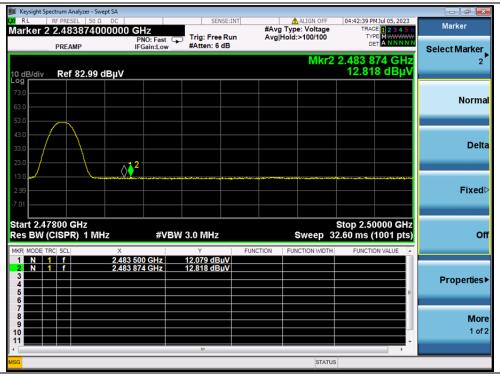

(AVERAGE, Channel 39)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525



Plot for Channel 0

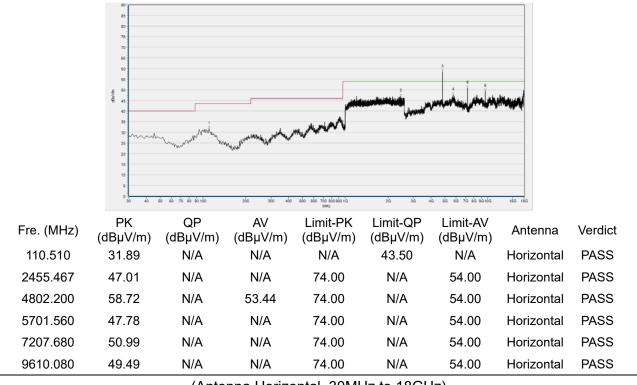

(Antenna Horizontal, 30MHz to 18GHz)

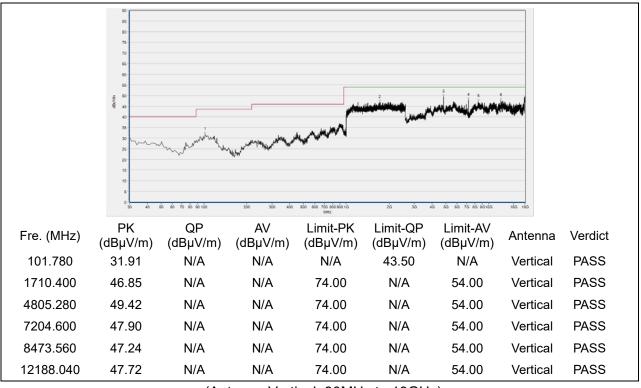

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



Plot for Channel 19

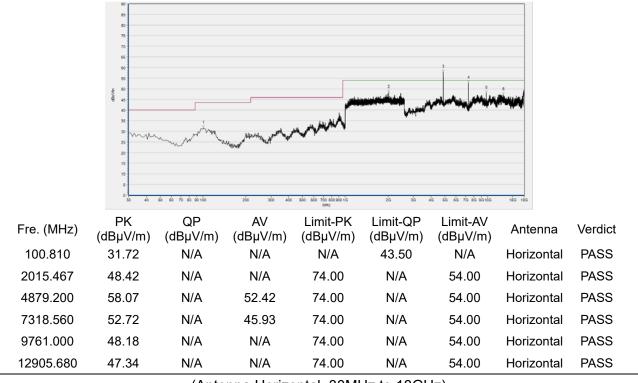

(Antenna Horizontal, 30MHz to 18GHz)

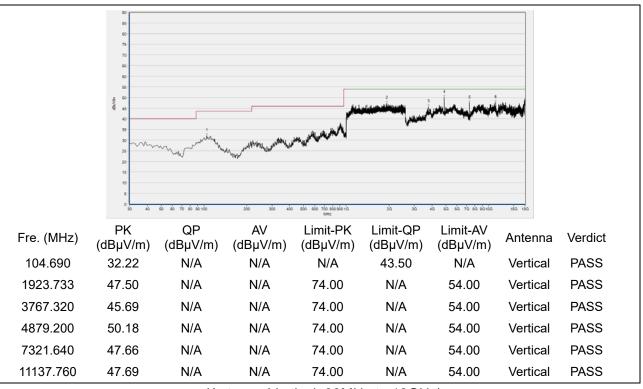

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



Plot for Channel 39

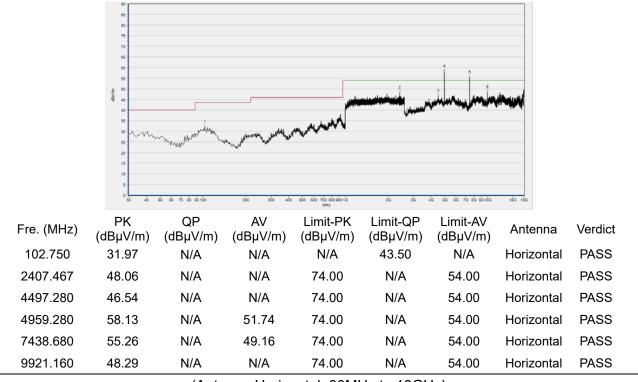

(Antenna Horizontal, 30MHz to 18GHz)

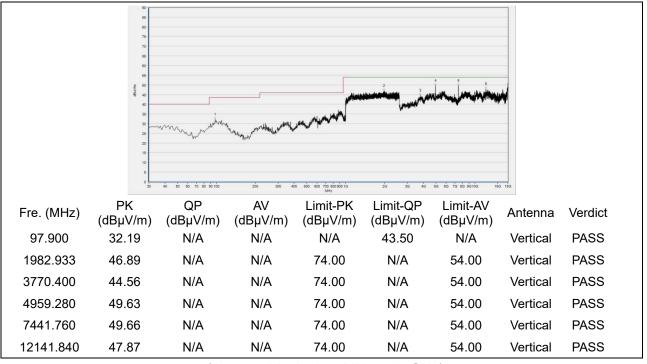

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn