



HCT CO., LTD.

SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL: +82 31 639 8565 FAX: +82 31 639 8525 www.hct.co.kr

HAC RF Emission TEST REPORT

Cal-Comp Electronics & Communications Company Limited
3F., No.99, NAN-KING E.RD.,SEC.5, Taipei 105, Taiwan
TEL: +82 2 2662 2660#7532 FAX: +82 2 8913 2001#7573

Date of Issue: Jul.06, 2009
Test Report No.: HCT-IA0907-0301-02
Test Site: HCT CO., LTD.

FCC ID: US7-A150

APPLICANT: Cal-Comp Electronics & Communications Company Limited

| | |
|--------------------------------|--|
| EUT Type: | Tri-Band CDMA Phone(CDMA/PCS CDMA/AWS CDMA) |
| Tx Frequency: | 824.70 – 848.31 MHz (CDMA) 1 711.25 – 1 753.75 MHz (AWS CDMA) 1 851.25 – 1 908.75 MHz (PCS CDMA) |
| Maximum Conducted Power (HAC): | 0.251 W CDMA (24.0 dBm) 0.251 W PCS CDMA (24.0 dBm) 0.251 W AWS CDMA (24.0 dBm) |
| Trade Name/Model(s): | Cal-Comp / A150 |
| FCC Classification: | Licensed Portable Transmitter Held to Ear (PCE) |
| FCC Rule Part(s): | §20.19 |
| HAC Standard: | ANSI C63.19-2007 |

Hearing Aid Near-Field Category: M4


This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2007 and had been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT Co., Ltd. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti- Drug Abuse Act of 1998, 21 U.S. C. 862.


Report prepared by

: Sun-Hee Kim
Test Engineer of SAR Part


Approved by

: Jae-Sang So
Manager of SAR Part

Table of Contents

| | |
|--|----|
| 1. APPLICANT / EUT DESCRIPTION ----- | 3 |
| 2. HAC MEASUREMENT SET- UP ----- | 4 |
| 3. SYSTEM SPECIFICATIONS ----- | 5 |
| 4. EUT ARRANGEMENT ----- | 7 |
| 5. SYSTEM VALIDATION ----- | 8 |
| 6. PROBE MODULATION FACTOR ----- | 10 |
| 7. FCC 3G MEASUREMENTS – MAY / JUNE 2006 ----- | 13 |
| 8. TEST PROCEDURE ----- | 14 |
| 9. ANSI/IEEE C63.19 PERFORMANCE CATEGORIES ----- | 16 |
| 10. MEASUREMENT UNCERTAINTIES ----- | 17 |
| 11. HAC TEST DATA SUMMARY ----- | 19 |
| 12. HAC TEST EQUIPMENT LIST ----- | 22 |
| 13. CONCLUSION ----- | 23 |

Appendix A_HAC TEST PLOTS

Appendix B_TEST SET-UP PHOTO

Appendix C_DIPOLE VALIDATION PLOTS

Appendix D_PROBE CALIBRATION DATA

Appendix E_DIPOLE CALIBRATION DATA

HAC MEASUREMENT REPORT

1. APPLICANT / EUT DESCRIPTION

1.1 Applicant

- Company Name: Cal-Comp Electronics & Communications Company Limited
- Address: 3F., No.99, NAN-KING E.RD., SEC.5, Taipei 105, Taiwan
- Tel. / Fax : +82 2 2662 2660#7532 / +82 2 8913 2001#7573

1.2 EUT Description

- EUT Type: Tri-Band CDMA Phone(CDMA/PCS CDMA/AWS CDMA)
- Trade Name: Cal-Comp
- Model(s): A150
- FCC ID: US7-A150
- Serial Number(s): #1
- Tx Frequency: 824.70 – 848.31 MHz (CDMA)
1 711.25 – 1 753.75 MHz (AWS CDMA)
1 851.25 – 1 908.75 MHz (PCS CDMA)
- FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)
- FCC Rule Part(s): § 20.19(b); §6.3(v), §7.3(v)
- Modulation(s): CDMA835/AWS1700/PCS1900
- Antenna Type: Intenna
- Date(s) of Tests: Jul.04, 2009
- Place of Tests: HCT CO., LTD.
Icheon, Kyoung ki-Do, KOREA
- Report Serial No.: HCT-IA0907-0301-02
- Max E-Field Emission: channel 875, 1 753.75 MHz = 29.3 dBV/m (M4)
- Max H-Field Emission: channel 25, 1 851.25 MHz = -25.3 dBA/m (M4)

2. HAC MEASUREMENT SET-UP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium IV computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements.

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Pentium IV 3.0 GHz computer with Windows XP system and HAC Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

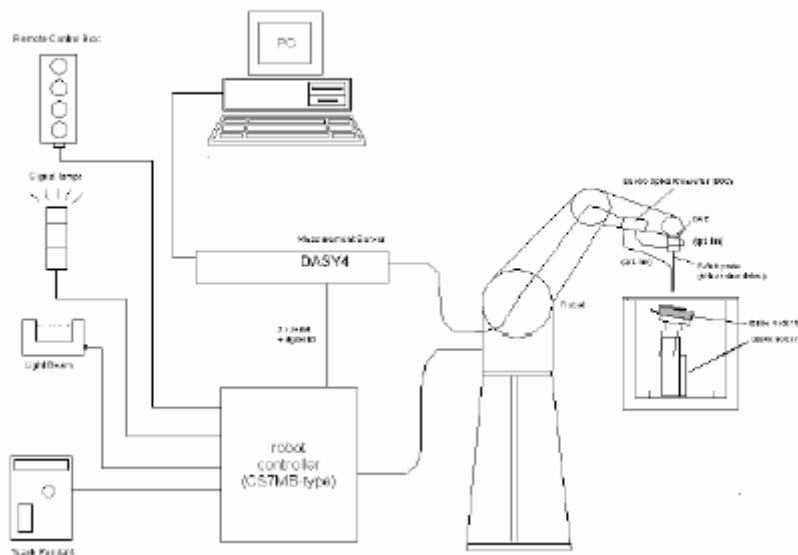



Figure 1. HAC Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.


3. SYSTEM SPECIFICATIONS

3.1 Probe

3.1.1 E-Field Probe Description

| | | |
|---------------|--|--|
| Construction | One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges |  <p>[E-Field Probe]</p> |
| Calibration | In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k = 2$) | |
| Frequency | 100 MHz to > 6 GHz; Linearity: ± 0.2 dB (100 MHz to 3 GHz) | |
| Directivity | ± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis) | |
| Dynamic Range | 2 V/m to > 1000 V/m (M3 or better device readings fall well below diode compression point) | |
| Linearity | ± 0.2 dB | |
| Dimensions | Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm | |

3.1.2 H-Field Probe Description

| | | |
|----------------------|---|--|
| Construction | Three concentric loop sensors with 3.8 mm loop diameters resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether) |  <p>[H-Field Probe]</p> |
| Frequency | 200 MHz to > 3 GHz (absolute accuracy $\pm 6.0\%$, $k = 2$); Output linearized | |
| Directivity | ± 0.25 dB (spherical isotropy error) | |
| Dynamic Range | 10 mA/m to 2 A/m at 1 GHz | |
| E-Field Interference | < 10 % at 3 GHz (for plane wave) | |
| Dimensions | Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm The closest part of the sensor element is 1.9 mm closer to the tip | |

3.2 Phantom & Device Holder



Figure 2. HAC Phantom & Device Holder

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

The devices can be easily, accurately, and repeatably positioned according to the FCC specifications.

3.3 Robotic System Specifications

Specifications

POSITIONER: Stäubli Unimation Corp. Robot Model: RX90LB
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium IV
Clock Speed: 3.0 GHz
Operating System: Windows XP
Data Card: DASY4 PC-Board

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
Optical uplink for commands and clock

PC Interface Card

Function: 24 bit (64 MHz) DSP for real time processing
Link to DAE3
16 bit A/D converter for surface detection system
serial link to robot
direct emergency stop output for robot

4. EUT ARRANGEMENT

4.1 WD RF Emission Measurements Reference and Plane

Figure 3. Illustrate the references and reference plane that shall be used in the WD emissions measurement.

- The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
- The grid is centered on the audio frequency output transducer of the WD (speaker or T-coil).
- The grid is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the WD handset, which, in normal handset use, rest against the ear.
- The measurement plane is parallel to, and 1.0 cm in front of, the reference plane.



Figure 3. WD reference and plane for RF emission measurements

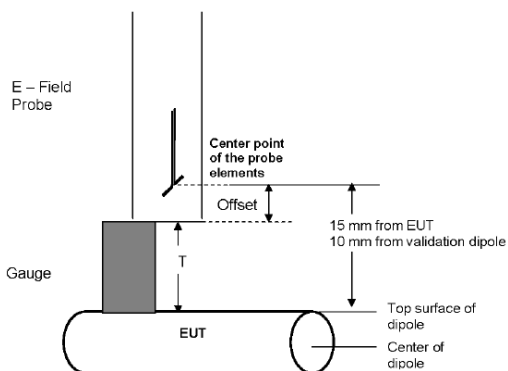


Figure 4. Gauge Block with E-Field Probe

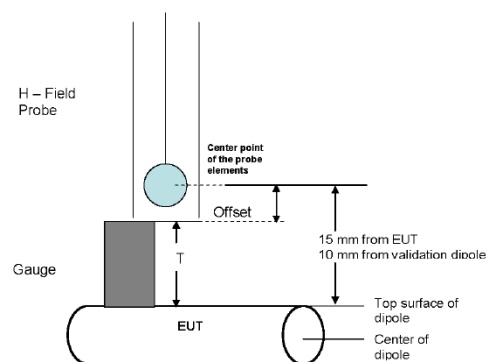


Figure 5. Gauge Block with H-Field Probe

5. SYSTEM VALIDATION

The test setup was validated when configured and verified periodically thereafter to ensure proper function. The procedure is a validation procedure using dipole antennas for which the field levels were computed by FDTD modeling.

5.1 Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI-C63.19 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field and H-field probes so that:

- the probes and their cables are parallel to the coaxial feed of the dipole antenna
- the probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions; and
- the probes are 10 mm from the surface of the dipole elements.

Scan the length of the dipole with both E-field and H-field probes and record the maximum values for each. Compare the readings to expected values.

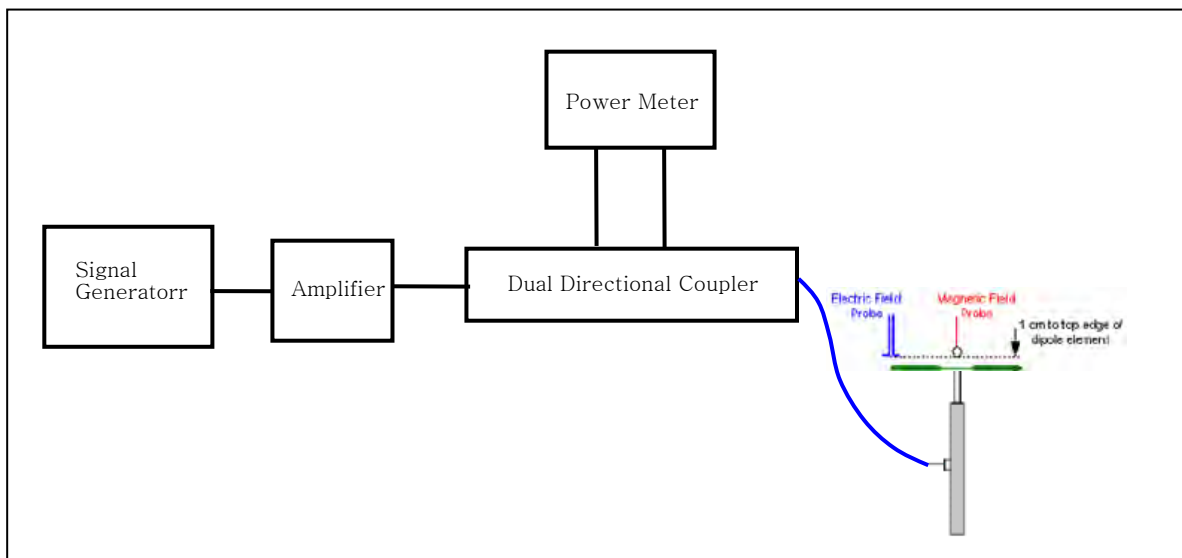


Figure 6. Dipole Validation SET-UP

5.2 Validation Result

5.2.1 E-Field Scan

| Mode | Freq. [MHz] | Input Power [dBm] | Measured Value [V/m] | Target Value [V/m] SPEAG | Deviation [%] | Limit [%] |
|------|-------------|-------------------|----------------------|--------------------------|---------------|-----------|
| CW | 835 | 20 | 166.6 | 159 | + 4.78 | ± 25 |
| CW | 1 880 | 20 | 142.1 | 140.25 | + 1.01 | ± 25 |

5.2.2 H-Field Scan

| Mode | Freq. [MHz] | Input Power [dBm] | Measured Value [A/m] | Target Value [A/m] SPEAG | Deviation [%] | Limit [%] |
|------|-------------|-------------------|----------------------|--------------------------|---------------|-----------|
| CW | 835 | 20 | 0.456 | 0.445 | + 2.47 | ± 25 |
| CW | 1 880 | 20 | 0.479 | 0.469 | + 2.13 | ± 25 |

Notes:

- 1) Deviation (%) = 100 * (Measured value minus Target value) divided by Target value.
ANSI-C63.19 requires values to be within 25 % of their targets. 12 % is deviation and 13 % is measurement uncertainty.
- 2) The maximum E-field or H-field were evaluated and compared to the target values provided by SPEAG in the calibration certificate of specific dipoles.
- 3) Please refer to the attachment for detailed measurement data and plot.

6. Probe Modulation Factor

A calibration was made of the modulation response of the probe and its instrumentation chain. This calibration was performed with the field probe, attached to its instrumentation. The response of the probe system to a CW field at the frequency of interest is compared to its response to a modulated signal with equal peak amplitude to that of a CW signal. The field level of the test signals are ensured to be more than 10 dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated reading was applied to the DUT measurements.

All voice modes for this device have been investigated in this section of the report. According to the FCC 3G Measurement Procedures, May 2006 for RF Emissions, variations in peak field and power readings.

This was done using the following procedure:

1. The probe was illuminated with a CW signal at the intended measurement frequency and wireless device power.
2. The probe was positioned at the field maxima over the dipole antenna (determined after an area scan over the dipole) illuminated with the CW signal.
3. The reading of the probe measurement system of the CW signal at the maximum point was recorded.
4. Using a Spectrum Analyzer, the modulated signal adjusted with the same peak level of the CW signal was determined.
5. The probe measurement system reading was recorded with the modulated signal. The appropriate system crest factors for the modulation type were configured in the software to the system measurements.
6. The ratio of the CW reading to modulated signal reading is the probe modulation factor (PMF) for the modulation and field probe combination. This was repeated for 80 % AM.
7. Steps 1-6 were repeated at all frequency bands and for both E and H field probes.

The modulation factors obtained were applied to readings taken of the actual wireless device, in order to obtain an accurate peak field reading using the formula:

$$\text{Peak} = 20 \cdot \log (\text{Raw} \cdot \text{PMF})$$

This method correlates well with the modulation using the DUT in the alternative substitution method.

See below for correlation of signal:

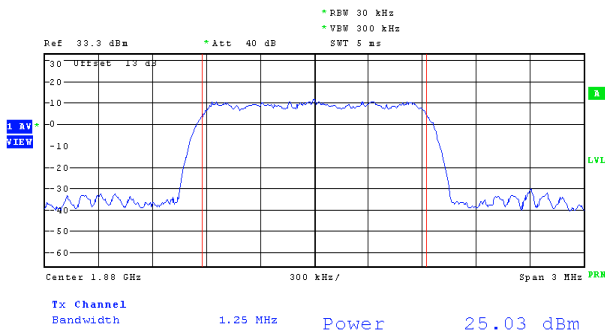


Figure. 7

Signal Generator Modulated Signal

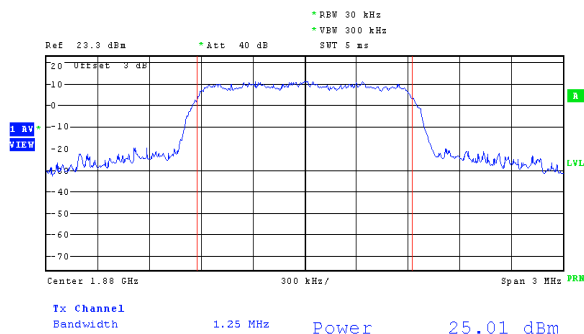


Figure. 8

Wireless Device Modulated Signal

6.1 Modulation Factor

6.1.1 E-Field

| Mode | Freq. [MHz] | Input Power [dB] | E-Field measured value [V/m] | Probe Modulation Factor |
|------------------|--------------|------------------|------------------------------|-------------------------|
| CW | 835 | 24 | 276.7 | - |
| 80 % AM | | 24 | 167.9 | 1.648 |
| CDMA (Full Rate) | | 24 | 282.9 | 0.978 |
| CDMA (1/8 Rate) | | 24 | 88.6 | 3.123 |
| CW | 1 880/ 1 700 | 24 | 202.5 | - |
| 80 % AM | | 24 | 126.8 | 1.597 |
| CDMA (Full Rate) | | 24 | 209.5 | 0.967 |
| CDMA (1/8 Rate) | | 24 | 65.6 | 3.087 |

6.1.2 H-Field


| Mode | Freq. [MHz] | Input Power [dB] | H-Field measured value [A/m] | Probe Modulation Factor |
|------------------|--------------|------------------|------------------------------|-------------------------|
| CW | 835 | 24 | 0.859 | - |
| 80 % AM | | 24 | 0.568 | 1.512 |
| CDMA (Full Rate) | | 24 | 0.989 | 0.869 |
| CDMA (1/8 Rate) | | 24 | 0.314 | 2.736 |
| CW | 1 880/ 1 700 | 24 | 0.762 | - |
| 80 % AM | | 24 | 0.505 | 1.509 |
| CDMA (Full Rate) | | 24 | 0.989 | 0.770 |
| CDMA (1/8 Rate) | | 24 | 0.292 | 2.610 |

Notes:


- 1) Modulation Factor = CW / WD_CDMA

6.1.3 PMF Peak Power Measurement Plots

■ Probe Modulation Factor (CW)

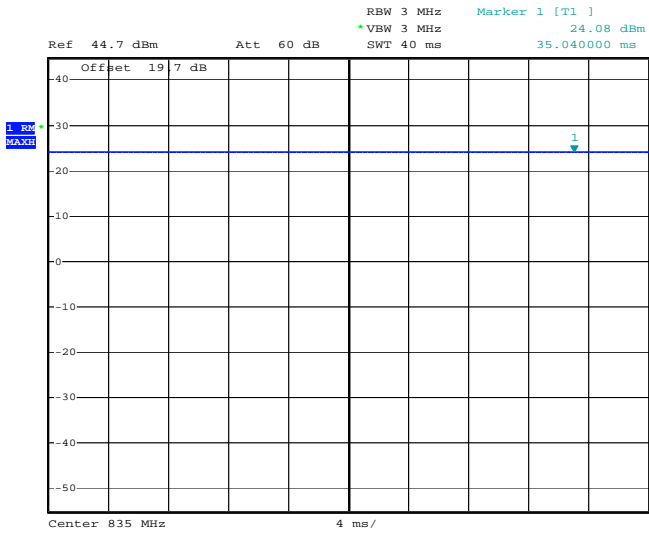


■ Probe Modulation Factor (AM 80 %)

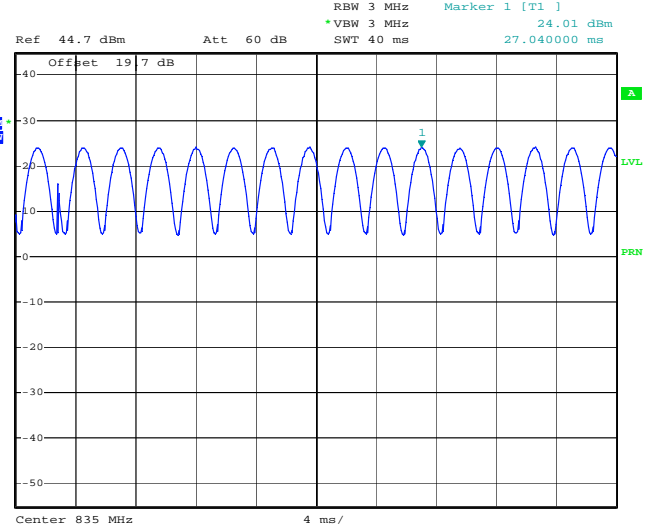

Date: 18.MAY.2007 19:22:24


■ Probe Modulation Factor (CDMA: full rate)

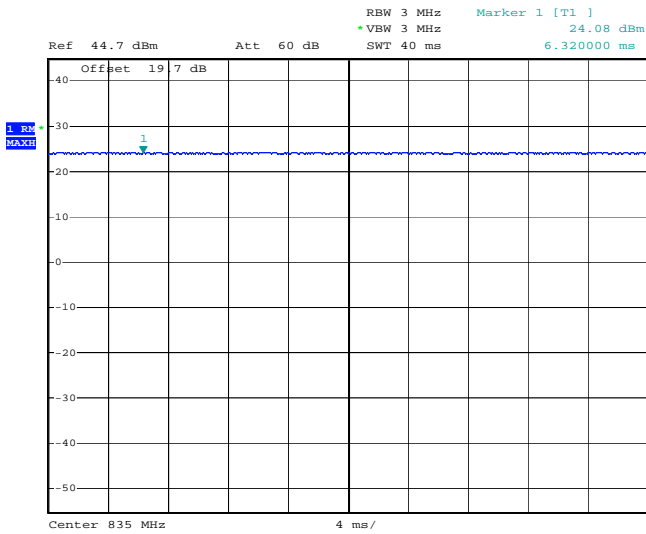

Date: 18.MAY.2007 19:30:14

Date: 18.MAY.2007 19:28:41

■ Probe Modulation Factor (CDMA: 1/8 rate)

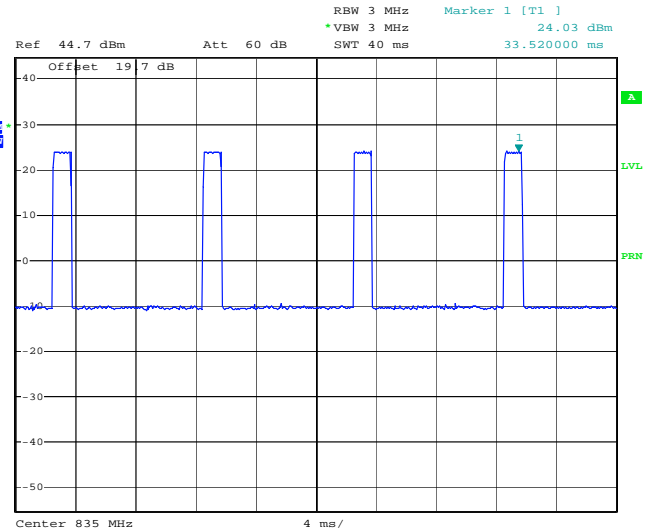

Date: 18.MAY.2007 19:38:05

Spectrum Analyzer Settings

- Input Power: 24.0 dBm
- RBW: 3 MHz
- Video Bandwidth: 3 MHz
- Span: Zero
- Sweep Time: 40 ms
- Detection: Peak detection (RMS)

7. FCC 3G MEASUREMENTS – MAY / JUNE 2006

Sample pre-testing of the various modes were performed at the worst case probe location as part of subset testing justification. See below for measured conducted power for applicable device modes:

7.1 Handset Measured Conducted Powers

Average Output Power Measurement for FCC ID: US7-A150

| Band | Channel | SO2 | SO2 | SO55 | SO55 | TDSO SO32 |
|------|---------|-------|-------|-------|-------|--------------|
| | | RC1/1 | RC3/3 | RC1/1 | RC3/3 | RC3/3 |
| CDMA | 1013 | 23.71 | 23.70 | 23.69 | 23.73 | 23.77 |
| | 384 | 23.80 | 23.60 | 23.87 | 23.52 | 23.56 |
| | 777 | 23.77 | 23.62 | 23.76 | 23.49 | 23.53 |
| PCS | 25 | 23.64 | 23.35 | 23.61 | 23.53 | 23.59 |
| | 600 | 23.78 | 23.55 | 23.73 | 23.45 | 23.55 |
| | 1175 | 23.98 | 23.84 | 24.03 | 23.80 | 23.89 |
| AWS | 25 | 23.93 | 23.71 | 23.98 | 23.70 | 23.74 |
| | 450 | 23.91 | 23.77 | 23.92 | 23.75 | 23.72 |
| | 875 | 23.91 | 23.57 | 23.87 | 23.66 | 23.69 |

7.2 Worst-Case Probe Location Measurements

Below are RC/SO mode investigation results of the device at the worst-case (maximum) field point location.

The worst-case RC/SO was used for HAC testing.

| Mode | Channel | Backlight | RC/SO | Battery | Antenna | Conducted Power [dBm] | Time Avg. Field [V/m] | Peak Field [dBV/m] | FCC Limit [dBV/m] | FCC MARGIN [dB] | RESULT |
|------|---------|-----------|----------|----------|---------|-----------------------|-----------------------|--------------------|-------------------|-----------------|-----------|
| AWS | 875 | off | SO55/RC3 | Standard | Intenna | 23.66 | 28.75 | 28.9 | 41 | -12.12 | M4 |
| AWS | 875 | on | SO55/RC1 | Standard | Intenna | 23.87 | 28.98 | 29.0 | 41 | -12.05 | M4 |
| AWS | 875 | off | SO2/RC1 | Standard | Intenna | 23.75 | 28.83 | 28.9 | 41 | -12.09 | M4 |
| AWS | 875 | off | SO3/RC1 | Standard | Intenna | 23.65 | 10.25 | 30.0 | 41 | -10.99 | M4 |
| AWS | 875 | off | SO55/RC1 | Standard | Intenna | 23.66 | 29.19 | 29.0 | 41 | -11.99 | M4 |
| AWS | 875 | off | SO9/RC2 | Standard | Intenna | 23.54 | 28.75 | 28.9 | 41 | -12.12 | M4 |
| AWS | 875 | off | SO2/RC3 | Standard | Intenna | 23.67 | 29.11 | 29.0 | 41 | -12.01 | M4 |
| AWS | 875 | off | SO3/RC3 | Standard | Intenna | 23.62 | 28.38 | 28.8 | 41 | -12.23 | M4 |

8. TEST PROCEDURE

Test Instructions

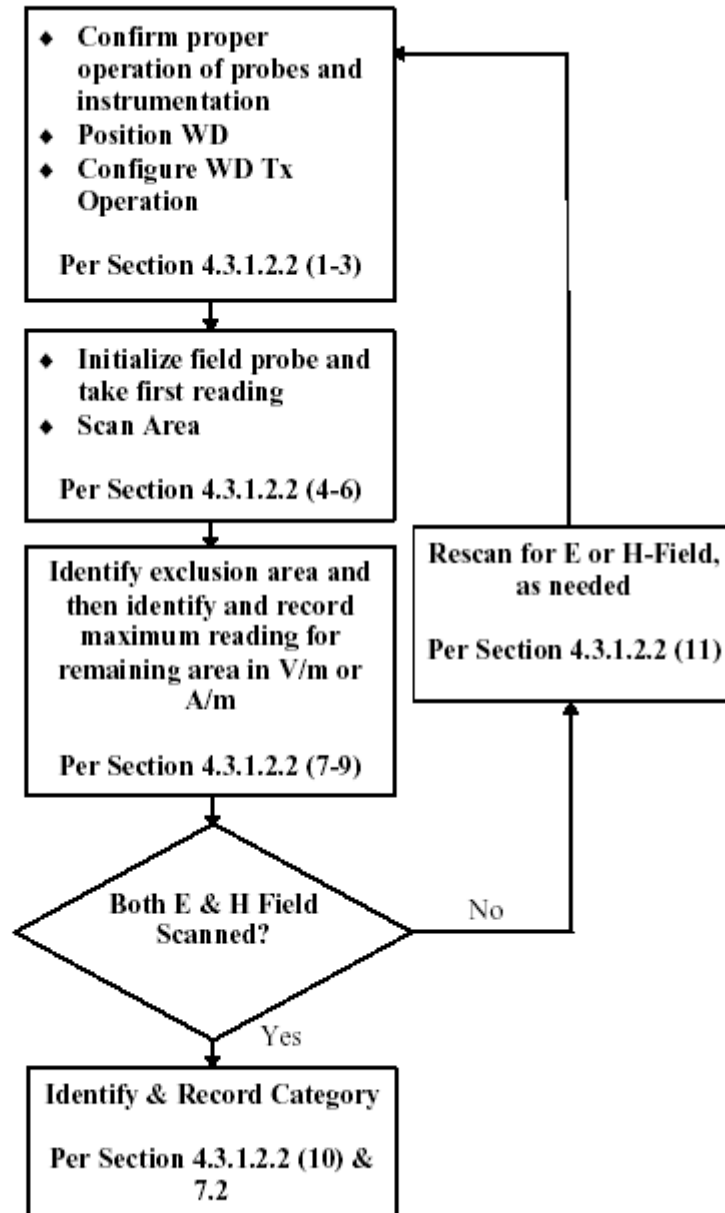


Figure 9. WD near-field emission automated test flowchart

The evaluation was performed with the following procedure:

1. Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
2. Position the WD in its intended test position. The measurement should be performed at a distance 1cm from the probe elements so the gauge block can simplify this positioning.
3. Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters, as intended for the test.
4. The center sub-grid shall be centered on the center of the WD output (acoustic or T-Coil output), as appropriate.
5. A Surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. Locate the field probe at reference location and measure the field strength.
7. Scan the entire 5 cm by 5 cm region at 5 mm increments and record the reading at each measurement point.
8. Identify the maximum field reading within the non-excluded sub-grids identified in Step 7.
9. Move the probe to the location of maximum scan measurement and then 360° rotating the probe to align it for the maximum reading at that position.
10. Locate the field probe at the reference location and measure the field strength for drift evaluation. If conducted power deviations of more than 5 % occurred, the tests were repeated.
11. Convert the maximum field strength reading identified in Step 8 to V/m or A/m, as appropriate. For probes which require a probe modulation factor, this conversion shall be done using the appropriate probe modulation.
12. Repeat Step 1 through Step 11 for both the E and H field measurements.

9. ANSI/IEEE C63.19 PERFORMANCE CATEGORIES

The EUT must meet the following M3 or M4 category:

| Category | Telephone RF Parameters | | |
|---------------------|-------------------------|----------------------------|----------------------------|
| Near Field | AWF [dB] | E-Field Emissions dB [V/m] | H-Field Emissions dB [A/m] |
| Frequency < 960 MHz | | | |
| M1 | 0 | 56 to 61 | + 5.6 to + 10.6 |
| | -5 | 53.5 to 58.5 | + 3.1 to + 8.1 |
| M2 | 0 | 51 to 56 | + 0.6 to + 5.6 |
| | -5 | 48.5 to 53.5 | - 1.9 to + 3.1 |
| M3 | 0 | 46 to 51 | - 4.4 to + 0.6 |
| | -5 | 43.5 to 48.5 | - 6.9 to - 1.9 |
| M4 | 0 | < 46 | < - 4.4 |
| | -5 | < 43.5 | < - 6.9 |
| Frequency > 960 MHz | | | |
| M1 | 0 | 46 to 51 | - 4.4 to 0.6 |
| | -5 | 43.5 to 48.5 | - 6.9 to -1.9 |
| M2 | 0 | 41 to 46 | - 9.4 to - 4.4 |
| | -5 | 38.5 to 43.5 | -11.9 to - 6.9 |
| M3 | 0 | 36 to 41 | - 14.4 to - 9.4 |
| | -5 | 33.5 to 38.5 | - 16.9 to -11.9 |
| M4 | 0 | < 36 | < - 14.4 |
| | -5 | < 33.5 | < - 16.9 |

Table 1. Telephone near-field categories in linear units

10. MEASUREMENT UNCERTAINTIES

10.1 E-Field

| HAC (E-Field) Uncertainty Budget [According to ANSI C63.19] | | | | | | | | | | Note/ Comment |
|---|--------------------------------|--------------------------|-------------|--------|--------------------------|----------------|---------------------------|-----------|---|------------------|
| Error Description | Uncertainty [%] | Probability Distribution | Divisor | ci [E] | Standard Uncertainty [E] | Stand Uncert*2 | (Stand Uncert*2) X (ci*2) | Vi & Veff | | |
| Measurement system | | | | | | | | | | |
| 1 | Probe Calibration | 5.1 % | Normal | 1.00 | 1 | 5.1 % | 26.01 | 26.01 | ∞ | |
| 2 | Axial Isotropy | 4.7 % | Rectangular | 1.73 | 1 | 2.7 % | 7.36 | 7.36 | ∞ | |
| 3 | Sensor Displacement | 16.5 % | Rectangular | 1.73 | 1 | 9.5 % | 90.75 | 90.75 | ∞ | |
| 4 | Boundary effect | 2.4 % | Rectangular | 1.73 | 1 | 1.4 % | 1.92 | 1.92 | ∞ | |
| 5 | Linearity | 4.7 % | Rectangular | 1.73 | 1 | 2.7 % | 7.36 | 7.36 | ∞ | |
| 6 | Scaling to peak Envelope Power | 2.0 % | Rectangular | 1.73 | 1 | 1.2 % | 1.33 | 1.33 | ∞ | |
| 7 | System Detection limits | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.33 | 0.33 | ∞ | |
| 8 | Readout Electronics | 0.3 % | Normal | 1.00 | 1 | 0.3 % | 0.09 | 0.09 | ∞ | |
| 9 | Response time | 0.8 % | Rectangular | 1.73 | 1 | 0.5 % | 0.21 | 0.21 | ∞ | |
| 10 | Integration time | 2.6 % | Rectangular | 1.73 | 1 | 1.5 % | 2.25 | 2.25 | ∞ | |
| 11 | RF Ambient Conditions | 3.0 % | Rectangular | 1.73 | 1 | 1.7 % | 3.00 | 3.00 | ∞ | |
| 12 | RF Reflections | 1.2 % | Rectangular | 1.73 | 1 | 0.7 % | 0.50 | 0.50 | ∞ | |
| 13 | Probe positioner | 1.2 % | Rectangular | 1.73 | 1 | 0.7 % | 0.48 | 0.48 | ∞ | |
| 14 | Probe positioning | 4.7 % | Rectangular | 1.73 | 1 | 2.7 % | 7.36 | 7.36 | ∞ | |
| 15 | Extrap. And Interpolation | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.33 | 0.33 | ∞ | |
| Test Sample Related | | | | | | | | | | |
| 16 | Device Positioning Vertical | 4.7 % | Rectangular | 1.73 | 1 | 2.7 % | 7.36 | 7.36 | ∞ | |
| 17 | Device Positioning Lateral | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.33 | 0.33 | ∞ | |
| 18 | Device Holder and Phantom | 2.4 % | Rectangular | 1.73 | 1 | 1.4 % | 1.92 | 1.92 | ∞ | |
| 19 | Test Sample | 0.4 % | Normal | 1.00 | 1 | 0.4 % | 0.16 | 0.16 | g | 0.17 dB |
| 20 | Power drift | 3.0 % | Rectangular | 1.73 | 1 | 1.7 % | 3.00 | 3.00 | ∞ | |
| PMF Calculations | | | | | | | | | | |
| 21 | Power Sensor | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.32 | 0.32 | ∞ | |
| 22 | Dual Directional Coupler | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.32 | 0.32 | ∞ | |
| Phantom and Setup Related | | | | | | | | | | |
| 23 | Phantom Thickness | 2.4 % | Rectangular | 1.73 | 1 | 1.4 % | 1.92 | 1.92 | ∞ | |
| Combined standard Uncertainty [%] | | | | | | 12.8 % | | 164.64 | | 0.523 dB |
| Expanded standard Uncertainty [k = 2 , Confidence 95 %] | | | | | | 25.7 % | | | | 0.993 dB |

Table 2. Uncertainties (E-Field)

Notes:

1. Worst-Case uncertainty budget for HAC free field assessment according to ANSI-C 63.19[1]. The budget is valid for the frequency range 800 MHz-3 GHz and represents a worst-Case analysis. For specific test sand configurations, the uncertainty could be considerably smaller. Some of the parameters are dependent on the user situations and need adjustment according to the actual laboratory conditions.
2. * Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)

10.2 H-Field

| HAC (H-Field) Uncertainty Budget [According to ANSI C63.19] | | | | | | | | | | Note/ Comment |
|---|--------------------------------|--------------------------|-------------|--------|--------------------------|----------------|---------------------------|-----------------------------------|---|------------------|
| Error Description | Uncertainty [%] | Probability Distribution | Divisor | ci [H] | Standard Uncertainty [H] | Stand Uncert*2 | (Stand Uncert*2) X (ci^2) | V _i & V _{eff} | | |
| Measurement system | | | | | | | | | | |
| 1 | Probe Calibration | 5.1 % | Normal | 1.00 | 1 | 5.1 % | 26.01 | 26.01 | ∞ | |
| 2 | Axial Isotropy | 4.7 % | Rectangular | 1.73 | 1 | 2.7 % | 7.36 | 7.36 | ∞ | |
| 3 | Sensor Displacement | 16.5 % | Rectangular | 1.73 | 0.145 | 1.4 % | 1.91 | 0.04 | ∞ | |
| 4 | Boundary effect | 2.4 % | Rectangular | 1.73 | 1 | 1.4 % | 1.92 | 1.92 | ∞ | |
| 5 | Linearity | 4.7 % | Rectangular | 1.73 | 1 | 2.7 % | 7.36 | 7.36 | ∞ | |
| 6 | Scaling to peak Envelope Power | 2.0 % | Rectangular | 1.73 | 1 | 1.2 % | 1.33 | 1.33 | ∞ | |
| 7 | System Detection limits | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.33 | 0.33 | ∞ | |
| 8 | Readout Electronics | 0.3 % | Normal | 1.00 | 1 | 0.3 % | 0.09 | 0.09 | ∞ | |
| 9 | Response time | 0.8 % | Rectangular | 1.73 | 1 | 0.5 % | 0.21 | 0.21 | ∞ | |
| 10 | Integration time | 2.6 % | Rectangular | 1.73 | 1 | 1.5 % | 2.25 | 2.25 | ∞ | |
| 11 | RF Ambient Conditions | 3.0 % | Rectangular | 1.73 | 1 | 1.7 % | 3.00 | 3.00 | ∞ | |
| 12 | RF Reflections | 1.1 % | Rectangular | 1.00 | 1 | 1.1 % | 1.14 | 1.14 | ∞ | |
| 13 | Probe positioner | 1.2 % | Rectangular | 1.73 | 0.67 | 0.5 % | 0.22 | 0.10 | ∞ | |
| 14 | Probe positioning | 4.7 % | Rectangular | 1.73 | 0.67 | 1.8 % | 3.31 | 1.48 | ∞ | |
| 15 | Extrap. And Interpolation | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.33 | 0.33 | ∞ | |
| Test Sample Related | | | | | | | | | | |
| 16 | Device Positioning Vertical | 4.7 % | Rectangular | 1.73 | 0.67 | 1.8 % | 3.31 | 7.32 | ∞ | |
| 17 | Device Positioning Lateral | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.33 | 0.33 | ∞ | |
| 18 | Device Holder and Phantom | 2.4 % | Rectangular | 1.73 | 1 | 1.4 % | 1.92 | 1.92 | ∞ | |
| 19 | Test Sample | 0.3 % | Normal | 1.00 | 1 | 0.3 % | 0.08 | 0.08 | 9 | 0.013 dB |
| 20 | Power drift | 3.0 % | Rectangular | 1.73 | 1 | 1.7 % | 3.00 | 3.00 | ∞ | |
| PMF Calculations | | | | | | | | | | |
| 21 | Power Sensor | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.32 | 0.10 | ∞ | |
| 22 | Dual Directional Coupler | 1.0 % | Rectangular | 1.73 | 1 | 0.6 % | 0.32 | 0.32 | ∞ | |
| Phantom and Setup Related | | | | | | | | | | |
| 23 | Phantom Thickness | 2.4 % | Rectangular | 1.73 | 0.67 | 0.9 % | 0.86 | 0.39 | ∞ | |
| Combined standard Uncertainty [%] | | | | | | 8.2 % | | 66.44 | | 0.342 dB |
| Expanded standard Uncertainty [k = 2 , Confidence 95 %] | | | | | | 16.3 % | | | | 0.6558 dB |

Table 3. Uncertainties (H-Field)

Notes:

1. Worst-Case uncertainty budget for HAC free field assessment according to ANSI-C 63.19[1]. The budget is valid for the frequency range 800 MHz-3 GHz and represents a worst-Case analysis. For specific test sand configurations, the uncertainty could be considerably smaller. Some of the parameters are dependent on the user situations and need adjustment according to the actual laboratory conditions.
2. * Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)

11. HAC TEST DATA SUMMARY

11.1 Measurement Results (E-Field CDMA / PCS DATA/AWS DATA)

Ambient TEMPERATURE (°C): 21.4

S/N: #1

| Mode | Ch. | Backlight | RC/SO | Battery | Antenna | Conducted Power (dBm) | Time Avg. Field (V/m) | Peak Field (dBV/m) | FCC Limit (dBV/m) | FCC MARGIN (dB) | Exclusion Block | RESULT |
|------|------|-----------|----------|----------|---------|-----------------------|-----------------------|--------------------|-------------------|-----------------|-----------------|-----------|
| CDMA | 1013 | off | SO55/RC1 | Standard | Intenna | 23.69 | 39.4 | 31.6 | 51 | - 19.44 | none | M4 |
| CDMA | 384 | off | SO55/RC1 | Standard | Intenna | 23.87 | 44.5 | 32.6 | 51 | - 18.38 | none | M4 |
| CDMA | 777 | off | SO55/RC1 | Standard | Intenna | 23.76 | 47.6 | 33.2 | 51 | - 17.80 | none | M4 |
| PCS | 25 | off | SO55/RC1 | Standard | Intenna | 23.61 | 30.3 | 29.4 | 41 | - 11.60 | none | M4 |
| PCS | 600 | off | SO55/RC1 | Standard | Intenna | 23.73 | 32.0 | 29.9 | 41 | - 11.13 | none | M4 |
| PCS | 1175 | off | SO55/RC1 | Standard | Intenna | 24.03 | 22.5 | 26.8 | 41 | - 14.18 | none | M4 |
| AWS | 25 | off | SO55/RC1 | Standard | Intenna | 23.98 | 24.8 | 27.7 | 41 | - 13.33 | none | M4 |
| AWS | 450 | off | SO55/RC1 | Standard | Intenna | 23.92 | 23.2 | 27.1 | 41 | - 13.93 | none | M4 |
| AWS | 875 | off | SO55/RC1 | Standard | Intenna | 23.87 | 25.6 | 27.9 | 41 | - 13.05 | none | M4 |

NOTES:

- All modes of operation were investigated and the worst-case are reported.
- Battery Type Standard Extended Fixed
- Power Measured Conducted EIRP ERP
- Test Signal Call Mode Manual Test cord Base Station Simulator
- HAC Measurement System SPEAG

11.2 Measurement Results (H-Field CDMA / PCS DATA/AWS DATA)

Ambient TEMPERATURE (°C): 21.4

S/N: #1

| Mode | Ch. | Backlight | RC/SO | Battery | Antenna | Conducted Power (dBm) | Time Avg. Field (A/m) | Peak Field (dBA/m) | FCC Limit (dBA/m) | FCC MARGIN (dB) | Exclusion Block | RESULT |
|------|------|-----------|----------|----------|---------|-----------------------|-----------------------|--------------------|-------------------|-----------------|-----------------|-----------|
| CDMA | 1013 | off | SO55/RC1 | Standard | Intenna | 23.69 | 0.132 | -18.8 | 0.6 | - 19.39 | none | M4 |
| CDMA | 384 | off | SO55/RC1 | Standard | Intenna | 23.87 | 0.135 | -18.6 | 0.6 | - 19.25 | none | M4 |
| CDMA | 777 | off | SO55/RC1 | Standard | Intenna | 23.76 | 0.140 | -18.3 | 0.6 | - 18.88 | none | M4 |
| PCS | 25 | off | SO55/RC1 | Standard | Intenna | 23.61 | 0.070 | -25.3 | -9.4 | - 15.94 | none | M4 |
| PCS | 600 | off | SO55/RC1 | Standard | Intenna | 23.73 | 0.061 | -26.5 | -9.4 | - 17.14 | none | M4 |
| PCS | 1175 | off | SO55/RC1 | Standard | Intenna | 24.03 | 0.062 | -26.5 | -9.4 | - 17.09 | none | M4 |
| AWS | 25 | off | SO55/RC1 | Standard | Intenna | 23.98 | 0.067 | -25.8 | -9.4 | - 16.37 | none | M4 |
| AWS | 450 | off | SO55/RC1 | Standard | Intenna | 23.92 | 0.059 | -26.8 | -9.4 | - 17.38 | none | M4 |
| AWS | 875 | off | SO55/RC1 | Standard | Intenna | 23.87 | 0.066 | -25.9 | -9.4 | - 16.49 | none | M4 |

NOTES:


- All modes of operation were investigated and the worst-case are reported.
- Battery Type Standard Extended Fixed
- Power Measured Conducted EIRP ERP
- Test Signal Call Mode Manual Test cord Base Station Simulator
- HAC Measurement System SPEAG

11.3 Worst-case Configuration Evaluation

Ambient TEMPERATURE (°C): 21.5
S/N: #1

Peak Reading 360° Probe Rotation at Azimuth axis

| Mode | Ch. | Backlight | RC/SO | Battery | Antenna | Conducted Power (dBm) | Time Avg. Field (A/m) | Peak Field (dBA/m) | FCC Limit (dBA/m) | FCC MARGIN (dB) | Exclusion Block | RESULT |
|------|-----|-----------|----------|----------|---------|-----------------------|-----------------------|--------------------|-------------------|-----------------|-----------------|-----------|
| AWS | 875 | off | SO55/RC1 | Standard | Intenna | 23.66 | 30.8 | 29.5 | 41 | - 11.52 | none | M4 |

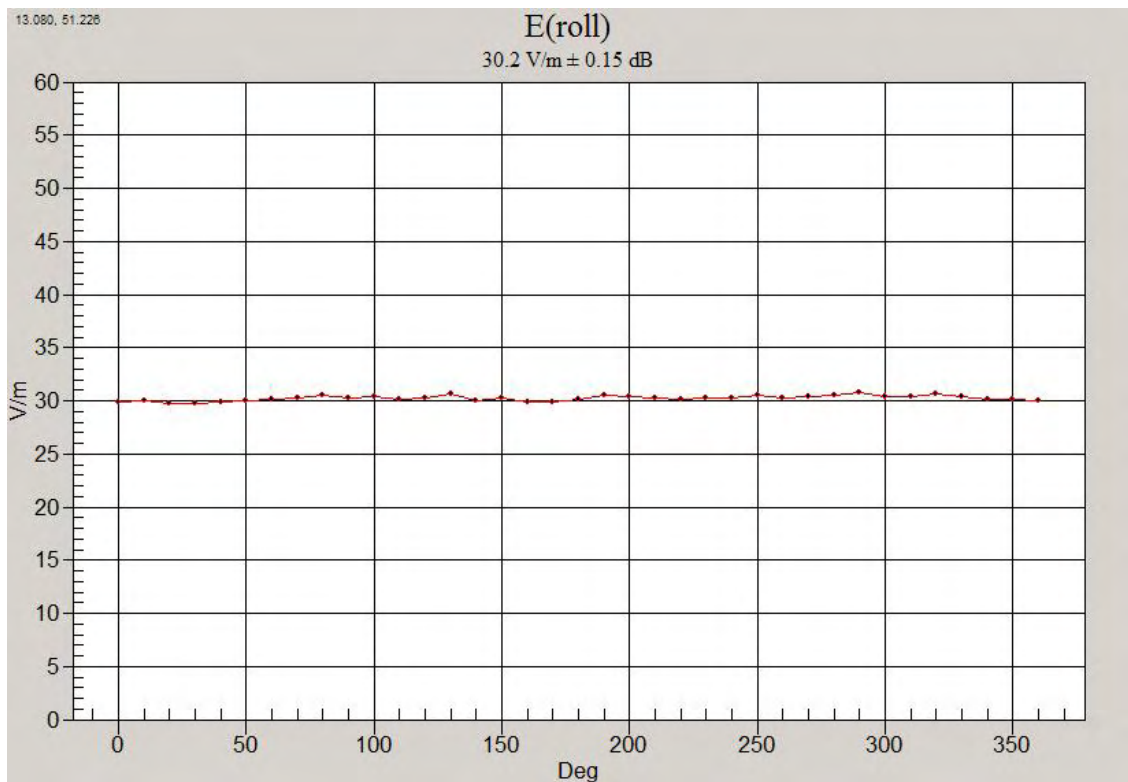

Worst-Case Probe Rotation about Azimuth axis

12. HAC TEST EQUIPMENT LIST

| Manufacturer | Type / Model | S/N | Calib. Date | Calib. Interval | Calib. Due |
|--------------|-------------------------------|------------------|-------------|-----------------|------------|
| Staubli | Robot RX90L | F01/ 5K09A1/A/01 | N/A | N/A | N/A |
| Staubli | Robot ControllerCS7MB | F99/5A82A1/C/01 | N/A | N/A | N/A |
| Staubli | Teach Pendant (Joystick) | D221340.01 | N/A | N/A | N/A |
| HP | Pavilion t000_puffer | KRJ51201TV | N/A | N/A | N/A |
| SPEAG | SPEAG HAC Phantom | - | N/A | N/A | N/A |
| SPEAG | Light Alignment Sensor | 265 | N/A | N/A | N/A |
| SPEAG | DAE3 | 446 | 05/22/09 | Annual | 05/22/10 |
| SPEAG | DAE4 | 869 | 09/03/ 08 | Annual | 09/03/09 |
| SPEAG | E-Field Probe | 2343 | 05/22/09 | Annual | 05/22/10 |
| SPEAG | H-Field Probe | 6101 | 05/22/09 | Annual | 05/22/10 |
| SPEAG | Validation Dipole CD835V2 | 1024 | 03/11/08 | Biennial | 03/11/10 |
| SPEAG | Validation Dipole CD1880V2 | 1019 | 03/11/08 | Biennial | 03/11/10 |
| Agilent | Power Meter(F) E4419B | MY41291386 | 11/05/08 | Annual | 11/05/09 |
| Agilent | Power Sensor(G) 8481 | MY41090870 | 11/05/08 | Annual | 11/05/09 |
| HP | Signal Generator E4438C | MY42082646 | 12/24/08 | Annual | 12/24/09 |
| EM POWER | Power Amp BBS3Q7ELU | 1009D/C0028 | 11/05/08 | Annual | 11/05/09 |
| HP | Dual Directional Coupler 778D | 16072 | 11/05/08 | Annual | 11/05/09 |
| R&S | Base Station CMU200 | 110740 | 07/26/08 | Annual | 07/26/09 |
| Agilent | Base Station E5515C | GB44400269 | 02/10/09 | Annual | 02/10/10 |
| R&S | Spectrum Analyzer FSP30 | 839117/011 | 07/31/08 | Annual | 07/31/09 |

NOTE:

The probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Validation measurement is performed by HCT Lab. before each test.

13. CONCLUSION

The HAC measurement indicates that the EUT complies with the HAC limits of the ANSI-C63.19-2007.

These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise Laboratory measures were taken to assure repeatability of the tests.

APPENDIX A. HAC TEST PLOTS

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /1013
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn446; Calibrated: 2009-05-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):


Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 55.1 V/m
 Probe Modulation Factor = 0.978
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 77.5 V/m; Power Drift = 0.053 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 50.4 M4 | 53.7 M4 | 51.6 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 52.1 M4 | 55.1 M4 | 54.0 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 51.6 M4 | 54.1 M4 | 52.2 M4 |

Cursor:

Total = 55.1 V/m
 E Category: M4
 Location: -2.5, 0.5, 369.9 mm

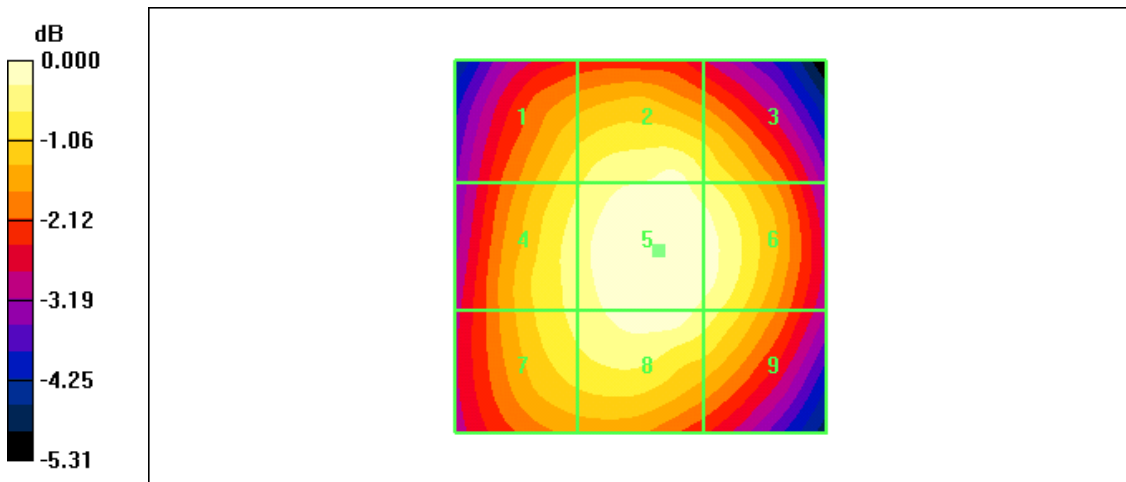

0 dB = 55.1V/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /384
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 60.2 V/m
 Probe Modulation Factor = 0.978
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 84.2 V/m; Power Drift = 0.040 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 54.4 M4 | 57.8 M4 | 56.7 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 56.7 M4 | 60.2 M4 | 58.7 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 56.0 M4 | 58.3 M4 | 56.4 M4 |

Cursor:
 Total = 60.2 V/m
 E Category: M4
 Location: -1, 0, 369.9 mm

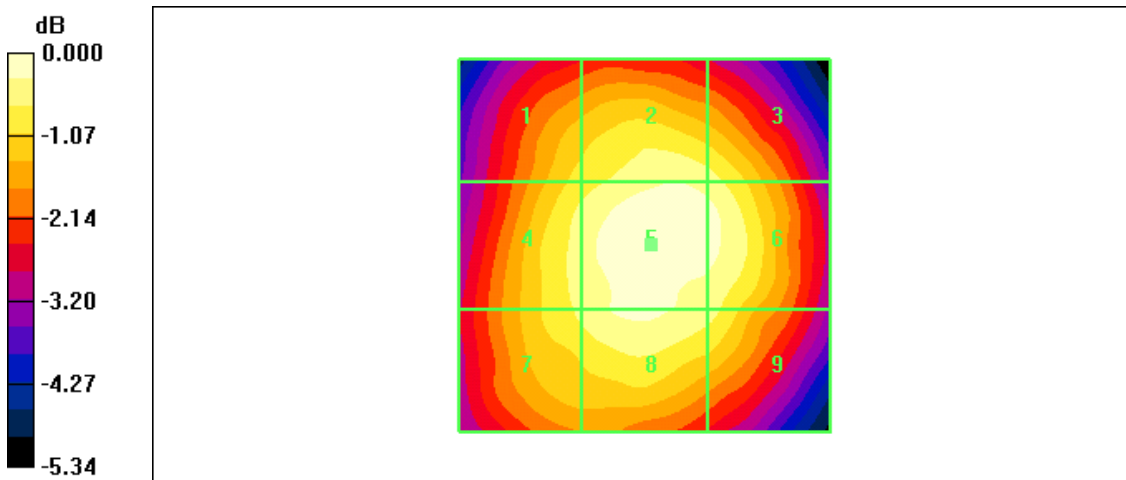

0 dB = 60.2V/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /777
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 61.4 V/m
 Probe Modulation Factor = 0.978
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 86.9 V/m; Power Drift = 0.031 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 56.6 M4 | 59.5 M4 | 57.9 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 58.7 M4 | 61.4 M4 | 60.5 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 57.6 M4 | 60.2 M4 | 57.7 M4 |

Cursor:
 Total = 61.4 V/m
 E Category: M4
 Location: -2.5, 0, 369.9 mm

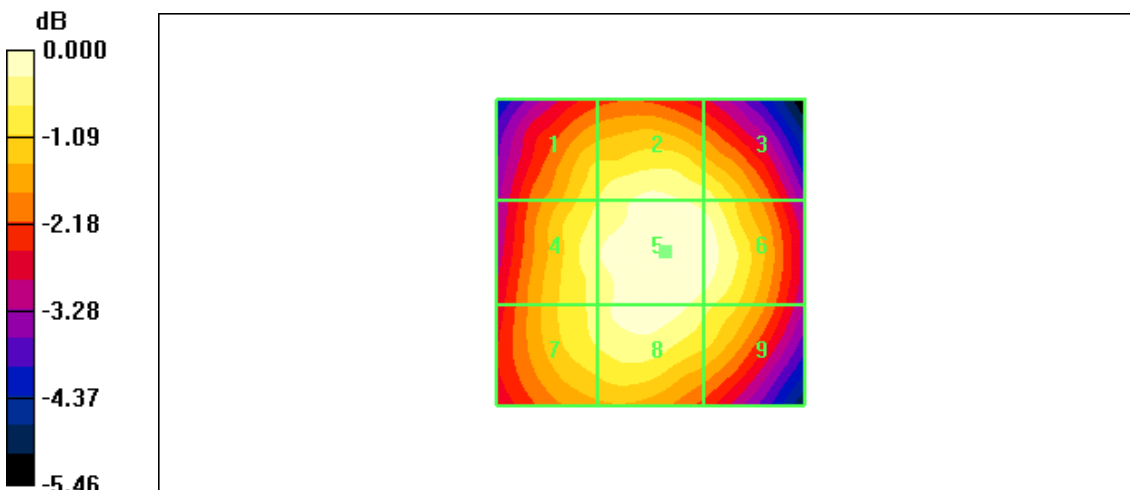

0 dB = 61.4V/m

Test Laboratory: HCT CO., LTD.

Ambient Temperature / Channel 21.4 °C /25

Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: PCS 1900MHz FCC; Frequency: 1851.25 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn446; Calibrated: 2009-05-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):


Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 26.7 V/m
 Probe Modulation Factor = 0.967
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 17.3 V/m; Power Drift = 0.001 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 21.5 M4 | 21.3 M4 | 19.9 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 21.3 M4 | 21.1 M4 | 18.8 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 26.7 M4 | 26.3 M4 | 21.7 M4 |

Cursor:

Total = 26.7 V/m
 E Category: M4
 Location: 14, 25, 369.9 mm

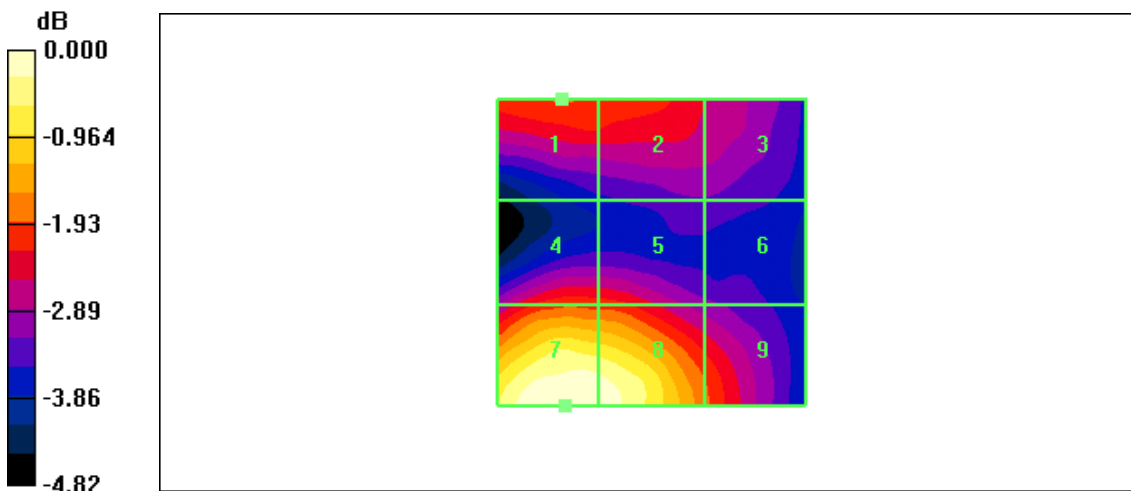

0 dB = 26.7V/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /600
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 19.5 V/m
 Probe Modulation Factor = 0.967
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 13.6 V/m; Power Drift = 0.075 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 17.8 M4 | 18.9 M4 | 19.2 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 15.7 M4 | 17.5 M4 | 18.3 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 19.4 M4 | 19.5 M4 | 18.8 M4 |

Cursor:
 Total = 19.5 V/m
 E Category: M4
 Location: 5, 25, 369.9 mm

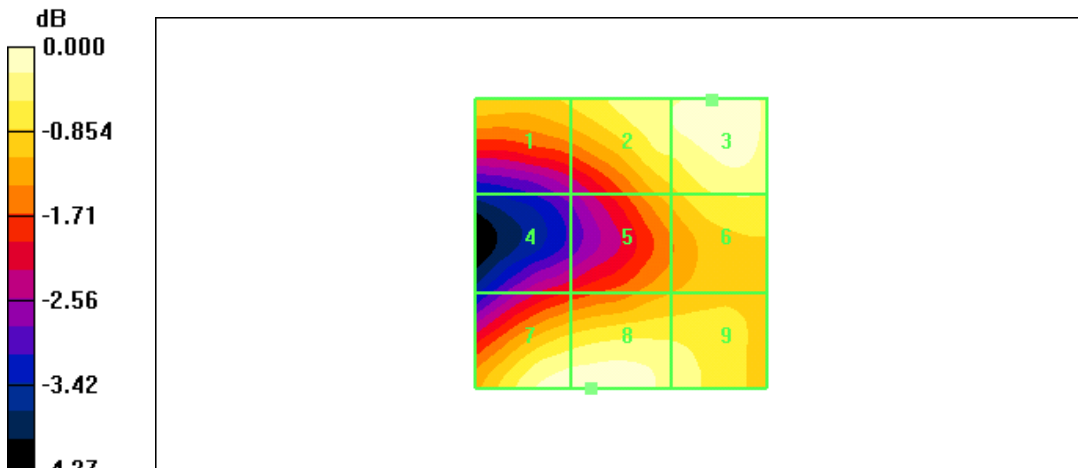

0 dB = 19.5V/m

Test Laboratory: HCT CO., LTD.

Ambient Temperature / Channel 21.4 °C /1175

Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: PCS 1900MHz FCC; Frequency: 1908.75 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn446; Calibrated: 2009-05-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):


Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 20.1 V/m
 Probe Modulation Factor = 0.967
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 10.8 V/m; Power Drift = 0.012 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 20.1 M4 | 17.9 M4 | 16.8 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 14.0 M4 | 14.8 M4 | 15.7 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 15.3 M4 | 14.8 M4 | 14.9 M4 |

Cursor:

Total = 20.1 V/m
 E Category: M4
 Location: 25, -25, 369.9 mm

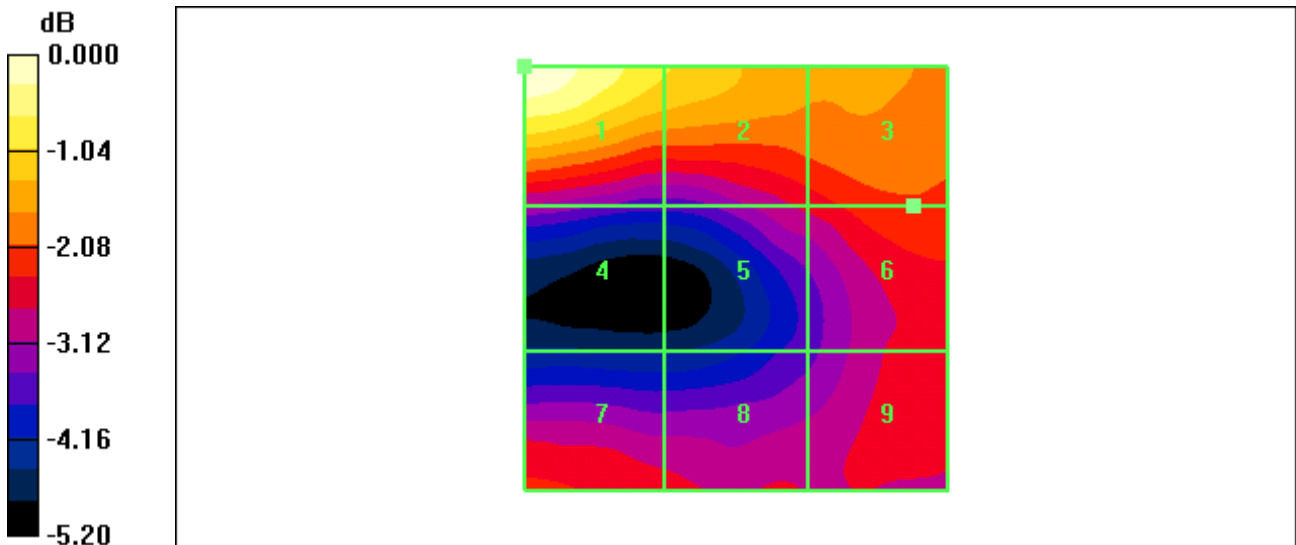

0 dB = 20.1V/m

Test Laboratory: HCT CO., LTD.

Ambient Temperature / Channel 21.4 °C /25

Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: AWS 1700 MHz FCC; Frequency: 1711.25 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA


E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 22.9 V/m
 Probe Modulation Factor = 0.967
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 23.5 V/m; Power Drift = -0.026 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 13.8 M4 | 14.3 M4 | 14.3 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 18.4 M4 | 17.7 M4 | 14.5 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 22.9 M4 | 20.6 M4 | 15.6 M4 |

Cursor:
 Total = 22.9 V/m
 E Category: M4
 Location: 23.5, 25, 369.9 mm

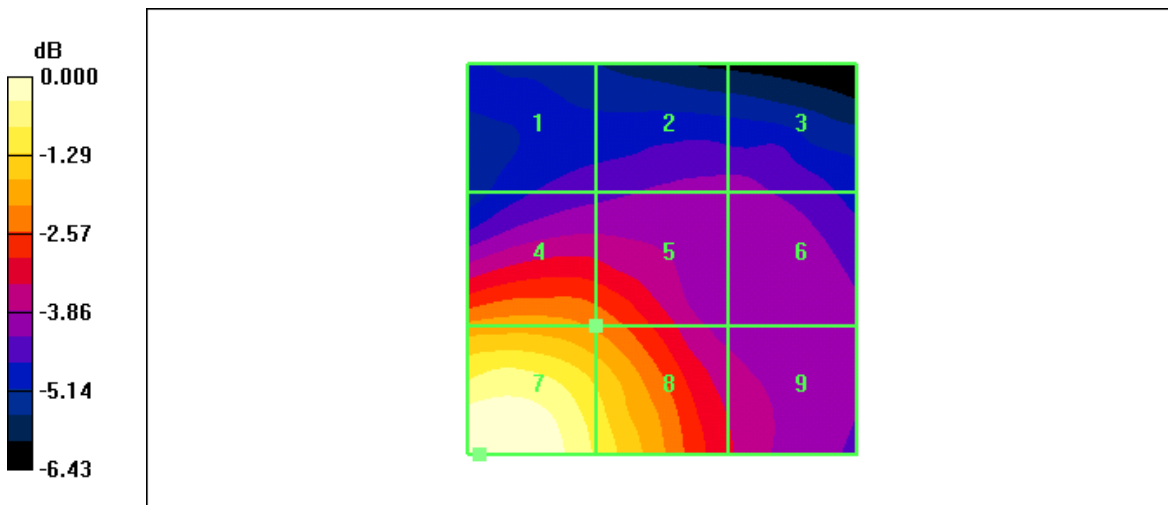

0 dB = 22.9V/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /450
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: AWS 1700 MHz FCC; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 24.6 V/m
 Probe Modulation Factor = 0.967
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 18.3 V/m; Power Drift = -0.033 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 15.4 M4 | 13.0 M4 | 12.7 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 19.2 M4 | 17.7 M4 | 13.6 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 24.6 M4 | 22.0 M4 | 15.7 M4 |

Cursor:
 Total = 24.6 V/m
 E Category: M4
 Location: 22, 25, 369.9 mm

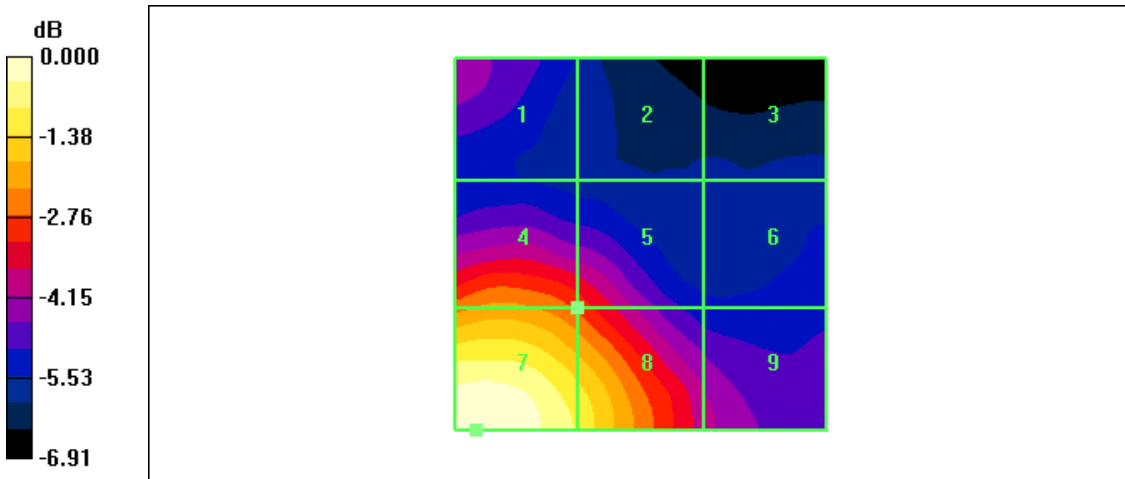

0 dB = 24.6V/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /875
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: AWS 1700 MHz FCC; Frequency: 1753.75 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 29.1 V/m
 Probe Modulation Factor = 0.967
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 19.7 V/m; Power Drift = 0.105 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------|---------|---------|
| Grid 1 | Grid 2 | Grid 3 |
| 19.3 M4 | 15.6 M4 | 12.6 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 22.7 M4 | 21.0 M4 | 14.0 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 29.1 M4 | 25.8 M4 | 17.1 M4 |

Cursor:
 Total = 29.1 V/m
 E Category: M4
 Location: 23, 25, 369.9 mm

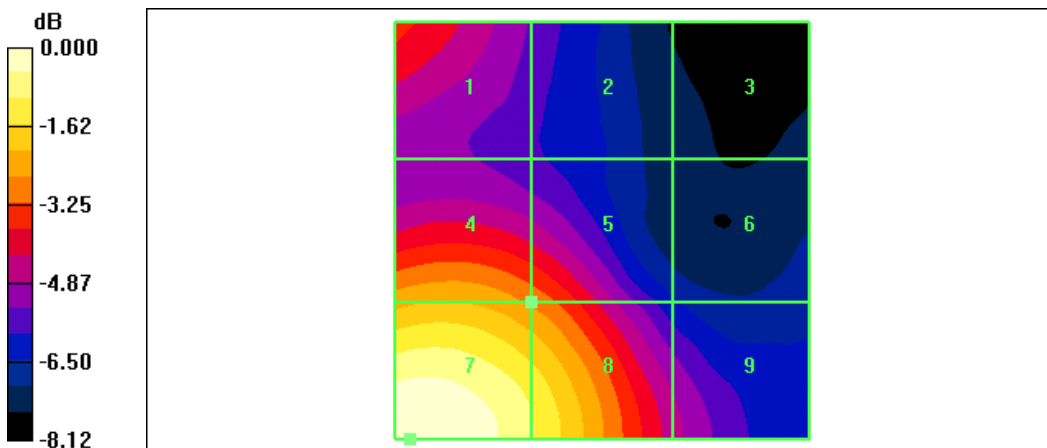

0 dB = 29.1V/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /1013
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.115 A/m
 Probe Modulation Factor = 0.869
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.083 A/m; Power Drift = -0.011 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.113 M4 | 0.082 M4 | 0.052 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.115 M4 | 0.084 M4 | 0.054 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.113 M4 | 0.082 M4 | 0.054 M4 |

Cursor:
 Total = 0.115 A/m
 H Category: M4
 Location: 25, -4.5, 369.4 mm

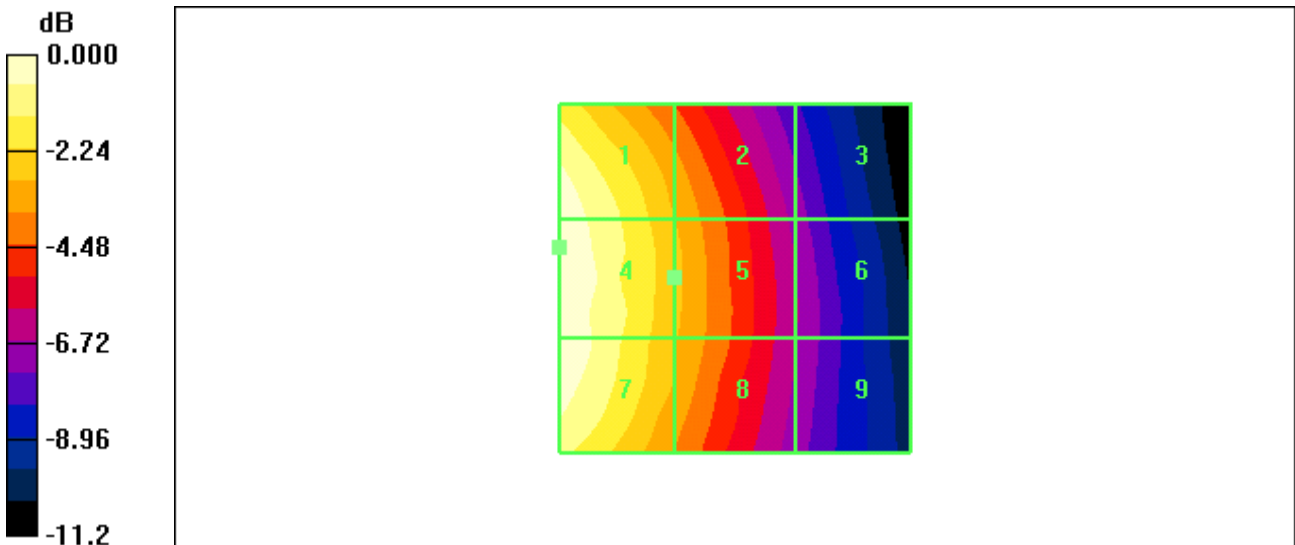

0 dB = 0.115A/m

Test Laboratory: HCT CO., LTD.

Ambient Temperature / Channel 21.4 °C /384

Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.117 A/m
 Probe Modulation Factor = 0.869
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.084 A/m; Power Drift = 0.016 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.116 M4 | 0.083 M4 | 0.052 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.117 M4 | 0.085 M4 | 0.054 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.115 M4 | 0.083 M4 | 0.054 M4 |

Cursor:
 Total = 0.117 A/m
 H Category: M4
 Location: 25, -3.5, 369.4 mm

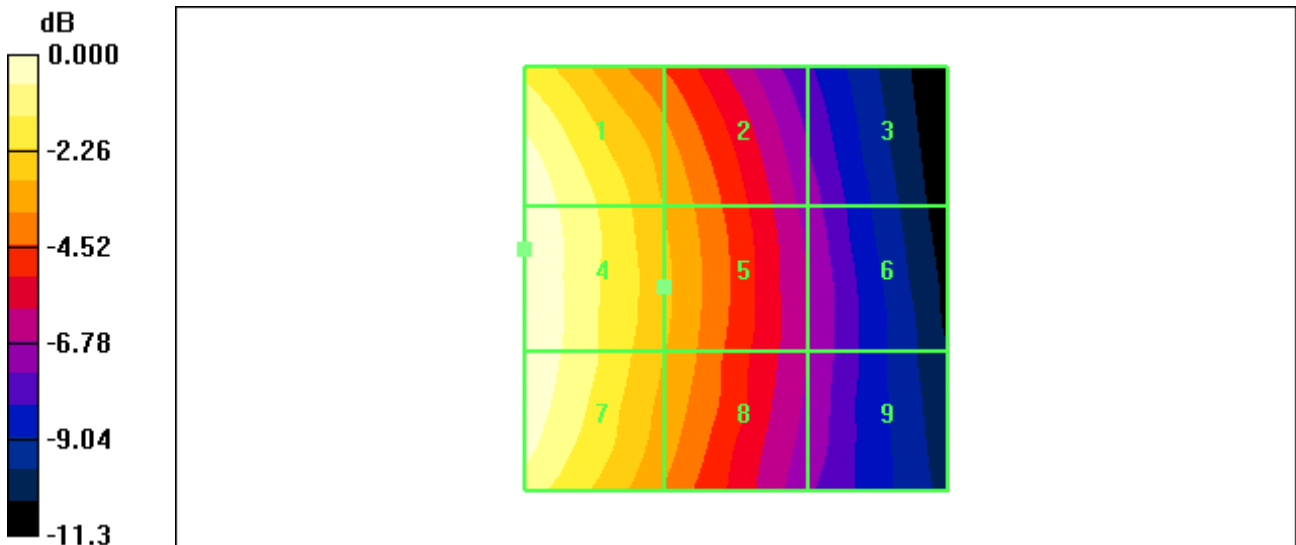

0 dB = 0.117A/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /777
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.122 A/m
 Probe Modulation Factor = 0.869
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.085 A/m; Power Drift = 0.070 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.121 M4 | 0.086 M4 | 0.052 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.122 M4 | 0.087 M4 | 0.053 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.119 M4 | 0.085 M4 | 0.052 M4 |

Cursor:
 Total = 0.122 A/m
 H Category: M4
 Location: 25, -1, 369.4 mm

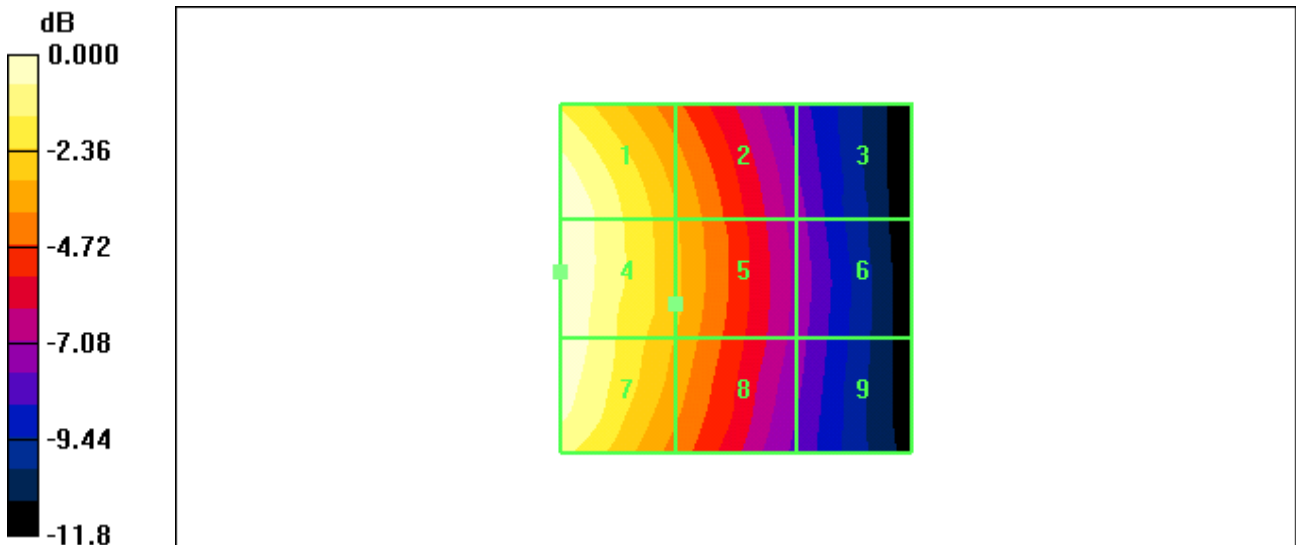

0 dB = 0.122A/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /25
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: PCS 1900MHz FCC; Frequency: 1851.25 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.054 A/m
 Probe Modulation Factor = 0.770
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.062 A/m; Power Drift = -0.073 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.046 M4 | 0.046 M4 | 0.046 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.045 M4 | 0.046 M4 | 0.046 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.054 M4 | 0.044 M4 | 0.044 M4 |

Cursor:
 Total = 0.054 A/m
 H Category: M4
 Location: 25, 25, 369.4 mm

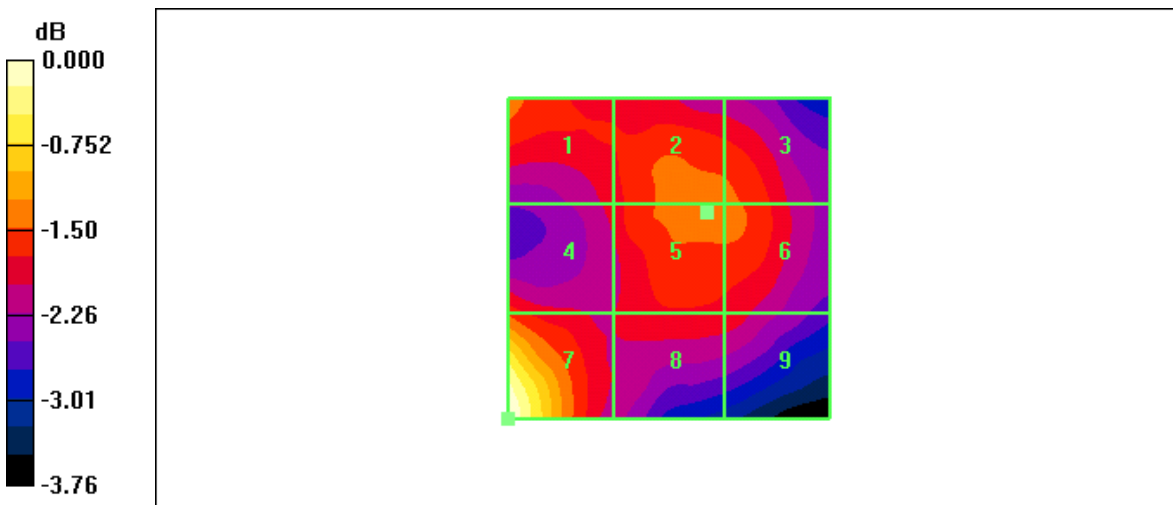

0 dB = 0.054A/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /600
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.047 A/m
 Probe Modulation Factor = 0.770
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.050 A/m; Power Drift = -0.032 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.047 M4 | 0.043 M4 | 0.039 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.038 M4 | 0.039 M4 | 0.038 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.044 M4 | 0.034 M4 | 0.034 M4 |

Cursor:
 Total = 0.047 A/m
 H Category: M4
 Location: 25, -25, 369.4 mm

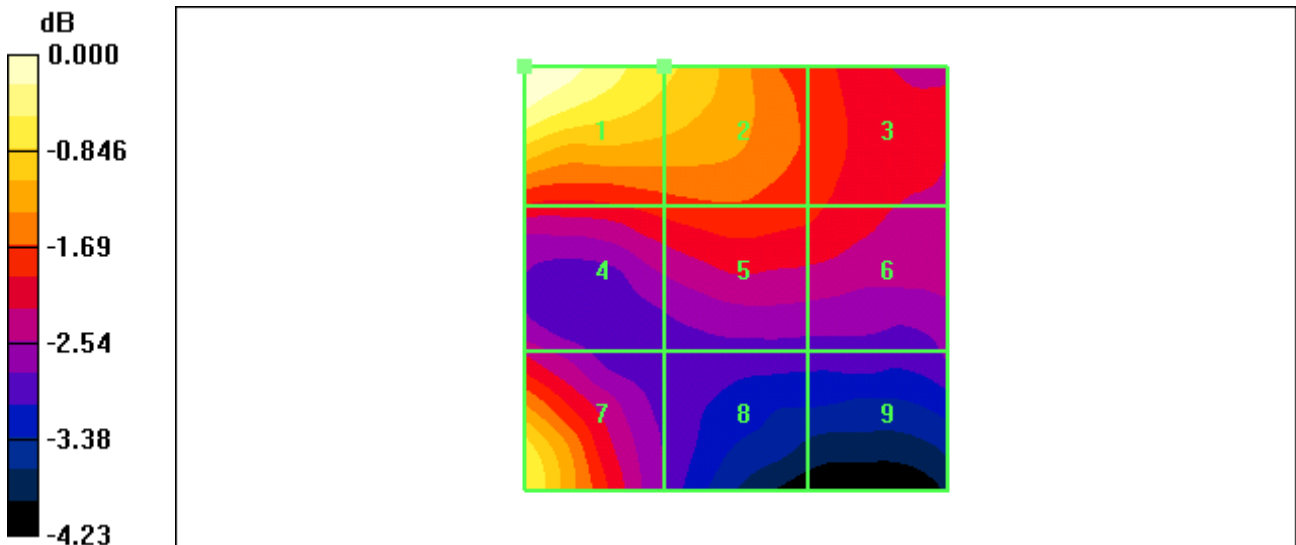

0 dB = 0.047A/m

Test Laboratory: HCT CO., LTD.

Ambient Temperature / Channel 21.4 °C /1175

Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: PCS 1900MHz FCC; Frequency: 1908.75 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.047 A/m
 Probe Modulation Factor = 0.770
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.052 A/m; Power Drift = -0.040 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.047 M4 | 0.044 M4 | 0.041 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.040 M4 | 0.041 M4 | 0.040 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.040 M4 | 0.036 M4 | 0.035 M4 |

Cursor:
 Total = 0.047 A/m
 H Category: M4
 Location: 25, -25, 369.4 mm

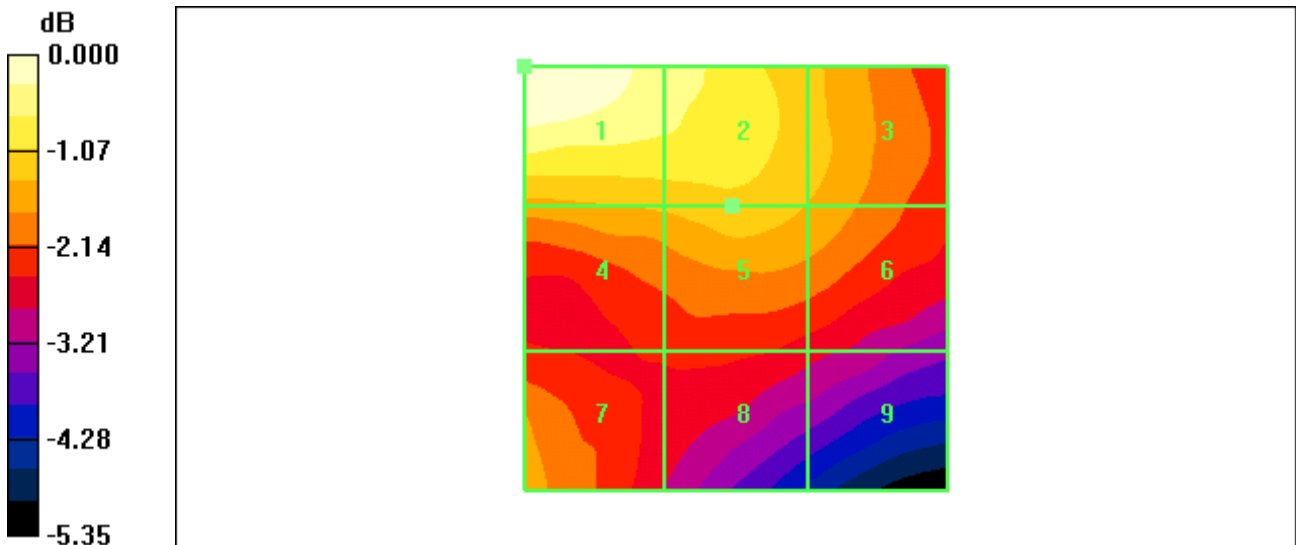

0 dB = 0.047A/m

Test Laboratory: HCT CO., LTD.

Ambient Temperature / Channel 21.4 °C /25

Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: AWS 1700 MHz FCC; Frequency: 1711.25 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.051 A/m
 Probe Modulation Factor = 0.770
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.063 A/m; Power Drift = -0.063 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|--------------------|--------------------|--------------------|
| Grid 1 0.040 M4 | Grid 2 0.040 M4 | Grid 3 0.033 M4 |
| Grid 4 0.045 M4 | Grid 5 0.045 M4 | Grid 6 0.038 M4 |
| Grid 7 0.051 M4 | Grid 8 0.046 M4 | Grid 9 0.038 M4 |

Cursor:
 Total = 0.051 A/m
 H Category: M4
 Location: 25, 22.5, 369.4 mm

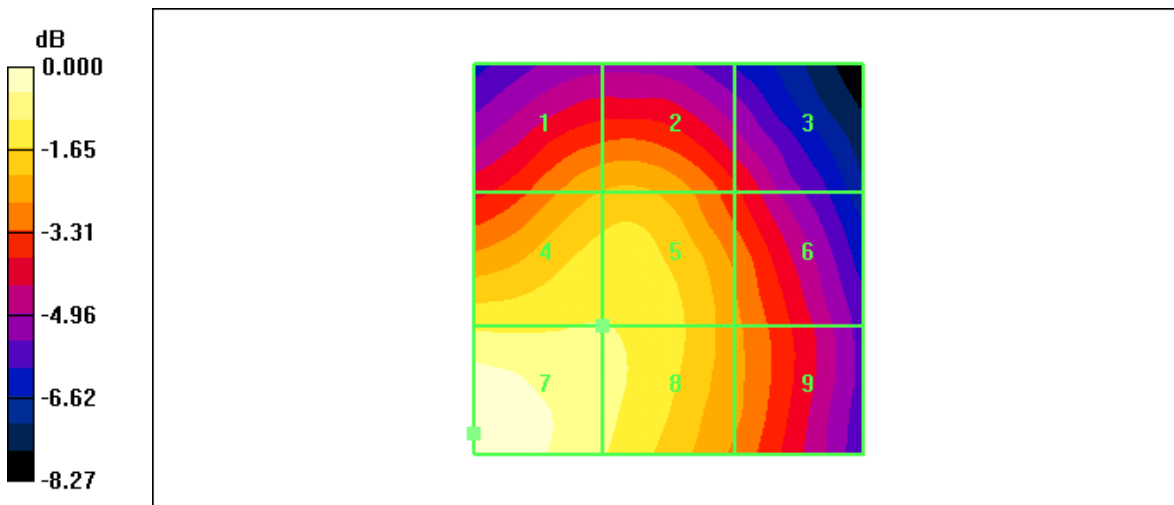

0 dB = 0.051A/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /450
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: AWS 1700 MHz FCC; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.046 A/m
 Probe Modulation Factor = 0.770
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.059 A/m; Power Drift = -0.158 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.038 M4 | 0.039 M4 | 0.035 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.041 M4 | 0.042 M4 | 0.038 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.046 M4 | 0.042 M4 | 0.038 M4 |

Cursor:
 Total = 0.046 A/m
 H Category: M4
 Location: 25, 23, 369.4 mm

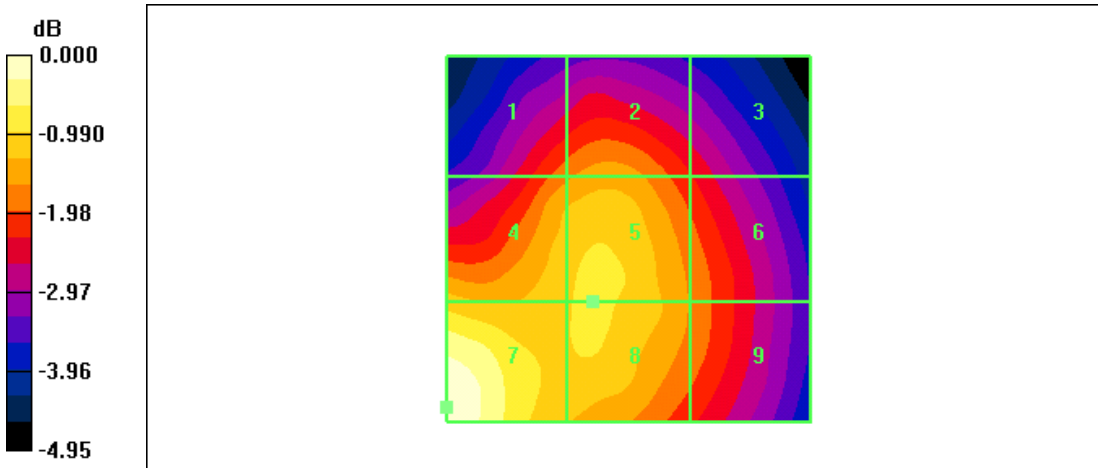

0 dB = 0.046A/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature / Channel 21.4 °C /875
 Test Date Jul.04, 2009

DUT: A150; Type: Folder; Serial: #1

Communication System: AWS 1700 MHz FCC; Frequency: 1753.75 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.051 A/m
 Probe Modulation Factor = 0.770
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 0.067 A/m; Power Drift = -0.105 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.044 M4 | 0.046 M4 | 0.043 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.046 M4 | 0.047 M4 | 0.045 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.051 M4 | 0.047 M4 | 0.045 M4 |

Cursor:
 Total = 0.051 A/m
 H Category: M4
 Location: 25, 22.5, 369.4 mm

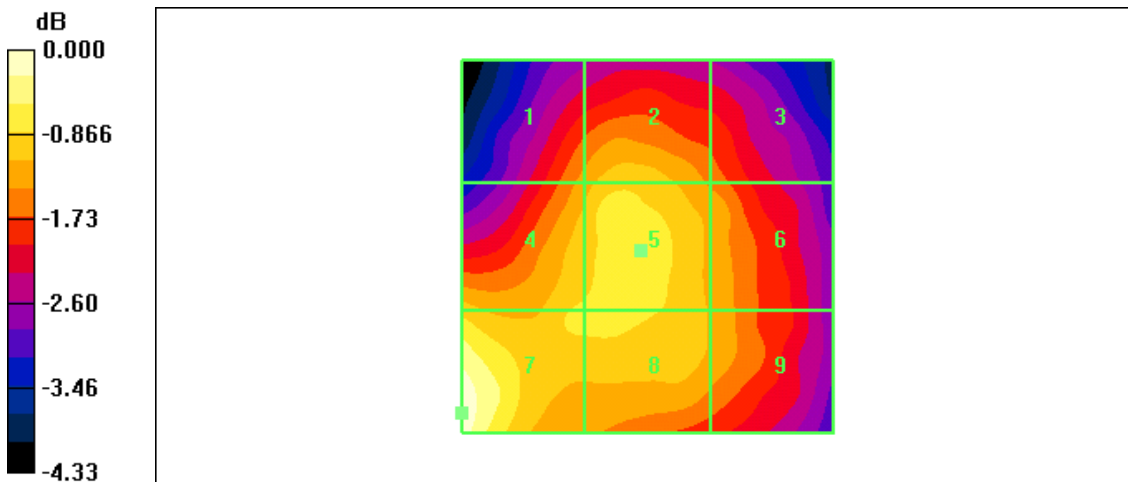


0 dB = 0.051A/m

APPENDIX B (HAC TEST SET-UP PHOTO)

■ Test Setup Photo



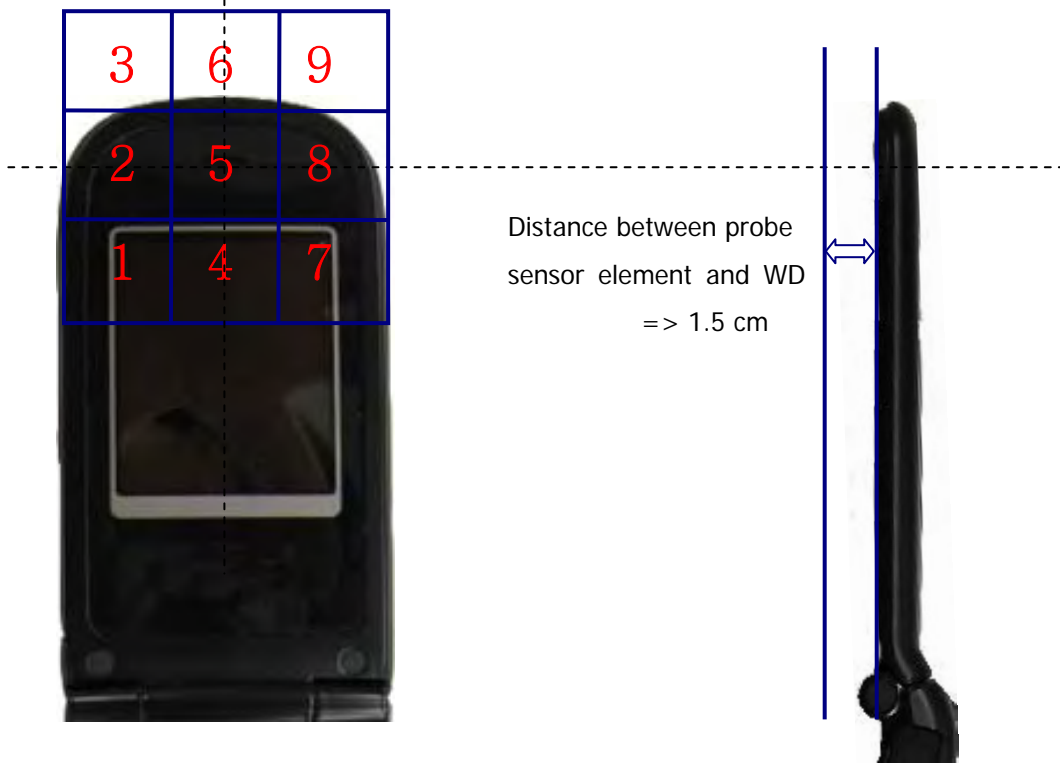

5 X 5 Scan grid above WD



E-Field WD Scan overlay



H-Field WD Scan overlay

APPENDIX C (DIPOLE VALIDATION)

Test Laboratory: HCT CO., LTD.
 Ambient Temperature: 21.4 °C
 Test Date: Jul.04, 2009

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial:1024

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Dipole Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 169.6 V/m
 Probe Modulation Factor = 1.00
 Device Reference Point: 0.000, 0.000, 354.7 mm
 Reference Value = 132.8 V/m; Power Drift = 0.016 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 161.4 M4 | 169.6 M4 | 167.0 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 83.0 M4 | 88.0 M4 | 87.0 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 156.0 M4 | 163.5 M4 | 161.6 M4 |

Cursor:
 Total = 169.6 V/m
 E Category: M4
 Location: -0.5, -78.5, 365.8 mm

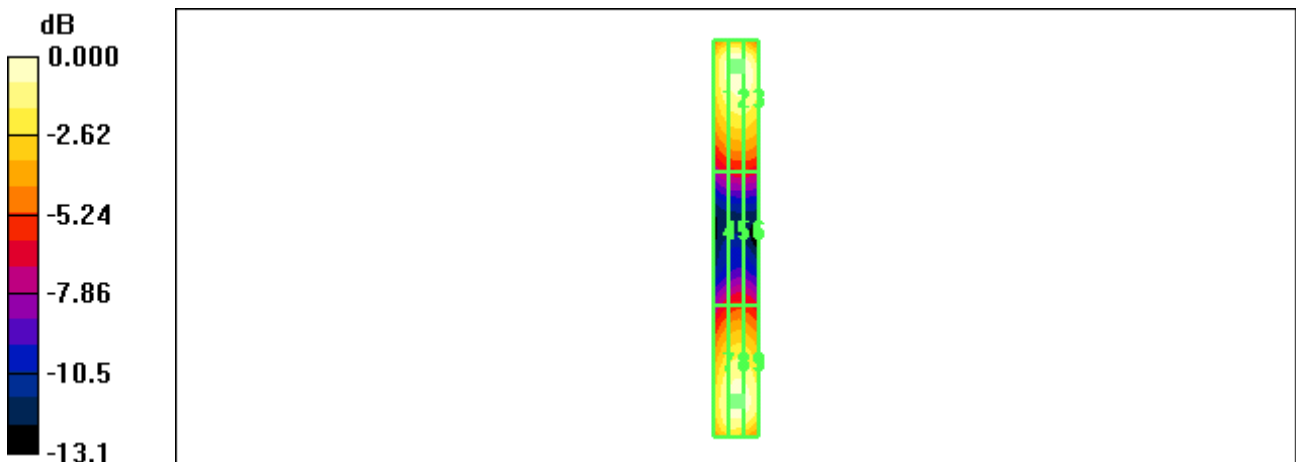

0 dB = 169.6V/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature: 21.4 °C
 Test Date: Jul.04, 2009

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial:1019

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 145.3 V/m
 Probe Modulation Factor = 1.00
 Device Reference Point: 0.000, 0.000, 353.7 mm
 Reference Value = 77.1 V/m; Power Drift = -0.061 dB
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------|--------------------|--------------------|
| Grid 1 126.7 M2 | Grid 2 138.9 M2 | Grid 3 137.6 M2 |
| Grid 4 94.1 M3 | Grid 5 99.7 M3 | Grid 6 97.6 M3 |
| Grid 7 129.8 M2 | Grid 8 145.3 M2 | Grid 9 144.0 M2 |

Cursor:
 Total = 145.3 V/m
 E Category: M2
 Location: -2, 38.5, 364.8 mm

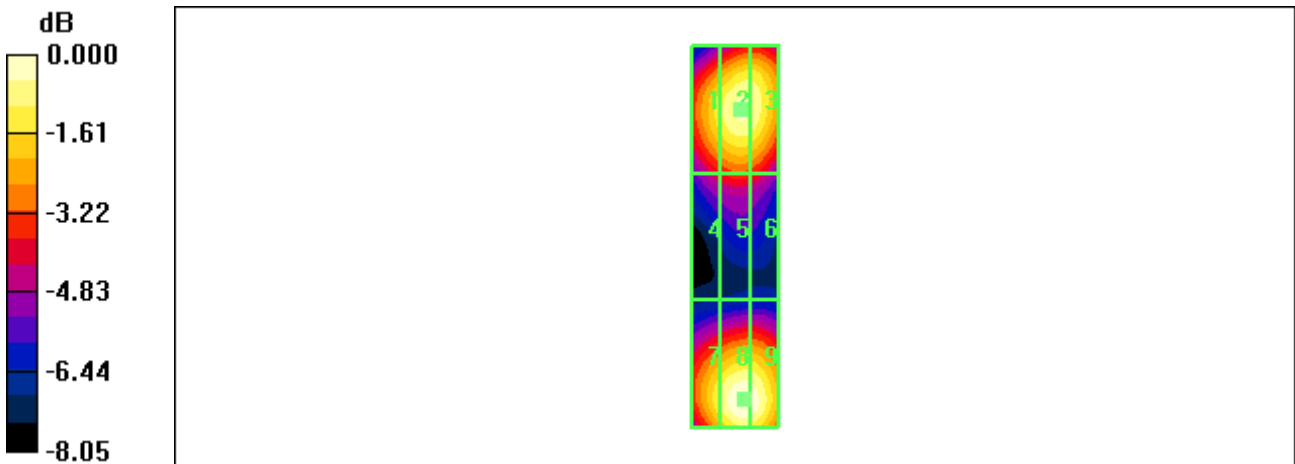

0 dB = 145.3V/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature: 21.4 °C
 Test Date: Jul.04, 2009

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial:1024

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA

H Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.456 A/m
 Probe Modulation Factor = 1.00
 Device Reference Point: 0.000, 0.000, 354.7 mm
 Reference Value = 0.571 A/m; Power Drift = -0.054 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.369 M4 | 0.396 M4 | 0.390 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.419 M4 | 0.456 M4 | 0.449 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.371 M4 | 0.407 M4 | 0.401 M4 |

Cursor:
 Total = 0.456 A/m
 H Category: M4
 Location: -1.5, 0, 366.6 mm

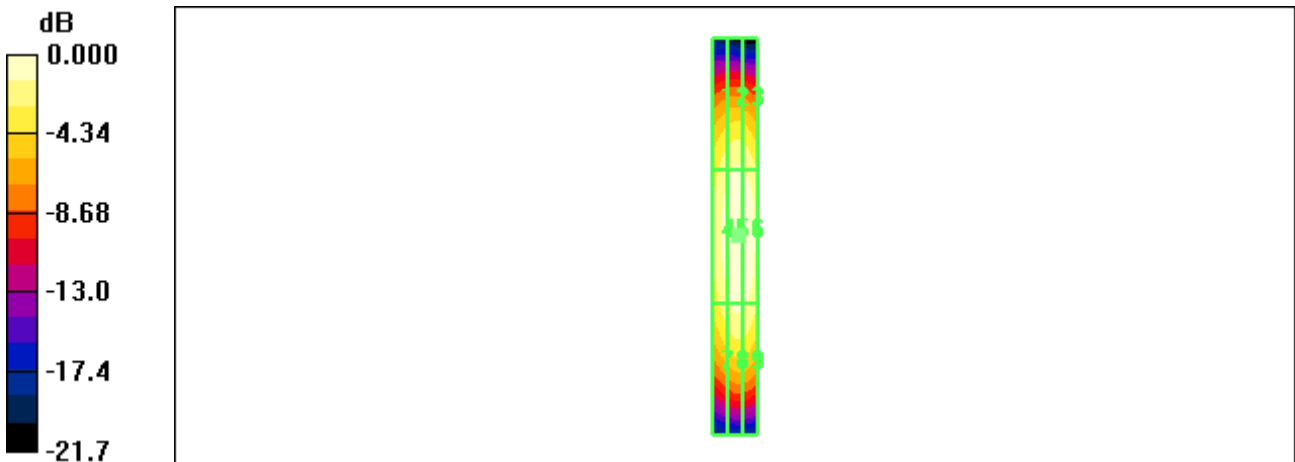

0 dB = 0.456A/m

Test Laboratory: HCT CO., LTD.
 Ambient Temperature: 21.4 °C
 Test Date: Jul.04, 2009

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1019

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
 - Probe: H3DV6 - SN6101; ; Calibrated: 2009-05-22
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE3 Sn446; Calibrated: 2009-05-22
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA


H Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.479 A/m
 Probe Modulation Factor = 1.00
 Device Reference Point: 0.000, 0.000, 354.7 mm
 Reference Value = 0.585 A/m; Power Drift = -0.029 dB
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.397 M2 | 0.437 M2 | 0.434 M2 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.436 M2 | 0.479 M2 | 0.475 M2 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.397 M2 | 0.436 M2 | 0.434 M2 |

Cursor:
 Total = 0.479 A/m
 H Category: M2
 Location: -2, 0, 366.6 mm

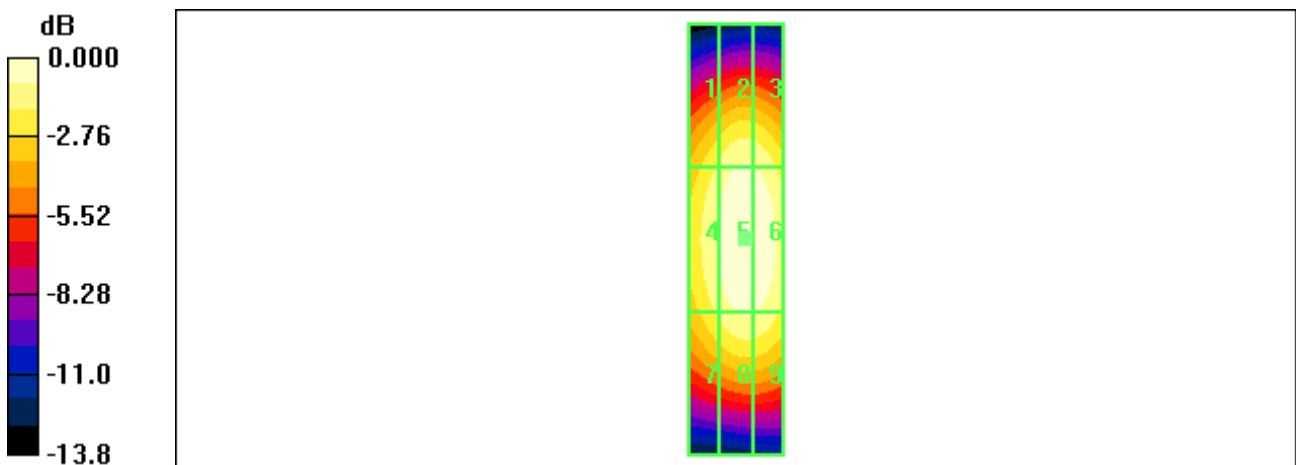

0 dB = 0.479A/m

APPENDIX D (PROBE CALIBRATION DATA)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **HCT (Dymstec)**

Certificate No: **H3-6101_May09**

CALIBRATION CERTIFICATE

Object **H3DV6 - SN:6101**

Calibration procedure(s) **QA CAL-03.v5
Calibration procedure for H-field probes optimized for close near field
evaluations in air**

Calibration date: **May 22, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|--------------------------------|-----------------------|
| Power meter E4419B | GB41293874 | 1-Apr-09 (No. 217-01030) | Apr-10 |
| Power sensor E4412A | MY41495277 | 1-Apr-09 (No. 217-01030) | Apr-10 |
| Power sensor E4412A | MY41498087 | 1-Apr-09 (No. 217-01030) | Apr-10 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 31-Mar-09 (No. 217-01026) | Mar-10 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 31-Mar-09 (No. 217-01028) | Mar-10 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 31-Mar-09 (No. 217-01027) | Mar-10 |
| Reference Probe H3DV6 | SN: 6182 | 1-Oct-08 (No. H3-6182_Oct08) | Oct-09 |
| DAE4 | SN: 789 | 19-Dec-08 (No. DAE4-789_Dec08) | Dec-09 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------|--------------|-----------------------------------|------------------------|
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Oct-07) | In house check: Oct-09 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-08) | In house check: Oct-09 |

| | Name | Function | Signature |
|----------------|----------------|-----------------------|-----------|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: May 25, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|--|
| NORM _{x,y,z} | sensitivity in free space |
| DCP | diode compression point |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, " IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- X, Y, Z_{a0a1a2} : Assessed for E-field polarization $\vartheta = 90$ for XY sensors and $\vartheta = 0$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- $X, Y, Z(f)_{a0a1a2} = X, Y, Z_{a0a1a2} * \text{frequency_response}$ (see Frequency Response Chart).
- $DCP_{x,y,z}$: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the X_{a0a1a2} (no uncertainty required).

H3DV6 SN:6101

May 22, 2009

Probe H3DV6

SN:6101

| | |
|------------------|-------------------|
| Manufactured: | December 10, 2001 |
| Last calibrated: | May 19, 2008 |
| Recalibrated: | May 22, 2009 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

H3DV6 SN:6101

May 22, 2009

DASY - Parameters of Probe: H3DV6 SN:6101Sensitivity in Free Space [A/m / $\sqrt{\mu\text{V}}$]

| | a0 | a1 | a2 |
|---|-----------|-----------|-----------------------------|
| X | 2.945E-03 | -9.310E-5 | -8.342E-6 \pm 5.1 % (k=2) |
| Y | 2.924E-03 | -1.510E-4 | -3.093E-5 \pm 5.1 % (k=2) |
| Z | 3.293E-03 | -5.896E-5 | 1.890E-5 \pm 5.1 % (k=2) |

Diode Compression¹

| | |
|-------|-------|
| DCP X | 82 mV |
| DCP Y | 93 mV |
| DCP Z | 84 mV |

Sensor Offset (Probe Tip to Sensor Center)

| | |
|---|--------|
| X | 3.0 mm |
| Y | 3.0 mm |
| Z | 3.0 mm |

Connector Angle -63 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


¹ numerical linearization parameter: uncertainty not required

H3DV6 SN:6101

May 22, 2009

Frequency Response of H-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)

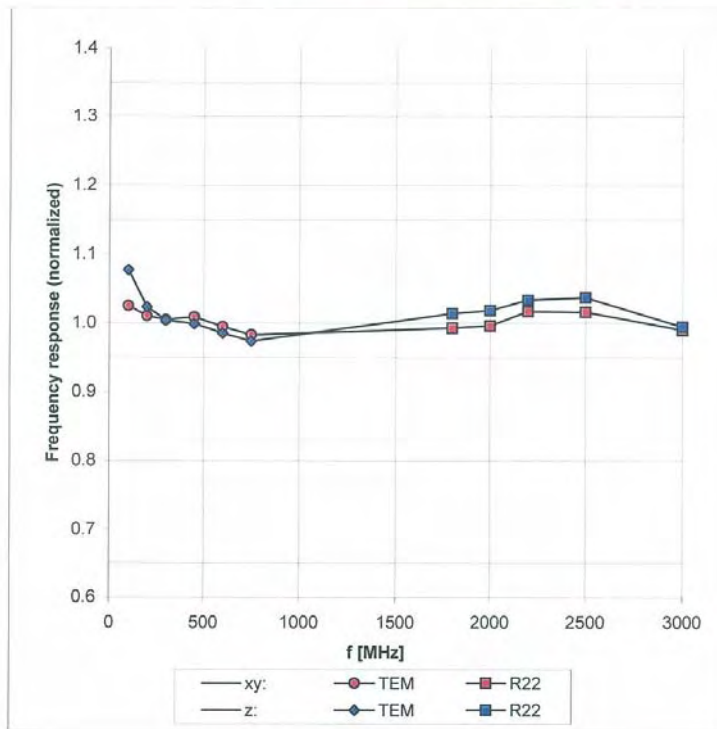


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)


H3DV6 SN:6101

May 22, 2009

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

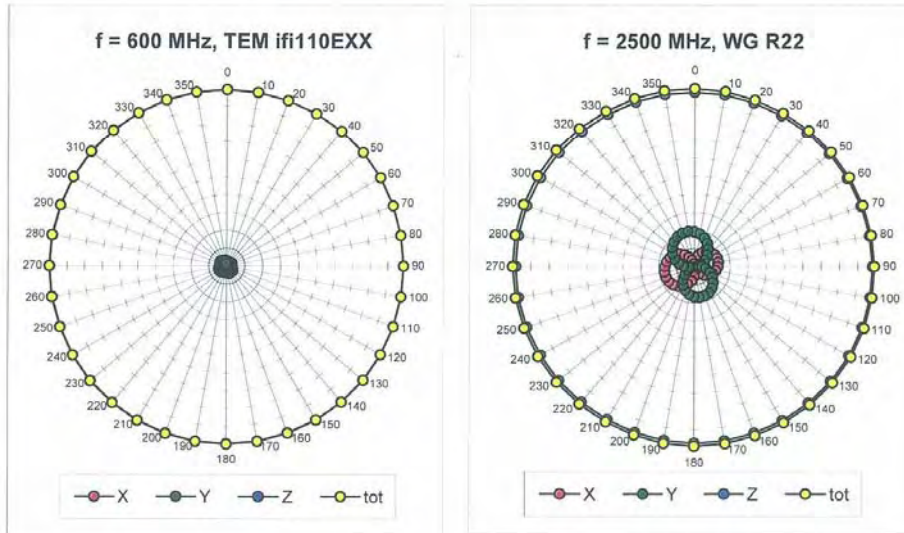


Receiving Pattern (ϕ), $\vartheta = 0^\circ$

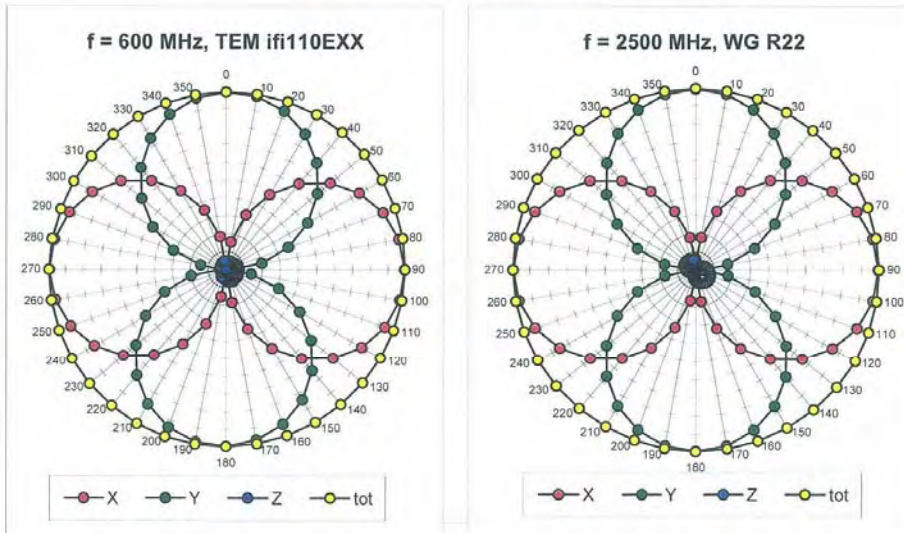

H3DV6 SN:6101


May 22, 2009

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

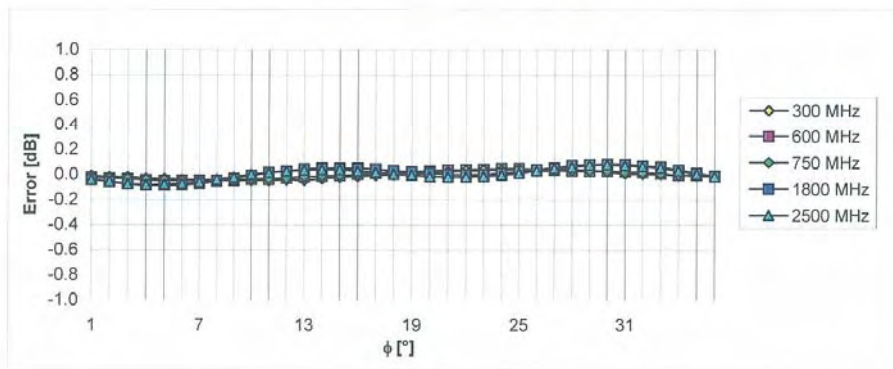

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

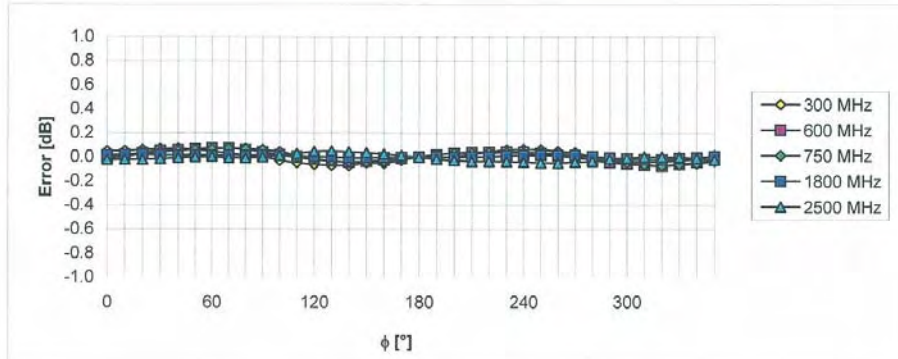


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

H3DV6 SN:6101

May 22, 2009

Dynamic Range f(H-field)
(Waveguide R22, f = 1800 MHz)

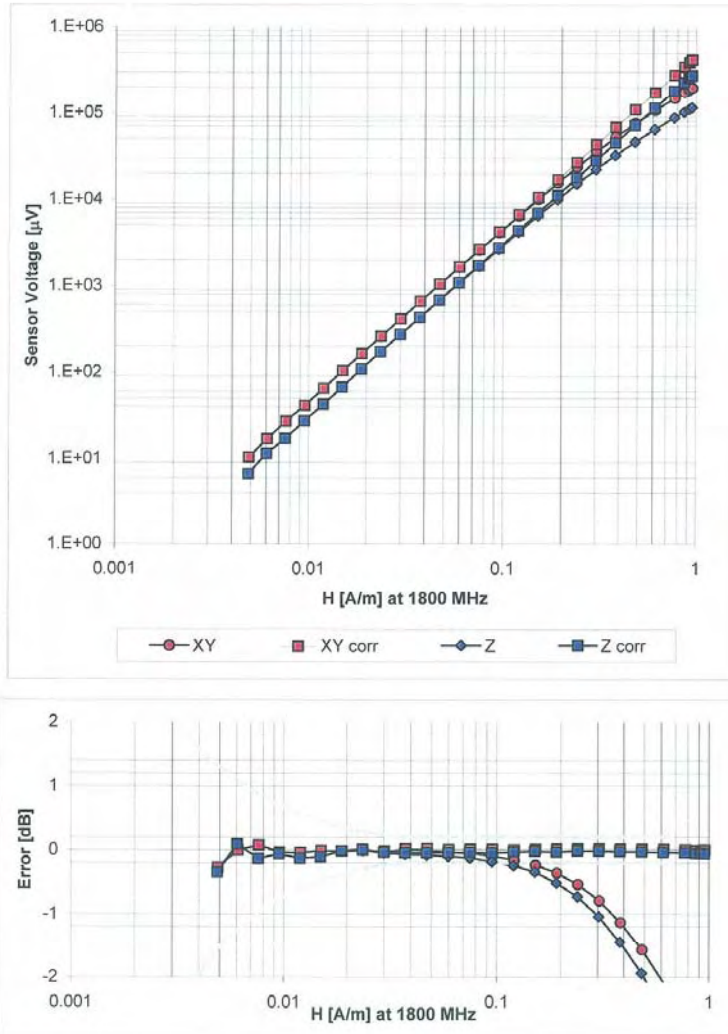


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

H3DV6 SN:6101

May 22, 2009

Deviation from Isotropy in Air
Error (ϕ, ϑ), $f = 900$ MHz

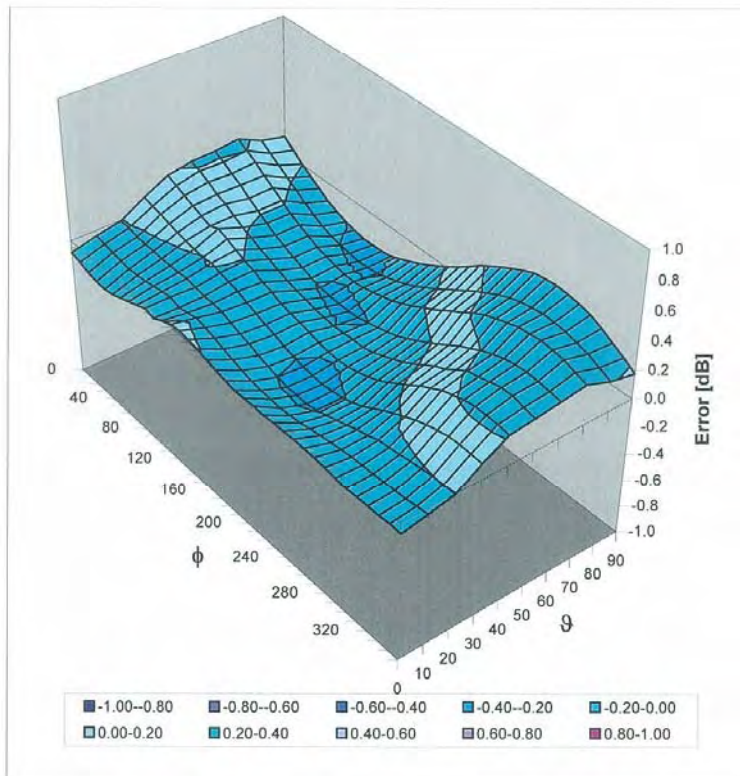

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **HCT (Dymstec)**

Certificate No: **ER3-2343_May09**

CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2343**

Calibration procedure(s) **QA CAL-02.v5
Calibration procedure for E-field probes optimized for close near field
evaluations in air**

Calibration date: **May 22, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 1-Apr-09 (No. 217-01030) | Apr-10 |
| Power sensor E4412A | MY41495277 | 1-Apr-09 (No. 217-01030) | Apr-10 |
| Power sensor E4412A | MY41498087 | 1-Apr-09 (No. 217-01030) | Apr-10 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 31-Mar-09 (No. 217-01026) | Mar-10 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 31-Mar-09 (No. 217-01028) | Mar-10 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 31-Mar-09 (No. 217-01027) | Mar-10 |
| Reference Probe ER3DV6 | SN: 2328 | 1-Oct-08 (No. ER3-2328_Oct08) | Oct-09 |
| D4E4 | SN: 789 | 19-Dec-08 (No. D4E4-789_Dec08) | Dec-09 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Oct-07) | In house check: Oct-09 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-08) | In house check: Oct-09 |

| | Name | Function | Signature |
|----------------|----------------|-----------------------|-----------|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: May 25, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|--|
| NORM _{x,y,z} | sensitivity in free space |
| DCP | diode compression point |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, " IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart).
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

ER3DV6 SN:2343

May 22, 2009

Probe ER3DV6

SN:2343

| | |
|------------------|-------------------|
| Manufactured: | December 14, 2004 |
| Last calibrated: | May 19, 2008 |
| Recalibrated: | May 22, 2009 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ER3DV6 SN:2343

May 22, 2009

DASY - Parameters of Probe: ER3DV6 SN:2343Sensitivity in Free Space [$\mu\text{V}/(\text{V}/\text{m})^2$]Diode Compression^A

| | | | |
|-------|---------------------|-------|-------|
| NormX | 1.68 ± 10.1 % (k=2) | DCP X | 92 mV |
| NormY | 1.63 ± 10.1 % (k=2) | DCP Y | 94 mV |
| NormZ | 1.63 ± 10.1 % (k=2) | DCP Z | 97 mV |

Frequency Correction

| | |
|---|-----|
| X | 0.0 |
| Y | 0.0 |
| Z | 0.0 |

Sensor Offset

(Probe Tip to Sensor Center)

| | |
|---|--------|
| X | 2.5 mm |
| Y | 2.5 mm |
| Z | 2.5 mm |

Connector Angle

63 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


^A numerical linearization parameter: uncertainty not required

ER3DV6 SN:2343

May 22, 2009

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)


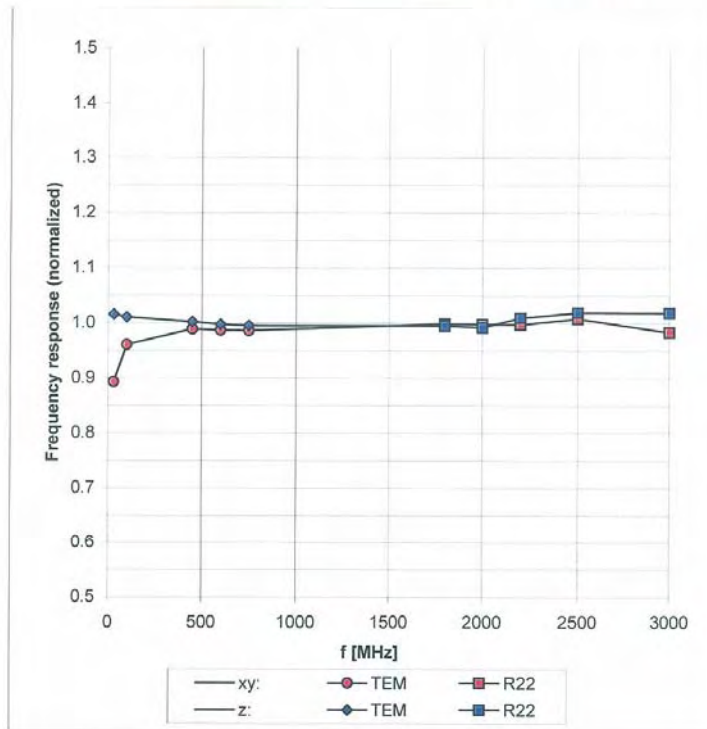


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



ER3DV6 SN:2343

May 22, 2009

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

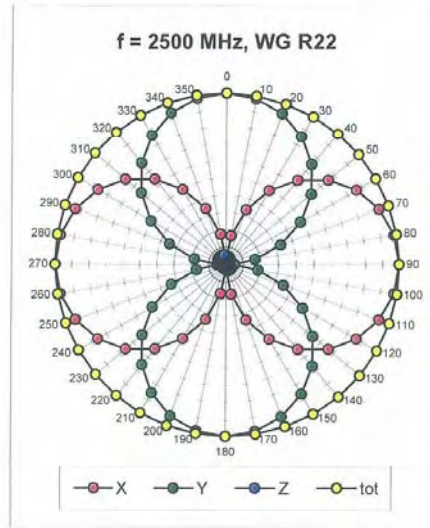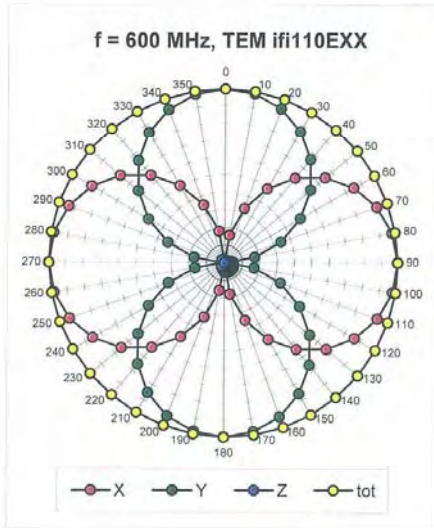


Receiving Pattern (ϕ), $\vartheta = 90^\circ$

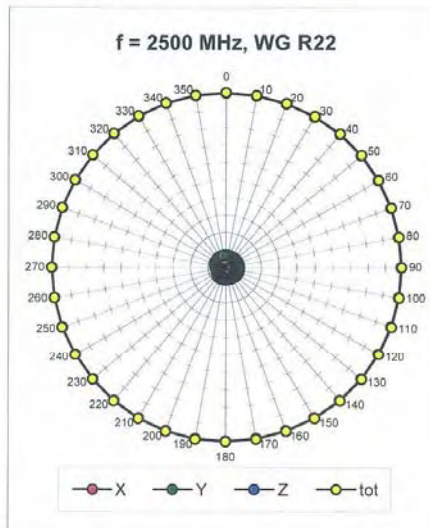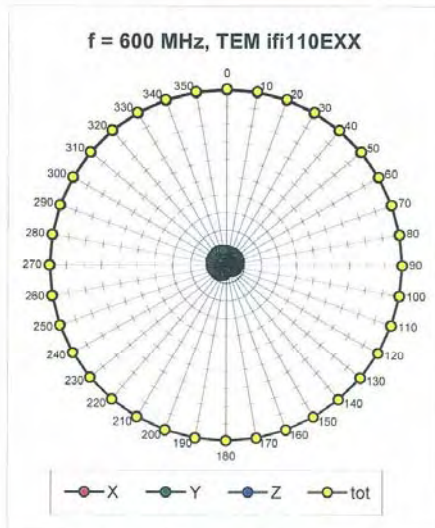

ER3DV6 SN:2343


May 22, 2009

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

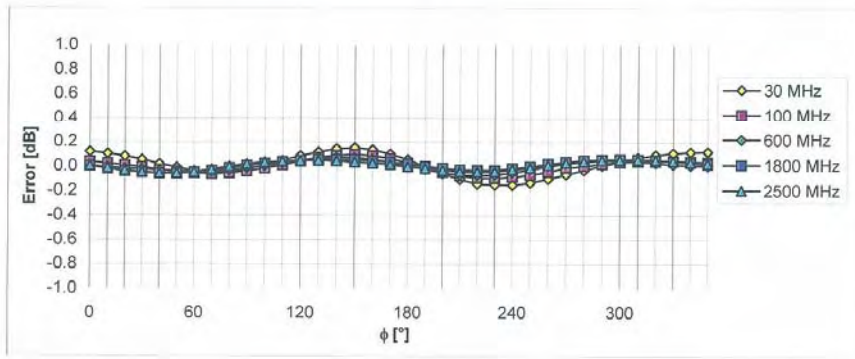

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 90^\circ$


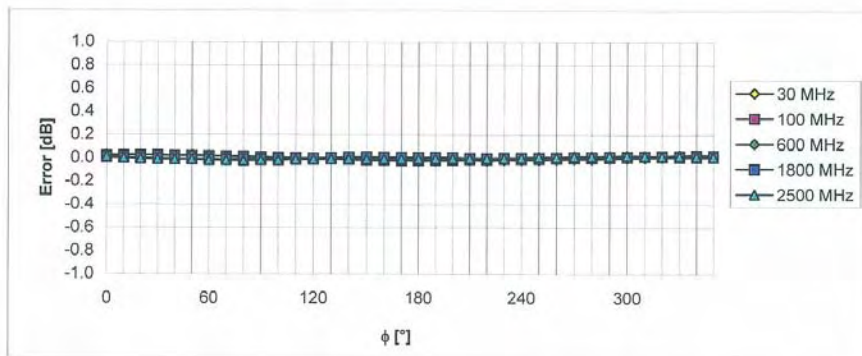


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

ER3DV6 SN:2343

May 22, 2009

Dynamic Range f(E-field)
(Waveguide R22, f = 1800 MHz)

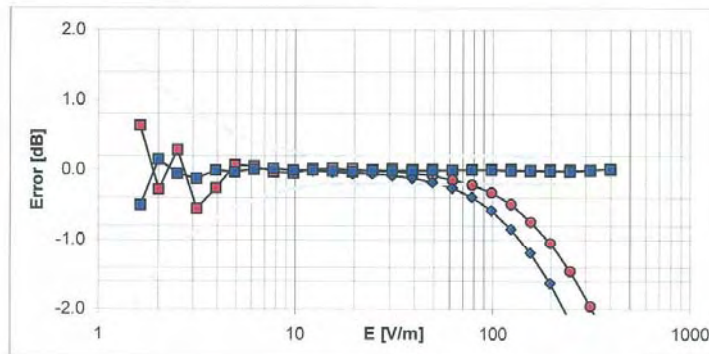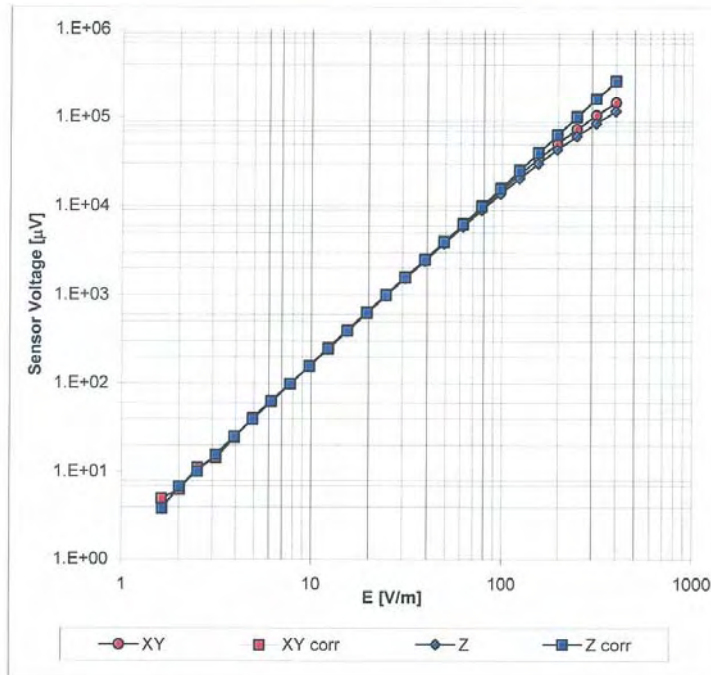


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

ER3DV6 SN:2343

May 22, 2009

Deviation from Isotropy in Air
Error (ϕ, θ), $f = 900$ MHz

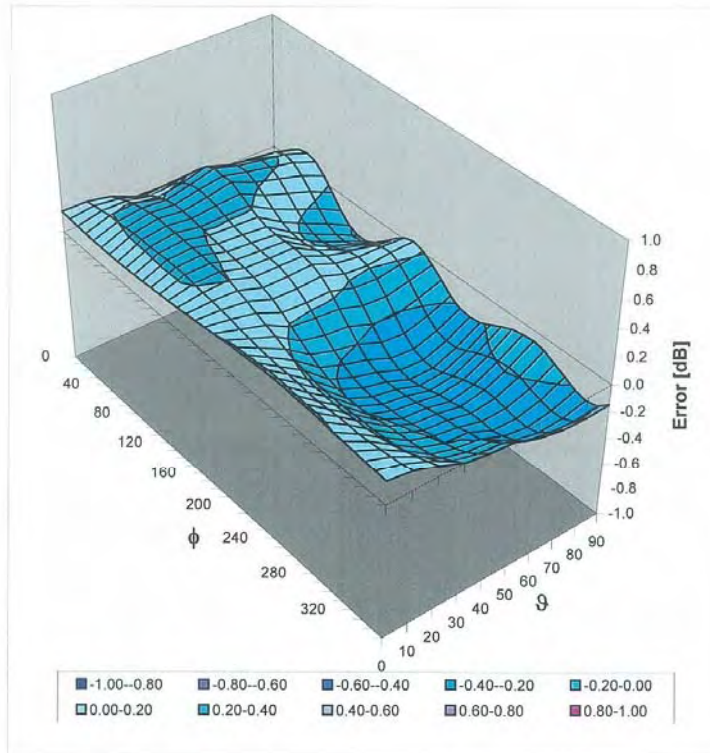

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

APPENDIX E (DIPOLE CALIBRATION DATA)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **H-CT (Dymstec)**

Certificate No: **CD835V3-1024_Mar08**

CALIBRATION CERTIFICATE

Object **CD835V3 - SN: 1024**

Calibration procedure(s) **QA CAL-20.v4
Calibration procedure for dipoles in air**

Calibration date: **March 11, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|---------------------------|-------------|---|------------------------|
| Power meter EPM-442A | GB37480704 | 04-Oct-07 (METAS, No. 217-00736) | Oct-08 |
| Power sensor HP 8481A | US37292783 | 04-Oct-07 (METAS, No. 217-00736) | Oct-08 |
| Probe ER3DV6 | SN: 2336 | 31-Dec-07 (SPEAG, No. ER3-2336_Dec07) | Dec-08 |
| Probe H3DV6 | SN: 6065 | 31-Dec-07 (SPEAG, No. H3-6065_-Dec07) | Dec-08 |
| DAE4 | SN: 781 | 2-Oct-07 (SPEAG, No. DAE4-781_Oct07) | Oct-08 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power meter EPM-4419B | GB42420191 | 11-May-05 (SPEAG, in house check Oct -07) | In house check: Nov-08 |
| Power sensor HP 8482A | US37295597 | 11-May-05 (SPEAG, in house check Oct -07) | In house check: Nov-08 |
| Power sensor HP 8482H | 3318A09450 | 08-Jan-02 (SPEAG, in house check Oct -07) | In house check: Nov-08 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-07) | In house check: Nov-08 |
| RF generator E4433B | MY 41310391 | 22-Nov-04 (SPEAG, in house check Oct-07) | In house check: Nov-08 |

Calibrated by:

| | | |
|------------|-----------------------|-----------|
| Name | Function | Signature |
| Mike Meili | Laboratory Technician | |

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

References

- [1] ANSI-C63.19-2006
American National Standard for Methods of Measurement of Compatibility between Wireless
Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with standard [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY4 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- **H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------------|------------------|----------------------|
| DASY Version | DASY4 | V4.7 B61 |
| DASY PP Version | SEMCAD | V1.8 B176 |
| Phantom | HAC Test Arch | SD HAC P01 BA, #1070 |
| Distance Dipole Top - Probe Center | 10 mm | |
| Scan resolution | dx, dy = 5 mm | area = 20 x 180 mm |
| Frequency | 835 MHz ± 1 MHz | |
| Forward power at dipole connector | 20.0 dBm = 100mW | |
| Input power drift | < 0.05 dB | |

2 Maximum Field values

| H-field 10 mm above dipole surface | condition | interpolated maximum |
|------------------------------------|----------------------|----------------------|
| Maximum measured | 100 mW forward power | 0.445 A/m |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition | interpolated maximum |
|------------------------------------|----------------------|----------------------|
| Maximum measured above high end- | 100 mW forward power | 180.4 V/m |
| Maximum measured above low end | 100 mW forward power | 157.6 V/m |
| Averaged maximum above arm | 100 mW forward power | 159.0 V/m |

Uncertainty for E-field measurement: 12.8% (k=2)

3 Appendix

3.1 Antenna Parameters

| Frequency | Return Loss | Impedance |
|----------------|----------------|----------------------------|
| 800 MHz | 18.0 dB | (44.2 - j10.4) Ohm |
| 835 MHz | 24.7 dB | (48.7 + j5.6) Ohm |
| 900 MHz | 17.3 dB | (59.2 - j11.8) Ohm |
| 950 MHz | 19.7 dB | (47.5 + j9.8) Ohm |
| 960 MHz | 14.3 dB | (57.2 + j19.7) Ohm |

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

3.3 Measurement Sheets

3.3.1 Return Loss and Smith Chart

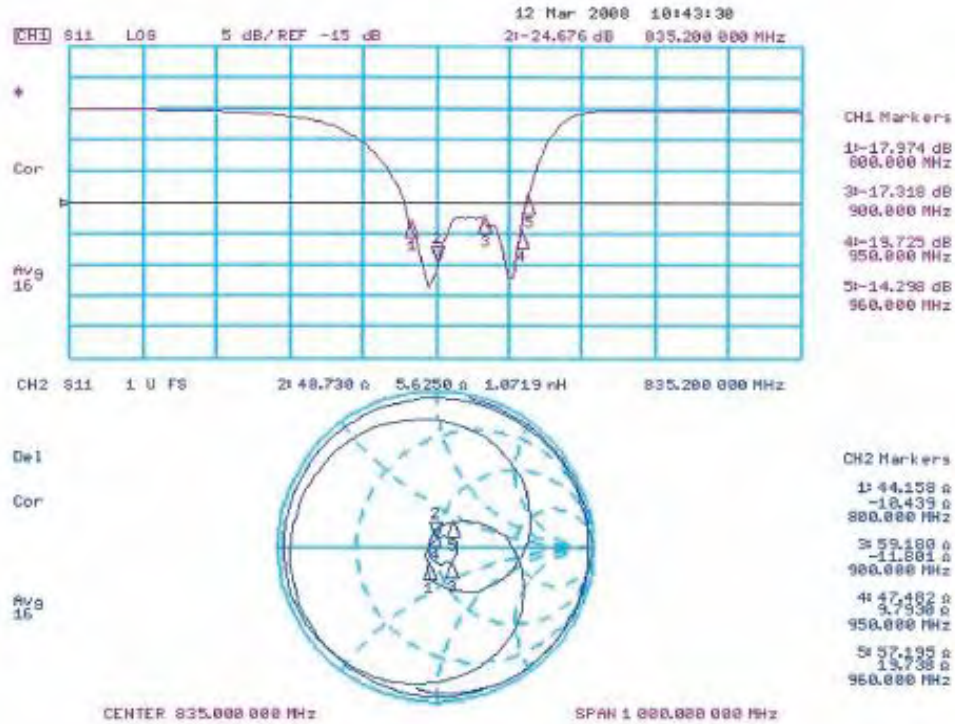

3.3.2 DASY4 H-field result

Date/Time: 11.03.2008 10:51:20

Test Laboratory: SPEAG Lab 2


DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1024
 Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section
 Measurement Standard: DASY4 (High Precision Assessment)
 DASY4 Configuration:

- Probe: H3DV6 - SN6065; Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - Sensor Center 10mm above CD835 Dipole/Hearing Aid Compatibility Test (41x361x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.445 A/m
 Probe Modulation Factor = 1.00
 Device Reference Point: 0.000, 0.000, 354.7 mm
 Reference Value = 0.473 A/m; Power Drift = 0.003 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|-----------------------|-----------------------|-----------------------|
| Grid 1 0.376 M4 | Grid 2 0.391 M4 | Grid 3 0.362 M4 |
| Grid 4 0.424 M4 | Grid 5 0.445 M4 | Grid 6 0.419 M4 |
| Grid 7 0.369 M4 | Grid 8 0.392 M4 | Grid 9 0.369 M4 |

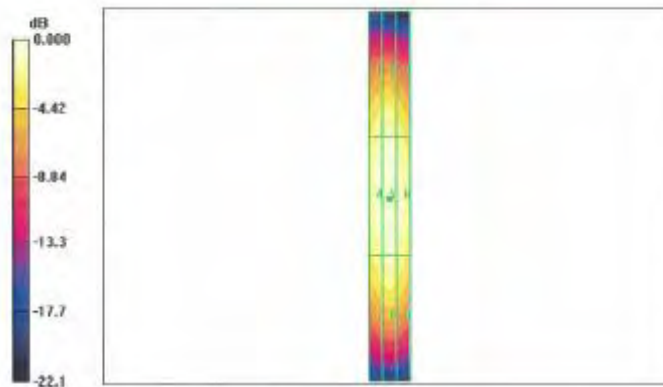

0 dB = 0.445A/m

3.3.3 DASY4 E-Field result

Date/Time: 11.03.2008 17:04:34

Test Laboratory: SPEAG Lab 2


DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1024
 Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Dipole Section
 Measurement Standard: DASY4 (High Precision Assessment)
 DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - Sensor Center 10mm above CD835 Dipole/Hearing Aid Compatibility Test (41x361x1):
 Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 160.4 V/m
 Probe Modulation Factor = 1.00
 Device Reference Point: 0.000, 0.000, 354.7 mm
 Reference Value = 103.1 V/m; Power Drift = -0.022 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|-----------------------|-----------------------|-----------------------|
| Grid 1 157.7 M4 | Grid 2 160.4 M4 | Grid 3 152.7 M4 |
| Grid 4 86.2 M4 | Grid 5 87.6 M4 | Grid 6 83.7 M4 |
| Grid 7 152.1 M4 | Grid 8 157.6 M4 | Grid 9 153.7 M4 |

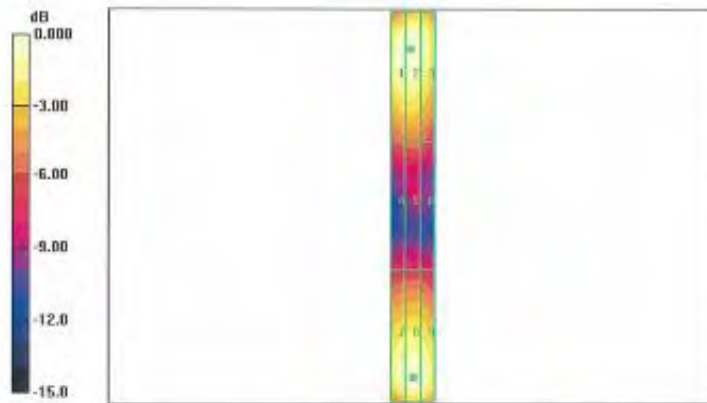

0 dB = 160.4V/m

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **HCT**

Certificate No: **CD1880V3-1019_Mar08**

| CALIBRATION CERTIFICATE | | | |
|---|--|---|--------------------------------|
| Object | CD1880V3 - SN: 1019 | | |
| Calibration procedure(s) | QA CAL-20.v4 Calibration procedure for dipoles in air | | |
| Calibration date: | March 11, 2008 | | |
| Condition of the calibrated item | In Tolerance | | |
| This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. | | | |
| Calibration Equipment used (M&TE critical for calibration) | | | |
| Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
| Power meter EPM-442A | GB37480704 | 04-Oct-07 (METAS, No. 217-00736) | Oct-08 |
| Power sensor HP 8481A | US37292783 | 04-Oct-07 (METAS, No. 217-00736) | Oct-08 |
| Probe ER3DV6 | SN: 2338 | 31-Dec-07 (SPEAG, No. ER3-2338_Dec07) | Dec-08 |
| Probe H3DV6 | SN: 6065 | 31-Dec-07 (SPEAG, No. H3-6065_Dec07) | Dec-08 |
| DAE4 | SN: 781 | 2-Oct-07 (SPEAG, No. DAE4-781_Oct07) | Oct-08 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power meter EPM-4419B | GB42420191 | 11-May-05 (SPEAG, in house check Oct-07) | In house check: Nov-08 |
| Power sensor HP 8482A | US37295597 | 11-May-05 (SPEAG, in house check Oct-07) | In house check: Nov-08 |
| Power sensor HP 8482H | 3318A09450 | 08-Jan-02 (SPEAG, in house check Oct-07) | In house check: Nov-08 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-07) | In house check: Nov-09 |
| RF generator E4433B | MY 41310391 | 22-Nov-04 (SPEAG, in house check Oct-07) | In house check: Nov-09 |
| Calibrated by: | Name Mike Meili | Function Laboratory Technician | Signature <i>M. Meili</i> |
| Approved by: | Name Fin Bombolt | Function Technical Director | Signature <i>F. Bombolt</i> |
| | | | Issued: March 12, 2008 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | |

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

References

- [1] ANSI-C63.19-2006
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with standard [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY4 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- *H-field distribution:* H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

1. Measurement Conditions

DASY system configuration, as far as not given on page 1:

| | | |
|------------------------------------|------------------|----------------------|
| DASY Version | DASY4 | V4.7 B61 |
| DASY PP Version | SEMCAD | V1.8 B176 |
| Phantom | HAC Test Arch | SD HAC P01 BA, #1070 |
| Distance Dipole Top - Probe Center | 10 mm | |
| Scan resolution | dx, dy = 5 mm | area = 20 x 90 mm |
| Frequency | 1880 MHz ± 1 MHz | |
| Forward power at dipole connector | 20.0 dBm = 100mW | |
| Input power drift | < 0.05 dB | |

2. Maximum Field values

| H-field 10 mm above dipole surface | condition | Interpolated maximum |
|------------------------------------|----------------------|----------------------|
| Maximum measured | 100 mW forward power | 0.469 A/m |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition | Interpolated maximum |
|------------------------------------|----------------------|----------------------|
| Maximum measured above high end | 100 mW forward power | 141.5 V/m |
| Maximum measured above low end | 100 mW forward power | 139.0 V/m |
| Averaged maximum above arm | 100 mW forward power | 140.3 V/m |

Uncertainty for E-field measurement: 12.8% (k=2)

3. Appendix

3.1 Antenna Parameters

| Frequency | Return Loss | Impedance |
|-----------|-------------|---------------------|
| 1710 MHz | 22.7 dB | (50.7 + j7.4) Ohm |
| 1880 MHz | 20.9 dB | (48.4 + j6.7) Ohm |
| 1900 MHz | 21.0 dB | (50.7 + j9.0) Ohm |
| 1950 MHz | 25.8 dB | (53.7 + j3.8) Ohm |
| 2000 MHz | 25.6 dB | (46.3 + j3.4) Ohm |

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

3.3 Measurement Sheets

3.3.1 Return Loss and Smith Chart

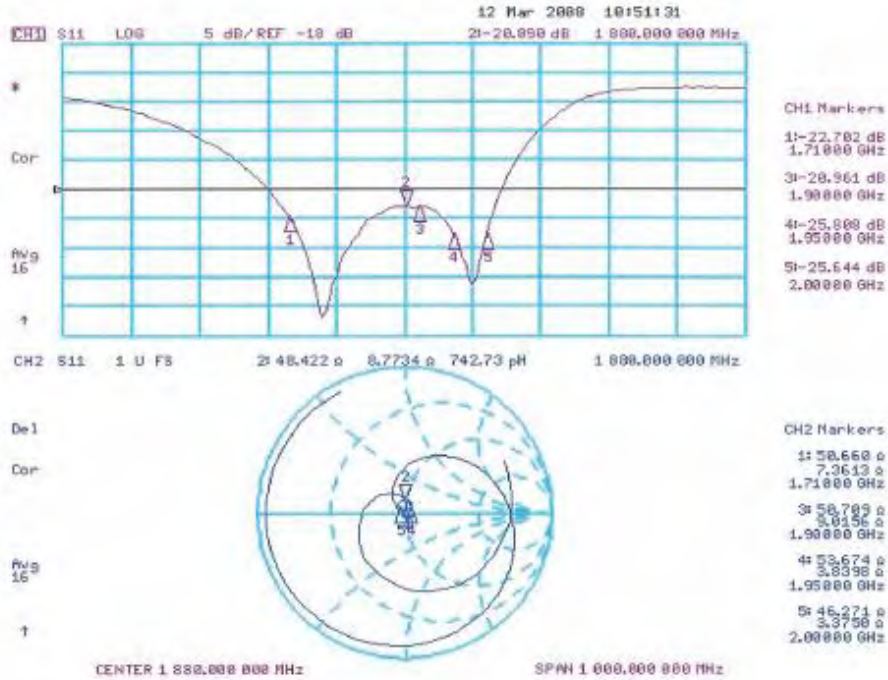

3.3.2 DASY4 H-Field Result

Date/Time: 11.03.2008 14:25:06

Test Laboratory: SPEAG Lab 2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1019

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6065; Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - Sensor Center 10mm above CD1880V3 Dipole/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.469 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.496 A/m; Power Drift = 0.010 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

| | | |
|------------------------------|------------------------------|------------------------------|
| Grid 1 0.400 M2 | Grid 2 0.423 M2 | Grid 3 0.406 M2 |
| Grid 4 0.443 M2 | Grid 5 0.469 M2 | Grid 6 0.450 M2 |
| Grid 7 0.407 M2 | Grid 8 0.435 M2 | Grid 9 0.417 M2 |

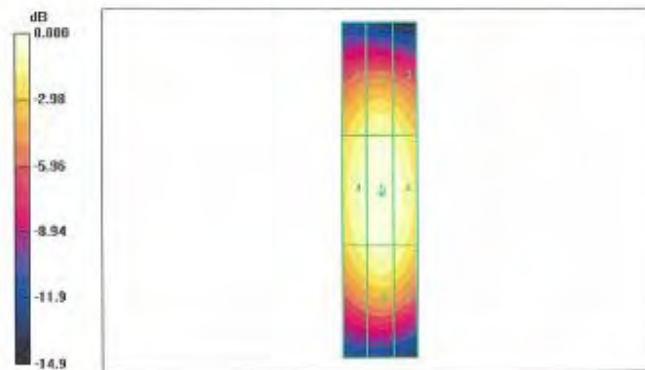

0 dB = 0.469A/m

3.3.2 DASY4 E-Field Result

Date/Time: 11.03.2008 17:37:34

Test Laboratory: SPEAG Lab 2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1019

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - Sensor Center 10mm above CD1880V3 Dipole/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 141.5 V/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 159.4 V/m; Power Drift = 0.007 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

| | | |
|-----------------------|-----------------------|-----------------------|
| Grid 1 134.8 M2 | Grid 2 139.0 M2 | Grid 3 134.2 M2 |
| Grid 4 91.0 M3 | Grid 5 93.3 M3 | Grid 6 89.0 M3 |
| Grid 7 133.4 M2 | Grid 8 141.5 M2 | Grid 9 137.7 M2 |

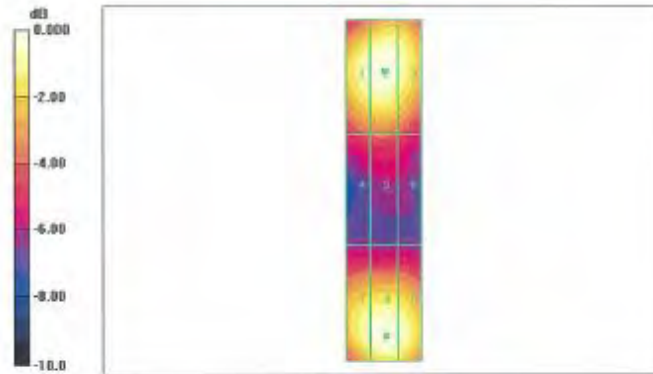

0 dB = 141.5V/m