


Intertek**ETL SEMKO****EMC TEST REPORT****COMPANY: PAXTON ACCESS LTD****PRODUCT: PROXIMITY KP50 KEY PAD
READER****REPORT NO. 06022772d****WRITTEN BY: D A Legge****REVIEWED BY: D Griffin****TEST ENGINEER: D A Legge****ISSUE: 1****DATE: November 2006****TOTAL PAGES: 12**

Opinions and interpretations based on test results are outside our scope of UKAS Accreditation.

This report shall not be reproduced, except in full, without written approval of Intertek ETL Semko

Intertek Testing & Certification Ltd

Intertek House, Cleeve Road, Leatherhead, Surrey KT22 7SB
Telephone: +44 (0)1372 370900 Fax: +44 (0)1372 370999 Web: www.uk.intertek-etlsemko.com

Registered No. 3272281 Registered Office: 25 Savile Row, London W1S 2ES

For Terms & Conditions please see reverse

| Contents | Page No. |
|--|-----------------|
| 1. JOB DESCRIPTION | 3 |
| 2. TEST SUMMARY | 4 |
| 3. EQUIPMENT UNDER TEST (EUT) | 4 |
| 3.1. Description of the EUT | 4 |
| 3.2. EUT's Modes of Operation | 4 |
| 3.3. EUT Configuration Diagram | 4 |
| 3.4. EUT Support Equipment | 4 |
| 3.5. Cables Associated With the EUT | 5 |
| 4. CONDUCTED EMISSIONS | 6 |
| 4.1. Conducted Emissions Test Method | 6 |
| 4.2. Conducted Emissions Test Results | 6 |
| 4.3. Modification Performed During Testing | 6 |
| 4.4. Conducted Emissions Conclusions | 6 |
| 4.5. Measurement Uncertainty | 6 |
| 5. EMISSIONS RADIATED | 11 |
| 5.1. Radiated Emissions Test Method | 11 |
| 5.2. Radiated H Field Test Results | 11 |
| 5.3. Radiated Spurious Emissions | 11 |
| 5.4. Measurement Uncertainty | 11 |
| 6. TEST EQUIPMENT | 12 |
| TABLES | |
| Tables 1 -2 Conducted Emissions Test Results | 7 |
| GRAPHS | |
| Graphs 1- 2 Conducted Emissions Test Results | 8 |

1. JOB DESCRIPTION

Equipment: Proximity KP50 Keypad Reader

Equipment Model No.: 355-110-US

Equipment Serial No.: None

Phase: Compliance

Customer: Paxton Access Ltd

Test Plan Reference: -

Test Standards: CFR47 Part 15: 209

Test Location: Intertek ETL Semko
Unit D Randalls Way
Leatherhead
Surrey
KT22 7SB

Test Work Started: 7th November 2006

Test Work Completed: 13th November 2006

2. TEST SUMMARY

PRODUCT REFERENCE STANDARDS

ANSI C63.4-2003, ETSI EN300 330-1: Annex A:A1.2.1

| TEST STANDARD | TEST | COMMENT |
|--------------------|---------------------|---------|
| CFR 47 Part 15:107 | Conducted Emissions | Pass |
| CFR 47 Part 15:209 | Radiated Emissions | Pass |

3. EQUIPMENT UNDER TEST (EUT)

3.1. Description of the EUT

The purpose of the Proximity KP50 Keypad Reader is to receive a radio signal from a passive proximity token(card or keyfob) in order to provide a digital output for access control. It has the added functionality of a keypad entry system. The power was derived from a 120vac 60Hz supply which delivered 12vdc to an Access control unit. The Proximity KP50 keypad reader (remote unit) was in turn connected to the Access control unit. The key component of the Paxton Access Proximity KP50 keypad Reader is the Phillips HTRC110 hitag chip. The EUT was tested as received with no external visible signs of damage and was of production quality.

3.2. EUT's Modes of Operation

Standby and active

3.3. EUT Configuration Diagram

See photographs in Annex A

3.4. EUT Support Equipment

The reader system was monitored for functionality client software "Net2". A RS232/485 comms converter was used to provide the connection back to the PC/Software.

3.5. Cables Associated With the EUT

| EUT PORT | TYPE | LENGTH (m) | TERMINATION/LOAD |
|----------|-----------|------------|---------------------|
| DC | Twin core | < 3 | Access control unit |
| DC | 8core | < 3 | Reader |
| AC mains | 2 core | < 3 | Comms converter |

4. CONDUCTED EMISSIONS

4.1. Conducted Emissions Test Method

The testing was performed in accordance with FCC Part 15.33, and Part 15.109.

The test was performed in a screened room using a Line Impedance Stabilising Network (LISN).

4.2. Conducted Emissions Test Results

Any measurements within 10dB below the average and quasi-peak limit lines are measured with the average and quasi-peak detectors respectively are given in Tables 1 - 2. The emissions signatures are given in Graph 1 - 2.

4.3. Modification Performed During Testing

None

4.4. Conducted Emissions Conclusions

The EUT complied with FCC Part 15:33 and 15:109, Class A and B

4.5. Measurement Uncertainty

150kHz to 30MHz \pm 2.9 dB

The measurement uncertainties have been determined at a confidence level of not less than 95%.

Table 1 Conducted Emissions Test Results

Standard: FCC Part 15:109 Class A and B

Test: Conducted Emissions

Port: 120vac 60Hz

Units of measurement:

Frequency: MHz **Amplitude:** dB μ V

Bandwidths: 10kHz

Mode of operation: Active Reading Card

Comment: Running client Software

EM06022772 16 Nov 2006 11:23

Conducted Emissions

EUT: Proximity KP50 Keypad
 Manuf: Paxton Access
 Op Cond: 120vac 60Hz
 Operator: D Legge
 Test Spec: CFR47 Part 15:107
 Comment: Active - Reading Card
 Negative Line
 Result File: 2772aa.dat : KP50 Card Reader - Paxton Access - Conducted Emissions

| Scan Settings | | | (1 Range) Frequencies | | | Receiver Settings | | | |
|----------------------------|------------|-------------|-----------------------|-------------------|--------|-------------------|--------|-------|--|
| Start | Stop | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge | |
| 150kHz | 30MHz | 5kHz | 10kHz | PK+AV | 20msec | Auto | ON | 60dB | |
| Transducer | No. | Start | Stop | Name | | | | | |
| 1 | 20 | 9kHz | 30MHz | LISN7474 | | | | | |
| | 21 | 9kHz | 30MHz | 8157 | | | | | |
| Prescan Measurement: | | Detectors: | | X PK / + AV | | | | | |
| | | Meas Time: | | see scan settings | | | | | |
| | | Subranges: | | 25 | | | | | |
| | | Acc Margin: | | 10 dB | | | | | |
| Peak Search Results | | | | | | | | | |
| Frequency | PK Level | PK Limit | PK Delta | Phase | PE | | | | |
| MHz | dB μ V | dB μ V | dB | - | - | | | | |
| No results | | | | | | | | | |
| Frequency | AV Level | AV Limit | AV Delta | Phase | PE | | | | |
| MHz | dB μ V | dB μ V | dB | - | - | | | | |
| No results | | | | | | | | | |

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

Graph 1 Conducted Emissions Test Results

EM06022772

16 Nov 2006 11:23

Conducted Emissions

EUT: Proximity KP50 Keypad
 Manuf: Paxton Access
 Op Cond: 120vac 60Hz
 Operator: D Legge
 Test Spec: CFR47 Part 15:107
 Comment: Active - Reading Card
 Negative Line
 Result File: 2772aa.dat : KP50 Card Reader - Paxton Access - Conducted Emissions

| Scan Settings | | | (1 Range) | | Receiver Settings | | | | |
|----------------------|-------|-------------|-------------------|----------|-------------------|--------|-------|--------|-------|
| Start | Stop | Frequencies | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge |
| 150kHz | 30MHz | | 5kHz | 10kHz | PK+AV | 20msec | Auto | ON | 60dB |
| Transducer | No. | Start | Stop | Name | | | | | |
| 1 | 20 | 9kHz | 30MHz | LISN7474 | | | | | |
| | 21 | 9kHz | 30MHz | 8157 | | | | | |
| Prescan Measurement: | | Detectors: | X PK / + AV | | | | | | |
| | | Meas Time: | see scan settings | | | | | | |
| | | Subranges: | 25 | | | | | | |
| | | Acc Margin: | 10 dB | | | | | | |

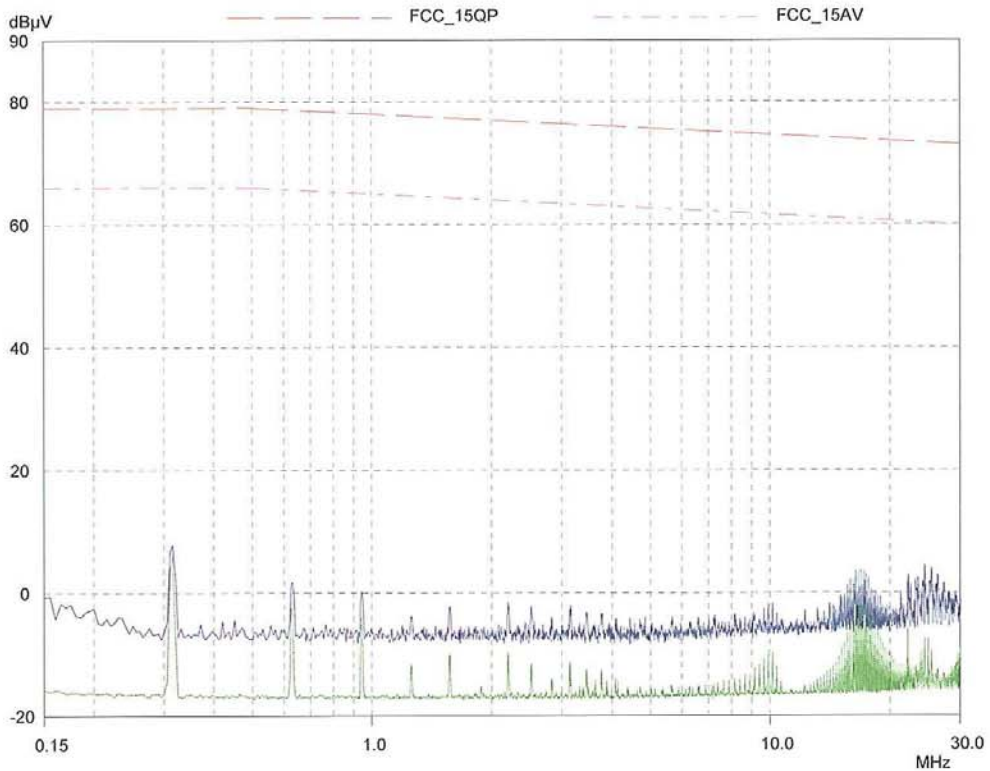


Table 2 Conducted Emissions Test Results

Standard: FCC Part 15:109 Class A and B

Test: Conducted Emissions

Port: 120vac 60Hz

Units of measurement:

Frequency: MHz **Amplitude:** dB μ V

Bandwidths: 10kHz
Mode of operation: Active reading Card
Comment: Running Client Software

```

EM06022772
Conducted Emissions
EUT: Proximity KP50 Keypad
Manuf: Paxton Access
Op Cond: 120vac 60Hz
Operator: D Legge
Test Spec: CFR47 Part 15:107
Comment: Active - Reading Card
Positive Line
Result File: 2772bb.dat : KP50 Card Reader - Paxton Access - Conducted Emissions
16 Nov 2006 10:40

Scan Settings (1 Range)
Start Stop Step IF BW Detector Receiver Settings
150kHz 30MHz 5kHz 10kHz PK+AV M-Time Atten Preamp OpRge
20msec Auto ON 60dB

Transducer No. Start Stop Name
1 20 9kHz 30MHz LISN7474
21 9kHz 30MHz 8157

Prescan Measurement: Detectors: X PK / + AV
Meas Time: see scan settings
Subranges: 25
Acc Margin: 10 dB

Peak Search Results
Frequency PK Level PK Limit PK Delta Phase PE
MHz dB $\mu$ V dB $\mu$ V dB - -
No results

Frequency AV Level AV Limit AV Delta Phase PE
MHz dB $\mu$ V dB $\mu$ V dB - -
No results
  
```

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

Graph 2 Conducted Emissions Test Results

EM06022772

16 Nov 2006 10:40


Conducted Emissions

EUT: Proximity KP50 Keypad
 Manuf: Paxton Access
 Op Cond: 120vac 60Hz
 Operator: D Legge
 Test Spec: CFR47 Part 15:107
 Comment: Active - Reading Card
 Positive Line
 Result File: 2772bb.dat ; KP50 Card Reader - Paxton Access - Conducted Emissions

| Scan Settings | | | | Receiver Settings | | | | | |
|---------------|-------|------|-------|-------------------|--------|-------|--------|-------|--|
| (1 Range) | | | | | | | | | |
| Frequencies | | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge | |
| Start | Stop | 5kHz | 10kHz | PK+AV | 20msec | Auto | ON | 60dB | |
| 150kHz | 30MHz | | | | | | | | |

| Transducer | No. | Start | Stop | Name |
|------------|-----|-------|-------|----------|
| 1 | 20 | 9kHz | 30MHz | LISN7474 |
| | 21 | 9kHz | 30MHz | 8157 |

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Subranges: 25
 Acc Margin: 10 dB

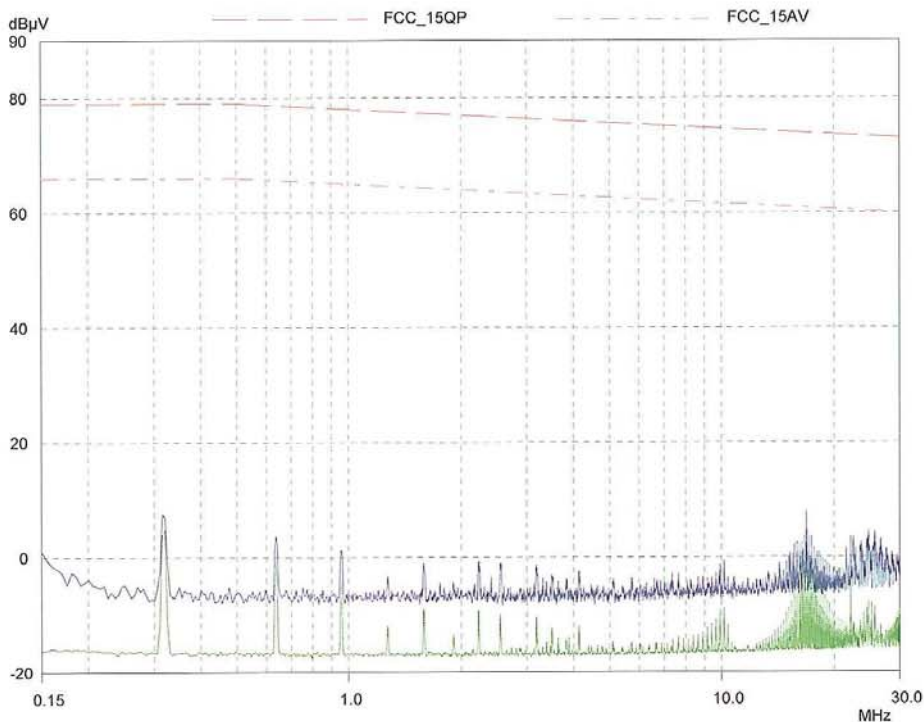

5. EMISSIONS RADIATED

5.1. Radiated Emissions Test Method

The testing was performed in accordance with ANSI C63.4-2003 and ETSI 300 330-2 V1.3.1:2006. Annex A1

The testing was carried out over a grassed area(OATS) which was free of external objects which might cause parasitic reflections. The test distance was three metres due to the low transmitter power of the EUT.

Prior to testing on the OATS tests were carried out in a screened chamber to determine any frequencies of interest.

5.2. Radiated H Field Test Results

$$E \text{ [dB}\mu\text{V/m]} = \text{dB}\mu\text{V} + K(\text{antenna correction}) + 51.5$$

| Frequency kHz | Set Rdg dB μ V | Distance Corr dB | Antenna Corr dB | Correction E field | Total dB μ v/m | Limit 10m |
|---------------|--------------------|------------------|-----------------|--------------------|--------------------|-----------|
| 125.01 | 56.09 | -10 | -28.8 | +51.5 | 68.79 | 85.1 |
| | | | | | | |

5.3. Radiated Spurious Emissions

| Frequency kHz | Set Rdg dB μ V | Distance Corr dB | Antenna Corr dB | Correction E field | Total dB μ v/m | Limit 10m |
|---------------|--------------------|------------------|-----------------|--------------------|--------------------|-----------|
| 375.553 | 25.87 | -10 | -32.5 | +51.5 | 34.87 | 85.1 |
| | | | | | | |

The EUT complied with FCC Part 15:209, Class A and B.

5.4. Measurement Uncertainty

0.09 MHz to 30MHz \pm 3.3 dB

The measurement uncertainties have been determined at a confidence level of not less than 95%.

6. TEST EQUIPMENT

| Equipment | Type | ID |
|--------------------------|---------------------|-----------|
| Advantest R3271 Spectrum | Analyser | 7770 |
| Rohde & Schwarz HFH Z2 | Loop Antenna | 7480 |
| Rohde & Schwarz ESHS10 | Receiver | 7463 |
| Rohde & Schwarz ESHS-Z5 | Lisn | 7473 |
| 02m N to N | Cable | 8157 |
| OATS | Environment | - |
| GSM A | Environment | 7286 |
| Test Bay 5 | Environment | 7404 |
| High Accuracy TH | Environment Monitor | 7516 |

Annex A

OATS Test Site Set up



3m Test Site