


Scan Settings (2 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	AUTO LN	OFF
1M	30M	10k	9k	QP+AV	20ms	AUTO LN	OFF

Transducer No.	Start	Stop	Name
11	150k	30M	EL219

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 16
 Acc Margin: 30dB

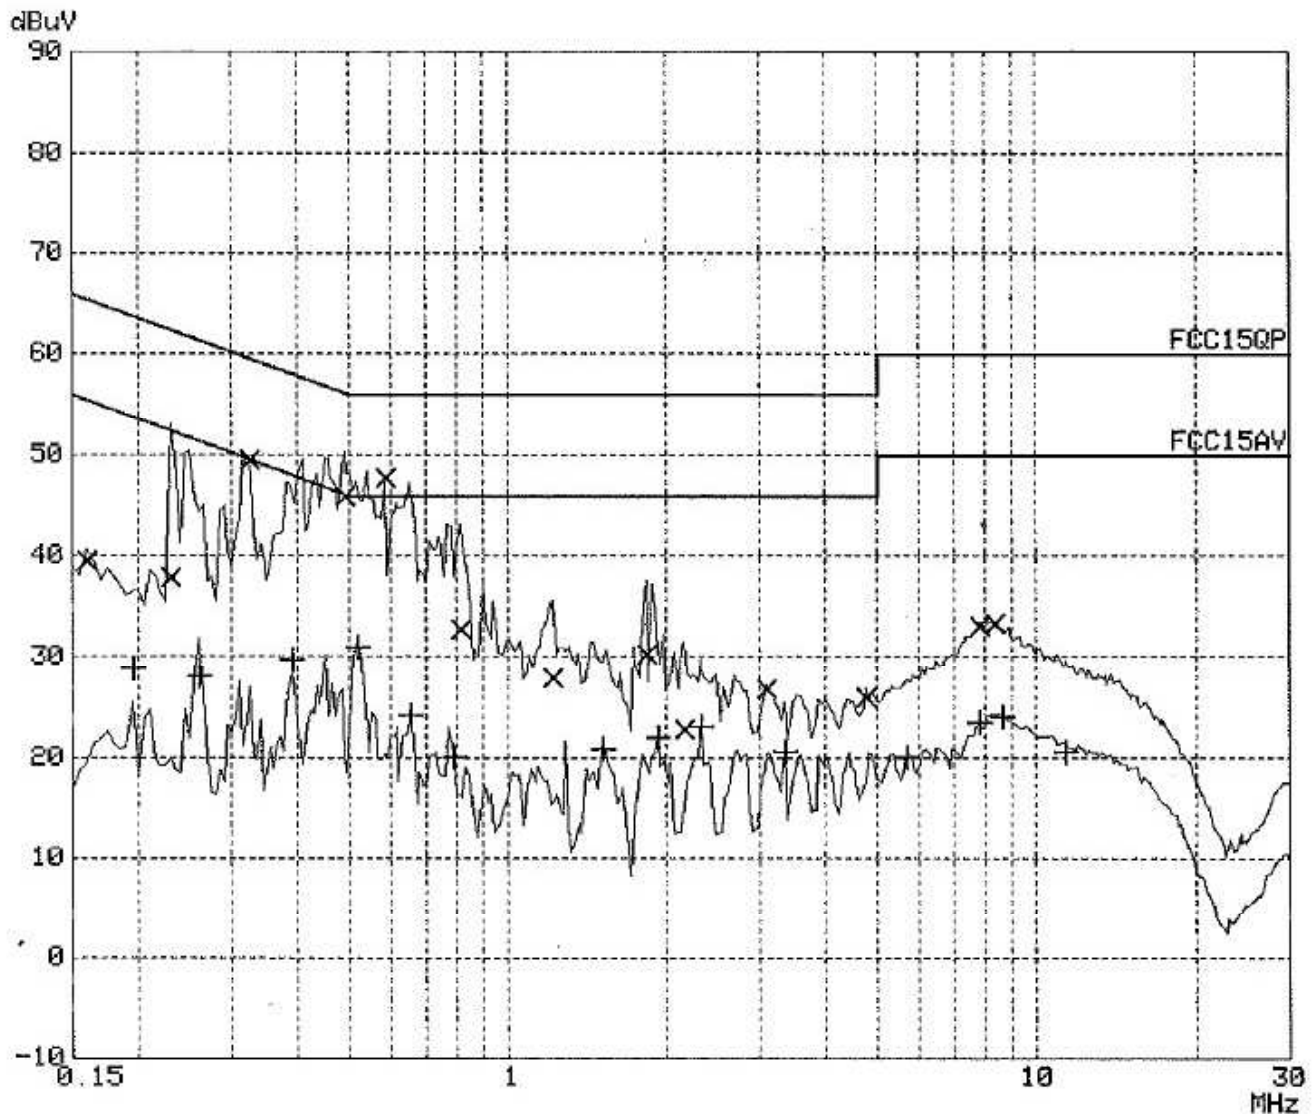

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.16000	39.5	-26.0	L1	gnd
0.23000	37.9	-24.5	N	gnd
0.32500	49.5	-10.0	L1	gnd
0.49000	45.9	-10.2	N	gnd
0.58500	47.7	-8.3	L1	gnd
0.81500	32.7	-23.2	N	gnd
1.22000	27.9	-28.1	N	gnd
1.83000	30.3	-25.6	N	gnd
2.16000	22.8	-33.1	L1	gnd
3.09000	26.8	-29.1	L1	gnd
4.77000	26.0	-30.0	N	gnd
7.81000	33.0	-26.9	L1	gnd
8.38000	33.4	-26.6	L1	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.19500	28.9	-24.9	L1	gnd
0.26000	28.1	-23.3	L1	gnd
0.39000	29.7	-18.3	L1	gnd
0.52000	31.0	-14.9	L1	gnd
0.65500	24.2	-21.7	L1	gnd
0.79000	20.1	-25.8	L1	gnd
1.52000	20.8	-25.1	L1	gnd
1.92000	22.0	-23.9	L1	gnd
2.32000	23.0	-22.9	L1	gnd
3.35000	20.5	-25.4	L1	gnd
5.69000	20.1	-29.9	L1	gnd
7.81000	23.4	-26.5	L1	gnd
8.61000	24.0	-25.9	L1	gnd
11.32000	20.6	-29.3	L1	gnd

* limit exceeded