



20MHz Channel Bandwidth – Full RB

Low Channel ACP

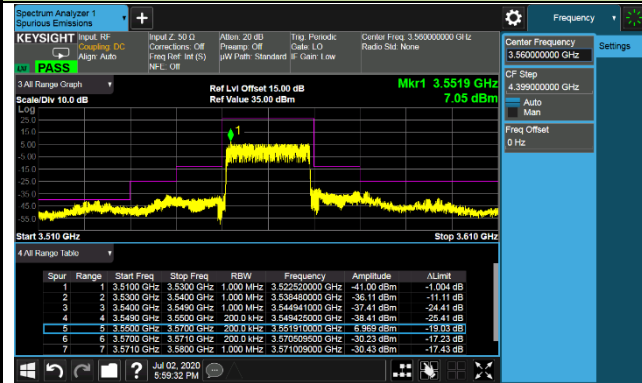

Middle Channel ACP

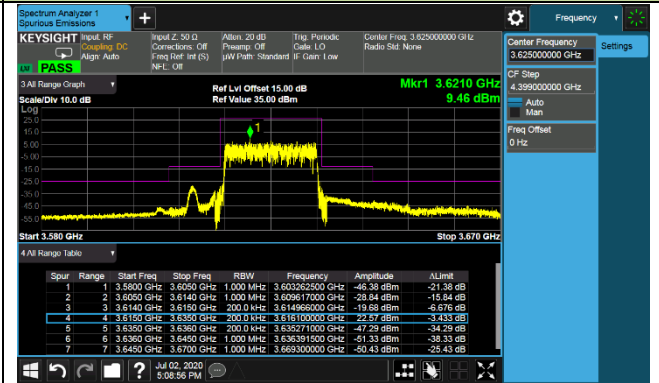

High Channel ACP



5.6. Conducted Spurious Emissions

5.6.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

The conducted power of any emissions below 3530MHz or above 3720MHz shall not exceed -40dBm/MHz.

5.6.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.7

5.6.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW \geq 3*RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.

To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.6.4. Test Setup

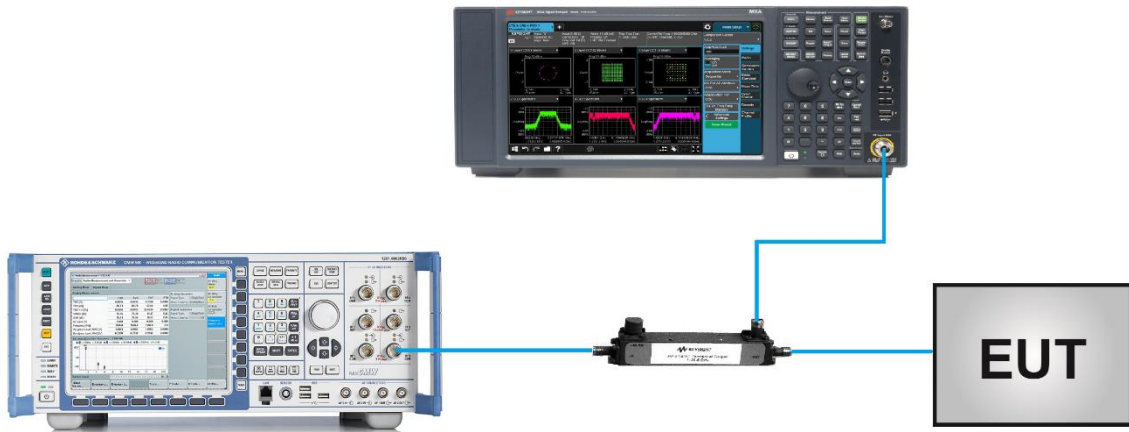


5.6.5. Test Result

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/07/13	Test Site	TR3

Channel	Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm/MHz)	Limit (dBm/MHz)	Result
QPSK						
55265	3552.5	5	30 ~ 40000	-47.21	≤ -40.00	Pass
55900	3625.0	5	30 ~ 40000	-53.51	≤ -40.00	Pass
56715	3697.5	5	30 ~ 40000	-51.72	≤ -40.00	Pass
55290	3555.0	10	30 ~ 40000	-52.77	≤ -40.00	Pass
55900	3625.0	10	30 ~ 40000	-50.71	≤ -40.00	Pass
56690	3695.0	10	30 ~ 40000	-53.84	≤ -40.00	Pass
55315	3557.5	15	30 ~ 40000	-50.67	≤ -40.00	Pass
55900	3625.0	15	30 ~ 40000	-53.02	≤ -40.00	Pass
56665	3692.5	15	30 ~ 40000	-49.28	≤ -40.00	Pass
55340	3550.0	20	30 ~ 40000	-51.61	≤ -40.00	Pass
55900	3625.0	20	30 ~ 40000	-52.39	≤ -40.00	Pass
56640	3690.0	20	30 ~ 40000	-49.22	≤ -40.00	Pass

5MHz Channel Bandwidth

Channel 55265 (3552.5MHz)

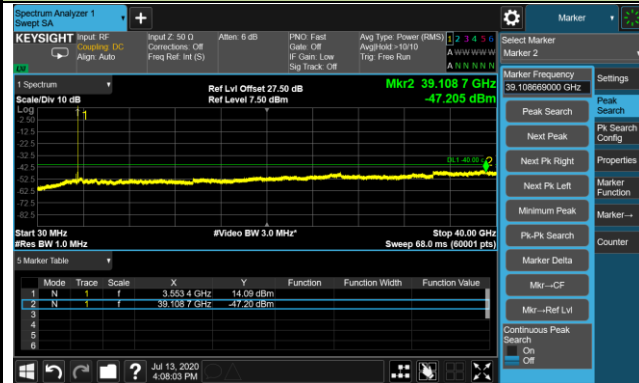

Channel 55900 (3625.0MHz)



Channel 56715 (3697.5MHz)



10MHz Channel Bandwidth

Channel 55290 (3555.0MHz)




Channel 55900 (3625.0MHz)



Channel 56690 (3695.0MHz)



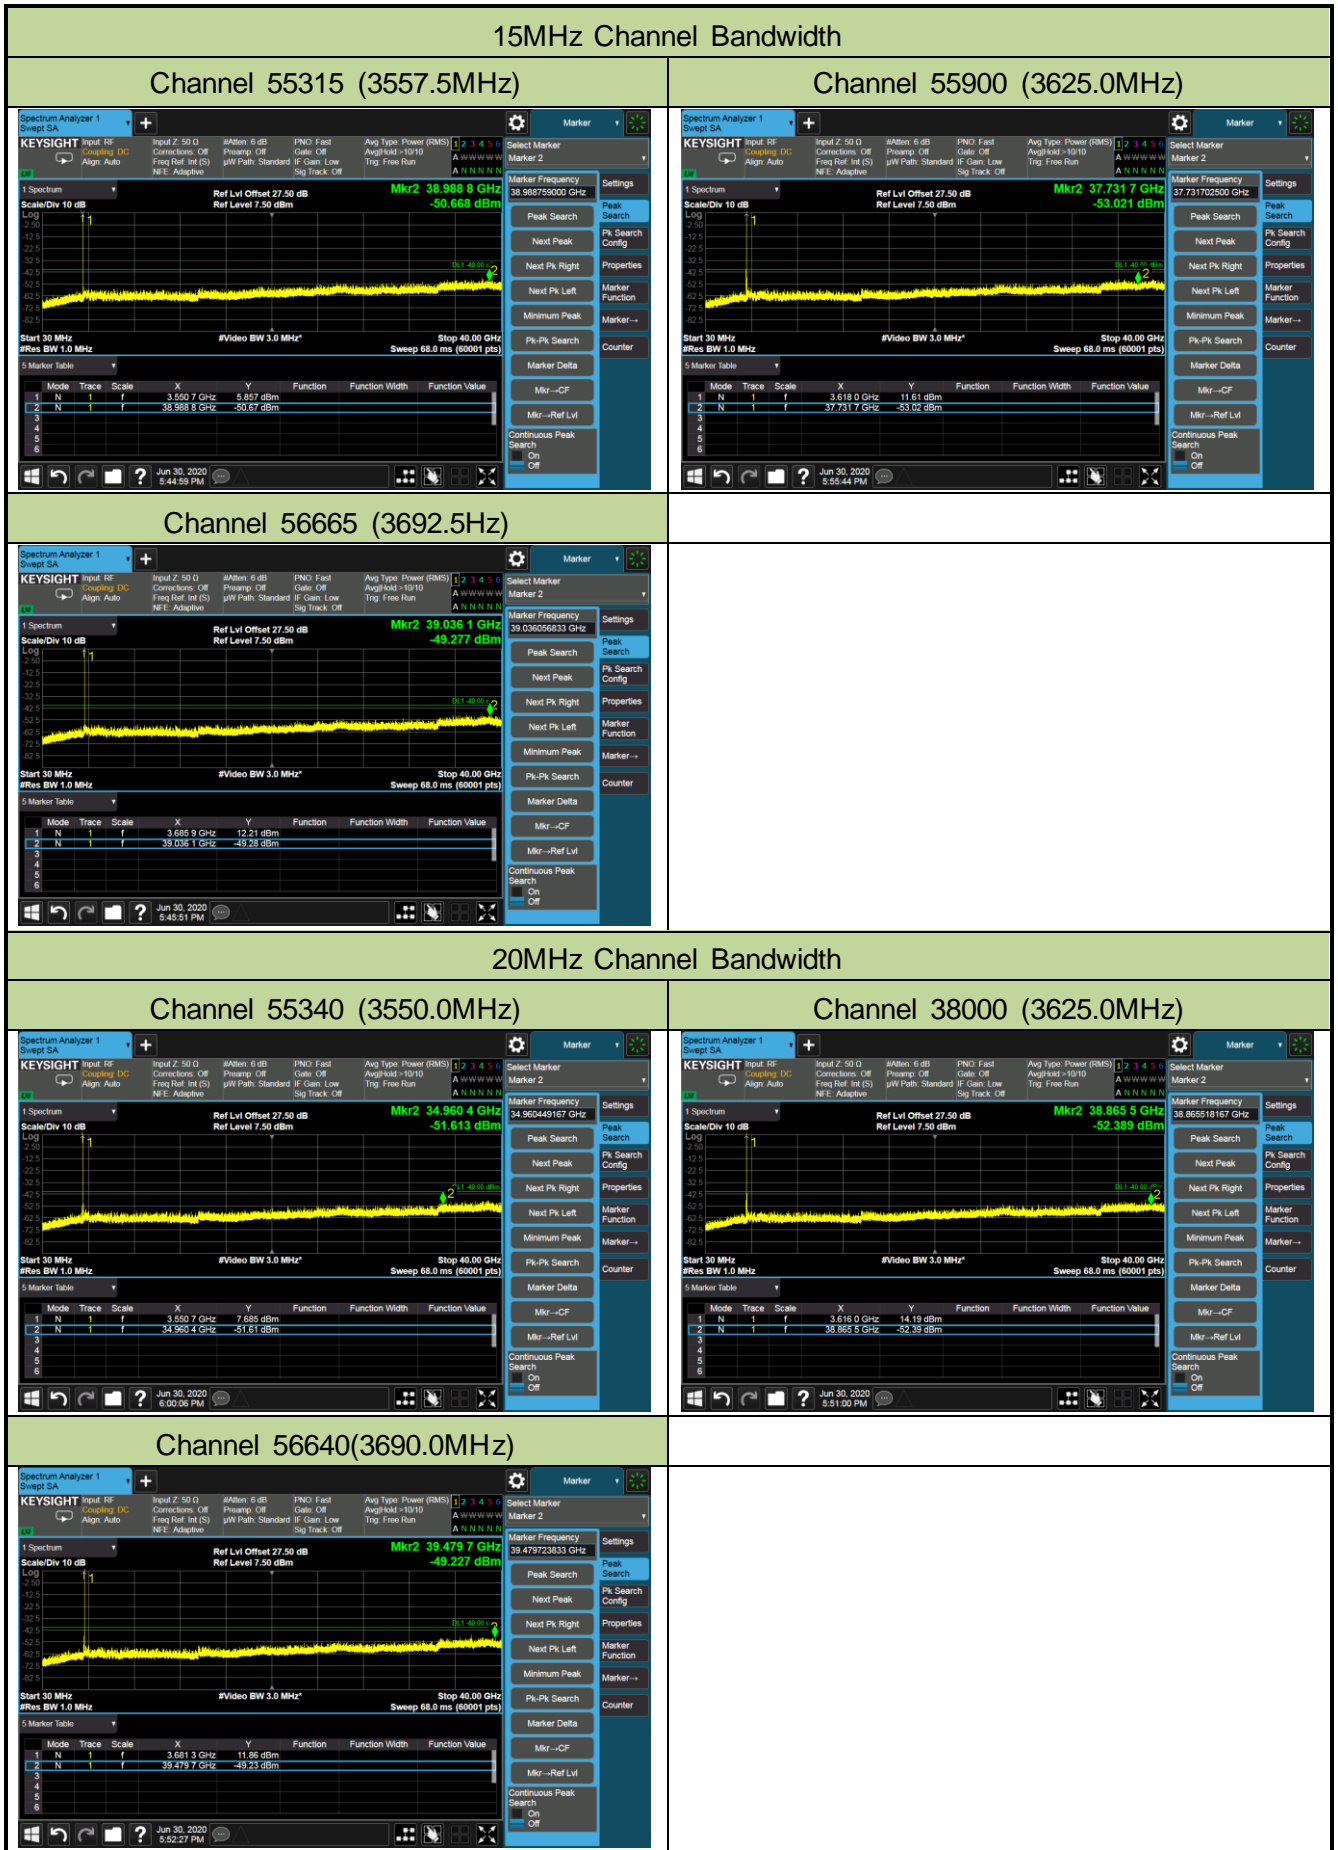

5.7. Radiated Spurious Emissions Measurements

5.7.1. Test Limit

Out of band emissions: The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz .

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$; where D is the measurement distance in meters. The emission limit equal to $55.3\text{dB}\mu\text{V/m}$.

5.7.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.7.3. Test Setting


1. RBW = 1MHz
2. VBW $\geq 3 \times \text{RBW}$
3. Sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})$
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.7.4. Test Setup

Below 1GHz Test Setup:

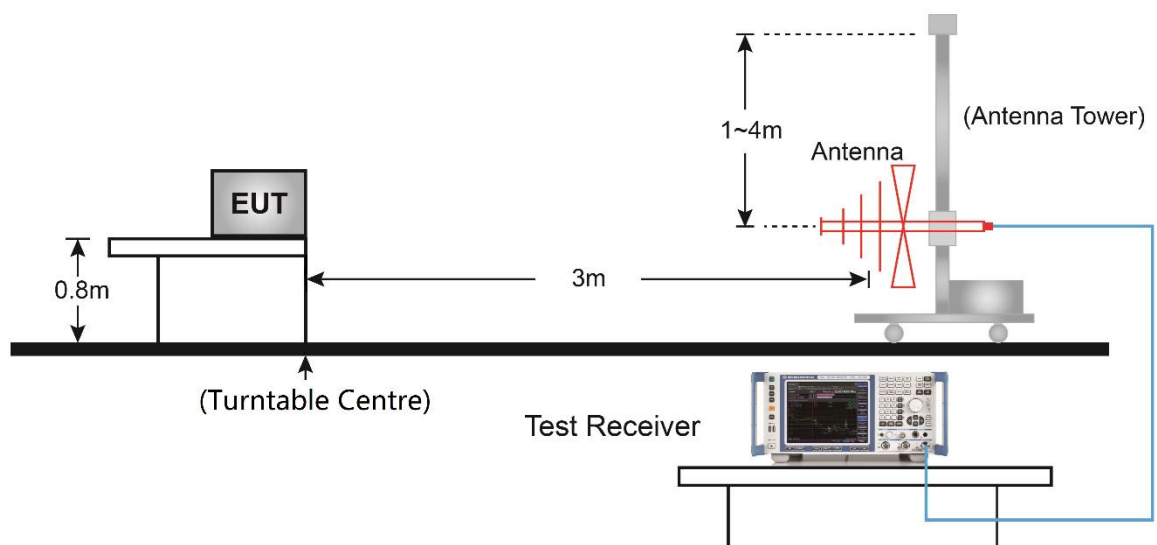

Above 1GHz Test Setup:

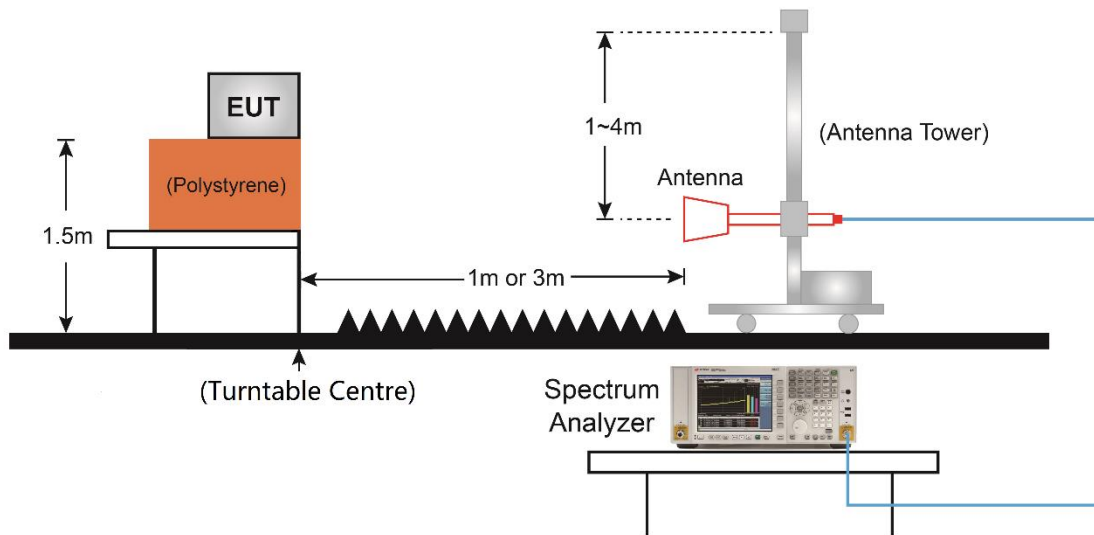

5.7.5. Test Result

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Buter Shi
Test Date	2020/07/13	Test Site	AC1
Test Mode	LTE Band 48 - 5MHz Bandwidth, 1RB, QPSK		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Bottom CH 55265 (3552.5MHz)							
36.3	29.2	13.5	42.7	52.3	-9.6	Peak	Horizontal
409.3	24.4	17.4	41.9	52.3	-10.4	Peak	Horizontal
35.8	30.2	13.5	43.6	52.3	-8.7	Peak	Vertical
413.6	24.6	17.5	42.2	52.3	-10.1	Peak	Vertical
4000.5	37.0	3.4	40.4	52.3	-11.9	Peak	Horizontal
4663.5	35.4	5.2	40.6	52.3	-11.7	Peak	Horizontal
4561.5	36.0	5.1	41.1	52.3	-11.2	Peak	Vertical
4927.0	35.3	6.2	41.5	52.3	-10.8	Peak	Vertical
Middle CH 55900 (3625.0MHz)							
365.6	23.9	16.4	40.2	52.3	-12.1	Peak	Horizontal
407.3	24.3	17.4	41.8	52.3	-10.5	Peak	Horizontal
35.8	29.0	13.5	42.5	52.3	-9.8	Peak	Vertical
408.3	23.7	17.4	41.2	52.3	-11.1	Peak	Vertical
5088.5	36.6	6.5	43.1	52.3	-9.2	Peak	Horizontal
5479.5	35.8	6.5	42.3	52.3	-10.0	Peak	Horizontal
4187.5	37.2	3.7	40.9	52.3	-11.4	Peak	Vertical
4969.5	35.3	6.1	41.4	52.3	-10.9	Peak	Vertical
Top CH 56715 (3697.5MHz)							
407.3	24.7	17.4	42.1	52.3	-10.2	Peak	Horizontal
882.6	16.4	25.6	42.0	52.3	-10.3	Peak	Horizontal
365.6	23.6	16.4	40.0	52.3	-12.3	Peak	Vertical
406.4	23.8	17.4	41.2	52.3	-11.1	Peak	Vertical
5173.5	37.3	6.5	43.8	52.3	-8.5	Peak	Horizontal
5964.0	37.9	6.9	44.8	52.3	-7.5	Peak	Horizontal
5173.5	37.3	6.5	43.8	52.3	-8.5	Peak	Vertical
5964.0	37.9	6.9	44.8	52.3	-7.5	Peak	Vertical

5.8. End User Device Additional Requirement (CBSD Protocol)

5.8.1. Test Limit

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD

5.8.2. Test Procedure Used

KDB 940660 D01 v02, WINNF-TS-0122 V1.0.0

5.8.3. Test Setting

The EUT was connected via an RF cable to a certified CBSD (Ruckus Wireless, Inc. FCC ID: S9GQ910US00) and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.

Step 1:

- a. Setup WINNF.PT.C.HBT.1 with 3570 ~ 3590MHz and power level at 13 dBm/MHz.
- b. Enable AP service from Ruckus LTE Cloud management.
- c. Check EUT Tx frequency and power.
- d. Disable AP service from Ruckus LTE Cloud management and check EUT stop transmission within 10s.

Step 2:

- a. Setup WINNF.PT.C.HBT.1 with 3670 ~ 3690MHz and power level at 8 dBm/MHz.
- b. Enable AP service from Ruckus LTE Cloud management.
- c. Check EUT Tx frequency and power.
- d. Disable AP service from Ruckus LTE Cloud management and check EUT stop transmission within 10s.

5.8.4. Test Result

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Larry Yan
Test Date	2020/07/09	Test Site	TR3
Test Mode	CBSD transmit at 3560MHz (20MHz BW), 13dBm/MHz		



Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Larry Yan
Test Date	2020/07/09	Test Site	TR3
Test Mode	CBSD transmit at 3680MHz (20MHz BW), 8dBm/MHz		



Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

6. CONCLUSION

The data collected relate only the item(s) tested and show that unit is compliance with FCC Rules.

Appendix A - Test Setup Photograph

Refer to "2006RSU085-UT" file.

Appendix B - EUT Photograph

Refer to "2006RSU085-UE" file.