



FCC RADIO TEST REPORT

FCC ID : UZ7ET40AA
Equipment : Tablet
Brand Name : Zebra
Model Name : ET40AA
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart E §15.407

The product was received on Mar. 18, 2022 and testing was performed from Mar. 23, 2022 to Apr. 28, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	7
1.4 Testing Location	8
1.5 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	16
2.4 Support Unit used in test configuration and system	17
2.5 EUT Operation Test Setup	18
2.6 Measurement Results Explanation Example.....	18
3 Test Result	19
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	19
3.2 Maximum Conducted Output Power Measurement	29
3.3 Power Spectral Density Measurement	33
3.4 Unwanted Emissions Measurement.....	39
3.5 AC Conducted Emission Measurement.....	45
3.6 Antenna Requirements	47
4 List of Measuring Equipment.....	50
5 Uncertainty of Evaluation	51
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR222224E	01	Initial issue of report	May 18, 2022
FR222224E	02	Revise image resolution	May 23, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	7.37 dB under the limit at 806.970 MHz
3.5	15.207	AC Conducted Emission	Pass	17.72 dB under the limit at 0.266 MHz
3.6	15.203 15.407(a)	Antenna Requirement	Pass	-

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet
Brand Name	Zebra
Model Name	ET40AA
FCC ID	UZ7ET40AA
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE
HW Version	EV2-1
SW Version	ET40-userdebug 11 11-07-10.00-RG-U00-PRD-GSE MX3 release-keys
MFD	28JAN22
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
Battery	Brand Name	Zebra	Model Name	BT-000455

Supported Unit Used in Test Configuration and System				
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01
Earphone 2	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01



1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna <CDD Mode>	MIMO <Ant. 6+7> 802.11a: 23.97 dBm / 0.2493 W 802.11n HT20: 23.82 dBm / 0.2410 W 802.11n HT40: 23.03 dBm / 0.2008 W 802.11ac VHT20: 23.82 dBm / 0.2410 W 802.11ac VHT40: 23.03 dBm / 0.2008 W 802.11ac VHT80: 22.84 dBm / 0.1923 W 802.11ax HE20: 23.92 dBm / 0.2466 W 802.11ax HE40: 23.13 dBm / 0.2055 W 802.11ax HE80: 22.94 dBm / 0.1967 W
Maximum Output Power to Antenna <TXBF Mode>	MIMO <Ant. 6+7> 802.11n HT20: 23.73 dBm / 0.2360 W 802.11n HT40: 22.84 dBm / 0.1923 W 802.11ax HE20: 23.83 dBm / 0.2415 W 802.11ax HE40: 22.94 dBm / 0.1967 W 802.11ax HE80: 22.84 dBm / 0.1923 W
99% Occupied Bandwidth <CDD Mode>	MIMO<Ant. 6> 802.11a: 19.53 MHz 802.11ax HE20: 19.48 MHz 802.11ac HE40: 38.36 MHz 802.11ac HE80: 77.44 MHz MIMO<Ant. 7> 802.11a: 17.58 MHz 802.11ax HE20: 19.28 MHz 802.11ac HE40: 38.06 MHz 802.11ac HE80: 77.32 MHz
99% Occupied Bandwidth <TXBF Mode>	MIMO <Ant. 6> 802.11ax HE20: 19.08 MHz 802.11ax HE40: 38.06 MHz 802.11ax HE80: 77.08 MHz MIMO <Ant. 7> 802.11ax HE20: 19.03 MHz 802.11ax HE40: 37.96 MHz 802.11ax HE80: 77.32 MHz
Antenna Type	Ant. 6 : IFA Antenna Ant. 7 : IFA Antenna
Antenna Gain	Ant. 6 : 1.04 dBi Ant. 7 : 1.02 dBi



Product Specification is subject to this standard			
Type of Modulation	802.11a/n: OFDM (BPSK/QPSK/16QAM/64QAM)		
	802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)		
Antenna Function Description	802.11ax: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/ 1024QAM)		
		Ant. 6	Ant. 7
	802.11 a/n/ac/ax MIMO	V	V
	802.11 n/ax TXBF	V	V

Note:

1. MIMO Ant. 6+7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.
2. The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH13-HY, CO07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80.



2.2 Test Mode

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The CDD mode is chosen as worst case configuration for all test cases due to higher power than SISO mode.

The 802.11n/ac mode has no higher power and PSD than 802.11ax mode, thus the 802.11ax mode is chosen as main test configuration, and the 802.11n/ac mode is verified the power.

The final test modes consider the modulation and the worst data rates as shown in the table below.

CDD Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ac VHT20 (Covered by HE20)	MCS0
802.11ac VHT40 (Covered by HE40)	MCS0
802.11ac VHT80 (Covered by HE80)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

TXBF Mode

Modulation	Data Rate
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0



Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + Bluetooth Link + MPEG4 + USB Cable (Charging from Adapter)

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11ax HE20	802.11ax HE40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.



<CDD Mode>

MIMO <Ant. 6+7>

802.11a RF Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	Data Rate (bps)	Channel	Data Rate (bps)						
		6M		9M	12M	18M	24M	36M	48M	54M
CH 149	5745	23.96	CH 157	23.87	23.87	23.87	23.77	23.77	23.77	23.77
CH 157	5785	23.97								
CH 165	5825	23.87								

802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index						
		MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 149	5745	23.81	CH 157	23.72	23.72	23.72	23.62	23.62	23.62	23.62
CH 157	5785	23.82								
CH 165	5825	23.67								

802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index						
		MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 151	5755	23.03	CH 151	22.93	22.93	22.93	22.83	22.83	22.83	22.83
CH 159	5795	22.98								

802.11ac VHT20 RF Output Power (dBm)											
Power vs. Channel			Power vs Data Rate								
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index							
		MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 149	5745	23.81	CH 157	23.72	23.72	23.72	23.62	23.62	23.62	23.62	23.52
CH 157	5785	23.82									
CH 165	5825	23.67									



802.11ac VHT40 RF Output Power (dBm)													
Power vs. Channel				Power vs Data Rate									
Channel	Frequency (MHz)	MCS Index		Channel	MCS Index								
		MCS0			MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 151	5755	23.03		CH 151	22.93	22.93	22.93	22.83	22.83	22.83	22.83	22.73	22.73
CH 159	5795	22.98											

802.11ac VHT80 RF Output Power (dBm)													
Power vs. Channel				Power vs Data Rate									
Channel	Frequency (MHz)	MCS Index		Channel	MCS Index								
		MCS0			MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 155	5775	22.84		CH 155	22.74	22.74	22.74	22.64	22.64	22.64	22.64	22.54	22.54

802.11ax HE20 RF Output Power (dBm)															
Power vs. Channel				Power vs Data Rate											
Channel	Frequency (MHz)	RU Config.	MCS Index		Channel	MCS Index									
			MCS0			MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10
CH 149	5745	Full	23.91		CH 157	23.82	23.82	23.82	23.72	23.72	23.72	23.72	23.62	23.62	
CH 149	5745	26/0	16.64												
CH 149	5745	52/37	19.17												
CH 149	5745	106/53	22.17												
CH 157	5785	Full	23.92												
CH 157	5785	26/4	15.76												
CH 157	5785	52/38	18.66												
CH 157	5785	106/53	22.13												
CH 157	5785	Full	23.77												
CH 157	5785	26/8	15.77												
CH 157	5785	52/40	18.77												
CH 165	5825	106/54	21.88												



802.11ax HE40 RF Output Power (dBm)															
Power vs. Channel				Power vs Data Rate											
Channel	Frequency (MHz)	RU Config.	MCS Index	Channel	MCS Index										
			MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
CH 151	5755	Full	23.13	CH 151	23.03	23.03	23.03	22.93	22.93	22.93	22.93	22.83	22.83	22.83	
CH 151	5755	242/61	20.41												
CH 159	5795	Full	23.08												
CH 159	5795	242/62	19.56												

802.11ax HE80 RF Output Power (dBm)															
Power vs. Channel				Power vs Data Rate											
Channel	Frequency (MHz)	RU Config.	MCS Index	Channel	MCS Index										
			MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
CH 155	5775	Full	22.94	CH 155	22.84	22.84	22.84	22.74	22.74	22.74	22.74	22.64	22.64	22.64	
CH 155	5775	484/65	19.87												
CH 155	5775	484/66	19.27												

<TXBF Mode>

MIMO <Ant. 6+7>

802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index						
		MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 149	5745	23.72	CH 157	23.63	23.63	23.63	23.53	23.53	23.53	23.43
CH 157	5785	23.73								
CH 165	5825	23.64								

802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index						
		MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 151	5755	22.84	CH 151	22.74	22.74	22.74	22.64	22.64	22.64	22.54
CH 159	5795	22.78								




802.11ax HE20 RF Output Power (dBm)															
Power vs. Channel				Power vs Data Rate											
Channel	Frequency (MHz)	RU Config.	MCS Index	Channel	MCS Index										
			MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
CH 149	5745	Full	23.82												
CH 157	5785	Full	23.83	CH 157	23.73	23.73	23.73	23.63	23.63	23.63	23.63	23.53	23.53	23.53	23.43
CH 157	5785	Full	23.74												

802.11ax HE40 RF Output Power (dBm)															
Power vs. Channel				Power vs Data Rate											
Channel	Frequency (MHz)	RU Config.	MCS Index	Channel	MCS Index										
			MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
CH 151	5755	Full	22.94												
CH 159	5795	Full	22.88	CH 151	22.84	22.84	22.84	22.74	22.74	22.74	22.74	22.64	22.64	22.64	22.54


802.11ax HE80 RF Output Power (dBm)															
Power vs. Channel				Power vs Data Rate											
Channel	Frequency (MHz)	RU Config.	MCS Index	Channel	MCS Index										
			MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
CH 155	5775	Full	22.84	CH 155	22.74	22.74	22.70	22.70	22.71	22.71	22.77	22.77	22.72	22.72	22.72

2.3 Connection Diagram of Test System


<AC Conducted Emission Mode>

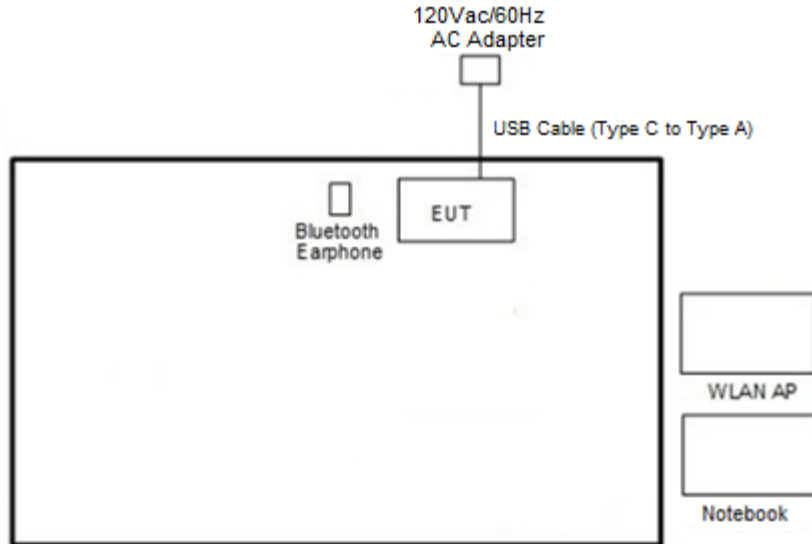

<WLAN Tx Mode>

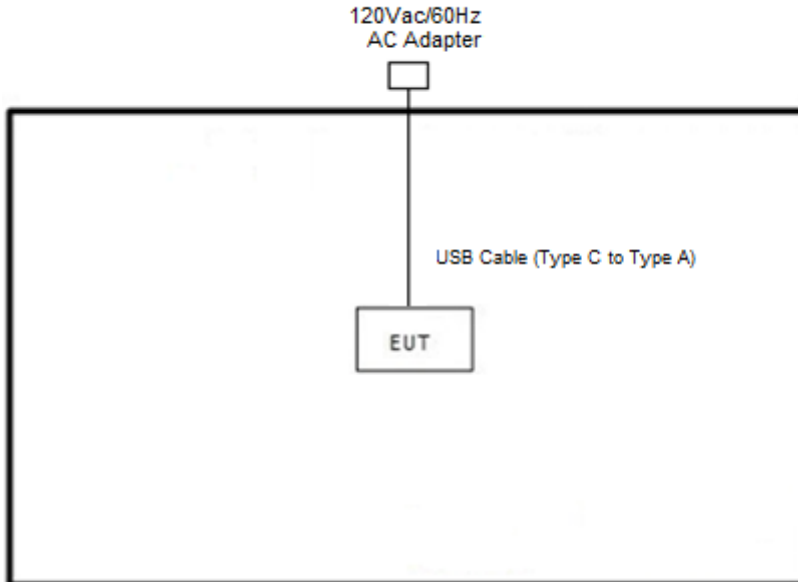

<WLAN TXBF Mode>

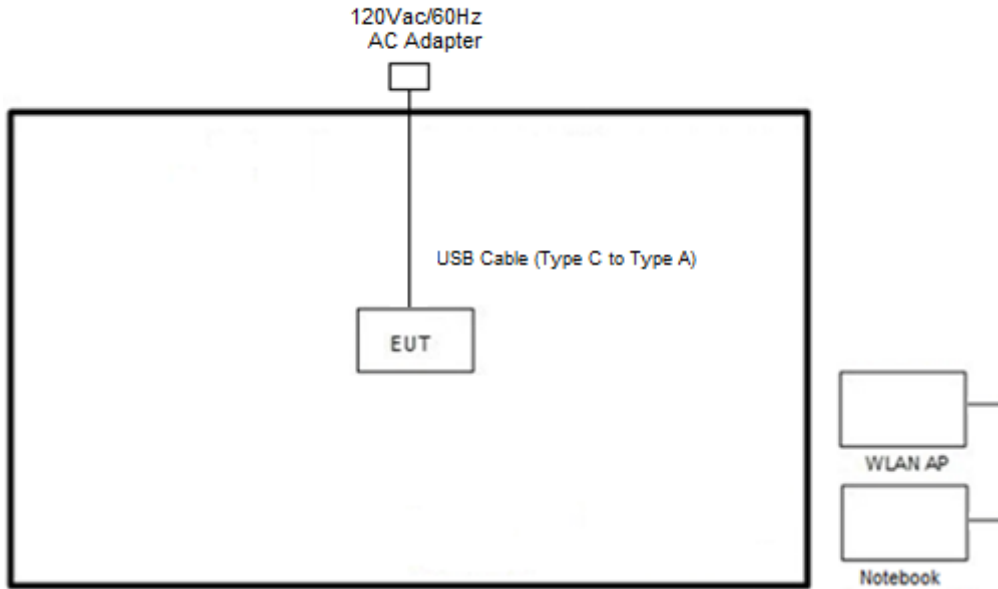

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Notebook	Dell	P74G	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility “cmd v10.0.17134.1304” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

For TXBF mode, the modulation modes and data rates manipulated by the command lines in the engineering program made the EUT link to another EUT by power under the normal operation. The “cmd v10.0.17134.1304” software tool was used to enable the EUT to transmit signals continuously.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup





3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Test Engineer :	Benny Ku	Temperature :	21~25°C
		Relative Humidity :	51~54%

<CDD Mode>

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	149	5745	18.33	17.58	33.35	29.95	16.39	16.45	0.5	Pass
11a	6Mbps	2	157	5785	18.93	17.58	34.55	27.05	16.35	16.45	0.5	Pass
11a	6Mbps	2	165	5825	19.53	17.23	33.80	25.90	16.40	16.40	0.5	Pass

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	149	5745	Full	19.48	19.28	34.25	28.90	18.35	18.15	0.5	Pass
HE20	MCS0	2	157	5785	Full	19.48	19.13	32.40	26.40	18.10	18.65	0.5	Pass
HE20	MCS0	2	165	5825	Full	19.48	19.13	34.90	26.30	18.40	18.10	0.5	Pass
HE40	MCS0	2	151	5755	Full	38.36	38.06	52.38	47.88	37.98	37.89	0.5	Pass
HE40	MCS0	2	159	5795	Full	38.16	37.96	55.35	48.69	37.89	37.53	0.5	Pass
HE80	MCS0	2	155	5775	Full	77.44	77.32	112.64	104.64	77.76	77.92	0.5	Pass




<TXBF Mode>

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	149	5745	Full	18.98	19.03	21.50	22.00	17.00	16.55	0.5	Pass
HE20	MCS0	2	157	5785	Full	19.03	18.98	26.70	21.20	18.45	16.15	0.5	Pass
HE20	MCS0	2	165	5825	Full	19.08	18.93	22.10	21.35	15.15	17.15	0.5	Pass
HE40	MCS0	2	151	5755	Full	38.06	37.86	56.34	58.68	37.89	37.80	0.5	Pass
HE40	MCS0	2	159	5795	Full	37.96	37.96	44.82	54.45	37.44	37.26	0.5	Pass
HE80	MCS0	2	155	5775	Full	77.08	77.32	83.36	90.72	76.64	75.68	0.5	Pass



<CDD Modes>


<802.11a>

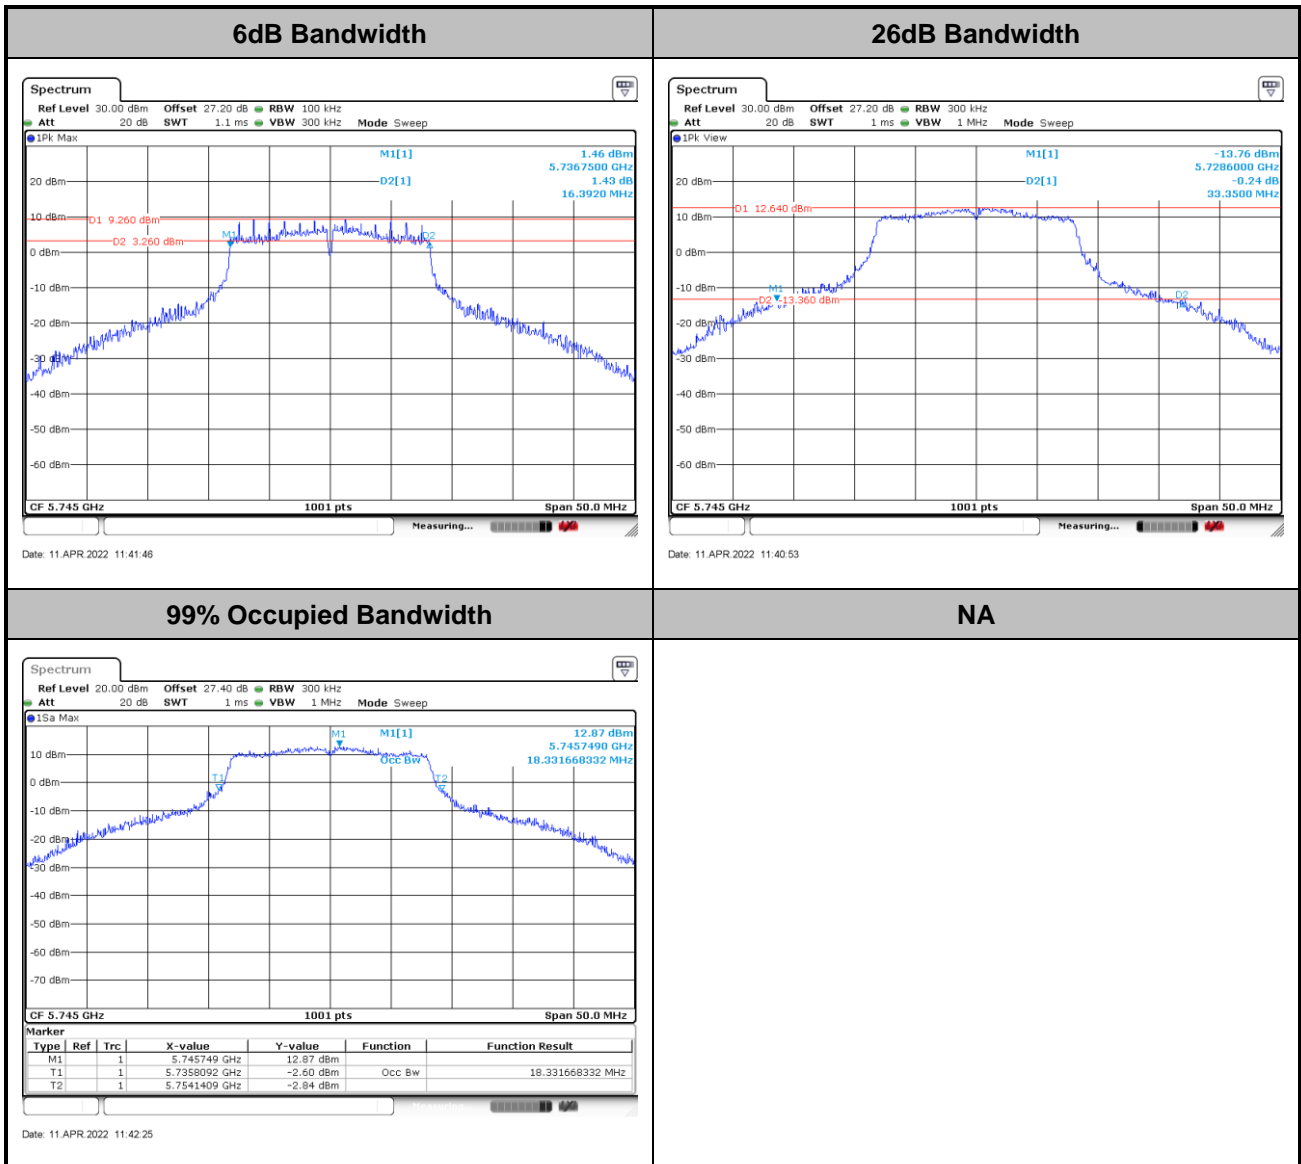

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE20>

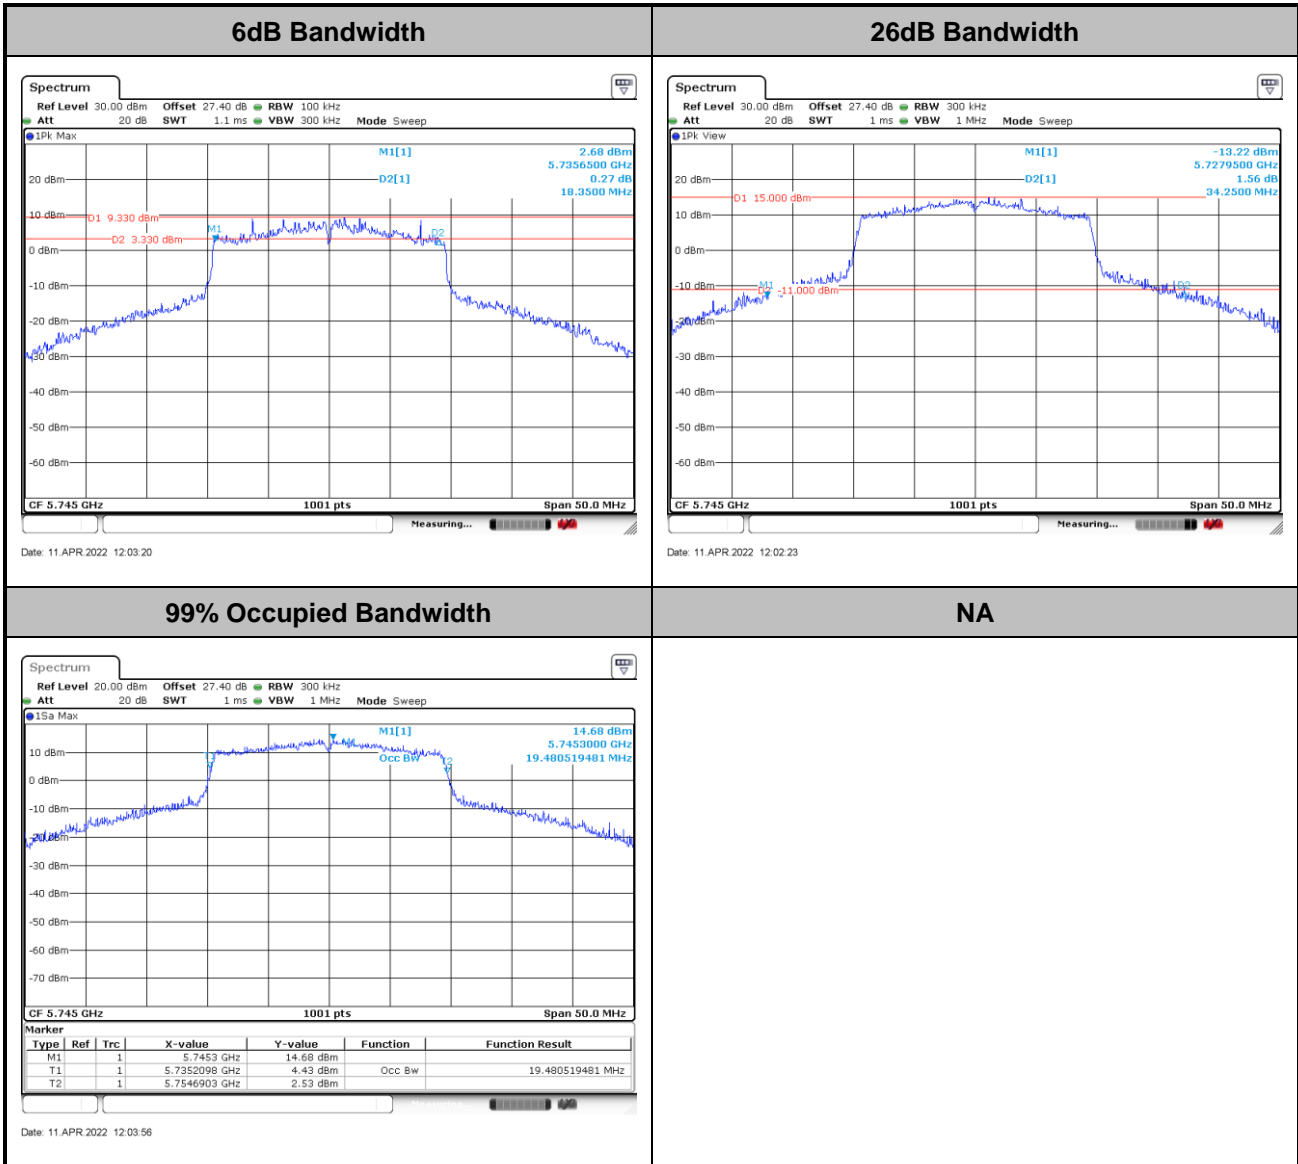

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE40>

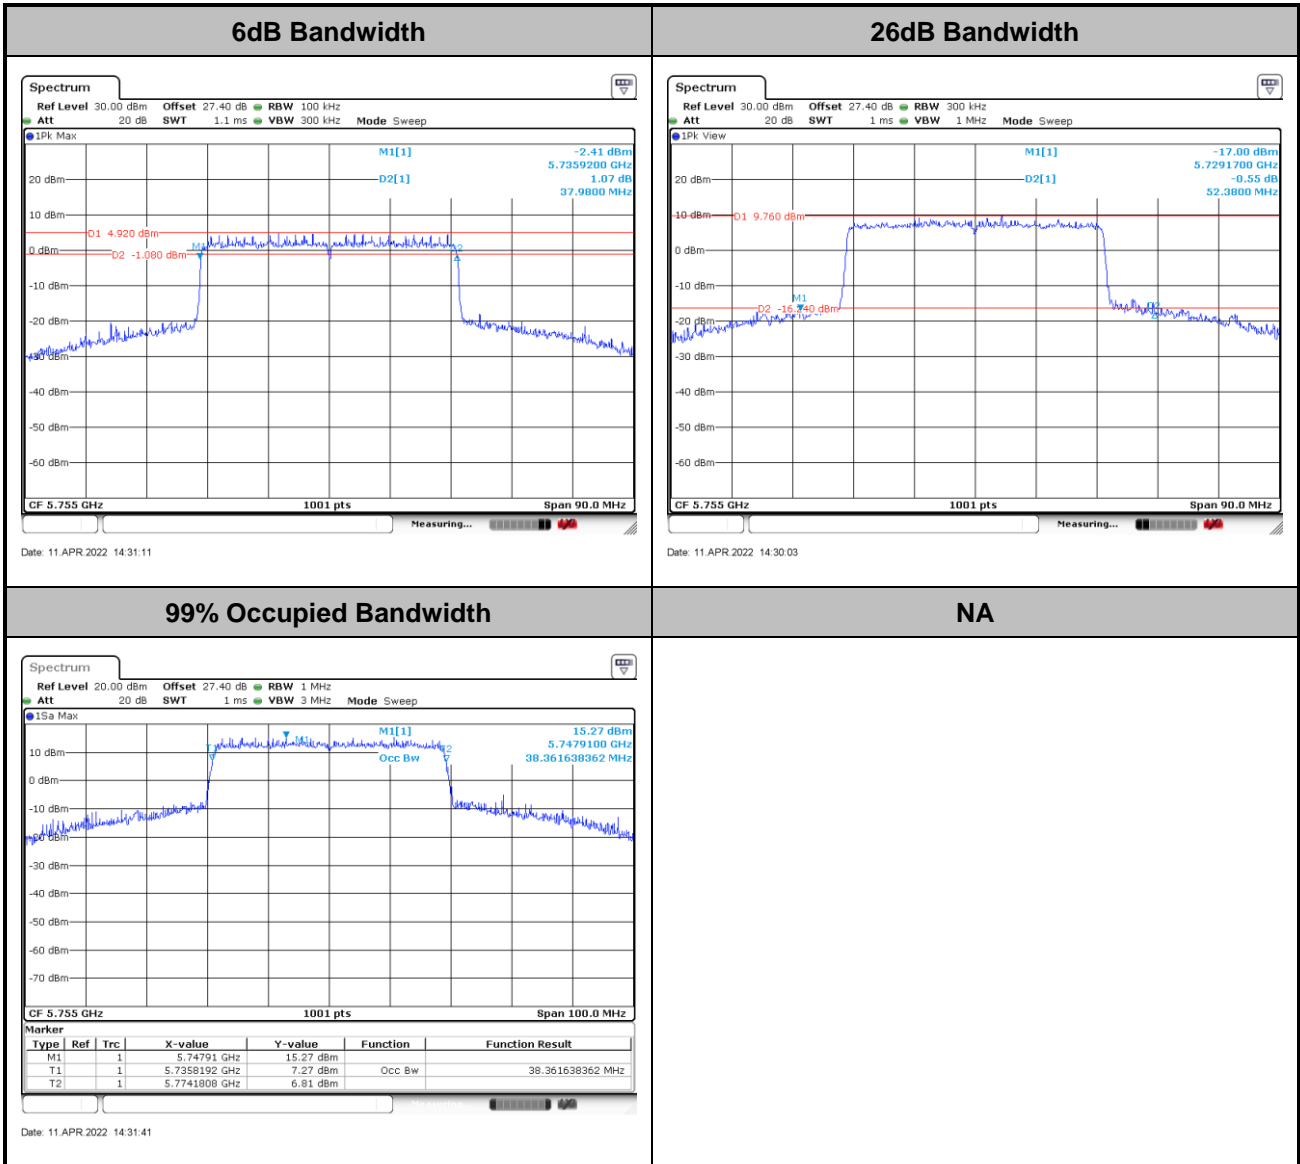

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE80>

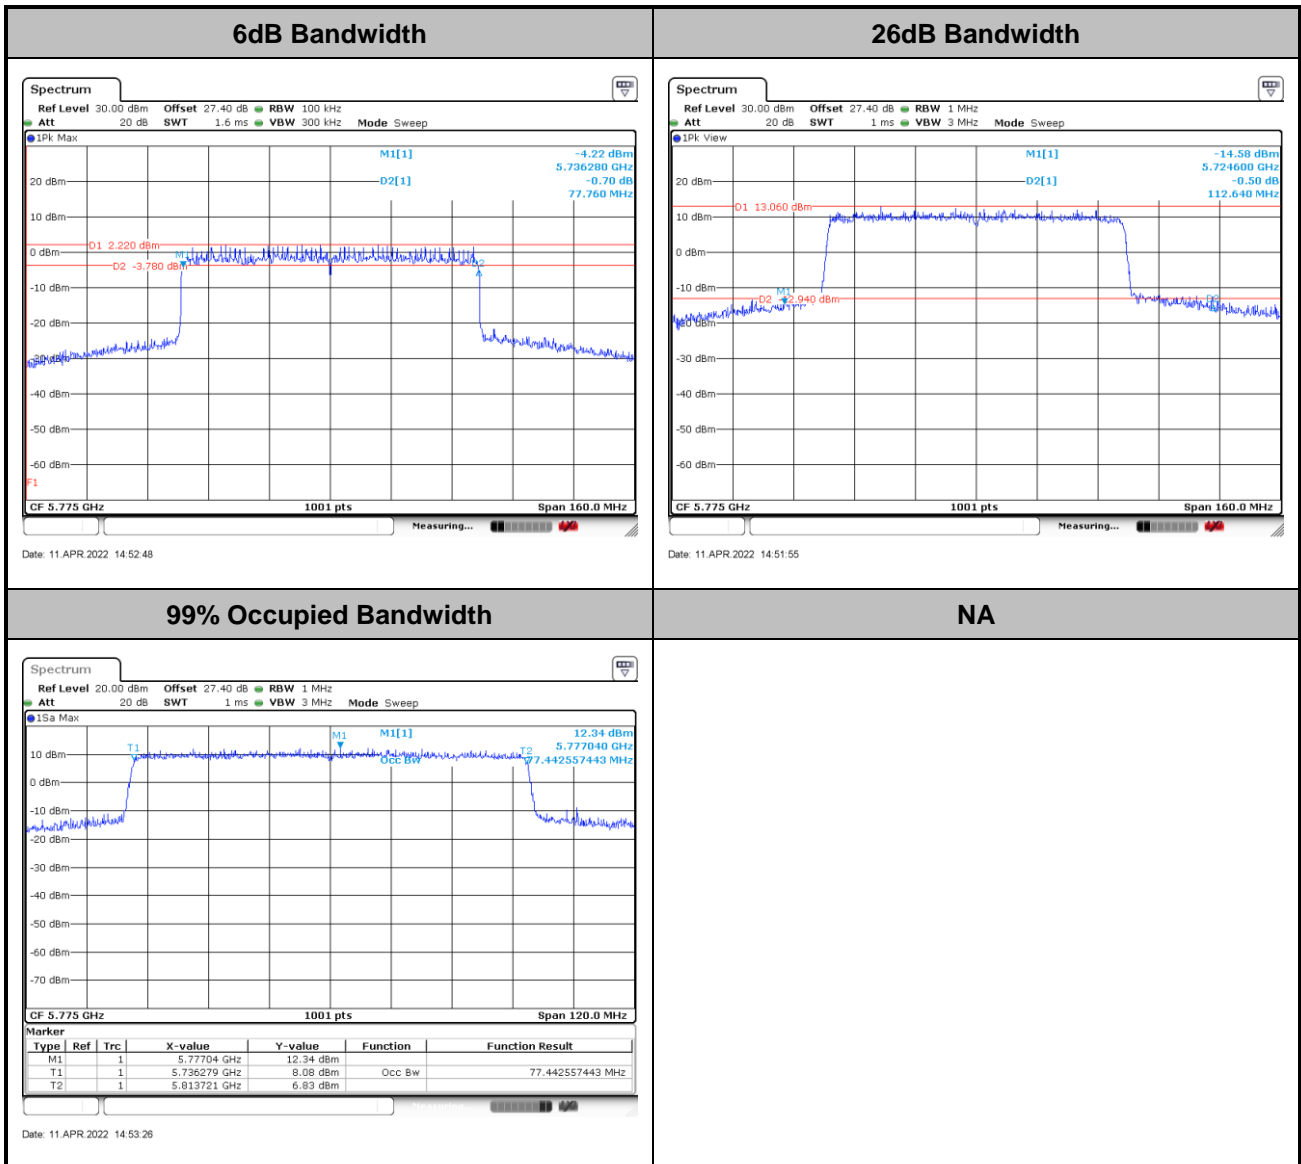


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<TXBF Modes>


<802.11ax HE20>

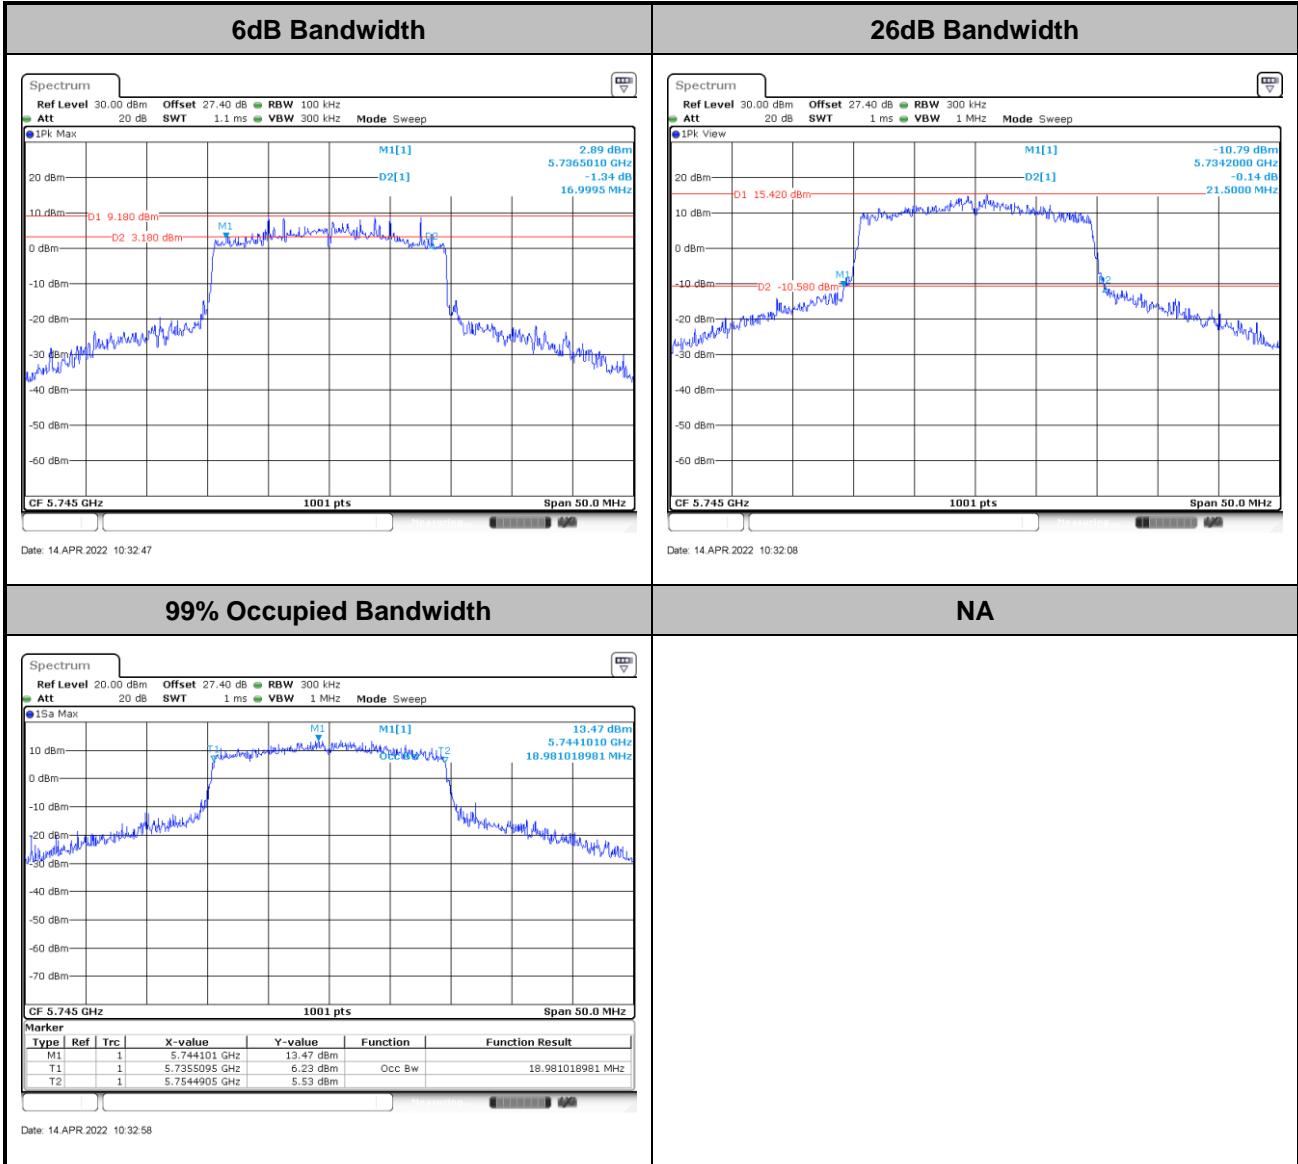

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE40>

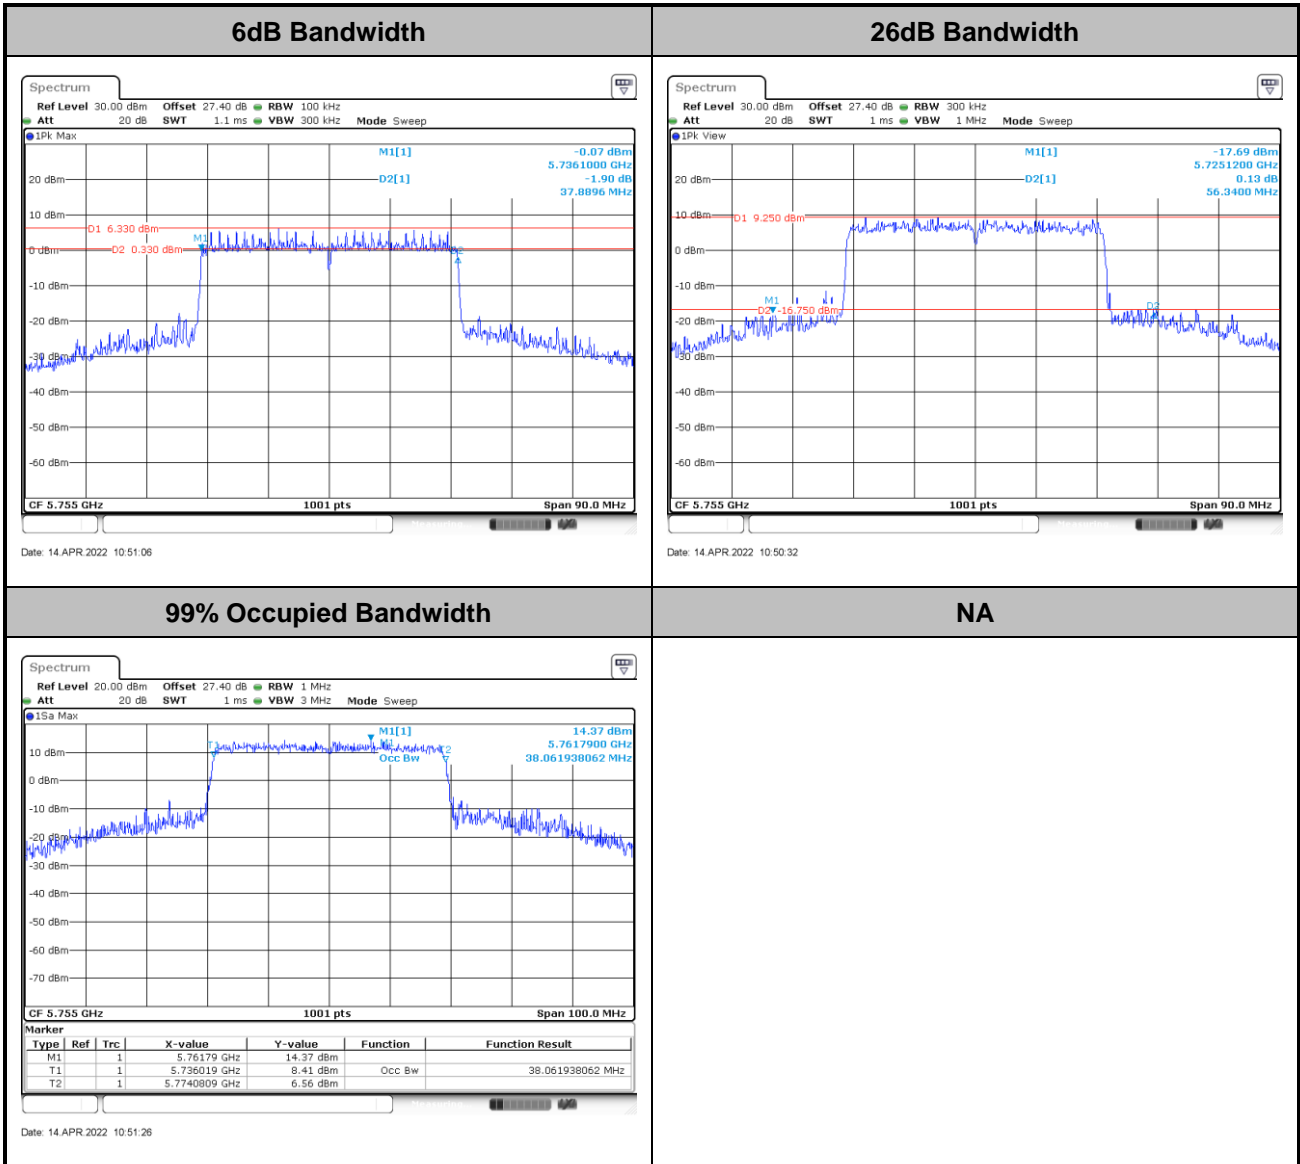

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE80>

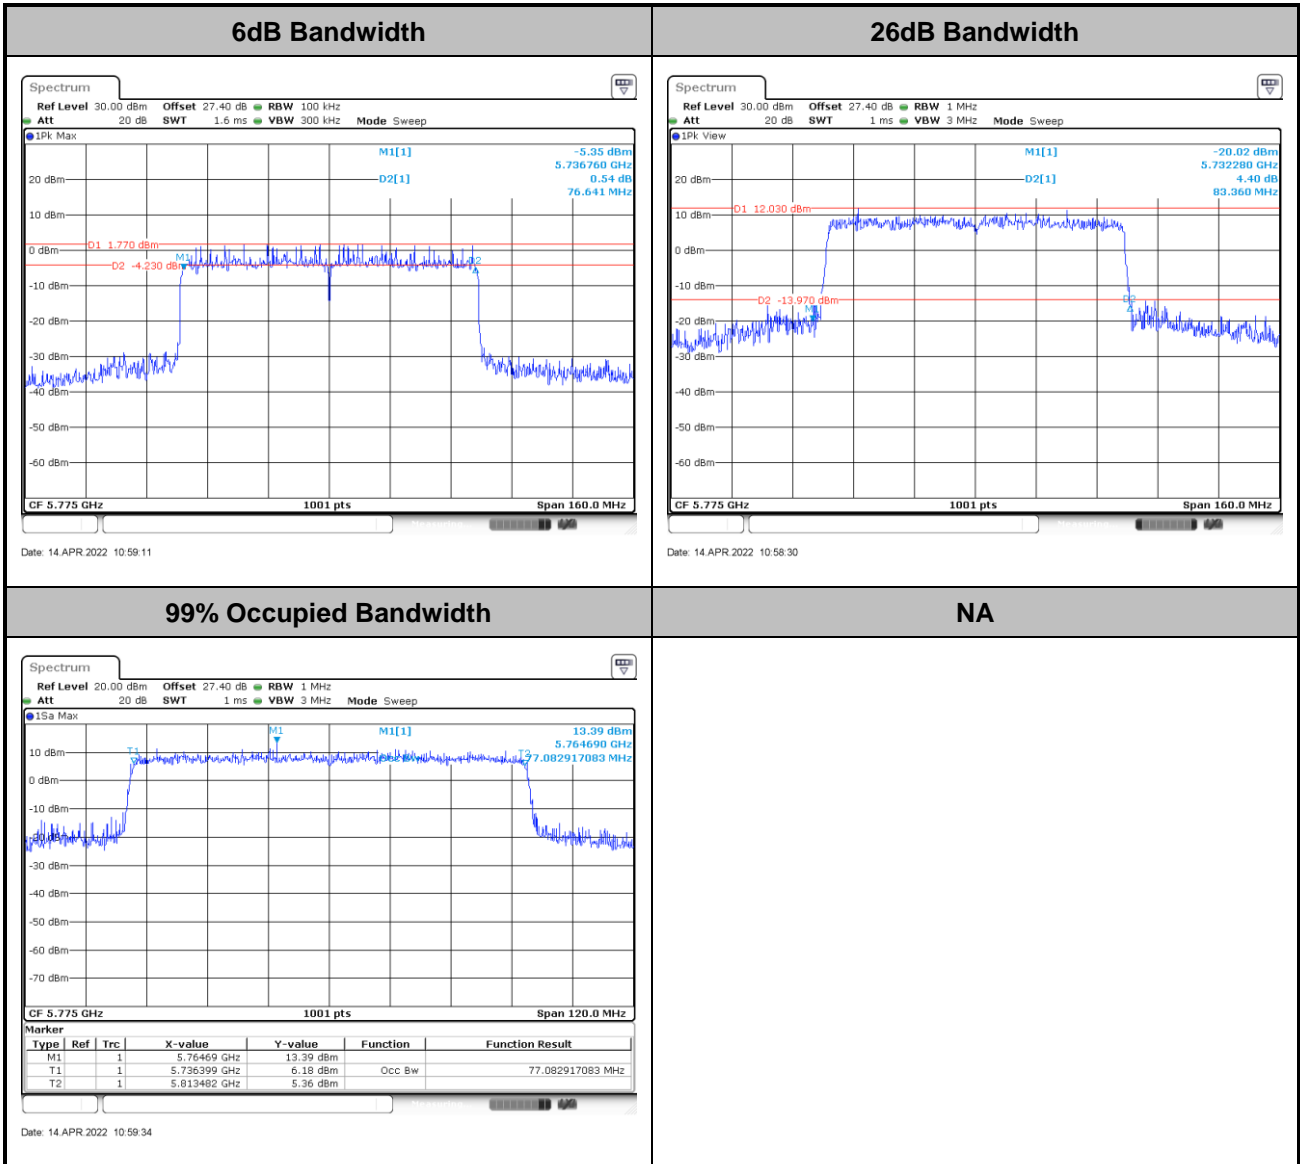

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

<CDD Modes>

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01


<TXBF Modes>

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 for TXBF modes.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

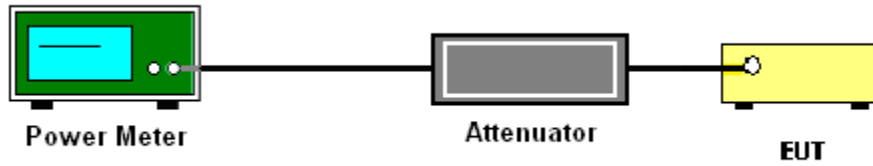

3.2.5 Test Result of Maximum Conducted Output Power

Test Engineer :	Benny Ku	Temperature :	21~25°C
		Relative Humidity :	51~54%

<CDD Mode>

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	21.10	20.80	23.96	30.00	1.04		Pass	
11a	6Mbps	2	157	5785	21.20	20.70	23.97	30.00	1.04		Pass	
11a	6Mbps	2	165	5825	21.20	20.50	23.87	30.00	1.04		Pass	
HT20	MCS0	2	149	5745	21.00	20.60	23.81	30.00	1.04		Pass	
HT20	MCS0	2	157	5785	21.10	20.50	23.82	30.00	1.04		Pass	
HT20	MCS0	2	165	5825	21.00	20.30	23.67	30.00	1.04		Pass	
HT40	MCS0	2	151	5755	20.40	19.60	23.03	30.00	1.04		Pass	
HT40	MCS0	2	159	5795	20.40	19.50	22.98	30.00	1.04		Pass	
VHT20	MCS0	2	149	5745	21.00	20.60	23.81	30.00	1.04		Pass	
VHT20	MCS0	2	157	5785	21.10	20.50	23.82	30.00	1.04		Pass	
VHT20	MCS0	2	165	5825	21.00	20.30	23.67	30.00	1.04		Pass	
VHT40	MCS0	2	151	5755	20.40	19.60	23.03	30.00	1.04		Pass	
VHT40	MCS0	2	159	5795	20.40	19.50	22.98	30.00	1.04		Pass	
VHT80	MCS0	2	155	5775	20.30	19.30	22.84	30.00	1.04		Pass	



<802.11ax Mode>

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	21.10	20.70	23.91	30.00		1.04		Pass
HE20	MCS0	2	149	5745	26/0	14.10	13.10	16.64	30.00		1.04		Pass
HE20	MCS0	2	149	5745	52/37	16.50	15.80	19.17	30.00		1.04		Pass
HE20	MCS0	2	149	5745	106/53	19.50	18.80	22.17	30.00		1.04		Pass
HE20	MCS0	2	157	5785	Full	21.20	20.60	23.92	30.00		1.04		Pass
HE20	MCS0	2	157	5785	26/4	12.90	12.60	15.76	30.00		1.04		Pass
HE20	MCS0	2	157	5785	52/38	15.80	15.50	18.66	30.00		1.04		Pass
HE20	MCS0	2	157	5785	106/53	19.50	18.70	22.13	30.00		1.04		Pass
HE20	MCS0	2	165	5825	Full	21.10	20.40	23.77	30.00		1.04		Pass
HE20	MCS0	2	165	5825	26/8	13.10	12.40	15.77	30.00		1.04		Pass
HE20	MCS0	2	165	5825	52/40	16.10	15.40	18.77	30.00		1.04		Pass
HE20	MCS0	2	165	5825	106/54	19.30	18.40	21.88	30.00		1.04		Pass
HE40	MCS0	2	151	5755	Full	20.50	19.70	23.13	30.00		1.04		Pass
HE40	MCS0	2	151	5755	242/61	17.50	17.30	20.41	30.00		1.04		Pass
HE40	MCS0	2	159	5795	Full	20.50	19.60	23.08	30.00		1.04		Pass
HE40	MCS0	2	159	5795	242/62	16.70	16.40	19.56	30.00		1.04		Pass
HE80	MCS0	2	155	5775	Full	20.40	19.40	22.94	30.00		1.04		Pass
HE80	MCS0	2	155	5775	484/65	17.20	16.50	19.87	30.00		1.04		Pass
HE80	MCS0	2	155	5775	484/66	16.50	16.00	19.27	30.00		1.04		Pass



<TXBF Mode>

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HT20	MCS2	2	149	5745	21.00	20.40	23.72	30.00	30.00	4.04	4.04	Pass
HT20	MCS2	2	157	5785	21.10	20.30	23.73	30.00	30.00	4.04	4.04	Pass
HT20	MCS2	2	165	5825	21.10	20.10	23.64	30.00	30.00	4.04	4.04	Pass
HT40	MCS0	2	151	5755	20.30	19.30	22.84	30.00	30.00	4.04	4.04	Pass
HT40	MCS0	2	159	5795	20.20	19.30	22.78	30.00	30.00	4.04	4.04	Pass

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS3	2	149	5745	Full	21.10	20.50	23.82	30.00	30.00	4.04	4.04	Pass
HE20	MCS3	2	157	5785	Full	21.20	20.40	23.83	30.00	30.00	4.04	4.04	Pass
HE20	MCS3	2	165	5825	Full	21.20	20.20	23.74	30.00	30.00	4.04	4.04	Pass
HE40	MCS0	2	151	5755	Full	20.40	19.40	22.94	30.00	30.00	4.04	4.04	Pass
HE40	MCS0	2	159	5795	Full	20.30	19.40	22.88	30.00	30.00	4.04	4.04	Pass
HE80	MCS0	2	155	5775	Full	20.30	19.30	22.84	30.00	30.00	4.04	4.04	Pass



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

<CDD Modes>

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300kHz.
- Set VBW \geq 1 MHz.
- Add $10 \log(500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement
- Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.


<TXBF Modes>**# Method SA-3 #**

(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time \leq (number of points in sweep) \times T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - Detector = power averaging (rms).
 - Trace mode = max hold.
 - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{th}$ of the PSD limit.

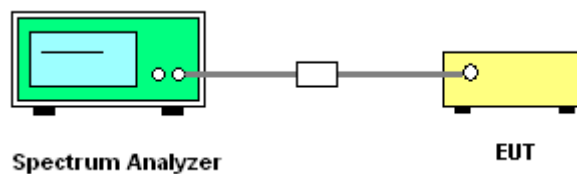3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density


Test Engineer :	Benny Ku	Temperature :	21~25°C
		Relative Humidity :	51~54%

<CDD Mode>

Band IV MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	2.22	7.05	6.09	10.06	30.00	30.00	4.04	4.04	Pass	
11a	6Mbps	2	157	5785	2.22	7.49	6.05	10.50	30.00	30.00	4.04	4.04	Pass	
11a	6Mbps	2	165	5825	2.22	6.94	5.88	9.95	30.00	30.00	4.04	4.04	Pass	

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

<802.11a>

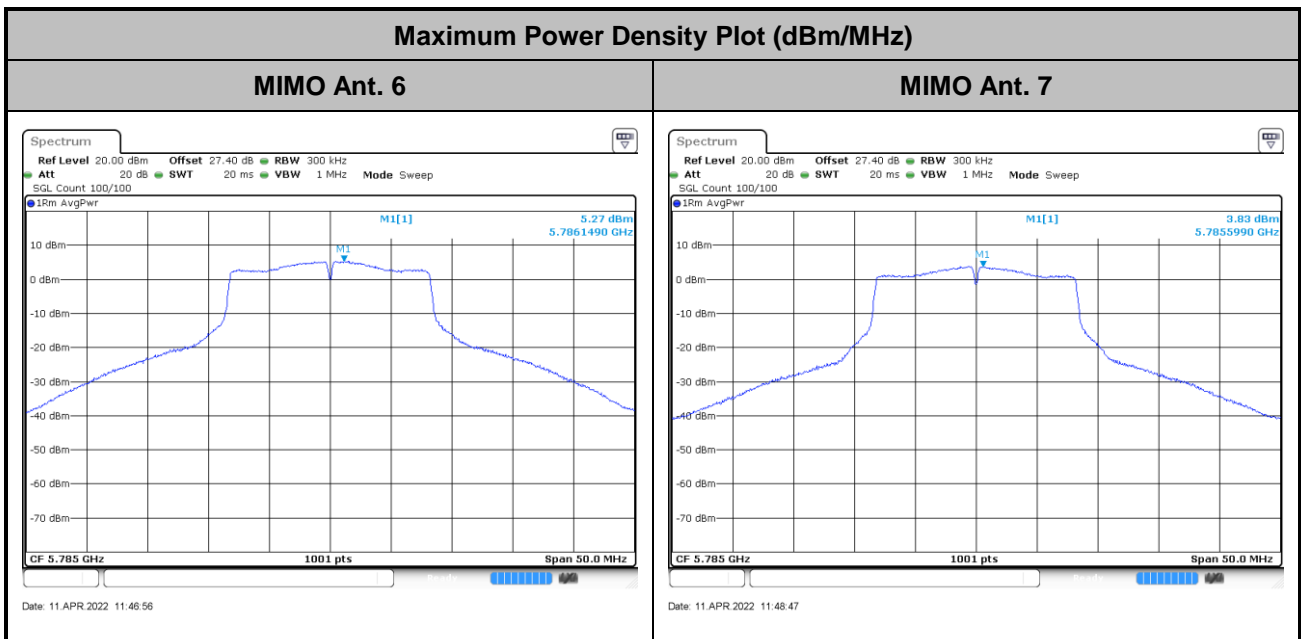




<802.11ax Mode>

Band IV MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	10log (500kHz /RBW) Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	2.22	2.22	7.19	6.13	10.20	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	149	5745	26/0	2.22	2.22	7.11	6.10	10.12	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	149	5745	52/37	2.22	2.22	7.03	6.12	10.04	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	149	5745	106/53	2.22	2.22	6.64	6.00	9.65	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	157	5785	Full	2.22	2.22	7.06	6.04	10.07	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	157	5785	26/4	2.22	2.22	6.93	5.85	9.94	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	157	5785	52/38	2.22	2.22	6.70	5.91	9.71	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	157	5785	106/53	2.22	2.22	6.69	5.88	9.70	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	165	5825	Full	2.22	2.22	6.86	5.89	9.87	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	165	5825	26/8	2.22	2.22	6.78	5.78	9.79	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	165	5825	52/40	2.22	2.22	6.82	5.69	9.83	30.00	30.00	4.04	4.04	Pass
HE20	MCS0	2	165	5825	106/54	2.22	2.22	6.59	5.73	9.60	30.00	30.00	4.04	4.04	Pass
HE40	MCS0	2	151	5755	Full	2.22	2.22	1.00	0.59	4.01	30.00	30.00	4.04	4.04	Pass
HE40	MCS0	2	151	5755	242/61	2.22	2.22	0.78	0.55	3.79	30.00	30.00	4.04	4.04	Pass
HE40	MCS0	2	159	5795	Full	2.22	2.22	1.53	0.57	4.54	30.00	30.00	4.04	4.04	Pass
HE40	MCS0	2	159	5795	242/62	2.22	2.22	1.10	0.53	4.11	30.00	30.00	4.04	4.04	Pass
HE80	MCS0	2	155	5775	Full	2.22	2.22	-2.04	-2.51	0.97	30.00	30.00	4.04	4.04	Pass
HE80	MCS0	2	155	5775	484/65	2.22	2.22	-2.11	-2.68	0.90	30.00	30.00	4.04	4.04	Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)



<802.11ax HE20>

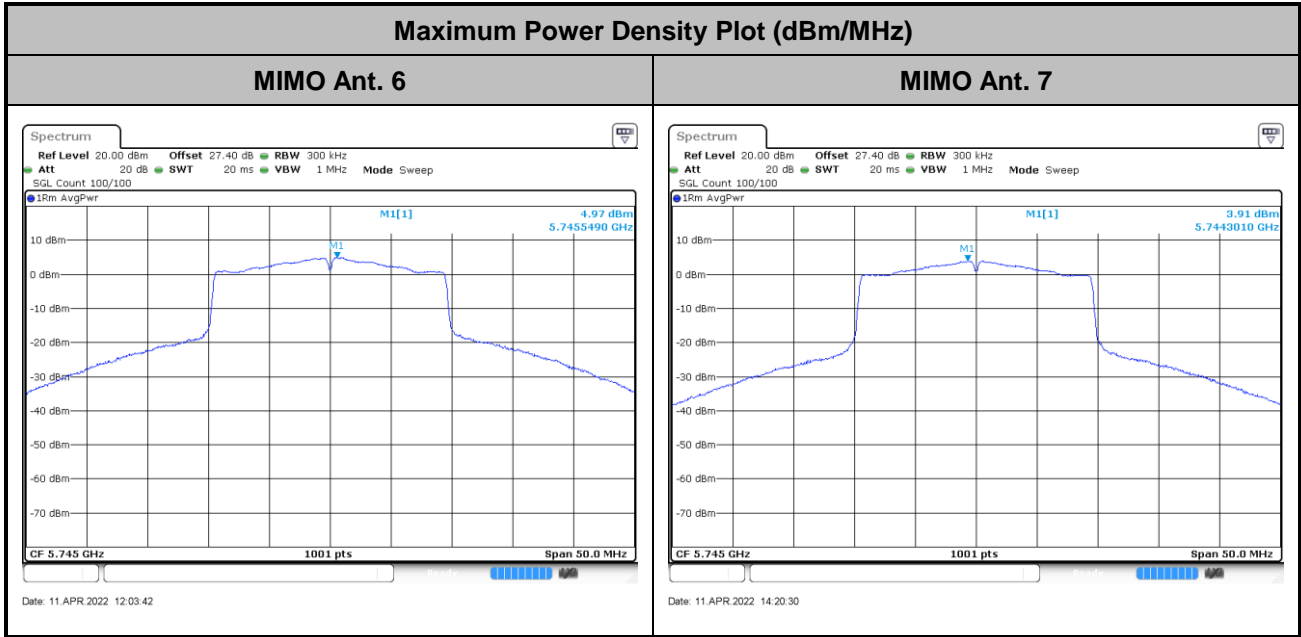


<TXBF Mode>

Band IV MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	2.22	10.19	9.70	13.20	30.00	4.04	Pass			
HE20	MCS0	2	157	5785	Full	2.22	10.66	9.53	13.67	30.00	4.04	Pass			
HE20	MCS0	2	165	5825	Full	2.22	10.97	9.61	13.98	30.00	4.04	Pass			
HE40	MCS0	2	151	5755	Full	2.22	6.14	5.23	9.15	30.00	4.04	Pass			
HE40	MCS0	2	159	5795	Full	2.22	6.03	5.41	9.04	30.00	4.04	Pass			
HE80	MCS0	2	155	5775	Full	2.22	2.79	1.76	5.80	30.00	4.04	Pass			



<802.11ax HE20>

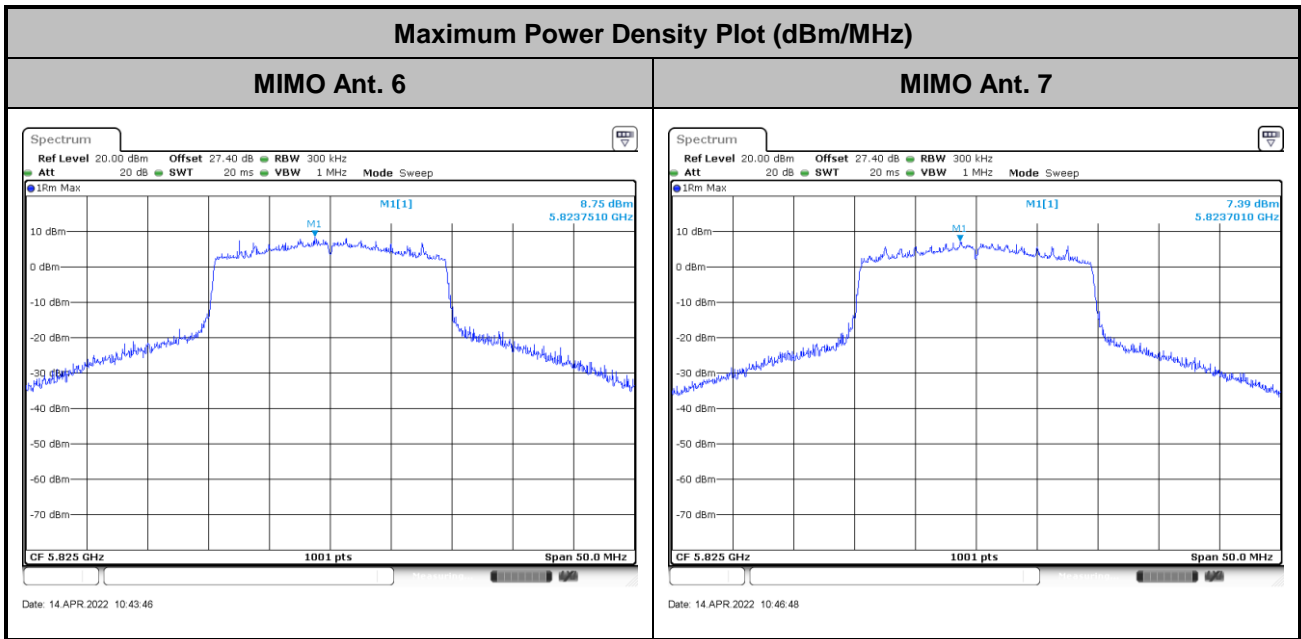



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.



3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.

6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.


3.4.4 Test Setup

For radiated emissions below 30MHz

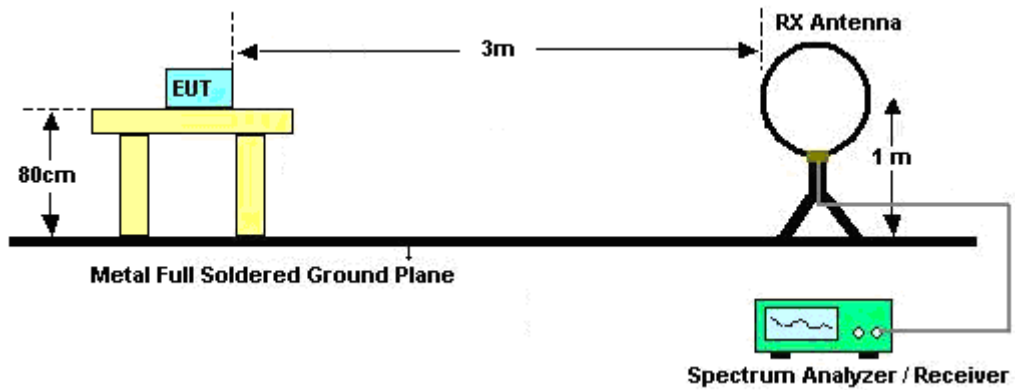


For radiated emissions from 30MHz to 1GHz

<CDD Mode>

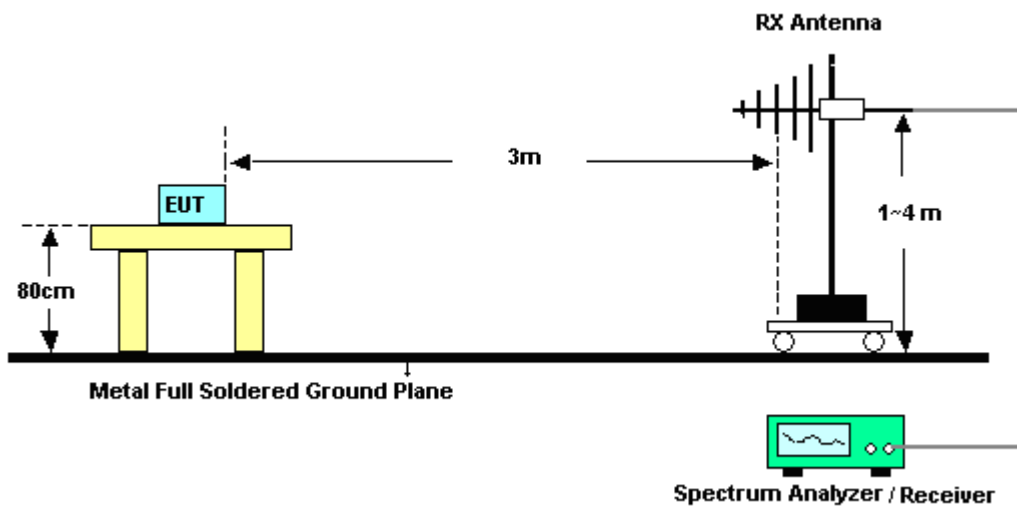


<TXBF Modes>

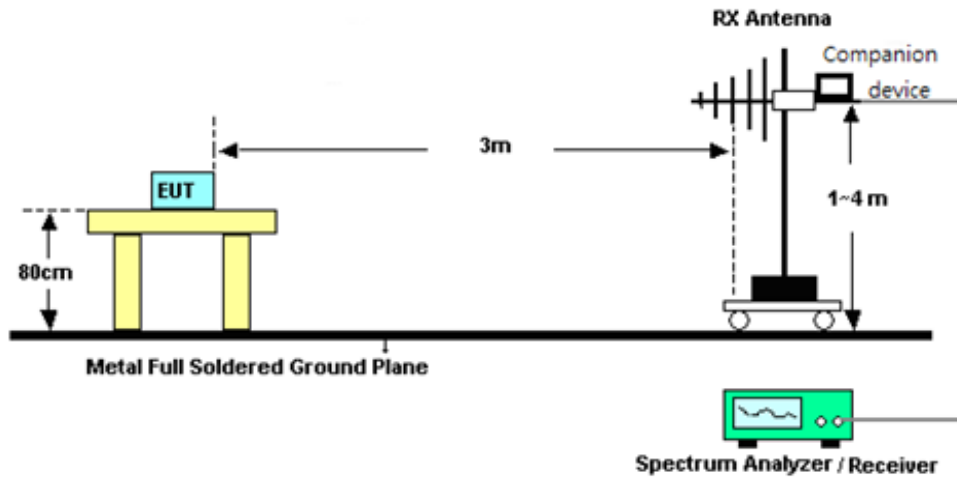


For radiated test from 1GHz to 18GHz

<CDD Mode>

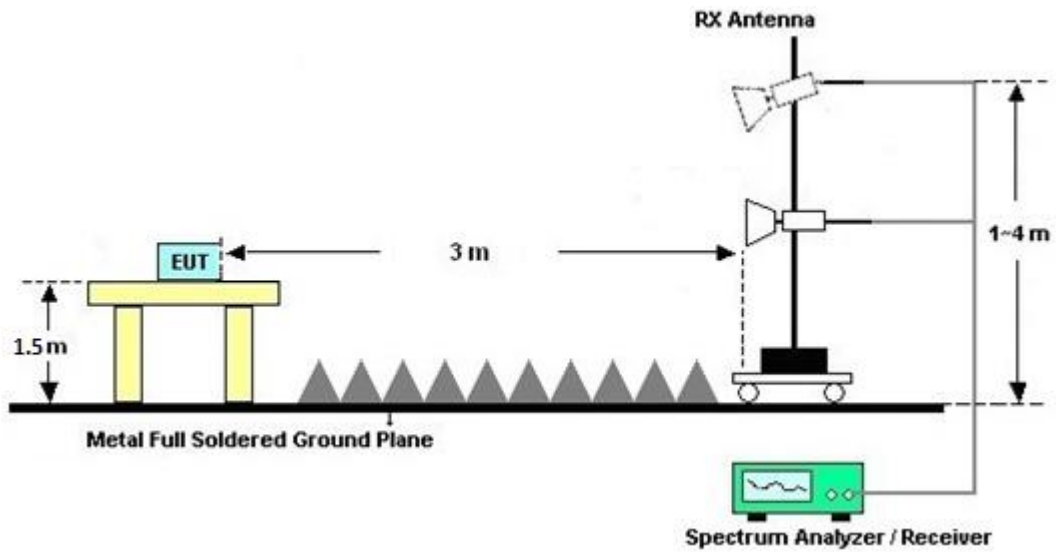


<TXBF Modes>

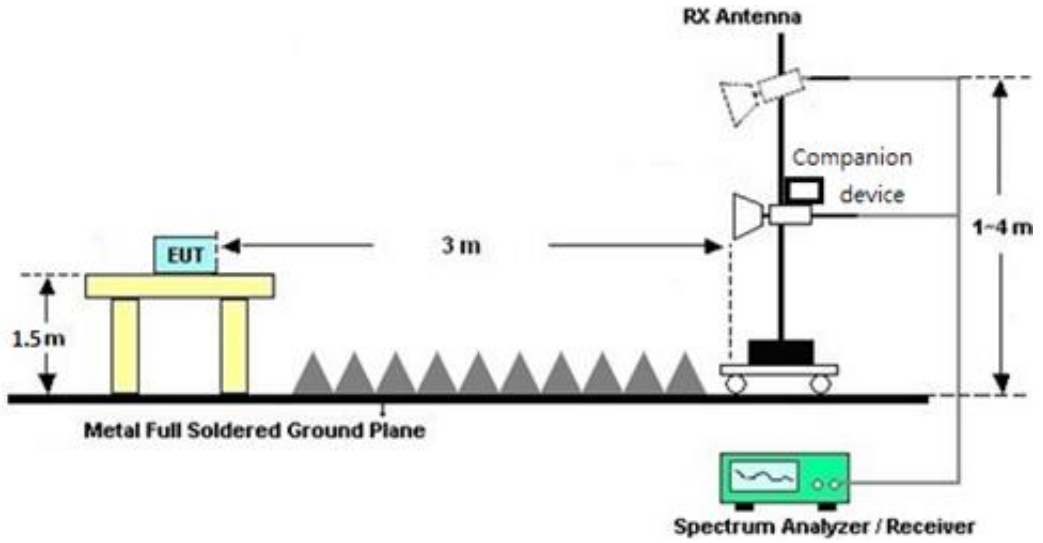


For radiated test above 18GHz

<CDD Mode>

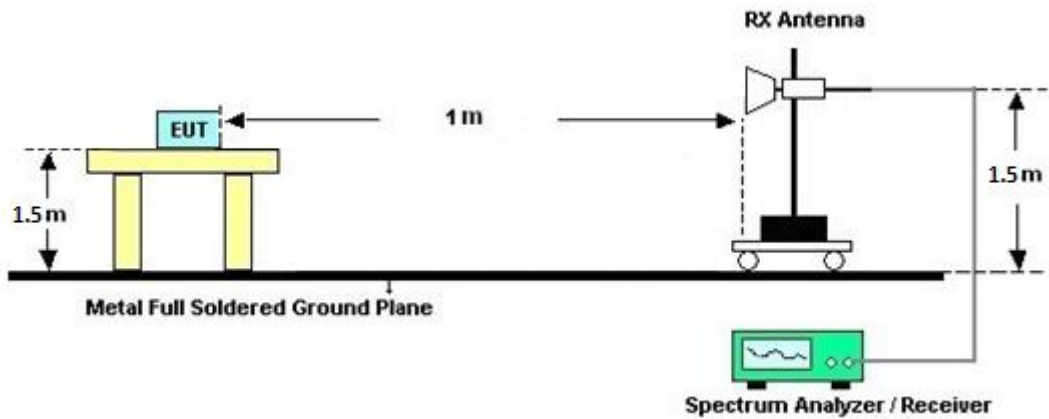

<TXBF Modes>

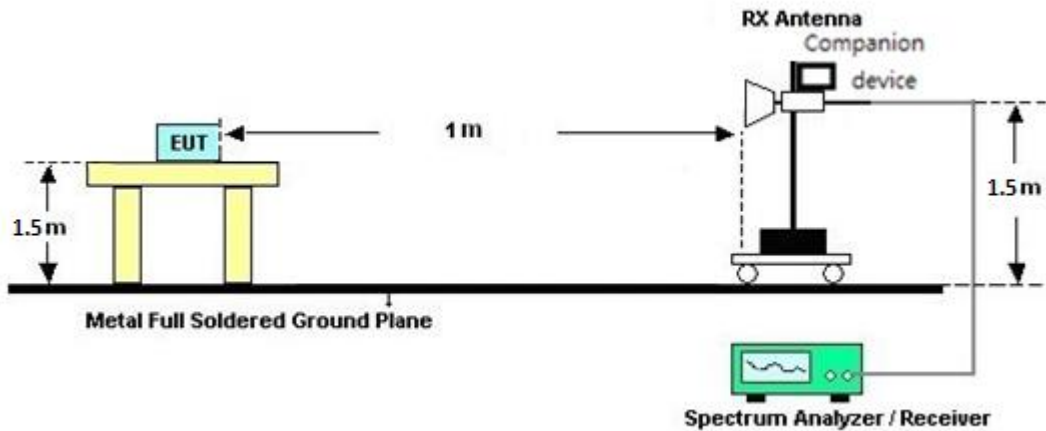

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B and C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

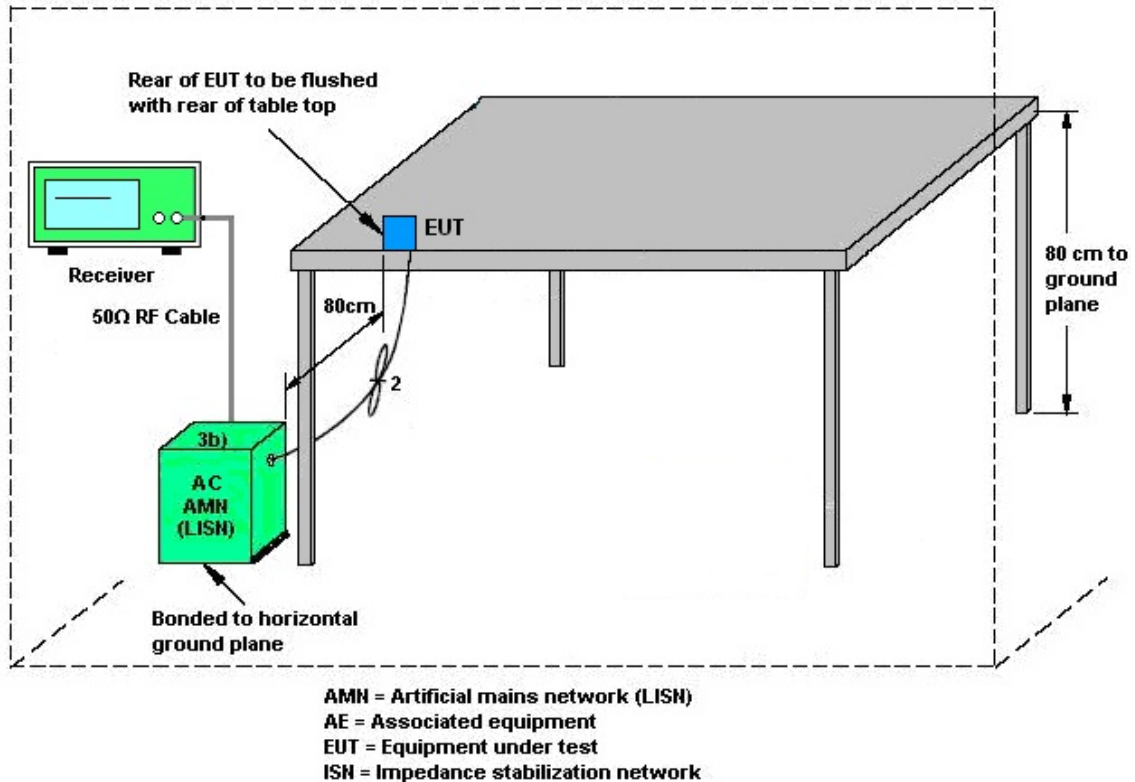

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For power measurements on IEEE 802.11 devices,

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation follows F)2)f)ii) of KDB 662911 D01 v02r01.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where G_1, G_2, \dots, G_N denote single antenna gain.

For example: If a device has two antenna, $G_{ANT1}= 3.6$ dBi; $G_{ANT2}=4.2$ dBi

Directional gain of power measurement = $\max(3.6, 4.2) + 0 = 4.2$ dBi

Directional gain of PSD measurement = $10 \cdot \log[(10^{3.6/20} + 10^{4.2/20})^2 / 2] = 6.92$ dBi



The directional gain of EUT is listed in the following table.

<CDD Modes>						
			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 6	Ant. 7	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	1.04	1.02	1.04	4.04	0.00	0.00

$$\text{Power Limit Reduction} = DG(\text{Power}) - 6\text{dBi}, (\text{min} = 0)$$

$$\text{PSD Limit Reduction} = DG(\text{PSD}) - 6\text{dBi}, (\text{min} = 0)$$

Calculation example:

For the Band IV, the DG for PSD is derived from formula is

$$10 \times \log \left\{ \left[10^{(1.04 \text{ dBi} / 20)} + 10^{(1.02 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$
$$= 4.04 \text{ dBi}$$

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports beamforming modes.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 6	Ant 7	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	1.04	1.02	4.04	4.04	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$

Calculation example:

For the Band IV, the DG for PSD is derived from formula is

$$10 \times \log \left\{ \left[10^{(1.04\text{ dBi} / 20)} + 10^{(1.02\text{ dBi} / 20)} \right]^2 / 2 \right\}$$

= 4.04 dBi



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 07, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Sep. 06, 2022	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 24, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Dec. 23, 2022	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 30, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Nov. 29, 2022	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 15, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Dec. 14, 2022	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	41912 & 05	30MHz~1GHz	Feb. 06, 2022	Apr. 09, 2022 ~ Apr. 28, 2022	Feb. 05, 2023	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Jul. 13, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Jul. 12, 2022	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303B	TP200889	N/A	Sep. 30, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Sep. 29, 2022	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 18, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	May 17, 2022	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Oct. 26, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Oct. 25, 2022	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 18, 2022	Apr. 09, 2022 ~ Apr. 28, 2022	Mar. 17, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 14, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Sep. 13, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3GHz High Pass Filter	Jul. 12, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Jul. 11, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000-40ST	SN6	6.75GHz High Pass Filter	Jun. 30, 2021	Apr. 09, 2022 ~ Apr. 28, 2022	Jun. 29, 2022	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 09, 2022	Apr. 09, 2022 ~ Apr. 28, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 09, 2022	Apr. 09, 2022 ~ Apr. 28, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 09, 2022	Apr. 09, 2022 ~ Apr. 28, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	Apr. 09, 2022 ~ Apr. 28, 2022	Mar. 09, 2023	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 09, 2022 ~ Apr. 28, 2022	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Apr. 09, 2022 ~ Apr. 28, 2022	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 09, 2022 ~ Apr. 28, 2022	N/A	Radiation (03CH13-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 23, 2022	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 23, 2022	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 29, 2021	Apr. 23, 2022	Oct. 28, 2022	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 16, 2022	Apr. 23, 2022	Mar. 15, 2023	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Feb. 16, 2022	Apr. 23, 2022	Feb. 15, 2023	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Fed. 24, 2022	Apr. 23, 2022	Feb. 23, 2023	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Mar. 23, 2022~ Apr. 19, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 16, 2021	Mar. 23, 2022~ Apr. 19, 2022	Dec. 15, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Mar. 23, 2022~ Apr. 19, 2022	Aug. 29, 2022	Conducted (TH05-HY)
Switch Control Mainframe	E-IUSTRUMENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Mar. 23, 2022~ Apr. 19, 2022	Aug. 11, 2022	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9 dB
---	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	28.6~29.5°C
		Relative Humidity :	43.9~46.7%

EUT Information

Report NO : 222224
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

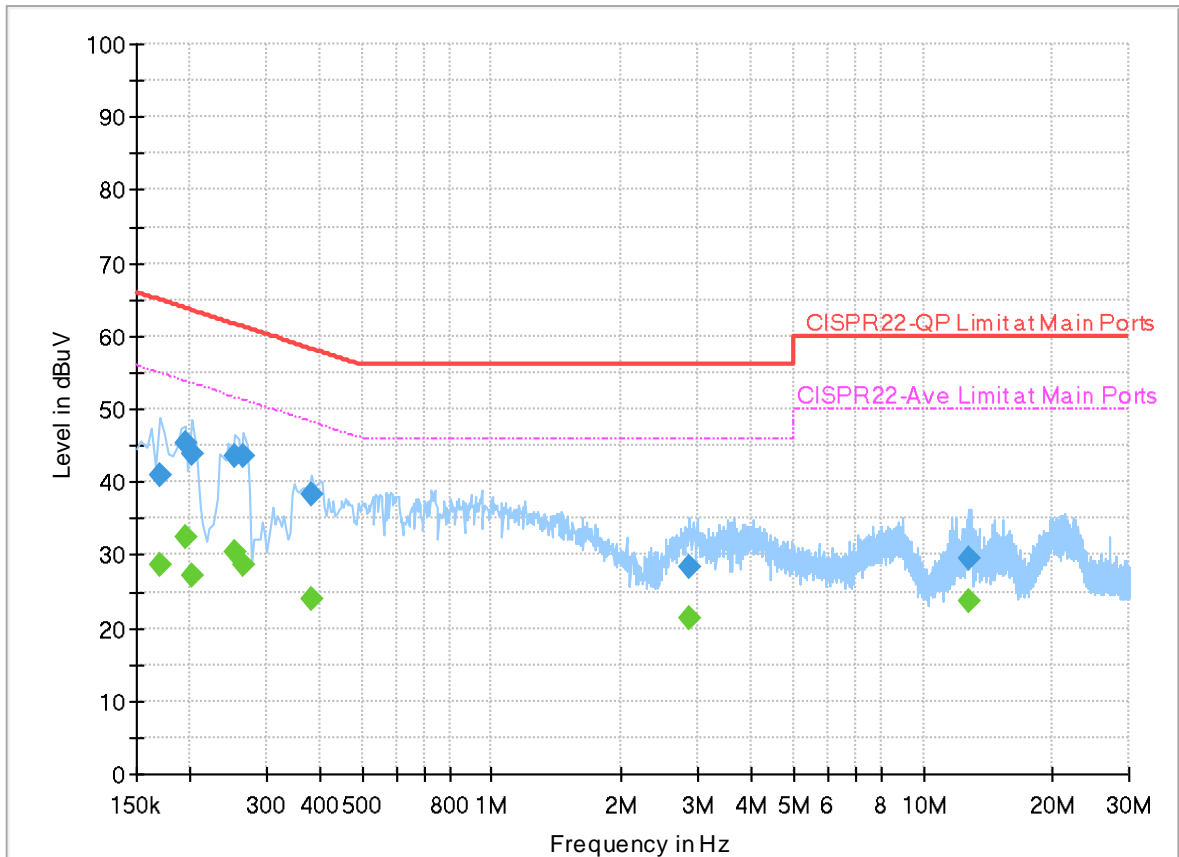


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.170000	---	28.66	54.96	26.30	N	OFF	20.0
0.170000	40.80	---	64.96	24.16	N	OFF	20.0
0.194000	---	32.31	53.86	21.55	N	OFF	20.0
0.194000	45.31	---	63.86	18.55	N	OFF	20.0
0.202000	---	27.30	53.53	26.23	N	OFF	20.0
0.202000	43.81	---	63.53	19.72	N	OFF	20.0
0.254000	---	30.38	51.63	21.25	N	OFF	20.0
0.254000	43.44	---	61.63	18.19	N	OFF	20.0
0.266000	---	28.56	51.24	22.68	N	OFF	20.0
0.266000	43.52	---	61.24	17.72	N	OFF	20.0
0.382000	---	24.12	48.24	24.12	N	OFF	20.0
0.382000	38.42	---	58.24	19.82	N	OFF	20.0
2.878000	---	21.30	46.00	24.70	N	OFF	20.0
2.878000	28.22	---	56.00	27.78	N	OFF	20.0
12.694000	---	23.66	50.00	26.34	N	OFF	20.2
12.694000	29.49	---	60.00	30.51	N	OFF	20.2

EUT Information

Report NO : 222224
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

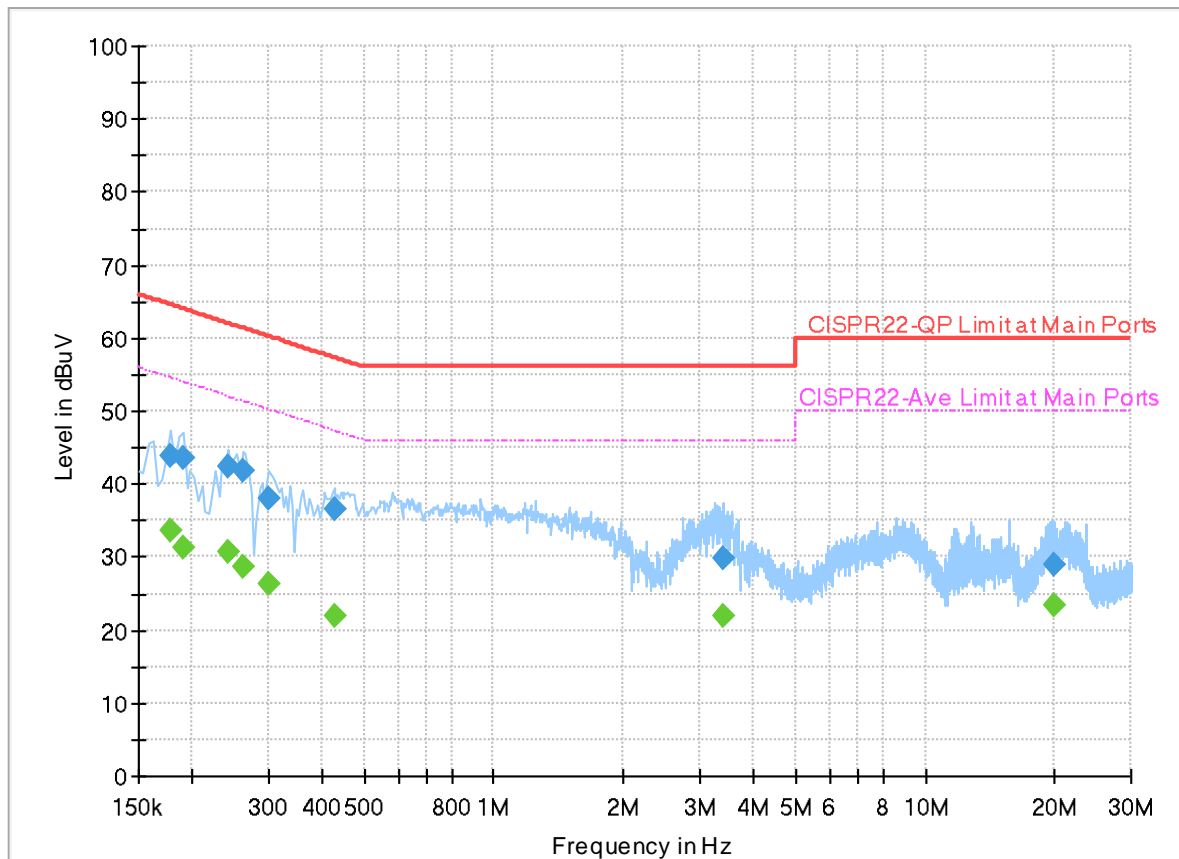

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.178000	---	33.48	54.58	21.10	L1	OFF	20.0
0.178000	43.99	---	64.58	20.59	L1	OFF	20.0
0.190000	---	31.21	54.04	22.83	L1	OFF	20.0
0.190000	43.64	---	64.04	20.40	L1	OFF	20.0
0.242000	---	30.84	52.03	21.19	L1	OFF	20.0
0.242000	42.31	---	62.03	19.72	L1	OFF	20.0
0.262000	---	28.57	51.37	22.80	L1	OFF	20.0
0.262000	41.93	---	61.37	19.44	L1	OFF	20.0
0.302000	---	26.36	50.19	23.83	L1	OFF	20.0
0.302000	37.94	---	60.19	22.25	L1	OFF	20.0
0.426000	---	21.99	47.33	25.34	L1	OFF	20.0
0.426000	36.57	---	57.33	20.76	L1	OFF	20.0
3.394000	---	21.89	46.00	24.11	L1	OFF	20.0
3.394000	29.88	---	56.00	26.12	L1	OFF	20.0
19.890000	---	23.36	50.00	26.64	L1	OFF	20.2
19.890000	28.88	---	60.00	31.12	L1	OFF	20.2



Appendix B. Radiated Spurious Emission

Test Engineer :	Yuan Le, Jacky Hong, Peter Liao and Rain Lee	Temperature :	20~25°C
		Relative Humidity :	40~60%

<CDD Mode>

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 149 5745MHz		5635.2	54.44	-13.76	68.2	42.65	31.93	6.47	26.61	100	336	P	H	
		5694.8	60.16	-41.21	101.37	48.11	32.17	6.52	26.64	100	336	P	H	
		5719.2	68.39	-42.19	110.58	56.22	32.28	6.54	26.65	100	336	P	H	
		5724	81.51	-38.41	119.92	69.31	32.3	6.55	26.65	100	336	P	H	
	*	5745	116.41	-	-	104.13	32.38	6.56	26.66	100	336	P	H	
	*	5745	108.47	-	-	96.19	32.38	6.56	26.66	100	336	A	H	
														H
														H
			5648.4	55.44	-12.76	68.2	43.68	31.9	6.48	26.62	100	119	P	V
			5700	59.84	-45.36	105.2	47.75	32.2	6.53	26.64	100	119	P	V
			5719.6	68.49	-42.2	110.69	56.32	32.28	6.54	26.65	100	119	P	V
			5724	81.39	-38.53	119.92	69.19	32.3	6.55	26.65	100	119	P	V
	*		5745	114.28	-	-	102	32.38	6.56	26.66	100	119	P	V
	*		5745	106.29	-	-	94.01	32.38	6.56	26.66	100	119	A	V
														V
														V



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 157 5785MHz		5624.6	52.79	-15.41	68.2	40.99	31.95	6.46	26.61	100	336	P	H	
		5685.8	54.74	-39.98	94.72	42.75	32.11	6.51	26.63	100	336	P	H	
		5706.8	56.9	-50.21	107.11	44.78	32.23	6.53	26.64	100	336	P	H	
		5721	57.01	-56.07	113.08	44.84	32.28	6.54	26.65	100	336	P	H	
	*	5785	116.15	-	-	103.82	32.4	6.6	26.67	100	336	P	H	
	*	5785	109.16	-	-	96.83	32.4	6.6	26.67	100	336	A	H	
		5853.6	56.04	-57.95	113.99	43.59	32.51	6.64	26.7	100	336	P	H	
		5870	57.93	-48.67	106.6	45.4	32.58	6.66	26.71	100	336	P	H	
		5876.8	54.9	-48.96	103.86	42.34	32.61	6.66	26.71	100	336	P	H	
		5929	55.07	-13.13	68.2	42.35	32.76	6.69	26.73	100	336	P	H	
														H
														H
			5618.6	52.92	-15.28	68.2	41.11	31.96	6.46	26.61	100	118	P	V
			5692.8	55.95	-43.94	99.89	43.91	32.16	6.52	26.64	100	118	P	V
			5700.8	57.12	-48.3	105.42	45.03	32.2	6.53	26.64	100	118	P	V
			5720.4	56.11	-55.6	111.71	43.94	32.28	6.54	26.65	100	118	P	V
	*		5785	114.26	-	-	101.93	32.4	6.6	26.67	100	118	P	V
	*		5785	107.04	-	-	94.71	32.4	6.6	26.67	100	118	A	V
			5851.8	55.51	-62.59	118.1	43.06	32.51	6.64	26.7	100	118	P	V
			5859.4	56.52	-53.05	109.57	44.03	32.54	6.65	26.7	100	118	P	V
		5891.4	55.38	-37.65	93.03	42.76	32.67	6.67	26.72	100	118	P	V	
		5947.8	54.7	-13.5	68.2	41.93	32.8	6.71	26.74	100	118	P	V	
													V	
													V	



WiFi Ant. 6+7	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	116.28	-	-	103.89	32.45	6.63	26.69	100	329	P	H	
	*	5825	108.98	-	-	96.59	32.45	6.63	26.69	100	329	A	H	
		5851.8	69.58	-48.52	118.1	57.13	32.51	6.64	26.7	100	329	P	H	
		5856.8	69.6	-40.7	110.3	57.12	32.53	6.65	26.7	100	329	P	H	
		5879.4	58.39	-43.54	101.93	45.82	32.62	6.66	26.71	100	329	P	H	
		5930.6	54.28	-13.92	68.2	41.56	32.76	6.69	26.73	100	329	P	H	
														H
														H
	*	5825	115.28	-	-	102.89	32.45	6.63	26.69	101	118	P	V	
	*	5825	106.92	-	-	94.53	32.45	6.63	26.69	101	118	A	V	
		5850.4	69.91	-51.38	121.29	57.47	32.5	6.64	26.7	101	118	P	V	
		5855.2	67.99	-42.75	110.74	55.52	32.52	6.65	26.7	101	118	P	V	
		5880.8	59.35	-41.54	100.89	46.78	32.62	6.66	26.71	101	118	P	V	
		5936.8	53.98	-14.22	68.2	41.24	32.77	6.7	26.73	101	118	P	V	
														V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	47.2	-26.8	74	52.43	40.17	10.38	55.78	-	-	P	H
		17235	48.21	-19.99	68.2	50.98	40.57	12.86	56.2	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11490	47.55	-26.45	74	52.78	40.17	10.38	55.78	-	-	P
		17235	49.74	-18.46	68.2	52.51	40.57	12.86	56.2	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		11570	46.99	-27.01	74	52.29	40.06	10.41	55.77	-	-	P	H
		17355	47.51	-20.69	68.2	49.91	41.03	12.99	56.42	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11570	47.21	-26.79	74	52.51	40.06	10.41	55.77	-	-	P
		17355	47.23	-20.97	68.2	49.63	41.03	12.99	56.42	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		11650	47.84	-26.16	74	53.4	39.75	10.45	55.76	-	-	P	H
		17475	48.49	-19.71	68.2	50.49	41.52	13.12	56.64	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11650	47.97	-26.03	74	53.53	39.75	10.45	55.76	-	-	P
		17475	50.78	-17.42	68.2	52.78	41.52	13.12	56.64	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 4 5725~5850MHz
WIFI 802.11ax HE20_Full (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 149 5745MHz		5643.2	56.92	-11.28	68.2	45.15	31.91	6.48	26.62	101	335	P	H	
		5692	60.72	-38.58	99.3	48.69	32.15	6.52	26.64	101	335	P	H	
		5719.6	75.47	-35.22	110.69	63.3	32.28	6.54	26.65	101	335	P	H	
		5724.8	83.8	-37.94	121.74	71.6	32.3	6.55	26.65	101	335	P	H	
	*	5745	116.84	-	-	104.56	32.38	6.56	26.66	101	335	P	H	
	*	5745	107.69	-	-	95.41	32.38	6.56	26.66	101	335	A	H	
														H
														H
			5644.2	55.52	-12.68	68.2	43.75	31.91	6.48	26.62	100	118	P	V
			5699.2	58.61	-46	104.61	46.53	32.2	6.52	26.64	100	118	P	V
			5719.6	72	-38.69	110.69	59.83	32.28	6.54	26.65	100	118	P	V
			5725	80.44	-41.76	122.2	68.24	32.3	6.55	26.65	100	118	P	V
	*		5745	114.89	-	-	102.61	32.38	6.56	26.66	100	118	P	V
	*		5745	105.39	-	-	93.11	32.38	6.56	26.66	100	118	A	V
													V	
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5642.8	54.18	-14.02	68.2	42.41	31.91	6.48	26.62	100	335	P	H
		5695.2	55.64	-46.02	101.66	43.59	32.17	6.52	26.64	100	335	P	H
		5718.6	57.11	-53.3	110.41	44.95	32.27	6.54	26.65	100	335	P	H
		5724.2	57.96	-62.42	120.38	45.76	32.3	6.55	26.65	100	335	P	H
	*	5785	117.83	-	-	105.5	32.4	6.6	26.67	100	335	P	H
	*	5785	108.09	-	-	95.76	32.4	6.6	26.67	100	335	A	H
		5854	56.25	-56.83	113.08	43.78	32.52	6.65	26.7	100	335	P	H
		5860.2	56.92	-52.42	109.34	44.43	32.54	6.65	26.7	100	335	P	H
		5876.4	57.94	-46.22	104.16	45.38	32.61	6.66	26.71	100	335	P	H
		5940.4	55.75	-12.45	68.2	43.01	32.78	6.7	26.74	100	335	P	H
802.11ax													H
HE20 Full													H
CH 157		5606.6	54.2	-14	68.2	42.36	31.99	6.45	26.6	100	118	P	V
5785MHz		5678.6	56.68	-32.72	89.4	44.73	32.07	6.51	26.63	100	118	P	V
		5712.8	57.7	-51.09	108.79	45.56	32.25	6.54	26.65	100	118	P	V
		5720.8	57.13	-55.49	112.62	44.96	32.28	6.54	26.65	100	118	P	V
	*	5785	116.58	-	-	104.25	32.4	6.6	26.67	100	118	P	V
	*	5785	106.3	-	-	93.97	32.4	6.6	26.67	100	118	A	V
		5850	56.05	-66.15	122.2	43.61	32.5	6.64	26.7	100	118	P	V
		5858.8	56.35	-53.38	109.73	43.86	32.54	6.65	26.7	100	118	P	V
		5875.4	57.08	-47.82	104.9	44.53	32.6	6.66	26.71	100	118	P	V
		5939	55.9	-12.3	68.2	43.16	32.78	6.7	26.74	100	118	P	V
													V
													V



WiFi Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 165 5825MHz	*	5825	116.61	-	-	104.22	32.45	6.63	26.69	100	346	P	H	
	*	5825	108.64	-	-	96.25	32.45	6.63	26.69	100	346	A	H	
		5851.2	76.61	-42.85	119.46	64.17	32.5	6.64	26.7	100	346	P	H	
		5855.6	69.84	-40.79	110.63	57.37	32.52	6.65	26.7	100	346	P	H	
		5875.6	58.51	-46.24	104.75	45.96	32.6	6.66	26.71	100	346	P	H	
		5926.2	55.69	-12.51	68.2	42.98	32.75	6.69	26.73	100	346	P	H	
														H
														H
	*	5825	114.77	-	-	102.38	32.45	6.63	26.69	100	116	116	P	V
	*	5825	105.89	-	-	93.5	32.45	6.63	26.69	100	116	116	A	V
		5851	74.21	-45.71	119.92	61.77	32.5	6.64	26.7	100	116	116	P	V
		5855.6	67.44	-43.19	110.63	54.97	32.52	6.65	26.7	100	116	116	P	V
		5878.2	57.55	-45.27	102.82	44.99	32.61	6.66	26.71	100	116	116	P	V
		5931.2	54.32	-13.88	68.2	41.59	32.76	6.7	26.73	100	116	116	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 149 5745MHz		11490	47.98	-26.02	74	53.21	40.17	10.38	55.78	-	-	P	H	
		17235	47.77	-20.43	68.2	50.54	40.57	12.86	56.2	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11490	47.52	-26.48	74	52.75	40.17	10.38	55.78	-	-	P	V
			17235	48.6	-19.6	68.2	51.37	40.57	12.86	56.2	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 157 5785MHz		11570	47.53	-26.47	74	52.83	40.06	10.41	55.77	-	-	P	H
		17355	48.27	-19.93	68.2	50.67	41.03	12.99	56.42	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11570	47.17	-26.83	74	52.47	40.06	10.41	55.77	-	-	P
		17355	48.66	-19.54	68.2	51.06	41.03	12.99	56.42	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 165 5825MHz		11650	46.89	-27.11	74	52.45	39.75	10.45	55.76	-	-	P	H	
		17475	49.06	-19.14	68.2	51.06	41.52	13.12	56.64	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11650	46.98	-27.02	74	52.54	39.75	10.45	55.76	-	-	P	V
			17475	49.62	-18.58	68.2	51.62	41.52	13.12	56.64	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



**Band 4 5725~5850MHz
WIFI 802.11ax HE20_Partial 106 (Band Edge @ 3m)**

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 106/53 CH 149 5745MHz		5619.2	56.32	-11.88	68.2	44.51	31.96	6.46	26.61	100	290	P	H	
		5696	59.53	-42.72	102.25	47.47	32.18	6.52	26.64	100	290	P	H	
		5718.6	59.84	-50.57	110.41	47.68	32.27	6.54	26.65	100	290	P	H	
		5725	66.04	-56.16	122.2	53.84	32.3	6.55	26.65	100	290	P	H	
	*	5745	116.19	-	-	103.91	32.38	6.56	26.66	100	290	P	H	
	*	5745	106.35	-	-	94.07	32.38	6.56	26.66	100	290	A	H	
														H
														H
			5647.4	55.12	-13.08	68.2	43.35	31.91	6.48	26.62	100	123	P	V
			5689.8	57.61	-40.07	97.68	45.59	32.14	6.52	26.64	100	123	P	V
			5717.2	61.93	-48.09	110.02	49.77	32.27	6.54	26.65	100	123	P	V
			5725	64.68	-57.52	122.2	52.48	32.3	6.55	26.65	100	123	P	V
	*		5745	113.58	-	-	101.3	32.38	6.56	26.66	100	123	P	V
	*		5745	104.65	-	-	92.37	32.38	6.56	26.66	100	123	A	V
														V
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 106/54 CH 165 5825MHz	*	5825	114.59	-	-	102.2	32.45	6.63	26.69	107	293	P	H	
	*	5825	105.26	-	-	92.87	32.45	6.63	26.69	107	293	A	H	
		5851	60.12	-59.8	119.92	47.68	32.5	6.64	26.7	107	293	P	H	
		5864	56.59	-51.69	108.28	44.09	32.56	6.65	26.71	107	293	P	H	
		5878.2	55.53	-47.29	102.82	42.97	32.61	6.66	26.71	107	293	P	H	
		5944.4	53.4	-14.8	68.2	40.65	32.79	6.7	26.74	107	293	P	H	
														H
														H
	*	5825	113.55	-	-	101.16	32.45	6.63	26.69	100	123	P	V	
	*	5825	104.15	-	-	91.76	32.45	6.63	26.69	100	123	A	V	
		5850.6	57.41	-63.42	120.83	44.97	32.5	6.64	26.7	100	123	P	V	
		5856.8	56.56	-53.74	110.3	44.08	32.53	6.65	26.7	100	123	P	V	
		5900.4	54.97	-31.39	86.36	42.31	32.7	6.68	26.72	100	123	P	V	
		5926.8	53.86	-14.34	68.2	41.15	32.75	6.69	26.73	100	123	P	V	
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11ax HE40_Full (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5629	57.21	-10.99	68.2	45.42	31.94	6.46	26.61	102	345	P	H
		5698.2	61.72	-42.15	103.87	49.65	32.19	6.52	26.64	102	345	P	H
		5719	74.55	-35.97	110.52	62.38	32.28	6.54	26.65	102	345	P	H
		5723.2	76.42	-41.68	118.1	64.24	32.29	6.54	26.65	102	345	P	H
	*	5755	110.61	-	-	98.3	32.4	6.57	26.66	102	345	P	H
	*	5755	100.82	-	-	88.51	32.4	6.57	26.66	102	345	A	H
		5852.6	57.18	-59.09	116.27	44.73	32.51	6.64	26.7	102	345	P	H
		5861.2	56.71	-52.35	109.06	44.22	32.54	6.65	26.7	102	345	P	H
		5879.8	56.8	-44.83	101.63	44.23	32.62	6.66	26.71	102	345	P	H
		5948.8	55.02	-13.18	68.2	42.25	32.8	6.71	26.74	102	345	P	H
802.11ax													H
HE40 Full													H
CH 151		5622.2	56.77	-11.43	68.2	44.96	31.96	6.46	26.61	100	120	P	V
5755MHz		5699.8	59.51	-45.54	105.05	47.43	32.2	6.52	26.64	100	120	P	V
		5712.8	73.78	-35.01	108.79	61.64	32.25	6.54	26.65	100	120	P	V
		5722.2	73.84	-41.98	115.82	61.66	32.29	6.54	26.65	100	120	P	V
	*	5755	109.62	-	-	97.31	32.4	6.57	26.66	100	120	P	V
	*	5755	99.07	-	-	86.76	32.4	6.57	26.66	100	120	A	V
		5854.6	55.36	-56.35	111.71	42.89	32.52	6.65	26.7	100	120	P	V
		5865.8	55.64	-52.13	107.77	43.14	32.56	6.65	26.71	100	120	P	V
		5922.6	56.76	-13.21	69.97	44.05	32.75	6.69	26.73	100	120	P	V
		5926.8	55.84	-12.36	68.2	43.13	32.75	6.69	26.73	100	120	P	V
													V
													V



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5631.6	53.27	-14.93	68.2	41.47	31.94	6.47	26.61	100	346	P	H
		5695	54.24	-47.27	101.51	42.19	32.17	6.52	26.64	100	346	P	H
		5717.8	58.02	-52.16	110.18	45.86	32.27	6.54	26.65	100	346	P	H
		5722	57.23	-58.13	115.36	45.05	32.29	6.54	26.65	100	346	P	H
	*	5795	110.72	-	-	98.39	32.4	6.61	26.68	100	346	P	H
	*	5795	101.45	-	-	89.12	32.4	6.61	26.68	100	346	A	H
		5850	64.91	-57.29	122.2	52.47	32.5	6.64	26.7	100	346	P	H
		5857	63.06	-47.18	110.24	50.58	32.53	6.65	26.7	100	346	P	H
		5875	57.12	-48.08	105.2	44.57	32.6	6.66	26.71	100	346	P	H
		5949	53.85	-14.35	68.2	41.08	32.8	6.71	26.74	100	346	P	H
802.11ax													H
HE40 Full													H
CH 159		5649	53.35	-14.85	68.2	41.59	31.9	6.48	26.62	100	118	P	V
5795MHz		5681.4	55.03	-36.44	91.47	43.06	32.09	6.51	26.63	100	118	P	V
		5719.8	58.64	-52.1	110.74	46.47	32.28	6.54	26.65	100	118	P	V
		5722.6	56.71	-60.02	116.73	44.53	32.29	6.54	26.65	100	118	P	V
	*	5795	109.19	-	-	96.86	32.4	6.61	26.68	100	118	P	V
	*	5795	99.34	-	-	87.01	32.4	6.61	26.68	100	118	A	V
		5850.6	60.72	-60.11	120.83	48.28	32.5	6.64	26.7	100	118	P	V
		5855.8	59.09	-51.49	110.58	46.62	32.52	6.65	26.7	100	118	P	V
		5880.6	55.62	-45.42	101.04	43.05	32.62	6.66	26.71	100	118	P	V
		5937	53.42	-14.78	68.2	40.68	32.77	6.7	26.73	100	118	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ax HE40_Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 151 5755MHz		11510	47.43	-26.57	74	52.65	40.18	10.38	55.78	-	-	P	H
		17265	47.17	-21.03	68.2	49.91	40.63	12.89	56.26	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11510	47.98	-26.02	74	53.2	40.18	10.38	55.78	-	-	P
		17265	47.72	-20.48	68.2	50.46	40.63	12.89	56.26	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 6+7	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 159 5795MHz		11590	47.56	-26.44	74	52.89	40.02	10.42	55.77	-	-	P	H	
		17385	48.08	-20.12	68.2	50.33	41.21	13.02	56.48	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11590	47.19	-26.81	74	52.52	40.02	10.42	55.77	-	-	P	V
			17385	48.19	-20.01	68.2	50.44	41.21	13.02	56.48	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 4 5725~5850MHz
WIFI 802.11ax HE80_Full (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5649.6	57.58	-10.62	68.2	45.82	31.9	6.48	26.62	100	348	P	H
		5698.2	70.52	-33.35	103.87	58.45	32.19	6.52	26.64	100	348	P	H
		5711.8	75.06	-33.45	108.51	62.91	32.25	6.54	26.64	100	348	P	H
		5721.6	74.79	-39.66	114.45	62.61	32.29	6.54	26.65	100	348	P	H
	*	5775	109.09	-	-	96.77	32.4	6.59	26.67	100	348	P	H
	*	5775	98.53	-	-	86.21	32.4	6.59	26.67	100	348	A	H
		5851.4	72.69	-46.32	119.01	60.24	32.51	6.64	26.7	100	348	P	H
		5862.2	70.81	-37.97	108.78	58.31	32.55	6.65	26.7	100	348	P	H
		5877.6	65.06	-38.21	103.27	52.5	32.61	6.66	26.71	100	348	P	H
		5933.8	58.98	-9.22	68.2	46.24	32.77	6.7	26.73	100	348	P	H
802.11ax													H
HE80 Full													H
CH 155		5635	58.28	-9.92	68.2	46.49	31.93	6.47	26.61	100	119	P	V
5775MHz		5697.2	70.16	-32.98	103.14	58.1	32.18	6.52	26.64	100	119	P	V
		5700.6	70.83	-34.54	105.37	58.74	32.2	6.53	26.64	100	119	P	V
		5720.4	74.61	-37.1	111.71	62.44	32.28	6.54	26.65	100	119	P	V
	*	5775	106.32	-	-	94	32.4	6.59	26.67	100	119	P	V
	*	5775	96.7	-	-	84.38	32.4	6.59	26.67	100	119	A	V
		5852.6	69.12	-47.15	116.27	56.67	32.51	6.64	26.7	100	119	P	V
		5858.2	67.59	-42.31	109.9	55.11	32.53	6.65	26.7	100	119	P	V
		5880.2	65.26	-36.08	101.34	52.69	32.62	6.66	26.71	100	119	P	V
		5926.4	59.21	-8.99	68.2	46.5	32.75	6.69	26.73	100	119	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE80 Full CH 155 5775MHz		11550	47.94	-26.06	74	53.21	40.1	10.4	55.77	-	-	P	H	
		17325	46.54	-21.66	68.2	49.11	40.85	12.95	56.37	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11550	46.78	-27.22	74	52.05	40.1	10.4	55.77	-	-	P	V
			17325	46.67	-21.53	68.2	49.24	40.85	12.95	56.37	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



<TXBF Mode>

Band 4 - 5725~5850MHz

WIFI 802.11ax HE20_Full (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
6+7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE20 Full CH 149 5745MHz		5646.8	57.43	-10.77	68.2	45.66	31.91	6.48	26.62	108	292	P	H	
		5694	60.8	-39.98	100.78	48.76	32.16	6.52	26.64	108	292	P	H	
		5719.4	72.82	-37.81	110.63	60.65	32.28	6.54	26.65	108	292	P	H	
		5724.4	80.9	-39.93	120.83	68.7	32.3	6.55	26.65	108	292	P	H	
	*	5745	115.14	-	-	102.86	32.38	6.56	26.66	108	292	P	H	
	*	5745	106.57	-	-	94.29	32.38	6.56	26.66	108	292	A	H	
														H
														H
			5613.6	56.4	-11.8	68.2	44.59	31.97	6.45	26.61	100	117	P	V
			5698.2	59.33	-44.54	103.87	47.26	32.19	6.52	26.64	100	117	P	V
			5720	80.59	-30.21	110.8	68.42	32.28	6.54	26.65	100	117	P	V
			5725	83.92	-38.28	122.2	71.72	32.3	6.55	26.65	100	117	P	V
	*		5745	112.63	-	-	100.35	32.38	6.56	26.66	100	117	P	V
	*		5745	104.85	-	-	92.57	32.38	6.56	26.66	100	117	A	V
													V	
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5624	54.54	-13.66	68.2	42.74	31.95	6.46	26.61	100	347	P	H
		5692.8	54.97	-44.92	99.89	42.93	32.16	6.52	26.64	100	347	P	H
		5718.8	57.39	-53.07	110.46	45.22	32.28	6.54	26.65	100	347	P	H
		5720.4	57.06	-54.65	111.71	44.89	32.28	6.54	26.65	100	347	P	H
	*	5785	117.42	-	-	105.09	32.4	6.6	26.67	100	347	P	H
	*	5785	107.49	-	-	95.16	32.4	6.6	26.67	100	347	A	H
		5850.2	55.64	-66.1	121.74	43.2	32.5	6.64	26.7	100	347	P	H
		5861.4	56.02	-52.99	109.01	43.52	32.55	6.65	26.7	100	347	P	H
		5877.6	55.96	-47.31	103.27	43.4	32.61	6.66	26.71	100	347	P	H
		5937.8	53.81	-14.39	68.2	41.07	32.78	6.7	26.74	100	347	P	H
802.11ax													H
HE20 Full													H
CH 157		5635.4	53.67	-14.53	68.2	41.88	31.93	6.47	26.61	100	131	P	V
5785MHz		5695.2	55.41	-46.25	101.66	43.36	32.17	6.52	26.64	100	131	P	V
		5719.4	56.94	-53.69	110.63	44.77	32.28	6.54	26.65	100	131	P	V
		5720.6	55.01	-57.16	112.17	42.84	32.28	6.54	26.65	100	131	P	V
	*	5785	111.03	-	-	98.7	32.4	6.6	26.67	100	131	P	V
	*	5785	102.56	-	-	90.23	32.4	6.6	26.67	100	131	A	V
		5854.4	54.91	-57.26	112.17	42.44	32.52	6.65	26.7	100	131	P	V
		5862.6	54.46	-54.21	108.67	41.97	32.55	6.65	26.71	100	131	P	V
		5887.2	54.68	-41.46	96.14	42.07	32.65	6.67	26.71	100	131	P	V
		5931.6	53.88	-14.32	68.2	41.15	32.76	6.7	26.73	100	131	P	V
													V
													V



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 165 5825MHz	*	5825	116.68	-	-	104.29	32.45	6.63	26.69	100	347	P	H	
	*	5825	107.34	-	-	94.95	32.45	6.63	26.69	100	347	A	H	
		5850.8	74.86	-45.52	120.38	62.42	32.5	6.64	26.7	100	347	P	H	
		5855.6	67.13	-43.5	110.63	54.66	32.52	6.65	26.7	100	347	P	H	
		5880.6	59.51	-41.53	101.04	46.94	32.62	6.66	26.71	100	347	P	H	
		5933.8	54.42	-13.78	68.2	41.68	32.77	6.7	26.73	100	347	P	H	
														H
														H
	*	5825	115.28	-	-	102.89	32.45	6.63	26.69	107	121	P	V	
	*	5825	105.34	-	-	92.95	32.45	6.63	26.69	107	121	A	V	
		5850	71.32	-50.88	122.2	58.88	32.5	6.64	26.7	107	121	P	V	
		5855.6	66.9	-43.73	110.63	54.43	32.52	6.65	26.7	107	121	P	V	
		5877.2	55.88	-47.69	103.57	43.32	32.61	6.66	26.71	107	121	P	V	
		5925.6	54.86	-13.34	68.2	42.15	32.75	6.69	26.73	107	121	P	V	
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 149 5745MHz		11490	46.15	-27.85	74	51.38	40.17	10.38	55.78	-	-	P	H	
		17235	48.76	-19.44	68.2	51.53	40.57	12.86	56.2	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11490	46.85	-27.15	74	52.08	40.17	10.38	55.78	-	-	P	V
			17235	50.4	-17.8	68.2	53.17	40.57	12.86	56.2	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 157 5785MHz		11570	45.55	-28.45	74	50.85	40.06	10.41	55.77	-	-	P	H	
		17355	48.45	-19.75	68.2	50.85	41.03	12.99	56.42	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11570	45.71	-28.29	74	51.01	40.06	10.41	55.77	-	-	P	V
			17355	48.26	-19.94	68.2	50.66	41.03	12.99	56.42	-	-	P	V
														V
														V
														V
														V
													V	
													V	
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 165 5825MHz		11650	46.28	-27.72	74	51.84	39.75	10.45	55.76	-	-	P	H	
		17475	49.58	-18.62	68.2	51.58	41.52	13.12	56.64	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11650	46.12	-27.88	74	51.68	39.75	10.45	55.76	-	-	P	V
			17475	49.39	-18.81	68.2	51.39	41.52	13.12	56.64	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 4 5725~5850MHz
WIFI 802.11ax HE40_Full (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5629.4	57.55	-10.65	68.2	45.76	31.94	6.46	26.61	104	325	P	H
		5695.8	65.85	-36.25	102.1	53.8	32.17	6.52	26.64	104	325	P	H
		5718.4	80.24	-30.11	110.35	68.08	32.27	6.54	26.65	104	325	P	H
		5723.2	81.53	-36.57	118.1	69.35	32.29	6.54	26.65	104	325	P	H
	*	5755	111.43	-	-	99.12	32.4	6.57	26.66	104	325	P	H
	*	5755	101.55	-	-	89.24	32.4	6.57	26.66	104	325	A	H
		5850.4	59.17	-62.12	121.29	46.73	32.5	6.64	26.7	104	325	P	H
		5856.2	58.21	-52.25	110.46	45.74	32.52	6.65	26.7	104	325	P	H
		5880.6	57.5	-43.54	101.04	44.93	32.62	6.66	26.71	104	325	P	H
		5935.6	56.47	-11.73	68.2	43.73	32.77	6.7	26.73	104	325	P	H
802.11ax													H
HE40 Full													H
CH 151		5645	55.79	-12.41	68.2	44.02	31.91	6.48	26.62	113	105	P	V
5755MHz		5699	62.37	-42.09	104.46	50.3	32.19	6.52	26.64	113	105	P	V
		5718.8	77.9	-32.56	110.46	65.73	32.28	6.54	26.65	113	105	P	V
		5724.6	77.48	-43.81	121.29	65.28	32.3	6.55	26.65	113	105	P	V
	*	5755	107.17	-	-	94.86	32.4	6.57	26.66	113	105	P	V
	*	5755	97.47	-	-	85.16	32.4	6.57	26.66	113	105	A	V
		5850.8	55.57	-64.81	120.38	43.13	32.5	6.64	26.7	113	105	P	V
		5867.2	56.29	-51.09	107.38	43.78	32.57	6.65	26.71	113	105	P	V
		5883.6	55.08	-43.73	98.81	42.5	32.63	6.66	26.71	113	105	P	V
		5949.4	55.76	-12.44	68.2	42.99	32.8	6.71	26.74	113	105	P	V
													V
													V



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5603.6	53.39	-14.81	68.2	41.56	31.99	6.44	26.6	101	351	P	H
		5695.6	55.39	-46.57	101.96	43.34	32.17	6.52	26.64	101	351	P	H
		5710.2	59.04	-49.02	108.06	46.91	32.24	6.53	26.64	101	351	P	H
		5721.8	59.68	-55.22	114.9	47.5	32.29	6.54	26.65	101	351	P	H
	*	5795	110.3	-	-	97.97	32.4	6.61	26.68	101	351	P	H
	*	5795	100.24	-	-	87.91	32.4	6.61	26.68	101	351	A	H
		5851.2	65.93	-53.53	119.46	53.49	32.5	6.64	26.7	101	351	P	H
		5856.4	65.66	-44.75	110.41	53.18	32.53	6.65	26.7	101	351	P	H
		5875.8	61.84	-42.77	104.61	49.29	32.6	6.66	26.71	101	351	P	H
		5930.4	53.35	-14.85	68.2	40.63	32.76	6.69	26.73	101	351	P	H
802.11ax													H
HE40 Full													H
CH 159		5636.4	53.63	-14.57	68.2	41.84	31.93	6.47	26.61	109	118	P	V
5795MHz		5684.4	55.11	-38.58	93.69	43.12	32.11	6.51	26.63	109	118	P	V
		5708	58.64	-48.8	107.44	46.52	32.23	6.53	26.64	109	118	P	V
		5720	60.03	-50.77	110.8	47.86	32.28	6.54	26.65	109	118	P	V
	*	5795	109.64	-	-	97.31	32.4	6.61	26.68	109	118	P	V
	*	5795	100.07	-	-	87.74	32.4	6.61	26.68	109	118	A	V
		5850	64.5	-57.7	122.2	52.06	32.5	6.64	26.7	109	118	P	V
		5856	62.71	-47.81	110.52	50.24	32.52	6.65	26.7	109	118	P	V
		5884.6	58.2	-39.87	98.07	45.61	32.64	6.66	26.71	109	118	P	V
		5932.8	54.79	-13.41	68.2	42.05	32.77	6.7	26.73	109	118	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40_Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 151 5755MHz		11510	46.12	-27.88	74	51.34	40.18	10.38	55.78	-	-	P	H	
		17265	47.69	-20.51	68.2	50.43	40.63	12.89	56.26	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11510	46.31	-27.69	74	51.53	40.18	10.38	55.78	-	-	P	V
			17265	48.16	-20.04	68.2	50.9	40.63	12.89	56.26	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 159 5795MHz		11590	45.66	-28.34	74	50.99	40.02	10.42	55.77	-	-	P	H	
		17385	48.45	-19.75	68.2	50.7	41.21	13.02	56.48	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11590	46.92	-27.08	74	52.25	40.02	10.42	55.77	-	-	P	V
			17385	48.81	-19.39	68.2	51.06	41.21	13.02	56.48	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													
	3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 4 5725~5850MHz
WIFI 802.11ax HE80_Full (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5635.8	60.32	-7.88	68.2	48.53	31.93	6.47	26.61	100	341	P	H
		5698.2	73.36	-30.51	103.87	61.29	32.19	6.52	26.64	100	341	P	H
		5717.6	75.66	-34.47	110.13	63.5	32.27	6.54	26.65	100	341	P	H
		5725	77.45	-44.75	122.2	65.25	32.3	6.55	26.65	100	341	P	H
	*	5775	107.94	-	-	95.62	32.4	6.59	26.67	100	341	P	H
	*	5775	99.03	-	-	86.71	32.4	6.59	26.67	100	341	A	H
		5853.8	74.53	-39.01	113.54	62.07	32.52	6.64	26.7	100	341	P	H
		5861.8	73.8	-35.09	108.89	61.3	32.55	6.65	26.7	100	341	P	H
		5875	66.38	-38.82	105.2	53.83	32.6	6.66	26.71	100	341	P	H
		5931.4	58.8	-9.4	68.2	46.07	32.76	6.7	26.73	100	341	P	H
802.11ax													H
HE80 Full													H
CH 155		5638.6	59.19	-9.01	68.2	47.42	31.92	6.47	26.62	100	115	P	V
5775MHz		5693.2	71.8	-28.39	100.19	59.76	32.16	6.52	26.64	100	115	P	V
		5718.2	74.32	-35.98	110.3	62.16	32.27	6.54	26.65	100	115	P	V
		5723.6	76.45	-42.56	119.01	64.26	32.29	6.55	26.65	100	115	P	V
	*	5775	105.73	-	-	93.41	32.4	6.59	26.67	100	115	P	V
	*	5775	96.46	-	-	84.14	32.4	6.59	26.67	100	115	A	V
		5851	73	-46.92	119.92	60.56	32.5	6.64	26.7	100	115	P	V
		5857.6	71.65	-38.42	110.07	59.17	32.53	6.65	26.7	100	115	P	V
		5875	67.19	-38.01	105.2	54.64	32.6	6.66	26.71	100	115	P	V
		5927.4	58.23	-9.97	68.2	45.52	32.75	6.69	26.73	100	115	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 155 5775MHz		11550	46.2	-27.8	74	51.47	40.1	10.4	55.77	-	-	P	H
		17325	48.23	-19.97	68.2	50.8	40.85	12.95	56.37	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11550	46.71	-27.29	74	51.98	40.1	10.4	55.77	-	-	P
		17325	47.87	-20.33	68.2	50.44	40.85	12.95	56.37	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Emission below 1GHz

5GHz WIFI 802.11ax HE80 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
6+7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE80 Full LF		66.86	23.62	-16.38	40	43.06	11.95	0.91	32.3	-	-	P	H	
		127.97	27.03	-16.47	43.5	40.57	17.62	1.14	32.3	-	-	P	H	
		285.11	25.31	-20.69	46	36.96	18.99	1.55	32.19	-	-	P	H	
		711.91	36.58	-9.42	46	40.2	26.21	2.34	32.17	-	-	P	H	
		806.97	38.63	-7.37	46	40.51	27.64	2.46	31.98	-	-	P	H	
		954.41	32.93	-13.07	46	30.93	30.51	2.57	31.08	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			30.97	21.74	-18.26	40	29.52	23.85	0.72	32.35	-	-	P	V
			127.97	27.84	-15.66	43.5	41.38	17.62	1.14	32.3	-	-	P	V
			578.05	27.58	-18.42	46	32.1	25.6	2.14	32.26	-	-	P	V
			711.91	33.53	-12.47	46	37.15	26.21	2.34	32.17	-	-	P	V
			806.97	32.35	-13.65	46	34.23	27.64	2.46	31.98	-	-	P	V
			952.47	32.73	-13.27	46	30.84	30.43	2.56	31.1	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
6+7		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5650	55.45	-12.75	68.2	54.51	32.22	4.58	35.86	103	308	P	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBµV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBµV/m) – Limit Line(dBµV/m)

For Peak Limit @ 5650MHz:

1. Level(dBµV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBµV) – 35.86 (dB)
= 55.45 (dBµV/m)
2. Over Limit(dB)
= Level(dBµV/m) – Limit Line(dBµV/m)
= 55.45(dBµV/m) – 68.2(dBµV/m)
= -12.75 (dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Yuan Le, Jacky Hong, Peter Liao and Rain Lee	Temperature :	20~25°C
		Relative Humidity :	40~60%

<CDD Mode>

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH13-HY Condition : PEAK(U)II 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
6+7	Horizontal	Fundamental
<p>Peak</p>	<p>Date: 1 Level (dBV/m) Date: 2022-04-04 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2 Level (dBV/m) Date: 2022-04-04 PEAK(B4)</p> <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
<p>Peak</p>	<p>Date: 3 Level (dBV/m) Date: 2022-04-04 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
6+7	Vertical	Fundamental
Peak	<p>Date: 2022-04-04 Date: 2022-04-04 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-04-04 Date: 2022-04-04 PEAK(FUN)</p> <p>Site : 03CH13-HY Condition : PEAK(FUN) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	<p>Date: 2022-04-04 Date: 2022-04-04 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>





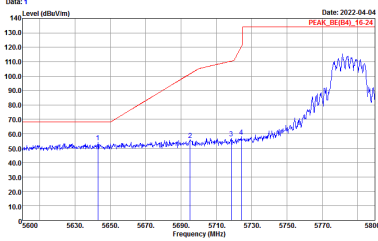
Band 4 5725~5850MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

Table with 3 columns: WIFI, ANT, 6+7. It contains two spectral plots: 'Horizontal' and 'Fundamental'. The 'Horizontal' plot shows a peak at 5745 MHz with a level of 130.0 dBm. The 'Fundamental' plot shows a peak at 5745 MHz with a level of 130.0 dBm. Both plots include site and condition details.

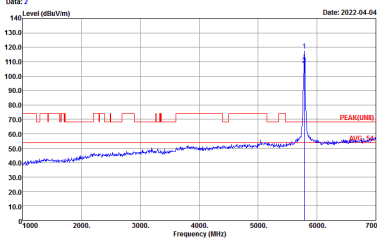

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>

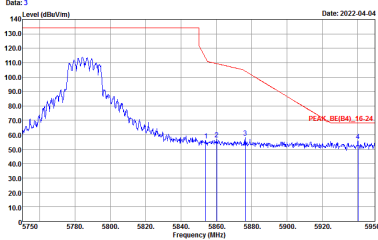

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Horizontal	Fundamental
Peak	 <p>Date: 1 Level (dBuV/m) Date: 2022-04-04 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2 Level (dBuV/m) Date: 2022-04-04 PEAK(UWB)</p> <p>Site : 03CH13-HY Condition : PEAK(UWB) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Date: 3 Level (dBuV/m) Date: 2022-04-04 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Vertical	Fundamental
Peak	<p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK(FUN)</p> <p>Site : 03CH13-HY Condition : PEAK(FUN) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	<p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Vertical	Fundamental
Peak	<p>Site Condition : 03CH12-HY : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site Condition : 03CH12-HY : PEAK(UNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 106/53 CH149 5745MHz	
6+7	Horizontal	Fundamental
Peak	<p>Date: 1 Level (dBm/100Hz) Date: 2022-04-24 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_31200_1241 HORIZONTAL REW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2 Level (dBm/100Hz) Date: 2022-04-24 PEAK(UNIT)_DIS_24</p> <p>Site : 03CH13-HY Condition : PEAK(UNIT)_DIS_24 3m HORN_31200_1241 HORIZONTAL REW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 106/53 CH149 5745MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 106/54 CH165 5825MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UB) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 106/54 CH165 5825MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>





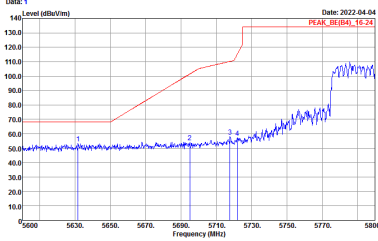
Band 4 5725~5850MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

Table with 2 columns (WIFI, ANT) and 2 rows (6+7). Contains spectral plots for Horizontal and Fundamental signals, and a 'Left blank' plot. Includes site and condition details for each plot.



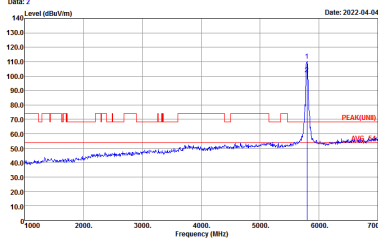


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
6+7	Vertical	Fundamental
<p>Peak</p>	<p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK(FUN)</p> <p>Site : 03CH13-HY Condition : PEAK(FUN) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
<p>Peak</p>	<p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Left blank</p>

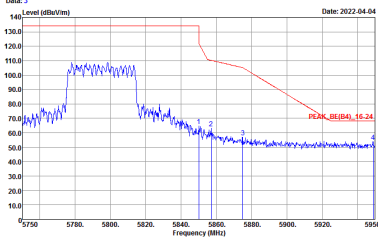

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full HT40 CH159 5795MHz	
6+7	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(LUNII) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
<p>Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>

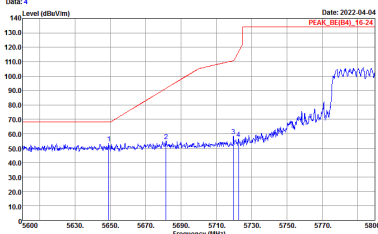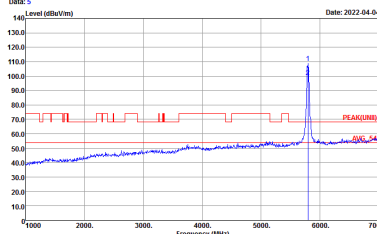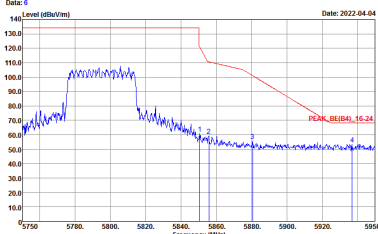




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH159 5795MHz	
6+7	Vertical	Fundamental
Peak	 <p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK(B4)</p> <p>Site : 03CH13-HY Condition : PEAK(LUNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Date: 2022-04-04 Level (dBuV/m) Date: 2022-04-04 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
6+7	Horizontal	Fundamental
<p align="center">Peak</p>		
<p align="center">Peak</p>		<p align="center">Left blank</p>

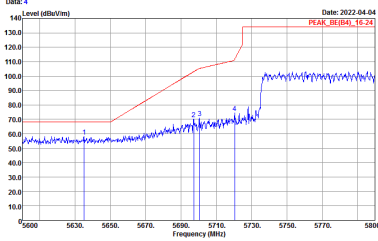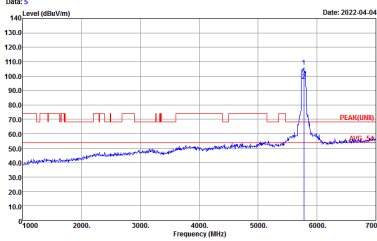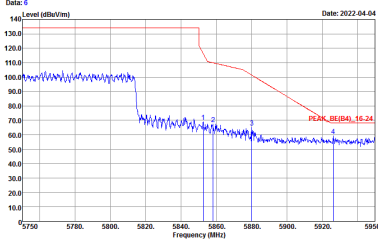

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
6+7	Vertical	Fundamental
Peak	 <p>Site : :03CH13-HY Condition : :PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL :RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : :03CH13-HY Condition : :PEAK(UNII) 3m HORN_91200_1241 VERTICAL :RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Site : :03CH13-HY Condition : :PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL :RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAQ(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAQ(UNIT) 3m HORN_91200_1241 VERTICAL</p>





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



**Band 4 5725~5850MHz
WIFI 802.11ax HE20 Full (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>

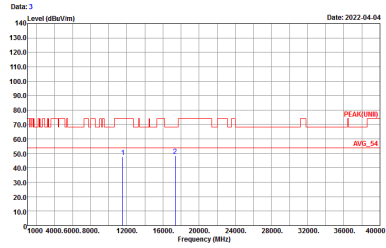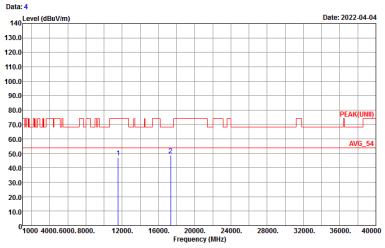

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

Table with 3 columns: WIFI (Band 4 5725~5850MHz Harmonic @ 3m), ANT (802.11ax HE40 Full CH151 5755MHz), and 6+7 (Horizontal and Vertical). The 6+7 column contains two graphs (Data 3 and Data 4) showing Level (dBuV/m) vs Frequency (MHz) for Peak and Avg. measurements.



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH159 5795MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

Table with 4 columns: WIFI, ANT, 6+7, and two measurement plots (Horizontal and Vertical). The plots show Level (dBuV/m) vs Frequency (MHz) with Peak and Avg. markers.





<TXBF Mode>

Band 4 - 5725~5850MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

Table with 2 columns: Horizontal and Fundamental. It contains two spectral plots showing Level (dBm/1m) vs Frequency (MHz) with various peak markers and site conditions.

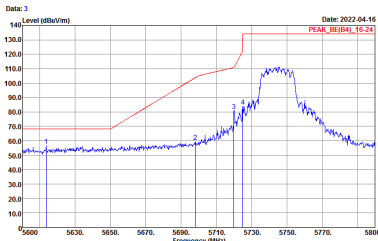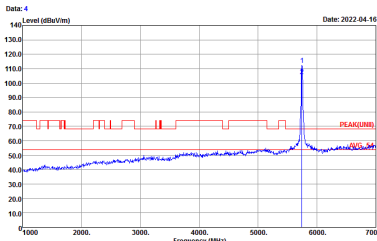

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
6+7	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Horizontal	Fundamental
Peak	<p>Date: 2022-04-21 Level (dBV/m) Date: 2022-04-21 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-04-21 Level (dBV/m) Date: 2022-04-21 PEAK(B)</p> <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	<p>Date: 2022-04-21 Level (dBV/m) Date: 2022-04-21 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Vertical	Fundamental
Peak	<p>Date: 2022-04-21 Level (dBuV/m) PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-04-21 Level (dBuV/m) PEAK(FUN)</p> <p>Site : 03CH13-HY Condition : PEAK(FUN) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	<p>Date: 2022-04-21 Level (dBuV/m) PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
6+7	Horizontal	Fundamental
<p align="center">Peak</p>	<p>Date: 1 Level (dBuV/m) Date: 2022-04-21 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2 Level (dBuV/m) Date: 2022-04-21 PEAK(UMB) BYG_58</p> <p>Site : 03CH13-HY Condition : PEAK(UMB) 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
<p align="center">Peak</p>	<p>Date: 3 Level (dBuV/m) Date: 2022-04-21 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p align="center">Left blank</p>

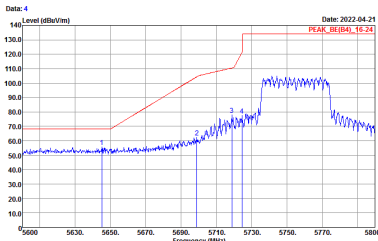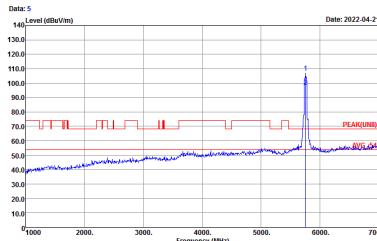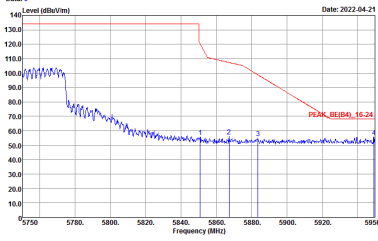

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
6+7	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(FUN) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full HT40 CH159 5795MHz	
6+7	Horizontal	Fundamental
Peak		
Peak		Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH159 5795MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : site Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH13-HY Condition : PEAK(UWB) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
6+7	Horizontal	Fundamental
<p align="center">Peak</p>	<p>Date: 1 Level (dBuV/m) Date: 2022-04-16 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2 Level (dBuV/m) Date: 2022-04-16 PEAK(UNB)</p> <p>Site : 03CH13-HY Condition : PEAK(UNB) 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
<p align="center">Peak</p>	<p>Date: 3 Level (dBuV/m) Date: 2022-04-16 PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p align="center">Left blank</p>

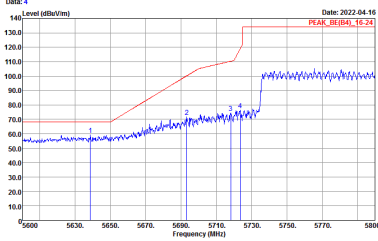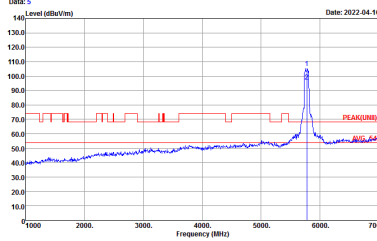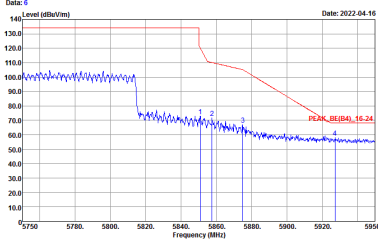

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
6+7	Vertical	Fundamental
Peak	 <p>Date: 2022-04-16 Date: 2022-04-16 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2022-04-16 Date: 2022-04-16 PEAK(UB)</p> <p>Site : 03CH13-HY Condition : PEAK(UB) 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Peak	 <p>Date: 2022-04-16 Date: 2022-04-16 PEAK_BE(B4)_15-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank



Band 4 - 5725~5850MHz
WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



**Band 4 5725~5850MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH159 5795MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL</p>



Emission below 1GHz
5GHz WIFI 802.11ax HE80 Full (LF @ 3m)

WIFI	5GHz WIFI	
ANT	802.11ax HE80 Full LF	
6+7	Horizontal	Vertical
QP / Peak	<p>Date: 1 Level (dBu/m) Date: 2022-04-26</p> <p>Site : 03CH13-HY Condition : QP 3m BIL06_40103 HORIZONTAL</p>	<p>Date: 2 Level (dBu/m) Date: 2022-04-26</p> <p>Site : 03CH13-HY Condition : QP 3m BIL06_40103 VERTICAL</p>







Appendix D. Duty Cycle Plots

<CDD Mode>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
6+7	802.11a	93.52	1429	0.70	1kHz
6+7	5GHz 802.11ax HE20 Full RU	97.55	3902	0.26	300Hz
6+7	5GHz 802.11ax HE20 106 RU	99.56	-	-	10Hz
6+7	5GHz 802.11ax HE40 Full RU	94.23	1960	0.51	1kHz
6+7	5GHz 802.11ax HE80 Full RU	90.53	975	1.03	3kHz

MIMO <Ant. 6+7>

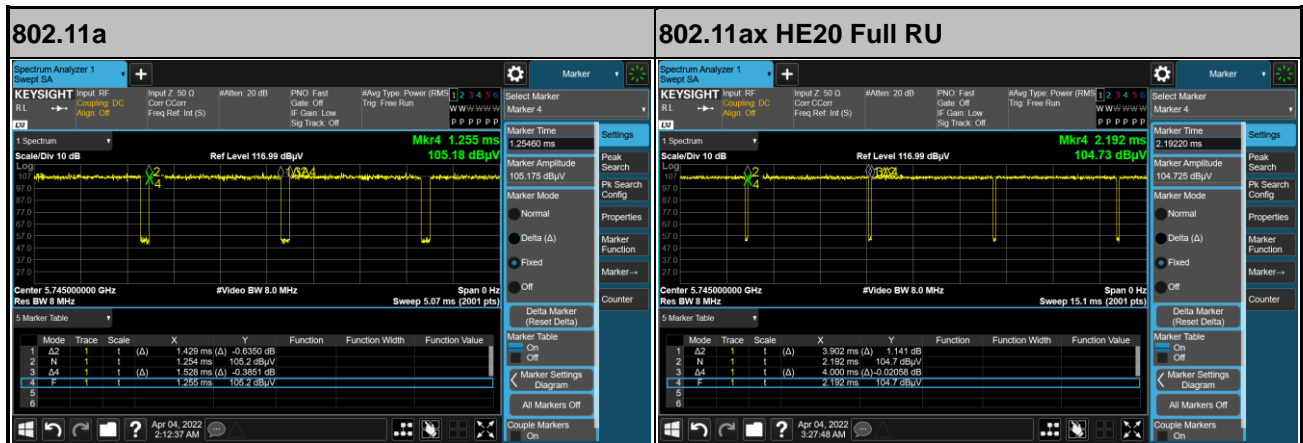

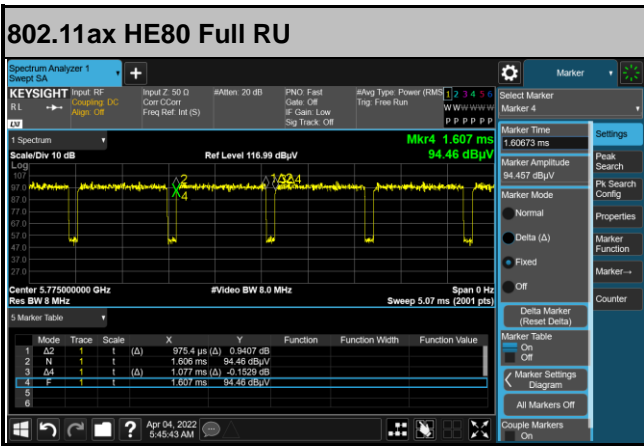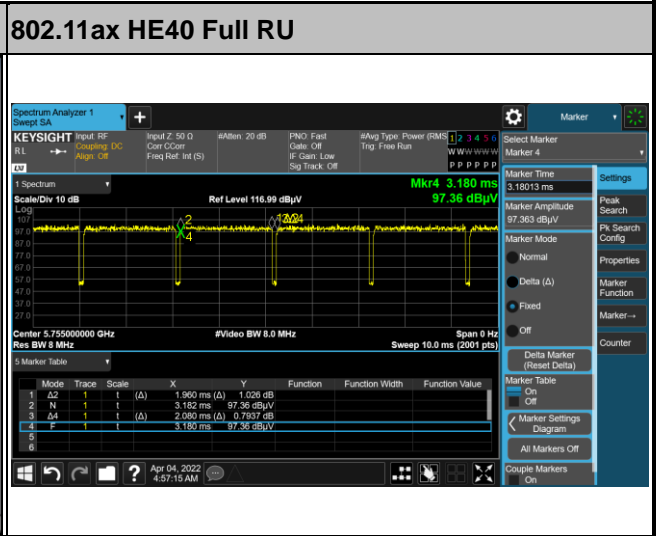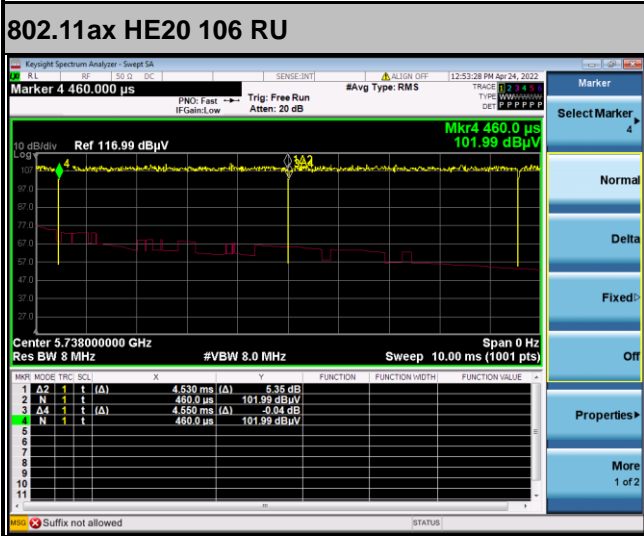



<TXBF Mode>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
6+7	5GHz 802.11ax HE20 Full RU	92.97	5160	0.19	300Hz
6+7	5GHz 802.11ax HE40 Full RU	91.09	4700	0.21	300Hz
6+7	5GHz 802.11ax HE80 Full RU	95.15	5100	0.20	300Hz

MIMO <Ant. 6+7>

