



FCC RADIO TEST REPORT

FCC ID : UZ7RM520NGL
Equipment : 5G Sub-6 GHz M.2 Module
Brand Name : ZEBRA
Model Name : RM520N-GL
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Quectel Wireless Solutions Co., Ltd.
Building 5, Shanghai Business Park Phase III (Area B), No.
1016 Tianlin Road, Minhang District, Shanghai, China 200233
Standard : FCC 47 CFR Part 2, 96

The product was received on Jan. 09, 2024 and testing was performed from Feb. 08, 2024 to Mar. 14, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3
Summary of Test Result.....4
1 General Description5
 1.1 Product Feature of Equipment Under Test.....5
 1.2 Product Specification of Equipment Under Test.....7
 1.3 Modification of EUT7
 1.4 Testing Site8
 1.5 Applied Standards9
2 Test Configuration of Equipment Under Test10
 2.1 Test Mode10
 2.2 Connection Diagram of Test System11
 2.3 Support Unit used in test configuration and system11
 2.4 Frequency List of Low/Middle/High Channels11
3 Conducted Test Items12
 3.1 Measuring Instruments12
 3.2 Conducted Output Power Measurement13
 3.3 EIRP14
4 Radiated Test Items15
 4.1 Measuring Instruments15
 4.2 Test Setup15
 4.3 Test Result of Radiated Test16
 4.4 Radiated Spurious Emission17
5 List of Measuring Equipment.....18
6 Measurement Uncertainty19
Appendix A. Test Results of Conducted Test
Appendix B. Test Results of Radiated Test
Appendix C. Test Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	-	See Note
3.3	§96.41	Effective Isotropic Radiated Power	Pass	-
-	§2.1049 §96.41	Occupied Bandwidth	-	See Note
-	§2.1051 §96.41	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §96.41	Conducted Spurious Emission	-	See Note
-	§2.1055	Frequency Stability for Temperature & Voltage	-	See Note
4.4	§2.1053 §96.41	Radiated Spurious Emission	Pass	10.13 dB under the limit at 14724.00 MHz

Note:

1. For host device, Radiated Spurious Emission and Effective Radiated Power are verified and complies with the limit in this test report.
2. For host device, the Conducted Output Power is no difference after compared to module (Model: RM520N-GL)
3. Testing was conducted on the EUT to compare its antenna gain, which was found to be higher than reported by the module in specific frequency bands. This testing encompassed evaluations of conducted power, EIRP, and RSE.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	5G Sub-6 GHz M.2 Module
Brand Name	ZEBRA
Model Name	RM520N-GL
FCC ID	UZ7RM520NGL
Installed into host	Equipment Name: Industrial Fixed RFID Reader Brand Name: ZEBRA Model Name: FXR9011 FCC ID: UZ7FXR9001
Sample 1	FXR90110-400000-WR 4 port (BT/WiFi/RFID/WWAN/GPS)
Sample 2	FXR90111-400000-WR 4+1 port (BT/WiFi/RFID/WWAN/GPS)
Sample 3	FXR90110-800000-WR 8 port (BT/WiFi/RFID/WWAN/GPS)
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS
HW Version	DV1
SW Version	0.4.18-90
MFD	26DEC23
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Supported Unit Used in Test Configuration and System for Host			
Cable, 3-way USB Splitter	Brand Name	ZEBRA	Model Name ADP-USB0010-M12
Cable, USB-C Host, 5ft.	Brand Name	ZEBRA	Model Name CBL-USBCHST015-M12
Cable, USB-C Host, 15ft.	Brand Name	ZEBRA	Model Name CBL-USBCHST035-M12
Cable, USB-C Client, 5ft.	Brand Name	ZEBRA	Model Name CBL-USBCCLT015-M12
Cable, USB-C Client, 15ft.	Brand Name	ZEBRA	Model Name CBL-USBCCLT035-M12
Cable, USB-A Client, 5ft.	Brand Name	ZEBRA	Model Name CBL-USBACL015-M12
Cable, USB-A Client, 15ft.	Brand Name	ZEBRA	Model Name CBL-USBACL035-M12
Cable, GPIO	Brand Name	ZEBRA	Model Name CBL-GP0050-M12M12A
Cable, 12V (Cigarette Lighter) Power Adapter, 3.5 meter	Brand Name	ZEBRA	Model Name CBL-PWRD035-M12CL
Cable, DC Power Cord (Flying Leads), 3.5m	Brand Name	ZEBRA	Model Name CBL-PWRD035-M1200
Cable, DC Power Cord (Flying Leads), 10m	Brand Name	ZEBRA	Model Name CBL-PWRD100-M1200
Cable, Power Supply Output Adapter, 3.5m	Brand Name	ZEBRA	Model Name CBL-PWRD035-M12M12
Cable, Power Supply Output Adapter, 10m	Brand Name	ZEBRA	Model Name CBL-PWRD100-M12M12



Supported Unit Used in Test Configuration and System for Host				
Cable, DC-DC Power Supply Input	Brand Name	ZEBRA	Model Name	CBL-PWRD150-M12M00
Cable, AC-DC Power Supply Input (Flying Leads)	Brand Name	ZEBRA	Model Name	CBL-PWRA150-M1200
Cable, AC-DC Power Supply Input (IEC plug)	Brand Name	ZEBRA	Model Name	CBL-PWRA035-M12IEC
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 68", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-3B4000680R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 180", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-3B4001800R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 240", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-3B4002400R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 360", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-3B4003600R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 68", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-1B4000680R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 180", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-1B4001800R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 240", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-1B4002400R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 360", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-1B4003600R
CHIMERA ETHERNET CABLE 5M	Brand Name	ZEBRA	Model Name	CBL-ENT00500-M1200
CHIMERA ETHERNET CABLE 15M	Brand Name	ZEBRA	Model Name	CBL-ENT01500-M1200
Outdoor AC-DC PSU	Brand Name	ZEBRA	Model Name	PWR-BGA24V90W0WW (Spec PD-007875-01)
Forklift DC-DC PSU	Brand Name	ZEBRA	Model Name	PWR-BGA24V90W1WW (Spec PD-007876-01)
Indoor AC-DC PSU	Brand Name	ZEBRA	Model Name	PWR-BGA24V78W3WW (Spec PD-007877-01)
PoE adaptor	Brand Name	ZEBRA	Model Name	PD-9001GR/AT/AC



Supported Unit Used in Test Configuration and System for Host				
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN480
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN650
External RFID Antenna	Brand Name	ZEBRA	Model Name	SR5502
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN510
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN520
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN610
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN620
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN720
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN440
External RFID Antenna	Brand Name	ZEBRA	Model Name	SP5504
BT/WLAN_ External Antenna	Brand Name	Amphenol	Model Name	ST0228-30-502-A
BT/WLAN_ External Antenna	Brand Name	Amphenol	Model Name	ZB511A-02-001-C
AN650 Antenna cable(5ft/1524mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4000600R
AN650 Antenna cable(20ft/6096mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4002400R
AN650 Antenna cable(15ft/4572mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4001800R
AN650 Antenna cable(30ft/9144mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4003600R
AN650 Antenna cable(10ft/3048mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4001200R
WWAN_ External Antenna	Brand Name	Quectel	Model Name	YB0007BA

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	3552.5 MHz ~ 3697.5 MHz
Rx Frequency	3552.5 MHz ~ 3697.5 MHz
Bandwidth	5 MHz / 10 MHz / 15 MHz / 20 MHz
Maximum Output Power to Antenna	17.99 dBm
Antenna Type for Host	Omni-directional Antenna
Antenna Gain for Host	<Ant. 2>: 2.00 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY
Test Engineer	Bryant Liu
Temperature (°C)	22.1~23.6
Relative Humidity (%)	50.4~55.8

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH21-HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Ray Lung and Sky Chang
Temperature (°C)	18~26
Relative Humidity (%)	50~70
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



1.5 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in two config (Ant. Degree 0 and Ant. Degree 90), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.


Modulation Type	Modulation
A	QPSK
B	16QAM
C	64QAM
D	256QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, D	All	1, Half, Full	L, M, H
EIRP	A, B, C, D	All	1, Half, Full	L, M, H
RSE	A	20 MHz	1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. All the radiated test cases were performed with Sample 3.

2.2 Connection Diagram of Test System

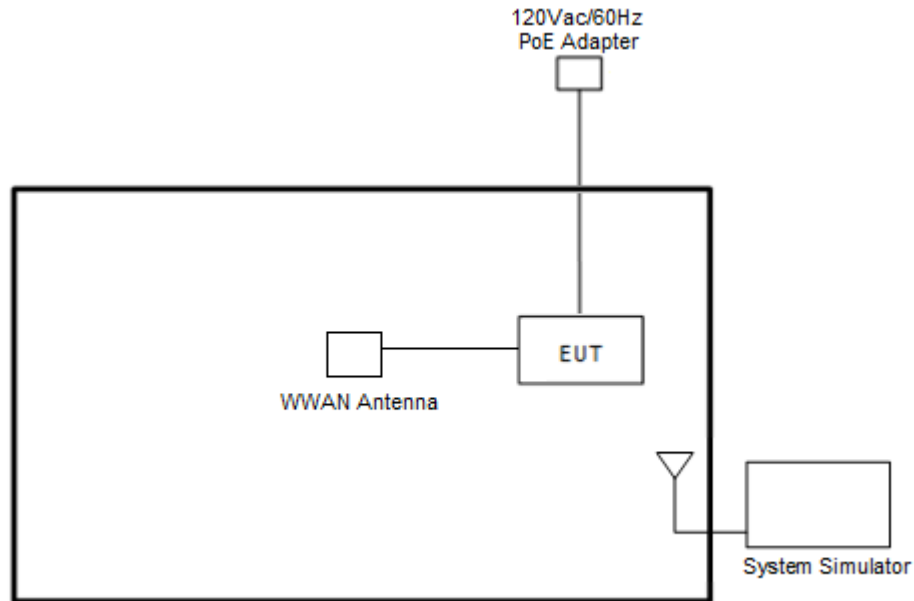

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560	3625	3690
15	Channel	55315	55990	56665
	Frequency	3557.5	3625	3692.5
10	Channel	55290	55990	56690
	Frequency	3555	3625	3695
5	Channel	55265	55990	56715
	Frequency	3552.5	3625	3697.5


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

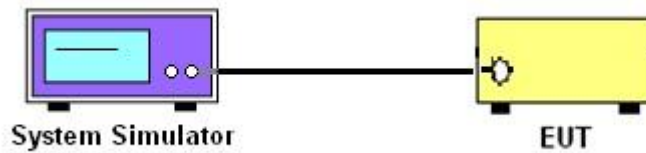

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power Measurement

3.2.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 EIRP

3.3.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for LTE Band 48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - LC$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a

Remark: Total channel power is complied with EIRP limit 23dBm/10MHz.

3.3.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated test below 30MHz

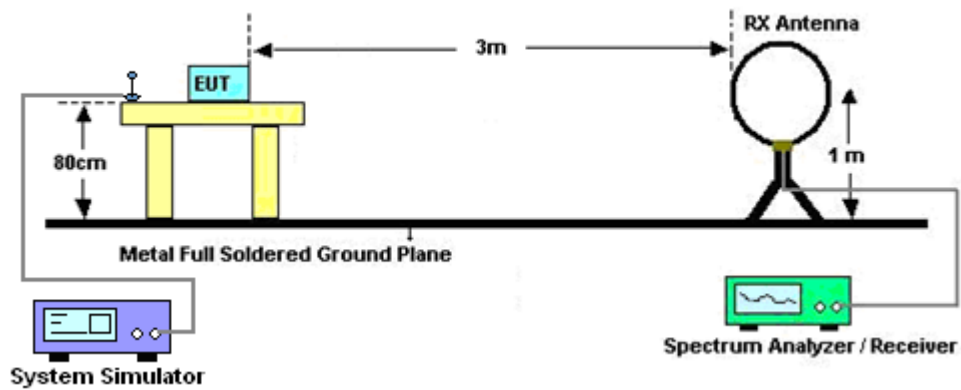


For radiated test from 30MHz to 1GHz

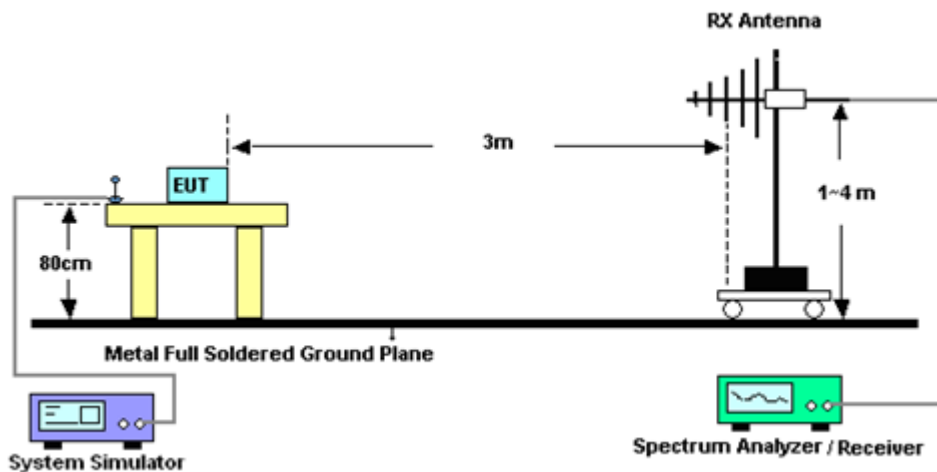

For radiated emissions from 1GHz to 18GHz

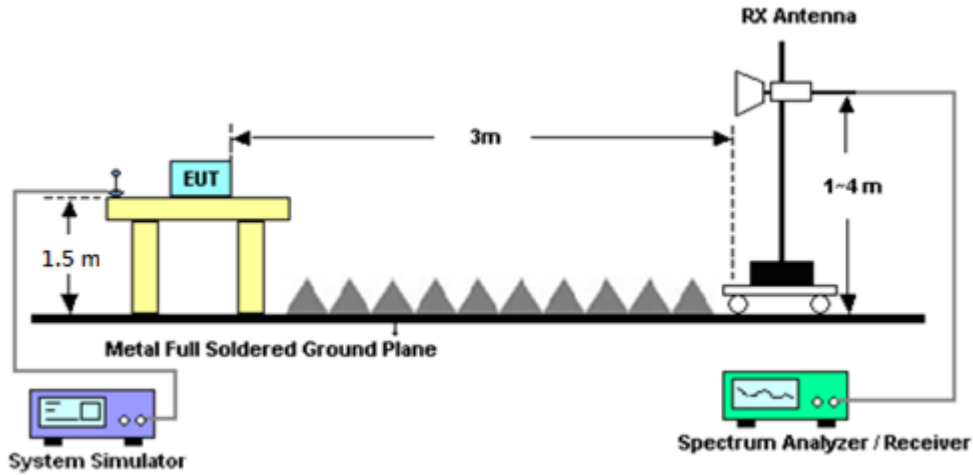

For radiated emissions above 18GHz

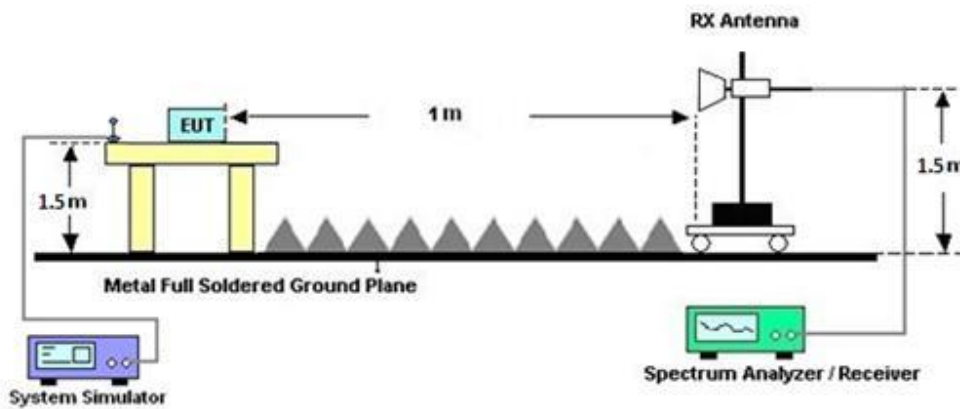

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
8. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
9. ERP (dBm) = EIRP (dBm) - 2.15
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Feb. 08, 2024~ Mar. 14, 2024	Sep. 11, 2024	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Oct. 15, 2023	Feb. 08, 2024~ Mar. 14, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18 EN	1GHz~18GHz	Jul. 12, 2023	Feb. 08, 2024~ Mar. 14, 2024	Jul. 11, 2024	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	Feb. 08, 2024~ Mar. 14, 2024	Jul. 09, 2024	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 15, 2023	Feb. 08, 2024~ Mar. 14, 2024	Jul. 14, 2024	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 28, 2023	Feb. 08, 2024~ Mar. 14, 2024	Sep. 27, 2024	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 30, 2023	Feb. 08, 2024~ Mar. 14, 2024	Aug. 29, 2024	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Aug. 28, 2023	Feb. 08, 2024~ Mar. 14, 2024	Aug. 27, 2024	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 07, 2023	Feb. 08, 2024~ Mar. 05, 2024	Mar. 06, 2024	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Mar. 06, 2024~ Mar. 14, 2024	Mar. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,804614/2	30MHz~40GHz	Oct. 24, 2023	Feb. 08, 2024~ Mar. 14, 2024	Oct. 23, 2024	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 30, 2023	Feb. 08, 2024~ Mar. 14, 2024	Oct. 29, 2024	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 08, 2024~ Mar. 14, 2024	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 08, 2024~ Mar. 14, 2024	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 08, 2024~ Mar. 14, 2024	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 08, 2024~ Mar. 14, 2024	N/A	Radiation (03CH21-HY)
Base Station (Measure)	Anritsu	MT8821C	6201664755	LTE FDD/TDD(with4 4), LTE-4CC DLCA/2CC ULCA, CatM1/NB1/NB2	Jul. 18, 2023	Mar. 08, 2024	Jul. 17, 2024	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 08, 2024	Mar. 08, 2024	Jan. 07, 2025	Conducted (TH03-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.04 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.33 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.68 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power & EIRP)

LTE Band 48 Maximum Average Power [dBm] (GT - LC = 2 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	17.98	17.98	17.98	19.98	0.0995
20	1	49		17.97	17.92	17.93		
20	1	99		17.84	17.77	17.81		
20	50	0		16.94	16.95	16.98		
20	50	24		16.99	16.93	16.95		
20	50	50		16.96	16.96	16.99		
20	100	0		16.97	16.93	16.93		
20	1	0	16-QAM	16.96	16.99	16.98	18.99	0.0793
20	1	49		16.95	16.95	16.83		
20	1	99		16.71	16.82	16.80		
20	50	0		15.98	15.97	16.00		
20	50	24		15.97	15.92	15.97		
20	50	50		15.97	15.96	15.98		
20	100	0		15.96	15.87	15.95		
20	1	0	64-QAM	15.98	15.98	15.94	17.98	0.0628
20	1	49		15.93	15.85	15.86		
20	1	99		15.76	15.75	15.75		
20	50	0		14.93	14.95	14.98		
20	50	24		15.00	14.94	14.96		
20	50	50		14.95	14.94	14.89		
20	100	0		15.00	14.92	14.96		
20	1	0	256-QAM	12.85	12.78	12.82	15.06	0.0321
20	1	49		12.96	12.80	12.80		
20	1	99		13.06	12.93	12.81		
20	50	0		12.76	12.71	12.71		
20	50	24		12.88	12.70	12.71		
20	50	50		12.90	12.79	12.77		
20	100	0		12.88	12.69	12.67		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = 2 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	17.90	17.84	17.85	19.99	0.0998
15	1	37		17.99	17.89	17.92		
15	1	74		17.98	17.91	17.84		
15	36	0		16.65	16.57	16.58		
15	36	20		16.74	16.61	16.67		
15	36	39		16.80	16.70	16.70		
15	75	0		16.78	16.59	16.66		
15	1	0	16-QAM	16.88	16.85	16.88	18.99	0.0793
15	1	37		16.97	16.95	16.88		
15	1	74		16.99	16.90	16.92		
15	36	0		15.65	15.61	15.65		
15	36	20		15.79	15.62	15.69		
15	36	39		15.78	15.70	15.70		
15	75	0		15.78	15.63	15.69		
15	1	0	64-QAM	15.81	15.83	15.85	18.01	0.0632
15	1	37		16.00	15.93	15.86		
15	1	74		16.01	15.84	15.75		
15	36	0		14.68	14.54	14.60		
15	36	20		14.80	14.60	14.67		
15	36	39		14.79	14.66	14.67		
15	75	0		14.78	14.58	14.65		
15	1	0	256-QAM	12.77	12.73	12.74	15.04	0.0319
15	1	37		12.87	12.78	12.70		
15	1	74		13.04	12.87	12.81		
15	36	0		12.66	12.61	12.65		
15	36	20		12.83	12.64	12.65		
15	36	39		12.88	12.70	12.72		
15	75	0		12.83	12.68	12.67		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = 2 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	17.78	17.75	17.80	19.86	0.0968
10	1	25		17.85	17.78	17.82		
10	1	49		17.86	17.76	17.77		
10	25	0		16.82	16.71	16.72		
10	25	12		16.92	16.75	16.79		
10	25	25		16.92	16.84	16.80		
10	50	0		16.85	16.73	16.77		
10	1	0	16-QAM	17.09	17.06	17.13	19.20	0.0832
10	1	25		17.16	17.16	17.06		
10	1	49		17.20	17.10	17.14		
10	25	0		15.93	15.77	15.75		
10	25	12		15.94	15.77	15.82		
10	25	25		15.93	15.84	15.88		
10	50	0		15.91	15.73	15.74		
10	1	0	64-QAM	16.09	15.96	16.04	18.09	0.0644
10	1	25		16.09	16.09	16.06		
10	1	49		16.05	16.04	15.95		
10	25	0		14.87	14.75	14.70		
10	25	12		14.93	14.80	14.77		
10	25	25		14.92	14.85	14.80		
10	50	0		14.92	14.77	14.73		
10	1	0	256-QAM	12.77	12.71	12.73	15.02	0.0318
10	1	25		12.88	12.75	12.76		
10	1	49		13.02	12.85	12.72		
10	25	0		12.73	12.63	12.64		
10	25	12		12.87	12.64	12.67		
10	25	25		12.83	12.72	12.72		
10	50	0		12.86	12.63	12.65		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = 2 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	17.82	17.80	17.73	19.92	0.0982
5	1	12		17.92	17.89	17.80		
5	1	24		17.91	17.88	17.81		
5	12	0		16.90	16.80	16.79		
5	12	7		16.91	16.89	16.79		
5	12	13		16.92	16.90	16.83		
5	25	0		16.90	16.79	16.74		
5	1	0	16-QAM	17.04	17.13	17.01	19.28	0.0847
5	1	12		17.28	17.21	17.12		
5	1	24		17.15	17.24	17.14		
5	12	0		15.93	15.87	15.76		
5	12	7		15.98	15.91	15.84		
5	12	13		15.99	15.83	15.84		
5	25	0		15.93	15.81	15.81		
5	1	0	64-QAM	16.03	15.97	15.95	18.13	0.0650
5	1	12		16.10	16.13	16.07		
5	1	24		16.05	16.09	16.07		
5	12	0		14.94	14.75	14.87		
5	12	7		14.97	14.87	14.85		
5	12	13		14.95	14.92	14.89		
5	25	0		14.91	14.76	14.76		
5	1	0	256-QAM	12.65	12.68	12.71	14.94	0.0312
5	1	12		12.86	12.61	12.71		
5	1	24		12.94	12.90	12.79		
5	12	0		12.62	12.59	12.64		
5	12	7		12.74	12.56	12.63		
5	12	13		12.87	12.79	12.59		
5	25	0		12.84	12.69	12.65		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	Amp\Cbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 96	LTE B48	H	14724	-50.13	RMS	41.65	-23.00	0.42	-95.23	26.03	-40.00	-10.13	H	Ant2




Ant2

Part 96 Mode 1


LTE B48 20M Ch55340 1RB0 QPSK

L

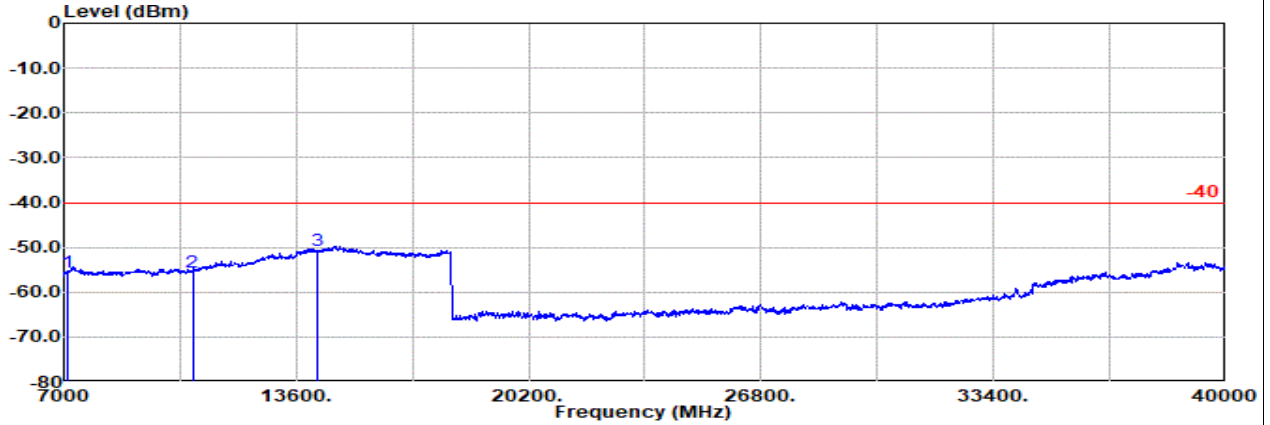

Site : 03CH21-HY
 Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE B48 20M Ch55340 1RB0 QPSK

	Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	7102.00	-55.66	RMS	36.40	-21.43	1.19	-95.23	23.41	-40.00	-15.66	Horizontal	
2	10653.00	-55.40	RMS	37.50	-21.68	0.44	-95.23	23.57	-40.00	-15.40	Horizontal	
3	14204.00	-50.84	RMS	41.00	-22.34	0.41	-95.23	25.32	-40.00	-10.84	Horizontal	

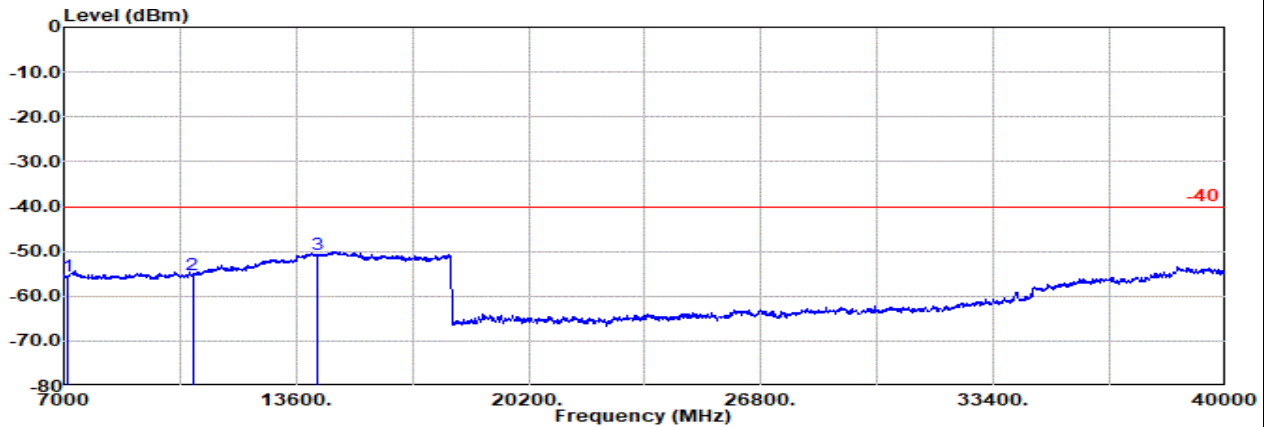


Site : 03CH21-HY
 Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE B48 20M Ch55340 1RB0 QPSK

	Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	7102.00	-55.45	RMS	36.40	-21.43	1.19	-95.23	23.62	-40.00	-15.45	Vertical	
2	10653.00	-55.29	RMS	37.50	-21.68	0.44	-95.23	23.68	-40.00	-15.29	Vertical	
3	14204.00	-50.81	RMS	41.00	-22.34	0.41	-95.23	25.35	-40.00	-10.81	Vertical	




Ant2

Part 96 Mode 1
 LTE B48 20M Ch55990 1RB0 QPSK
 M

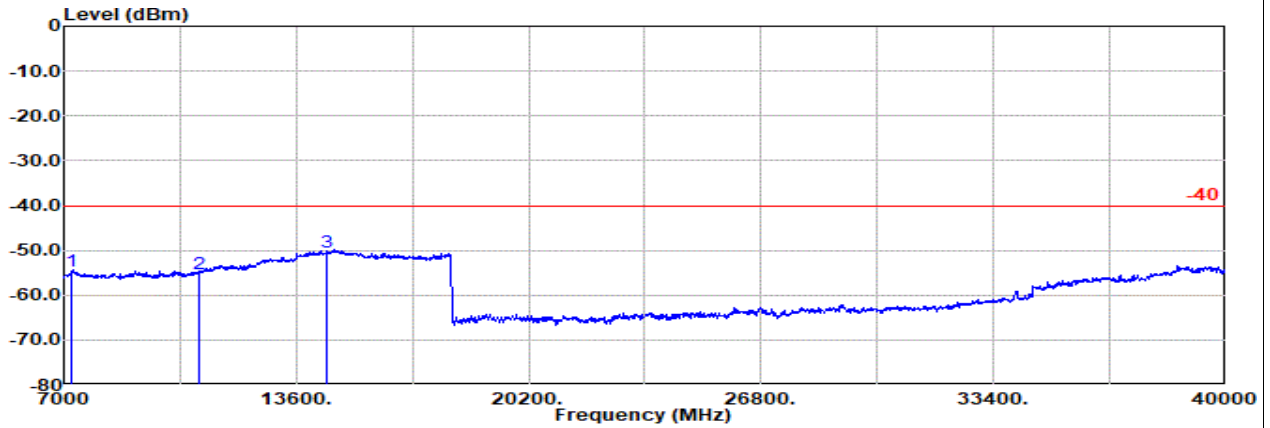

Site : 03CH21-HY
 Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE B48 20M Ch55990 1RB0 QPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7232.00	-54.77	RMS	36.86	-21.34	1.13	-95.23	23.81	-40.00	-14.77	Horizontal
2	10848.00	-55.10	RMS	37.51	-21.65	0.44	-95.23	23.83	-40.00	-15.10	Horizontal
3	14464.00	-50.56	RMS	41.16	-22.73	0.42	-95.23	25.82	-40.00	-10.56	Horizontal

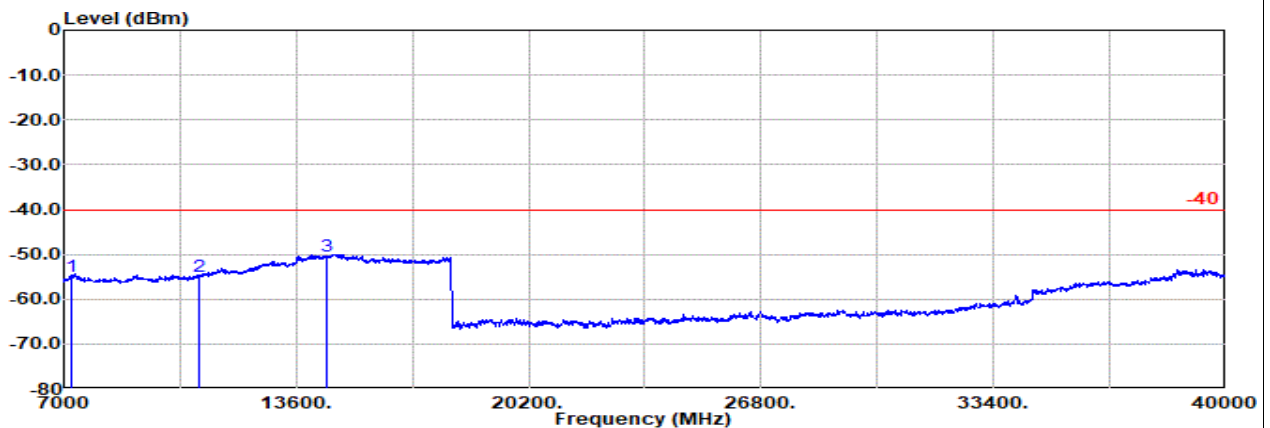

Site : 03CH21-HY
 Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE B48 20M Ch55990 1RB0 QPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7232.00	-54.97	RMS	36.86	-21.34	1.13	-95.23	23.61	-40.00	-14.97	Vertical
2	10848.00	-54.87	RMS	37.51	-21.65	0.44	-95.23	24.06	-40.00	-14.87	Vertical
3	14464.00	-50.28	RMS	41.16	-22.73	0.42	-95.23	26.10	-40.00	-10.28	Vertical




Ant2

Part 96 Mode 1


LTE B48 20M Ch56640 1RB0 QPSK

H

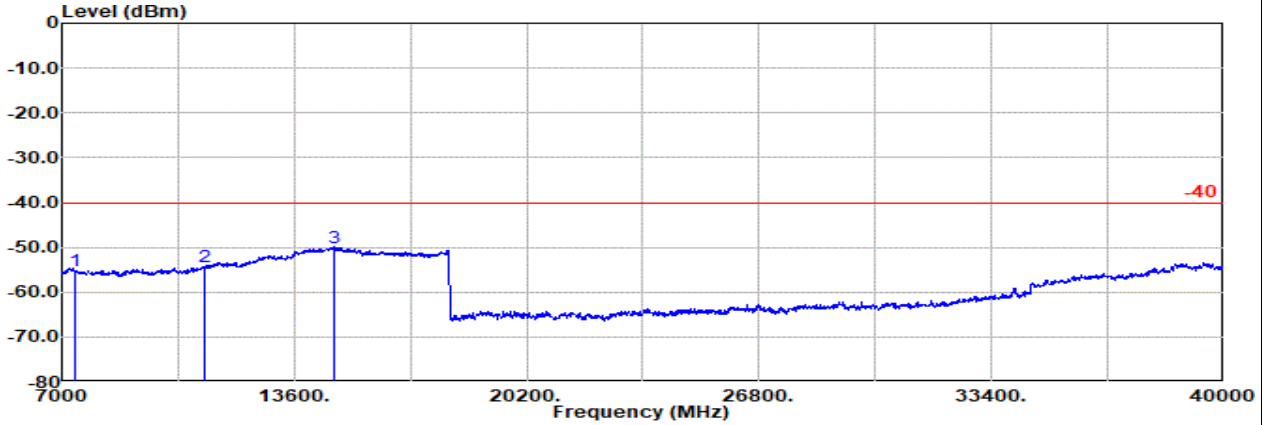

Site : 03CH21-HY
 Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE B48 20M Ch56640 1RB0 QPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Reading	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7362.00	-55.19	RMS	36.98	-21.28	1.05	-95.23	23.29	-40.00	-15.19	Horizontal
2 11043.00	-54.25	RMS	37.97	-21.61	0.44	-95.23	24.18	-40.00	-14.25	Horizontal
3 14724.00	-50.13	RMS	41.65	-23.00	0.42	-95.23	26.03	-40.00	-10.13	Horizontal

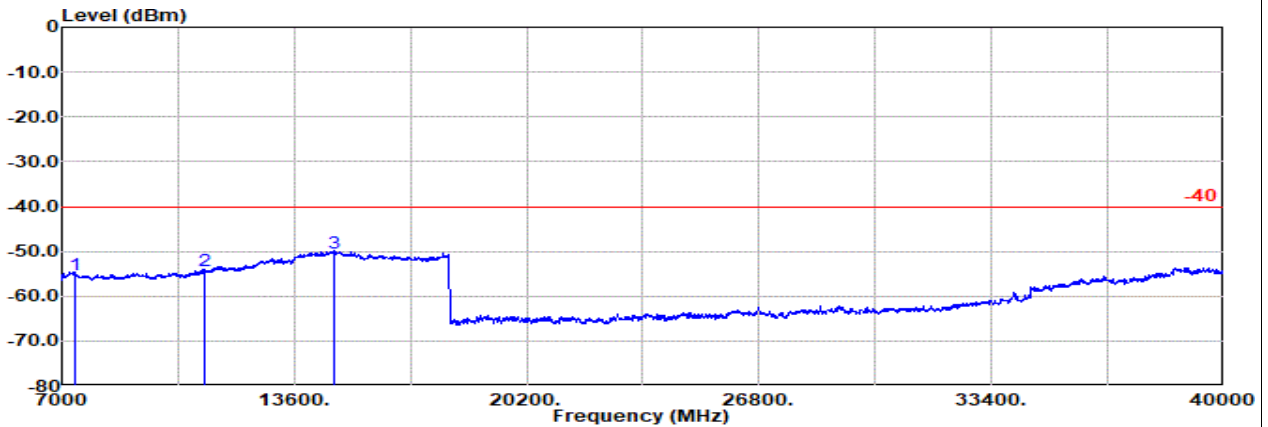

Site : 03CH21-HY
 Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE B48 20M Ch56640 1RB0 QPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Reading	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7362.00	-55.33	RMS	36.98	-21.28	1.05	-95.23	23.15	-40.00	-15.33	Vertical
2 11043.00	-54.42	RMS	37.97	-21.61	0.44	-95.23	24.01	-40.00	-14.42	Vertical
3 14724.00	-50.34	RMS	41.65	-23.00	0.42	-95.23	25.82	-40.00	-10.34	Vertical




Ant2

Part 96 Mode 1


LTE B48 20M Ch56640 1RB0 QPSK

H

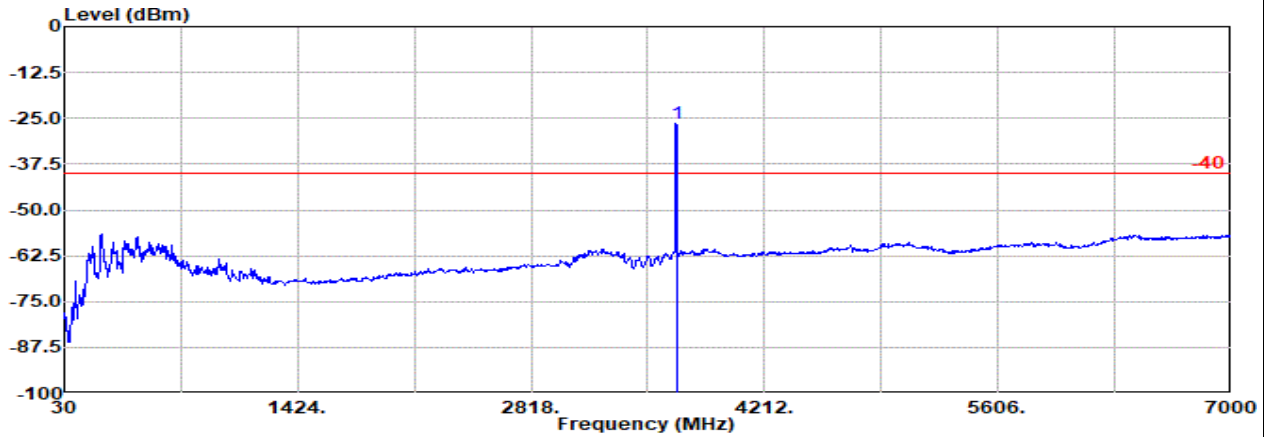

Site : 03CH21-HY
 Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE B48 20M Ch56640 1RB0 QPSK
 : #1 is fundamental signal which can be ignored.

1	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	dB			dB	dB		
1	3690.00	-26.41	RMS	29.80	-23.23	0.56	-95.23	61.69	-40.00	13.59	Horizontal

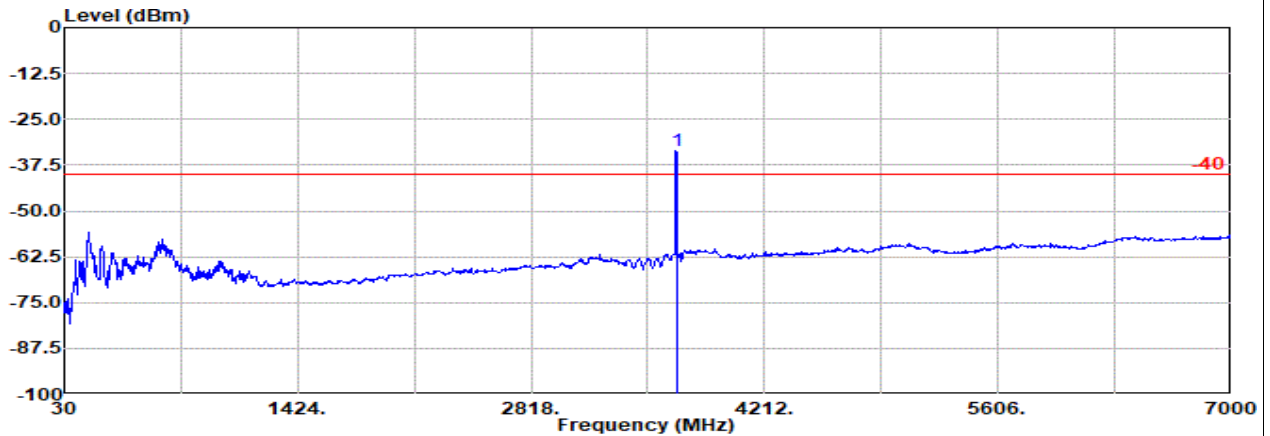

Site : 03CH21-HY
 Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE B48 20M Ch56640 1RB0 QPSK
 : #1 is fundamental signal which can be ignored.

1	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	dB			dB	dB		
1	3690.00	-33.41	RMS	29.80	-23.23	0.56	-95.23	54.69	-40.00	6.59	Vertical

Remark: #1 is fundamental signal which can be ignored.