



FCC SAR TEST REPORT

FCC ID : UZ7RTL10B1
Equipment : Tablet
Brand Name : Zebra
Model Name : RTL10B1
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Mar.15, 2019 and testing was started from Apr. 03, 2019 and completed on Apr. 22, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4

2. Guidance Applied..... 4

3. Equipment Under Test (EUT) Information 5

 3.1 General Information 5

 3.2 General LTE SAR Test and Reporting Considerations 7

4. Proximity Sensor Triggering Test.....10

5. RF Exposure Limits.....16

 5.1 Uncontrolled Environment.....16

 5.2 Controlled Environment.....16

6. Specific Absorption Rate (SAR).....17

 6.1 Introduction17

 6.2 SAR Definition.....17

7. System Description and Setup18

 7.1 E-Field Probe19

 7.2 Data Acquisition Electronics (DAE)19

 7.3 Phantom.....20

 7.4 Device Holder.....21

8. Measurement Procedures22

 8.1 Spatial Peak SAR Evaluation22

 8.2 Power Reference Measurement.....23

 8.3 Area Scan23

 8.4 Zoom Scan.....24

 8.5 Volume Scan Procedures.....24

 8.6 Power Drift Monitoring.....24

9. Test Equipment List25

10. System Verification26

 10.1 Tissue Simulating Liquids.....26

 10.2 Tissue Verification27

 10.3 System Performance Check Results.....28

11. RF Exposure Positions28

 11.1 SAR Testing for Tablet28

12. Conducted RF Output Power (Unit: dBm).....29

13. Antenna Location104

14. SAR Test Results108

 14.1 Body SAR110

 14.2 Repeated SAR Measurement117

15. Simultaneous Transmission Analysis.....118

 15.1 Body Exposure Conditions119

 15.2 SPLSR Evaluation and Analysis.....121

16. Uncertainty Assessment151

17. References.....151

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos



History of this test report

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|--------------|
| FA922214 | 01 | Initial issue of report | May 17, 2019 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Zebra Technologies Corporation, Tablet, RTL10B1, are as follows.

Table with 4 columns: Equipment Class, Frequency Band, Highest SAR Summary (Body, 1g SAR (W/kg)), and Highest Simultaneous Transmission (1g SAR (W/kg)). Rows include Licensed (WCDMA II-IV, LTE Band 7-66), DTS (2.4GHz WLAN), NII (5GHz WLAN), and DSS (Bluetooth). Date of Testing: 2019/4/3 ~ 2019/4/22.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang
Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 616217 D04 SAR for laptop and tablets v01r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

| Product Feature & Specification | |
|---|---|
| Equipment Name | Tablet |
| Brand Name | Zebra |
| Model Name | RTL10B1 |
| FCC ID | UZ7RTL10B1 |
| Wireless Technology and Frequency Range | WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz |
| Mode | RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n/ac HT20/HT40/VHT20/VHT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK |
| HW Version | DV0 |
| SW Version | Android version 8.1.0 |
| FW Version – Xpad | 01-17-09.00-OG-U00-PLT (RF sample; Engineering build image for TXBF) |
| FW Version - Xslate | 01-17-05.00-OG-U00-PRD (RF sample; Engineering build image) |
| FW Version - Xbook | 01-17-05.00-OG-U00-PRD (RF sample; Engineering build image) |
| MFD - Xpad | 19MAR01 |
| MFD - Xslate | 19MAR01 |
| MFD - Xbook | 19MAR01 |
| EUT Stage | Identical Prototype |
| Remark: | <ol style="list-style-type: none"> There are five kinds sample of this device, the larger difference between sample 1/2 and sample 3/4/5 is the handle, RF evaluation chose sample 2 as the main test, and sample 3 was spot check bottom face of sample 2 to show compliance. Sample 1 is the similar device to sample 2, thus sample 1 didn't be performed SAR evaluation. Sample 4/5 is the similar device to sample 3 and the varied part is far away from the transmitter antenna, thus sample 4/5 didn't be performed SAR evaluation. |

<Sample Information>

| | Sample 1 | Sample 2 | Sample 3 | Sample 4 | Sample 5 | |
|--------------------|--------------------|-------------------------------|-------------------------------|-------------------------------|--|-------------------------------|
| DV0 | SKU 1+ Keyboard | L10A - SKU1 | L10A - SKU2 | L10A - SKU3 | L10A - SKU4 | |
| ID | Xbook | XSLATE | XPAD | XPAD | XPAD | |
| OS | Refer Sample 2 | Android O | Android O | Android O | Android O | |
| CPU | | Qualcomm SDM660 | Qualcomm SDM660 | Qualcomm SDM660 | Qualcomm SDM660 | |
| Display with touch | | Panasonic EP101R1912N500TG | Panasonic EP101R1912N500TG | Panasonic EP101R1912N500TG | Panasonic EP101R1912N500TG | Panasonic EP101R1912N500TG |
| | | 10.1" LCD (500nits) | 10.1" LCD (500nits) | 10.1" LCD (1000nits) | 10.1" LCD (1000nits) with digitizer | |
| Memory | | Samsung LPDDR4 4GB | Samsung LPDDR4 4GB | Samsung LPDDR4 4GB | Samsung LPDDR4 4GB | |
| | | Hynix LPDDR4 4 GB | Hynix LPDDR4 4 GB | Micron LPDDR4 4 GB | Micron LPDDR4 4 GB | |
| eMMC | | TOSHIBA 64GB | TOSHIBA 64GB | TOSHIBA 64GB | TOSHIBA 64GB | |
| GPS | | Qualcomm | Qualcomm | Qualcomm | Qualcomm | |
| WWAN | | Qualcomm | Qualcomm | Qualcomm | Qualcomm | |
| WLAN | | Qualcomm WCN3990 | Qualcomm WCN3990 | Qualcomm WCN3990 | Qualcomm WCN3990 | |
| Antenna | | WLAN*2/NFC | WLAN*2/NFC | WLAN*2/NFC | WLAN*2/NFC | |
| | | /GPS/WWAN*2 | /GPS/WWAN*2 | /GPS/WWAN*2 | /GPS/WWAN*2 | |
| Barcode Reader | | No | Yes | Yes | Yes | |
| HDMI | | No | No | Yes | No | |
| Serial Port | | No | Yes | No | No | |

Accessories Information

| | Brand Name | | Model Name | |
|------------------------------|------------|--|--------------------------|--|
| AC Adapter | Delta | | ADP-65JH HB | |
| Spare Standard Battery 36Whr | XPLORE | | XLBM1 | |
| Keyboard dock | XPLORE | | LX-KB | |
| Touch Pen | WACOM | | CP-903-05B-2 | |
| Touch Pen | EMPIA | | EPNB-8C1000-000040820A01 | |
| Touch Pen | HAO SHUAN | | 440007 | |



3.2 General LTE SAR Test and Reporting Considerations

| Summarized necessary items addressed in KDB 941225 D05 v02r05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|------------|---|--------|--------|--------|----------|--|----------|---------|---------|-------|--------|--------|--------|------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|---------|-----|--|--|--|--|--|-----|
| FCC ID | UZ7RTL10B1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Equipment Name | Tablet | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Frequency Range of each LTE transmission band | LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Channel Bandwidth | LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| uplink modulations used | QPSK / 16QAM / 64QAM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Voice / Data requirements | Data only | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE MPR permanently built-in by design | <p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> | Modulation | Channel bandwidth / Transmission bandwidth (N _{RB}) | | | | | | MPR (dB) | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 | 64 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 2 | 64 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 3 | 256 QAM | ≥ 1 | | | | | | ≤ 5 |
| Modulation | Channel bandwidth / Transmission bandwidth (N _{RB}) | | | | | | MPR (dB) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 64 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 64 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 256 QAM | ≥ 1 | | | | | | ≤ 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE A-MPR | In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Spectrum plots for RB configuration | A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power reduction applied to satisfy SAR compliance | 1. Yes, Proximity Sensor. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Carrier Aggregation Combinations | Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Carrier Aggregation Additional Information | This device supports maximum of 3 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Transmission (H, M, L) channel numbers and frequencies in each LTE band | | | | | | | | | | | | | | | | |
|---|-------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|--|------------|--|
| LTE Band 2 | | | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | | | |
| L | 18607 | 1850.7 | 18615 | 1851.5 | 18625 | 1852.5 | 18650 | 1855 | 18675 | 1857.5 | 18700 | 1860 | | | | |
| M | 18900 | 1880 | 18900 | 1880 | 18900 | 1880 | 18900 | 1880 | 18900 | 1880 | 18900 | 1880 | | | | |
| H | 19193 | 1909.3 | 19185 | 1908.5 | 19175 | 1907.5 | 19150 | 1905 | 19125 | 1902.5 | 19100 | 1900 | | | | |
| LTE Band 4 | | | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | | | |
| L | 19957 | 1710.7 | 19965 | 1711.5 | 19975 | 1712.5 | 20000 | 1715 | 20025 | 1717.5 | 20050 | 1720 | | | | |
| M | 20175 | 1732.5 | 20175 | 1732.5 | 20175 | 1732.5 | 20175 | 1732.5 | 20175 | 1732.5 | 20175 | 1732.5 | | | | |
| H | 20393 | 1754.3 | 20385 | 1753.5 | 20375 | 1752.5 | 20350 | 1750 | 20325 | 1747.5 | 20300 | 1745 | | | | |
| LTE Band 5 | | | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | | | |
| L | 20407 | 824.7 | 20415 | 825.5 | 20425 | 826.5 | 20450 | 829 | 20450 | 829 | 20450 | 829 | | | | |
| M | 20525 | 836.5 | 20525 | 836.5 | 20525 | 836.5 | 20525 | 836.5 | 20525 | 836.5 | 20525 | 836.5 | | | | |
| H | 20643 | 848.3 | 20635 | 847.5 | 20625 | 846.5 | 20600 | 844 | 20600 | 844 | 20600 | 844 | | | | |
| LTE Band 7 | | | | | | | | | | | | | | | | |
| | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | | | |
| L | 20775 | 2502.5 | 20800 | 2505 | 20825 | 2507.5 | 20850 | 2510 | 20850 | 2510 | 20850 | 2510 | | | | |
| M | 21100 | 2535 | 21100 | 2535 | 21100 | 2535 | 21100 | 2535 | 21100 | 2535 | 21100 | 2535 | | | | |
| H | 21425 | 2567.5 | 21400 | 2565 | 21375 | 2562.5 | 21350 | 2560 | 21350 | 2560 | 21350 | 2560 | | | | |
| LTE Band 12 | | | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | | | |
| L | 23017 | 699.7 | 23025 | 700.5 | 23035 | 701.5 | 23060 | 704 | 23060 | 704 | 23060 | 704 | | | | |
| M | 23095 | 707.5 | 23095 | 707.5 | 23095 | 707.5 | 23095 | 707.5 | 23095 | 707.5 | 23095 | 707.5 | | | | |
| H | 23173 | 715.3 | 23165 | 714.5 | 23155 | 713.5 | 23130 | 711 | 23130 | 711 | 23130 | 711 | | | | |
| LTE Band 13 | | | | | | | | | | | | | | | | |
| | Bandwidth 5 MHz | | | | Bandwidth 10 MHz | | | | Bandwidth 15 MHz | | | | Bandwidth 20 MHz | | | |
| | Channel # | | Freq.(MHz) | | Channel # | | Freq.(MHz) | | Channel # | | Freq.(MHz) | | Channel # | | Freq.(MHz) | |
| L | 23205 | | 779.5 | | 23230 | | 782 | | 23255 | | 784.5 | | 23280 | | 787 | |
| M | 23230 | | 782 | | 23255 | | 784.5 | | 23280 | | 787 | | 23305 | | 789.5 | |
| H | 23255 | | 784.5 | | 23280 | | 787 | | 23305 | | 789.5 | | 23330 | | 792 | |
| LTE Band 14 | | | | | | | | | | | | | | | | |
| | Bandwidth 5 MHz | | | | Bandwidth 10 MHz | | | | Bandwidth 15 MHz | | | | Bandwidth 20 MHz | | | |
| | Channel # | | Channel # | | Channel # | | Freq.(MHz) | | Channel # | | Freq.(MHz) | | Channel # | | Freq.(MHz) | |
| L | 23305 | | 790.5 | | 23330 | | 793 | | 23355 | | 795.5 | | 23380 | | 798 | |
| M | 23330 | | 793 | | 23355 | | 795.5 | | 23380 | | 798 | | 23405 | | 800.5 | |
| H | 23355 | | 795.5 | | 23380 | | 798 | | 23405 | | 800.5 | | 23430 | | 803 | |
| LTE Band 25 | | | | | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | | | |
| L | 26047 | 1850.7 | 26055 | 1851.5 | 26065 | 1852.5 | 26090 | 1855 | 26115 | 1857.5 | 26140 | 1860 | | | | |
| M | 26340 | 1880 | 26340 | 1880 | 26340 | 1880 | 26340 | 1880 | 26340 | 1880 | 26340 | 1880 | | | | |
| H | 26683 | 1914.3 | 26675 | 1913.5 | 26665 | 1912.5 | 26640 | 1910 | 26615 | 1907.5 | 26590 | 1905 | | | | |




| LTE Band 26 | | | | | | | | | | | | |
|-------------|-------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) |
| L | 26697 | 814.7 | 26705 | 815.5 | 26715 | 816.5 | 26740 | 819 | 26765 | 821.5 | | |
| M | 26865 | 831.5 | 26865 | 831.5 | 26865 | 831.5 | 26865 | 831.5 | 26865 | 831.5 | | |
| H | 27033 | 848.3 | 27025 | 847.5 | 27015 | 846.5 | 26990 | 844 | 26965 | 841.5 | | |
| LTE Band 38 | | | | | | | | | | | | |
| | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) |
| L | 37775 | 2572.5 | 37800 | 2575 | 37825 | 2577.5 | 37850 | 2580 | | | | |
| M | 38000 | 2595 | 38000 | 2595 | 38000 | 2595 | 38000 | 2595 | | | | |
| H | 38225 | 2617.5 | 38200 | 2615 | 38175 | 2612.5 | 38150 | 2610 | | | | |
| LTE Band 41 | | | | | | | | | | | | |
| | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) |
| L | 39675 | 2498.5 | 39700 | 2501 | 39725 | 2503.5 | 39750 | 2506 | | | | |
| L | 40148 | 2545.8 | 40160 | 2547 | 40173 | 2548.3 | 40185 | 2549.5 | | | | |
| M | 40620 | 2593 | 40620 | 2593 | 40620 | 2593 | 40620 | 2593 | | | | |
| H | 41093 | 2640.3 | 41080 | 2639 | 41068 | 2637.8 | 41055 | 2636.5 | | | | |
| H | 41565 | 2687.5 | 41540 | 2685 | 41515 | 2682.5 | 41490 | 2680 | | | | |
| LTE Band 66 | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) |
| L | 131979 | 1710.7 | 131987 | 1711.5 | 131997 | 1712.5 | 132022 | 1715 | 132047 | 1717.5 | 132072 | 1720 |
| M | 132322 | 1745 | 132322 | 1745 | 132322 | 1745 | 132322 | 1745 | 132322 | 1745 | 132322 | 1745 |
| H | 132665 | 1779.3 | 132657 | 1778.5 | 132647 | 1777.5 | 132622 | 1775 | 132597 | 1772.5 | 132572 | 1770 |

4. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated in the exhibit “P-Sensor operational description”, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

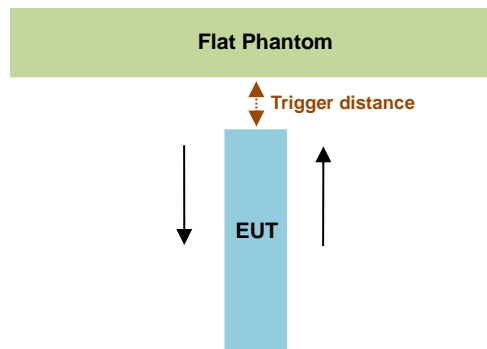


| Proximity Sensor Trigger Distance (mm) | | |
|--|-------------|--------|
| Position | Bottom Face | Edge 1 |
| Minimum | 4 | 16 |

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad, therefore, According to KDB 616217 section 6.3, these procedures do not apply and are not required for bottom face and Edge 1 due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at 13 mm separation. Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

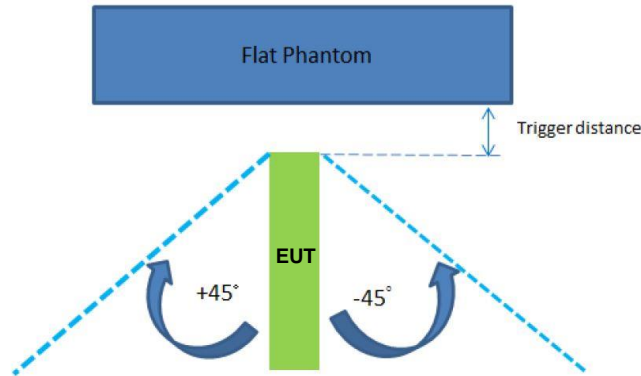

| The Sensor Trigger Distance (mm) | |
|----------------------------------|--------|
| Position | Edge 1 |
| Minimum | 16 |

Proximity sensor power reduction

| Exposure Position / wireless mode | Bottom Face ⁽¹⁾ | Edge 1 ⁽¹⁾ | Edge 2 | Edge 3 | Edge 4 |
|-----------------------------------|----------------------------|-----------------------|--------|--------|--------|
| WCDMA Band II | 4 dB | 4 dB | 0 dB | 0 dB | 0 dB |
| WCDMA Band IV | 6 dB | 6 dB | 0 dB | 0 dB | 0 dB |
| WCDMA Band V | 3 dB | 3 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 2 | 4 dB | 4 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 4 | 5.5 dB | 5.5 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 5 | 2.5 dB | 2.5 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 7 | 6 dB | 6 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 13 | 2.5 dB | 2.5 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 14 | 3 dB | 3 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 25 | 4 dB | 4 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 26 | 2.5 dB | 2.5 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 38 | 5 dB | 5 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 41 | 5 dB | 5 dB | 0 dB | 0 dB | 0 dB |
| LTE Band 66 | 6 dB | 6 dB | 0 dB | 0 dB | 0 dB |



Remark:



1. ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
2. Power reduction is not applicable for WLAN and Bluetooth.
3. Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
4. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Bottom Face: [3 mm](#)
 - Edge1: [15 mm](#)



Power Measurement during Sensor Trigger distance testing

| Band/Mode | Measured power reduction (dBm) | | Reduction Levels (dB) |
|---------------|--------------------------------|-------------------|-----------------------|
| | w/o power back-off | w/ power back-off | |
| WCDMA Band II | 23.39 | 19.18 | 4.21 |
| WCDMA Band IV | 24.20 | 18.48 | 5.72 |
| WCDMA Band V | 24.30 | 20.94 | 3.36 |
| LTE Band 2 | 23.07 | 18.51 | 4.56 |
| LTE Band 4 | 23.81 | 17.78 | 6.03 |
| LTE Band 5 | 23.53 | 20.45 | 3.08 |
| LTE Band 7 | 23.36 | 16.55 | 6.81 |
| LTE Band 13 | 23.89 | 20.88 | 3.01 |
| LTE Band 14 | 23.86 | 20.39 | 3.47 |
| LTE Band 25 | 23.12 | 18.54 | 4.58 |
| LTE Band 26 | 23.53 | 20.57 | 2.96 |
| LTE Band 38 | 23.79 | 18.27 | 5.52 |
| LTE Band 41 | 23.00 | 18.13 | 4.87 |
| LTE Band 66 | 24.41 | 17.81 | 6.6 |

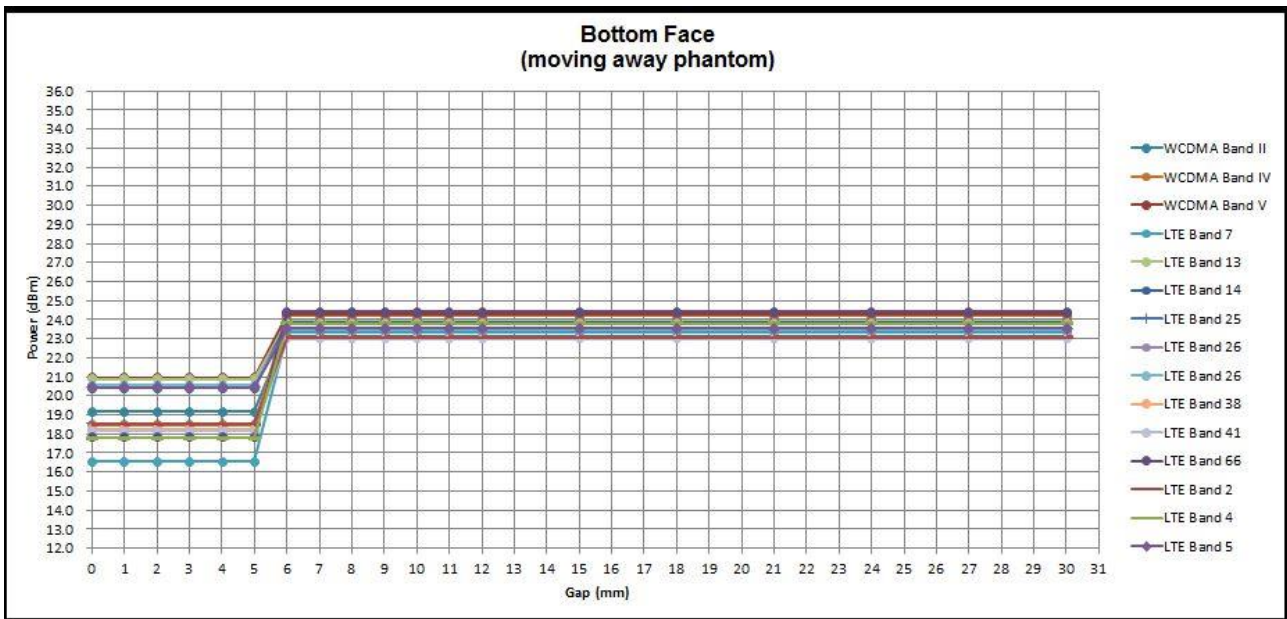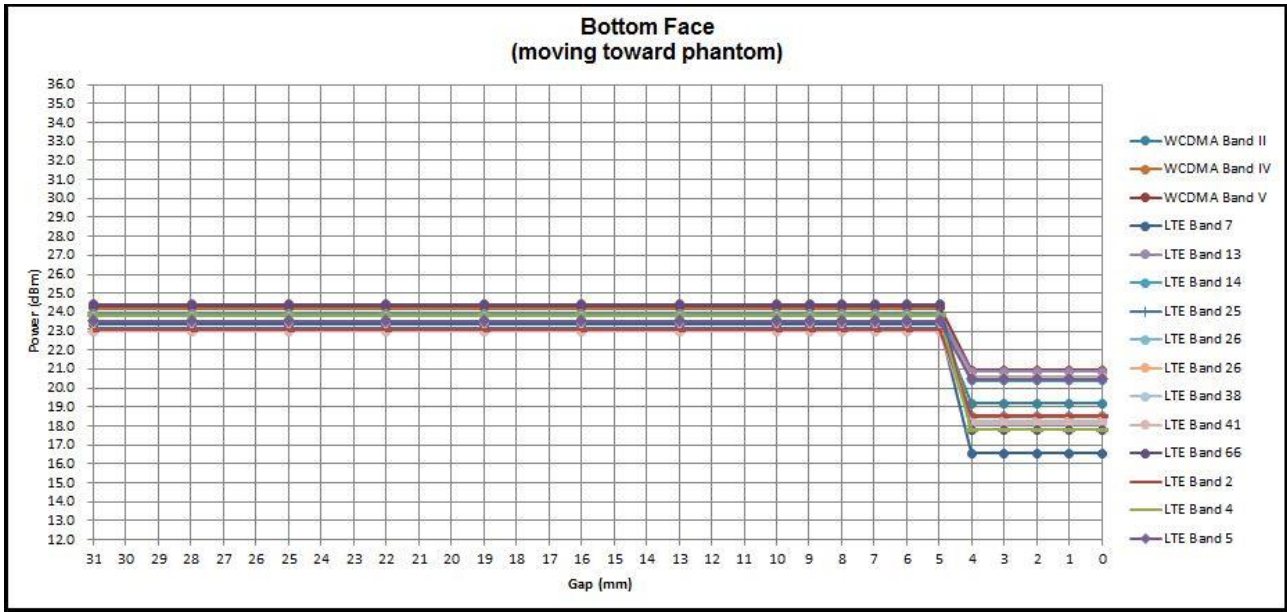

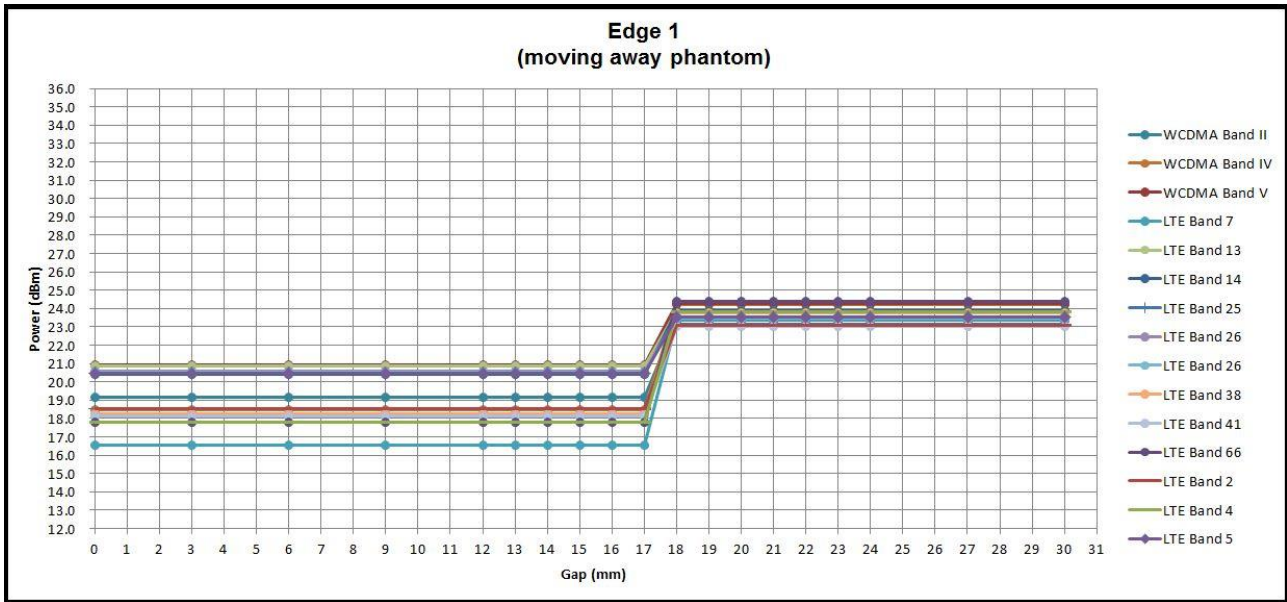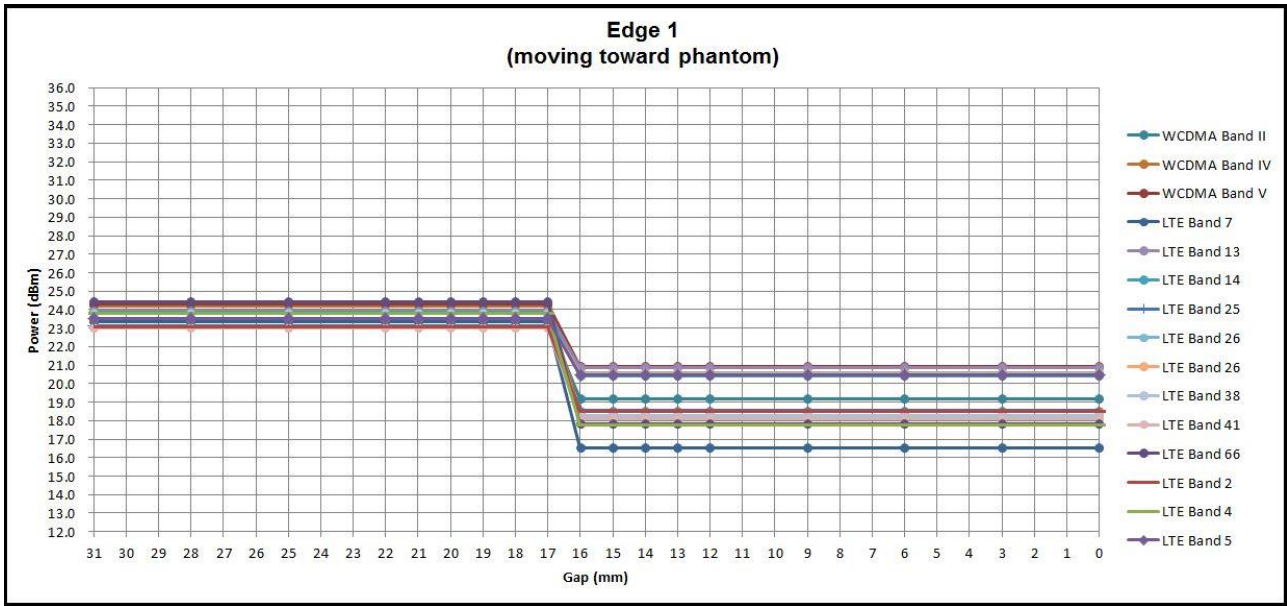



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4 | 8.0 | 20.0 |

Limits for General Population/Uncontrolled Exposure (W/kg)

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08 | 1.6 | 4.0 |

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

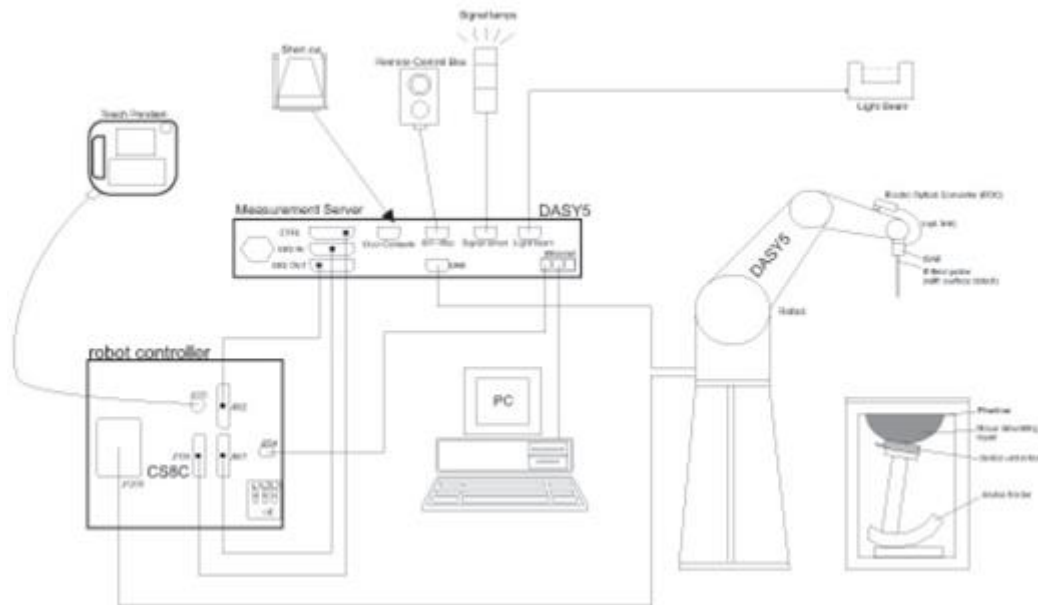


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

| | | |
|----------------------|--|--|
| Construction | Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| Frequency | 10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz) | |
| Directivity | ±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis) | |
| Dynamic Range | 5 µW/g – >100 mW/g; Linearity: ±0.2 dB | |
| Dimensions | Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm | |

<EX3DV4 Probe>

| | | |
|----------------------|---|---|
| Construction | Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| Frequency | 10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz) | |
| Directivity | ±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis) | |
| Dynamic Range | 10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g) | |
| Dimensions | Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm | |

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.3 Phantom

<SAM Twin Phantom>

| | | |
|--------------------------|---|--|
| Shell Thickness | 2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm |  |
| Filling Volume | Approx. 25 liters | |
| Dimensions | Length: 1000 mm; Width: 500 mm; Height: adjustable feet | |
| Measurement Areas | Left Hand, Right Hand, Flat Phantom | |

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>
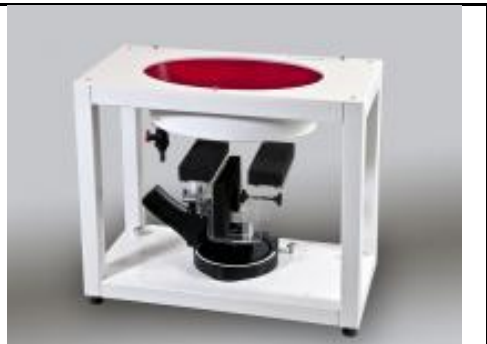
| | | |
|------------------------|--|---|
| Shell Thickness | 2 ± 0.2 mm (sagging: <1%) |  |
| Filling Volume | Approx. 30 liters | |
| Dimensions | Major ellipse axis: 600 mm Minor axis: 400 mm | |

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

| | ≤ 3 GHz | > 3 GHz |
|--|---|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | 30° ± 1° | 20° ± 1° |
| Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$ | ≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm |
| | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

| | | ≤ 3 GHz | > 3 GHz | |
|--|------------------------------------|--|---|--|
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$ | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* | |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm | |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ | |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm | |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | | |

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

| Manufacturer | Name of Equipment | Type/Model | Serial Number | Calibration | |
|---------------|---------------------------------|-----------------|---------------|---------------|---------------|
| | | | | Last Cal. | Due Date |
| SPEAG | 750MHz System Validation Kit | D750V3 | 1012 | Sep. 05, 2018 | Sep. 04, 2019 |
| SPEAG | 835MHz System Validation Kit | D835V2 | 499 | Sep. 06, 2018 | Sep. 05, 2019 |
| SPEAG | 1750MHz System Validation Kit | D1750V2 | 1068 | Nov. 19, 2018 | Nov. 18, 2019 |
| SPEAG | 1900MHz System Validation Kit | D1900V2 | 5d041 | Sep. 11, 2018 | Sep. 10, 2019 |
| SPEAG | 2450MHz System Validation Kit | D2450V2 | 736 | Aug. 31, 2018 | Aug. 30, 2019 |
| SPEAG | 2600MHz System Validation Kit | D2600V2 | 1008 | Aug. 31, 2018 | Aug. 30, 2019 |
| SPEAG | 5GHz System Validation Kit | D5GHzV2 | 1006 | Sep. 27, 2018 | Sep. 26, 2019 |
| SPEAG | Data Acquisition Electronics | DAE3 | 495 | May. 24, 2018 | May. 23, 2019 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1326 | Sep. 18, 2018 | Sep. 17, 2019 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1399 | Nov. 16, 2018 | Nov. 15, 2019 |
| SPEAG | Dosimetric E-Field Probe | ES3DV3 | 3169 | May. 28, 2018 | May. 27, 2019 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3931 | Sep. 27, 2018 | Sep. 26, 2019 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 7306 | Jul. 26, 2018 | Jul. 25, 2019 |
| RCPTWN | Thermometer | HTC-1 | TM685-1 | Nov. 12, 2018 | Nov. 11, 2019 |
| RCPTWN | Thermometer | HTC-1 | TM560-2 | Nov. 12, 2018 | Nov. 11, 2019 |
| Anritsu | Radio Communication Analyzer | MT8821C | 6201341950 | Apr. 17, 2018 | Apr. 16, 2019 |
| Agilent | Wireless Communication Test Set | E5515C | MY50266977 | May. 21, 2018 | May. 20, 2019 |
| R&S | BT Base Station | CBT32 | 100519 | May. 30, 2018 | May. 29, 2019 |
| SPEAG | Device Holder | N/A | N/A | N/A | N/A |
| Anritsu | Signal Generator | MG3710A | 6201502524 | Dec. 11, 2018 | Dec. 10, 2019 |
| Agilent | ENA Network Analyzer | E5071C | MY46104758 | Sep. 19, 2018 | Sep. 18, 2019 |
| SPEAG | Dielectric Probe Kit | DAK-3.5 | 1126 | Sep. 19, 2018 | Sep. 18, 2019 |
| LINE SEIKI | Digital Thermometer | DTM3000-spezial | 3169 | Sep. 11, 2018 | Sep. 10, 2019 |
| Anritsu | Power Meter | ML2495A | 1419002 | May. 18, 2018 | May. 17, 2019 |
| Anritsu | Power Sensor | MA2411B | 1339124 | May. 18, 2018 | May. 17, 2019 |
| Anritsu | Power Meter | ML2495A | 1240001 | Sep. 13, 2018 | Sep. 12, 2019 |
| Anritsu | Power Sensor | MA2411B | 1207349 | Sep. 13, 2018 | Sep. 12, 2019 |
| Agilent | Spectrum Analyzer | E4408B | MY44211028 | Aug. 28, 2018 | Aug. 27, 2019 |
| Anritsu | Spectrum Analyzer | MS2830A | 6201396378 | Jun. 23, 2018 | Jun. 22, 2019 |
| Mini-Circuits | Power Amplifier | ZVE-8G+ | 070501814 | Oct. 08, 2018 | Oct. 07, 2019 |
| Mini-Circuits | Power Amplifier | ZVE-8G+ | 6382 | Aug. 09, 2018 | Aug. 08, 2019 |
| ATM | Dual Directional Coupler | C122H-10 | P610410z-02 | Note 1 | |
| Woken | Attenuator 1 | WK0602-XX | N/A | Note 1 | |
| PE | Attenuator 2 | PE7005-10 | N/A | Note 1 | |
| PE | Attenuator 3 | PE7005-3 | N/A | Note 1 | |

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR

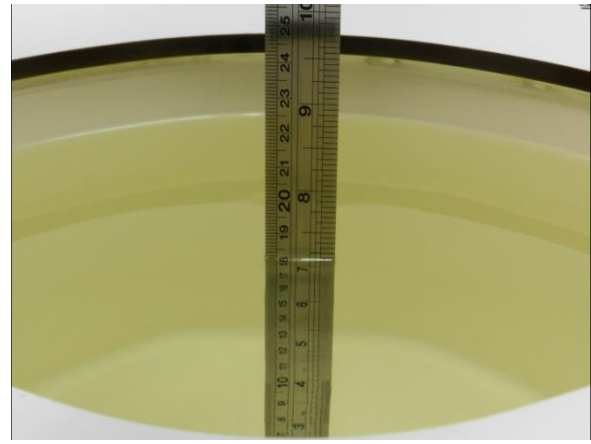


Fig 10.2 Photo of Liquid Height for Body SAR



10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Frequency (MHz) | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity (σ) | Permittivity (εr) |
|------------------|-----------|-----------|---------------|----------|---------------|----------|------------------|-------------------|
| For Head | | | | | | | | |
| 750 | 41.1 | 57.0 | 0.2 | 1.4 | 0.2 | 0 | 0.89 | 41.9 |
| 835 | 40.3 | 57.9 | 0.2 | 1.4 | 0.2 | 0 | 0.90 | 41.5 |
| 900 | 40.3 | 57.9 | 0.2 | 1.4 | 0.2 | 0 | 0.97 | 41.5 |
| 1800, 1900, 2000 | 55.2 | 0 | 0 | 0.3 | 0 | 44.5 | 1.40 | 40.0 |
| 2450 | 55.0 | 0 | 0 | 0 | 0 | 45.0 | 1.80 | 39.2 |
| 2600 | 54.8 | 0 | 0 | 0.1 | 0 | 45.1 | 1.96 | 39.0 |
| For Body | | | | | | | | |
| 750 | 51.7 | 47.2 | 0 | 0.9 | 0.1 | 0 | 0.96 | 55.5 |
| 835 | 50.8 | 48.2 | 0 | 0.9 | 0.1 | 0 | 0.97 | 55.2 |
| 900 | 50.8 | 48.2 | 0 | 0.9 | 0.1 | 0 | 1.05 | 55.0 |
| 1800, 1900, 2000 | 70.2 | 0 | 0 | 0.4 | 0 | 29.4 | 1.52 | 53.3 |
| 2450 | 68.6 | 0 | 0 | 0 | 0 | 31.4 | 1.95 | 52.7 |
| 2600 | 68.1 | 0 | 0 | 0.1 | 0 | 31.8 | 2.16 | 52.5 |

Simulating Liquid for 5GHz, Manufactured by SPEAG

| Ingredients | (% by weight) |
|--------------------|---------------|
| Water | 64~78% |
| Mineral oil | 11~18% |
| Emulsifiers | 9~15% |
| Additives and Salt | 2~3% |

<Tissue Dielectric Parameter Check Results>

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Conductivity (σ) | Permittivity (εr) | Conductivity Target (σ) | Permittivity Target (εr) | Delta (σ) (%) | Delta (εr) (%) | Limit (%) | Date |
|-----------------|-------------|-------------------|------------------|-------------------|-------------------------|--------------------------|---------------|----------------|-----------|-----------|
| 750 | MSL | 22.6 | 0.951 | 54.242 | 0.96 | 55.50 | -0.94 | -2.27 | ±5 | 2019/4/4 |
| 750 | MSL | 22.7 | 0.968 | 55.233 | 0.96 | 55.50 | 0.83 | -0.48 | ±5 | 2019/4/11 |
| 835 | MSL | 22.6 | 0.940 | 54.574 | 0.97 | 55.20 | -3.09 | -1.13 | ±5 | 2019/4/3 |
| 835 | MSL | 22.7 | 0.939 | 54.515 | 0.97 | 55.20 | -3.20 | -1.24 | ±5 | 2019/4/11 |
| 1750 | MSL | 22.4 | 1.448 | 55.766 | 1.49 | 53.40 | -2.82 | 4.43 | ±5 | 2019/4/8 |
| 1750 | MSL | 22.2 | 1.518 | 53.357 | 1.49 | 53.40 | 1.88 | -0.08 | ±5 | 2019/4/12 |
| 1900 | MSL | 22.4 | 1.536 | 53.065 | 1.52 | 53.30 | 1.05 | -0.44 | ±5 | 2019/4/7 |
| 1900 | MSL | 22.2 | 1.523 | 52.039 | 1.52 | 53.30 | 0.20 | -2.37 | ±5 | 2019/4/12 |
| 2450 | MSL | 22.3 | 1.992 | 52.989 | 1.95 | 52.70 | 2.15 | 0.55 | ±5 | 2019/4/22 |
| 2450 | MSL | 22.3 | 1.992 | 52.989 | 1.95 | 52.70 | 2.15 | 0.55 | ±5 | 2019/4/22 |
| 2600 | MSL | 22.5 | 2.215 | 51.508 | 2.16 | 52.50 | 2.55 | -1.89 | ±5 | 2019/4/9 |
| 5250 | MSL | 22.5 | 5.433 | 47.893 | 5.36 | 48.95 | 1.36 | -2.16 | ±5 | 2019/4/21 |
| 5600 | MSL | 22.5 | 5.892 | 47.241 | 5.77 | 48.50 | 2.11 | -2.60 | ±5 | 2019/4/21 |
| 5750 | MSL | 22.5 | 6.112 | 46.912 | 5.94 | 48.28 | 2.90 | -2.83 | ±5 | 2019/4/21 |

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Date | Frequency (MHz) | Tissue Type | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured 1g SAR (W/kg) | Targeted 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) |
|-----------|-----------------|-------------|------------------|---------------|-----------------|-------------|------------------------|------------------------|--------------------------|---------------|
| 2019/4/4 | 750 | MSL | 250 | D750V3-1012 | ES3DV3 - SN3169 | DAE4 Sn1326 | 2.27 | 8.76 | 9.08 | 3.65 |
| 2019/4/11 | 750 | MSL | 250 | D750V3-1012 | EX3DV4 - SN7306 | DAE3 Sn495 | 2.30 | 8.76 | 9.2 | 5.02 |
| 2019/4/3 | 835 | MSL | 250 | D835V2-499 | ES3DV3 - SN3169 | DAE4 Sn1326 | 2.35 | 9.82 | 9.4 | -4.28 |
| 2019/4/11 | 835 | MSL | 250 | D835V2-499 | EX3DV4 - SN7306 | DAE3 Sn495 | 2.48 | 9.82 | 9.92 | 1.02 |
| 2019/4/8 | 1750 | MSL | 250 | D1750V2-1068 | ES3DV3 - SN3169 | DAE4 Sn1326 | 9.20 | 37.00 | 36.8 | -0.54 |
| 2019/4/12 | 1750 | MSL | 250 | D1750V2-1068 | EX3DV4 - SN7306 | DAE3 Sn495 | 9.65 | 37.00 | 38.6 | 4.32 |
| 2019/4/7 | 1900 | MSL | 250 | D1900V2-5d041 | ES3DV3 - SN3169 | DAE4 Sn1326 | 9.98 | 40.20 | 39.92 | -0.70 |
| 2019/4/12 | 1900 | MSL | 250 | D1900V2-5d041 | EX3DV4 - SN7306 | DAE3 Sn495 | 10.50 | 40.20 | 42 | 4.48 |
| 2019/4/22 | 2450 | MSL | 250 | D2450V2-736 | EX3DV4 - SN3931 | DAE4 Sn1399 | 13.00 | 51.50 | 52 | 0.97 |
| 2019/4/22 | 2450 | MSL | 250 | D2450V2-736 | ES3DV3 - SN3169 | DAE4 Sn1399 | 12.80 | 51.50 | 51.2 | -0.58 |
| 2019/4/9 | 2600 | MSL | 250 | D2600V2-1008 | EX3DV4 - SN7306 | DAE3 Sn495 | 13.60 | 55.30 | 54.4 | -1.63 |
| 2019/4/21 | 5250 | MSL | 100 | D5GHzV2-1006 | EX3DV4 - SN3931 | DAE4 Sn1399 | 8.04 | 78.30 | 80.4 | 2.68 |
| 2019/4/21 | 5600 | MSL | 100 | D5GHzV2-1006 | EX3DV4 - SN3931 | DAE4 Sn1399 | 8.39 | 81.00 | 83.9 | 3.58 |
| 2019/4/21 | 5750 | MSL | 100 | D5GHzV2-1006 | EX3DV4 - SN3931 | DAE4 Sn1399 | 7.46 | 77.40 | 74.6 | -3.62 |

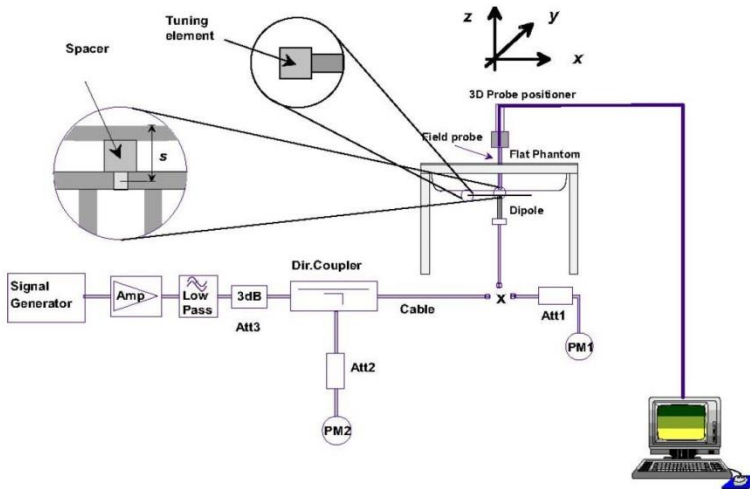


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. Conducted RF Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

| Sub-test | β_c | β_d | β_d (SF) | β_c/β_d | β_{hs} (Note 1, Note 2) | CM (dB) (Note 3) | MPR (dB) (Note 3) |
|----------|-------------------|-------------------|-------------------|-------------------|-------------------------------------|---------------------|----------------------|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 0.0 | 0.0 |
| 2 | 12/15 (Note 4) | 15/15 (Note 4) | 64 | 12/15 (Note 4) | 24/15 | 1.0 | 0.0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 1.5 | 0.5 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 1.5 | 0.5 |

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

| Sub-test | β_c | β_d | β_d (SF) | β_c/β_d | β_{HS} (Note1) | β_{ec} | β_{ed} (Note 4) (Note 5) | β_{ed} (SF) | β_{ed} (Codes) | CM (dB) (Note 2) | MPR (dB) (Note 2) (Note 6) | AG Index (Note 5) | E-TFCl |
|----------|----------------|----------------|----------------|-------------------|----------------------|--------------|--|-------------------|----------------------|------------------|----------------------------|-------------------|--------|
| 1 | 11/15 (Note 3) | 15/15 (Note 3) | 64 | 11/15 (Note 3) | 22/15 | 209/25 | 1309/225 | 4 | 1 | 1.0 | 0.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 94/75 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | $\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$ | 4 4 | 2 | 2.0 | 1.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 2/15 | 56/75 | 4 | 1 | 3.0 | 2.0 | 17 | 71 |
| 5 | 15/15 | 0 | - | - | 5/15 | 5/15 | 47/15 | 4 | 1 | 1.0 | 0.0 | 12 | 67 |

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

| Parameter | Unit | Value |
|--|-----------|-------|
| Nominal Avg. Inf. Bit Rate | kbps | 60 |
| Inter-TTI Distance | TTI's | 1 |
| Number of HARQ Processes | Processes | 6 |
| Information Bit Payload (N_{INF}) | Bits | 120 |
| Number Code Blocks | Blocks | 1 |
| Binary Channel Bits Per TTI | Bits | 960 |
| Total Available SML's in UE | SML's | 19200 |
| Number of SML's per HARQ Proc. | SML's | 3200 |
| Coding Rate | | 0.15 |
| Number of Physical Channel Codes | Codes | 1 |
| Modulation | | QPSK |
| Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used. | | |

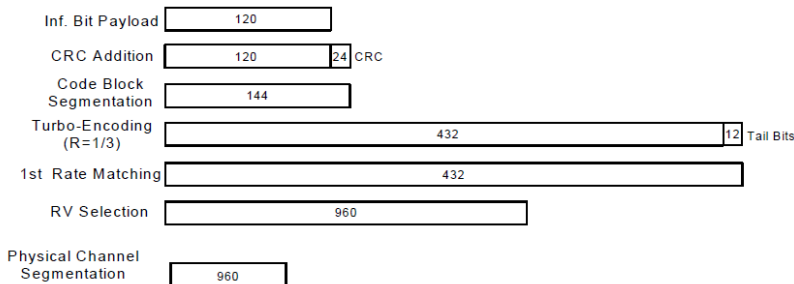


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Parm
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

| Sub-test | β_c (Note 3) | β_d | β_{HS} (Note 1) | β_{ec} | β_{ed} (2xSF2) (Note 4) | β_{ed} (2xSF4) (Note 4) | CM (dB) (Note 2) | MPR (dB) (Note 2) | AG Index (Note 4) | E-TFCI (Note 5) | E-TFCI (boost) |
|----------|-----------------------|-----------|--------------------------|--------------|--|--|------------------------|-------------------------|-------------------------|--------------------|-------------------|
| 1 | 1 | 0 | 30/15 | 30/15 | β_{ed1} : 30/15 β_{ed2} : 30/15 | β_{ed3} : 24/15 β_{ed4} : 24/15 | 3.5 | 2.5 | 14 | 105 | 105 |

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+ are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<Default Power Mode>

| Band | | WCDMA II | | | Tune-up Limit (dBm) | WCDMA IV | | | Tune-up Limit (dBm) | WCDMA V | | | Tune-up Limit (dBm) |
|-----------------|-------------------------|----------|-------|--------|---------------------|----------|--------|-------|---------------------|---------|-------|-------|---------------------|
| TX Channel | Rx Channel | 9262 | 9400 | 9538 | | 1312 | 1413 | 1513 | | 4132 | 4182 | 4233 | |
| Frequency (MHz) | | 1852.4 | 1880 | 1907.6 | 1712.4 | 1732.6 | 1752.6 | 826.4 | 836.4 | 846.6 | | | |
| 3GPP Rel 99 | RMC 12.2Kbps | 23.30 | 23.39 | 23.31 | 23.50 | 24.11 | 24.20 | 24.17 | 24.50 | 24.34 | 24.30 | 24.27 | 24.50 |
| 3GPP Rel 6 | HSDPA Subtest-1 | 22.35 | 22.50 | 22.44 | 22.50 | 22.99 | 23.20 | 23.27 | 23.50 | 23.39 | 23.38 | 23.33 | 23.50 |
| 3GPP Rel 6 | HSDPA Subtest-2 | 22.41 | 22.48 | 22.45 | 22.50 | 23.02 | 23.18 | 23.24 | 23.50 | 23.43 | 23.34 | 23.31 | 23.50 |
| 3GPP Rel 6 | HSDPA Subtest-3 | 21.93 | 21.99 | 22.00 | 22.00 | 22.53 | 22.68 | 22.75 | 23.00 | 22.93 | 22.88 | 22.84 | 23.00 |
| 3GPP Rel 6 | HSDPA Subtest-4 | 21.89 | 21.98 | 21.97 | 22.00 | 22.51 | 22.68 | 22.75 | 23.00 | 22.91 | 22.86 | 22.84 | 23.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest-1 | 22.34 | 22.44 | 22.38 | 22.50 | 22.96 | 23.12 | 23.25 | 23.50 | 23.35 | 23.30 | 23.33 | 23.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest-2 | 22.37 | 22.47 | 22.45 | 22.50 | 22.99 | 23.08 | 23.15 | 23.50 | 23.38 | 23.30 | 23.21 | 23.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest-3 | 21.87 | 21.97 | 21.91 | 22.00 | 22.47 | 22.59 | 22.74 | 23.00 | 22.93 | 22.84 | 22.79 | 23.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest-4 | 21.83 | 21.98 | 21.95 | 22.00 | 22.46 | 22.59 | 22.67 | 23.00 | 22.86 | 22.79 | 22.77 | 23.00 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 22.39 | 22.49 | 22.49 | 22.50 | 23.03 | 23.20 | 23.28 | 23.50 | 23.39 | 23.40 | 23.36 | 23.50 |
| 3GPP Rel 6 | HSUPA Subtest-2 | 20.32 | 20.48 | 20.49 | 20.50 | 21.04 | 21.21 | 21.27 | 21.50 | 21.49 | 21.38 | 21.40 | 21.50 |
| 3GPP Rel 6 | HSUPA Subtest-3 | 21.40 | 21.50 | 21.50 | 21.50 | 22.02 | 22.23 | 22.02 | 22.50 | 22.42 | 22.37 | 22.27 | 22.50 |
| 3GPP Rel 6 | HSUPA Subtest-4 | 20.41 | 20.50 | 20.49 | 20.50 | 21.03 | 21.23 | 21.28 | 21.50 | 21.38 | 21.37 | 21.33 | 21.50 |
| 3GPP Rel 6 | HSUPA Subtest-5 | 22.40 | 22.50 | 22.50 | 22.50 | 23.10 | 23.20 | 23.20 | 23.50 | 23.40 | 23.40 | 23.40 | 23.50 |
| 3GPP Rel 7 | HSPA+ (16QAM) Subtest-1 | 19.56 | 19.67 | 19.62 | 20.00 | 20.45 | 20.58 | 20.55 | 21.00 | 20.48 | 20.62 | 20.58 | 21.00 |

<Reduced Power Mode>

| Band | | WCDMA II | | | Tune-up Limit (dBm) | WCDMA IV | | | Tune-up Limit (dBm) | WCDMA V | | | Tune-up Limit (dBm) |
|-----------------|-------------------------|----------|-------|--------|---------------------|----------|--------|-------|---------------------|---------|-------|-------|---------------------|
| TX Channel | Rx Channel | 9262 | 9400 | 9538 | | 1312 | 1413 | 1513 | | 4132 | 4182 | 4233 | |
| Frequency (MHz) | | 1852.4 | 1880 | 1907.6 | 1712.4 | 1732.6 | 1752.6 | 826.4 | 836.4 | 846.6 | | | |
| 3GPP Rel 99 | RMC 12.2Kbps | 18.82 | 19.18 | 18.57 | 19.50 | 17.88 | 18.48 | 18.29 | 18.50 | 20.91 | 20.94 | 20.89 | 21.50 |
| 3GPP Rel 6 | HSDPA Subtest-1 | 17.72 | 17.85 | 17.84 | 18.50 | 16.90 | 17.05 | 17.08 | 17.50 | 19.74 | 19.73 | 19.71 | 20.50 |
| 3GPP Rel 6 | HSDPA Subtest-2 | 17.78 | 17.93 | 17.88 | 18.50 | 16.90 | 17.08 | 17.12 | 17.50 | 19.80 | 19.73 | 19.69 | 20.50 |
| 3GPP Rel 6 | HSDPA Subtest-3 | 16.86 | 17.03 | 17.40 | 18.00 | 16.43 | 16.55 | 16.57 | 17.00 | 19.27 | 19.21 | 19.25 | 20.00 |
| 3GPP Rel 6 | HSDPA Subtest-4 | 17.28 | 17.38 | 17.39 | 18.00 | 16.38 | 16.58 | 16.57 | 17.00 | 19.27 | 19.27 | 19.23 | 20.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest-1 | 17.70 | 17.85 | 17.75 | 18.50 | 16.82 | 16.96 | 17.01 | 17.50 | 19.70 | 19.69 | 19.70 | 20.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest-2 | 17.78 | 17.92 | 17.80 | 18.50 | 16.89 | 16.99 | 17.07 | 17.50 | 19.72 | 19.64 | 19.66 | 20.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest-3 | 16.83 | 16.93 | 17.38 | 18.00 | 16.34 | 16.53 | 16.52 | 17.00 | 19.17 | 19.21 | 19.21 | 20.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest-4 | 17.22 | 17.32 | 17.35 | 18.00 | 16.28 | 16.48 | 16.51 | 17.00 | 19.26 | 19.27 | 19.18 | 20.00 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 17.66 | 17.77 | 17.82 | 18.50 | 16.90 | 17.01 | 16.90 | 17.50 | 19.78 | 19.73 | 19.73 | 20.50 |
| 3GPP Rel 6 | HSUPA Subtest-2 | 15.70 | 15.67 | 15.77 | 16.50 | 15.03 | 15.01 | 15.00 | 15.50 | 17.73 | 17.72 | 17.73 | 18.50 |
| 3GPP Rel 6 | HSUPA Subtest-3 | 16.70 | 16.66 | 16.58 | 17.50 | 16.02 | 16.01 | 15.99 | 16.50 | 18.79 | 18.76 | 18.73 | 19.50 |
| 3GPP Rel 6 | HSUPA Subtest-4 | 15.80 | 15.77 | 15.72 | 16.50 | 15.00 | 15.03 | 15.06 | 15.50 | 17.72 | 17.70 | 17.66 | 18.50 |
| 3GPP Rel 6 | HSUPA Subtest-5 | 17.70 | 17.80 | 17.90 | 18.50 | 16.90 | 17.00 | 16.60 | 17.50 | 19.80 | 19.70 | 19.60 | 20.50 |
| 3GPP Rel 7 | HSPA+ (16QAM) Subtest-1 | 15.56 | 15.62 | 15.65 | 16.00 | 14.52 | 14.65 | 14.58 | 15.00 | 17.51 | 17.61 | 17.54 | 18.00 |


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12/ B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/38 SAR test was covered by Band 25/66/26/ 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM

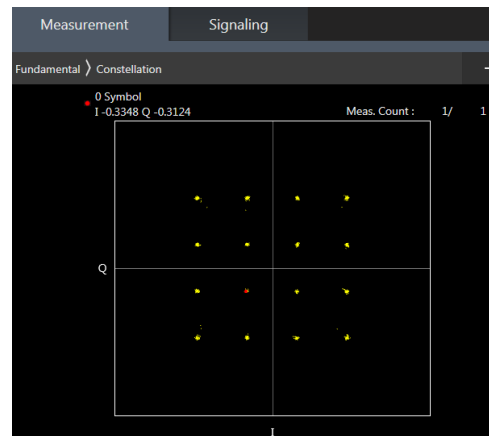

16QAM



<Default Power Mode>

<LTE Band 2>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 18700 | 18900 | 19100 | | |
| Frequency (MHz) | | | | 1860 | 1880 | 1900 | | |
| 20 | QPSK | 1 | 0 | 23.05 | 23.07 | 22.97 | 23.5 | 0 |
| 20 | QPSK | 1 | 49 | 23.01 | 23.06 | 22.95 | | |
| 20 | QPSK | 1 | 99 | 23.00 | 23.05 | 22.93 | | |
| 20 | QPSK | 50 | 0 | 22.00 | 22.12 | 22.07 | 22.5 | 1 |
| 20 | QPSK | 50 | 24 | 22.06 | 22.11 | 22.05 | | |
| 20 | QPSK | 50 | 50 | 22.02 | 22.10 | 21.99 | | |
| 20 | QPSK | 100 | 0 | 22.02 | 22.10 | 22.09 | | |
| 20 | 16QAM | 1 | 0 | 22.48 | 22.47 | 22.34 | 22.5 | 1 |
| 20 | 16QAM | 1 | 49 | 22.40 | 22.48 | 22.33 | | |
| 20 | 16QAM | 1 | 99 | 22.39 | 22.43 | 22.31 | | |
| 20 | 16QAM | 50 | 0 | 21.15 | 21.21 | 21.19 | 21.5 | 2 |
| 20 | 16QAM | 50 | 24 | 21.21 | 21.26 | 21.14 | | |
| 20 | 16QAM | 50 | 50 | 21.19 | 21.22 | 21.14 | | |
| 20 | 16QAM | 100 | 0 | 21.16 | 21.22 | 21.22 | | |
| 20 | 64QAM | 1 | 0 | 21.39 | 21.41 | 21.28 | 21.5 | 2 |
| 20 | 64QAM | 1 | 49 | 21.36 | 21.44 | 21.28 | | |
| 20 | 64QAM | 1 | 99 | 21.33 | 21.36 | 21.22 | | |
| 20 | 64QAM | 50 | 0 | 20.15 | 20.24 | 20.23 | 20.5 | 3 |
| 20 | 64QAM | 50 | 24 | 20.22 | 20.27 | 20.17 | | |
| 20 | 64QAM | 50 | 50 | 20.19 | 20.24 | 20.16 | | |
| 20 | 64QAM | 100 | 0 | 20.16 | 20.26 | 20.22 | | |
| Channel | | | | 18675 | 18900 | 19125 | | |
| Frequency (MHz) | | | | 1857.5 | 1880 | 1902.5 | | |
| 15 | QPSK | 1 | 0 | 23.04 | 23.04 | 22.92 | 23.5 | 0 |
| 15 | QPSK | 1 | 37 | 22.94 | 23.06 | 22.94 | | |
| 15 | QPSK | 1 | 74 | 22.90 | 22.96 | 22.92 | | |
| 15 | QPSK | 36 | 0 | 21.99 | 22.11 | 22.06 | 22.5 | 1 |
| 15 | QPSK | 36 | 20 | 22.01 | 22.04 | 22.00 | | |
| 15 | QPSK | 36 | 39 | 22.01 | 22.02 | 21.96 | | |
| 15 | QPSK | 75 | 0 | 22.00 | 22.04 | 22.00 | | |
| 15 | 16QAM | 1 | 0 | 22.39 | 22.44 | 22.25 | 22.5 | 1 |
| 15 | 16QAM | 1 | 37 | 22.36 | 22.38 | 22.25 | | |
| 15 | 16QAM | 1 | 74 | 22.33 | 22.41 | 22.23 | | |
| 15 | 16QAM | 36 | 0 | 21.13 | 21.21 | 21.09 | 21.5 | 2 |
| 15 | 16QAM | 36 | 20 | 21.20 | 21.20 | 21.06 | | |
| 15 | 16QAM | 36 | 39 | 21.16 | 21.15 | 21.11 | | |
| 15 | 16QAM | 75 | 0 | 21.16 | 21.16 | 21.15 | | |
| 15 | 64QAM | 1 | 0 | 21.35 | 21.39 | 21.24 | 21.5 | 2 |
| 15 | 64QAM | 1 | 37 | 21.26 | 21.41 | 21.18 | | |
| 15 | 64QAM | 1 | 74 | 21.25 | 21.29 | 21.22 | | |
| 15 | 64QAM | 36 | 0 | 20.09 | 20.14 | 20.22 | 20.5 | 3 |
| 15 | 64QAM | 36 | 20 | 20.18 | 20.20 | 20.16 | | |
| 15 | 64QAM | 36 | 39 | 20.18 | 20.17 | 20.13 | | |
| 15 | 64QAM | 75 | 0 | 20.06 | 20.23 | 20.13 | | |



| Channel | | | | 18650 | 18900 | 19150 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1855 | 1880 | 1905 | | |
| 10 | QPSK | 1 | 0 | 22.99 | 22.99 | 22.96 | 23.5 | 0 |
| 10 | QPSK | 1 | 25 | 22.95 | 23.03 | 22.88 | | |
| 10 | QPSK | 1 | 49 | 22.94 | 23.00 | 22.92 | | |
| 10 | QPSK | 25 | 0 | 21.91 | 22.03 | 21.98 | 22.5 | 1 |
| 10 | QPSK | 25 | 12 | 22.03 | 22.04 | 21.99 | | |
| 10 | QPSK | 25 | 25 | 21.97 | 22.03 | 21.91 | | |
| 10 | QPSK | 50 | 0 | 21.94 | 22.05 | 22.08 | 22.5 | 1 |
| 10 | 16QAM | 1 | 0 | 22.40 | 22.43 | 22.26 | | |
| 10 | 16QAM | 1 | 25 | 22.40 | 22.43 | 22.33 | | |
| 10 | 16QAM | 1 | 49 | 22.34 | 22.40 | 22.30 | 21.5 | 2 |
| 10 | 16QAM | 25 | 0 | 21.12 | 21.18 | 21.17 | | |
| 10 | 16QAM | 25 | 12 | 21.13 | 21.26 | 21.08 | | |
| 10 | 16QAM | 25 | 25 | 21.11 | 21.13 | 21.04 | 21.5 | 2 |
| 10 | 16QAM | 50 | 0 | 21.10 | 21.16 | 21.22 | | |
| 10 | 64QAM | 1 | 0 | 21.32 | 21.32 | 21.22 | | |
| 10 | 64QAM | 1 | 25 | 21.29 | 21.39 | 21.23 | 21.5 | 2 |
| 10 | 64QAM | 1 | 49 | 21.31 | 21.27 | 21.12 | | |
| 10 | 64QAM | 25 | 0 | 20.06 | 20.24 | 20.22 | | |
| 10 | 64QAM | 25 | 12 | 20.13 | 20.25 | 20.11 | 20.5 | 3 |
| 10 | 64QAM | 25 | 25 | 20.18 | 20.16 | 20.11 | | |
| 10 | 64QAM | 50 | 0 | 20.16 | 20.19 | 20.20 | | |
| Channel | | | | 18625 | 18900 | 19175 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1852.5 | 1880 | 1907.5 | | |
| 5 | QPSK | 1 | 0 | 23.03 | 23.06 | 22.90 | 23.5 | 0 |
| 5 | QPSK | 1 | 12 | 22.97 | 23.01 | 22.91 | | |
| 5 | QPSK | 1 | 24 | 22.92 | 23.00 | 22.89 | | |
| 5 | QPSK | 12 | 0 | 21.91 | 22.07 | 22.04 | 22.5 | 1 |
| 5 | QPSK | 12 | 7 | 22.01 | 22.03 | 22.04 | | |
| 5 | QPSK | 12 | 13 | 21.97 | 22.10 | 21.96 | | |
| 5 | QPSK | 25 | 0 | 21.92 | 22.00 | 22.02 | 22.5 | 1 |
| 5 | 16QAM | 1 | 0 | 22.44 | 22.37 | 22.28 | | |
| 5 | 16QAM | 1 | 12 | 22.37 | 22.43 | 22.29 | | |
| 5 | 16QAM | 1 | 24 | 22.38 | 22.43 | 22.31 | 21.5 | 2 |
| 5 | 16QAM | 12 | 0 | 21.10 | 21.18 | 21.10 | | |
| 5 | 16QAM | 12 | 7 | 21.12 | 21.19 | 21.11 | | |
| 5 | 16QAM | 12 | 13 | 21.11 | 21.14 | 21.10 | 21.5 | 2 |
| 5 | 16QAM | 25 | 0 | 21.16 | 21.16 | 21.12 | | |
| 5 | 64QAM | 1 | 0 | 21.30 | 21.34 | 21.24 | | |
| 5 | 64QAM | 1 | 12 | 21.33 | 21.39 | 21.24 | 21.5 | 2 |
| 5 | 64QAM | 1 | 24 | 21.30 | 21.32 | 21.16 | | |
| 5 | 64QAM | 12 | 0 | 20.11 | 20.14 | 20.21 | | |
| 5 | 64QAM | 12 | 7 | 20.14 | 20.22 | 20.16 | 20.5 | 3 |
| 5 | 64QAM | 12 | 13 | 20.11 | 20.16 | 20.14 | | |
| 5 | 64QAM | 25 | 0 | 20.06 | 20.17 | 20.21 | | |



| Channel | | | | 18615 | 18900 | 19185 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1851.5 | 1880 | 1908.5 | | |
| 3 | QPSK | 1 | 0 | 22.95 | 22.99 | 22.95 | 23.5 | 0 |
| 3 | QPSK | 1 | 8 | 22.99 | 23.01 | 22.90 | | |
| 3 | QPSK | 1 | 14 | 22.95 | 23.03 | 22.92 | | |
| 3 | QPSK | 8 | 0 | 21.97 | 22.09 | 22.06 | 22.5 | 1 |
| 3 | QPSK | 8 | 4 | 21.99 | 22.03 | 22.01 | | |
| 3 | QPSK | 8 | 7 | 21.94 | 22.01 | 21.92 | | |
| 3 | QPSK | 15 | 0 | 21.94 | 22.10 | 22.06 | | |
| 3 | 16QAM | 1 | 0 | 22.39 | 22.42 | 22.29 | 22.5 | 1 |
| 3 | 16QAM | 1 | 8 | 22.32 | 22.41 | 22.28 | | |
| 3 | 16QAM | 1 | 14 | 22.38 | 22.36 | 22.21 | | |
| 3 | 16QAM | 8 | 0 | 21.10 | 21.12 | 21.15 | 21.5 | 2 |
| 3 | 16QAM | 8 | 4 | 21.17 | 21.16 | 21.10 | | |
| 3 | 16QAM | 8 | 7 | 21.19 | 21.15 | 21.12 | | |
| 3 | 16QAM | 15 | 0 | 21.09 | 21.16 | 21.12 | | |
| 3 | 64QAM | 1 | 0 | 21.37 | 21.32 | 21.25 | 21.5 | 2 |
| 3 | 64QAM | 1 | 8 | 21.26 | 21.41 | 21.26 | | |
| 3 | 64QAM | 1 | 14 | 21.23 | 21.34 | 21.12 | | |
| 3 | 64QAM | 8 | 0 | 20.07 | 20.16 | 20.17 | 20.5 | 3 |
| 3 | 64QAM | 8 | 4 | 20.21 | 20.17 | 20.17 | | |
| 3 | 64QAM | 8 | 7 | 20.15 | 20.17 | 20.12 | | |
| 3 | 64QAM | 15 | 0 | 20.06 | 20.26 | 20.19 | | |
| Channel | | | | 18607 | 18900 | 19193 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1850.7 | 1880 | 1909.3 | | |
| 1.4 | QPSK | 1 | 0 | 23.00 | 23.06 | 22.90 | 23.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 22.98 | 23.01 | 22.95 | | |
| 1.4 | QPSK | 1 | 5 | 22.99 | 22.98 | 22.87 | | |
| 1.4 | QPSK | 3 | 0 | 21.98 | 22.04 | 22.06 | | |
| 1.4 | QPSK | 3 | 1 | 22.00 | 22.05 | 22.05 | | |
| 1.4 | QPSK | 3 | 3 | 22.02 | 22.07 | 21.91 | | |
| 1.4 | QPSK | 6 | 0 | 22.00 | 22.09 | 22.02 | 22.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 22.45 | 22.37 | 22.24 | 22.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 22.30 | 22.45 | 22.24 | | |
| 1.4 | 16QAM | 1 | 5 | 22.39 | 22.35 | 22.23 | | |
| 1.4 | 16QAM | 3 | 0 | 21.13 | 21.21 | 21.12 | | |
| 1.4 | 16QAM | 3 | 1 | 21.13 | 21.20 | 21.14 | | |
| 1.4 | 16QAM | 3 | 3 | 21.10 | 21.16 | 21.08 | | |
| 1.4 | 16QAM | 6 | 0 | 21.14 | 21.12 | 21.19 | 21.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 21.38 | 21.39 | 21.21 | 21.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 21.31 | 21.36 | 21.26 | | |
| 1.4 | 64QAM | 1 | 5 | 21.31 | 21.28 | 21.16 | | |
| 1.4 | 64QAM | 3 | 0 | 20.14 | 20.22 | 20.20 | | |
| 1.4 | 64QAM | 3 | 1 | 20.15 | 20.20 | 20.09 | | |
| 1.4 | 64QAM | 3 | 3 | 20.14 | 20.24 | 20.09 | | |
| 1.4 | 64QAM | 6 | 0 | 20.10 | 20.26 | 20.14 | 20.5 | 3 |



<LTE Band 4>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20050 | 20175 | 20300 | | |
| Frequency (MHz) | | | | 1720 | 1732.5 | 1745 | | |
| 20 | QPSK | 1 | 0 | 23.57 | 23.81 | 23.78 | 24 | 0 |
| 20 | QPSK | 1 | 49 | 23.59 | 23.72 | 23.71 | | |
| 20 | QPSK | 1 | 99 | 23.63 | 23.68 | 23.70 | | |
| 20 | QPSK | 50 | 0 | 22.63 | 22.88 | 22.82 | 23 | 1 |
| 20 | QPSK | 50 | 24 | 22.79 | 22.83 | 22.87 | | |
| 20 | QPSK | 50 | 50 | 22.71 | 22.75 | 22.78 | | |
| 20 | QPSK | 100 | 0 | 22.74 | 22.83 | 22.82 | | |
| 20 | 16QAM | 1 | 0 | 22.89 | 22.86 | 22.99 | 23 | 1 |
| 20 | 16QAM | 1 | 49 | 22.92 | 22.88 | 23.00 | | |
| 20 | 16QAM | 1 | 99 | 22.93 | 22.88 | 22.88 | | |
| 20 | 16QAM | 50 | 0 | 21.77 | 21.89 | 21.96 | 22 | 2 |
| 20 | 16QAM | 50 | 24 | 21.88 | 21.92 | 21.97 | | |
| 20 | 16QAM | 50 | 50 | 21.85 | 21.87 | 21.91 | | |
| 20 | 16QAM | 100 | 0 | 21.81 | 21.86 | 21.90 | | |
| 20 | 64QAM | 1 | 0 | 21.86 | 21.98 | 21.97 | 22 | 2 |
| 20 | 64QAM | 1 | 49 | 21.91 | 21.91 | 21.98 | | |
| 20 | 64QAM | 1 | 99 | 21.92 | 21.98 | 21.96 | | |
| 20 | 64QAM | 50 | 0 | 20.76 | 20.93 | 20.96 | 21 | 3 |
| 20 | 64QAM | 50 | 24 | 20.91 | 20.92 | 20.97 | | |
| 20 | 64QAM | 50 | 50 | 20.85 | 20.91 | 20.95 | | |
| 20 | 64QAM | 100 | 0 | 20.86 | 20.91 | 20.96 | | |
| Channel | | | | 20025 | 20175 | 20325 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1717.5 | 1732.5 | 1747.5 | | |
| 15 | QPSK | 1 | 0 | 23.57 | 23.78 | 23.74 | 24 | 0 |
| 15 | QPSK | 1 | 37 | 23.50 | 23.63 | 23.69 | | |
| 15 | QPSK | 1 | 74 | 23.59 | 23.61 | 23.63 | | |
| 15 | QPSK | 36 | 0 | 22.60 | 22.84 | 22.77 | 23 | 1 |
| 15 | QPSK | 36 | 20 | 22.76 | 22.80 | 22.80 | | |
| 15 | QPSK | 36 | 39 | 22.62 | 22.67 | 22.70 | | |
| 15 | QPSK | 75 | 0 | 22.66 | 22.83 | 22.72 | | |
| 15 | 16QAM | 1 | 0 | 22.80 | 22.85 | 22.89 | 23 | 1 |
| 15 | 16QAM | 1 | 37 | 22.83 | 22.85 | 22.98 | | |
| 15 | 16QAM | 1 | 74 | 22.92 | 22.80 | 22.88 | | |
| 15 | 16QAM | 36 | 0 | 21.76 | 21.80 | 21.92 | 22 | 2 |
| 15 | 16QAM | 36 | 20 | 21.86 | 21.88 | 21.95 | | |
| 15 | 16QAM | 36 | 39 | 21.78 | 21.81 | 21.82 | | |
| 15 | 16QAM | 75 | 0 | 21.71 | 21.85 | 21.84 | | |
| 15 | 64QAM | 1 | 0 | 21.86 | 21.98 | 21.92 | 22 | 2 |
| 15 | 64QAM | 1 | 37 | 21.81 | 21.89 | 21.88 | | |
| 15 | 64QAM | 1 | 74 | 21.91 | 21.98 | 21.94 | | |
| 15 | 64QAM | 36 | 0 | 20.76 | 20.85 | 20.91 | 21 | 3 |
| 15 | 64QAM | 36 | 20 | 20.89 | 20.88 | 20.97 | | |
| 15 | 64QAM | 36 | 39 | 20.81 | 20.88 | 20.95 | | |
| 15 | 64QAM | 75 | 0 | 20.79 | 20.90 | 20.91 | | |



| Channel | | | | 20000 | 20175 | 20350 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1715 | 1732.5 | 1750 | | |
| 10 | QPSK | 1 | 0 | 23.54 | 23.72 | 23.69 | 24 | 0 |
| 10 | QPSK | 1 | 25 | 23.53 | 23.68 | 23.67 | | |
| 10 | QPSK | 1 | 49 | 23.59 | 23.64 | 23.66 | | |
| 10 | QPSK | 25 | 0 | 22.53 | 22.83 | 22.77 | 23 | 1 |
| 10 | QPSK | 25 | 12 | 22.70 | 22.83 | 22.87 | | |
| 10 | QPSK | 25 | 25 | 22.61 | 22.67 | 22.73 | | |
| 10 | QPSK | 50 | 0 | 22.74 | 22.81 | 22.77 | 23 | 1 |
| 10 | 16QAM | 1 | 0 | 22.82 | 22.76 | 22.96 | | |
| 10 | 16QAM | 1 | 25 | 22.83 | 22.78 | 22.94 | | |
| 10 | 16QAM | 1 | 49 | 22.91 | 22.84 | 22.88 | 22 | 2 |
| 10 | 16QAM | 25 | 0 | 21.72 | 21.79 | 21.95 | | |
| 10 | 16QAM | 25 | 12 | 21.86 | 21.84 | 21.97 | | |
| 10 | 16QAM | 25 | 25 | 21.79 | 21.78 | 21.84 | 22 | 2 |
| 10 | 16QAM | 50 | 0 | 21.72 | 21.80 | 21.85 | | |
| 10 | 64QAM | 1 | 0 | 21.79 | 21.88 | 21.88 | | |
| 10 | 64QAM | 1 | 25 | 21.83 | 21.91 | 21.89 | 22 | 2 |
| 10 | 64QAM | 1 | 49 | 21.91 | 21.90 | 21.93 | | |
| 10 | 64QAM | 25 | 0 | 20.68 | 20.85 | 20.94 | | |
| 10 | 64QAM | 25 | 12 | 20.81 | 20.88 | 20.97 | 21 | 3 |
| 10 | 64QAM | 25 | 25 | 20.77 | 20.90 | 20.91 | | |
| 10 | 64QAM | 50 | 0 | 20.81 | 20.81 | 20.86 | | |
| Channel | | | | 19975 | 20175 | 20375 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1712.5 | 1732.5 | 1752.5 | | |
| 5 | QPSK | 1 | 0 | 23.49 | 23.79 | 23.71 | 24 | 0 |
| 5 | QPSK | 1 | 12 | 23.51 | 23.65 | 23.64 | | |
| 5 | QPSK | 1 | 24 | 23.56 | 23.68 | 23.60 | | |
| 5 | QPSK | 12 | 0 | 22.60 | 22.80 | 22.79 | 23 | 1 |
| 5 | QPSK | 12 | 7 | 22.74 | 22.83 | 22.79 | | |
| 5 | QPSK | 12 | 13 | 22.66 | 22.73 | 22.69 | | |
| 5 | QPSK | 25 | 0 | 22.72 | 22.77 | 22.73 | 23 | 1 |
| 5 | 16QAM | 1 | 0 | 22.81 | 22.79 | 22.89 | | |
| 5 | 16QAM | 1 | 12 | 22.89 | 22.88 | 22.97 | | |
| 5 | 16QAM | 1 | 24 | 22.92 | 22.78 | 22.80 | 22 | 2 |
| 5 | 16QAM | 12 | 0 | 21.72 | 21.88 | 21.86 | | |
| 5 | 16QAM | 12 | 7 | 21.80 | 21.86 | 21.89 | | |
| 5 | 16QAM | 12 | 13 | 21.85 | 21.86 | 21.86 | 22 | 2 |
| 5 | 16QAM | 25 | 0 | 21.78 | 21.84 | 21.85 | | |
| 5 | 64QAM | 1 | 0 | 21.79 | 21.95 | 21.90 | | |
| 5 | 64QAM | 1 | 12 | 21.86 | 21.90 | 21.91 | 22 | 2 |
| 5 | 64QAM | 1 | 24 | 21.86 | 21.94 | 21.93 | | |
| 5 | 64QAM | 12 | 0 | 20.69 | 20.93 | 20.93 | | |
| 5 | 64QAM | 12 | 7 | 20.91 | 20.90 | 20.88 | 21 | 3 |
| 5 | 64QAM | 12 | 13 | 20.78 | 20.91 | 20.88 | | |
| 5 | 64QAM | 25 | 0 | 20.82 | 20.89 | 20.93 | | |



| Channel | | | | 19965 | 20175 | 20385 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1711.5 | 1732.5 | 1753.5 | | |
| 3 | QPSK | 1 | 0 | 23.50 | 23.79 | 23.77 | 24 | 0 |
| 3 | QPSK | 1 | 8 | 23.49 | 23.71 | 23.62 | | |
| 3 | QPSK | 1 | 14 | 23.56 | 23.67 | 23.70 | | |
| 3 | QPSK | 8 | 0 | 22.54 | 22.79 | 22.74 | 23 | 1 |
| 3 | QPSK | 8 | 4 | 22.75 | 22.79 | 22.83 | | |
| 3 | QPSK | 8 | 7 | 22.67 | 22.67 | 22.70 | | |
| 3 | QPSK | 15 | 0 | 22.68 | 22.76 | 22.75 | 23 | 1 |
| 3 | 16QAM | 1 | 0 | 22.84 | 22.77 | 22.94 | | |
| 3 | 16QAM | 1 | 8 | 22.82 | 22.86 | 22.95 | | |
| 3 | 16QAM | 1 | 14 | 22.88 | 22.82 | 22.83 | 22 | 2 |
| 3 | 16QAM | 8 | 0 | 21.70 | 21.88 | 21.93 | | |
| 3 | 16QAM | 8 | 4 | 21.86 | 21.82 | 21.97 | | |
| 3 | 16QAM | 8 | 7 | 21.78 | 21.81 | 21.87 | 21 | 3 |
| 3 | 16QAM | 15 | 0 | 21.81 | 21.79 | 21.82 | | |
| 3 | 64QAM | 1 | 0 | 21.77 | 21.97 | 21.93 | | |
| 3 | 64QAM | 1 | 8 | 21.84 | 21.90 | 21.96 | 22 | 2 |
| 3 | 64QAM | 1 | 14 | 21.83 | 21.94 | 21.86 | | |
| 3 | 64QAM | 8 | 0 | 20.66 | 20.86 | 20.93 | | |
| 3 | 64QAM | 8 | 4 | 20.89 | 20.89 | 20.97 | 21 | 3 |
| 3 | 64QAM | 8 | 7 | 20.76 | 20.90 | 20.94 | | |
| 3 | 64QAM | 15 | 0 | 20.80 | 20.88 | 20.87 | | |
| Channel | | | | 19957 | 20175 | 20393 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1710.7 | 1732.5 | 1754.3 | | |
| 1.4 | QPSK | 1 | 0 | 23.48 | 23.79 | 23.70 | 24 | 0 |
| 1.4 | QPSK | 1 | 3 | 23.50 | 23.64 | 23.63 | | |
| 1.4 | QPSK | 1 | 5 | 23.60 | 23.64 | 23.65 | | |
| 1.4 | QPSK | 3 | 0 | 22.62 | 22.85 | 22.73 | | |
| 1.4 | QPSK | 3 | 1 | 22.77 | 22.81 | 22.86 | | |
| 1.4 | QPSK | 3 | 3 | 22.63 | 22.72 | 22.75 | | |
| 1.4 | QPSK | 6 | 0 | 22.64 | 22.75 | 22.80 | 23 | 1 |
| 1.4 | 16QAM | 1 | 0 | 22.83 | 22.82 | 22.94 | 23 | 1 |
| 1.4 | 16QAM | 1 | 3 | 22.89 | 22.81 | 22.95 | | |
| 1.4 | 16QAM | 1 | 5 | 22.85 | 22.80 | 22.80 | | |
| 1.4 | 16QAM | 3 | 0 | 21.77 | 21.84 | 21.91 | | |
| 1.4 | 16QAM | 3 | 1 | 21.81 | 21.86 | 21.95 | | |
| 1.4 | 16QAM | 3 | 3 | 21.85 | 21.81 | 21.84 | | |
| 1.4 | 16QAM | 6 | 0 | 21.79 | 21.85 | 21.90 | 22 | 2 |
| 1.4 | 64QAM | 1 | 0 | 21.77 | 21.98 | 21.91 | 22 | 2 |
| 1.4 | 64QAM | 1 | 3 | 21.81 | 21.90 | 21.98 | | |
| 1.4 | 64QAM | 1 | 5 | 21.84 | 21.91 | 21.87 | | |
| 1.4 | 64QAM | 3 | 0 | 20.71 | 20.83 | 20.88 | | |
| 1.4 | 64QAM | 3 | 1 | 20.89 | 20.89 | 20.87 | | |
| 1.4 | 64QAM | 3 | 3 | 20.77 | 20.91 | 20.86 | | |
| 1.4 | 64QAM | 6 | 0 | 20.77 | 20.91 | 20.92 | 21 | 3 |



<LTE Band 5>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20450 | 20525 | 20600 | | |
| Frequency (MHz) | | | | 829 | 836.5 | 844 | | |
| 10 | QPSK | 1 | 0 | 23.44 | 23.53 | 23.47 | 24 | 0 |
| 10 | QPSK | 1 | 25 | 23.49 | 23.52 | 23.51 | | |
| 10 | QPSK | 1 | 49 | 23.47 | 23.41 | 23.40 | | |
| 10 | QPSK | 25 | 0 | 22.56 | 22.62 | 22.50 | 23 | 1 |
| 10 | QPSK | 25 | 12 | 22.54 | 22.54 | 22.59 | | |
| 10 | QPSK | 25 | 25 | 22.61 | 22.51 | 22.48 | | |
| 10 | QPSK | 50 | 0 | 22.49 | 22.57 | 22.46 | 23 | 1 |
| 10 | 16QAM | 1 | 0 | 22.78 | 22.75 | 22.84 | | |
| 10 | 16QAM | 1 | 25 | 22.79 | 22.87 | 22.82 | | |
| 10 | 16QAM | 1 | 49 | 22.76 | 22.76 | 22.73 | 22 | 2 |
| 10 | 16QAM | 25 | 0 | 21.62 | 21.68 | 21.57 | | |
| 10 | 16QAM | 25 | 12 | 21.64 | 21.67 | 21.68 | | |
| 10 | 16QAM | 25 | 25 | 21.69 | 21.62 | 21.59 | 22 | 2 |
| 10 | 16QAM | 50 | 0 | 21.60 | 21.68 | 21.55 | | |
| 10 | 64QAM | 1 | 0 | 21.70 | 21.69 | 21.76 | | |
| 10 | 64QAM | 1 | 25 | 21.73 | 21.83 | 21.80 | 22 | 2 |
| 10 | 64QAM | 1 | 49 | 21.72 | 21.70 | 21.72 | | |
| 10 | 64QAM | 25 | 0 | 20.65 | 20.68 | 20.57 | | |
| 10 | 64QAM | 25 | 12 | 20.64 | 20.70 | 20.67 | 21 | 3 |
| 10 | 64QAM | 25 | 25 | 20.69 | 20.65 | 20.61 | | |
| 10 | 64QAM | 50 | 0 | 20.62 | 20.68 | 20.56 | | |
| Channel | | | | 20425 | 20525 | 20625 | | |
| Frequency (MHz) | | | | 826.5 | 836.5 | 846.5 | | |
| 5 | QPSK | 1 | 0 | 23.43 | 23.44 | 23.42 | 24 | 0 |
| 5 | QPSK | 1 | 12 | 23.39 | 23.42 | 23.45 | | |
| 5 | QPSK | 1 | 24 | 23.45 | 23.36 | 23.32 | | |
| 5 | QPSK | 12 | 0 | 22.50 | 22.56 | 22.45 | 23 | 1 |
| 5 | QPSK | 12 | 7 | 22.54 | 22.49 | 22.59 | | |
| 5 | QPSK | 12 | 13 | 22.54 | 22.46 | 22.38 | | |
| 5 | QPSK | 25 | 0 | 22.47 | 22.51 | 22.42 | 23 | 1 |
| 5 | 16QAM | 1 | 0 | 22.74 | 22.67 | 22.77 | | |
| 5 | 16QAM | 1 | 12 | 22.75 | 22.84 | 22.81 | | |
| 5 | 16QAM | 1 | 24 | 22.68 | 22.70 | 22.71 | 22 | 2 |
| 5 | 16QAM | 12 | 0 | 21.61 | 21.63 | 21.57 | | |
| 5 | 16QAM | 12 | 7 | 21.62 | 21.66 | 21.67 | | |
| 5 | 16QAM | 12 | 13 | 21.65 | 21.54 | 21.55 | 22 | 2 |
| 5 | 16QAM | 25 | 0 | 21.58 | 21.62 | 21.49 | | |
| 5 | 64QAM | 1 | 0 | 21.61 | 21.64 | 21.69 | | |
| 5 | 64QAM | 1 | 12 | 21.70 | 21.82 | 21.71 | 22 | 2 |
| 5 | 64QAM | 1 | 24 | 21.67 | 21.66 | 21.65 | | |
| 5 | 64QAM | 12 | 0 | 20.65 | 20.62 | 20.49 | | |
| 5 | 64QAM | 12 | 7 | 20.58 | 20.61 | 20.63 | 21 | 3 |
| 5 | 64QAM | 12 | 13 | 20.64 | 20.62 | 20.58 | | |
| 5 | 64QAM | 25 | 0 | 20.54 | 20.58 | 20.56 | | |



| Channel | | | | 20415 | 20525 | 20635 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------|----------|
| Frequency (MHz) | | | | 825.5 | 836.5 | 847.5 | | |
| 3 | QPSK | 1 | 0 | 23.40 | 23.50 | 23.41 | 24 | 0 |
| 3 | QPSK | 1 | 8 | 23.41 | 23.45 | 23.49 | | |
| 3 | QPSK | 1 | 14 | 23.42 | 23.31 | 23.32 | | |
| 3 | QPSK | 8 | 0 | 22.51 | 22.59 | 22.45 | 23 | 1 |
| 3 | QPSK | 8 | 4 | 22.53 | 22.47 | 22.52 | | |
| 3 | QPSK | 8 | 7 | 22.56 | 22.42 | 22.40 | | |
| 3 | QPSK | 15 | 0 | 22.49 | 22.49 | 22.43 | 23 | 1 |
| 3 | 16QAM | 1 | 0 | 22.73 | 22.66 | 22.83 | | |
| 3 | 16QAM | 1 | 8 | 22.77 | 22.78 | 22.82 | | |
| 3 | 16QAM | 1 | 14 | 22.75 | 22.68 | 22.63 | 22 | 2 |
| 3 | 16QAM | 8 | 0 | 21.61 | 21.62 | 21.56 | | |
| 3 | 16QAM | 8 | 4 | 21.56 | 21.63 | 21.63 | | |
| 3 | 16QAM | 8 | 7 | 21.61 | 21.52 | 21.58 | 21 | 3 |
| 3 | 16QAM | 15 | 0 | 21.53 | 21.58 | 21.52 | | |
| 3 | 64QAM | 1 | 0 | 21.68 | 21.66 | 21.72 | | |
| 3 | 64QAM | 1 | 8 | 21.73 | 21.81 | 21.76 | 22 | 2 |
| 3 | 64QAM | 1 | 14 | 21.62 | 21.68 | 21.62 | | |
| 3 | 64QAM | 8 | 0 | 20.59 | 20.65 | 20.53 | | |
| 3 | 64QAM | 8 | 4 | 20.60 | 20.65 | 20.64 | 21 | 3 |
| 3 | 64QAM | 8 | 7 | 20.66 | 20.61 | 20.57 | | |
| 3 | 64QAM | 15 | 0 | 20.52 | 20.67 | 20.53 | | |
| Channel | | | | 20407 | 20525 | 20643 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 824.7 | 836.5 | 848.3 | | |
| 1.4 | QPSK | 1 | 0 | 23.37 | 23.50 | 23.39 | 24 | 0 |
| 1.4 | QPSK | 1 | 3 | 23.39 | 23.49 | 23.45 | | |
| 1.4 | QPSK | 1 | 5 | 23.42 | 23.39 | 23.34 | | |
| 1.4 | QPSK | 3 | 0 | 22.51 | 22.58 | 22.41 | | |
| 1.4 | QPSK | 3 | 1 | 22.48 | 22.48 | 22.53 | | |
| 1.4 | QPSK | 3 | 3 | 22.57 | 22.45 | 22.43 | | |
| 1.4 | QPSK | 6 | 0 | 22.42 | 22.56 | 22.45 | 23 | 1 |
| 1.4 | 16QAM | 1 | 0 | 22.71 | 22.65 | 22.78 | 23 | 1 |
| 1.4 | 16QAM | 1 | 3 | 22.78 | 22.79 | 22.75 | | |
| 1.4 | 16QAM | 1 | 5 | 22.72 | 22.76 | 22.73 | | |
| 1.4 | 16QAM | 3 | 0 | 21.55 | 21.64 | 21.52 | | |
| 1.4 | 16QAM | 3 | 1 | 21.54 | 21.61 | 21.58 | | |
| 1.4 | 16QAM | 3 | 3 | 21.64 | 21.60 | 21.59 | | |
| 1.4 | 16QAM | 6 | 0 | 21.59 | 21.62 | 21.47 | 22 | 2 |
| 1.4 | 64QAM | 1 | 0 | 21.70 | 21.65 | 21.68 | 22 | 2 |
| 1.4 | 64QAM | 1 | 3 | 21.70 | 21.74 | 21.70 | | |
| 1.4 | 64QAM | 1 | 5 | 21.68 | 21.70 | 21.62 | | |
| 1.4 | 64QAM | 3 | 0 | 20.64 | 20.68 | 20.53 | | |
| 1.4 | 64QAM | 3 | 1 | 20.61 | 20.62 | 20.63 | | |
| 1.4 | 64QAM | 3 | 3 | 20.66 | 20.55 | 20.59 | | |
| 1.4 | 64QAM | 6 | 0 | 20.53 | 20.62 | 20.46 | 21 | 3 |



<LTE Band 7>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20850 | 21100 | 21350 | | |
| Frequency (MHz) | | | | 2510 | 2535 | 2560 | | |
| 20 | QPSK | 1 | 0 | 23.21 | 23.36 | 23.35 | 24 | 0 |
| 20 | QPSK | 1 | 49 | 23.20 | 23.32 | 23.33 | | |
| 20 | QPSK | 1 | 99 | 23.10 | 23.24 | 23.23 | | |
| 20 | QPSK | 50 | 0 | 22.29 | 22.45 | 22.44 | 23 | 1 |
| 20 | QPSK | 50 | 24 | 22.28 | 22.34 | 22.39 | | |
| 20 | QPSK | 50 | 50 | 22.28 | 22.30 | 22.34 | | |
| 20 | QPSK | 100 | 0 | 22.27 | 22.40 | 22.39 | | |
| 20 | 16QAM | 1 | 0 | 22.45 | 22.49 | 22.68 | 23 | 1 |
| 20 | 16QAM | 1 | 49 | 22.60 | 22.61 | 22.73 | | |
| 20 | 16QAM | 1 | 99 | 22.66 | 22.78 | 22.78 | | |
| 20 | 16QAM | 50 | 0 | 21.38 | 21.37 | 21.46 | 22 | 2 |
| 20 | 16QAM | 50 | 24 | 21.43 | 21.44 | 21.55 | | |
| 20 | 16QAM | 50 | 50 | 21.41 | 21.47 | 21.58 | | |
| 20 | 16QAM | 100 | 0 | 21.39 | 21.44 | 21.54 | | |
| 20 | 64QAM | 1 | 0 | 21.43 | 21.37 | 21.60 | 22 | 2 |
| 20 | 64QAM | 1 | 49 | 21.57 | 21.56 | 21.69 | | |
| 20 | 64QAM | 1 | 99 | 21.56 | 21.72 | 21.77 | | |
| 20 | 64QAM | 50 | 0 | 20.41 | 20.41 | 20.50 | 21 | 3 |
| 20 | 64QAM | 50 | 24 | 20.43 | 20.45 | 20.57 | | |
| 20 | 64QAM | 50 | 50 | 20.43 | 20.48 | 20.59 | | |
| 20 | 64QAM | 100 | 0 | 20.43 | 20.44 | 20.56 | | |
| Channel | | | | 20825 | 21100 | 21375 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2507.5 | 2535 | 2562.5 | | |
| 15 | QPSK | 1 | 0 | 23.02 | 23.34 | 23.20 | 24 | 0 |
| 15 | QPSK | 1 | 37 | 23.11 | 23.23 | 23.34 | | |
| 15 | QPSK | 1 | 74 | 23.20 | 23.23 | 23.30 | | |
| 15 | QPSK | 36 | 0 | 22.18 | 22.43 | 22.24 | 23 | 1 |
| 15 | QPSK | 36 | 20 | 22.28 | 22.21 | 22.29 | | |
| 15 | QPSK | 36 | 39 | 22.26 | 22.28 | 22.43 | | |
| 15 | QPSK | 75 | 0 | 22.24 | 22.34 | 22.32 | | |
| 15 | 16QAM | 1 | 0 | 22.42 | 22.49 | 22.68 | 23 | 1 |
| 15 | 16QAM | 1 | 37 | 22.57 | 22.61 | 22.67 | | |
| 15 | 16QAM | 1 | 74 | 22.56 | 22.71 | 22.71 | | |
| 15 | 16QAM | 36 | 0 | 21.37 | 21.28 | 21.36 | 22 | 2 |
| 15 | 16QAM | 36 | 20 | 21.42 | 21.39 | 21.52 | | |
| 15 | 16QAM | 36 | 39 | 21.40 | 21.42 | 21.49 | | |
| 15 | 16QAM | 75 | 0 | 21.33 | 21.38 | 21.51 | | |
| 15 | 64QAM | 1 | 0 | 21.34 | 21.36 | 21.59 | 22 | 2 |
| 15 | 64QAM | 1 | 37 | 21.54 | 21.46 | 21.61 | | |
| 15 | 64QAM | 1 | 74 | 21.51 | 21.72 | 21.75 | | |
| 15 | 64QAM | 36 | 0 | 20.36 | 20.41 | 20.47 | 21 | 3 |
| 15 | 64QAM | 36 | 20 | 20.42 | 20.40 | 20.51 | | |
| 15 | 64QAM | 36 | 39 | 20.33 | 20.41 | 20.51 | | |
| 15 | 64QAM | 75 | 0 | 20.34 | 20.36 | 20.47 | | |



| Channel | | | | 20800 | 21100 | 21400 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2505 | 2535 | 2565 | | |
| 10 | QPSK | 1 | 0 | 23.07 | 23.28 | 23.19 | 24 | 0 |
| 10 | QPSK | 1 | 25 | 23.18 | 23.14 | 23.33 | | |
| 10 | QPSK | 1 | 49 | 23.15 | 23.22 | 23.25 | | |
| 10 | QPSK | 25 | 0 | 22.21 | 22.37 | 22.27 | 23 | 1 |
| 10 | QPSK | 25 | 12 | 22.20 | 22.20 | 22.36 | | |
| 10 | QPSK | 25 | 25 | 22.26 | 22.34 | 22.41 | | |
| 10 | QPSK | 50 | 0 | 22.21 | 22.33 | 22.36 | 23 | 1 |
| 10 | 16QAM | 1 | 0 | 22.39 | 22.47 | 22.64 | | |
| 10 | 16QAM | 1 | 25 | 22.54 | 22.60 | 22.72 | | |
| 10 | 16QAM | 1 | 49 | 22.61 | 22.75 | 22.74 | 22 | 2 |
| 10 | 16QAM | 25 | 0 | 21.38 | 21.30 | 21.43 | | |
| 10 | 16QAM | 25 | 12 | 21.37 | 21.39 | 21.55 | | |
| 10 | 16QAM | 25 | 25 | 21.33 | 21.47 | 21.48 | 21 | 3 |
| 10 | 16QAM | 50 | 0 | 21.39 | 21.34 | 21.51 | | |
| 10 | 64QAM | 1 | 0 | 21.38 | 21.37 | 21.53 | | |
| 10 | 64QAM | 1 | 25 | 21.49 | 21.50 | 21.66 | 22 | 2 |
| 10 | 64QAM | 1 | 49 | 21.50 | 21.72 | 21.74 | | |
| 10 | 64QAM | 25 | 0 | 20.31 | 20.36 | 20.46 | | |
| 10 | 64QAM | 25 | 12 | 20.36 | 20.36 | 20.51 | 21 | 3 |
| 10 | 64QAM | 25 | 25 | 20.33 | 20.43 | 20.50 | | |
| 10 | 64QAM | 50 | 0 | 20.35 | 20.40 | 20.47 | | |
| Channel | | | | 20775 | 21100 | 21425 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2502.5 | 2535 | 2567.5 | | |
| 5 | QPSK | 1 | 0 | 23.04 | 23.28 | 23.20 | 24 | 0 |
| 5 | QPSK | 1 | 12 | 23.15 | 23.15 | 23.32 | | |
| 5 | QPSK | 1 | 24 | 23.17 | 23.23 | 23.32 | | |
| 5 | QPSK | 12 | 0 | 22.27 | 22.40 | 22.26 | 23 | 1 |
| 5 | QPSK | 12 | 7 | 22.18 | 22.28 | 22.31 | | |
| 5 | QPSK | 12 | 13 | 22.22 | 22.32 | 22.39 | | |
| 5 | QPSK | 25 | 0 | 22.25 | 22.38 | 22.31 | 23 | 1 |
| 5 | 16QAM | 1 | 0 | 22.42 | 22.39 | 22.62 | | |
| 5 | 16QAM | 1 | 12 | 22.60 | 22.51 | 22.69 | | |
| 5 | 16QAM | 1 | 24 | 22.57 | 22.71 | 22.73 | 22 | 2 |
| 5 | 16QAM | 12 | 0 | 21.31 | 21.30 | 21.46 | | |
| 5 | 16QAM | 12 | 7 | 21.33 | 21.39 | 21.50 | | |
| 5 | 16QAM | 12 | 13 | 21.35 | 21.46 | 21.58 | 22 | 2 |
| 5 | 16QAM | 25 | 0 | 21.39 | 21.38 | 21.44 | | |
| 5 | 64QAM | 1 | 0 | 21.35 | 21.33 | 21.60 | | |
| 5 | 64QAM | 1 | 12 | 21.54 | 21.53 | 21.61 | 22 | 2 |
| 5 | 64QAM | 1 | 24 | 21.56 | 21.69 | 21.67 | | |
| 5 | 64QAM | 12 | 0 | 20.31 | 20.35 | 20.47 | | |
| 5 | 64QAM | 12 | 7 | 20.34 | 20.39 | 20.57 | 21 | 3 |
| 5 | 64QAM | 12 | 13 | 20.38 | 20.48 | 20.50 | | |
| 5 | 64QAM | 25 | 0 | 20.33 | 20.37 | 20.56 | | |



<LTE Band 12>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 23060 | 23095 | 23130 | | |
| Frequency (MHz) | | | | 704 | 707.5 | 711 | | |
| 10 | QPSK | 1 | 0 | 23.61 | 23.78 | 23.71 | 24.5 | 0 |
| 10 | QPSK | 1 | 25 | 23.72 | 23.76 | 23.73 | | |
| 10 | QPSK | 1 | 49 | 23.68 | 23.72 | 23.75 | | |
| 10 | QPSK | 25 | 0 | 22.75 | 22.88 | 22.75 | 23.5 | 1 |
| 10 | QPSK | 25 | 12 | 22.87 | 22.83 | 22.76 | | |
| 10 | QPSK | 25 | 25 | 22.84 | 22.77 | 22.72 | | |
| 10 | QPSK | 50 | 0 | 22.84 | 22.85 | 22.74 | 23.5 | 1 |
| 10 | 16QAM | 1 | 0 | 22.96 | 23.08 | 23.08 | | |
| 10 | 16QAM | 1 | 25 | 23.12 | 23.13 | 23.09 | | |
| 10 | 16QAM | 1 | 49 | 23.14 | 23.12 | 23.09 | 22.5 | 2 |
| 10 | 16QAM | 25 | 0 | 21.87 | 21.93 | 21.86 | | |
| 10 | 16QAM | 25 | 12 | 22.00 | 21.93 | 21.88 | | |
| 10 | 16QAM | 25 | 25 | 21.93 | 21.88 | 21.84 | 22.5 | 2 |
| 10 | 16QAM | 50 | 0 | 21.94 | 21.90 | 21.86 | | |
| 10 | 64QAM | 1 | 0 | 21.90 | 21.99 | 22.04 | | |
| 10 | 64QAM | 1 | 25 | 22.05 | 22.09 | 22.04 | 22.5 | 2 |
| 10 | 64QAM | 1 | 49 | 22.06 | 22.07 | 22.05 | | |
| 10 | 64QAM | 25 | 0 | 20.89 | 20.94 | 20.89 | | |
| 10 | 64QAM | 25 | 12 | 21.00 | 20.93 | 20.90 | 21.5 | 3 |
| 10 | 64QAM | 25 | 25 | 20.96 | 20.91 | 20.87 | | |
| 10 | 64QAM | 50 | 0 | 20.97 | 20.92 | 20.88 | | |
| Channel | | | | 23035 | 23095 | 23155 | | |
| Frequency (MHz) | | | | 701.5 | 707.5 | 713.5 | | |
| 5 | QPSK | 1 | 0 | 23.55 | 23.76 | 23.70 | 24.5 | 0 |
| 5 | QPSK | 1 | 12 | 23.67 | 23.68 | 23.63 | | |
| 5 | QPSK | 1 | 24 | 23.59 | 23.69 | 23.67 | | |
| 5 | QPSK | 12 | 0 | 22.70 | 22.86 | 22.69 | 23.5 | 1 |
| 5 | QPSK | 12 | 7 | 22.87 | 22.77 | 22.68 | | |
| 5 | QPSK | 12 | 13 | 22.75 | 22.71 | 22.70 | | |
| 5 | QPSK | 25 | 0 | 22.81 | 22.83 | 22.64 | 23.5 | 1 |
| 5 | 16QAM | 1 | 0 | 22.86 | 23.03 | 23.01 | | |
| 5 | 16QAM | 1 | 12 | 23.08 | 23.10 | 22.99 | | |
| 5 | 16QAM | 1 | 24 | 23.06 | 23.11 | 23.08 | 22.5 | 2 |
| 5 | 16QAM | 12 | 0 | 21.85 | 21.88 | 21.77 | | |
| 5 | 16QAM | 12 | 7 | 21.93 | 21.85 | 21.78 | | |
| 5 | 16QAM | 12 | 13 | 21.83 | 21.80 | 21.75 | 22.5 | 2 |
| 5 | 16QAM | 25 | 0 | 21.87 | 21.89 | 21.79 | | |
| 5 | 64QAM | 1 | 0 | 21.81 | 21.97 | 21.99 | | |
| 5 | 64QAM | 1 | 12 | 22.01 | 22.05 | 22.00 | 22.5 | 2 |
| 5 | 64QAM | 1 | 24 | 22.02 | 21.97 | 22.02 | | |
| 5 | 64QAM | 12 | 0 | 20.80 | 20.89 | 20.84 | | |
| 5 | 64QAM | 12 | 7 | 20.95 | 20.87 | 20.81 | 21.5 | 3 |
| 5 | 64QAM | 12 | 13 | 20.89 | 20.89 | 20.80 | | |
| 5 | 64QAM | 25 | 0 | 20.97 | 20.89 | 20.88 | | |



| Channel | | | | 23025 | 23095 | 23165 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------|----------|
| Frequency (MHz) | | | | 700.5 | 707.5 | 714.5 | | |
| 3 | QPSK | 1 | 0 | 23.55 | 23.73 | 23.64 | 24.5 | 0 |
| 3 | QPSK | 1 | 8 | 23.70 | 23.76 | 23.71 | | |
| 3 | QPSK | 1 | 14 | 23.67 | 23.71 | 23.70 | | |
| 3 | QPSK | 8 | 0 | 22.71 | 22.80 | 22.68 | 23.5 | 1 |
| 3 | QPSK | 8 | 4 | 22.85 | 22.74 | 22.71 | | |
| 3 | QPSK | 8 | 7 | 22.84 | 22.68 | 22.64 | | |
| 3 | QPSK | 15 | 0 | 22.77 | 22.76 | 22.71 | 23.5 | 1 |
| 3 | 16QAM | 1 | 0 | 22.96 | 23.02 | 23.07 | | |
| 3 | 16QAM | 1 | 8 | 23.09 | 23.12 | 23.08 | | |
| 3 | 16QAM | 1 | 14 | 23.08 | 23.06 | 23.07 | 22.5 | 2 |
| 3 | 16QAM | 8 | 0 | 21.81 | 21.91 | 21.81 | | |
| 3 | 16QAM | 8 | 4 | 21.91 | 21.93 | 21.78 | | |
| 3 | 16QAM | 8 | 7 | 21.89 | 21.84 | 21.80 | 21.5 | 3 |
| 3 | 16QAM | 15 | 0 | 21.86 | 21.85 | 21.79 | | |
| 3 | 64QAM | 1 | 0 | 21.83 | 21.98 | 22.00 | | |
| 3 | 64QAM | 1 | 8 | 21.97 | 22.05 | 21.97 | 22.5 | 2 |
| 3 | 64QAM | 1 | 14 | 22.01 | 22.05 | 21.97 | | |
| 3 | 64QAM | 8 | 0 | 20.87 | 20.90 | 20.87 | | |
| 3 | 64QAM | 8 | 4 | 20.99 | 20.83 | 20.89 | 21.5 | 3 |
| 3 | 64QAM | 8 | 7 | 20.94 | 20.88 | 20.82 | | |
| 3 | 64QAM | 15 | 0 | 20.92 | 20.83 | 20.82 | | |
| Channel | | | | 23017 | 23095 | 23173 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 699.7 | 707.5 | 715.3 | | |
| 1.4 | QPSK | 1 | 0 | 23.57 | 23.72 | 23.67 | 24.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 23.72 | 23.72 | 23.63 | | |
| 1.4 | QPSK | 1 | 5 | 23.60 | 23.68 | 23.72 | | |
| 1.4 | QPSK | 3 | 0 | 22.73 | 22.81 | 22.66 | | |
| 1.4 | QPSK | 3 | 1 | 22.80 | 22.83 | 22.73 | | |
| 1.4 | QPSK | 3 | 3 | 22.74 | 22.71 | 22.68 | | |
| 1.4 | QPSK | 6 | 0 | 22.84 | 22.82 | 22.68 | 23.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 22.91 | 23.01 | 23.04 | 23.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 23.11 | 23.13 | 23.00 | | |
| 1.4 | 16QAM | 1 | 5 | 23.11 | 23.06 | 23.09 | | |
| 1.4 | 16QAM | 3 | 0 | 21.79 | 21.87 | 21.86 | | |
| 1.4 | 16QAM | 3 | 1 | 21.95 | 21.83 | 21.85 | | |
| 1.4 | 16QAM | 3 | 3 | 21.91 | 21.78 | 21.77 | | |
| 1.4 | 16QAM | 6 | 0 | 21.89 | 21.84 | 21.76 | 22.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 21.83 | 21.99 | 21.99 | 22.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 21.98 | 22.04 | 21.98 | | |
| 1.4 | 64QAM | 1 | 5 | 22.03 | 21.97 | 21.96 | | |
| 1.4 | 64QAM | 3 | 0 | 20.79 | 20.88 | 20.88 | | |
| 1.4 | 64QAM | 3 | 1 | 20.91 | 20.85 | 20.89 | | |
| 1.4 | 64QAM | 3 | 3 | 20.90 | 20.88 | 20.79 | | |
| 1.4 | 64QAM | 6 | 0 | 20.92 | 20.91 | 20.82 | 21.5 | 3 |



<LTE Band 13>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 23230 | | | | |
| Frequency (MHz) | | | | 782 | | | | |
| 10 | QPSK | 1 | 0 | | 23.89 | | 24.5 | 0 |
| 10 | QPSK | 1 | 25 | | 23.73 | | | |
| 10 | QPSK | 1 | 49 | | 23.83 | | | |
| 10 | QPSK | 25 | 0 | | 22.99 | | 23.5 | 1 |
| 10 | QPSK | 25 | 12 | | 22.88 | | | |
| 10 | QPSK | 25 | 25 | | 22.94 | | | |
| 10 | QPSK | 50 | 0 | | 22.96 | | 23.5 | 1 |
| 10 | 16QAM | 1 | 0 | | 22.95 | | | |
| 10 | 16QAM | 1 | 25 | | 23.17 | | | |
| 10 | 16QAM | 1 | 49 | | 23.14 | | 22.5 | 2 |
| 10 | 16QAM | 25 | 0 | | 21.95 | | | |
| 10 | 16QAM | 25 | 12 | | 22.08 | | | |
| 10 | 16QAM | 25 | 25 | | 22.00 | | 22.5 | 2 |
| 10 | 16QAM | 50 | 0 | | 22.06 | | | |
| 10 | 64QAM | 1 | 0 | | 21.94 | | | |
| 10 | 64QAM | 1 | 25 | | 22.12 | | 22.5 | 2 |
| 10 | 64QAM | 1 | 49 | | 22.09 | | | |
| 10 | 64QAM | 25 | 0 | | 20.97 | | | |
| 10 | 64QAM | 25 | 12 | | 21.06 | | 21.5 | 3 |
| 10 | 64QAM | 25 | 25 | | 21.01 | | | |
| 10 | 64QAM | 50 | 0 | | 21.05 | | | |
| Channel | | | | 23205 | 23230 | 23255 | | |
| Frequency (MHz) | | | | 779.5 | 782 | 784.5 | | |
| 5 | QPSK | 1 | 0 | 23.65 | 23.81 | 23.58 | 24.5 | 0 |
| 5 | QPSK | 1 | 12 | 23.52 | 23.64 | 23.47 | | |
| 5 | QPSK | 1 | 24 | 23.64 | 23.74 | 23.62 | | |
| 5 | QPSK | 12 | 0 | 22.72 | 22.92 | 22.68 | 23.5 | 1 |
| 5 | QPSK | 12 | 7 | 22.67 | 22.79 | 22.66 | | |
| 5 | QPSK | 12 | 13 | 22.76 | 22.89 | 22.66 | | |
| 5 | QPSK | 25 | 0 | 22.83 | 22.95 | 22.80 | 23.5 | 1 |
| 5 | 16QAM | 1 | 0 | 22.72 | 22.87 | 22.69 | | |
| 5 | 16QAM | 1 | 12 | 22.95 | 23.13 | 22.88 | | |
| 5 | 16QAM | 1 | 24 | 22.92 | 23.04 | 22.91 | 22.5 | 2 |
| 5 | 16QAM | 12 | 0 | 21.73 | 21.87 | 21.64 | | |
| 5 | 16QAM | 12 | 7 | 21.89 | 22.03 | 21.79 | | |
| 5 | 16QAM | 12 | 13 | 21.79 | 21.91 | 21.78 | 22.5 | 2 |
| 5 | 16QAM | 25 | 0 | 21.88 | 22.01 | 21.86 | | |
| 5 | 64QAM | 1 | 0 | 21.76 | 21.91 | 21.76 | | |
| 5 | 64QAM | 1 | 12 | 21.87 | 22.05 | 21.77 | 22.5 | 2 |
| 5 | 64QAM | 1 | 24 | 21.80 | 21.99 | 21.77 | | |
| 5 | 64QAM | 12 | 0 | 20.84 | 20.95 | 20.83 | | |
| 5 | 64QAM | 12 | 7 | 20.93 | 21.06 | 20.93 | 21.5 | 3 |
| 5 | 64QAM | 12 | 13 | 20.81 | 20.98 | 20.76 | | |
| 5 | 64QAM | 25 | 0 | 20.93 | 21.05 | 20.91 | | |



<LTE Band 14>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 23330 | | | | |
| Frequency (MHz) | | | | 793 | | | | |
| 10 | QPSK | 1 | 0 | | 23.86 | | 24.5 | 0 |
| 10 | QPSK | 1 | 25 | | 23.80 | | | |
| 10 | QPSK | 1 | 49 | | 23.70 | | | |
| 10 | QPSK | 25 | 0 | | 22.89 | | 23.5 | 1 |
| 10 | QPSK | 25 | 12 | | 22.87 | | | |
| 10 | QPSK | 25 | 25 | | 22.81 | | | |
| 10 | QPSK | 50 | 0 | | 22.84 | | 23.5 | 1 |
| 10 | 16QAM | 1 | 0 | | 23.18 | | | |
| 10 | 16QAM | 1 | 25 | | 23.12 | | | |
| 10 | 16QAM | 1 | 49 | | 22.94 | | 22.5 | 2 |
| 10 | 16QAM | 25 | 0 | | 21.97 | | | |
| 10 | 16QAM | 25 | 12 | | 21.95 | | | |
| 10 | 16QAM | 25 | 25 | | 21.90 | | 22.5 | 2 |
| 10 | 16QAM | 50 | 0 | | 21.91 | | | |
| 10 | 64QAM | 1 | 0 | | 22.10 | | | |
| 10 | 64QAM | 1 | 25 | | 22.05 | | 22.5 | 2 |
| 10 | 64QAM | 1 | 49 | | 21.93 | | | |
| 10 | 64QAM | 25 | 0 | | 20.96 | | | |
| 10 | 64QAM | 25 | 12 | | 20.95 | | 21.5 | 3 |
| 10 | 64QAM | 25 | 25 | | 20.91 | | | |
| 10 | 64QAM | 50 | 0 | | 20.94 | | | |
| Channel | | | | 23305 | 23330 | 23355 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 790.5 | 793 | 795.5 | | |
| 5 | QPSK | 1 | 0 | 23.68 | 23.85 | 23.61 | 24.5 | 0 |
| 5 | QPSK | 1 | 12 | 23.57 | 23.74 | 23.48 | | |
| 5 | QPSK | 1 | 24 | 23.44 | 23.64 | 23.36 | | |
| 5 | QPSK | 12 | 0 | 22.67 | 22.85 | 22.58 | 23.5 | 1 |
| 5 | QPSK | 12 | 7 | 22.68 | 22.80 | 22.60 | | |
| 5 | QPSK | 12 | 13 | 22.63 | 22.80 | 22.62 | | |
| 5 | QPSK | 25 | 0 | 22.62 | 22.76 | 22.56 | 23.5 | 1 |
| 5 | 16QAM | 1 | 0 | 22.92 | 23.08 | 22.84 | | |
| 5 | 16QAM | 1 | 12 | 22.89 | 23.02 | 22.85 | | |
| 5 | 16QAM | 1 | 24 | 22.71 | 22.84 | 22.70 | 22.5 | 2 |
| 5 | 16QAM | 12 | 0 | 21.84 | 21.95 | 21.84 | | |
| 5 | 16QAM | 12 | 7 | 21.80 | 21.94 | 21.75 | | |
| 5 | 16QAM | 12 | 13 | 21.70 | 21.85 | 21.60 | 22.5 | 2 |
| 5 | 16QAM | 25 | 0 | 21.68 | 21.83 | 21.64 | | |
| 5 | 64QAM | 1 | 0 | 21.88 | 22.02 | 21.79 | | |
| 5 | 64QAM | 1 | 12 | 21.93 | 22.03 | 21.91 | 22.5 | 2 |
| 5 | 64QAM | 1 | 24 | 21.75 | 21.93 | 21.75 | | |
| 5 | 64QAM | 12 | 0 | 20.80 | 20.91 | 20.70 | | |
| 5 | 64QAM | 12 | 7 | 20.69 | 20.86 | 20.60 | 21.5 | 3 |
| 5 | 64QAM | 12 | 13 | 20.72 | 20.91 | 20.70 | | |
| 5 | 64QAM | 25 | 0 | 20.67 | 20.87 | 20.58 | | |



<LTE Band 25>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 26140 | 26340 | 26590 | | |
| Frequency (MHz) | | | | 1860 | 1880 | 1905 | | |
| 20 | QPSK | 1 | 0 | 23.10 | 23.12 | 22.99 | 23.5 | 0 |
| 20 | QPSK | 1 | 49 | 23.05 | 23.08 | 23.07 | | |
| 20 | QPSK | 1 | 99 | 23.02 | 23.08 | 23.04 | | |
| 20 | QPSK | 50 | 0 | 22.07 | 22.14 | 22.13 | 22.5 | 1 |
| 20 | QPSK | 50 | 24 | 22.04 | 22.12 | 22.12 | | |
| 20 | QPSK | 50 | 50 | 22.03 | 22.07 | 22.08 | | |
| 20 | QPSK | 100 | 0 | 22.03 | 22.12 | 22.11 | | |
| 20 | 16QAM | 1 | 0 | 22.43 | 22.42 | 22.37 | 22.5 | 1 |
| 20 | 16QAM | 1 | 49 | 22.42 | 22.50 | 22.45 | | |
| 20 | 16QAM | 1 | 99 | 22.43 | 22.42 | 22.34 | | |
| 20 | 16QAM | 50 | 0 | 21.14 | 21.19 | 21.19 | 21.5 | 2 |
| 20 | 16QAM | 50 | 24 | 21.23 | 21.26 | 21.22 | | |
| 20 | 16QAM | 50 | 50 | 21.17 | 21.21 | 21.21 | | |
| 20 | 16QAM | 100 | 0 | 21.14 | 21.20 | 21.20 | | |
| 20 | 64QAM | 1 | 0 | 21.42 | 21.38 | 21.31 | 21.5 | 2 |
| 20 | 64QAM | 1 | 49 | 21.37 | 21.39 | 21.39 | | |
| 20 | 64QAM | 1 | 99 | 21.36 | 21.38 | 21.28 | | |
| 20 | 64QAM | 50 | 0 | 20.16 | 20.20 | 20.20 | 20.5 | 3 |
| 20 | 64QAM | 50 | 24 | 20.23 | 20.25 | 20.26 | | |
| 20 | 64QAM | 50 | 50 | 20.21 | 20.22 | 20.23 | | |
| 20 | 64QAM | 100 | 0 | 20.17 | 20.22 | 20.23 | | |
| Channel | | | | 26115 | 26340 | 26615 | | |
| Frequency (MHz) | | | | 1857.5 | 1880 | 1907.5 | | |
| 15 | QPSK | 1 | 0 | 23.10 | 23.04 | 22.93 | 23.5 | 0 |
| 15 | QPSK | 1 | 37 | 22.95 | 23.07 | 23.04 | | |
| 15 | QPSK | 1 | 74 | 22.95 | 23.01 | 23.00 | | |
| 15 | QPSK | 36 | 0 | 21.94 | 22.04 | 21.99 | 22.5 | 1 |
| 15 | QPSK | 36 | 20 | 22.05 | 22.07 | 22.08 | | |
| 15 | QPSK | 36 | 39 | 21.98 | 22.00 | 22.13 | | |
| 15 | QPSK | 75 | 0 | 21.94 | 22.05 | 22.10 | | |
| 15 | 16QAM | 1 | 0 | 22.41 | 22.37 | 22.34 | 22.5 | 1 |
| 15 | 16QAM | 1 | 37 | 22.36 | 22.42 | 22.39 | | |
| 15 | 16QAM | 1 | 74 | 22.36 | 22.38 | 22.34 | | |
| 15 | 16QAM | 36 | 0 | 21.06 | 21.15 | 21.17 | 21.5 | 2 |
| 15 | 16QAM | 36 | 20 | 21.14 | 21.16 | 21.19 | | |
| 15 | 16QAM | 36 | 39 | 21.10 | 21.20 | 21.13 | | |
| 15 | 16QAM | 75 | 0 | 21.13 | 21.11 | 21.12 | | |
| 15 | 64QAM | 1 | 0 | 21.34 | 21.36 | 21.26 | 21.5 | 2 |
| 15 | 64QAM | 1 | 37 | 21.28 | 21.30 | 21.36 | | |
| 15 | 64QAM | 1 | 74 | 21.32 | 21.33 | 21.28 | | |
| 15 | 64QAM | 36 | 0 | 20.06 | 20.15 | 20.15 | 20.5 | 3 |
| 15 | 64QAM | 36 | 20 | 20.16 | 20.16 | 20.23 | | |
| 15 | 64QAM | 36 | 39 | 20.18 | 20.12 | 20.20 | | |
| 15 | 64QAM | 75 | 0 | 20.16 | 20.12 | 20.15 | | |



| Channel | | | | 26090 | 26340 | 26640 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1855 | 1880 | 1910 | | |
| 10 | QPSK | 1 | 0 | 23.08 | 23.10 | 22.93 | 23.5 | 0 |
| 10 | QPSK | 1 | 25 | 22.97 | 23.05 | 22.97 | | |
| 10 | QPSK | 1 | 49 | 22.95 | 23.01 | 23.03 | | |
| 10 | QPSK | 25 | 0 | 22.01 | 22.07 | 22.06 | 22.5 | 1 |
| 10 | QPSK | 25 | 12 | 22.04 | 22.12 | 22.09 | | |
| 10 | QPSK | 25 | 25 | 22.04 | 22.07 | 22.06 | | |
| 10 | QPSK | 50 | 0 | 22.00 | 22.10 | 22.04 | 22.5 | 1 |
| 10 | 16QAM | 1 | 0 | 22.43 | 22.36 | 22.32 | | |
| 10 | 16QAM | 1 | 25 | 22.36 | 22.40 | 22.38 | | |
| 10 | 16QAM | 1 | 49 | 22.35 | 22.34 | 22.24 | 21.5 | 2 |
| 10 | 16QAM | 25 | 0 | 21.05 | 21.10 | 21.11 | | |
| 10 | 16QAM | 25 | 12 | 21.21 | 21.17 | 21.17 | | |
| 10 | 16QAM | 25 | 25 | 21.07 | 21.17 | 21.11 | 21.5 | 2 |
| 10 | 16QAM | 50 | 0 | 21.11 | 21.16 | 21.10 | | |
| 10 | 64QAM | 1 | 0 | 21.40 | 21.34 | 21.28 | | |
| 10 | 64QAM | 1 | 25 | 21.37 | 21.30 | 21.32 | 21.5 | 2 |
| 10 | 64QAM | 1 | 49 | 21.32 | 21.31 | 21.27 | | |
| 10 | 64QAM | 25 | 0 | 20.10 | 20.13 | 20.15 | | |
| 10 | 64QAM | 25 | 12 | 20.19 | 20.17 | 20.16 | 20.5 | 3 |
| 10 | 64QAM | 25 | 25 | 20.17 | 20.15 | 20.21 | | |
| 10 | 64QAM | 50 | 0 | 20.13 | 20.20 | 20.23 | | |
| Channel | | | | 26065 | 26340 | 26665 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1852.5 | 1880 | 1912.5 | | |
| 5 | QPSK | 1 | 0 | 23.08 | 23.11 | 22.99 | 23.5 | 0 |
| 5 | QPSK | 1 | 12 | 23.05 | 23.06 | 22.99 | | |
| 5 | QPSK | 1 | 24 | 22.96 | 23.05 | 23.04 | | |
| 5 | QPSK | 12 | 0 | 21.98 | 22.08 | 21.99 | 22.5 | 1 |
| 5 | QPSK | 12 | 7 | 22.06 | 22.10 | 22.09 | | |
| 5 | QPSK | 12 | 13 | 22.02 | 22.04 | 22.05 | | |
| 5 | QPSK | 25 | 0 | 22.01 | 22.05 | 22.05 | 22.5 | 1 |
| 5 | 16QAM | 1 | 0 | 22.33 | 22.37 | 22.30 | | |
| 5 | 16QAM | 1 | 12 | 22.40 | 22.48 | 22.44 | | |
| 5 | 16QAM | 1 | 24 | 22.36 | 22.32 | 22.27 | 21.5 | 2 |
| 5 | 16QAM | 12 | 0 | 21.06 | 21.19 | 21.12 | | |
| 5 | 16QAM | 12 | 7 | 21.23 | 21.19 | 21.19 | | |
| 5 | 16QAM | 12 | 13 | 21.17 | 21.17 | 21.16 | 21.5 | 2 |
| 5 | 16QAM | 25 | 0 | 21.14 | 21.16 | 21.14 | | |
| 5 | 64QAM | 1 | 0 | 21.38 | 21.38 | 21.25 | | |
| 5 | 64QAM | 1 | 12 | 21.33 | 21.39 | 21.31 | 21.5 | 2 |
| 5 | 64QAM | 1 | 24 | 21.28 | 21.33 | 21.18 | | |
| 5 | 64QAM | 12 | 0 | 20.10 | 20.11 | 20.12 | | |
| 5 | 64QAM | 12 | 7 | 20.20 | 20.23 | 20.26 | 20.5 | 3 |
| 5 | 64QAM | 12 | 13 | 20.13 | 20.16 | 20.23 | | |
| 5 | 64QAM | 25 | 0 | 20.16 | 20.16 | 20.21 | | |



| Channel | | | | 26055 | 26340 | 26675 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1851.5 | 1880 | 1913.5 | | |
| 3 | QPSK | 1 | 0 | 23.10 | 23.07 | 22.98 | 23.5 | 0 |
| 3 | QPSK | 1 | 8 | 22.96 | 22.98 | 23.02 | | |
| 3 | QPSK | 1 | 14 | 22.94 | 23.01 | 23.01 | | |
| 3 | QPSK | 8 | 0 | 21.98 | 22.11 | 21.99 | 22.5 | 1 |
| 3 | QPSK | 8 | 4 | 22.00 | 22.10 | 22.10 | | |
| 3 | QPSK | 8 | 7 | 21.98 | 21.99 | 22.11 | | |
| 3 | QPSK | 15 | 0 | 21.99 | 22.02 | 22.05 | 22.5 | 1 |
| 3 | 16QAM | 1 | 0 | 22.43 | 22.37 | 22.29 | | |
| 3 | 16QAM | 1 | 8 | 22.37 | 22.47 | 22.38 | | |
| 3 | 16QAM | 1 | 14 | 22.39 | 22.39 | 22.24 | 21.5 | 2 |
| 3 | 16QAM | 8 | 0 | 21.12 | 21.13 | 21.19 | | |
| 3 | 16QAM | 8 | 4 | 21.18 | 21.19 | 21.22 | | |
| 3 | 16QAM | 8 | 7 | 21.07 | 21.20 | 21.14 | 21.5 | 2 |
| 3 | 16QAM | 15 | 0 | 21.04 | 21.17 | 21.10 | | |
| 3 | 64QAM | 1 | 0 | 21.42 | 21.31 | 21.26 | | |
| 3 | 64QAM | 1 | 8 | 21.30 | 21.35 | 21.37 | 21.5 | 2 |
| 3 | 64QAM | 1 | 14 | 21.29 | 21.33 | 21.20 | | |
| 3 | 64QAM | 8 | 0 | 20.06 | 20.10 | 20.11 | | |
| 3 | 64QAM | 8 | 4 | 20.15 | 20.15 | 20.17 | 20.5 | 3 |
| 3 | 64QAM | 8 | 7 | 20.11 | 20.18 | 20.22 | | |
| 3 | 64QAM | 15 | 0 | 20.16 | 20.13 | 20.18 | | |
| Channel | | | | 26047 | 26340 | 26683 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1850.7 | 1880 | 1914.3 | | |
| 1.4 | QPSK | 1 | 0 | 23.01 | 23.08 | 22.89 | 23.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 22.99 | 23.08 | 22.98 | | |
| 1.4 | QPSK | 1 | 5 | 22.94 | 23.04 | 23.03 | | |
| 1.4 | QPSK | 3 | 0 | 21.96 | 22.14 | 21.98 | | |
| 1.4 | QPSK | 3 | 1 | 22.01 | 22.02 | 22.06 | | |
| 1.4 | QPSK | 3 | 3 | 22.04 | 22.03 | 22.07 | | |
| 1.4 | QPSK | 6 | 0 | 21.94 | 22.04 | 22.07 | 22.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 22.36 | 22.40 | 22.27 | 22.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 22.39 | 22.45 | 22.35 | | |
| 1.4 | 16QAM | 1 | 5 | 22.39 | 22.32 | 22.28 | | |
| 1.4 | 16QAM | 3 | 0 | 21.06 | 21.18 | 21.16 | | |
| 1.4 | 16QAM | 3 | 1 | 21.14 | 21.16 | 21.15 | | |
| 1.4 | 16QAM | 3 | 3 | 21.13 | 21.21 | 21.14 | | |
| 1.4 | 16QAM | 6 | 0 | 21.09 | 21.13 | 21.17 | 21.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 21.35 | 21.35 | 21.30 | 21.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 21.29 | 21.29 | 21.33 | | |
| 1.4 | 64QAM | 1 | 5 | 21.31 | 21.30 | 21.22 | | |
| 1.4 | 64QAM | 3 | 0 | 20.16 | 20.14 | 20.16 | | |
| 1.4 | 64QAM | 3 | 1 | 20.22 | 20.16 | 20.18 | | |
| 1.4 | 64QAM | 3 | 3 | 20.14 | 20.21 | 20.19 | | |
| 1.4 | 64QAM | 6 | 0 | 20.13 | 20.12 | 20.19 | 20.5 | 3 |



<LTE Band 26>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 26765 | 26865 | 26965 | | |
| Frequency (MHz) | | | | 821.5 | 831.5 | 841.5 | | |
| 15 | QPSK | 1 | 0 | 23.51 | 23.53 | 23.39 | | |
| 15 | QPSK | 1 | 37 | 23.45 | 23.37 | 23.37 | 24 | 0 |
| 15 | QPSK | 1 | 74 | 23.45 | 23.41 | 23.38 | | |
| 15 | QPSK | 36 | 0 | 22.48 | 22.59 | 22.35 | | |
| 15 | QPSK | 36 | 20 | 22.58 | 22.46 | 22.42 | 23 | 1 |
| 15 | QPSK | 36 | 39 | 22.53 | 22.40 | 22.34 | | |
| 15 | QPSK | 75 | 0 | 22.57 | 22.58 | 22.39 | | |
| 15 | 16QAM | 1 | 0 | 22.57 | 22.85 | 22.71 | 23 | 1 |
| 15 | 16QAM | 1 | 37 | 22.79 | 22.66 | 22.73 | | |
| 15 | 16QAM | 1 | 74 | 22.76 | 22.79 | 22.70 | | |
| 15 | 16QAM | 36 | 0 | 21.61 | 21.57 | 21.45 | 22 | 2 |
| 15 | 16QAM | 36 | 20 | 21.69 | 21.53 | 21.54 | | |
| 15 | 16QAM | 36 | 39 | 21.63 | 21.50 | 21.47 | | |
| 15 | 16QAM | 75 | 0 | 21.68 | 21.53 | 21.50 | 22 | 2 |
| 15 | 64QAM | 1 | 0 | 21.75 | 21.79 | 21.67 | | |
| 15 | 64QAM | 1 | 37 | 21.73 | 21.62 | 21.67 | | |
| 15 | 64QAM | 1 | 74 | 21.69 | 21.70 | 21.64 | 22 | 2 |
| 15 | 64QAM | 36 | 0 | 20.65 | 20.61 | 20.50 | | |
| 15 | 64QAM | 36 | 20 | 20.71 | 20.58 | 20.57 | | |
| 15 | 64QAM | 36 | 39 | 20.67 | 20.52 | 20.50 | 21 | 3 |
| 15 | 64QAM | 75 | 0 | 20.68 | 20.54 | 20.53 | | |
| Channel | | | | 26740 | 26865 | 26990 | | |
| Frequency (MHz) | | | | 819 | 831.5 | 844 | | |
| 10 | QPSK | 1 | 0 | 23.48 | 23.52 | 23.36 | | |
| 10 | QPSK | 1 | 25 | 23.45 | 23.36 | 23.33 | | |
| 10 | QPSK | 1 | 49 | 23.41 | 23.32 | 23.29 | | |
| 10 | QPSK | 25 | 0 | 22.46 | 22.56 | 22.28 | | |
| 10 | QPSK | 25 | 12 | 22.52 | 22.40 | 22.33 | 23 | 1 |
| 10 | QPSK | 25 | 25 | 22.46 | 22.30 | 22.29 | | |
| 10 | QPSK | 50 | 0 | 22.51 | 22.50 | 22.32 | | |
| 10 | 16QAM | 1 | 0 | 22.53 | 22.83 | 22.71 | 23 | 1 |
| 10 | 16QAM | 1 | 25 | 22.70 | 22.58 | 22.68 | | |
| 10 | 16QAM | 1 | 49 | 22.74 | 22.71 | 22.68 | | |
| 10 | 16QAM | 25 | 0 | 21.53 | 21.57 | 21.41 | 22 | 2 |
| 10 | 16QAM | 25 | 12 | 21.69 | 21.46 | 21.45 | | |
| 10 | 16QAM | 25 | 25 | 21.63 | 21.42 | 21.46 | | |
| 10 | 16QAM | 50 | 0 | 21.63 | 21.49 | 21.46 | 22 | 2 |
| 10 | 64QAM | 1 | 0 | 21.70 | 21.79 | 21.64 | | |
| 10 | 64QAM | 1 | 25 | 21.69 | 21.56 | 21.61 | | |
| 10 | 64QAM | 1 | 49 | 21.69 | 21.63 | 21.59 | 22 | 2 |
| 10 | 64QAM | 25 | 0 | 20.63 | 20.58 | 20.49 | | |
| 10 | 64QAM | 25 | 12 | 20.68 | 20.57 | 20.57 | | |
| 10 | 64QAM | 25 | 25 | 20.66 | 20.47 | 20.49 | 21 | 3 |
| 10 | 64QAM | 50 | 0 | 20.62 | 20.50 | 20.49 | | |



| Channel | | | | 26715 | 26865 | 27015 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------|----------|
| Frequency (MHz) | | | | 816.5 | 831.5 | 846.5 | | |
| 5 | QPSK | 1 | 0 | 23.46 | 23.49 | 23.31 | 24 | 0 |
| 5 | QPSK | 1 | 12 | 23.41 | 23.33 | 23.27 | | |
| 5 | QPSK | 1 | 24 | 23.35 | 23.31 | 23.32 | | |
| 5 | QPSK | 12 | 0 | 22.44 | 22.49 | 22.28 | 23 | 1 |
| 5 | QPSK | 12 | 7 | 22.51 | 22.41 | 22.36 | | |
| 5 | QPSK | 12 | 13 | 22.52 | 22.30 | 22.29 | | |
| 5 | QPSK | 25 | 0 | 22.52 | 22.48 | 22.34 | 23 | 1 |
| 5 | 16QAM | 1 | 0 | 22.47 | 22.82 | 22.66 | | |
| 5 | 16QAM | 1 | 12 | 22.69 | 22.61 | 22.71 | | |
| 5 | 16QAM | 1 | 24 | 22.69 | 22.75 | 22.66 | 22 | 2 |
| 5 | 16QAM | 12 | 0 | 21.61 | 21.48 | 21.43 | | |
| 5 | 16QAM | 12 | 7 | 21.69 | 21.49 | 21.52 | | |
| 5 | 16QAM | 12 | 13 | 21.62 | 21.43 | 21.44 | 21 | 3 |
| 5 | 16QAM | 25 | 0 | 21.58 | 21.51 | 21.50 | | |
| 5 | 64QAM | 1 | 0 | 21.69 | 21.79 | 21.67 | | |
| 5 | 64QAM | 1 | 12 | 21.67 | 21.60 | 21.59 | 22 | 2 |
| 5 | 64QAM | 1 | 24 | 21.64 | 21.70 | 21.63 | | |
| 5 | 64QAM | 12 | 0 | 20.62 | 20.51 | 20.46 | | |
| 5 | 64QAM | 12 | 7 | 20.62 | 20.56 | 20.51 | 21 | 3 |
| 5 | 64QAM | 12 | 13 | 20.57 | 20.48 | 20.48 | | |
| 5 | 64QAM | 25 | 0 | 20.64 | 20.53 | 20.43 | | |
| Channel | | | | 26705 | 26865 | 27025 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 815.5 | 831.5 | 847.5 | | |
| 3 | QPSK | 1 | 0 | 23.41 | 23.52 | 23.29 | 24 | 0 |
| 3 | QPSK | 1 | 8 | 23.40 | 23.37 | 23.33 | | |
| 3 | QPSK | 1 | 14 | 23.45 | 23.41 | 23.28 | | |
| 3 | QPSK | 8 | 0 | 22.43 | 22.58 | 22.30 | 23 | 1 |
| 3 | QPSK | 8 | 4 | 22.53 | 22.37 | 22.34 | | |
| 3 | QPSK | 8 | 7 | 22.50 | 22.32 | 22.25 | | |
| 3 | QPSK | 15 | 0 | 22.47 | 22.48 | 22.31 | 23 | 1 |
| 3 | 16QAM | 1 | 0 | 22.51 | 22.75 | 22.61 | | |
| 3 | 16QAM | 1 | 8 | 22.72 | 22.59 | 22.73 | | |
| 3 | 16QAM | 1 | 14 | 22.69 | 22.72 | 22.68 | 22 | 2 |
| 3 | 16QAM | 8 | 0 | 21.58 | 21.55 | 21.39 | | |
| 3 | 16QAM | 8 | 4 | 21.60 | 21.48 | 21.49 | | |
| 3 | 16QAM | 8 | 7 | 21.61 | 21.48 | 21.41 | 22 | 2 |
| 3 | 16QAM | 15 | 0 | 21.60 | 21.53 | 21.44 | | |
| 3 | 64QAM | 1 | 0 | 21.74 | 21.78 | 21.65 | | |
| 3 | 64QAM | 1 | 8 | 21.71 | 21.61 | 21.57 | 22 | 2 |
| 3 | 64QAM | 1 | 14 | 21.69 | 21.68 | 21.60 | | |
| 3 | 64QAM | 8 | 0 | 20.59 | 20.56 | 20.43 | | |
| 3 | 64QAM | 8 | 4 | 20.62 | 20.51 | 20.56 | 21 | 3 |
| 3 | 64QAM | 8 | 7 | 20.60 | 20.49 | 20.40 | | |
| 3 | 64QAM | 15 | 0 | 20.63 | 20.44 | 20.48 | | |



| Channel | | | | 26697 | 26865 | 27033 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|---|---|-------|-------|-------|------------------------|-------------|
| Frequency (MHz) | | | | 814.7 | 831.5 | 848.3 | | |
| 1.4 | QPSK | 1 | 0 | 23.42 | 23.43 | 23.35 | 24 | 0 |
| 1.4 | QPSK | 1 | 3 | 23.43 | 23.37 | 23.27 | | |
| 1.4 | QPSK | 1 | 5 | 23.45 | 23.38 | 23.38 | | |
| 1.4 | QPSK | 3 | 0 | 22.47 | 22.54 | 22.27 | | |
| 1.4 | QPSK | 3 | 1 | 22.52 | 22.36 | 22.41 | | |
| 1.4 | QPSK | 3 | 3 | 22.52 | 22.35 | 22.32 | | |
| 1.4 | QPSK | 6 | 0 | 22.52 | 22.51 | 22.29 | 23 | 1 |
| 1.4 | 16QAM | 1 | 0 | 22.57 | 22.78 | 22.64 | 23 | 1 |
| 1.4 | 16QAM | 1 | 3 | 22.72 | 22.59 | 22.73 | | |
| 1.4 | 16QAM | 1 | 5 | 22.76 | 22.78 | 22.60 | | |
| 1.4 | 16QAM | 3 | 0 | 21.58 | 21.47 | 21.44 | | |
| 1.4 | 16QAM | 3 | 1 | 21.63 | 21.47 | 21.54 | | |
| 1.4 | 16QAM | 3 | 3 | 21.55 | 21.43 | 21.41 | | |
| 1.4 | 16QAM | 6 | 0 | 21.66 | 21.53 | 21.43 | 22 | 2 |
| 1.4 | 64QAM | 1 | 0 | 21.71 | 21.78 | 21.61 | 22 | 2 |
| 1.4 | 64QAM | 1 | 3 | 21.67 | 21.58 | 21.58 | | |
| 1.4 | 64QAM | 1 | 5 | 21.63 | 21.61 | 21.64 | | |
| 1.4 | 64QAM | 3 | 0 | 20.58 | 20.54 | 20.49 | | |
| 1.4 | 64QAM | 3 | 1 | 20.63 | 20.52 | 20.54 | | |
| 1.4 | 64QAM | 3 | 3 | 20.59 | 20.50 | 20.42 | | |
| 1.4 | 64QAM | 6 | 0 | 20.60 | 20.53 | 20.48 | 21 | 3 |



<LTE Band 66>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 132072 | 132322 | 132572 | | |
| Frequency (MHz) | | | | 1720 | 1745 | 1770 | | |
| 20 | QPSK | 1 | 0 | 24.21 | 24.41 | 24.26 | 24.5 | 0 |
| 20 | QPSK | 1 | 49 | 24.11 | 24.39 | 24.23 | | |
| 20 | QPSK | 1 | 99 | 24.07 | 24.21 | 24.04 | | |
| 20 | QPSK | 50 | 0 | 23.10 | 23.33 | 23.22 | 23.5 | 1 |
| 20 | QPSK | 50 | 24 | 23.10 | 23.27 | 23.19 | | |
| 20 | QPSK | 50 | 50 | 23.09 | 23.24 | 23.19 | | |
| 20 | QPSK | 100 | 0 | 23.10 | 23.28 | 23.20 | | |
| 20 | 16QAM | 1 | 0 | 23.37 | 23.36 | 23.44 | 23.5 | 1 |
| 20 | 16QAM | 1 | 49 | 23.50 | 23.45 | 23.37 | | |
| 20 | 16QAM | 1 | 99 | 23.32 | 23.49 | 23.12 | | |
| 20 | 16QAM | 50 | 0 | 22.22 | 22.41 | 22.29 | 22.5 | 2 |
| 20 | 16QAM | 50 | 24 | 22.20 | 22.36 | 22.27 | | |
| 20 | 16QAM | 50 | 50 | 22.18 | 22.35 | 22.22 | | |
| 20 | 16QAM | 100 | 0 | 22.17 | 22.39 | 22.22 | | |
| 20 | 64QAM | 1 | 0 | 22.33 | 22.34 | 22.44 | 22.5 | 2 |
| 20 | 64QAM | 1 | 49 | 22.44 | 22.50 | 22.46 | | |
| 20 | 64QAM | 1 | 99 | 22.27 | 22.44 | 22.17 | | |
| 20 | 64QAM | 50 | 0 | 21.19 | 21.39 | 21.30 | 21.5 | 3 |
| 20 | 64QAM | 50 | 24 | 21.22 | 21.40 | 21.26 | | |
| 20 | 64QAM | 50 | 50 | 21.19 | 21.39 | 21.24 | | |
| 20 | 64QAM | 100 | 0 | 21.22 | 21.35 | 21.23 | | |
| Channel | | | | 132047 | 132322 | 132597 | | |
| Frequency (MHz) | | | | 1717.5 | 1745 | 1772.5 | | |
| 15 | QPSK | 1 | 0 | 24.01 | 24.32 | 24.17 | 24.5 | 0 |
| 15 | QPSK | 1 | 37 | 24.17 | 24.36 | 24.21 | | |
| 15 | QPSK | 1 | 74 | 24.01 | 24.18 | 23.97 | | |
| 15 | QPSK | 36 | 0 | 23.07 | 23.25 | 23.16 | 23.5 | 1 |
| 15 | QPSK | 36 | 20 | 23.04 | 23.27 | 23.09 | | |
| 15 | QPSK | 36 | 39 | 23.04 | 23.24 | 23.18 | | |
| 15 | QPSK | 75 | 0 | 23.00 | 23.27 | 23.14 | | |
| 15 | 16QAM | 1 | 0 | 23.36 | 23.26 | 23.40 | 23.5 | 1 |
| 15 | 16QAM | 1 | 37 | 23.45 | 23.40 | 23.30 | | |
| 15 | 16QAM | 1 | 74 | 23.30 | 23.43 | 23.10 | | |
| 15 | 16QAM | 36 | 0 | 22.22 | 22.34 | 22.21 | 22.5 | 2 |
| 15 | 16QAM | 36 | 20 | 22.16 | 22.34 | 22.17 | | |
| 15 | 16QAM | 36 | 39 | 22.17 | 22.33 | 22.21 | | |
| 15 | 16QAM | 75 | 0 | 22.14 | 22.32 | 22.17 | | |
| 15 | 64QAM | 1 | 0 | 22.31 | 22.34 | 22.40 | 22.5 | 2 |
| 15 | 64QAM | 1 | 37 | 22.42 | 22.41 | 22.41 | | |
| 15 | 64QAM | 1 | 74 | 22.25 | 22.40 | 22.14 | | |
| 15 | 64QAM | 36 | 0 | 21.18 | 21.37 | 21.24 | 21.5 | 3 |
| 15 | 64QAM | 36 | 20 | 21.17 | 21.33 | 21.22 | | |
| 15 | 64QAM | 36 | 39 | 21.16 | 21.38 | 21.14 | | |
| 15 | 64QAM | 75 | 0 | 21.16 | 21.30 | 21.13 | | |



| Channel | | | | 132022 | 132322 | 132622 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1715 | 1745 | 1775 | | |
| 10 | QPSK | 1 | 0 | 24.09 | 24.40 | 24.13 | 24.5 | 0 |
| 10 | QPSK | 1 | 25 | 24.18 | 24.32 | 24.20 | | |
| 10 | QPSK | 1 | 49 | 24.00 | 24.20 | 23.97 | | |
| 10 | QPSK | 25 | 0 | 23.01 | 23.33 | 23.19 | 23.5 | 1 |
| 10 | QPSK | 25 | 12 | 23.01 | 23.23 | 23.11 | | |
| 10 | QPSK | 25 | 25 | 23.08 | 23.21 | 23.13 | | |
| 10 | QPSK | 50 | 0 | 23.06 | 23.22 | 23.13 | 23.5 | 1 |
| 10 | 16QAM | 1 | 0 | 23.32 | 23.28 | 23.36 | | |
| 10 | 16QAM | 1 | 25 | 23.43 | 23.36 | 23.28 | | |
| 10 | 16QAM | 1 | 49 | 23.29 | 23.47 | 23.05 | 22.5 | 2 |
| 10 | 16QAM | 25 | 0 | 22.21 | 22.32 | 22.28 | | |
| 10 | 16QAM | 25 | 12 | 22.10 | 22.33 | 22.26 | | |
| 10 | 16QAM | 25 | 25 | 22.12 | 22.31 | 22.21 | 22.5 | 2 |
| 10 | 16QAM | 50 | 0 | 22.12 | 22.33 | 22.18 | | |
| 10 | 64QAM | 1 | 0 | 22.27 | 22.32 | 22.42 | | |
| 10 | 64QAM | 1 | 25 | 22.44 | 22.41 | 22.39 | 22.5 | 2 |
| 10 | 64QAM | 1 | 49 | 22.18 | 22.37 | 22.16 | | |
| 10 | 64QAM | 25 | 0 | 21.13 | 21.29 | 21.27 | | |
| 10 | 64QAM | 25 | 12 | 21.18 | 21.34 | 21.22 | 21.5 | 3 |
| 10 | 64QAM | 25 | 25 | 21.10 | 21.34 | 21.22 | | |
| 10 | 64QAM | 25 | 25 | 21.10 | 21.34 | 21.22 | | |
| 10 | 64QAM | 50 | 0 | 21.21 | 21.30 | 21.20 | 21.5 | 3 |
| Channel | | | | 131997 | 132322 | 132647 | | |
| Frequency (MHz) | | | | 1712.5 | 1745 | 1777.5 | | |
| 5 | QPSK | 1 | 0 | 24.06 | 24.34 | 24.18 | 24.5 | 0 |
| 5 | QPSK | 1 | 12 | 24.14 | 24.29 | 24.19 | | |
| 5 | QPSK | 1 | 24 | 23.99 | 24.21 | 23.98 | | |
| 5 | QPSK | 12 | 0 | 23.09 | 23.32 | 23.17 | 23.5 | 1 |
| 5 | QPSK | 12 | 7 | 23.10 | 23.19 | 23.09 | | |
| 5 | QPSK | 12 | 13 | 23.08 | 23.23 | 23.09 | | |
| 5 | QPSK | 25 | 0 | 23.02 | 23.24 | 23.18 | 23.5 | 1 |
| 5 | 16QAM | 1 | 0 | 23.36 | 23.36 | 23.38 | | |
| 5 | 16QAM | 1 | 12 | 23.40 | 23.42 | 23.36 | | |
| 5 | 16QAM | 1 | 24 | 23.32 | 23.45 | 23.06 | 22.5 | 2 |
| 5 | 16QAM | 12 | 0 | 22.19 | 22.37 | 22.24 | | |
| 5 | 16QAM | 12 | 7 | 22.17 | 22.35 | 22.24 | | |
| 5 | 16QAM | 12 | 13 | 22.12 | 22.33 | 22.21 | 22.5 | 2 |
| 5 | 16QAM | 25 | 0 | 22.07 | 22.33 | 22.19 | | |
| 5 | 64QAM | 1 | 0 | 22.26 | 22.33 | 22.38 | | |
| 5 | 64QAM | 1 | 12 | 22.34 | 22.40 | 22.40 | 22.5 | 2 |
| 5 | 64QAM | 1 | 24 | 22.19 | 22.43 | 22.14 | | |
| 5 | 64QAM | 12 | 0 | 21.10 | 21.36 | 21.28 | | |
| 5 | 64QAM | 12 | 7 | 21.14 | 21.37 | 21.20 | 21.5 | 3 |
| 5 | 64QAM | 12 | 13 | 21.15 | 21.35 | 21.21 | | |
| 5 | 64QAM | 25 | 0 | 21.20 | 21.26 | 21.20 | | |



| Channel | | | | 131987 | 132322 | 132657 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1711.5 | 1745 | 1778.5 | | |
| 3 | QPSK | 1 | 0 | 24.06 | 24.33 | 24.15 | 24.5 | 0 |
| 3 | QPSK | 1 | 8 | 24.21 | 24.33 | 24.25 | | |
| 3 | QPSK | 1 | 14 | 24.07 | 24.18 | 24.04 | | |
| 3 | QPSK | 8 | 0 | 23.01 | 23.26 | 23.14 | 23.5 | 1 |
| 3 | QPSK | 8 | 4 | 23.02 | 23.17 | 23.12 | | |
| 3 | QPSK | 8 | 7 | 23.00 | 23.19 | 23.18 | | |
| 3 | QPSK | 15 | 0 | 23.09 | 23.28 | 23.13 | | |
| 3 | 16QAM | 1 | 0 | 23.33 | 23.32 | 23.35 | 23.5 | 1 |
| 3 | 16QAM | 1 | 8 | 23.42 | 23.42 | 23.32 | | |
| 3 | 16QAM | 1 | 14 | 23.32 | 23.39 | 23.03 | | |
| 3 | 16QAM | 8 | 0 | 22.17 | 22.34 | 22.24 | 22.5 | 2 |
| 3 | 16QAM | 8 | 4 | 22.15 | 22.35 | 22.20 | | |
| 3 | 16QAM | 8 | 7 | 22.15 | 22.35 | 22.13 | | |
| 3 | 16QAM | 15 | 0 | 22.15 | 22.37 | 22.12 | | |
| 3 | 64QAM | 1 | 0 | 22.26 | 22.33 | 22.43 | 22.5 | 2 |
| 3 | 64QAM | 1 | 8 | 22.44 | 22.41 | 22.43 | | |
| 3 | 64QAM | 1 | 14 | 22.19 | 22.37 | 22.13 | | |
| 3 | 64QAM | 8 | 0 | 21.13 | 21.29 | 21.23 | 21.5 | 3 |
| 3 | 64QAM | 8 | 4 | 21.20 | 21.37 | 21.17 | | |
| 3 | 64QAM | 8 | 7 | 21.17 | 21.37 | 21.24 | | |
| 3 | 64QAM | 15 | 0 | 21.21 | 21.28 | 21.19 | | |
| Channel | | | | 131979 | 132322 | 132665 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1710.7 | 1745 | 1779.3 | | |
| 1.4 | QPSK | 1 | 0 | 24.11 | 24.31 | 24.15 | 24.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 24.12 | 24.37 | 24.16 | | |
| 1.4 | QPSK | 1 | 5 | 24.03 | 24.21 | 23.95 | | |
| 1.4 | QPSK | 3 | 0 | 23.07 | 23.27 | 23.13 | | |
| 1.4 | QPSK | 3 | 1 | 23.01 | 23.21 | 23.10 | | |
| 1.4 | QPSK | 3 | 3 | 23.03 | 23.16 | 23.18 | | |
| 1.4 | QPSK | 6 | 0 | 23.08 | 23.21 | 23.10 | 23.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 23.37 | 23.30 | 23.42 | 23.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 23.49 | 23.40 | 23.28 | | |
| 1.4 | 16QAM | 1 | 5 | 23.25 | 23.40 | 23.03 | | |
| 1.4 | 16QAM | 3 | 0 | 22.17 | 22.37 | 22.25 | | |
| 1.4 | 16QAM | 3 | 1 | 22.19 | 22.30 | 22.26 | | |
| 1.4 | 16QAM | 3 | 3 | 22.13 | 22.35 | 22.12 | | |
| 1.4 | 16QAM | 6 | 0 | 22.07 | 22.32 | 22.16 | 22.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 22.26 | 22.27 | 22.35 | 22.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 22.35 | 22.47 | 22.36 | | |
| 1.4 | 64QAM | 1 | 5 | 22.26 | 22.41 | 22.09 | | |
| 1.4 | 64QAM | 3 | 0 | 21.18 | 21.38 | 21.30 | | |
| 1.4 | 64QAM | 3 | 1 | 21.21 | 21.36 | 21.16 | | |
| 1.4 | 64QAM | 3 | 3 | 21.10 | 21.30 | 21.20 | | |
| 1.4 | 64QAM | 6 | 0 | 21.12 | 21.26 | 21.15 | 21.5 | 3 |



<Reduced Power Mode>

<LTE Band 2>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 18700 | 18900 | 19100 | | |
| Frequency (MHz) | | | | 1860 | 1880 | 1900 | | |
| 20 | QPSK | 1 | 0 | 18.47 | 18.51 | 18.37 | 19.5 | 0 |
| 20 | QPSK | 1 | 49 | 18.44 | 18.46 | 18.34 | | |
| 20 | QPSK | 1 | 99 | 18.43 | 18.45 | 18.33 | | |
| 20 | QPSK | 50 | 0 | 17.42 | 17.42 | 17.42 | 18.5 | 1 |
| 20 | QPSK | 50 | 24 | 17.47 | 17.46 | 17.34 | | |
| 20 | QPSK | 50 | 50 | 17.43 | 17.44 | 17.37 | | |
| 20 | QPSK | 100 | 0 | 17.43 | 17.43 | 17.44 | | |
| 20 | 16QAM | 1 | 0 | 17.94 | 17.96 | 17.83 | 18.5 | 1 |
| 20 | 16QAM | 1 | 49 | 17.91 | 17.93 | 17.78 | | |
| 20 | 16QAM | 1 | 99 | 17.91 | 17.88 | 17.78 | | |
| 20 | 16QAM | 50 | 0 | 16.57 | 16.57 | 16.57 | 17.5 | 2 |
| 20 | 16QAM | 50 | 24 | 16.60 | 16.63 | 16.50 | | |
| 20 | 16QAM | 50 | 50 | 16.58 | 16.60 | 16.50 | | |
| 20 | 16QAM | 100 | 0 | 16.55 | 16.58 | 16.54 | | |
| 20 | 64QAM | 1 | 0 | 16.86 | 16.88 | 16.74 | 17.5 | 2 |
| 20 | 64QAM | 1 | 49 | 16.82 | 16.83 | 16.70 | | |
| 20 | 64QAM | 1 | 99 | 16.81 | 16.81 | 16.70 | | |
| 20 | 64QAM | 50 | 0 | 15.57 | 15.59 | 15.57 | 16.5 | 3 |
| 20 | 64QAM | 50 | 24 | 15.62 | 15.63 | 15.51 | | |
| 20 | 64QAM | 50 | 50 | 15.60 | 15.61 | 15.50 | | |
| 20 | 64QAM | 100 | 0 | 15.56 | 15.60 | 15.57 | | |
| Channel | | | | 18675 | 18900 | 19125 | | |
| Frequency (MHz) | | | | 1857.5 | 1880 | 1902.5 | | |
| 15 | QPSK | 1 | 0 | 18.42 | 18.42 | 18.33 | 19.5 | 0 |
| 15 | QPSK | 1 | 37 | 18.40 | 18.40 | 18.34 | | |
| 15 | QPSK | 1 | 74 | 18.39 | 18.35 | 18.28 | | |
| 15 | QPSK | 36 | 0 | 17.32 | 17.32 | 17.41 | 18.5 | 1 |
| 15 | QPSK | 36 | 20 | 17.45 | 17.44 | 17.29 | | |
| 15 | QPSK | 36 | 39 | 17.34 | 17.34 | 17.36 | | |
| 15 | QPSK | 75 | 0 | 17.40 | 17.43 | 17.37 | | |
| 15 | 16QAM | 1 | 0 | 17.93 | 17.92 | 17.76 | 18.5 | 1 |
| 15 | 16QAM | 1 | 37 | 17.90 | 17.91 | 17.77 | | |
| 15 | 16QAM | 1 | 74 | 17.83 | 17.86 | 17.78 | | |
| 15 | 16QAM | 36 | 0 | 16.47 | 16.57 | 16.47 | 17.5 | 2 |
| 15 | 16QAM | 36 | 20 | 16.50 | 16.56 | 16.46 | | |
| 15 | 16QAM | 36 | 39 | 16.49 | 16.58 | 16.48 | | |
| 15 | 16QAM | 75 | 0 | 16.50 | 16.51 | 16.51 | | |
| 15 | 64QAM | 1 | 0 | 16.76 | 16.87 | 16.71 | 17.5 | 2 |
| 15 | 64QAM | 1 | 37 | 16.78 | 16.83 | 16.68 | | |
| 15 | 64QAM | 1 | 74 | 16.72 | 16.78 | 16.69 | | |
| 15 | 64QAM | 36 | 0 | 15.52 | 15.57 | 15.47 | 16.5 | 3 |
| 15 | 64QAM | 36 | 20 | 15.59 | 15.55 | 15.42 | | |
| 15 | 64QAM | 36 | 39 | 15.59 | 15.58 | 15.49 | | |
| 15 | 64QAM | 75 | 0 | 15.54 | 15.53 | 15.51 | | |



| Channel | | | | 18650 | 18900 | 19150 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1855 | 1880 | 1905 | | |
| 10 | QPSK | 1 | 0 | 18.40 | 18.49 | 18.36 | 19.5 | 0 |
| 10 | QPSK | 1 | 25 | 18.38 | 18.40 | 18.26 | | |
| 10 | QPSK | 1 | 49 | 18.37 | 18.43 | 18.24 | | |
| 10 | QPSK | 25 | 0 | 17.40 | 17.37 | 17.42 | 18.5 | 1 |
| 10 | QPSK | 25 | 12 | 17.40 | 17.45 | 17.27 | | |
| 10 | QPSK | 25 | 25 | 17.38 | 17.34 | 17.31 | | |
| 10 | QPSK | 50 | 0 | 17.42 | 17.38 | 17.41 | | |
| 10 | 16QAM | 1 | 0 | 17.93 | 17.87 | 17.76 | 18.5 | 1 |
| 10 | 16QAM | 1 | 25 | 17.83 | 17.92 | 17.74 | | |
| 10 | 16QAM | 1 | 49 | 17.91 | 17.84 | 17.78 | | |
| 10 | 16QAM | 25 | 0 | 16.48 | 16.48 | 16.56 | 17.5 | 2 |
| 10 | 16QAM | 25 | 12 | 16.53 | 16.61 | 16.42 | | |
| 10 | 16QAM | 25 | 25 | 16.49 | 16.52 | 16.40 | | |
| 10 | 16QAM | 50 | 0 | 16.52 | 16.57 | 16.50 | | |
| 10 | 64QAM | 1 | 0 | 16.80 | 16.82 | 16.66 | 17.5 | 2 |
| 10 | 64QAM | 1 | 25 | 16.75 | 16.75 | 16.67 | | |
| 10 | 64QAM | 1 | 49 | 16.76 | 16.75 | 16.66 | | |
| 10 | 64QAM | 25 | 0 | 15.57 | 15.51 | 15.49 | 16.5 | 3 |
| 10 | 64QAM | 25 | 12 | 15.60 | 15.59 | 15.47 | | |
| 10 | 64QAM | 25 | 25 | 15.54 | 15.61 | 15.42 | | |
| 10 | 64QAM | 50 | 0 | 15.54 | 15.57 | 15.53 | | |
| Channel | | | | 18625 | 18900 | 19175 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1852.5 | 1880 | 1907.5 | | |
| 5 | QPSK | 1 | 0 | 18.46 | 18.42 | 18.27 | 19.5 | 0 |
| 5 | QPSK | 1 | 12 | 18.35 | 18.42 | 18.27 | | |
| 5 | QPSK | 1 | 24 | 18.39 | 18.37 | 18.31 | | |
| 5 | QPSK | 12 | 0 | 17.33 | 17.41 | 17.38 | 18.5 | 1 |
| 5 | QPSK | 12 | 7 | 17.46 | 17.40 | 17.34 | | |
| 5 | QPSK | 12 | 13 | 17.37 | 17.39 | 17.36 | | |
| 5 | QPSK | 25 | 0 | 17.42 | 17.35 | 17.36 | | |
| 5 | 16QAM | 1 | 0 | 17.93 | 17.88 | 17.73 | 18.5 | 1 |
| 5 | 16QAM | 1 | 12 | 17.85 | 17.92 | 17.76 | | |
| 5 | 16QAM | 1 | 24 | 17.82 | 17.81 | 17.68 | | |
| 5 | 16QAM | 12 | 0 | 16.47 | 16.56 | 16.56 | 17.5 | 2 |
| 5 | 16QAM | 12 | 7 | 16.57 | 16.56 | 16.49 | | |
| 5 | 16QAM | 12 | 13 | 16.51 | 16.53 | 16.41 | | |
| 5 | 16QAM | 25 | 0 | 16.47 | 16.50 | 16.49 | | |
| 5 | 64QAM | 1 | 0 | 16.82 | 16.79 | 16.70 | 17.5 | 2 |
| 5 | 64QAM | 1 | 12 | 16.72 | 16.80 | 16.65 | | |
| 5 | 64QAM | 1 | 24 | 16.81 | 16.77 | 16.62 | | |
| 5 | 64QAM | 12 | 0 | 15.51 | 15.58 | 15.55 | 16.5 | 3 |
| 5 | 64QAM | 12 | 7 | 15.57 | 15.62 | 15.43 | | |
| 5 | 64QAM | 12 | 13 | 15.50 | 15.59 | 15.42 | | |
| 5 | 64QAM | 25 | 0 | 15.53 | 15.50 | 15.53 | | |



| Channel | | | | 18615 | 18900 | 19185 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1851.5 | 1880 | 1908.5 | | |
| 3 | QPSK | 1 | 0 | 18.46 | 18.44 | 18.29 | 19.5 | 0 |
| 3 | QPSK | 1 | 8 | 18.41 | 18.45 | 18.32 | | |
| 3 | QPSK | 1 | 14 | 18.39 | 18.37 | 18.23 | | |
| 3 | QPSK | 8 | 0 | 17.40 | 17.34 | 17.36 | 18.5 | 1 |
| 3 | QPSK | 8 | 4 | 17.45 | 17.42 | 17.27 | | |
| 3 | QPSK | 8 | 7 | 17.34 | 17.44 | 17.35 | | |
| 3 | QPSK | 15 | 0 | 17.35 | 17.33 | 17.39 | | |
| 3 | 16QAM | 1 | 0 | 17.89 | 17.90 | 17.82 | 18.5 | 1 |
| 3 | 16QAM | 1 | 8 | 17.89 | 17.93 | 17.75 | | |
| 3 | 16QAM | 1 | 14 | 17.81 | 17.85 | 17.77 | | |
| 3 | 16QAM | 8 | 0 | 16.50 | 16.49 | 16.54 | 17.5 | 2 |
| 3 | 16QAM | 8 | 4 | 16.51 | 16.54 | 16.42 | | |
| 3 | 16QAM | 8 | 7 | 16.54 | 16.55 | 16.46 | | |
| 3 | 16QAM | 15 | 0 | 16.55 | 16.49 | 16.45 | | |
| 3 | 64QAM | 1 | 0 | 16.84 | 16.81 | 16.72 | 17.5 | 2 |
| 3 | 64QAM | 1 | 8 | 16.76 | 16.82 | 16.65 | | |
| 3 | 64QAM | 1 | 14 | 16.77 | 16.78 | 16.62 | | |
| 3 | 64QAM | 8 | 0 | 15.52 | 15.53 | 15.53 | 16.5 | 3 |
| 3 | 64QAM | 8 | 4 | 15.62 | 15.62 | 15.50 | | |
| 3 | 64QAM | 8 | 7 | 15.55 | 15.60 | 15.50 | | |
| 3 | 64QAM | 15 | 0 | 15.46 | 15.60 | 15.51 | | |
| Channel | | | | 18607 | 18900 | 19193 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1850.7 | 1880 | 1909.3 | | |
| 1.4 | QPSK | 1 | 0 | 18.47 | 18.48 | 18.34 | 19.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 18.34 | 18.40 | 18.32 | | |
| 1.4 | QPSK | 1 | 5 | 18.38 | 18.43 | 18.24 | | |
| 1.4 | QPSK | 3 | 0 | 17.55 | 17.59 | 17.59 | | |
| 1.4 | QPSK | 3 | 1 | 17.66 | 17.57 | 17.50 | | |
| 1.4 | QPSK | 3 | 3 | 17.58 | 17.54 | 17.51 | | |
| 1.4 | QPSK | 6 | 0 | 17.33 | 17.40 | 17.39 | 18.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 17.94 | 17.88 | 17.76 | 18.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 17.81 | 17.89 | 17.72 | | |
| 1.4 | 16QAM | 1 | 5 | 17.86 | 17.80 | 17.71 | | |
| 1.4 | 16QAM | 3 | 0 | 16.51 | 16.53 | 16.50 | | |
| 1.4 | 16QAM | 3 | 1 | 16.54 | 16.58 | 16.52 | | |
| 1.4 | 16QAM | 3 | 3 | 16.52 | 16.51 | 16.53 | | |
| 1.4 | 16QAM | 6 | 0 | 16.55 | 16.53 | 16.49 | 17.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 16.82 | 16.87 | 16.69 | 17.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 16.80 | 16.78 | 16.66 | | |
| 1.4 | 64QAM | 1 | 5 | 16.81 | 16.79 | 16.68 | | |
| 1.4 | 64QAM | 3 | 0 | 15.51 | 15.51 | 15.51 | | |
| 1.4 | 64QAM | 3 | 1 | 15.58 | 15.58 | 15.53 | | |
| 1.4 | 64QAM | 3 | 3 | 15.58 | 15.57 | 15.50 | | |
| 1.4 | 64QAM | 6 | 0 | 15.54 | 15.56 | 15.57 | 16.5 | 3 |



<LTE Band 4>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20050 | 20175 | 20300 | | |
| Frequency (MHz) | | | | 1720 | 1732.5 | 1745 | | |
| 20 | QPSK | 1 | 0 | 17.57 | 17.78 | 17.77 | 18.5 | 0 |
| 20 | QPSK | 1 | 49 | 17.60 | 17.71 | 17.76 | | |
| 20 | QPSK | 1 | 99 | 17.62 | 17.60 | 17.67 | | |
| 20 | QPSK | 50 | 0 | 16.60 | 16.85 | 16.78 | 17.5 | 1 |
| 20 | QPSK | 50 | 24 | 16.74 | 16.76 | 16.84 | | |
| 20 | QPSK | 50 | 50 | 16.71 | 16.74 | 16.77 | | |
| 20 | QPSK | 100 | 0 | 16.74 | 16.80 | 16.79 | | |
| 20 | 16QAM | 1 | 0 | 17.00 | 17.10 | 17.15 | 17.5 | 1 |
| 20 | 16QAM | 1 | 49 | 17.01 | 17.11 | 17.16 | | |
| 20 | 16QAM | 1 | 99 | 17.00 | 17.05 | 17.04 | | |
| 20 | 16QAM | 50 | 0 | 15.74 | 15.87 | 15.92 | 16.5 | 2 |
| 20 | 16QAM | 50 | 24 | 15.85 | 15.89 | 15.92 | | |
| 20 | 16QAM | 50 | 50 | 15.82 | 15.86 | 15.85 | | |
| 20 | 16QAM | 100 | 0 | 15.83 | 15.87 | 15.90 | | |
| 20 | 64QAM | 1 | 0 | 15.90 | 16.01 | 16.05 | 16.5 | 2 |
| 20 | 64QAM | 1 | 49 | 15.93 | 16.00 | 16.08 | | |
| 20 | 64QAM | 1 | 99 | 15.91 | 15.93 | 15.98 | | |
| 20 | 64QAM | 50 | 0 | 14.74 | 14.89 | 14.93 | 15.5 | 3 |
| 20 | 64QAM | 50 | 24 | 14.88 | 14.92 | 14.96 | | |
| 20 | 64QAM | 50 | 50 | 14.85 | 14.87 | 14.89 | | |
| 20 | 64QAM | 100 | 0 | 14.87 | 14.87 | 14.91 | | |
| Channel | | | | 20025 | 20175 | 20325 | | |
| Frequency (MHz) | | | | 1717.5 | 1732.5 | 1747.5 | | |
| 15 | QPSK | 1 | 0 | 17.51 | 17.68 | 17.75 | 18.5 | 0 |
| 15 | QPSK | 1 | 37 | 17.59 | 17.63 | 17.75 | | |
| 15 | QPSK | 1 | 74 | 17.59 | 17.56 | 17.59 | | |
| 15 | QPSK | 36 | 0 | 16.59 | 16.76 | 16.76 | 17.5 | 1 |
| 15 | QPSK | 36 | 20 | 16.64 | 16.75 | 16.82 | | |
| 15 | QPSK | 36 | 39 | 16.66 | 16.66 | 16.67 | | |
| 15 | QPSK | 75 | 0 | 16.70 | 16.78 | 16.76 | | |
| 15 | 16QAM | 1 | 0 | 16.94 | 17.01 | 17.11 | 17.5 | 1 |
| 15 | 16QAM | 1 | 37 | 16.99 | 17.08 | 17.09 | | |
| 15 | 16QAM | 1 | 74 | 16.94 | 17.02 | 16.99 | | |
| 15 | 16QAM | 36 | 0 | 15.65 | 15.81 | 15.90 | 16.5 | 2 |
| 15 | 16QAM | 36 | 20 | 15.84 | 15.81 | 15.85 | | |
| 15 | 16QAM | 36 | 39 | 15.72 | 15.83 | 15.85 | | |
| 15 | 16QAM | 75 | 0 | 15.73 | 15.77 | 15.88 | | |
| 15 | 64QAM | 1 | 0 | 15.80 | 15.92 | 15.95 | 16.5 | 2 |
| 15 | 64QAM | 1 | 37 | 15.89 | 15.90 | 16.06 | | |
| 15 | 64QAM | 1 | 74 | 15.91 | 15.90 | 15.89 | | |
| 15 | 64QAM | 36 | 0 | 14.68 | 14.88 | 14.89 | 15.5 | 3 |
| 15 | 64QAM | 36 | 20 | 14.81 | 14.87 | 14.87 | | |
| 15 | 64QAM | 36 | 39 | 14.84 | 14.85 | 14.83 | | |
| 15 | 64QAM | 75 | 0 | 14.86 | 14.80 | 14.81 | | |



| Channel | | | | 20000 | 20175 | 20350 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1715 | 1732.5 | 1750 | | |
| 10 | QPSK | 1 | 0 | 17.55 | 17.78 | 17.77 | 18.5 | 0 |
| 10 | QPSK | 1 | 25 | 17.57 | 17.66 | 17.69 | | |
| 10 | QPSK | 1 | 49 | 17.61 | 17.52 | 17.65 | | |
| 10 | QPSK | 25 | 0 | 16.53 | 16.81 | 16.73 | 17.5 | 1 |
| 10 | QPSK | 25 | 12 | 16.70 | 16.68 | 16.81 | | |
| 10 | QPSK | 25 | 25 | 16.70 | 16.73 | 16.76 | | |
| 10 | QPSK | 50 | 0 | 16.74 | 16.70 | 16.70 | 17.5 | 1 |
| 10 | 16QAM | 1 | 0 | 16.98 | 17.03 | 17.14 | | |
| 10 | 16QAM | 1 | 25 | 16.94 | 17.01 | 17.07 | | |
| 10 | 16QAM | 1 | 49 | 16.98 | 16.98 | 17.01 | 16.5 | 2 |
| 10 | 16QAM | 25 | 0 | 15.74 | 15.78 | 15.83 | | |
| 10 | 16QAM | 25 | 12 | 15.78 | 15.79 | 15.83 | | |
| 10 | 16QAM | 25 | 25 | 15.75 | 15.79 | 15.82 | 16.5 | 2 |
| 10 | 16QAM | 50 | 0 | 15.80 | 15.78 | 15.86 | | |
| 10 | 64QAM | 1 | 0 | 15.85 | 15.94 | 16.04 | | |
| 10 | 64QAM | 1 | 25 | 15.92 | 15.98 | 16.07 | 16.5 | 2 |
| 10 | 64QAM | 1 | 49 | 15.86 | 15.92 | 15.98 | | |
| 10 | 64QAM | 25 | 0 | 14.65 | 14.83 | 14.93 | | |
| 10 | 64QAM | 25 | 12 | 14.87 | 14.87 | 14.86 | 15.5 | 3 |
| 10 | 64QAM | 25 | 25 | 14.75 | 14.81 | 14.83 | | |
| 10 | 64QAM | 50 | 0 | 14.85 | 14.77 | 14.81 | | |
| Channel | | | | 19975 | 20175 | 20375 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1712.5 | 1732.5 | 1752.5 | | |
| 5 | QPSK | 1 | 0 | 17.47 | 17.76 | 17.73 | 18.5 | 0 |
| 5 | QPSK | 1 | 12 | 17.56 | 17.68 | 17.71 | | |
| 5 | QPSK | 1 | 24 | 17.62 | 17.60 | 17.62 | | |
| 5 | QPSK | 12 | 0 | 16.56 | 16.75 | 16.69 | 17.5 | 1 |
| 5 | QPSK | 12 | 7 | 16.67 | 16.76 | 16.76 | | |
| 5 | QPSK | 12 | 13 | 16.68 | 16.70 | 16.71 | | |
| 5 | QPSK | 25 | 0 | 16.74 | 16.75 | 16.75 | 17.5 | 1 |
| 5 | 16QAM | 1 | 0 | 16.90 | 17.01 | 17.05 | | |
| 5 | 16QAM | 1 | 12 | 17.00 | 17.02 | 17.10 | | |
| 5 | 16QAM | 1 | 24 | 16.95 | 16.98 | 16.96 | 16.5 | 2 |
| 5 | 16QAM | 12 | 0 | 15.67 | 15.84 | 15.90 | | |
| 5 | 16QAM | 12 | 7 | 15.84 | 15.82 | 15.90 | | |
| 5 | 16QAM | 12 | 13 | 15.78 | 15.79 | 15.78 | 16.5 | 2 |
| 5 | 16QAM | 25 | 0 | 15.76 | 15.77 | 15.84 | | |
| 5 | 64QAM | 1 | 0 | 15.82 | 15.93 | 15.98 | | |
| 5 | 64QAM | 1 | 12 | 15.83 | 15.92 | 15.99 | 16.5 | 2 |
| 5 | 64QAM | 1 | 24 | 15.89 | 15.86 | 15.94 | | |
| 5 | 64QAM | 12 | 0 | 14.64 | 14.80 | 14.91 | | |
| 5 | 64QAM | 12 | 7 | 14.78 | 14.84 | 14.89 | 15.5 | 3 |
| 5 | 64QAM | 12 | 13 | 14.81 | 14.79 | 14.83 | | |
| 5 | 64QAM | 25 | 0 | 14.84 | 14.82 | 14.89 | | |



| Channel | | | | 19965 | 20175 | 20385 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1711.5 | 1732.5 | 1753.5 | | |
| 3 | QPSK | 1 | 0 | 17.50 | 17.71 | 17.67 | 18.5 | 0 |
| 3 | QPSK | 1 | 8 | 17.55 | 17.62 | 17.75 | | |
| 3 | QPSK | 1 | 14 | 17.57 | 17.54 | 17.66 | | |
| 3 | QPSK | 8 | 0 | 16.60 | 16.85 | 16.73 | 17.5 | 1 |
| 3 | QPSK | 8 | 4 | 16.70 | 16.66 | 16.84 | | |
| 3 | QPSK | 8 | 7 | 16.68 | 16.73 | 16.77 | | |
| 3 | QPSK | 15 | 0 | 16.66 | 16.72 | 16.79 | | |
| 3 | 16QAM | 1 | 0 | 16.94 | 17.05 | 17.15 | 17.5 | 1 |
| 3 | 16QAM | 1 | 8 | 16.93 | 17.08 | 17.11 | | |
| 3 | 16QAM | 1 | 14 | 16.92 | 16.99 | 16.96 | | |
| 3 | 16QAM | 8 | 0 | 15.70 | 15.77 | 15.91 | 16.5 | 2 |
| 3 | 16QAM | 8 | 4 | 15.85 | 15.89 | 15.88 | | |
| 3 | 16QAM | 8 | 7 | 15.73 | 15.85 | 15.77 | | |
| 3 | 16QAM | 15 | 0 | 15.78 | 15.79 | 15.83 | | |
| 3 | 64QAM | 1 | 0 | 15.83 | 15.97 | 16.01 | 16.5 | 2 |
| 3 | 64QAM | 1 | 8 | 15.86 | 16.00 | 16.02 | | |
| 3 | 64QAM | 1 | 14 | 15.88 | 15.84 | 15.96 | | |
| 3 | 64QAM | 8 | 0 | 14.70 | 14.86 | 14.91 | 15.5 | 3 |
| 3 | 64QAM | 8 | 4 | 14.82 | 14.85 | 14.87 | | |
| 3 | 64QAM | 8 | 7 | 14.80 | 14.80 | 14.81 | | |
| 3 | 64QAM | 8 | 7 | 14.80 | 14.80 | 14.81 | | |
| 3 | 64QAM | 15 | 0 | 14.77 | 14.82 | 14.89 | | |
| Channel | | | | 19957 | 20175 | 20393 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1710.7 | 1732.5 | 1754.3 | | |
| 1.4 | QPSK | 1 | 0 | 17.56 | 17.77 | 17.72 | 18.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 17.55 | 17.68 | 17.71 | | |
| 1.4 | QPSK | 1 | 5 | 17.56 | 17.50 | 17.64 | | |
| 1.4 | QPSK | 3 | 0 | 16.51 | 16.81 | 16.77 | | |
| 1.4 | QPSK | 3 | 1 | 16.69 | 16.68 | 16.74 | | |
| 1.4 | QPSK | 3 | 3 | 16.70 | 16.70 | 16.67 | | |
| 1.4 | QPSK | 6 | 0 | 16.67 | 16.79 | 16.72 | 17.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 16.97 | 17.01 | 17.12 | 17.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 16.96 | 17.08 | 17.10 | | |
| 1.4 | 16QAM | 1 | 5 | 17.00 | 16.98 | 16.99 | | |
| 1.4 | 16QAM | 3 | 0 | 15.65 | 15.85 | 15.87 | | |
| 1.4 | 16QAM | 3 | 1 | 15.78 | 15.85 | 15.91 | | |
| 1.4 | 16QAM | 3 | 3 | 15.81 | 15.83 | 15.75 | | |
| 1.4 | 16QAM | 6 | 0 | 15.83 | 15.82 | 15.85 | 16.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 15.83 | 15.94 | 16.00 | 16.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 15.88 | 15.92 | 16.02 | | |
| 1.4 | 64QAM | 1 | 5 | 15.91 | 15.84 | 15.96 | | |
| 1.4 | 64QAM | 3 | 0 | 14.64 | 14.80 | 14.90 | | |
| 1.4 | 64QAM | 3 | 1 | 14.84 | 14.85 | 14.89 | | |
| 1.4 | 64QAM | 3 | 3 | 14.83 | 14.79 | 14.87 | | |
| 1.4 | 64QAM | 6 | 0 | 14.82 | 14.82 | 14.86 | 15.5 | 3 |



<LTE Band 5>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20450 | 20525 | 20600 | | |
| Frequency (MHz) | | | | 829 | 836.5 | 844 | | |
| 10 | QPSK | 1 | 0 | 20.36 | 20.45 | 20.38 | 21.5 | 0 |
| 10 | QPSK | 1 | 25 | 20.42 | 20.44 | 20.42 | | |
| 10 | QPSK | 1 | 49 | 20.42 | 20.34 | 20.34 | | |
| 10 | QPSK | 25 | 0 | 19.51 | 19.57 | 19.40 | 20.5 | 1 |
| 10 | QPSK | 25 | 12 | 19.49 | 19.50 | 19.50 | | |
| 10 | QPSK | 25 | 25 | 19.56 | 19.47 | 19.44 | | |
| 10 | QPSK | 50 | 0 | 19.48 | 19.50 | 19.39 | | |
| 10 | 16QAM | 1 | 0 | 19.79 | 19.77 | 19.77 | 20.5 | 1 |
| 10 | 16QAM | 1 | 25 | 19.81 | 19.84 | 19.81 | | |
| 10 | 16QAM | 1 | 49 | 19.83 | 19.74 | 19.74 | | |
| 10 | 16QAM | 25 | 0 | 18.62 | 18.62 | 18.56 | 19.5 | 2 |
| 10 | 16QAM | 25 | 12 | 18.63 | 18.64 | 18.61 | | |
| 10 | 16QAM | 25 | 25 | 18.65 | 18.57 | 18.54 | | |
| 10 | 16QAM | 50 | 0 | 18.59 | 18.61 | 18.52 | | |
| 10 | 64QAM | 1 | 0 | 18.69 | 18.69 | 18.72 | 19.5 | 2 |
| 10 | 64QAM | 1 | 25 | 18.75 | 18.76 | 18.74 | | |
| 10 | 64QAM | 1 | 49 | 18.73 | 18.65 | 18.67 | | |
| 10 | 64QAM | 25 | 0 | 17.65 | 17.66 | 17.55 | 18.5 | 3 |
| 10 | 64QAM | 25 | 12 | 17.64 | 17.65 | 17.64 | | |
| 10 | 64QAM | 25 | 25 | 17.68 | 17.59 | 17.59 | | |
| 10 | 64QAM | 50 | 0 | 17.61 | 17.64 | 17.54 | | |
| Channel | | | | 20425 | 20525 | 20625 | | |
| Frequency (MHz) | | | | 826.5 | 836.5 | 846.5 | | |
| 5 | QPSK | 1 | 0 | 20.26 | 20.40 | 20.38 | 21.5 | 0 |
| 5 | QPSK | 1 | 12 | 20.32 | 20.34 | 20.37 | | |
| 5 | QPSK | 1 | 24 | 20.39 | 20.30 | 20.28 | | |
| 5 | QPSK | 12 | 0 | 19.47 | 19.48 | 19.34 | 20.5 | 1 |
| 5 | QPSK | 12 | 7 | 19.42 | 19.40 | 19.41 | | |
| 5 | QPSK | 12 | 13 | 19.49 | 19.43 | 19.34 | | |
| 5 | QPSK | 25 | 0 | 19.47 | 19.47 | 19.33 | | |
| 5 | 16QAM | 1 | 0 | 19.77 | 19.69 | 19.70 | 20.5 | 1 |
| 5 | 16QAM | 1 | 12 | 19.77 | 19.77 | 19.77 | | |
| 5 | 16QAM | 1 | 24 | 19.78 | 19.74 | 19.65 | | |
| 5 | 16QAM | 12 | 0 | 18.52 | 18.59 | 18.49 | 19.5 | 2 |
| 5 | 16QAM | 12 | 7 | 18.54 | 18.55 | 18.59 | | |
| 5 | 16QAM | 12 | 13 | 18.57 | 18.47 | 18.49 | | |
| 5 | 16QAM | 25 | 0 | 18.58 | 18.60 | 18.43 | | |
| 5 | 64QAM | 1 | 0 | 18.67 | 18.61 | 18.65 | 19.5 | 2 |
| 5 | 64QAM | 1 | 12 | 18.71 | 18.72 | 18.66 | | |
| 5 | 64QAM | 1 | 24 | 18.64 | 18.61 | 18.57 | | |
| 5 | 64QAM | 12 | 0 | 17.59 | 17.64 | 17.47 | 18.5 | 3 |
| 5 | 64QAM | 12 | 7 | 17.64 | 17.59 | 17.56 | | |
| 5 | 64QAM | 12 | 13 | 17.62 | 17.57 | 17.50 | | |
| 5 | 64QAM | 25 | 0 | 17.56 | 17.58 | 17.44 | | |



| Channel | | | | 20415 | 20525 | 20635 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------|----------|
| Frequency (MHz) | | | | 825.5 | 836.5 | 847.5 | | |
| 3 | QPSK | 1 | 0 | 20.28 | 20.41 | 20.28 | 21.5 | 0 |
| 3 | QPSK | 1 | 8 | 20.42 | 20.44 | 20.40 | | |
| 3 | QPSK | 1 | 14 | 20.33 | 20.27 | 20.30 | | |
| 3 | QPSK | 8 | 0 | 19.47 | 19.49 | 19.37 | 20.5 | 1 |
| 3 | QPSK | 8 | 4 | 19.41 | 19.44 | 19.45 | | |
| 3 | QPSK | 8 | 7 | 19.48 | 19.39 | 19.37 | | |
| 3 | QPSK | 15 | 0 | 19.44 | 19.49 | 19.38 | | |
| 3 | 16QAM | 1 | 0 | 19.76 | 19.69 | 19.74 | 20.5 | 1 |
| 3 | 16QAM | 1 | 8 | 19.78 | 19.81 | 19.73 | | |
| 3 | 16QAM | 1 | 14 | 19.79 | 19.65 | 19.65 | | |
| 3 | 16QAM | 8 | 0 | 18.58 | 18.56 | 18.52 | 19.5 | 2 |
| 3 | 16QAM | 8 | 4 | 18.60 | 18.64 | 18.59 | | |
| 3 | 16QAM | 8 | 7 | 18.60 | 18.50 | 18.47 | | |
| 3 | 16QAM | 15 | 0 | 18.58 | 18.55 | 18.51 | | |
| 3 | 64QAM | 1 | 0 | 18.68 | 18.62 | 18.68 | 19.5 | 2 |
| 3 | 64QAM | 1 | 8 | 18.66 | 18.68 | 18.70 | | |
| 3 | 64QAM | 1 | 14 | 18.71 | 18.64 | 18.65 | | |
| 3 | 64QAM | 8 | 0 | 17.57 | 17.66 | 17.48 | 18.5 | 3 |
| 3 | 64QAM | 8 | 4 | 17.56 | 17.65 | 17.56 | | |
| 3 | 64QAM | 8 | 7 | 17.58 | 17.53 | 17.57 | | |
| 3 | 64QAM | 8 | 7 | 17.58 | 17.53 | 17.57 | | |
| 3 | 64QAM | 15 | 0 | 17.58 | 17.63 | 17.52 | | |
| Channel | | | | 20407 | 20525 | 20643 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 824.7 | 836.5 | 848.3 | | |
| 1.4 | QPSK | 1 | 0 | 20.31 | 20.37 | 20.38 | 21.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 20.41 | 20.41 | 20.32 | | |
| 1.4 | QPSK | 1 | 5 | 20.36 | 20.24 | 20.34 | | |
| 1.4 | QPSK | 3 | 0 | 19.53 | 19.60 | 19.50 | | |
| 1.4 | QPSK | 3 | 1 | 19.50 | 19.52 | 19.59 | | |
| 1.4 | QPSK | 3 | 3 | 19.57 | 19.55 | 19.52 | | |
| 1.4 | QPSK | 6 | 0 | 19.40 | 19.41 | 19.35 | 20.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 19.73 | 19.71 | 19.76 | 20.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 19.78 | 19.84 | 19.76 | | |
| 1.4 | 16QAM | 1 | 5 | 19.78 | 19.68 | 19.71 | | |
| 1.4 | 16QAM | 3 | 0 | 18.56 | 18.57 | 18.50 | | |
| 1.4 | 16QAM | 3 | 1 | 18.59 | 18.56 | 18.53 | | |
| 1.4 | 16QAM | 3 | 3 | 18.61 | 18.50 | 18.51 | | |
| 1.4 | 16QAM | 6 | 0 | 18.52 | 18.59 | 18.45 | 19.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 18.67 | 18.66 | 18.71 | 19.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 18.65 | 18.76 | 18.64 | | |
| 1.4 | 64QAM | 1 | 5 | 18.66 | 18.65 | 18.58 | | |
| 1.4 | 64QAM | 3 | 0 | 17.65 | 17.56 | 17.50 | | |
| 1.4 | 64QAM | 3 | 1 | 17.64 | 17.55 | 17.59 | | |
| 1.4 | 64QAM | 3 | 3 | 17.68 | 17.54 | 17.59 | | |
| 1.4 | 64QAM | 6 | 0 | 17.56 | 17.58 | 17.49 | | |



<LTE Band 7>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 20850 | 21100 | 21350 | | |
| Frequency (MHz) | | | | 2510 | 2535 | 2560 | | |
| 20 | QPSK | 1 | 0 | 16.17 | 16.55 | 16.31 | 18 | 0 |
| 20 | QPSK | 1 | 49 | 16.30 | 16.33 | 16.42 | | |
| 20 | QPSK | 1 | 99 | 16.34 | 16.40 | 16.54 | | |
| 20 | QPSK | 50 | 0 | 15.36 | 15.55 | 15.44 | 17 | 1 |
| 20 | QPSK | 50 | 24 | 15.35 | 15.39 | 15.51 | | |
| 20 | QPSK | 50 | 50 | 15.35 | 15.41 | 15.54 | | |
| 20 | QPSK | 100 | 0 | 15.36 | 15.48 | 15.47 | | |
| 20 | 16QAM | 1 | 0 | 15.55 | 15.60 | 15.71 | 17 | 1 |
| 20 | 16QAM | 1 | 49 | 15.67 | 15.70 | 15.82 | | |
| 20 | 16QAM | 1 | 99 | 15.73 | 15.76 | 15.86 | | |
| 20 | 16QAM | 50 | 0 | 14.49 | 14.47 | 14.57 | 16 | 2 |
| 20 | 16QAM | 50 | 24 | 14.51 | 14.52 | 14.67 | | |
| 20 | 16QAM | 50 | 50 | 14.50 | 14.54 | 14.66 | | |
| 20 | 16QAM | 100 | 0 | 14.55 | 14.51 | 14.61 | | |
| 20 | 64QAM | 1 | 0 | 14.62 | 14.66 | 14.82 | 16 | 2 |
| 20 | 64QAM | 1 | 49 | 14.83 | 14.81 | 14.93 | | |
| 20 | 64QAM | 1 | 99 | 14.79 | 14.86 | 14.98 | | |
| 20 | 64QAM | 50 | 0 | 13.47 | 13.49 | 13.60 | 15 | 3 |
| 20 | 64QAM | 50 | 24 | 13.53 | 13.53 | 13.65 | | |
| 20 | 64QAM | 50 | 50 | 13.54 | 13.55 | 13.66 | | |
| 20 | 64QAM | 100 | 0 | 13.52 | 13.50 | 13.68 | | |
| Channel | | | | 20825 | 21100 | 21375 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2507.5 | 2535 | 2562.5 | | |
| 15 | QPSK | 1 | 0 | 16.13 | 16.49 | 16.30 | 18 | 0 |
| 15 | QPSK | 1 | 37 | 16.24 | 16.27 | 16.41 | | |
| 15 | QPSK | 1 | 74 | 16.34 | 16.34 | 16.51 | | |
| 15 | QPSK | 36 | 0 | 15.30 | 15.45 | 15.35 | 17 | 1 |
| 15 | QPSK | 36 | 20 | 15.33 | 15.35 | 15.42 | | |
| 15 | QPSK | 36 | 39 | 15.26 | 15.35 | 15.50 | | |
| 15 | QPSK | 75 | 0 | 15.26 | 15.46 | 15.42 | | |
| 15 | 16QAM | 1 | 0 | 15.47 | 15.57 | 15.70 | 17 | 1 |
| 15 | 16QAM | 1 | 37 | 15.58 | 15.62 | 15.72 | | |
| 15 | 16QAM | 1 | 74 | 15.72 | 15.75 | 15.76 | | |
| 15 | 16QAM | 36 | 0 | 14.46 | 14.44 | 14.55 | 16 | 2 |
| 15 | 16QAM | 36 | 20 | 14.47 | 14.49 | 14.67 | | |
| 15 | 16QAM | 36 | 39 | 14.47 | 14.48 | 14.62 | | |
| 15 | 16QAM | 75 | 0 | 14.45 | 14.51 | 14.60 | | |
| 15 | 64QAM | 1 | 0 | 14.53 | 14.66 | 14.75 | 16 | 2 |
| 15 | 64QAM | 1 | 37 | 14.74 | 14.72 | 14.88 | | |
| 15 | 64QAM | 1 | 74 | 14.73 | 14.85 | 14.88 | | |
| 15 | 64QAM | 36 | 0 | 13.47 | 13.41 | 13.57 | 15 | 3 |
| 15 | 64QAM | 36 | 20 | 13.53 | 13.48 | 13.65 | | |
| 15 | 64QAM | 36 | 39 | 13.46 | 13.54 | 13.56 | | |
| 15 | 64QAM | 75 | 0 | 13.42 | 13.48 | 13.63 | | |



| Channel | | | | 20800 | 21100 | 21400 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2505 | 2535 | 2565 | | |
| 10 | QPSK | 1 | 0 | 16.11 | 16.51 | 16.29 | 18 | 0 |
| 10 | QPSK | 1 | 25 | 16.24 | 16.25 | 16.36 | | |
| 10 | QPSK | 1 | 49 | 16.33 | 16.39 | 16.50 | | |
| 10 | QPSK | 25 | 0 | 15.30 | 15.45 | 15.37 | 17 | 1 |
| 10 | QPSK | 25 | 12 | 15.28 | 15.35 | 15.51 | | |
| 10 | QPSK | 25 | 25 | 15.25 | 15.35 | 15.47 | | |
| 10 | QPSK | 50 | 0 | 15.27 | 15.38 | 15.37 | 17 | 1 |
| 10 | 16QAM | 1 | 0 | 15.45 | 15.56 | 15.66 | | |
| 10 | 16QAM | 1 | 25 | 15.65 | 15.65 | 15.82 | | |
| 10 | 16QAM | 1 | 49 | 15.71 | 15.66 | 15.76 | 16 | 2 |
| 10 | 16QAM | 25 | 0 | 14.44 | 14.41 | 14.50 | | |
| 10 | 16QAM | 25 | 12 | 14.45 | 14.51 | 14.64 | | |
| 10 | 16QAM | 25 | 25 | 14.40 | 14.51 | 14.57 | 16 | 2 |
| 10 | 16QAM | 50 | 0 | 14.55 | 14.51 | 14.58 | | |
| 10 | 64QAM | 1 | 0 | 14.62 | 14.63 | 14.82 | | |
| 10 | 64QAM | 1 | 25 | 14.77 | 14.81 | 14.90 | 16 | 2 |
| 10 | 64QAM | 1 | 49 | 14.79 | 14.79 | 14.90 | | |
| 10 | 64QAM | 25 | 0 | 13.47 | 13.39 | 13.56 | | |
| 10 | 64QAM | 25 | 12 | 13.44 | 13.47 | 13.63 | 15 | 3 |
| 10 | 64QAM | 25 | 25 | 13.47 | 13.53 | 13.61 | | |
| 10 | 64QAM | 50 | 0 | 13.48 | 13.49 | 13.63 | | |
| Channel | | | | 20775 | 21100 | 21425 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2502.5 | 2535 | 2567.5 | | |
| 5 | QPSK | 1 | 0 | 16.07 | 16.54 | 16.28 | 18 | 0 |
| 5 | QPSK | 1 | 12 | 16.25 | 16.24 | 16.41 | | |
| 5 | QPSK | 1 | 24 | 16.26 | 16.34 | 16.54 | | |
| 5 | QPSK | 12 | 0 | 15.31 | 15.54 | 15.36 | 17 | 1 |
| 5 | QPSK | 12 | 7 | 15.25 | 15.32 | 15.45 | | |
| 5 | QPSK | 12 | 13 | 15.29 | 15.31 | 15.49 | | |
| 5 | QPSK | 25 | 0 | 15.26 | 15.45 | 15.47 | 17 | 1 |
| 5 | 16QAM | 1 | 0 | 15.47 | 15.56 | 15.63 | | |
| 5 | 16QAM | 1 | 12 | 15.61 | 15.63 | 15.72 | | |
| 5 | 16QAM | 1 | 24 | 15.63 | 15.68 | 15.86 | 16 | 2 |
| 5 | 16QAM | 12 | 0 | 14.39 | 14.42 | 14.53 | | |
| 5 | 16QAM | 12 | 7 | 14.43 | 14.45 | 14.63 | | |
| 5 | 16QAM | 12 | 13 | 14.46 | 14.48 | 14.65 | 16 | 2 |
| 5 | 16QAM | 25 | 0 | 14.46 | 14.47 | 14.56 | | |
| 5 | 64QAM | 1 | 0 | 14.61 | 14.58 | 14.73 | | |
| 5 | 64QAM | 1 | 12 | 14.79 | 14.75 | 14.84 | 16 | 2 |
| 5 | 64QAM | 1 | 24 | 14.71 | 14.77 | 14.95 | | |
| 5 | 64QAM | 12 | 0 | 13.43 | 13.42 | 13.58 | | |
| 5 | 64QAM | 12 | 7 | 13.50 | 13.49 | 13.56 | 15 | 3 |
| 5 | 64QAM | 12 | 13 | 13.53 | 13.51 | 13.60 | | |
| 5 | 64QAM | 25 | 0 | 13.48 | 13.47 | 13.67 | | |



<LTE Band 13>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 23230 | | | | |
| Frequency (MHz) | | | | 782 | | | | |
| 10 | QPSK | 1 | 0 | | 20.88 | | 22 | 0 |
| 10 | QPSK | 1 | 25 | | 20.87 | | | |
| 10 | QPSK | 1 | 49 | | 20.81 | | | |
| 10 | QPSK | 25 | 0 | | 19.97 | | 21 | 1 |
| 10 | QPSK | 25 | 12 | | 19.96 | | | |
| 10 | QPSK | 25 | 25 | | 19.87 | | | |
| 10 | QPSK | 50 | 0 | | 19.90 | | 21 | 1 |
| 10 | 16QAM | 1 | 0 | | 20.09 | | | |
| 10 | 16QAM | 1 | 25 | | 20.30 | | | |
| 10 | 16QAM | 1 | 49 | | 20.20 | | 20 | 2 |
| 10 | 16QAM | 25 | 0 | | 18.98 | | | |
| 10 | 16QAM | 25 | 12 | | 19.08 | | | |
| 10 | 16QAM | 25 | 25 | | 18.99 | | 20 | 2 |
| 10 | 16QAM | 50 | 0 | | 19.05 | | | |
| 10 | 64QAM | 1 | 0 | | 19.01 | | | |
| 10 | 64QAM | 1 | 25 | | 19.18 | | 20 | 2 |
| 10 | 64QAM | 1 | 49 | | 19.14 | | | |
| 10 | 64QAM | 25 | 0 | | 17.98 | | | |
| 10 | 64QAM | 25 | 12 | | 18.09 | | 19 | 3 |
| 10 | 64QAM | 25 | 25 | | 18.00 | | | |
| 10 | 64QAM | 50 | 0 | | 18.06 | | | |
| Channel | | | | 23205 | 23230 | 23255 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 779.5 | 782 | 784.5 | | |
| 5 | QPSK | 1 | 0 | 20.68 | 20.87 | 20.58 | 22 | 0 |
| 5 | QPSK | 1 | 12 | 20.74 | 20.85 | 20.64 | | |
| 5 | QPSK | 1 | 24 | 20.64 | 20.74 | 20.54 | | |
| 5 | QPSK | 12 | 0 | 19.79 | 19.95 | 19.76 | 21 | 1 |
| 5 | QPSK | 12 | 7 | 19.74 | 19.94 | 19.68 | | |
| 5 | QPSK | 12 | 13 | 19.66 | 19.86 | 19.56 | | |
| 5 | QPSK | 25 | 0 | 19.74 | 19.85 | 19.72 | 21 | 1 |
| 5 | 16QAM | 1 | 0 | 19.90 | 20.00 | 19.90 | | |
| 5 | 16QAM | 1 | 12 | 20.08 | 20.28 | 20.08 | | |
| 5 | 16QAM | 1 | 24 | 20.09 | 20.19 | 20.05 | 20 | 2 |
| 5 | 16QAM | 12 | 0 | 18.78 | 18.91 | 18.72 | | |
| 5 | 16QAM | 12 | 7 | 18.86 | 19.06 | 18.78 | | |
| 5 | 16QAM | 12 | 13 | 18.78 | 18.98 | 18.72 | 20 | 2 |
| 5 | 16QAM | 25 | 0 | 18.84 | 19.02 | 18.79 | | |
| 5 | 64QAM | 1 | 0 | 18.79 | 18.98 | 18.77 | | |
| 5 | 64QAM | 1 | 12 | 19.07 | 19.17 | 19.06 | 20 | 2 |
| 5 | 64QAM | 1 | 24 | 18.97 | 19.14 | 18.92 | | |
| 5 | 64QAM | 12 | 0 | 17.82 | 17.97 | 17.79 | | |
| 5 | 64QAM | 12 | 7 | 17.90 | 18.03 | 17.89 | 19 | 3 |
| 5 | 64QAM | 12 | 13 | 17.78 | 17.94 | 17.75 | | |
| 5 | 64QAM | 25 | 0 | 17.90 | 18.05 | 17.86 | | |



<LTE Band 14>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 23330 | | | | |
| Frequency (MHz) | | | | 793 | | | | |
| 10 | QPSK | 1 | 0 | | 20.39 | | 21.5 | 0 |
| 10 | QPSK | 1 | 25 | | 20.38 | | | |
| 10 | QPSK | 1 | 49 | | 20.21 | | | |
| 10 | QPSK | 25 | 0 | | 19.64 | | 20.5 | 1 |
| 10 | QPSK | 25 | 12 | | 19.33 | | | |
| 10 | QPSK | 25 | 25 | | 19.26 | | | |
| 10 | QPSK | 50 | 0 | | 19.32 | | 20.5 | 1 |
| 10 | 16QAM | 1 | 0 | | 19.73 | | | |
| 10 | 16QAM | 1 | 25 | | 19.73 | | | |
| 10 | 16QAM | 1 | 49 | | 19.61 | | 19.5 | 2 |
| 10 | 16QAM | 25 | 0 | | 18.47 | | | |
| 10 | 16QAM | 25 | 12 | | 18.47 | | | |
| 10 | 16QAM | 25 | 25 | | 18.39 | | 19.5 | 2 |
| 10 | 16QAM | 50 | 0 | | 18.44 | | | |
| 10 | 64QAM | 1 | 0 | | 18.70 | | | |
| 10 | 64QAM | 1 | 25 | | 18.73 | | 19.5 | 2 |
| 10 | 64QAM | 1 | 49 | | 18.61 | | | |
| 10 | 64QAM | 25 | 0 | | 17.47 | | | |
| 10 | 64QAM | 25 | 12 | | 17.49 | | 18.5 | 3 |
| 10 | 64QAM | 25 | 25 | | 17.51 | | | |
| 10 | 64QAM | 50 | 0 | | 17.53 | | | |
| Channel | | | | 23305 | 23330 | 23355 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 790.5 | 793 | 795.5 | | |
| 5 | QPSK | 1 | 0 | 20.14 | 20.31 | 20.07 | 21.5 | 0 |
| 5 | QPSK | 1 | 12 | 20.21 | 20.38 | 20.17 | | |
| 5 | QPSK | 1 | 24 | 19.97 | 20.12 | 19.96 | | |
| 5 | QPSK | 12 | 0 | 19.50 | 19.62 | 19.50 | 20.5 | 1 |
| 5 | QPSK | 12 | 7 | 19.09 | 19.23 | 18.99 | | |
| 5 | QPSK | 12 | 13 | 19.02 | 19.21 | 18.93 | | |
| 5 | QPSK | 25 | 0 | 19.08 | 19.23 | 19.08 | 20.5 | 1 |
| 5 | 16QAM | 1 | 0 | 19.59 | 19.72 | 19.51 | | |
| 5 | 16QAM | 1 | 12 | 19.57 | 19.71 | 19.49 | | |
| 5 | 16QAM | 1 | 24 | 19.39 | 19.52 | 19.34 | 19.5 | 2 |
| 5 | 16QAM | 12 | 0 | 18.24 | 18.43 | 18.19 | | |
| 5 | 16QAM | 12 | 7 | 18.28 | 18.41 | 18.20 | | |
| 5 | 16QAM | 12 | 13 | 18.24 | 18.34 | 18.17 | 19.5 | 2 |
| 5 | 16QAM | 25 | 0 | 18.18 | 18.34 | 18.18 | | |
| 5 | 64QAM | 1 | 0 | 18.57 | 18.70 | 18.55 | | |
| 5 | 64QAM | 1 | 12 | 18.52 | 18.69 | 18.42 | 19.5 | 2 |
| 5 | 64QAM | 1 | 24 | 18.44 | 18.57 | 18.42 | | |
| 5 | 64QAM | 12 | 0 | 17.30 | 17.45 | 17.27 | | |
| 5 | 64QAM | 12 | 7 | 17.36 | 17.48 | 17.34 | 18.5 | 3 |
| 5 | 64QAM | 12 | 13 | 17.30 | 17.49 | 17.29 | | |
| 5 | 64QAM | 25 | 0 | 17.29 | 17.45 | 17.20 | | |



<LTE Band 25>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 26140 | 26340 | 26590 | | |
| Frequency (MHz) | | | | 1860 | 1880 | 1905 | | |
| 20 | QPSK | 1 | 0 | 18.89 | 18.90 | 18.81 | 19.5 | 0 |
| 20 | QPSK | 1 | 49 | 18.82 | 18.85 | 18.86 | | |
| 20 | QPSK | 1 | 99 | 18.82 | 18.84 | 18.87 | | |
| 20 | QPSK | 50 | 0 | 17.93 | 17.95 | 17.94 | 18.5 | 1 |
| 20 | QPSK | 50 | 24 | 17.83 | 17.88 | 17.88 | | |
| 20 | QPSK | 50 | 50 | 17.77 | 17.85 | 17.85 | | |
| 20 | QPSK | 100 | 0 | 17.83 | 17.88 | 17.87 | | |
| 20 | 16QAM | 1 | 0 | 18.34 | 18.25 | 18.25 | 18.5 | 1 |
| 20 | 16QAM | 1 | 49 | 18.28 | 18.30 | 18.31 | | |
| 20 | 16QAM | 1 | 99 | 18.24 | 18.30 | 18.29 | | |
| 20 | 16QAM | 50 | 0 | 16.97 | 16.96 | 16.96 | 17.5 | 2 |
| 20 | 16QAM | 50 | 24 | 17.03 | 17.02 | 17.01 | | |
| 20 | 16QAM | 50 | 50 | 16.98 | 16.99 | 17.03 | | |
| 20 | 16QAM | 100 | 0 | 16.97 | 16.99 | 17.00 | | |
| 20 | 64QAM | 1 | 0 | 17.23 | 17.15 | 17.12 | 17.5 | 2 |
| 20 | 64QAM | 1 | 49 | 17.18 | 17.19 | 17.20 | | |
| 20 | 64QAM | 1 | 99 | 17.16 | 17.19 | 17.16 | | |
| 20 | 64QAM | 50 | 0 | 15.97 | 15.96 | 15.97 | 16.5 | 3 |
| 20 | 64QAM | 50 | 24 | 16.03 | 16.03 | 16.03 | | |
| 20 | 64QAM | 50 | 50 | 15.98 | 15.99 | 16.03 | | |
| 20 | 64QAM | 100 | 0 | 15.96 | 16.01 | 15.98 | | |
| Channel | | | | 26115 | 26340 | 26615 | | |
| Frequency (MHz) | | | | 1857.5 | 1880 | 1907.5 | | |
| 15 | QPSK | 1 | 0 | 18.84 | 18.88 | 18.81 | 19.5 | 0 |
| 15 | QPSK | 1 | 37 | 18.77 | 18.81 | 18.85 | | |
| 15 | QPSK | 1 | 74 | 18.77 | 18.74 | 18.78 | | |
| 15 | QPSK | 36 | 0 | 17.74 | 17.92 | 17.83 | 18.5 | 1 |
| 15 | QPSK | 36 | 20 | 17.79 | 17.84 | 17.84 | | |
| 15 | QPSK | 36 | 39 | 17.80 | 17.85 | 17.78 | | |
| 15 | QPSK | 75 | 0 | 17.74 | 17.85 | 17.85 | | |
| 15 | 16QAM | 1 | 0 | 18.24 | 18.23 | 18.16 | 18.5 | 1 |
| 15 | 16QAM | 1 | 37 | 18.24 | 18.28 | 18.24 | | |
| 15 | 16QAM | 1 | 74 | 18.20 | 18.22 | 18.22 | | |
| 15 | 16QAM | 36 | 0 | 16.90 | 16.89 | 16.96 | 17.5 | 2 |
| 15 | 16QAM | 36 | 20 | 16.95 | 16.97 | 16.96 | | |
| 15 | 16QAM | 36 | 39 | 16.96 | 16.96 | 16.96 | | |
| 15 | 16QAM | 75 | 0 | 16.92 | 16.92 | 16.95 | | |
| 15 | 64QAM | 1 | 0 | 17.23 | 17.14 | 17.09 | 17.5 | 2 |
| 15 | 64QAM | 1 | 37 | 17.10 | 17.14 | 17.19 | | |
| 15 | 64QAM | 1 | 74 | 17.14 | 17.10 | 17.11 | | |
| 15 | 64QAM | 36 | 0 | 15.93 | 15.95 | 15.87 | 16.5 | 3 |
| 15 | 64QAM | 36 | 20 | 16.01 | 16.00 | 16.01 | | |
| 15 | 64QAM | 36 | 39 | 15.92 | 15.89 | 15.95 | | |
| 15 | 64QAM | 75 | 0 | 15.95 | 16.00 | 15.88 | | |



| Channel | | | | 26090 | 26340 | 26640 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1855 | 1880 | 1910 | | |
| 10 | QPSK | 1 | 0 | 18.80 | 18.84 | 18.72 | 19.5 | 0 |
| 10 | QPSK | 1 | 25 | 18.72 | 18.83 | 18.82 | | |
| 10 | QPSK | 1 | 49 | 18.73 | 18.81 | 18.78 | | |
| 10 | QPSK | 25 | 0 | 17.80 | 17.87 | 17.78 | 18.5 | 1 |
| 10 | QPSK | 25 | 12 | 17.82 | 17.83 | 17.81 | | |
| 10 | QPSK | 25 | 25 | 17.80 | 17.75 | 17.85 | | |
| 10 | QPSK | 50 | 0 | 17.81 | 17.79 | 17.81 | 18.5 | 1 |
| 10 | 16QAM | 1 | 0 | 18.27 | 18.20 | 18.23 | | |
| 10 | 16QAM | 1 | 25 | 18.20 | 18.24 | 18.26 | | |
| 10 | 16QAM | 1 | 49 | 18.24 | 18.22 | 18.28 | 17.5 | 2 |
| 10 | 16QAM | 25 | 0 | 16.96 | 16.86 | 16.93 | | |
| 10 | 16QAM | 25 | 12 | 16.93 | 16.92 | 16.91 | | |
| 10 | 16QAM | 25 | 25 | 16.94 | 16.94 | 16.97 | 17.5 | 2 |
| 10 | 16QAM | 50 | 0 | 16.90 | 16.97 | 16.92 | | |
| 10 | 64QAM | 1 | 0 | 17.15 | 17.14 | 17.11 | | |
| 10 | 64QAM | 1 | 25 | 17.09 | 17.12 | 17.10 | 17.5 | 2 |
| 10 | 64QAM | 1 | 49 | 17.09 | 17.13 | 17.06 | | |
| 10 | 64QAM | 25 | 0 | 15.92 | 15.88 | 15.92 | | |
| 10 | 64QAM | 25 | 12 | 15.94 | 15.95 | 16.03 | 16.5 | 3 |
| 10 | 64QAM | 25 | 25 | 15.90 | 15.97 | 16.00 | | |
| 10 | 64QAM | 50 | 0 | 15.89 | 15.95 | 15.94 | | |
| Channel | | | | 26065 | 26340 | 26665 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1852.5 | 1880 | 1912.5 | | |
| 5 | QPSK | 1 | 0 | 18.79 | 18.88 | 18.72 | 19.5 | 0 |
| 5 | QPSK | 1 | 12 | 18.72 | 18.81 | 18.76 | | |
| 5 | QPSK | 1 | 24 | 18.74 | 18.80 | 18.83 | | |
| 5 | QPSK | 12 | 0 | 17.74 | 17.85 | 17.82 | 18.5 | 1 |
| 5 | QPSK | 12 | 7 | 17.85 | 17.86 | 17.89 | | |
| 5 | QPSK | 12 | 13 | 17.80 | 17.84 | 17.81 | | |
| 5 | QPSK | 25 | 0 | 17.83 | 17.86 | 17.84 | 18.5 | 1 |
| 5 | 16QAM | 1 | 0 | 18.30 | 18.19 | 18.16 | | |
| 5 | 16QAM | 1 | 12 | 18.22 | 18.23 | 18.31 | | |
| 5 | 16QAM | 1 | 24 | 18.18 | 18.30 | 18.20 | 17.5 | 2 |
| 5 | 16QAM | 12 | 0 | 16.91 | 16.90 | 16.90 | | |
| 5 | 16QAM | 12 | 7 | 16.93 | 17.01 | 17.01 | | |
| 5 | 16QAM | 12 | 13 | 16.90 | 16.92 | 16.99 | 17.5 | 2 |
| 5 | 16QAM | 25 | 0 | 16.91 | 16.96 | 16.94 | | |
| 5 | 64QAM | 1 | 0 | 17.16 | 17.15 | 17.02 | | |
| 5 | 64QAM | 1 | 12 | 17.09 | 17.15 | 17.15 | 17.5 | 2 |
| 5 | 64QAM | 1 | 24 | 17.08 | 17.11 | 17.12 | | |
| 5 | 64QAM | 12 | 0 | 15.87 | 15.94 | 15.91 | | |
| 5 | 64QAM | 12 | 7 | 15.99 | 15.95 | 16.01 | 16.5 | 3 |
| 5 | 64QAM | 12 | 13 | 15.96 | 15.94 | 15.98 | | |
| 5 | 64QAM | 25 | 0 | 15.90 | 16.01 | 15.97 | | |



| Channel | | | | 26055 | 26340 | 26675 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1851.5 | 1880 | 1913.5 | | |
| 3 | QPSK | 1 | 0 | 18.84 | 18.81 | 18.73 | 19.5 | 0 |
| 3 | QPSK | 1 | 8 | 18.77 | 18.84 | 18.86 | | |
| 3 | QPSK | 1 | 14 | 18.72 | 18.76 | 18.83 | | |
| 3 | QPSK | 8 | 0 | 17.73 | 17.87 | 17.83 | 18.5 | 1 |
| 3 | QPSK | 8 | 4 | 17.83 | 17.88 | 17.84 | | |
| 3 | QPSK | 8 | 7 | 17.75 | 17.81 | 17.88 | | |
| 3 | QPSK | 15 | 0 | 17.74 | 17.86 | 17.83 | | |
| 3 | 16QAM | 1 | 0 | 18.31 | 18.16 | 18.25 | 18.5 | 1 |
| 3 | 16QAM | 1 | 8 | 18.20 | 18.25 | 18.31 | | |
| 3 | 16QAM | 1 | 14 | 18.23 | 18.25 | 18.28 | | |
| 3 | 16QAM | 8 | 0 | 16.87 | 16.95 | 16.89 | 17.5 | 2 |
| 3 | 16QAM | 8 | 4 | 16.95 | 16.97 | 16.97 | | |
| 3 | 16QAM | 8 | 7 | 16.93 | 16.97 | 17.03 | | |
| 3 | 16QAM | 15 | 0 | 16.96 | 16.97 | 16.92 | | |
| 3 | 64QAM | 1 | 0 | 17.21 | 17.07 | 17.11 | 17.5 | 2 |
| 3 | 64QAM | 1 | 8 | 17.08 | 17.13 | 17.16 | | |
| 3 | 64QAM | 1 | 14 | 17.08 | 17.14 | 17.06 | | |
| 3 | 64QAM | 8 | 0 | 15.96 | 15.88 | 15.93 | 16.5 | 3 |
| 3 | 64QAM | 8 | 4 | 15.95 | 15.94 | 15.96 | | |
| 3 | 64QAM | 8 | 7 | 15.96 | 15.91 | 15.98 | | |
| 3 | 64QAM | 15 | 0 | 15.91 | 15.99 | 15.98 | | |
| Channel | | | | 26047 | 26340 | 26683 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1850.7 | 1880 | 1914.3 | | |
| 1.4 | QPSK | 1 | 0 | 18.85 | 18.81 | 18.76 | 19.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 18.77 | 18.80 | 18.86 | | |
| 1.4 | QPSK | 1 | 5 | 18.73 | 18.75 | 18.85 | | |
| 1.4 | QPSK | 3 | 0 | 17.87 | 17.93 | 17.91 | | |
| 1.4 | QPSK | 3 | 1 | 17.95 | 17.90 | 17.99 | | |
| 1.4 | QPSK | 3 | 3 | 17.86 | 17.94 | 17.96 | | |
| 1.4 | QPSK | 6 | 0 | 17.74 | 17.79 | 17.87 | 18.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 18.24 | 18.18 | 18.23 | 18.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 18.26 | 18.24 | 18.29 | | |
| 1.4 | 16QAM | 1 | 5 | 18.19 | 18.27 | 18.23 | | |
| 1.4 | 16QAM | 3 | 0 | 16.96 | 16.96 | 16.91 | | |
| 1.4 | 16QAM | 3 | 1 | 16.93 | 16.92 | 16.98 | | |
| 1.4 | 16QAM | 3 | 3 | 16.98 | 16.93 | 17.02 | | |
| 1.4 | 16QAM | 6 | 0 | 16.91 | 16.99 | 16.91 | 17.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 17.19 | 17.09 | 17.12 | 17.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 17.16 | 17.11 | 17.19 | | |
| 1.4 | 64QAM | 1 | 5 | 17.15 | 17.13 | 17.15 | | |
| 1.4 | 64QAM | 3 | 0 | 15.94 | 15.88 | 15.88 | | |
| 1.4 | 64QAM | 3 | 1 | 16.02 | 15.97 | 15.94 | | |
| 1.4 | 64QAM | 3 | 3 | 15.93 | 15.89 | 15.93 | | |
| 1.4 | 64QAM | 6 | 0 | 15.89 | 15.99 | 15.91 | 16.5 | 3 |



<LTE Band 26>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 26765 | 26865 | 26965 | | |
| Frequency (MHz) | | | | 821.5 | 831.5 | 841.5 | | |
| 15 | QPSK | 1 | 0 | 20.54 | 20.57 | 20.42 | | |
| 15 | QPSK | 1 | 37 | 20.49 | 20.42 | 20.39 | 21.5 | 0 |
| 15 | QPSK | 1 | 74 | 20.47 | 20.41 | 20.41 | | |
| 15 | QPSK | 36 | 0 | 19.51 | 19.63 | 19.36 | | |
| 15 | QPSK | 36 | 20 | 19.62 | 19.46 | 19.45 | 20.5 | 1 |
| 15 | QPSK | 36 | 39 | 19.52 | 19.42 | 19.38 | | |
| 15 | QPSK | 75 | 0 | 19.54 | 19.58 | 19.44 | | |
| 15 | 16QAM | 1 | 0 | 19.97 | 19.93 | 19.83 | 20.5 | 1 |
| 15 | 16QAM | 1 | 37 | 19.87 | 19.84 | 19.81 | | |
| 15 | 16QAM | 1 | 74 | 19.86 | 19.85 | 19.78 | | |
| 15 | 16QAM | 36 | 0 | 18.65 | 18.61 | 18.49 | 19.5 | 2 |
| 15 | 16QAM | 36 | 20 | 18.74 | 18.61 | 18.58 | | |
| 15 | 16QAM | 36 | 39 | 18.65 | 18.53 | 18.48 | | |
| 15 | 16QAM | 75 | 0 | 18.73 | 18.56 | 18.59 | 19.5 | 2 |
| 15 | 64QAM | 1 | 0 | 18.87 | 18.86 | 18.73 | | |
| 15 | 64QAM | 1 | 37 | 18.80 | 18.72 | 18.70 | | |
| 15 | 64QAM | 1 | 74 | 18.79 | 18.76 | 18.68 | 18.5 | 3 |
| 15 | 64QAM | 36 | 0 | 17.68 | 17.67 | 17.54 | | |
| 15 | 64QAM | 36 | 20 | 17.77 | 17.63 | 17.62 | | |
| 15 | 64QAM | 36 | 39 | 17.71 | 17.55 | 17.55 | 18.5 | 3 |
| 15 | 64QAM | 75 | 0 | 17.71 | 17.60 | 17.56 | | |
| Channel | | | | 26740 | 26865 | 26990 | | |
| Frequency (MHz) | | | | 819 | 831.5 | 844 | | |
| 10 | QPSK | 1 | 0 | 20.45 | 20.48 | 20.33 | 21.5 | 0 |
| 10 | QPSK | 1 | 25 | 20.46 | 20.42 | 20.29 | | |
| 10 | QPSK | 1 | 49 | 20.38 | 20.33 | 20.41 | | |
| 10 | QPSK | 25 | 0 | 19.48 | 19.57 | 19.32 | 20.5 | 1 |
| 10 | QPSK | 25 | 12 | 19.52 | 19.39 | 19.35 | | |
| 10 | QPSK | 25 | 25 | 19.52 | 19.39 | 19.28 | | |
| 10 | QPSK | 50 | 0 | 19.45 | 19.55 | 19.39 | 20.5 | 1 |
| 10 | 16QAM | 1 | 0 | 19.92 | 19.84 | 19.77 | | |
| 10 | 16QAM | 1 | 25 | 19.82 | 19.79 | 19.76 | | |
| 10 | 16QAM | 1 | 49 | 19.77 | 19.75 | 19.77 | 19.5 | 2 |
| 10 | 16QAM | 25 | 0 | 18.60 | 18.61 | 18.44 | | |
| 10 | 16QAM | 25 | 12 | 18.68 | 18.54 | 18.48 | | |
| 10 | 16QAM | 25 | 25 | 18.55 | 18.49 | 18.39 | 19.5 | 2 |
| 10 | 16QAM | 50 | 0 | 18.67 | 18.54 | 18.50 | | |
| 10 | 64QAM | 1 | 0 | 18.78 | 18.85 | 18.67 | | |
| 10 | 64QAM | 1 | 25 | 18.74 | 18.72 | 18.65 | 19.5 | 2 |
| 10 | 64QAM | 1 | 49 | 18.76 | 18.70 | 18.66 | | |
| 10 | 64QAM | 25 | 0 | 17.68 | 17.63 | 17.47 | | |
| 10 | 64QAM | 25 | 12 | 17.70 | 17.58 | 17.57 | 18.5 | 3 |
| 10 | 64QAM | 25 | 25 | 17.61 | 17.51 | 17.50 | | |
| 10 | 64QAM | 50 | 0 | 17.68 | 17.55 | 17.48 | | |



| Channel | | | | 26715 | 26865 | 27015 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------|----------|
| Frequency (MHz) | | | | 816.5 | 831.5 | 846.5 | | |
| 5 | QPSK | 1 | 0 | 20.44 | 20.47 | 20.32 | 21.5 | 0 |
| 5 | QPSK | 1 | 12 | 20.46 | 20.37 | 20.30 | | |
| 5 | QPSK | 1 | 24 | 20.46 | 20.34 | 20.31 | | |
| 5 | QPSK | 12 | 0 | 19.51 | 19.53 | 19.27 | 20.5 | 1 |
| 5 | QPSK | 12 | 7 | 19.56 | 19.41 | 19.42 | | |
| 5 | QPSK | 12 | 13 | 19.52 | 19.34 | 19.31 | | |
| 5 | QPSK | 25 | 0 | 19.44 | 19.53 | 19.44 | 20.5 | 1 |
| 5 | 16QAM | 1 | 0 | 19.88 | 19.84 | 19.79 | | |
| 5 | 16QAM | 1 | 12 | 19.77 | 19.78 | 19.81 | | |
| 5 | 16QAM | 1 | 24 | 19.81 | 19.76 | 19.77 | 19.5 | 2 |
| 5 | 16QAM | 12 | 0 | 18.55 | 18.53 | 18.46 | | |
| 5 | 16QAM | 12 | 7 | 18.64 | 18.54 | 18.56 | | |
| 5 | 16QAM | 12 | 13 | 18.57 | 18.50 | 18.42 | 19.5 | 2 |
| 5 | 16QAM | 25 | 0 | 18.67 | 18.50 | 18.57 | | |
| 5 | 64QAM | 1 | 0 | 18.81 | 18.78 | 18.67 | | |
| 5 | 64QAM | 1 | 12 | 18.80 | 18.70 | 18.62 | 19.5 | 2 |
| 5 | 64QAM | 1 | 24 | 18.71 | 18.70 | 18.68 | | |
| 5 | 64QAM | 12 | 0 | 17.59 | 17.61 | 17.52 | | |
| 5 | 64QAM | 12 | 7 | 17.70 | 17.57 | 17.57 | 18.5 | 3 |
| 5 | 64QAM | 12 | 13 | 17.69 | 17.45 | 17.51 | | |
| 5 | 64QAM | 25 | 0 | 17.65 | 17.60 | 17.55 | | |
| Channel | | | | 26705 | 26865 | 27025 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 815.5 | 831.5 | 847.5 | | |
| 3 | QPSK | 1 | 0 | 20.47 | 20.53 | 20.37 | 21.5 | 0 |
| 3 | QPSK | 1 | 8 | 20.49 | 20.35 | 20.32 | | |
| 3 | QPSK | 1 | 14 | 20.37 | 20.38 | 20.33 | | |
| 3 | QPSK | 8 | 0 | 19.46 | 19.56 | 19.32 | 20.5 | 1 |
| 3 | QPSK | 8 | 4 | 19.60 | 19.46 | 19.40 | | |
| 3 | QPSK | 8 | 7 | 19.44 | 19.36 | 19.31 | | |
| 3 | QPSK | 15 | 0 | 19.47 | 19.55 | 19.34 | 20.5 | 1 |
| 3 | 16QAM | 1 | 0 | 19.91 | 19.88 | 19.78 | | |
| 3 | 16QAM | 1 | 8 | 19.82 | 19.74 | 19.71 | | |
| 3 | 16QAM | 1 | 14 | 19.82 | 19.80 | 19.72 | 19.5 | 2 |
| 3 | 16QAM | 8 | 0 | 18.65 | 18.55 | 18.45 | | |
| 3 | 16QAM | 8 | 4 | 18.66 | 18.57 | 18.50 | | |
| 3 | 16QAM | 8 | 7 | 18.65 | 18.46 | 18.43 | 19.5 | 2 |
| 3 | 16QAM | 15 | 0 | 18.68 | 18.54 | 18.51 | | |
| 3 | 64QAM | 1 | 0 | 18.83 | 18.78 | 18.65 | | |
| 3 | 64QAM | 1 | 8 | 18.73 | 18.69 | 18.70 | 19.5 | 2 |
| 3 | 64QAM | 1 | 14 | 18.69 | 18.67 | 18.58 | | |
| 3 | 64QAM | 8 | 0 | 17.63 | 17.57 | 17.54 | | |
| 3 | 64QAM | 8 | 4 | 17.68 | 17.57 | 17.57 | 18.5 | 3 |
| 3 | 64QAM | 8 | 7 | 17.66 | 17.48 | 17.51 | | |
| 3 | 64QAM | 15 | 0 | 17.61 | 17.59 | 17.54 | | |



| Channel | | | | 26697 | 26865 | 27033 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|---|---|-------|-------|-------|------------------------|-------------|
| Frequency (MHz) | | | | 814.7 | 831.5 | 848.3 | | |
| 1.4 | QPSK | 1 | 0 | 20.54 | 20.49 | 20.35 | 21.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 20.46 | 20.33 | 20.30 | | |
| 1.4 | QPSK | 1 | 5 | 20.42 | 20.33 | 20.34 | | |
| 1.4 | QPSK | 3 | 0 | 19.70 | 19.73 | 19.56 | | |
| 1.4 | QPSK | 3 | 1 | 19.75 | 19.64 | 19.65 | | |
| 1.4 | QPSK | 3 | 3 | 19.69 | 19.54 | 19.52 | | |
| 1.4 | QPSK | 6 | 0 | 19.53 | 19.51 | 19.42 | 20.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 19.92 | 19.87 | 19.83 | 20.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 19.79 | 19.79 | 19.79 | | |
| 1.4 | 16QAM | 1 | 5 | 19.84 | 19.78 | 19.78 | | |
| 1.4 | 16QAM | 3 | 0 | 18.61 | 18.60 | 18.50 | | |
| 1.4 | 16QAM | 3 | 1 | 18.70 | 18.56 | 18.54 | | |
| 1.4 | 16QAM | 3 | 3 | 18.55 | 18.57 | 18.52 | | |
| 1.4 | 16QAM | 6 | 0 | 18.64 | 18.54 | 18.53 | 19.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 18.85 | 18.81 | 18.71 | 19.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 18.75 | 18.63 | 18.67 | | |
| 1.4 | 64QAM | 1 | 5 | 18.77 | 18.73 | 18.63 | | |
| 1.4 | 64QAM | 3 | 0 | 17.67 | 17.60 | 17.58 | | |
| 1.4 | 64QAM | 3 | 1 | 17.77 | 17.56 | 17.52 | | |
| 1.4 | 64QAM | 3 | 3 | 17.67 | 17.52 | 17.58 | | |
| 1.4 | 64QAM | 6 | 0 | 17.67 | 17.53 | 17.55 | 18.5 | 3 |



<LTE Band 66>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 132072 | 132322 | 132572 | | |
| Frequency (MHz) | | | | 1720 | 1745 | 1770 | | |
| 20 | QPSK | 1 | 0 | 18.03 | 18.23 | 18.11 | 18.5 | 0 |
| 20 | QPSK | 1 | 49 | 18.10 | 18.11 | 18.17 | | |
| 20 | QPSK | 1 | 99 | 17.98 | 18.07 | 17.99 | | |
| 20 | QPSK | 50 | 0 | 17.02 | 17.18 | 17.06 | 17.5 | 1 |
| 20 | QPSK | 50 | 24 | 16.98 | 17.13 | 17.06 | | |
| 20 | QPSK | 50 | 50 | 16.95 | 17.10 | 17.02 | | |
| 20 | QPSK | 100 | 0 | 16.98 | 17.12 | 17.03 | | |
| 20 | 16QAM | 1 | 0 | 17.41 | 17.46 | 17.47 | 17.5 | 1 |
| 20 | 16QAM | 1 | 49 | 17.45 | 17.43 | 17.42 | | |
| 20 | 16QAM | 1 | 99 | 17.33 | 17.45 | 17.33 | | |
| 20 | 16QAM | 50 | 0 | 16.11 | 16.28 | 16.15 | 16.5 | 2 |
| 20 | 16QAM | 50 | 24 | 16.11 | 16.23 | 16.16 | | |
| 20 | 16QAM | 50 | 50 | 16.09 | 16.19 | 16.13 | | |
| 20 | 16QAM | 100 | 0 | 16.10 | 16.22 | 16.10 | | |
| 20 | 64QAM | 1 | 0 | 16.33 | 16.45 | 16.39 | 16.5 | 2 |
| 20 | 64QAM | 1 | 49 | 16.40 | 16.45 | 16.40 | | |
| 20 | 64QAM | 1 | 99 | 16.23 | 16.35 | 16.24 | | |
| 20 | 64QAM | 50 | 0 | 15.11 | 15.29 | 15.19 | 15.5 | 3 |
| 20 | 64QAM | 50 | 24 | 15.12 | 15.24 | 15.10 | | |
| 20 | 64QAM | 50 | 50 | 15.11 | 15.20 | 15.12 | | |
| 20 | 64QAM | 100 | 0 | 15.12 | 15.21 | 15.12 | | |
| Channel | | | | 132047 | 132322 | 132597 | | |
| Frequency (MHz) | | | | 1717.5 | 1745 | 1772.5 | | |
| 15 | QPSK | 1 | 0 | 18.01 | 18.19 | 18.11 | 18.5 | 0 |
| 15 | QPSK | 1 | 37 | 18.09 | 18.10 | 18.15 | | |
| 15 | QPSK | 1 | 74 | 17.88 | 18.02 | 17.92 | | |
| 15 | QPSK | 36 | 0 | 16.93 | 17.18 | 16.98 | 17.5 | 1 |
| 15 | QPSK | 36 | 20 | 16.96 | 17.03 | 17.05 | | |
| 15 | QPSK | 36 | 39 | 16.86 | 17.09 | 16.96 | | |
| 15 | QPSK | 75 | 0 | 16.88 | 17.11 | 16.97 | | |
| 15 | 16QAM | 1 | 0 | 17.41 | 17.47 | 17.44 | 17.5 | 1 |
| 15 | 16QAM | 1 | 37 | 17.45 | 17.40 | 17.47 | | |
| 15 | 16QAM | 1 | 74 | 17.23 | 17.42 | 17.32 | | |
| 15 | 16QAM | 36 | 0 | 16.07 | 16.20 | 16.07 | 16.5 | 2 |
| 15 | 16QAM | 36 | 20 | 16.11 | 16.20 | 16.14 | | |
| 15 | 16QAM | 36 | 39 | 16.08 | 16.10 | 16.07 | | |
| 15 | 16QAM | 75 | 0 | 16.07 | 16.12 | 16.08 | | |
| 15 | 64QAM | 1 | 0 | 16.25 | 16.36 | 16.33 | 16.5 | 2 |
| 15 | 64QAM | 1 | 37 | 16.39 | 16.50 | 16.32 | | |
| 15 | 64QAM | 1 | 74 | 16.14 | 16.33 | 16.19 | | |
| 15 | 64QAM | 36 | 0 | 15.09 | 15.19 | 15.09 | 15.5 | 3 |
| 15 | 64QAM | 36 | 20 | 15.09 | 15.17 | 15.02 | | |
| 15 | 64QAM | 36 | 39 | 15.11 | 15.18 | 15.08 | | |
| 15 | 64QAM | 75 | 0 | 15.10 | 15.18 | 15.10 | | |



| Channel | | | | 132022 | 132322 | 132622 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1715 | 1745 | 1775 | | |
| 10 | QPSK | 1 | 0 | 17.94 | 18.16 | 18.09 | 18.5 | 0 |
| 10 | QPSK | 1 | 25 | 18.06 | 18.08 | 18.08 | | |
| 10 | QPSK | 1 | 49 | 17.90 | 18.05 | 17.89 | | |
| 10 | QPSK | 25 | 0 | 16.94 | 17.14 | 17.02 | 17.5 | 1 |
| 10 | QPSK | 25 | 12 | 16.91 | 17.11 | 17.02 | | |
| 10 | QPSK | 25 | 25 | 16.87 | 17.06 | 16.94 | | |
| 10 | QPSK | 50 | 0 | 16.90 | 17.08 | 16.94 | 17.5 | 1 |
| 10 | 16QAM | 1 | 0 | 17.33 | 17.44 | 17.37 | | |
| 10 | 16QAM | 1 | 25 | 17.35 | 17.43 | 17.41 | | |
| 10 | 16QAM | 1 | 49 | 17.30 | 17.44 | 17.28 | 16.5 | 2 |
| 10 | 16QAM | 25 | 0 | 16.03 | 16.18 | 16.14 | | |
| 10 | 16QAM | 25 | 12 | 16.09 | 16.17 | 16.11 | | |
| 10 | 16QAM | 25 | 25 | 16.05 | 16.12 | 16.13 | 16.5 | 2 |
| 10 | 16QAM | 50 | 0 | 16.07 | 16.17 | 16.07 | | |
| 10 | 64QAM | 1 | 0 | 16.24 | 16.41 | 16.35 | | |
| 10 | 64QAM | 1 | 25 | 16.30 | 16.45 | 16.35 | 16.5 | 2 |
| 10 | 64QAM | 1 | 49 | 16.21 | 16.27 | 16.24 | | |
| 10 | 64QAM | 25 | 0 | 15.02 | 15.23 | 15.19 | | |
| 10 | 64QAM | 25 | 12 | 15.05 | 15.23 | 15.00 | 15.5 | 3 |
| 10 | 64QAM | 25 | 25 | 15.11 | 15.12 | 15.10 | | |
| 10 | 64QAM | 50 | 0 | 15.09 | 15.16 | 15.12 | | |
| Channel | | | | 131997 | 132322 | 132647 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1712.5 | 1745 | 1777.5 | | |
| 5 | QPSK | 1 | 0 | 17.98 | 18.19 | 18.09 | 18.5 | 0 |
| 5 | QPSK | 1 | 12 | 18.05 | 18.11 | 18.16 | | |
| 5 | QPSK | 1 | 24 | 17.91 | 18.06 | 17.98 | | |
| 5 | QPSK | 12 | 0 | 16.98 | 17.16 | 16.99 | 17.5 | 1 |
| 5 | QPSK | 12 | 7 | 16.94 | 17.12 | 17.06 | | |
| 5 | QPSK | 12 | 13 | 16.85 | 17.09 | 16.96 | | |
| 5 | QPSK | 25 | 0 | 16.92 | 17.02 | 17.03 | 17.5 | 1 |
| 5 | 16QAM | 1 | 0 | 17.39 | 17.43 | 17.46 | | |
| 5 | 16QAM | 1 | 12 | 17.37 | 17.40 | 17.42 | | |
| 5 | 16QAM | 1 | 24 | 17.26 | 17.42 | 17.32 | 16.5 | 2 |
| 5 | 16QAM | 12 | 0 | 16.03 | 16.18 | 16.08 | | |
| 5 | 16QAM | 12 | 7 | 16.04 | 16.13 | 16.14 | | |
| 5 | 16QAM | 12 | 13 | 16.00 | 16.10 | 16.11 | 16.5 | 2 |
| 5 | 16QAM | 25 | 0 | 16.08 | 16.20 | 16.06 | | |
| 5 | 64QAM | 1 | 0 | 16.31 | 16.39 | 16.38 | | |
| 5 | 64QAM | 1 | 12 | 16.32 | 16.48 | 16.30 | 16.5 | 2 |
| 5 | 64QAM | 1 | 24 | 16.23 | 16.30 | 16.16 | | |
| 5 | 64QAM | 12 | 0 | 15.07 | 15.22 | 15.13 | | |
| 5 | 64QAM | 12 | 7 | 15.03 | 15.23 | 15.06 | 15.5 | 3 |
| 5 | 64QAM | 12 | 13 | 15.03 | 15.10 | 15.03 | | |
| 5 | 64QAM | 25 | 0 | 15.11 | 15.18 | 15.05 | | |



| Channel | | | | 131987 | 132322 | 132657 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1711.5 | 1745 | 1778.5 | | |
| 3 | QPSK | 1 | 0 | 17.96 | 18.19 | 18.06 | 18.5 | 0 |
| 3 | QPSK | 1 | 8 | 18.04 | 18.04 | 18.09 | | |
| 3 | QPSK | 1 | 14 | 17.89 | 18.02 | 17.94 | | |
| 3 | QPSK | 8 | 0 | 16.99 | 17.09 | 16.97 | 17.5 | 1 |
| 3 | QPSK | 8 | 4 | 16.97 | 17.05 | 17.06 | | |
| 3 | QPSK | 8 | 7 | 16.93 | 17.10 | 16.99 | | |
| 3 | QPSK | 15 | 0 | 16.95 | 17.03 | 16.97 | 17.5 | 1 |
| 3 | 16QAM | 1 | 0 | 17.41 | 17.50 | 17.44 | | |
| 3 | 16QAM | 1 | 8 | 17.38 | 17.43 | 17.45 | | |
| 3 | 16QAM | 1 | 14 | 17.31 | 17.38 | 17.32 | 16.5 | 2 |
| 3 | 16QAM | 8 | 0 | 16.03 | 16.24 | 16.13 | | |
| 3 | 16QAM | 8 | 4 | 16.01 | 16.18 | 16.12 | | |
| 3 | 16QAM | 8 | 7 | 16.05 | 16.12 | 16.11 | 16.5 | 2 |
| 3 | 16QAM | 15 | 0 | 16.02 | 16.17 | 16.02 | | |
| 3 | 64QAM | 1 | 0 | 16.24 | 16.45 | 16.37 | | |
| 3 | 64QAM | 1 | 8 | 16.36 | 16.45 | 16.40 | 16.5 | 2 |
| 3 | 64QAM | 1 | 14 | 16.13 | 16.35 | 16.22 | | |
| 3 | 64QAM | 8 | 0 | 15.01 | 15.27 | 15.12 | | |
| 3 | 64QAM | 8 | 4 | 15.09 | 15.19 | 15.09 | 15.5 | 3 |
| 3 | 64QAM | 8 | 7 | 15.09 | 15.20 | 15.06 | | |
| 3 | 64QAM | 15 | 0 | 15.07 | 15.12 | 15.07 | | |
| Channel | | | | 131979 | 132322 | 132665 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1710.7 | 1745 | 1779.3 | | |
| 1.4 | QPSK | 1 | 0 | 17.94 | 18.22 | 18.08 | 18.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 18.05 | 18.08 | 18.17 | | |
| 1.4 | QPSK | 1 | 5 | 17.95 | 18.05 | 17.90 | | |
| 1.4 | QPSK | 3 | 0 | 17.00 | 17.18 | 17.03 | | |
| 1.4 | QPSK | 3 | 1 | 16.94 | 17.11 | 16.96 | | |
| 1.4 | QPSK | 3 | 3 | 16.92 | 17.00 | 16.99 | | |
| 1.4 | QPSK | 6 | 0 | 16.88 | 17.12 | 16.98 | 17.5 | 1 |
| 1.4 | 16QAM | 1 | 0 | 17.34 | 17.46 | 17.37 | 17.5 | 1 |
| 1.4 | 16QAM | 1 | 3 | 17.44 | 17.43 | 17.49 | | |
| 1.4 | 16QAM | 1 | 5 | 17.30 | 17.37 | 17.29 | | |
| 1.4 | 16QAM | 3 | 0 | 16.01 | 16.26 | 16.06 | | |
| 1.4 | 16QAM | 3 | 1 | 16.05 | 16.13 | 16.10 | | |
| 1.4 | 16QAM | 3 | 3 | 16.05 | 16.11 | 16.11 | | |
| 1.4 | 16QAM | 6 | 0 | 16.00 | 16.13 | 16.05 | 16.5 | 2 |
| 1.4 | 64QAM | 1 | 0 | 16.25 | 16.37 | 16.39 | 16.5 | 2 |
| 1.4 | 64QAM | 1 | 3 | 16.38 | 16.46 | 16.30 | | |
| 1.4 | 64QAM | 1 | 5 | 16.19 | 16.33 | 16.21 | | |
| 1.4 | 64QAM | 3 | 0 | 15.06 | 15.27 | 15.18 | | |
| 1.4 | 64QAM | 3 | 1 | 15.12 | 15.23 | 15.07 | | |
| 1.4 | 64QAM | 3 | 3 | 15.05 | 15.12 | 15.08 | | |
| 1.4 | 64QAM | 6 | 0 | 15.10 | 15.11 | 15.08 | 15.5 | 3 |

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

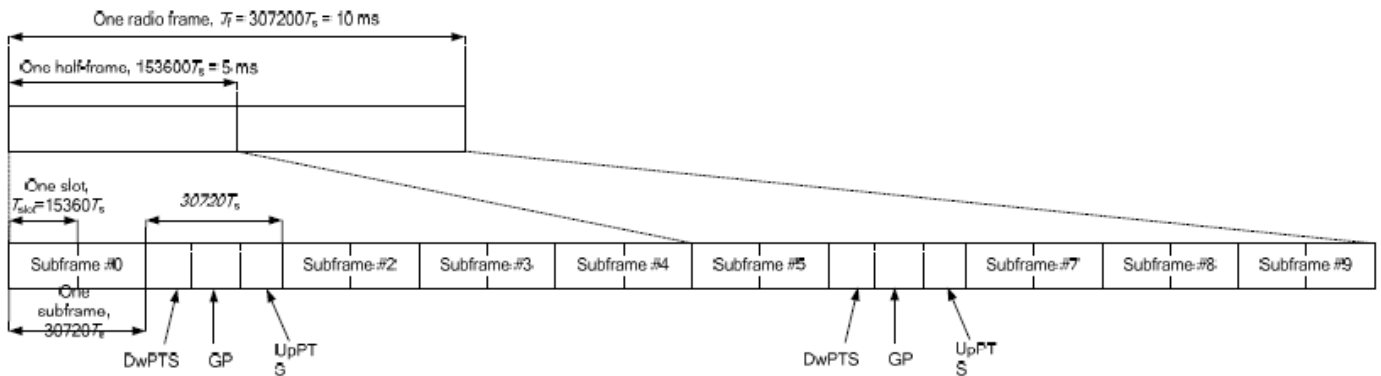


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number | | | | | | | | | |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0 | 5 ms | D | S | U | U | U | D | S | U | U | U |
| 1 | 5 ms | D | S | U | U | D | D | S | U | U | D |
| 2 | 5 ms | D | S | U | D | D | D | S | U | D | D |
| 3 | 10 ms | D | S | U | U | U | D | D | D | D | D |
| 4 | 10 ms | D | S | U | U | D | D | D | D | D | D |
| 5 | 10 ms | D | S | U | D | D | D | D | D | D | D |
| 6 | 5 ms | D | S | U | U | U | D | S | U | U | D |

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

| Special subframe configuration | Normal cyclic prefix in downlink | | | | Extended cyclic prefix in downlink | | | |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|-------------------|------------------------------------|----------------------------------|--|--|
| | DwPTS | UpPTS | | DwPTS | UpPTS | | | |
| | | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink | | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink | | |
| 0 | $6592 \cdot T_s$ | $2192 \cdot T_s$ | $2560 \cdot T_s$ | $7680 \cdot T_s$ | $2192 \cdot T_s$ | $2560 \cdot T_s$ | | |
| 1 | $19760 \cdot T_s$ | | | $20480 \cdot T_s$ | | | | |
| 2 | $21952 \cdot T_s$ | | | $23040 \cdot T_s$ | | | | |
| 3 | $24144 \cdot T_s$ | | | $25600 \cdot T_s$ | | | | |
| 4 | $26336 \cdot T_s$ | | | $7680 \cdot T_s$ | | | | |
| 5 | $6592 \cdot T_s$ | $4384 \cdot T_s$ | $5120 \cdot T_s$ | $20480 \cdot T_s$ | $4384 \cdot T_s$ | $5120 \cdot T_s$ | | |
| 6 | $19760 \cdot T_s$ | | | $23040 \cdot T_s$ | | | | |
| 7 | $21952 \cdot T_s$ | | | $12800 \cdot T_s$ | | | | |
| 8 | $24144 \cdot T_s$ | | | - | | | | |
| 9 | $13168 \cdot T_s$ | | | - | | | | |

| Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS) | | | |
|---|---------------------------------------|---------------------------------------|---|
| | Special subframe configuration | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| Uplink duty factor in one special subframe | 0~4 | 7.13% | 8.33% |
| | 5~9 | 14.3% | 16.7% |

| Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS) | | | |
|--|---------------------------------------|---------------------------------------|---|
| | Special subframe configuration | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| Uplink duty factor in one special subframe | 0~3 | 7.13% | 8.33% |
| | 4~7 | 14.3% | 16.7% |

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Default Power Mode>

<LTE Band 38>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 37850 | 38000 | 38150 | | |
| Frequency (MHz) | | | | 2580 | 2595 | 2610 | | |
| 20 | QPSK | 1 | 0 | 23.55 | 23.79 | 23.55 | 24.5 | 0 |
| 20 | QPSK | 1 | 49 | 23.64 | 23.68 | 23.70 | | |
| 20 | QPSK | 1 | 99 | 23.66 | 23.67 | 23.76 | | |
| 20 | QPSK | 50 | 0 | 22.58 | 22.73 | 22.59 | 23.5 | 1 |
| 20 | QPSK | 50 | 24 | 22.68 | 22.66 | 22.61 | | |
| 20 | QPSK | 50 | 50 | 22.68 | 22.70 | 22.72 | | |
| 20 | QPSK | 100 | 0 | 22.67 | 22.68 | 22.57 | 23.5 | 1 |
| 20 | 16QAM | 1 | 0 | 22.75 | 22.87 | 22.78 | | |
| 20 | 16QAM | 1 | 49 | 22.81 | 22.91 | 22.94 | | |
| 20 | 16QAM | 1 | 99 | 22.94 | 22.85 | 22.98 | 22.5 | 2 |
| 20 | 16QAM | 50 | 0 | 21.74 | 21.81 | 21.79 | | |
| 20 | 16QAM | 50 | 24 | 21.89 | 21.84 | 21.82 | | |
| 20 | 16QAM | 50 | 50 | 21.89 | 21.86 | 21.91 | 22.5 | 2 |
| 20 | 16QAM | 100 | 0 | 21.87 | 21.84 | 21.77 | | |
| 20 | 64QAM | 1 | 0 | 21.55 | 21.65 | 21.59 | | |
| 20 | 64QAM | 1 | 49 | 21.53 | 21.64 | 21.68 | 22.5 | 2 |
| 20 | 64QAM | 1 | 99 | 21.66 | 21.66 | 21.68 | | |
| 20 | 64QAM | 50 | 0 | 20.75 | 20.85 | 20.78 | | |
| 20 | 64QAM | 50 | 24 | 20.88 | 20.84 | 20.78 | 21.5 | 3 |
| 20 | 64QAM | 50 | 50 | 20.87 | 20.84 | 20.91 | | |
| 20 | 64QAM | 100 | 0 | 20.89 | 20.85 | 20.78 | | |
| Channel | | | | 37825 | 38000 | 38175 | | |
| Frequency (MHz) | | | | 2577.5 | 2595 | 2612.5 | | |
| 15 | QPSK | 1 | 0 | 23.54 | 23.74 | 23.45 | 24.5 | 0 |
| 15 | QPSK | 1 | 37 | 23.60 | 23.68 | 23.67 | | |
| 15 | QPSK | 1 | 74 | 23.65 | 23.65 | 23.71 | | |
| 15 | QPSK | 36 | 0 | 22.57 | 22.65 | 22.54 | 23.5 | 1 |
| 15 | QPSK | 36 | 20 | 22.63 | 22.61 | 22.54 | | |
| 15 | QPSK | 36 | 39 | 22.62 | 22.69 | 22.62 | | |
| 15 | QPSK | 75 | 0 | 22.64 | 22.64 | 22.56 | 23.5 | 1 |
| 15 | 16QAM | 1 | 0 | 22.73 | 22.83 | 22.73 | | |
| 15 | 16QAM | 1 | 37 | 22.78 | 22.85 | 22.88 | | |
| 15 | 16QAM | 1 | 74 | 22.87 | 22.75 | 22.91 | 22.5 | 2 |
| 15 | 16QAM | 36 | 0 | 21.70 | 21.73 | 21.76 | | |
| 15 | 16QAM | 36 | 20 | 21.81 | 21.78 | 21.73 | | |
| 15 | 16QAM | 36 | 39 | 21.88 | 21.80 | 21.82 | 22.5 | 2 |
| 15 | 16QAM | 75 | 0 | 21.84 | 21.74 | 21.75 | | |
| 15 | 64QAM | 1 | 0 | 21.52 | 21.63 | 21.57 | | |
| 15 | 64QAM | 1 | 37 | 21.45 | 21.64 | 21.68 | 22.5 | 2 |
| 15 | 64QAM | 1 | 74 | 21.58 | 21.66 | 21.64 | | |
| 15 | 64QAM | 36 | 0 | 20.66 | 20.85 | 20.76 | | |
| 15 | 64QAM | 36 | 20 | 20.83 | 20.82 | 20.73 | 21.5 | 3 |
| 15 | 64QAM | 36 | 39 | 20.82 | 20.84 | 20.86 | | |
| 15 | 64QAM | 75 | 0 | 20.81 | 20.77 | 20.68 | | |



| Channel | | | | 37800 | 38000 | 38200 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2575 | 2595 | 2615 | | |
| 10 | QPSK | 1 | 0 | 23.49 | 23.73 | 23.54 | 24.5 | 0 |
| 10 | QPSK | 1 | 25 | 23.62 | 23.64 | 23.65 | | |
| 10 | QPSK | 1 | 49 | 23.64 | 23.64 | 23.70 | | |
| 10 | QPSK | 25 | 0 | 22.57 | 22.71 | 22.49 | 23.5 | 1 |
| 10 | QPSK | 25 | 12 | 22.62 | 22.63 | 22.51 | | |
| 10 | QPSK | 25 | 25 | 22.64 | 22.66 | 22.64 | | |
| 10 | QPSK | 50 | 0 | 22.63 | 22.67 | 22.54 | 23.5 | 1 |
| 10 | 16QAM | 1 | 0 | 22.67 | 22.80 | 22.73 | | |
| 10 | 16QAM | 1 | 25 | 22.75 | 22.90 | 22.88 | | |
| 10 | 16QAM | 1 | 49 | 22.88 | 22.80 | 22.92 | 22.5 | 2 |
| 10 | 16QAM | 25 | 0 | 21.72 | 21.78 | 21.76 | | |
| 10 | 16QAM | 25 | 12 | 21.80 | 21.79 | 21.81 | | |
| 10 | 16QAM | 25 | 25 | 21.81 | 21.82 | 21.84 | 21.5 | 3 |
| 10 | 16QAM | 50 | 0 | 21.87 | 21.81 | 21.75 | | |
| 10 | 64QAM | 1 | 0 | 21.50 | 21.62 | 21.55 | | |
| 10 | 64QAM | 1 | 25 | 21.49 | 21.57 | 21.65 | 22.5 | 2 |
| 10 | 64QAM | 1 | 49 | 21.58 | 21.63 | 21.68 | | |
| 10 | 64QAM | 25 | 0 | 20.67 | 20.85 | 20.74 | | |
| 10 | 64QAM | 25 | 12 | 20.82 | 20.77 | 20.71 | 21.5 | 3 |
| 10 | 64QAM | 25 | 25 | 20.79 | 20.79 | 20.86 | | |
| 10 | 64QAM | 50 | 0 | 20.87 | 20.84 | 20.77 | | |
| Channel | | | | 37775 | 38000 | 38225 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2572.5 | 2595 | 2617.5 | | |
| 5 | QPSK | 1 | 0 | 23.55 | 23.78 | 23.54 | 24.5 | 0 |
| 5 | QPSK | 1 | 12 | 23.59 | 23.66 | 23.64 | | |
| 5 | QPSK | 1 | 24 | 23.58 | 23.63 | 23.71 | | |
| 5 | QPSK | 12 | 0 | 22.49 | 22.66 | 22.54 | 23.5 | 1 |
| 5 | QPSK | 12 | 7 | 22.63 | 22.56 | 22.58 | | |
| 5 | QPSK | 12 | 13 | 22.65 | 22.64 | 22.69 | | |
| 5 | QPSK | 25 | 0 | 22.67 | 22.66 | 22.55 | 23.5 | 1 |
| 5 | 16QAM | 1 | 0 | 22.69 | 22.82 | 22.77 | | |
| 5 | 16QAM | 1 | 12 | 22.80 | 22.89 | 22.91 | | |
| 5 | 16QAM | 1 | 24 | 22.93 | 22.85 | 22.88 | 22.5 | 2 |
| 5 | 16QAM | 12 | 0 | 21.67 | 21.79 | 21.70 | | |
| 5 | 16QAM | 12 | 7 | 21.80 | 21.80 | 21.72 | | |
| 5 | 16QAM | 12 | 13 | 21.79 | 21.77 | 21.88 | 22.5 | 2 |
| 5 | 16QAM | 25 | 0 | 21.77 | 21.75 | 21.72 | | |
| 5 | 64QAM | 1 | 0 | 21.51 | 21.61 | 21.51 | | |
| 5 | 64QAM | 1 | 12 | 21.44 | 21.62 | 21.66 | 22.5 | 2 |
| 5 | 64QAM | 1 | 24 | 21.60 | 21.60 | 21.63 | | |
| 5 | 64QAM | 12 | 0 | 20.66 | 20.81 | 20.72 | | |
| 5 | 64QAM | 12 | 7 | 20.87 | 20.80 | 20.75 | 21.5 | 3 |
| 5 | 64QAM | 12 | 13 | 20.84 | 20.76 | 20.90 | | |
| 5 | 64QAM | 25 | 0 | 20.85 | 20.75 | 20.77 | | |



<LTE Band 41>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Low Middle Ch. / Freq. | Power Middle Ch. / Freq. | Power High Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------------|--------------------------|-------------------------------|------------------------|---------------------|----------|
| Channel | | | | 39750 | 40185 | 40620 | 41055 | 41490 | | |
| Frequency (MHz) | | | | 2506 | 2549.5 | 2593 | 2636.5 | 2680 | | |
| 20 | QPSK | 1 | 0 | 22.70 | 22.86 | 23.00 | 22.89 | 24.39 | 24.5 | 0 |
| 20 | QPSK | 1 | 49 | 22.72 | 22.87 | 23.13 | 22.91 | 22.82 | | |
| 20 | QPSK | 1 | 99 | 22.85 | 22.96 | 23.16 | 22.94 | 24.50 | | |
| 20 | QPSK | 50 | 0 | 21.80 | 21.94 | 22.19 | 21.97 | 21.98 | 23.5 | 1 |
| 20 | QPSK | 50 | 24 | 21.82 | 22.06 | 22.18 | 21.97 | 21.95 | | |
| 20 | QPSK | 50 | 50 | 21.91 | 22.04 | 22.05 | 22.01 | 22.16 | | |
| 20 | QPSK | 100 | 0 | 21.93 | 22.06 | 22.18 | 21.98 | 22.19 | 23.5 | 1 |
| 20 | 16QAM | 1 | 0 | 21.80 | 21.98 | 22.19 | 22.05 | 23.28 | | |
| 20 | 16QAM | 1 | 49 | 21.81 | 21.99 | 22.33 | 22.11 | 22.09 | | |
| 20 | 16QAM | 1 | 99 | 21.92 | 22.10 | 22.32 | 22.17 | 23.47 | 22.5 | 2 |
| 20 | 16QAM | 50 | 0 | 20.88 | 21.03 | 21.28 | 21.09 | 21.16 | | |
| 20 | 16QAM | 50 | 24 | 20.91 | 21.14 | 21.34 | 21.11 | 21.13 | | |
| 20 | 16QAM | 50 | 50 | 21.01 | 21.15 | 21.32 | 21.13 | 21.22 | 22.5 | 2 |
| 20 | 16QAM | 100 | 0 | 21.00 | 21.17 | 21.30 | 21.11 | 21.22 | | |
| 20 | 64QAM | 1 | 0 | 20.57 | 20.75 | 20.95 | 20.84 | 22.49 | | |
| 20 | 64QAM | 1 | 49 | 20.54 | 20.75 | 21.08 | 20.85 | 20.88 | 22.5 | 2 |
| 20 | 64QAM | 1 | 99 | 20.69 | 20.88 | 21.11 | 20.88 | 22.48 | | |
| 20 | 64QAM | 50 | 0 | 19.89 | 20.06 | 20.29 | 20.12 | 20.18 | | |
| 20 | 64QAM | 50 | 24 | 19.90 | 20.19 | 20.30 | 20.15 | 20.15 | 21.5 | 3 |
| 20 | 64QAM | 50 | 50 | 20.04 | 20.16 | 20.30 | 20.14 | 20.24 | | |
| 20 | 64QAM | 100 | 0 | 20.00 | 20.13 | 20.34 | 20.15 | 20.24 | | |
| Channel | | | | 39725 | 40173 | 40620 | 41068 | 41515 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2503.5 | 2548.3 | 2593 | 2637.8 | 2682.5 | | |
| 15 | QPSK | 1 | 0 | 22.77 | 22.98 | 23.21 | 23.04 | 22.88 | 24.5 | 0 |
| 15 | QPSK | 1 | 37 | 22.73 | 22.94 | 23.30 | 23.03 | 22.92 | | |
| 15 | QPSK | 1 | 74 | 22.81 | 23.19 | 23.33 | 23.14 | 22.96 | | |
| 15 | QPSK | 36 | 0 | 21.84 | 22.05 | 22.26 | 22.06 | 22.00 | 23.5 | 1 |
| 15 | QPSK | 36 | 20 | 21.83 | 22.14 | 22.27 | 22.07 | 21.97 | | |
| 15 | QPSK | 36 | 39 | 21.81 | 22.13 | 22.27 | 22.04 | 22.00 | | |
| 15 | QPSK | 75 | 0 | 21.79 | 22.15 | 22.27 | 22.00 | 21.94 | 23.5 | 1 |
| 15 | 16QAM | 1 | 0 | 21.82 | 22.12 | 22.37 | 22.22 | 22.11 | | |
| 15 | 16QAM | 1 | 37 | 21.88 | 22.08 | 22.44 | 22.29 | 22.16 | | |
| 15 | 16QAM | 1 | 74 | 21.92 | 22.31 | 22.54 | 22.30 | 22.17 | 22.5 | 2 |
| 15 | 16QAM | 36 | 0 | 20.80 | 21.06 | 21.31 | 21.14 | 21.12 | | |
| 15 | 16QAM | 36 | 20 | 20.87 | 21.24 | 21.37 | 21.14 | 21.12 | | |
| 15 | 16QAM | 36 | 39 | 20.85 | 21.25 | 21.36 | 21.13 | 21.14 | 22.5 | 2 |
| 15 | 16QAM | 75 | 0 | 20.92 | 21.21 | 21.34 | 21.18 | 21.15 | | |
| 15 | 64QAM | 1 | 0 | 20.64 | 20.87 | 21.10 | 20.97 | 20.94 | | |
| 15 | 64QAM | 1 | 37 | 20.61 | 20.84 | 21.18 | 20.98 | 20.96 | 22.5 | 2 |
| 15 | 64QAM | 1 | 74 | 20.70 | 21.07 | 21.27 | 21.06 | 20.95 | | |
| 15 | 64QAM | 36 | 0 | 19.84 | 20.12 | 20.38 | 20.17 | 20.18 | | |
| 15 | 64QAM | 36 | 20 | 19.90 | 20.26 | 20.40 | 20.21 | 20.21 | 21.5 | 3 |
| 15 | 64QAM | 36 | 39 | 19.90 | 20.25 | 20.39 | 20.17 | 20.20 | | |
| 15 | 64QAM | 75 | 0 | 19.87 | 20.27 | 20.38 | 20.20 | 20.17 | | |



FCC SAR TEST REPORT

Report No. : FA922214

| Channel | | | | 39700 | 40160 | 40620 | 41080 | 41540 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|-------|---------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2501 | 2547 | 2593 | 2639 | 2685 | | |
| 10 | QPSK | 1 | 0 | 22.66 | 22.88 | 23.08 | 22.95 | 23.41 | 24.5 | 0 |
| 10 | QPSK | 1 | 25 | 22.67 | 22.91 | 23.23 | 22.97 | 22.90 | | |
| 10 | QPSK | 1 | 49 | 22.67 | 23.07 | 23.20 | 23.05 | 23.42 | | |
| 10 | QPSK | 25 | 0 | 21.70 | 21.97 | 22.20 | 21.88 | 22.10 | 23.5 | 1 |
| 10 | QPSK | 25 | 12 | 21.76 | 21.96 | 22.24 | 21.94 | 21.93 | | |
| 10 | QPSK | 25 | 25 | 21.77 | 22.09 | 22.20 | 21.95 | 22.02 | | |
| 10 | QPSK | 50 | 0 | 21.73 | 22.08 | 22.20 | 21.94 | 22.03 | 23.5 | 1 |
| 10 | 16QAM | 1 | 0 | 21.78 | 22.02 | 22.27 | 22.19 | 22.59 | | |
| 10 | 16QAM | 1 | 25 | 21.80 | 22.07 | 22.44 | 22.23 | 22.06 | | |
| 10 | 16QAM | 1 | 49 | 21.78 | 22.15 | 22.35 | 22.10 | 22.64 | 22.5 | 2 |
| 10 | 16QAM | 25 | 0 | 20.78 | 21.04 | 21.30 | 21.11 | 21.27 | | |
| 10 | 16QAM | 25 | 12 | 20.82 | 21.11 | 21.30 | 21.10 | 21.16 | | |
| 10 | 16QAM | 25 | 25 | 20.79 | 21.12 | 21.33 | 21.15 | 21.31 | 22.5 | 2 |
| 10 | 16QAM | 50 | 0 | 20.83 | 21.15 | 21.30 | 21.11 | 21.19 | | |
| 10 | 64QAM | 1 | 0 | 20.51 | 20.73 | 20.98 | 20.87 | 21.50 | | |
| 10 | 64QAM | 1 | 25 | 20.53 | 20.78 | 21.12 | 20.90 | 20.84 | 22.5 | 2 |
| 10 | 64QAM | 1 | 49 | 20.55 | 20.89 | 21.18 | 20.97 | 21.34 | | |
| 10 | 64QAM | 25 | 0 | 19.87 | 20.11 | 20.34 | 20.13 | 20.29 | | |
| 10 | 64QAM | 25 | 12 | 19.84 | 20.12 | 20.37 | 20.21 | 20.19 | 21.5 | 3 |
| 10 | 64QAM | 25 | 25 | 19.87 | 20.23 | 20.31 | 20.20 | 20.33 | | |
| 10 | 64QAM | 50 | 0 | 19.83 | 20.17 | 20.34 | 20.11 | 20.24 | | |
| Channel | | | | 39675 | 40148 | 40620 | 41093 | 41565 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2498.5 | 2545.8 | 2593 | 2640.30 | 2687.5 | | |
| 5 | QPSK | 1 | 0 | 22.63 | 22.76 | 23.05 | 22.80 | 22.73 | 24.5 | 0 |
| 5 | QPSK | 1 | 12 | 22.66 | 22.75 | 23.12 | 22.84 | 22.81 | | |
| 5 | QPSK | 1 | 24 | 22.66 | 22.78 | 23.06 | 22.93 | 22.68 | | |
| 5 | QPSK | 12 | 0 | 21.70 | 21.85 | 22.02 | 21.80 | 21.80 | 23.5 | 1 |
| 5 | QPSK | 12 | 7 | 21.72 | 21.89 | 22.08 | 21.86 | 21.76 | | |
| 5 | QPSK | 12 | 13 | 21.72 | 21.87 | 22.11 | 21.85 | 21.75 | | |
| 5 | QPSK | 25 | 0 | 21.69 | 21.86 | 22.03 | 21.80 | 21.76 | 23.5 | 1 |
| 5 | 16QAM | 1 | 0 | 21.74 | 21.87 | 22.24 | 21.94 | 21.93 | | |
| 5 | 16QAM | 1 | 12 | 21.81 | 21.95 | 22.22 | 22.01 | 21.97 | | |
| 5 | 16QAM | 1 | 24 | 21.78 | 21.92 | 22.23 | 22.04 | 21.97 | 22.5 | 2 |
| 5 | 16QAM | 12 | 0 | 20.75 | 20.87 | 21.17 | 20.93 | 20.88 | | |
| 5 | 16QAM | 12 | 7 | 20.76 | 20.93 | 21.15 | 20.92 | 20.93 | | |
| 5 | 16QAM | 12 | 13 | 20.77 | 20.92 | 21.15 | 20.96 | 20.93 | 22.5 | 2 |
| 5 | 16QAM | 25 | 0 | 20.79 | 20.95 | 21.23 | 21.00 | 20.94 | | |
| 5 | 64QAM | 1 | 0 | 20.51 | 20.66 | 20.97 | 20.72 | 20.68 | | |
| 5 | 64QAM | 1 | 12 | 20.50 | 20.67 | 21.02 | 20.79 | 20.64 | 22.5 | 2 |
| 5 | 64QAM | 1 | 24 | 20.54 | 20.71 | 20.98 | 20.75 | 20.74 | | |
| 5 | 64QAM | 12 | 0 | 19.78 | 20.04 | 20.22 | 20.02 | 20.03 | | |
| 5 | 64QAM | 12 | 7 | 19.83 | 20.00 | 20.21 | 19.97 | 20.05 | 21.5 | 3 |
| 5 | 64QAM | 12 | 13 | 19.82 | 19.98 | 20.22 | 19.96 | 19.99 | | |
| 5 | 64QAM | 25 | 0 | 19.80 | 20.02 | 20.24 | 20.06 | 20.04 | | |



<Reduced Power Mode>

<LTE Band 38>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 37850 | 38000 | 38150 | | |
| Frequency (MHz) | | | | 2580 | 2595 | 2610 | | |
| 20 | QPSK | 1 | 0 | 18.11 | 18.27 | 18.12 | 19.5 | 0 |
| 20 | QPSK | 1 | 49 | 18.09 | 18.18 | 18.20 | | |
| 20 | QPSK | 1 | 99 | 18.23 | 18.21 | 18.26 | | |
| 20 | QPSK | 50 | 0 | 17.16 | 17.32 | 17.22 | 18.5 | 1 |
| 20 | QPSK | 50 | 24 | 17.28 | 17.28 | 17.21 | | |
| 20 | QPSK | 50 | 50 | 17.30 | 17.28 | 17.31 | | |
| 20 | QPSK | 100 | 0 | 17.32 | 17.33 | 17.22 | | |
| 20 | 16QAM | 1 | 0 | 17.24 | 17.36 | 17.24 | 18.5 | 1 |
| 20 | 16QAM | 1 | 49 | 17.25 | 17.34 | 17.38 | | |
| 20 | 16QAM | 1 | 99 | 17.36 | 17.35 | 17.40 | | |
| 20 | 16QAM | 50 | 0 | 16.30 | 16.33 | 16.26 | 17.5 | 2 |
| 20 | 16QAM | 50 | 24 | 16.38 | 16.32 | 16.29 | | |
| 20 | 16QAM | 50 | 50 | 16.38 | 16.34 | 16.42 | | |
| 20 | 16QAM | 100 | 0 | 16.37 | 16.33 | 16.26 | | |
| 20 | 64QAM | 1 | 0 | 15.98 | 16.04 | 16.00 | 17.5 | 2 |
| 20 | 64QAM | 1 | 49 | 15.99 | 16.05 | 16.09 | | |
| 20 | 64QAM | 1 | 99 | 16.13 | 16.10 | 16.12 | | |
| 20 | 64QAM | 50 | 0 | 15.24 | 15.36 | 15.27 | 16.5 | 3 |
| 20 | 64QAM | 50 | 24 | 15.37 | 15.33 | 15.28 | | |
| 20 | 64QAM | 50 | 50 | 15.41 | 15.35 | 15.39 | | |
| 20 | 64QAM | 100 | 0 | 15.39 | 15.38 | 15.30 | | |
| Channel | | | | 37825 | 38000 | 38175 | | |
| Frequency (MHz) | | | | 2577.5 | 2595 | 2612.5 | | |
| 15 | QPSK | 1 | 0 | 18.11 | 18.21 | 18.04 | 19.5 | 0 |
| 15 | QPSK | 1 | 37 | 18.00 | 18.10 | 18.14 | | |
| 15 | QPSK | 1 | 74 | 18.15 | 18.15 | 18.16 | | |
| 15 | QPSK | 36 | 0 | 17.09 | 17.28 | 17.13 | 18.5 | 1 |
| 15 | QPSK | 36 | 20 | 17.26 | 17.24 | 17.20 | | |
| 15 | QPSK | 36 | 39 | 17.20 | 17.22 | 17.28 | | |
| 15 | QPSK | 75 | 0 | 17.22 | 17.29 | 17.20 | | |
| 15 | 16QAM | 1 | 0 | 17.20 | 17.32 | 17.22 | 18.5 | 1 |
| 15 | 16QAM | 1 | 37 | 17.25 | 17.31 | 17.34 | | |
| 15 | 16QAM | 1 | 74 | 17.26 | 17.32 | 17.34 | | |
| 15 | 16QAM | 36 | 0 | 16.26 | 16.29 | 16.18 | 17.5 | 2 |
| 15 | 16QAM | 36 | 20 | 16.37 | 16.28 | 16.24 | | |
| 15 | 16QAM | 36 | 39 | 16.33 | 16.24 | 16.39 | | |
| 15 | 16QAM | 75 | 0 | 16.36 | 16.24 | 16.17 | | |
| 15 | 64QAM | 1 | 0 | 15.89 | 15.99 | 15.93 | 17.5 | 2 |
| 15 | 64QAM | 1 | 37 | 15.96 | 16.05 | 16.05 | | |
| 15 | 64QAM | 1 | 74 | 16.10 | 16.02 | 16.04 | | |
| 15 | 64QAM | 36 | 0 | 15.16 | 15.36 | 15.22 | 16.5 | 3 |
| 15 | 64QAM | 36 | 20 | 15.29 | 15.28 | 15.27 | | |
| 15 | 64QAM | 36 | 39 | 15.32 | 15.25 | 15.32 | | |
| 15 | 64QAM | 75 | 0 | 15.36 | 15.35 | 15.23 | | |



| Channel | | | | 37800 | 38000 | 38200 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2575 | 2595 | 2615 | | |
| 10 | QPSK | 1 | 0 | 18.09 | 18.19 | 18.08 | 19.5 | 0 |
| 10 | QPSK | 1 | 25 | 18.09 | 18.08 | 18.15 | | |
| 10 | QPSK | 1 | 49 | 18.17 | 18.13 | 18.22 | | |
| 10 | QPSK | 25 | 0 | 17.10 | 17.26 | 17.15 | 18.5 | 1 |
| 10 | QPSK | 25 | 12 | 17.21 | 17.21 | 17.19 | | |
| 10 | QPSK | 25 | 25 | 17.25 | 17.23 | 17.23 | | |
| 10 | QPSK | 50 | 0 | 17.27 | 17.30 | 17.15 | 18.5 | 1 |
| 10 | 16QAM | 1 | 0 | 17.20 | 17.36 | 17.17 | | |
| 10 | 16QAM | 1 | 25 | 17.20 | 17.30 | 17.30 | | |
| 10 | 16QAM | 1 | 49 | 17.26 | 17.25 | 17.32 | 17.5 | 2 |
| 10 | 16QAM | 25 | 0 | 16.28 | 16.33 | 16.24 | | |
| 10 | 16QAM | 25 | 12 | 16.34 | 16.24 | 16.21 | | |
| 10 | 16QAM | 25 | 25 | 16.30 | 16.31 | 16.33 | 17.5 | 2 |
| 10 | 16QAM | 50 | 0 | 16.35 | 16.24 | 16.21 | | |
| 10 | 64QAM | 1 | 0 | 15.88 | 16.04 | 15.91 | | |
| 10 | 64QAM | 1 | 25 | 15.91 | 15.97 | 16.08 | 17.5 | 2 |
| 10 | 64QAM | 1 | 49 | 16.05 | 16.10 | 16.09 | | |
| 10 | 64QAM | 25 | 0 | 15.20 | 15.28 | 15.17 | | |
| 10 | 64QAM | 25 | 12 | 15.34 | 15.32 | 15.28 | 16.5 | 3 |
| 10 | 64QAM | 25 | 25 | 15.41 | 15.32 | 15.36 | | |
| 10 | 64QAM | 50 | 0 | 15.36 | 15.37 | 15.25 | | |
| Channel | | | | 37775 | 38000 | 38225 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2572.5 | 2595 | 2617.5 | | |
| 5 | QPSK | 1 | 0 | 18.02 | 18.17 | 18.12 | 19.5 | 0 |
| 5 | QPSK | 1 | 12 | 18.06 | 18.11 | 18.19 | | |
| 5 | QPSK | 1 | 24 | 18.14 | 18.15 | 18.25 | | |
| 5 | QPSK | 12 | 0 | 17.06 | 17.31 | 17.16 | 18.5 | 1 |
| 5 | QPSK | 12 | 7 | 17.18 | 17.18 | 17.17 | | |
| 5 | QPSK | 12 | 13 | 17.25 | 17.18 | 17.22 | | |
| 5 | QPSK | 25 | 0 | 17.25 | 17.30 | 17.21 | 18.5 | 1 |
| 5 | 16QAM | 1 | 0 | 17.15 | 17.35 | 17.17 | | |
| 5 | 16QAM | 1 | 12 | 17.17 | 17.27 | 17.35 | | |
| 5 | 16QAM | 1 | 24 | 17.28 | 17.31 | 17.38 | 17.5 | 2 |
| 5 | 16QAM | 12 | 0 | 16.24 | 16.23 | 16.23 | | |
| 5 | 16QAM | 12 | 7 | 16.31 | 16.25 | 16.29 | | |
| 5 | 16QAM | 12 | 13 | 16.32 | 16.24 | 16.39 | 17.5 | 2 |
| 5 | 16QAM | 25 | 0 | 16.31 | 16.31 | 16.25 | | |
| 5 | 64QAM | 1 | 0 | 15.93 | 15.98 | 15.94 | | |
| 5 | 64QAM | 1 | 12 | 15.90 | 16.00 | 15.99 | 17.5 | 2 |
| 5 | 64QAM | 1 | 24 | 16.12 | 16.09 | 16.07 | | |
| 5 | 64QAM | 12 | 0 | 15.22 | 15.32 | 15.21 | | |
| 5 | 64QAM | 12 | 7 | 15.30 | 15.25 | 15.18 | 16.5 | 3 |
| 5 | 64QAM | 12 | 13 | 15.37 | 15.25 | 15.31 | | |
| 5 | 64QAM | 25 | 0 | 15.39 | 15.29 | 15.20 | | |



<LTE Band 41>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Low Middle Ch. / Freq. | Power Middle Ch. / Freq. | Power High Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------------|--------------------------|-------------------------------|------------------------|---------------------|----------|
| Channel | | | | 39750 | 40185 | 40620 | 41055 | 41490 | | |
| Frequency (MHz) | | | | 2506 | 2549.5 | 2593 | 2636.5 | 2680 | | |
| 20 | QPSK | 1 | 0 | 17.77 | 17.96 | 18.13 | 18.00 | 19.43 | 19.5 | 0 |
| 20 | QPSK | 1 | 49 | 17.75 | 17.97 | 18.15 | 18.02 | 17.88 | | |
| 20 | QPSK | 1 | 99 | 17.91 | 18.11 | 18.25 | 18.08 | 19.50 | | |
| 20 | QPSK | 50 | 0 | 16.79 | 17.04 | 17.21 | 17.03 | 17.07 | 18.5 | 1 |
| 20 | QPSK | 50 | 24 | 16.81 | 17.13 | 17.26 | 17.16 | 17.02 | | |
| 20 | QPSK | 50 | 50 | 16.95 | 17.20 | 17.27 | 17.17 | 17.34 | | |
| 20 | QPSK | 100 | 0 | 16.92 | 17.18 | 17.12 | 17.13 | 17.25 | | |
| 20 | 16QAM | 1 | 0 | 16.93 | 17.11 | 17.26 | 17.17 | 18.41 | 18.5 | 1 |
| 20 | 16QAM | 1 | 49 | 16.93 | 17.12 | 17.35 | 17.13 | 17.08 | | |
| 20 | 16QAM | 1 | 99 | 17.02 | 17.23 | 17.40 | 17.13 | 18.43 | | |
| 20 | 16QAM | 50 | 0 | 15.89 | 16.10 | 16.41 | 16.14 | 16.12 | 17.5 | 2 |
| 20 | 16QAM | 50 | 24 | 15.93 | 16.25 | 16.43 | 16.23 | 16.06 | | |
| 20 | 16QAM | 50 | 50 | 16.06 | 16.23 | 16.42 | 16.10 | 16.18 | | |
| 20 | 16QAM | 100 | 0 | 16.01 | 16.27 | 16.42 | 16.18 | 16.15 | | |
| 20 | 64QAM | 1 | 0 | 15.65 | 15.84 | 15.93 | 15.80 | 17.39 | 17.5 | 2 |
| 20 | 64QAM | 1 | 49 | 15.66 | 15.84 | 16.13 | 15.81 | 15.80 | | |
| 20 | 64QAM | 1 | 99 | 15.75 | 16.01 | 16.15 | 15.86 | 17.48 | | |
| 20 | 64QAM | 50 | 0 | 14.93 | 15.17 | 15.45 | 15.11 | 15.19 | 16.5 | 3 |
| 20 | 64QAM | 50 | 24 | 14.97 | 15.29 | 15.48 | 15.12 | 15.19 | | |
| 20 | 64QAM | 50 | 50 | 15.05 | 15.27 | 15.45 | 15.29 | 15.23 | | |
| 20 | 64QAM | 100 | 0 | 15.08 | 15.29 | 15.44 | 15.30 | 15.27 | | |
| Channel | | | | 39725 | 40173 | 40620 | 41068 | 41515 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2503.5 | 2548.3 | 2593 | 2637.8 | 2682.5 | | |
| 15 | QPSK | 1 | 0 | 17.74 | 17.91 | 18.16 | 17.94 | 17.82 | 19.5 | 0 |
| 15 | QPSK | 1 | 37 | 17.72 | 17.91 | 18.25 | 18.01 | 17.88 | | |
| 15 | QPSK | 1 | 74 | 17.78 | 18.14 | 18.25 | 18.06 | 17.93 | | |
| 15 | QPSK | 36 | 0 | 16.75 | 17.00 | 17.21 | 16.96 | 16.99 | 18.5 | 1 |
| 15 | QPSK | 36 | 20 | 16.79 | 17.14 | 17.20 | 17.01 | 16.97 | | |
| 15 | QPSK | 36 | 39 | 16.74 | 17.06 | 17.24 | 17.00 | 16.99 | | |
| 15 | QPSK | 75 | 0 | 16.75 | 17.05 | 17.23 | 16.95 | 16.85 | | |
| 15 | 16QAM | 1 | 0 | 16.74 | 17.08 | 17.32 | 17.22 | 17.03 | 18.5 | 1 |
| 15 | 16QAM | 1 | 37 | 16.83 | 16.98 | 17.42 | 17.19 | 17.16 | | |
| 15 | 16QAM | 1 | 74 | 16.90 | 17.28 | 17.50 | 17.29 | 17.09 | | |
| 15 | 16QAM | 36 | 0 | 15.79 | 16.04 | 16.21 | 16.05 | 16.12 | 17.5 | 2 |
| 15 | 16QAM | 36 | 20 | 15.84 | 16.20 | 16.34 | 16.13 | 16.08 | | |
| 15 | 16QAM | 36 | 39 | 15.83 | 16.16 | 16.26 | 16.10 | 16.14 | | |
| 15 | 16QAM | 75 | 0 | 15.83 | 16.18 | 16.33 | 16.12 | 16.06 | | |
| 15 | 64QAM | 1 | 0 | 15.55 | 15.84 | 16.10 | 15.89 | 15.94 | 17.5 | 2 |
| 15 | 64QAM | 1 | 37 | 15.59 | 15.80 | 16.13 | 15.98 | 15.86 | | |
| 15 | 64QAM | 1 | 74 | 15.70 | 16.04 | 16.21 | 15.96 | 15.92 | | |
| 15 | 64QAM | 36 | 0 | 14.76 | 15.02 | 15.29 | 15.16 | 15.08 | 16.5 | 3 |
| 15 | 64QAM | 36 | 20 | 14.87 | 15.26 | 15.38 | 15.17 | 15.11 | | |
| 15 | 64QAM | 36 | 39 | 14.90 | 15.19 | 15.30 | 15.08 | 15.20 | | |
| 15 | 64QAM | 75 | 0 | 14.87 | 15.17 | 15.30 | 15.20 | 15.16 | | |



FCC SAR TEST REPORT

Report No. : FA922214

| Channel | | | | 39700 | 40160 | 40620 | 41080 | 41540 | Tune-up limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|--------|-------|---------|--------|---------------------|----------|
| Frequency (MHz) | | | | 2501 | 2547 | 2593 | 2639 | 2685 | | |
| 10 | QPSK | 1 | 0 | 17.77 | 17.97 | 18.16 | 17.99 | 17.80 | 19.5 | 0 |
| 10 | QPSK | 1 | 25 | 17.69 | 17.88 | 18.23 | 18.01 | 17.89 | | |
| 10 | QPSK | 1 | 49 | 17.76 | 18.16 | 18.24 | 18.10 | 17.91 | | |
| 10 | QPSK | 25 | 0 | 16.84 | 16.96 | 17.17 | 16.99 | 16.99 | 18.5 | 1 |
| 10 | QPSK | 25 | 12 | 16.79 | 17.10 | 17.20 | 17.06 | 16.91 | | |
| 10 | QPSK | 25 | 25 | 16.73 | 17.05 | 17.25 | 17.01 | 17.00 | | |
| 10 | QPSK | 50 | 0 | 16.69 | 17.07 | 17.26 | 16.99 | 16.89 | 18.5 | 1 |
| 10 | 16QAM | 1 | 0 | 16.81 | 17.08 | 17.34 | 17.15 | 17.07 | | |
| 10 | 16QAM | 1 | 25 | 16.87 | 16.98 | 17.40 | 17.25 | 17.10 | | |
| 10 | 16QAM | 1 | 49 | 16.82 | 17.26 | 17.50 | 17.23 | 17.16 | 17.5 | 2 |
| 10 | 16QAM | 25 | 0 | 15.76 | 16.02 | 16.21 | 16.04 | 16.05 | | |
| 10 | 16QAM | 25 | 12 | 15.81 | 16.22 | 16.30 | 16.10 | 16.03 | | |
| 10 | 16QAM | 25 | 25 | 15.84 | 16.19 | 16.34 | 16.07 | 16.14 | 17.5 | 2 |
| 10 | 16QAM | 50 | 0 | 15.87 | 16.17 | 16.26 | 16.17 | 16.10 | | |
| 10 | 64QAM | 1 | 0 | 15.54 | 15.83 | 16.10 | 15.93 | 15.93 | | |
| 10 | 64QAM | 1 | 25 | 15.56 | 15.83 | 16.12 | 15.92 | 15.94 | 17.5 | 2 |
| 10 | 64QAM | 1 | 49 | 15.68 | 16.06 | 16.19 | 15.98 | 15.85 | | |
| 10 | 64QAM | 25 | 0 | 14.76 | 15.10 | 15.28 | 15.17 | 15.11 | | |
| 10 | 64QAM | 25 | 12 | 14.83 | 15.23 | 15.40 | 15.14 | 15.13 | 16.5 | 3 |
| 10 | 64QAM | 25 | 25 | 14.88 | 15.25 | 15.30 | 15.12 | 15.14 | | |
| 10 | 64QAM | 50 | 0 | 14.81 | 15.23 | 15.36 | 15.19 | 15.15 | | |
| Channel | | | | 39675 | 40148 | 40620 | 41093 | 41565 | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2498.5 | 2545.8 | 2593 | 2640.30 | 2687.5 | | |
| 5 | QPSK | 1 | 0 | 17.77 | 17.93 | 18.12 | 18.03 | 17.86 | 19.5 | 0 |
| 5 | QPSK | 1 | 12 | 17.67 | 17.91 | 18.22 | 17.95 | 17.83 | | |
| 5 | QPSK | 1 | 24 | 17.73 | 18.16 | 18.32 | 18.07 | 17.86 | | |
| 5 | QPSK | 12 | 0 | 16.80 | 17.04 | 17.26 | 17.04 | 16.99 | 18.5 | 1 |
| 5 | QPSK | 12 | 7 | 16.81 | 17.04 | 17.18 | 17.07 | 16.96 | | |
| 5 | QPSK | 12 | 13 | 16.80 | 17.12 | 17.24 | 17.01 | 17.00 | | |
| 5 | QPSK | 25 | 0 | 16.73 | 17.14 | 17.17 | 16.92 | 16.91 | 18.5 | 1 |
| 5 | 16QAM | 1 | 0 | 16.78 | 17.07 | 17.31 | 17.15 | 17.05 | | |
| 5 | 16QAM | 1 | 12 | 16.79 | 17.05 | 17.44 | 17.28 | 17.13 | | |
| 5 | 16QAM | 1 | 24 | 16.85 | 17.29 | 17.44 | 17.22 | 17.10 | 17.5 | 2 |
| 5 | 16QAM | 12 | 0 | 15.71 | 15.97 | 16.31 | 16.13 | 16.10 | | |
| 5 | 16QAM | 12 | 7 | 15.77 | 16.16 | 16.29 | 16.13 | 16.10 | | |
| 5 | 16QAM | 12 | 13 | 15.85 | 16.24 | 16.33 | 16.06 | 16.08 | 17.5 | 2 |
| 5 | 16QAM | 25 | 0 | 15.82 | 16.12 | 16.33 | 16.11 | 16.07 | | |
| 5 | 64QAM | 1 | 0 | 15.59 | 15.86 | 16.10 | 15.87 | 15.91 | | |
| 5 | 64QAM | 1 | 12 | 15.55 | 15.83 | 16.09 | 15.88 | 15.94 | 17.5 | 2 |
| 5 | 64QAM | 1 | 24 | 15.69 | 15.98 | 16.27 | 15.96 | 15.87 | | |
| 5 | 64QAM | 12 | 0 | 14.82 | 15.05 | 15.36 | 15.10 | 15.11 | | |
| 5 | 64QAM | 12 | 7 | 14.80 | 15.26 | 15.36 | 15.13 | 15.11 | 16.5 | 3 |
| 5 | 64QAM | 12 | 13 | 14.86 | 15.19 | 15.33 | 15.12 | 15.15 | | |
| 5 | 64QAM | 25 | 0 | 14.81 | 15.23 | 15.31 | 15.12 | 15.09 | | |



<LTE Carrier Aggregation combinations>

General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.
3. All permutations exist. No restrictions on Pcell & Scell combinations. Only LTE Band 29A is limited to Scell.

| 2CC Downlink Carrier Aggregation | | | | 3CC Downlink Carrier Aggregation | | | |
|----------------------------------|-------------|-------------|---------------------------------|----------------------------------|-------------|-------------|---------------------------------|
| Number | Combination | Restriction | Covered by Measurement Superset | Number | Combination | Restriction | Covered by Measurement Superset |
| 1 | 2C | | 3CC-46 | 31 | 41A-41C | | |
| 2 | 5B | | 3CC-43 | 32 | 2A-2A-5A | | |
| 3 | 7B | | | 33 | 2A-2A-13A | | |
| 4 | 7C | | 3CC-51 | 34 | 4A-4A-5A | | |
| 5 | 12B | | 3CC-36 | 35 | 4A-4A-12A | | |
| 6 | 41C | | 3CC-31 | 36 | 4A-12B | | |
| 7 | 2A-2A | | 3CC-32 | 37 | 4A-4A-13A | | |
| 8 | 4A-4A | | 3CC-34 | 38 | 41D | | |
| 9 | 5A-5A | | 3CC-49 | 39 | 66A-66B | | |
| 10 | 7A-7A | | 3CC-50 | 40 | 66A-66C | | |
| 11 | 25A-25A | | | 41 | 2A-2A-12A | | |
| 12 | 41A-41A | | | 42 | 2A-2A-14A | | |
| 13 | 66A-66A | | 3CC-52 | 43 | 2A-5B | | |
| 14 | 2A-5A | | 3CC-32 | 44 | 2A-12A-12A | | |
| 15 | 2A-12A | | 3CC-41 | 45 | 2A-12B | | |
| 16 | 2A-13A | | 3CC-33 | 46 | 2C-5A | | |
| 17 | 4A-5A | | 3CC-34 | 47 | 4A-5B | | |
| 18 | 4A-12A | | 3CC-35 | 48 | 4A-12A-12A | | |
| 19 | 4A-13A | | 3CC-37 | 49 | 5A-5A-66A | | |
| 20 | 26A-41A | | | 50 | 5A-7A-7A | | |
| 21 | 4A-17A | | | 51 | 5A-7C | | |
| 22 | 66B | | 3CC-39 | 52 | 13A-66A-66A | | |
| 23 | 66C | | 3CC-40 | 53 | 13A-66B | | |
| 24 | 38C | | | 54 | 13A-66C | | |
| 25 | 12A-12A | | 3CC-44 | | | | |
| 26 | 2A-14A | | 3CC-42 | | | | |
| 27 | 5A-7A | | 3CC-50 | | | | |
| 28 | 5A-66A | | 3CC-49 | | | | |
| 29 | 13A-66A | | 3CC-52 | | | | |
| 30 | 25A-26A | | | | | | |

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

| Configure | | PCC | | | | | | | SCC | | | | Power | |
|------------|----------------|----------|----------|----------------|------------|------|--------|--------------|----------|----------|----------------|------------|------------------------|-----------------------|
| | | LTE Band | BW (MHz) | UL Freq. (MHz) | UL Channel | Mod. | UL# RB | UL RB Offset | LTE Band | BW (MHz) | DL Freq. (MHz) | DL Channel | With CA Tx.Power (dBm) | W/O CA Tx.Power (dBm) |
| Inter-Band | | 26 | 15 | 831.5 | 26865 | QPSK | 1 | 0 | 41 | 20 | 25.93 | 40620 | 23.50 | 23.53 |
| | | 4 | 20 | 1732.5 | 20175 | QPSK | 1 | 0 | 17 | 10 | 740 | 5790 | 23.72 | 23.81 |
| | | 25 | 20 | 1880 | 26340 | QPSK | 1 | 0 | 26 | 15 | 876.5 | 8865 | 23.09 | 23.12 |
| Intra-Band | Non-Contiguous | 25 | 20 | 1880 | 26340 | QPSK | 1 | 0 | 25 | 5 | 1992.5 | 8665 | 23.11 | 23.12 |
| | | 41 | 20 | 2680 | 41490 | QPSK | 1 | 99 | 41 | 5 | 2545.8 | 40148 | 24.46 | 24.50 |
| | Contiguous | 7 | 15 | 2535 | 21100 | QPSK | 1 | 0 | 7 | 5 | 2687.5 | 3425 | 23.30 | 23.36 |
| | | 38 | 20 | 2595 | 38000 | QPSK | 1 | 0 | 38 | 20 | 2614.8 | 38198 | 23.68 | 23.79 |



<Three Carrier power verification>

| Configure | PCC | | | | | | | SCC1 | | | | SCC2 | | | | Power | | |
|------------|------------|----------|----------------|------------|-------|--------|--------------|----------|----------|----------------|------------|----------|----------|----------------|------------|------------------------|-----------------------|-------|
| | LTE Band | BW (MHz) | UL Freq. (MHz) | UL Channel | Mod. | UL# RB | UL RB Offset | LTE Band | BW (MHz) | DL Freq. (MHz) | DL Channel | LTE Band | BW (MHz) | DL Freq. (MHz) | DL Channel | With CA Tx.Power (dBm) | W/O CA Tx.Power (dBm) | |
| Inter-Band | 41 | 20 | 2680 | 41490 | QPSK | 1 | 99 | 41 | 5 | 2498.5 | 39675 | 41 | 5 | 2503.3 | 39725 | 24.42 | 24.50 | |
| | 2 | 20 | 1880 | 18900 | QPSK | 1 | 0 | 2 | 5 | 625 | 1932.5 | 5 | 10 | 881.5 | 2525 | 23.03 | 23.07 | |
| | 2 | 20 | 1880 | 18900 | QPSK | 1 | 0 | 2 | 5 | 625 | 1932.5 | 13 | 10 | 751 | 5230 | 23.02 | 23.07 | |
| | 4 | 20 | 1732.5 | 20175 | QPSK | 1 | 0 | 4 | 5 | 2112.5 | 1975 | 5 | 10 | 881.5 | 2525 | 23.73 | 23.81 | |
| | 4 | 20 | 1732.5 | 20175 | QPSK | 1 | 0 | 4 | 5 | 2112.5 | 1975 | 12 | 10 | 737.5 | 5095 | 23.78 | 23.81 | |
| | 4 | 20 | 1732.5 | 20175 | QPSK | 1 | 0 | 12 | 5 | 737.5 | 5095 | 12 | 10 | 744.7 | 5167 | 23.80 | 23.81 | |
| | 4 | 20 | 1732.5 | 20175 | QPSK | 1 | 0 | 4 | 5 | 2112.5 | 1975 | 13 | 10 | 751 | 5230 | 23.78 | 23.81 | |
| | 66 | 20 | 1745 | 132322 | QPSK | 1 | 0 | 66 | 5 | 2112.5 | 66461 | 66 | 15 | 2121.8 | 66554 | 24.32 | 24.41 | |
| | 66 | 20 | 1745 | 132322 | QPSK | 1 | 0 | 66 | 5 | 2112.5 | 66461 | 66 | 5 | 2117.3 | 66509 | 24.40 | 24.41 | |
| | 2 | 20 | 1880 | 18900 | QPSK | 1 | 0 | 2 | 5 | 625 | 1932.5 | 12 | 10 | 737.5 | 5095 | 23.00 | 23.07 | |
| | 2 | 20 | 1880 | 18900 | QPSK | 1 | 0 | 2 | 5 | 625 | 1932.5 | 14 | 10 | 763 | 5330 | 23.04 | 23.07 | |
| | 2 | 20 | 1880 | 18900 | QPSK | 1 | 0 | 5 | 10 | 881.5 | 2525 | 5 | 5 | 879.7 | 2507 | 23.02 | 23.07 | |
| | 2 | 20 | 1880 | 18900 | QPSK | 1 | 0 | 12 | 5 | 737.5 | 5095 | 12 | 5 | 731.5 | 5035 | 23.02 | 23.07 | |
| | 2 | 20 | 1880 | 18900 | QPSK | 1 | 0 | 12 | 5 | 737.5 | 5095 | 12 | 10 | 744.7 | 5167 | 23.00 | 23.07 | |
| | 2 | 20 | 1880 | 18900 | QPSK | 1 | 0 | 2 | 20 | 1098 | 1979.8 | 5 | 10 | 881.5 | 2525 | 23.04 | 23.07 | |
| | 4 | 20 | 1732.5 | 20175 | QPSK | 1 | 0 | 5 | 10 | 881.5 | 2525 | 5 | 5 | 879.7 | 2507 | 23.74 | 23.81 | |
| | 4 | 20 | 1732.5 | 20175 | QPSK | 1 | 0 | 12 | 5 | 737.5 | 5095 | 12 | 5 | 731.5 | 5035 | 23.71 | 23.81 | |
| | 5 | 10 | 836.5 | 20525 | QPSK | 1 | 0 | 5 | 5 | 871.5 | 2425 | 66 | 20 | 2155 | 66886 | 23.52 | 23.53 | |
| | 5 | 10 | 836.5 | 20525 | QPSK | 1 | 0 | 7 | 20 | 2655 | 3100 | 7 | 5 | 2622.5 | 2775 | 23.48 | 23.53 | |
| | 5 | 10 | 836.5 | 20525 | QPSK | 1 | 0 | 7 | 20 | 2655 | 3100 | 7 | 20 | 2674.8 | 3298 | 23.47 | 23.53 | |
| | 13 | 10 | 782 | 23230 | QPSK | 1 | 0 | 66 | 20 | 2155 | 66886 | 66 | 5 | 2112.5 | 66461 | 23.89 | 23.89 | |
| | 13 | 10 | 782 | 23230 | QPSK | 1 | 0 | 66 | 15 | 2155 | 66886 | 66 | 5 | 2162.2 | 66958 | 23.85 | 23.89 | |
| | 13 | 10 | 782 | 23230 | QPSK | 1 | 0 | 66 | 20 | 2155 | 66886 | 66 | 20 | 2174.8 | 67084 | 23.82 | 23.89 | |
| Intra-Band | Contiguous | 41 | 20 | 2680 | 41490 | QPSK | 1 | 99 | 41 | 10 | 2593 | 40620 | 41 | 20 | 2593 | 40620 | 24.40 | 24.50 |



<WLAN Conducted Power>

General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6W/kg and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<Non-beamforming mode>

<2.4GHz WLAN ANT 1>

| 2.4GHz WLAN | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|-------------------|---------|-----------------|---------------------|---------------|--------------|
| | 802.11b 1Mbps | 1 | 2412 | 20.00 | 20.50 | 100.00 |
| | | 6 | 2437 | 20.20 | 20.50 | |
| | | 11 | 2462 | 20.10 | 20.50 | |
| | 802.11g 6Mbps | 1 | 2412 | 14.80 | 15.00 | 94.85 |
| | | 6 | 2437 | 20.40 | 20.50 | |
| | | 11 | 2462 | 14.80 | 15.00 | |
| | 802.11n-HT20 MCS0 | 1 | 2412 | 13.40 | 13.50 | 94.59 |
| | | 6 | 2437 | 19.30 | 19.50 | |
| | | 11 | 2462 | 14.50 | 15.00 | |
| 802.11n-HT40 MCS0 | 3 | 2422 | 12.80 | 13.00 | 90.87 | |
| | 6 | 2437 | 15.70 | 16.00 | | |
| | 9 | 2452 | 11.10 | 11.50 | | |
| 802.11ac-VHT20 MCS0 | 1 | 2412 | 13.50 | 14.00 | 94.84 | |
| | 6 | 2437 | 20.40 | 20.50 | | |
| | 11 | 2462 | 14.60 | 15.00 | | |
| 802.11ac-VHT40 MCS0 | 3 | 2422 | 12.90 | 13.00 | 89.67 | |
| | 6 | 2437 | 15.90 | 16.00 | | |
| | 9 | 2452 | 11.20 | 11.50 | | |

<2.4GHz WLAN ANT 2>

| 2.4GHz WLAN | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|-------------------|---------|-----------------|---------------------|---------------|--------------|
| | 802.11b 1Mbps | 1 | 2412 | 20.10 | 20.50 | 100.00 |
| | | 6 | 2437 | 20.30 | 20.50 | |
| | | 11 | 2462 | 20.10 | 20.50 | |
| | 802.11g 6Mbps | 1 | 2412 | 14.70 | 15.00 | 94.85 |
| | | 6 | 2437 | 20.10 | 20.50 | |
| | | 11 | 2462 | 14.80 | 15.00 | |
| | 802.11n-HT20 MCS0 | 1 | 2412 | 13.50 | 13.50 | 94.85 |
| | | 6 | 2437 | 19.40 | 19.50 | |
| | | 11 | 2462 | 14.60 | 15.00 | |
| 802.11n-HT40 MCS0 | 3 | 2422 | 12.60 | 13.00 | 90.43 | |
| | 6 | 2437 | 15.50 | 16.00 | | |
| | 9 | 2452 | 11.30 | 11.50 | | |
| 802.11ac-VHT20 MCS0 | 1 | 2412 | 13.60 | 14.00 | 94.84 | |
| | 6 | 2437 | 20.10 | 20.50 | | |
| | 11 | 2462 | 14.70 | 15.00 | | |
| 802.11ac-VHT40 MCS0 | 3 | 2422 | 12.70 | 13.00 | 90.91 | |
| | 6 | 2437 | 15.70 | 16.00 | | |
| | 9 | 2452 | 11.40 | 11.50 | | |



<2.4GHz WLAN ANT 1+2>

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 2.4GHz WLAN | 802.11b 1Mbps | 1 | 2412 | 23.31 | 23.50 | 100.00 |
| | | 6 | 2437 | 22.84 | 23.50 | |
| | | 11 | 2462 | 22.98 | 23.50 | |
| | 802.11g 6Mbps | 1 | 2412 | 17.97 | 18.00 | 94.86 |
| | | 6 | 2437 | 22.75 | 23.50 | |
| | | 11 | 2462 | 18.08 | 18.50 | |
| | 802.11n-HT20 MCS0 | 1 | 2412 | 15.87 | 16.00 | 95.09 |
| | | 6 | 2437 | 22.64 | 23.50 | |
| | | 11 | 2462 | 17.52 | 18.00 | |
| | 802.11n-HT40 MCS0 | 3 | 2422 | 14.44 | 14.50 | 90.91 |
| | | 6 | 2437 | 18.37 | 18.50 | |
| | | 9 | 2452 | 15.08 | 15.50 | |
| | 802.11ac-VHT20 MCS0 | 1 | 2412 | 15.97 | 16.00 | 94.62 |
| | | 6 | 2437 | 22.74 | 23.50 | |
| | | 11 | 2462 | 17.62 | 18.00 | |
| 802.11ac-VHT40 MCS0 | 3 | 2422 | 14.58 | 15.00 | 90.91 | |
| | 6 | 2437 | 18.47 | 18.50 | | |
| | 9 | 2452 | 15.23 | 15.50 | | |

<5GHz WLAN ANT1>

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.2GHz WLAN | 802.11a 6Mbps | 36 | 5180 | 16.40 | 16.50 | 94.93 |
| | | 40 | 5200 | 16.20 | 16.50 | |
| | | 44 | 5220 | 16.30 | 16.50 | |
| | | 48 | 5240 | 16.30 | 16.50 | |
| | 802.11n-HT20 MCS0 | 36 | 5180 | 16.10 | 16.50 | 94.58 |
| | | 40 | 5200 | 16.00 | 16.50 | |
| | | 44 | 5220 | 16.00 | 16.50 | |
| | | 48 | 5240 | 16.00 | 16.50 | |
| | 802.11n-HT40 MCS0 | 38 | 5190 | 16.20 | 16.50 | 89.52 |
| | | 46 | 5230 | 16.00 | 16.50 | |
| | 802.11ac-VHT20 MCS0 | 36 | 5180 | 16.20 | 16.50 | 95.10 |
| | | 40 | 5200 | 16.10 | 16.50 | |
| | | 44 | 5220 | 16.10 | 16.50 | |
| | | 48 | 5240 | 16.10 | 16.50 | |
| | 802.11ac-VHT40 MCS0 | 38 | 5190 | 16.30 | 16.50 | 90.48 |
| 46 | | 5230 | 16.10 | 16.50 | | |
| 802.11ac-VHT80 MCS0 | 42 | 5210 | 13.60 | 14.00 | 89.02 | |



| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.3GHz WLAN | 802.11a 6Mbps | 52 | 5260 | 16.20 | 16.50 | 94.93 |
| | | 56 | 5280 | 16.10 | 16.50 | |
| | | 60 | 5300 | 16.30 | 16.50 | |
| | | 64 | 5320 | 16.10 | 16.50 | |
| | 802.11n-HT20 MCS0 | 52 | 5260 | 16.10 | 16.50 | 94.58 |
| | | 56 | 5280 | 15.90 | 16.50 | |
| | | 60 | 5300 | 16.00 | 16.50 | |
| | | 64 | 5320 | 15.90 | 16.50 | |
| | 802.11n-HT40 MCS0 | 54 | 5270 | 16.00 | 16.50 | 89.52 |
| | | 62 | 5310 | 13.60 | 14.00 | |
| | 802.11ac-VHT20 MCS0 | 52 | 5260 | 16.20 | 16.50 | 95.10 |
| | | 56 | 5280 | 16.00 | 16.50 | |
| | | 60 | 5300 | 16.10 | 16.50 | |
| | | 64 | 5320 | 16.00 | 16.50 | |
| 802.11ac-VHT40 MCS0 | 54 | 5270 | 16.10 | 16.50 | 90.48 | |
| | 62 | 5310 | 13.70 | 14.00 | | |
| 802.11ac-VHT80 MCS0 | 58 | 5290 | 10.00 | 10.00 | 89.02 | |



| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.5GHz WLAN | 802.11a 6Mbps | 100 | 5500 | 13.50 | 14.00 | 94.93 |
| | | 116 | 5580 | 13.70 | 14.00 | |
| | | 124 | 5620 | 13.60 | 14.00 | |
| | | 132 | 5660 | 13.60 | 14.00 | |
| | | 144 | 5720 | 13.60 | 14.00 | |
| | 802.11n-HT20 MCS0 | 100 | 5500 | 13.80 | 14.00 | 94.58 |
| | | 116 | 5580 | 13.70 | 14.00 | |
| | | 124 | 5620 | 13.50 | 14.00 | |
| | | 132 | 5660 | 13.50 | 14.00 | |
| | | 144 | 5720 | 13.90 | 14.00 | |
| | 802.11n-HT40 MCS0 | 102 | 5510 | 13.80 | 14.00 | 89.52 |
| | | 110 | 5550 | 13.50 | 14.00 | |
| | | 126 | 5630 | 13.50 | 14.00 | |
| | | 134 | 5670 | 13.50 | 14.00 | |
| | | 142 | 5710 | 13.40 | 14.00 | |
| | 802.11ac-VHT20 MCS0 | 100 | 5500 | 13.90 | 14.00 | 95.10 |
| | | 116 | 5580 | 13.80 | 14.00 | |
| | | 124 | 5620 | 13.60 | 14.00 | |
| | | 132 | 5660 | 13.60 | 14.00 | |
| | | 144 | 5720 | 14.00 | 14.00 | |
| 802.11ac-VHT40 MCS0 | 102 | 5510 | 13.90 | 14.00 | 90.48 | |
| | 110 | 5550 | 13.60 | 14.00 | | |
| | 126 | 5630 | 13.60 | 14.00 | | |
| | 134 | 5670 | 13.60 | 14.00 | | |
| | 142 | 5710 | 13.50 | 14.00 | | |
| 802.11ac-VHT80 MCS0 | 106 | 5530 | 13.90 | 14.00 | 89.02 | |
| | 122 | 5610 | 14.00 | 14.00 | | |
| | 138 | 5690 | 14.00 | 14.00 | | |

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.8GHz WLAN | 802.11a MCS0 | 149 | 5745 | 13.80 | 14.00 | 94.93 |
| | | 157 | 5785 | 13.90 | 14.00 | |
| | | 165 | 5825 | 13.80 | 14.00 | |
| | 802.11n-HT20 MCS0 | 149 | 5745 | 13.80 | 14.00 | 94.58 |
| | | 157 | 5785 | 13.70 | 14.00 | |
| | | 165 | 5825 | 13.70 | 14.00 | |
| | 802.11n-HT40 MCS0 | 151 | 5755 | 13.90 | 14.00 | 89.52 |
| | | 159 | 5795 | 13.70 | 14.00 | |
| | 802.11ac-VHT20 MCS0 | 149 | 5745 | 13.90 | 14.00 | 95.10 |
| | | 157 | 5785 | 13.80 | 14.00 | |
| | | 165 | 5825 | 13.80 | 14.00 | |
| | 802.11ac-VHT40 MCS0 | 151 | 5755 | 14.00 | 14.00 | 90.48 |
| | | 159 | 5795 | 13.80 | 14.00 | |
| 802.11ac-VHT80 MCS0 | 155 | 5775 | 13.80 | 14.00 | 89.02 | |



<5GHz WLAN ANT2>

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.2GHz WLAN | 802.11a 6Mbps | 36 | 5180 | 16.20 | 16.50 | 95.39 |
| | | 40 | 5200 | 16.10 | 16.50 | |
| | | 44 | 5220 | 16.10 | 16.50 | |
| | | 48 | 5240 | 16.40 | 16.50 | |
| | 802.11n-HT20 MCS0 | 36 | 5180 | 15.90 | 16.50 | 94.58 |
| | | 40 | 5200 | 15.90 | 16.50 | |
| | | 44 | 5220 | 15.90 | 16.50 | |
| | | 48 | 5240 | 16.20 | 16.50 | |
| | 802.11n-HT40 MCS0 | 38 | 5190 | 15.90 | 16.50 | 89.62 |
| | | 46 | 5230 | 16.40 | 16.50 | |
| | 802.11ac-VHT20 MCS0 | 36 | 5180 | 16.00 | 16.50 | 94.61 |
| | | 40 | 5200 | 16.00 | 16.50 | |
| | | 44 | 5220 | 16.00 | 16.50 | |
| | | 48 | 5240 | 16.30 | 16.50 | |
| | 802.11ac-VHT40 MCS0 | 38 | 5190 | 16.00 | 16.50 | 89.62 |
| | | 46 | 5230 | 16.50 | 16.50 | |
| 802.11ac-VHT80 MCS0 | 42 | 5210 | 14.00 | 14.00 | 89.16 | |

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.3GHz WLAN | 802.11a 6Mbps | 52 | 5260 | 16.40 | 16.50 | 95.39 |
| | | 56 | 5280 | 16.20 | 16.50 | |
| | | 60 | 5300 | 16.30 | 16.50 | |
| | | 64 | 5320 | 16.10 | 16.50 | |
| | 802.11n-HT20 MCS0 | 52 | 5260 | 16.20 | 16.50 | 94.58 |
| | | 56 | 5280 | 16.00 | 16.50 | |
| | | 60 | 5300 | 15.90 | 16.50 | |
| | | 64 | 5320 | 16.30 | 16.50 | |
| | 802.11n-HT40 MCS0 | 54 | 5270 | 16.10 | 16.50 | 89.62 |
| | | 62 | 5310 | 13.40 | 14.00 | |
| | 802.11ac-VHT20 MCS0 | 52 | 5260 | 16.30 | 16.50 | 94.61 |
| | | 56 | 5280 | 16.10 | 16.50 | |
| | | 60 | 5300 | 16.00 | 16.50 | |
| | | 64 | 5320 | 16.40 | 16.50 | |
| | 802.11ac-VHT40 MCS0 | 54 | 5270 | 16.20 | 16.50 | 89.62 |
| | | 62 | 5310 | 13.50 | 14.00 | |
| 802.11ac-VHT80 MCS0 | 58 | 5290 | 10.00 | 10.00 | 89.16 | |



| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.5GHz WLAN | 802.11a 6Mbps | 100 | 5500 | 14.00 | 14.00 | 95.39 |
| | | 116 | 5580 | 13.90 | 14.00 | |
| | | 124 | 5620 | 13.80 | 14.00 | |
| | | 132 | 5660 | 13.70 | 14.00 | |
| | | 144 | 5720 | 13.70 | 14.00 | |
| | 802.11n-HT20 MCS0 | 100 | 5500 | 13.90 | 14.00 | 94.58 |
| | | 116 | 5580 | 13.80 | 14.00 | |
| | | 124 | 5620 | 13.70 | 14.00 | |
| | | 132 | 5660 | 13.60 | 14.00 | |
| | | 144 | 5720 | 13.50 | 14.00 | |
| | 802.11n-HT40 MCS0 | 102 | 5510 | 13.60 | 14.00 | 89.62 |
| | | 110 | 5550 | 13.80 | 14.00 | |
| | | 126 | 5630 | 13.70 | 14.00 | |
| | | 134 | 5670 | 13.80 | 14.00 | |
| | | 142 | 5710 | 13.90 | 14.00 | |
| | 802.11ac-VHT20 MCS0 | 100 | 5500 | 14.00 | 14.00 | 94.61 |
| | | 116 | 5580 | 13.90 | 14.00 | |
| | | 124 | 5620 | 13.80 | 14.00 | |
| | | 132 | 5660 | 13.70 | 14.00 | |
| | | 144 | 5720 | 13.60 | 14.00 | |
| 802.11ac-VHT40 MCS0 | 102 | 5510 | 13.70 | 14.00 | 89.62 | |
| | 110 | 5550 | 13.90 | 14.00 | | |
| | 126 | 5630 | 13.80 | 14.00 | | |
| | 134 | 5670 | 13.90 | 14.00 | | |
| | 142 | 5710 | 14.00 | 14.00 | | |
| 802.11ac-VHT80 MCS0 | 106 | 5530 | 13.90 | 14.00 | 89.16 | |
| | 122 | 5610 | 13.80 | 14.00 | | |
| | 138 | 5690 | 14.00 | 14.00 | | |

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.8GHz WLAN | 802.11a MCS0 | 149 | 5745 | 13.70 | 14.00 | 95.39 |
| | | 157 | 5785 | 13.90 | 14.00 | |
| | | 165 | 5825 | 13.80 | 14.00 | |
| | 802.11n-HT20 MCS0 | 149 | 5745 | 13.60 | 14.00 | 94.58 |
| | | 157 | 5785 | 13.80 | 14.00 | |
| | | 165 | 5825 | 13.70 | 14.00 | |
| | 802.11n-HT40 MCS0 | 151 | 5755 | 13.50 | 14.00 | 89.62 |
| | | 159 | 5795 | 13.90 | 14.00 | |
| | 802.11ac-VHT20 MCS0 | 149 | 5745 | 13.70 | 14.00 | 94.61 |
| | | 157 | 5785 | 13.90 | 14.00 | |
| | | 165 | 5825 | 13.80 | 14.00 | |
| | 802.11ac-VHT40 MCS0 | 151 | 5755 | 13.60 | 14.00 | 89.62 |
| | | 159 | 5795 | 13.80 | 14.00 | |
| 802.11ac-VHT80 MCS0 | 155 | 5775 | 13.90 | 14.00 | 89.16 | |



<5GHz WLAN ANT1+2>

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.2GHz WLAN | 802.11a 6Mbps | 36 | 5180 | 19.07 | 19.50 | 95.39 |
| | | 40 | 5200 | 19.06 | 19.50 | |
| | | 44 | 5220 | 19.06 | 19.50 | |
| | | 48 | 5240 | 18.91 | 19.50 | |
| | 802.11n-HT20 MCS0 | 36 | 5180 | 18.91 | 19.50 | 94.58 |
| | | 40 | 5200 | 18.76 | 19.50 | |
| | | 44 | 5220 | 18.87 | 19.50 | |
| | | 48 | 5240 | 18.77 | 19.50 | |
| | 802.11n-HT40 MCS0 | 38 | 5190 | 18.81 | 19.50 | 89.62 |
| | | 46 | 5230 | 18.76 | 19.50 | |
| | 802.11ac-VHT20 MCS0 | 36 | 5180 | 19.01 | 19.50 | 94.61 |
| | | 40 | 5200 | 18.81 | 19.50 | |
| | | 44 | 5220 | 18.97 | 19.50 | |
| | | 48 | 5240 | 18.87 | 19.50 | |
| | 802.11ac-VHT40 MCS0 | 38 | 5190 | 17.81 | 19.50 | 90.57 |
| | | 46 | 5230 | 18.86 | 19.50 | |
| 802.11ac-VHT80 MCS0 | 42 | 5210 | 17.41 | 17.50 | 89.02 | |

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.3GHz WLAN | 802.11a 6Mbps | 52 | 5260 | 18.86 | 19.50 | 95.39 |
| | | 56 | 5280 | 19.01 | 19.50 | |
| | | 60 | 5300 | 19.26 | 19.50 | |
| | | 64 | 5320 | 19.06 | 19.50 | |
| | 802.11n-HT20 MCS0 | 52 | 5260 | 19.21 | 19.50 | 94.58 |
| | | 56 | 5280 | 19.16 | 19.50 | |
| | | 60 | 5300 | 19.06 | 19.50 | |
| | | 64 | 5320 | 18.86 | 19.50 | |
| | 802.11n-HT40 MCS0 | 54 | 5270 | 19.21 | 19.50 | 89.62 |
| | | 62 | 5310 | 14.51 | 15.00 | |
| | 802.11ac-VHT20 MCS0 | 52 | 5260 | 19.31 | 19.50 | 94.61 |
| | | 56 | 5280 | 19.21 | 19.50 | |
| | | 60 | 5300 | 19.16 | 19.50 | |
| | | 64 | 5320 | 18.96 | 19.50 | |
| | 802.11ac-VHT40 MCS0 | 54 | 5270 | 19.31 | 19.50 | 90.57 |
| | | 62 | 5310 | 14.61 | 15.00 | |
| 802.11ac-VHT80 MCS0 | 58 | 5290 | 11.97 | 12.00 | 89.02 | |



| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.5GHz WLAN | 802.11a 6Mbps | 100 | 5500 | 16.57 | 17.00 | 95.39 |
| | | 116 | 5580 | 16.71 | 17.00 | |
| | | 124 | 5620 | 16.46 | 17.00 | |
| | | 132 | 5660 | 16.41 | 17.00 | |
| | | 144 | 5720 | 16.28 | 17.00 | |
| | 802.11n-HT20 MCS0 | 100 | 5500 | 16.21 | 17.00 | 94.58 |
| | | 116 | 5580 | 16.36 | 17.00 | |
| | | 124 | 5620 | 16.24 | 17.00 | |
| | | 132 | 5660 | 16.19 | 17.00 | |
| | | 144 | 5720 | 16.01 | 17.00 | |
| | 802.11n-HT40 MCS0 | 102 | 5510 | 16.31 | 17.00 | 89.62 |
| | | 110 | 5550 | 16.46 | 17.00 | |
| | | 126 | 5630 | 16.31 | 17.00 | |
| | | 134 | 5670 | 16.47 | 17.00 | |
| | | 142 | 5710 | 16.23 | 17.00 | |
| | 802.11ac-VHT20 MCS0 | 100 | 5500 | 16.47 | 17.00 | 94.61 |
| | | 116 | 5580 | 16.61 | 17.00 | |
| | | 124 | 5620 | 16.48 | 17.00 | |
| | | 132 | 5660 | 16.37 | 17.00 | |
| | | 144 | 5720 | 16.24 | 17.00 | |
| 802.11ac-VHT40 MCS0 | 102 | 5510 | 16.41 | 17.00 | 90.57 | |
| | 110 | 5550 | 16.56 | 17.00 | | |
| | 126 | 5630 | 16.48 | 17.00 | | |
| | 134 | 5670 | 16.57 | 17.00 | | |
| | 142 | 5710 | 16.33 | 17.00 | | |
| 802.11ac-VHT80 MCS0 | 106 | 5530 | 16.47 | 17.00 | 89.02 | |
| | 122 | 5610 | 16.37 | 17.00 | | |
| | 138 | 5690 | 16.37 | 17.00 | | |

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|---------------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.8GHz WLAN | 802.11a MCS0 | 149 | 5745 | 16.77 | 17.00 | 95.39 |
| | | 157 | 5785 | 16.81 | 17.00 | |
| | | 165 | 5825 | 16.47 | 17.00 | |
| | 802.11n-HT20 MCS0 | 149 | 5745 | 16.62 | 17.00 | 94.58 |
| | | 157 | 5785 | 16.61 | 17.00 | |
| | | 165 | 5825 | 16.27 | 17.00 | |
| | 802.11n-HT40 MCS0 | 151 | 5755 | 16.67 | 17.00 | 89.62 |
| | | 159 | 5795 | 16.52 | 17.00 | |
| | 802.11ac-VHT20 MCS0 | 149 | 5745 | 16.72 | 17.00 | 95.10 |
| | | 157 | 5785 | 16.71 | 17.00 | |
| | | 165 | 5825 | 16.37 | 17.00 | |
| | 802.11ac-VHT40 MCS0 | 151 | 5755 | 16.77 | 17.00 | 90.57 |
| | | 159 | 5795 | 16.62 | 17.00 | |
| 802.11ac-VHT80 MCS0 | 155 | 5775 | 16.56 | 17.00 | 89.02 | |



<Beamforming mode>

<2.4GHz WLAN ANT 1+2>

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 2.4GHz WLAN | 802.11ac-VHT20 MCS0 | 1 | 2412 | 21.41 | 21.50 | 100.00 |
| | | 6 | 2437 | 21.46 | 21.50 | |
| | | 11 | 2462 | 21.11 | 21.50 | |
| | 802.11ac-VHT40 MCS0 | 3 | 2422 | 21.16 | 21.50 | 100.00 |
| | | 6 | 2437 | 21.21 | 21.50 | |
| | | 9 | 2452 | 21.21 | 21.50 | |

<5GHz WLAN ANT1+2>

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.2GHz WLAN | 802.11ac-VHT20 MCS0 | 36 | 5180 | 19.36 | 19.50 | 100.00 |
| | | 40 | 5200 | 19.34 | 19.50 | |
| | | 44 | 5220 | 19.36 | 19.50 | |
| | | 48 | 5240 | 19.36 | 19.50 | |
| | 802.11ac-VHT40 MCS0 | 38 | 5190 | 19.41 | 19.50 | 100.00 |
| | | 46 | 5230 | 19.36 | 19.50 | |
| | 802.11ac-VHT80 MCS0 | 42 | 5210 | 19.41 | 19.50 | 100.00 |

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.3GHz WLAN | 802.11ac-VHT20 MCS0 | 52 | 5260 | 19.21 | 19.50 | 100.00 |
| | | 60 | 5300 | 19.36 | 19.50 | |
| | | 64 | 5320 | 19.31 | 19.50 | |
| | 802.11ac-VHT40 MCS0 | 54 | 5270 | 19.36 | 19.50 | 100.00 |
| | | 62 | 5310 | 19.26 | 19.50 | |
| | 802.11ac-VHT80 MCS0 | 58 | 5290 | 19.26 | 19.50 | 100.00 |



| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % | |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|--|
| 5.5GHz WLAN | 802.11ac-VHT20 MCS0 | 100 | 5500 | 16.76 | 17.00 | 100.00 | |
| | | 116 | 5580 | 16.56 | 17.00 | | |
| | | 140 | 5700 | 16.61 | 17.00 | | |
| | | 144 | 5720 | 16.66 | 17.00 | | |
| | 802.11ac-VHT40 MCS0 | 102 | 5510 | 16.66 | 17.00 | 100.00 | |
| | | 110 | 5550 | 16.66 | 17.00 | | |
| | | 134 | 5670 | 16.76 | 17.00 | | |
| | 802.11ac-VHT80 MCS0 | 142 | 5710 | 16.71 | 17.00 | 100.00 | |
| | | 106 | 5530 | 16.66 | 17.00 | | |
| | | 122 | 5610 | 16.91 | 17.00 | | |
| | | | 138 | 5690 | 16.76 | 17.00 | |

| | Mode | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.8GHz WLAN | 802.11ac-VHT20 MCS0 | 149 | 5745 | 16.76 | 17.00 | 100.00 |
| | | 157 | 5785 | 16.66 | 17.00 | |
| | | 165 | 5825 | 16.61 | 17.00 | |
| | 802.11ac-VHT40 MCS0 | 151 | 5755 | 16.56 | 17.00 | 100.00 |
| | | 159 | 5795 | 16.61 | 17.00 | |
| | 802.11ac-VHT80 MCS0 | 155 | 5775 | 16.66 | 17.00 | 100.00 |




<2.4GHz Bluetooth>

| Mode | Channel | Frequency (MHz) | Average power (dBm) | | |
|---------------|---------|-----------------|---------------------|-------|-------|
| | | | 1Mbps | 2Mbps | 3Mbps |
| BR / EDR | CH 00 | 2402 | 2.40 | -0.55 | -0.53 |
| | CH 39 | 2441 | 1.93 | -1.58 | -1.57 |
| | CH 78 | 2480 | 1.68 | -1.20 | -1.18 |
| Tune-up Limit | | | 3.00 | 1.00 | 1.00 |

| Mode | Channel | Frequency (MHz) | Average power (dBm) | |
|---------------|---------|-----------------|---------------------|-------|
| | | | 1Mbps | 2Mbps |
| LE | CH 00 | 2402 | 2.20 | 2.20 |
| | CH 19 | 2440 | 1.80 | 1.80 |
| | CH 39 | 2480 | 1.50 | 1.50 |
| Tune-up Limit | | | 3.00 | 3.00 |


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.84% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

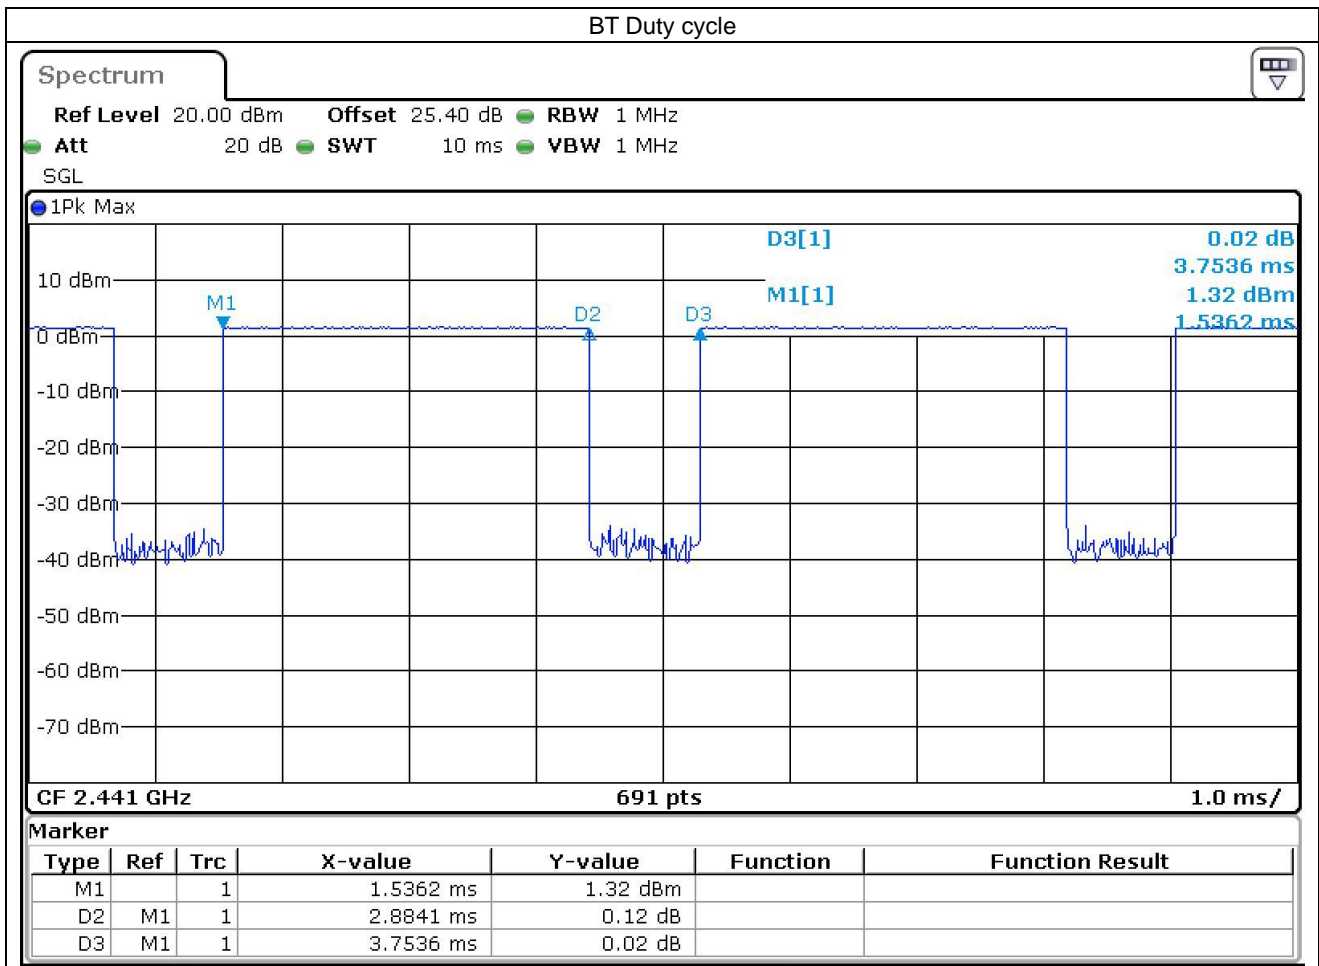


13. Antenna Location

<Sample 1 & 2>

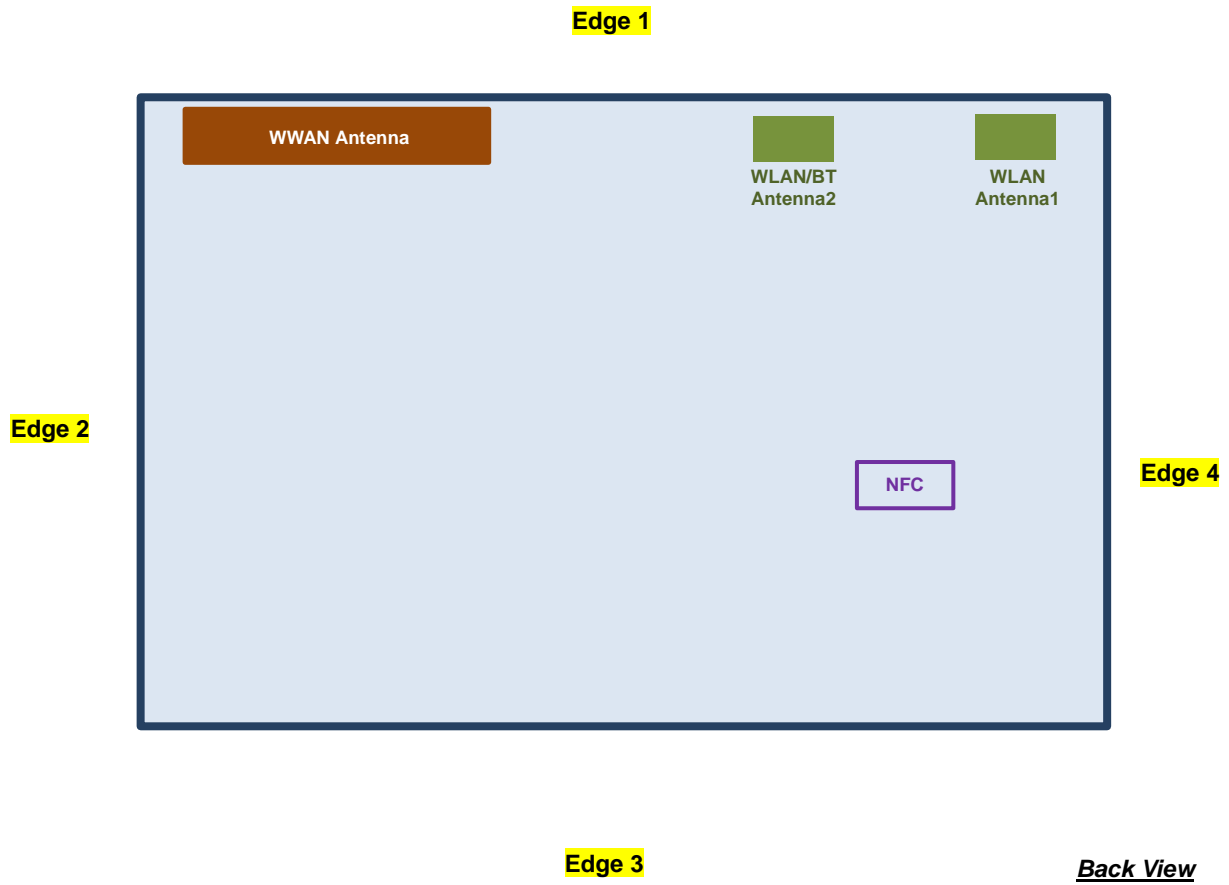

<Sample 3, 4 & 5>

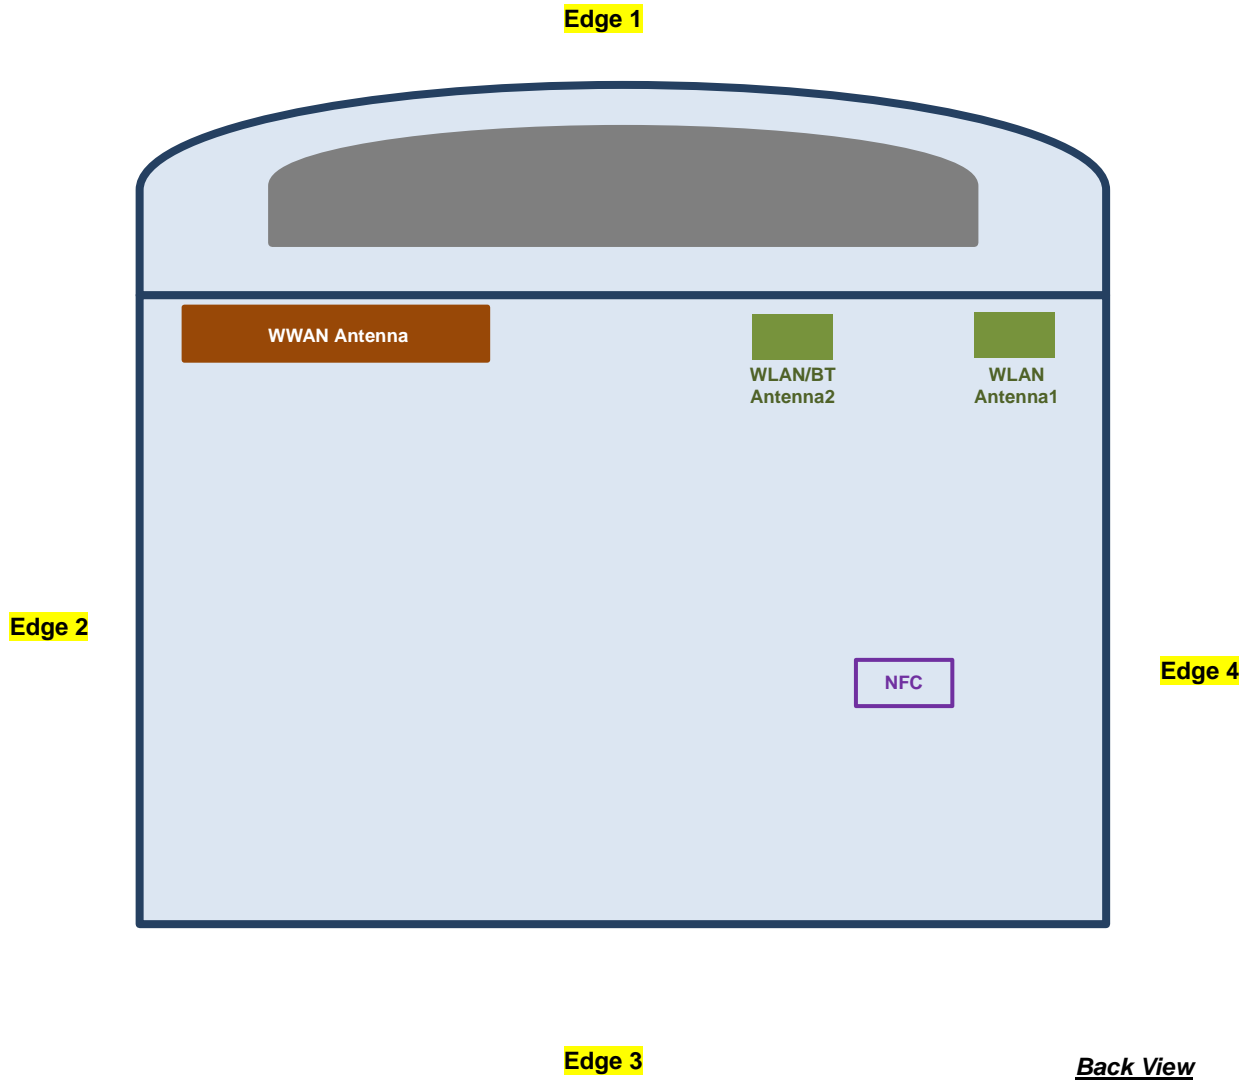



<SAR test exclusion table>

General Note:

- The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz
- For the sample3, the Edge1 SAR is not necessary, due to the transmit antenna to the edge is higher the sample 2

| Exposure Position | Wireless Interface | WCDMA Band V | WCDMA Band IV | WCDMA Band II | LTE Band 12 | LTE Band 14 | LTE Band 13 | LTE Band 5 | LTE Band 26 | LTE Band 4 | LTE Band 66 | LTE Band 2 | LTE Band 25 | LTE Band 7 | LTE Band 38 | LTE Band 41 |
|-----------------------|-------------------------|--------------|---------------|---------------|-------------|-------------|-------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|-------------|
| | Calculated Frequency | 846MHz | 1750MHz | 1907MHz | 715MHz | 793MHz | 784MHz | 848MHz | 848MHz | 1754MHz | 1779MHz | 1909MHz | 1914MHz | 2567MHz | 2617MHz | 2687MHz |
| | Maximum power (dBm) | 24.50 | 24.5 | 23.5 | 24.5 | 24.5 | 24.5 | 24 | 24 | 24 | 24.5 | 23.5 | 23.5 | 24 | 24.5 | 24.5 |
| | Maximum rated power(mW) | 282.0 | 282.0 | 224.0 | 282.0 | 282.0 | 282.0 | 251.0 | 251.0 | 251.0 | 282.0 | 224.0 | 224.0 | 251.0 | 282.0 | 282.0 |
| Bottom Face | Separation distance(mm) | 5.0 | | | | | | | | | | | | | | |
| | exclusion threshold | 51.9 | 74.6 | 61.9 | 47.7 | 47.6 | 49.9 | 46.2 | 46.2 | 66.5 | 75.2 | 61.9 | 62.0 | 80.4 | 91.2 | 92.5 |
| | Testing required? | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Edge 1 | Separation distance(mm) | 5.4 | | | | | | | | | | | | | | |
| | exclusion threshold | 48.5 | 69.7 | 57.8 | 44.6 | 44.5 | 46.7 | 43.2 | 43.2 | 62.1 | 70.3 | 57.9 | 57.9 | 75.2 | 85.3 | 86.4 |
| | Testing required? | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Edge 1 ⁽⁷⁾ | Separation distance(mm) | 63.3 | | | | | | | | | | | | | | |
| | exclusion threshold | 238.0 | 246.0 | 241.0 | 241.0 | 241.0 | 239.0 | 238.0 | 238.0 | 246.0 | 245.0 | 241.0 | 241.0 | 226.0 | 225.0 | 224.0 |
| | Testing required? | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No |
| Edge 2 | Separation distance(mm) | 22.7 | | | | | | | | | | | | | | |
| | exclusion threshold | 11.4 | 16.4 | 13.6 | 10.5 | 10.5 | 11.0 | 10.2 | 10.2 | 14.6 | 16.6 | 13.6 | 13.7 | 17.7 | 20.1 | 20.4 |
| | Testing required? | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Edge 3 | Separation distance(mm) | 175.4 | | | | | | | | | | | | | | |
| | exclusion threshold | 870.0 | 1367.0 | 1362.0 | 775.0 | 774.0 | 825.0 | 872.0 | 872.0 | 1367.0 | 1366.0 | 1362.0 | 1362.0 | 1347.0 | 1347.0 | 1345.0 |
| | Testing required? | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No |
| Edge 4 | Separation distance(mm) | 171.5 | | | | | | | | | | | | | | |
| | exclusion threshold | 848.0 | 1328.0 | 1324.0 | 757.0 | 755.0 | 804.0 | 850.0 | 850.0 | 1328.0 | 1328.0 | 1324.0 | 1324.0 | 1309.0 | 1308.0 | 1307.0 |
| | Testing required? | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No |



| Exposure Position | Wireless Interface | 2.4GHz WLAN ANT 1 | 2.4GHz WLAN ANT 2 | 5GHz WLAN ANT 1 | 5GHz WLAN ANT 2 |
|-----------------------|-------------------------|-------------------|-------------------|-----------------|-----------------|
| | Calculated Frequency | 2462MHz | 2462MHz | 5825MHz | 5825MHz |
| | Maximum power (dBm) | 20.5 | 20.5 | 16.5 | 16.5 |
| Bottom Face | Maximum rated power(mW) | 112.0 | 112.0 | 45.0 | 45.0 |
| | Separation distance(mm) | 5.0 | 5.0 | 5.0 | 5.0 |
| | exclusion threshold | 35.2 | 35.2 | 21.7 | 21.7 |
| | Testing required? | Yes | Yes | Yes | Yes |
| Edge 1 | Separation distance(mm) | 11.8 | 8.6 | 11.8 | 8.6 |
| | exclusion threshold | 14.8 | 20.4 | 9.2 | 12.6 |
| | Testing required? | Yes | Yes | Yes | Yes |
| Edge 1 ⁽⁷⁾ | Separation distance(mm) | 71.8 | 68.6 | 71.8 | 68.6 |
| | exclusion threshold | 314.0 | 281.0 | 280.0 | 248.0 |
| | Testing required? | No | No | No | No |
| Edge 2 | Separation distance(mm) | 171.6 | 241.4 | 171.6 | 241.4 |
| | exclusion threshold | 1312.0 | 2010.0 | 1278.0 | 1976.0 |
| | Testing required? | No | No | No | No |
| Edge 3 | Separation distance(mm) | 179.1 | 178.7 | 179.1 | 178.7 |
| | exclusion threshold | 1386.0 | 1383.0 | 1353.0 | 1349.0 |
| | Testing required? | No | No | No | No |
| Edge 4 | Separation distance(mm) | 91.6 | 21.9 | 91.6 | 21.9 |
| | exclusion threshold | 512.0 | 8.0 | 478.0 | 5.0 |
| | Testing required? | No | Yes | No | Yes |



14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 3mm for bottom face, 15mm for edge1.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/38 SAR test was covered by Band 25/66/26/ 41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
8. Since the same RF amplifier and antenna2 is used for WiFi / Bluetooth transmitter and the Bluetooth output power is least 2 dB below the output power of WiFi, for the Bluetooth exposure positions were according to WiFi.



14.1 Body SAR

<WCDMA SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Sample | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|----------|--------------|---------------|----------|----------|-----------------|------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | WCDMA II | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 9400 | 1880 | 23.39 | 23.50 | 1.026 | -0.06 | 1.380 | 1.415 |
| | WCDMA II | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 9262 | 1852.4 | 23.30 | 23.50 | 1.047 | 0.06 | 1.250 | 1.309 |
| 01 | WCDMA II | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 9538 | 1907.6 | 23.31 | 23.50 | 1.045 | -0.01 | 1.380 | 1.442 |
| | WCDMA II | RMC 12.2Kbps | Bottom Face | 3mm | Sample 3 | OFF | 9538 | 1907.6 | 23.31 | 23.50 | 1.045 | 0.04 | 1.350 | 1.410 |
| | WCDMA II | RMC 12.2Kbps | Edge 1 | 15mm | Sample 2 | OFF | 9400 | 1880 | 23.39 | 23.50 | 1.026 | -0.03 | 0.874 | 0.896 |
| | WCDMA II | RMC 12.2Kbps | Edge 1 | 15mm | Sample 2 | OFF | 9262 | 1852.4 | 23.30 | 23.50 | 1.047 | -0.05 | 0.807 | 0.845 |
| | WCDMA II | RMC 12.2Kbps | Edge 1 | 15mm | Sample 2 | OFF | 9538 | 1907.6 | 23.31 | 23.50 | 1.045 | 0 | 0.863 | 0.902 |
| | WCDMA II | RMC 12.2Kbps | Edge 2 | 0mm | Sample 2 | OFF | 9400 | 1880 | 23.39 | 23.50 | 1.026 | 0.07 | 0.038 | 0.039 |
| | WCDMA II | RMC 12.2Kbps | Bottom Face | 0mm | Sample 2 | ON | 9400 | 1880 | 19.18 | 19.50 | 1.076 | 0.02 | 0.782 | 0.842 |
| | WCDMA II | RMC 12.2Kbps | Bottom Face | 0mm | Sample 2 | ON | 9262 | 1852.4 | 18.82 | 19.50 | 1.169 | 0.03 | 0.739 | 0.864 |
| | WCDMA II | RMC 12.2Kbps | Bottom Face | 0mm | Sample 2 | ON | 9538 | 1907.6 | 18.57 | 19.50 | 1.239 | 0.05 | 0.805 | 0.997 |
| | WCDMA II | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 9400 | 1880 | 19.18 | 19.50 | 1.076 | 0.19 | 1.110 | 1.195 |
| | WCDMA II | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 9262 | 1852.4 | 18.82 | 19.50 | 1.169 | 0.06 | 1.020 | 1.193 |
| | WCDMA II | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 9538 | 1907.6 | 18.57 | 19.50 | 1.239 | 0.17 | 0.945 | 1.171 |
| 02 | WCDMA IV | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 1413 | 1732.6 | 24.20 | 24.50 | 1.072 | -0.01 | 1.350 | 1.447 |
| | WCDMA IV | RMC 12.2Kbps | Bottom Face | 3mm | Sample 3 | OFF | 1413 | 1732.6 | 24.20 | 24.50 | 1.072 | 0.17 | 1.210 | 1.297 |
| | WCDMA IV | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 1312 | 1712.4 | 24.11 | 24.50 | 1.094 | -0.04 | 1.300 | 1.422 |
| | WCDMA IV | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 1513 | 1752.6 | 24.17 | 24.50 | 1.079 | -0.01 | 1.340 | 1.446 |
| | WCDMA IV | RMC 12.2Kbps | Edge 1 | 15mm | Sample 2 | OFF | 1413 | 1732.6 | 24.20 | 24.50 | 1.072 | -0.02 | 0.763 | 0.818 |
| | WCDMA IV | RMC 12.2Kbps | Edge 1 | 15mm | Sample 2 | OFF | 1312 | 1712.4 | 24.11 | 24.50 | 1.094 | -0.04 | 0.673 | 0.736 |
| | WCDMA IV | RMC 12.2Kbps | Edge 1 | 15mm | Sample 2 | OFF | 1513 | 1752.6 | 24.17 | 24.50 | 1.079 | -0.01 | 0.823 | 0.888 |
| | WCDMA IV | RMC 12.2Kbps | Edge 2 | 0mm | Sample 2 | OFF | 1413 | 1732.6 | 24.20 | 24.50 | 1.072 | 0.04 | 0.059 | 0.063 |
| | WCDMA IV | RMC 12.2Kbps | Bottom Face | 0mm | Sample 2 | ON | 1413 | 1732.6 | 18.48 | 18.50 | 1.005 | -0.01 | 0.620 | 0.623 |
| | WCDMA IV | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 1413 | 1732.6 | 18.48 | 18.50 | 1.005 | -0.17 | 1.020 | 1.025 |
| | WCDMA IV | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 1312 | 1712.4 | 17.88 | 18.50 | 1.153 | -0.15 | 0.876 | 1.010 |
| | WCDMA IV | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 1513 | 1752.6 | 18.29 | 18.50 | 1.050 | -0.15 | 1.110 | 1.165 |
| | WCDMA V | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 4132 | 826.4 | 24.34 | 24.50 | 1.038 | -0.02 | 1.340 | 1.390 |
| 03 | WCDMA V | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 4182 | 836.4 | 24.30 | 24.50 | 1.047 | -0.03 | 1.380 | 1.445 |
| | WCDMA V | RMC 12.2Kbps | Bottom Face | 3mm | Sample 3 | OFF | 4182 | 836.4 | 24.30 | 24.50 | 1.047 | -0.07 | 1.330 | 1.393 |
| | WCDMA V | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 4233 | 846.6 | 24.27 | 24.50 | 1.054 | -0.06 | 1.350 | 1.423 |
| | WCDMA V | RMC 12.2Kbps | Edge 1 | 15mm | Sample 2 | OFF | 4132 | 826.4 | 24.34 | 24.50 | 1.038 | 0 | 0.405 | 0.420 |
| | WCDMA V | RMC 12.2Kbps | Edge 2 | 0mm | Sample 2 | OFF | 4132 | 826.4 | 24.34 | 24.50 | 1.038 | 0.01 | 0.098 | 0.102 |
| | WCDMA V | RMC 12.2Kbps | Bottom Face | 0mm | Sample 2 | ON | 4182 | 836.4 | 20.94 | 21.50 | 1.138 | 0.11 | 0.824 | 0.937 |
| | WCDMA V | RMC 12.2Kbps | Bottom Face | 0mm | Sample 2 | ON | 4132 | 826.4 | 20.91 | 21.50 | 1.146 | 0.08 | 0.799 | 0.915 |
| | WCDMA V | RMC 12.2Kbps | Bottom Face | 0mm | Sample 2 | ON | 4233 | 846.6 | 20.89 | 21.50 | 1.151 | 0.09 | 0.845 | 0.972 |
| | WCDMA V | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 4182 | 836.4 | 20.94 | 21.50 | 1.138 | -0.04 | 1.000 | 1.138 |
| | WCDMA V | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 4132 | 826.4 | 20.91 | 21.50 | 1.146 | 0.12 | 0.977 | 1.119 |
| | WCDMA V | RMC 12.2Kbps | Edge 1 | 0mm | Sample 2 | ON | 4233 | 846.6 | 20.89 | 21.50 | 1.151 | 0.1 | 1.040 | 1.197 |



<FDD LTE SAR>

| Plot No. | Band | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Sample | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 21100 | 2535 | 23.36 | 24.00 | 1.159 | -0.11 | 1.180 | 1.367 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 20850 | 2510 | 23.21 | 24.00 | 1.199 | -0.16 | 1.120 | 1.343 |
| 04 | LTE Band 7 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 21350 | 2560 | 23.35 | 24.00 | 1.161 | -0.14 | 1.180 | 1.371 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 3 | OFF | 21350 | 2560 | 23.35 | 24.00 | 1.161 | -0.01 | 0.716 | 0.832 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 21100 | 2535 | 22.45 | 23.00 | 1.135 | -0.07 | 0.997 | 1.132 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 20850 | 2510 | 22.29 | 23.00 | 1.178 | -0.04 | 0.965 | 1.136 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 21350 | 2560 | 22.44 | 23.00 | 1.138 | -0.09 | 0.938 | 1.067 |
| | LTE Band 7 | 20M | QPSK | 100 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 21100 | 2535 | 22.40 | 23.00 | 1.148 | -0.1 | 0.976 | 1.121 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 21100 | 2535 | 23.36 | 24.00 | 1.159 | -0.05 | 0.808 | 0.936 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 20850 | 2510 | 23.21 | 24.00 | 1.199 | -0.05 | 0.749 | 0.898 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 21350 | 2560 | 23.35 | 24.00 | 1.161 | -0.04 | 0.848 | 0.985 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 21100 | 2535 | 22.45 | 23.00 | 1.135 | -0.03 | 0.662 | 0.751 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 20850 | 2510 | 22.29 | 23.00 | 1.178 | -0.04 | 0.603 | 0.710 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 21350 | 2560 | 22.44 | 23.00 | 1.138 | -0.05 | 0.685 | 0.779 |
| | LTE Band 7 | 20M | QPSK | 100 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 21100 | 2535 | 22.40 | 23.00 | 1.148 | -0.07 | 0.667 | 0.766 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 21100 | 2535 | 23.36 | 24.00 | 1.159 | 0.03 | 0.457 | 0.530 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 21100 | 2535 | 22.45 | 23.00 | 1.135 | 0.07 | 0.371 | 0.421 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Bottom Face | 0mm | Sample 2 | ON | 21100 | 2535 | 16.55 | 18.00 | 1.396 | -0.07 | 0.425 | 0.593 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Bottom Face | 0mm | Sample 2 | ON | 21100 | 2535 | 15.55 | 17.00 | 1.396 | -0.03 | 0.342 | 0.478 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 21100 | 2535 | 16.55 | 18.00 | 1.396 | 0.07 | 0.684 | 0.955 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 20850 | 2510 | 16.17 | 18.00 | 1.524 | -0.1 | 0.651 | 0.992 |
| | LTE Band 7 | 20M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 21350 | 2560 | 16.31 | 18.00 | 1.476 | 0.04 | 0.764 | 1.127 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 21100 | 2535 | 15.55 | 17.00 | 1.396 | 0 | 0.666 | 0.930 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 20850 | 2510 | 15.36 | 17.00 | 1.459 | 0.04 | 0.542 | 0.791 |
| | LTE Band 7 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 21350 | 2560 | 15.44 | 17.00 | 1.432 | 0.02 | 0.632 | 0.905 |
| | LTE Band 7 | 20M | QPSK | 100 | 0 | Edge 1 | 0mm | Sample 2 | ON | 21100 | 2535 | 15.48 | 17.00 | 1.419 | -0.18 | 0.581 | 0.824 |
| | LTE Band 12 | 10M | QPSK | 1 | 0 | Bottom Face | 0mm | Sample 2 | OFF | 23095 | 707.5 | 23.78 | 24.50 | 1.180 | -0.04 | 0.918 | 1.084 |
| | LTE Band 12 | 10M | QPSK | 1 | 0 | Bottom Face | 0mm | Sample 3 | OFF | 23095 | 707.5 | 23.78 | 24.50 | 1.180 | 0.05 | 0.768 | 0.906 |
| | LTE Band 12 | 10M | QPSK | 25 | 0 | Bottom Face | 0mm | Sample 2 | OFF | 23095 | 707.5 | 22.88 | 23.50 | 1.153 | -0.01 | 0.799 | 0.922 |
| | LTE Band 12 | 10M | QPSK | 50 | 0 | Bottom Face | 0mm | Sample 2 | OFF | 23095 | 707.5 | 22.85 | 23.50 | 1.161 | 0.04 | 0.818 | 0.950 |
| 05 | LTE Band 12 | 10M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | OFF | 23095 | 707.5 | 23.78 | 24.50 | 1.180 | 0.08 | 1.090 | 1.287 |
| | LTE Band 12 | 10M | QPSK | 25 | 0 | Edge 1 | 0mm | Sample 2 | OFF | 23095 | 707.5 | 22.88 | 23.50 | 1.153 | 0.06 | 0.920 | 1.061 |
| | LTE Band 12 | 10M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | OFF | 23095 | 707.5 | 22.85 | 23.50 | 1.161 | 0.06 | 0.925 | 1.074 |
| | LTE Band 12 | 10M | QPSK | 1 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 23095 | 707.5 | 23.78 | 24.50 | 1.180 | 0 | 0.115 | 0.136 |
| | LTE Band 12 | 10M | QPSK | 25 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 23095 | 707.5 | 22.88 | 23.50 | 1.153 | -0.02 | 0.103 | 0.119 |



| Plot No. | Band | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Sample | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| 06 | LTE Band 13 | 10M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 23230 | 782 | 23.89 | 24.50 | 1.151 | -0.01 | 1.080 | 1.243 |
| | LTE Band 13 | 10M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 3 | OFF | 23230 | 782 | 23.89 | 24.50 | 1.151 | -0.04 | 1.050 | 1.209 |
| | LTE Band 13 | 10M | QPSK | 25 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 23230 | 782 | 22.99 | 23.50 | 1.125 | -0.04 | 0.906 | 1.019 |
| | LTE Band 13 | 10M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 23230 | 782 | 22.96 | 23.50 | 1.132 | -0.02 | 0.907 | 1.027 |
| | LTE Band 13 | 10M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 23230 | 782 | 23.89 | 24.50 | 1.151 | -0.02 | 0.211 | 0.243 |
| | LTE Band 13 | 10M | QPSK | 25 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 23230 | 782 | 22.99 | 23.50 | 1.125 | -0.02 | 0.181 | 0.204 |
| | LTE Band 13 | 10M | QPSK | 1 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 23230 | 782 | 23.89 | 24.50 | 1.151 | 0.03 | 0.118 | 0.136 |
| | LTE Band 13 | 10M | QPSK | 25 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 23230 | 782 | 22.99 | 23.50 | 1.125 | -0.02 | 0.095 | 0.107 |
| | LTE Band 13 | 10M | QPSK | 1 | 0 | Bottom Face | 0mm | Sample 2 | ON | 23230 | 782 | 20.88 | 22.00 | 1.294 | -0.02 | 0.730 | 0.945 |
| | LTE Band 13 | 10M | QPSK | 25 | 0 | Bottom Face | 0mm | Sample 2 | ON | 23230 | 782 | 19.97 | 21.00 | 1.268 | -0.02 | 0.598 | 0.758 |
| | LTE Band 13 | 10M | QPSK | 50 | 0 | Bottom Face | 0mm | Sample 2 | ON | 23230 | 782 | 19.90 | 21.00 | 1.288 | -0.01 | 0.595 | 0.767 |
| | LTE Band 13 | 10M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 23230 | 782 | 20.88 | 22.00 | 1.294 | -0.11 | 0.871 | 1.127 |
| | LTE Band 13 | 10M | QPSK | 25 | 0 | Edge 1 | 0mm | Sample 2 | ON | 23230 | 782 | 19.97 | 21.00 | 1.268 | -0.14 | 0.722 | 0.915 |
| | LTE Band 13 | 10M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 23230 | 782 | 19.90 | 21.00 | 1.288 | -0.13 | 0.720 | 0.928 |
| 07 | LTE Band 14 | 10M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 23330 | 793 | 23.86 | 24.50 | 1.159 | -0.03 | 1.180 | 1.367 |
| | LTE Band 14 | 10M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 3 | OFF | 23330 | 793 | 23.86 | 24.50 | 1.159 | -0.02 | 1.120 | 1.298 |
| | LTE Band 14 | 10M | QPSK | 25 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 23330 | 793 | 22.89 | 23.50 | 1.151 | -0.06 | 0.989 | 1.138 |
| | LTE Band 14 | 10M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 23330 | 793 | 22.84 | 23.50 | 1.164 | -0.01 | 0.987 | 1.149 |
| | LTE Band 14 | 10M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 23330 | 793 | 23.86 | 24.50 | 1.159 | 0 | 0.251 | 0.291 |
| | LTE Band 14 | 10M | QPSK | 25 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 23330 | 793 | 22.89 | 23.50 | 1.151 | 0.04 | 0.211 | 0.243 |
| | LTE Band 14 | 10M | QPSK | 1 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 23330 | 793 | 23.86 | 24.50 | 1.159 | -0.01 | 0.121 | 0.140 |
| | LTE Band 14 | 10M | QPSK | 25 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 23330 | 793 | 22.89 | 23.50 | 1.151 | 0 | 0.098 | 0.113 |
| | LTE Band 14 | 10M | QPSK | 1 | 0 | Bottom Face | 0mm | Sample 2 | ON | 23330 | 793 | 20.39 | 21.50 | 1.291 | 0 | 0.708 | 0.914 |
| | LTE Band 14 | 10M | QPSK | 25 | 0 | Bottom Face | 0mm | Sample 2 | ON | 23330 | 793 | 19.64 | 20.50 | 1.219 | -0.03 | 0.586 | 0.714 |
| | LTE Band 14 | 10M | QPSK | 50 | 0 | Bottom Face | 0mm | Sample 2 | ON | 23330 | 793 | 19.32 | 20.50 | 1.312 | -0.03 | 0.582 | 0.764 |
| | LTE Band 14 | 10M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 23330 | 793 | 20.39 | 21.50 | 1.291 | -0.16 | 0.856 | 1.105 |
| | LTE Band 14 | 10M | QPSK | 25 | 0 | Edge 1 | 0mm | Sample 2 | ON | 23330 | 793 | 19.64 | 20.50 | 1.219 | -0.18 | 0.700 | 0.853 |
| | LTE Band 14 | 10M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 23330 | 793 | 19.32 | 20.50 | 1.312 | -0.11 | 0.697 | 0.915 |



| Plot No. | Band | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Sample | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26340 | 1880 | 23.12 | 23.50 | 1.091 | -0.08 | 1.130 | 1.233 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26140 | 1860 | 23.10 | 23.50 | 1.096 | 0.04 | 1.080 | 1.184 |
| 08 | LTE Band 25 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26590 | 1905 | 22.99 | 23.50 | 1.125 | -0.04 | 1.210 | 1.361 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 3 | OFF | 26590 | 1905 | 22.99 | 23.50 | 1.125 | 0.04 | 1.190 | 1.338 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26340 | 1880 | 22.14 | 22.50 | 1.086 | 0 | 0.927 | 1.007 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26140 | 1860 | 22.07 | 22.50 | 1.104 | 0.04 | 0.869 | 0.959 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26590 | 1905 | 22.13 | 22.50 | 1.089 | 0 | 0.987 | 1.075 |
| | LTE Band 25 | 20M | QPSK | 100 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26340 | 1880 | 22.12 | 22.50 | 1.091 | 0.02 | 0.952 | 1.039 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 26340 | 1880 | 23.12 | 23.50 | 1.091 | 0.04 | 0.843 | 0.920 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 26140 | 1860 | 23.10 | 23.50 | 1.096 | 0.01 | 0.807 | 0.885 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 26590 | 1905 | 22.99 | 23.50 | 1.125 | -0.04 | 0.842 | 0.947 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 26340 | 1880 | 22.14 | 22.50 | 1.086 | 0.09 | 0.661 | 0.718 |
| | LTE Band 25 | 20M | QPSK | 100 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 26340 | 1880 | 22.12 | 22.50 | 1.091 | 0.12 | 0.678 | 0.740 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 26340 | 1880 | 23.12 | 23.50 | 1.091 | -0.07 | 0.039 | 0.043 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 26340 | 1880 | 22.14 | 22.50 | 1.086 | -0.06 | 0.030 | 0.033 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Bottom Face | 0mm | Sample 2 | ON | 26340 | 1880 | 18.90 | 19.50 | 1.148 | -0.03 | 0.694 | 0.797 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Bottom Face | 0mm | Sample 2 | ON | 26340 | 1880 | 17.95 | 18.50 | 1.135 | -0.03 | 0.566 | 0.642 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26340 | 1880 | 18.90 | 19.50 | 1.148 | -0.1 | 1.030 | 1.183 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26140 | 1860 | 18.89 | 19.50 | 1.151 | -0.07 | 1.040 | 1.197 |
| | LTE Band 25 | 20M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26590 | 1905 | 18.81 | 19.50 | 1.172 | -0.03 | 1.010 | 1.184 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26340 | 1880 | 17.95 | 18.50 | 1.135 | -0.15 | 0.971 | 1.102 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26140 | 1860 | 17.93 | 18.50 | 1.140 | -0.14 | 1.050 | 1.197 |
| | LTE Band 25 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26590 | 1905 | 17.94 | 18.50 | 1.138 | -0.09 | 0.807 | 0.918 |
| | LTE Band 25 | 20M | QPSK | 100 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26340 | 1880 | 17.88 | 18.50 | 1.153 | -0.08 | 0.937 | 1.081 |
| 09 | LTE Band 26 | 15M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26865 | 831.5 | 23.53 | 24.00 | 1.114 | 0.01 | 1.110 | 1.237 |
| | LTE Band 26 | 15M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 3 | OFF | 26865 | 831.5 | 23.53 | 24.00 | 1.114 | 0.13 | 1.070 | 1.192 |
| | LTE Band 26 | 15M | QPSK | 36 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26865 | 831.5 | 22.59 | 23.00 | 1.099 | 0 | 0.921 | 1.012 |
| | LTE Band 26 | 15M | QPSK | 75 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 26865 | 831.5 | 22.58 | 23.00 | 1.102 | 0 | 0.924 | 1.018 |
| | LTE Band 26 | 15M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 26865 | 831.5 | 23.53 | 24.00 | 1.114 | -0.04 | 0.292 | 0.325 |
| | LTE Band 26 | 15M | QPSK | 36 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 26865 | 831.5 | 22.59 | 23.00 | 1.099 | 0.03 | 0.229 | 0.252 |
| | LTE Band 26 | 15M | QPSK | 1 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 26865 | 831.5 | 23.53 | 24.00 | 1.114 | -0.01 | 0.096 | 0.107 |
| | LTE Band 26 | 15M | QPSK | 36 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 26865 | 831.5 | 22.59 | 23.00 | 1.099 | -0.01 | 0.076 | 0.084 |
| | LTE Band 26 | 15M | QPSK | 1 | 0 | Bottom Face | 0mm | Sample 2 | ON | 26865 | 831.5 | 20.57 | 21.50 | 1.239 | 0.07 | 0.718 | 0.889 |
| | LTE Band 26 | 15M | QPSK | 36 | 0 | Bottom Face | 0mm | Sample 2 | ON | 26865 | 831.5 | 19.63 | 20.50 | 1.222 | 0.06 | 0.591 | 0.722 |
| | LTE Band 26 | 15M | QPSK | 75 | 0 | Bottom Face | 0mm | Sample 2 | ON | 26865 | 831.5 | 19.58 | 20.50 | 1.236 | 0.02 | 0.588 | 0.727 |
| | LTE Band 26 | 15M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26865 | 831.5 | 20.57 | 21.50 | 1.239 | -0.13 | 0.871 | 1.079 |
| | LTE Band 26 | 15M | QPSK | 36 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26865 | 831.5 | 19.63 | 20.50 | 1.222 | -0.15 | 0.723 | 0.883 |
| | LTE Band 26 | 15M | QPSK | 75 | 0 | Edge 1 | 0mm | Sample 2 | ON | 26865 | 831.5 | 19.58 | 20.50 | 1.236 | -0.12 | 0.729 | 0.901 |



| Plot No. | Band | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Sample | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|----------|-----------------|--------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| 10 | LTE Band 66 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 132322 | 1745 | 24.41 | 24.50 | 1.021 | 0.03 | 1.360 | 1.388 |
| | LTE Band 66 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 3 | OFF | 132322 | 1745 | 24.41 | 24.50 | 1.021 | 0.09 | 1.330 | 1.358 |
| | LTE Band 66 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 132072 | 1720 | 24.21 | 24.50 | 1.069 | -0.13 | 1.220 | 1.304 |
| | LTE Band 66 | 20M | QPSK | 1 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 132572 | 1770 | 24.26 | 24.50 | 1.057 | -0.02 | 1.260 | 1.332 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 132322 | 1745 | 23.33 | 23.50 | 1.040 | -0.01 | 1.090 | 1.134 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 132072 | 1720 | 23.10 | 23.50 | 1.096 | -0.07 | 1.020 | 1.118 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 132572 | 1770 | 23.22 | 23.50 | 1.067 | 0.03 | 1.030 | 1.099 |
| | LTE Band 66 | 20M | QPSK | 100 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 132322 | 1745 | 23.28 | 23.50 | 1.052 | 0.02 | 1.100 | 1.157 |
| | LTE Band 66 | 20M | QPSK | 1 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 132322 | 1745 | 24.41 | 24.50 | 1.021 | -0.06 | 0.762 | 0.778 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 132322 | 1745 | 23.33 | 23.50 | 1.040 | -0.01 | 0.631 | 0.656 |
| | LTE Band 66 | 20M | QPSK | 1 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 132322 | 1745 | 24.41 | 24.50 | 1.021 | -0.07 | 0.068 | 0.069 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 132322 | 1745 | 23.33 | 23.50 | 1.040 | -0.03 | 0.054 | 0.056 |
| | LTE Band 66 | 20M | QPSK | 1 | 0 | Bottom Face | 0mm | Sample 2 | ON | 132322 | 1745 | 18.23 | 18.50 | 1.064 | -0.17 | 0.556 | 0.592 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Bottom Face | 0mm | Sample 2 | ON | 132322 | 1745 | 17.18 | 17.50 | 1.076 | -0.04 | 0.452 | 0.487 |
| | LTE Band 66 | 20M | QPSK | 1 | 0 | Edge 1 | 0mm | Sample 2 | ON | 132322 | 1745 | 18.23 | 18.50 | 1.064 | -0.11 | 1.020 | 1.085 |
| | LTE Band 66 | 20M | QPSK | 1 | 49 | Edge 1 | 0mm | Sample 2 | ON | 132072 | 1720 | 18.10 | 18.50 | 1.096 | -0.16 | 0.871 | 0.955 |
| | LTE Band 66 | 20M | QPSK | 1 | 49 | Edge 1 | 0mm | Sample 2 | ON | 132572 | 1770 | 18.17 | 18.50 | 1.079 | -0.09 | 1.110 | 1.198 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 132322 | 1745 | 17.18 | 17.50 | 1.076 | -0.09 | 0.789 | 0.849 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 132072 | 1720 | 17.02 | 17.50 | 1.117 | -0.18 | 0.628 | 0.701 |
| | LTE Band 66 | 20M | QPSK | 50 | 0 | Edge 1 | 0mm | Sample 2 | ON | 132572 | 1770 | 17.06 | 17.50 | 1.107 | -0.14 | 0.854 | 0.945 |
| | LTE Band 66 | 20M | QPSK | 100 | 0 | Edge 1 | 0mm | Sample 2 | ON | 132322 | 1745 | 17.12 | 17.50 | 1.091 | -0.17 | 0.812 | 0.886 |



<TDD LTE SAR>

| Plot No. | Band | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Sample | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|----------|-----------------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Bottom Face | 3mm | Sample 2 | OFF | 41490 | 2680 | 24.50 | 24.50 | 1.000 | 62.9 | 1.006 | -0.11 | 1.000 | 1.006 |
| 11 | LTE Band 41 | 20M | QPSK | 1 | 99 | Bottom Face | 3mm | Sample 2 | OFF | 39750 | 2506 | 22.85 | 24.50 | 1.462 | 62.9 | 1.006 | -0.1 | 0.828 | 1.218 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Bottom Face | 3mm | Sample 3 | OFF | 39750 | 2506 | 22.85 | 24.50 | 1.462 | 62.9 | 1.006 | -0.01 | 0.675 | 0.993 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Bottom Face | 3mm | Sample 2 | OFF | 40185 | 2549.5 | 22.96 | 24.50 | 1.426 | 62.9 | 1.006 | -0.05 | 0.742 | 1.064 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Bottom Face | 3mm | Sample 2 | OFF | 40620 | 2593 | 23.16 | 24.50 | 1.361 | 62.9 | 1.006 | -0.05 | 0.711 | 0.974 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Bottom Face | 3mm | Sample 2 | OFF | 41055 | 2636.5 | 22.94 | 24.50 | 1.432 | 62.9 | 1.006 | 0 | 0.680 | 0.980 |
| | LTE Band 41 | 20M | QPSK | 50 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 40620 | 2593 | 22.19 | 23.50 | 1.352 | 62.9 | 1.006 | -0.02 | 0.629 | 0.856 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Bottom Face | 3mm | Sample 2 | OFF | 39750 | 2506 | 21.91 | 23.50 | 1.442 | 62.9 | 1.006 | -0.11 | 0.606 | 0.879 |
| | LTE Band 41 | 20M | QPSK | 50 | 24 | Bottom Face | 3mm | Sample 2 | OFF | 40185 | 2549.5 | 22.06 | 23.50 | 1.393 | 62.9 | 1.006 | -0.06 | 0.610 | 0.855 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Bottom Face | 3mm | Sample 2 | OFF | 41055 | 2636.5 | 22.01 | 23.50 | 1.409 | 62.9 | 1.006 | -0.03 | 0.557 | 0.790 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Bottom Face | 3mm | Sample 2 | OFF | 41490 | 2680 | 22.16 | 23.50 | 1.361 | 62.9 | 1.006 | -0.06 | 0.572 | 0.783 |
| | LTE Band 41 | 20M | QPSK | 100 | 0 | Bottom Face | 3mm | Sample 2 | OFF | 41490 | 2680 | 22.19 | 23.50 | 1.352 | 62.9 | 1.006 | 0.03 | 0.542 | 0.737 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 15mm | Sample 2 | OFF | 41490 | 2680 | 24.50 | 24.50 | 1.000 | 62.9 | 1.006 | -0.1 | 0.773 | 0.778 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 15mm | Sample 2 | OFF | 39750 | 2506 | 22.85 | 24.50 | 1.462 | 62.9 | 1.006 | -0.03 | 0.475 | 0.699 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 15mm | Sample 2 | OFF | 40185 | 2549.5 | 22.96 | 24.50 | 1.426 | 62.9 | 1.006 | -0.06 | 0.546 | 0.783 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 15mm | Sample 2 | OFF | 40620 | 2593 | 23.16 | 24.50 | 1.361 | 62.9 | 1.006 | -0.03 | 0.584 | 0.800 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 15mm | Sample 2 | OFF | 41055 | 2636.5 | 22.94 | 24.50 | 1.432 | 62.9 | 1.006 | -0.07 | 0.653 | 0.941 |
| | LTE Band 41 | 20M | QPSK | 50 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 40620 | 2593 | 22.19 | 23.50 | 1.352 | 62.9 | 1.006 | -0.04 | 0.467 | 0.635 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Edge 1 | 15mm | Sample 2 | OFF | 39750 | 2506 | 21.91 | 23.50 | 1.442 | 62.9 | 1.006 | -0.03 | 0.388 | 0.563 |
| | LTE Band 41 | 20M | QPSK | 50 | 24 | Edge 1 | 15mm | Sample 2 | OFF | 40185 | 2549.5 | 22.06 | 23.50 | 1.393 | 62.9 | 1.006 | -0.06 | 0.458 | 0.642 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Edge 1 | 15mm | Sample 2 | OFF | 41055 | 2636.5 | 22.01 | 23.50 | 1.409 | 62.9 | 1.006 | -0.08 | 0.522 | 0.740 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Edge 1 | 15mm | Sample 2 | OFF | 41490 | 2680 | 22.16 | 23.50 | 1.361 | 62.9 | 1.006 | -0.08 | 0.458 | 0.627 |
| | LTE Band 41 | 20M | QPSK | 100 | 0 | Edge 1 | 15mm | Sample 2 | OFF | 41490 | 2680 | 22.19 | 23.50 | 1.352 | 62.9 | 1.006 | -0.06 | 0.483 | 0.657 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 2 | 0mm | Sample 2 | OFF | 41490 | 2680 | 24.50 | 24.50 | 1.000 | 62.9 | 1.006 | -0.02 | 0.329 | 0.331 |
| | LTE Band 41 | 20M | QPSK | 50 | 0 | Edge 2 | 0mm | Sample 2 | OFF | 40620 | 2593 | 22.19 | 23.50 | 1.352 | 62.9 | 1.006 | 0.07 | 0.182 | 0.248 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Bottom Face | 0mm | Sample 2 | ON | 41490 | 2680 | 19.50 | 19.50 | 1.000 | 62.9 | 1.006 | 0.07 | 0.381 | 0.383 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Bottom Face | 0mm | Sample 2 | ON | 41490 | 2680 | 17.34 | 18.50 | 1.306 | 62.9 | 1.006 | 0.07 | 0.214 | 0.281 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 0mm | Sample 2 | ON | 41490 | 2680 | 19.50 | 19.50 | 1.000 | 62.9 | 1.006 | -0.02 | 1.150 | 1.157 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 0mm | Sample 2 | ON | 39750 | 2506 | 17.91 | 19.50 | 1.442 | 62.9 | 1.006 | -0.15 | 0.595 | 0.863 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 0mm | Sample 2 | ON | 40185 | 2549.5 | 18.11 | 19.50 | 1.377 | 62.9 | 1.006 | -0.08 | 0.714 | 0.989 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 0mm | Sample 2 | ON | 40620 | 2593 | 18.25 | 19.50 | 1.334 | 62.9 | 1.006 | -0.09 | 0.773 | 1.037 |
| | LTE Band 41 | 20M | QPSK | 1 | 99 | Edge 1 | 0mm | Sample 2 | ON | 41055 | 2636.5 | 18.08 | 19.50 | 1.387 | 62.9 | 1.006 | -0.13 | 0.772 | 1.077 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Edge 1 | 0mm | Sample 2 | ON | 41490 | 2680 | 17.34 | 18.50 | 1.306 | 62.9 | 1.006 | -0.12 | 0.591 | 0.777 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Edge 1 | 0mm | Sample 2 | ON | 39750 | 2506 | 16.95 | 18.50 | 1.429 | 62.9 | 1.006 | -0.12 | 0.473 | 0.680 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Edge 1 | 0mm | Sample 2 | ON | 40185 | 2549.5 | 17.20 | 18.50 | 1.349 | 62.9 | 1.006 | -0.12 | 0.566 | 0.768 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Edge 1 | 0mm | Sample 2 | ON | 40620 | 2593 | 17.27 | 18.50 | 1.327 | 62.9 | 1.006 | -0.12 | 0.625 | 0.835 |
| | LTE Band 41 | 20M | QPSK | 50 | 50 | Edge 1 | 0mm | Sample 2 | ON | 41055 | 2636.5 | 17.17 | 18.50 | 1.358 | 62.9 | 1.006 | -0.14 | 0.623 | 0.851 |
| | LTE Band 41 | 20M | QPSK | 100 | 0 | Edge 1 | 0mm | Sample 2 | ON | 41490 | 2680 | 17.25 | 18.50 | 1.334 | 62.9 | 1.006 | -0.1 | 0.651 | 0.873 |



<WLAN SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Antenna | Sample | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------------|---------------|----------|---------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| | WLAN2.4GHz | 802.11b 1Mbps | Bottom Face | 0mm | Ant 1 | Sample 2 | 6 | 2437 | 20.20 | 20.50 | 1.072 | 100 | 1.000 | 0.04 | 0.493 | 0.528 |
| | WLAN2.4GHz | 802.11b 1Mbps | Bottom Face | 0mm | Ant 1 | Sample 3 | 6 | 2437 | 20.20 | 20.50 | 1.072 | 100 | 1.000 | 0.04 | 0.482 | 0.516 |
| | WLAN2.4GHz | 802.11b 1Mbps | Edge 1 | 0mm | Ant 1 | Sample 2 | 6 | 2437 | 20.20 | 20.50 | 1.072 | 100 | 1.000 | -0.19 | 0.489 | 0.524 |
| | WLAN2.4GHz | 802.11b 1Mbps | Bottom Face | 0mm | Ant 2 | Sample 2 | 6 | 2437 | 20.30 | 20.50 | 1.047 | 100 | 1.000 | -0.06 | 0.880 | 0.921 |
| | WLAN2.4GHz | 802.11b 1Mbps | Bottom Face | 0mm | Ant 2 | Sample 2 | 1 | 2412 | 20.10 | 20.50 | 1.096 | 100 | 1.000 | -0.01 | 0.878 | 0.963 |
| 12 | WLAN2.4GHz | 802.11b 1Mbps | Bottom Face | 0mm | Ant 2 | Sample 2 | 11 | 2462 | 20.10 | 20.50 | 1.096 | 100 | 1.000 | -0.01 | 1.030 | 1.129 |
| | WLAN2.4GHz | 802.11b 1Mbps | Bottom Face | 0mm | Ant 2 | Sample 3 | 11 | 2462 | 20.10 | 20.50 | 1.096 | 100 | 1.000 | -0.06 | 0.883 | 0.968 |
| | WLAN2.4GHz | 802.11b 1Mbps | Edge 1 | 0mm | Ant 2 | Sample 2 | 6 | 2437 | 20.30 | 20.50 | 1.047 | 100 | 1.000 | 0 | 0.983 | 1.029 |
| | WLAN2.4GHz | 802.11b 1Mbps | Edge 1 | 0mm | Ant 2 | Sample 2 | 1 | 2412 | 20.10 | 20.50 | 1.096 | 100 | 1.000 | 0.04 | 0.876 | 0.961 |
| | WLAN2.4GHz | 802.11b 1Mbps | Edge 1 | 0mm | Ant 2 | Sample 2 | 11 | 2462 | 20.10 | 20.50 | 1.096 | 100 | 1.000 | 0.09 | 0.896 | 0.982 |
| | WLAN2.4GHz | 802.11b 1Mbps | Edge 4 | 0mm | Ant 2 | Sample 2 | 6 | 2437 | 20.30 | 20.50 | 1.047 | 100 | 1.000 | -0.17 | 0.296 | 0.310 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Bottom Face | 0mm | Ant 1 | Sample 2 | 54 | 5270 | 16.00 | 16.50 | 1.122 | 89.52 | 1.117 | -0.03 | 0.403 | 0.505 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Bottom Face | 0mm | Ant 1 | Sample 3 | 54 | 5270 | 16.00 | 16.50 | 1.122 | 89.52 | 1.117 | 0.1 | 0.377 | 0.472 |
| 13 | WLAN5GHz | 802.11n-HT40 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 54 | 5270 | 16.00 | 16.50 | 1.122 | 89.52 | 1.117 | -0.19 | 0.939 | 1.177 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 62 | 5310 | 13.60 | 14.00 | 1.096 | 89.52 | 1.117 | -0.15 | 0.642 | 0.786 |
| | WLAN5GHz | 802.11a 6Mbps | Edge 1 | 0mm | Ant 1 | Sample 2 | 60 | 5300 | 16.30 | 16.50 | 1.047 | 94.93 | 1.053 | 0.15 | 1.010 | 1.114 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Bottom Face | 0mm | Ant 2 | Sample 2 | 54 | 5270 | 16.10 | 16.50 | 1.096 | 89.62 | 1.116 | -0.08 | 0.569 | 0.696 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Bottom Face | 0mm | Ant 2 | Sample 3 | 54 | 5270 | 16.10 | 16.50 | 1.096 | 89.62 | 1.116 | -0.03 | 0.552 | 0.675 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Edge 1 | 0mm | Ant 2 | Sample 2 | 54 | 5270 | 16.10 | 16.50 | 1.096 | 89.62 | 1.116 | -0.01 | 0.914 | 1.118 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Edge 1 | 0mm | Ant 2 | Sample 2 | 62 | 5310 | 13.40 | 14.00 | 1.148 | 89.62 | 1.116 | 0.1 | 0.499 | 0.639 |
| | WLAN5GHz | 802.11a 6Mbps | Edge 1 | 0mm | Ant 2 | Sample 2 | 52 | 5260 | 16.40 | 16.50 | 1.023 | 95.39 | 1.048 | 0.1 | 1.020 | 1.094 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Edge 4 | 0mm | Ant 2 | Sample 2 | 54 | 5270 | 16.10 | 16.50 | 1.096 | 89.62 | 1.116 | 0.08 | 0.092 | 0.113 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom Face | 0mm | Ant 1 | Sample 2 | 138 | 5690 | 14.00 | 14.00 | 1.000 | 89.02 | 1.123 | 0.06 | 0.188 | 0.211 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom Face | 0mm | Ant 1 | Sample 3 | 138 | 5690 | 14.00 | 14.00 | 1.000 | 89.02 | 1.123 | -0.03 | 0.151 | 0.170 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 138 | 5690 | 14.00 | 14.00 | 1.000 | 89.02 | 1.123 | -0.12 | 0.938 | 1.053 |
| 14 | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 106 | 5530 | 13.90 | 14.00 | 1.023 | 89.02 | 1.123 | -0.13 | 1.020 | 1.172 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 122 | 5610 | 14.00 | 14.00 | 1.000 | 89.02 | 1.123 | -0.19 | 0.997 | 1.120 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom Face | 0mm | Ant 2 | Sample 2 | 138 | 5690 | 14.00 | 14.00 | 1.000 | 89.16 | 1.122 | -0.03 | 0.342 | 0.384 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom Face | 0mm | Ant 2 | Sample 3 | 138 | 5690 | 14.00 | 14.00 | 1.000 | 89.16 | 1.122 | -0.03 | 0.320 | 0.359 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 2 | Sample 2 | 138 | 5690 | 14.00 | 14.00 | 1.000 | 89.16 | 1.122 | 0.14 | 0.499 | 0.560 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 4 | 0mm | Ant 2 | Sample 2 | 138 | 5690 | 14.00 | 14.00 | 1.000 | 89.16 | 1.122 | 0.12 | 0.045 | 0.050 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom Face | 0mm | Ant 1 | Sample 2 | 155 | 5775 | 13.80 | 14.00 | 1.047 | 89.02 | 1.123 | 0.13 | 0.198 | 0.233 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom Face | 0mm | Ant 1 | Sample 3 | 155 | 5775 | 13.80 | 14.00 | 1.047 | 89.02 | 1.123 | 0.11 | 0.190 | 0.223 |
| 15 | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 155 | 5775 | 13.80 | 14.00 | 1.047 | 89.02 | 1.123 | 0.19 | 0.942 | 1.108 |
| | WLAN5GHz | 802.11n-HT40 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 151 | 5755 | 13.90 | 14.00 | 1.023 | 89.52 | 1.117 | 0.13 | 0.906 | 1.036 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom Face | 0mm | Ant 2 | Sample 2 | 155 | 5775 | 13.90 | 14.00 | 1.023 | 89.16 | 1.122 | -0.05 | 0.413 | 0.474 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom Face | 0mm | Ant 2 | Sample 3 | 155 | 5775 | 13.90 | 14.00 | 1.023 | 89.16 | 1.122 | 0 | 0.334 | 0.383 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 2 | Sample 2 | 155 | 5775 | 13.90 | 14.00 | 1.023 | 89.16 | 1.122 | 0.13 | 0.542 | 0.622 |
| | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 4 | 0mm | Ant 2 | Sample 2 | 155 | 5775 | 13.90 | 14.00 | 1.023 | 89.16 | 1.122 | 0.02 | 0.071 | 0.082 |

<Bluetooth SAR>

| Plot No. | Band | Mode | Test Position | Gap (mm) | Antenna | Sample | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-----------|-------|---------------|----------|---------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| | Bluetooth | 1Mbps | Bottom Face | 0mm | Ant 1 | Sample 2 | 0 | 2402 | 2.40 | 3.00 | 1.148 | 76.84 | 1.084 | -0.19 | 0.005 | 0.007 |
| | Bluetooth | 1Mbps | Bottom Face | 0mm | Ant 1 | Sample 3 | 0 | 2402 | 2.40 | 3.00 | 1.148 | 76.84 | 1.084 | -0.19 | 0.004 | 0.005 |
| 16 | Bluetooth | 1Mbps | Edge 1 | 0mm | Ant 1 | Sample 2 | 0 | 2402 | 2.40 | 3.00 | 1.148 | 76.84 | 1.084 | 0.09 | 0.010 | 0.012 |
| | Bluetooth | 1Mbps | Edge 1 | 0mm | Ant 1 | Sample 2 | 39 | 2441 | 1.93 | 3.00 | 1.279 | 76.84 | 1.084 | 0.12 | 0.008 | 0.011 |
| | Bluetooth | 1Mbps | Edge 1 | 0mm | Ant 1 | Sample 2 | 78 | 2480 | 1.68 | 3.00 | 1.355 | 76.84 | 1.084 | 0.01 | 0.006 | 0.009 |



14.2 Repeated SAR Measurement

| No. | Band | Mode | Test Position | Gap (mm) | Sample | Power Reduction | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Ratio | Reported 1g SAR (W/kg) |
|-----|-------------|--------------|---------------|----------|----------|-----------------|--------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|-------|------------------------|
| 1st | WCDMA II | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 9538 | 1907.6 | 23.31 | 23.50 | 1.045 | -0.01 | 1.380 | - | 1.442 |
| 2nd | WCDMA II | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 9538 | 1907.6 | 23.31 | 23.50 | 1.045 | -0.01 | 1.340 | 1.03 | 1.400 |
| 1st | WCDMA V | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 4182 | 836.4 | 24.30 | 24.50 | 1.047 | -0.03 | 1.380 | - | 1.445 |
| 2nd | WCDMA V | RMC 12.2Kbps | Bottom Face | 3mm | Sample 2 | OFF | 4182 | 836.4 | 24.30 | 24.50 | 1.047 | -0.05 | 1.300 | 1.06 | 1.361 |
| 1st | LTE Band 7 | 20M_QPSK_1_0 | Bottom Face | 3mm | Sample 2 | OFF | 21350 | 2560 | 23.35 | 24.00 | 1.161 | -0.14 | 1.180 | - | 1.371 |
| 2nd | LTE Band 7 | 20M_QPSK_1_0 | Bottom Face | 3mm | Sample 2 | OFF | 21350 | 2560 | 23.35 | 24.00 | 1.161 | -0.05 | 1.020 | 1.16 | 1.185 |
| 1st | LTE Band 14 | 10M_QPSK_1_0 | Bottom Face | 3mm | Sample 2 | OFF | 23330 | 793 | 23.86 | 24.50 | 1.159 | -0.03 | 1.180 | - | 1.367 |
| 2nd | LTE Band 14 | 10M_QPSK_1_0 | Bottom Face | 3mm | Sample 2 | OFF | 23330 | 793 | 23.86 | 24.50 | 1.159 | -0.04 | 1.160 | 1.02 | 1.344 |
| 1st | LTE Band 66 | 20M_QPSK_1_0 | Bottom Face | 3mm | Sample 2 | OFF | 132322 | 1745 | 24.41 | 24.50 | 1.021 | 0.03 | 1.360 | - | 1.388 |
| 2nd | LTE Band 66 | 20M_QPSK_1_0 | Bottom Face | 3mm | Sample 2 | OFF | 132322 | 1745 | 24.41 | 24.50 | 1.021 | -0.01 | 1.240 | 1.10 | 1.266 |

| No. | Band | Mode | Test Position | Gap (mm) | Antenna | Sample | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Ratio | Reported 1g SAR (W/kg) |
|-----|------------|---------------------|---------------|----------|---------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|-------|------------------------|
| 1st | WLAN2.4GHz | 802.11b 1Mbps | Bottom Face | 0mm | Ant 2 | Sample 2 | 11 | 2462 | 20.10 | 20.50 | 1.096 | 100 | 1.000 | -0.01 | 1.030 | - | 1.129 |
| 2nd | WLAN2.4GHz | 802.11b 1Mbps | Bottom Face | 0mm | Ant 2 | Sample 2 | 11 | 2462 | 20.10 | 20.50 | 1.096 | 100 | 1.000 | -0.06 | 1.010 | 1.02 | 1.107 |
| 1st | WLAN5GHz | 802.11a 6Mbps | Edge 1 | 0mm | Ant 2 | Sample 2 | 52 | 5260 | 16.40 | 16.50 | 1.023 | 95.39 | 1.048 | 0.1 | 1.020 | - | 1.094 |
| 2nd | WLAN5GHz | 802.11a 6Mbps | Edge 1 | 0mm | Ant 2 | Sample 2 | 52 | 5260 | 16.40 | 16.50 | 1.023 | 95.39 | 1.048 | -0.09 | 0.981 | 1.04 | 1.052 |
| 1st | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 106 | 5530 | 13.90 | 14.00 | 1.023 | 89.02 | 1.123 | -0.13 | 1.020 | - | 1.172 |
| 2nd | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 106 | 5530 | 13.90 | 14.00 | 1.023 | 89.02 | 1.123 | -0.17 | 1.000 | 1.02 | 1.149 |
| 1st | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 155 | 5775 | 13.80 | 14.00 | 1.047 | 89.02 | 1.123 | 0.19 | 0.942 | - | 1.108 |
| 2nd | WLAN5GHz | 802.11ac-VHT80 MCS0 | Edge 1 | 0mm | Ant 1 | Sample 2 | 155 | 5775 | 13.80 | 14.00 | 1.047 | 89.02 | 1.123 | 0.15 | 0.922 | 1.02 | 1.084 |

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

| NO. | Simultaneous Transmission Configurations | Body |
|-----|---|------|
| 1. | WWAN + WLAN 2.4GHz MIMO (Ant. 1 + Ant. 2) | Yes |
| 2. | WWAN + WLAN 2.4GHz Ant.1 + WLAN 5GHz Ant. 2 | Yes |
| 3. | WWAN + WLAN 5GHz Ant. 2 + Bluetooth Ant. 1 | Yes |
| 4. | WWAN + WLAN 5GHz MIMO (Ant. 1 + Ant. 2) | Yes |

General Note:

1. WLAN and Bluetooth share the same antenna1, and cannot transmit simultaneously.
2. All licensed modes share the same antenna part and cannot transmit simultaneously.
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 15.2.



15.1 Body Exposure Conditions

| WWAN Band | Exposure Position | 1 | 2 | 3 | 4 | 5 | 6 | 1+2+3 Summed 1g SAR (W/kg) | 1+4+5 Summed 1g SAR (W/kg) | 1+2+5 Summed 1g SAR (W/kg) | 1+5+6 Summed 1g SAR (W/kg) | 1+2+3 SPLSR | 1+2+3 Case No | 1+4+5 SPLSR | 1+4+5 Case No | 1+2+5 SPLSR | 1+2+5 Case No | 1+5+6 SPLSR | 1+5+6 Case No | |
|-----------|-------------------|--------------------|-------------------|-------------------|-----------------|-----------------|-----------------|----------------------------|----------------------------|----------------------------|----------------------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|----------|
| | | WWAN | 2.4GHz WLAN Ant 1 | 2.4GHz WLAN Ant 2 | 5GHz WLAN Ant 1 | 5GHz WLAN Ant 2 | Bluetooth Ant 1 | | | | | | | | | | | | | |
| | | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | | | | | | | | | | | | | |
| WCDMA | WCDMA II | Bottom Face at 3mm | 1.442 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 3.099 | 2.643 | 2.666 | 2.145 | 0.04 | Case 1 | 0.03 | Case 44 | 0.02 | Case 86 | 0.02 | Case 129 |
| | | Edge 1 at 15mm | 0.902 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.455 | 3.197 | 2.544 | 2.032 | 0.03 | Case 2 | 0.04 | Case 45 | 0.03 | Case 87 | 0.02 | Case 130 |
| | | Bottom Face at 0mm | 0.997 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.654 | 2.198 | 2.221 | 1.700 | 0.04 | Case 3 | 0.02 | Case 46 | 0.02 | Case 88 | 0.01 | Case 131 |
| | | Edge 1 at 0mm | 1.195 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.748 | 3.490 | 2.837 | 2.325 | 0.03 | Case 4 | 0.04 | Case 47 | 0.03 | Case 89 | 0.02 | Case 132 |
| | | Edge 2 at 0mm | 0.039 | | | | | | 0.039 | 0.039 | 0.039 | 0.039 | | | | | | | | |
| | WCDMA IV | Bottom Face at 3mm | 1.447 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 3.104 | 2.648 | 2.671 | 2.150 | 0.04 | Case 5 | 0.03 | Case 48 | 0.02 | Case 90 | 0.02 | Case 133 |
| | | Edge 1 at 15mm | 0.888 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.441 | 3.183 | 2.530 | 2.018 | 0.03 | Case 6 | 0.04 | Case 49 | 0.03 | Case 91 | 0.02 | Case 134 |
| | | Bottom Face at 0mm | 0.623 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.280 | 1.824 | 1.847 | 1.326 | 0.04 | Case 7 | 0.02 | Case 50 | 0.02 | Case 92 | | |
| | | Edge 1 at 0mm | 1.165 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.718 | 3.460 | 2.807 | 2.295 | 0.03 | Case 8 | 0.04 | Case 51 | 0.03 | Case 93 | 0.02 | Case 135 |
| | | Edge 2 at 0mm | 0.063 | | | | | | 0.063 | 0.063 | 0.063 | 0.063 | | | | | | | | |
| | WCDMA V | Bottom Face at 3mm | 1.445 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 3.102 | 2.646 | 2.669 | 2.148 | 0.04 | Case 9 | 0.03 | Case 52 | 0.03 | Case 94 | 0.02 | Case 136 |
| | | Edge 1 at 15mm | 0.420 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 1.973 | 2.715 | 2.062 | 1.550 | 0.03 | Case 10 | 0.04 | Case 53 | 0.03 | Case 95 | | |
| | | Bottom Face at 0mm | 0.972 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.629 | 2.173 | 2.196 | 1.675 | 0.04 | Case 11 | 0.02 | Case 54 | 0.02 | Case 96 | 0.01 | Case 137 |
| | | Edge 1 at 0mm | 1.197 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.750 | 3.492 | 2.839 | 2.327 | 0.03 | Case 12 | 0.04 | Case 55 | 0.03 | Case 97 | 0.02 | Case 138 |
| | | Edge 2 at 0mm | 0.102 | | | | | | 0.102 | 0.102 | 0.102 | 0.102 | | | | | | | | |
| LTE | LTE Band 7 | Bottom Face at 3mm | 1.371 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 3.028 | 2.572 | 2.595 | 2.074 | 0.04 | Case 13 | 0.02 | Case 56 | 0.02 | Case 98 | 0.01 | Case 139 |
| | | Edge 1 at 15mm | 0.985 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.538 | 3.280 | 2.627 | 2.115 | 0.03 | Case 14 | 0.04 | Case 57 | 0.03 | Case 99 | 0.02 | Case 140 |
| | | Bottom Face at 0mm | 0.593 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.250 | 1.794 | 1.817 | 1.296 | 0.04 | Case 15 | 0.02 | Case 58 | 0.02 | Case 100 | | |
| | | Edge 1 at 0mm | 1.127 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.680 | 3.422 | 2.769 | 2.257 | 0.03 | Case 16 | 0.04 | Case 59 | 0.03 | Case 101 | 0.02 | Case 141 |
| | | Edge 2 at 0mm | 0.530 | | | | | | 0.530 | 0.530 | 0.530 | 0.530 | | | | | | | | |
| | LTE Band 12 | Bottom Face at 3mm | | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 1.657 | 1.201 | 1.224 | 0.703 | 0.04 | Case 17 | | | | | | |
| | | Edge 1 at 15mm | | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 1.553 | 2.295 | 1.642 | 1.130 | | | 0.04 | Case 60 | 0.03 | Case 102 | | |
| | | Bottom Face at 0mm | 1.084 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.741 | 2.285 | 2.308 | 1.787 | 0.04 | Case 18 | 0.02 | Case 61 | 0.02 | Case 103 | 0.01 | Case 142 |
| | | Edge 1 at 0mm | 1.287 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.840 | 3.582 | 2.929 | 2.417 | 0.03 | Case 19 | 0.04 | Case 62 | 0.03 | Case 104 | 0.02 | Case 143 |
| | | Edge 2 at 0mm | 0.136 | | | | | | 0.136 | 0.136 | 0.136 | 0.136 | | | | | | | | |
| | LTE Band 13 | Bottom Face at 3mm | 1.243 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.900 | 2.444 | 2.467 | 1.946 | 0.04 | Case 20 | 0.02 | Case 63 | 0.02 | Case 105 | 0.02 | Case 144 |
| | | Edge 1 at 15mm | 0.243 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 1.796 | 2.538 | 1.885 | 1.373 | 0.03 | Case 21 | 0.04 | Case 64 | 0.03 | Case 106 | | |
| | | Bottom Face at 0mm | 0.945 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.602 | 2.146 | 2.169 | 1.648 | 0.04 | Case 22 | 0.02 | Case 65 | 0.02 | Case 107 | 0.01 | Case 145 |
| | | Edge 1 at 0mm | 1.127 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.680 | 3.422 | 2.769 | 2.257 | 0.03 | Case 23 | 0.04 | Case 66 | 0.03 | Case 108 | 0.02 | Case 146 |
| | | Edge 2 at 0mm | 0.136 | | | | | | 0.136 | 0.136 | 0.136 | 0.136 | | | | | | | | |




| WWAN Band | Exposure Position | 1 | 2 | 3 | 4 | 5 | 6 | 1+2+3 | 1+4+5 | 1+2+5 | 1+5+6 | 1+2+3 | 1+2+3 | 1+4+5 | 1+4+5 | 1+2+5 | 1+2+5 | 1+5+6 | 1+5+6 | |
|-------------|--------------------|--------------------|-------------------|-------------------|-----------------|-----------------|-----------------|----------------------|----------------------|----------------------|----------------------|-------|---------|---------|---------|---------|----------|----------|----------|----------|
| | | WWAN | 2.4GHz WLAN Ant 1 | 2.4GHz WLAN Ant 2 | 5GHz WLAN Ant 1 | 5GHz WLAN Ant 2 | Bluetooth Ant 1 | Summed 1g SAR (W/kg) | Summed 1g SAR (W/kg) | Summed 1g SAR (W/kg) | Summed 1g SAR (W/kg) | SPLSR | Case No | SPLSR | Case No | SPLSR | Case No | SPLSR | Case No | |
| | | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | | | | | | | | | | | | | |
| LTE | LTE Band 14 | Bottom Face at 3mm | 1.367 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 3.024 | 2.568 | 2.591 | 2.070 | 0.04 | Case 24 | 0.03 | Case 67 | 0.02 | Case 109 | 0.02 | Case 147 |
| | | Edge 1 at 15mm | 0.291 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 1.844 | 2.586 | 1.933 | 1.421 | 0.03 | Case 25 | 0.04 | Case 68 | 0.03 | Case 110 | | |
| | | Bottom Face at 0mm | 0.914 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.571 | 2.115 | 2.138 | 1.617 | 0.04 | Case 26 | 0.02 | Case 69 | 0.02 | Case 111 | 0.01 | Case 148 |
| | | Edge 1 at 0mm | 1.105 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.658 | 3.400 | 2.747 | 2.235 | 0.03 | Case 27 | 0.04 | Case 70 | 0.03 | Case 112 | 0.02 | Case 149 |
| | | Edge 2 at 0mm | 0.140 | | | | | | 0.140 | 0.140 | 0.140 | 0.140 | | | | | | | | |
| | LTE Band 25 | Bottom Face at 3mm | 1.361 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 3.018 | 2.562 | 2.585 | 2.064 | 0.04 | Case 28 | 0.02 | Case 71 | 0.02 | Case 113 | 0.01 | Case 150 |
| | | Edge 1 at 15mm | 0.947 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.500 | 3.242 | 2.589 | 2.077 | 0.03 | Case 29 | 0.04 | Case 72 | 0.03 | Case 114 | 0.02 | Case 151 |
| | | Bottom Face at 0mm | 0.797 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.454 | 1.998 | 2.021 | 1.500 | 0.04 | Case 30 | 0.02 | Case 73 | 0.02 | Case 115 | | |
| | | Edge 1 at 0mm | 1.197 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.750 | 3.492 | 2.839 | 2.327 | 0.03 | Case 31 | 0.04 | Case 74 | 0.03 | Case 116 | 0.02 | Case 152 |
| | | Edge 2 at 0mm | 0.043 | | | | | | 0.043 | 0.043 | 0.043 | 0.043 | | | | | | | | |
| | LTE Band 26 | Bottom Face at 3mm | 1.237 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.894 | 2.438 | 2.461 | 1.940 | 0.04 | Case 32 | 0.02 | Case 75 | 0.02 | Case 117 | 0.02 | Case 153 |
| | | Edge 1 at 15mm | 0.325 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 1.878 | 2.620 | 1.967 | 1.455 | 0.03 | Case 33 | 0.04 | Case 76 | 0.03 | Case 118 | | |
| | | Bottom Face at 0mm | 0.889 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.546 | 2.090 | 2.113 | 1.592 | 0.04 | Case 34 | 0.02 | Case 77 | 0.02 | Case 119 | | |
| | | Edge 1 at 0mm | 1.079 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.632 | 3.374 | 2.721 | 2.209 | 0.03 | Case 35 | 0.04 | Case 78 | 0.03 | Case 120 | 0.02 | Case 154 |
| | | Edge 2 at 0mm | 0.107 | | | | | | 0.107 | 0.107 | 0.107 | 0.107 | | | | | | | | |
| | LTE Band 41 | Bottom Face at 3mm | 1.218 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.875 | 2.419 | 2.442 | 1.921 | 0.04 | Case 36 | 0.02 | Case 79 | 0.02 | Case 121 | 0.01 | Case 155 |
| | | Edge 1 at 15mm | 0.941 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.494 | 3.236 | 2.583 | 2.071 | 0.03 | Case 37 | 0.04 | Case 80 | 0.03 | Case 122 | 0.02 | Case 156 |
| | | Bottom Face at 0mm | 0.383 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.040 | 1.584 | 1.607 | 1.086 | 0.04 | Case 38 | | | 0.02 | Case 123 | | |
| | | Edge 1 at 0mm | 1.157 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.710 | 3.452 | 2.799 | 2.287 | 0.03 | Case 39 | 0.04 | Case 81 | 0.03 | Case 124 | 0.02 | Case 157 |
| | | Edge 2 at 0mm | 0.331 | | | | | | 0.331 | 0.331 | 0.331 | 0.331 | | | | | | | | |
| LTE Band 66 | Bottom Face at 3mm | 1.388 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 3.045 | 2.589 | 2.612 | 2.091 | 0.04 | Case 40 | 0.02 | Case 82 | 0.02 | Case 125 | 0.02 | Case 158 | |
| | Edge 1 at 15mm | 0.778 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.331 | 3.073 | 2.420 | 1.908 | 0.03 | Case 41 | 0.04 | Case 83 | 0.03 | Case 126 | 0.02 | Case 159 | |
| | Bottom Face at 0mm | 0.592 | 0.528 | 1.129 | 0.505 | 0.696 | 0.007 | 2.249 | 1.793 | 1.816 | 1.295 | 0.04 | Case 42 | 0.02 | Case 84 | 0.02 | Case 127 | | | |
| | Edge 1 at 0mm | 1.198 | 0.524 | 1.029 | 1.177 | 1.118 | 0.012 | 2.751 | 3.493 | 2.840 | 2.328 | 0.03 | Case 43 | 0.04 | Case 85 | 0.03 | Case 128 | 0.02 | Case 160 | |
| | Edge 2 at 0mm | 0.069 | | | | | | 0.069 | 0.069 | 0.069 | 0.069 | | | | | | | | | |

15.2 SPLSR Evaluation and Analysis

General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
2. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

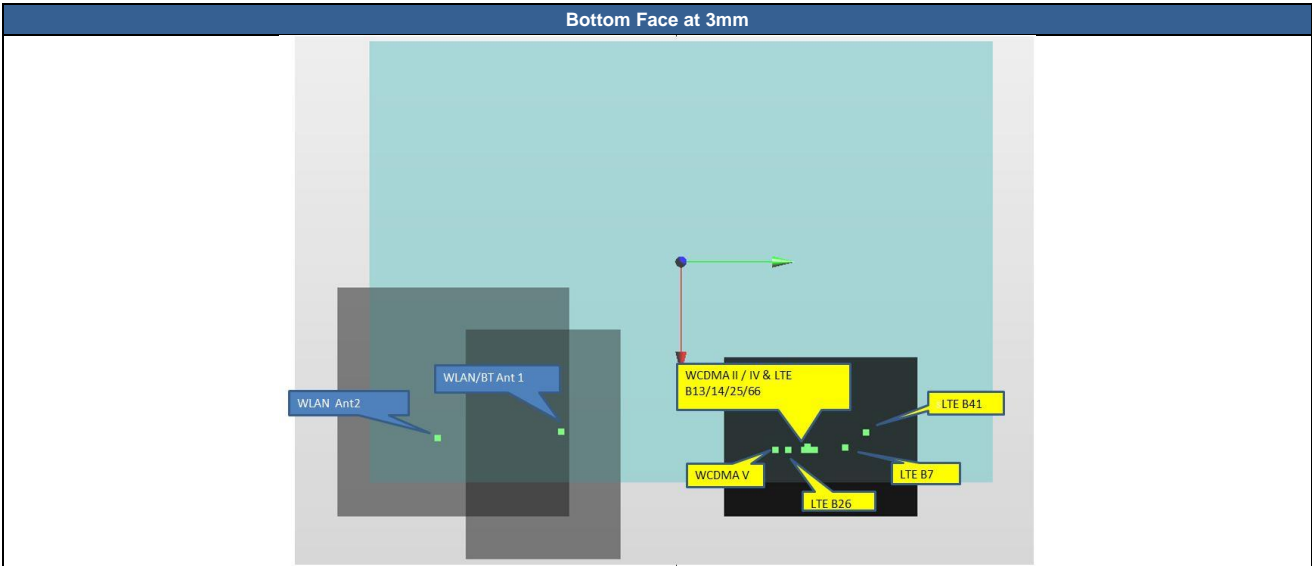

| | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|--------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 1 | WCDMA II | Bottom Face | 1.442 | 3mm | 90.2 | 62.2 | -1.39 | 116.2 | 1.97 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| | WCDMA II | Bottom Face | 1.442 | 3mm | 90.2 | 62.2 | -1.39 | 175.6 | 2.57 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 2 | Bottom Face | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | WLAN2.4GHz_Ant 2 | Bottom Face | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 5 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA IV | WLAN2.4GHz_Ant 1 | Bottom Face | 1.447 | 3mm | 91.7 | 63.3 | -1.33 | 117.4 | 1.98 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| WCDMA IV | WLAN2.4GHz_Ant 2 | Bottom Face | 1.447 | 3mm | 91.7 | 63.3 | -1.33 | 176.8 | 2.58 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 9 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA V | WLAN2.4GHz_Ant 1 | Bottom Face | 1.445 | 3mm | 90.1 | 47.2 | -1.7 | 101.2 | 1.97 | 0.03 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| WCDMA V | WLAN2.4GHz_Ant 2 | Bottom Face | 1.445 | 3mm | 90.1 | 47.2 | -1.7 | 160.6 | 2.57 | 0.03 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 13 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 7 | WLAN2.4GHz_Ant 1 | Bottom Face | 1.371 | 3mm | 85.6 | 80.4 | -1.07 | 134.1 | 1.90 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 7 | WLAN2.4GHz_Ant 2 | Bottom Face | 1.371 | 3mm | 85.6 | 80.4 | -1.07 | 193.7 | 2.50 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 20 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 13 | WLAN2.4GHz_Ant 1 | Bottom Face | 1.243 | 3mm | 88.5 | 59 | -1.75 | 148.9 | 1.77 | 0.02 | Not required |
| | | | 0.528 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| LTE Band 13 | WLAN2.4GHz_Ant 2 | Bottom Face | 1.243 | 3mm | 88.5 | 59 | -1.75 | 199.2 | 2.37 | 0.02 | Not required |
| | | | 1.129 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case 24 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 14 | WLAN2.4GHz_Ant 1 | Bottom Face | 1.367 | 3mm | 88.5 | 59.1 | -1.75 | 113.0 | 1.90 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 14 | WLAN2.4GHz_Ant 2 | Bottom Face | 1.367 | 3mm | 88.5 | 59.1 | -1.75 | 172.5 | 2.50 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 25 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 14 | WLAN2.4GHz_Ant 1 | Edge 1 | 0.291 | 15mm | 0 | 64.4 | -3.29 | 129.1 | 0.82 | 0.01 | Not required |
| | | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| LTE Band 14 | WLAN2.4GHz_Ant 2 | Edge 1 | 0.291 | 15mm | 0 | 64.4 | -3.29 | 186.1 | 1.32 | 0.01 | Not required |
| | | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required |
| | | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case 26 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 14 | WLAN2.4GHz_Ant 1 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | 107.1 | 1.44 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 14 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | 166.4 | 2.04 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 28 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 25 | WLAN2.4GHz_Ant 1 | Bottom Face | 1.361 | 3mm | 88.5 | 60.6 | -1.41 | 114.4 | 1.89 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 25 | WLAN2.4GHz_Ant 2 | Bottom Face | 1.361 | 3mm | -3 | 65.6 | -2.63 | 197.9 | 2.49 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 29 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 25 | WLAN2.4GHz_Ant 1 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 130.5 | 1.47 | 0.01 | Not required |
| | | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| LTE Band 25 | WLAN2.4GHz_Ant 2 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 187.4 | 1.98 | 0.01 | Not required |
| | | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required |
| | | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case 32 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 26 | WLAN2.4GHz_Ant 1 | Bottom Face | 1.237 | 3mm | 90.1 | 54.8 | -1.94 | 108.8 | 1.77 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 26 | WLAN2.4GHz_Ant 2 | Bottom Face | 1.237 | 3mm | 90.1 | 54.8 | -1.94 | 168.2 | 2.37 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 33 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 26 | WLAN2.4GHz_Ant 1 | Edge 1 | 0.325 | 15mm | 1.4 | 64 | -3.3 | 128.7 | 0.85 | 0.01 | Not required |
| | | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| LTE Band 26 | WLAN2.4GHz_Ant 2 | Edge 1 | 0.325 | 15mm | 1.4 | 64 | -3.3 | 185.7 | 1.35 | 0.01 | Not required |
| | | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required |
| | | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case 36 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 41 | WLAN2.4GHz_Ant 1 | Bottom Face | 1.218 | 3mm | 80.4 | 86 | -1.13 | 139.6 | 1.75 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 41 | WLAN2.4GHz_Ant 2 | Bottom Face | 1.218 | 3mm | 80.4 | 86 | -1.13 | 199.2 | 2.35 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 40 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 66 | WLAN2.4GHz_Ant 1 | Bottom Face | 1.388 | 3mm | 88.5 | 62.1 | -1.42 | 115.9 | 1.92 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 66 | WLAN2.4GHz_Ant 2 | Bottom Face | 1.388 | 3mm | 88.5 | 62.1 | -1.42 | 175.4 | 2.52 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 44 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA II | WLAN5GHz_Ant 1 | Bottom Face | 1.442 | 3mm | 90.2 | 62.2 | -1.39 | 105.7 | 1.95 | 0.03 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| WCDMA II | WLAN5GHz_Ant 2 | Bottom Face | 1.442 | 3mm | 90.2 | 62.2 | -1.39 | 180.3 | 2.14 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 48 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA IV | WLAN5GHz_Ant 1 | Bottom Face | 1.447 | 3mm | 91.7 | 63.3 | -1.33 | 107.1 | 1.95 | 0.03 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| WCDMA IV | WLAN5GHz_Ant 2 | Bottom Face | 1.447 | 3mm | 91.7 | 63.3 | -1.33 | 181.4 | 2.14 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 52 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA V | WLAN5GHz_Ant 1 | Bottom Face | 1.445 | 3mm | 90.1 | 47.2 | -1.7 | 90.9 | 1.95 | 0.03 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| WCDMA V | WLAN5GHz_Ant 2 | Bottom Face | 1.445 | 3mm | 90.1 | 47.2 | -1.7 | 165.3 | 2.14 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 56 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 7 | WLAN5GHz_Ant 1 | Bottom Face | 1.371 | 3mm | 85.6 | 80.4 | -1.07 | 123.3 | 1.88 | 0.02 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| LTE Band 7 | WLAN5GHz_Ant 2 | Bottom Face | 1.371 | 3mm | 85.6 | 80.4 | -1.07 | 198.7 | 2.07 | 0.01 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 63 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 13 | WLAN5GHz_Ant 1 | Bottom Face | 1.243 | 3mm | 88.5 | 59 | -1.75 | 102.4 | 1.75 | 0.02 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| LTE Band 13 | WLAN5GHz_Ant 2 | Bottom Face | 1.243 | 3mm | 88.5 | 59 | -1.75 | 177.2 | 1.94 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |



| Case 67 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 14 | WLAN5GHz_Ant 1 | Bottom Face | 1.367 | 3mm | 88.5 | 59.1 | -1.75 | 102.5 | 1.87 | 0.03 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| LTE Band 14 | WLAN5GHz_Ant 2 | Bottom Face | 1.367 | 3mm | 88.5 | 59.1 | -1.75 | 177.3 | 2.06 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 71 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 25 | WLAN5GHz_Ant 1 | Bottom Face | 1.361 | 3mm | 88.5 | 60.6 | -1.41 | 103.9 | 1.87 | 0.02 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| LTE Band 25 | WLAN5GHz_Ant 2 | Bottom Face | 1.361 | 3mm | -3 | 65.6 | -2.63 | 208.8 | 2.06 | 0.01 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 75 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 26 | WLAN5GHz_Ant 1 | Bottom Face | 1.237 | 3mm | 90.1 | 54.8 | -1.94 | 98.4 | 1.74 | 0.02 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| LTE Band 26 | WLAN5GHz_Ant 2 | Bottom Face | 1.237 | 3mm | 90.1 | 54.8 | -1.94 | 172.9 | 1.93 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 79 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 41 | WLAN5GHz_Ant 1 | Bottom Face | 1.218 | 3mm | 80.4 | 86 | -1.13 | 128.5 | 1.72 | 0.02 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| LTE Band 41 | WLAN5GHz_Ant 2 | Bottom Face | 1.218 | 3mm | 80.4 | 86 | -1.13 | 204.6 | 1.91 | 0.01 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 82 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 66 | WLAN5GHz_Ant 1 | Bottom Face | 1.388 | 3mm | 88.5 | 62.1 | -1.42 | 105.4 | 1.89 | 0.02 | Not required |
| | | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| LTE Band 66 | WLAN5GHz_Ant 2 | Bottom Face | 1.388 | 3mm | 88.5 | 62.1 | -1.42 | 180.3 | 2.08 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 86 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA II | WLAN2.4GHz_Ant 1 | Bottom Face | 1.442 | 3mm | 90.2 | 62.2 | -1.39 | 116.2 | 1.97 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| WCDMA II | WLAN5GHz_Ant 2 | Bottom Face | 1.442 | 3mm | 90.2 | 62.2 | -1.39 | 180.3 | 2.14 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN5GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required |
| | | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |



| Case 90 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA IV | Bottom Face | 1.447 | 3mm | 91.7 | 63.3 | -1.33 | 117.4 | 1.98 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| WCDMA IV | Bottom Face | 1.447 | 3mm | 91.7 | 63.3 | -1.33 | 181.4 | 2.14 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 94 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA V | Bottom Face | 1.445 | 3mm | 90.1 | 47.2 | -1.7 | 101.2 | 1.97 | 0.03 | Not required |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| WCDMA V | Bottom Face | 1.445 | 3mm | 90.1 | 47.2 | -1.7 | 165.3 | 2.14 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 98 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 7 | Bottom Face | 1.371 | 3mm | 85.6 | 80.4 | -1.07 | 134.1 | 1.90 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 7 | Bottom Face | 1.371 | 3mm | 85.6 | 80.4 | -1.07 | 198.7 | 2.07 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 105 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 13 | Bottom Face | 1.243 | 3mm | 88.5 | 59 | -1.75 | 112.9 | 1.77 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 13 | Bottom Face | 1.243 | 3mm | 88.5 | 59 | -1.75 | 177.2 | 1.94 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 109 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 14 | Bottom Face | 1.367 | 3mm | 88.5 | 59.1 | -1.75 | 113.0 | 1.90 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 14 | Bottom Face | 1.367 | 3mm | 88.5 | 59.1 | -1.75 | 177.3 | 2.06 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 113 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 25 | Bottom Face | 1.361 | 3mm | 88.5 | 60.6 | -1.41 | 114.4 | 1.89 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 25 | Bottom Face | 1.361 | 3mm | -3 | 65.6 | -2.63 | 208.8 | 2.06 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |



| Case 117 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 26 | Bottom Face | 1.237 | 3mm | 90.1 | 54.8 | -1.94 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 26 | Bottom Face | 1.237 | 3mm | 90.1 | 54.8 | -1.94 | 172.9 | 1.93 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 121 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 41 | Bottom Face | 1.218 | 3mm | 80.4 | 86 | -1.13 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 41 | Bottom Face | 1.218 | 3mm | 80.4 | 86 | -1.13 | 204.6 | 1.91 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 125 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 66 | Bottom Face | 1.388 | 3mm | 88.5 | 62.1 | -1.42 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 66 | Bottom Face | 1.388 | 3mm | 88.5 | 62.1 | -1.42 | 180.3 | 2.08 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 129 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA II | Bottom Face | 1.442 | 3mm | 90.2 | 62.2 | -1.39 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| WCDMA II | Bottom Face | 1.442 | 3mm | 90.2 | 62.2 | -1.39 | 180.3 | 2.14 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 133 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA IV | Bottom Face | 1.447 | 3mm | 91.7 | 63.3 | -1.33 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| WCDMA IV | Bottom Face | 1.447 | 3mm | 91.7 | 63.3 | -1.33 | 181.4 | 2.14 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 136 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA V | Bottom Face | 1.445 | 3mm | 90.1 | 47.2 | -1.7 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| WCDMA V | Bottom Face | 1.445 | 3mm | 90.1 | 47.2 | -1.7 | 165.3 | 2.14 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |



| Case 139 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 7 | Bottom Face | 1.371 | 3mm | 85.6 | 80.4 | -1.07 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 7 | Bottom Face | 1.371 | 3mm | 85.6 | 80.4 | -1.07 | 198.7 | 2.07 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 144 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 13 | Bottom Face | 1.243 | 3mm | 88.5 | 59 | -1.75 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 13 | Bottom Face | 1.243 | 3mm | 88.5 | 59 | -1.75 | 177.2 | 1.94 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |


| Case 147 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 14 | Bottom Face | 1.367 | 3mm | 88.5 | 59.1 | -1.75 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 14 | Bottom Face | 1.367 | 3mm | 88.5 | 59.1 | -1.75 | 177.3 | 2.06 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 150 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 25 | Bottom Face | 1.361 | 3mm | 88.5 | 60.6 | -1.41 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 25 | Bottom Face | 1.361 | 3mm | -3 | 65.6 | -2.63 | 208.8 | 2.06 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 153 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 26 | Bottom Face | 1.237 | 3mm | 90.1 | 54.8 | -1.94 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 26 | Bottom Face | 1.237 | 3mm | 90.1 | 54.8 | -1.94 | 172.9 | 1.93 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 155 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 41 | Bottom Face | 1.218 | 3mm | 80.4 | 86 | -1.13 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 41 | Bottom Face | 1.218 | 3mm | 80.4 | 86 | -1.13 | 204.6 | 1.91 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 158 | LTE Band 66 | Bottom Face | 1.388 | 3mm | 88.5 | 62.1 | -1.42 | 127.8 | 1.40 | 0.01 | Not required |
| | Bluetooth | | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | | | | |
| | LTE Band 66 | Bottom Face | 1.388 | 3mm | 88.5 | 62.1 | -1.42 | 180.3 | 2.08 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| | Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

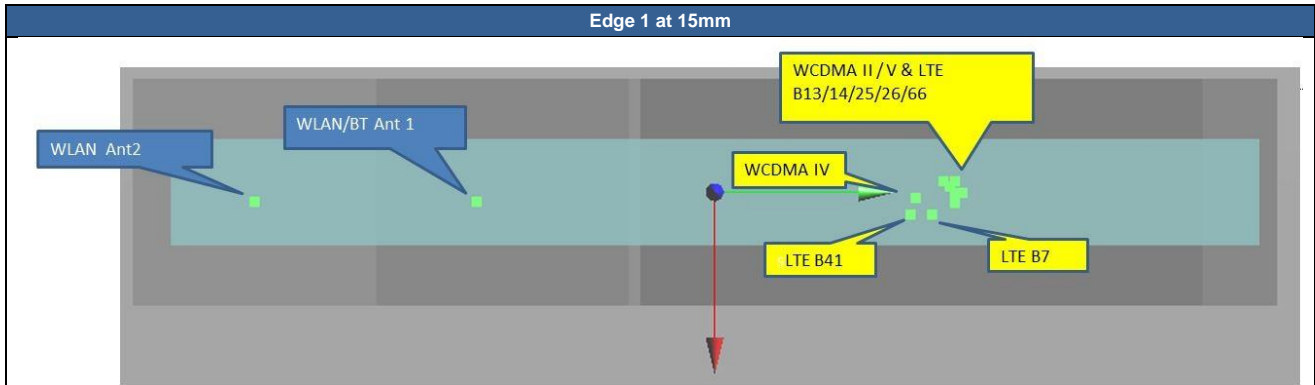

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 2 | WCDMA II | Edge 1 | 0.902 | 15mm | 0 | 65.6 | -2.63 | 130.3 | 1.43 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | WCDMA II | Edge 1 | 0.902 | 15mm | 0 | 65.6 | -2.63 | 187.3 | 1.93 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 6 | WCDMA IV | Edge 1 | 0.888 | 15mm | 1.5 | 58.3 | -2.69 | 123.0 | 1.41 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | WCDMA IV | Edge 1 | 0.888 | 15mm | 1.5 | 58.3 | -2.69 | 180.0 | 1.92 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 10 | WCDMA V | Edge 1 | 0.42 | 15mm | -1.5 | 60.9 | -2.92 | 125.7 | 0.94 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | WCDMA V | Edge 1 | 0.42 | 15mm | -1.5 | 60.9 | -2.92 | 182.6 | 1.45 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case 14 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 7 | Edge 1 | 0.985 | 15mm | 6 | 60 | -2.3 | 124.6 | 1.51 | 0.01 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 7 | Edge 1 | 0.985 | 15mm | 6 | 60 | -2.3 | 181.6 | 2.01 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 21 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 13 | Edge 1 | 0.243 | 15mm | 0 | 64.4 | -3.31 | 129.1 | 0.77 | 0.01 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 13 | Edge 1 | 0.243 | 15mm | 0 | 64.4 | -3.31 | 186.1 | 1.27 | 0.01 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 25 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 14 | Edge 1 | 0.291 | 15mm | 0 | 64.4 | -3.29 | 129.1 | 0.82 | 0.01 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 14 | Edge 1 | 0.291 | 15mm | 0 | 64.4 | -3.29 | 186.1 | 1.32 | 0.01 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 29 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 25 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 130.5 | 1.47 | 0.01 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 25 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 187.4 | 1.98 | 0.01 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 33 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 26 | Edge 1 | 0.325 | 15mm | 1.4 | 64 | -3.3 | 128.7 | 0.85 | 0.01 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 26 | Edge 1 | 0.325 | 15mm | 1.4 | 64 | -3.3 | 185.7 | 1.35 | 0.01 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 37 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 41 | Edge 1 | 0.941 | 15mm | 7 | 53 | -2.35 | 117.6 | 1.47 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 41 | Edge 1 | 0.941 | 15mm | 7 | 53 | -2.35 | 174.6 | 1.97 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 41 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 41 | LTE Band 66 | Edge 1 | 0.778 | 15mm | -3 | 59.4 | -2.69 | 124.3 | 1.30 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| Case 41 | LTE Band 66 | Edge 1 | 0.778 | 15mm | -3 | 59.4 | -2.69 | 181.2 | 1.81 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| Case 41 | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case 45 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 45 | WCDMA II | Edge 1 | 0.902 | 15mm | 0 | 65.6 | -2.63 | 111.9 | 2.08 | 0.03 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 45 | WCDMA II | Edge 1 | 0.902 | 15mm | 0 | 65.6 | -2.63 | 190.5 | 2.02 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 45 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 49 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 49 | WCDMA IV | Edge 1 | 0.888 | 15mm | 1.5 | 58.3 | -2.69 | 104.5 | 2.07 | 0.03 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 49 | WCDMA IV | Edge 1 | 0.888 | 15mm | 1.5 | 58.3 | -2.69 | 183.2 | 2.01 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 49 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 53 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 53 | WCDMA V | Edge 1 | 0.42 | 15mm | -1.5 | 60.9 | -2.92 | 107.4 | 1.60 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 53 | WCDMA V | Edge 1 | 0.42 | 15mm | -1.5 | 60.9 | -2.92 | 185.9 | 1.54 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 53 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 57 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 57 | LTE Band 7 | Edge 1 | 0.985 | 15mm | 6 | 60 | -2.3 | 106.0 | 2.16 | 0.03 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 57 | LTE Band 7 | Edge 1 | 0.985 | 15mm | 6 | 60 | -2.3 | 184.9 | 2.10 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 57 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 64 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 64 | LTE Band 13 | Edge 1 | 0.243 | 15mm | 0 | 64.4 | -3.31 | 110.7 | 1.42 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 64 | LTE Band 13 | Edge 1 | 0.243 | 15mm | 0 | 64.4 | -3.31 | 189.4 | 1.36 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 64 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 68 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 68 | LTE Band 14 | Edge 1 | 0.291 | 15mm | 0 | 64.4 | -3.29 | 110.7 | 1.47 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 68 | LTE Band 14 | Edge 1 | 0.291 | 15mm | 0 | 64.4 | -3.29 | 189.4 | 1.41 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 68 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 72 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 72 | LTE Band 25 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 112.2 | 2.12 | 0.03 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 72 | LTE Band 25 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 190.6 | 2.07 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 72 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 76 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 76 | LTE Band 26 | Edge 1 | 0.325 | 15mm | 1.4 | 64 | -3.3 | 110.2 | 1.50 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 76 | LTE Band 26 | Edge 1 | 0.325 | 15mm | 1.4 | 64 | -3.3 | 188.9 | 1.44 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 76 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 80 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 80 | LTE Band 41 | Edge 1 | 0.941 | 15mm | 7 | 53 | -2.35 | 99.0 | 2.12 | 0.03 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 80 | LTE Band 41 | Edge 1 | 0.941 | 15mm | 7 | 53 | -2.35 | 178.0 | 2.06 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 80 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 83 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 83 | LTE Band 66 | Edge 1 | 0.778 | 15mm | -3 | 59.4 | -2.69 | 106.0 | 1.96 | 0.03 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| Case 83 | LTE Band 66 | Edge 1 | 0.778 | 15mm | -3 | 59.4 | -2.69 | 184.4 | 1.90 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 83 | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 87 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 87 | WCDMA II | Edge 1 | 0.902 | 15mm | 0 | 65.6 | -2.63 | 130.3 | 1.43 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| Case 87 | WCDMA II | Edge 1 | 0.902 | 15mm | 0 | 65.6 | -2.63 | 190.5 | 2.02 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| Case 87 | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |



| Case 91 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------------------------|--------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA IV WLAN2.4GHz_Ant 1 | Edge 1 | 0.888 | 15mm | 1.5 | 58.3 | -2.69 | 123.0 | 1.41 | 0.01 | Not required | |
| | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| WCDMA IV WLAN5GHz_Ant 2 | Edge 1 | 0.888 | 15mm | 1.5 | 58.3 | -2.69 | 183.2 | 2.01 | 0.02 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN2.4GHz_Ant 1 WLAN5GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 95 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------------------------|--------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA V WLAN2.4GHz_Ant 1 | Edge 1 | 0.42 | 15mm | -1.5 | 60.9 | -2.92 | 125.7 | 0.94 | 0.01 | Not required | |
| | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| WCDMA V WLAN5GHz_Ant 2 | Edge 1 | 0.42 | 15mm | -1.5 | 60.9 | -2.92 | 185.9 | 1.54 | 0.01 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN2.4GHz_Ant 1 WLAN5GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 99 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------------------------|--------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 7 WLAN2.4GHz_Ant 1 | Edge 1 | 0.985 | 15mm | 6 | 60 | -2.3 | 124.6 | 1.51 | 0.01 | Not required | |
| | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 7 WLAN5GHz_Ant 2 | Edge 1 | 0.985 | 15mm | 6 | 60 | -2.3 | 184.9 | 2.10 | 0.02 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN2.4GHz_Ant 1 WLAN5GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 106 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------------------------|--------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 13 WLAN2.4GHz_Ant 1 | Edge 1 | 0.243 | 15mm | 0 | 64.4 | -3.31 | 129.1 | 0.77 | 0.01 | Not required | |
| | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 13 WLAN5GHz_Ant 2 | Edge 1 | 0.243 | 15mm | 0 | 64.4 | -3.31 | 189.4 | 1.36 | 0.01 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN2.4GHz_Ant 1 WLAN5GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 110 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------------------------|--------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 14 WLAN2.4GHz_Ant 1 | Edge 1 | 0.291 | 15mm | 0 | 64.4 | -3.29 | 129.1 | 0.82 | 0.01 | Not required | |
| | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 14 WLAN5GHz_Ant 2 | Edge 1 | 0.291 | 15mm | 0 | 64.4 | -3.29 | 189.4 | 1.41 | 0.01 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN2.4GHz_Ant 1 WLAN5GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 114 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------------------------|--------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 25 WLAN2.4GHz_Ant 1 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 130.5 | 1.47 | 0.01 | Not required | |
| | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 25 WLAN5GHz_Ant 2 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 190.6 | 2.07 | 0.02 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN2.4GHz_Ant 1 WLAN5GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required | |
| | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |



| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 118 | LTE Band 26 | Edge 1 | 0.325 | 15mm | 1.4 | 64 | -3.3 | 128.7 | 0.85 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 26 | Edge 1 | 0.325 | 15mm | 1.4 | 64 | -3.3 | 188.9 | 1.44 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 122 | LTE Band 41 | Edge 1 | 0.941 | 15mm | 7 | 53 | -2.35 | 117.6 | 1.47 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 41 | Edge 1 | 0.941 | 15mm | 7 | 53 | -2.35 | 178.0 | 2.06 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 126 | LTE Band 66 | Edge 1 | 0.778 | 15mm | -3 | 59.4 | -2.69 | 124.3 | 1.30 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 66 | Edge 1 | 0.778 | 15mm | -3 | 59.4 | -2.69 | 184.4 | 1.90 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 130 | WCDMA II | Edge 1 | 0.902 | 15mm | 0 | 65.6 | -2.63 | 126.5 | 0.91 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | WCDMA II | Edge 1 | 0.902 | 15mm | 0 | 65.6 | -2.63 | 190.5 | 2.02 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 134 | WCDMA IV | Edge 1 | 0.888 | 15mm | 1.5 | 58.3 | -2.69 | 119.1 | 0.90 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | WCDMA IV | Edge 1 | 0.888 | 15mm | 1.5 | 58.3 | -2.69 | 183.2 | 2.01 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |


| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 140 | LTE Band 7 | Edge 1 | 0.985 | 15mm | 6 | 60 | -2.3 | 120.7 | 1.00 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 7 | Edge 1 | 0.985 | 15mm | 6 | 60 | -2.3 | 184.9 | 2.10 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |



| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 151 | LTE Band 25 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 126.6 | 0.96 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 25 | Edge 1 | 0.947 | 15mm | -3 | 65.6 | -2.63 | 190.6 | 2.07 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 156 | LTE Band 41 | Edge 1 | 0.941 | 15mm | 7 | 53 | -2.35 | 113.7 | 0.95 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 41 | Edge 1 | 0.941 | 15mm | 7 | 53 | -2.35 | 178.0 | 2.06 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 159 | LTE Band 66 | Edge 1 | 0.778 | 15mm | -3 | 59.4 | -2.69 | 120.5 | 0.79 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 66 | Edge 1 | 0.778 | 15mm | -3 | 59.4 | -2.69 | 184.4 | 1.90 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

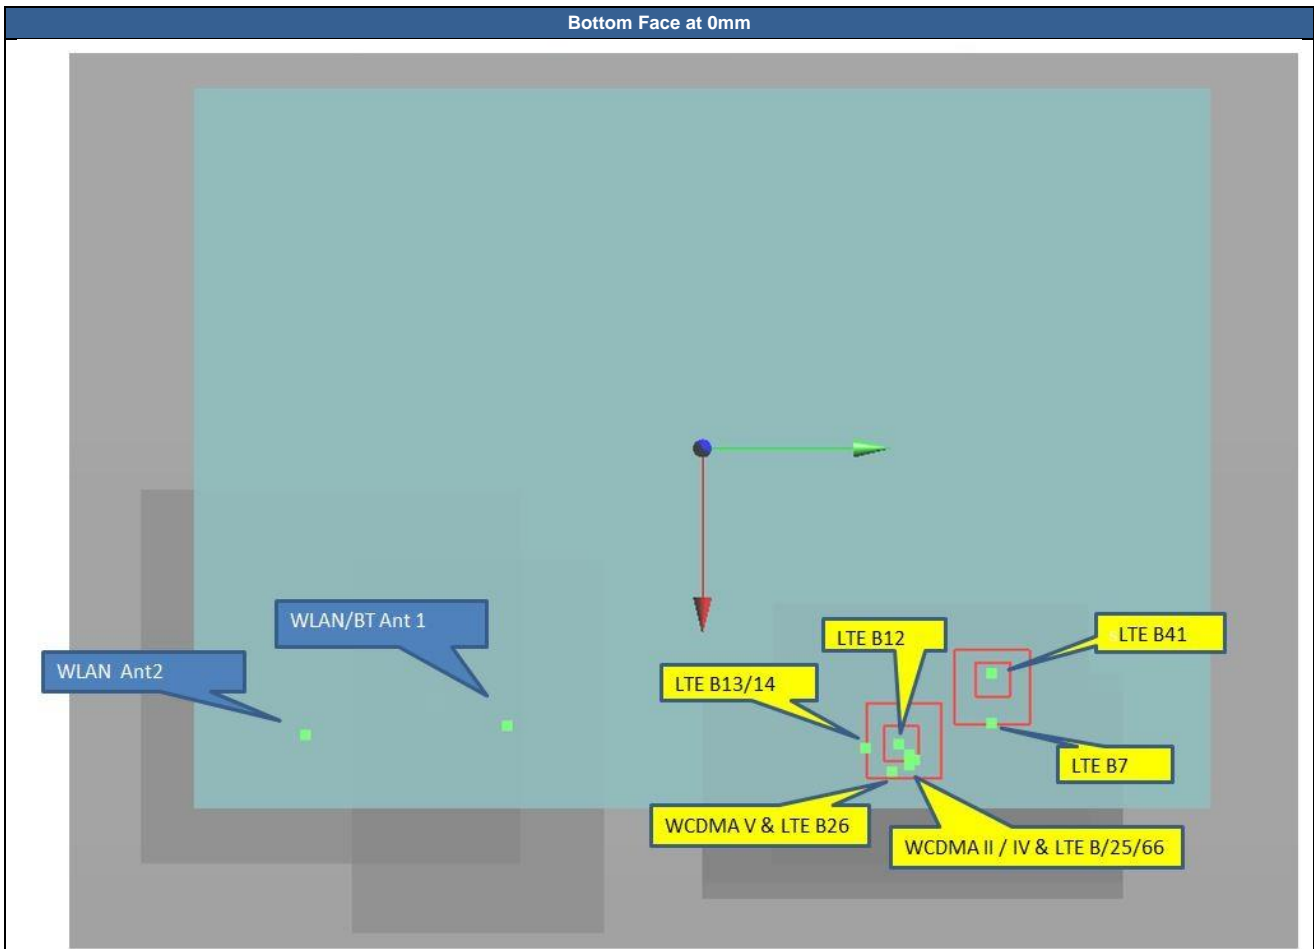

| Case 3 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|--------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 3 | WCDMA II | Bottom Face | 0.997 | 0mm | 90.1 | 63.8 | 1.68 | 117.8 | 1.53 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| | WCDMA II | Bottom Face | 0.997 | 0mm | 90.1 | 63.8 | 1.68 | 177.2 | 2.13 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 2 | Bottom Face | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | WLAN2.4GHz_Ant 2 | Bottom Face | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 7 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|--------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 7 | WCDMA IV | Bottom Face | 0.623 | 0mm | 91.6 | 65.3 | 1.66 | 119.4 | 1.15 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| | WCDMA IV | Bottom Face | 0.623 | 0mm | 91.6 | 65.3 | 1.66 | 178.8 | 1.75 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 2 | Bottom Face | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | WLAN2.4GHz_Ant 2 | Bottom Face | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |



| Case 11 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA V | WLAN2.4GHz_Ant 1 | Bottom Face | 0.972 | 0mm | 93.5 | 57.2 | 0.99 | 111.5 | 1.50 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| WCDMA V | WLAN2.4GHz_Ant 2 | Bottom Face | 0.972 | 0mm | 93.5 | 57.2 | 0.99 | 170.8 | 2.10 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 15 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 7 | WLAN2.4GHz_Ant 1 | Bottom Face | 0.593 | 0mm | 85.6 | 80.4 | -1.07 | 134.1 | 1.12 | 0.01 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 7 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.593 | 0mm | 85.6 | 80.4 | -1.07 | 193.7 | 1.72 | 0.01 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 17 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 18 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 12 | WLAN2.4GHz_Ant 1 | Bottom Face | 1.084 | 0mm | 85.5 | 56 | 0.17 | 109.7 | 1.61 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 12 | WLAN2.4GHz_Ant 2 | Bottom Face | 1.084 | 0mm | 85.5 | 56 | 0.17 | 169.2 | 2.21 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 22 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 13 | WLAN2.4GHz_Ant 1 | Bottom Face | 0.945 | 0mm | 91.3 | 51.3 | 3.28 | 105.5 | 1.47 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 13 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.945 | 0mm | 91.3 | 51.3 | 3.28 | 164.8 | 2.07 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 26 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 14 | WLAN2.4GHz_Ant 1 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | 107.1 | 1.44 | 0.02 | Not required |
| | | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| LTE Band 14 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | 166.4 | 2.04 | 0.02 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 30 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 30 | LTE Band 25 | Bottom Face | 0.797 | 0mm | 91.6 | 63.8 | 3.65 | 118.0 | 1.33 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| Case 30 | LTE Band 25 | Bottom Face | 0.797 | 0mm | 91.6 | 63.8 | 3.65 | 177.3 | 1.93 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| Case 30 | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 34 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 34 | LTE Band 26 | Bottom Face | 0.889 | 0mm | 91.9 | 52.4 | 3.24 | 106.6 | 1.42 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| Case 34 | LTE Band 26 | Bottom Face | 0.889 | 0mm | 91.9 | 52.4 | 3.24 | 165.9 | 2.02 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| Case 34 | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 38 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|------------------|-------------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 38 | LTE Band 41 | Bottom Face | 0.383 | 0mm | 80.4 | 86 | -1.13 | 139.6 | 0.91 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| Case 38 | LTE Band 41 | Bottom Face | 0.383 | 0mm | 80.4 | 86 | -1.13 | 199.2 | 1.51 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| Case 38 | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 42 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|------------------|-------------|------------|----------|------------------------|--------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 42 | LTE Band 66 | Bottom Face | 0.592 | 0mm | 93.1 | 65.4 | 2.61 | 119.7 | 1.12 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.528 | 0mm | 81 | -53.6 | -0.5 | | | | |
| Case 42 | LTE Band 66 | Bottom Face | 0.592 | 0mm | 93.1 | 65.4 | 2.61 | 179.0 | 1.72 | 0.01 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |
| Case 42 | WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 59.6 | 1.66 | 0.04 | Not required |
| | WLAN2.4GHz_Ant 2 | | 1.129 | 0mm | 81.8 | -113.2 | 1.35 | | | | |

| Case 46 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|-------------|------------|----------|------------------------|-------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 46 | WCDMA II | Bottom Face | 0.997 | 0mm | 90.1 | 63.8 | 1.68 | 107.3 | 1.50 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| Case 46 | WCDMA II | Bottom Face | 0.997 | 0mm | 90.1 | 63.8 | 1.68 | 181.9 | 1.69 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| Case 46 | WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 50 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|-------------|------------|----------|------------------------|-------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 50 | WCDMA IV | Bottom Face | 0.623 | 0mm | 91.6 | 65.3 | 1.66 | 109.0 | 1.13 | 0.01 | Not required |
| | WLAN5GHz_Ant 1 | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| Case 50 | WCDMA IV | Bottom Face | 0.623 | 0mm | 91.6 | 65.3 | 1.66 | 183.4 | 1.32 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| Case 50 | WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 54 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|-------------|------------|----------|------------------------|-------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 54 | WCDMA V | Bottom Face | 0.972 | 0mm | 93.5 | 57.2 | 0.99 | 101.3 | 1.48 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| Case 54 | WCDMA V | Bottom Face | 0.972 | 0mm | 93.5 | 57.2 | 0.99 | 175.2 | 1.67 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| Case 54 | WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 58 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 58 | LTE Band 7 | Bottom Face | 0.593 | 0mm | 85.6 | 80.4 | -1.07 | 123.3 | 1.10 | 0.01 | Not required |
| | WLAN5GHz_Ant 1 | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| Case 58 | LTE Band 7 | Bottom Face | 0.593 | 0mm | 85.6 | 80.4 | -1.07 | 198.7 | 1.29 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| Case 58 | WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 61 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|-------------|------------|----------|------------------------|-------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 61 | LTE Band 12 | Bottom Face | 1.084 | 0mm | 85.5 | 56 | 0.17 | 99.0 | 1.59 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| Case 61 | LTE Band 12 | Bottom Face | 1.084 | 0mm | 85.5 | 56 | 0.17 | 174.3 | 1.78 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| Case 61 | WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 65 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|-------------|------------|----------|------------------------|-------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 65 | LTE Band 13 | Bottom Face | 0.945 | 0mm | 91.3 | 51.3 | 3.28 | 95.2 | 1.45 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| Case 65 | LTE Band 13 | Bottom Face | 0.945 | 0mm | 91.3 | 51.3 | 3.28 | 169.4 | 1.64 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| Case 65 | WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 69 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|-------------|------------|----------|------------------------|-------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 69 | LTE Band 14 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | 96.8 | 1.42 | 0.02 | Not required |
| | WLAN5GHz_Ant 1 | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| Case 69 | LTE Band 14 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | 171.0 | 1.61 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| Case 69 | WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |

| Case 73 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|---------|----------------|-------------|------------|----------|------------------------|-------|------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| Case 73 | LTE Band 25 | Bottom Face | 0.797 | 0mm | 91.6 | 63.8 | 3.65 | 107.6 | 1.30 | 0.01 | Not required |
| | WLAN5GHz_Ant 1 | | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | | | | |
| Case 73 | LTE Band 25 | Bottom Face | 0.797 | 0mm | 91.6 | 63.8 | 3.65 | 181.9 | 1.49 | 0.01 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |
| Case 73 | WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | |



| Case 77 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 26 | Bottom Face | 0.889 | 0mm | 91.9 | 52.4 | 3.24 | | | | |
| WLAN5GHz_Ant 1 | 0.505 | | 0mm | 74.8 | -42.4 | 0.75 | | | | | |
| LTE Band 26 | Bottom Face | 0.889 | 0mm | 91.9 | 52.4 | 3.24 | 170.5 | 1.59 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 84 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 66 | Bottom Face | 0.592 | 0mm | 93.1 | 65.4 | 2.61 | | | | |
| WLAN5GHz_Ant 1 | 0.505 | | 0mm | 74.8 | -42.4 | 0.75 | | | | | |
| LTE Band 66 | Bottom Face | 0.592 | 0mm | 93.1 | 65.4 | 2.61 | 183.4 | 1.29 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN5GHz_Ant 1 | Bottom Face | 0.505 | 0mm | 74.8 | -42.4 | 0.75 | 78.6 | 1.20 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 88 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA II | Bottom Face | 0.997 | 0mm | 90.1 | 63.8 | 1.68 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| WCDMA II | Bottom Face | 0.997 | 0mm | 90.1 | 63.8 | 1.68 | 181.9 | 1.69 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 92 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA IV | Bottom Face | 0.623 | 0mm | 91.6 | 65.3 | 1.66 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| WCDMA IV | Bottom Face | 0.623 | 0mm | 91.6 | 65.3 | 1.66 | 183.4 | 1.32 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 96 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA V | Bottom Face | 0.972 | 0mm | 93.5 | 57.2 | 0.99 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| WCDMA V | Bottom Face | 0.972 | 0mm | 93.5 | 57.2 | 0.99 | 175.2 | 1.67 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 100 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 7 | Bottom Face | 0.593 | 0mm | 85.6 | 80.4 | -1.07 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 7 | Bottom Face | 0.593 | 0mm | 85.6 | 80.4 | -1.07 | 198.7 | 1.29 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |



| Case 103 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 12 | Bottom Face | 1.084 | 0mm | 85.5 | 56 | 0.17 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 12 | Bottom Face | 1.084 | 0mm | 85.5 | 56 | 0.17 | 174.3 | 1.78 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 107 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 13 | Bottom Face | 0.945 | 0mm | 91.3 | 51.3 | 3.28 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 13 | Bottom Face | 0.945 | 0mm | 91.3 | 51.3 | 3.28 | 169.4 | 1.64 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 111 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 14 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 14 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | 171.0 | 1.61 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 115 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 25 | Bottom Face | 0.797 | 0mm | 91.6 | 63.8 | 3.65 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 25 | Bottom Face | 0.797 | 0mm | 91.6 | 63.8 | 3.65 | 181.9 | 1.49 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 119 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 26 | Bottom Face | 0.889 | 0mm | 91.9 | 52.4 | 3.24 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 26 | Bottom Face | 0.889 | 0mm | 91.9 | 52.4 | 3.24 | 170.5 | 1.59 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 123 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 41 | Bottom Face | 0.383 | 0mm | 80.4 | 86 | -1.13 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 41 | Bottom Face | 0.383 | 0mm | 80.4 | 86 | -1.13 | 204.6 | 1.08 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |



| Case 127 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|-------------|------------|----------|------------------------|------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 66 | Bottom Face | 0.592 | 0mm | 93.1 | 65.4 | 2.61 | | | | |
| WLAN2.4GHz_Ant 1 | 0.528 | | 0mm | 81 | -53.6 | -0.5 | | | | | |
| LTE Band 66 | Bottom Face | 0.592 | 0mm | 93.1 | 65.4 | 2.61 | 183.4 | 1.29 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| WLAN2.4GHz_Ant 1 | Bottom Face | 0.528 | 0mm | 81 | -53.6 | -0.5 | 66.2 | 1.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |


| Case 131 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA II | Bottom Face | 0.997 | 0mm | 90.1 | 63.8 | 1.68 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| WCDMA II | Bottom Face | 0.997 | 0mm | 90.1 | 63.8 | 1.68 | 181.9 | 1.69 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 137 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | WCDMA V | Bottom Face | 0.972 | 0mm | 93.5 | 57.2 | 0.99 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| WCDMA V | Bottom Face | 0.972 | 0mm | 93.5 | 57.2 | 0.99 | 175.2 | 1.67 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 142 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 12 | Bottom Face | 1.084 | 0mm | 85.5 | 56 | 0.17 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 12 | Bottom Face | 1.084 | 0mm | 85.5 | 56 | 0.17 | 174.3 | 1.78 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 145 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 13 | Bottom Face | 0.945 | 0mm | 91.3 | 51.3 | 3.28 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 13 | Bottom Face | 0.945 | 0mm | 91.3 | 51.3 | 3.28 | 169.4 | 1.64 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

| Case 148 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|-------------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 14 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | | | | |
| Bluetooth | 0.007 | | 0mm | 81.2 | -65.5 | -0.38 | | | | | |
| LTE Band 14 | Bottom Face | 0.914 | 0mm | 91.3 | 52.9 | 3.28 | 171.0 | 1.61 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |
| Bluetooth | Bottom Face | 0.007 | 0mm | 81.2 | -65.5 | -0.38 | 54.7 | 0.70 | 0.01 | Not required | |
| WLAN5GHz_Ant 2 | | 0.696 | 0mm | 96.4 | -118 | 1.01 | | | | | |

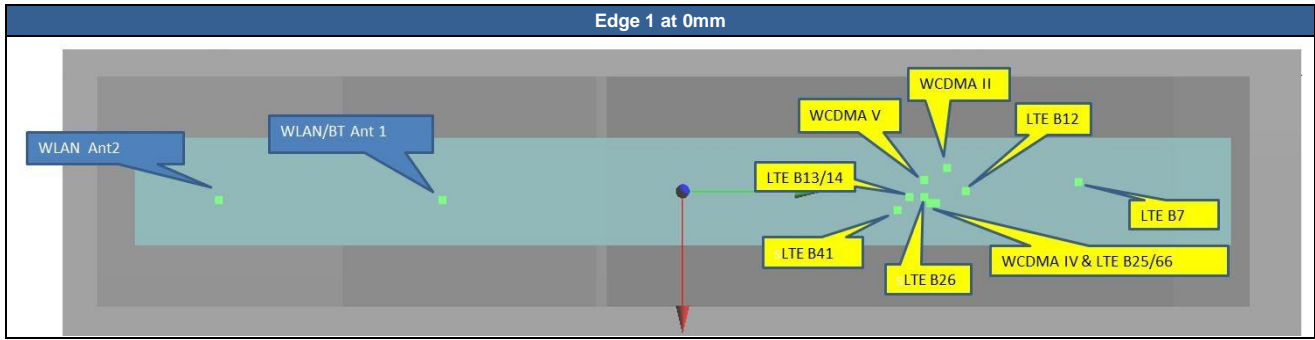

| Case 4 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|--------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | | | | | WCDMA II | Edge 1 | 1.195 | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| WCDMA II | Edge 1 | 1.195 | 0mm | -6 | 70 | -2.55 | 191.9 | 2.22 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | Edge 1 | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | Edge 1 | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 8 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|--------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | | | | | WCDMA IV | Edge 1 | 1.165 | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| WCDMA IV | Edge 1 | 1.165 | 0mm | 3 | 68.7 | -2.36 | 190.3 | 2.19 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | Edge 1 | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | Edge 1 | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 12 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|--------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | | | | | WCDMA V | Edge 1 | 1.197 | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| WCDMA V | Edge 1 | 1.197 | 0mm | -3 | 62.4 | -0.93 | 184.2 | 2.23 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | Edge 1 | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | Edge 1 | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 16 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|--------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | | | | | LTE Band 7 | Edge 1 | 1.127 | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 7 | Edge 1 | 1.127 | 0mm | 6 | 60 | -2.3 | 181.6 | 2.16 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | Edge 1 | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | Edge 1 | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |



| Case 19 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 12 | Edge 1 | 1.287 | 0mm | -1.6 | 70.2 | -1.16 | 135.0 | 1.81 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 12 | Edge 1 | 1.287 | 0mm | -1.6 | 70.2 | -1.16 | 191.9 | 2.32 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 23 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 13 | Edge 1 | 1.127 | 0mm | 1.5 | 64.8 | 5.12 | 129.6 | 1.65 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 13 | Edge 1 | 1.127 | 0mm | 1.5 | 64.8 | 5.12 | 186.5 | 2.16 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 27 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 14 | Edge 1 | 1.105 | 0mm | 1.5 | 64.8 | 5.12 | 129.6 | 1.63 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 14 | Edge 1 | 1.105 | 0mm | 1.5 | 64.8 | 5.12 | 186.5 | 2.13 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 31 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 25 | Edge 1 | 1.197 | 0mm | 3 | 68.6 | -2.3 | 133.2 | 1.72 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 25 | Edge 1 | 1.197 | 0mm | 3 | 68.6 | -2.3 | 190.2 | 2.23 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 35 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 26 | Edge 1 | 1.079 | 0mm | 1.5 | 62.4 | 5.16 | 127.2 | 1.60 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 26 | Edge 1 | 1.079 | 0mm | 1.5 | 62.4 | 5.16 | 184.1 | 2.11 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 39 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 41 | Edge 1 | 1.157 | 0mm | 7 | 53 | -2.35 | 117.6 | 1.68 | 0.02 | Not required |
| WLAN2.4GHz_Ant 1 | 0.524 | | 0mm | 5.4 | -64.6 | -0.56 | | | | | |
| LTE Band 41 | Edge 1 | 1.157 | 0mm | 7 | 53 | -2.35 | 174.6 | 2.19 | 0.02 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |
| WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required | |
| WLAN2.4GHz_Ant 2 | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | | |

| Case 43 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------------------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 66 | WLAN2.4GHz_Ant 1 | Edge 1 | 1.198 | 0mm | 3 | 68.7 | -2.06 | 133.3 | 1.72 | 0.02 | Not required |
| | | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| LTE Band 66 | WLAN2.4GHz_Ant 2 | Edge 1 | 1.198 | 0mm | 3 | 68.7 | -2.06 | 190.3 | 2.23 | 0.02 | Not required |
| | | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |
| WLAN2.4GHz_Ant 1 | WLAN2.4GHz_Ant 2 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 57.0 | 1.55 | 0.03 | Not required |
| | | | 1.029 | 0mm | 4.4 | -121.6 | 0.55 | | | | |

| Case 47 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA II | WLAN5GHz_Ant 1 | Edge 1 | 1.195 | 0mm | -6 | 70 | -2.55 | 116.9 | 2.37 | 0.03 | Not required |
| | | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| WCDMA II | WLAN5GHz_Ant 2 | Edge 1 | 1.195 | 0mm | -6 | 70 | -2.55 | 195.1 | 2.31 | 0.02 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 51 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA IV | WLAN5GHz_Ant 1 | Edge 1 | 1.165 | 0mm | 3 | 68.7 | -2.36 | 114.8 | 2.34 | 0.03 | Not required |
| | | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| WCDMA IV | WLAN5GHz_Ant 2 | Edge 1 | 1.165 | 0mm | 3 | 68.7 | -2.36 | 193.6 | 2.28 | 0.02 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 55 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WCDMA V | WLAN5GHz_Ant 1 | Edge 1 | 1.197 | 0mm | -3 | 62.4 | -0.93 | 109.0 | 2.37 | 0.03 | Not required |
| | | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| WCDMA V | WLAN5GHz_Ant 2 | Edge 1 | 1.197 | 0mm | -3 | 62.4 | -0.93 | 187.4 | 2.32 | 0.02 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 59 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| LTE Band 7 | WLAN5GHz_Ant 1 | Edge 1 | 1.127 | 0mm | 6 | 60 | -2.3 | 106.0 | 2.30 | 0.03 | Not required |
| | | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| LTE Band 7 | WLAN5GHz_Ant 2 | Edge 1 | 1.127 | 0mm | 6 | 60 | -2.3 | 184.9 | 2.25 | 0.02 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case 60 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| WLAN5GHz_Ant 1 | WLAN5GHz_Ant 2 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |



| Case 62 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 12 | Edge 1 | 1.287 | 0mm | -1.6 | 70.2 | -1.16 | 116.6 | 2.46 | 0.03 | Not required |
| WLAN5GHz_Ant 1 | 1.177 | | 0mm | 8.4 | -46 | -2.58 | | | | | |
| LTE Band 12 | Edge 1 | 1.287 | 0mm | -1.6 | 70.2 | -1.16 | 195.2 | 2.41 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 66 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 13 | Edge 1 | 1.127 | 0mm | 1.5 | 64.8 | 5.12 | 111.3 | 2.30 | 0.03 | Not required |
| WLAN5GHz_Ant 1 | 1.177 | | 0mm | 8.4 | -46 | -2.58 | | | | | |
| LTE Band 13 | Edge 1 | 1.127 | 0mm | 1.5 | 64.8 | 5.12 | 189.8 | 2.25 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 70 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 14 | Edge 1 | 1.105 | 0mm | 1.5 | 64.8 | 5.12 | 111.3 | 2.28 | 0.03 | Not required |
| WLAN5GHz_Ant 1 | 1.177 | | 0mm | 8.4 | -46 | -2.58 | | | | | |
| LTE Band 14 | Edge 1 | 1.105 | 0mm | 1.5 | 64.8 | 5.12 | 189.8 | 2.22 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 74 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 25 | Edge 1 | 1.197 | 0mm | 3 | 68.6 | -2.3 | 114.7 | 2.37 | 0.03 | Not required |
| WLAN5GHz_Ant 1 | 1.177 | | 0mm | 8.4 | -46 | -2.58 | | | | | |
| LTE Band 25 | Edge 1 | 1.197 | 0mm | 3 | 68.6 | -2.3 | 193.5 | 2.32 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 78 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 26 | Edge 1 | 1.079 | 0mm | 1.5 | 62.4 | 5.16 | 108.9 | 2.26 | 0.03 | Not required |
| WLAN5GHz_Ant 1 | 1.177 | | 0mm | 8.4 | -46 | -2.58 | | | | | |
| LTE Band 26 | Edge 1 | 1.079 | 0mm | 1.5 | 62.4 | 5.16 | 187.4 | 2.20 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |

| Case 81 | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|----------------|-------------|----------|------------|----------|------------------------|-------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| | LTE Band 41 | Edge 1 | 1.157 | 0mm | 7 | 53 | -2.35 | 99.0 | 2.33 | 0.04 | Not required |
| WLAN5GHz_Ant 1 | 1.177 | | 0mm | 8.4 | -46 | -2.58 | | | | | |
| LTE Band 41 | Edge 1 | 1.157 | 0mm | 7 | 53 | -2.35 | 178.0 | 2.28 | 0.02 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |
| WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required | |
| WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | | |



| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 85 | LTE Band 66 | Edge 1 | 1.198 | 0mm | 3 | 68.7 | -2.06 | 114.8 | 2.38 | 0.03 | Not required |
| | WLAN5GHz_Ant 1 | | 1.177 | 0mm | 8.4 | -46 | -2.58 | | | | |
| | LTE Band 66 | Edge 1 | 1.198 | 0mm | 3 | 68.7 | -2.06 | 193.6 | 2.32 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN5GHz_Ant 1 | Edge 1 | 1.177 | 0mm | 8.4 | -46 | -2.58 | 79.1 | 2.30 | 0.04 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 89 | WCDMA II | Edge 1 | 1.195 | 0mm | -6 | 70 | -2.55 | 135.1 | 1.72 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | WCDMA II | Edge 1 | 1.195 | 0mm | -6 | 70 | -2.55 | 195.1 | 2.31 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 93 | WCDMA IV | Edge 1 | 1.165 | 0mm | 3 | 68.7 | -2.36 | 133.3 | 1.69 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | WCDMA IV | Edge 1 | 1.165 | 0mm | 3 | 68.7 | -2.36 | 193.6 | 2.28 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 97 | WCDMA V | Edge 1 | 1.197 | 0mm | -3 | 62.4 | -0.93 | 127.3 | 1.72 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | WCDMA V | Edge 1 | 1.197 | 0mm | -3 | 62.4 | -0.93 | 187.4 | 2.32 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 101 | LTE Band 7 | Edge 1 | 1.127 | 0mm | 6 | 60 | -2.3 | 124.6 | 1.65 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 7 | Edge 1 | 1.127 | 0mm | 6 | 60 | -2.3 | 184.9 | 2.25 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 102 | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |



| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 104 | LTE Band 12 | Edge 1 | 1.287 | 0mm | -1.6 | 70.2 | -1.16 | 135.0 | 1.81 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 12 | Edge 1 | 1.287 | 0mm | -1.6 | 70.2 | -1.16 | 195.2 | 2.41 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 108 | LTE Band 13 | Edge 1 | 1.127 | 0mm | 1.5 | 64.8 | 5.12 | 129.6 | 1.65 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 13 | Edge 1 | 1.127 | 0mm | 1.5 | 64.8 | 5.12 | 189.8 | 2.25 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 112 | LTE Band 14 | Edge 1 | 1.105 | 0mm | 1.5 | 64.8 | 5.12 | 129.6 | 1.63 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 14 | Edge 1 | 1.105 | 0mm | 1.5 | 64.8 | 5.12 | 189.8 | 2.22 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 116 | LTE Band 25 | Edge 1 | 1.197 | 0mm | 3 | 68.6 | -2.3 | 133.2 | 1.72 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 25 | Edge 1 | 1.197 | 0mm | 3 | 68.6 | -2.3 | 193.5 | 2.32 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 120 | LTE Band 26 | Edge 1 | 1.079 | 0mm | 1.5 | 62.4 | 5.16 | 127.2 | 1.60 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 26 | Edge 1 | 1.079 | 0mm | 1.5 | 62.4 | 5.16 | 187.4 | 2.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 124 | LTE Band 41 | Edge 1 | 1.157 | 0mm | 7 | 53 | -2.35 | 117.6 | 1.68 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 41 | Edge 1 | 1.157 | 0mm | 7 | 53 | -2.35 | 178.0 | 2.28 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|------------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 128 | LTE Band 66 | Edge 1 | 1.198 | 0mm | 3 | 68.7 | -2.06 | 133.3 | 1.72 | 0.02 | Not required |
| | WLAN2.4GHz_Ant 1 | | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | | | | |
| | LTE Band 66 | Edge 1 | 1.198 | 0mm | 3 | 68.7 | -2.06 | 193.6 | 2.32 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | WLAN2.4GHz_Ant 1 | Edge 1 | 0.524 | 0mm | 5.4 | -64.6 | -0.56 | 60.3 | 1.64 | 0.03 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 132 | WCDMA II | Edge 1 | 1.195 | 0mm | -6 | 70 | -2.55 | 131.3 | 1.21 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | WCDMA II | Edge 1 | 1.195 | 0mm | -6 | 70 | -2.55 | 195.1 | 2.31 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 135 | WCDMA IV | Edge 1 | 1.165 | 0mm | 3 | 68.7 | -2.36 | 129.4 | 1.18 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | WCDMA IV | Edge 1 | 1.165 | 0mm | 3 | 68.7 | -2.36 | 193.6 | 2.28 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 138 | WCDMA V | Edge 1 | 1.197 | 0mm | -3 | 62.4 | -0.93 | 123.4 | 1.21 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | WCDMA V | Edge 1 | 1.197 | 0mm | -3 | 62.4 | -0.93 | 187.4 | 2.32 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 141 | LTE Band 7 | Edge 1 | 1.127 | 0mm | 6 | 60 | -2.3 | 120.7 | 1.14 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 7 | Edge 1 | 1.127 | 0mm | 6 | 60 | -2.3 | 184.9 | 2.25 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 143 | LTE Band 12 | Edge 1 | 1.287 | 0mm | -1.6 | 70.2 | -1.16 | 131.1 | 1.30 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 12 | Edge 1 | 1.287 | 0mm | -1.6 | 70.2 | -1.16 | 195.2 | 2.41 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |



| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 146 | LTE Band 13 | Edge 1 | 1.127 | 0mm | 1.5 | 64.8 | 5.12 | 125.7 | 1.14 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 13 | Edge 1 | 1.127 | 0mm | 1.5 | 64.8 | 5.12 | 189.8 | 2.25 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 149 | LTE Band 14 | Edge 1 | 1.105 | 0mm | 1.5 | 64.8 | 5.12 | 125.7 | 1.12 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 14 | Edge 1 | 1.105 | 0mm | 1.5 | 64.8 | 5.12 | 189.8 | 2.22 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 152 | LTE Band 25 | Edge 1 | 1.197 | 0mm | 3 | 68.6 | -2.3 | 129.3 | 1.21 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 25 | Edge 1 | 1.197 | 0mm | 3 | 68.6 | -2.3 | 193.5 | 2.32 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 154 | LTE Band 26 | Edge 1 | 1.079 | 0mm | 1.5 | 62.4 | 5.16 | 123.3 | 1.09 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 26 | Edge 1 | 1.079 | 0mm | 1.5 | 62.4 | 5.16 | 187.4 | 2.20 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 157 | LTE Band 41 | Edge 1 | 1.157 | 0mm | 7 | 53 | -2.35 | 113.7 | 1.17 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 41 | Edge 1 | 1.157 | 0mm | 7 | 53 | -2.35 | 178.0 | 2.28 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

| Case | Band | Position | SAR (W/kg) | Gap (mm) | SAR peak location (mm) | | | 3D distance (mm) | Summed SAR (W/kg) | SPLSR Results | Simultaneous SAR |
|------|----------------|----------|------------|----------|------------------------|--------|-------|------------------|-------------------|---------------|------------------|
| | | | | | X | Y | Z | | | | |
| 160 | LTE Band 66 | Edge 1 | 1.198 | 0mm | 3 | 68.7 | -2.06 | 129.4 | 1.21 | 0.01 | Not required |
| | Bluetooth | | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | | | | |
| | LTE Band 66 | Edge 1 | 1.198 | 0mm | 3 | 68.7 | -2.06 | 193.6 | 2.32 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |
| | Bluetooth | Edge 1 | 0.012 | 0mm | 6.2 | -60.7 | -1.11 | 64.3 | 1.13 | 0.02 | Not required |
| | WLAN5GHz_Ant 2 | | 1.118 | 0mm | 3.2 | -124.9 | 0.04 | | | | |

Test Engineer : Carter Jhuang Randy Lin Andy Chiang and Mood Huang



16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [8] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [9] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.