

## FCC Test Report (Part 24)

**Report No.:** RF170427C12-1

**FCC ID:** UZ7TC25AJ

**Test Model:** TC25AJ

**Received Date:** Apr. 27, 2017

**Test Date:** May 15 ~ Oct. 23, 2017

**Issued Date:** Oct. 24, 2017

**Applicant:** Zebra Technologies Corporation

**Address:** 1 Zebra Plaza Holtsville New York United States 11742

**Manufacturer:** Zebra Technologies Corporation

**Address:** 1 Zebra Plaza Holtsville New York United States 11742

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments.....	7
<b>3 General Information</b> .....	<b>8</b>
3.1 General Description of EUT.....	8
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units.....	11
3.3 Test Mode Applicability and Tested Channel Detail.....	12
3.4 EUT Operating Conditions.....	16
3.5 General Description of Applied Standards.....	16
<b>4 Test Types and Results</b> .....	<b>17</b>
4.1 Output Power Measurement.....	17
4.1.1 Limits of Output Power Measurement.....	17
4.1.2 Test Procedures.....	17
4.1.3 Test Setup.....	18
4.1.4 Test Results.....	19
4.2 Modulation Characteristics Measurement.....	31
4.2.1 Limits of Modulation Characteristics.....	31
4.2.2 Test Procedure.....	31
4.2.3 Test Setup.....	31
4.2.4 Test Results.....	32
4.3 Frequency Stability Measurement.....	35
4.3.1 Limits of Frequency Stability Measurement.....	35
4.3.2 Test Procedure.....	35
4.3.3 Test Setup.....	35
4.3.4 Test Results.....	36
4.4 Occupied Bandwidth Measurement.....	37
4.4.1 Test Procedure.....	37
4.4.2 Test Setup.....	37
4.4.3 Test Result.....	38
4.5 Band Edge Measurement.....	48
4.5.1 Limits of Band Edge Measurement.....	48
4.5.2 Test Setup.....	48
4.5.3 Test Procedures.....	48
4.5.4 Test Results.....	49
4.6 Peak to Average Ratio.....	57
4.6.1 Limits of Peak to Average Ratio Measurement.....	57
4.6.2 Test Setup.....	57
4.6.3 Test Procedures.....	57
4.6.4 Test Results.....	58
4.7 Conducted Spurious Emissions.....	63
4.7.1 Limits of Conducted Spurious Emissions Measurement.....	63
4.7.2 Test Setup.....	63
4.7.3 Test Procedure.....	63
4.7.4 Test Results.....	64
4.8 Radiated Emission Measurement.....	100
4.8.1 Limits of Radiated Emission Measurement.....	100
4.8.2 Test Procedure.....	100
4.8.3 Deviation from Test Standard.....	100
4.8.4 Test Setup.....	101
4.8.5 Test Results.....	102

<b>5</b>	<b>Pictures of Test Arrangements.....</b>	<b>143</b>
	<b>Appendix – Information on the Testing Laboratories .....</b>	<b>144</b>



### Release Control Record

Issue No.	Description	Date Issued
RF170427C12-1	Original release	Oct. 24, 2017

## 1 Certificate of Conformity

**Product:** Touch Computer

**Brand:** ZEBRA

**Test Model:** TC25AJ

**Sample Status:** Engineering sample

**Applicant:** Zebra Technologies Corporation

**Test Date:** May 15 ~ Oct. 23, 2017

**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

  
Polly Chien / Specialist

, Date:

Oct. 24, 2017

Approved by :

  
Dylan Chiou / Project Engineer

, Date:

Oct. 24, 2017

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective radiated power	Pass	Meet the requirement of limit.
2.1046 24.232(d)	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	PASS	Meet the requirement
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -17.9dB at 9400.00MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 24, 2016	Oct. 23, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Aug. 16, 2016	Aug. 15, 2017
			Aug. 18, 2017	Aug. 17, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Dec. 28, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Dec. 15, 2016	Dec. 14, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 14, 2016	Dec. 13, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2016	Aug. 10, 2017
			Aug. 10, 2017	Aug. 09, 2018
Preamplifier Agilent	8447D	2944A10738	Aug. 22, 2016	Aug. 21, 2017
			Aug. 21, 2017	Aug. 20, 2018
Preamplifier Agilent	8449B	3008A01922	Sep. 18, 2016	Sep. 17, 2017
			Sep. 15, 2017	Sep. 14, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Aug. 09, 2016	Aug. 08, 2017
			Aug. 08, 2017	Aug. 07, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Aug. 09, 2016	Aug. 08, 2017
			Aug. 08, 2017	Aug. 07, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 08, 2016	Jun. 07, 2017
			Jun. 07, 2017	Jun. 06, 2018
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
  5. The IC Site Registration No. is IC7450F-4.

### 3 General Information

#### 3.1 General Description of EUT

Product	Touch Computer	
Brand	ZEBRA	
Test Model	TC25AJ	
Sample Status	Engineering sample	
MFD	11JUL17	
HW Version	DV	
SW Version	90-06-05-N-00-E1	
Power Supply Rating	5Vdc (adapter or host equipment) 12 or 24Vdc (vehicle cigarette adaptor) 3.85Vdc (battery or power pack)	
Modulation Type	GSM, GPRS: GMSK EDGE: 8PSK WCDMA: BPSK, QPSK HSDPA: BPSK HSUPA: QPSK LTE: QPSK, 16QAM	
Operating Frequency	GPRS, EDGE	1850.2MHz ~ 1909.8MHz
	WCDMA Band 2	1852.4MHz ~ 1907.6MHz
	LTE Band 2 (Channel Bandwidth 1.4MHz)	1850.7MHz ~ 1909.3MHz
	LTE Band 2 (Channel Bandwidth 3MHz)	1851.5MHz ~ 1908.5MHz
	LTE Band 2 (Channel Bandwidth 5MHz)	1852.5MHz ~ 1907.5MHz
	LTE Band 2 (Channel Bandwidth 10MHz)	1855.0MHz ~ 1905.0MHz
	LTE Band 2 (Channel Bandwidth 15MHz)	1857.5MHz ~ 1902.5MHz
	LTE Band 2 (Channel Bandwidth 20MHz)	1860.0MHz ~ 1900.0MHz
Max. EIRP Power	GPRS	1264.736mW (31.02dBm)
	EDGE	456.037mW (26.59dBm)
	WCDMA Band 2	289.734mW (24.62dBm)
	LTE Band 2 (Channel Bandwidth 1.4MHz)	306.902mW (24.87dBm)
	LTE Band 2 (Channel Bandwidth 3MHz)	311.889mW (24.94dBm)
	LTE Band 2 (Channel Bandwidth 5MHz)	319.154mW (25.04dBm)
	LTE Band 2 (Channel Bandwidth 10MHz)	325.0874mW (25.12dBm)
	LTE Band 2 (Channel Bandwidth 15MHz)	328.095mW (25.16dBm)
LTE Band 2 (Channel Bandwidth 20MHz)	332.660mW (25.22dBm)	
Antenna Type	Refer to Note	
Antenna Connector	Refer to Note	
Accessory Device	Adapter, Gun Handle, Arm Mount, Holster , Vehicle Cigarette Adaptor, Power pack (Refer to note 3 for more details)	
Data Cable Supplied	1.5m shielded USB Type C to Type A cable without core (Refer to note 3 for more details)	



Note:

1. The EUT has two types for sale.

Brand	Model	Difference
ZEBRA	TC25AJ	Scanner SE4710 with camera
	TC25AJ	Scanner SE2100 without camera

2. The EUT consumes power from the following adapter, Vehicle Cigarette Adaptor, battery and power pack.

Adapter	
Brand	ZEBRA
Model	SAWA-65-20005A
Input Power	100-240Vac, 0.5A, 50-60Hz
Output Power	5Vdc, 2.5A

Vehicle Cigarette Adaptor	
Brand	ZEBRA
Model	SAWA-68-25005A
Input Power	12-24V(3.5A)
Output Power	5V(2.5A)

Battery	
Brand	ZEBRA
Model	BT-000334
Rate capacity	3000mAh
Min capacity	2800mAh
Rate Voltage	3.85Vdc

Power Pack	
Brand	ZEBRA
Model	BT-000343
Rate capacity	2900mAh
Min capacity	2800mAh
Rate Voltage	3.85Vdc

3. Accessory devices of EUT are list as below:


Specification of Accessory		
AC Adapter	Brand Name	ZEBRA
	Model Name	SAWA-65-20005A
USB Type C cable	Brand Name	ZEBRA
	P/N Number	CBL-MPM-USB1-01
Gun Handle	Brand Name	ZEBRA
	P/N Number	TRG-TC2X-SNP1-01
Arm Mount	Brand Name	ZEBRA
	P/N Number	SG-TC2X-ARMNT-01
Holster	Brand Name	ZEBRA
	P/N Number	SG-TC2X-HLSTR1-01
Vehicle Cigarette Adaptor	Brand Name	ZEBRA
	Model Name	SAWA-68-25005A
Power pack	Brand Name	ZEBRA
	Model Name	BT-000343

4. The EUT uses following antennas.

Type	Connector	Gain (dBi)		
		1850 MHz	1880 MHz	1910 MHz
PIFA	NA	0.5	0.78	1.25

### 3.2 Configuration of System under Test


Mode A, E

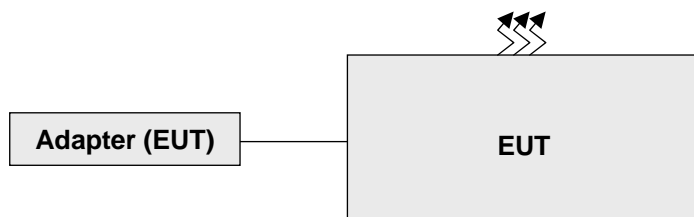

Remote site




Mode B

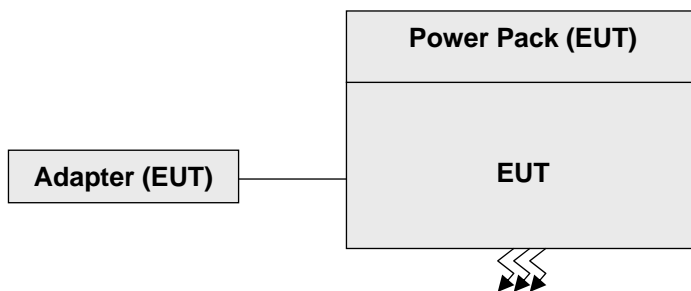

Remote site




Mode C

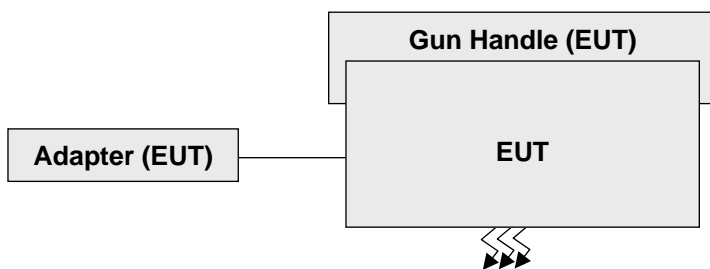

Remote site

Mode D

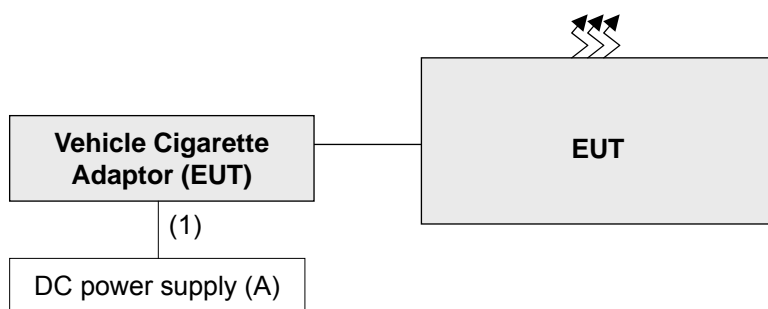

Remote site

**3.2.1 Description of Support Units**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Radio Communication Tester	R&S	CMU200	123112	NA	-
B.	DC power supply	Keysight	U8002A	MY56330015	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC cable	1	1.0	N	0	-

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane. Following channel(s) was (were) selected for the final test as listed below:

Test results are presented in the report as below.

Test Mode	Test Condition
A	Scanner SE4710, EUT+USB cable+adapter
B	Scanner SE4710, EUT+USB cable+adapter+power pack
C	Scanner SE4710, EUT+USB cable+adapter+Gun Handle
D	Scanner SE4710, EUT+USB cable+Vehicle Cigarette Adaptor
E	Scanner SE2100, EUT+USB cable+adapter

#### GPRS Mode

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
A	EIRP	512 to 810	512(1850.2MHz), 661(1880.0MHz), 810(1909.8MHz)	GPRS, EDGE
A	Modulation characteristics	512 to 810	661(1880.0MHz),	GSM, GPRS, EDGE
A	Frequency Stability	512 to 810	661(1880.0MHz)	GPRS
A	Occupied Bandwidth	512 to 810	512(1850.2MHz), 661(1880.0MHz), 810(1909.8MHz)	GSM, GPRS, EDGE
A	Band Edge	512 to 810	512(1850.2MHz), 810(1909.8MHz)	GSM, GPRS, EDGE
A	Peak To Average Ratio	512 to 810	512(1850.2MHz), 661(1880.0MHz), 810(1909.8MHz)	GSM, GPRS, EDGE
A	Conducted Emission	512 to 810	512(1850.2MHz), 661(1880.0MHz), 810(1909.8MHz)	GSM, GPRS, EDGE
A, B, C, D, E	Radiated Emission Below 1GHz	512 to 810	512(1850.2MHz)	GPRS, EDGE
A	Radiated Emission Above 1GHz	512 to 810	512(1850.2MHz), 661(1880.0MHz), 810(1909.8MHz)	GPRS

WCDMA Mode

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
A	EIRP	9262 to 9538	9262(1852.4MHz), 9400(1880.0MHz), 9538(1907.6MHz)	WCDMA
A	Modulation characteristics	9262 to 9538	9400(1880.0MHz)	WCDMA, HSDPA, HSUPA
A	Frequency Stability	9262 to 9538	9400(1880.0MHz)	WCDMA
A	Occupied Bandwidth	9262 to 9538	9262(1852.4MHz), 9400(1880.0MHz), 9538(1907.6MHz)	WCDMA, HSDPA, HSUPA
A	Band Edge	9262 to 9538	9262(1852.4MHz), 9538(1907.6MHz)	WCDMA, HSDPA, HSUPA
A	Peak To Average Ratio	9262 to 9538	9262(1852.4MHz), 9400(1880.0MHz), 9538(1907.6MHz)	WCDMA, HSDPA, HSUPA
A	Conducted Emission	9262 to 9538	9262(1852.4MHz), 9400(1880.0MHz), 9538(1907.6MHz)	WCDMA, HSDPA, HSUPA
A, B, C, D, E	Radiated Emission Below 1GHz	9262 to 9538	9262(1852.4MHz)	WCDMA
A	Radiated Emission Above 1GHz	9262 to 9538	9262(1852.4MHz), 9400(1880.0MHz), 9538(1907.6MHz)	WCDMA

LTE Band 2

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	Mode
A	EIRP	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
		18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK	1 RB / 14 RB Offset
		18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK	1 RB / 24 RB Offset
		18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK	1 RB / 49 RB Offset
		18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK	1 RB / 74 RB Offset
		18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset
A	Modulation characteristics	18700 to 19100	18900(1880.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset
A	Frequency Stability	18607 to 19193	18900(1880.00MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
A	Occupied Bandwidth	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK / 16QAM	1 RB / 5 RB Offset
		18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK / 16QAM	1 RB / 14 RB Offset
		18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK / 16QAM	1 RB / 24 RB Offset
		18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK / 16QAM	1 RB / 49 RB Offset
		18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK / 16QAM	1 RB / 74 RB Offset
		18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK / 16QAM	1 RB / 99 RB Offset
A	Band Edge	18607 to 19193	18607(1850.70MHz), 19193(1909.30MHz)	1.4MHz	QPSK	1 RB / 0 RB Offset 1 RB / 5 RB Offset 6 RB / 0 RB Offset
		18615 to 19185	18615(1851.50MHz), 19185(1908.50MHz)	3MHz	QPSK	1 RB / 0 RB Offset 1 RB / 14 RB Offset 15 RB / 0 RB Offset
		18625 to 19175	18625(1852.50MHz), 19175(1907.50MHz)	5MHz	QPSK	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
		18650 to 19150	18650(1855.00MHz), 19150(1905.00MHz)	10MHz	QPSK	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
		18675 to 19125	18675(1857.50MHz), 19125(1902.50MHz)	15MHz	QPSK	1 RB / 0 RB Offset 1 RB / 74 RB Offset 75 RB / 0 RB Offset
		18700 to 19100	18700(1860.00MHz), 19100(1900.00MHz)	20MHz	QPSK	1 RB / 0 RB Offset 1 RB / 99 RB Offset 100 RB / 0 RB Offset

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	Mode
A	Peak to Average Ratio	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK / 16QAM	1 RB / 5 RB Offset
		18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK / 16QAM	1 RB / 14 RB Offset
		18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK / 16QAM	1 RB / 24 RB Offset
		18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK / 16QAM	1 RB / 49 RB Offset
		18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK / 16QAM	1 RB / 74 RB Offset
		18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK / 16QAM	1 RB / 99 RB Offset
A	Conducted Emission	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
		18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK	1 RB / 14 RB Offset
		18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK	1 RB / 24 RB Offset
		18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK	1 RB / 49 RB Offset
		18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK	1 RB / 74 RB Offset
		18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset
A	Radiated Emission Below 1GHz	18607 to 19193	18607(1850.70MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
		18615 to 19185	18615(1851.50MHz)	3MHz	QPSK	1 RB / 14 RB Offset
		18625 to 19175	18625(1852.50MHz)	5MHz	QPSK	1 RB / 24 RB Offset
		18650 to 19150	18650(1855.00MHz)	10MHz	QPSK	1 RB / 49 RB Offset
		18675 to 19125	18675(1857.50MHz)	15MHz	QPSK	1 RB / 74 RB Offset
		18700 to 19100	18700(1860.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset
A, B, C, D, E	Radiated Emission Above 1GHz	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
A		18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK	1 RB / 14 RB Offset
A		18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK	1 RB / 24 RB Offset
A		18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK	1 RB / 49 RB Offset
A		18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK	1 RB / 74 RB Offset
A		18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset

**Note:**

1. For radiated emission below 1GHz, low, mid and high channels were pre-tested in chamber with 1.4MHz mode. Low channel on mode A was found to be the worst case and therefore had been chosen for all final tests.
2. The conducted output power for QPSK and 16QAM, measured value of QPSK is higher than 16QAM mode. Therefore, only occupied bandwidth and Peak to average ratio items had been tested under QPSK and 16QAM modes, the other test items were performed under QPSK mode only.

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
EIRP	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Modulation characteristics	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Frequency Stability	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Occupied Bandwidth	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Band Edge	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Peak To Average Ratio	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Conducted Emission	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Radiated Emission	20deg. C, 69%RH 25deg. C, 70%RH	120Vac, 60Hz	Bayu Chen Bond Tseng Luis Lee Matthew Yang

### 3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.



## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.r.p.

#### 4.1.2 Test Procedures

##### EIRP / ERP Measurement:

- All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, 5MHz for WCDMA mode and 10MHz for LTE mode.
- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15dBi.

Where:

$$ERP/EIRP = P_{Meas} + G_T - L_C$$

$P_{Meas}$  : Measure transmitter output power.

$G_T$  : Gain of the transmitting antenna.

$L_C$  : signal attenuation in the connecting cable between the transmitter and antenna.


##### Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, WCDMA, LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


### 4.1.3 Test Setup

EIRP / ERP Measurement:

**For Radiated Emission below or equal 1GHz**

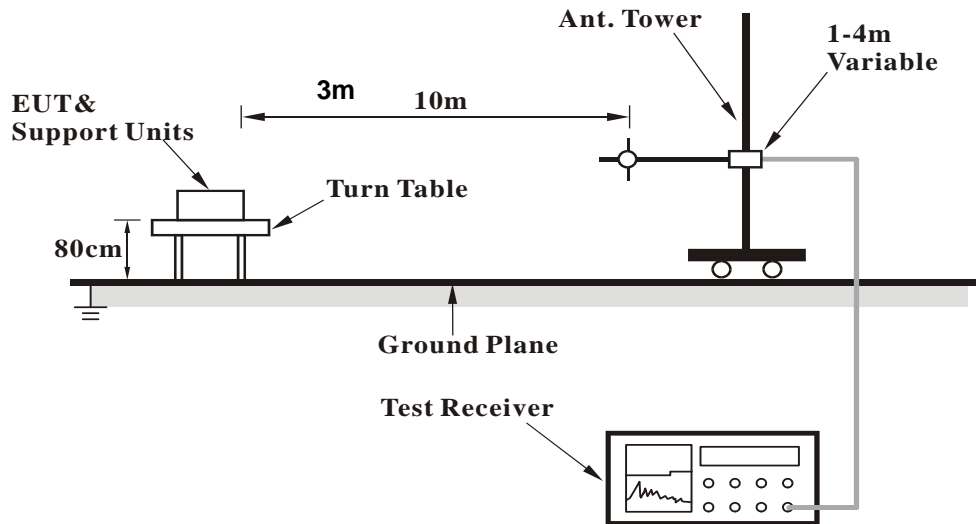


**For Radiated Emission above 1GHz**

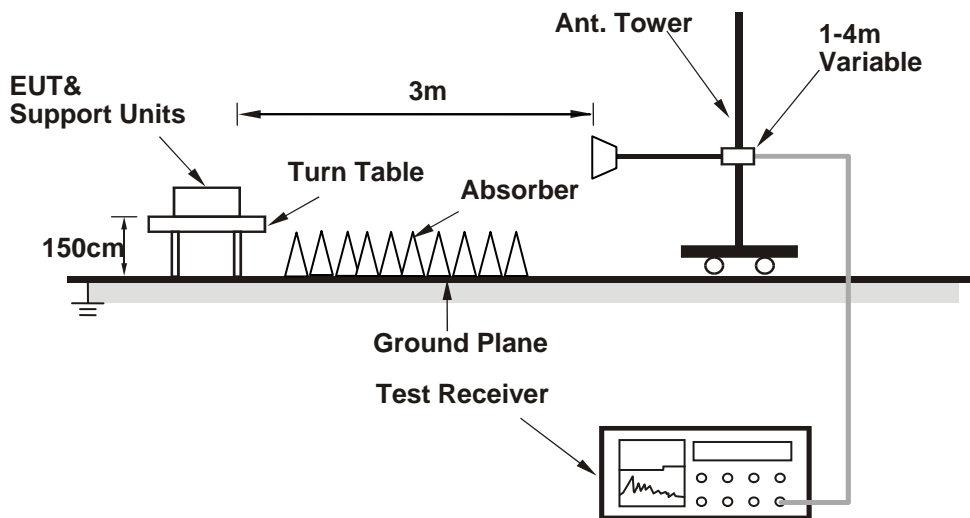

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:

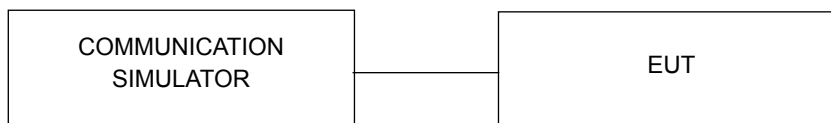

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 Test Results

Conducted Output Power (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency	1850.2	1880	1909.8
GSM	29.58	29.05	28.15
GPRS 8	<b>29.61</b>	29.06	28.17
GPRS 10	27.94	27.50	27.15
GPRS 11	25.97	25.63	25.49
GPRS 12	24.92	24.89	24.64
EDGE 8 (MCS9)	25.28	<b>25.34</b>	25.27
EDGE 10 (MCS9)	23.73	23.80	23.79
EDGE 11 (MCS9)	21.73	21.74	21.67
EDGE 12 (MCS9)	20.70	20.53	20.63

Band	WCDMA II		
Channel	9262	9400	9538
Frequency	1852.4	1880	1907.6
RMC 12.2K	23.15	<b>23.37</b>	23.11
HSDPA Subtest-1	21.86	<b>22.08</b>	21.65
HSDPA Subtest-2	21.92	21.94	21.71
HSDPA Subtest-3	21.44	21.66	21.23
HSDPA Subtest-4	21.44	21.66	21.23
HSUPA Subtest-1	21.82	22.04	21.61
HSUPA Subtest-2	20.78	21.00	20.57
HSUPA Subtest-3	20.39	20.61	20.18
HSUPA Subtest-4	21.18	21.30	21.15
HSUPA Subtest-5	21.88	<b>22.10</b>	21.67

Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18607	CH 18900	CH 19193	CH 18607	CH 18900	CH 19193
			1850.7 MHz	1880 MHz	1909.3 MHz	1850.7 MHz	1880 MHz	1909.3 MHz
2 / 1.4MHz	1	0	23.45	<b>23.62</b>	23.42	22.43	<b>22.61</b>	22.40
	1	2	23.12	23.42	23.09	22.10	22.40	22.07
	1	5	22.96	23.26	22.93	21.94	22.24	21.91
	3	0	22.54	<b>22.57</b>	22.55	21.52	21.55	21.51
	3	1	22.53	22.53	22.56	21.57	<b>21.58</b>	21.55
	3	3	22.52	22.53	22.51	21.57	21.54	21.52
	6	0	21.92	<b>22.22</b>	21.89	20.90	<b>21.20</b>	20.87

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18615	CH 18900	CH 19185	CH 18615	CH 18900	CH 19185
			1851.5 MHz	1880 MHz	1908.5 MHz	1851.5 MHz	1880 MHz	1908.5 MHz
2 / 3MHz	1	0	23.52	<b>23.69</b>	23.49	22.50	<b>22.67</b>	22.47
	1	7	23.19	23.49	23.16	22.17	22.47	22.14
	1	14	23.03	23.33	23.00	22.01	22.31	21.98
	8	0	22.34	<b>22.64</b>	22.31	21.32	<b>21.62</b>	21.29
	8	3	22.07	22.37	22.04	21.05	21.35	21.02
	8	7	21.83	22.13	21.80	20.81	21.11	20.78
	15	0	21.99	<b>22.29</b>	21.96	20.97	<b>21.27</b>	20.94

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18625	CH 18900	CH 19175	CH 18625	CH 18900	CH 19175
			1852.5 MHz	1880 MHz	1907.5 MHz	1852.5 MHz	1880 MHz	1907.5 MHz
2 / 5MHz	1	0	23.62	<b>23.79</b>	23.59	22.60	<b>22.77</b>	22.57
	1	12	23.29	23.59	23.26	22.27	22.57	22.24
	1	24	23.13	23.43	23.10	22.11	22.41	22.08
	12	0	22.44	<b>22.74</b>	22.41	21.42	<b>21.72</b>	21.39
	12	6	22.17	22.47	22.14	21.15	21.45	21.12
	12	13	21.93	22.23	21.90	20.91	21.21	20.88
	25	0	22.09	<b>22.39</b>	22.06	21.07	<b>21.37</b>	21.04

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18650	CH 18900	CH 19150	CH 18650	CH 18900	CH 19150
			1855 MHz	1880 MHz	1905 MHz	1855 MHz	1880 MHz	1905 MHz
2 / 10MHz	1	0	23.70	<b>23.87</b>	23.67	22.68	<b>22.85</b>	22.65
	1	24	23.37	23.67	23.34	22.35	22.65	22.32
	1	49	23.21	23.51	23.18	22.19	22.49	22.16
	25	0	22.52	<b>22.82</b>	22.49	21.50	<b>21.80</b>	21.47
	25	12	22.25	22.55	22.22	21.23	21.53	21.20
	25	25	22.01	22.31	21.98	20.99	21.29	20.96
	50	0	22.17	<b>22.47</b>	22.14	21.15	<b>21.45</b>	21.12

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18675	CH 18900	CH 19125	CH 18675	CH 18900	CH 19125
			1857.5 MHz	1880 MHz	1902.5 MHz	1857.5 MHz	1880 MHz	1902.5 MHz
2 / 15MHz	1	0	23.74	<b>23.91</b>	23.71	22.72	<b>22.89</b>	22.69
	1	37	23.41	23.71	23.38	22.39	22.69	22.36
	1	74	23.25	23.55	23.22	22.23	22.53	22.20
	36	0	22.56	<b>22.86</b>	22.53	21.54	<b>21.84</b>	21.51
	36	19	22.29	22.59	22.26	21.27	21.57	21.24
	36	39	22.05	22.35	22.02	21.03	21.33	21.00
	75	0	22.21	<b>22.51</b>	22.18	21.19	<b>21.49</b>	21.16

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18700	CH 18900	CH 19100	CH 18700	CH 18900	CH 19100
			1860 MHz	1880 MHz	1900 MHz	1860 MHz	1880 MHz	1900 MHz
2 / 20MHz	1	0	23.81	<b>23.97</b>	23.78	21.84	<b>22.59</b>	21.88
	1	50	23.48	23.78	23.45	21.82	22.30	21.79
	1	99	23.32	23.62	23.29	21.14	21.32	21.11
	50	0	22.63	<b>22.93</b>	22.60	21.23	<b>21.41</b>	21.30
	50	25	22.36	22.66	22.33	21.21	21.04	21.13
	50	50	22.12	22.42	22.09	21.02	21.07	21.09
	100	0	22.28	<b>22.58</b>	22.25	20.39	<b>20.87</b>	20.36

EIRP Power (dBm)  
GPRS Mode

MODE		TX channel 512					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-14.55	25.61	0.11	25.72	33.00	-7.28
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-9.45	30.91	0.11	<b>31.02</b>	33.00	-1.98

MODE		TX channel 661					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-15.12	25.37	-0.01	25.36	33.00	-7.64
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-9.97	30.62	-0.01	30.61	33.00	-2.39

MODE		TX channel 810					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-15.83	24.84	-0.12	24.72	33.00	-8.28
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-10.29	30.53	-0.12	30.41	33.00	-2.59

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

EDGE Mode

MODE		TX channel 512					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-19.14	21.02	0.11	21.13	33.00	-11.87
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-13.94	26.42	0.11	26.53	33.00	-6.47

MODE		TX channel 661					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-19.64	20.85	-0.01	20.84	33.00	-12.16
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-13.99	26.60	-0.01	<b>26.59</b>	33.00	-6.41

MODE		TX channel 810					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-19.32	21.35	-0.12	21.23	33.00	-11.77
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-14.18	26.64	-0.12	26.52	33.00	-6.48

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

WCDMA Mode

MODE		TX channel 9262					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.40	-17.26	22.94	0.09	23.03	33.00	-9.97
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.40	-16.28	24.11	0.09	24.20	33.00	-8.80

MODE		TX channel 9400					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-17.14	23.35	-0.01	23.34	33.00	-9.66
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-15.96	24.63	-0.01	<b>24.62</b>	33.00	-8.38

MODE		TX channel 9538					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.60	-17.80	22.88	-0.12	22.76	33.00	-10.24
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.60	-16.33	24.48	-0.12	24.36	33.00	-8.64

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



LTE Band 2, Channel Bandwidth: 1.4MHz

MODE		TX channel 18607					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-19.02	21.16	0.10	21.26	33.00	-11.74
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-15.78	24.60	0.10	24.70	33.00	-8.30

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.73	21.76	-0.01	21.75	33.00	-11.25
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-15.71	24.88	-0.01	<b>24.87</b>	33.00	-8.13

MODE		TX channel 19193					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.30	-19.15	21.52	-0.12	21.40	33.00	-11.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.30	-16.02	24.79	-0.12	24.67	33.00	-8.33

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 3MHz

MODE		TX channel 18615					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-19.40	20.78	0.10	20.88	33.00	-12.12
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-15.71	24.67	0.10	24.77	33.00	-8.23

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-19.43	21.06	-0.01	21.05	33.00	-11.95
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-15.64	24.95	-0.01	<b>24.94</b>	33.00	-8.06

MODE		TX channel 19185					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1908.50	-19.55	21.13	-0.12	21.01	33.00	-11.99
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1908.50	-15.95	24.86	-0.12	24.74	33.00	-8.26

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 5MHz

MODE		TX channel 18625					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-19.39	20.81	0.09	20.90	33.00	-12.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-15.61	24.78	0.09	24.87	33.00	-8.13

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-19.31	21.18	-0.01	21.17	33.00	-11.83
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-15.54	25.05	-0.01	<b>25.04</b>	33.00	-7.96

MODE		TX channel 19175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.50	-18.83	21.85	-0.12	21.73	33.00	-11.27
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.50	-15.85	24.96	-0.12	24.84	33.00	-8.16

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 10MHz

MODE		TX channel 18650					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-18.49	21.73	0.09	21.82	33.00	-11.18
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-15.54	24.86	0.09	24.95	33.00	-8.05

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.39	22.10	-0.01	22.09	33.00	-10.91
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-15.46	25.13	-0.01	<b>25.12</b>	33.00	-7.88

MODE		TX channel 19150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1905.00	-18.77	21.92	-0.11	21.81	33.00	-11.19
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1905.00	-15.76	25.03	-0.11	24.92	33.00	-8.08

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 15MHz

MODE		TX channel 18675					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-18.69	21.56	0.07	21.63	33.00	-11.37
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-15.51	24.92	0.07	24.99	33.00	-8.01

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-19.31	21.18	-0.01	21.17	33.00	-11.83
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-15.42	25.17	-0.01	<b>25.16</b>	33.00	-7.84

MODE		TX channel 19125					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1902.50	-19.21	21.49	-0.10	21.39	33.00	-11.61
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1902.50	-15.71	25.06	-0.10	24.96	33.00	-8.04

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 20MHz

MODE		TX channel 18700					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-18.55	21.72	0.07	21.79	33.00	-11.21
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-15.45	24.99	0.07	25.06	33.00	-7.94

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.80	21.69	-0.01	21.68	33.00	-11.32
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-15.36	25.23	-0.01	<b>25.22</b>	33.00	-7.78

MODE		TX channel 19100					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1900.00	-19.35	21.35	-0.09	21.26	33.00	-11.74
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1900.00	-15.63	25.12	-0.09	25.03	33.00	-7.97

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

## 4.2 Modulation Characteristics Measurement

### 4.2.1 Limits of Modulation Characteristics

N/A


### 4.2.2 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector, The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

### 4.2.3 Test Setup



### 4.2.4 Test Results

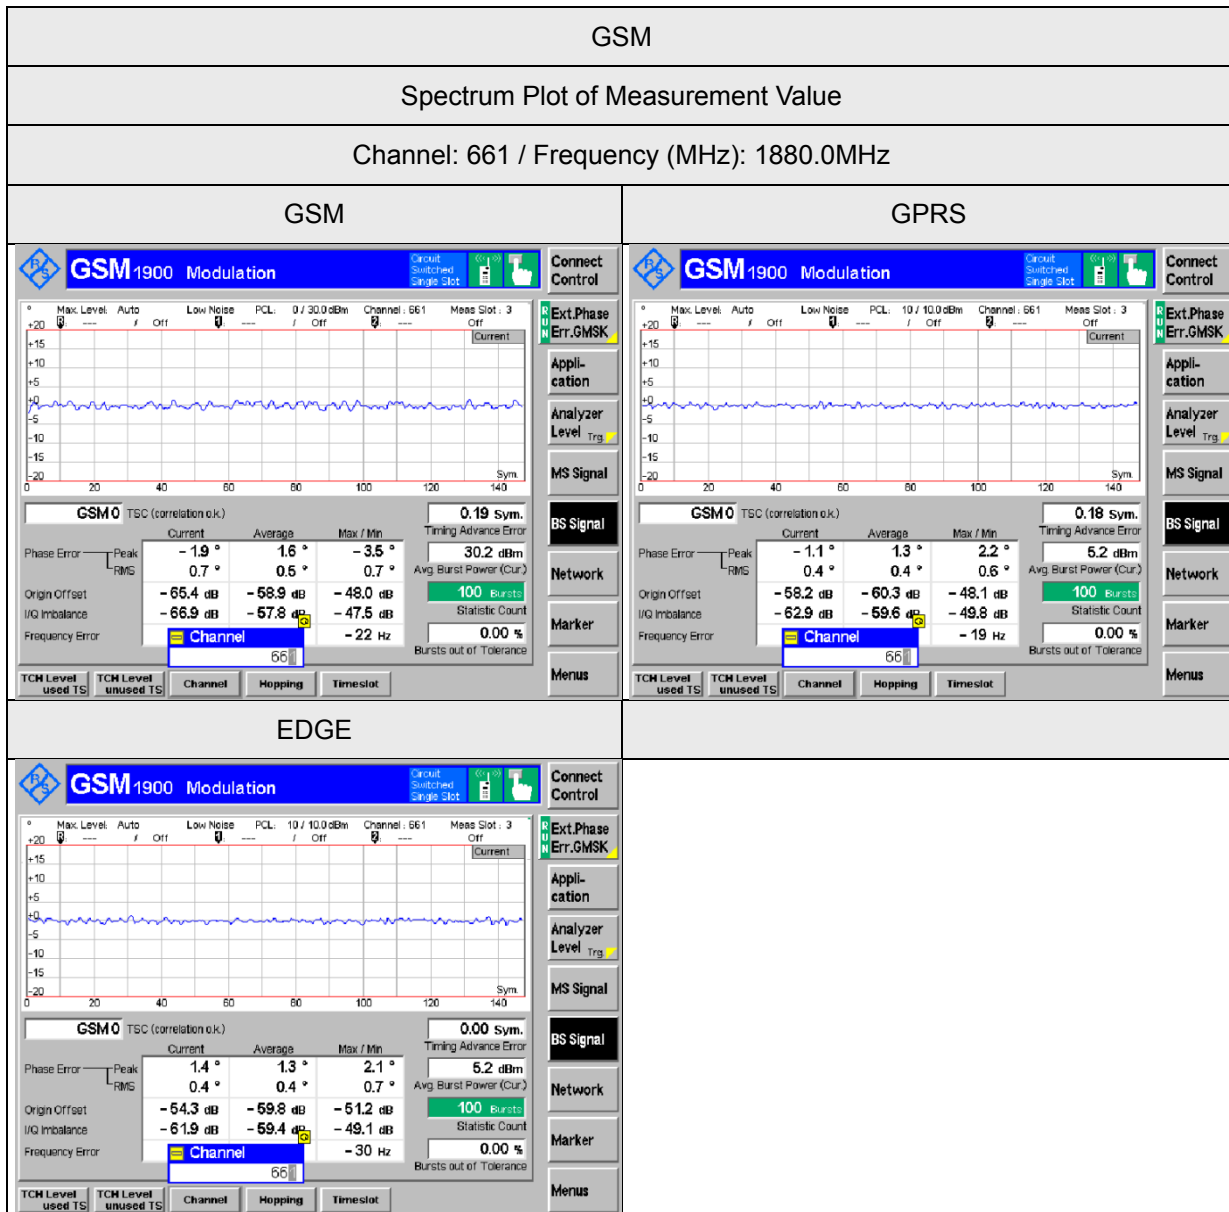




WCDMA Band 2


Spectrum Plot of Measurement Value

Channel: 9400 / Frequency (MHz): 1800.0MHz


WCDMA

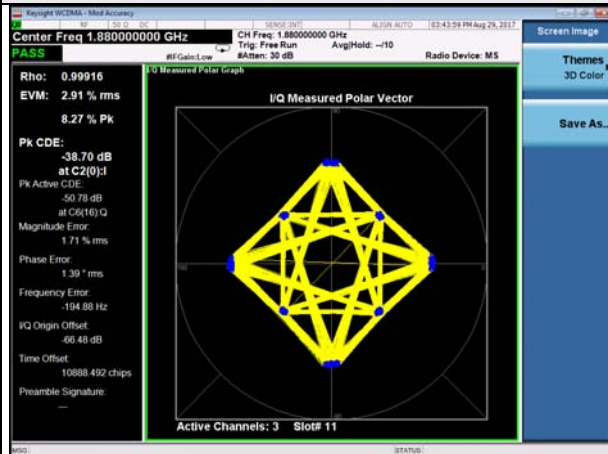

HSDPA

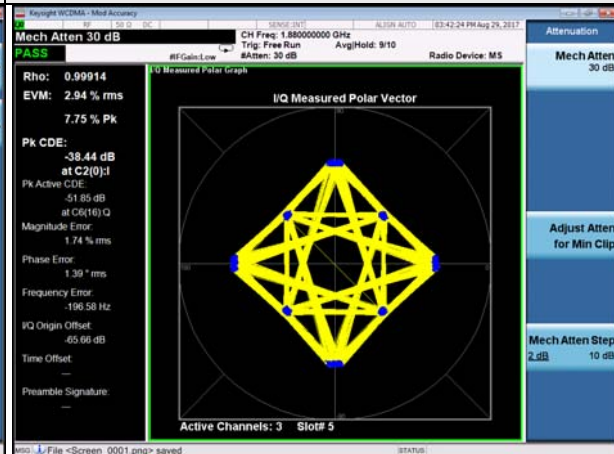

HSUPA

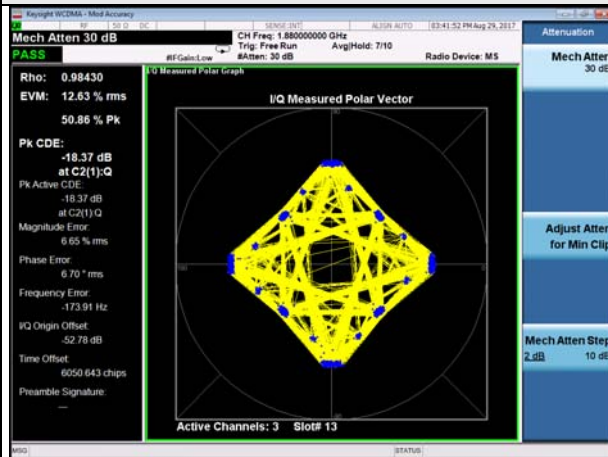


LTE Band 2

Spectrum Plot of Measurement Value

Channel: 18900 / Frequency (MHz): 1880.0MHz

Channel Bandwidth: 20MHz / QPSK

Channel Bandwidth: 20MHz / 16QAM

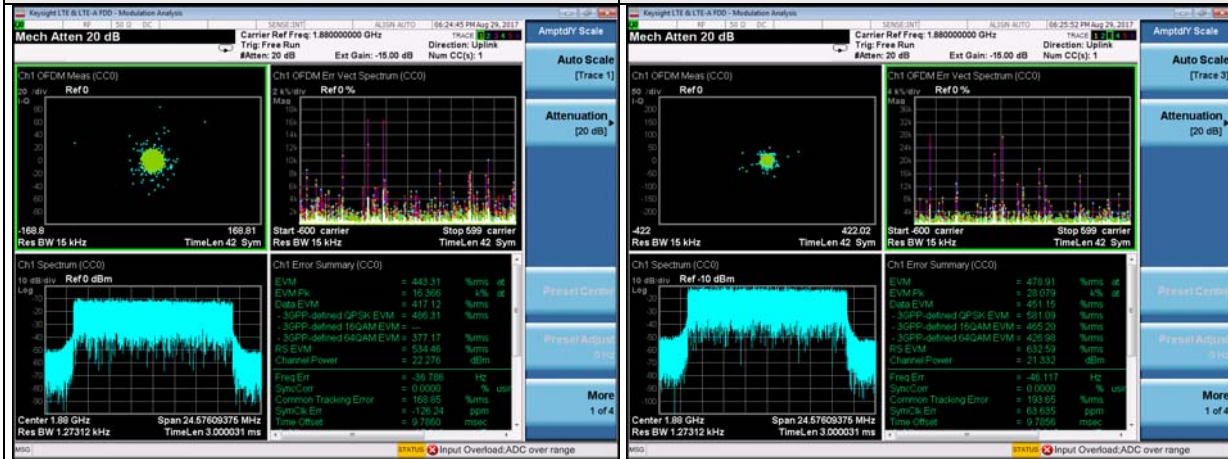

### 4.3 Frequency Stability Measurement

#### 4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

#### 4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5$  °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

#### 4.3.3 Test Setup

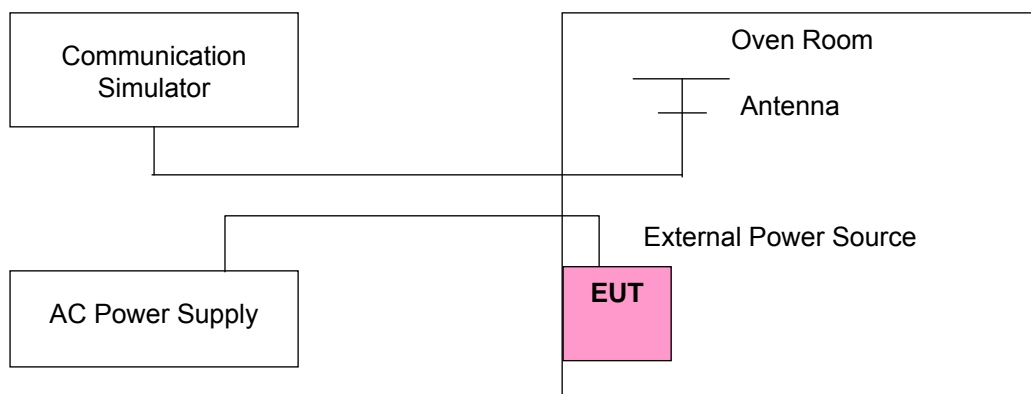

#### 4.3.4 Test Results

##### Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (ppm)			Limit (ppm)
	GSM	WCDMA Band 2	LTE Band 2	
138	-0.004	-0.004	-0.005	2.5
120	-0.004	-0.004	-0.005	2.5
102	-0.004	-0.004	-0.004	2.5

Note: The applicant defined the normal working voltage is from 102Vac to 138Vac.

##### Frequency Error vs. Temperature.


Temp. (°C)	Frequency Error (ppm)			Limit (ppm)
	GSM	WCDMA Band 2	LTE Band 2	
50	-0.006	-0.005	-0.006	2.5
40	-0.005	-0.004	-0.005	2.5
30	-0.005	-0.004	-0.005	2.5
20	-0.004	-0.004	-0.005	2.5
10	-0.005	-0.005	-0.005	2.5
0	-0.005	-0.005	-0.006	2.5
-10	-0.007	-0.006	-0.007	2.5
-20	-0.006	-0.007	-0.008	2.5
-30	-0.007	-0.007	-0.007	2.5

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

### 4.4.2 Test Setup

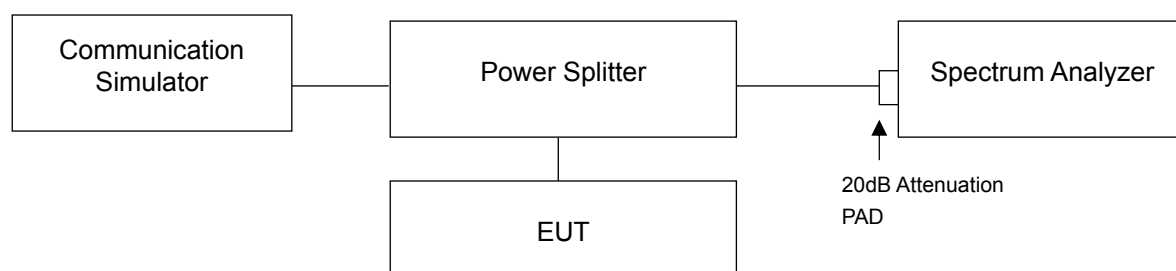


### 4.4.3 Test Result


Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)		
		GSM	GPRS	EDGE
512	1850.2	245	244	240
661	1880.0	255	246	244
810	1909.8	250	244	244

### Spectrum Plot of Worst Value


#### GSM

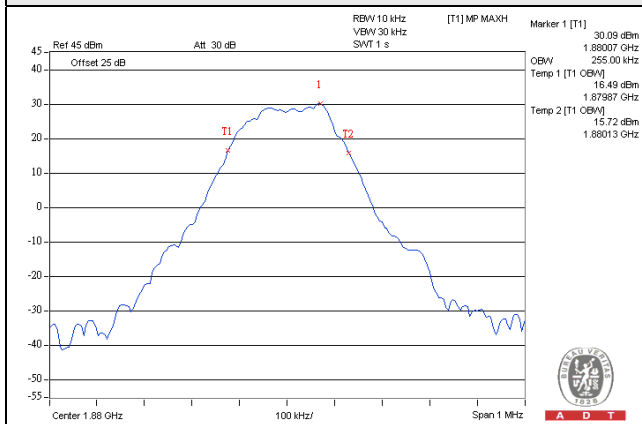

#### GPRS

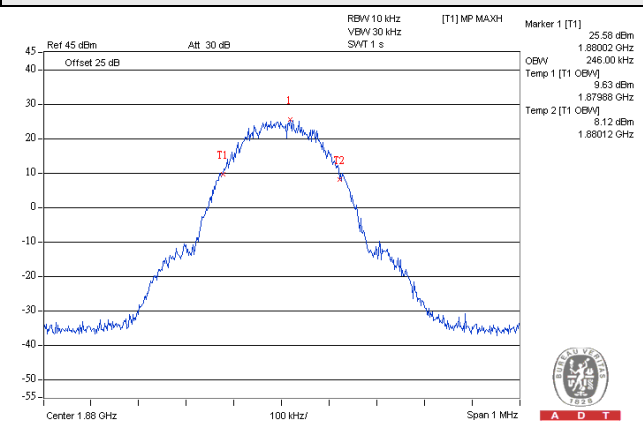


#### EDGE

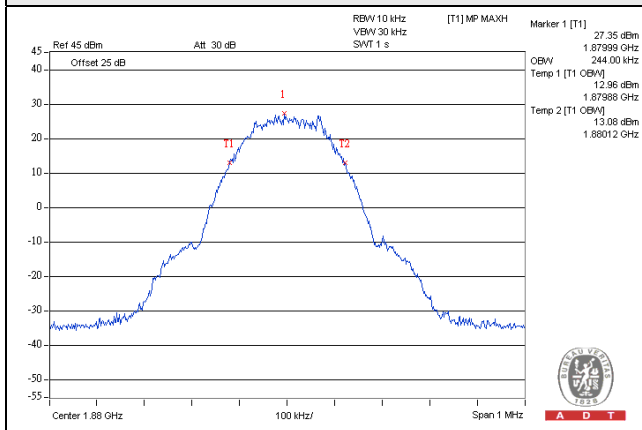

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		
		WCDMA	HSDPA	HSUPA
9262	1852.4	4.16	4.14	4.14
9400	1880.0	4.14	4.12	4.12
9538	1907.6	4.14	4.14	4.16

### Spectrum Plot of Worst Value

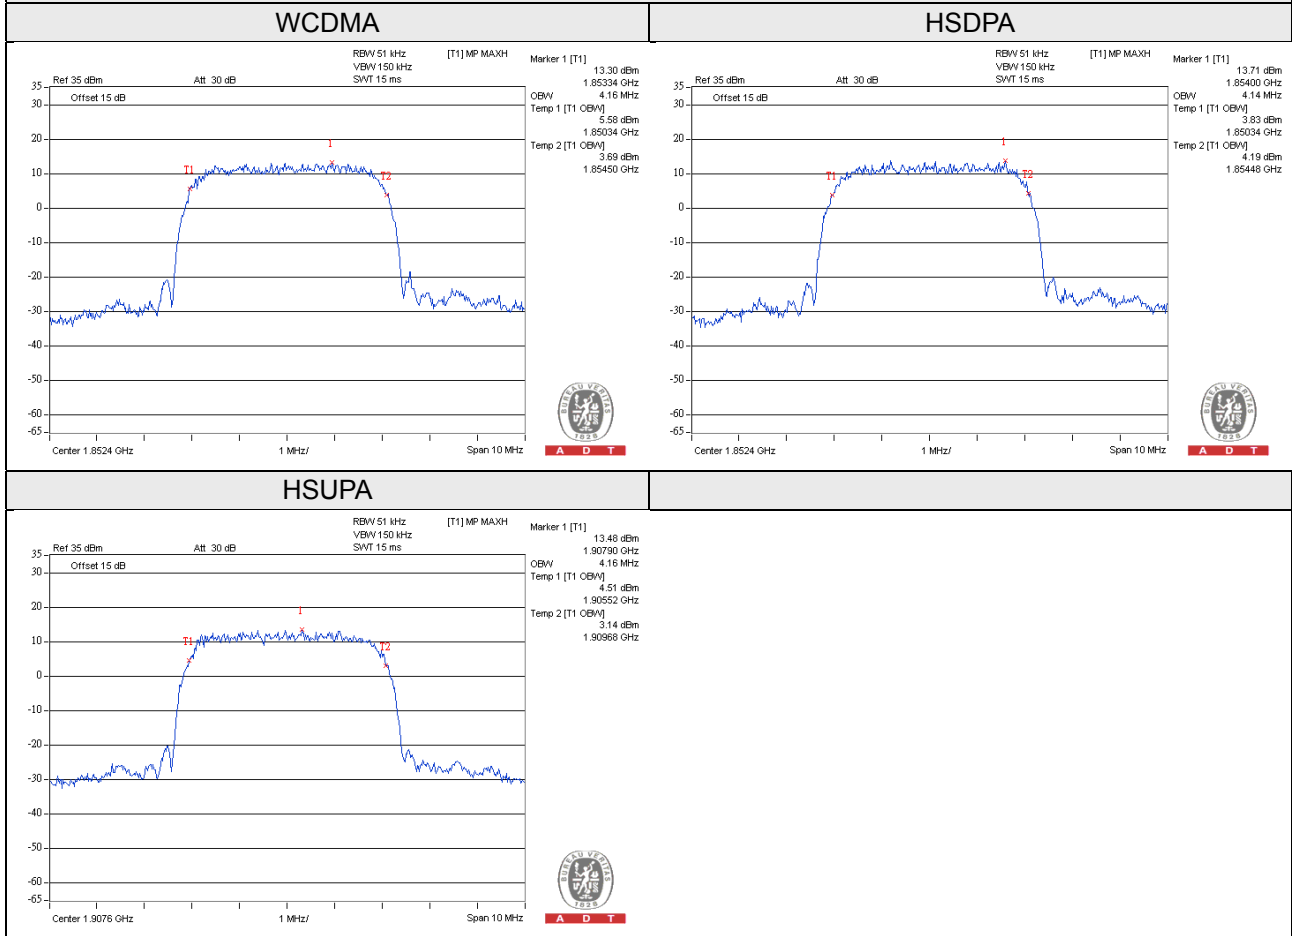


### 26dB Bandwidth


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		
		GSM	GPRS	EDGE
512	1850.2	313.406	320.432	319.672
661	1880.0	310.300	314.646	317.933
810	1909.8	313.016	319.639	321.078

### Spectrum Plot of Worst Value


#### GSM

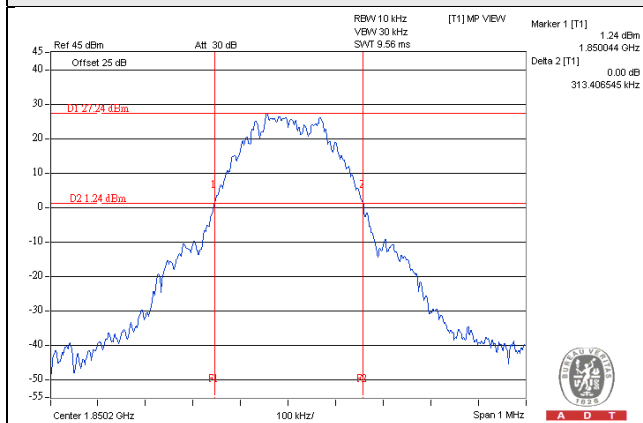

#### GPRS

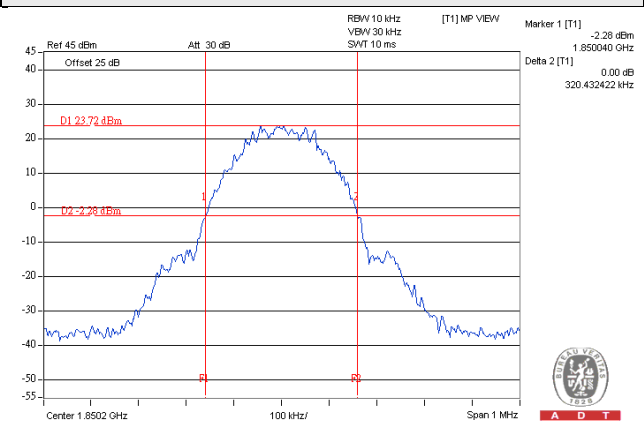

#### EDGE

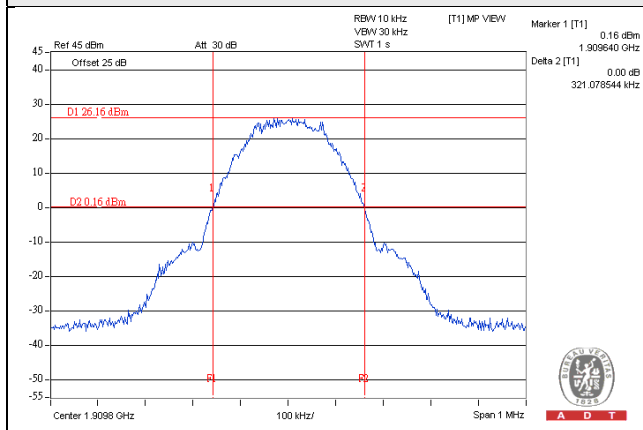





Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		
		WCDMA	HSDPA	HSUPA
9262	1852.4	4.706	4.701	4.686
9400	1880.0	4.676	4.686	4.653
9538	1907.6	4.667	4.704	4.721

### Spectrum Plot of Worst Value


#### WCDMA

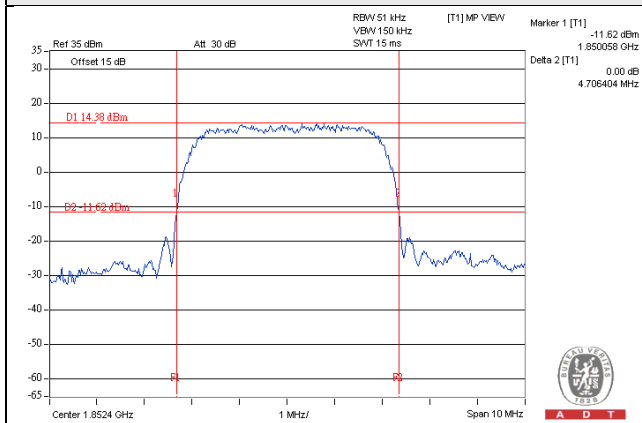

#### HSDPA

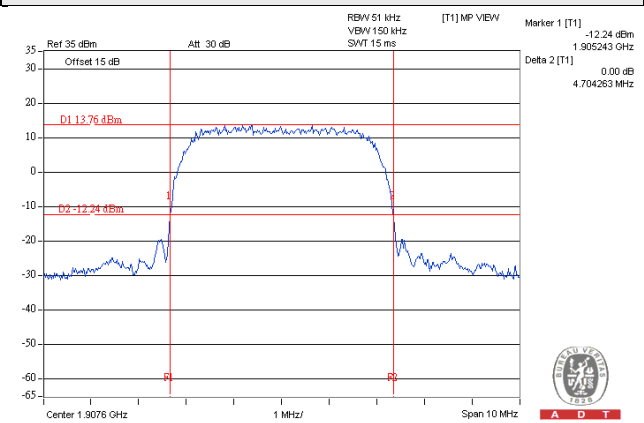

#### HSUPA

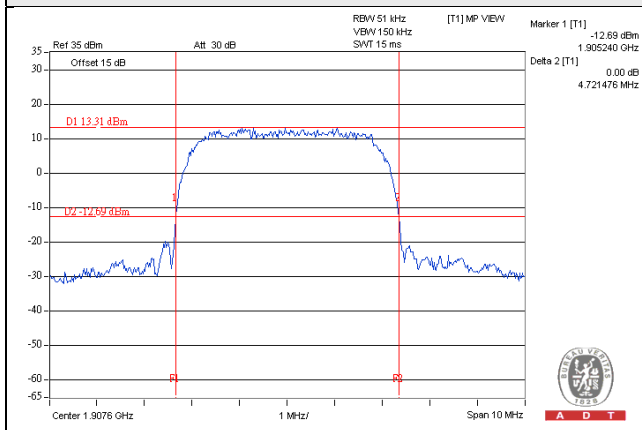

LTE Band 2, Channel Bandwidth 1.4MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18607	1850.7	1.270	1.274
18900	1880.0	1.268	1.290
19193	1909.3	1.289	1.283

LTE Band 2, Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18615	1851.5	2.963	2.944
18900	1880.0	2.945	2.972
19185	1908.5	2.973	2.968

LTE Band 2, Channel Bandwidth 5MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18625	1852.5	4.937	4.905
18900	1880.0	4.930	4.884
19175	1907.5	4.929	4.900


LTE Band 2, Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18650	1855.0	9.635	9.620
18900	1880.0	9.648	9.637
19150	1905.0	9.608	9.597

LTE Band 2, Channel Bandwidth 15MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18675	1857.5	14.352	14.335
18900	1880.0	14.473	14.462
19125	1902.5	14.387	14.425


LTE Band 2, Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18700	1860.0	19.355	19.294
18900	1880.0	19.512	19.422
19100	1900.0	19.455	19.385

## Spectrum Plot of Worst Value


### 1.4MHz / 16QAM

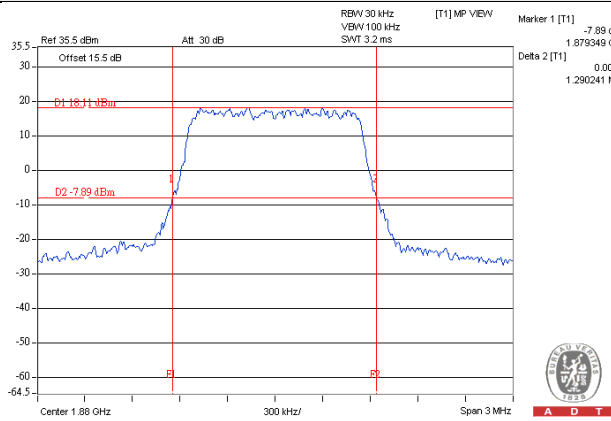


### 3MHz / QPSK

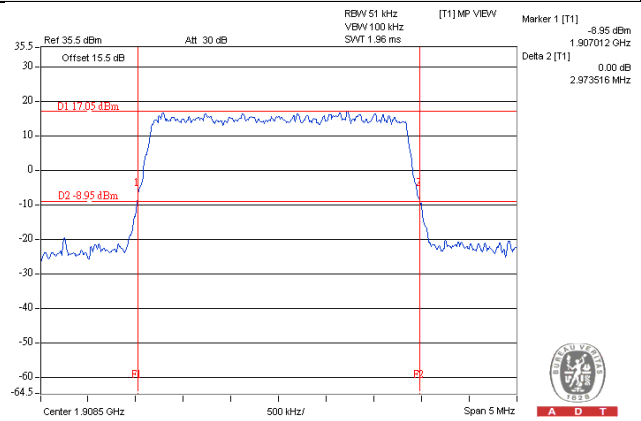


### 5MHz / QPSK

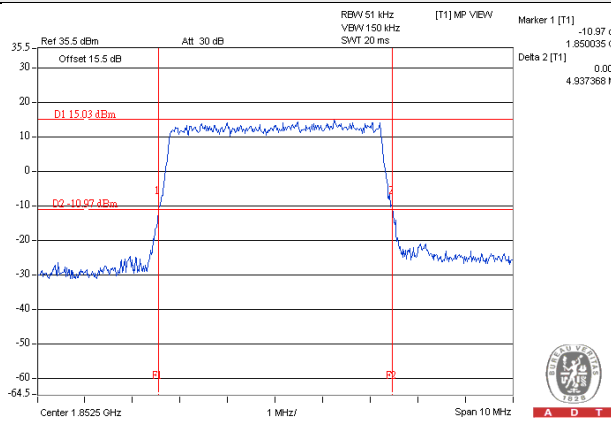


### 10MHz / QPSK

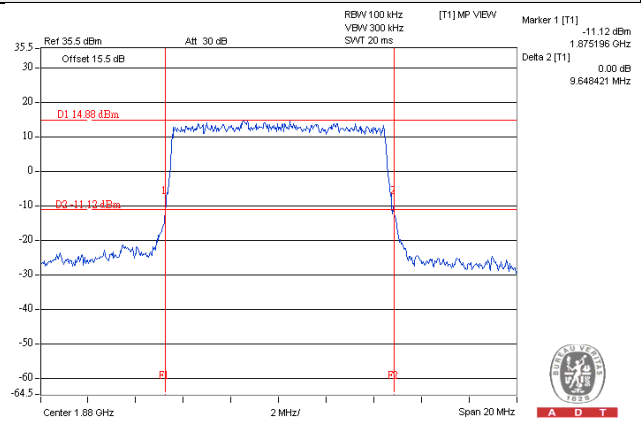

### 15MHz / QPSK

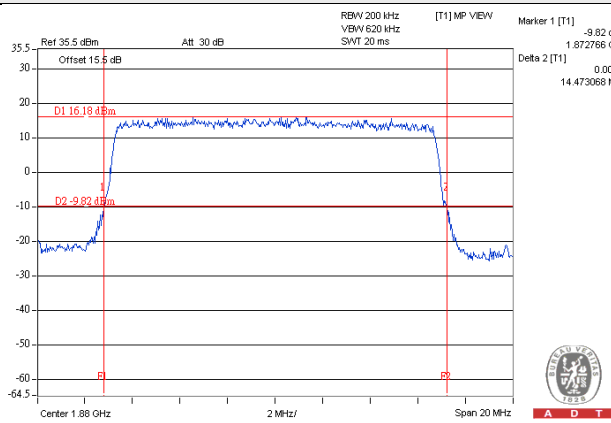

### 20MHz / QPSK

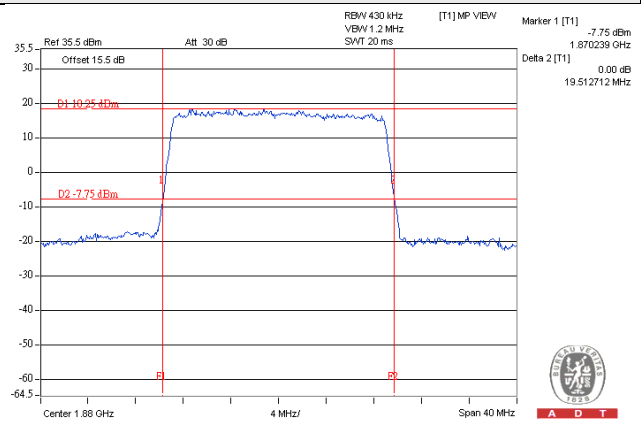

### Occupied Bandwidth

LTE Band 2, Channel Bandwidth 1.4MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18607	1850.7	1.10	1.09
18900	1880.0	1.09	1.09
19193	1909.3	1.09	1.10

LTE Band 2, Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18615	1851.5	2.68	2.68
18900	1880.0	2.68	2.68
19185	1908.5	2.68	2.69

LTE Band 2, Channel Bandwidth 5MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18625	1852.5	4.47	4.47
18900	1880.0	4.45	4.45
19175	1907.5	4.47	4.48


LTE Band 2, Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18650	1855.0	8.93	8.93
18900	1880.0	8.93	8.90
19150	1905.0	8.90	8.90

LTE Band 2, Channel Bandwidth 15MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18675	1857.5	13.33	13.33
18900	1880.0	13.37	13.37
19125	1902.5	13.37	13.37


LTE Band 2, Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18700	1860.0	17.87	17.87
18900	1880.0	17.87	17.93
19100	1900.0	17.80	17.80

## Spectrum Plot of Worst Value


### 1.4MHz / QPSK

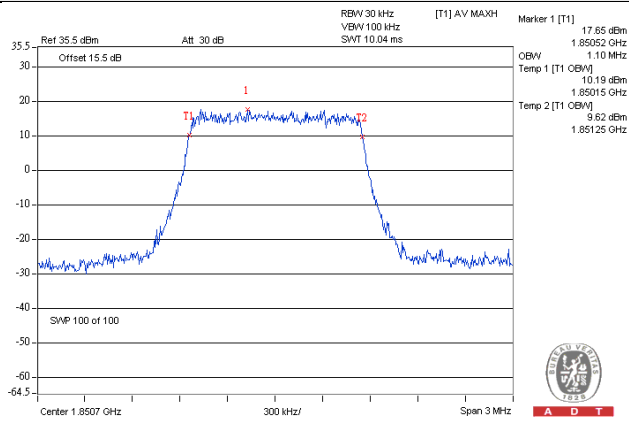


### 3MHz / 16QAM

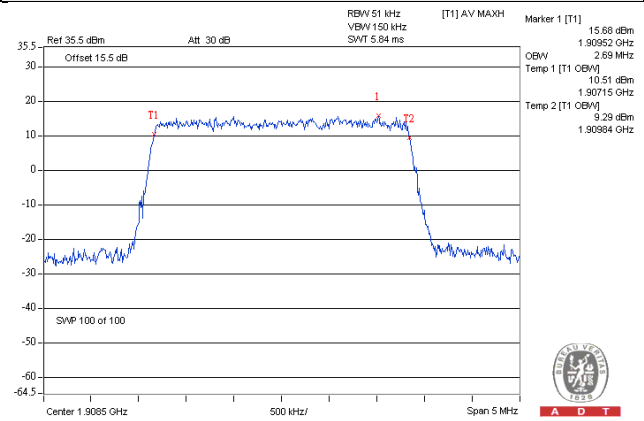


### 5MHz / 16QAM

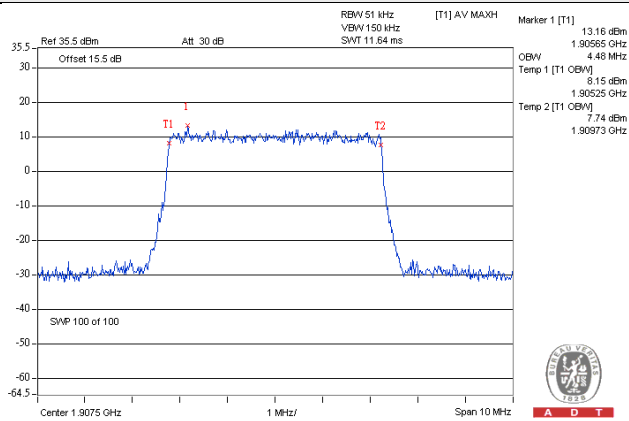


### 10MHz / QPSK

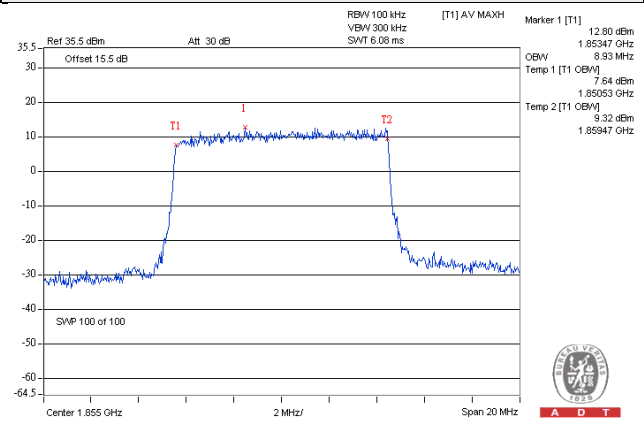

### 15MHz / QPSK

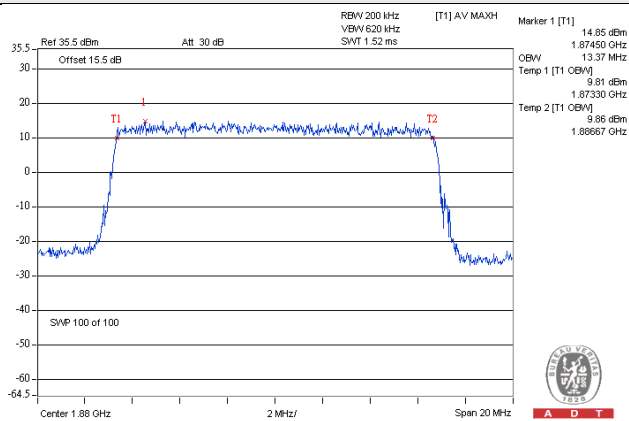

### 20MHz / 16QAM

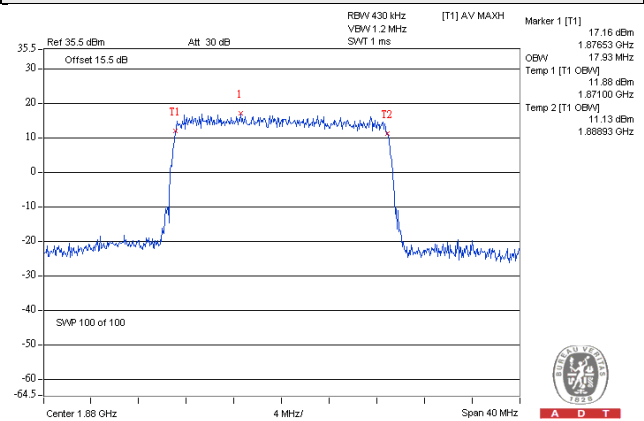


## 4.5 Band Edge Measurement

### 4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.5.2 Test Setup

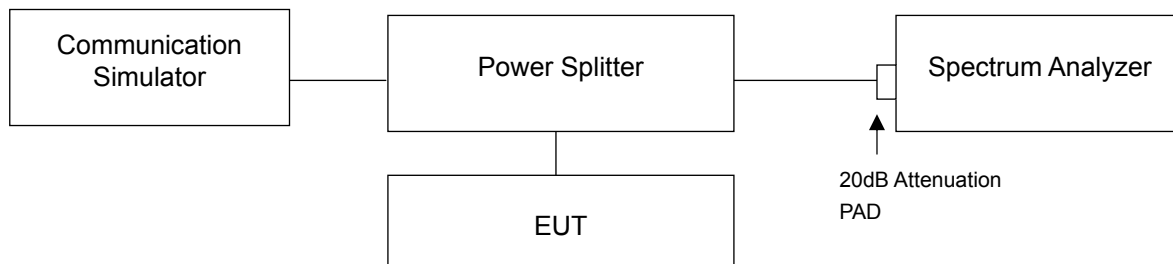


### 4.5.3 Test Procedures


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 10kHz and VB of the spectrum is 30kHz (GSM / GPRS / EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 51kHz and VB of the spectrum is 150kHz (WCDMA / HSDPA / HSUPA).
- d. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Channel Bandwidth 1.4MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 51kHz and VB of the spectrum is 150kHz (LTE Channel Bandwidth 3MHz and 5MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Channel Bandwidth 10MHz).
- g. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 200kHz and VB of the spectrum is 620kHz (LTE Channel Bandwidth 15MHz).
- h. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 430kHz and VB of the spectrum is 1200kHz (LTE Channel Bandwidth 20MHz).
- i. Record the max trace plot into the test report.




### 4.5.4 Test Results

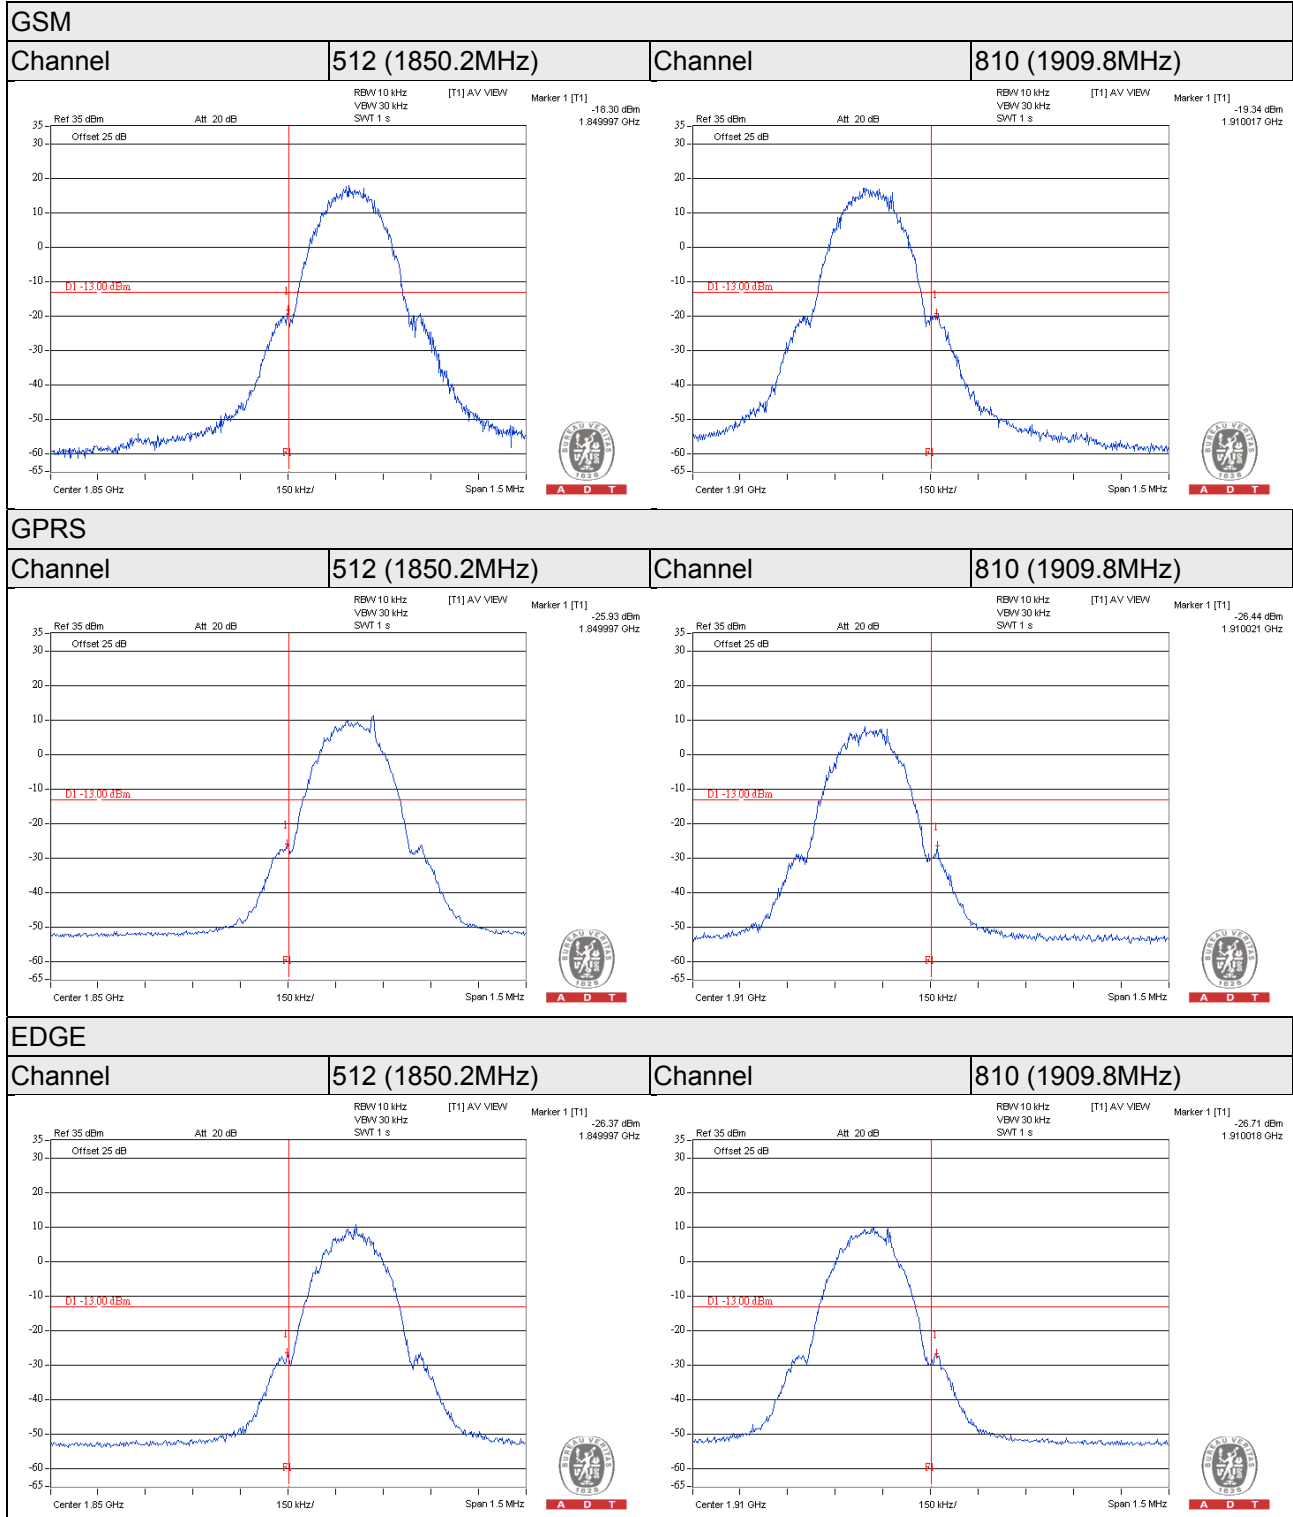


### WCDMA

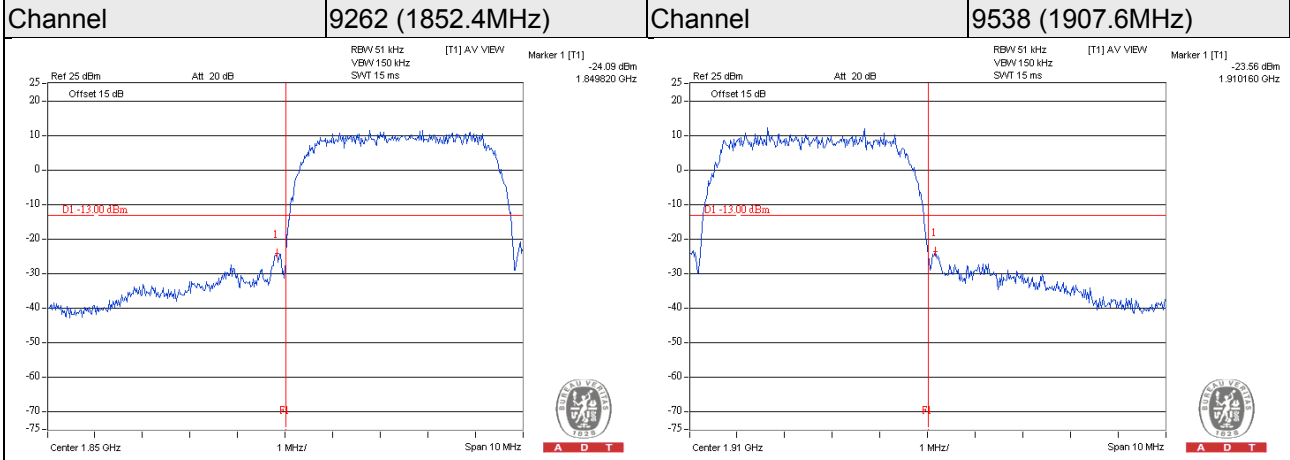

### HSDPA

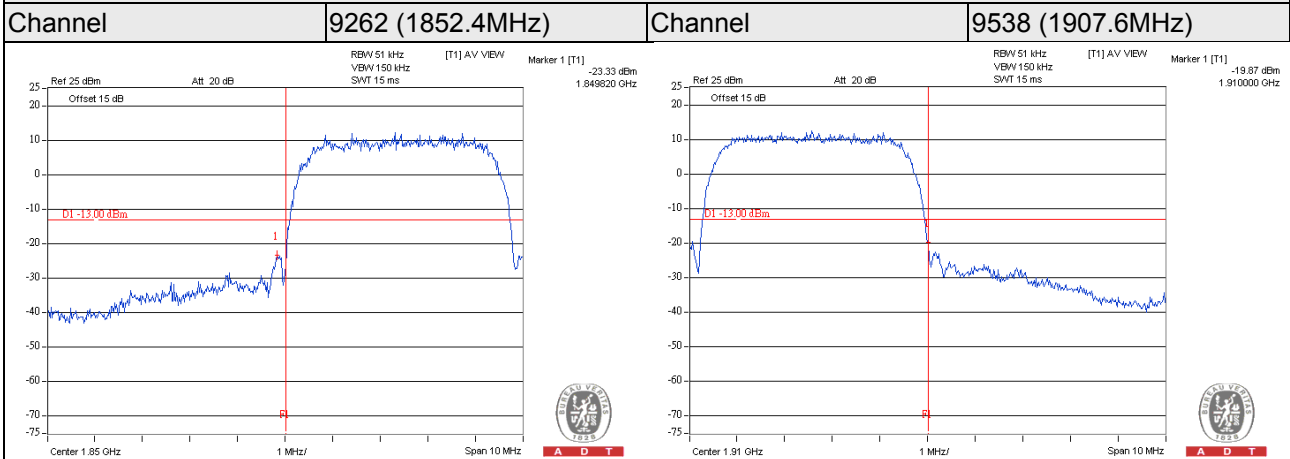

### HSUPA

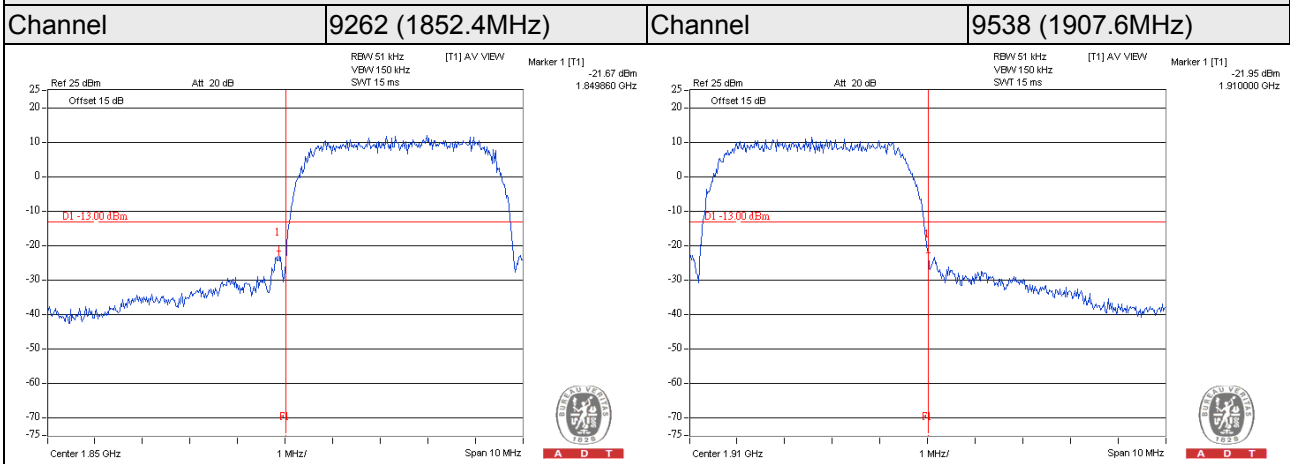

LTE Band 2, Channel Bandwidth 1.4MHz

Channel 18607  
(1850.70MHz)



QPSK

1 RB / 0 RB Offset

Channel 19193  
(1909.30MHz)

QPSK

1 RB / 5 RB Offset

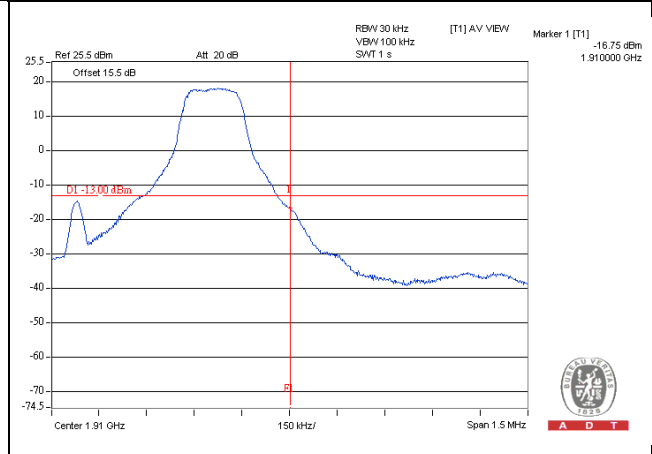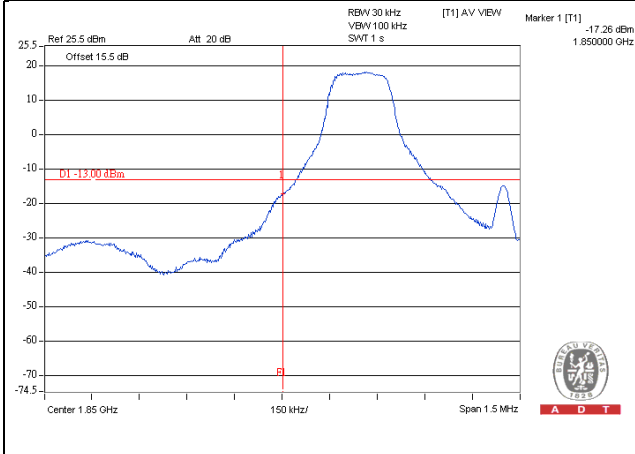

Channel 18607  
(1850.70MHz)



QPSK

6 RB / 0 RB Offset

Channel 19193  
(1909.30MHz)



QPSK

6 RB / 0 RB Offset

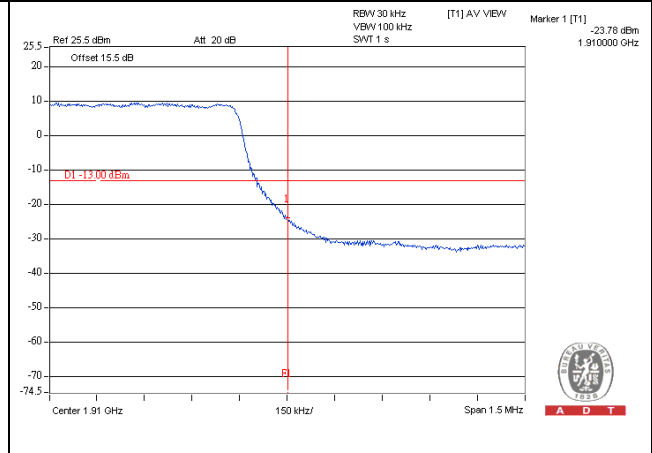
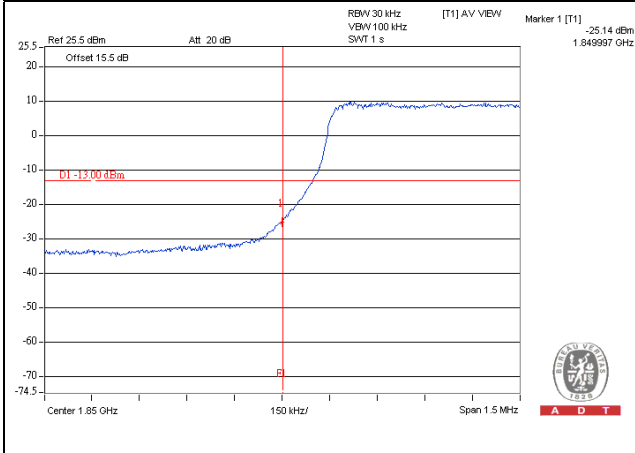


**LTE Band 2, Channel Bandwidth 3MHz**



<b>Channel 18615 (1851.50MHz)</b>	<b>QPSK</b>	<b>1 RB / 0 RB Offset</b>	<b>Channel 19185 (1908.50MHz)</b>	<b>QPSK</b>	<b>1 RB / 14 RB Offset</b>
---------------------------------------	-------------	---------------------------	---------------------------------------	-------------	----------------------------

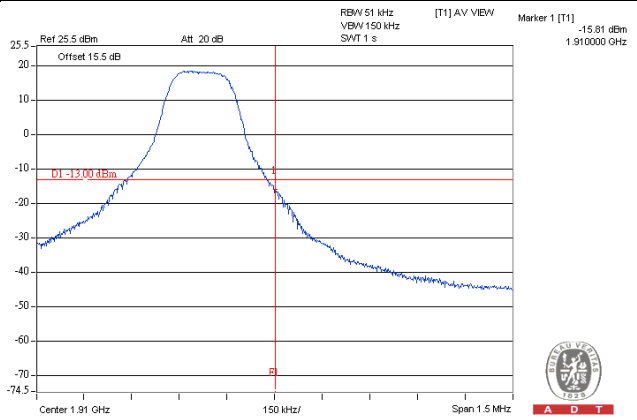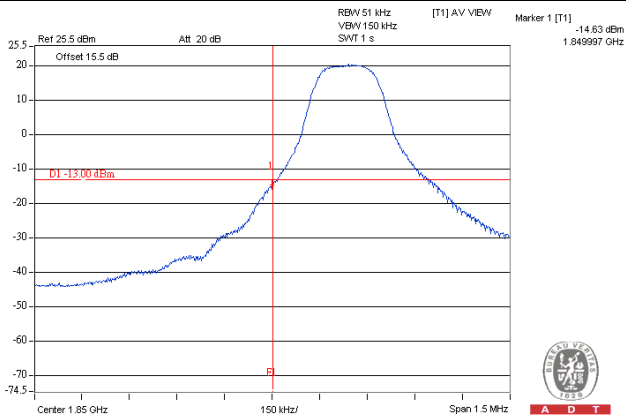



<b>Channel 18615 (1851.50MHz)</b>	<b>QPSK</b>	<b>15 RB / 0 RB Offset</b>	<b>Channel 19185 (1908.50MHz)</b>	<b>QPSK</b>	<b>15 RB / 0 RB Offset</b>
---------------------------------------	-------------	----------------------------	---------------------------------------	-------------	----------------------------

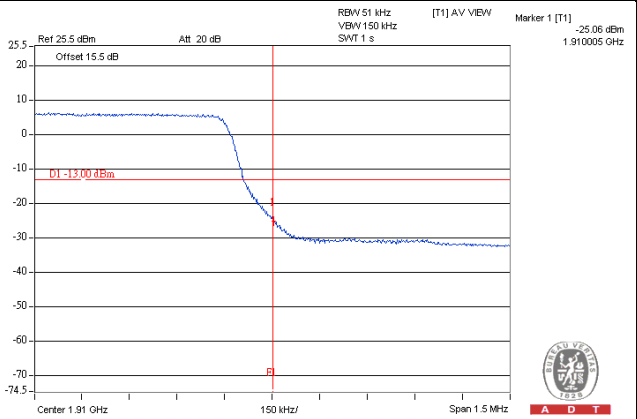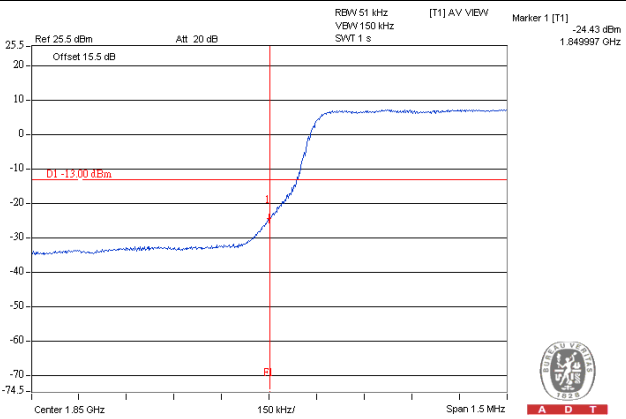



**LTE Band 2, Channel Bandwidth 5MHz**

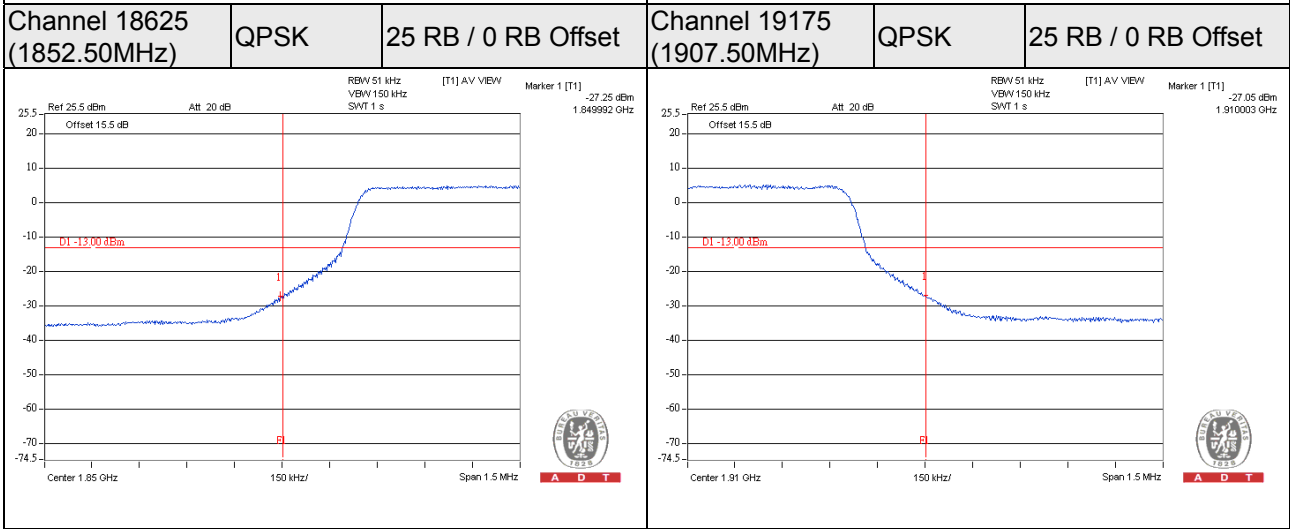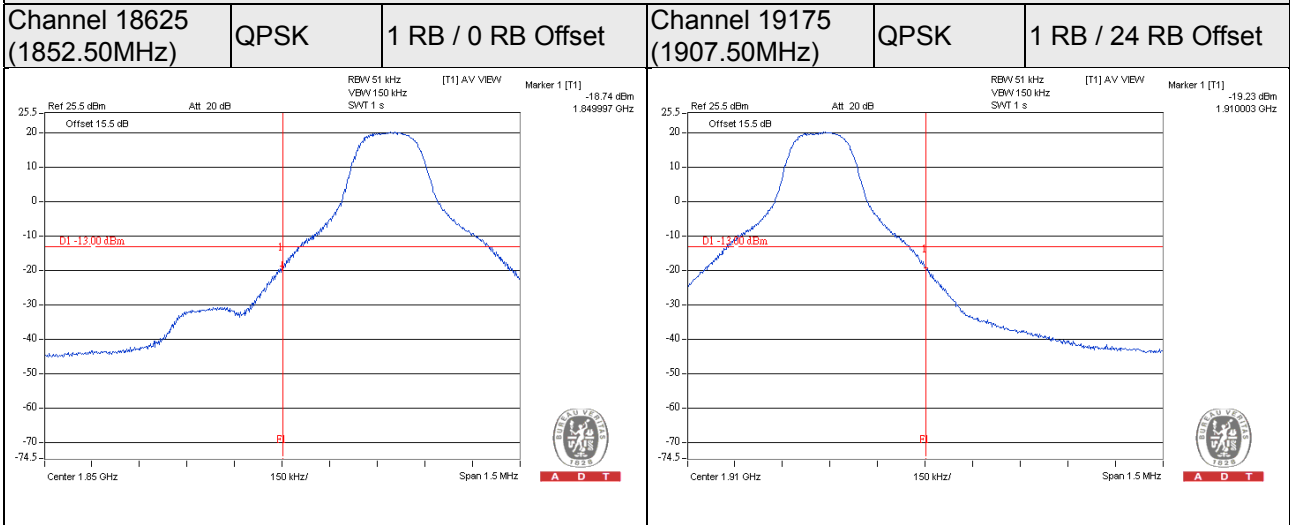



**LTE Band 2, Channel Bandwidth 10MHz**

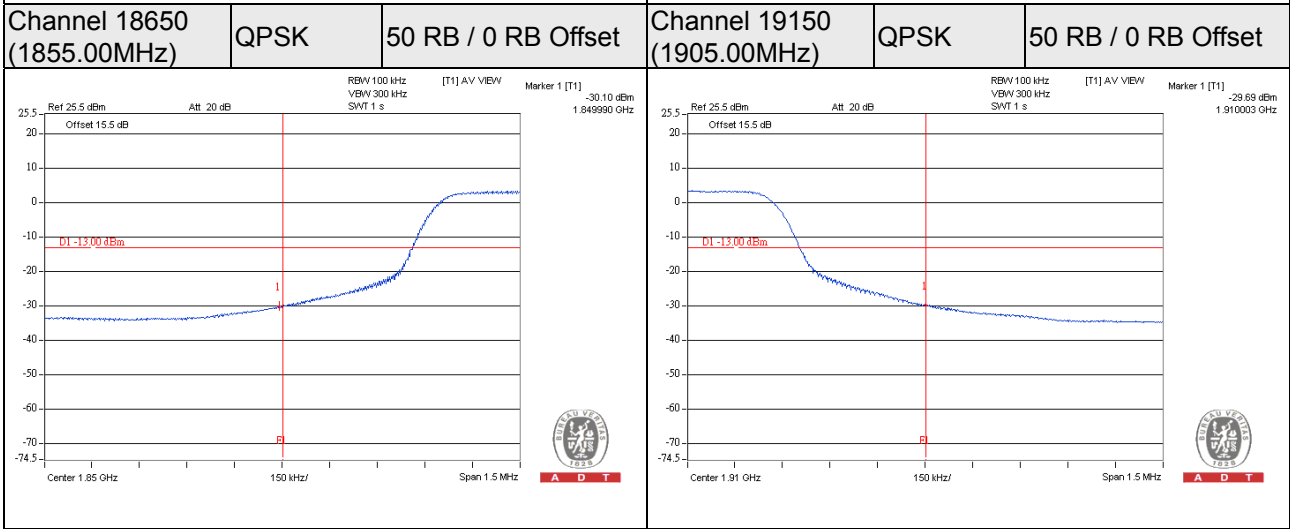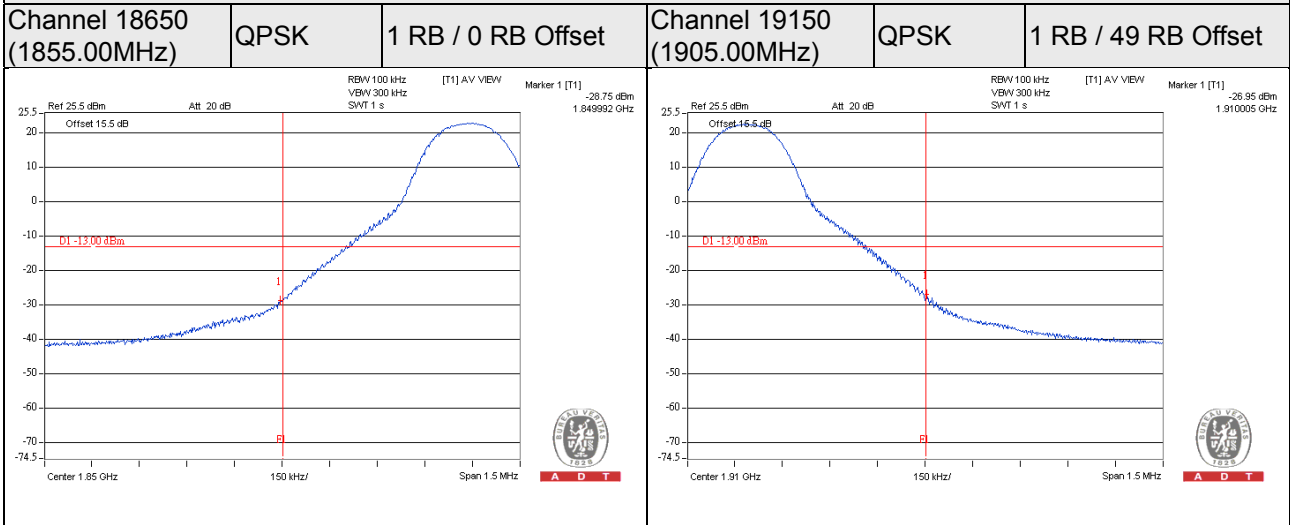

**LTE Band 2, Channel Bandwidth 15MHz**

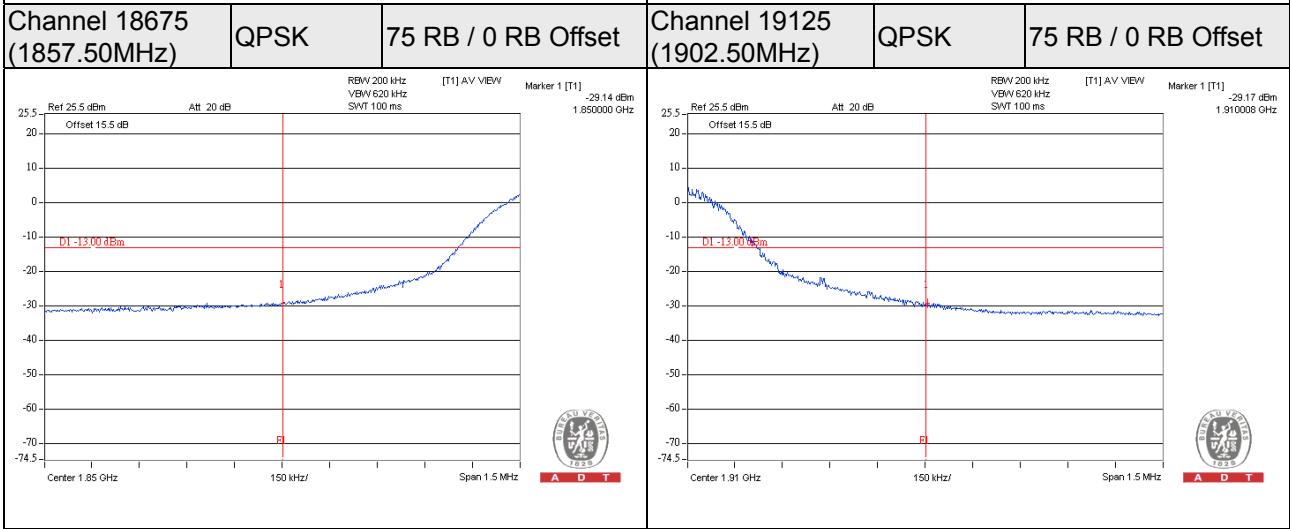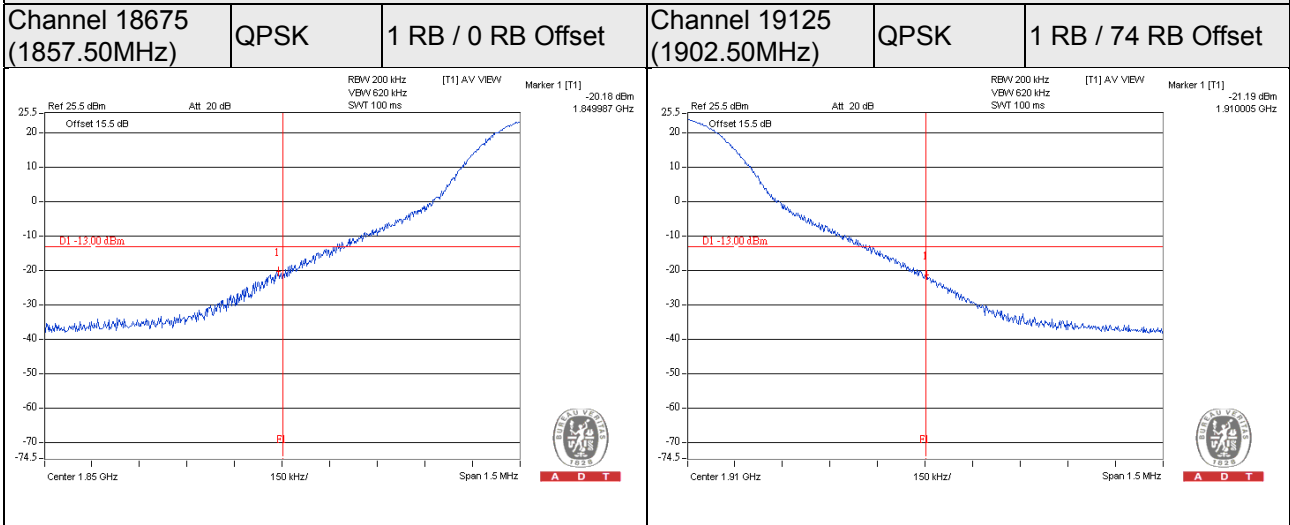

**LTE Band 2, Channel Bandwidth 20MHz**

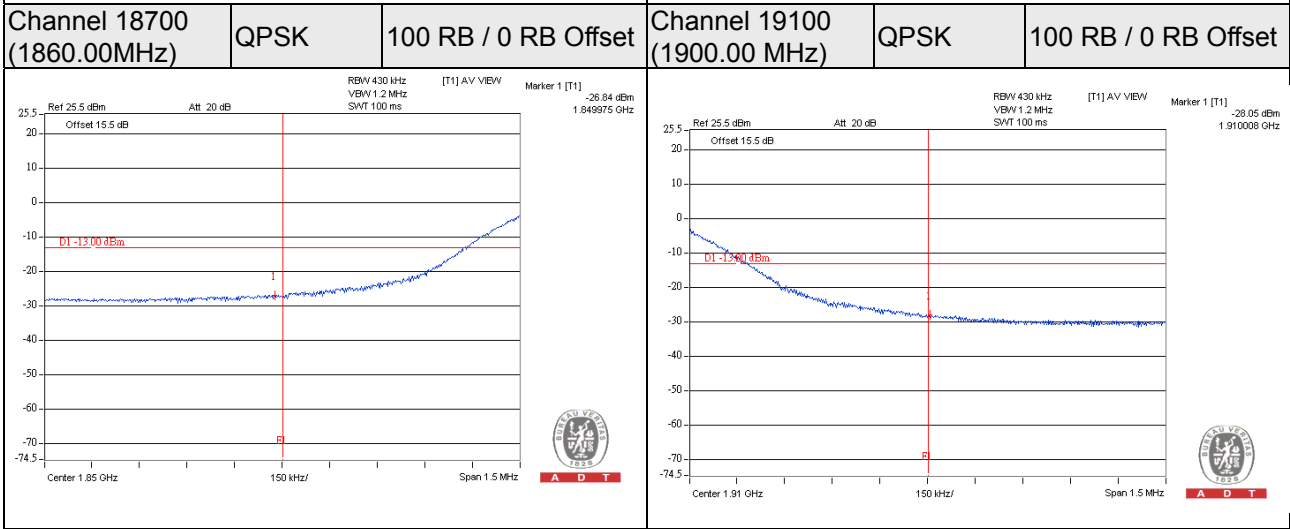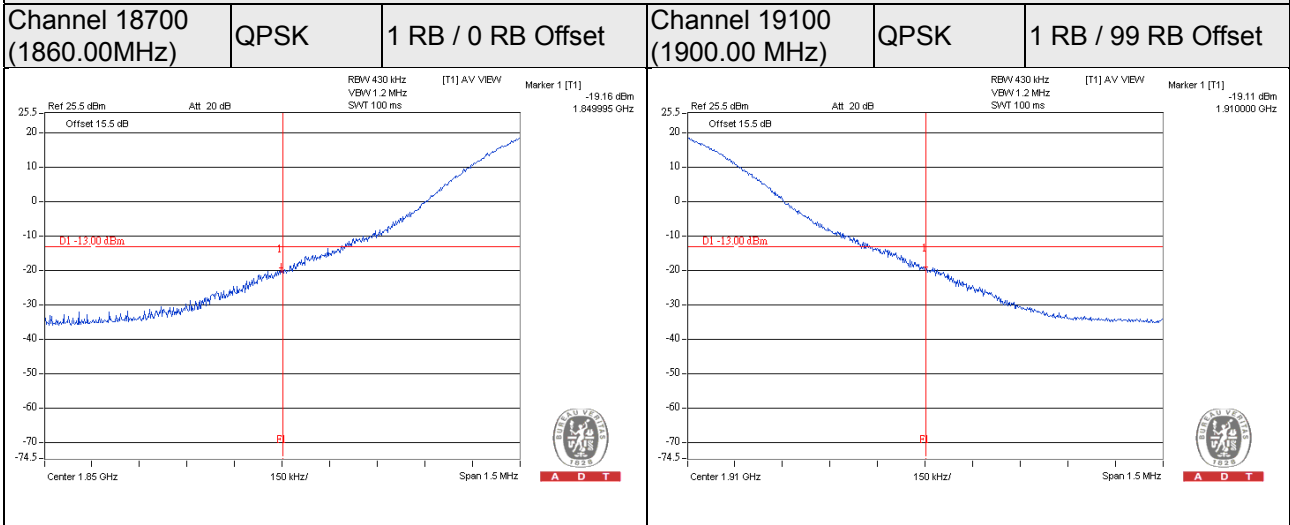




## 4.6 Peak to Average Ratio

### 4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

### 4.6.2 Test Setup

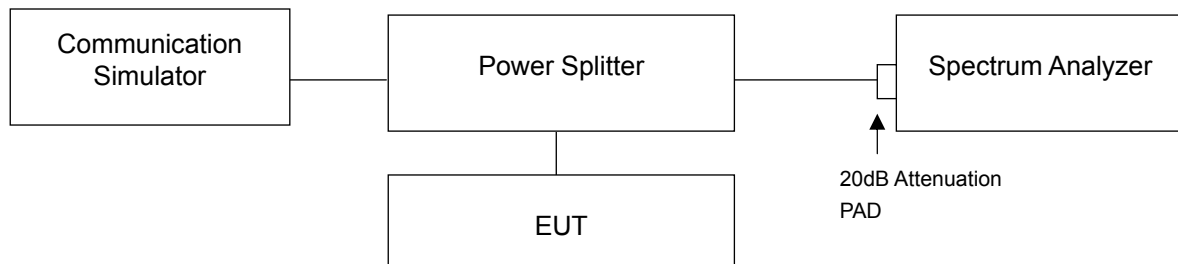

### 4.6.3 Test Procedures


- Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

#### 4.6.4 Test Results


Channel	Frequency (MHz)	Peak To Average Ratio (dB)		
		GSM	GPRS	EDGE
512	1850.2	2.96	2.86	2.90
661	1880.0	2.72	2.79	2.75
810	1909.8	2.73	2.76	2.80

#### Spectrum Plot Of Worst Value


##### GSM

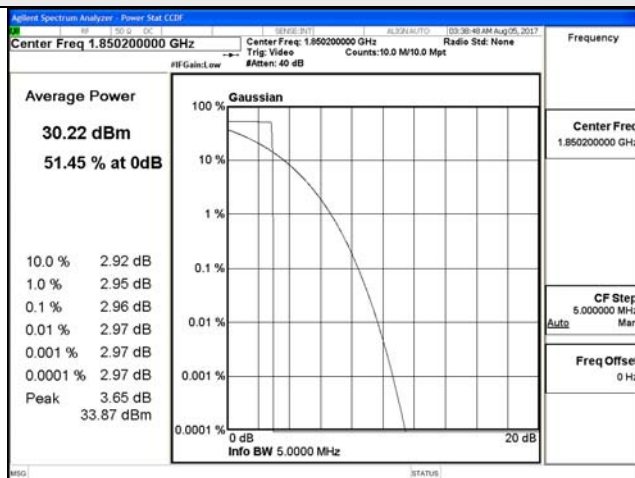



##### GPRS

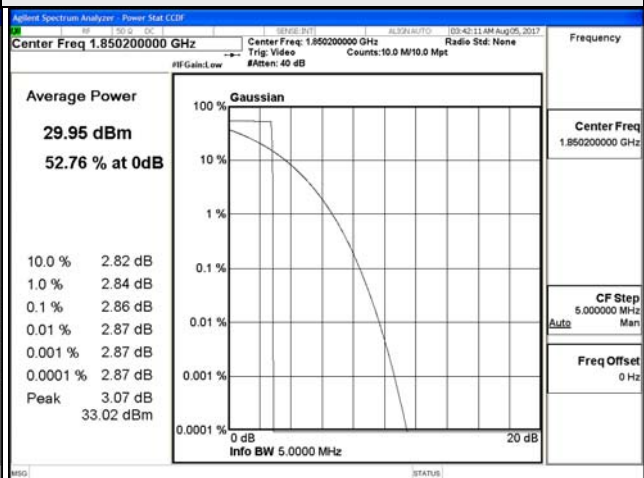

##### EDGE

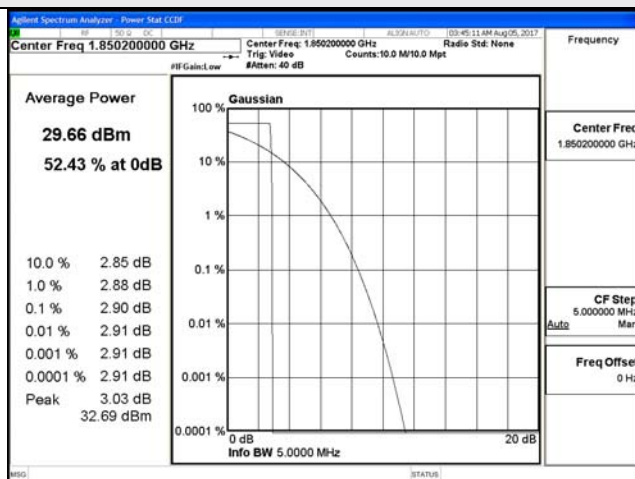

Channel	Frequency (MHz)	Peak To Average Ratio (dB)		
		WCDMA	HSDPA	HSUPA
9262	1852.4	3.02	3.02	2.99
9400	1880.0	3.12	3.11	3.10
9538	1907.6	2.91	2.91	2.92

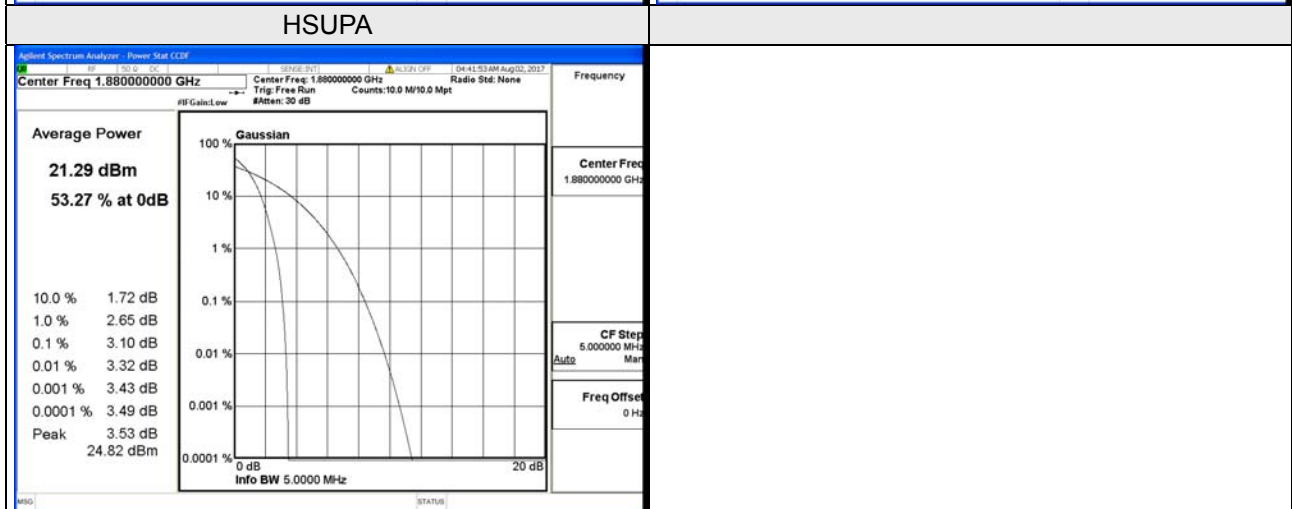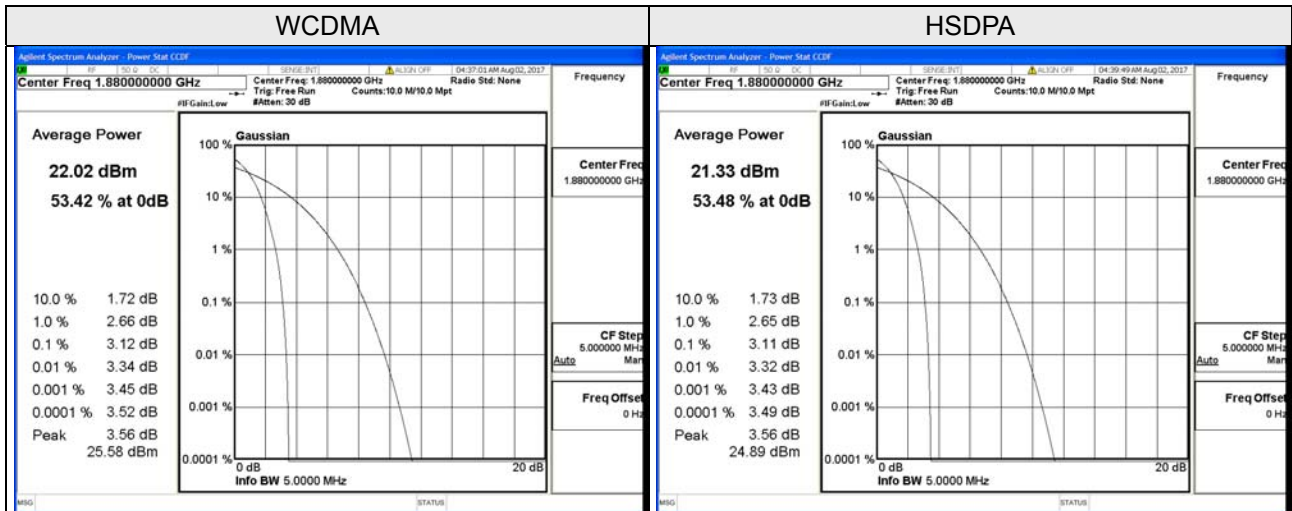

LTE Band 2, Channel Bandwidth 1.4MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18607	1850.7	3.41	4.36
18900	1880.0	3.70	4.73
19193	1909.3	4.25	4.25

LTE Band 2, Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18615	1851.5	3.56	3.25
18900	1880.0	3.71	3.66
19185	1908.5	3.35	3.28

LTE Band 2, Channel Bandwidth 5MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18625	1852.5	4.82	3.48
18900	1880.0	4.97	3.65
19175	1907.5	3.49	3.46


LTE Band 2, Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18650	1855.0	3.42	3.43
18900	1880.0	3.62	3.58
19150	1905.0	3.50	3.41

LTE Band 2, Channel Bandwidth 15MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18675	1857.5	3.42	3.37
18900	1880.0	3.63	3.55
19125	1902.5	3.62	3.64


LTE Band 2, Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18700	1860.0	3.43	3.42
18900	1880.0	3.38	3.37
19100	1900.0	3.78	3.69

### Spectrum Plot Of Worst Value


#### 1.4MHz / 16QAM

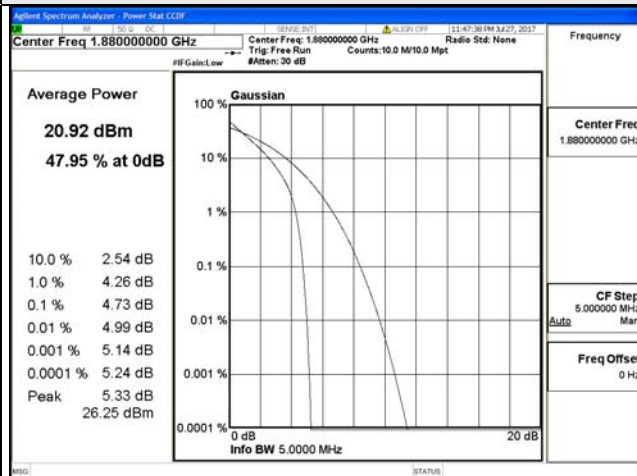


#### 3MHz / QPSK

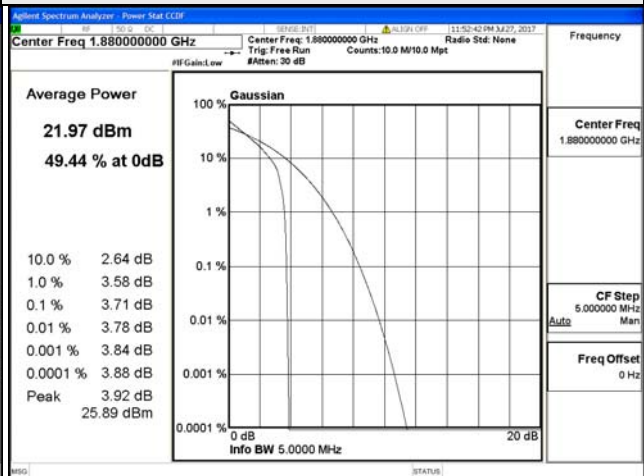


#### 5MHz / QPSK

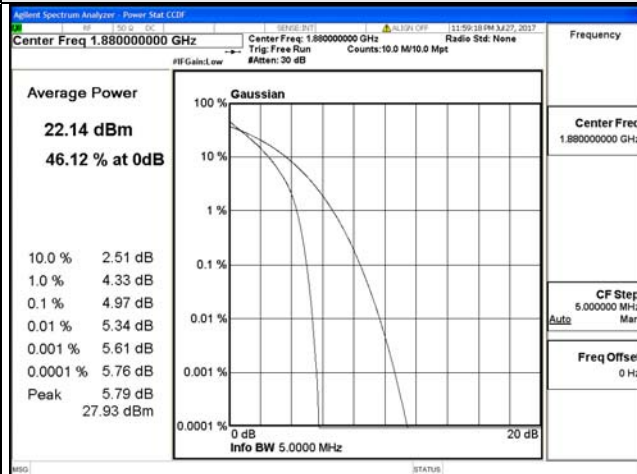


#### 10MHz / QPSK

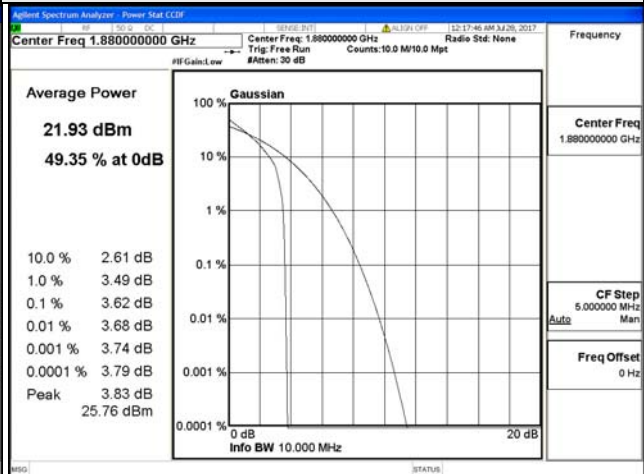

#### 15MHz / QPSK

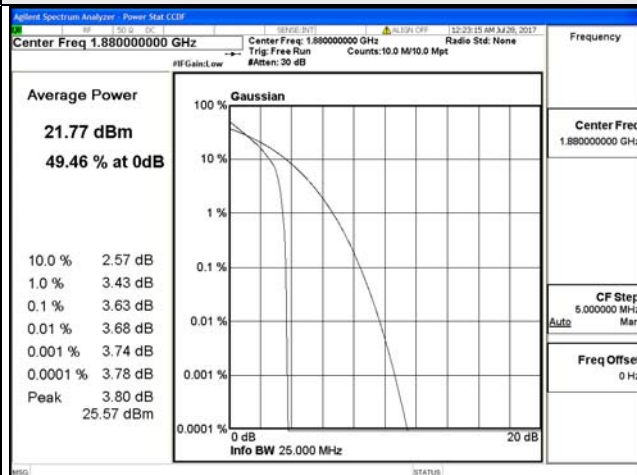

#### 20MHz / QPSK

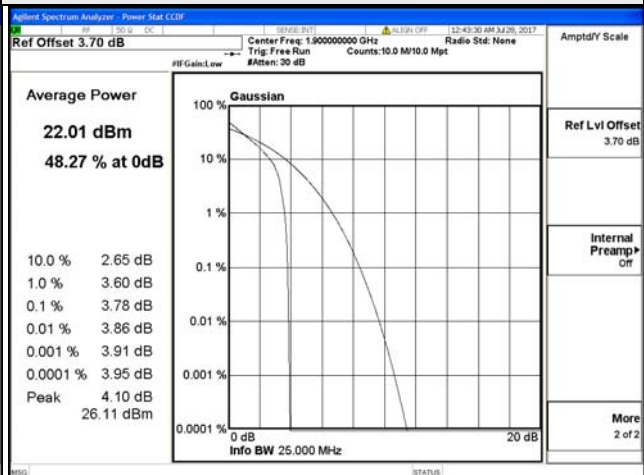


## 4.7 Conducted Spurious Emissions

### 4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.7.2 Test Setup

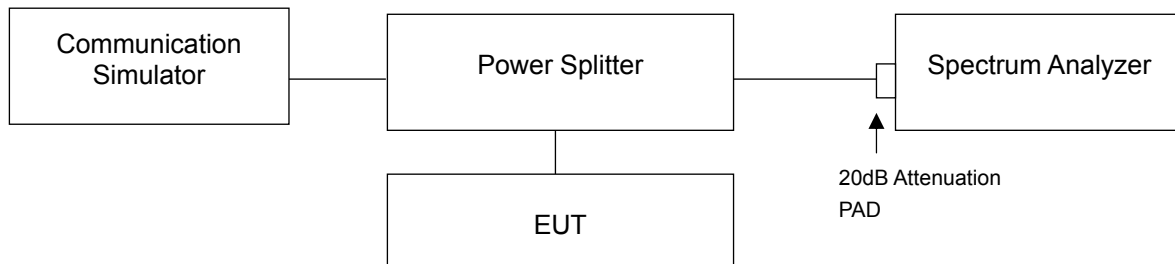

### 4.7.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1GHz. 20dB attenuation pad is connected with spectrum. RBW=100kHz and VBW=300kHz is used for conducted emission measurement.
- Measuring frequency range is from 1GHz to 26.5GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

### 4.7.4 Test Results


**GSM**

**Channel 512 (1850.2MHz)**

**Frequency Range : 9kHz~1GHz**      **Frequency Range : 1GHz~10GHz**

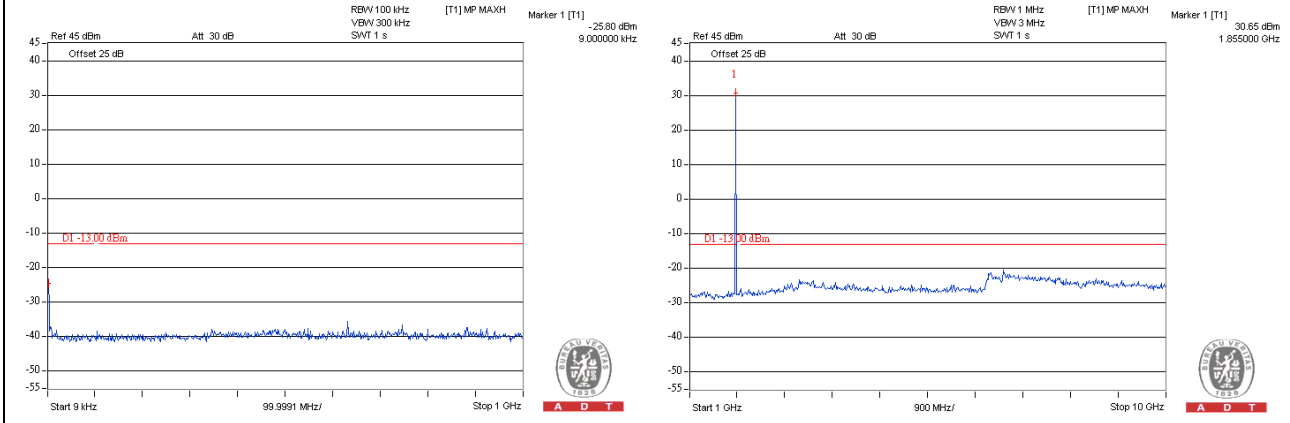

**Frequency Range : 10GHz~26.5GHz**

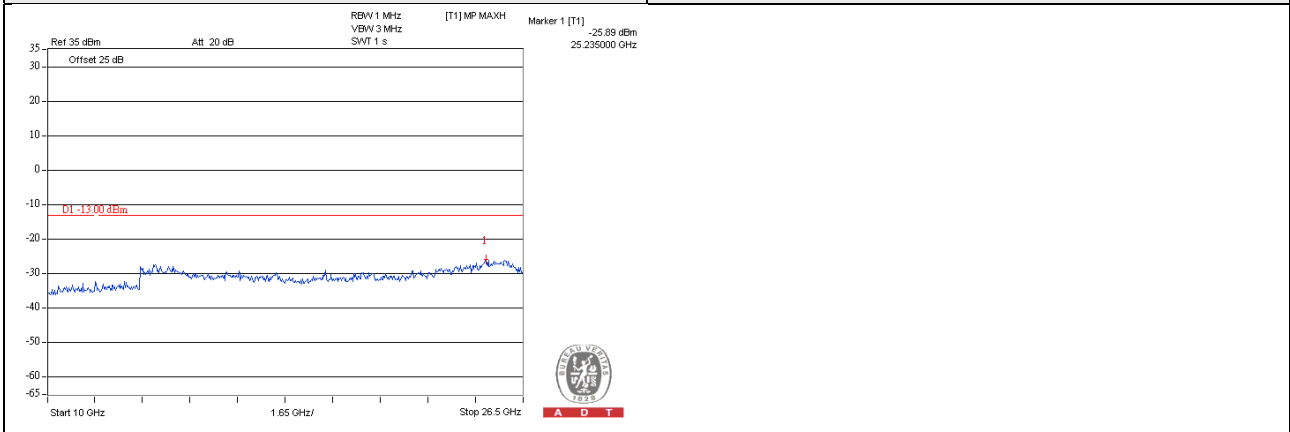





**GSM**


**Channel 661 (1880.0MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

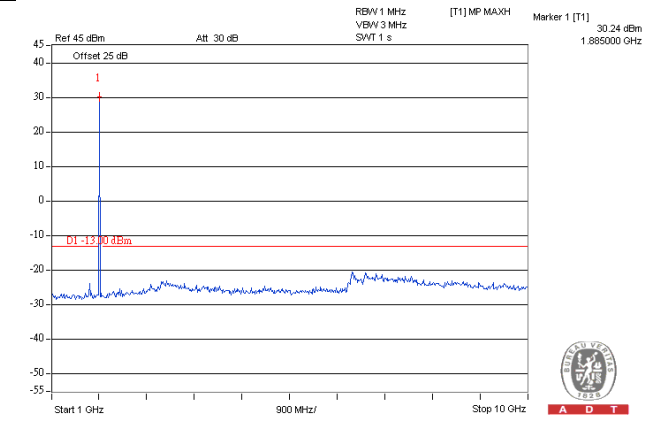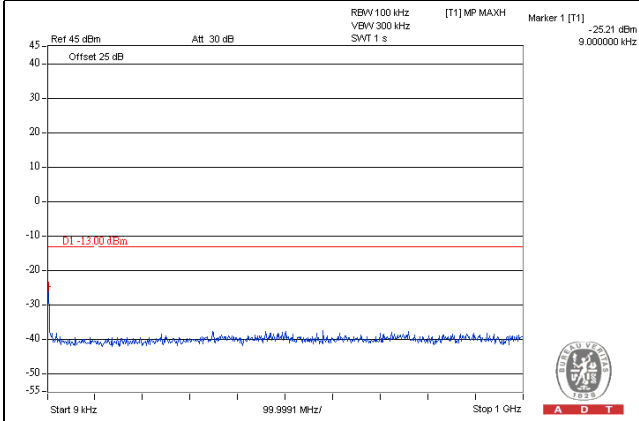

**Frequency Range : 10GHz~26.5GHz**


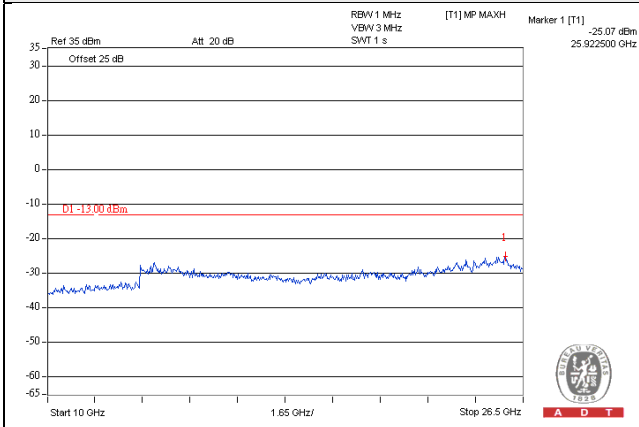


**GSM**


**Channel 810 (1909.8MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

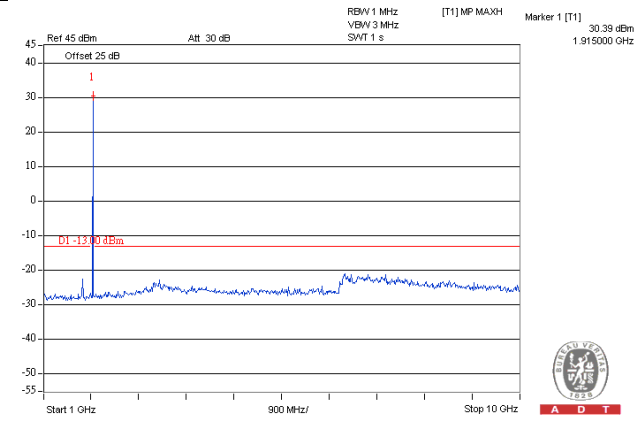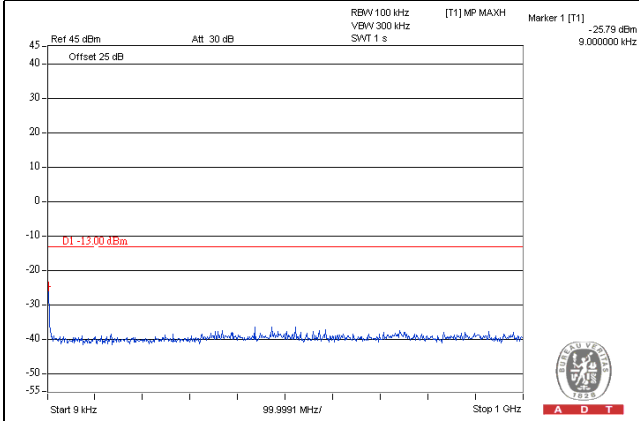

**Frequency Range : 10GHz~26.5GHz**


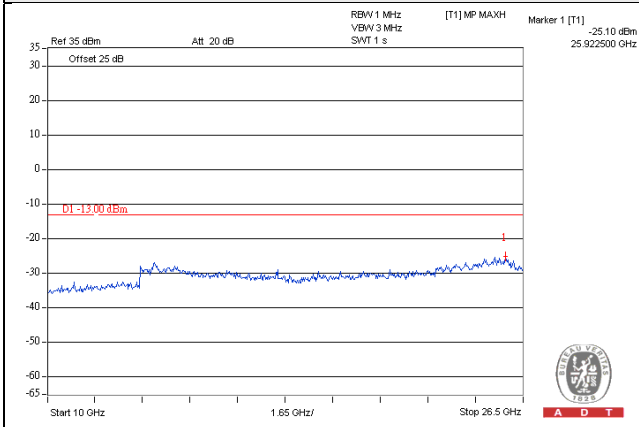


**GPRS**


**Channel 512 (1850.2MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

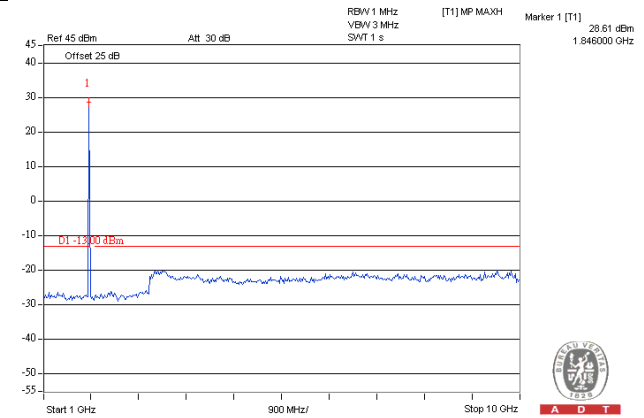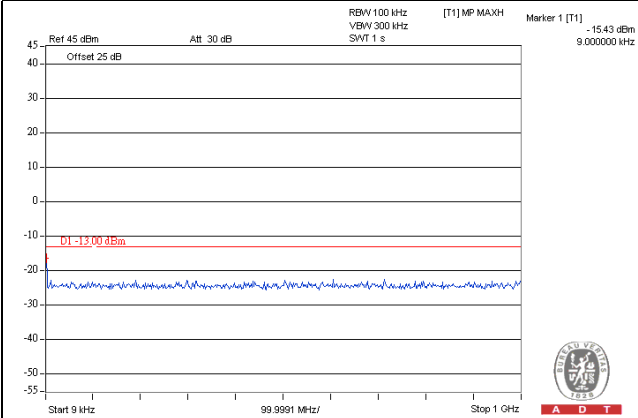

**Frequency Range : 10GHz~26.5GHz**


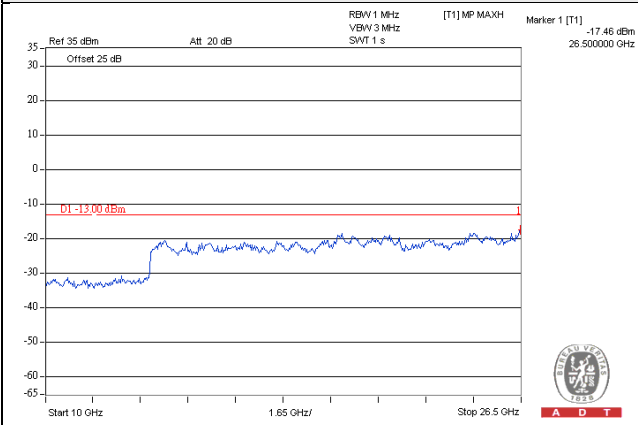


**GPRS**


**Channel 661 (1880.0MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

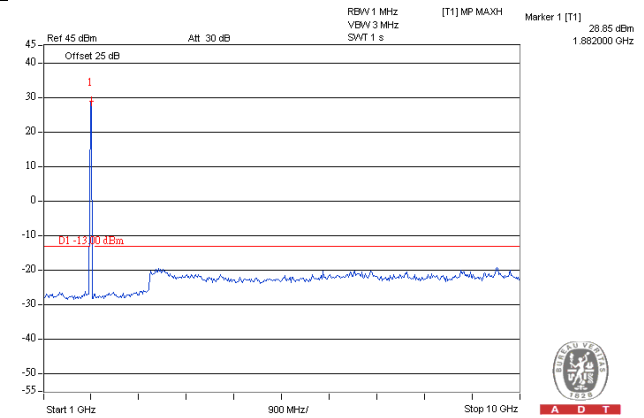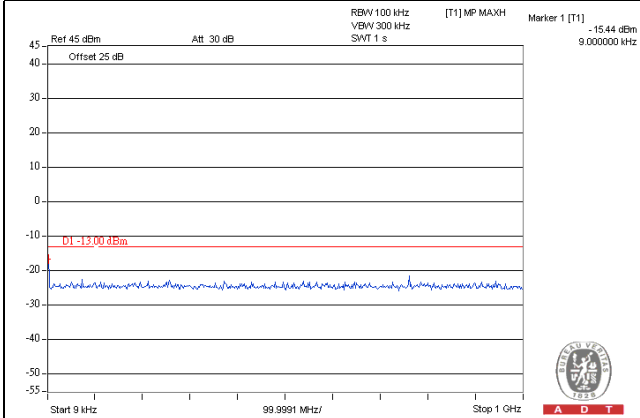

**Frequency Range : 10GHz~26.5GHz**


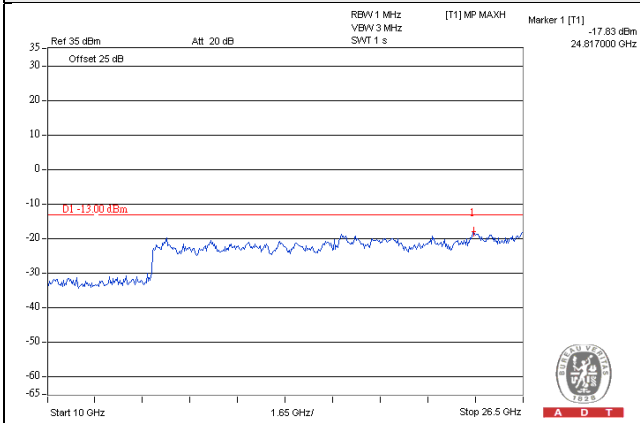


**GPRS**


**Channel 810 (1909.8MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

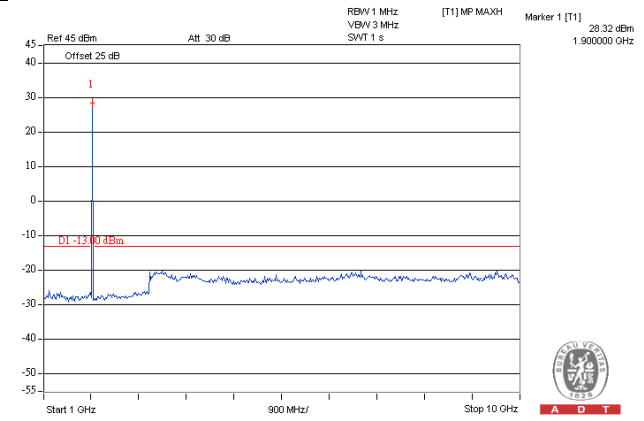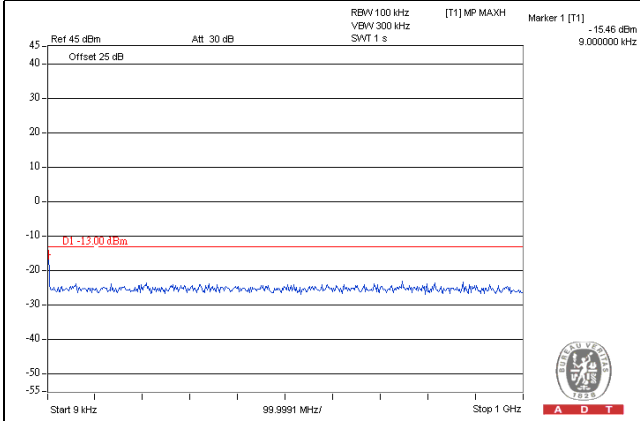

**Frequency Range : 10GHz~26.5GHz**


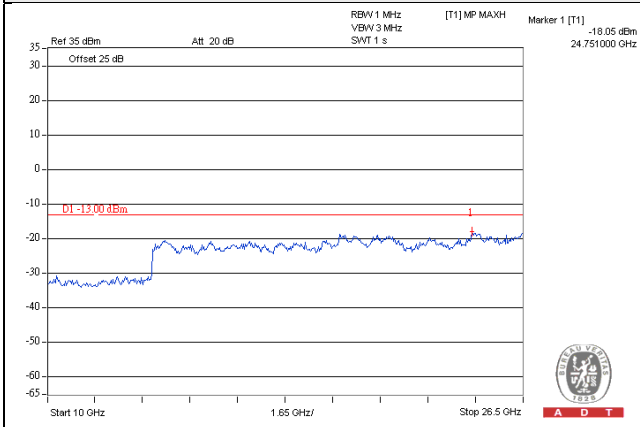


**EDGE**


**Channel 512 (1850.2MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

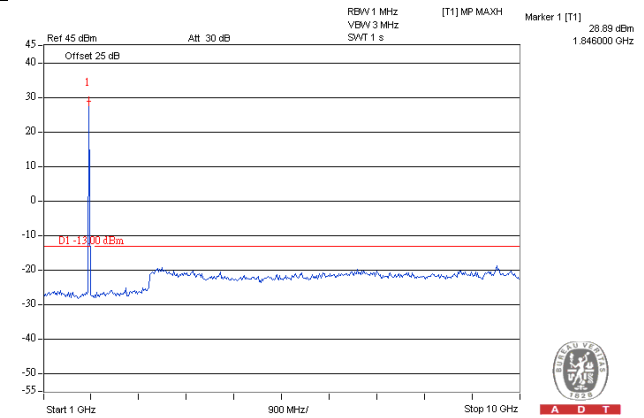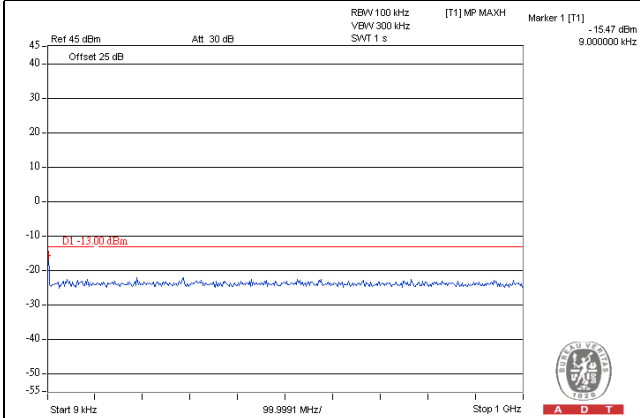

**Frequency Range : 10GHz~26.5GHz**


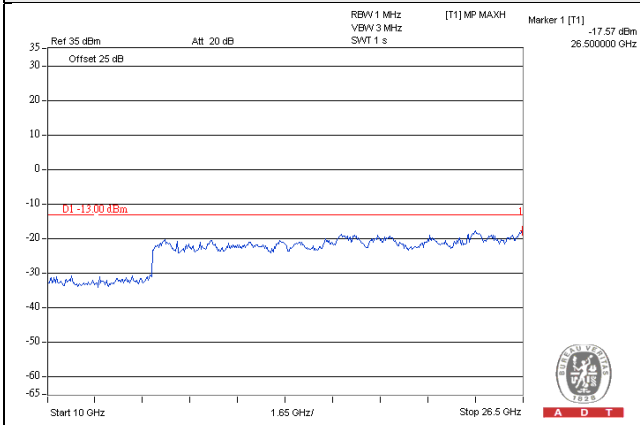


**EDGE**


**Channel 661 (1880.0MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

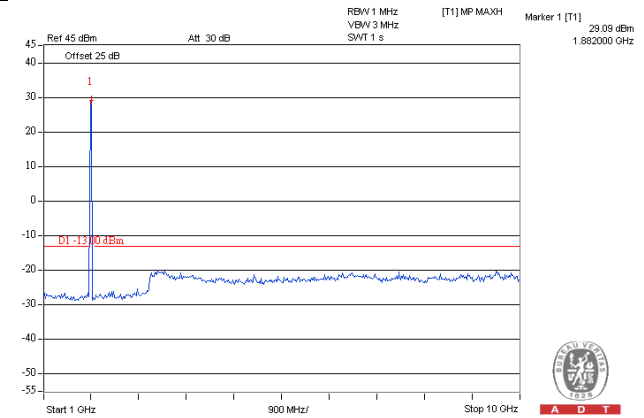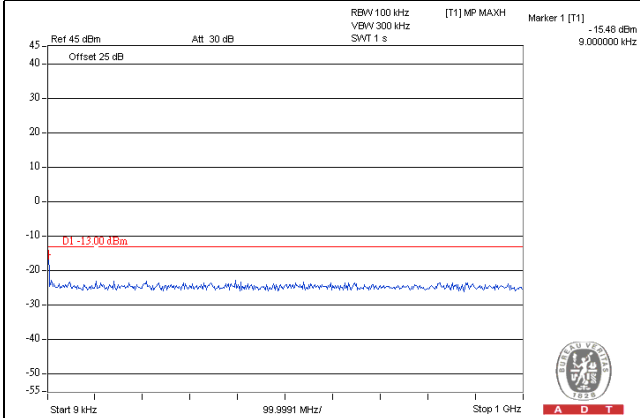

**Frequency Range : 10GHz~26.5GHz**


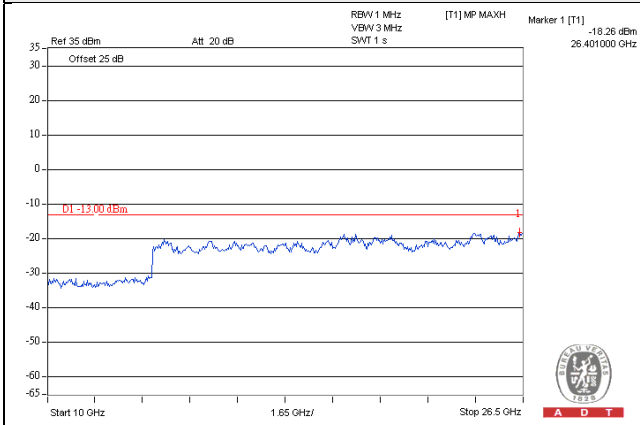


**EDGE**


Channel 810 (1909.8MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

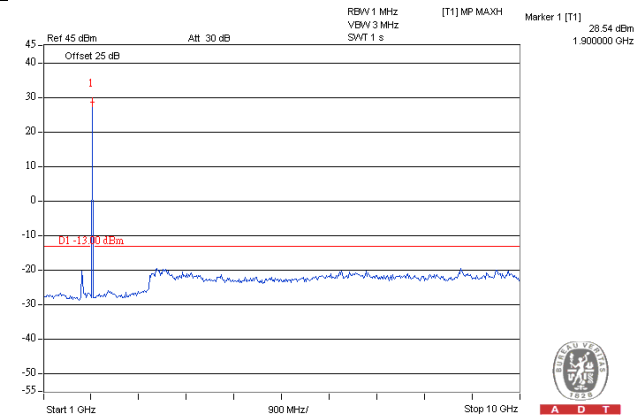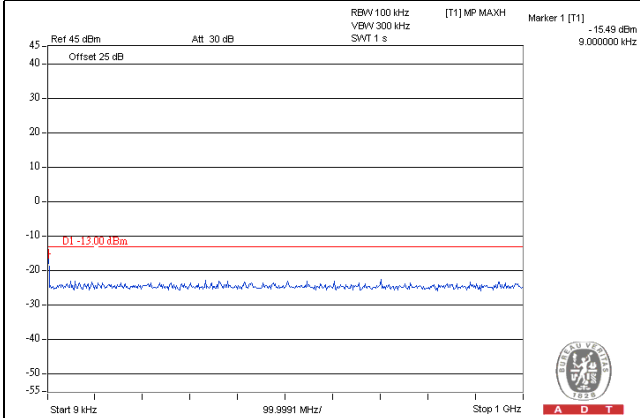

Frequency Range : 10GHz~26.5GHz

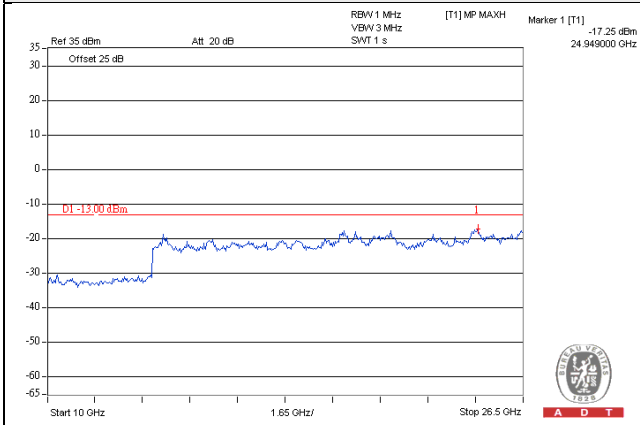





WCDMA


Channel 9262 (1852.4MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

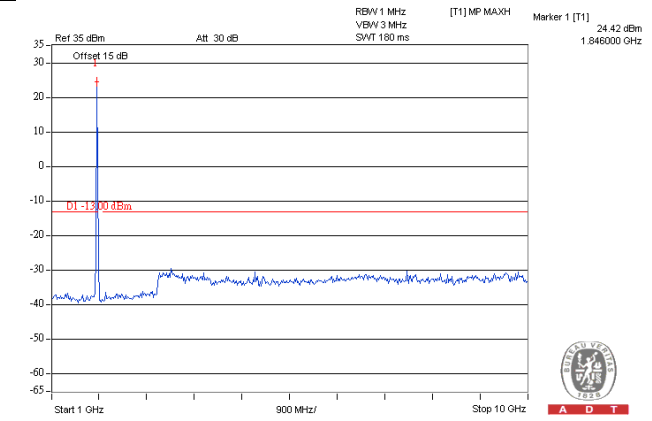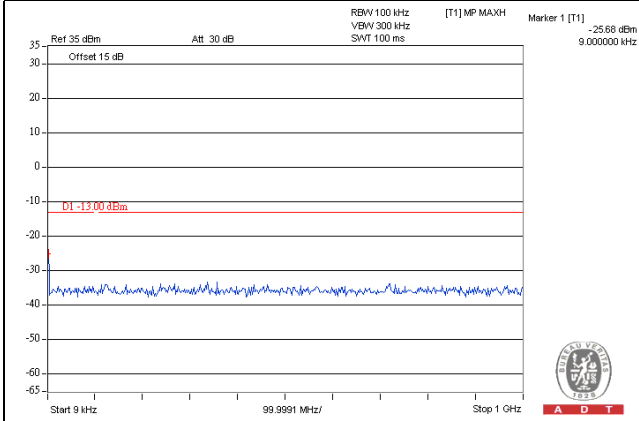

Frequency Range : 10GHz~26.5GHz


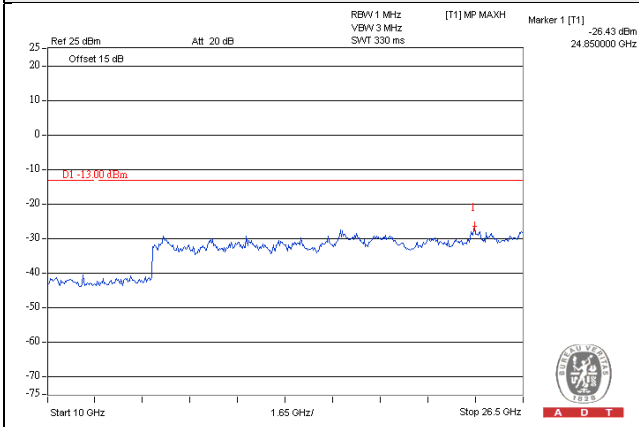


WCDMA


Channel 9400 (1880.0MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

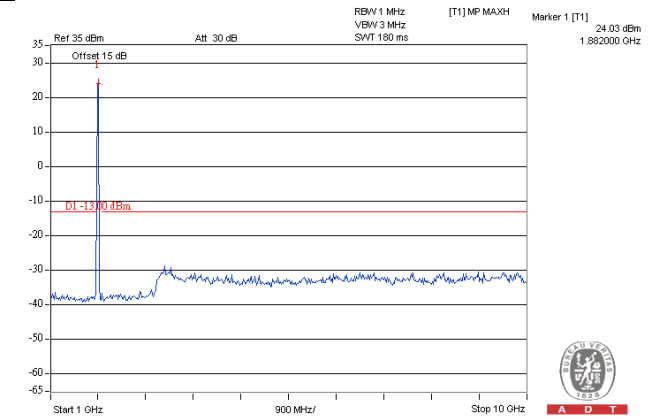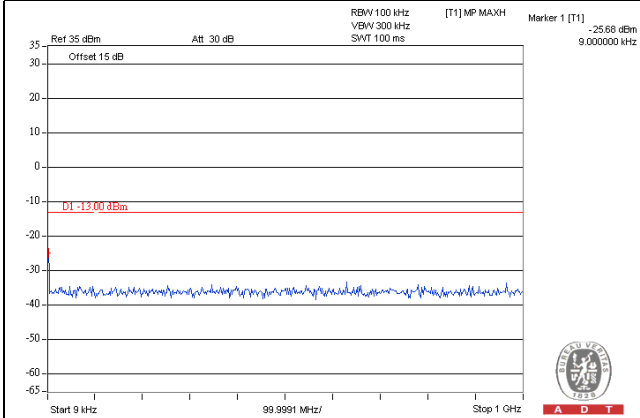

Frequency Range : 10GHz~26.5GHz


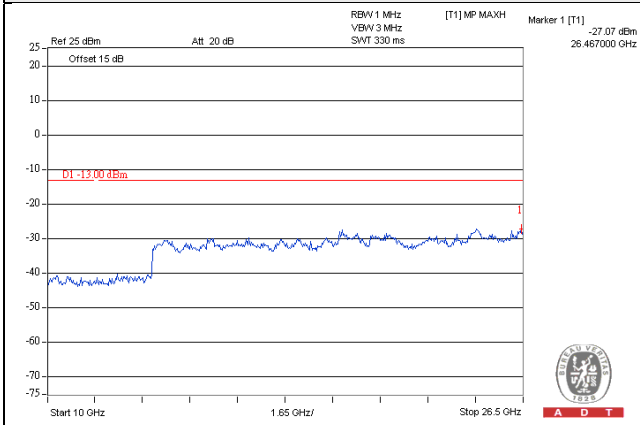


WCDMA


Channel 9538 (1907.6MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

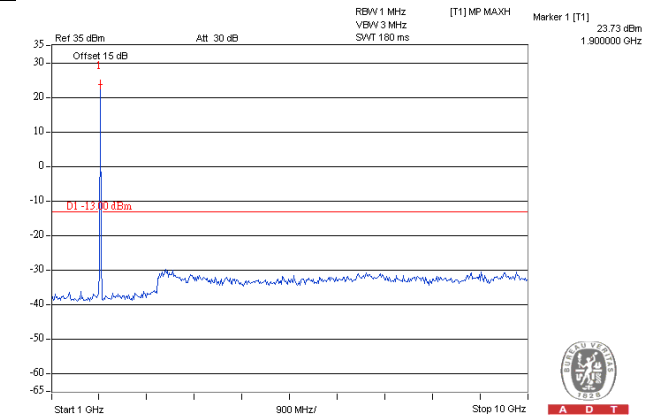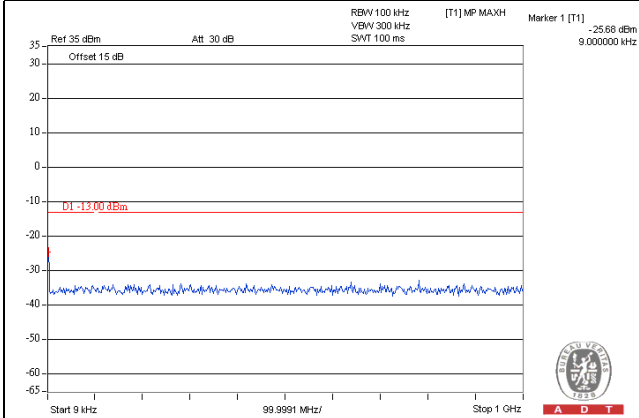

Frequency Range : 10GHz~26.5GHz


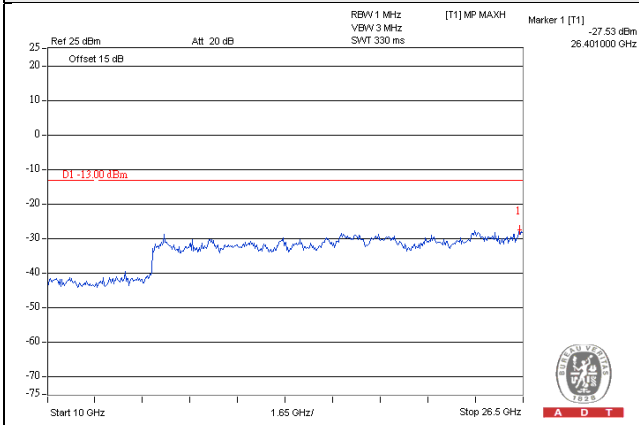


HSDPA


Channel 9262 (1852.4MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

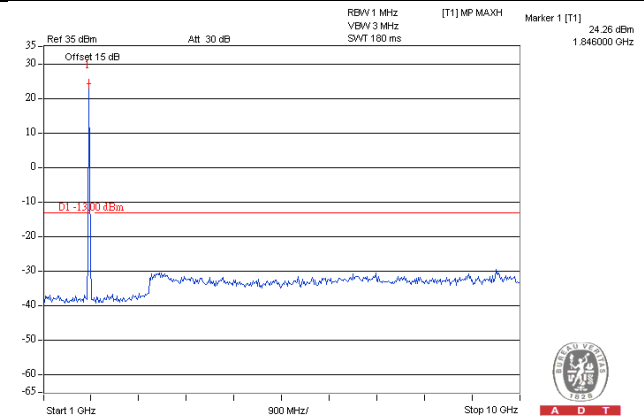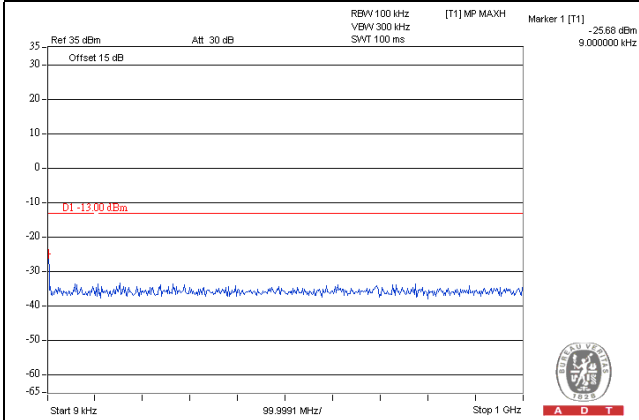

Frequency Range : 10GHz~26.5GHz


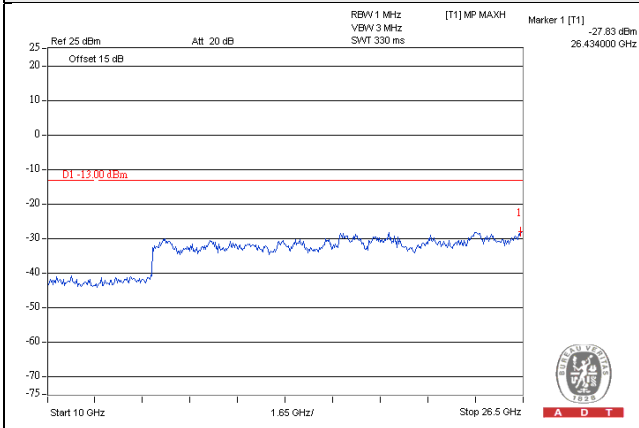


**HSDPA**


**Channel 9400 (1880.0MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

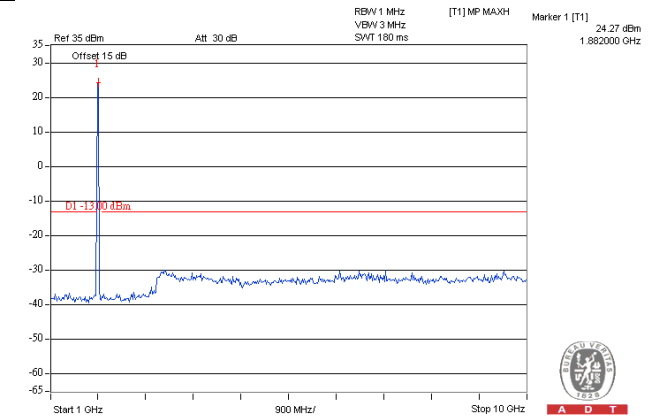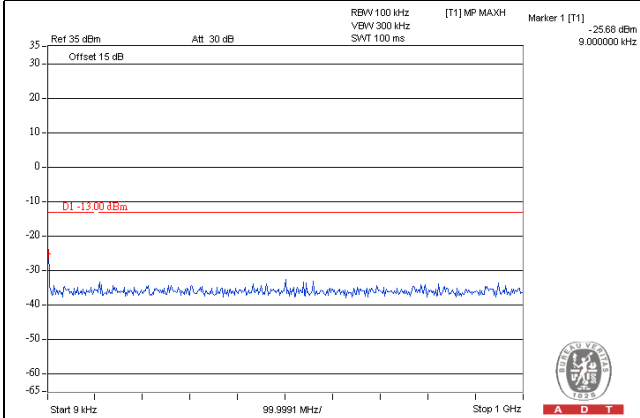

**Frequency Range : 10GHz~26.5GHz**


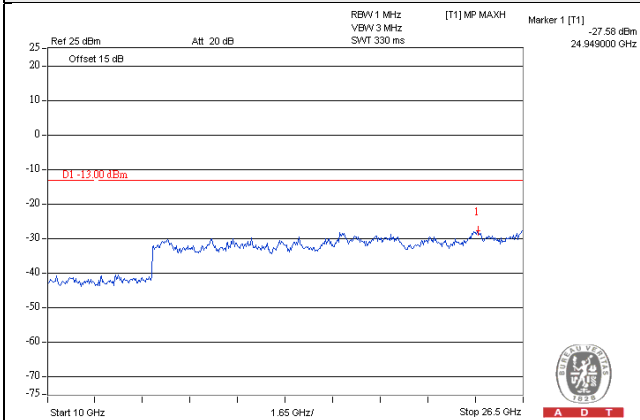


# HSDPA


Channel 9538 (1907.6MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

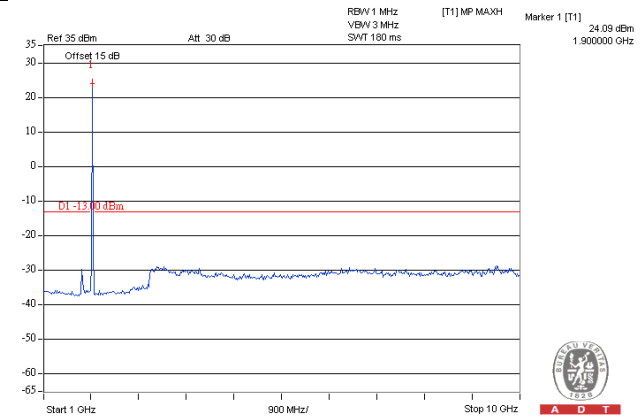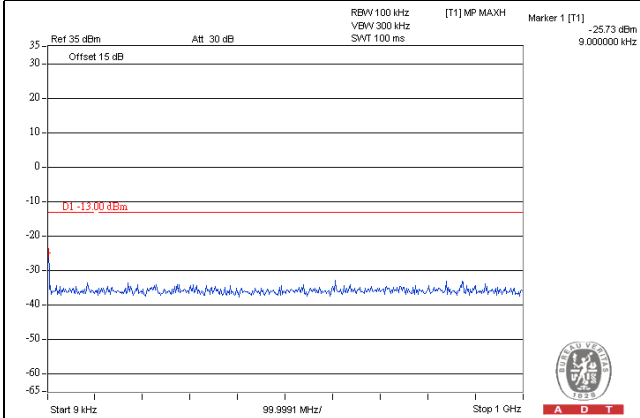

Frequency Range : 10GHz~26.5GHz


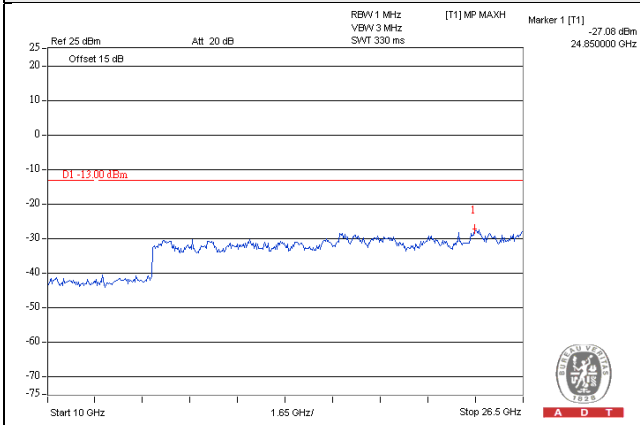


**HSUPA**


**Channel 9262 (1852.4MHz)**

**Frequency Range : 9kHz~1GHz**

**Frequency Range : 1GHz~10GHz**

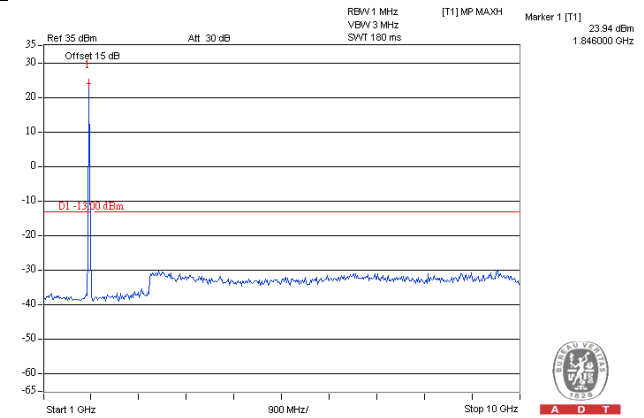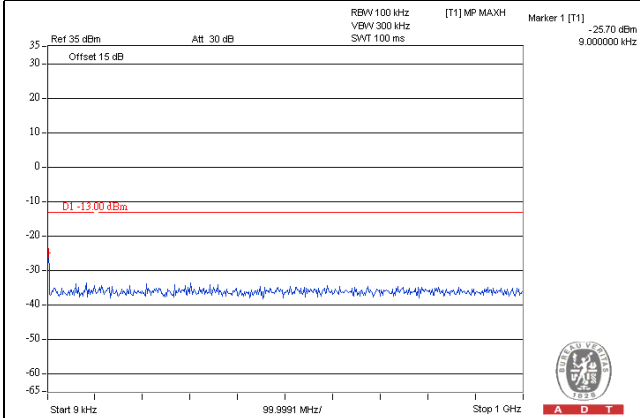

**Frequency Range : 10GHz~26.5GHz**


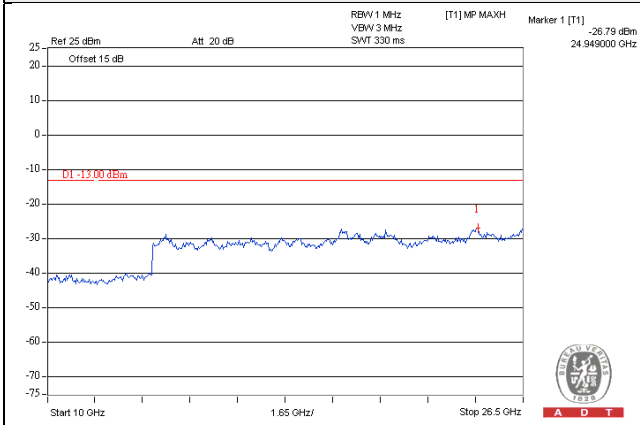


HSUPA


Channel 9400 (1880.0MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

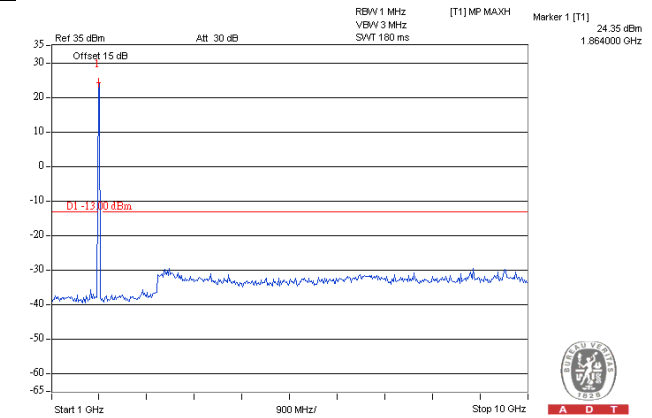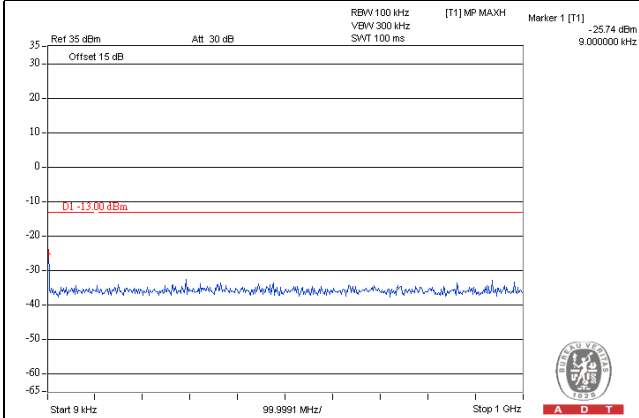

Frequency Range : 10GHz~26.5GHz

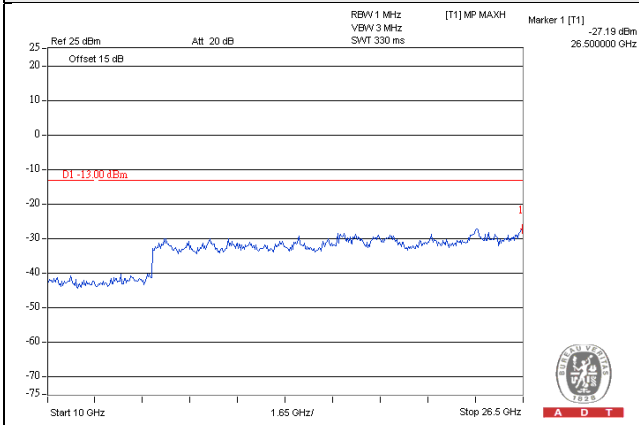





HSUPA


Channel 9538 (1907.6MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

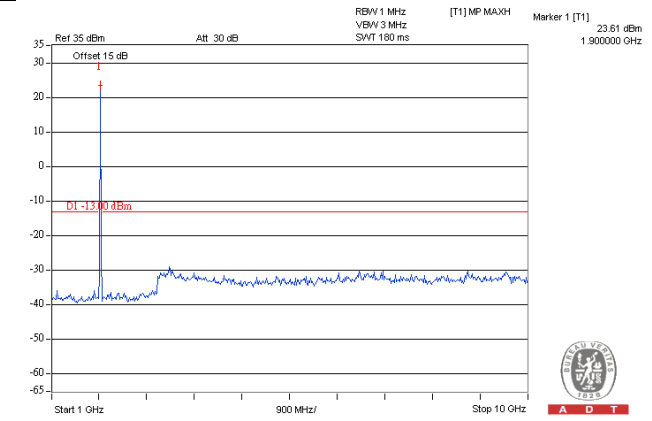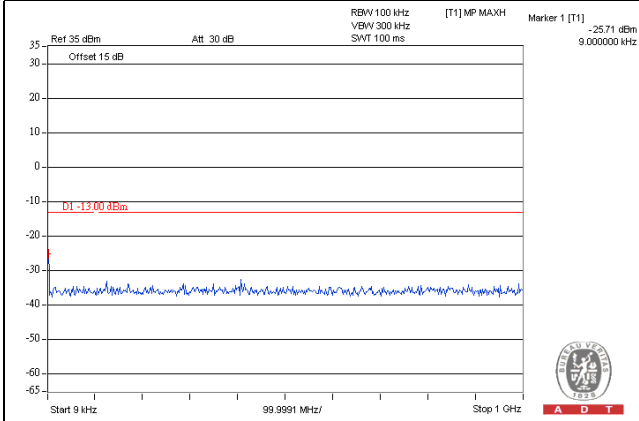

Frequency Range : 10GHz~26.5GHz


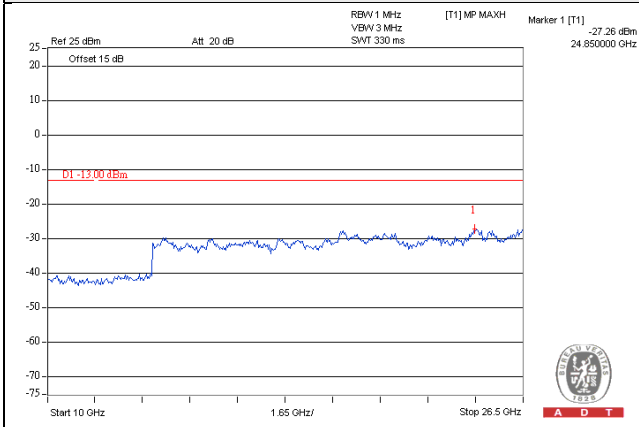


LTE Band 2, Channel Bandwidth 1.4MHz


Channel 18607 (1850.70MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

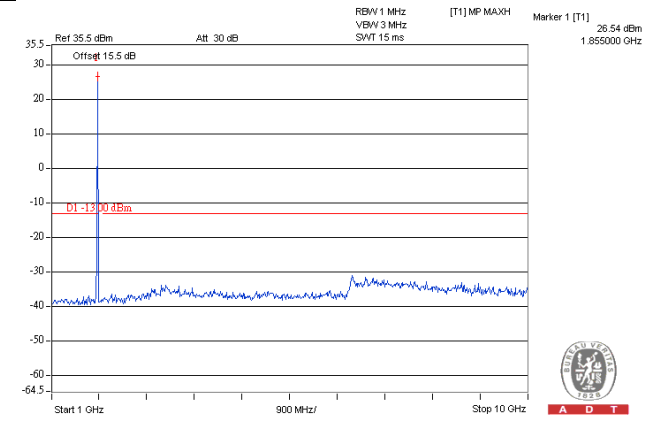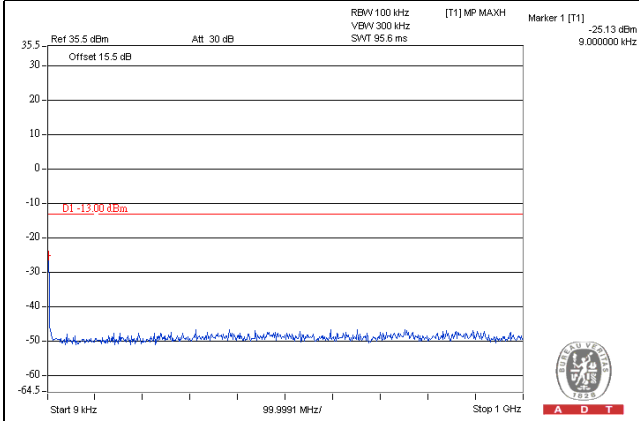

Frequency Range : 10GHz~26.5GHz


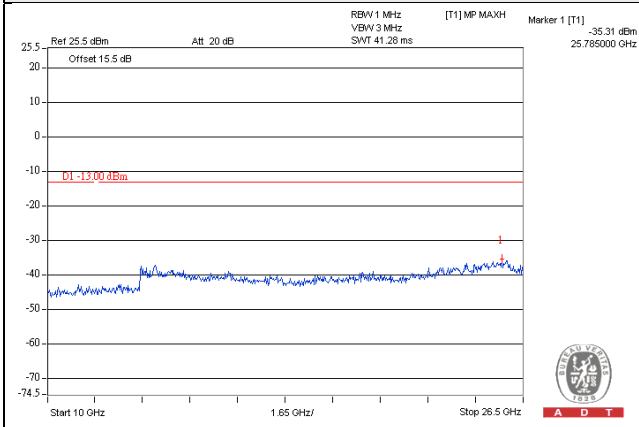


LTE Band 2, Channel Bandwidth 1.4MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

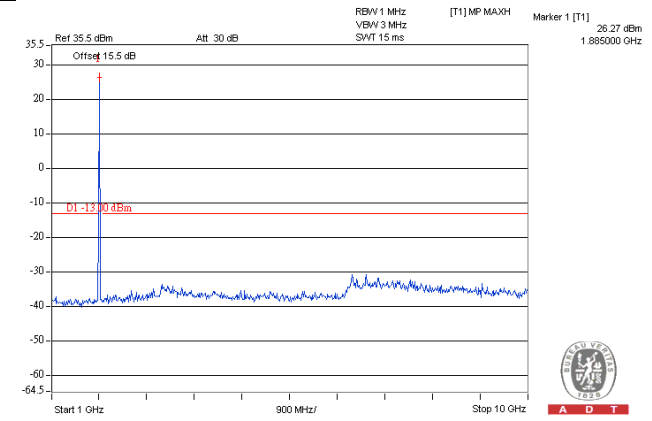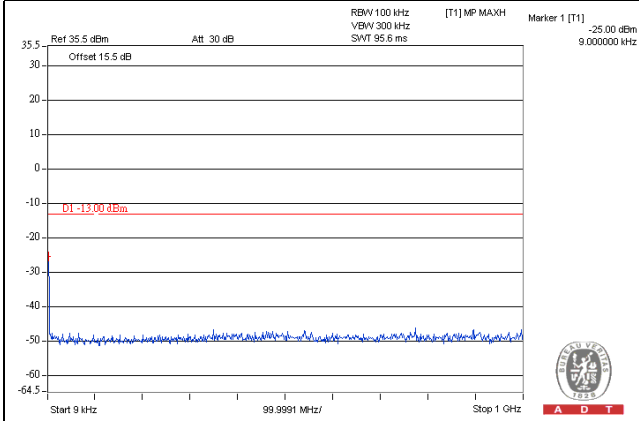

Frequency Range : 10GHz~26.5GHz


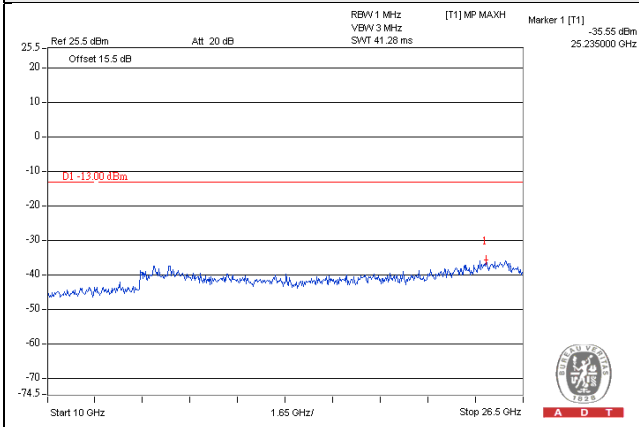


LTE Band 2, Channel Bandwidth 1.4MHz


Channel 19193 (1909.30MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

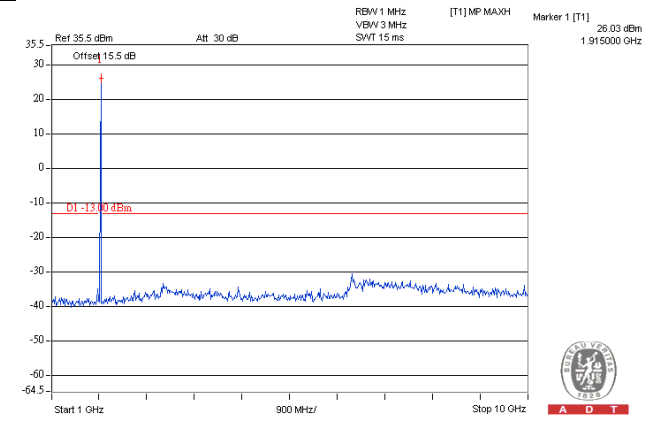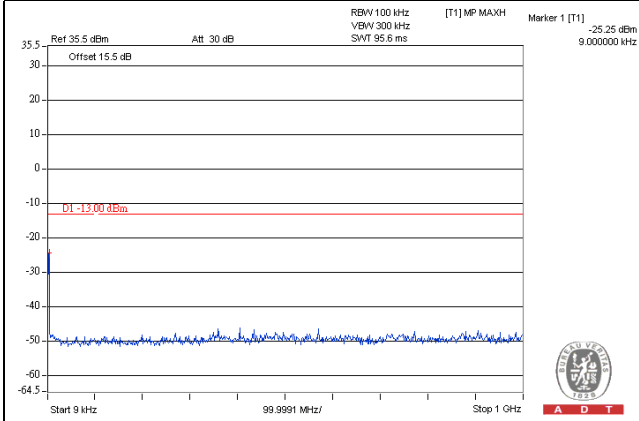

Frequency Range : 10GHz~26.5GHz


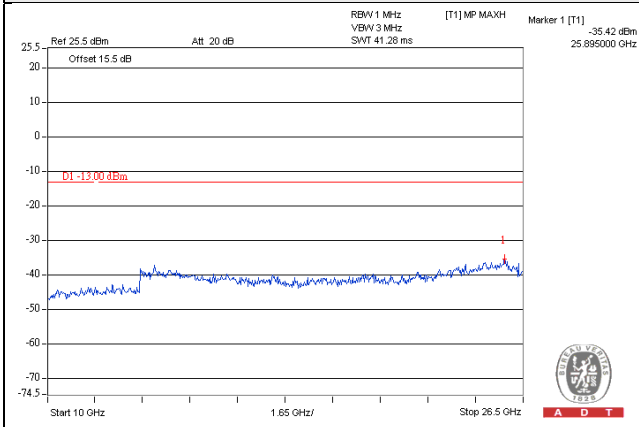


LTE Band 2, Channel Bandwidth 3MHz


Channel 18615 (1851.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

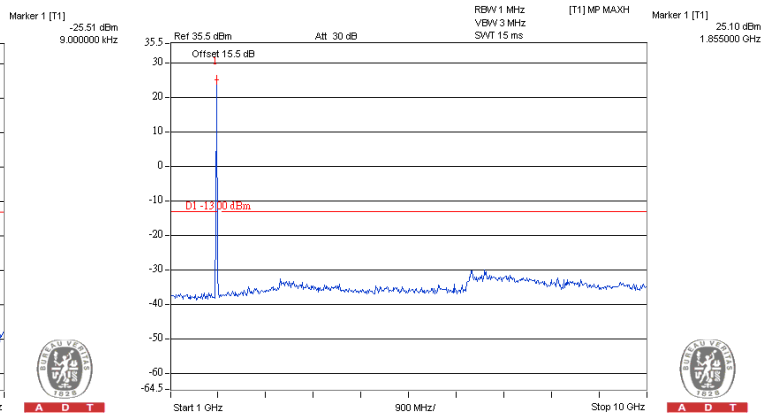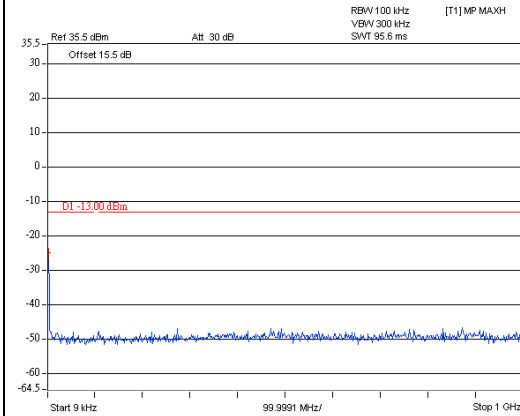

Frequency Range : 10GHz~26.5GHz


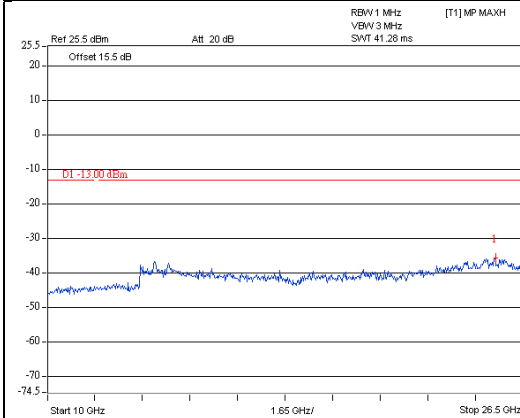


LTE Band 2, Channel Bandwidth 3MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

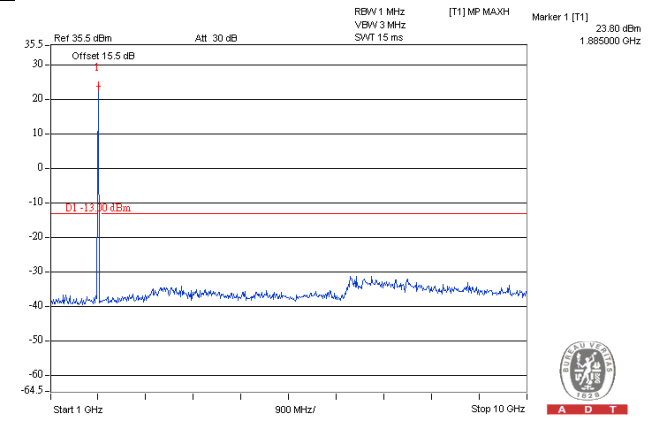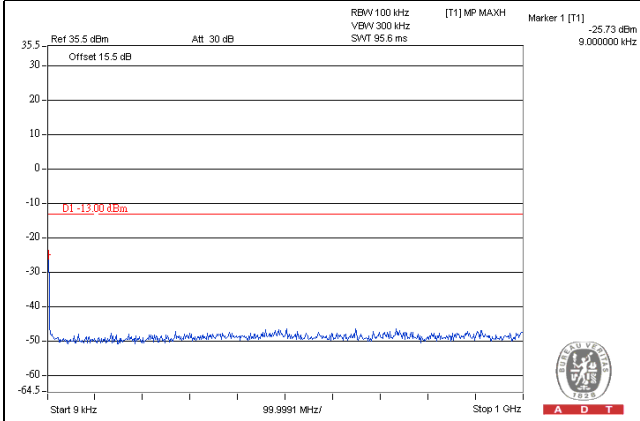

Frequency Range : 10GHz~26.5GHz


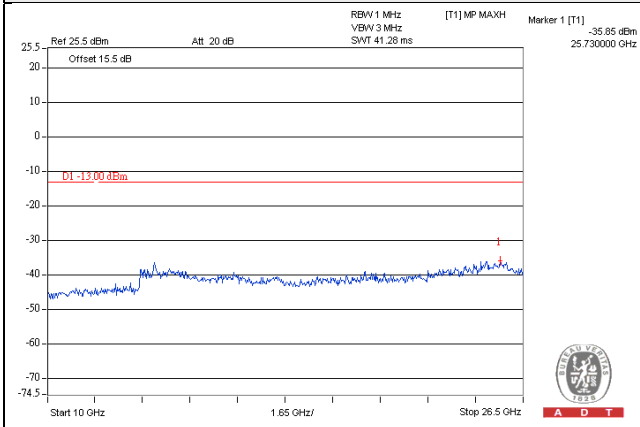


LTE Band 2, Channel Bandwidth 3MHz


Channel 19185 (1908.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

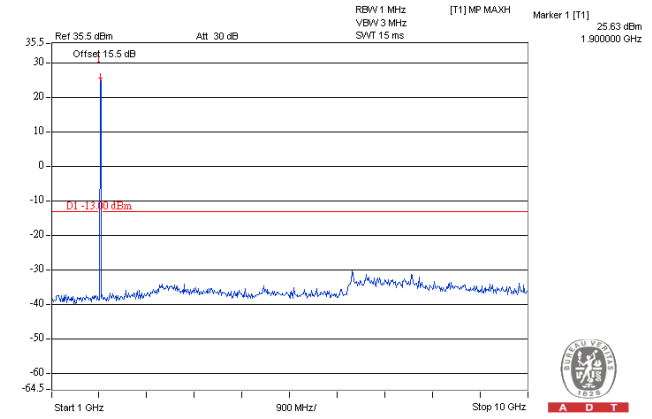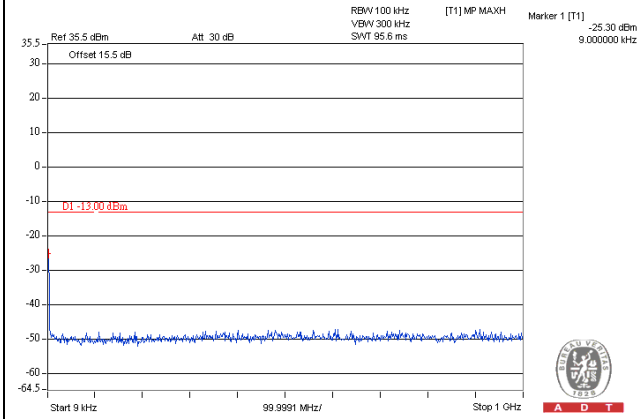

Frequency Range : 10GHz~26.5GHz


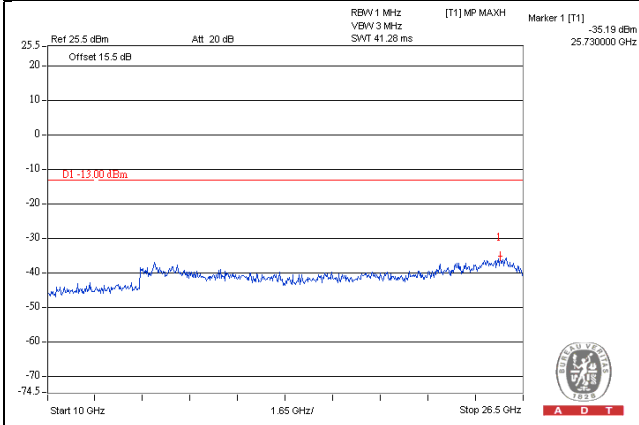


LTE Band 2, Channel Bandwidth 5MHz


Channel 18625 (1852.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

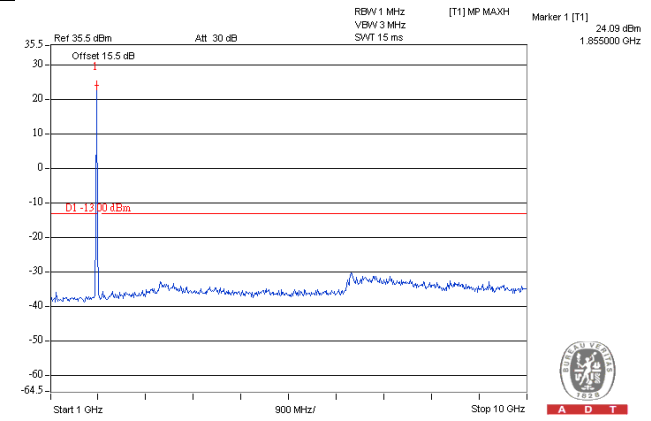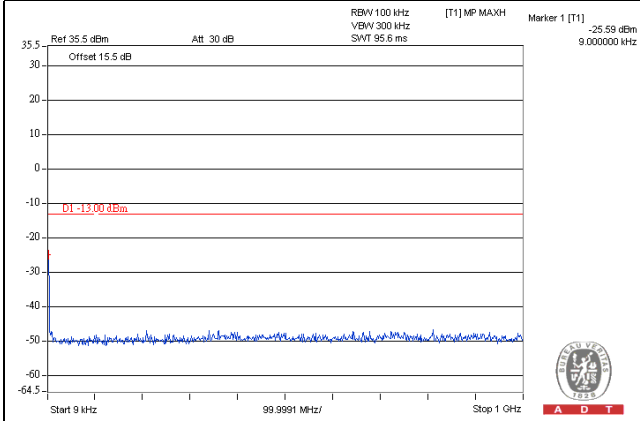

Frequency Range : 10GHz~26.5GHz

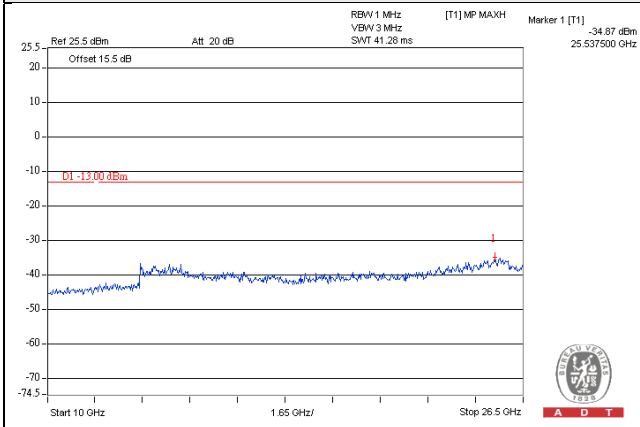





LTE Band 2, Channel Bandwidth 5MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

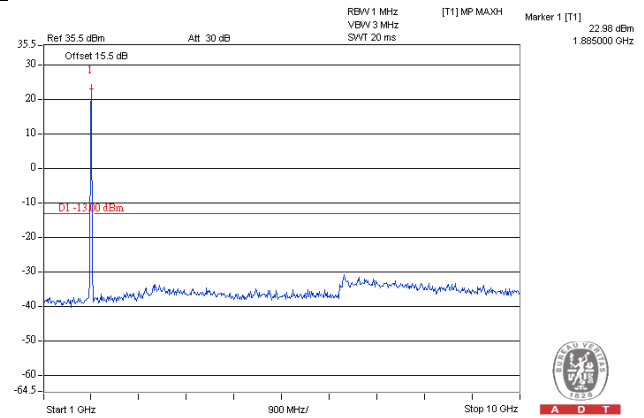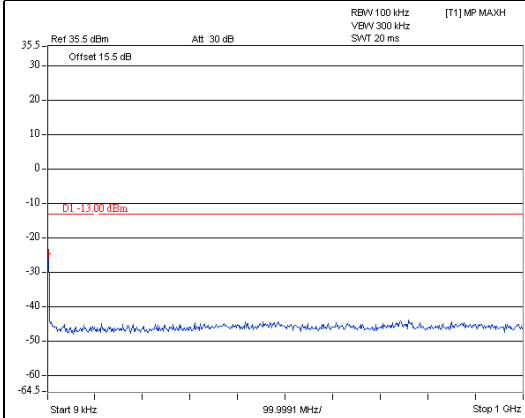

Frequency Range : 10GHz~26.5GHz


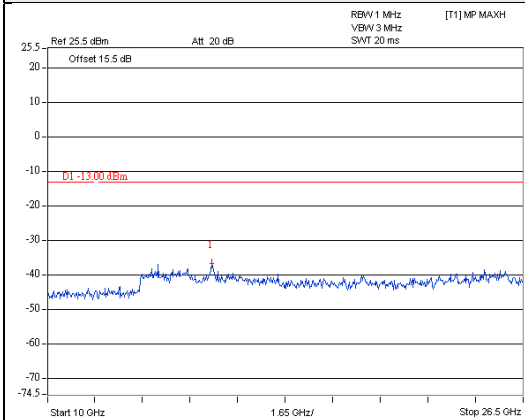


LTE Band 2, Channel Bandwidth 5MHz


Channel 19175 (1907.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

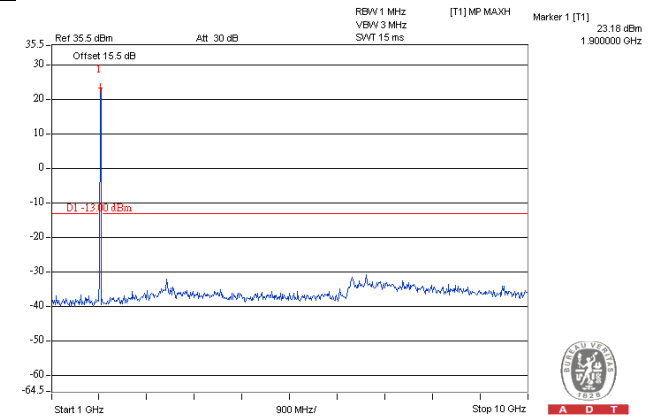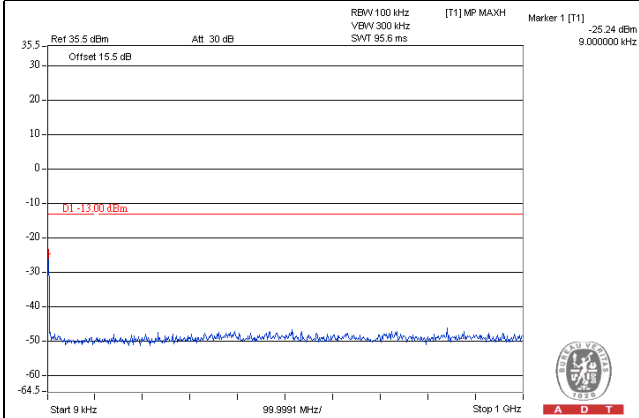

Frequency Range : 10GHz~26.5GHz


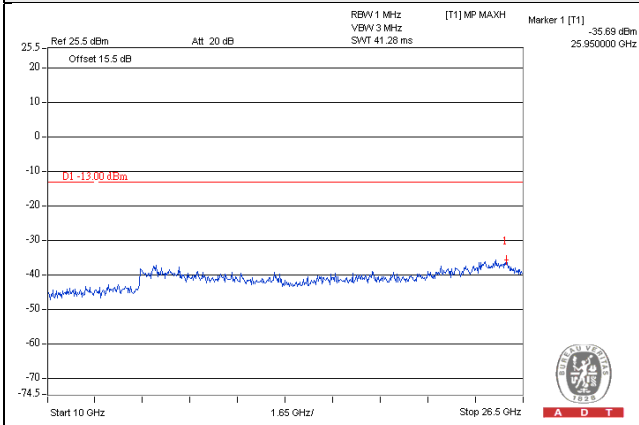


LTE Band 2, Channel Bandwidth 10MHz


Channel 18650 (1855.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

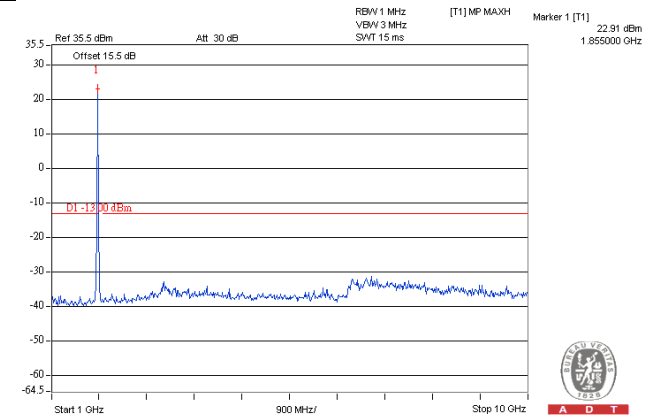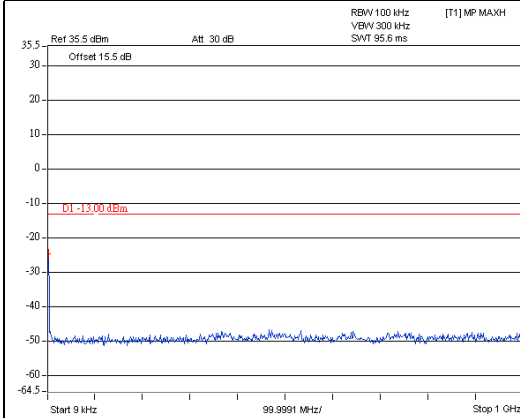

Frequency Range : 10GHz~26.5GHz


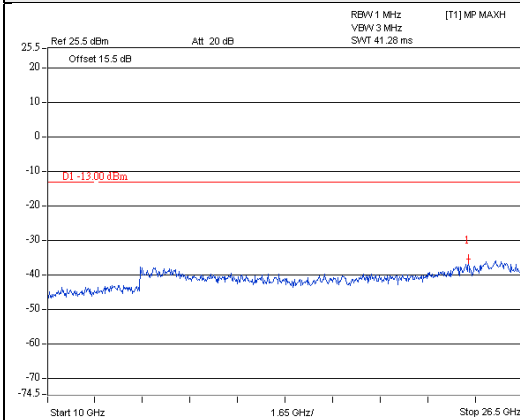


LTE Band 2, Channel Bandwidth 10MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

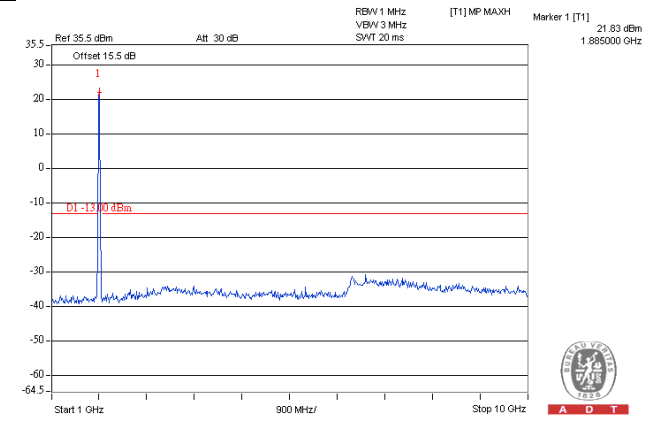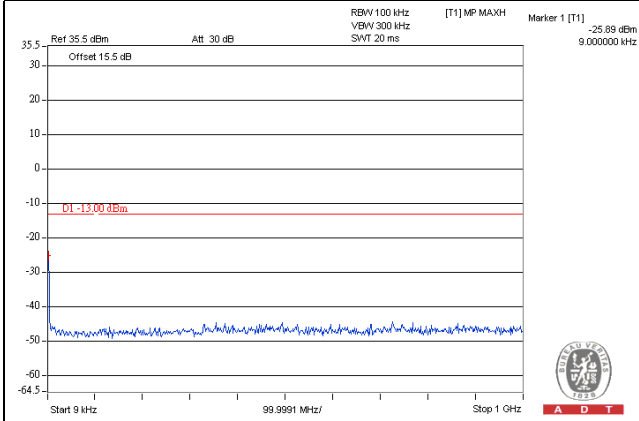

Frequency Range : 10GHz~26.5GHz


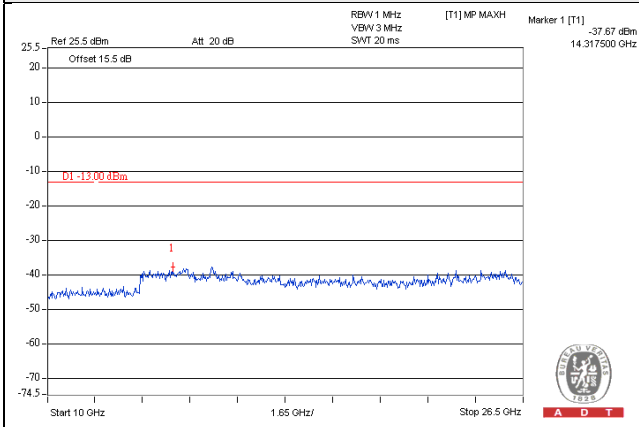


LTE Band 2, Channel Bandwidth 10MHz


Channel 19150 (1905.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

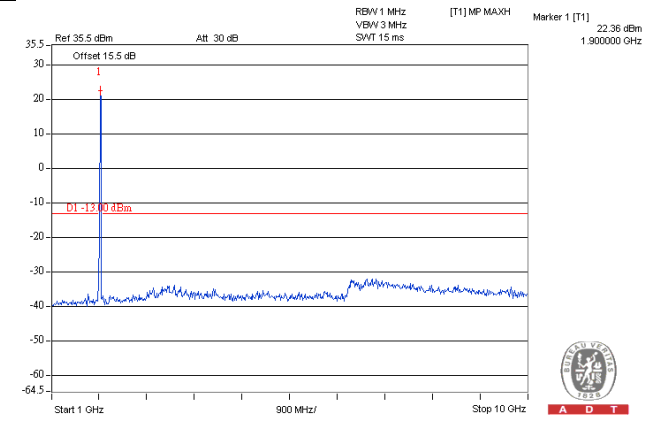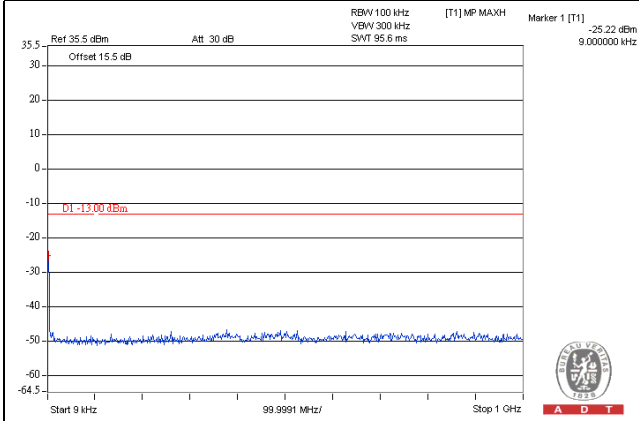

Frequency Range : 10GHz~26.5GHz


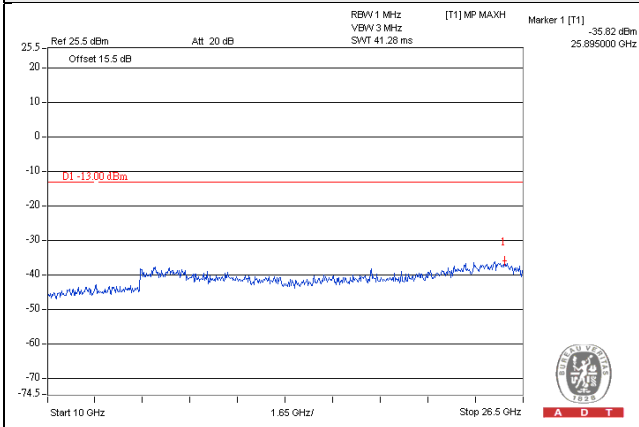


LTE Band 2, Channel Bandwidth 15MHz


Channel 18675 (1857.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

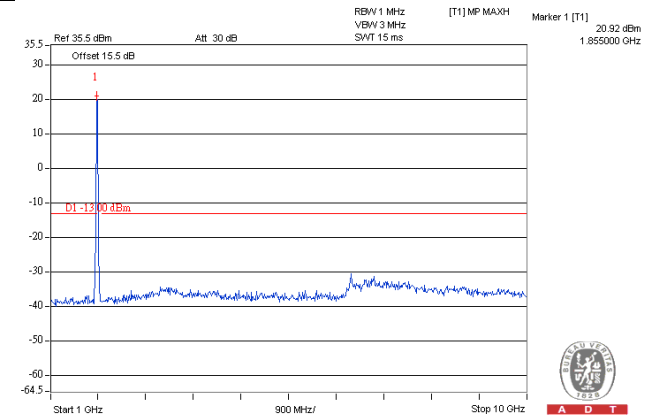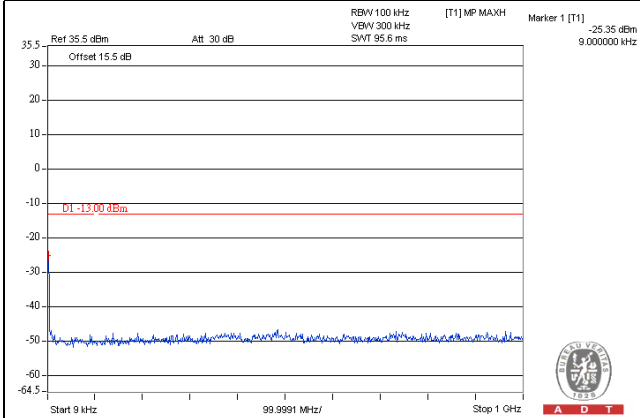

Frequency Range : 10GHz~26.5GHz


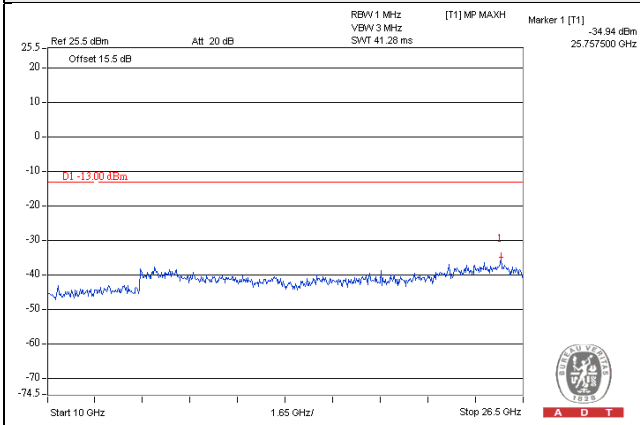


LTE Band 2, Channel Bandwidth 15MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

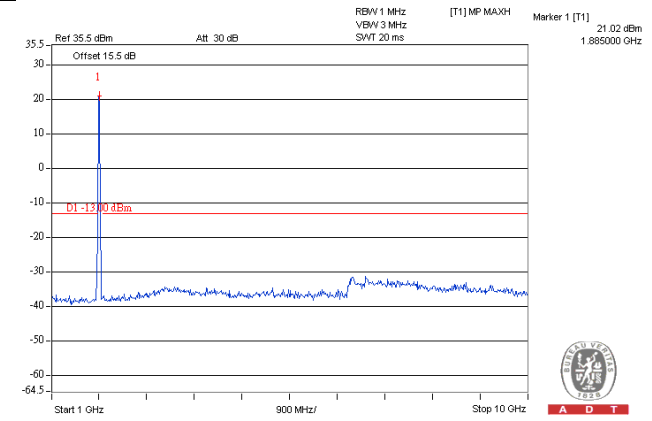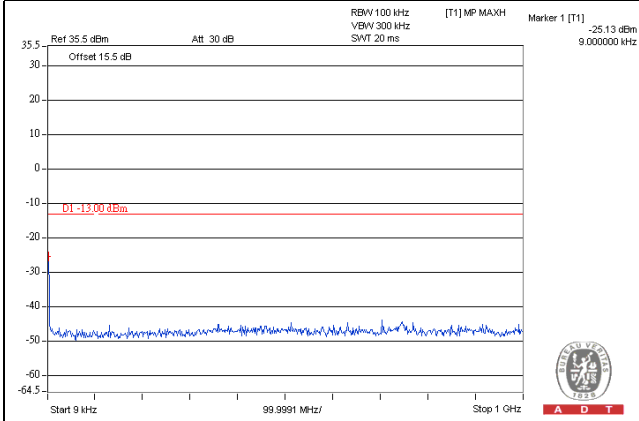

Frequency Range : 10GHz~26.5GHz


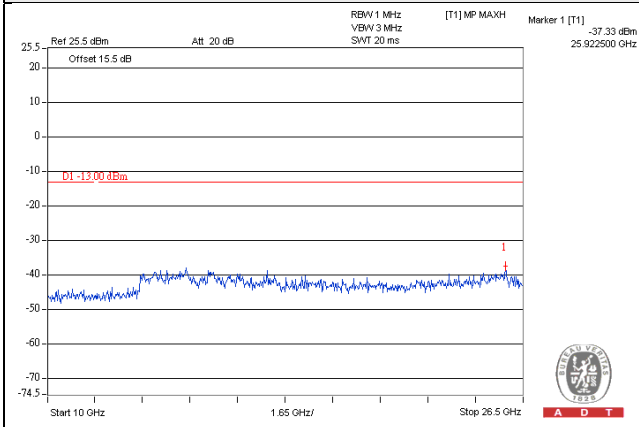


LTE Band 2, Channel Bandwidth 15MHz


Channel 19125 (1902.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

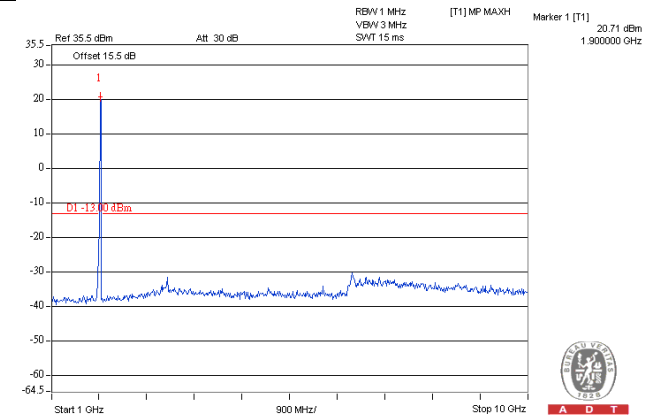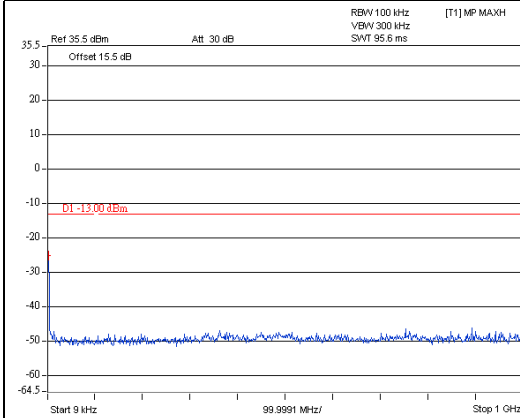

Frequency Range : 10GHz~26.5GHz

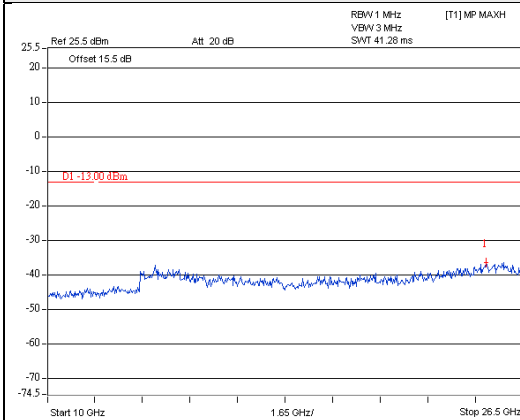





LTE Band 2, Channel Bandwidth 20MHz


Channel 18700 (1860.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

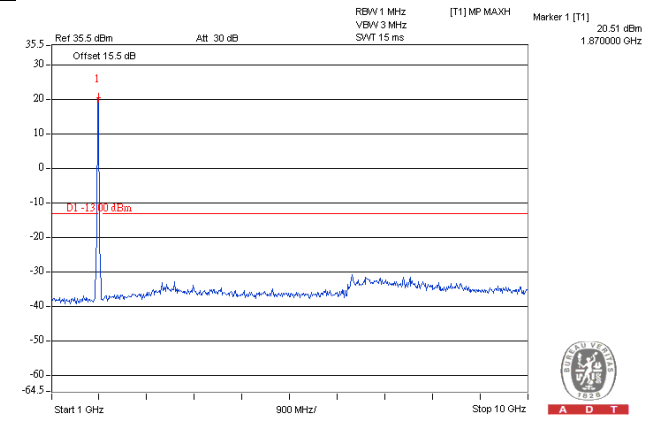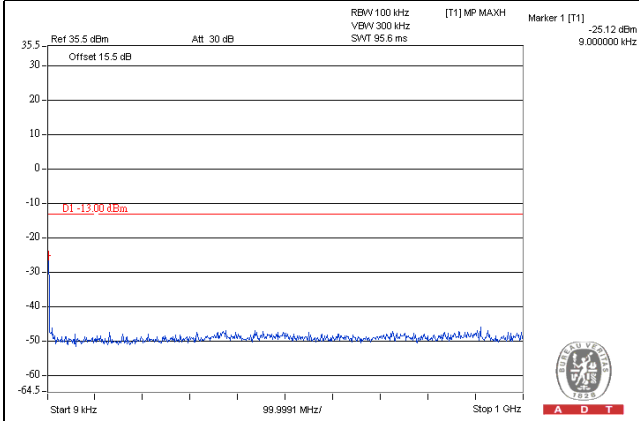

Frequency Range : 10GHz~26.5GHz


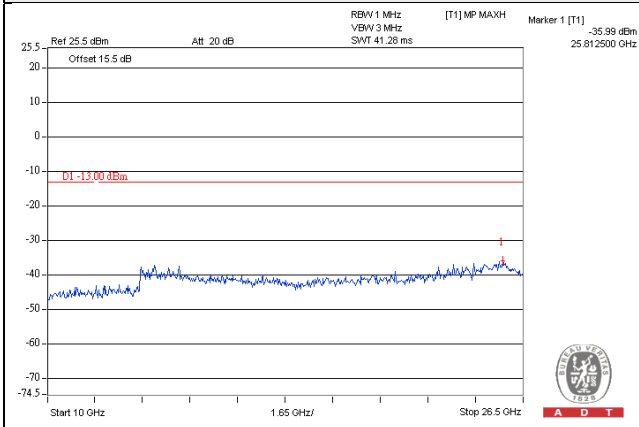


LTE Band 2, Channel Bandwidth 20MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

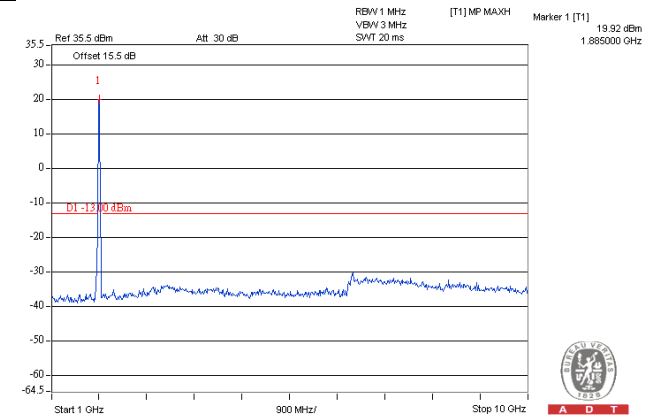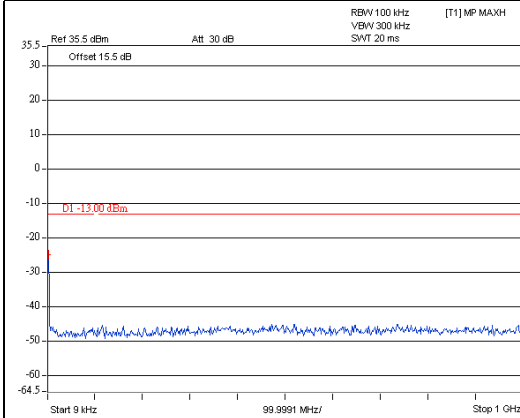

Frequency Range : 10GHz~26.5GHz


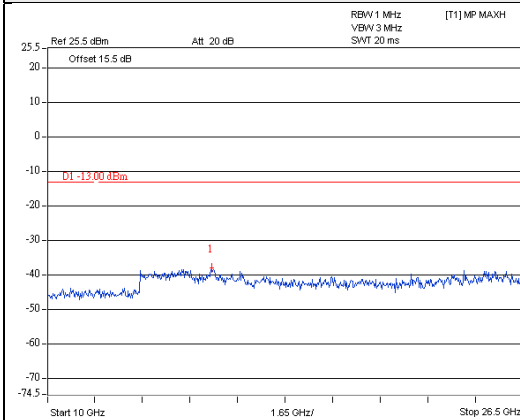


LTE Band 2, Channel Bandwidth 20MHz


Channel 19100 (1900.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

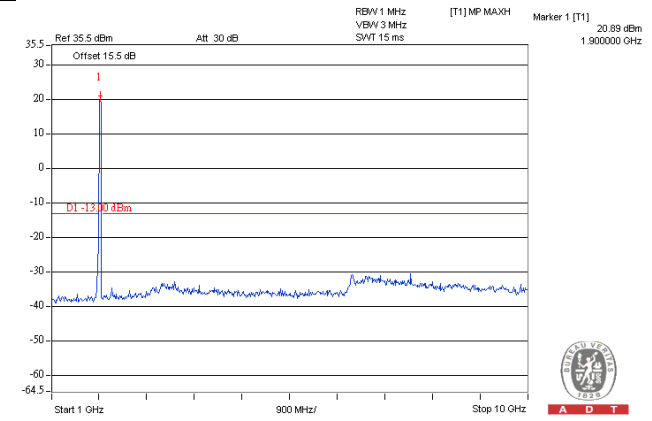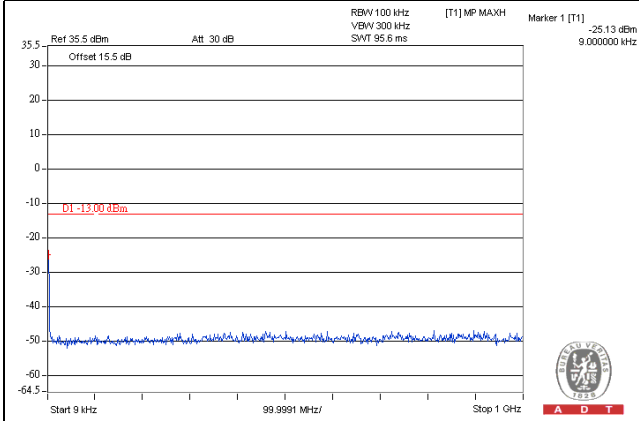

Frequency Range : 10GHz~26.5GHz

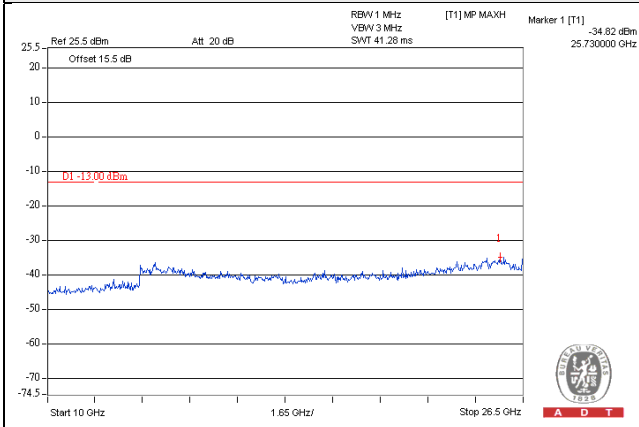

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.8.2 Test Procedure


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}$ .

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.8.3 Deviation from Test Standard

No deviation.

#### 4.8.4 Test Setup

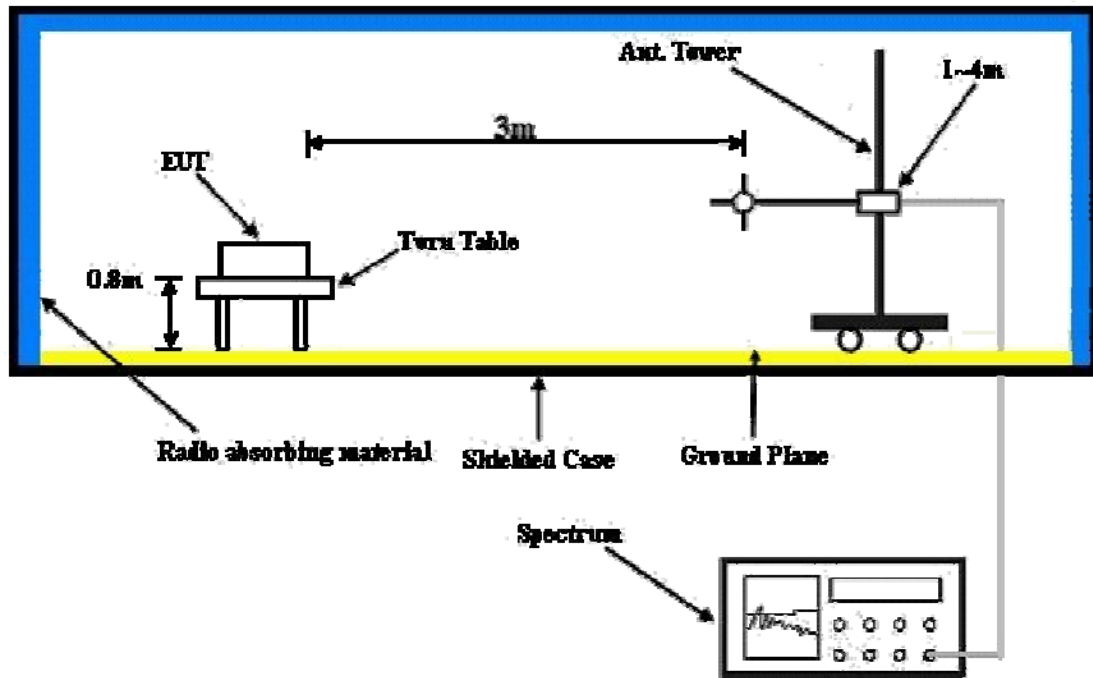

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.8.5 Test Results

Below 1GHz  
GPRS Mode

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	43.58	-47.2	-34.4	-10.3	-44.7	-13.0	-31.7
2	70.74	-39.5	-41.1	-4.7	-45.8	-13.0	-32.8
3	181.32	-45.5	-57.1	3.1	-54.0	-13.0	-41.0
4	210.42	-45.0	-59.1	5.4	-53.7	-13.0	-40.7
5	745.86	-52.6	-53.7	4.7	-49.0	-13.0	-36.0
6	935.98	-52.9	-49.8	3.9	-45.9	-13.0	-32.9

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	43.58	-39.3	-35.2	-10.3	-45.5	-13.0	-32.5
2	68.80	-34.2	-35.0	-5.3	-40.3	-13.0	-27.3
3	128.94	-44.9	-50.1	-0.1	-50.2	-13.0	-37.2
4	208.48	-54.3	-61.0	5.4	-55.6	-13.0	-42.6
5	743.92	-47.8	-46.8	4.7	-42.1	-13.0	-29.1
6	937.92	-51.8	-46.9	3.9	-43.0	-13.0	-30.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	B

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-56.6	-44.4	-11.2	-55.6	-13.0	-42.6
2	66.86	-47.6	-50.0	-5.8	-55.8	-13.0	-42.8
3	121.18	-39.2	-49.0	0.1	-48.9	-13.0	-35.9
4	130.88	-46.5	-55.7	-0.1	-55.8	-13.0	-42.8
5	887.48	-68.0	-67.5	3.9	-63.6	-13.0	-50.6
6	937.92	-57.0	-56.0	3.9	-52.1	-13.0	-39.1

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	39.70	-43.1	-42.4	-10.9	-53.3	-13.0	-40.3
2	64.92	-43.2	-46.1	-6.3	-52.4	-13.0	-39.4
3	107.60	-48.8	-57.9	0.5	-57.4	-13.0	-44.4
4	220.12	-57.2	-65.1	5.4	-59.7	-13.0	-46.7
5	233.70	-59.1	-66.6	5.4	-61.2	-13.0	-48.2
6	937.92	-56.9	-54.2	3.9	-50.3	-13.0	-37.3

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	C

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	43.58	-54.1	-41.3	-10.3	-51.6	-13.0	-38.6
2	68.80	-42.7	-43.5	-5.3	-48.8	-13.0	-35.8
3	111.48	-36.2	-44.0	0.4	-43.6	-13.0	-30.6
4	204.60	-52.6	-66.8	5.4	-61.4	-13.0	-48.4
5	249.22	-54.4	-66.5	5.4	-61.1	-13.0	-48.1
6	935.98	-56.1	-53.0	3.9	-49.1	-13.0	-36.1

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	66.86	-34.6	-35.3	-5.8	-41.1	-13.0	-28.1
2	107.60	-42.0	-48.9	0.5	-48.4	-13.0	-35.4
3	202.66	-46.4	-53.9	5.4	-48.5	-13.0	-35.5
4	328.76	-50.0	-56.1	5.2	-50.9	-13.0	-37.9
5	396.66	-52.9	-58.9	5.2	-53.7	-13.0	-40.7
6	745.86	-55.7	-54.8	4.7	-50.1	-13.0	-37.1

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	D

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	148.34	-51.2	-57.4	-0.2	-57.6	-13.0	-44.6
2	307.42	-50.4	-62.4	5.2	-57.2	-13.0	-44.2
3	350.10	-50.9	-61.5	5.2	-56.3	-13.0	-43.3
4	390.84	-51.8	-60.1	5.2	-54.9	-13.0	-41.9
5	406.36	-48.6	-57.0	5.3	-51.8	-13.0	-38.8
6	935.98	-57.2	-56.2	3.9	-52.3	-13.0	-39.3

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	57.16	-49.6	-50.7	-8.2	-58.9	-13.0	-45.9
2	134.76	-49.2	-55.7	-0.2	-55.9	-13.0	-42.9
3	613.94	-60.2	-62.1	4.5	-57.5	-13.0	-44.5
4	625.58	-60.6	-62.5	4.6	-57.9	-13.0	-44.9
5	666.32	-60.2	-62.4	5.0	-57.4	-13.0	-44.4
6	937.92	-57.1	-54.3	3.9	-50.4	-13.0	-37.4

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Matthew Yang	Test Mode	E

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	42.44	-51.5	-38.0	-10.5	-48.5	-13.0	-35.5
2	110.83	-40.7	-48.6	0.4	-48.2	-13.0	-35.2
3	266.28	-56.2	-66.8	5.3	-61.5	-13.0	-48.5
4	291.15	-58.2	-66.8	5.1	-61.7	-13.0	-48.7
5	746.62	-55.0	-56.1	4.7	-51.4	-13.0	-38.4
6	892.74	-52.1	-49.5	3.9	-45.6	-13.0	-32.6

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	67.31	-40.9	-41.6	-5.7	-47.3	-13.0	-34.3
2	110.83	-43.8	-50.9	0.4	-50.5	-13.0	-37.5
3	174.57	-58.8	-61.3	2.2	-59.1	-13.0	-46.1
4	267.84	-60.7	-62.9	5.3	-57.6	-13.0	-44.6
5	373.54	-58.2	-64.7	5.3	-59.4	-13.0	-46.4
6	936.27	-53.2	-48.4	3.9	-44.5	-13.0	-31.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

EDGE Mode

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	41.64	-54.6	-41.0	-10.6	-51.6	-13.0	-38.6
2	72.68	-41.3	-43.0	-4.1	-47.1	-13.0	-34.1
3	123.12	-43.3	-50.3	0.0	-50.3	-13.0	-37.3
4	154.16	-49.0	-53.6	0.1	-53.5	-13.0	-40.5
5	730.34	-55.8	-57.4	4.9	-52.5	-13.0	-39.5
6	935.98	-57.9	-54.8	3.9	-50.9	-13.0	-37.9

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	43.58	-39.3	-35.2	-10.3	-45.5	-13.0	-32.5
2	70.74	-35.4	-36.5	-4.7	-41.2	-13.0	-28.2
3	156.10	-50.5	-51.5	0.2	-51.3	-13.0	-38.3
4	173.56	-52.8	-55.0	2.1	-52.9	-13.0	-39.9
5	730.34	-61.3	-60.5	4.9	-55.6	-13.0	-42.6
6	939.86	-56.3	-51.4	3.9	-47.5	-13.0	-34.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	B

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-54.7	-42.5	-11.2	-53.7	-13.0	-40.7
2	68.80	-47.6	-50.6	-5.3	-55.9	-13.0	-42.9
3	119.24	-39.1	-49.0	0.1	-48.9	-13.0	-35.9
4	130.88	-47.0	-56.1	-0.1	-56.2	-13.0	-43.2
5	817.64	-56.2	-56.7	4.0	-52.7	-13.0	-39.7
6	935.98	-56.6	-55.6	3.9	-51.7	-13.0	-38.7

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-40.9	-40.3	-11.2	-51.5	-13.0	-38.5
2	66.86	-41.8	-44.6	-5.8	-50.4	-13.0	-37.4
3	119.24	-49.0	-57.7	0.1	-57.6	-13.0	-44.6
4	745.86	-61.7	-62.9	4.7	-58.2	-13.0	-45.2
5	935.98	-56.0	-53.4	3.9	-49.5	-13.0	-36.5
6	994.18	-69.1	-64.8	4.0	-60.8	-13.0	-47.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	C

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	51.34	-37.2	-29.5	-8.9	-38.4	-13.0	-25.4
2	107.60	-37.8	-46.0	0.5	-45.5	-13.0	-32.5
3	146.40	-32.6	-36.8	-0.2	-37.0	-13.0	-24.0
4	264.74	-55.1	-65.6	5.3	-60.3	-13.0	-47.3
5	745.86	-60.6	-61.7	4.7	-57.0	-13.0	-44.0
6	935.98	-59.0	-55.9	3.9	-52.0	-13.0	-39.0

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	45.52	-41.4	-37.8	-10.0	-47.8	-13.0	-34.8
2	66.86	-35.6	-36.3	-5.8	-42.1	-13.0	-29.1
3	107.60	-42.2	-49.1	0.5	-48.6	-13.0	-35.6
4	247.28	-58.4	-63.5	5.4	-58.1	-13.0	-45.1
5	524.70	-61.1	-65.8	4.8	-61.0	-13.0	-48.0
6	922.40	-68.2	-63.9	3.9	-60.0	-13.0	-47.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	D

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-59.4	-45.9	-12.2	-58.1	-13.0	-45.1
2	299.66	-52.1	-62.8	5.1	-57.7	-13.0	-44.7
3	383.08	-51.0	-59.4	5.3	-54.1	-13.0	-41.1
4	406.36	-51.5	-59.9	5.3	-54.6	-13.0	-41.6
5	602.30	-57.1	-63.2	4.5	-58.7	-13.0	-45.7
6	937.92	-58.3	-57.2	3.9	-53.3	-13.0	-40.3

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	134.76	-47.6	-54.1	-0.2	-54.3	-13.0	-41.3
2	390.84	-52.3	-60.7	5.2	-55.5	-13.0	-42.5
3	617.82	-58.9	-60.6	4.6	-56.0	-13.0	-43.0
4	631.40	-56.1	-58.1	4.7	-53.4	-13.0	-40.4
5	668.26	-59.8	-61.9	5.0	-56.9	-13.0	-43.9
6	937.92	-56.2	-53.5	3.9	-49.6	-13.0	-36.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Matthew Yang	Test Mode	E

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	45.54	-49.3	-38.0	-10.0	-48.0	-13.0	-35.0
2	113.94	-41.3	-49.3	0.3	-49.0	-13.0	-36.0
3	214.98	-53.8	-67.5	5.4	-62.1	-13.0	-49.1
4	261.62	-56.5	-66.9	5.3	-61.6	-13.0	-48.6
5	729.52	-67.3	-69.0	4.9	-64.1	-13.0	-51.1
6	866.31	-40.8	-38.9	3.9	-35.0	-13.0	-22.0

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	67.31	-42.6	-43.3	-5.7	-49.0	-13.0	-36.0
2	112.39	-43.5	-50.5	0.4	-50.1	-13.0	-37.1
3	216.54	-58.2	-64.6	5.4	-59.2	-13.0	-46.2
4	267.84	-59.8	-62.0	5.3	-56.7	-13.0	-43.7
5	371.99	-62.8	-69.2	5.2	-64.0	-13.0	-51.0
6	732.63	-54.9	-54.1	4.8	-49.3	-13.0	-36.3

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

WCDMA Mode

Mode	TX channel 9262 (1852.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	41.64	-50.5	-36.9	-10.6	-47.5	-13.0	-34.5
2	72.68	-41.0	-42.7	-4.1	-46.8	-13.0	-33.8
3	125.06	-43.2	-50.3	0.0	-50.3	-13.0	-37.3
4	128.94	-44.8	-51.8	-0.1	-51.9	-13.0	-38.9
5	747.80	-42.9	-44.0	4.7	-39.3	-13.0	-26.3
6	935.98	-53.1	-50.0	3.9	-46.1	-13.0	-33.1

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-35.4	-32.7	-11.2	-43.9	-13.0	-30.9
2	70.74	-35.8	-36.9	-4.7	-41.6	-13.0	-28.6
3	123.12	-43.4	-49.2	0.0	-49.2	-13.0	-36.2
4	171.62	-52.9	-54.3	1.8	-52.5	-13.0	-39.5
5	730.34	-49.9	-49.1	4.9	-44.2	-13.0	-31.2
6	935.98	-53.2	-48.4	3.9	-44.5	-13.0	-31.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



Mode	TX channel 9262 (1852.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	B

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	39.70	-55.4	-44.4	-10.9	-55.3	-13.0	-42.3
2	68.80	-47.0	-49.9	-5.3	-55.2	-13.0	-42.2
3	117.30	-39.1	-48.9	0.2	-48.7	-13.0	-35.7
4	130.88	-45.6	-54.8	-0.1	-54.9	-13.0	-41.9
5	937.92	-56.8	-55.7	3.9	-51.8	-13.0	-38.8
6	978.66	-68.5	-66.8	3.9	-62.9	-13.0	-49.9

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-36.4	-35.8	-11.2	-47.0	-13.0	-34.0
2	66.86	-40.9	-43.7	-5.8	-49.5	-13.0	-36.5
3	119.24	-49.0	-57.6	0.1	-57.5	-13.0	-44.5
4	132.82	-54.5	-61.6	-0.1	-61.7	-13.0	-48.7
5	893.30	-68.2	-67.4	3.9	-63.5	-13.0	-50.5
6	935.98	-56.0	-53.4	3.9	-49.5	-13.0	-36.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 9262 (1852.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	C

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	43.58	-56.0	-43.2	-10.3	-53.5	-13.0	-40.5
2	66.86	-44.8	-45.0	-5.8	-50.8	-13.0	-37.8
3	109.54	-38.4	-46.6	0.5	-46.1	-13.0	-33.1
4	148.34	-43.3	-47.3	-0.2	-47.5	-13.0	-34.5
5	264.74	-54.6	-65.1	5.3	-59.8	-13.0	-46.8
6	935.98	-55.0	-51.9	3.9	-48.0	-13.0	-35.0

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-37.7	-35.0	-11.2	-46.2	-13.0	-33.2
2	66.86	-35.2	-35.9	-5.8	-41.7	-13.0	-28.7
3	107.60	-41.6	-48.5	0.5	-48.0	-13.0	-35.0
4	235.64	-58.8	-63.9	5.4	-58.5	-13.0	-45.5
5	264.74	-59.6	-62.3	5.3	-57.0	-13.0	-44.0
6	935.98	-57.4	-52.6	3.9	-48.7	-13.0	-35.7

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 9262 (1852.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	D

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	142.52	-49.7	-56.8	-0.3	-57.1	-13.0	-44.1
2	295.78	-51.8	-62.6	5.2	-57.5	-13.0	-44.5
3	385.02	-54.3	-62.7	5.3	-57.5	-13.0	-44.5
4	416.06	-50.8	-59.3	5.2	-54.0	-13.0	-41.0
5	602.30	-57.3	-63.4	4.5	-58.9	-13.0	-45.9
6	937.92	-57.3	-56.3	3.9	-52.3	-13.0	-39.3

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	51.34	-43.1	-42.6	-9.5	-52.0	-13.0	-39.0
2	80.44	-50.7	-54.9	-1.5	-56.4	-13.0	-43.4
3	381.14	-53.2	-61.9	5.3	-56.7	-13.0	-43.7
4	613.94	-60.4	-62.3	4.5	-57.7	-13.0	-44.7
5	736.16	-60.7	-62.2	4.8	-57.3	-13.0	-44.3
6	935.98	-57.5	-54.9	3.9	-51.0	-13.0	-38.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 9262 (1852.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Matthew Yang	Test Mode	E

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	45.54	-48.9	-37.6	-10.0	-47.6	-13.0	-34.6
2	65.75	-47.2	-47.2	-6.1	-53.3	-13.0	-40.3
3	110.83	-40.3	-48.2	0.4	-47.8	-13.0	-34.8
4	213.43	-58.3	-72.1	5.4	-66.7	-13.0	-53.7
5	281.83	-57.8	-67.2	5.3	-61.9	-13.0	-48.9
6	931.60	-54.9	-51.7	3.9	-47.8	-13.0	-34.8

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	67.31	-41.4	-42.1	-5.7	-47.8	-13.0	-34.8
2	117.05	-47.0	-53.5	0.2	-53.3	-13.0	-40.3
3	267.84	-60.0	-62.2	5.3	-56.9	-13.0	-43.9
4	368.88	-61.8	-68.2	5.2	-63.0	-13.0	-50.0
5	449.71	-64.3	-70.5	5.0	-65.5	-13.0	-52.5
6	892.74	-50.9	-47.9	3.9	-44.0	-13.0	-31.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 1.4MHz

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-43.0	-19.6	-19.4	-39.0	-13.0	-26.0
2	148.34	-51.1	-52.9	-3.0	-55.9	-13.0	-42.9
3	179.38	-48.5	-53.5	-2.9	-56.4	-13.0	-43.4
4	297.72	-60.0	-61.0	-1.7	-62.7	-13.0	-49.7
5	580.96	-63.5	-66.2	3.8	-62.4	-13.0	-49.4
6	943.74	-52.7	-48.1	3.7	-44.4	-13.0	-31.4

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	187.14	-49.3	-49.0	-2.7	-51.7	-13.0	-38.7
2	297.72	-56.4	-55.0	-1.7	-56.7	-13.0	-43.7
3	363.68	-57.6	-61.8	3.9	-57.9	-13.0	-44.9
4	429.64	-57.7	-61.6	3.5	-58.1	-13.0	-45.1
5	887.48	-52.5	-48.0	3.5	-44.5	-13.0	-31.5
6	941.80	-52.9	-47.6	3.8	-43.8	-13.0	-30.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	B

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-52.2	-39.8	-11.7	-51.5	-13.0	-38.5
2	66.86	-47.4	-49.7	-5.8	-55.6	-13.0	-42.6
3	117.30	-38.9	-48.8	0.2	-48.6	-13.0	-35.6
4	128.94	-47.3	-56.4	-0.1	-56.5	-13.0	-43.5
5	730.34	-61.9	-65.6	4.9	-60.8	-13.0	-47.8
6	932.10	-57.7	-56.8	3.9	-52.8	-13.0	-39.8

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	45.52	-43.5	-42.0	-10.0	-52.0	-13.0	-39.0
2	66.86	-43.1	-46.0	-5.8	-51.8	-13.0	-38.8
3	119.24	-49.5	-58.1	0.1	-58.0	-13.0	-45.0
4	745.86	-57.2	-58.5	4.7	-53.8	-13.0	-40.8
5	937.92	-56.8	-54.0	3.9	-50.1	-13.0	-37.1
6	998.06	-68.5	-64.1	4.0	-60.1	-13.0	-47.1

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	C

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	43.58	-53.4	-40.6	-10.3	-50.9	-13.0	-37.9
2	68.80	-42.9	-43.7	-5.3	-49.0	-13.0	-36.0
3	107.60	-37.8	-46.0	0.5	-45.5	-13.0	-32.5
4	262.80	-55.1	-65.5	5.3	-60.2	-13.0	-47.2
5	745.86	-59.8	-60.9	4.7	-56.2	-13.0	-43.2
6	937.92	-55.2	-52.0	3.9	-48.1	-13.0	-35.1

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	43.58	-41.1	-37.0	-10.3	-47.3	-13.0	-34.3
2	66.86	-35.8	-36.5	-5.8	-42.3	-13.0	-29.3
3	107.60	-42.7	-49.6	0.5	-49.1	-13.0	-36.1
4	247.28	-57.5	-62.6	5.4	-57.2	-13.0	-44.2
5	383.08	-55.7	-62.3	5.3	-57.0	-13.0	-44.0
6	837.04	-59.8	-57.3	4.0	-53.3	-13.0	-40.3

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee	Test Mode	D

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-56.6	-43.2	-12.2	-55.3	-13.0	-42.3
2	305.48	-49.8	-62.0	5.1	-56.8	-13.0	-43.8
3	377.26	-47.9	-56.8	5.2	-51.5	-13.0	-38.5
4	406.36	-48.9	-57.3	5.3	-52.1	-13.0	-39.1
5	745.86	-57.2	-60.5	4.7	-55.8	-13.0	-42.8
6	935.98	-57.4	-56.5	3.9	-52.6	-13.0	-39.6

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	49.40	-47.4	-45.8	-9.9	-55.7	-13.0	-42.7
2	76.56	-50.9	-54.6	-2.8	-57.4	-13.0	-44.4
3	136.70	-49.9	-55.9	-0.3	-56.2	-13.0	-43.2
4	623.64	-60.4	-62.3	4.6	-57.6	-13.0	-44.6
5	668.26	-59.7	-61.8	5.0	-56.8	-13.0	-43.8
6	935.98	-56.1	-53.5	3.9	-49.5	-13.0	-36.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



Mode	TX channel 18607 (1850.70MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Matthew Yang	Test Mode	E

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	47.10	-48.8	-38.0	-9.7	-47.7	-13.0	-34.7
2	110.83	-40.5	-48.4	0.4	-48.0	-13.0	-35.0
3	216.54	-54.6	-68.1	5.4	-62.7	-13.0	-49.7
4	288.04	-59.0	-67.5	5.2	-62.3	-13.0	-49.3
5	729.52	-60.3	-62.0	4.9	-57.1	-13.0	-44.1
6	931.60	-53.7	-50.5	3.9	-46.6	-13.0	-33.6

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	65.75	-41.7	-42.5	-6.1	-48.6	-13.0	-35.6
2	110.83	-43.7	-50.8	0.4	-50.4	-13.0	-37.4
3	176.12	-59.2	-62.2	2.4	-59.8	-13.0	-46.8
4	280.27	-58.6	-62.4	5.3	-57.1	-13.0	-44.1
5	371.99	-63.9	-70.3	5.2	-65.1	-13.0	-52.1
6	743.51	-59.6	-58.6	4.7	-53.9	-13.0	-40.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 3MHz

Mode	TX channel 18615 (1851.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-49.4	-27.7	-18.3	-46.0	-13.0	-33.0
2	97.90	-48.0	-55.3	-1.4	-56.7	-13.0	-43.7
3	146.40	-50.5	-52.3	-3.0	-55.3	-13.0	-42.3
4	177.44	-48.0	-52.9	-3.0	-55.9	-13.0	-42.9
5	796.30	-61.1	-59.5	4.0	-55.5	-13.0	-42.5
6	943.74	-55.0	-50.4	3.7	-46.7	-13.0	-33.7

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	57.16	-40.1	-42.3	-4.7	-47.0	-13.0	-34.0
2	161.92	-39.4	-39.4	-2.9	-42.3	-13.0	-29.3
3	297.72	-57.0	-55.6	-1.7	-57.3	-13.0	-44.3
4	363.68	-58.1	-62.3	3.9	-58.4	-13.0	-45.4
5	429.64	-57.3	-61.2	3.5	-57.7	-13.0	-44.7
6	941.80	-54.3	-49.0	3.8	-45.2	-13.0	-32.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 5MHz

Mode	TX channel 18625 (1852.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-56.9	-33.5	-19.4	-52.9	-13.0	-39.9
2	66.86	-39.7	-45.1	-1.5	-46.6	-13.0	-33.6
3	144.46	-50.8	-52.7	-3.2	-55.9	-13.0	-42.9
4	177.44	-47.3	-52.2	-3.0	-55.2	-13.0	-42.2
5	297.72	-60.0	-61.0	-1.7	-62.7	-13.0	-49.7
6	943.74	-53.3	-48.7	3.7	-45.0	-13.0	-32.0

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-35.3	-25.8	-19.4	-45.2	-13.0	-32.2
2	59.10	-42.7	-45.7	-3.8	-49.5	-13.0	-36.5
3	177.44	-47.8	-48.5	-3.0	-51.5	-13.0	-38.5
4	297.72	-58.1	-56.7	-1.7	-58.4	-13.0	-45.4
5	476.20	-51.3	-55.2	3.6	-51.6	-13.0	-38.6
6	943.74	-55.3	-49.9	3.7	-46.2	-13.0	-33.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 10MHz

Mode	TX channel 18650 (1855.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-51.6	-28.2	-19.4	-47.6	-13.0	-34.6
2	146.40	-51.1	-52.9	-3.0	-55.9	-13.0	-42.9
3	175.50	-48.3	-53.1	-2.8	-55.9	-13.0	-42.9
4	297.72	-59.9	-60.9	-1.7	-62.6	-13.0	-49.6
5	579.02	-64.3	-67.0	3.7	-63.3	-13.0	-50.3
6	943.74	-56.0	-51.4	3.7	-47.7	-13.0	-34.7

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	62.98	-31.1	-35.4	-2.4	-37.8	-13.0	-24.8
2	97.90	-43.2	-49.9	-1.4	-51.3	-13.0	-38.3
3	189.08	-48.9	-48.3	-2.8	-51.1	-13.0	-38.1
4	297.72	-57.6	-56.2	-1.7	-57.9	-13.0	-44.9
5	429.64	-57.6	-61.5	3.5	-58.0	-13.0	-45.0
6	941.80	-53.9	-48.6	3.8	-44.8	-13.0	-31.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 15MHz

Mode	TX channel 18675 (1857.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-57.0	-33.6	-19.4	-53.0	-13.0	-40.0
2	146.40	-49.6	-51.4	-3.0	-54.4	-13.0	-41.4
3	177.44	-47.2	-52.1	-3.0	-55.1	-13.0	-42.1
4	297.72	-61.4	-62.4	-1.7	-64.1	-13.0	-51.1
5	579.02	-63.0	-65.7	3.7	-62.0	-13.0	-49.0
6	941.80	-54.3	-49.7	3.8	-45.9	-13.0	-32.9

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-40.0	-30.5	-19.4	-49.9	-13.0	-36.9
2	59.10	-42.0	-45.0	-3.8	-48.8	-13.0	-35.8
3	177.44	-47.5	-48.2	-3.0	-51.2	-13.0	-38.2
4	297.72	-57.2	-55.8	-1.7	-57.5	-13.0	-44.5
5	429.64	-57.4	-61.3	3.5	-57.8	-13.0	-44.8
6	941.80	-53.7	-48.4	3.8	-44.6	-13.0	-31.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 20MHz

Mode	TX channel 18700 (1860.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng	Test Mode	A

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-45.2	-21.8	-19.4	-41.2	-13.0	-28.2
2	59.10	-49.0	-49.7	-3.8	-53.5	-13.0	-40.5
3	185.20	-50.4	-55.9	-2.8	-58.7	-13.0	-45.7
4	297.72	-60.3	-61.3	-1.7	-63.0	-13.0	-50.0
5	579.02	-64.2	-66.9	3.7	-63.2	-13.0	-50.2
6	943.74	-53.3	-48.7	3.7	-45.0	-13.0	-32.0

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	59.10	-42.6	-45.6	-3.8	-49.4	-13.0	-36.4
2	97.90	-45.1	-51.8	-1.4	-53.2	-13.0	-40.2
3	183.26	-50.7	-51.0	-3.0	-54.0	-13.0	-41.0
4	297.72	-57.9	-56.5	-1.7	-58.2	-13.0	-45.2
5	429.64	-58.0	-61.9	3.5	-58.4	-13.0	-45.4
6	941.80	-55.3	-50.0	3.8	-46.2	-13.0	-33.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Above 1GHz  
GPRS Mode

Mode	TX channel 512 (1850.2MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-52.9	-44.4	1.4	-43.0	-13.0	-30.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-54.5	-46.3	1.4	-44.9	-13.0	-31.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 661 (1880.0MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-53.2	-44.7	1.3	-43.4	-13.0	-30.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-55.1	-46.8	1.3	-45.5	-13.0	-32.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 810 (1909.8MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.00	-57.3	-49.0	1.4	-47.6	-13.0	-34.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.00	-54.9	-46.7	1.4	-45.3	-13.0	-32.3

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



WCDMA Mode

Mode	TX channel 9262 (1852.4MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-59.0	-50.5	1.4	-49.1	-13.0	-36.1
2	5557.20	-58.8	-45.9	1.3	-44.6	-13.0	-31.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-57.0	-48.8	1.4	-47.4	-13.0	-34.4
2	5557.20	-57.1	-45.0	1.3	-43.7	-13.0	-30.7

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 9400 (1880.0MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.3	-49.8	1.3	-48.5	-13.0	-35.5
2	5640.00	-58.8	-45.8	1.3	-44.5	-13.0	-31.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-56.6	-48.3	1.3	-47.0	-13.0	-34.0
2	5640.00	-56.8	-44.9	1.3	-43.6	-13.0	-30.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 9538 (1907.6MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-59.3	-51.0	1.4	-49.6	-13.0	-36.6
2	5722.80	-60.7	-47.6	1.2	-46.4	-13.0	-33.4

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-57.3	-49.1	1.4	-47.7	-13.0	-34.7
2	5722.80	-58.7	-46.6	1.2	-45.4	-13.0	-32.4

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 1.4MHz

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-55.0	-46.5	1.4	-45.1	-13.0	-32.1
2	5552.10	-55.7	-42.9	1.4	-41.5	-13.0	-28.5
3	7402.80	-57.5	-38.8	0.9	-37.9	-13.0	-24.9
4	9253.50	-54.6	-33.0	1.1	-31.9	-13.0	-18.9

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-55.5	-47.3	1.4	-45.9	-13.0	-32.9
2	5552.10	-54.6	-42.6	1.4	-41.2	-13.0	-28.2
3	7402.80	-58.4	-40.8	0.9	-39.9	-13.0	-26.9
4	9253.50	-56.5	-35.7	1.1	-34.6	-13.0	-21.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-55.1	-46.6	1.3	-45.3	-13.0	-32.3
2	5640.00	-55.8	-42.8	1.3	-41.5	-13.0	-28.5
3	7520.00	-57.8	-39.2	1.0	-38.2	-13.0	-25.2
4	9400.00	-54.5	-32.3	1.0	-31.3	-13.0	-18.3

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-56.2	-47.9	1.3	-46.6	-13.0	-33.6
2	5640.00	-54.9	-43.0	1.3	-41.7	-13.0	-28.7
3	7520.00	-58.6	-40.6	1.0	-39.6	-13.0	-26.6
4	9400.00	-56.7	-35.9	1.0	-34.9	-13.0	-21.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19193 (1909.30MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.60	-54.8	-46.5	1.4	-45.1	-13.0	-32.1
2	5727.90	-55.4	-42.3	1.2	-41.1	-13.0	-28.1
3	7637.20	-58.3	-40.8	1.2	-39.6	-13.0	-26.6
4	9546.50	-54.9	-32.6	1.0	-31.6	-13.0	-18.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.60	-55.7	-47.5	1.4	-46.1	-13.0	-33.1
2	5727.90	-54.9	-42.7	1.2	-41.5	-13.0	-28.5
3	7637.20	-58.6	-40.6	1.2	-39.4	-13.0	-26.4
4	9546.50	-56.3	-35.6	1.0	-34.6	-13.0	-21.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 3MHz

Mode	TX channel 18615 (1851.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3703.00	-55.3	-46.8	1.4	-45.4	-13.0	-32.4
2	5554.50	-55.5	-42.6	1.3	-41.3	-13.0	-28.3
3	7406.00	-57.1	-38.4	0.9	-37.5	-13.0	-24.5
4	9257.50	-54.6	-33.1	1.1	-32.0	-13.0	-19.0

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3703.00	-55.1	-46.9	1.4	-45.5	-13.0	-32.5
2	5554.50	-53.5	-41.4	1.3	-40.1	-13.0	-27.1
3	7406.00	-57.0	-39.3	0.9	-38.4	-13.0	-25.4
4	9257.50	-56.4	-35.6	1.1	-34.5	-13.0	-21.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-54.4	-45.9	1.3	-44.6	-13.0	-31.6
2	5640.00	-56.2	-43.2	1.3	-41.9	-13.0	-28.9
3	7520.00	-58.3	-39.7	1.0	-38.7	-13.0	-25.7
4	<b>9400.00</b>	<b>-54.1</b>	<b>-31.9</b>	<b>1.0</b>	<b>-30.9</b>	<b>-13.0</b>	<b>-17.9</b>

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-55.8	-47.5	1.3	-46.2	-13.0	-33.2
2	5640.00	-55.2	-43.3	1.3	-42.0	-13.0	-29.0
3	7520.00	-58.1	-40.1	1.0	-39.1	-13.0	-26.1
4	9400.00	-57.3	-36.5	1.0	-35.5	-13.0	-22.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19185 (1908.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3817.00	-54.6	-46.3	1.4	-44.9	-13.0	-31.9
2	5725.50	-55.7	-42.6	1.2	-41.4	-13.0	-28.4
3	7634.00	-57.7	-40.2	1.2	-39.0	-13.0	-26.0
4	9542.50	-54.6	-32.3	1.0	-31.3	-13.0	-18.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3817.00	-55.9	-47.7	1.4	-46.3	-13.0	-33.3
2	5725.50	-54.4	-42.2	1.2	-41.0	-13.0	-28.0
3	7634.00	-58.4	-40.4	1.2	-39.2	-13.0	-26.2
4	9542.50	-55.5	-34.8	1.0	-33.8	-13.0	-20.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 5MHz

Mode	TX channel 18625 (1852.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-55.8	-47.3	1.4	-45.9	-13.0	-32.9
2	5557.50	-56.2	-43.3	1.3	-42.0	-13.0	-29.0
3	7410.00	-57.4	-38.7	0.9	-37.8	-13.0	-24.8
4	9262.50	-53.9	-32.4	1.1	-31.3	-13.0	-18.3

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-54.8	-46.6	1.4	-45.2	-13.0	-32.2
2	5557.50	-53.1	-41.0	1.3	-39.7	-13.0	-26.7
3	7410.00	-56.3	-38.6	0.9	-37.7	-13.0	-24.7
4	9262.50	-56.1	-35.3	1.1	-34.2	-13.0	-21.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-54.7	-46.2	1.3	-44.9	-13.0	-31.9
2	5640.00	-55.8	-42.8	1.3	-41.5	-13.0	-28.5
3	7520.00	-58.4	-39.8	1.0	-38.8	-13.0	-25.8
4	9400.00	-54.6	-32.4	1.0	-31.4	-13.0	-18.4

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-56.3	-48.0	1.3	-46.7	-13.0	-33.7
2	5640.00	-55.5	-43.6	1.3	-42.3	-13.0	-29.3
3	7520.00	-58.6	-40.6	1.0	-39.6	-13.0	-26.6
4	9400.00	-56.6	-35.8	1.0	-34.8	-13.0	-21.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19175 (1907.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.00	-55.5	-47.2	1.4	-45.8	-13.0	-32.8
2	5722.50	-55.7	-42.6	1.2	-41.4	-13.0	-28.4
3	7630.00	-59.2	-41.7	1.2	-40.5	-13.0	-27.5
4	9537.50	-56.5	-34.2	1.0	-33.2	-13.0	-20.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.00	-56.2	-48.0	1.4	-46.6	-13.0	-33.6
2	5722.50	-54.2	-42.1	1.2	-40.9	-13.0	-27.9
3	7630.00	-58.7	-40.7	1.2	-39.5	-13.0	-26.5
4	9537.50	-55.3	-34.5	1.0	-33.5	-13.0	-20.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



LTE Band 2, Channel Bandwidth: 10MHz

Mode	TX channel 18650 (1855.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3710.00	-55.4	-46.9	1.4	-45.5	-13.0	-32.5
2	5565.00	-55.5	-42.6	1.3	-41.3	-13.0	-28.3
3	7420.00	-57.8	-39.2	1.0	-38.2	-13.0	-25.2
4	9275.00	-54.2	-32.7	1.1	-31.6	-13.0	-18.6

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3710.00	-55.6	-47.4	1.4	-46.0	-13.0	-33.0
2	5565.00	-54.9	-42.9	1.3	-41.6	-13.0	-28.6
3	7420.00	-58.8	-41.2	1.0	-40.2	-13.0	-27.2
4	9275.00	-56.8	-35.9	1.1	-34.8	-13.0	-21.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-54.8	-46.3	1.3	-45.0	-13.0	-32.0
2	5640.00	-56.5	-43.5	1.3	-42.2	-13.0	-29.2
3	7520.00	-58.4	-39.8	1.0	-38.8	-13.0	-25.8
4	9400.00	-55.1	-32.9	1.0	-31.9	-13.0	-18.9

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-56.5	-48.2	1.3	-46.9	-13.0	-33.9
2	5640.00	-55.3	-43.4	1.3	-42.1	-13.0	-29.1
3	7520.00	-58.1	-40.1	1.0	-39.1	-13.0	-26.1
4	9400.00	-56.2	-35.4	1.0	-34.4	-13.0	-21.4

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19150 (1905.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3810.00	-54.9	-46.5	1.3	-45.2	-13.0	-32.2
2	5715.00	-55.8	-42.7	1.2	-41.5	-13.0	-28.5
3	7620.00	-58.8	-41.3	1.1	-40.2	-13.0	-27.2
4	9525.00	-54.3	-32.1	1.0	-31.1	-13.0	-18.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3810.00	-55.8	-47.5	1.3	-46.2	-13.0	-33.2
2	5715.00	-54.7	-42.6	1.2	-41.4	-13.0	-28.4
3	7620.00	-58.8	-40.7	1.1	-39.6	-13.0	-26.6
4	9525.00	-55.7	-34.8	1.0	-33.8	-13.0	-20.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 15MHz

Mode	TX channel 18675 (1857.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3715.00	-55.2	-46.7	1.4	-45.3	-13.0	-32.3
2	5572.50	-55.3	-42.4	1.3	-41.1	-13.0	-28.1
3	7430.00	-58.0	-39.4	1.0	-38.4	-13.0	-25.4
4	9287.50	-54.2	-32.8	1.1	-31.7	-13.0	-18.7

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3715.00	-55.7	-47.5	1.4	-46.1	-13.0	-33.1
2	5572.50	-54.9	-42.9	1.3	-41.6	-13.0	-28.6
3	7430.00	-58.2	-40.6	1.0	-39.6	-13.0	-26.6
4	9287.50	-57.3	-36.4	1.1	-35.3	-13.0	-22.3

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-55.4	-46.9	1.3	-45.6	-13.0	-32.6
2	5640.00	-56.3	-43.3	1.3	-42.0	-13.0	-29.0
3	7520.00	-56.9	-38.3	1.0	-37.3	-13.0	-24.3
4	9400.00	-54.7	-32.5	1.0	-31.5	-13.0	-18.5

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-56.4	-48.1	1.3	-46.8	-13.0	-33.8
2	5640.00	-55.3	-43.4	1.3	-42.1	-13.0	-29.1
3	7520.00	-58.9	-40.9	1.0	-39.9	-13.0	-26.9
4	9400.00	-56.2	-35.4	1.0	-34.4	-13.0	-21.4

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19125 (1902.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3805.00	-55.3	-46.9	1.3	-45.6	-13.0	-32.6
2	5707.50	-56.2	-43.1	1.2	-41.9	-13.0	-28.9
3	7610.00	-59.2	-41.7	1.1	-40.6	-13.0	-27.6
4	9152.50	-53.9	-32.2	1.1	-31.1	-13.0	-18.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3805.00	-55.3	-47.1	1.3	-45.8	-13.0	-32.8
2	5707.50	-54.5	-42.5	1.2	-41.3	-13.0	-28.3
3	7610.00	-58.2	-40.1	1.1	-39.0	-13.0	-26.0
4	9152.50	-55.3	-34.9	1.1	-33.8	-13.0	-20.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 20MHz

Mode	TX channel 18700 (1860.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-55.5	-47.0	1.4	-45.6	-13.0	-32.6
2	5580.00	-56.0	-43.0	1.3	-41.7	-13.0	-28.7
3	7440.00	-57.1	-38.4	1.0	-37.4	-13.0	-24.4
4	9300.00	-54.2	-32.9	1.1	-31.8	-13.0	-18.8

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-55.8	-47.6	1.4	-46.2	-13.0	-33.2
2	5580.00	-54.2	-42.2	1.3	-40.9	-13.0	-27.9
3	7440.00	-57.7	-40.0	1.0	-39.0	-13.0	-26.0
4	9300.00	-56.8	-35.9	1.1	-34.8	-13.0	-21.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-54.8	-46.3	1.3	-45.0	-13.0	-32.0
2	5640.00	-55.3	-42.3	1.3	-41.0	-13.0	-28.0
3	7520.00	-58.2	-39.6	1.0	-38.6	-13.0	-25.6
4	9400.00	-55.3	-33.1	1.0	-32.1	-13.0	-19.1

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-56.5	-48.2	1.3	-46.9	-13.0	-33.9
2	5640.00	-54.2	-42.3	1.3	-41.0	-13.0	-28.0
3	7520.00	-58.1	-40.1	1.0	-39.1	-13.0	-26.1
4	9400.00	-56.3	-35.5	1.0	-34.5	-13.0	-21.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19100 (1900.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800.00	-54.9	-46.5	1.3	-45.2	-13.0	-32.2
2	5700.00	-55.9	-42.8	1.2	-41.6	-13.0	-28.6
3	7600.00	-59.3	-41.8	1.1	-40.7	-13.0	-27.7
4	9500.00	-55.3	-33.2	1.0	-32.2	-13.0	-19.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800.00	-56.0	-47.8	1.3	-46.5	-13.0	-33.5
2	5700.00	-54.6	-42.7	1.2	-41.5	-13.0	-28.5
3	7600.00	-58.9	-40.7	1.1	-39.6	-13.0	-26.6
4	9500.00	-56.6	-35.6	1.0	-34.6	-13.0	-21.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---