



FCC RADIO TEST REPORT

FCC ID : UZ7TC78A1
Equipment : Touch Computer
Brand Name : Zebra
Model Name : TC78A1
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC 47 CFR Part 2, 27

The product was received on Aug. 09, 2022 and testing was performed from Aug. 17, 2022 to Oct. 06, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example.....	9
2.5 Frequency List of Low/Middle/High Channels	10
3 Conducted Test Items.....	12
3.1 Measuring Instruments	12
3.2 Conducted Output Power and EIRP	13
3.3 Peak-to-Average Ratio	14
3.4 Occupied Bandwidth.....	15
3.5 Conducted Band Edge	16
3.6 Conducted Spurious Emission	17
3.7 Frequency Stability	18
4 Radiated Test Items	19
4.1 Measuring Instruments	19
4.2 Radiated Spurious Emission Measurement	21
5 List of Measuring Equipment.....	22
6 Uncertainty of Evaluation	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG271554H	01	Initial issue of report	Oct. 21, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§27.50 (k)(3)	Equivalent Isotropic Radiated Power (n77) (n78)	Pass	
3.3	§27.50 (k)(4)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement (n77) (n78)	Pass	-
3.6	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission (n77) (n78)	Pass	-
3.7	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (n77) (n78)	Pass	Under limit 15.86 dB at 13805.000 MHz

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen**Report Producer: Michelle Chen**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	TC78A1
FCC ID	UZ7TC78A1
Sample 1	SE5500 + Premium config
Sample 2	SE4770 + Base config
Sample 3	SE5500 + Base config
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
HW Version	EV2
SW Version	athena_A11_userdebug_GMS_RelKey_2022-07-14-1733_p roduct_SE
MFD	11JUN22
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Battery 1X	Brand Name	Zebra	Part Number	BT-000442-0020
Battery 1.5X	Brand Name	Zebra	Part Number	BT-000442-0820
Wireless Battery	Brand Name	Zebra	Part Number	BT-000442-002A
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB TYPE C to 3.5mm audio connector	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
3.5mm Earphone	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01
USB TYPE C Earphone	Brand Name	Zebra	Part Number	HPST-USBC-PTT1-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-NGTC5-ELEC-01
Soft Holster	Brand Name	Zebra	Part Number	SG-NGTC5TC7-HLSTR-01
TC53/TC58 RUGGED BOOT	Brand Name	Zebra	Part Number	SG-NGTC5EXO1-01



1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	5G NR n77: 3460.2 MHz ~ 3540 MHz 5G NR n78: 3460.2 MHz ~ 3540 MHz
Rx Frequency	5G NR n77: 3460.2 MHz ~ 3540 MHz 5G NR n78: 3460.2 MHz ~ 3540 MHz
Bandwidth	5G NR n77: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz 5G NR n78: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
Maximum Output Power to Antenna	5G NR n77 : 24.31 dBm 5G NR n77 : 26.23 dBm for HPUE 5G NR n78 : 24.16 dBm 5G NR n78 : 25.78 dBm for HPUE
Antenna Type	<Ant. 11>: PIFA Antenna <Ant. 12>: PIFA Antenna
Antenna Gain	<Ant. 11> 5G NR n77: -0.95 dBi 5G NR n78: -0.95 dBi <Ant. 12> 5G NR n77: 0.36 dBi 5G NR n78: 0.36 dBi
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Sherry Wu and Luffy Lin
Temperature	23.5~25
Relative Humidity	48~52

Test Site	Sporton International Inc. Wensan Laboratory.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Wilson Wu, Jesse Fan and Tim Lee
Temperature	20~25
Relative Humidity	50~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168

D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.

Test Items	NR Band	Bandwidth (MHz)												Modulation					RB #			Test Channel		
		10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n77	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77	-	-	v	-									v	v	v	v	v			v		v	
	n78	Covered by 5G NR n77																						
26dB and 99% Bandwidth	n77	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v			v		v	
	n78	Covered by 5G NR n77																						
Conducted Band Edge	n77	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v		v
	n78	Covered by 5G NR n77																						
Conducted Spurious Emission	n77	-	-	v	-										v				v			v	v	v
	n78	Covered by 5G NR n77																						
Frequency Stability	n77	-	-	v	-									v							v		v	
	n78	Covered by 5G NR n77																						
E.I.R.P	n77	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	Max. Power					
	n78	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v						
Radiated Spurious Emission	n77	Worst Case																			v	v	v	
	n78	Worst Case																			v	v	v	
Remark	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, and the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant. 5. Test combination are EN-DC 66A-n77A and EN-DC 66A-n78A. 6. All the radiated test cases were performed with Battery 1X and Sample 1. 7. One representative bandwidth is selected to perform PAR and frequency stability. 8. Wider operating range bandwidth covers narrower one when the power is higher or the same.																							

2.2 Connection Diagram of Test System

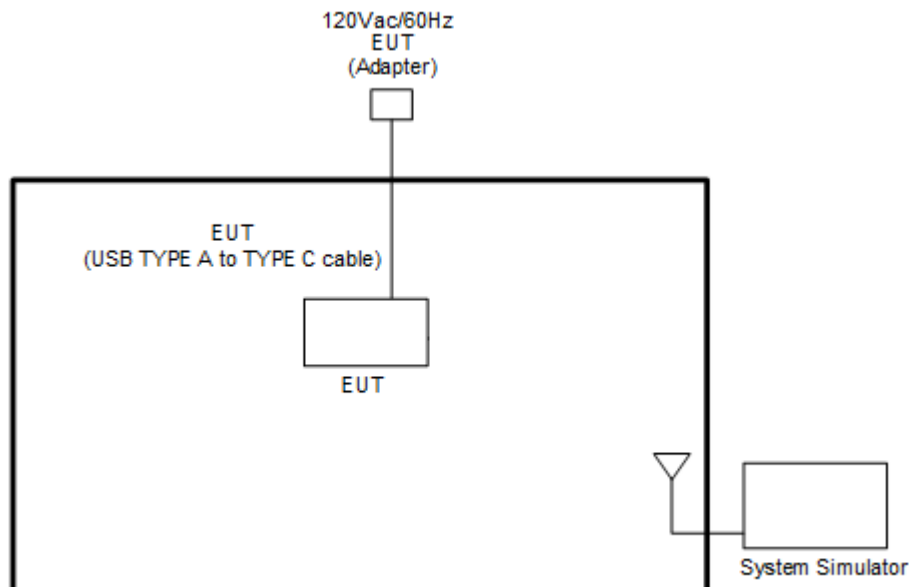

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540



5G NR n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

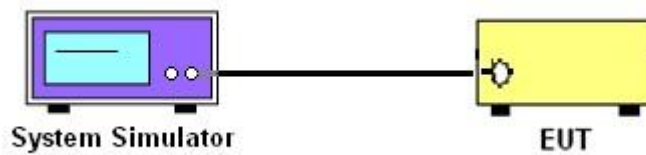

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

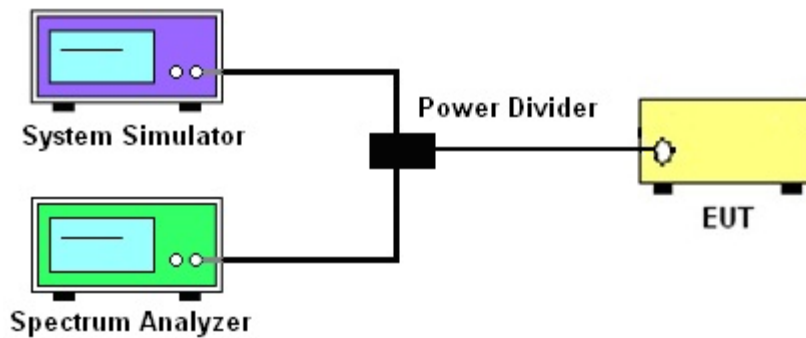

3.1.4 Frequency Stability

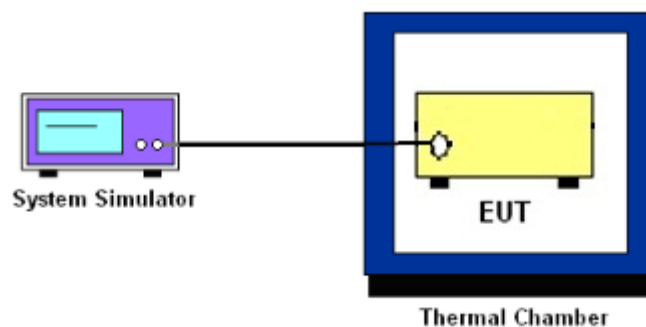

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and EIRP

3.2.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77 and n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

27.53 (n)(2)

(2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (n)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. For $EBW < 20\text{MHz}$, set $RBW \geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. For $EBW \geq 20\text{MHz}$, set $RBW = 200\text{kHz}$ in the 1MHz band immediately outside and adjacent to the band edge.
5. Between 1 ~5 MHz from the band edge, $RBW=500$ kHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

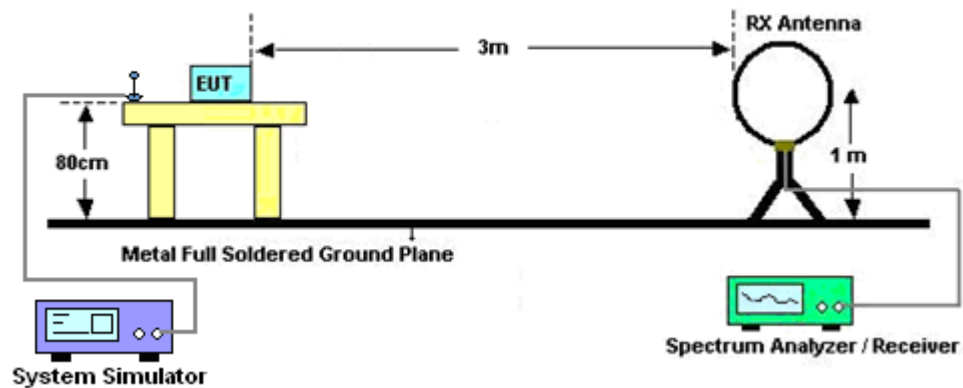


For radiated test from 30MHz to 1GHz

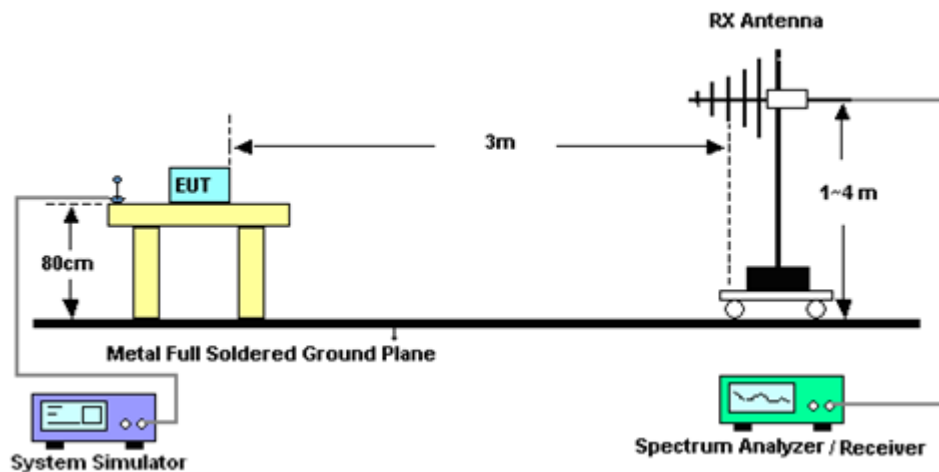

For radiated test from 1GHz to 18GHz

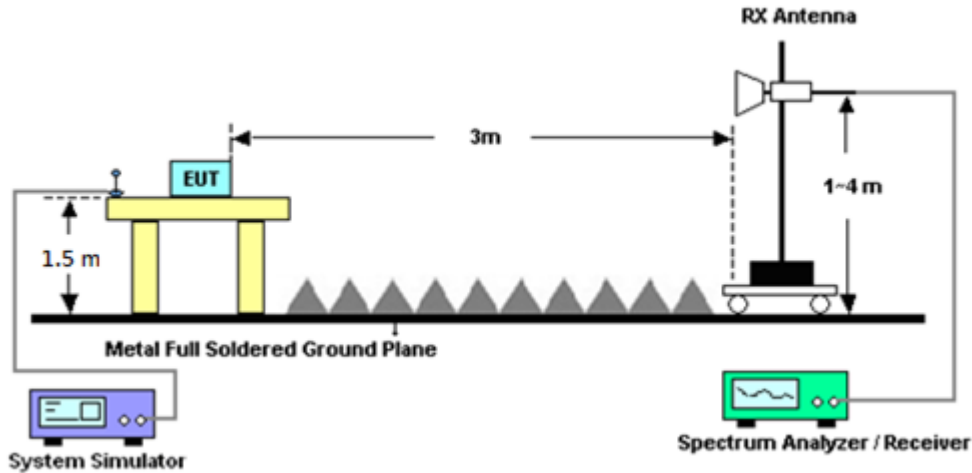

For radiated test above 18GHz

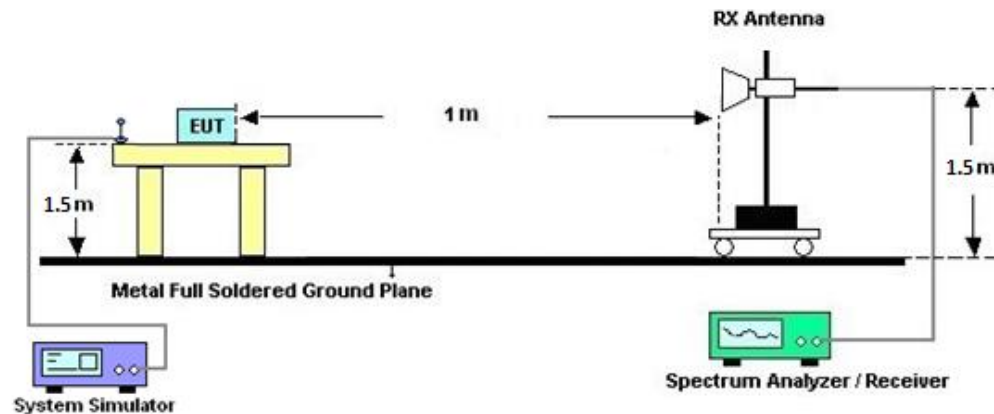

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	May 13, 2022	Sep. 08, 2022~ Sep. 26, 2022	May 12, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Sep. 08, 2022~ Sep. 26, 2022	Apr. 23, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 09, 2021	Sep. 08, 2022~ Sep. 26, 2022	Oct. 08, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1328	1GHz~18GHz	Dec. 03, 2021	Sep. 08, 2022~ Sep. 26, 2022	Dec. 02, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Mar. 10, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 09, 2023	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91702 51	18GHz~40GHz	Nov. 30, 2021	Sep. 08, 2022~ Sep. 26, 2022	Nov. 29, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 76	18GHz~40GHz	May 14, 2022	Sep. 08, 2022~ Sep. 26, 2022	May 13, 2023	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 76	18GHz~40GHz	May 14, 2022	Sep. 08, 2022~ Sep. 26, 2022	May 13, 2023	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 22, 2023	Radiation (03CH12-HY)
Preamplifier	Aglient	8449B	3008A02375	1GHz~26.5GHz	May 24, 2022	Sep. 08, 2022~ Sep. 26, 2022	May 23, 2023	Radiation (03CH12-HY)
Preamplifier	E-INSTRUME NT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900270	1GHz-18GHz	Dec. 27, 2021	Sep. 08, 2022~ Sep. 26, 2022	Dec. 26, 2022	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 24, 2021	Sep. 08, 2022~ Sep. 26, 2022	Dec. 23, 2022	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY53470118	10Hz~44GHz	Jan. 12, 2022	Sep. 08, 2022~ Sep. 26, 2022	Jan. 11, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 09, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 10, 2021	Sep. 08, 2022~ Sep. 26, 2022	Dec. 09, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	Sep. 08, 2022~ Sep. 26, 2022	Feb. 20, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Mar. 08, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 07, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN1	1.2GHz High Pass Filter	Mar. 15, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 14, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN2	3GHz High Pass Filter	Jul. 11, 2022	Sep. 08, 2022~ Sep. 26, 2022	Jul. 10, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12 SS	SN2	1.2GHz Low Pass Filter	Mar. 15, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 14, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN2	6.75GHz High Pass Filter	Mar. 16, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 15, 2023	Radiation (03CH12-HY)
Hygrometer	TECEPEL	DTM-303B	TP140349	N/A	Sep. 30, 2021	Sep. 08, 2022~ Sep. 26, 2022	Sep. 29, 2022	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Sep. 08, 2022~ Sep. 26, 2022	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Sep. 08, 2022~ Sep. 26, 2022	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 08, 2022~ Sep. 26, 2022	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Sep. 08, 2022~ Sep. 26, 2022	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Programmable Power Supply	GW Instek	PSS-2005	EL890089	50Hz~60Hz	Feb. 23, 2022	Aug. 17, 2022~ Oct. 06, 2022	Feb. 22, 2023	Conducted (TH03-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101048	10Hz~44GHz	May 05, 2022	Aug. 17, 2022~ Oct. 06, 2022	May 04, 2023	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-241	92003713	-30℃ ~95℃	May 19, 2022	Aug. 17, 2022~ Oct. 06, 2022	May 18, 2023	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8821C	6262044657	LTE	Feb. 16, 2022	Aug. 17, 2022~ Oct. 06, 2022	Feb. 15, 2023	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6261940327	FR1	Oct. 29, 2021	Aug. 17, 2022~ Oct. 06, 2022	Oct. 28, 2022	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.25 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.81 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and EIRP

NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.93	24.04	24.15	23.22	0.2099		
20	1	49		23.84	23.97	24.06				
20	25	12		23.88	24.07	24.08				
20	1	0		22.47	22.51	22.80				
20	1	50		22.34	22.52	22.60				
20	50	0		23.87	24.08	24.12				
20	1	1	QPSK	23.97	24.03	24.17				
20	1	49		23.87	23.98	24.05				
20	25	12		23.87	24.04	24.06				
20	1	0		22.41	22.53	22.69				
20	1	50		22.34	22.50	22.56				
20	50	0		21.93	22.10	22.14				
20	1	1	16-QAM	23.82	23.10	24.03	23.08	0.2032		
20	1	1	64-QAM	23.55	23.09	23.71				
20	1	1	256-QAM	21.36	21.50	21.56				
Limit	EIRP < 1W			Result			Pass			



NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	23.94	24.15	24.15	23.36	0.2168		
30	1	76		24.04	24.10	24.25				
30	36	18		23.91	24.07	24.24				
30	1	0		22.52	22.64	22.71				
30	1	77		22.55	22.67	22.81				
30	75	0		23.94	24.09	24.31				
30	1	1	QPSK	24.01	24.12	24.21				
30	1	76		24.03	24.12	24.26				
30	36	18		23.87	24.06	24.26				
30	1	0		22.51	22.64	22.72				
30	1	77		22.56	22.60	22.80				
30	75	0		21.95	22.09	22.35				
30	1	1	16-QAM	23.89	23.97	24.03	23.08	0.2032		
30	1	1	64-QAM	23.53	23.77	23.74				
30	1	1	256-QAM	21.42	21.55	21.67				
Limit	EIRP < 1W			Result			Pass			

NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.05	24.15	24.14	23.32	0.2148		
40	1	104		24.21	24.19	24.26				
40	50	25		24.04	24.13	24.23				
40	1	0		22.51	22.67	22.71				
40	1	105		22.72	22.72	22.80				
40	100	0		24.05	24.11	24.27				
40	1	1	QPSK	23.94	24.15	24.18				
40	1	104		24.17	24.12	24.25				
40	50	25		24.02	24.06	24.24				
40	1	0		22.47	22.67	22.70				
40	1	105		22.71	22.73	22.81				
40	100	0		22.06	22.12	22.31				
40	1	1	16-QAM	23.90	24.05	24.02	23.10	0.2042		
40	1	1	64-QAM	23.43	23.73	23.67				
40	1	1	256-QAM	21.41	21.57	21.61				
Limit	EIRP < 1W			Result			Pass			



NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	23.71	23.85	23.83	22.95	0.1972		
50	1	131		23.71	23.84	23.84				
50	64	32		23.72	23.90	23.85				
50	1	0		22.15	22.33	22.41				
50	1	132		22.28	22.40	22.34				
50	128	0		23.75	23.84	23.89				
50	1	1	QPSK	23.65	23.76	23.81				
50	1	131		23.65	23.84	23.85				
50	64	32		23.77	23.90	23.85				
50	1	0		22.15	22.33	22.41				
50	1	132		22.17	22.43	22.37				
50	128	0		21.75	21.89	21.88				
50	1	1	16-QAM	23.56	23.76	23.81	22.86	0.1932		
50	1	1	64-QAM	23.25	23.41	23.45				
50	1	1	256-QAM	21.09	21.23	21.32				
Limit	EIRP < 1W			Result			Pass			

NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	23.71	23.75	23.84	23.06	0.2023		
60	1	160		23.77	23.85	23.92				
60	81	40		23.83	23.94	24.01				
60	1	0		22.25	22.26	22.31				
60	1	161		22.31	22.35	22.47				
60	162	0		23.81	23.92	23.91				
60	1	1	QPSK	23.70	23.71	23.88				
60	1	160		23.75	23.84	23.94				
60	81	40		23.85	23.94	23.95				
60	1	0		22.21	22.24	22.31				
60	1	161		22.27	22.38	23.92				
60	162	0		21.82	21.87	21.97				
60	1	1	16-QAM	23.57	23.64	23.63	22.69	0.1858		
60	1	1	64-QAM	23.27	23.12	23.32				
60	1	1	256-QAM	21.16	21.17	21.25				
Limit	EIRP < 1W			Result			Pass			



NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	23.64	23.68	23.78	22.98	0.1986		
70	1	187		23.73	23.83	23.91				
70	90	45		23.66	23.87	23.92				
70	1	0		22.14	22.21	22.26				
70	1	188		22.21	22.31	22.39				
70	180	0		23.69	23.84	23.89				
70	1	1	QPSK	23.64	23.65	23.75				
70	1	187		23.71	23.79	23.93				
70	90	45		23.66	23.83	23.86				
70	1	0		22.19	22.21	22.29				
70	1	188		22.24	22.31	22.41				
70	180	0		21.69	21.87	21.97				
70	1	1	16-QAM	23.56	23.50	23.62	22.67	0.1849		
70	1	1	64-QAM	23.09	23.24	23.29				
70	1	1	256-QAM	21.11	21.18	21.15				
Limit	EIRP < 1W			Result			Pass			

NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	23.64	23.52	23.66	22.95	0.1972		
80	1	215		23.81	23.77	23.87				
80	108	54		23.77	23.84	23.81				
80	1	0		22.14	22.07	22.19				
80	1	216		22.29	22.27	22.34				
80	216	0		23.77	23.84	23.83				
80	1	1	QPSK	23.66	23.59	23.67				
80	1	215		23.81	23.87	23.90				
80	108	54		23.75	23.83	23.84				
80	1	0		22.14	22.06	22.17				
80	1	216		22.35	22.30	22.35				
80	216	0		21.78	21.87	21.84				
80	1	1	16-QAM	23.47	23.45	23.57	22.62	0.1828		
80	1	1	64-QAM	23.07	23.01	23.08				
80	1	1	256-QAM	21.09	20.94	21.23				
Limit	EIRP < 1W			Result			Pass			



NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	23.65	23.59	23.58	23.07	0.2028		
90	1	243		23.78	23.89	24.02				
90	120	60		23.82	23.85	23.97				
90	1	0		22.14	22.10	22.12				
90	1	244		22.31	22.42	22.53				
90	243	0		23.76	23.81	23.91				
90	1	1	QPSK	23.64	23.58	23.61				
90	1	243		23.81	24.00	24.02				
90	120	60		23.78	23.84	23.95				
90	1	0		22.15	22.14	22.08				
90	1	244		22.38	22.48	22.56				
90	243	0		21.78	21.85	21.91				
90	1	1	16-QAM	23.51	23.44	23.42	22.56	0.1803		
90	1	1	64-QAM	23.17	23.14	23.12				
90	1	1	256-QAM	21.07	20.97	21.02				
Limit	EIRP < 1W			Result			Pass			

NR n77 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	23.63	-	23.04	0.2014		
100	1	271		-	23.99	-				
100	135	67		-	23.85	-				
100	1	0		-	22.14	-				
100	1	272		-	22.52	-				
100	270	0		-	23.79	-				
100	1	1	QPSK	-	23.54	-				
100	1	271		-	23.89	-				
100	135	67		-	23.84	-				
100	1	0		-	22.11	-				
100	1	272		-	22.49	-				
100	270	0		-	21.76	-				
100	1	1	16-QAM	-	23.59	-	22.64	0.1837		
100	1	1	64-QAM	-	23.15	-				
100	1	1	256-QAM	-	20.99	-				
Limit	EIRP < 1W			Result			Pass			



NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.25	23.63	23.68	22.84	0.1923		
20	1	49		23.34	23.75	23.74				
20	25	12		23.31	23.71	23.74				
20	1	0		21.64	21.99	21.97				
20	1	50		21.75	22.02	22.03				
20	50	0		23.31	23.79	23.75				
20	1	1	QPSK	23.41	23.61	23.67				
20	1	49		23.35	23.71	23.74				
20	25	12		23.33	23.67	23.67				
20	1	0		21.64	21.95	21.99				
20	1	50		21.67	22.04	22.10				
20	50	0		23.12	23.47	23.47				
20	1	1	16-QAM	23.25	23.47	23.67	22.72	0.1871		
20	1	1	64-QAM	22.74	23.00	23.15				
20	1	1	256-QAM	20.61	20.81	21.06				
Limit	EIRP < 1W			Result			Pass			



NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	23.87	23.50	23.75	23.21	0.2094		
30	1	76		24.12	23.67	23.97				
30	36	18		24.10	23.72	24.04				
30	1	0		22.29	22.09	22.27				
30	1	77		22.40	21.99	22.16				
30	75	0		24.08	23.77	24.09				
30	1	1	QPSK	23.98	23.77	23.91				
30	1	76		24.06	23.94	24.16				
30	36	18		24.12	23.87	23.92				
30	1	0		22.32	22.17	22.36				
30	1	77		22.41	22.23	22.52				
30	75	0		23.91	23.72	23.84				
30	1	1	16-QAM	23.84	23.67	23.92	22.97	0.1982		
30	1	1	64-QAM	23.31	23.07	23.31				
30	1	1	256-QAM	21.21	21.00	21.20				
Limit	EIRP < 1W			Result			Pass			

NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	23.52	23.65	23.78	23.07	0.2028		
40	1	104		23.70	23.77	24.02				
40	50	25		23.51	23.74	23.91				
40	1	0		21.97	22.03	22.18				
40	1	105		22.02	22.12	22.32				
40	100	0		23.57	23.67	23.97				
40	1	1	QPSK	23.48	23.69	23.81				
40	1	104		23.69	23.80	24.01				
40	50	25		23.54	23.71	23.91				
40	1	0		21.85	22.05	22.19				
40	1	105		21.09	22.15	22.31				
40	100	0		23.37	23.52	23.61				
40	1	1	16-QAM	23.45	23.54	23.61	22.66	0.1845		
40	1	1	64-QAM	22.79	23.05	23.14				
40	1	1	256-QAM	20.79	20.93	21.01				
Limit	EIRP < 1W			Result			Pass			



NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	23.31	23.19	23.48	22.75	0.1884		
50	1	131		23.45	23.31	23.68				
50	64	32		23.45	23.37	23.70				
50	1	0		21.65	21.49	21.79				
50	1	132		21.76	21.62	22.01				
50	128	0		23.45	23.29	23.70				
50	1	1	QPSK	23.35	23.12	23.47				
50	1	131		23.47	23.35	23.63				
50	64	32		23.42	23.28	23.37				
50	1	0		21.64	21.52	21.76				
50	1	132		21.78	21.60	21.96				
50	128	0		23.21	23.10	23.45				
50	1	1	16-QAM	23.21	23.05	23.47	22.52	0.1786		
50	1	1	64-QAM	22.74	22.47	22.82				
50	1	1	256-QAM	20.41	20.50	20.71				
Limit	EIRP < 1W			Result			Pass			

NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	23.28	23.39	23.58	22.76	0.1888		
60	1	160		23.65	23.67	23.71				
60	81	40		23.64	23.57	23.64				
60	1	0		21.61	21.76	21.90				
60	1	161		21.94	21.98	22.00				
60	162	0		23.64	23.56	23.69				
60	1	1	QPSK	23.27	23.42	23.57				
60	1	160		23.60	23.64	23.70				
60	81	40		23.60	23.62	23.63				
60	1	0		21.59	21.74	21.91				
60	1	161		21.94	21.97	21.99				
60	162	0		23.37	23.40	23.47				
60	1	1	16-QAM	23.27	23.30	23.47	22.52	0.1786		
60	1	1	64-QAM	22.62	22.85	22.96				
60	1	1	256-QAM	20.56	20.63	20.82				
Limit	EIRP < 1W			Result			Pass			



NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	23.24	23.26	23.51	22.78	0.1897		
70	1	187		23.34	23.63	23.64				
70	90	45		23.36	23.54	23.72				
70	1	0		21.54	21.62	21.80				
70	1	188		21.76	21.94	21.97				
70	180	0		23.40	23.52	23.73				
70	1	1	QPSK	23.25	23.24	23.45				
70	1	187		23.42	23.54	23.61				
70	90	45		23.34	23.54	23.72				
70	1	0		21.58	21.58	21.77				
70	1	188		21.75	21.92	21.99				
70	180	0		23.24	23.31	23.52				
70	1	1	16-QAM	23.10	23.21	23.40	22.45	0.1758		
70	1	1	64-QAM	22.57	22.50	22.74				
70	1	1	256-QAM	20.45	20.52	20.69				
Limit	EIRP < 1W			Result			Pass			

NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	23.05	23.00	23.24	22.55	0.1799		
80	1	215		23.47	23.31	23.41				
80	108	54		23.41	23.27	23.48				
80	1	0		21.34	21.45	21.51				
80	1	216		21.72	21.53	21.73				
80	216	0		23.32	23.24	23.47				
80	1	1	QPSK	23.04	23.11	23.16				
80	1	215		23.43	23.36	23.34				
80	108	54		23.34	23.27	23.50				
80	1	0		21.38	21.31	21.49				
80	1	216		21.76	21.66	21.69				
80	216	0		23.04	23.04	23.24				
80	1	1	16-QAM	23.09	23.09	23.06	22.14	0.1637		
80	1	1	64-QAM	22.55	22.42	22.41				
80	1	1	256-QAM	20.43	20.27	20.24				
Limit	EIRP < 1W			Result			Pass			



NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	23.06	23.15	23.09	22.75	0.1884		
90	1	243		23.40	23.49	23.49				
90	120	60		23.31	23.31	23.45				
90	1	0		21.34	21.31	21.41				
90	1	244		21.69	21.59	21.83				
90	243	0		23.31	23.28	23.27				
90	1	1	QPSK	23.03	22.99	23.29				
90	1	243		23.40	23.31	23.70				
90	120	60		23.31	23.24	23.48				
90	1	0		21.37	21.31	21.57				
90	1	244		21.73	21.75	21.75				
90	243	0		23.12	23.09	23.24				
90	1	1	16-QAM	22.89	22.94	23.17	22.22	0.1667		
90	1	1	64-QAM	22.41	22.36	22.56				
90	1	1	256-QAM	20.21	20.16	20.35				
Limit	EIRP < 1W			Result			Pass			

NR n78 Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	23.12	-	22.64	0.1837		
100	1	271		-	23.58	-				
100	135	67		-	23.48	-				
100	1	0		-	21.45	-				
100	1	272		-	21.82	-				
100	270	0		-	23.45	-				
100	1	1	QPSK	-	23.14	-				
100	1	271		-	23.59	-				
100	135	67		-	23.49	-				
100	1	0		-	21.45	-				
100	1	272		-	21.92	-				
100	270	0		-	23.28	-				
100	1	1	16-QAM	-	23.05	-	22.10	0.1622		
100	1	1	64-QAM	-	22.58	-				
100	1	1	256-QAM	-	20.35	-				
Limit	EIRP < 1W			Result			Pass			



NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.97	25.98	26.11	25.16	0.3281		
20	1	49		25.81	25.99	26.02				
20	25	12		25.82	25.91	26.03				
20	1	0		22.48	22.52	22.62				
20	1	50		22.34	22.48	22.51				
20	50	0		24.84	24.91	25.03				
20	1	1	QPSK	25.93	26.00	26.11				
20	1	49		25.82	25.97	26.01				
20	25	12		25.82	25.89	26.01				
20	1	0		22.47	22.47	22.64				
20	1	50		22.31	22.48	22.53				
20	50	0		21.90	21.99	22.10				
20	1	1	16-QAM	24.75	24.86	24.97	24.02	0.2523		
20	1	1	64-QAM	23.55	23.58	23.67				
20	1	1	256-QAM	21.35	21.47	21.47				
Limit	EIRP < 1W			Result			Pass			



NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.85	26.11	26.14	25.28	0.3373		
30	1	76		25.92	26.05	26.21				
30	36	18		25.84	26.01	26.23				
30	1	0		22.39	22.64	22.67				
30	1	77		22.47	22.57	22.74				
30	75	0		24.89	25.07	25.26				
30	1	1	QPSK	25.86	26.05	26.10				
30	1	76		25.95	26.06	26.18				
30	36	18		25.81	25.99	26.20				
30	1	0		22.43	22.63	22.66				
30	1	77		22.50	22.63	22.72				
30	75	0		21.92	22.09	22.27				
30	1	1	16-QAM	24.72	24.91	25.04	24.09	0.2564		
30	1	1	64-QAM	23.47	23.69	23.58				
30	1	1	256-QAM	21.31	21.55	21.59				
Limit	EIRP < 1W			Result			Pass			

NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	26.09	26.07	26.05	25.26	0.3357		
40	1	104		26.15	26.12	26.18				
40	50	25		25.93	26.02	26.10				
40	1	0		22.59	22.62	22.67				
40	1	105		22.68	22.67	22.69				
40	100	0		24.99	25.06	25.07				
40	1	1	QPSK	26.06	26.10	26.13				
40	1	104		26.21	26.11	26.18				
40	50	25		25.94	26.03	26.07				
40	1	0		22.54	22.57	22.68				
40	1	105		22.64	22.64	22.71				
40	100	0		21.99	22.04	22.12				
40	1	1	16-QAM	24.87	24.99	24.95	24.04	0.2535		
40	1	1	64-QAM	23.47	23.64	23.71				
40	1	1	256-QAM	21.41	21.34	21.54				
Limit	EIRP < 1W			Result			Pass			



NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	25.67	25.73	25.78	24.9	0.309		
50	1	131		25.66	25.79	25.76				
50	64	32		25.71	25.85	25.85				
50	1	0		22.17	22.31	22.32				
50	1	132		22.21	22.31	22.31				
50	128	0		24.71	24.82	24.82				
50	1	1	QPSK	25.72	25.72	25.81				
50	1	131		25.69	25.78	25.78				
50	64	32		25.68	25.81	25.81				
50	1	0		22.24	22.28	22.35				
50	1	132		22.21	22.31	22.21				
50	128	0		21.73	21.81	21.83				
50	1	1	16-QAM	24.57	24.57	24.71	23.76	0.2377		
50	1	1	64-QAM	23.29	23.36	23.41				
50	1	1	256-QAM	21.08	21.18	21.27				
Limit	EIRP < 1W			Result			Pass			

NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	25.68	25.71	25.70	24.92	0.3105		
60	1	160		25.73	25.81	25.81				
60	81	40		25.81	25.87	25.78				
60	1	0		22.21	22.21	22.34				
60	1	161		22.29	22.36	22.37				
60	162	0		24.77	24.87	24.91				
60	1	1	QPSK	25.71	25.71	25.75				
60	1	160		25.73	25.87	25.87				
60	81	40		25.78	25.84	25.86				
60	1	0		22.23	22.26	22.26				
60	1	161		22.30	22.34	22.38				
60	162	0		21.78	21.86	21.96				
60	1	1	16-QAM	24.53	24.53	24.61	23.66	0.2323		
60	1	1	64-QAM	23.30	23.28	23.35				
60	1	1	256-QAM	21.15	21.12	21.15				
Limit	EIRP < 1W			Result			Pass			



NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	25.64	25.66	25.74	24.97	0.3141		
70	1	187		25.66	25.75	25.86				
70	90	45		25.62	25.78	25.92				
70	1	0		22.13	22.21	22.25				
70	1	188		22.17	22.24	22.39				
70	180	0		24.67	24.79	24.96				
70	1	1	QPSK	25.62	25.65	25.71				
70	1	187		25.58	25.71	25.86				
70	90	45		25.64	25.81	25.83				
70	1	0		22.12	22.21	22.18				
70	1	188		22.10	22.30	22.36				
70	180	0		21.67	21.85	21.91				
70	1	1	16-QAM	24.45	24.52	24.65	23.70	0.2344		
70	1	1	64-QAM	23.27	23.12	23.21				
70	1	1	256-QAM	21.07	21.21	21.17				
Limit	EIRP < 1W			Result			Pass			

NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	25.62	25.50	25.64	24.89	0.3083		
80	1	215		25.77	25.76	25.81				
80	108	54		25.84	25.78	25.81				
80	1	0		22.14	22.04	22.15				
80	1	216		22.38	22.37	22.34				
80	216	0		24.78	24.75	24.74				
80	1	1	QPSK	25.62	25.54	25.61				
80	1	215		25.78	25.78	25.78				
80	108	54		25.72	25.81	25.76				
80	1	0		22.12	22.02	22.12				
80	1	216		22.31	22.41	22.37				
80	216	0		21.82	21.81	21.76				
80	1	1	16-QAM	24.47	24.35	24.45	23.52	0.2249		
80	1	1	64-QAM	23.12	23.10	23.16				
80	1	1	256-QAM	21.08	21.09	21.07				
Limit	EIRP < 1W			Result			Pass			



NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	25.63	25.56	25.40	24.97	0.3141		
90	1	243		25.74	25.87	25.91				
90	120	60		25.78	25.78	25.88				
90	1	0		22.10	22.02	22.05				
90	1	244		22.35	22.41	22.47				
90	243	0		24.72	24.76	24.85				
90	1	1	QPSK	25.64	25.57	25.51				
90	1	243		25.75	25.91	25.92				
90	120	60		25.73	25.78	25.86				
90	1	0		22.16	22.02	22.07				
90	1	244		22.37	22.36	22.45				
90	243	0		21.74	21.82	21.87				
90	1	1	16-QAM	24.45	24.41	24.52	23.57	0.2275		
90	1	1	64-QAM	23.14	23.17	22.94				
90	1	1	256-QAM	20.98	21.01	20.94				
Limit	EIRP < 1W			Result			Pass			

NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	25.59	-	24.96	0.3133		
100	1	271		-	25.91	-				
100	135	67		-	25.78	-				
100	1	0		-	22.12	-				
100	1	272		-	22.43	-				
100	270	0		-	24.74	-				
100	1	1	QPSK	-	25.62	-				
100	1	271		-	25.91	-				
100	135	67		-	25.81	-				
100	1	0		-	22.16	-				
100	1	272		-	22.48	-				
100	270	0		-	21.84	-				
100	1	1	16-QAM	-	24.41	-	23.46	0.2218		
100	1	1	64-QAM	-	23.25	-				
100	1	1	256-QAM	-	21.04	-				
Limit	EIRP < 1W			Result			Pass			



NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.21	25.41	25.63	24.73	0.2972		
20	1	49		25.27	25.45	25.68				
20	25	12		25.15	25.46	25.59				
20	1	0		21.78	21.91	22.16				
20	1	50		21.78	22.00	22.15				
20	50	0		24.22	24.49	24.61				
20	1	1	QPSK	25.21	25.37	25.54				
20	1	49		25.27	25.41	25.51				
20	25	12		25.15	25.41	25.54				
20	1	0		21.81	21.91	22.13				
20	1	50		21.78	21.94	22.10				
20	50	0		23.18	23.52	23.61				
20	1	1	16-QAM	24.12	24.34	24.51	23.56	0.227		
20	1	1	64-QAM	22.85	22.89	23.09				
20	1	1	256-QAM	20.68	20.90	21.09				
Limit	EIRP < 1W			Result			Pass			



NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.29	25.53	25.71	24.83	0.3041		
30	1	76		25.29	25.60	25.76				
30	36	18		25.21	25.57	25.78				
30	1	0		21.86	22.07	22.21				
30	1	77		21.87	22.15	22.26				
30	75	0		24.27	24.60	24.80				
30	1	1	QPSK	25.32	25.51	25.69				
30	1	76		25.27	25.61	25.71				
30	36	18		25.21	25.56	25.78				
30	1	0		21.84	22.09	22.21				
30	1	77		21.86	22.21	22.32				
30	75	0		23.25	23.63	23.81				
30	1	1	16-QAM	24.17	24.41	24.58	23.63	0.2307		
30	1	1	64-QAM	22.85	23.08	23.25				
30	1	1	256-QAM	20.74	20.92	21.13				
Limit	EIRP < 1W			Result			Pass			

NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	25.41	25.54	25.57	24.76	0.2992		
40	1	104		25.57	25.65	25.71				
40	50	25		25.41	25.61	25.71				
40	1	0		21.97	22.07	22.13				
40	1	105		22.12	22.17	22.21				
40	100	0		24.45	24.62	24.71				
40	1	1	QPSK	25.45	25.51	25.51				
40	1	104		25.57	25.61	25.67				
40	50	25		25.40	25.56	25.70				
40	1	0		21.99	22.10	22.09				
40	1	105		22.15	22.19	22.24				
40	100	0		23.45	23.61	23.71				
40	1	1	16-QAM	24.29	24.43	24.46	23.51	0.2244		
40	1	1	64-QAM	23.02	22.99	23.06				
40	1	1	256-QAM	20.98	21.40	20.99				
Limit	EIRP < 1W			Result			Pass			



NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	25.03	25.10	25.14	24.46	0.2793		
50	1	131		25.14	25.35	25.32				
50	64	32		25.17	25.31	25.39				
50	1	0		21.64	21.67	21.71				
50	1	132		21.71	21.94	21.86				
50	128	0		24.18	24.23	24.39				
50	1	1	QPSK	25.07	25.10	25.16				
50	1	131		25.14	25.41	25.36				
50	64	32		25.05	25.28	25.37				
50	1	0		21.55	21.67	21.71				
50	1	132		21.70	21.94	21.88				
50	128	0		23.07	23.29	23.37				
50	1	1	16-QAM	24.02	23.99	24.01	23.07	0.2028		
50	1	1	64-QAM	22.51	22.75	22.74				
50	1	1	256-QAM	20.54	20.56	20.56				
Limit	EIRP < 1W			Result			Pass			

NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	25.20	25.04	25.27	24.44	0.278		
60	1	160		25.27	25.31	25.39				
60	81	40		25.21	25.28	25.33				
60	1	0		21.61	21.57	21.83				
60	1	161		21.80	21.85	21.91				
60	162	0		24.15	24.28	24.36				
60	1	1	QPSK	25.12	24.98	25.30				
60	1	160		25.28	25.34	25.39				
60	81	40		25.22	25.29	25.32				
60	1	0		21.64	21.59	21.87				
60	1	161		21.79	21.85	21.94				
60	162	0		23.21	23.29	23.34				
60	1	1	16-QAM	24.02	23.97	24.18	23.23	0.2104		
60	1	1	64-QAM	22.77	22.53	22.82				
60	1	1	256-QAM	20.52	20.41	20.76				
Limit	EIRP < 1W			Result			Pass			



NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	24.99	25.02	25.15	24.46	0.2793		
70	1	187		25.14	25.31	25.30				
70	90	45		25.10	25.21	25.41				
70	1	0		21.55	21.54	21.72				
70	1	188		21.67	21.82	21.84				
70	180	0		24.14	24.21	24.42				
70	1	1	QPSK	25.01	25.02	25.21				
70	1	187		25.11	25.29	25.32				
70	90	45		25.09	25.21	25.37				
70	1	0		21.53	21.57	21.72				
70	1	188		21.64	21.84	21.87				
70	180	0		23.11	23.27	23.45				
70	1	1	16-QAM	23.91	23.91	24.06	23.11	0.2046		
70	1	1	64-QAM	22.54	22.64	22.78				
70	1	1	256-QAM	20.44	20.42	20.60				
Limit	EIRP < 1W			Result			Pass			

NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	24.98	24.95	24.97	24.39	0.2748		
80	1	215		25.34	25.29	25.24				
80	108	54		25.31	25.23	25.32				
80	1	0		21.52	21.51	21.64				
80	1	216		21.83	21.83	21.81				
80	216	0		24.29	24.21	24.36				
80	1	1	QPSK	24.99	24.99	25.01				
80	1	215		25.31	25.32	25.30				
80	108	54		25.27	25.23	25.31				
80	1	0		21.57	21.52	21.55				
80	1	216		21.96	21.83	21.84				
80	216	0		23.31	23.24	23.36				
80	1	1	16-QAM	23.89	23.87	23.89	22.94	0.1968		
80	1	1	64-QAM	22.56	22.41	22.54				
80	1	1	256-QAM	20.42	20.41	20.51				
Limit	EIRP < 1W			Result			Pass			








NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	24.97	24.85	24.95	24.51	0.2825		
90	1	243		25.29	25.32	25.37				
90	120	60		25.22	25.25	25.33				
90	1	0		21.52	21.47	21.54				
90	1	244		21.82	21.87	21.89				
90	243	0		24.21	24.27	24.31				
90	1	1	QPSK	24.96	24.85	25.01				
90	1	243		25.35	25.34	25.36				
90	120	60		25.21	25.24	25.46				
90	1	0		21.49	21.43	21.52				
90	1	244		21.79	21.82	21.95				
90	243	0		23.25	23.27	23.45				
90	1	1	16-QAM	23.87	23.76	23.87	22.92	0.1959		
90	1	1	64-QAM	22.51	22.43	22.52				
90	1	1	256-QAM	20.36	20.28	20.41				
Limit	EIRP < 1W			Result			Pass			

NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = -0.95 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	24.89	-	24.39	0.2748		
100	1	271		-	25.32	-				
100	135	67		-	25.24	-				
100	1	0		-	21.46	-				
100	1	272		-	21.85	-				
100	270	0		-	24.26	-				
100	1	1	QPSK	-	24.91	-				
100	1	271		-	25.34	-				
100	135	67		-	25.26	-				
100	1	0		-	21.42	-				
100	1	272		-	21.82	-				
100	270	0		-	23.25	-				
100	1	1	16-QAM	-	23.74	-	22.79	0.1901		
100	1	1	64-QAM	-	22.57	-				
100	1	1	256-QAM	-	20.41	-				
Limit	EIRP < 1W			Result			Pass			

**FR1 n77_HPUE****Peak-to-Average Ratio**

Mode	FR1 n77 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.06	4.88	6.12	6.02	PASS
Mode	FR1 n77 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.46				PASS

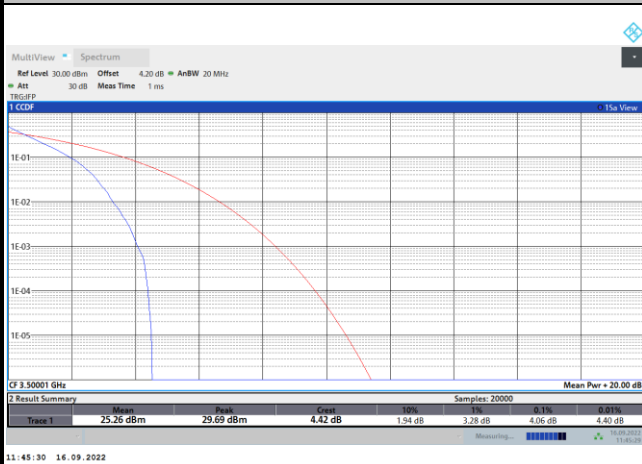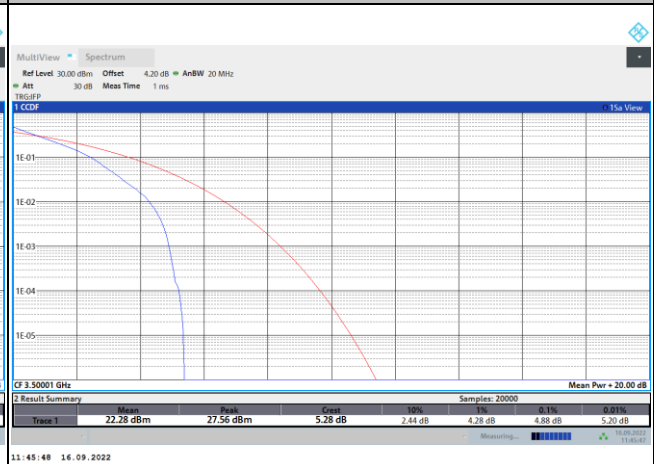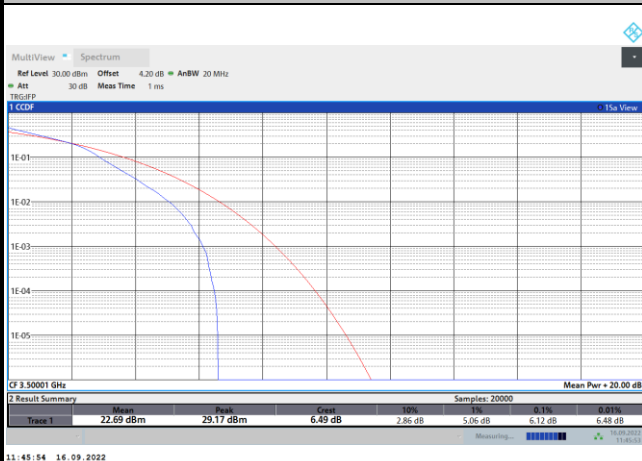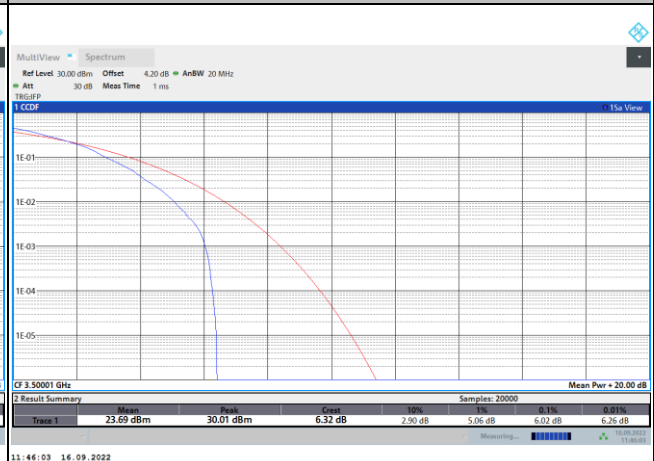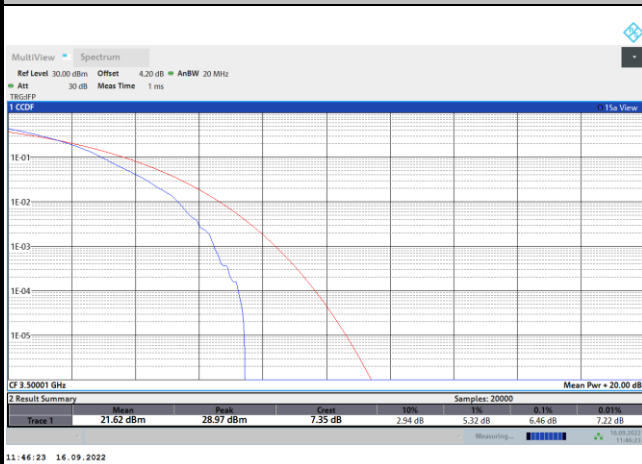**FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB****PI/2 BPSK****QPSK****16QAM****64QAM****256QAM**

**26dB Bandwidth**


Mode	FR1 n77 : 26dB BW(MHz) / DFT-S OFDM							
BW	20MHz	25MHz	30MHz	40MHz	50MHz	60MHz	70MHz	80MHz
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK
Middle CH	18.98	-	28.05	38.20	48.25	60.42	67.13	79.92
BW	90MHz	100MHz						
Mod.	PI/2 BPSK	PI/2 BPSK						
Middle CH	89.91	99.50						

Mode	FR1 n77 : 26dB BW(MHz) / CP OFDM							
BW	20MHz		25MHz		30MHz		40MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	19.10	19.06	-	-	29.07	28.89	40.36	40.36
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	19.02	19.14	-	-	28.77	28.83	40.36	40.36
BW	50MHz		60MHz		70MHz		80MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	50.15	50.15	60.42	60.42	70.21	70.35	80.24	80.40
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	49.95	50.15	60.66	60.42	70.21	70.07	80.40	80.56
BW	90MHz		100MHz					
Mod.	QPSK	16QAM	QPSK	16QAM				
Middle CH	90.45	90.45	100.30	100.70				
Mod.	64QAM	256QAM	64QAM	256QAM				
Middle CH	90.63	90.27	100.30	100.50				




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

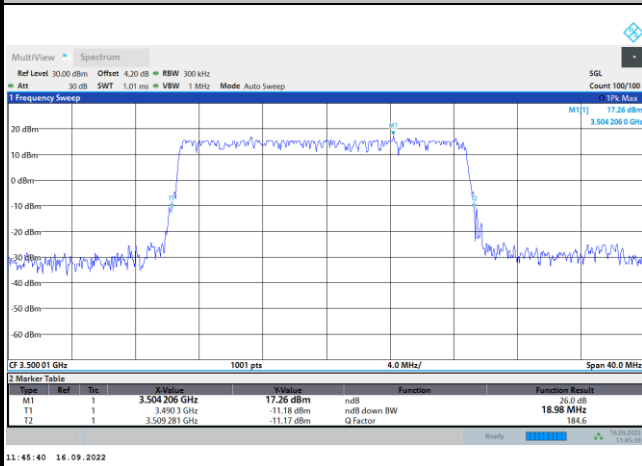


FR1 n77 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

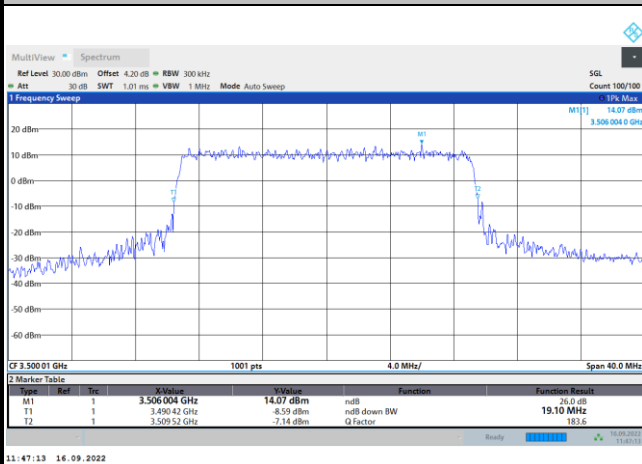


16QAM

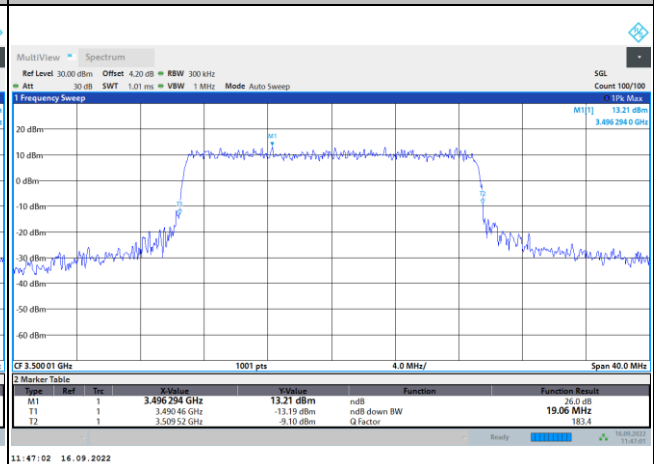

64QAM

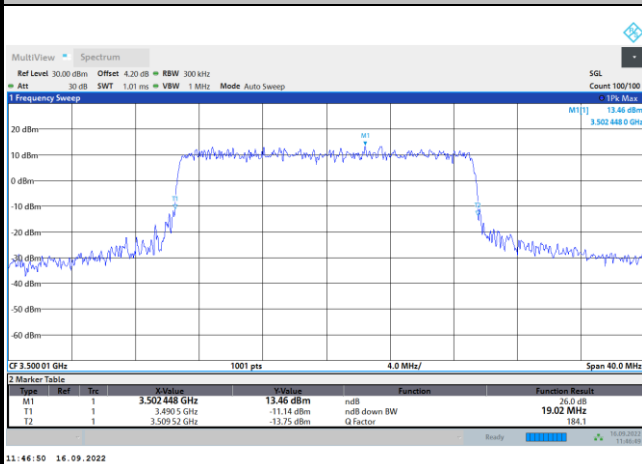


256QAM

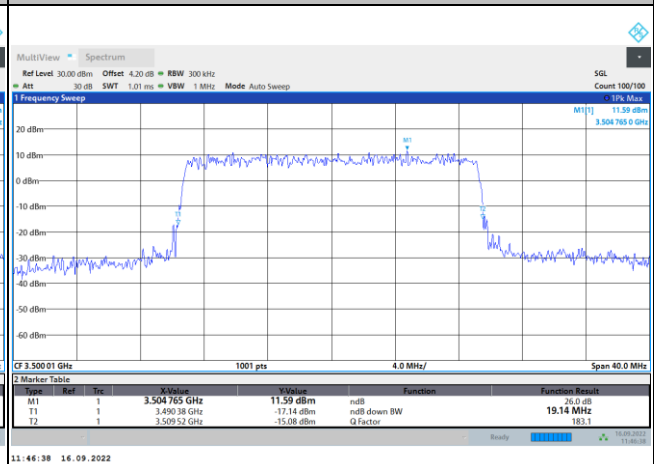


FR1 n77 / 30MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

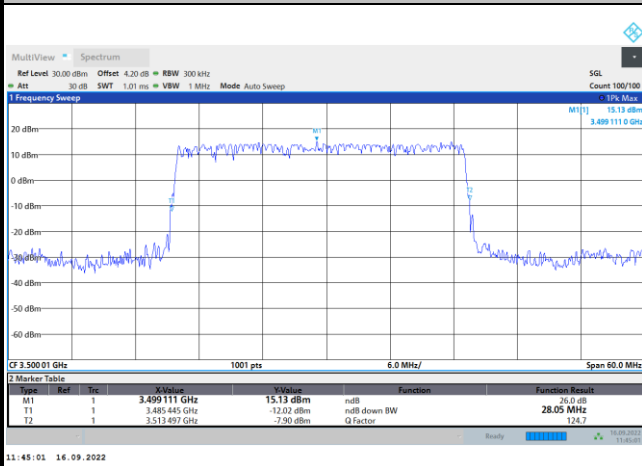


FR1 n77 / 30MHz / CP OFDM / Middle Channel / Full RB


QPSK

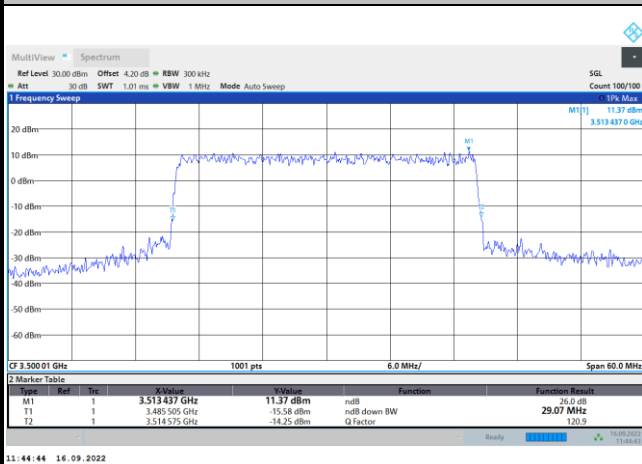


16QAM

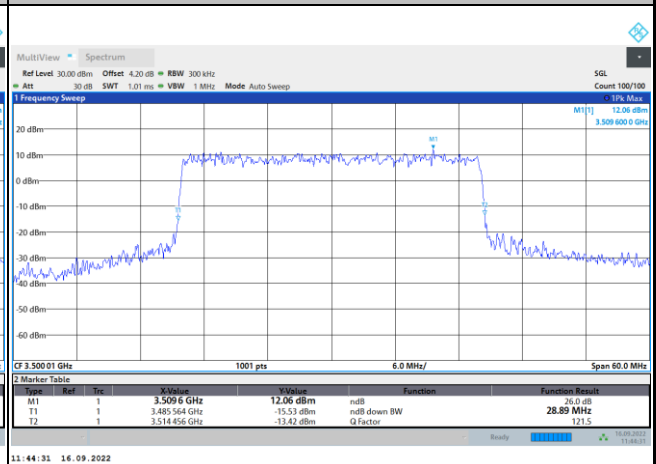

64QAM

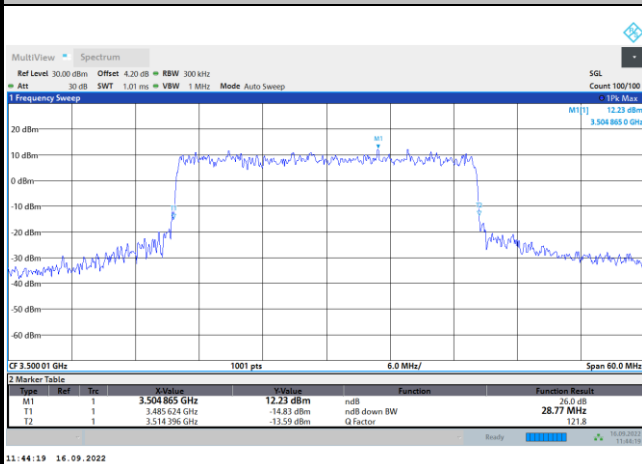


256QAM

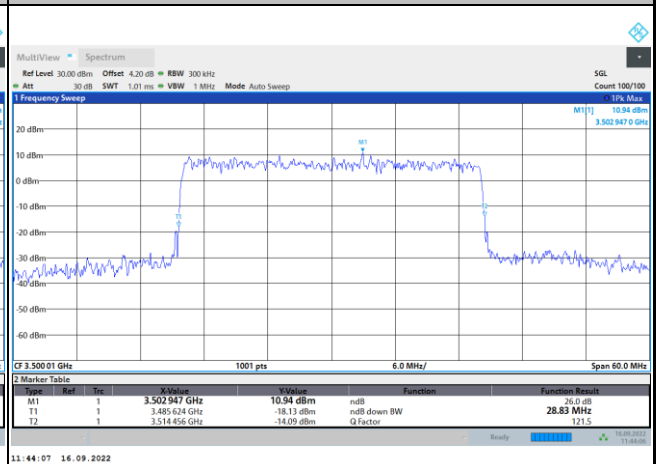




FR1 n77 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

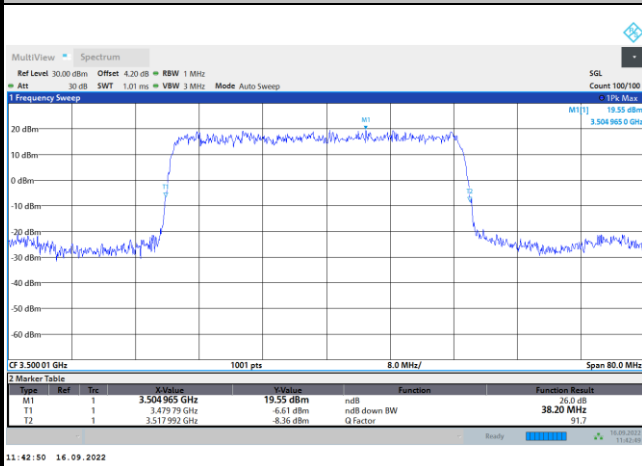


FR1 n77 / 40MHz / CP OFDM / Middle Channel / Full RB

QPSK

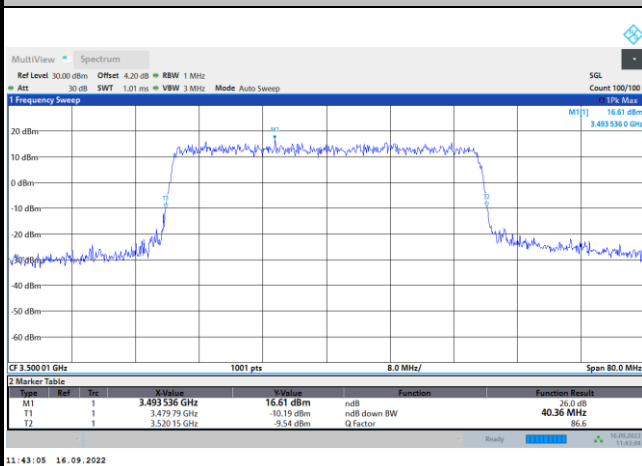


16QAM

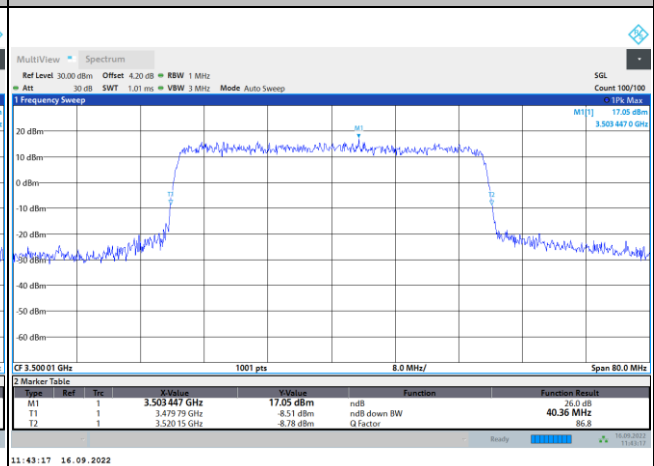

64QAM




256QAM

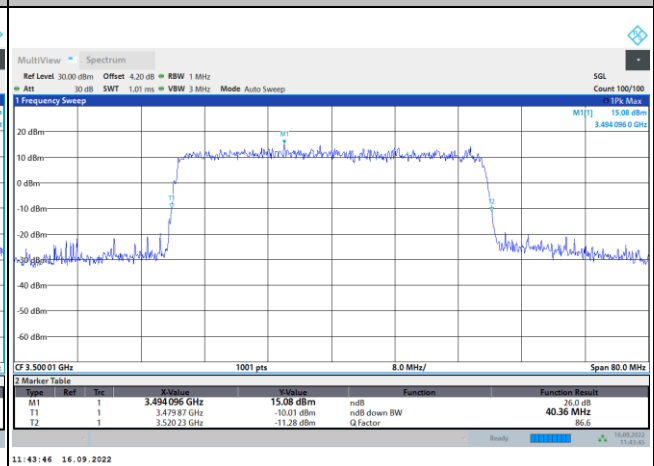




FR1 n77 / 50MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

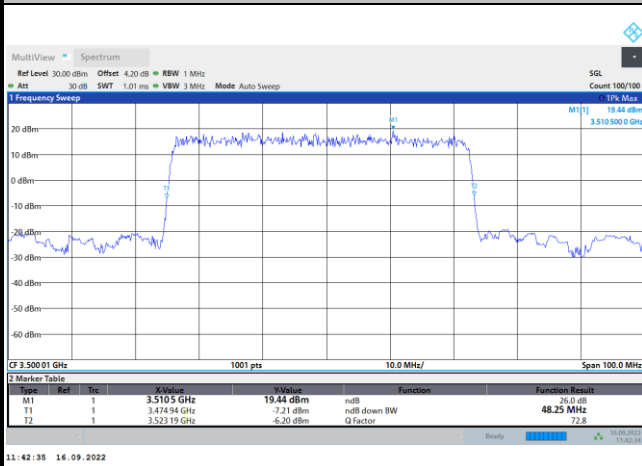


FR1 n77 / 50MHz / CP OFDM / Middle Channel / Full RB


QPSK

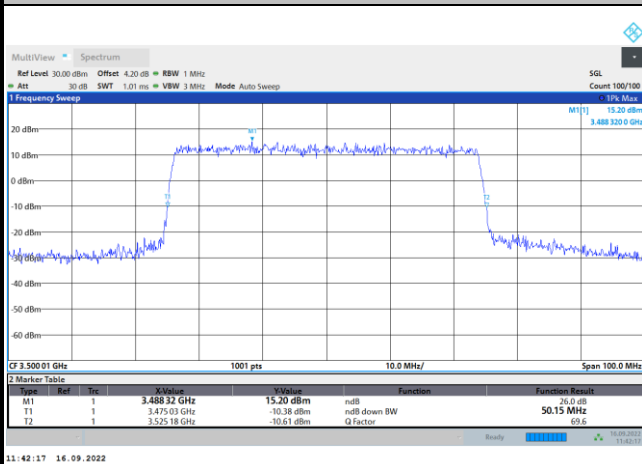


16QAM

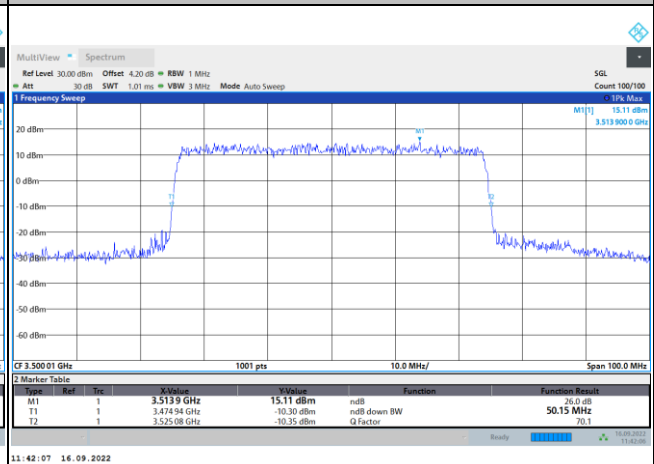

64QAM

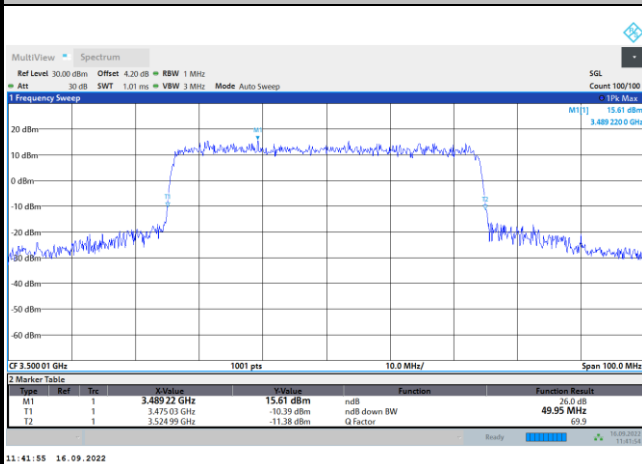


256QAM

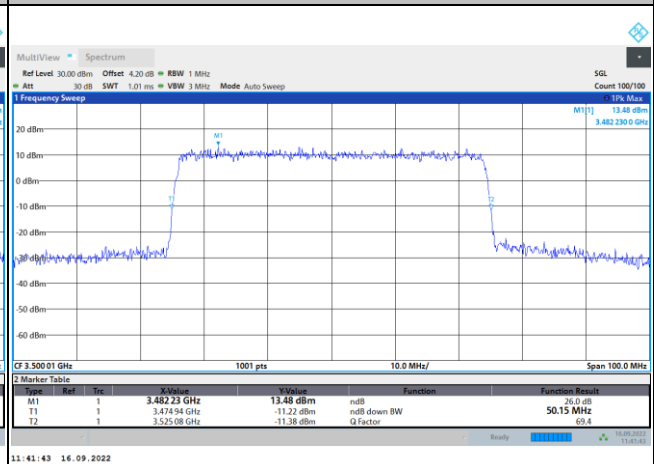




FR1 n77 / 60MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

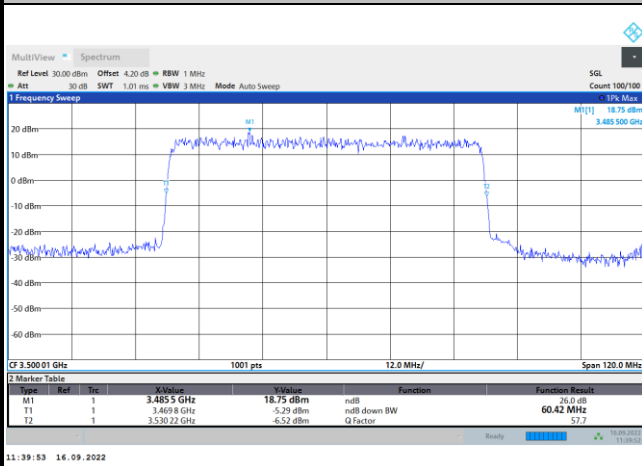


FR1 n77 / 60MHz / CP OFDM / Middle Channel / Full RB


QPSK

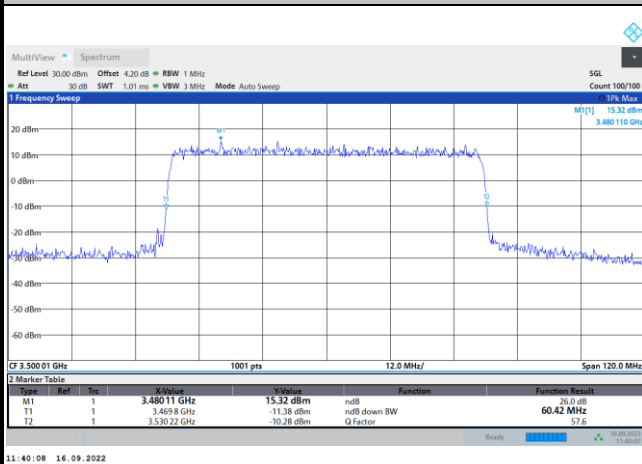


16QAM

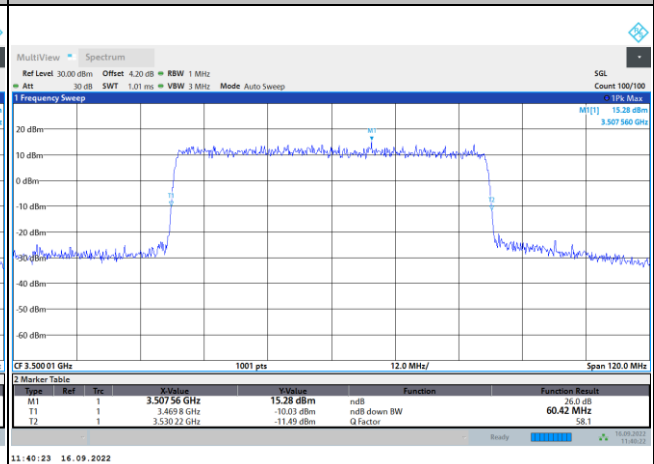

64QAM

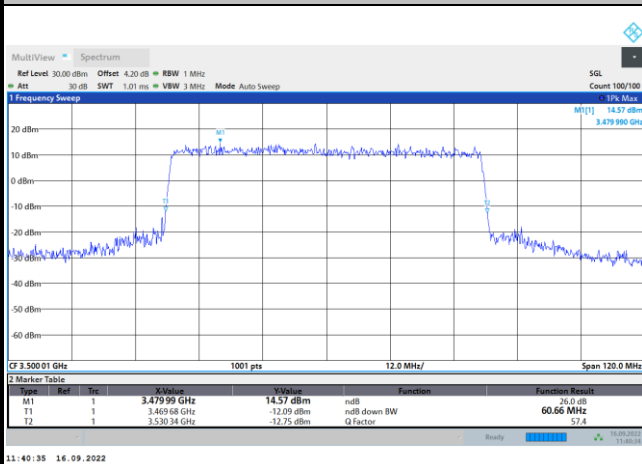


256QAM

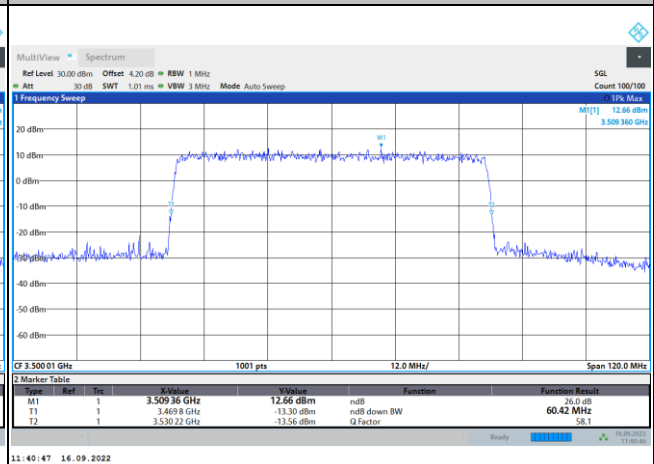




FR1 n77 / 70MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

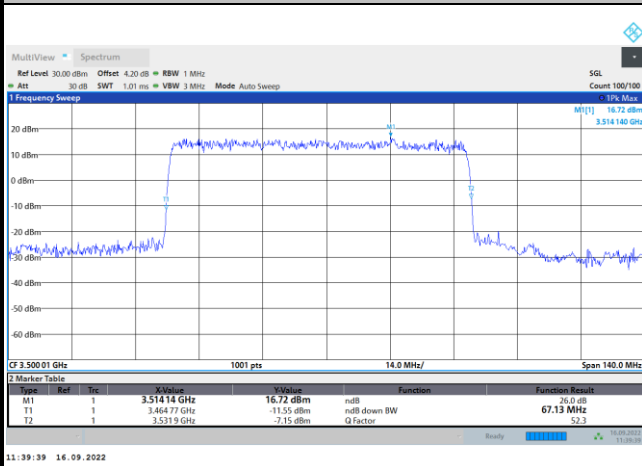


FR1 n77 / 70MHz / CP OFDM / Middle Channel / Full RB


QPSK

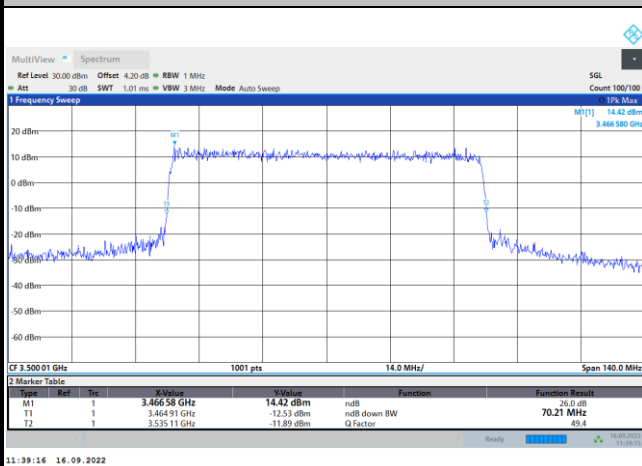


16QAM





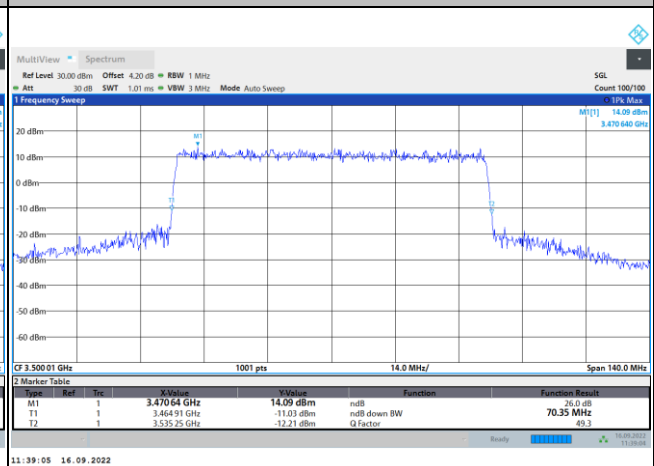


64QAM

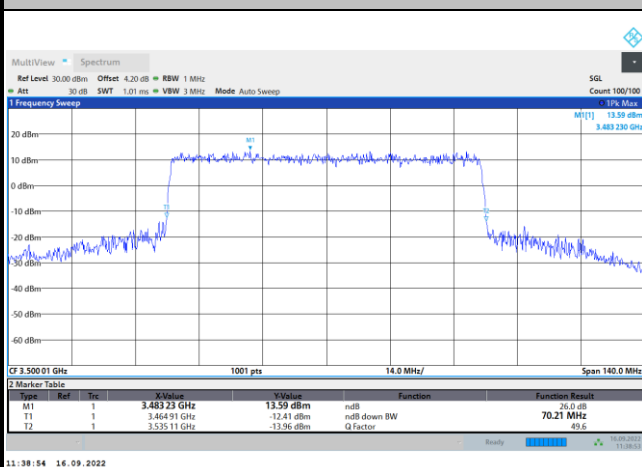

256QAM

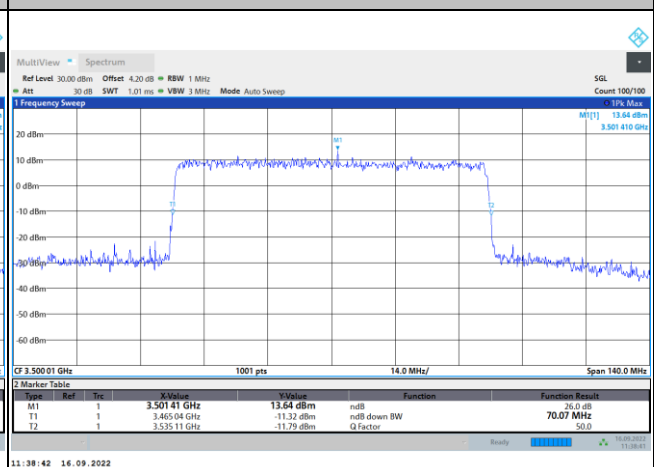


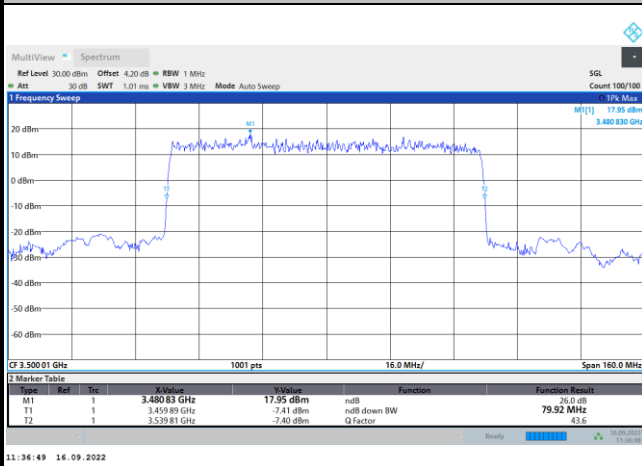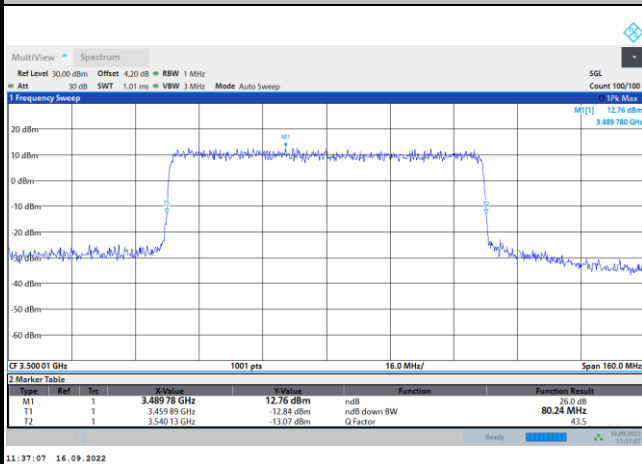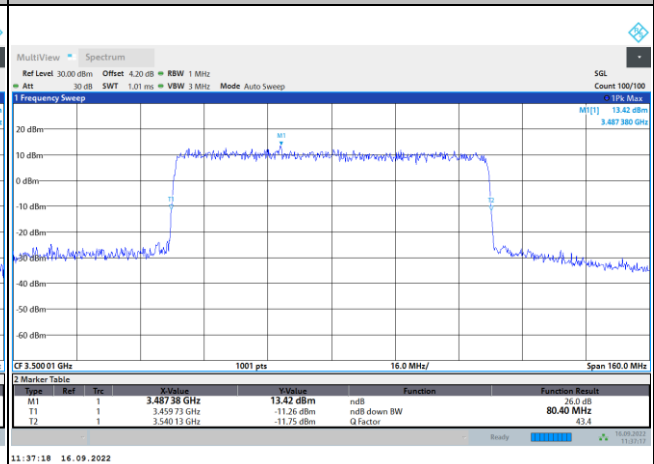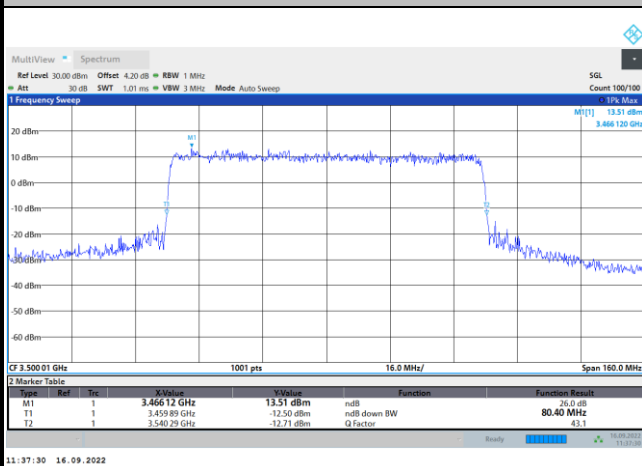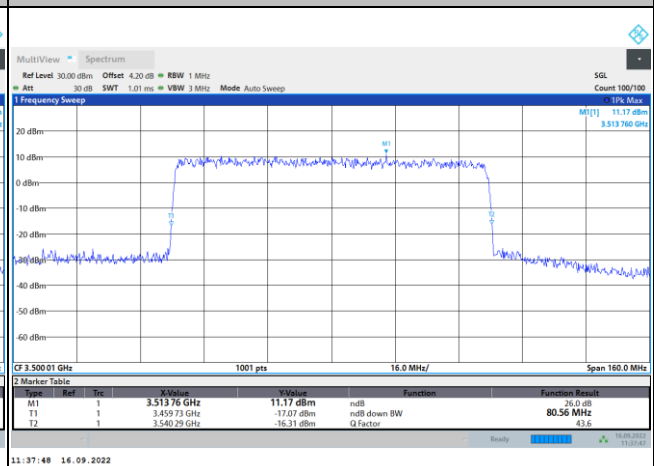**FR1 n77 / 80MHz / DFT-S OFDM / Middle Channel / Full RB****PI/2 BPSK****FR1 n77 / 80MHz / CP OFDM / Middle Channel / Full RB****QPSK****16QAM****64QAM****256QAM**




FR1 n77 / 90MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

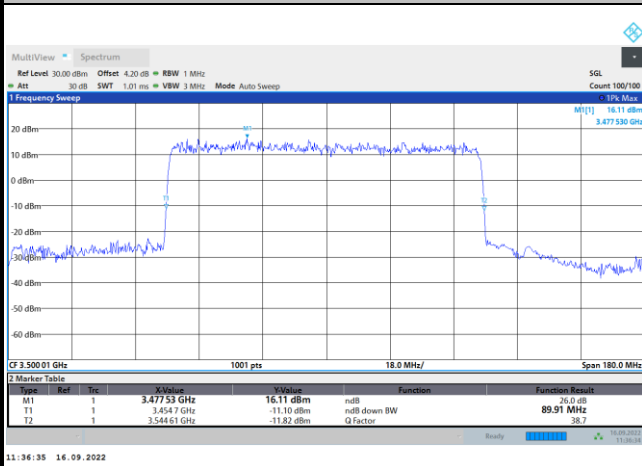


FR1 n77 / 90MHz / CP OFDM / Middle Channel / Full RB


QPSK

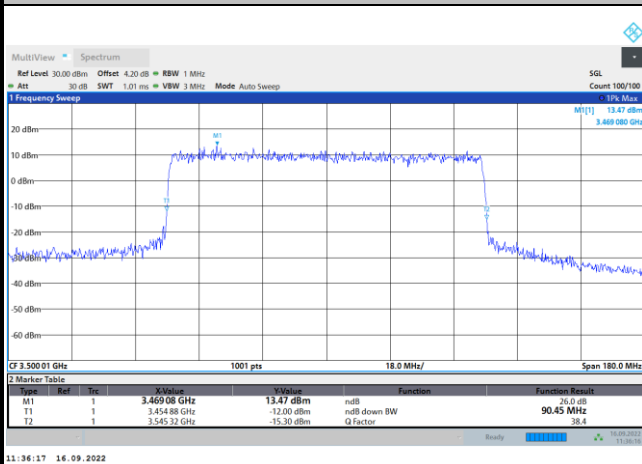


16QAM

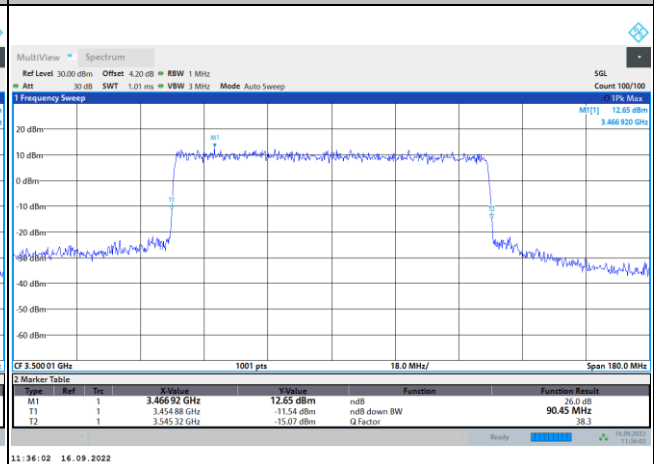

64QAM

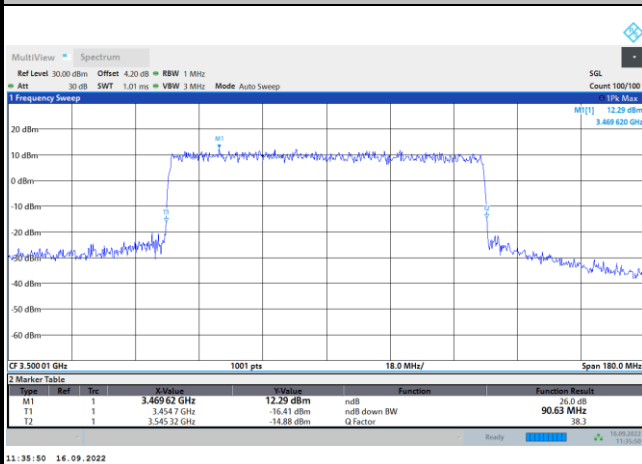


256QAM

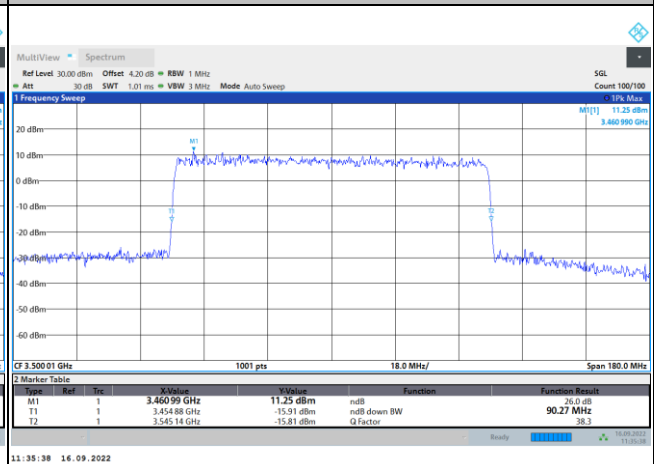




FR1 n77 / 100MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

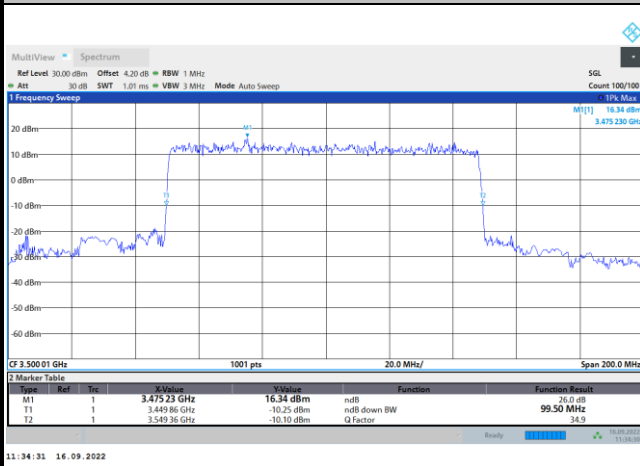


FR1 n77 / 100MHz / CP OFDM / Middle Channel / Full RB


QPSK

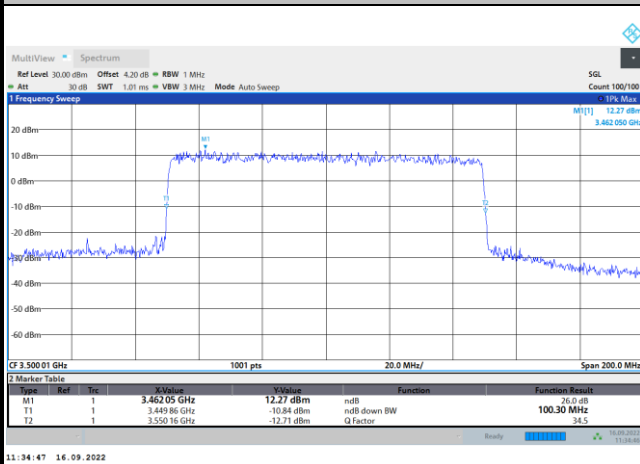


16QAM

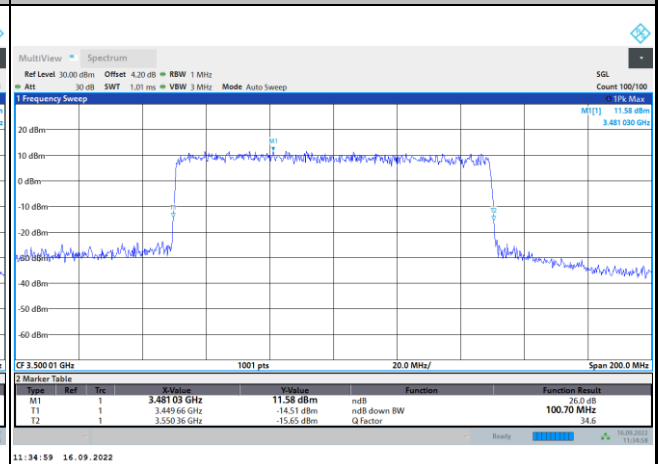

64QAM

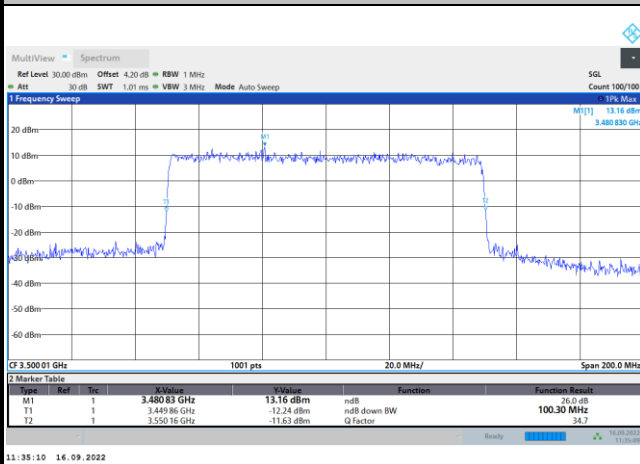

256QAM

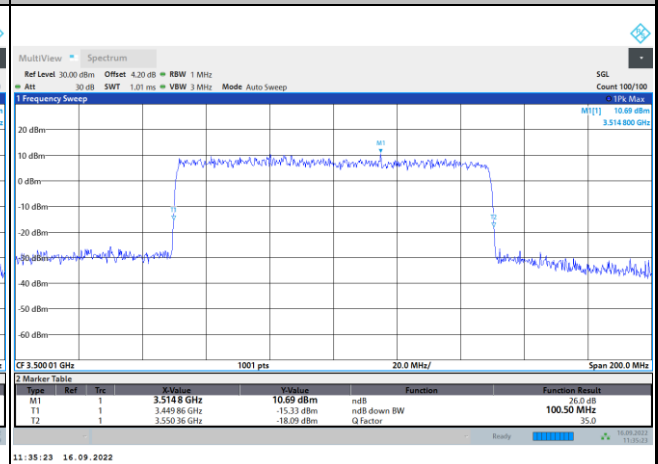

**Occupied Bandwidth**


Mode	FR1 n77 : OB BW(MHz) / DFT-S OFDM							
BW	20MHz	25MHz	30MHz	40MHz	50MHz	60MHz	70MHz	80MHz
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK
Middle CH	17.88	-	26.76	35.89	45.78	57.81	64.25	77.02
BW	90MHz	100MHz						
Mod.	PI/2 BPSK	PI/2 BPSK						
Middle CH	86.52	96.421						

Mode	FR1 n77 : OB BW(MHz) / CP OFDM							
BW	20MHz		25MHz		30MHz		40MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	18.20	18.16	-	-	27.77	27.84	37.93	38.03
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	18.13	18.25	-	-	27.84	27.87	37.90	37.98
BW	50MHz		60MHz		70MHz		80MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	47.53	47.52	57.85	57.79	67.59	67.67	77.47	77.44
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	47.59	47.62	57.70	57.86	67.40	67.43	77.26	77.25
BW	90MHz		100MHz					
Mod.	QPSK	16QAM	QPSK	16QAM				
Middle CH	87.18	87.40	97.25	97.02				
Mod.	64QAM	256QAM	64QAM	256QAM				
Middle CH	87.42	87.39	97.20	97.22				




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

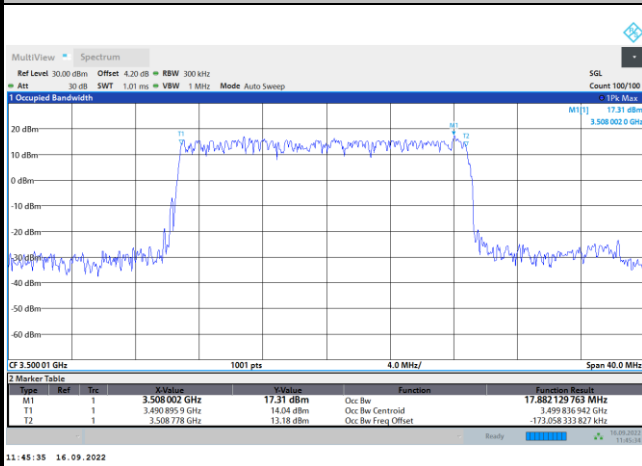


FR1 n77 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

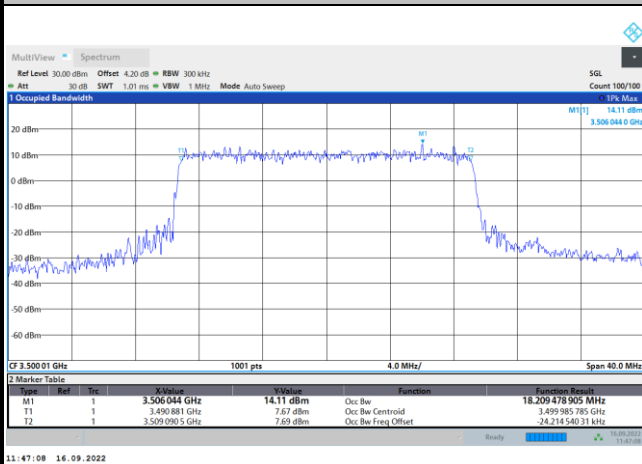


16QAM

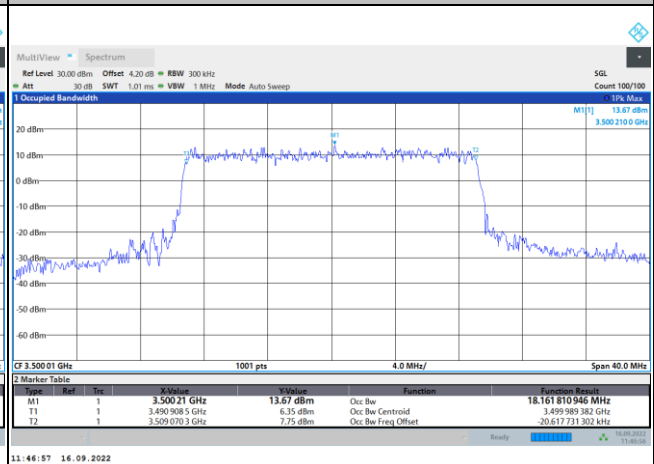

64QAM

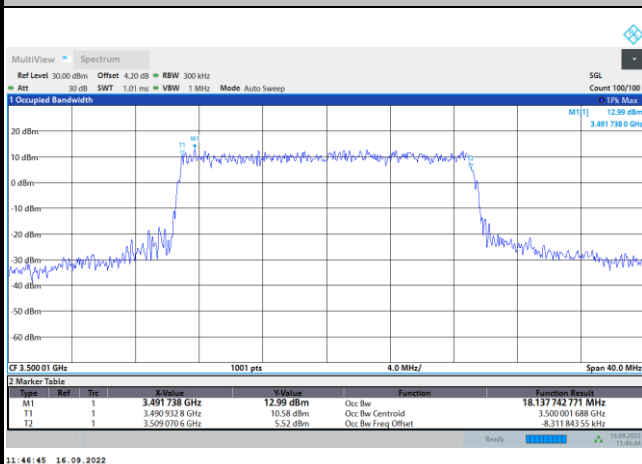


256QAM

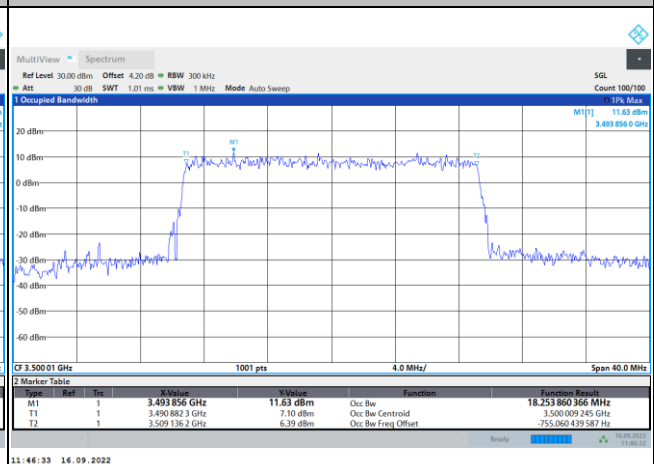


FR1 n77 / 30MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

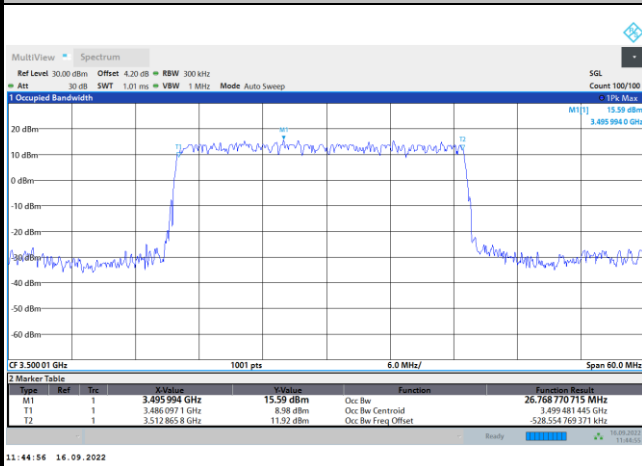


FR1 n77 / 30MHz / CP OFDM / Middle Channel / Full RB


QPSK

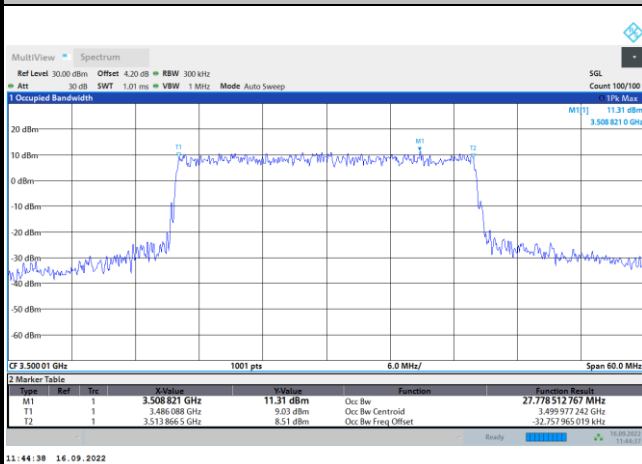


16QAM

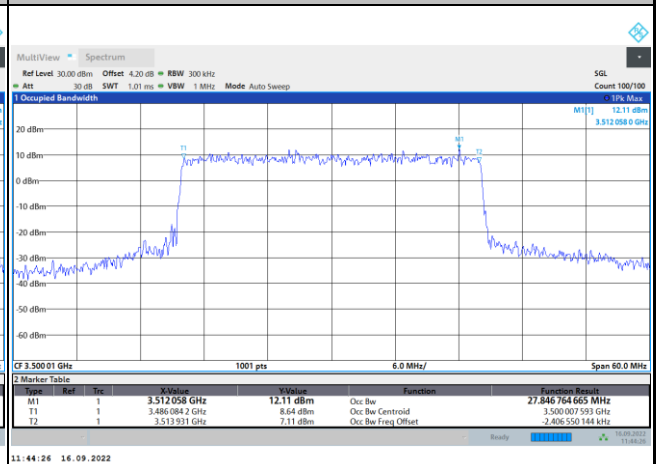

64QAM

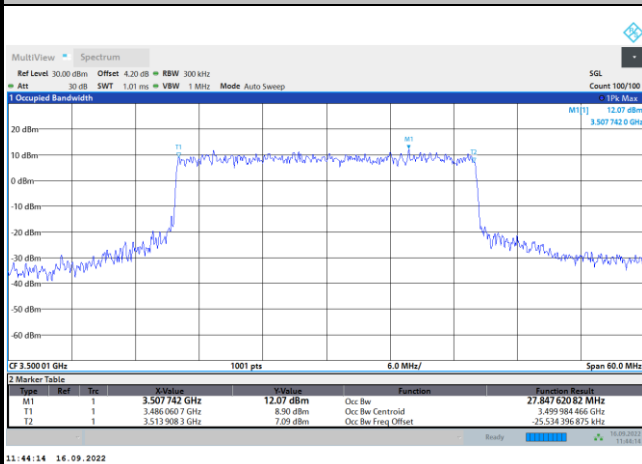


256QAM

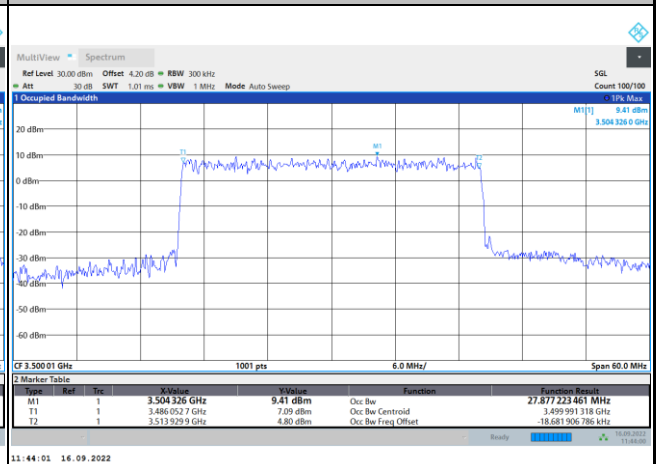




FR1 n77 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

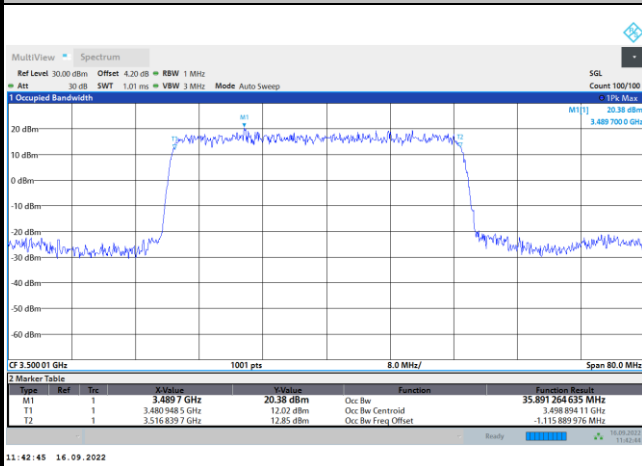


FR1 n77 / 40MHz / CP OFDM / Middle Channel / Full RB


QPSK

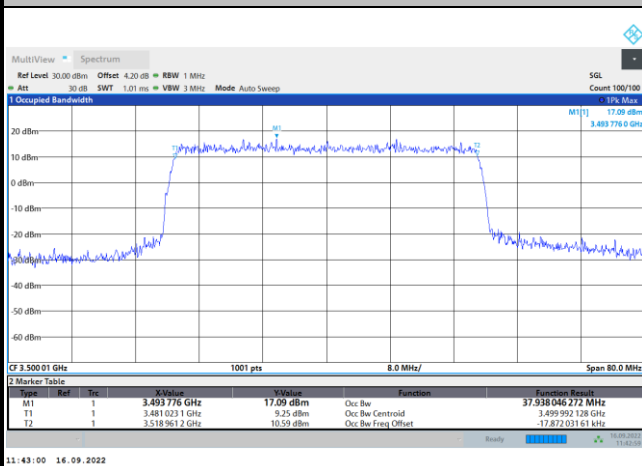


16QAM

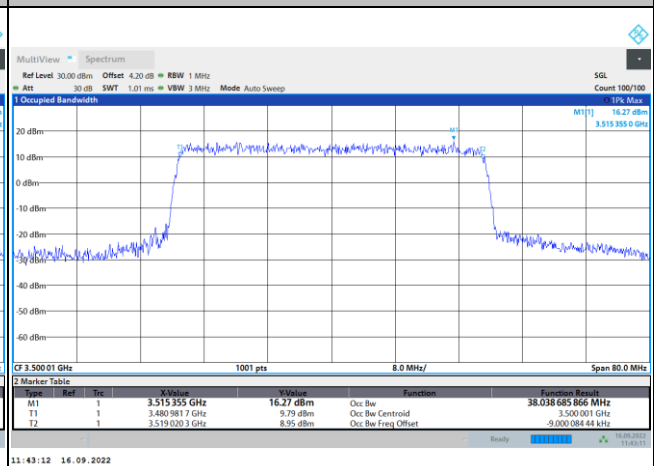

64QAM

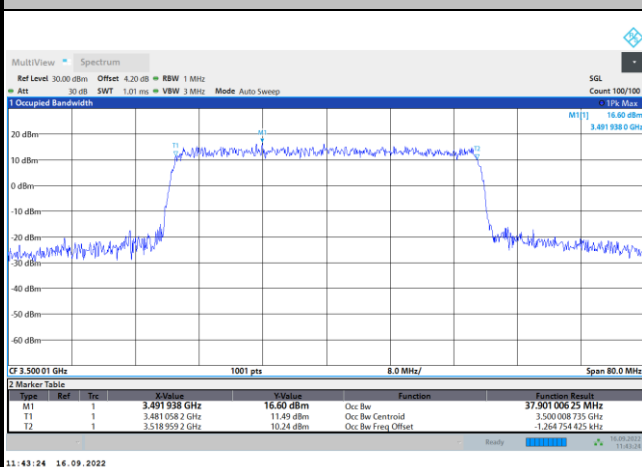


256QAM

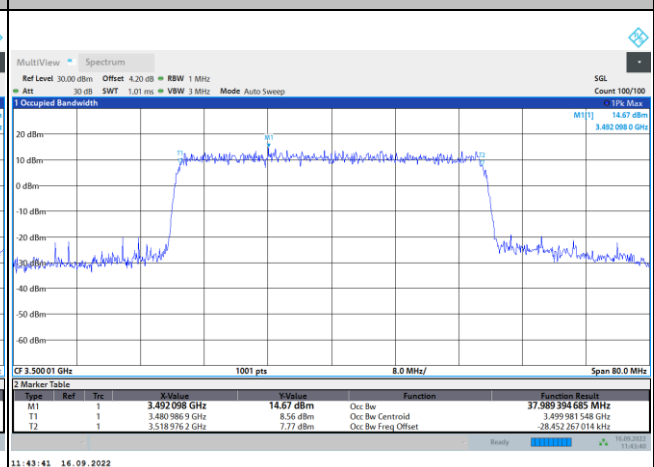




FR1 n77 / 50MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

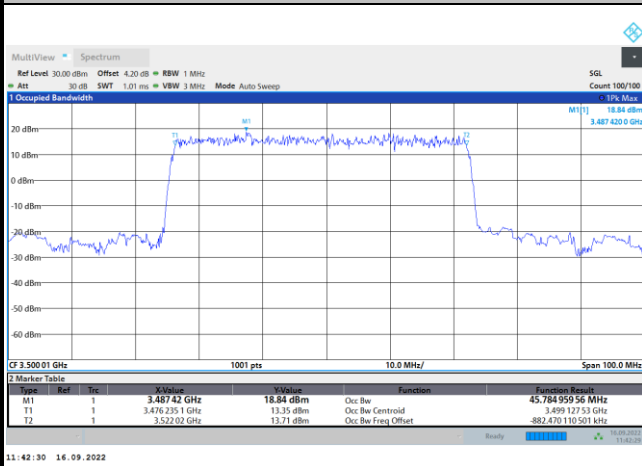


FR1 n77 / 50MHz / CP OFDM / Middle Channel / Full RB


QPSK

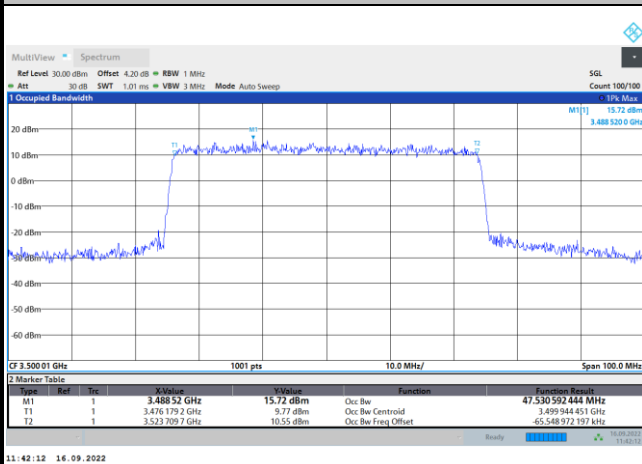


16QAM

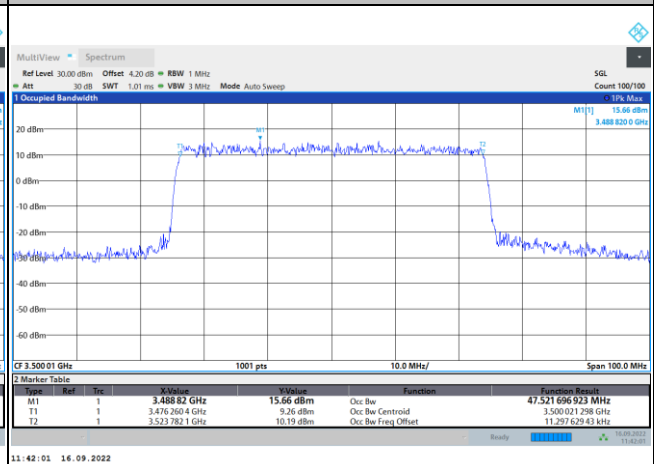

64QAM

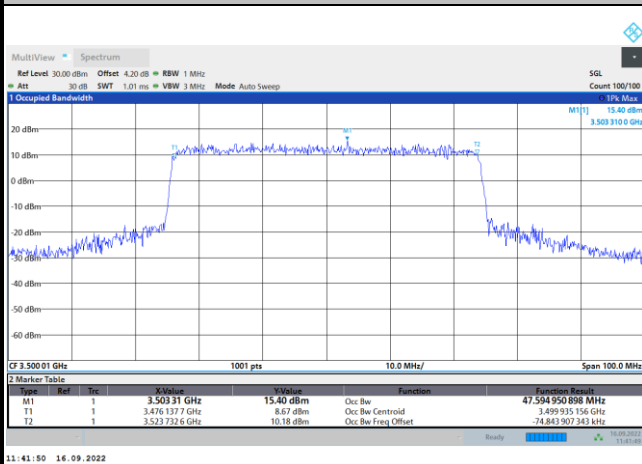


256QAM

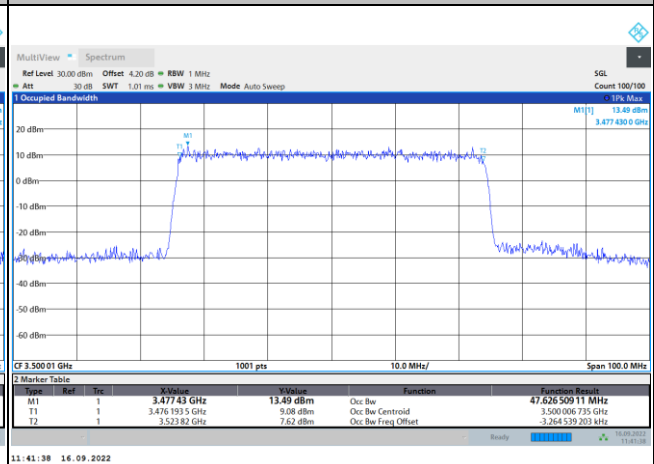


FR1 n77 / 60MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

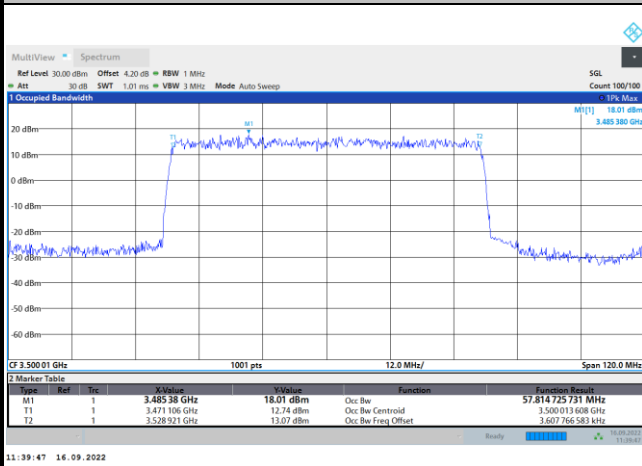


FR1 n77 / 60MHz / CP OFDM / Middle Channel / Full RB


QPSK

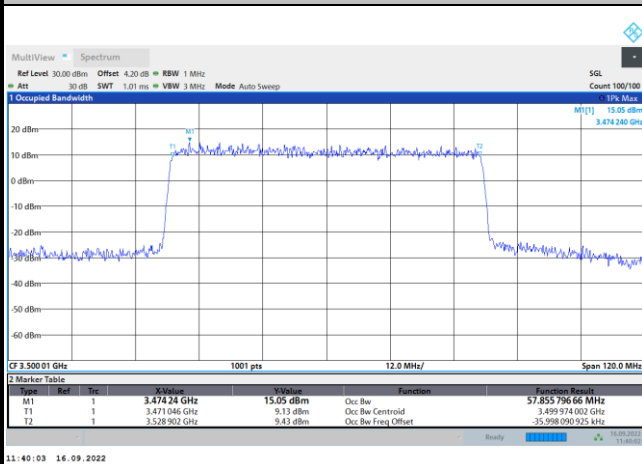


16QAM

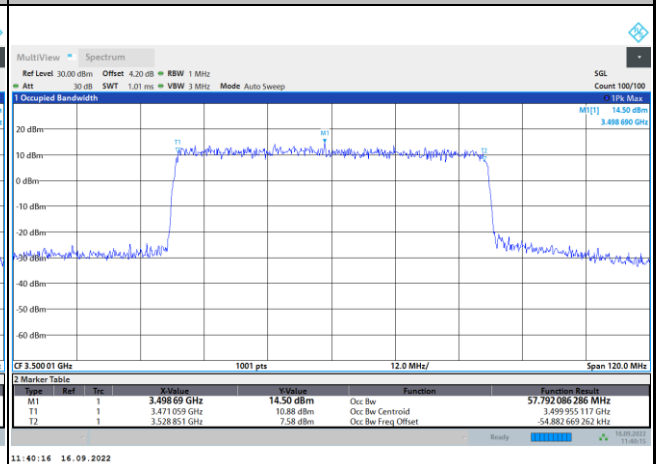

64QAM

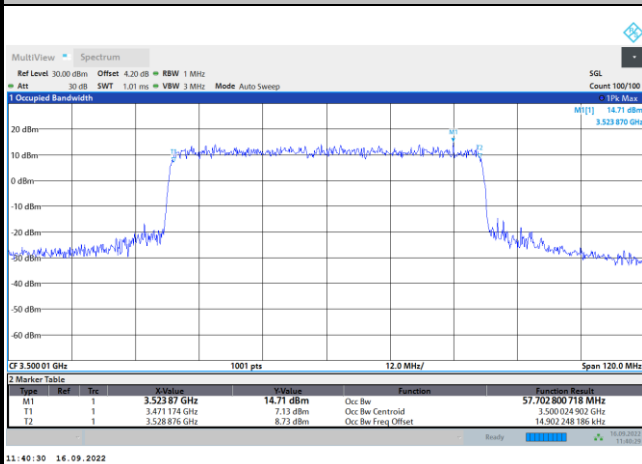


256QAM

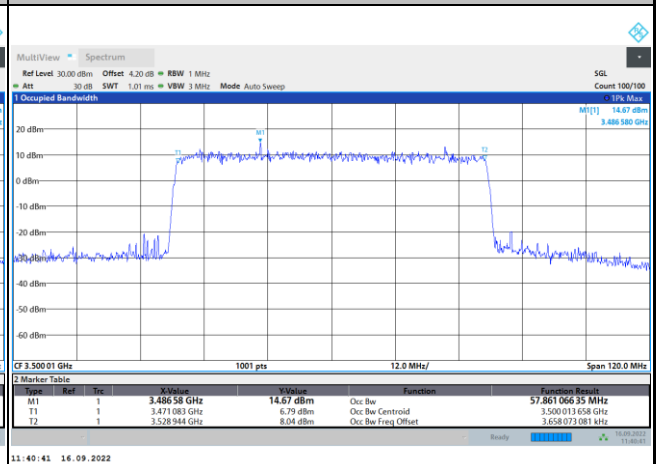




FR1 n77 / 70MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

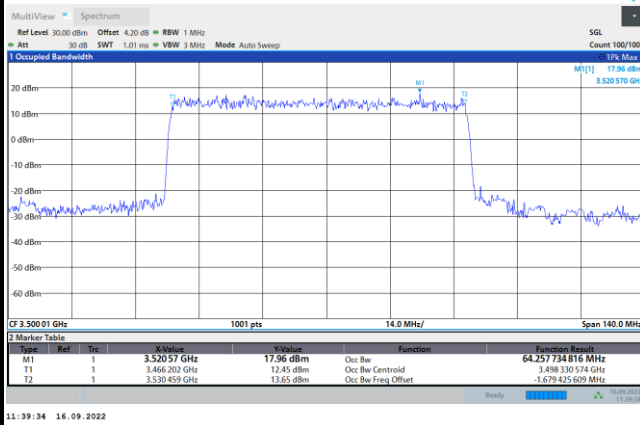


FR1 n77 / 70MHz / CP OFDM / Middle Channel / Full RB


QPSK

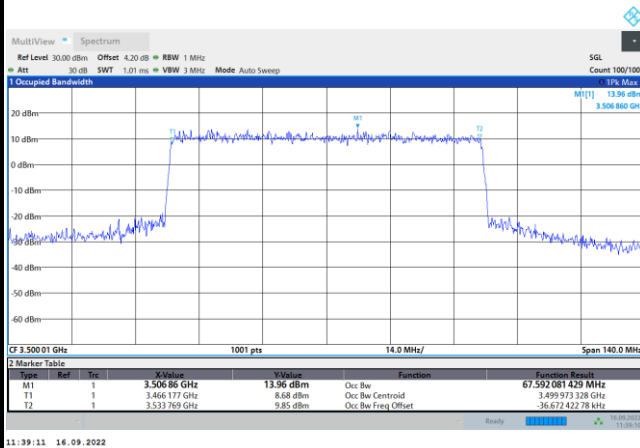

16QAM

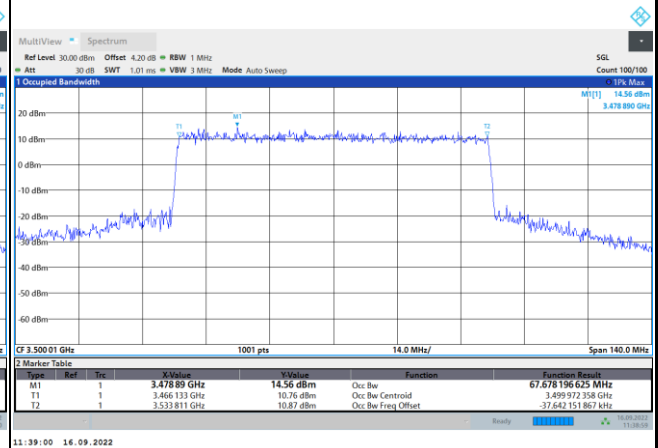

64QAM

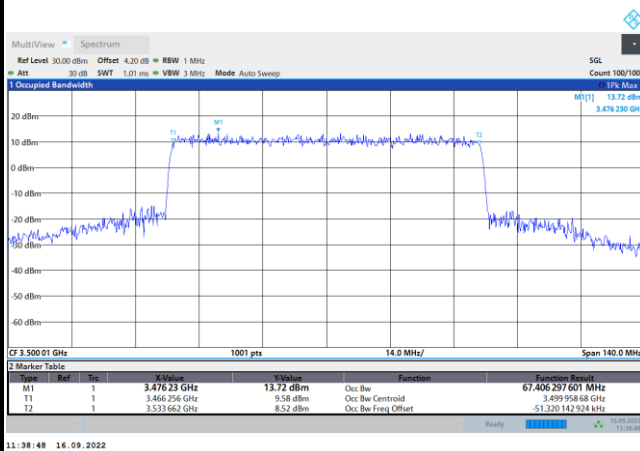

256QAM

